

| | | |
|---|---|--|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry ® Smartphone Model RBR41GW | Page 1(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 FCC ID: L6A RBR40GW |




SAR Compliance Test Report

| | | | |
|---------------------|---|-------------------|--|
| Testing Lab: | RIM Testing Services (RTS) 305 Phillip Street Waterloo, Ontario Canada N2L 3W8 Phone: 519-888-7465 Fax: 519-880-8173 | Applicant: | Research In Motion Limited 295 Phillip Street Waterloo, Ontario Canada N2L 3W8 Phone: 519-888-7465 Fax: 519-888-6906 Web site: www.rim.com |
|---------------------|---|-------------------|--|

Statement of Compliance: RIM Testing Services declares under its sole responsibility that the product to which this declaration relates, is in conformity with the appropriate RF exposure standards, recommendations and guidelines. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices.

Device Category: This wireless handheld is a portable device, designed to be used in direct contact with the user's head, hand and to be carried in approved accessories when carried on the user's body.

RF exposure environment: This wireless portable device has been shown to be in compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in OET Bulletin 65 Supplement C (Edition 01-01), FCC 96-326, IEEE Std. C95.1-1999, Health Canada's Safety Code 6, as reproduced in RSS-102 issue 2-2005 and has been tested in accordance with the measurement procedures specified in OET Bulletin 65 Supplement C (Edition 01-01), ANSI/IEEE Std. C95.3-1991, IEEE 1528-2003, IEC 62209-1-2005, DASY4 manual which follows draft IEC 62209 – Part 2 and Health Canada's Safety Code 6.

| | | |
|---|--|--------------|
| Tested and documented by: | Signatures | Date |
| Shahriar Ninad Compliance Specialist |  | 31-July-2007 |
| Tested and reviewed by: | | |
| Daoud Attayi Senior Compliance Specialist |  | 07-Aug-2007 |
| Approved by: | | |
| Paul G. Cardinal, Ph.D. Director, RIM Testing Services |  | 08-Aug-2007 |

| | | |
|---|---|---|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | Page 2(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 |
| | | FCC ID: L6ARBR40GW |

CONTENTS

| | |
|--|----|
| SAR COMPLIANCE TEST REPORT | 1 |
| CONTENTS | 2 |
| 1.0 OPERATING CONFIGURATIONS AND TEST CONDITIONS | 4 |
| 1.2 ANTENNA DESCRIPTION | 4 |
| 1.3 HANDHELD DESCRIPTION | 4 |
| 1.4 BODY WORN ACCESSORIES (HOLSTERS) | 5 |
| 1.5 HEADSETS | 5 |
| 1.6 BATTERY | 5 |
| 1.7 PROCEDURE USED TO ESTABLISH TEST SIGNAL | 5 |
| 2.0 DESCRIPTION OF THE TEST EQUIPMENT | 6 |
| 2.1 SAR MEASUREMENT SYSTEM | 7 |
| 2.1.1 EQUIPMENT LIST | 8 |
| 2.2 DESCRIPTION OF THE TEST SETUP | 8 |
| 2.2.1 HANDHELD AND BASE STATION SIMULATOR SETUP | 8 |
| 2.2.2 DASY SETUP | 8 |
| 3.0 ELECTRIC FIELD PROBE CALIBRATION | 9 |
| 3.1 PROBE SPECIFICATIONS | 9 |
| 3.2 PROBE CALIBRATION AND MEASUREMENT ERRORS | 10 |
| 4.0 SAR MEASUREMENT SYSTEM VERIFICATION | 10 |
| 4.1 SYSTEM ACCURACY VERIFICATION FOR HEAD ADJACENT USE | 10 |
| 5.0 PHANTOM DESCRIPTION | 11 |
| 6.0 TISSUE DIELECTRIC PROPERTIES | 12 |
| 6.1 COMPOSITION OF TISSUE SIMULANT | 12 |
| 6.1.1 EQUIPMENT | 12 |
| 6.1.2 PREPARATION PROCEDURE | 12 |
| 6.2 ELECTRICAL PARAMETERS OF THE TISSUE SIMULATING LIQUID | 13 |
| 6.2.1 EQUIPMENT | 14 |
| 6.2.2 TEST CONFIGURATION | 14 |
| 6.2.3 PROCEDURE | 14 |
| 7.0 SAR SAFETY LIMITS | 18 |
| 8.0 DEVICE POSITIONING | 19 |
| 8.1 DEVICE HOLDER FOR SAM TWIN PHANTOM | 19 |
| 8.2 DESCRIPTION OF THE TEST POSITIONING | 20 |
| 8.2.1 TEST POSITIONS OF DEVICE RELATIVE TO HEAD | 20 |
| 8.2.1.1 DEFINITION OF THE "CHEEK" POSITION | 21 |
| 8.2.1.2 DEFINITION OF THE "TILTED" POSITION | 22 |
| 8.2.2 BODY HOLSTER CONFIGURATION | 22 |
| 9.0 HIGH LEVEL EVALUATION | 23 |
| 9.1 MAXIMUM SEARCH | 23 |
| 9.2 EXTRAPOLATION | 23 |
| 9.3 BOUNDARY CORRECTION | 23 |
| 9.4 PEAK SEARCH FOR 1G AND 10G CUBE AVERAGED SAR | 23 |
| 10.0 MEASUREMENT UNCERTAINTY | 24 |
| 11.0 TEST RESULTS | 25 |
| 11.1 SAR MEASUREMENT RESULTS AT HIGHEST POWER MEASURED AGAINST THE HEAD | 25 |
| 11.3 SAR MEASUREMENT RESULTS AT HIGHEST POWER MEASURED AGAINST THE BODY USING ACCESSORIES | 27 |
| 12.0 REFERENCES | 30 |

| | | | |
|---|---|---|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 3(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 | FCC ID: L6ARBR40GW |

APPENDIX A: SAR DISTRIBUTION COMPARISON FOR ACCURACY VERIFICATION

APPENDIX B: SAR DISTRIBUTION PLOTS - HEAD CONFIGURATION

APPENDIX C: SAR DISTRIBUTION PLOTS - BODY-WORN CONFIGURATION

APPENDIX D: PROBE & DIPOLE CALIBRATION DATA

APPENDIX E: PHOTOGRAPHS

| | | | |
|------------------------------------|--|--|---|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 4(30) |
| | Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 |
| | | | FCC ID: L6ARBR40GW |

1.0 OPERATING CONFIGURATIONS AND TEST CONDITIONS

1.1 Picture of Handheld

Please refer to Appendix E.

Figure 1. BlackBerry Wireless Handheld

1.2 Antenna description

| | |
|----------------------|------------------------|
| Type | Internal fixed antenna |
| Location | Back bottom centre |
| Configuration | Internal fixed antenna |

Table 1. Antenna description

1.3 Device description

| | | | | | |
|---|---|---------------------------------------|-----------|-----------|-----------|
| Handheld Model | RBR41GW | | | | |
| FCC ID | L6ARBR40GW | | | | |
| PIN | 20610A89(rev 2); 20610AED (rev 3); 20610AF2 (rev 3) | | | | |
| Prototype or Production Unit | Production | | | | |
| Mode(s) of Operation in North America | 1-slot GSM 850 GSM 1900 | 2-slots EDGE / GPRS 850 1900 | Bluetooth | 802.11b | 802.11g |
| Maximum nominal conducted RF Output Power | 33.0 dBm 30.5 dBm | 30.5 dBm 28.5 dBm | - 0.5 dBm | 18.00 | 17.00 |
| Tolerance in Power Setting on centre channel | ± 0.50 dB | ± 0.50 dB | N/A | ± 0.50 dB | ± 0.50 dB |
| Duty Cycle | 1:8 | 2:8 | N/A | 1:1 | 1:1 |
| Tx Frequency Range (MHz) | 824.2 – 848.8 1850.2 – 1909.8 | 824.2 – 848.8 1850.2 – 1909.8 | 2402-2483 | 2412-2462 | 2412-2462 |

Table 2. Test device description

The device supports GSM / EDGE / GPRS 900 / 1800 MHz bands that are not operational in North America, therefore no data is presented in this report for those bands.

| | | | |
|---|--|---|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 5(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 | FCC ID: L6ARBR40GW |

1.4 Body worn accessories (holsters)

The BlackBerry device has been tested with the following holsters which all contain metal components and the separation distance between the handheld and the user's body is listed in the table below. All of the holsters are designed with the intended handheld orientation being with the LCD facing the belt clip. Proper positioning is vital for protection of the LCD display, and to help maximize the battery life of the handheld. The handheld can also be placed in the holsters with the backside facing the belt clip. Body SAR measurements were carried out with the worst-case configuration front LCD side and backside towards the belt clip.

| Holster | Model / Part Number | Separation (mm) |
|------------------------|---------------------|-----------------|
| Leather Swivel Holster | HDW-12715-001 | 21 |
| Horizontal Holster | HDW-15908-001 | 16 |
| Sports Case | HDW-15912-001 | 16 |

Table 3: Body worn holsters

Please refer to Appendix E.

Figure 2. Body-worn holsters

1.5 Headsets

The BlackBerry device was tested with and without the following headset model numbers.

- 1) HDW-14322-001

1.6 Battery

The BlackBerry device was tested with the following Lithium Ion Battery pack.

- 1) BAT-11004-001

1.7 Procedure used to establish test signal

The device was put into test mode for SAR measurements by placing a voice call from a Rohde & Schwarz CMU 200 Communications Test Instrument. The power control level was set to command the handheld to transmit at full power at the specified frequency. Other parameters include: Channel type = full rate, discontinuous transmission off, frequency hopping off. A Rohde & Schwarz CBT Bluetooth Tester was used to establish a connection with the EUT's Bluetooth radio. Worst case SAR was evaluated with Bluetooth on.

Radioscope software was used to command the device to transmit at specific 802.11 b/g WLAN band, maximum power, desired frequency and modulation type/data rate.

| | | | |
|---|--|---|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 6(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 | FCC ID: L6ARBR40GW |

1.8 Highlights of the FCC OET SAR Measurement Requirements for 3-6 GHz and Measurement Procedures for 802.11 b/g Transmitter that were followed

- Maintained dielectric parameter uncertainty as close to $\pm 5.0\%$ of the target value as possible.
- Liquid depth from SAM ERP or flat phantom was kept at 15 cm.
- Probe Requirement: Used SPEAG probe model EX3DV4 for 2.4 – 6 GHz SAR testing specs are outlined below:

| | |
|-------------------------------|--------------------------------------|
| Probe tip to sensor center | 1.0 mm |
| Probe tip diameter is | 2.5 mm |
| Probe calibration uncertainty | < 15 % for $f = 2.45$ to < 6.0 GHz |
| Probe calibration range | ± 100 MHz |

Table 4: Probe specification requirements

- Frequency Channel Configuration: 802.11 b/g modes are tested on “default test channels” 1, 6 and 11.
- For each frequency band, testing at higher rates and higher modulations is not required when the maximum average output power for each of these configurations is less than ¼ dB higher than those measured at the lowest data rate.
- SAR is not required for 802.11g channels when the maximum average output power is less than ¼ dB higher than that measured on the corresponding 802.11b channels.
- SAR test was conducted on each “default test channel” and each band with the worst case modulation that resulted in maximum duty cycle of 99.5 %.
- Conducted power measurements:

| | 802.11b | 802.11g |
|-------------|---------------------------------------|--|
| Chan | Conducted Power (dBm) at 1Mbps | Conducted Power (dBm) at 6 Mbps |
| 1 | 17.5 | 14.0 |
| 6 | 17.6 | 16.9 |
| 11 | 17.9 | 14.0 |

Table 5. 802.11 b/g channel vs. conducted power

| | | 802.11g | | | 802.11b |
|--------------------------|-------------|------------------------------|--------------------------|-------------|------------------------------|
| Data Rate (Mbits) | Mod. | Channel 6 | Data Rate (Mbits) | Mod. | Channel 6 |
| | | Conducted Power (dBm) | | | Conducted Power (dBm) |
| 6 | BPSK | 16.9 | 1 | DBPSK | 17.6 |
| 9 | BPSK | 16.9 | 2 | DQPSK | 17.6 |
| 12 | QPSK | 15.4 | 5.5 | DQPSK ,CCK | 17.6 |
| 18 | QPSK | 15.4 | 11 | DQPSK ,CCK | 17.9 |
| 24 | 16-QAM | 14.4 | | | |
| 36 | 16-QAM | 14.4 | | | |
| 48 | 64-QAM | 12.9 | | | |
| 54 | 64-QAM | 12.9 | | | |

Table 6. 802.11 b/g modulation type / data rate vs. conducted power

| | | | |
|---|--|---|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 7(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 | FCC ID: L6ARBR40GW |

2.0 DESCRIPTION OF THE TEST EQUIPMENT

2.1 SAR measurement system

SAR measurements were performed using a Dosimetric Assessment System (DASY4), an automated SAR measurement system manufactured by Schmid & Partner Engineering AG (SPEAG), of Zurich, Switzerland.

The DASY 4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software.
- An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A DAE module that performs the signal amplification, signal multiplexing, A/D conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the Electro-optical coupler (EOC).
- A unit to operate the optical surface detector that is connected to the EOC.
- The EOC performs the conversion from an optical signal into the digital electric signal of the DAE. The EOC is connected to the PC plug-in card.
- The functions of the PC plug-in card based on a DSP is to perform the time critical tasks such as signal filtering, surveillance of the robot operation fast movement interrupts.
- A computer operating Windows 2000.
- DASY 4 software version 4.7.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM Twin Phantom enabling testing left-hand and right-hand usage.
- The device holder for mobile phones.
- Tissue simulating liquid mixed according to the given recipes (see section 6.1).
- System validation dipoles allowing for the validation of proper functioning of the system.

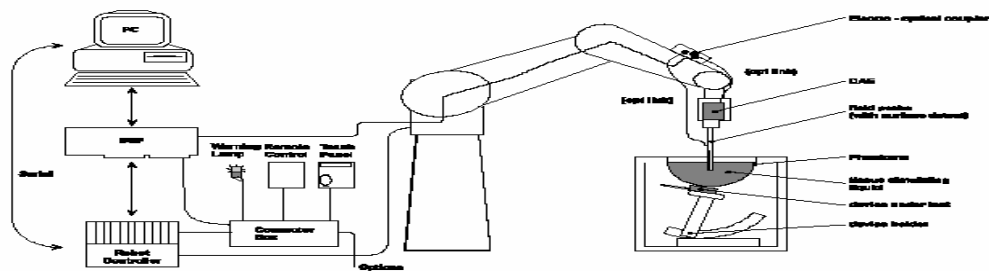


Figure 3. System Description

| | | | |
|---|--|---|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 8(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 | FCC ID: L6ARBR40GW |

2.1.1 Equipment List

| Manufacturer | Test Equipment | Model Number | Serial Number | Cal. Due Date |
|---------------------------------|-------------------------------------|--------------|---------------|---------------|
| SCHMID & Partner Engineering AG | E-field probe | ET3DV6 | 1642 | 01/15/2008 |
| SCHMID & Partner Engineering AG | E-field probe | EX3DV4 | 3548 | 01/19/2008 |
| SCHMID & Partner Engineering AG | Data Acquisition Electronics (DAE3) | DAE3 V1 | 472 | 03/07/2008 |
| SCHMID & Partner Engineering AG | Dipole Validation Kit | D835V2 | 446 | 01/08/2009 |
| SCHMID & Partner Engineering AG | Dipole Validation Kit | D1900V2 | 545 | 01/09/2009 |
| SCHMID & Partner Engineering AG | Dipole Validation Kit | D2450V2 | 747 | 12/14/2007 |
| Agilent Technologies | Signal generator | 8360B | 3844A00927 | 09/28/2007 |
| Agilent Technologies | Power meter | E4419B | GB40202821 | 11/27/2007 |
| Agilent Technologies | Power sensor | 8481A | MY41095417 | 09/15/2007 |
| Amplifier Research | Amplifier | 5S1G4M3 | 300986 | CNR |
| Agilent Technologies | Network analyzer | 8753ES | US39174857 | 09/28/2007 |
| Rohde & Schwarz | Base Station Simulator | CMU 200 | 109747 | 11/29/2007 |
| Rohde & Schwarz | CBT Bluetooth Tester | - | 100370 | 04/26/2008 |

Table 7. Equipment list

2.2 Description of the test setup

Before SAR measurements are conducted, the device and the DASY equipment are setup as follows:

2.2.1 Device and base station simulator setup

- Power up the device.
- Turn on the base station simulator and set the radio channel and power to the appropriate values.
- Connect an antenna to the RF IN/OUT of the communication test set and place it close to the device.

2.2.2 DASY setup

- Turn the computer on and log on to Windows 2000.
- Start the DASY4 software by clicking on the icon located on the Windows desktop.
- Mount the DAE unit and the probe. Turn on the DAE unit.
- Turn the Robot Controller on by turning the main power switch to the horizontal position

| | | | |
|---|--|---|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 9(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 | FCC ID: L6ARBR40GW |

- Align the probe by clicking the ‘Align probe in light beam’ button.
- Open a file and configure the proper parameters - probe, medium, communications system etc.
- Establish a connection between the Handheld and the communications test instrument. Place the Handheld on the stand and adjust it under the phantom.
- Start SAR measurements.

3.0 ELECTRIC FIELD PROBE CALIBRATION

3.1 Probe Specifications

SAR measurements were conducted using the dosimetric probe ET3DV6 and EX3DV4, designed by Schmid & Partner Engineering AG for the measurement of SAR. The probe is constructed using the thin film technique, with printed resistive lines on ceramic substrates. It has a symmetrical design with triangular core, built-in optical fibre for the surface detection system and built-in shielding against static discharge. The probe is sensitive to E-fields and thus incorporates three small dipoles arranged so that the overall response is close to isotropic. The table below summarizes the technical data for the probe.

| Property | Data |
|---|----------------------------------|
| Probe model EX3DV6 | |
| Frequency range | 30 MHz – 3 GHz |
| Linearity | ±0.1 dB |
| Directivity (rotation around probe axis) | ≤ ±0.2 dB |
| Directivity (rotation normal to probe axis) | ±0.4 dB |
| Dynamic Range | 5 mW/kg – 100 W/kg |
| Probe positioning repeatability | ±0.2 mm |
| Spatial resolution | < 0.125 mm ³ |
| Probe model EX3DV4 for 2.4 – 6 GHz | |
| Probe tip to sensor center | 1.0 mm |
| Probe tip diameter is | 2.5 mm |
| Probe calibration uncertainty | < 15 % for f = 2.45 to < 6.0 GHz |
| Probe calibration range | ± 100 MHz |

Table 8. Probe specifications

| | | | |
|---|--|---|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 10(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 | FCC ID: L6ARBR40GW |

3.2 Probe calibration and measurement errors

The probe ET3DV6 was calibrated on Jan 15, 2007 with an accuracy better than $\pm 10\%$ and $< 15\%$ for probe EX3DV4 (2-6 GHz). The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe were tested. The probe calibration parameters are shown on Appendix D.

4.0 SAR MEASUREMENT SYSTEM VERIFICATION

Prior to conducting SAR measurements, the system was validated using the dipole validation kit and the flat section of the SAM phantom. A power level of 1.0W was applied to the dipole antenna. The verification results are in the table below with a comparison to reference values. Printouts are shown in Appendix A. All the measured parameters are within the allowed tolerances.

4.1 System accuracy verification for head adjacent use

| f (MHz) | Limits / Measured | SAR (W/kg) 1 g/ 10 g | Dielectric Parameters | | Liquid Temp (°C) |
|------------|-----------------------|-------------------------|-----------------------|----------------|---------------------|
| | | | ϵ_r | σ [S/m] | |
| 835 | Measured (07/18/2007) | 9.05/5.90 | 42.69 | 0.88 | 22.6 |
| | Measured (07/26/2007) | 9.38/6.14 | 42.19 | 0.90 | 22.5 |
| | Recommended Limits | 9.28 / 6.04 | 41.50 | 0.90 | N/A |
| 1900 | Measured (07/03/2007) | 37.30/19.50 | 39.19 | 1.38 | 23.0 |
| | Measured (07/05/2007) | 40.60/21.30 | 39.50 | 1.46 | 23.3 |
| | Measured (07/24/2007) | 39.80/20.80 | 38.19 | 1.46 | 22.6 |
| | Recommended Limits | 37.0 / 19.60 | 40.00 | 1.40 | N/A |
| 2450 | Measured (07/23/2007) | 54.9/25.2 | 37.31 | 1.94* | 23.0 |
| | Recommended Limits | 53.8 / 24.9 | 39.2 | 1.80 | N/A |

* 7.98% higher than the target value. Despite our best efforts, we couldn't lower the conductivity any further. However, this high conductivity value would make the SAR more conservative.

Table 9. System accuracy (validation for head adjacent use)

| | | | |
|---|--|---|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 11(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 | FCC ID: L6ARBR40GW |

5.0 PHANTOM DESCRIPTION

The SAM Twin Phantom, manufactured by SPEAG, was used during the SAR measurements. The phantom is made of a fibreglass shell integrated with a wooden table.

The SAM Twin Phantom is a fibreglass shell phantom with 2 mm shell thickness. It has three measurement areas:

- Left side head
- Right side head
- Flat phantom

The phantom table dimensions are: 100x50x85 cm (LxWxH). The table is intended for use with freestanding robots.

The bottom shelf contains three pair of bolts for locking the device holder in place. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different solutions).

A white cover is provided to top the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on the cover are possible; however the optical surface detector does not work properly at the cover surface. Place a sheet of white paper on the cover when using optical surface detection.

Liquid depth of ≥ 15 cm is maintained in the phantom for all the measurements.



Figure 4. SAM Twin Phantom

| | | | |
|---|--|--|---|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 12(30) |
| | Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 |
| | | FCC ID: L6ARBR40GW | |

6.0 TISSUE DIELECTRIC PROPERTIES

6.1 Composition of tissue simulant

The composition of the brain and muscle simulating liquids for 800-900 MHz and 1800-1900 MHz are shown in the table below.

| INGREDIENT | MIXTURE 800–900MHz | | MIXTURE 1800–1900MHz | | MIXTURE 2450 MHz | |
|--------------|--------------------|----------|----------------------|----------|------------------|----------|
| | Brain % | Muscle % | Brain % | Muscle % | Brain % | Muscle % |
| Water | 40.29 | 65.45 | 55.24 | 69.91 | 55.0 | 68.75 |
| Sugar | 57.90 | 34.31 | 0 | 0 | 0 | 0 |
| Salt | 1.38 | 0.62 | 0.31 | 0.13 | 0 | 0 |
| HEC | 0.24 | 0 | 0 | 0 | 0 | 0 |
| Bactericide | 0.18 | 0.10 | 0 | 0 | 0 | 0 |
| DGBE | 0 | 0 | 44.45 | 29.96 | 40.0 | 31.25 |
| Triton X-100 | 0 | 0 | 0 | 0 | 5.0 | 0 |

Table10. Tissue simulant recipe

6.1.1 Equipment

| Manufacturer | Test Equipment | Model Number | Serial Number | Cal. Due Date |
|-----------------|---------------------|--------------|---------------|---------------|
| Pyrex, England | Graduated Cylinder | N/A | N/A | N/A |
| Pyrex, USA | Beaker | N/A | N/A | N/A |
| Acculab | Weight Scale | V1-1200 | 018WB2003 | N/A |
| Control Company | Digital Thermometer | 23609-234 | 21352860 | 08/31/07 |
| IKA Works Inc. | Hot Plate | RC Basic | 3.107433 | N/A |

Table 11. Tissue simulant preparation equipment

6.1.2 Preparation procedure

800-900 MHz liquids

- Fill the container with **water**. Begin heating and stirring.
- Add the **Cellulose**, the **preservative substance** and the **salt**. After several hours, the liquid will become more transparent again. The container must be covered to prevent evaporation.
- Add **Sugar**. Stir it well until the sugar is sufficiently dissolved.
- Keep the liquid hot but below the boiling point for at least an hour. The container must be covered to prevent evaporation.

| | | | |
|---|--|---|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 13(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 | FCC ID: L6ARBR40GW |

- Remove the container from, and turn the hotplate off and allow the liquid to cool off to room temperature prior to performing dielectric measurements.

1800-2450 MHz liquid

- Fill the container with water and place it on hotplate. Begin heating and stirring.
- Add the salt, Glycol/Triton X-100. The container must be covered to prevent evaporation.
- Keep the liquid hot enough to dissolve sugar for at least an hour. The container must be covered to prevent evaporation.
- Remove the container from, and turn the hotplate off and allow the liquid to cool off to room temperature prior to performing dielectric measurements.

6.2 Electrical parameters of the tissue simulating liquid

The tissue dielectric parameters shall be measured before a batch can be used for SAR measurements to ensure that the simulated tissue was properly made and will simulate the desired human characteristic. Limits and measured electrical parameters are shown in the table below.

Recommended limits are adopted from IEEE P1528-2003:

“Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, DASY 4 manual and from FCC Tissue Dielectric Properties web page at <http://www.fcc.gov/fcc-bin/dielec.sh>

| f (MHz) | Tissue Type | Limits / Measured | Dielectric Parameters | | Liquid Temp (°C) |
|---------|-------------|-----------------------|-----------------------|----------------|------------------|
| | | | ϵ_r | σ [S/m] | |
| 835 | Head | Measured (07/18/2007) | 42.69 | 0.88 | 22.6 |
| | | Measured (07/26/2007) | 42.19 | 0.90 | 22.5 |
| | | Recommended Limits | 41.50 | 0.90 | N/A |
| | Muscle | Measured (07/18/2007) | 54.91 | 0.96 | 22.9 |
| | | Measured (07/26/2007) | 53.79 | 0.96 | 22.7 |
| | | Recommended Limits | 55.20 | 0.97 | N/A |
| 1900 | Head | Measured (07/03/2007) | 39.19 | 1.38 | 23.0 |
| | | Measured (07/05/2007) | 39.50 | 1.46 | 23.3 |
| | | Measured (07/24/2007) | 38.19 | 1.46 | 22.6 |
| | | Recommended Limits | 40.00 | 1.40 | N/A |
| | Muscle | Measured (07/05/2007) | 50.86 | 1.59 | 22.8 |
| | | Measured (07/25/2007) | 50.80 | 1.59 | 22.9 |
| | | Recommended Limits | 53.3 | 1.52 | N/A |
| 2450 | Head | Measured (07/23/2007) | 37.31 | 1.94* | 23.0 |
| | | Recommended Limits | 39.2 | 1.80 | N/A |
| | Muscle | Measured (07/23/2007) | 50.48 | 1.94 | 22.9 |
| | | Recommended Limits | 52.7 | 1.95 | N/A |

* 7.98% higher than the target value. Despite our best efforts, we couldn't lower the conductivity any further. However, this high conductivity value would make the SAR more conservative.

Table 12. Electrical parameters of tissue simulating liquid

| | | | |
|---|--|--|---|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 14(30) |
| | Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 |
| | | | FCC ID: L6ARBR40GW |

6.2.1 Equipment

| Manufacturer | Test Equipment | Model Number | Serial Number | Cal. Due Date |
|----------------------|----------------------|--------------|---------------|---------------|
| Agilent Technologies | Network Analyzer | 8753ES | US39174857 | 09/28/2007 |
| Agilent Technologies | Dielectric probe kit | HP 85070C | US9936135 | CNR |
| Dell | PC using GPIB card | GX110 | 347 | N/A |
| Control Company | Digital Thermometer | 15-077-21 | 51129471 | 08/31/2007 |

Table 13. Equipment required for electrical parameter measurements

6.2.2 Test Configuration

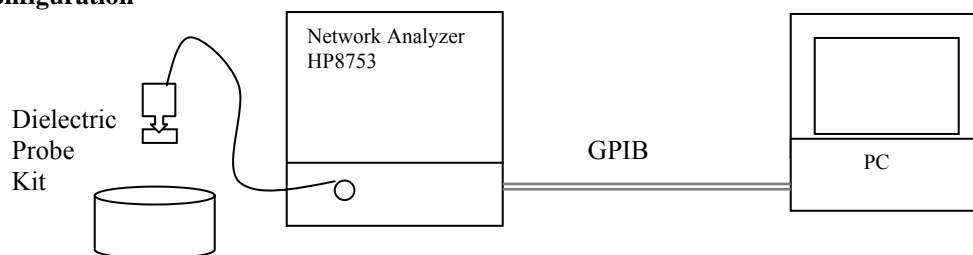


Figure 5. Test configuration

6.2.3 Procedure

1. Turn NWA on and allow at least 30 minutes for warm up.
2. Mount dielectric probe kit so that interconnecting cable to NWA will not be moved during measurements or calibration.
3. Pour de-ionized water and measure water temperature ($\pm 1^\circ$).
4. Set water temperature in HP-Software (Calibration Setup).
5. Perform calibration.
6. Relative permittivity $\epsilon_r = \epsilon'$ and conductivity can be calculated from ϵ''

$$\sigma = \omega \epsilon_0 \epsilon''$$
7. Measure liquid shortly after calibration.
8. Stir the liquid to be measured. Take a sample (~50ml) with a syringe from the center of the liquid container.
9. Pour the liquid into a small glass flask. Hold the syringe at the bottom of the flask to avoid air bubbles.
10. Put the dielectric probe in the glass flask. Check that there are no air bubbles in front of the opening in the dielectric probe kit.
11. Perform measurements.
12. Adjust medium parameters in DASY4 for the frequencies necessary for the measurements ('Setup Config', select medium (e.g. Head 835 MHz) and press 'Option'-button.
13. Select the current medium for the frequency of the validation (e.g. Setup Medium Brain 835 MHz).

Sample calculation for 835 MHz head tissue dielectric parameters using data from Table 14.

Relative permittivity $\epsilon_r = \epsilon' = 42.69$

Conductivity $\sigma = \omega \epsilon_0 \epsilon'' = (2\pi \times 835 \times 10^6)(8.854 \times 10^{-12})(18.87) = 0.88 \text{ S/m}$

| | | | |
|--------------------------------------|--|---|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 15(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 | FCC ID: L6ARBR40GW |

Title

SubTitle

July 18, 2007 10:40 PM

Title

SubTitle

July 18, 2007 10:52 PM

| Frequency | e' | e'' |
|----------------|---------|---------|
| 800.000000 MHz | 43.1900 | 19.0865 |
| 805.000000 MHz | 43.1445 | 19.0675 |
| 810.000000 MHz | 43.0584 | 19.0548 |
| 815.000000 MHz | 43.0000 | 19.0024 |
| 820.000000 MHz | 42.9354 | 18.9632 |
| 825.000000 MHz | 42.8669 | 18.9256 |
| 830.000000 MHz | 42.7729 | 18.9434 |
| 835.000000 MHz | 42.6871 | 18.8749 |
| 840.000000 MHz | 42.6498 | 18.8980 |
| 845.000000 MHz | 42.5580 | 18.8742 |
| 850.000000 MHz | 42.5293 | 18.8844 |
| 855.000000 MHz | 42.4359 | 18.8826 |
| 860.000000 MHz | 42.3532 | 18.8778 |
| 865.000000 MHz | 42.3260 | 18.9184 |
| 870.000000 MHz | 42.2427 | 18.9040 |
| 875.000000 MHz | 42.1931 | 18.9307 |
| 880.000000 MHz | 42.1203 | 18.9439 |
| 885.000000 MHz | 42.0762 | 18.9487 |
| 890.000000 MHz | 42.0340 | 18.9729 |
| 895.000000 MHz | 41.9997 | 18.9548 |
| 900.000000 MHz | 41.9684 | 18.9607 |
| 905.000000 MHz | 41.9351 | 18.9574 |
| 910.000000 MHz | 41.9059 | 18.9332 |
| 915.000000 MHz | 41.8476 | 18.9083 |
| 920.000000 MHz | 41.7772 | 18.8730 |

Head

| Frequency | e' | e'' |
|----------------|---------|---------|
| 800.000000 MHz | 55.1670 | 20.6542 |
| 805.000000 MHz | 55.1384 | 20.6607 |
| 810.000000 MHz | 55.1099 | 20.6332 |
| 815.000000 MHz | 55.0560 | 20.6263 |
| 820.000000 MHz | 55.0329 | 20.6082 |
| 825.000000 MHz | 55.0233 | 20.5796 |
| 830.000000 MHz | 54.9675 | 20.5737 |
| 835.000000 MHz | 54.9129 | 20.5675 |
| 840.000000 MHz | 54.8822 | 20.5634 |
| 845.000000 MHz | 54.8379 | 20.5207 |
| 850.000000 MHz | 54.7410 | 20.5092 |
| 855.000000 MHz | 54.6893 | 20.4701 |
| 860.000000 MHz | 54.6204 | 20.4543 |
| 865.000000 MHz | 54.5268 | 20.4267 |
| 870.000000 MHz | 54.4610 | 20.4265 |
| 875.000000 MHz | 54.4171 | 20.3967 |
| 880.000000 MHz | 54.3592 | 20.3832 |
| 885.000000 MHz | 54.3151 | 20.3751 |
| 890.000000 MHz | 54.2745 | 20.3868 |
| 895.000000 MHz | 54.2368 | 20.3764 |
| 900.000000 MHz | 54.2413 | 20.3649 |
| 905.000000 MHz | 54.1853 | 20.3826 |
| 910.000000 MHz | 54.1839 | 20.3524 |
| 915.000000 MHz | 54.1582 | 20.3373 |
| 920.000000 MHz | 54.1218 | 20.3574 |

Muscle

Table 14. 835 MHz head and muscle tissue dielectric parameters

| | | | |
|--------------------------------------|--|---|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 16(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 | FCC ID: L6ARBR40GW |

Title
SubTitle
July 03, 2007 05:47 PM

Title
SubTitle
July 05, 2007 02:53 PM

| Frequency | e' | e'' | Frequency | e' | e'' |
|-----------------|---------|---------|-----------------|---------|---------|
| 1.800000000 GHz | 37.6818 | 11.5607 | 1.800000000 GHz | 51.2497 | 14.4987 |
| 1.805000000 GHz | 37.7245 | 11.5471 | 1.805000000 GHz | 51.2372 | 14.5341 |
| 1.810000000 GHz | 37.7843 | 11.5378 | 1.810000000 GHz | 51.2176 | 14.5861 |
| 1.815000000 GHz | 37.8196 | 11.5512 | 1.815000000 GHz | 51.2068 | 14.6308 |
| 1.820000000 GHz | 37.9348 | 11.5668 | 1.820000000 GHz | 51.1974 | 14.6423 |
| 1.825000000 GHz | 38.0279 | 11.5889 | 1.825000000 GHz | 51.1769 | 14.6739 |
| 1.830000000 GHz | 38.1136 | 11.6032 | 1.830000000 GHz | 51.1472 | 14.6811 |
| 1.835000000 GHz | 38.2188 | 11.6255 | 1.835000000 GHz | 51.1075 | 14.7181 |
| 1.840000000 GHz | 38.3201 | 11.6845 | 1.840000000 GHz | 51.0953 | 14.7535 |
| 1.845000000 GHz | 38.4214 | 11.7427 | 1.845000000 GHz | 51.0752 | 14.7956 |
| 1.850000000 GHz | 38.5014 | 11.7842 | 1.850000000 GHz | 51.0533 | 14.8180 |
| 1.855000000 GHz | 38.5734 | 11.8504 | 1.855000000 GHz | 51.0303 | 14.8344 |
| 1.860000000 GHz | 38.6530 | 11.9611 | 1.860000000 GHz | 51.0122 | 14.8643 |
| 1.865000000 GHz | 38.7463 | 12.0979 | 1.865000000 GHz | 50.9904 | 14.8975 |
| 1.870000000 GHz | 38.8787 | 12.2160 | 1.870000000 GHz | 50.9727 | 14.9060 |
| 1.875000000 GHz | 38.9906 | 12.3374 | 1.875000000 GHz | 50.9575 | 14.9373 |
| 1.880000000 GHz | 39.0217 | 12.4503 | 1.880000000 GHz | 50.9512 | 14.9786 |
| 1.885000000 GHz | 39.0505 | 12.5819 | 1.885000000 GHz | 50.9395 | 14.9964 |
| 1.890000000 GHz | 39.1069 | 12.7283 | 1.890000000 GHz | 50.9039 | 15.0064 |
| 1.895000000 GHz | 39.1602 | 12.8823 | 1.895000000 GHz | 50.8762 | 15.0168 |
| 1.900000000 GHz | 39.1947 | 13.0334 | 1.900000000 GHz | 50.8650 | 15.0662 |
| 1.905000000 GHz | 39.1996 | 13.1972 | 1.905000000 GHz | 50.8584 | 15.1080 |
| 1.910000000 GHz | 39.1731 | 13.3662 | 1.910000000 GHz | 50.8698 | 15.1413 |
| 1.915000000 GHz | 39.1810 | 13.5695 | 1.915000000 GHz | 50.8481 | 15.1646 |
| 1.920000000 GHz | 39.2309 | 13.7726 | 1.920000000 GHz | 50.8174 | 15.1851 |
| Head | | | Muscle | | |

Table 15. 1900 MHz head and muscle tissue dielectric parameters

| | | | |
|--------------------------------------|--|---|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 17(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 | FCC ID: L6ARBR40GW |

Title
SubTitle
July 23, 2007 10:59 AM

Title
SubTitle
July 23, 2007 06:47 PM

| Frequency | e' | e'' |
|-----------------|---------|---------|
| 2.400000000 GHz | 37.5861 | 13.9949 |
| 2.405000000 GHz | 37.5474 | 14.0368 |
| 2.410000000 GHz | 37.4885 | 14.0944 |
| 2.415000000 GHz | 37.4831 | 14.1293 |
| 2.420000000 GHz | 37.4878 | 14.1071 |
| 2.425000000 GHz | 37.4588 | 14.1252 |
| 2.430000000 GHz | 37.4121 | 14.1655 |
| 2.435000000 GHz | 37.3946 | 14.1802 |
| 2.440000000 GHz | 37.3759 | 14.1931 |
| 2.445000000 GHz | 37.3389 | 14.2206 |
| 2.450000000 GHz | 37.3059 | 14.2560 |
| 2.455000000 GHz | 37.3070 | 14.2587 |
| 2.460000000 GHz | 37.4110 | 14.1956 |
| 2.465000000 GHz | 37.4934 | 14.0621 |
| 2.470000000 GHz | 37.3076 | 14.3026 |
| 2.475000000 GHz | 37.0527 | 14.3821 |
| 2.480000000 GHz | 36.9570 | 14.3945 |
| 2.485000000 GHz | 36.9957 | 14.4357 |
| 2.490000000 GHz | 36.9737 | 14.4280 |
| 2.495000000 GHz | 37.2023 | 14.3977 |
| 2.500000000 GHz | 36.9876 | 14.4639 |

| Frequency | e' | e'' |
|-----------------|---------|---------|
| 2.400000000 GHz | 50.4568 | 14.0613 |
| 2.405000000 GHz | 50.4245 | 14.0746 |
| 2.410000000 GHz | 50.4465 | 14.1061 |
| 2.415000000 GHz | 50.5337 | 14.1463 |
| 2.420000000 GHz | 50.5156 | 14.1647 |
| 2.425000000 GHz | 50.5884 | 14.2400 |
| 2.430000000 GHz | 50.6216 | 14.2580 |
| 2.435000000 GHz | 50.5804 | 14.2502 |
| 2.440000000 GHz | 50.5480 | 14.2462 |
| 2.445000000 GHz | 50.4925 | 14.2380 |
| 2.450000000 GHz | 50.4833 | 14.2496 |
| 2.455000000 GHz | 50.4925 | 14.2790 |
| 2.460000000 GHz | 50.5099 | 14.3385 |
| 2.465000000 GHz | 50.5314 | 14.4187 |
| 2.470000000 GHz | 50.5024 | 14.4663 |
| 2.475000000 GHz | 50.4485 | 14.4461 |
| 2.480000000 GHz | 50.4079 | 14.4538 |
| 2.485000000 GHz | 50.4102 | 14.4961 |
| 2.490000000 GHz | 50.3471 | 14.4737 |
| 2.495000000 GHz | 50.2794 | 14.4355 |
| 2.500000000 GHz | 50.2668 | 14.4531 |

Head

Muscle

Table 16. 2450 MHz head and muscle tissue dielectric parameters

| | | | |
|---|--|---|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 18(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 | FCC ID: L6ARBR40GW |

7.0 SAR SAFETY LIMITS

| Standards/Guideline | Localized SAR Limit (W/kg) General public (uncontrolled) | Localized SAR Limits (W/kg) Workers (controlled) |
|----------------------------|--|--|
| ICNIRP (1998) Standard | 2.0 (10g) | 10.0 (10g) |
| IEEE C95.1 (1999) Standard | 1.6 (1g) | 8.0 (1g) |

Table 17. SAR safety limits for Controlled / Uncontrolled environment

| Human Exposure | Localized SAR Limits (W/kg) 10g, ICNIRP (1998) Standard | Localized SAR Limits (W/kg) 1g, IEEE C95.1 (1999) Standard |
|--|---|--|
| Spatial Average (averaged over the whole body) | 0.08 | 0.08 |
| Spatial Peak (averaged over any X g of tissue) | 2.00 | 1.60 |
| Spatial Peak (hands/wrists/feet/ankles averaged over 10 g) | 4.00 | 4.00 (10g) |

Table 18. SAR safety limits

Uncontrolled Environments are defined as locations where there is exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

| | | | |
|---|--|---|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 19(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 | FCC ID: L6ARBR40GW |

8.0 DEVICE POSITIONING

8.1 Device holder for SAM Twin Phantom

The Handheld was positioned for all test configurations using the DASY4 holder. The device holder facilitates the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. The devices can be easily, accurately and with repeatability positioned according to FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

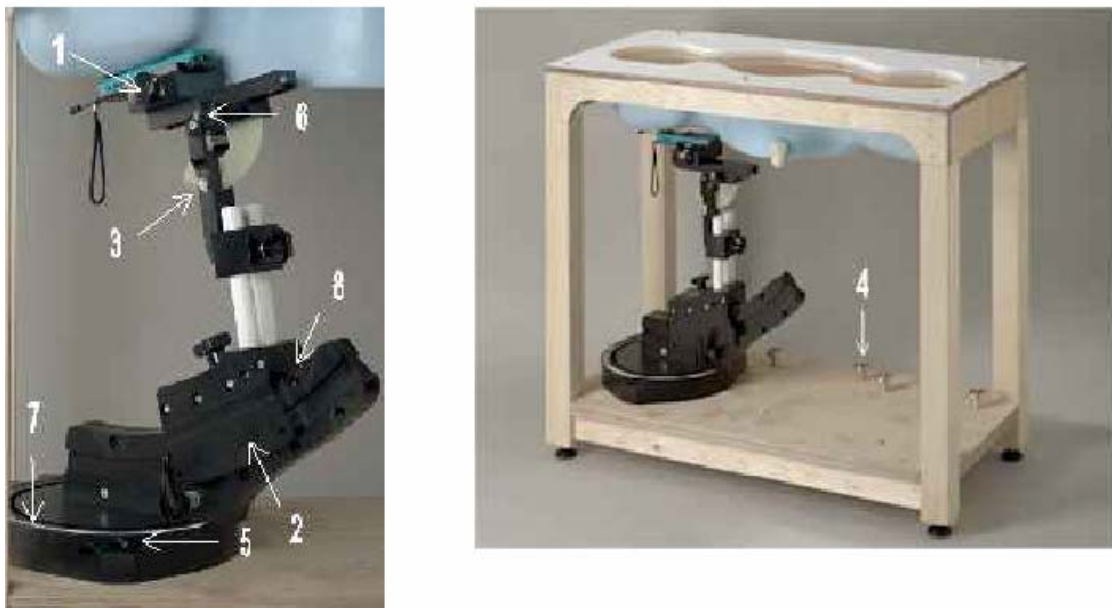


Figure 6. Device Holder

1. Put the phone in the clamp mechanism (1) and hold it straight while tightening. (Curved phones or phones with asymmetrical ear pieces should be positioned so that the earpiece is in the symmetry plane of the clamp).
2. Adjust the sliding carriage (2) to 90°. Then adjust the phone holder angle (3) until the reference line of the phone is horizontal (parallel to the flat phantom bottom). The phone reference line is defined as the front tangential line between the earpiece and the center of the device bottom (or the center of the flip hinge). For devices with parallel front and backsides, the phone holder angle (3) is 0°.
3. Place the device holder at the desired phantom section and move it securely against the positioning pins (4). The screw in front of the turning plate can be applied for correct positioning (5). (Do not tighten it too strongly).
4. Shift the phone clamp (6) so that the earpiece is exactly below the ear marking of the phantom. The phone is now correctly positioned in the holder for all standard phantom measurements, even after changing the phantom or phantom section.

| | | | |
|---|--|---|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 20(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 | FCC ID: L6ARBR40GW |

5. Adjust the device position angles to the desired measurement position.
6. After fixing the device angles, move the phone fixture up until the phone touches the ear marking. (The point of contact depends on the design of the device and the positioning angle).

8.2 Description of the test positioning

8.2.1 Test Positions of Device Relative to Head

The handset was tested in two test positions against the head phantom, the “cheek” position and the “tilted” position, on both left and right sides of the phantom.

The handset was tested in the above positions according to IEEE 1528- 2003 “Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques”.

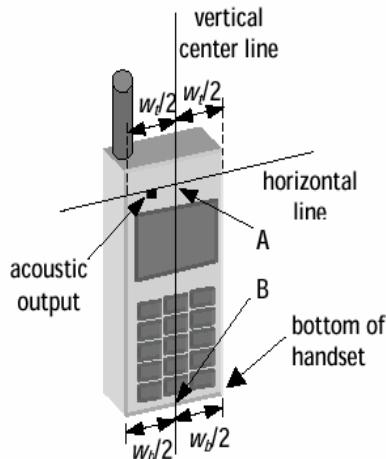


Figure 7a. Handset vertical and horizontal reference lines – fixed case

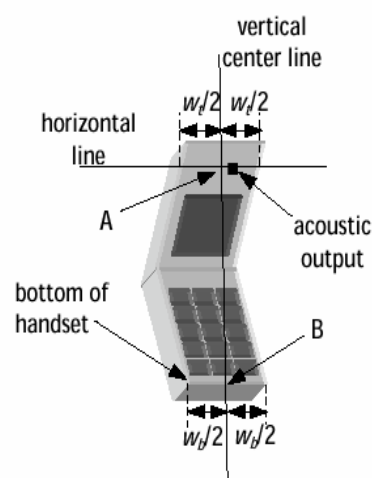


Figure 7b. Handset vertical and horizontal reference lines – “clam-shell”

| | | |
|---|--|---|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | Page 21(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 |
| | | FCC ID: L6ARBR40GW |

8.2.1.1 Definition of the “cheek” position

- 1) Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece, open the cover.
- 2) Define two imaginary lines on the handset: the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A on Figures 7a and 7b), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 7a). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 7b), especially for clamshell handsets, handsets with flip pieces, and other irregularly shaped handsets.
- 3) Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 7), such that the plane defined by the vertical center line and the horizontal center line is in a plane approximately parallel to the sagittal plane of the phantom.
- 4) Translate the handset towards the phantom along the line passing through RE and LE until the handset touches the ear.
- 5) While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is the plane normal to MB (“mouth-back”) - NF (“neck-front”) including the line MB (reference plane).
- 6) Rotate the phone around the vertical centerline until the phone (horizontal line) is symmetrical with respect to the line NF.
- 7) While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, rotate the handset about the line NF until any point on the handset is in contact with a phantom point below the ear (cheek).

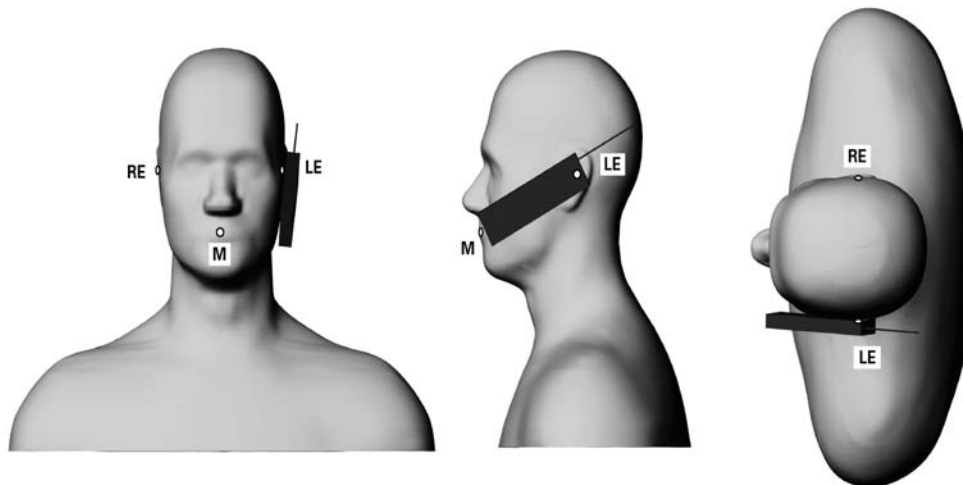


Figure 8. Phone position 1, “cheek” or “touch” position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning, are indicated. The shoulders are shown for illustration purposes only.

| | | | |
|---|--|---|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 22(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 | FCC ID: L6ARBR40GW |

8.2.1.2 Definition of the “Tilted” Position

- 1) Repeat steps 1 to 7 of 5.4.1 (in this report 8.2.1.1) to replace the device in the “cheek position.”
- 2) While maintaining the device in the reference plane (described above) and pivoting against the ear, move the device outward away from the mouth by an angle of 15 degrees, or until the antenna touches the phantom.

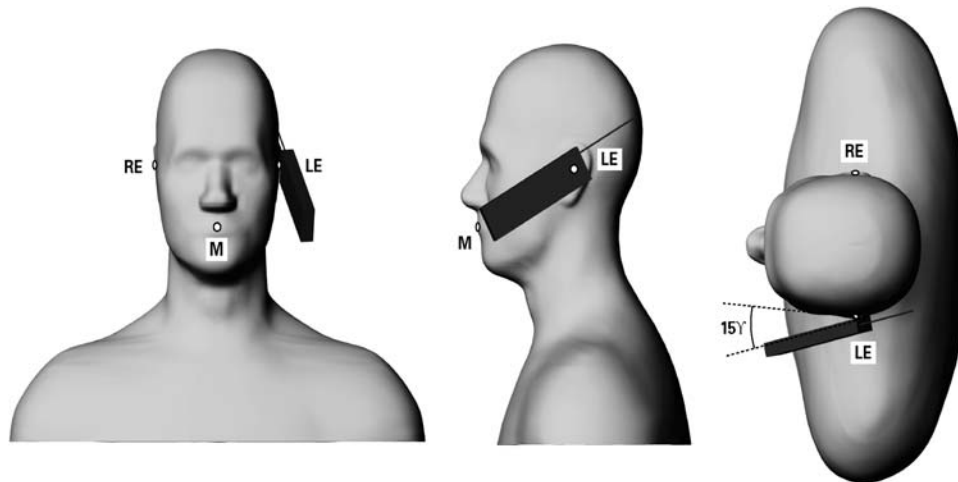


Figure 9. Phone position 2, “tilted position.” The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning, are indicated. The shoulders are shown for illustration purposes only.

8.2.2 Body Holster Configuration

A body worn holster, as shown on Figure 2, was tested with the Wireless Handheld for FCC RF exposure compliance. The EUT was positioned in the holster case and the belt clip was placed against the flat section of the phantom. A headset was then connected to the handheld to simulate hands-free operation in a body worn holster configuration.

| | | | |
|---|--|---|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 23(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 | FCC ID: L6ARBR40GW |

9.0 HIGH LEVEL EVALUATION

9.1 Maximum search

The maximum search is automatically performed after each coarse scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the coarse scan measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations.

9.2 Extrapolation

The extrapolation can be used in z-axis scans with automatic surface detection. The SAR values can be extrapolated to the inner phantom surface. The extrapolation distance is the sum of the probe sensor offset, the surface detection distance and the grid offset. The extrapolation is based on fourth order polynomial functions. The extrapolation is only available for SAR values.

9.3 Boundary correction

The correction of the probe boundary effect in the vicinity of the phantom surface is done in the standard (worst case) evaluation; the boundary effect is reduced by different weights for the lowest measured points in the extrapolation routine. The result is a slight overestimation of the extrapolated SAR values (2% to 8%) depending on the SAR distribution and gradient. The advanced evaluation makes a full compensation of the boundary effect before doing the extrapolation. This is only possible for probes with specifications on the boundary effect.

9.4 Peak search for 1g and 10g cube averaged SAR

The 1g and 10g peak evaluations are only available for the predefined cube 5x5x7 / 7x7x7 scan. The routines are verified and optimized for the grid dimensions used in these cube measurements.

The measured volume of 30x30x30mm mm with 5mm resolution amounts to 343 measurement points. The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume in a 1mm grid. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is then moved around until the highest averaged SAR is found. This last procedure is repeated for a 10 g cube. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

| | | | |
|------------------------------------|--|--|---|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 24(30) |
| | Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 |
| | | | FCC ID: L6ARBR40GW |

10.0 MEASUREMENT UNCERTAINTY

| DASY4 Uncertainty Budget According to IEEE P1528 [1] | | | | | | | | |
|--|-------------------|-------------|------|--------------|---------------|----------------|-----------------|---------------------|
| Error Description | Uncertainty value | Prob. Dist. | Div. | (c_i) 1g | (c_i) 10g | Std. Unc. (1g) | Std. Unc. (10g) | (v_i) v_{eff} |
| Measurement System | | | | | | | | |
| Probe Calibration | ±4.8 % | N | 1 | 1 | 1 | ±4.8 % | ±4.8 % | ∞ |
| Axial Isotropy | ±4.7 % | R | √3 | 0.7 | 0.7 | ±1.9 % | ±1.9 % | ∞ |
| Hemispherical Isotropy | ±9.6 % | R | √3 | 0.7 | 0.7 | ±3.9 % | ±3.9 % | ∞ |
| Boundary Effects | ±1.0 % | R | √3 | 1 | 1 | ±0.6 % | ±0.6 % | ∞ |
| Linearity | ±4.7 % | R | √3 | 1 | 1 | ±2.7 % | ±2.7 % | ∞ |
| System Detection Limits | ±1.0 % | R | √3 | 1 | 1 | ±0.6 % | ±0.6 % | ∞ |
| Readout Electronics | ±1.0 % | N | 1 | 1 | 1 | ±1.0 % | ±1.0 % | ∞ |
| Response Time | ±0.8 % | R | √3 | 1 | 1 | ±0.5 % | ±0.5 % | ∞ |
| Integration Time | ±2.6 % | R | √3 | 1 | 1 | ±1.5 % | ±1.5 % | ∞ |
| RF Ambient Conditions | ±3.0 % | R | √3 | 1 | 1 | ±1.7 % | ±1.7 % | ∞ |
| Probe Positioner | ±0.4 % | R | √3 | 1 | 1 | ±0.2 % | ±0.2 % | ∞ |
| Probe Positioning | ±2.9 % | R | √3 | 1 | 1 | ±1.7 % | ±1.7 % | ∞ |
| Max. SAR Eval. | ±1.0 % | R | √3 | 1 | 1 | ±0.6 % | ±0.6 % | ∞ |
| Test Sample Related | | | | | | | | |
| Device Positioning | ±2.9 % | N | 1 | 1 | 1 | ±2.9 % | ±2.9 % | 145 |
| Device Holder | ±3.6 % | N | 1 | 1 | 1 | ±3.6 % | ±3.6 % | 5 |
| Power Drift | ±5.0 % | R | √3 | 1 | 1 | ±2.9 % | ±2.9 % | ∞ |
| Phantom and Setup | | | | | | | | |
| Phantom Uncertainty | ±4.0 % | R | √3 | 1 | 1 | ±2.3 % | ±2.3 % | ∞ |
| Liquid Conductivity (target) | ±5.0 % | R | √3 | 0.64 | 0.43 | ±1.8 % | ±1.2 % | ∞ |
| Liquid Conductivity (meas.) | ±2.5 % | N | 1 | 0.64 | 0.43 | ±1.6 % | ±1.1 % | ∞ |
| Liquid Permittivity (target) | ±5.0 % | R | √3 | 0.6 | 0.49 | ±1.7 % | ±1.4 % | ∞ |
| Liquid Permittivity (meas.) | ±2.5 % | N | 1 | 0.6 | 0.49 | ±1.5 % | ±1.2 % | ∞ |
| Combined Std. Uncertainty | | | | | | ±10.3 % | ±10.0 % | 330 |
| Expanded STD Uncertainty | | | | | | ±20.6 % | ±20.1 % | |

Table 19. Worst-Case uncertainty budget for DASY4 assessed according to IEEE P1528.
Source: Schmid & Partner Engineering AG.

[1] The budget is valid for the frequency range 300MHz - 3 GHz and represents a worst-case analysis. For specific tests and configurations, the uncertainty could be considerably smaller.

| | | | |
|---|--|--|---|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 25(30) |
| | Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 |
| | | | FCC ID: L6ARBR40GW |

11.0 TEST RESULTS

11.1 SAR Measurement results at highest power measured against the head

| Mode | Freq. (MHz) | Cond. Out. Pwr. (dBm) | SAR, averaged over 1 g (W/kg) | | | SAR, averaged over 1 g (W/kg) | | |
|--------------------------------|-------------|------------------------|-------------------------------|-------|--------|-------------------------------|-------|--------|
| | | | Left-hand | | | Right-hand | | |
| | | | Liquid Temp. (°C) | Cheek | Tilted | Liquid Temp. (°C) | Cheek | Tilted |
| 2-slots GSM/EDGE 850 MHz | 824.2 | 30.5 | 22.7 | 0.97 | | 22.5 | 1.00 | |
| | 836.6 | 30.5 | 22.8 | 1.01 | | 22.4 | 1.05 | |
| | 848.8 | 30.5 | 22.6 | 1.01 | 0.44 | 22.6 | 1.05 | 0.50 |
| 2-slots GSM/EDGE 850 MHz + BT | 824.2 | 30.5 | | | | | | |
| | 836.6 | 30.5 | | | | | | |
| | 848.8 | 30.5 | 22.7 | 0.87 | | 22.9 | 0.91 | |
| 1-slot GSM 850 MHz | 824.2 | 32.6 | | | | | | |
| | 836.6 | 32.7 | | | | | | |
| | 848.8 | 32.6 | 23.0 | 0.88 | | 22.8 | 0.81 | |
| 2-slots GSM/EDGE 1900 MHz | 1850.2 | 28.5 | 23.2 | 0.56 | | 22.8 | 0.58 | |
| | 1880.0 | 28.3 | 23.0 | 0.63 | 0.48 | 23.3 | 0.81 | 0.63 |
| | 1909.8 | 28.3 | | | | 23.0 | 0.77 | |
| 2-slots GSM/EDGE 1900 MHz + BT | 1850.2 | 28.5 | | | | | | |
| | 1880.0 | 28.3 | | | | 22.5 | 0.84 | |
| | 1909.8 | 28.3 | | | | | | |
| 1-slot GSM 1900 MHz | 1850.2 | 30.8 | 23.4 | 0.54 | | 23.1 | 0.45 | |
| | 1880.0 | 30.6 | 22.7 | 0.56 | | 22.6 | 0.80* | |
| | 1909.8 | 30.5 | | | | | | |
| WLAN 2400 MHz | 2412 | | | | | | | |
| | 2437 | | | | | | | |
| | 2462 | | | | | | | |

* If the power drift is < - 0.2 dB, then the SAR values are compensated for by the the following formula:

$$\text{SAR (compensated)} = \text{SAR (measured)} * 10^{(|\text{Power Drift (dB)}| / 10)}$$

Table 20. SAR results for RBR41GW rev 2 for head configuration

| | | | |
|---|--|--|---|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 26(30) |
| | Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 |
| | | FCC ID: L6ARBR40GW | |

| Mode | Freq. (MHz) | Cond. Out. Pwr. (dBm) | SAR, averaged over 1 g (W/kg) | | | SAR, averaged over 1 g (W/kg) | | |
|---------------------------------|----------------|------------------------------------|----------------------------------|-------|--------|----------------------------------|-------|--------|
| | | | Left-hand | | | Right-hand | | |
| | | | Liquid Temp. (°C) | Cheek | Tilted | Liquid Temp. (°C) | Cheek | Tilted |
| | | | | | | | | |
| 2-slots GSM/EDGE 850 MHz | 824.2 | 30.5 | | | | | | |
| | 836.6 | 30.5 | | | | | | |
| | 848.8 | 30.5 | 23.1 | 1.19 | | 22.7 | 1.19 | |
| 1-slot GSM 850 MHz | 824.2 | 32.6 | | | | | | |
| | 836.6 | 32.7 | | | | | | |
| | 848.8 | 32.6 | 23.0 | 1.05 | | 22.8 | 1.04 | |
| 2-slots GSM/EDGE 1900 MHz | 1850.2 | 28.5 | 23.2 | 0.80 | 0.54 | 22.8 | 1.00 | 0.64 |
| | 1880.0 | 28.3 | | | | | | |
| | 1909.8 | 28.3 | | | | | | |
| 1-slot GSM 1900 MHz | 1850.2 | 30.8 | 22.9 | 0.75 | | 23.1 | 0.82 | |
| | 1880.0 | 30.6 | | | | | | |
| | 1909.8 | 30.5 | | | | | | |
| WLAN 2400 MHz | 2412 | 17.5 | | | | | | |
| | 2437 | 17.6 | 23.4 | 0.29* | 0.21 | 23.2 | 0.25* | 0.18 |
| | 2462 | 17.9 | | | | | | |

* If the power drift is < - 0.2 dB, then the SAR values are compensated for by the the following formula:

$$\text{SAR (compensated)} = \text{SAR (measured)} * 10^{(|\text{Power Drift (dB)}| / 10)}$$

Table 21. SAR results for RBR41GW rev 3 for head configuration

| | | | |
|---|--|---|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 27(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 | FCC ID: L6ARBR40GW |

11.2 Calculated worst case combined SAR for simultaneous transmission at highest power measured against the head

| Mode | SAR, averaged over 1 g (W/kg) | | SAR, averaged over 1 g (W/kg) | |
|-------------------------------------|-------------------------------|--------|-------------------------------|--------|
| | Left-hand | | Right-hand | |
| | Cheek | Tilted | Cheek | Tilted |
| 1 or 2-slots GSM/EDGE 850 MHz | 1.19 | 0.54 | 1.19 | 0.64 |
| WLAN 2400 MHz | 0.29 | 0.21 | 0.25 | 0.18 |
| 2-slots GSM 1900 + WLAN | 1.48 | 0.75 | 1.44 | 0.82 |

Table 22. SAR results for head configuration

| | | | |
|---|--|---|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 28(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 | FCC ID: L6ARBR40GW |

11.3 SAR measurement results at highest power measured against the body using accessories

| Mode | Freq. (MHz) | Cond. Power (dBm) | Liquid Temp. (°C) | Holster type / handheld configuration | Body SAR for rev 2, averaged over 1 g (W/kg) | Body SAR for rev 3, averaged over 1 g (W/kg) |
|-----------------------|-------------|-------------------|-------------------|--|--|--|
| 2-slots GPRS 850 MHz | 824.2 | 30.5 | 22.9 | Sports Case with strap, back side facing | 0.86 | 0.87 |
| | 836.8 | 30.5 | 23.1 | Sports Case with strap, back side facing | 0.84 | |
| | 848.8 | 30.5 | 22.9 | Sports Case with strap, back side facing | 0.84 | |
| | *836.8 | 30.5 | 23.3 | Sports Case without strap or clip, back side facing | 0.78 | |
| | 836.8 | 30.5 | 23.0 | Sports Case with clip, back side facing | 0.78 | |
| | 824.2 | 30.5 | 23.2 | Leather Swivel Holster, back side facing | 0.59 | |
| | 824.2 | 30.5 | 22.9 | Horizontal Holster, back side facing | 0.78 | |
| | 824.2 | 30.5 | 23.0 | Sports Case with strap, front side facing | 0.73 | |
| | 824.2 | 30.5 | 23.2 | Sports Case with strap, back side facing & BT on | 0.81 | |
| | 824.2 | 30.5 | 23.3 | Sports Case with strap and headset, back side facing | 0.64 | |
| | 824.2 | 30.5 | 23.2 | No Holster, back side 25 mm away | 0.44 | |
| 2-slots GPRS 1900 MHz | *1880 | 28.3 | 23.4 | Leather Swivel Holster, back side facing | 0.42 | |
| | 1880.0 | 28.3 | 23.5 | Horizontal Holster, back side facing | 0.54 | |
| | 1880.0 | 28.3 | 23.3 | Sports Case without strap or clip, back side facing | 0.68 | |
| | 1880.0 | 28.3 | 23.4 | Sports Case with strap, back side facing | 0.50 | |
| | 1880.0 | 28.3 | 23.5 | Sports Case with clip, back side facing | 0.71 | 1.07 |
| | 1880.0 | 28.3 | 23.3 | Sports Case with clip, front side facing | 0.27 | |
| | 1880.0 | 28.3 | 23.4 | Sports Case with clip and headset, back side facing | 0.66 | |
| | 1880.0 | 28.3 | 23.5 | Sports Case with clip, back side facing & BT on | 0.68 | |
| | 1880.0 | 28.3 | 23.2 | No Holster, back side 25 mm away | 0.20 | |

| | | | |
|---|--|---|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 29(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 | FCC ID: L6ARBR40GW |

| | | | | | | |
|---------------------|-------|------|------|---|--|-------------|
| WLAN 2400 MHz | *2437 | 17.6 | 22.7 | Leather Swivel Holster, back side facing | | 0.24 |
| | 2437 | 17.6 | 23.1 | Sports Case with strap, back side facing | | 0.34 |
| | 2437 | 17.6 | 23.3 | Sports Case without clip or strap, back side facing | | 0.32** |
| | 2437 | 17.6 | 23.4 | Sports Case with clip, back side facing | | 0.32 |
| | 2437 | 17.6 | 23.2 | Horizontal Holster, back side facing | | 0.39 |
| | 2437 | 17.6 | 23.0 | Horizontal Holster with headset, back side facing | | 0.42 |
| | 2437 | 17.6 | 23.1 | Horizontal Holster with headset, front side facing | | 0.03 |
| | 2437 | 17.6 | 23.3 | No Holster, back side 25 mm away | | 0.14 |
| | 2437 | 17.6 | 23.6 | No Holster, front side 25 mm away | | 0.02 |

* Supplement C: Middle channel testing is sufficient only if SAR < 3dB below limit see PN 02-1438

** If the power drift is < - 0.2 dB, then the SAR values are compensated for by the the following formula:

$$\text{SAR (compensated)} = \text{SAR (measured)} * 10^{(|\text{Power Drift (dB)}| / 10)}$$

Table 23. SAR results for body-worn configurations

11.4 Calculated worst case combined SAR for simultaneous transmission at highest power measured against the body using accessories

| Mode | Configuration | Body SAR, averaged over 1 g (W/kg) |
|----------------------------|---|------------------------------------|
| 2-slots GPRS 850 MHz | Sports Case with clip, back side facing | 1.07 |
| WLAN 2400 MHz | Sports Case with clip, back side facing | 0.32 |
| 2-slots GPRS + WLAN | Sports Case with clip, back side facing | 1.39 |

Table 24. SAR results for body worn configuration

| | | | |
|---|--|---|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RBR41GW | | Page 30(30) |
| Author Data Shahriar Ninad | Dates of Test July 03-27, 2007 | Test Report No RTS-0665-0706-25 | FCC ID: L6ARBR40GW |

12.0 REFERENCES

[1] IEEE 1528-2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

[2] EN 50360: 2001, Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz – 3 GHz)

[3] EN 50361: 2001, Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz – 3 GHz)

[4] ICNIRP, International Commission on Non-Ionizing Radiation Protection (1998), Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic fields (up to 300 GHz).

[5] Council Recommendation 1999/519/EC of July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz)

[6] IEEE C95.3-1991, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave.

[7] IEEE C95.1-1999, IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

[8] FCC OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields.

[9] FCC 96-326, Guidelines for Evaluating the Environmental Effects of Radio-Frequency Radiation.

[10] DASY 4 DOSIMETRIC ASSESSMENT SYSTEM SOFTWARE MANUAL V4.7 Schmid & Partner Engineering AG, June 2006 which follows draft IEC 62209 – Part 2.

[11] Health Canada, Safety Code 6, 1999: Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency range from 3 kHz to 300 GHz.

[12] RSS-102, issue 2-2005: Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields.

[13] IEC 62209-1, First Edition-2005: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)