

# EMI Test Report

Tested in accordance with  
Federal Communications Commission (FCC)  
Personal Communications Services  
CFR 47, Parts 15, Subpart B  
&  
Industry Canada (IC), ICES-003




**A division of Research In Motion Limited**

**REPORT NO.:** RTS-2604-1106-133

**PRODUCT MODEL NO.:** RDR61CW  
**TYPE NAME:** BlackBerry® smartphone  
**FCC ID:** L6ARDR60CW  
**IC:** 2503A-RDR60CW

**DATE:** July 14, 2011

|   |  |  |
|---|--|--|
|  | EMI Test Report for the BlackBerry® smartphone Model RDR61CW |  |
| Test Report No.<br>RTS-2604-1106-133  | Date of Test<br>June 16 - June 17, 2011                      | FCC ID: L6ARDR60CW<br>IC : 2503A-RDR60CW |

**Statement of Performance:**

The BlackBerry® smartphone, model RDR61CW, part number CER-41454-001 Rev. 4 and accessories when configured and operated per RIM's operation instructions, and performs within the requirements of the test standards.

**Declaration:**

We hereby certify that:

The test data reported herein is an accurate record of the performance of the sample(s) tested.

The test results are valid for the tested unit (s) only.

The test equipment used was suitable for the tests performed and within manufacturer's published specifications and operating parameters.

The test methods were consistent with the methods described in the relevant standards.

Documented by:



Shuo Wang  
Regulatory Compliance Specialist  
Date: July 14, 2011

Reviewed by:




Heng Lin  
Regulatory Compliance Specialist  
Date: July 14, 2011

Reviewed and Approved by:




Masud S. Attayi, P.Eng.  
Manager, Regulatory Compliance  
Date: July 14, 2011

|   |  |  |
|---|--|--|
|  | EMI Test Report for the BlackBerry® smartphone Model RDR61CW |  |
| <b>Test Report No.</b><br>RTS-2604-1106-133                                       | <b>Date of Test</b><br>June 16 - June 17, 2011               | <b>FCC ID:</b> L6ARDR60CW<br><b>IC :</b> 2503A-RDR60CW |

## Table of Contents

|    |   |    |
|----|---|----|
| A. | Scope .....   | 4  |
| B. | Associated Documents .....                                | 4  |
| C. | Product Identification .....                              | 4  |
| D. | Support Equipment Used for the Testing of the EUT .....   | 6  |
| E. | Summary of Results .....                                  | 6  |
| F. | Compliance Test Equipment Used .....                      | 9  |
|    | APPENDIX 1 - AC CONDUCTED EMISSIONS TEST DATA .....       | 10 |
|    | APPENDIX 2 - RADIATED EMISSIONS TEST DATA (RDR61CW) ..... | 25 |

|   |  |  |
|---|--|--|
|  | EMI Test Report for the BlackBerry® smartphone Model RDR61CW |  |
| <b>Test Report No.</b><br>RTS-2604-1106-133                                       | <b>Date of Test</b><br>June 16 - June 17, 2011               | <b>FCC ID:</b> L6ARDR60CW<br><b>IC :</b> 2503A-RDR60CW |

## A. Scope

This report details the results of compliance tests that were performed in accordance with the requirements of:

- FCC CFR 47 Part 15, Subpart B, October, 2010 Class B Digital Devices, Unintentional Radiators
- IC ICES-003 Issue 4, February 2004, Class B Digital Devices, Unintentional Radiators

## B. Associated Documents

None

## C. Product Identification


Manufactured by Research In Motion Limited whose headquarters is located at:  
295 Phillip Street  
Waterloo, Ontario  
Canada, N2L 3W8  
Phone: 519 888 7465  
Fax: 519 888 6906

The equipment under test (EUT) was tested at the following locations:

RIM Testing Services EMI test facilities

|                     |                     |
|---------------------|---------------------|
| 305 Phillip Street  | 440 Phillip Street  |
| Waterloo, Ontario   | Waterloo, Ontario   |
| Canada, N2L 3W8     | Canada, N2L 5R9     |
| Phone: 519 888 7465 | Phone: 519 888 7465 |
| Fax: 519 888 6906   | Fax: 519 888 6906   |

The testing was performed from June 16 to June 17, 2011.

|   |  |  |
|---|--|--|
|  | EMI Test Report for the BlackBerry® smartphone Model RDR61CW |  |
| Test Report No.<br>RTS-2604-1106-133  | Date of Test<br>June 16 - June 17, 2011                      | FCC ID: L6ARDR60CW<br>IC : 2503A-RDR60CW |

The sample EUT included:


| SAMPLE | MODEL   | CER NUMBER          | PIN      | Software              |
|--------|---------|---------------------|----------|-----------------------|
| 1      | RDR61CW | CER-41454-001 Rev 4 | 32EFD957 | V7.0.0.100 Bundle 848 |
| 2      | RDR61CW | CER-41454-001 Rev 4 | 32EFD941 | V7.0.0.100 Bundle 848 |

AC conducted testing was performed on sample 1.

Radiated Emissions testing was performed on sample 2.

### BlackBerry® smartphone Accessories Tested

- 1) Fixed Blade Charger Rev.1, part number HDW-24481-001 (model number RIM-C-0004ADUUS-001), with an output current of 750mA and voltage of 5.0 volts dc.
- 2) Alt. Fixed Blade Charger Rev.2, part number HDW-24481-001 (model number RIM-C-0004ADUUS-001 with an output current of 750mA and voltage of 5.0 volts dc.
- 3) Alt.1 Fixed Blade Charger part number HDW-24481-001 (model number PSM04A-050QRIM) with an output current of 750mA and voltage of 5.0 volts dc.
- 4) Captive Cable Charger, part number HDW-17957-003 with an output voltage of 5.0 volts dc, 750 mA.
- 5) Premium Stereo Headset, part number HDW-15766-005, 1.3 meters long.
- 6) Stereo Headset, part number HDW-24529-001, with a lead length of 1.1 meters.
- 7) Alt. Stereo Headset, part number HDW-24529-001, with a lead length of 1.1 meters.
- 8) Straight Jack Stereo Headset, part number HDW-24529-004, with a lead length of 1.1 meters.
- 9) Bluetooth Headset part number HDW-25937-001.
- 10) USB Data Cable, part number HDW-06610-005, 1.5 meters long.
- 11) USB Data Cable, part number HDW-06619-009, 1.0 meters long.
- 12) USB Data Cable, part number HDW-06610-013, 0.3 meters long.
- 13) USB Data Cable, part number HDW-29108-003, 1.2 meters long.
- 14) USB Data Y-Cable, part number HDW-19137-002.


|   |  |  |
|---|--|--|
|  | EMI Test Report for the BlackBerry® smartphone Model RDR61CW |  |
| <b>Test Report No.</b><br>RTS-2604-1106-133                                       | <b>Date of Test</b><br>June 16 - June 17, 2011               | <b>FCC ID:</b> L6ARDR60CW<br><b>IC :</b> 2503A-RDR60CW |

#### D. Support Equipment Used for the Testing of the EUT

- 1) IBM Thinkpad Lenovo T60p laptop, type 8742-C2U, product ID 8742C2U

#### E. Summary of Results

| SPECIFICATION      |          | TEST TYPE                                 | Meets Requirement | Test Data APPENDIX |
|--------------------|----------|---|-------------------|--------------------|
| FCC CFR 47         | IC       |   |                   |                    |
| Part 15, Subpart B | ICES-003 | Conducted AC Line Emission                | Yes               | 1                  |
| Part 15, Subpart B | ICES-003 | Radiated Unintentional Spurious Emissions | Yes               | 2                  |

|   |  |  |
|---|--|--|
|  | EMI Test Report for the BlackBerry® smartphone Model RDR61CW |  |
| Test Report No.<br>RTS-2604-1106-133  | Date of Test<br>June 16 - June 17, 2011                      | FCC ID: L6ARDR60CW<br>IC : 2503A-RDR60CW |

#### a) AC CONDUCTED EMISSIONS

The conducted emissions were measured using the test procedure outlined in CISPR Recommendation 22 through a 50 Ohm Line Impedance Stabilization Network (LISN), which was inserted in the power line to the equipment to provide the specified impedance for measurements. The EUT was placed on a nonconductive wooden table, 80 cm high that was positioned 40 cm from a vertical ground plane. The RF output of the network was connected to an EMI receiver system with characteristics that duplicate those of the receiver specified in CISPR Publication 16. BlackBerry® smartphone was in battery charging mode. The input voltage was 120 V, 60 Hz.


The following test configurations were measured for model RDR61CW:

| Test Configuration | Operating Mode(s)               | Charger + Accessories   |
|--------------------|---------------------------------|---|
| 1                  | GSM 850 Idle,<br>Audio Playback | Fixed Blade Charger<br>Premium Stereo Headset<br>1.5m USB cable   |
| 2                  | GSM1900 Idle,<br>Video Playback | Alt. Fixed Blade Charger<br>Alt. Stereo Headset<br>1.2m USB Cable |
| 3                  | CDMA Cellular Idle              | Fixed Blade Charger<br>Bluetooth Headset<br>1.2m USB Cable        |
| 4                  | CDMA PCS Idle                   | Alt.1 Fixed Blade Charger<br>Stereo Headset<br>USB Y-Cable        |

The sample EUT's conducted emissions were compared with respect to the FCC CFR 47 Part 15, Subpart B, and IC ICES-003, Class B limit. The sample EUT had a worse case test margin of 7.49 dB below the QP limit at 0.524 MHz using the quasi-peak detector, Test Configuration 1.

#### Measurement Uncertainty $\pm 3.0$ dB

To view the test data/plots, see APPENDIX 1.

|   |  |  |
|---|--|--|
|  | EMI Test Report for the BlackBerry® smartphone Model RDR61CW |  |
| Test Report No.<br>RTS-2604-1106-133  | Date of Test<br>June 16 - June 17, 2011                      | FCC ID: L6ARDR60CW<br>IC : 2503A-RDR60CW |

## b) RADIATED EMISSIONS

The radiated emissions from the EUT were measured using the methods outlined in CISPR Recommendation 22. The EUT was placed on a nonconductive styrofoam table, 80 cm high that was positioned on a remote controlled turntable. The test distance used between the EUT and the receiving antenna was three metres. The turntable was rotated to determine the azimuth of the peak emissions. Then the emissions were maximized by elevating the antenna in the range of 1 to 4 metres. The maximum emission level was recorded. The frequency range measured was from 30 MHz to 5.0 GHz. Both the horizontal and vertical polarizations of the emissions were measured.

The measurements were done in a semi-anechoic chamber. The FCC registration number is **778487** and the Industry Canada(IC) file number is **2503B-1**. The EUT was configured and operated to produce the maximum radiated emissions while still keeping within RIM's specifications.

The BlackBerry® smartphone was in battery charging mode for all configurations. The ac input voltage was 120V, 60Hz.

The following test configurations were measured for model RDR61CW:


| Test Configuration | Operating Mode(s) | Charger + Accessories   |
|--------------------|-------------------|---|
| 1                  | GSM 850 Idle      | Fixed Blade Charger + 1.5m USB Cable + Premium Stereo Headset               |
| 2                  | CDMA PCS Idle     | Fixed Blade Charger + 1.2m USB Cable + Premium Stereo Headset               |
| 3                  | CDMA CELL Idle    | Fixed Blade Charger + 0.3m USB Cable + Premium Stereo Headset               |
| 4                  | PCS 1900 Idle     | Captive Cable Charger + Stereo Headset                                      |
| 5                  | Bluetooth, Tx     | Alt. Fixed Blade Charger + 1.0m USB Cable + Bluetooth Headset + USB Y-Cable |
| 6                  | 802.11b Tx        | Alt. 1 Fixed Blade Charger + 0.3m USB Cable+ Alt. 1 Stereo Headset          |

The system's radiated emission levels were compared with respect to the FCC CFR 47 Part 15, Subpart B, and IC ICES-003, Class B limit.

The system met the requirements with a worst case emission test margin of 10.46 dB at 41.75MHz using quasi-peak detector in Test Configuration 4.

To view the test data see APPENDIX 2.



|   |  |  |
|---|--|--|
|  | EMI Test Report for the BlackBerry® smartphone Model RDR61CW |  |
| Test Report No.<br>RTS-2604-1106-133  | Date of Test<br>June 16 - June 17, 2011                      | FCC ID: L6ARDR60CW<br>IC : 2503A-RDR60CW |

### **Sample Calculation:**


Field Strength (dB $\mu$ V/m) is calculated as follows:

FS = Measured Level (dB $\mu$ V) + A.F. (dB/m) + Cable Loss (dB) - Preamp (dB) + Filter Loss (dB)

**Measurement Uncertainty  $\pm 4.6$  dB**


### **F. Compliance Test Equipment Used**

| <u>UNIT</u>                          | <u>MANUFACTURER</u> | <u>MODEL</u> | <u>SERIAL<br/>NUMBER</u> | <u>CAL DUE<br/>DATE</u><br>(YY MM DD) | <u>USE</u>                   |
|--------------------------------------|---------------------|--------------|--------------------------|---------------------------------------|------------------------------|
| Preamplifier                         | Sonoma              | 310N/11909A  | 185831                   | 11-11-14                              | Radiated Emissions           |
| Preamplifier system                  | TDK RF Solutions    | PA-02        | 080010                   | 11-09-13                              | Radiated Emissions           |
| EMC Analyzer                         | Rohde & Schwarz     | ESIB 40      | 3942A00517               | 11-11-28                              | Radiated Emissions           |
| Digital Multimeter                   | Hewlett Packard     | 34401A       | US36042324               | 11-10-28                              | Conducted/Radiated Emissions |
| T/RH Meter                           | OMEGA               | iTHX-SD      | 0380561                  | 11-10-13                              | Radiated Emission            |
| T/RH Meter                           | OMEGA               | iTHX-SD      | 0380567                  | 11-10-13                              | Radiated Emission            |
| L.I.S.N.                             | Rohde & Schwarz     | ENV216       | 100060                   | 11-12-10                              | Conducted Emissions          |
| Hybrid Log Antenna                   | EMC Automation      | HLP-3003C    | 017401                   | 12-01-14                              | Radiated Emissions           |
| Horn Antenna                         | EMC Automation      | HRN-0118     | 030101                   | 12-07-20                              | Radiated Emissions           |
| Universal Radio Communication Tester | Rohde & Schwarz     | CMU 200      | 837493/073               | 11-09-23                              | Radiated Emissions           |
| Universal Radio Communication Tester | Rohde & Schwarz     | CMU 200      | 112394                   | 11-11-29                              | Radiated/Conducted Emissions |
| EMI Test Receiver                    | Rohde & Schwarz     | ESU 40       | 100162                   | 11-10-30                              | Radiated/Conducted Emissions |
| Bluetooth Tester                     | Rohde & Schwarz     | CBT          | 100368                   | 11-11-27                              | Radiated Emissions           |
| Bluetooth Tester                     | Rohde & Schwarz     | CBT          | 100370                   | 11-11-29                              | Radiated/Conducted Emissions |

|   |   |  |
|---|---|--|
|  | EMI Test Report for the BlackBerry® smartphone Model RDR61CW<br><b>APPENDIX 1</b> |  |
| <b>Test Report No.</b><br>RTS-2604-1106-133                                       | <b>Date of Test</b><br>June 16 - June 17, 2011                                    | <b>FCC ID:</b> L6ARDR60CW<br><b>IC :</b> 2503A-RDR60CW |

## APPENDIX 1 - AC CONDUCTED EMISSIONS TEST DATA




|   |   |  |
|---|---|--|
|  | EMI Test Report for the BlackBerry® smartphone Model RDR61CW<br><b>APPENDIX 1</b> |  |
| <b>Test Report No.</b><br>RTS-2604-1106-133                                       | <b>Date of Test</b><br>June 16 - June 17, 2011                                    | <b>FCC ID:</b> L6ARDR60CW<br><b>IC :</b> 2503A-RDR60CW |

## AC Conducted Emissions Test Results

### Test Configuration 1 cont'd

| Frequency<br>(MHz) | Line | Reading<br>(QP)<br>(dBμV) | Correction<br>Factor<br>(dB) | Corrected<br>Reading<br>(QP)<br>(dBμV) | Limit<br>(QP)<br>(dBμV) | Limit<br>(AV)<br>(dBμV) | Margin<br>(QP)<br>Limits<br>(dB) |
|--------------------|------|---------------------------|------------------------------|--|-------------------------|-------------------------|----------------------------------|
| 1.824              | N    | 28.41                     | 9.82                         | 38.23                                  | 56.00                   | 46.00                   | -17.77                           |
| 2.499              | L1   | 29.05                     | 9.85                         | 38.90                                  | 56.00                   | 46.00                   | -17.10                           |
| 2.508              | N    | 27.41                     | 9.85                         | 37.26                                  | 56.00                   | 46.00                   | -18.74                           |
| 3.647              | N    | 24.10                     | 9.90                         | 34.00                                  | 56.00                   | 46.00                   | -22.00                           |
| 3.822              | L1   | 25.19                     | 9.90                         | 35.09                                  | 56.00                   | 46.00                   | -20.91                           |
| 10.140             | L1   | 25.80                     | 9.97                         | 35.77                                  | 60.00                   | 50.00                   | -24.23                           |
| 11.045             | L1   | 27.73                     | 9.98                         | 37.71                                  | 60.00                   | 50.00                   | -22.29                           |

|   |   |  |
|---|---|--|
|  | EMI Test Report for the BlackBerry® smartphone Model RDR61CW<br><b>APPENDIX 1</b> |  |
| <b>Test Report No.</b><br>RTS-2604-1106-133                                       | <b>Date of Test</b><br>June 16 - June 17, 2011                                    | <b>FCC ID:</b> L6ARDR60CW<br><b>IC :</b> 2503A-RDR60CW |


## AC Conducted Emissions Test Results

### Test Configuration 1 cont'd

| Frequency<br>(MHz) | Line | Reading<br>(AVG)<br>(dBμV) | Correction<br>Factor<br>(dB) | Corrected<br>Reading<br>(QP)<br>(dBμV) | Limit<br>(QP)<br>(dBμV) | Limit<br>(AV)<br>(dBμV) | Margin<br>(QP)<br>Limits<br>(dB) |
|--------------------|------|----------------------------|------------------------------|--|-------------------------|-------------------------|----------------------------------|
| 0.150              | N    | 22.42                      | 11.23                        | 33.66                                  | 56.00                   | 46.00                   | -22.34                           |
| 0.227              | N    | 18.28                      | 10.69                        | 28.97                                  | 52.60                   | 42.60                   | -23.63                           |
| 0.524              | L1   | 25.69                      | 9.90                         | 35.59                                  | 46.00                   | 36.00                   | -10.42                           |
| 0.533              | N    | 21.08                      | 9.90                         | 30.98                                  | 46.00                   | 36.00                   | -15.02                           |
| 0.542              | N    | 18.77                      | 9.89                         | 28.66                                  | 46.00                   | 36.00                   | -17.34                           |
| 0.987              | N    | 16.82                      | 9.81                         | 26.63                                  | 46.00                   | 36.00                   | -19.37                           |
| 1.118              | L1   | 20.03                      | 9.80                         | 29.84                                  | 46.00                   | 36.00                   | -16.16                           |
| 1.532              | L1   | 18.37                      | 9.80                         | 28.18                                  | 46.00                   | 36.00                   | -17.82                           |
| 1.824              | N    | 15.04                      | 9.82                         | 24.86                                  | 46.00                   | 36.00                   | -21.14                           |
| 2.499              | L1   | 17.96                      | 9.85                         | 27.81                                  | 46.00                   | 36.00                   | -18.19                           |
| 2.508              | N    | 13.84                      | 9.85                         | 23.69                                  | 46.00                   | 36.00                   | -22.31                           |
| 3.647              | N    | 11.97                      | 9.90                         | 21.87                                  | 46.00                   | 36.00                   | -24.13                           |
| 3.822              | L1   | 15.06                      | 9.90                         | 24.96                                  | 46.00                   | 36.00                   | -21.04                           |
| 10.140             | L1   | 15.33                      | 9.97                         | 25.30                                  | 50.00                   | 40.00                   | -24.70                           |
| 11.045             | L1   | 17.49                      | 9.98                         | 27.48                                  | 50.00                   | 40.00                   | -22.52                           |

All other emission levels had a test margin of greater than 25 dB.


Measurements were done with the quasi-peak and average detectors. See figure 1-1 and figure 1-2 for the measurement plot of the L1 and N lines of AC power line conducted emissions.

|   |   |  |
|---|---|--|
|  | EMI Test Report for the BlackBerry® smartphone Model RDR61CW<br><b>APPENDIX 1</b> |  |
| <b>Test Report No.</b><br>RTS-2604-1106-133                                       | <b>Date of Test</b><br>June 16 - June 17, 2011                                    | <b>FCC ID:</b> L6ARDR60CW<br><b>IC :</b> 2503A-RDR60CW |


## AC Conducted Emissions Test Graphs


### Test Configuration 1

**Figure 1-1: L1 lines**

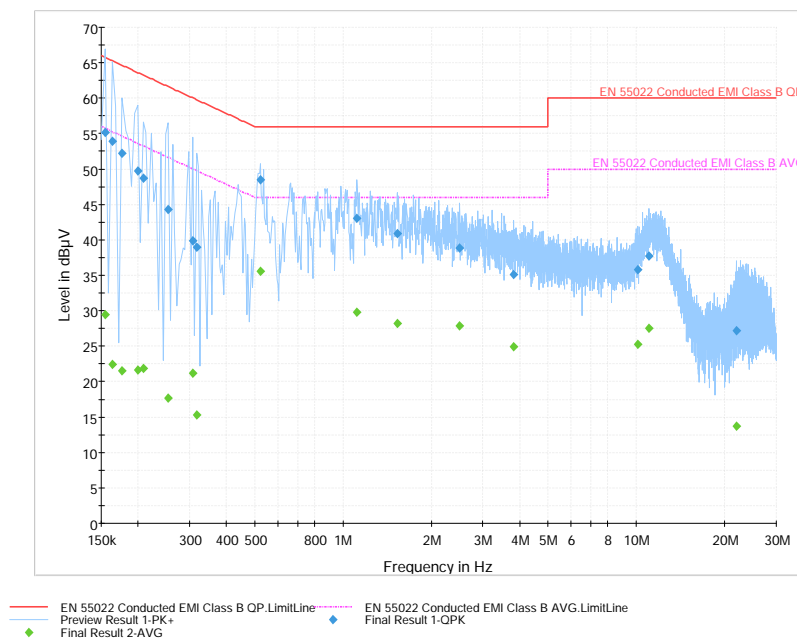

**Figure 1-2: N Lines**

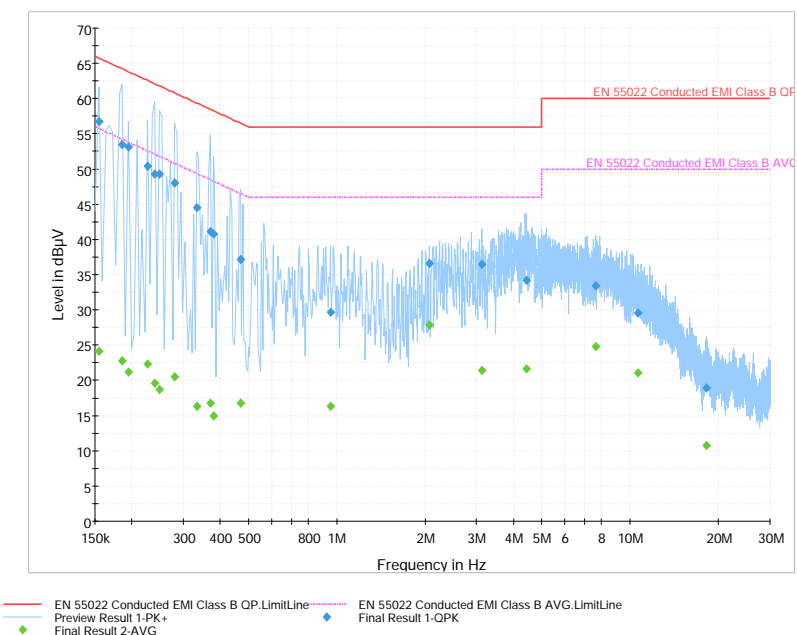

|   |   |  |
|---|---|--|
|  | EMI Test Report for the BlackBerry® smartphone Model RDR61CW<br><b>APPENDIX 1</b> |  |
| Test Report No.<br>RTS-2604-1106-133  | Date of Test<br>June 16 - June 17, 2011   | FCC ID: L6ARDR60CW<br>IC : 2503A-RDR60CW |

### AC Conducted Emissions Test Results cont'd


The following tests were performed by Savtej Sandhu.

#### Test Configuration 2

Date of the test: June 17, 2011

The environmental conditions were: Temperature: 25.2 °C  
Humidity: 42.0 %

| Frequency<br>(MHz) | Line | Reading<br>(QP)<br>(dBµV) | Correction<br>Factor<br>(dB) | Corrected<br>Reading<br>(QP)<br>(dBµV) | Limit<br>(QP)<br>(dBµV) | Limit<br>(AV)<br>(dBµV) | Margin<br>(QP)<br>Limits<br>(dB) |
|--------------------|------|---------------------------|------------------------------|--|-------------------------|-------------------------|----------------------------------|
| 0.150              | N    | 46.07                     | 11.23                        | 57.30                                  | 66.00                   | 56.00                   | -8.70                            |
| 0.155              | L1   | 46.55                     | 11.17                        | 57.73                                  | 65.80                   | 55.80                   | -8.08                            |
| 0.164              | N    | 45.21                     | 11.14                        | 56.35                                  | 65.30                   | 55.30                   | -8.95                            |
| 0.173              | 0    | 44.25                     | 11.08                        | 55.33                                  | 64.80                   | 54.80                   | -9.47                            |
| 0.177              | L1   | 45.15                     | 11.02                        | 56.16                                  | 64.60                   | 54.60                   | -8.44                            |
| 0.186              | L1   | 44.60                     | 10.95                        | 55.55                                  | 64.20                   | 54.20                   | -8.65                            |
| 0.200              | L1   | 43.47                     | 10.86                        | 54.33                                  | 63.60                   | 53.60                   | -9.27                            |
| 0.204              | N    | 41.96                     | 10.85                        | 52.81                                  | 63.40                   | 53.40                   | -10.59                           |
| 0.213              | N    | 41.01                     | 10.79                        | 51.81                                  | 63.10                   | 53.10                   | -11.30                           |
| 0.227              | N    | 40.06                     | 10.69                        | 50.76                                  | 62.60                   | 52.60                   | -11.84                           |
| 0.231              | L1   | 41.29                     | 10.64                        | 51.93                                  | 62.40                   | 52.40                   | -10.47                           |
| 0.245              | L1   | 40.04                     | 10.55                        | 50.59                                  | 61.90                   | 51.90                   | -11.32                           |
| 0.254              | L1   | 39.30                     | 10.48                        | 49.78                                  | 61.60                   | 51.60                   | -11.82                           |
| 0.263              | N    | 38.74                     | 10.44                        | 49.18                                  | 61.40                   | 51.40                   | -12.22                           |
| 0.272              | N    | 38.01                     | 10.38                        | 48.39                                  | 61.10                   | 51.10                   | -12.71                           |
| 0.281              | N    | 37.55                     | 10.31                        | 47.86                                  | 60.80                   | 50.80                   | -12.94                           |
| 0.285              | L1   | 37.53                     | 10.26                        | 47.79                                  | 60.70                   | 50.70                   | -12.91                           |
| 0.344              | L1   | 34.79                     | 10.10                        | 44.88                                  | 59.10                   | 49.10                   | -14.22                           |
| 0.353              | L1   | 33.59                     | 10.08                        | 43.67                                  | 58.90                   | 48.90                   | -15.23                           |
| 0.371              | N    | 31.42                     | 10.07                        | 41.49                                  | 58.50                   | 48.50                   | -17.01                           |
| 0.438              | N    | 27.84                     | 9.96                         | 37.80                                  | 57.10                   | 47.10                   | -19.30                           |
| 0.443              | L1   | 29.60                     | 9.95                         | 39.55                                  | 57.00                   | 47.00                   | -17.46                           |


|   |   |  |
|---|---|--|
|  | EMI Test Report for the BlackBerry® smartphone Model RDR61CW<br><b>APPENDIX 1</b> |  |
| <b>Test Report No.</b><br>RTS-2604-1106-133                                       | <b>Date of Test</b><br>June 16 - June 17, 2011                                    | <b>FCC ID:</b> L6ARDR60CW<br><b>IC :</b> 2503A-RDR60CW |

## AC Conducted Emissions Test Results

### Test Configuration 2 cont'd

| Frequency<br>(MHz) | Line | Reading<br>(QP)<br>(dBμV) | Correction<br>Factor<br>(dB) | Corrected<br>Reading<br>(QP)<br>(dBμV) | Limit<br>(QP)<br>(dBμV) | Limit<br>(AV)<br>(dBμV) | Margin<br>(QP)<br>Limits<br>(dB) |
|--------------------|------|---------------------------|------------------------------|--|-------------------------|-------------------------|----------------------------------|
| 0.942              | N    | 29.32                     | 9.81                         | 39.13                                  | 56.00                   | 46.00                   | -16.87                           |
| 1.014              | L1   | 24.21                     | 9.80                         | 34.01                                  | 56.00                   | 46.00                   | -21.99                           |
| 1.271              | L1   | 29.19                     | 9.80                         | 38.99                                  | 56.00                   | 46.00                   | -17.01                           |
| 1.410              | N    | 24.33                     | 9.81                         | 34.13                                  | 56.00                   | 46.00                   | -21.87                           |
| 2.391              | L1   | 27.88                     | 9.84                         | 37.72                                  | 56.00                   | 46.00                   | -18.28                           |
| 3.179              | N    | 25.32                     | 9.89                         | 35.20                                  | 56.00                   | 46.00                   | -20.80                           |
| 4.164              | L1   | 30.96                     | 9.90                         | 40.86                                  | 56.00                   | 46.00                   | -15.14                           |
| 4.178              | N    | 26.25                     | 9.91                         | 36.16                                  | 56.00                   | 46.00                   | -19.84                           |
| 6.176              | L1   | 26.42                     | 9.92                         | 36.35                                  | 60.00                   | 50.00                   | -23.65                           |



|   |   |  |
|---|---|--|
|  | EMI Test Report for the BlackBerry® smartphone Model RDR61CW<br><b>APPENDIX 1</b> |  |
| Test Report No.<br>RTS-2604-1106-133  | Date of Test<br>June 16 - June 17, 2011   | FCC ID: L6ARDR60CW<br>IC : 2503A-RDR60CW |


## AC Conducted Emissions Test Results

### Test Configuration 2 cont'd

| Frequency<br>(MHz) | Line | Reading<br>(AVG)<br>(dBμV) | Correction<br>Factor<br>(dB) | Corrected<br>Reading<br>(QP)<br>(dBμV) | Limit<br>(QP)<br>(dBμV) | Limit<br>(AV)<br>(dBμV) | Margin<br>(QP)<br>Limits<br>(dB) |
|--------------------|------|----------------------------|------------------------------|--|-------------------------|-------------------------|----------------------------------|
| 0.164              | N    | 19.17                      | 11.14                        | 30.31                                  | 55.30                   | 45.30                   | -24.99                           |
| 0.245              | L1   | 17.39                      | 10.55                        | 27.94                                  | 51.90                   | 41.90                   | -23.96                           |
| 0.344              | L1   | 23.20                      | 10.10                        | 33.30                                  | 49.10                   | 39.10                   | -15.81                           |
| 0.353              | L1   | 26.03                      | 10.08                        | 36.11                                  | 48.90                   | 38.90                   | -12.79                           |
| 0.443              | L1   | 17.93                      | 9.95                         | 27.88                                  | 47.00                   | 37.00                   | -19.12                           |
| 0.942              | N    | 15.51                      | 9.81                         | 25.32                                  | 46.00                   | 36.00                   | -20.68                           |
| 1.014              | L1   | 17.28                      | 9.80                         | 27.08                                  | 46.00                   | 36.00                   | -18.92                           |
| 1.271              | L1   | 22.74                      | 9.80                         | 32.55                                  | 46.00                   | 36.00                   | -13.45                           |
| 2.391              | L1   | 21.77                      | 9.84                         | 31.61                                  | 46.00                   | 36.00                   | -14.39                           |
| 3.179              | N    | 11.55                      | 9.89                         | 21.44                                  | 46.00                   | 36.00                   | -24.56                           |
| 4.164              | L1   | 23.11                      | 9.90                         | 33.01                                  | 46.00                   | 36.00                   | -12.99                           |
| 4.178              | N    | 16.84                      | 9.91                         | 26.75                                  | 46.00                   | 36.00                   | -19.25                           |
| 6.176              | L1   | 18.54                      | 9.92                         | 28.46                                  | 50.00                   | 40.00                   | -21.54                           |

All other emission levels had a test margin of greater than 25 dB.


Measurements were done with the quasi-peak and average detectors. See figure 1-3 and figure 1-4 for the measurement plot of the L1 and N lines of AC power line conducted emissions.

|   |   |  |
|---|---|--|
|  | EMI Test Report for the BlackBerry® smartphone Model RDR61CW<br><b>APPENDIX 1</b> |  |
| <b>Test Report No.</b><br>RTS-2604-1106-133                                       | <b>Date of Test</b><br>June 16 - June 17, 2011                                    | <b>FCC ID:</b> L6ARDR60CW<br><b>IC :</b> 2503A-RDR60CW |


## AC Conducted Emissions Test Graphs


### Test Configuration 2

**Figure 1-3: L1 lines**

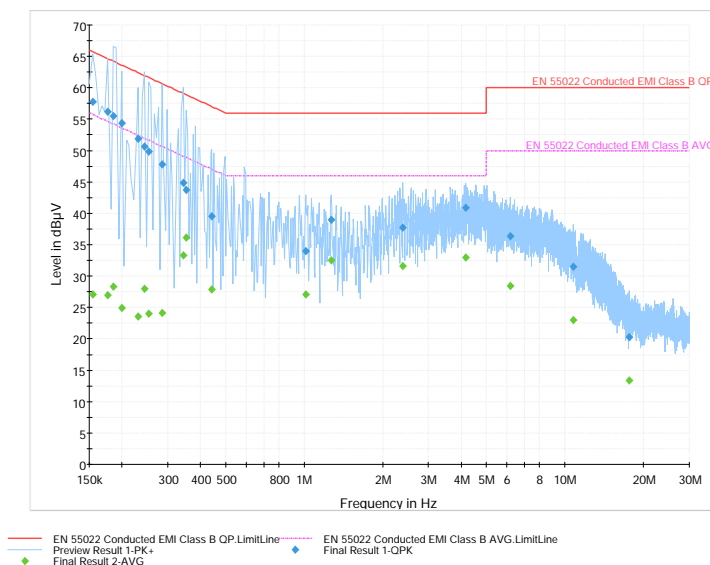

**Figure 1-4: N Lines**

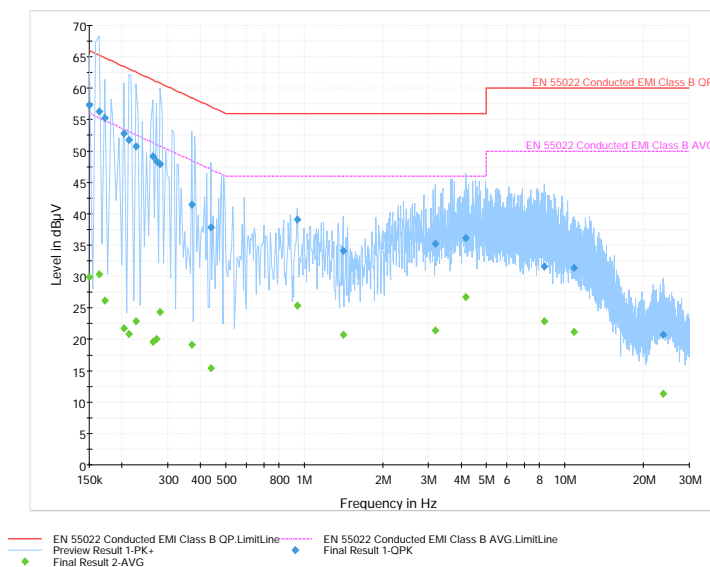

|   |   |  |
|---|---|--|
|  | EMI Test Report for the BlackBerry® smartphone Model RDR61CW<br><b>APPENDIX 1</b> |  |
|   | <b>Test Report No.</b><br>RTS-2604-1106-133                                       | <b>Date of Test</b><br>June 16 - June 17, 2011 |

**FCC ID:** L6ARDR60CW  
**IC :** 2503A-RDR60CW

### AC Conducted Emissions Test Results cont'd


The following tests were performed by Savtej Sandhu.

#### Test Configuration 3

Date of the test: June 17, 2011

The environmental conditions were: Temperature: 25.2 °C  
Humidity: 42.0%


| Frequency (MHz) | Line | Reading (QP) (dBμV) | Correction Factor (dB) | Corrected Reading (QP) (dBμV) | Limit (QP) (dBμV) | Limit (AV) (dBμV) | Margin (QP) Limits (dB) |
|-----------------|------|---------------------|------------------------|-------------------------------|-------------------|-------------------|-------------------------|
| 0.150           | L1   | 46.63               | 11.20                  | 57.84                         | 66.00             | 56.00             | -8.17                   |
| 0.155           | N    | 43.19               | 11.20                  | 54.39                         | 65.80             | 55.80             | -11.41                  |
| 0.168           | N    | 42.01               | 11.11                  | 53.12                         | 65.10             | 55.10             | -11.98                  |
| 0.173           | L1   | 42.77               | 11.05                  | 53.82                         | 64.80             | 54.80             | -10.98                  |
| 0.182           | L1   | 42.12               | 10.99                  | 53.11                         | 64.40             | 54.40             | -11.29                  |
| 0.191           | L1   | 41.13               | 10.92                  | 52.05                         | 64.00             | 54.00             | -11.95                  |
| 0.191           | N    | 40.09               | 10.95                  | 51.04                         | 64.00             | 54.00             | -12.96                  |
| 0.200           | N    | 39.01               | 10.89                  | 49.89                         | 63.60             | 53.60             | -13.71                  |
| 0.213           | L1   | 39.18               | 10.77                  | 49.94                         | 63.10             | 53.10             | -13.16                  |
| 0.227           | L1   | 38.35               | 10.67                  | 49.02                         | 62.60             | 52.60             | -13.58                  |
| 0.236           | N    | 35.79               | 10.63                  | 46.43                         | 62.30             | 52.30             | -15.87                  |
| 0.245           | N    | 35.00               | 10.57                  | 45.57                         | 61.90             | 51.90             | -16.33                  |
| 0.254           | N    | 34.16               | 10.50                  | 44.67                         | 61.60             | 51.60             | -16.94                  |
| 0.272           | L1   | 34.35               | 10.36                  | 44.71                         | 61.10             | 51.10             | -16.40                  |
| 0.281           | L1   | 34.01               | 10.29                  | 44.31                         | 60.80             | 50.80             | -16.49                  |
| 0.290           | N    | 31.44               | 10.25                  | 41.68                         | 60.50             | 50.50             | -18.82                  |
| 0.380           | L1   | 29.04               | 10.04                  | 39.08                         | 58.30             | 48.30             | -19.22                  |
| 0.533           | N    | 34.71               | 9.90                   | 44.61                         | 56.00             | 46.00             | -11.39                  |
| 0.551           | L1   | 32.96               | 9.88                   | 42.84                         | 56.00             | 46.00             | -13.16                  |
| 0.681           | N    | 33.13               | 9.84                   | 42.98                         | 56.00             | 46.00             | -13.02                  |
| 0.888           | L1   | 32.41               | 9.81                   | 42.22                         | 56.00             | 46.00             | -13.78                  |
| 0.987           | N    | 30.45               | 9.81                   | 40.26                         | 56.00             | 46.00             | -15.74                  |
| 1.266           | L1   | 30.73               | 9.80                   | 40.53                         | 56.00             | 46.00             | -15.47                  |

|   |   |  |
|---|---|--|
|  | EMI Test Report for the BlackBerry® smartphone Model RDR61CW<br><b>APPENDIX 1</b> |  |
| <b>Test Report No.</b><br>RTS-2604-1106-133                                       | <b>Date of Test</b><br>June 16 - June 17, 2011                                    | <b>FCC ID:</b> L6ARDR60CW<br><b>IC :</b> 2503A-RDR60CW |

## AC Conducted Emissions Test Results

### Test Configuration 3 cont'd

| Frequency<br>(MHz) | Line | Reading<br>(QP)<br>(dBμV) | Correction<br>Factor<br>(dB) | Corrected<br>Reading<br>(QP)<br>(dBμV) | Limit<br>(QP)<br>(dBμV) | Limit<br>(AV)<br>(dBμV) | Margin<br>(QP)<br>Limits<br>(dB) |
|--------------------|------|---------------------------|------------------------------|--|-------------------------|-------------------------|----------------------------------|
| 1.617              | N    | 27.86                     | 9.82                         | 37.67                                  | 56.00                   | 46.00                   | -18.33                           |
| 2.531              | L1   | 26.87                     | 9.85                         | 36.72                                  | 56.00                   | 46.00                   | -19.28                           |
| 2.576              | N    | 24.99                     | 9.86                         | 34.85                                  | 56.00                   | 46.00                   | -21.15                           |
| 4.079              | N    | 24.22                     | 9.90                         | 34.13                                  | 56.00                   | 46.00                   | -21.87                           |
| 4.641              | L1   | 24.58                     | 9.90                         | 34.48                                  | 56.00                   | 46.00                   | -21.52                           |
| 12.089             | L1   | 27.47                     | 10.03                        | 37.49                                  | 60.00                   | 50.00                   | -22.51                           |


|   |   |  |
|---|---|--|
|  | EMI Test Report for the BlackBerry® smartphone Model RDR61CW<br><b>APPENDIX 1</b> |  |
| <b>Test Report No.</b><br>RTS-2604-1106-133                                       | <b>Date of Test</b><br>June 16 - June 17, 2011                                    | <b>FCC ID:</b> L6ARDR60CW<br><b>IC :</b> 2503A-RDR60CW |

### AC Conducted Emissions Test Results

#### Test Configuration 3 cont'd

| Frequency<br>(MHz) | Line | Reading<br>(AVG)<br>(dBμV) | Correction<br>Factor<br>(dB) | Corrected<br>Reading<br>(QP)<br>(dBμV) | Limit<br>(QP)<br>(dBμV) | Limit<br>(AV)<br>(dBμV) | Margin<br>(QP)<br>Limits<br>(dB) |
|--------------------|------|----------------------------|------------------------------|--|-------------------------|-------------------------|----------------------------------|
| 0.150              | L1   | 24.81                      | 11.20                        | 36.02                                  | 56.00                   | 46.00                   | -19.98                           |
| 0.227              | L1   | 21.00                      | 10.67                        | 31.67                                  | 52.60                   | 42.60                   | -20.93                           |
| 0.380              | L1   | 14.40                      | 10.04                        | 24.44                                  | 48.30                   | 38.30                   | -23.86                           |
| 0.533              | N    | 21.51                      | 9.90                         | 31.41                                  | 46.00                   | 36.00                   | -14.59                           |
| 0.551              | L1   | 18.62                      | 9.88                         | 28.50                                  | 46.00                   | 36.00                   | -17.50                           |
| 0.681              | N    | 18.02                      | 9.84                         | 27.86                                  | 46.00                   | 36.00                   | -18.14                           |
| 0.888              | L1   | 20.60                      | 9.81                         | 30.41                                  | 46.00                   | 36.00                   | -15.59                           |
| 0.987              | N    | 15.98                      | 9.81                         | 25.79                                  | 46.00                   | 36.00                   | -20.21                           |
| 1.266              | L1   | 18.57                      | 9.80                         | 28.37                                  | 46.00                   | 36.00                   | -17.63                           |
| 1.617              | N    | 14.43                      | 9.82                         | 24.24                                  | 46.00                   | 36.00                   | -21.76                           |
| 2.531              | L1   | 16.78                      | 9.85                         | 26.63                                  | 46.00                   | 36.00                   | -19.37                           |
| 2.576              | N    | 13.07                      | 9.86                         | 22.93                                  | 46.00                   | 36.00                   | -23.07                           |
| 4.079              | N    | 11.95                      | 9.90                         | 21.85                                  | 46.00                   | 36.00                   | -24.15                           |
| 4.641              | L1   | 14.02                      | 9.90                         | 23.92                                  | 46.00                   | 36.00                   | -22.08                           |
| 12.089             | L1   | 17.29                      | 10.03                        | 27.32                                  | 50.00                   | 40.00                   | -22.68                           |


All other emission levels had a test margin of greater than 25 dB.  
Measurements were done with the quasi-peak and average detectors.  
See figure 1-5 and figure 1-6 for the measurement plot of the L1 and N lines of AC power line conducted emissions.

|   |   |  |
|---|---|--|
|  | EMI Test Report for the BlackBerry® smartphone Model RDR61CW<br><b>APPENDIX 1</b> |  |
| <b>Test Report No.</b><br>RTS-2604-1106-133                                       | <b>Date of Test</b><br>June 16 - June 17, 2011                                    | <b>FCC ID:</b> L6ARDR60CW<br><b>IC :</b> 2503A-RDR60CW |


## AC Conducted Emissions Test Graphs

### Test Configuration 3


**Figure 1-5: L1 lines**

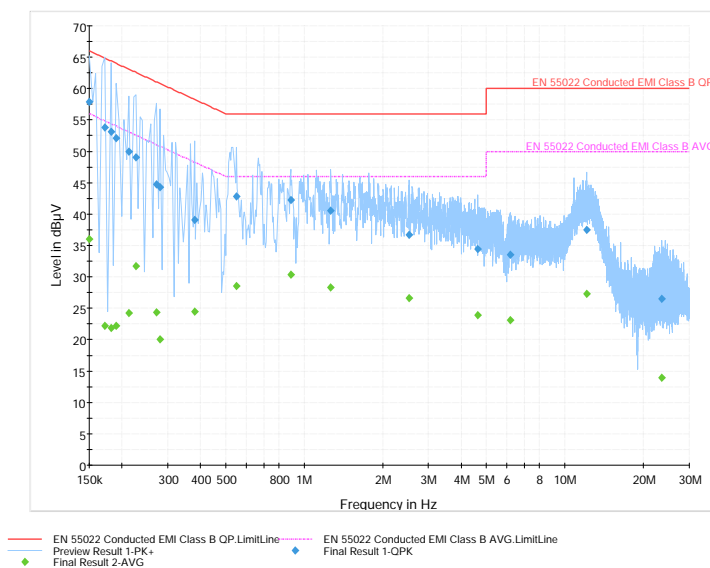

**Figure 1-6: N Lines**

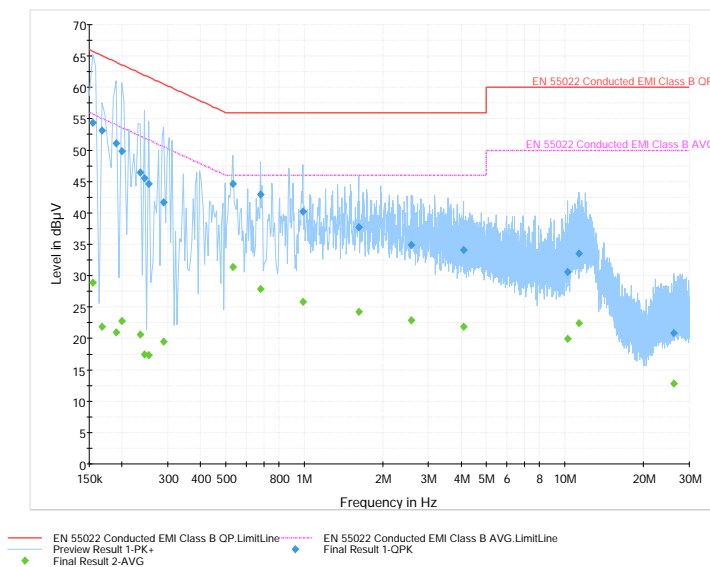




|   |   |  |
|---|---|--|
|  | EMI Test Report for the BlackBerry® smartphone Model RDR61CW<br><b>APPENDIX 1</b> |  |
| <b>Test Report No.</b><br>RTS-2604-1106-133                                       | <b>Date of Test</b><br>June 16 - June 17, 2011                                    | <b>FCC ID:</b> L6ARDR60CW<br><b>IC :</b> 2503A-RDR60CW |


## AC Conducted Emissions Test Graphs

### Test Configuration 4


**Figure 1-7: L1 lines**

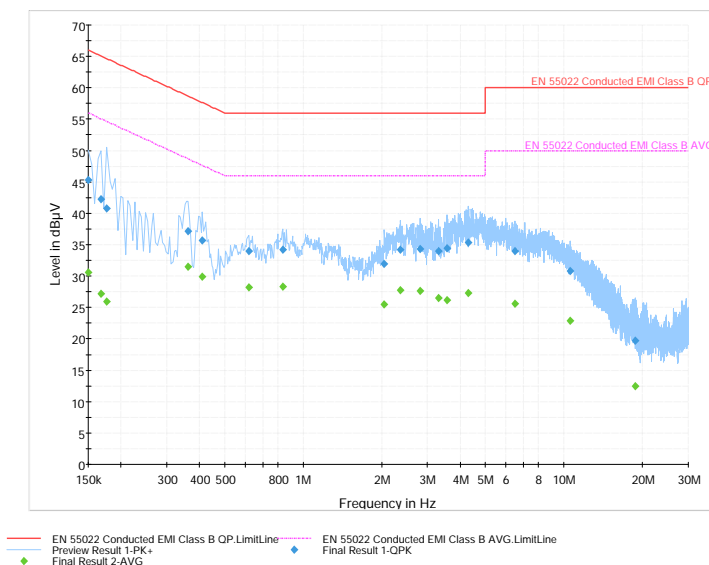


**Figure 1-8: N Lines**

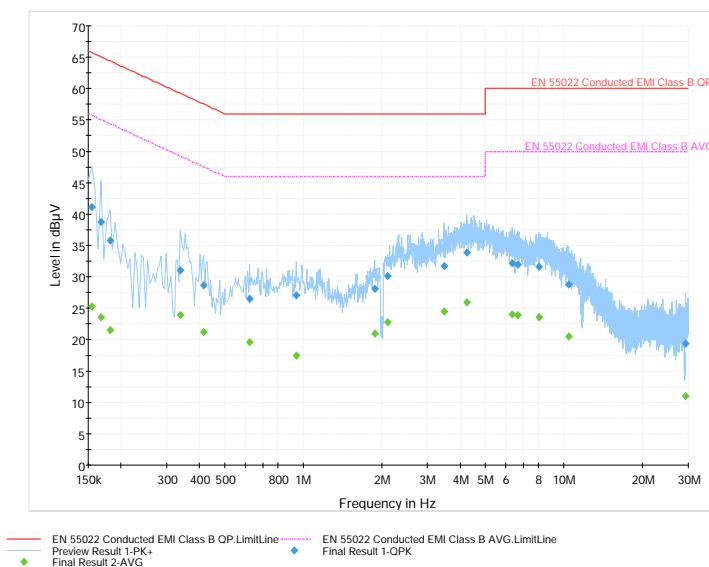



|   |   |   |
|---|---|---|
|  | EMI Test Report for the BlackBerry® smartphone Model RDR61CW<br><b>APPENDIX 2</b> |   |
| <b>Test Report No.</b><br>RTS-2604-1106-133                                       | <b>Date of Test</b><br>June 16 - June 17, 2011                                    | <b>FCC ID:</b> L6ARDR60CW <b>IC :</b> 2503A-RDR60UW |

## APPENDIX 2 - RADIATED EMISSIONS TEST DATA (RDR61CW)

|   |  |  |   |  |  |
|---|--|--|---|--|--|
|  |  |  | EMI Test Report for the BlackBerry® smartphone Model RDR61CW<br><b>APPENDIX 2</b> |  |  |
| <b>Test Report No.</b><br>RTS-2604-1106-133                                       |  | <b>Date of Test</b><br>June 16 - June 17, 2011 |   | <b>FCC ID:</b> L6ARDR60CW<br><b>IC :</b> 2503A-RDR60CW |  |

### Radiated Emissions Test Results

The following test configurations were measured for model RDR61CW.

The following tests were performed by Quan Ma

#### Test Configuration 1

Date of the test: June 16, 2011

The environmental conditions were: Temperature: 25.1 °C  
Humidity: 32.3 %

| Frequency<br>(MHz) | Antenna       |                    | Test<br>Angle<br>(Deg.) | Detector<br>(Q.P. or<br>Peak) | Measured<br>Level<br>(dBµV) | Correction Factor for<br>preamp/antenna /<br>cables/ filter<br>(dB/m) | Field<br>Strength<br>Level<br>(reading<br>+corr)<br>(dBµV/m) | Limit @<br>3.0 m<br>(dBµV/m) | Test<br>Margin<br>(dB) |
|--------------------|---------------|--------------------|-------------------------|-------------------------------|-----------------------------|---|--|------------------------------|------------------------|
|                    | Pol.<br>(V/H) | Height<br>(metres) |                         |                               |                             |   |  |                              |                        |
| 40.750             | V             | 1.40               | 270.00                  | Q.P.                          | 40.64                       | -15.63  | 25.01  | 40.00                        | -14.99                 |
| 51.250             | H             | 3.98               | 6.00                    | Q.P.                          | 34.95                       | -17.24  | 17.71  | 40.00                        | -22.29                 |
| 52.000             | V             | 1.40               | 83.00                   | Q.P.                          | 42.00                       | -17.31  | 24.69  | 40.00                        | -15.31                 |
| 63.800             | H             | 1.00               | 336.00                  | Q.P.                          | 33.64                       | -16.94  | 16.70  | 40.00                        | -23.30                 |

All other emission levels had a test margin greater than 25 dB.









