

TEST REPORT

Test report no.: 1-3439-01-04/11



Testing laboratory

CETECOM ICT Services GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.cetecom.com>
e-mail: ict@cetecom.com

Accredited test laboratory:

The test laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025
DAR registration number: D-PL-12076-01-01

Area of Testing: Radio/Satellite Communications

Applicant

Research In Motion Limited
305 Phillip Street
Waterloo, ON N2L 3W8 / Canada
Phone: +1-519-888-7465
Fax: +1-519-888-6906
Contact: Masud Attayi
e-mail: mattayi@rim.com
Phone: +1-519-888-7465

Manufacturer

Research In Motion Limited
305 Phillip Street
Waterloo, ON N2L 3W8 / Canada

Test standard/s

47 CFR Part 22	Title 47 of the Code of Federal Regulations; Chapter I Part 22 - Public mobile services
47 CFR Part 24	Title 47 of the Code of Federal Regulations; Chapter I Part 24 - Personal communications services
RSS - 132 Issue 2	Spectrum Management and Telecommunications Policy - Radio Standards Specifications Cellular Telephones Employing New Technologies Operating in the Bands 824-849 MHz and 869-894 MHz

For further applied test standards please refer to section 3 of this test report.

Test item

Kind of test item:	Mobile phone with GSM / GPRS / Edge, WCDMA / HSDPA, Bluetooth® 2.1 EDR, WLAN b / g / n – HT20, NFC, GPS
Model name:	RDY71UW
FCC ID:	-/-
IC:	-/-
Frequency:	824.2 – 848.8 MHz, 1850.2 – 1909.8 MHz
Power supply:	3.7 V DC by battery JM1 + charger PSM04R- 050CHW2
Temperature range:	-/-



This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test performed:

Test report authorised:

Jakob Reschke

Stefan Börs

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes	3
2.2	Application details	3
3	Test standard/s	3
4	Test environment	3
5	Test item	4
6	Test laboratories sub-contracted	4
7	Summary of measurement results	5
7.1	GSM 850	5
7.2	PCS 1900	5
7.3	UMTS band II	6
7.4	UMTS band V	6
8	RF measurement testing	7
8.1	Description of test setup	7
8.1.1	Radiated measurements	7
8.1.2	Conducted measurements	8
8.2	RSP100 test report cover sheet / performance test data	9
8.3	Results GSM 850	10
8.3.1	RF output power	10
8.4	Results PCS 1900	12
8.4.1	RF output power	12
8.5	Results UMTS band II	14
8.5.1	RF output power	14
8.5.2	Spurious emissions radiated	16
8.6	Results UMTS band V	43
8.6.1	RF output power	43
8.6.2	Spurious emissions radiated	45
9	Test equipment and ancillaries used for tests	66
Annex A	Document history	68
Annex B	Further information	68

2 General information

2.1 Notes

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2011-04-15
Date of receipt of test item:	2011-05-02
Start of test:	2011-05-02
End of test:	2011-05-05
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Version	Test standard description
47 CFR Part 22	2009-10	Title 47 of the Code of Federal Regulations; Chapter I Part 22 - Public mobile services
47 CFR Part 24	2009-10	Title 47 of the Code of Federal Regulations; Chapter I Part 24 - Personal communications services
RSS - 132 Issue 2	2005-09	Spectrum Management and Telecommunications Policy - Radio Standards Specifications Cellular Telephones Employing New Technologies Operating in the Bands 824-849 MHz and 869-894 MHz
RSS - 133 Issue 5	2009-02	Spectrum Management and Telecommunications Policy - Radio Standards Specifications 2 GHz Personal Communication Services

4 Test environment

Temperature:	T_{nom}	24	°C during room temperature tests
	T_{max}	-/-	°C during high temperature test
	T_{min}	-/-	°C during low temperature test

Relative humidity content: 40 %

Air pressure: not relevant for this kind of testing

Power supply:	V_{nom}	3.7	V	DC by battery JM1 + charger PSM04R-050CHW2
	V_{max}	-/-	V	
	V_{min}	-/-	V	

5 Test item

Kind of test item	:	Mobile phone with GSM / GPRS / Edge, WCDMA / HSDPA, Bluetooth® 2.1 EDR, WLAN b / g / n – HT20, NFC, GPS
Type identification	:	RDY71UW
S/N serial number	:	Sample 2 IMEI: 004402240602577
HW hardware status	:	No information available!
SW software status	:	No information available!
Frequency band [MHz]	:	824.2 – 848.8 MHz, 1850.2 – 1909.8 MHz
Type of modulation	:	GMSK; 8-PSK
Antenna	:	Integrated PCB antenna
Power supply	:	3.7 V DC by battery JM1 + charger PSM04R-050CHW2
Temperature range	:	No information available!

6 Test laboratories sub-contracted

None

7 Summary of measurement results



No deviations from the technical specifications were ascertained



There were deviations from the technical specifications ascertained

TC identifier	Description	verdict	date	Remark
RF-Testing	CFR Part 22, 24 RSS 132, 133	PASSED	2011-05-06	Delta tests according to customer test plan!

7.1 GSM 850

Test Case	temperature conditions	power source voltages	Pass	Fail	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
Frequency Stability	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
Spurious Emissions Radiated	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
Spurious Emissions Conducted	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
Block Edge Compliance	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
Occupied Bandwidth	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	

Note:

NA = Not applicable; NP = Not performed

7.2 PCS 1900

Test Case	temperature conditions	power source voltages	Pass	Fail	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
Frequency Stability	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
Spurious Emissions Radiated	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
Spurious Emissions Conducted	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
Block Edge Compliance	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
Occupied Bandwidth	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	

Note:

NA = Not applicable; NP = Not performed

7.3 UMTS band II

Test Case	temperature conditions	power source voltages	Pass	Fail	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
Frequency Stability	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
Spurious Emissions Conducted	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
Block Edge Compliance	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
Occupied Bandwidth	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	

Note:

NA = Not applicable; NP = Not performed

7.4 UMTS band V

Test Case	temperature conditions	power source voltages	Pass	Fail	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
Frequency Stability	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
Spurious Emissions Conducted	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
Block Edge Compliance	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
Occupied Bandwidth	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	

Note:

NA = Not applicable; NP = Not performed

8 RF measurement testing


8.1 Description of test setup

For the spurious measurements we use the substitution method according TIA/EIA 603.

8.1.1 Radiated measurements

The radiated emissions from the EUT are performed in a semi anechoic chamber. The EUT is placed on a conductive turntable and powered with nominal voltage. The signalling is performed either from outside the chamber with a signalling unit (AP or other) by air link using a signalling antenna or directly by special test software from the customer.

Semi anechoic chamber

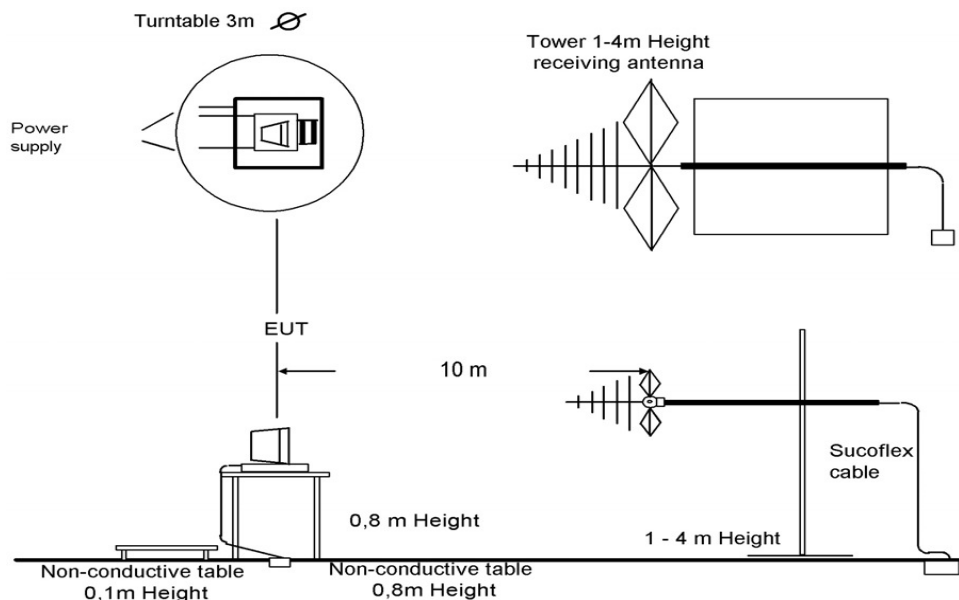


Picture 1: Diagram radiated measurements

9 kHz - 30 MHz:	active loop antenna
30 MHz – 1 GHz:	tri-log antenna
> 1 GHz:	horn antenna

8.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal paths is connected to the signalling unit (AP or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signalling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm. If special software is used, there is no power divider necessary.

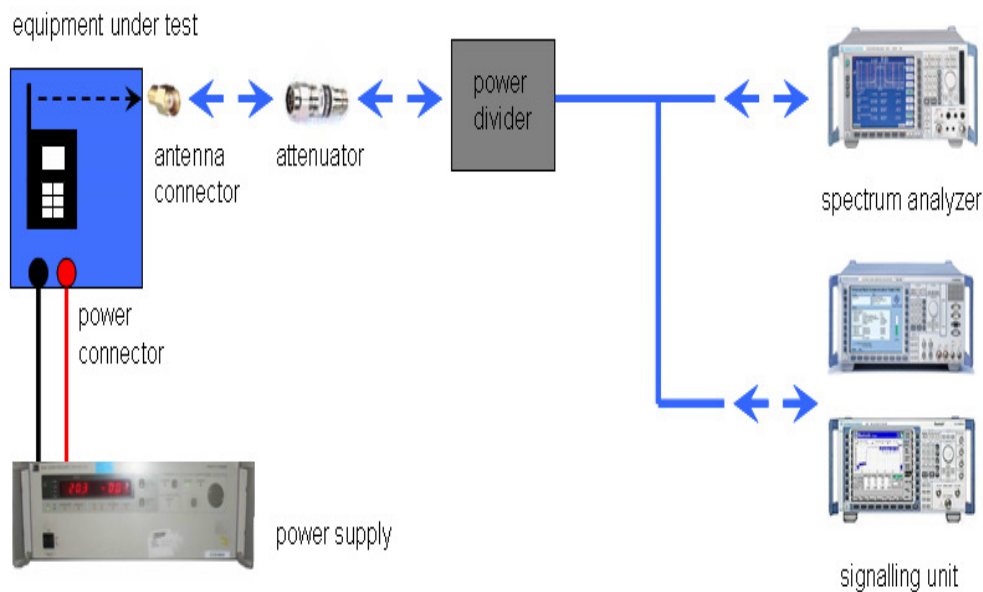

Picture 2: Diagram conducted measurements

The term measuring receiver refers to either a selective voltmeter or a spectrum analyser.

Frequency being measured f	Measuring receiver bandwidth 6 dB	Spectrum analyser bandwidth 3dB
$f < 150 \text{ kHz}$	200 Hz or	300 Hz
$150 \text{ kHz} \leq f < 25 \text{ MHz}$	9 kHz or	10 kHz
$25 \text{ MHz} \leq f < 1000 \text{ MHz}$	120 kHz or	100 kHz
$1000 \text{ MHz} \leq f$		1 MHz
NOTE: Specific requirements in CEPT/ERC/Recommendation 70-03 [2] shall be applied where applicable.		

8.2 RSP100 test report cover sheet / performance test data

Test Report Number	:	1-3439-01-04/11			
Equipment Model Number	:	RDY71UW			
Certification Number	:	-/-			
Manufacturer (complete Address)	:	Research In Motion Limited 305 Phillip Street Waterloo, ON N2L 3W8 / Canada			
Tested to radio standards specification no.	:	RSS - 132 Issue 2, RSS - 133 Issue 5			
Open Area Test Site IC No.	:	IC 3462C-1			
Frequency Range	:	824.2 – 848.8 MHz, 1850.2 – 1909.8 MHz			
GPS receiver turned	:	Off			
RF-power [W] (max.)	:	Band	Conducted	ERP / EIRP	Mode
		GSM850	Not performed	28.22 dBm	GMSK
			Not performed	20.10 dBm	8-PSK
		GSM1900	Not performed	28.00 dBm	GMSK
			Not performed	24.00 dBm	8-PSK
		WDCMA 850	Not performed	21.01 dBm	QPSK
			Not performed	21.30 dBm	16QAM
		WDCMA 1900	Not performed	27.10 dBm	QPSK
Not performed	27.20 dBm		16QAM		
Occupied bandwidth (99%-BW) [kHz]	:	GSM850	Not performed		GMSK
			Not performed		8-PSK
		GSM1900	Not performed		GMSK
			Not performed		8-PSK
		WDCMA 850	Not performed		QPSK
			Not performed		16QAM
		WDCMA 1900	Not performed		QPSK
			Not performed		16QAM
Type of modulation	:	GMSK; 8-PSK; QPSK; 16QAM			
Emission Designator (TRC-43)	:	GSM850	Not performed		GMSK
			Not performed		8-PSK
		GSM1900	Not performed		GMSK
			Not performed		8-PSK
		WDCMA 850	Not performed		QPSK
			Not performed		16QAM
		WDCMA 1900	Not performed		QPSK
			Not performed		16QAM
Antenna Information	:	integrated antenna			
Transmitter Spurious (worst case)	[dBm]	:	-39.69 @ 3815.2 MHz		
Receiver Spurious (worst case)	[µV/m @ 3m]:	:	Not performed		

ATTESTATION:

DECLARATION OF COMPLIANCE:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Laboratory Manager:

2011-05-06

Jakob Reschke

Date

Name

Signature

8.3 Results GSM 850

All GSM-band measurements are done in GSM mode only (circuit switched).

All relevant tests have been repeated using 8-PSK modulation if EDGE mode is supported. All tests were performed with one timeslot in uplink activated and one timeslot in downlink activated. For each mode the highest output power was determined and used.

8.3.1 RF output power

Description:

This paragraph contains average power, peak output power and ERP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

Measurement parameters	
Detector:	Peak and RMS (Power in Burst)
Sweep time:	Auto
Video bandwidth:	1 MHz
Resolution bandwidth:	1 MHz
Span:	Zero Span
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 22.9.1.3 CFR Part 2.1046	RSS 132, Issue 2, Section 4.4 and 6.4
Nominal Peak Output Power	
+38.45 dBm In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

Results:

Output Power (radiated) GMSK mode	
Frequency (MHz)	Average Output Power (dBm) - ERP
824.2	26.70
836.4	27.58
848.8	28.22
Measurement uncertainty	± 2.0 dB

Output Power (radiated) 8-PSK mode	
Frequency (MHz)	Average Output Power (dBm) - ERP
824.2	20.10
836.4	20.00
848.8	20.08
Measurement uncertainty	± 2.0 dB

Result: The result of the measurement is passed.

8.4 Results PCS 1900

All GSM-band measurements are done in GSM mode only (circuit switched).

All relevant tests have been repeated using 8-PSK modulation if EDGE mode is supported. All tests were performed with one timeslot in uplink activated and one timeslot in downlink activated. For each mode the highest output power was determined and used.

8.4.1 RF output power

Description:

This paragraph contains average power, peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

Measurement parameters	
Detector:	Peak and RMS (Power in Burst)
Sweep time:	Auto
Video bandwidth:	1 MHz
Resolution bandwidth:	1 MHz
Span:	Zero Span
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 24.232 CFR Part 2.1046	RSS 133, Issue 5, Section 6.4
Nominal Peak Output Power	
+33.00 dBm In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

Results:

Output Power (radiated) GMSK mode	
Frequency (MHz)	Average Output Power (dBm) - EIRP
1850.2	26.45
1880.0	27.25
1909.8	28.00
Measurement uncertainty	± 2.0 dB

Output Power (radiated) 8-PSK mode	
Frequency (MHz)	Average Output Power (dBm) - EIRP
1850.2	22.20
1880.0	23.50
1909.8	24.00
Measurement uncertainty	± 2.0 dB

Result: The result of the measurement is passed.

8.5 Results UMTS band II

All UMTS-band measurements are done in WCDMA mode only.

The connection was established with the following setup: WCDMA CS-RMC, Max Power (All Bit up)

8.5.1 RF output power

Description:

This paragraph contains average power, peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

Measurement parameters	
Detector:	Peak and RMS (Power in Burst)
Sweep time:	Auto
Video bandwidth:	10 MHz
Resolution bandwidth:	10 MHz
Span:	Zero Span
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 24.232 CFR Part 2.1046	RSS 133, Issue 5, Section 6.4
Nominal Peak Output Power	
+33.00 dBm In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

Results:

Output Power (radiated) WCDMA mode - CS	
Frequency (MHz)	Average Output Power (dBm) - EIRP
1852.4	26.00
1880.0	26.80
1907.6	27.10
Measurement uncertainty	± 2.0 dB

Output Power (radiated) WCDMA mode - PS	
Frequency (MHz)	Average Output Power (dBm) - EIRP
1852.4	26.30
1880.0	26.90
1907.6	27.20
Measurement uncertainty	± 2.0 dB

Result: The result of the measurement is passed.

8.5.2 Spurious emissions radiated

Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2009 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the UMTS band II.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- The antenna output was terminated in a 50 ohm load (if possible).
- A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters.
- Now each detected emissions were substituted by the substitution method, in accordance with the TIA/EIA 603 .

Measurement:

Measurement parameters	
Detector:	Peak
Sweep time:	2 sec.
Video bandwidth:	Below 1 GHz: 120 kHz Above 1 GHz: 1 MHz
Resolution bandwidth:	Below 1 GHz: 120 kHz Above 1 GHz: 1 MHz
Span:	100 MHz Steps
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 24.238 CFR Part 2.1053	RSS 133, Issue 5, Section 6.5
Spurious Emissions Radiated	
Attenuation $\geq 43 + 10\log(P)$ (P, Power in Watts)	
-13 dBm	

Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the UMTS band II (1852.4 MHz, 1880.0 MHz and 1907.6 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the UMTS band II into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization; the plots show the worst case.

The plots show only the middle channel. If spurious were detected, the lowest and highest channel were checked too. The found values are stated in the table below.

As can be seen from this data, the emissions from the test item were within the specification limit.


Spurious Emission Level (dBm)								
CS								
Harmonic	Ch. 9262 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 9400 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 9538 Freq. (MHz)	Level [dBm]
2	3704.8	-43.46	2	3760.0	-42.96	2	3815.2	-39.69
3	5557.2	-	3	5640.0	-	3	5722.8	-
4	7409.6	-	4	7520.0	-	4	7630.4	-
5	9262.0	-	5	9400.0	-	5	9538.0	-
6	11114.4	-	6	11280.0	-	6	11445.6	-
7	12966.8	-	7	13160.0	-	7	13353.2	-
8	14819.2	-	8	15040.0	-	8	15260.8	-
9	16671.6	-	9	16920.0	-	9	17168.4	-
10	18524.0	-	10	18800.0	-	10	19076.0	-
Measurement uncertainty					± 3dB			

Spurious Emission Level (dBm) PS								
Harmonic	Ch. 9262 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 9400 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 9538 Freq. (MHz)	Level [dBm]
2	3704.8	-45.19	2	3760.0	-44.40	2	3815.2	-40.76
3	5557.2	-	3	5640.0	-	3	5722.8	-
4	7409.6	-	4	7520.0	-	4	7630.4	-
5	9262.0	-	5	9400.0	-	5	9538.0	-
6	11114.4	-	6	11280.0	-	6	11445.6	-
7	12966.8	-	7	13160.0	-	7	13353.2	-
8	14819.2	-	8	15040.0	-	8	15260.8	-
9	16671.6	-	9	16920.0	-	9	17168.4	-
10	18524.0	-	10	18800.0	-	10	19076.0	-
Measurement uncertainty					± 3dB			


Result: The result of the measurement is passed.

CS


Plot 1: Channel 9262 (Traffic mode up to 30 MHz)

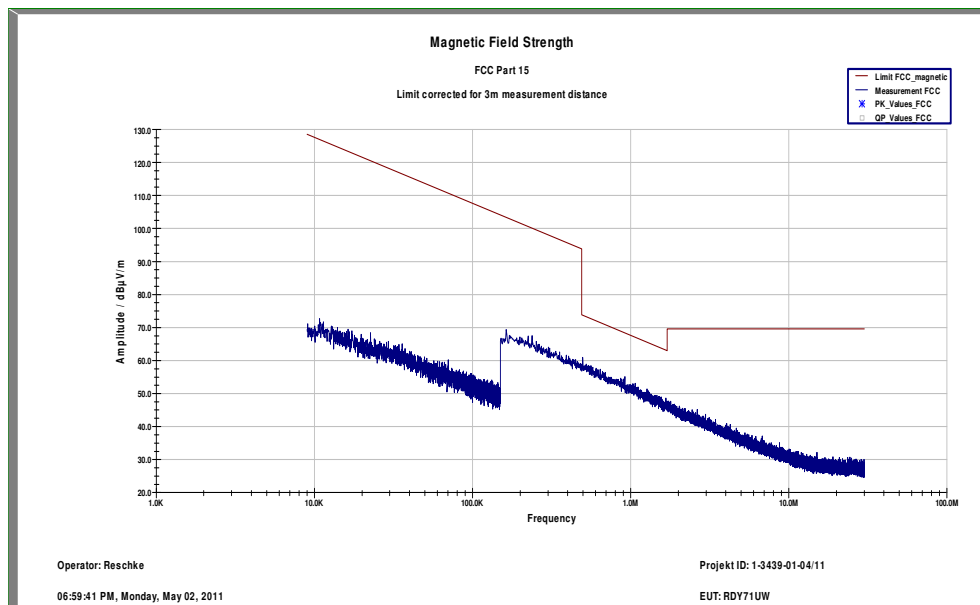

Plot 2: Channel 9262 (30 MHz - 1 GHz) – vertical

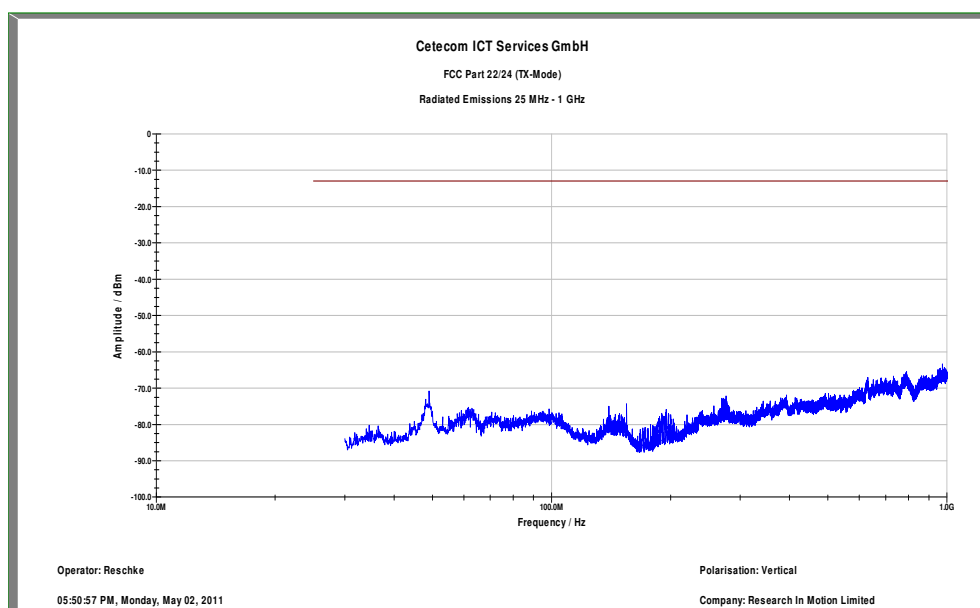


Plot 3: Channel 9262 (1 GHz – 12.75 GHz) – vertical

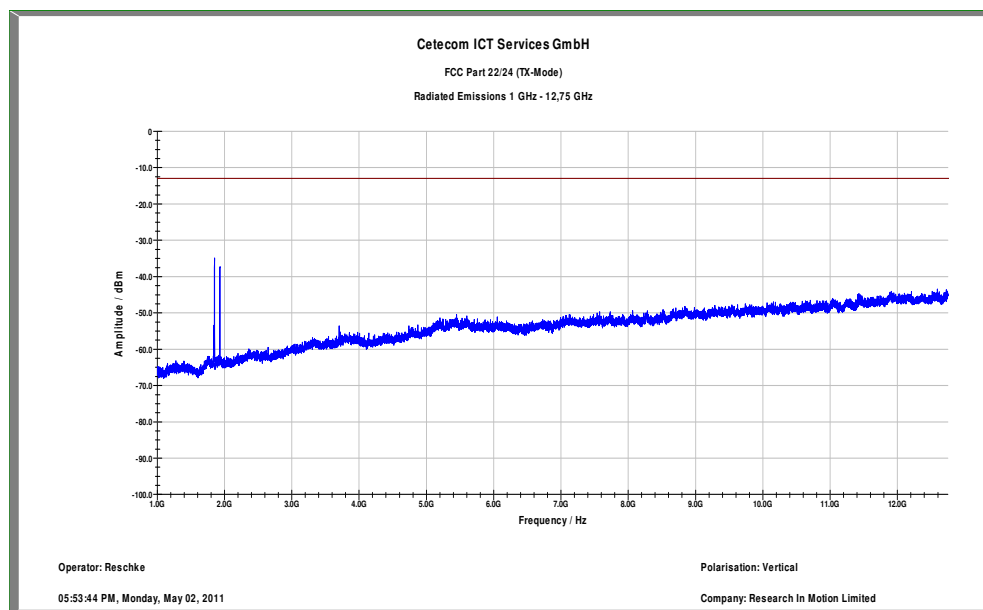


Carrier notched with 1.9 GHz rejection filter


Plot 4: Channel 9262 (12 GHz - 18 GHz) – vertical/horizontal (max hold)

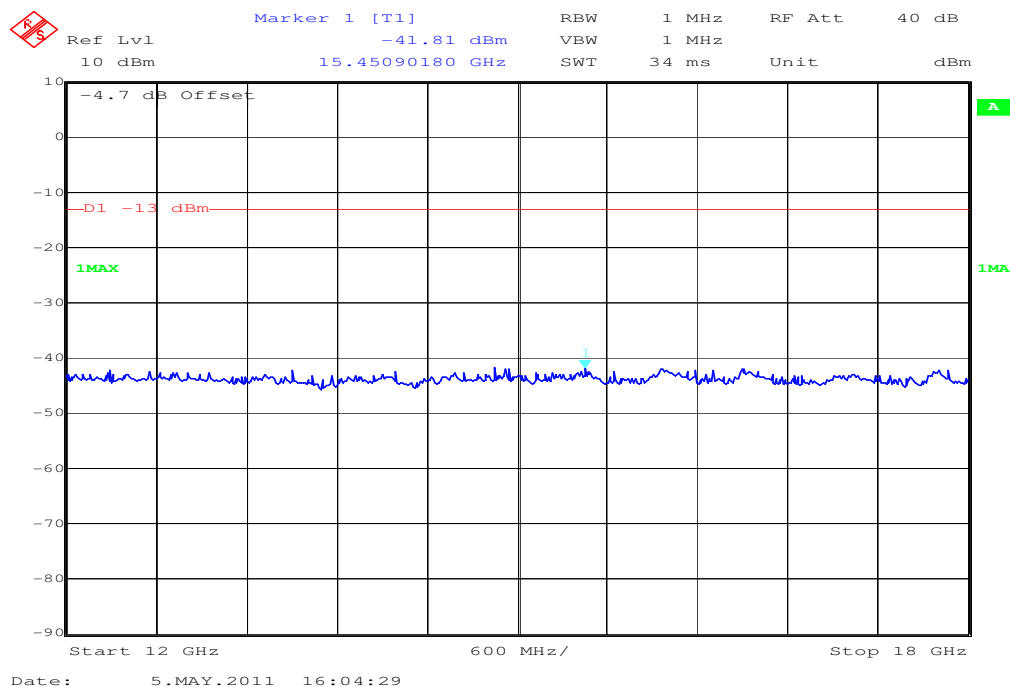


Plot 5: Channel 9262 (18 GHz - 26.5 GHz) – vertical/horizontal (max hold)

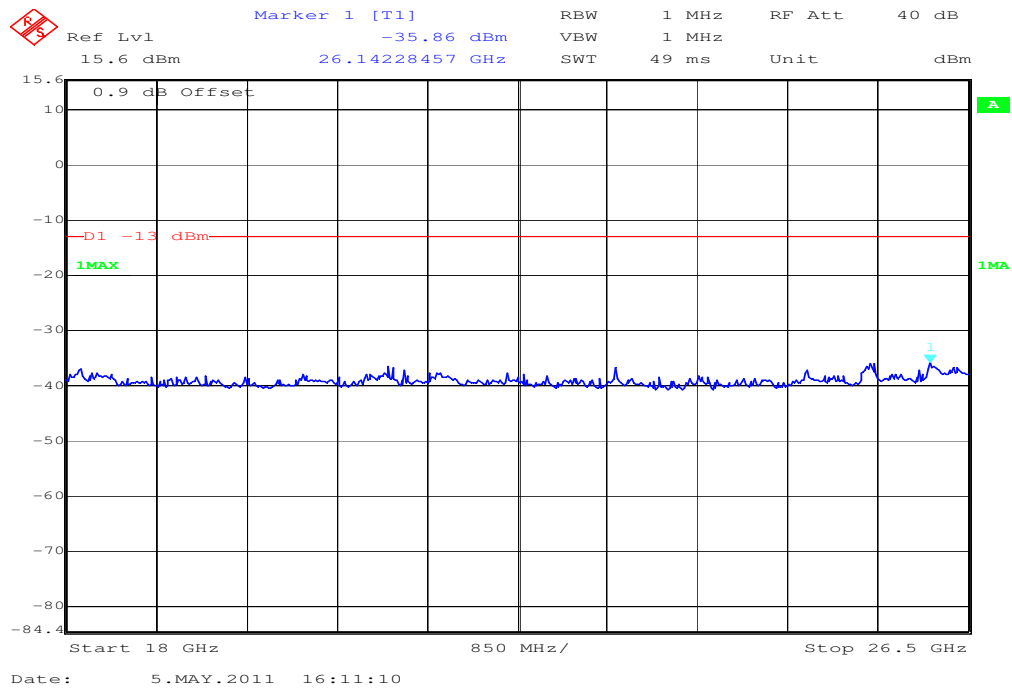

Plot 6: Channel 9262 (30 MHz - 1 GHz) – horizontal

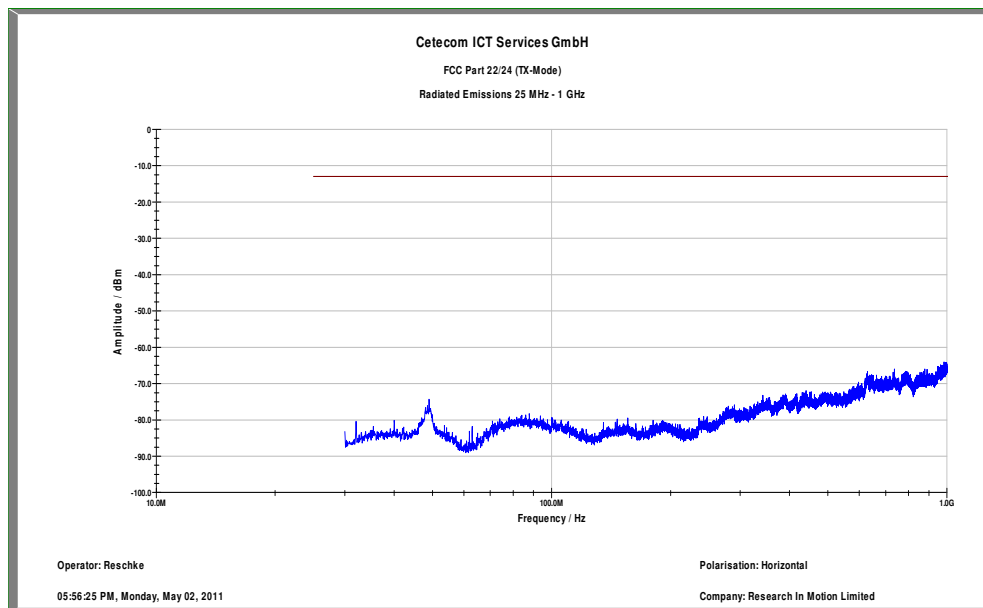


Plot 7: Channel 9262 (1 GHz – 12.75 GHz) – horizontal

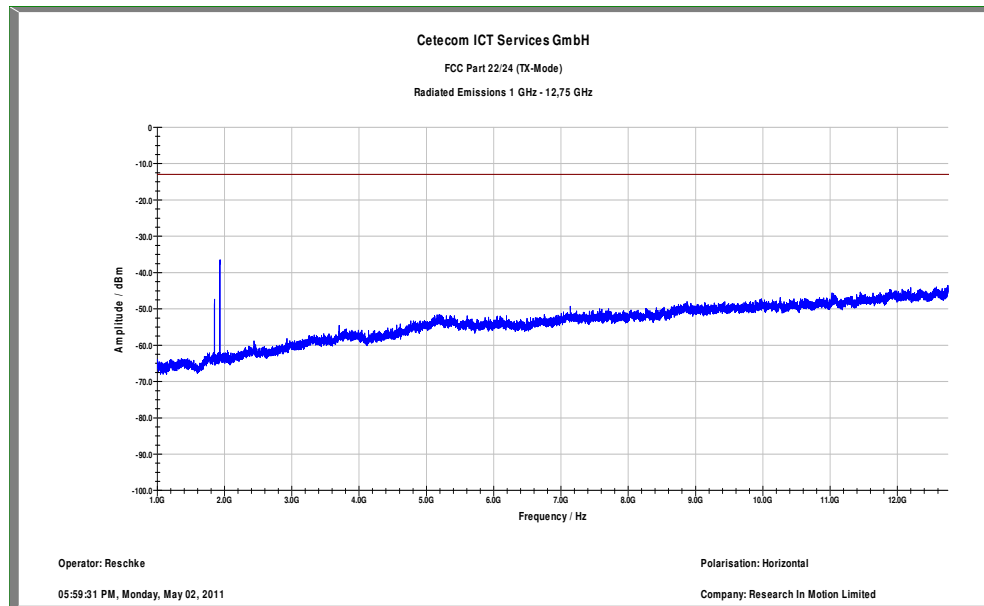


Carrier notched with 1.9 GHz rejection filter


Plot 8: Channel 9400 (Traffic mode up to 30 MHz)

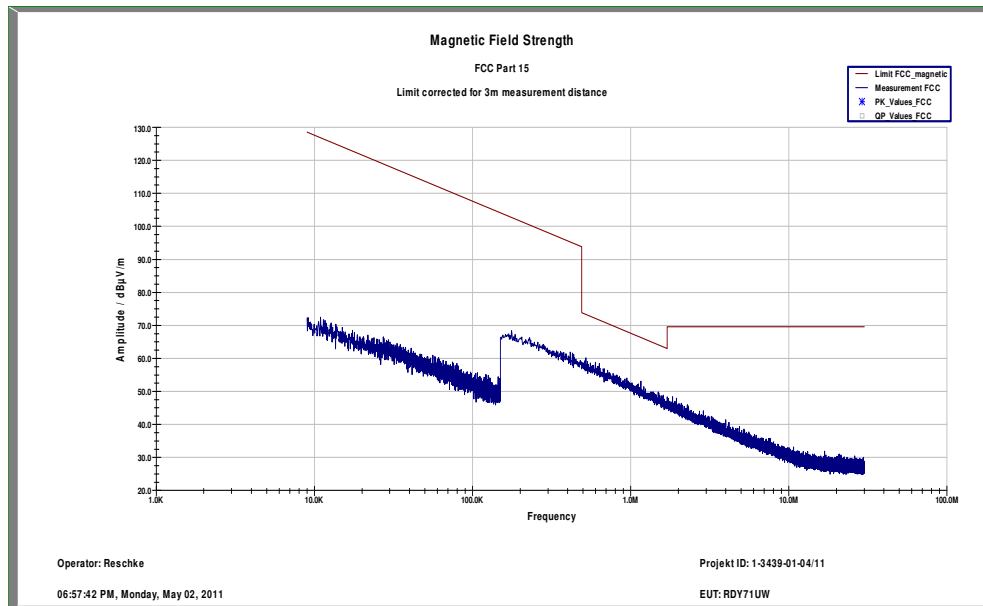


Plot 9: Channel 9400 (30 MHz - 1 GHz) – vertical


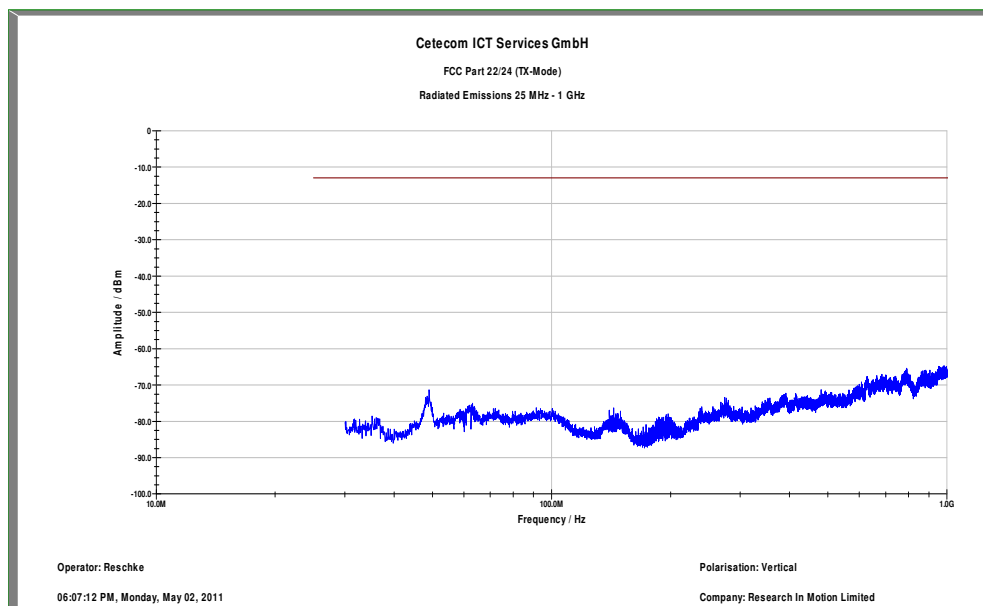


Plot 10: Channel 9400 (1 GHz – 12.75 GHz) – vertical

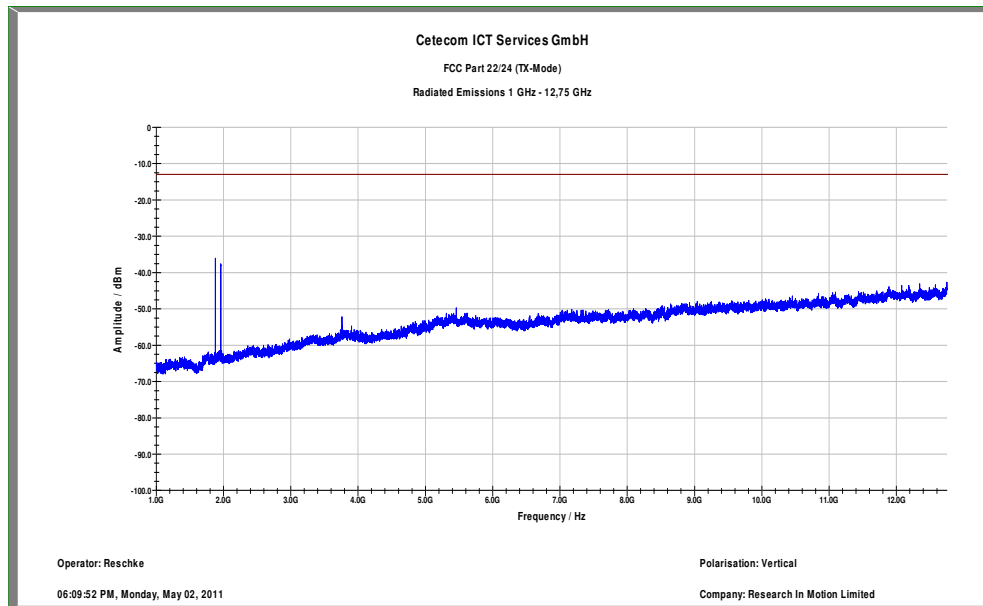
*Carrier notched with 1.9 GHz rejection filter*

Plot 11: Channel 9400 (12 GHz - 18 GHz) – vertical/horizontal (max hold)


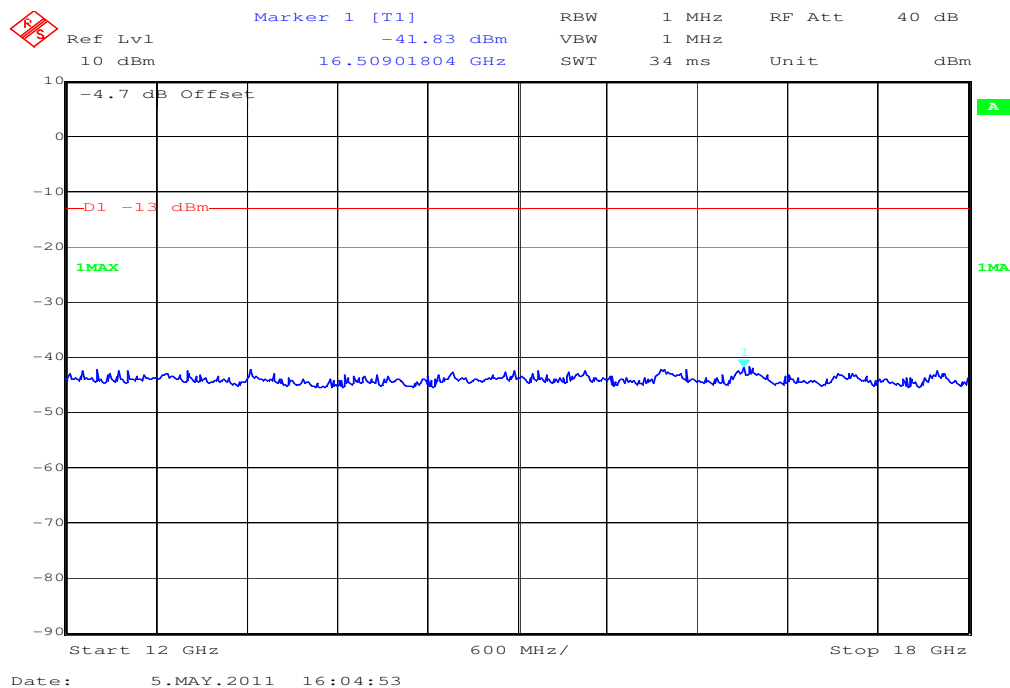


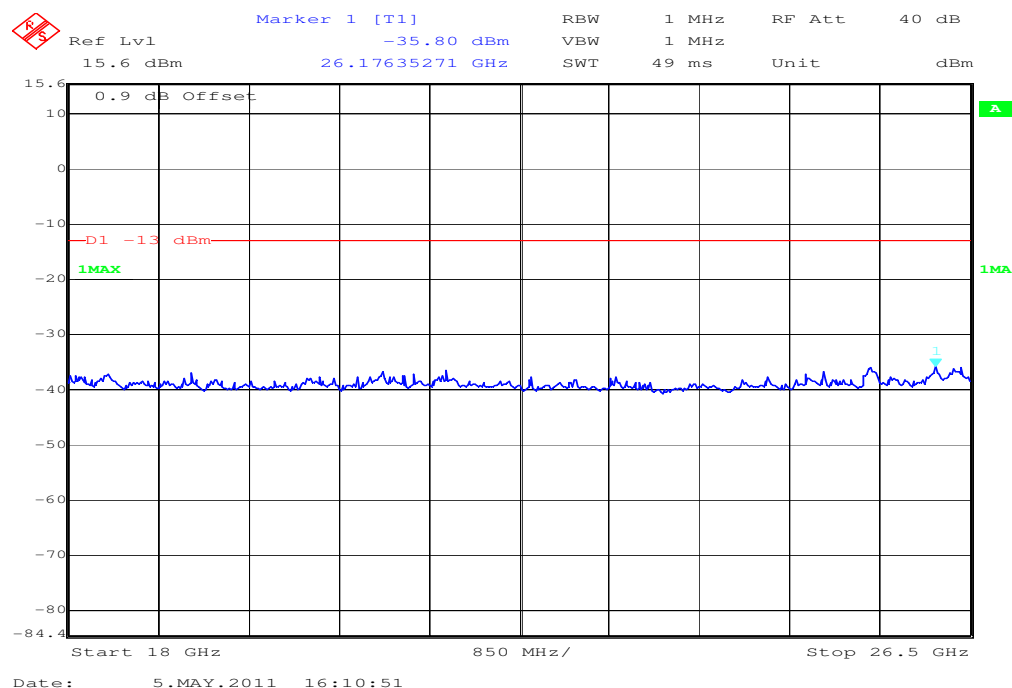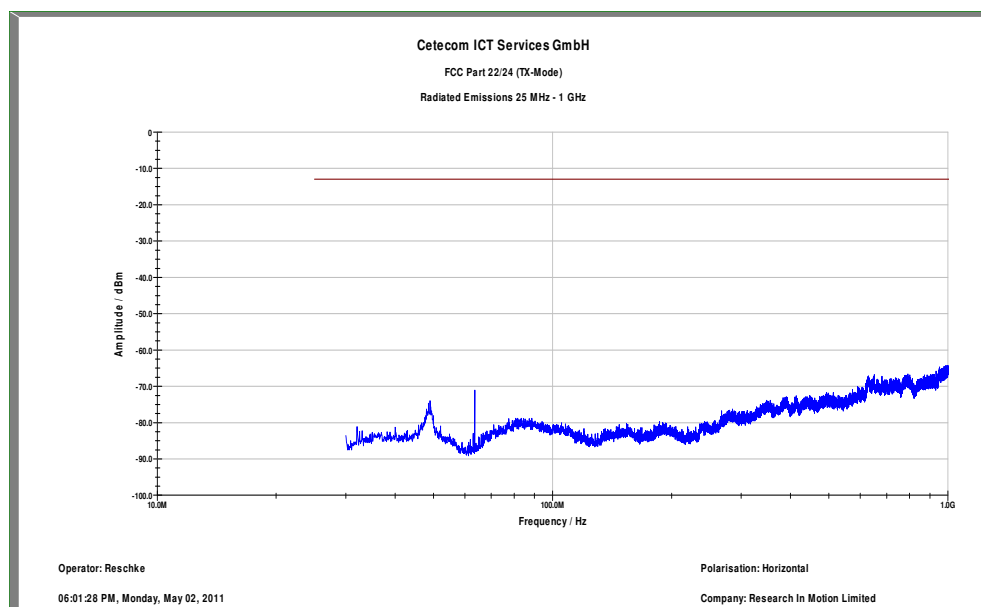Plot 12: Channel 9400 (18 GHz - 26.5 GHz) – vertical/horizontal (max hold)**Plot 13: Channel 9400 (30 MHz - 1 GHz) – horizontal**


Plot 14: Channel 9400 (1 GHz – 12.75 GHz) – horizontal

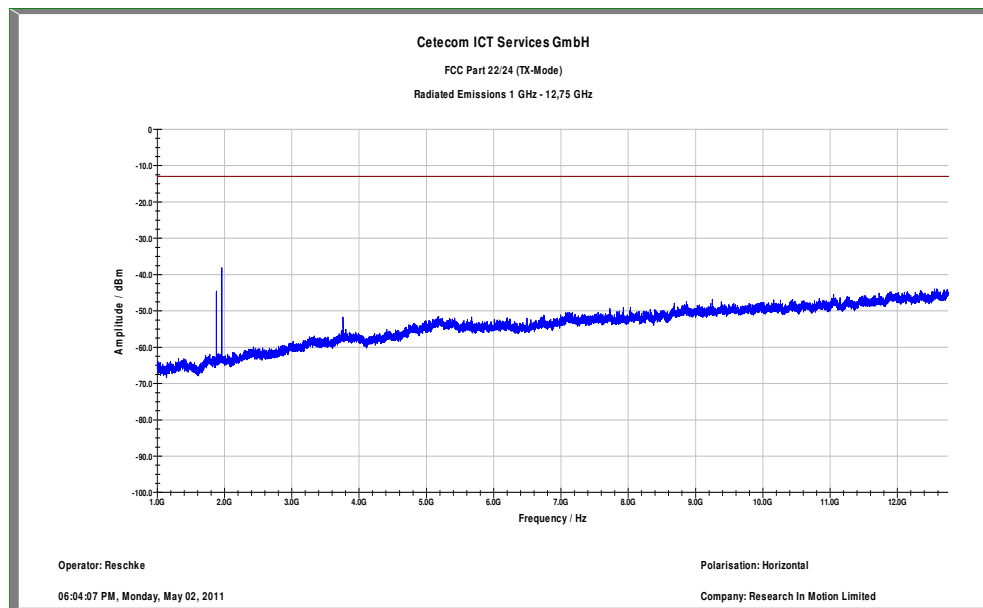

Carrier notched with 1.9 GHz rejection filter

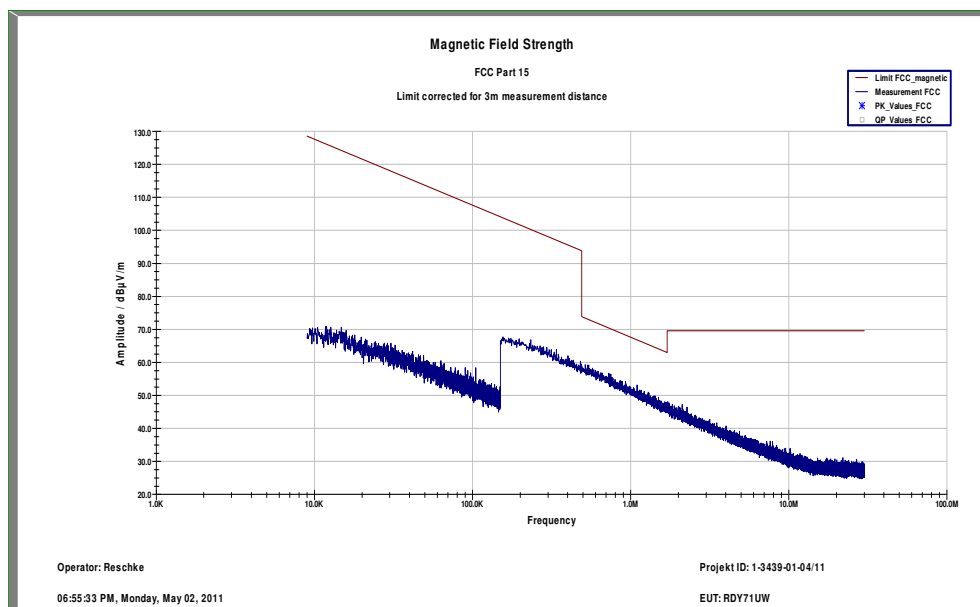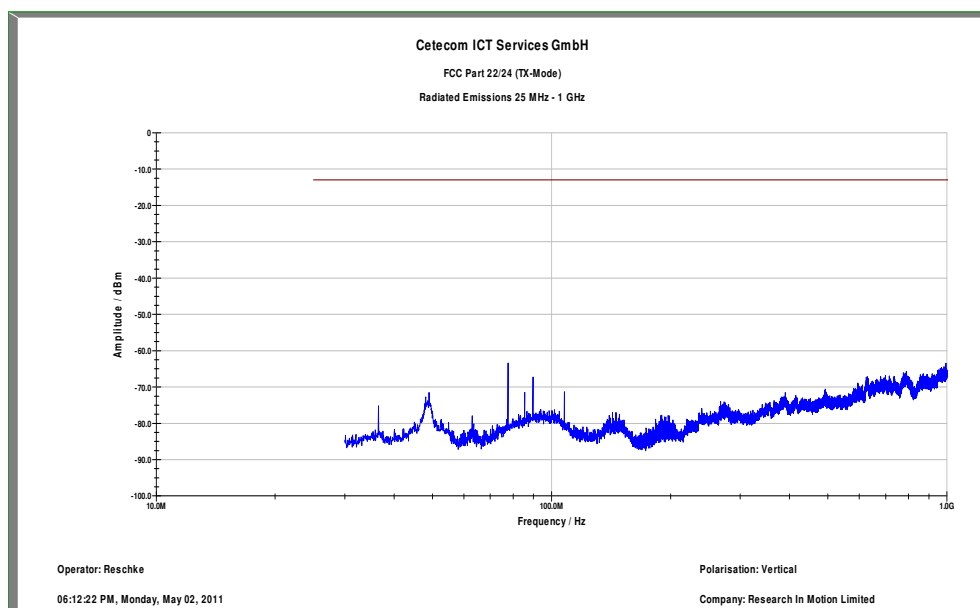
Plot 15: Channel 9538 (Traffic mode up to 30 MHz)**Plot 16: Channel 9538 (30 MHz - 1 GHz) – vertical**

Plot 17: Channel 9538 (1 GHz – 12.75 GHz) – vertical

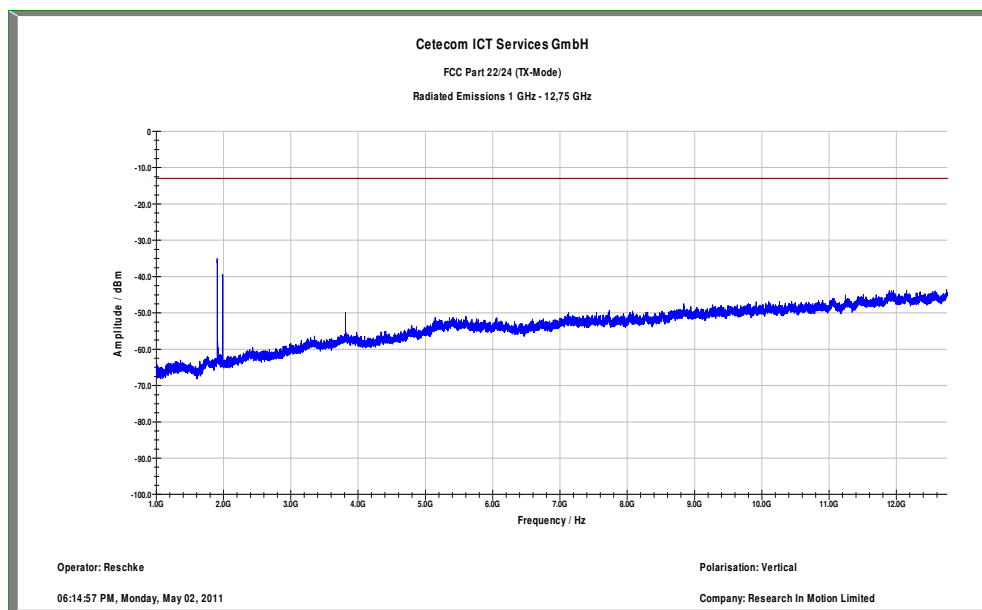


Carrier notched with 1.9 GHz rejection filter


Plot 18: Channel 9538 (12 GHz - 18 GHz) – vertical/horizontal (max hold)

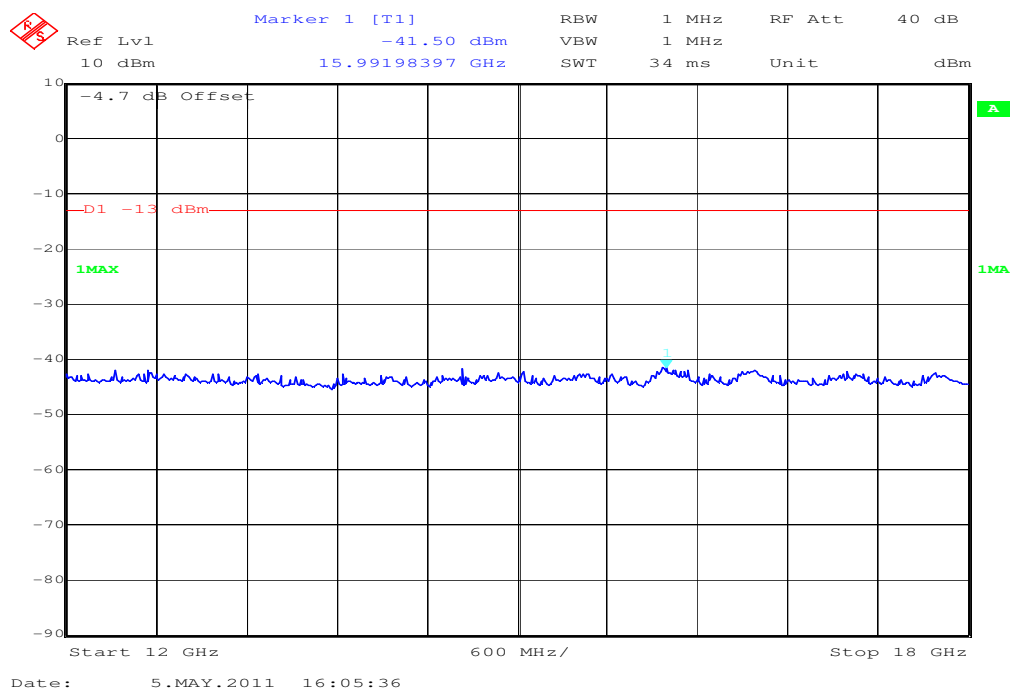


Plot 19: Channel 9538 (18 GHz - 26.5 GHz) – vertical/horizontal (max hold)

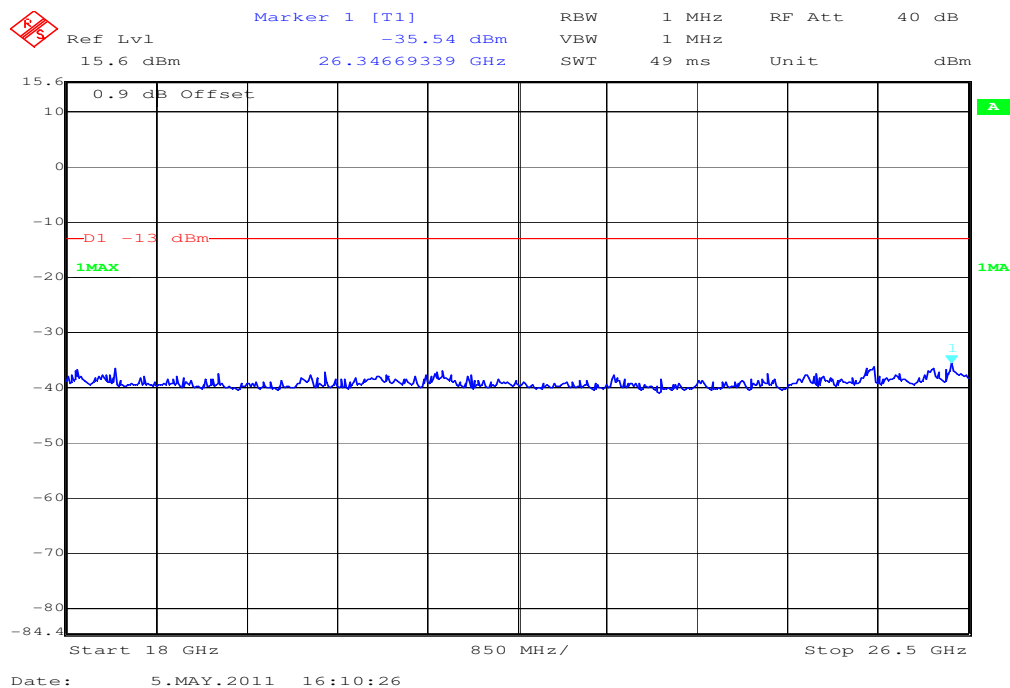



Plot 20: Channel 9538 (30 MHz - 1 GHz) – horizontal


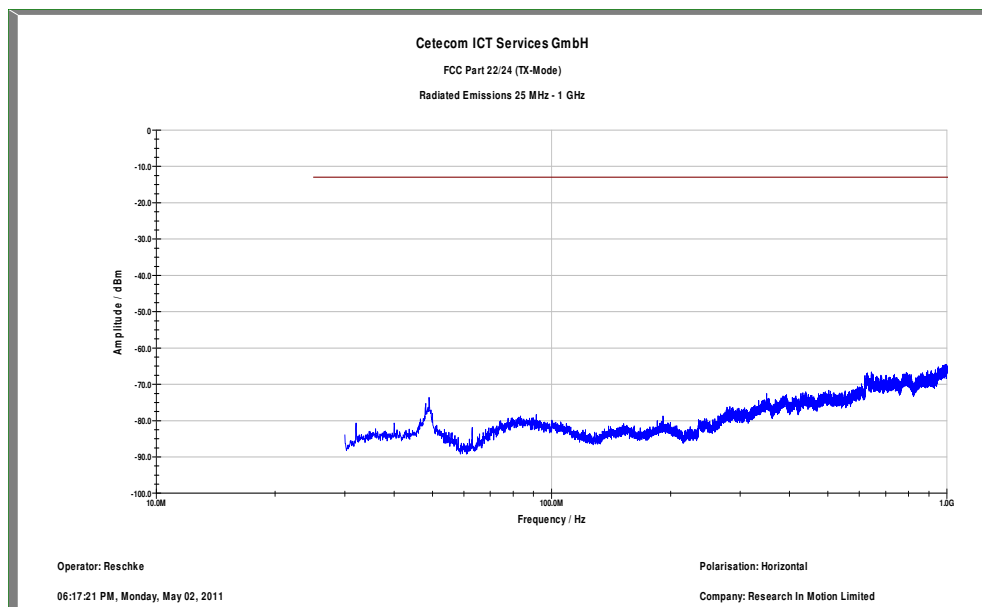




Plot 21: Channel 9538 (1 GHz – 12.75 GHz) – horizontal

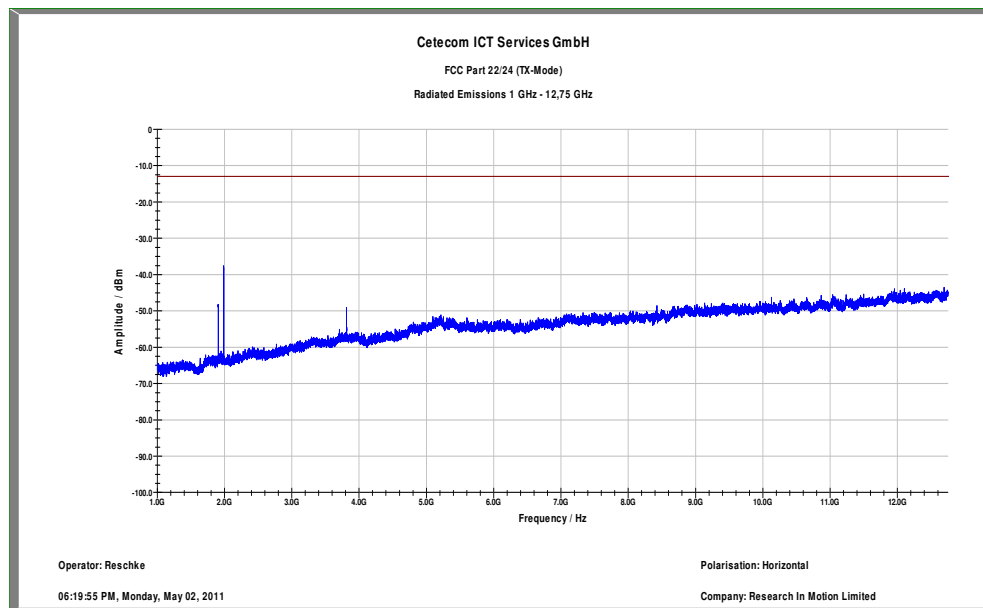


Carrier notched with 1.9 GHz rejection filter

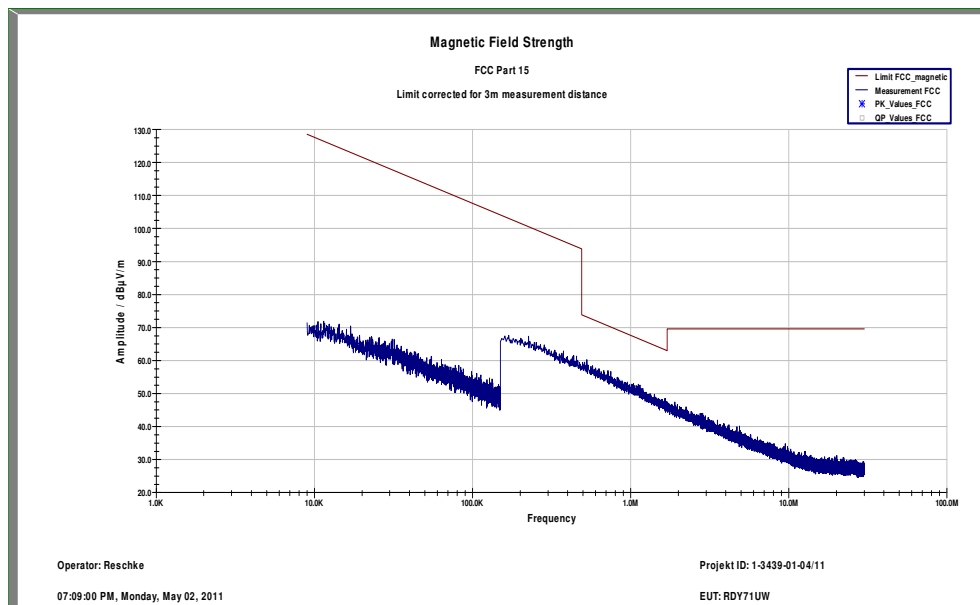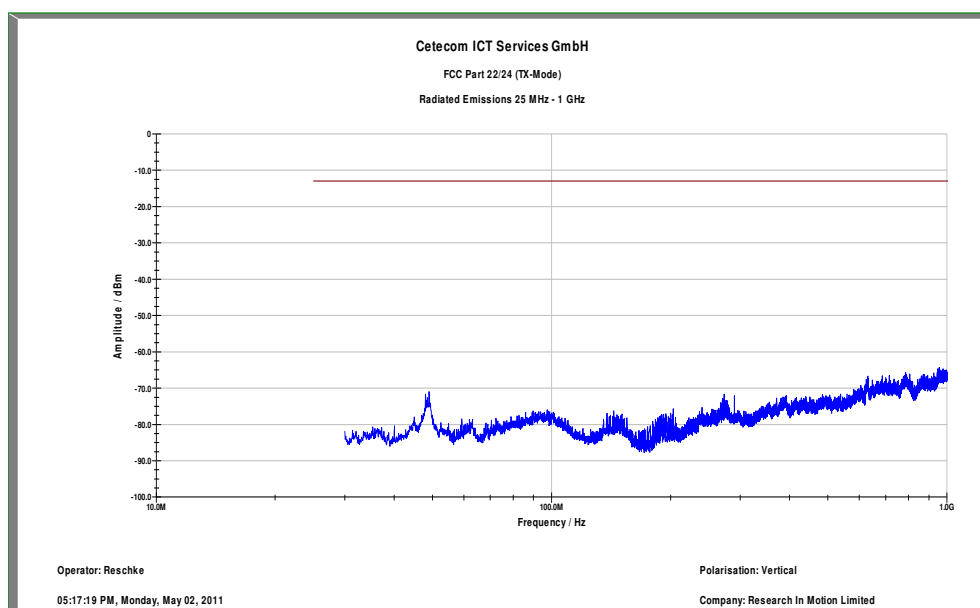PS**Plot 1: Channel 9262 (Traffic mode up to 30 MHz)****Plot 2: Channel 9262 (30 MHz - 1 GHz) – vertical**

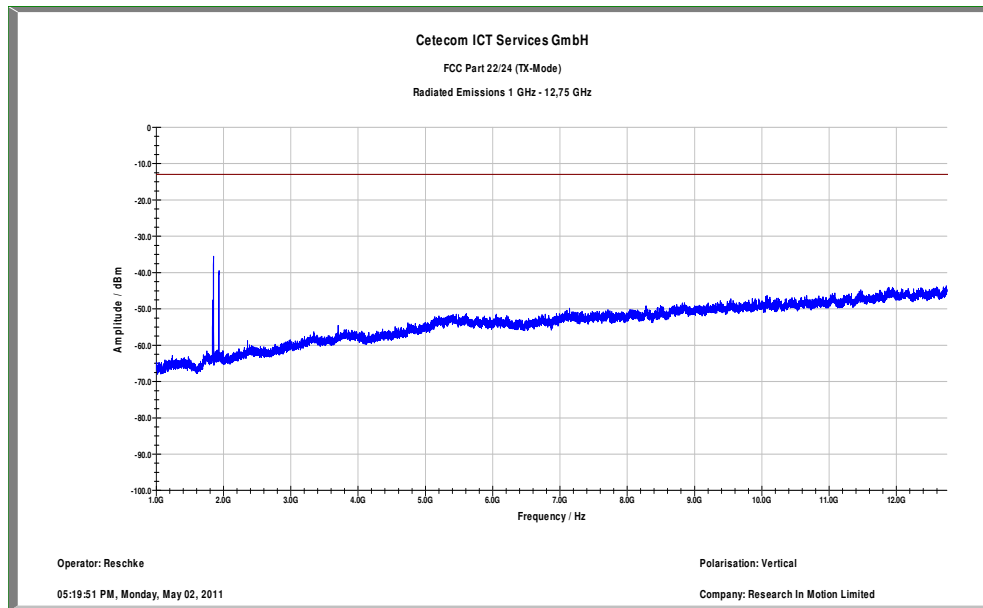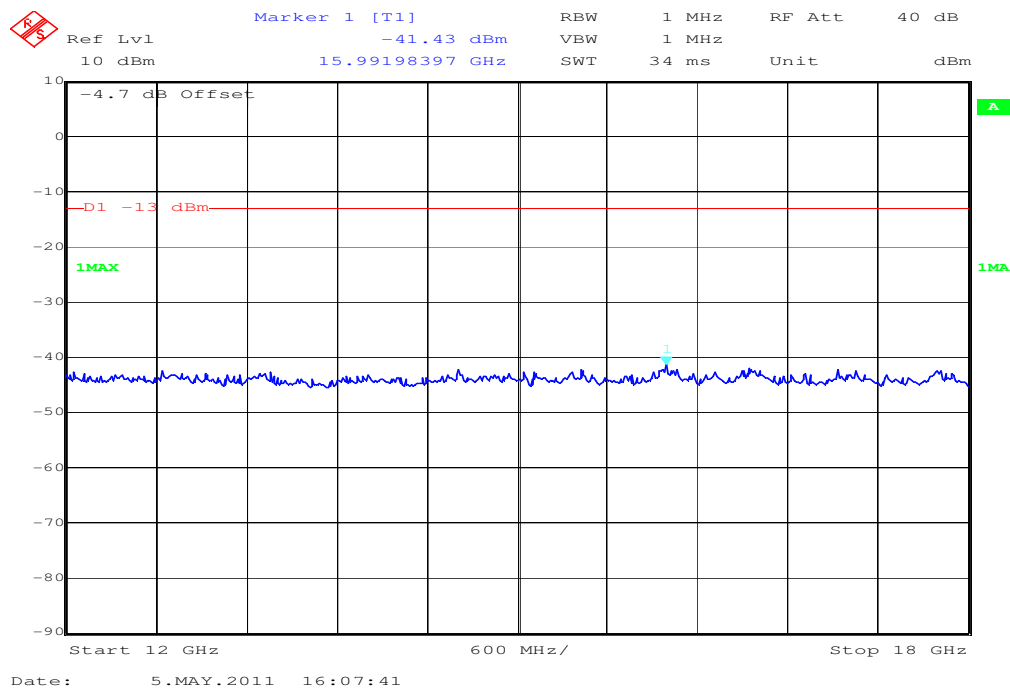Plot 3: Channel 9262 (1 GHz – 12.75 GHz) – vertical*Carrier notched with 1.9 GHz rejection filter***Plot 4: Channel 9262 (12 GHz - 18 GHz) – vertical/horizontal (max hold)**

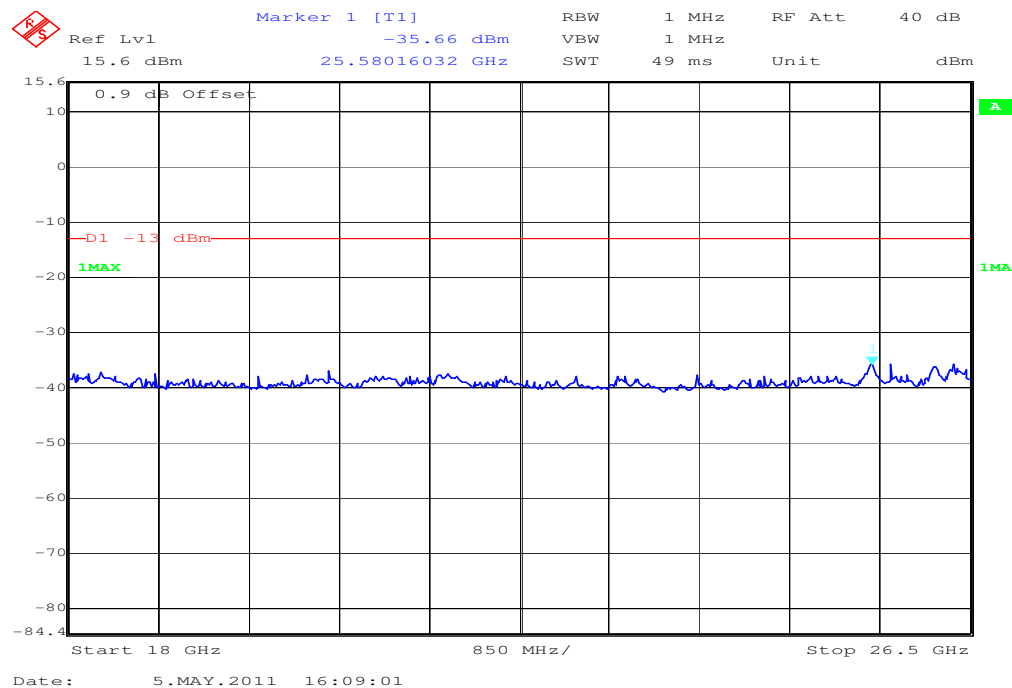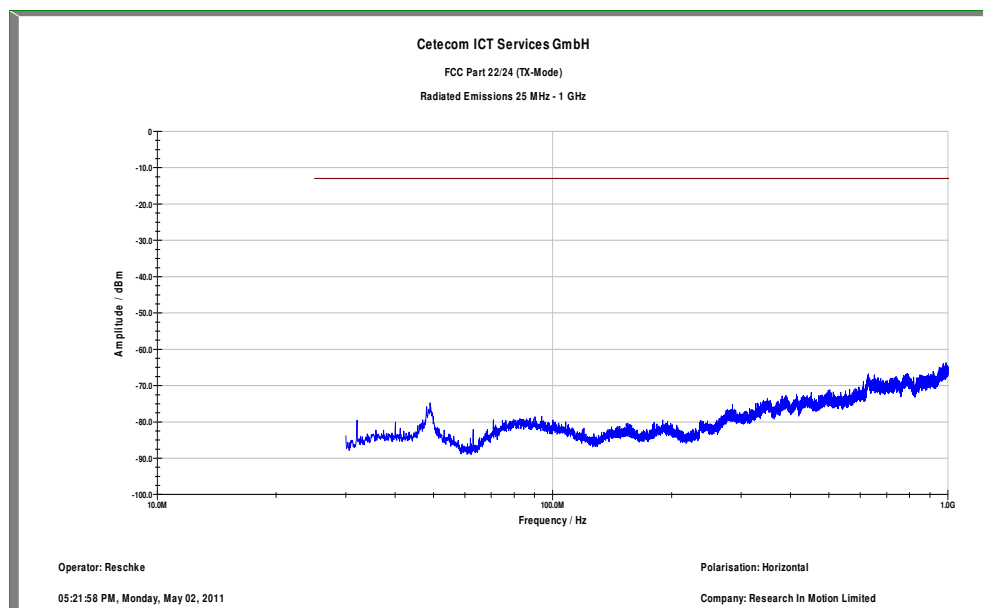
Plot 5: Channel 9262 (18 GHz - 26.5 GHz) – vertical/horizontal (max hold)**Plot 6: Channel 9262 (30 MHz - 1 GHz) – horizontal**

Plot 7: Channel 9262 (1 GHz – 12.75 GHz) – horizontal

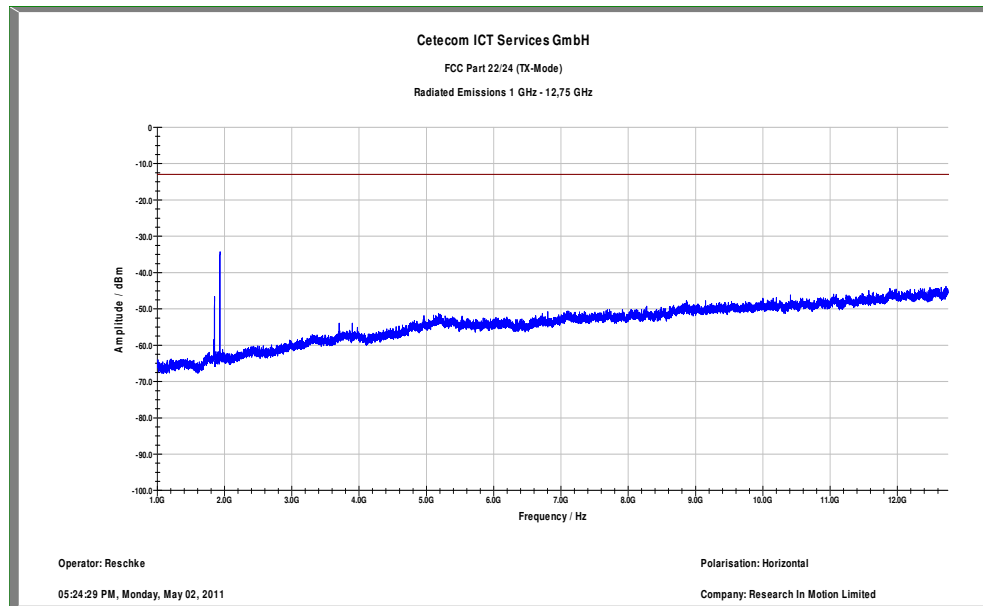




Carrier notched with 1.9 GHz rejection filter

Plot 8: Channel 9400 (Traffic mode up to 30 MHz)

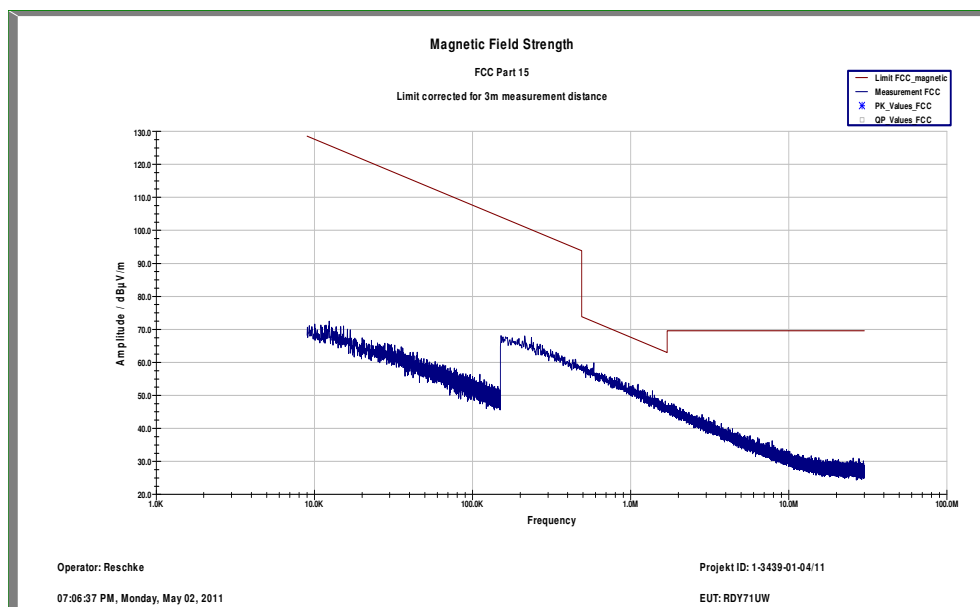


Plot 9: Channel 9400 (30 MHz - 1 GHz) – vertical

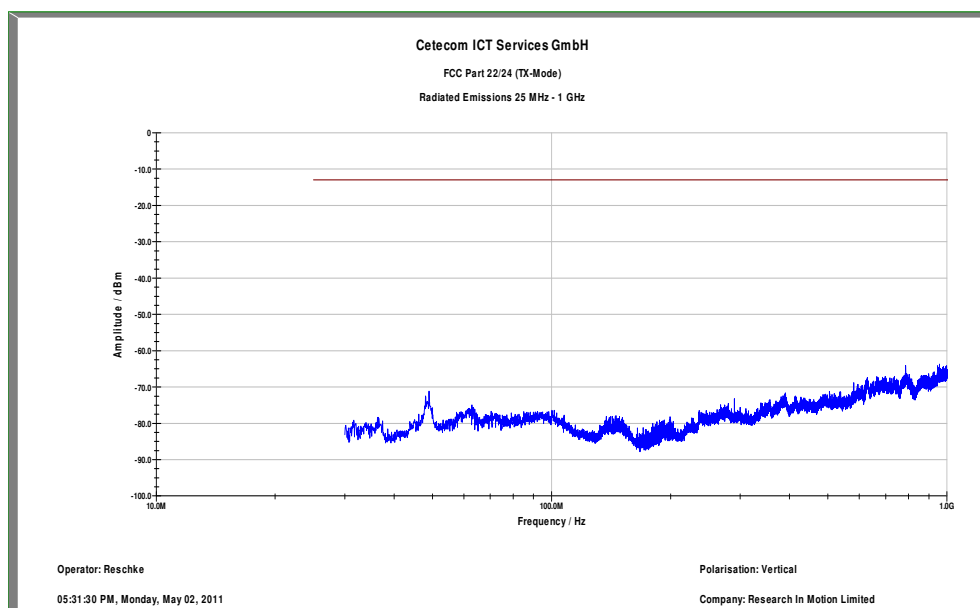


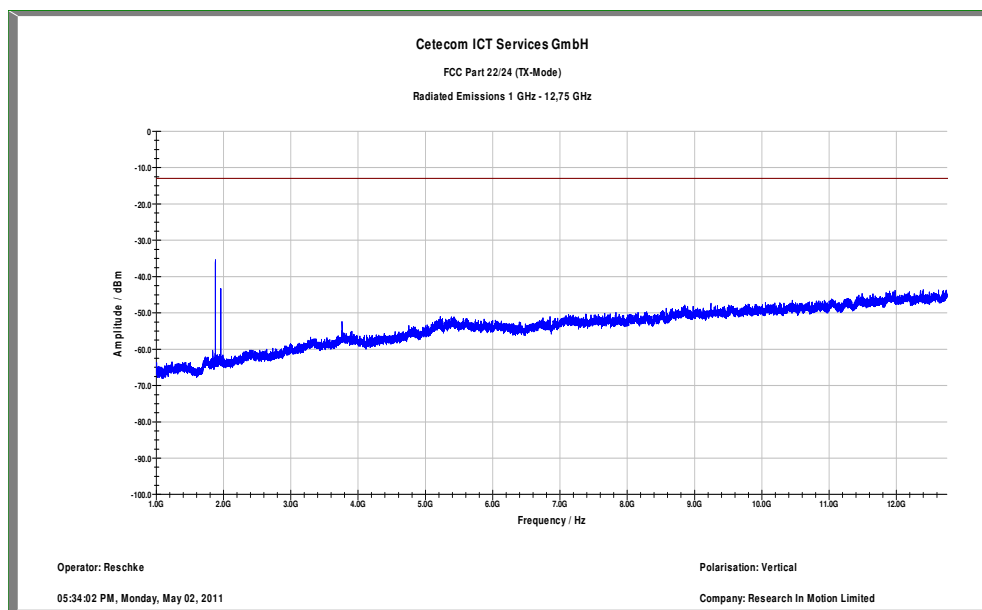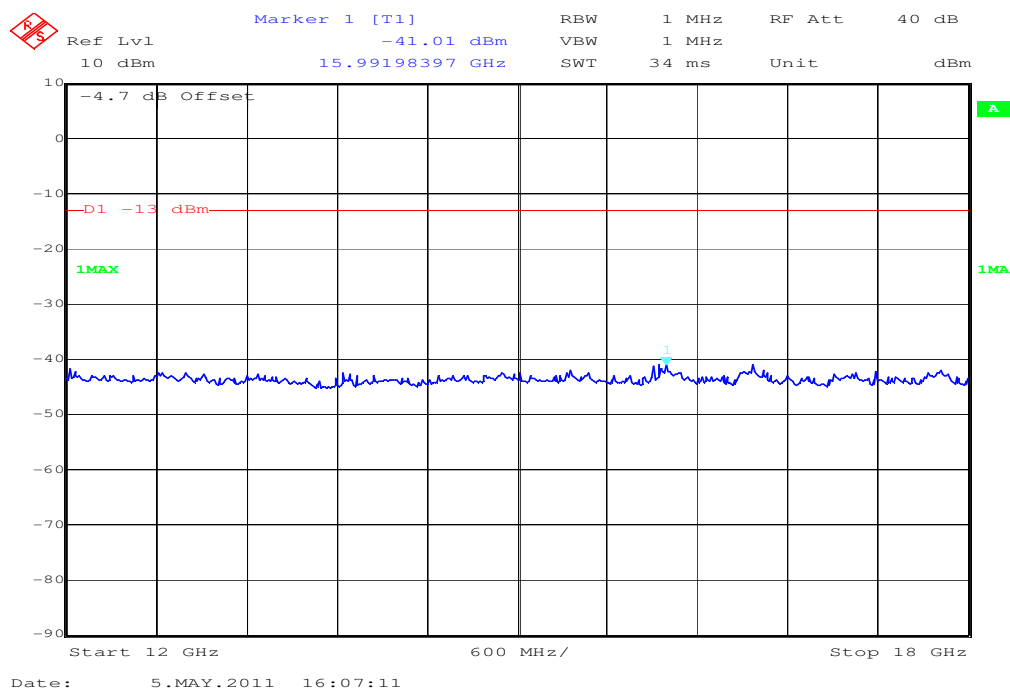Plot 10: Channel 9400 (1 GHz – 12.75 GHz) – vertical*Carrier notched with 1.9 GHz rejection filter***Plot 11: Channel 9400 (12 GHz - 18 GHz) – vertical/horizontal (max hold)**


Plot 12: Channel 9400 (18 GHz - 26.5 GHz) – vertical/horizontal (max hold)

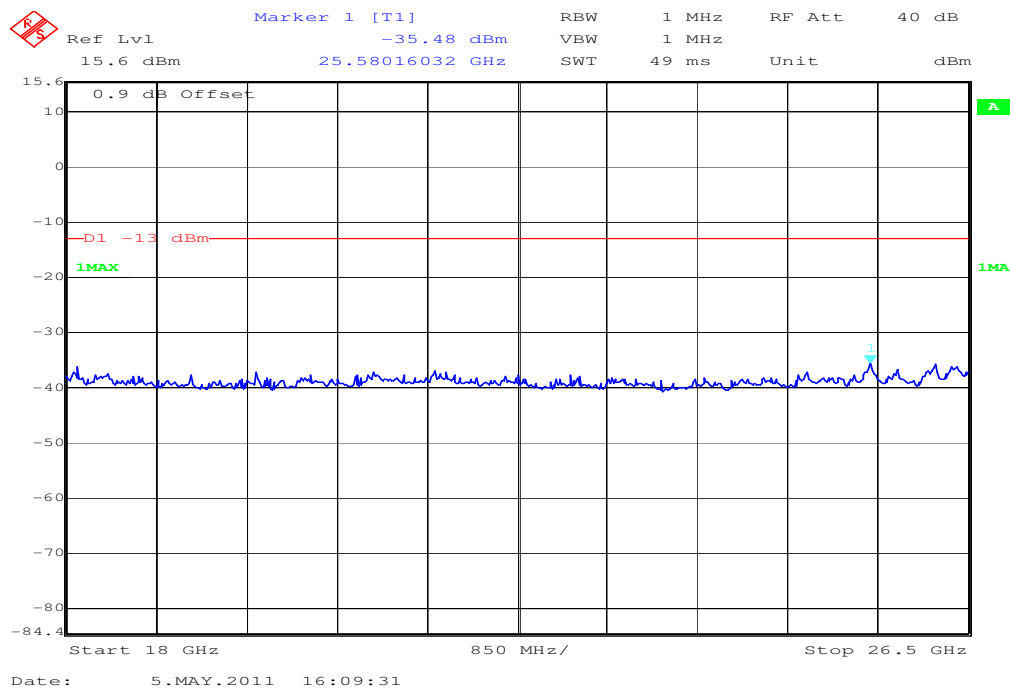

Plot 13: Channel 9400 (30 MHz - 1 GHz) – horizontal

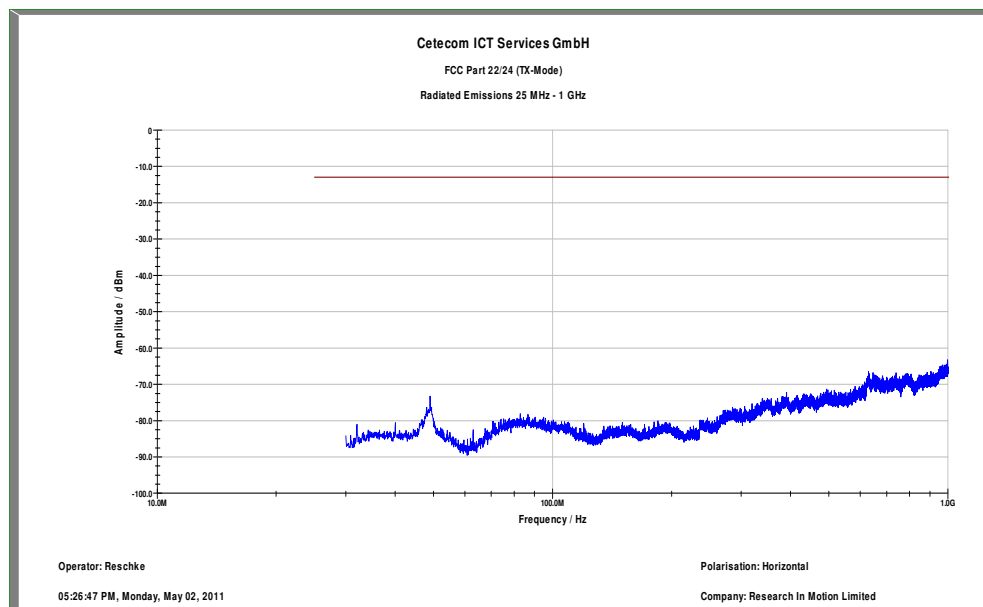


Plot 14: Channel 9400 (1 GHz – 12.75 GHz) – horizontal

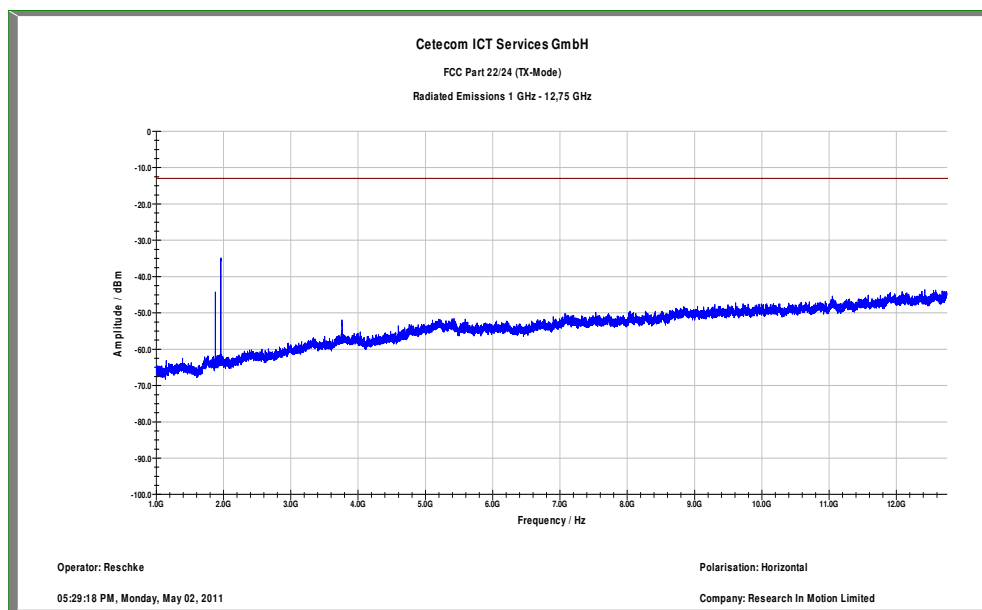




Carrier notched with 1.9 GHz rejection filter

Plot 15: Channel 9538 (Traffic mode up to 30 MHz)

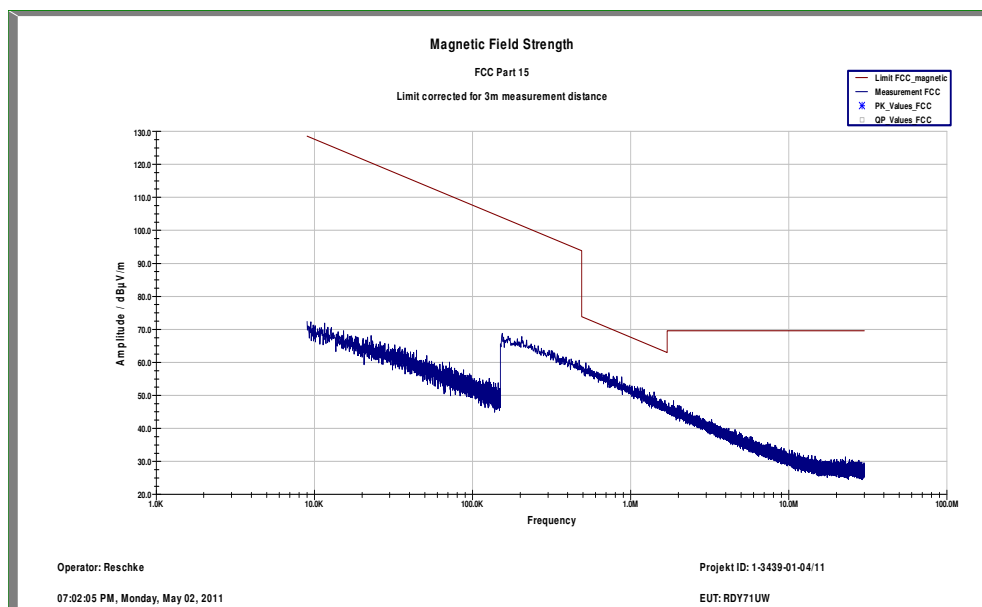


Plot 16: Channel 9538 (30 MHz - 1 GHz) – vertical

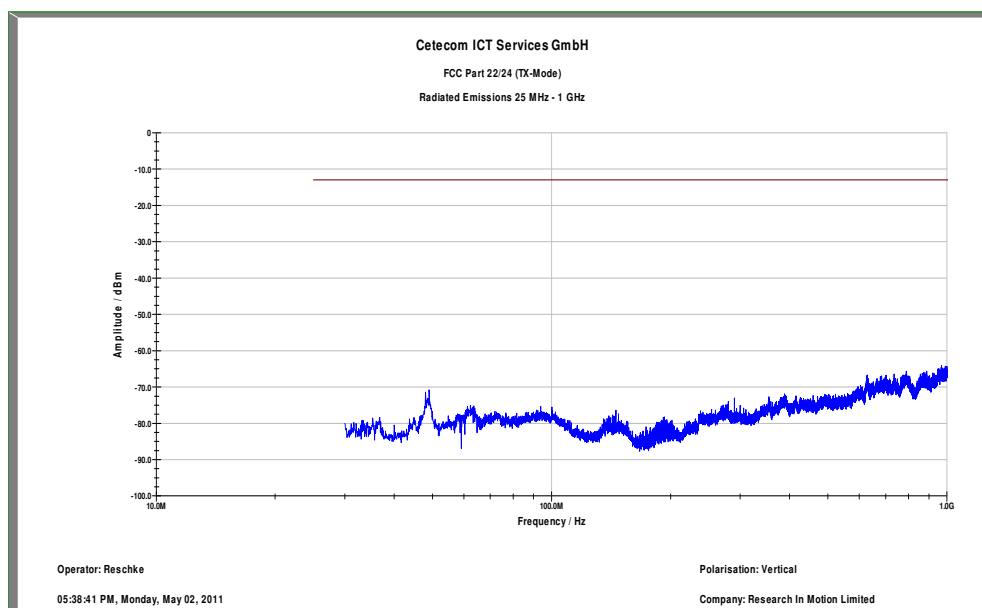


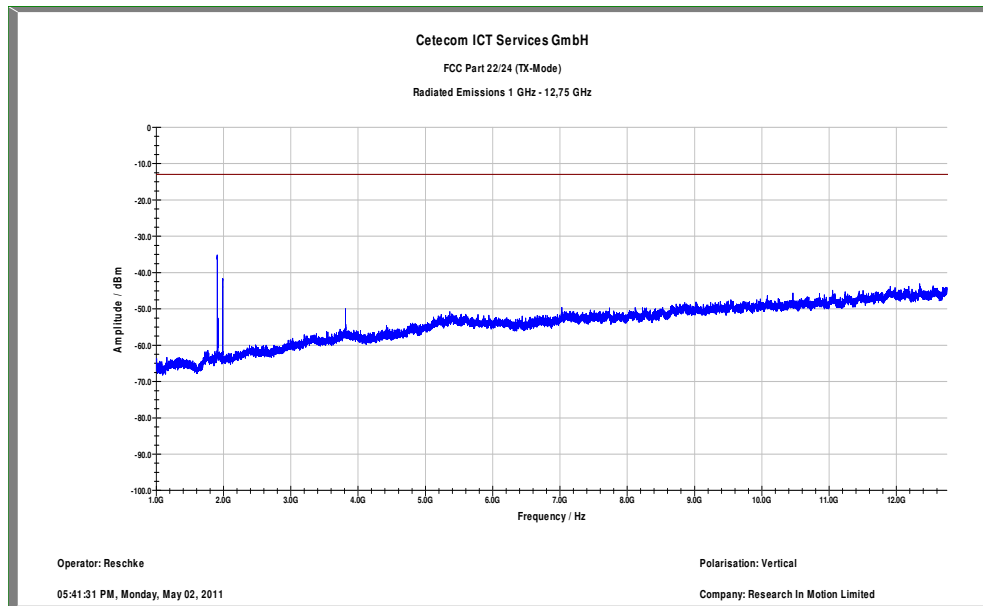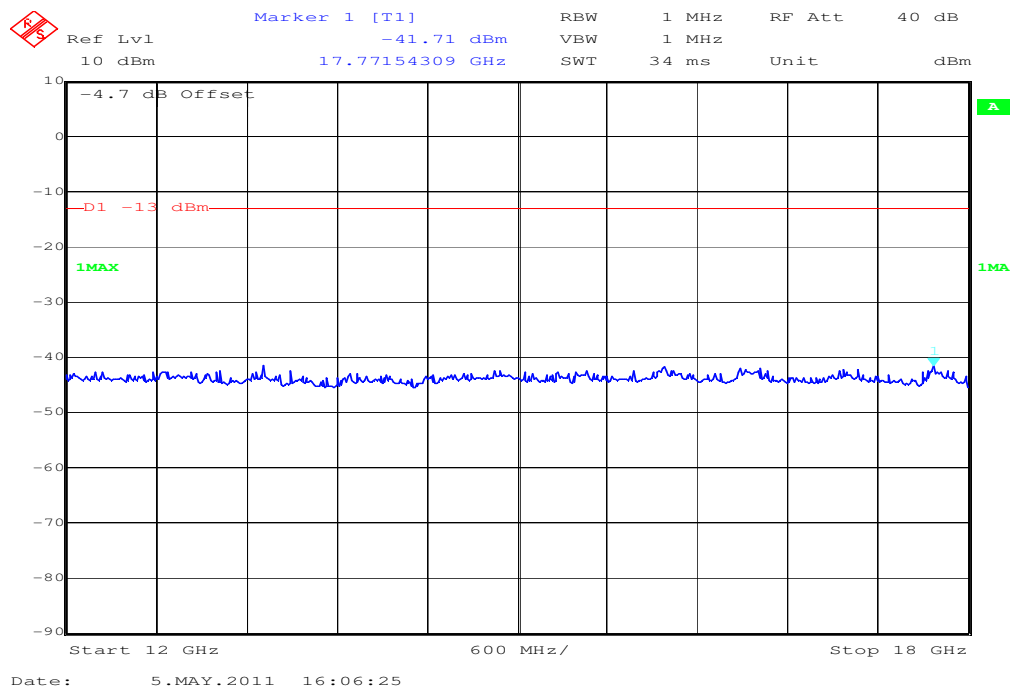Plot 17: Channel 9538 (1 GHz – 12.75 GHz) – vertical*Carrier notched with 1.9 GHz rejection filter***Plot 18: Channel 9538 (12 GHz - 18 GHz) – vertical/horizontal (max hold)**


Plot 19: Channel 9538 (18 GHz - 26.5 GHz) – vertical/horizontal (max hold)

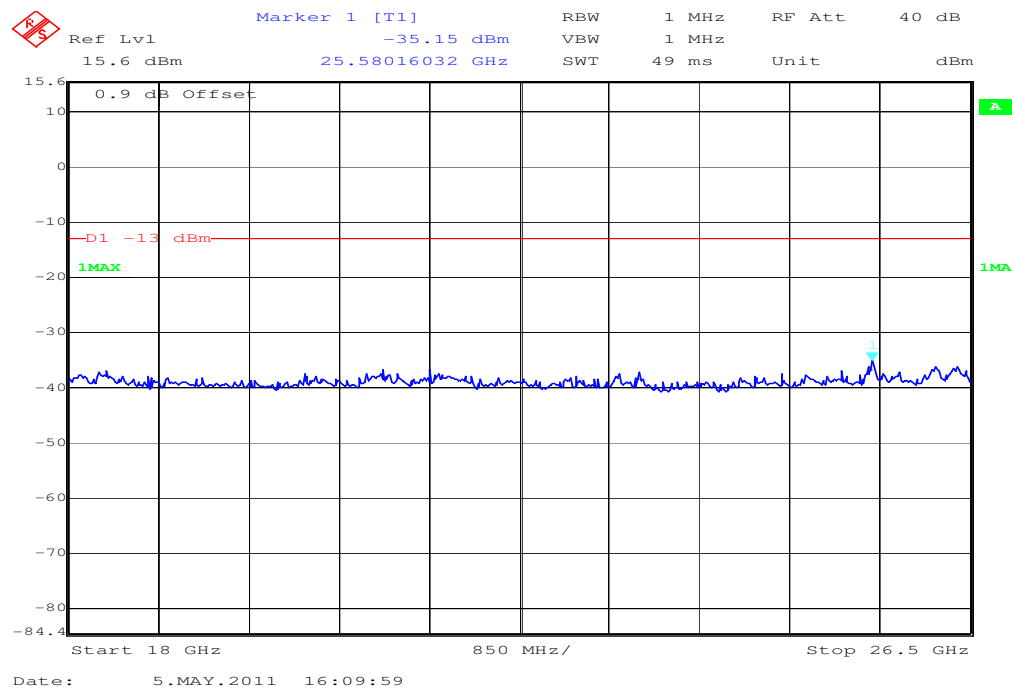

Plot 20: Channel 9538 (30 MHz - 1 GHz) – horizontal

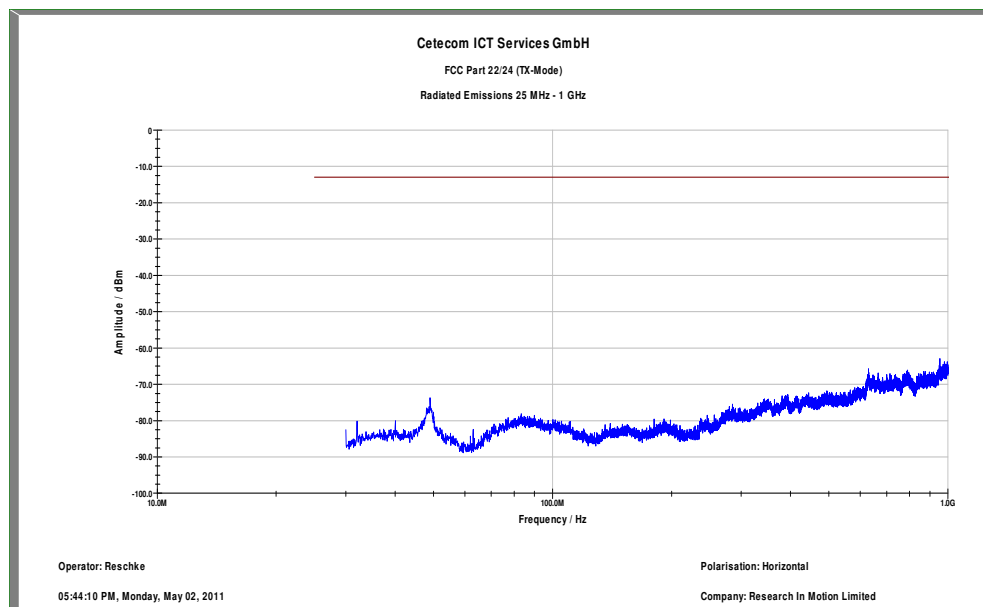

Plot 21: Channel 9538 (1 GHz – 12.75 GHz) – horizontal

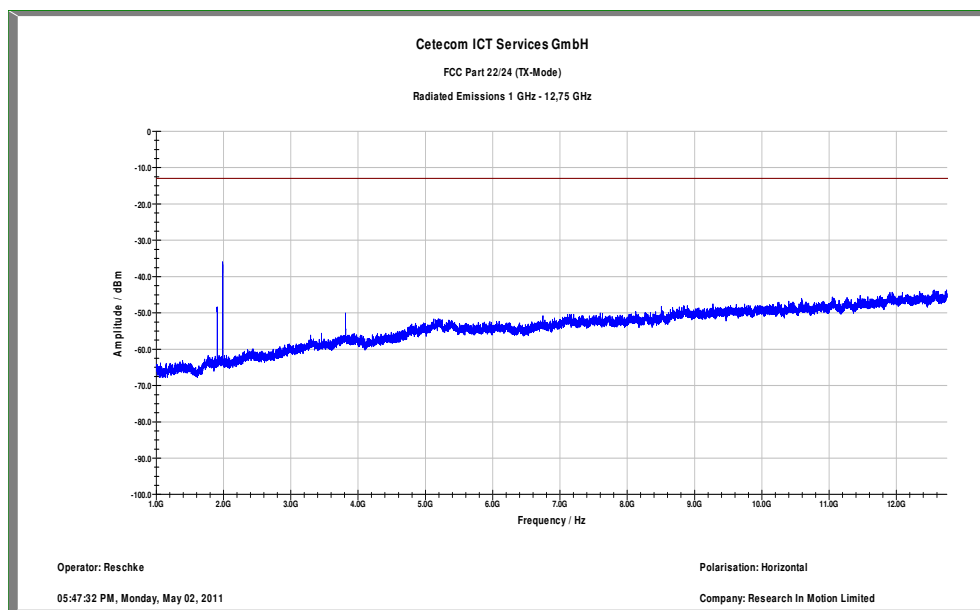

Carrier notched with 1.9 GHz rejection filter

8.6 Results UMTS band V

All UMTS-band measurements are done in WCDMA mode only.

The connection was established with the following setup: WCDMA CS-RMC, Max Power (All Bit up)

8.6.1 RF output power

Description:

This paragraph contains average power, peak output power and ERP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

Measurement parameters	
Detector:	Peak and RMS (Power in Burst)
Sweep time:	Auto
Video bandwidth:	10 MHz
Resolution bandwidth:	10 MHz
Span:	Zero Span
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 22.9.1.3 CFR Part 2.1046	RSS 132, Issue 2, Section 4.4 and 6.4
Nominal Peak Output Power	
+38.45 dBm In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

Results:

Output Power (radiated) WCDMA mode - CS	
Frequency (MHz)	Average Output Power (dBm) - ERP
826.4	19.00
836.0	19.50
846.6	21.01
Measurement uncertainty	± 2.0 dB

Output Power (radiated) WCDMA mode - PS	
Frequency (MHz)	Average Output Power (dBm) - ERP
826.4	19.40
836.0	20.00
846.6	21.30
Measurement uncertainty	± 2.0 dB

Result: The result of the measurement is passed.

8.6.2 Spurious emissions radiated

Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2009 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 846.6 MHz. This was rounded up to 12 GHz. The resolution bandwidth is set as outlined in Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the UMTS band V.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- The antenna output was terminated in a 50 ohm load (if possible).
- A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters.
- Now each detected emissions were substituted by the substitution method, in accordance with the TIA/EIA 603 .

Measurement:

Measurement parameters	
Detector:	Peak
Sweep time:	2 sec.
Video bandwidth:	Below 1 GHz: 120 kHz Above 1 GHz: 1 MHz
Resolution bandwidth:	Below 1 GHz: 120 kHz Above 1 GHz: 1 MHz
Span:	100 MHz Steps
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 22.917 CFR Part 2.1053	RSS 132, Issue 2, Section 4.5 and 6.5
Spurious Emissions Radiated	
Attenuation $\geq 43 + 10\log(P)$ (P, Power in Watts)	
-13 dBm	

Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the UMTS band V (826.4 MHz, 836.0 MHz and 846.6 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the UMTS band V into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization; the plots show the worst case.

The plots show only the middle channel. If spurious were detected, the lowest and highest channel were checked too. The found values are stated in the table below.

As can be seen from this data, the emissions from the test item were within the specification limit.


Spurious Emission Level (dBm)								
CS								
Harmonic	Ch. 4132 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 4180 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 4233 Freq. (MHz)	Level [dBm]
2	1652.8	-	2	1672.0	-	2	1693.2	-
3	2479.2	-	3	2508.0	-	3	2539.8	-
4	3305.6	-	4	3344.0	-	4	3386.4	-
5	4132.0	-	5	4180.0	-	5	4233.0	-
6	4958.4	-	6	5016.0	-	6	5079.6	-
7	5784.8	-	7	5852.0	-	7	5926.2	-
8	6611.2	-	8	6688.0	-	8	6772.8	-
9	7437.6	-	9	7524.0	-	9	7619.4	-
10	8264.0	-	10	8360.0	-	10	8466.0	-
Measurement uncertainty					± 3dB			

Spurious Emission Level (dBm) PS								
Harmonic	Ch. 4132 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 4180 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 4233 Freq. (MHz)	Level [dBm]
2	1652.8	-	2	1672.0	-	2	1693.2	-
3	2479.2	-	3	2508.0	-	3	2539.8	-
4	3305.6	-	4	3344.0	-	4	3386.4	-
5	4132.0	-	5	4180.0	-	5	4233.0	-
6	4958.4	-	6	5016.0	-	6	5079.6	-
7	5784.8	-	7	5852.0	-	7	5926.2	-
8	6611.2	-	8	6688.0	-	8	6772.8	-
9	7437.6	-	9	7524.0	-	9	7619.4	-
10	8264.0	-	10	8360.0	-	10	8466.0	-
Measurement uncertainty					± 3dB			


Result: The result of the measurement is passed.

CS


Plot 1: Channel 4132 (Traffic mode up to 30 MHz)

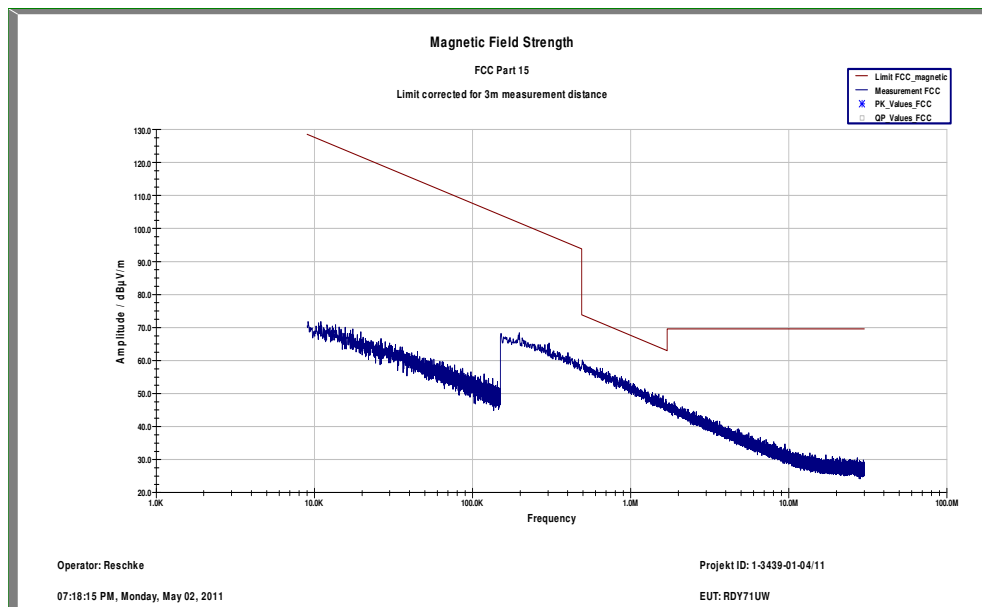


Plot 2: Channel 4132 (30 MHz - 1 GHz) – vertical

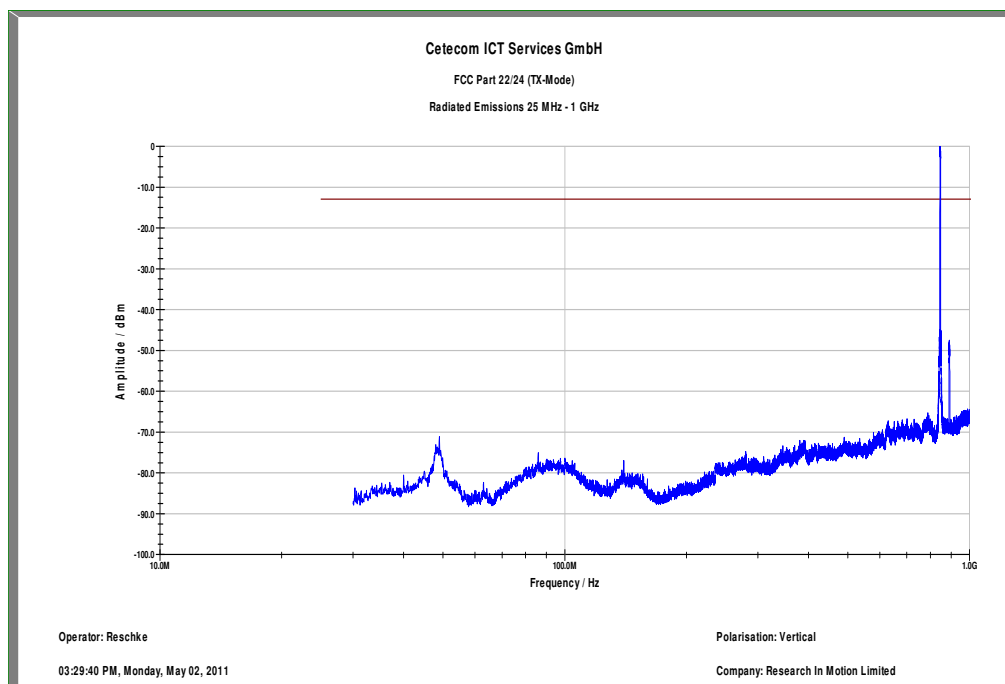


Plot 3: Channel 4132 (1 GHz – 12.75 GHz) – vertical

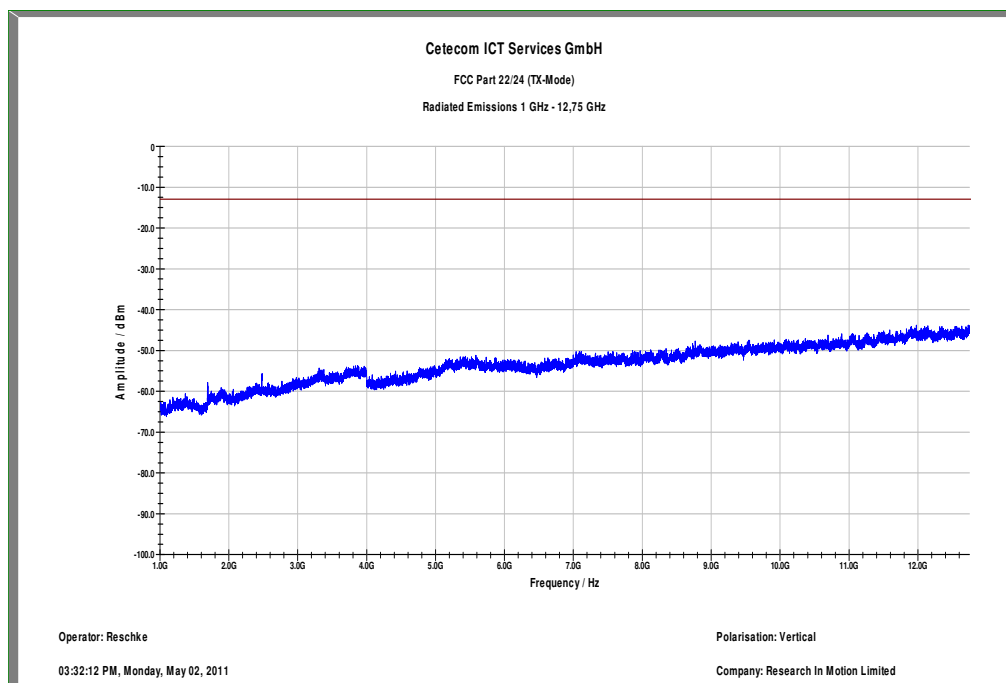


Plot 4: Channel 4132 (30 MHz - 1 GHz) – horizontal

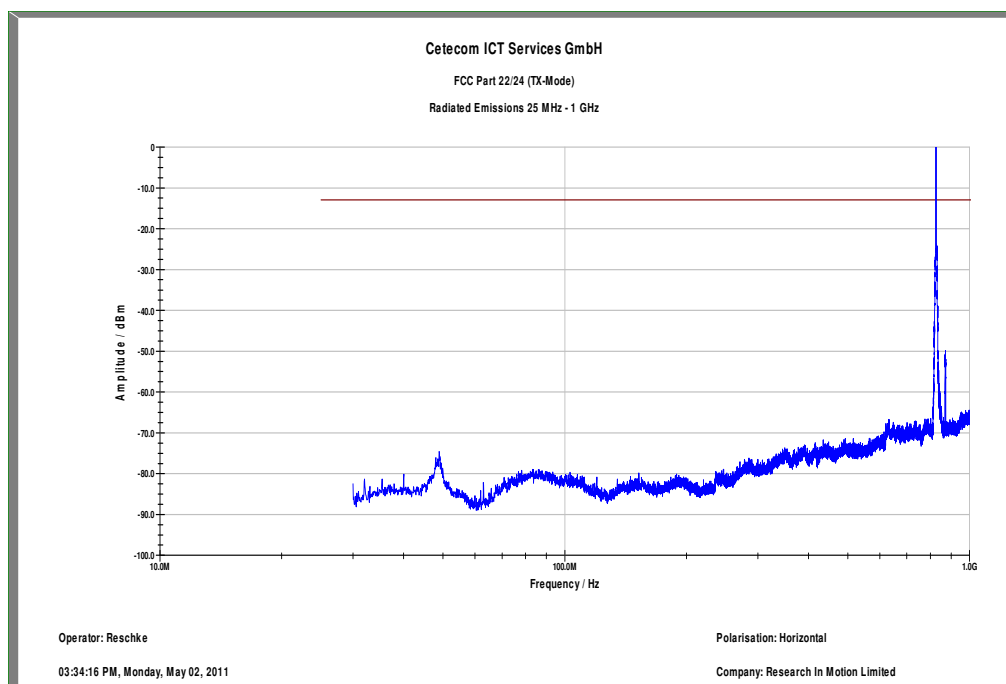


Plot 5: Channel 4132 (1 GHz – 12.75 GHz) – horizontal

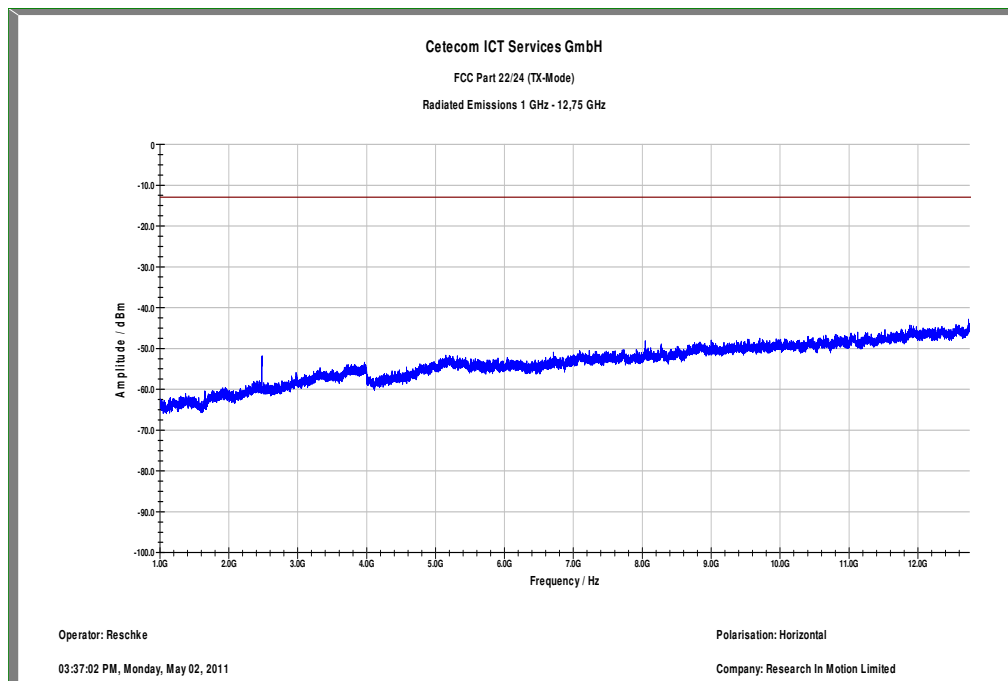


Plot 6: Channel 4180 (Traffic mode up to 30 MHz)

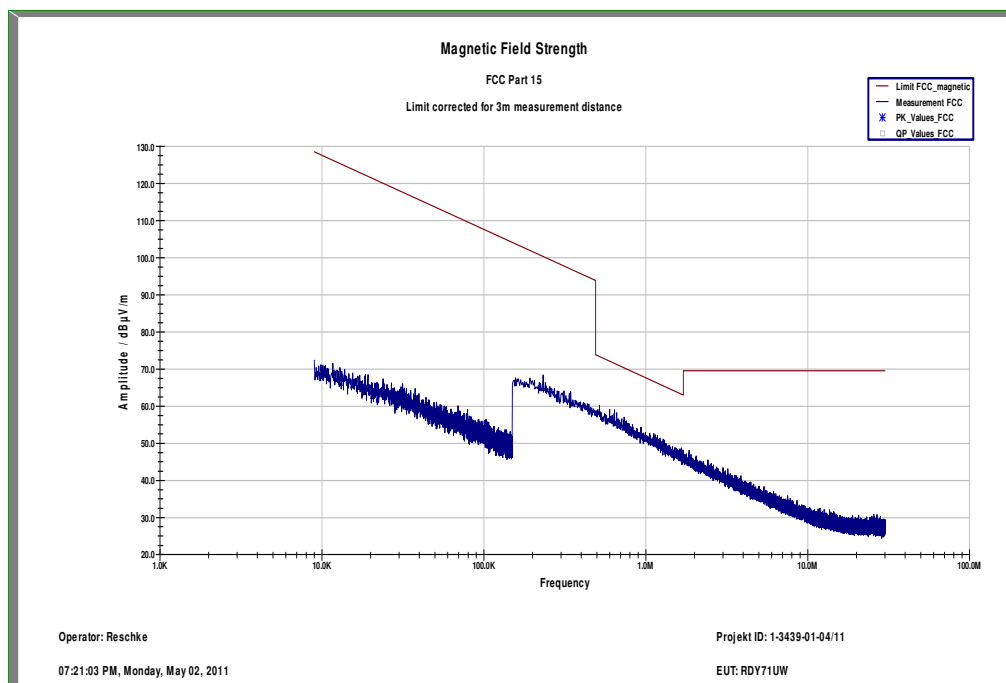


Plot 7: Channel 4180 (30 MHz - 1 GHz) – vertical

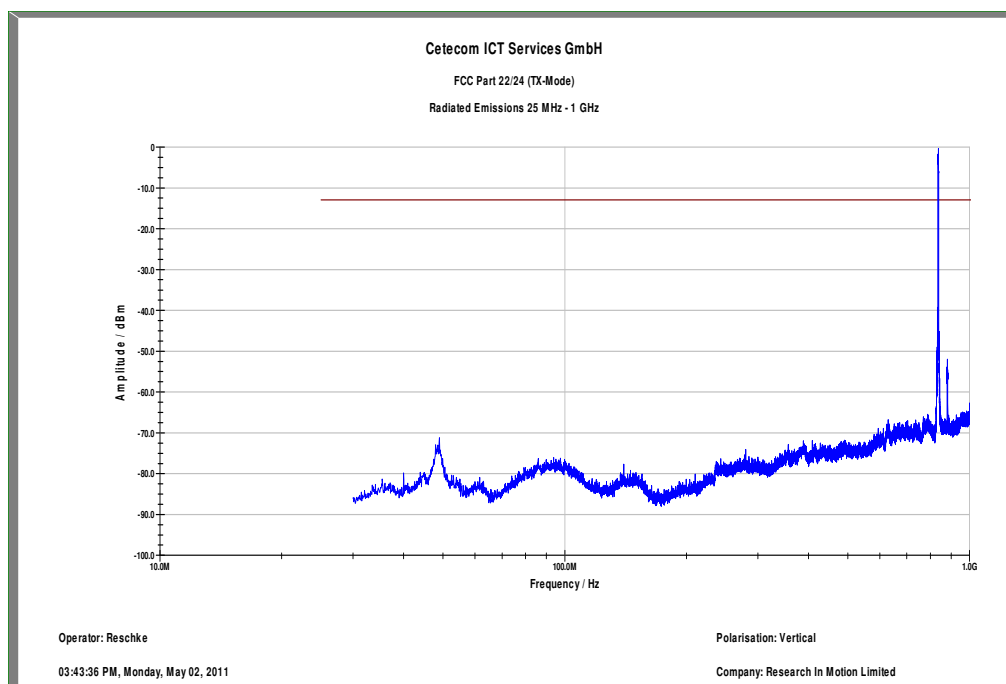


Plot 8: Channel 4180 (1 GHz – 12.75 GHz) – vertical

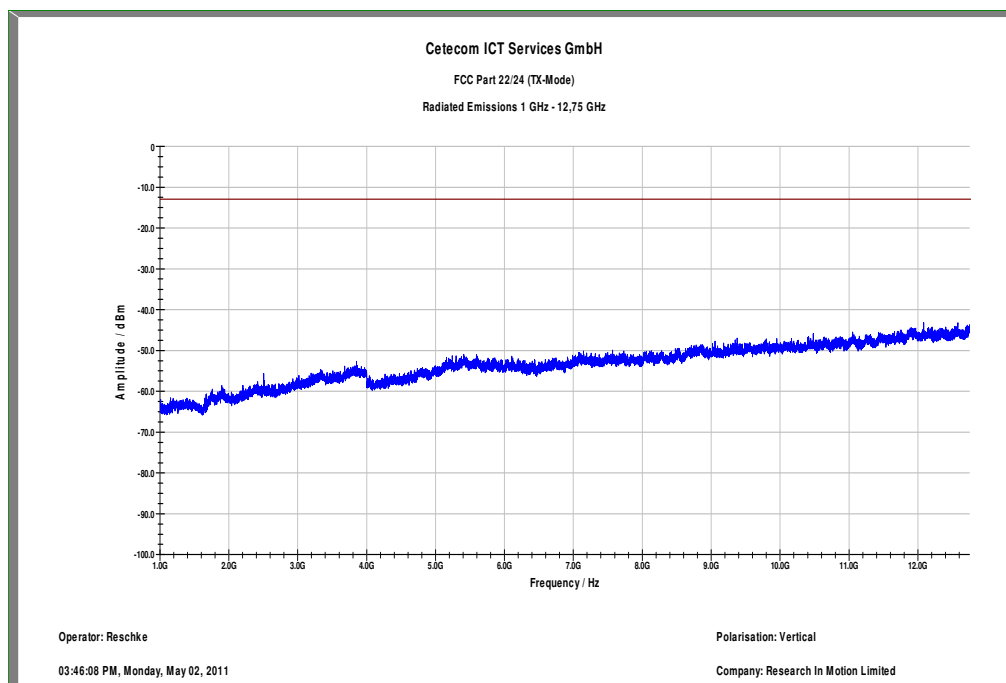


Plot 9: Channel 4180 (30 MHz - 1 GHz) – horizontal

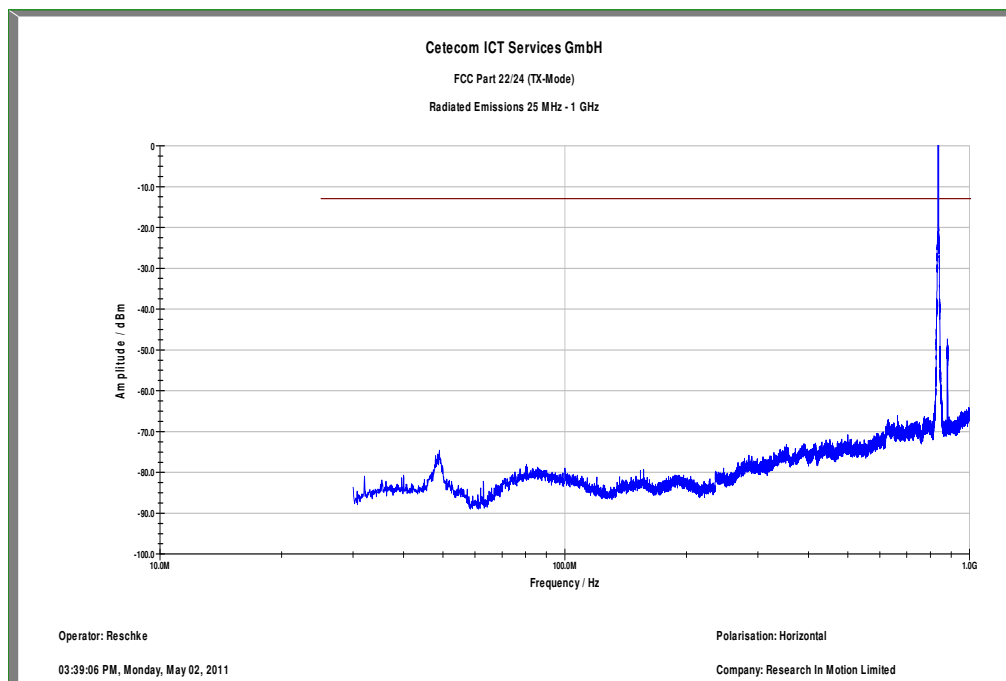


Plot 10: Channel 4180 (1 GHz – 12.75 GHz) – horizontal

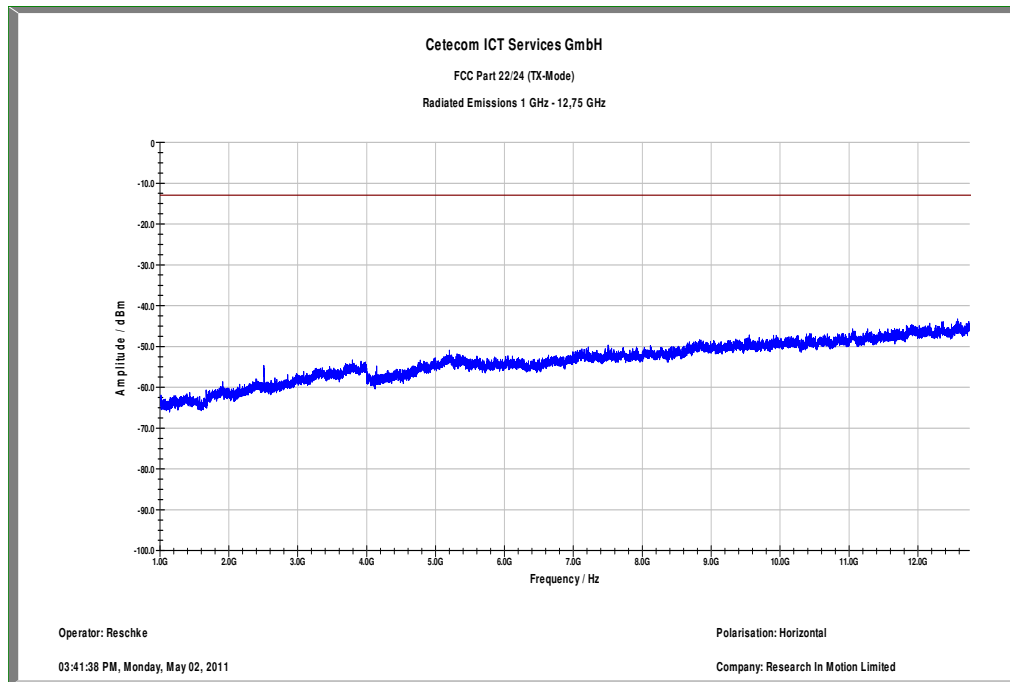


Plot 11: Channel 4233 (Traffic mode up to 30 MHz)

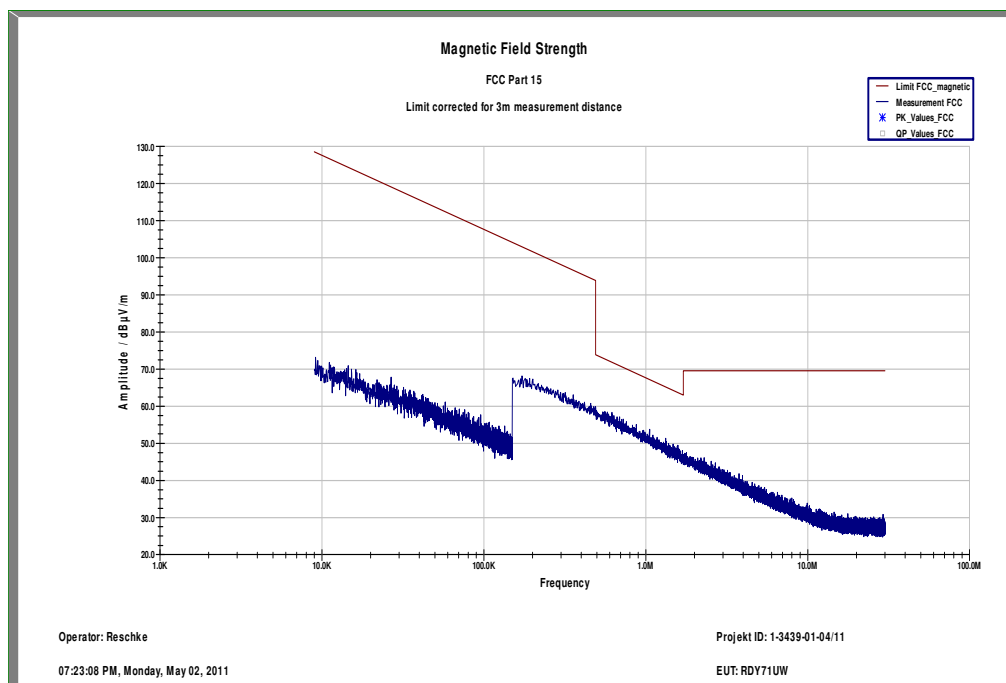


Plot 12: Channel 4233 (30 MHz - 1 GHz) – vertical

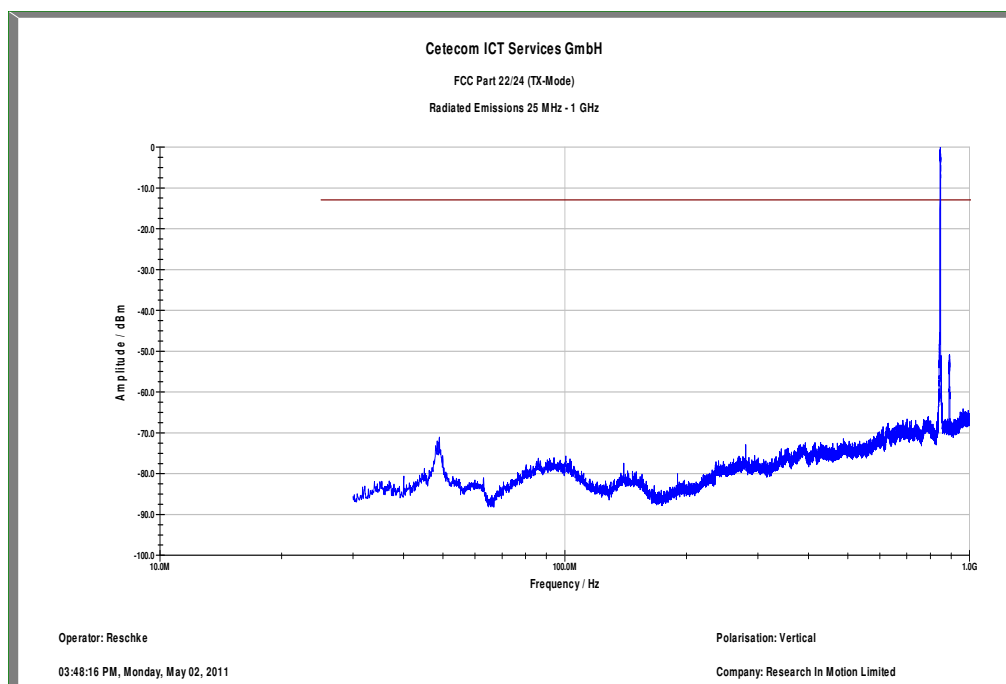


Plot 13: Channel 4233 (1 GHz – 12.75 GHz) – vertical


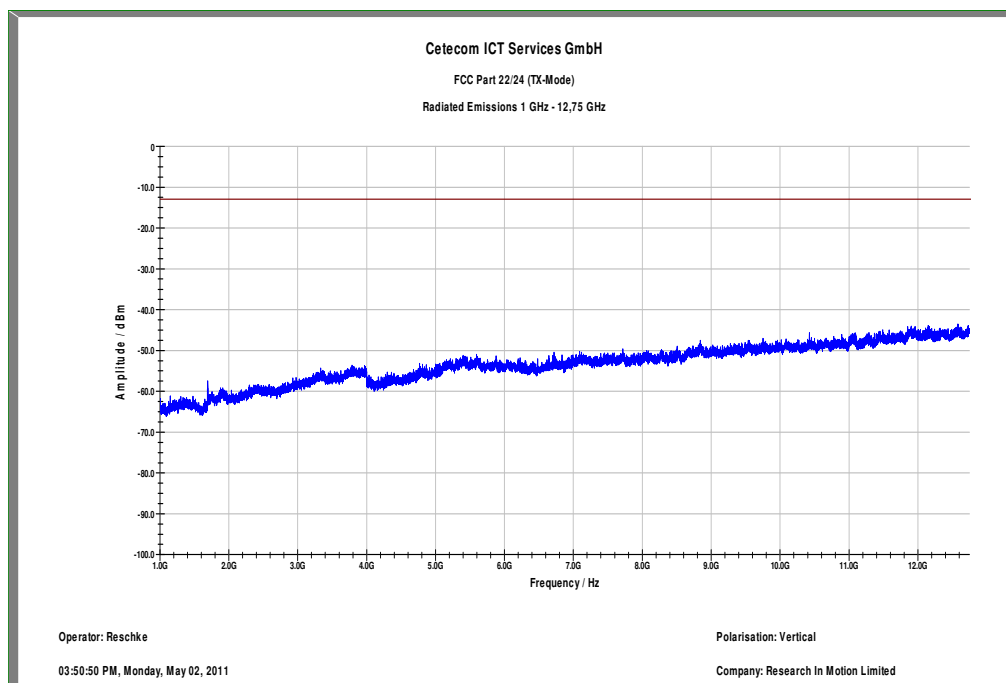




Plot 14: Channel 4233 (30 MHz - 1 GHz) – horizontal

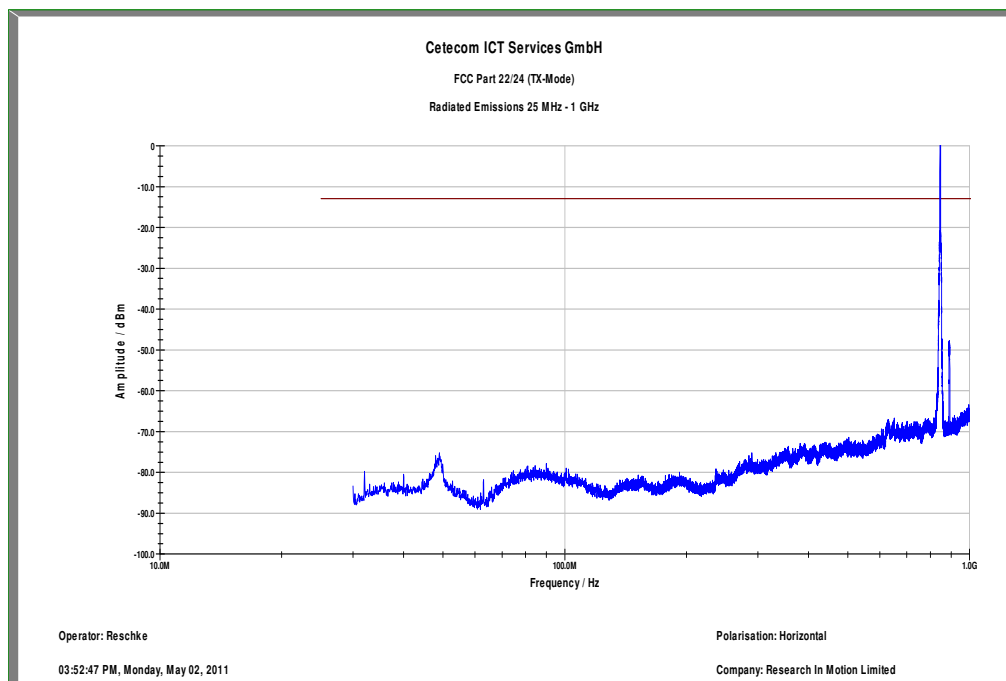


Plot 15: Channel 4233 (1 GHz – 12.75 GHz) – horizontal

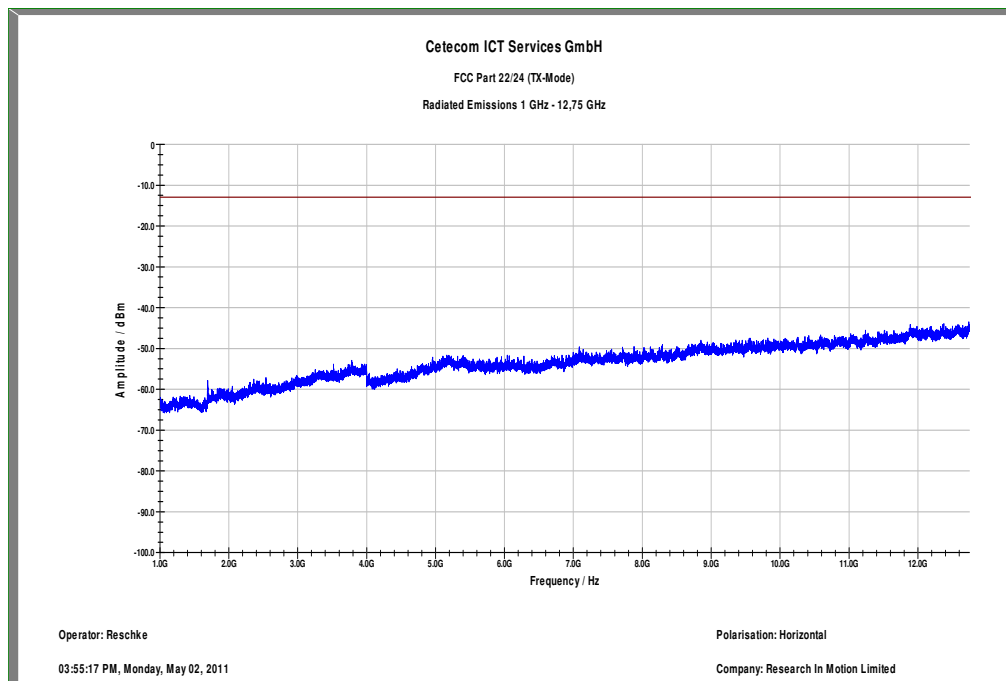

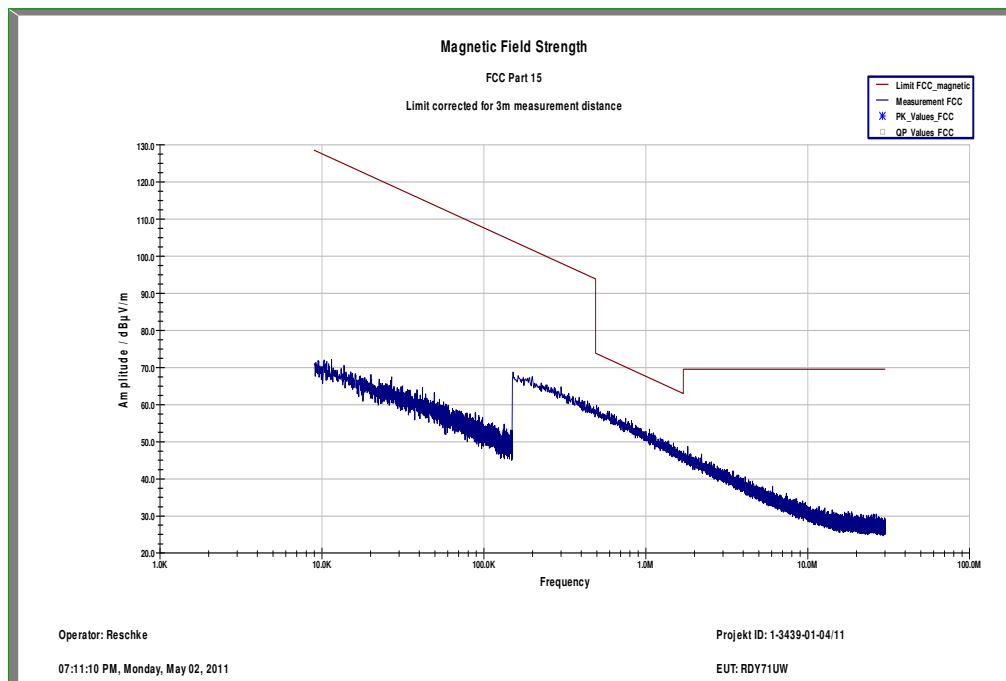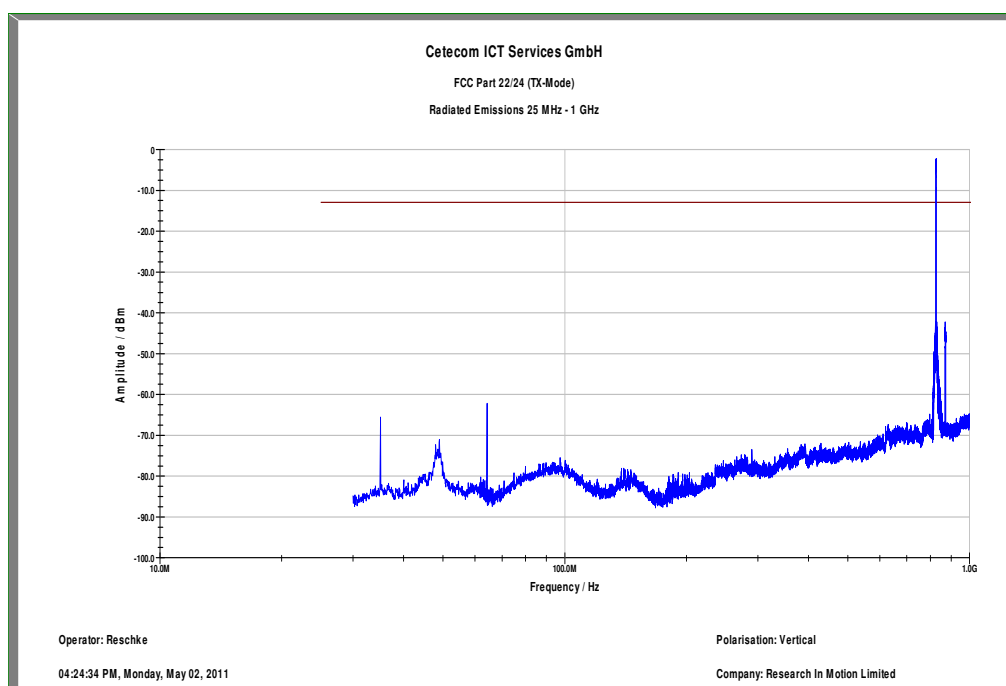
PS**Plot 1: Channel 4132 (Traffic mode up to 30 MHz)****Plot 2: Channel 4132 (30 MHz - 1 GHz) – vertical**

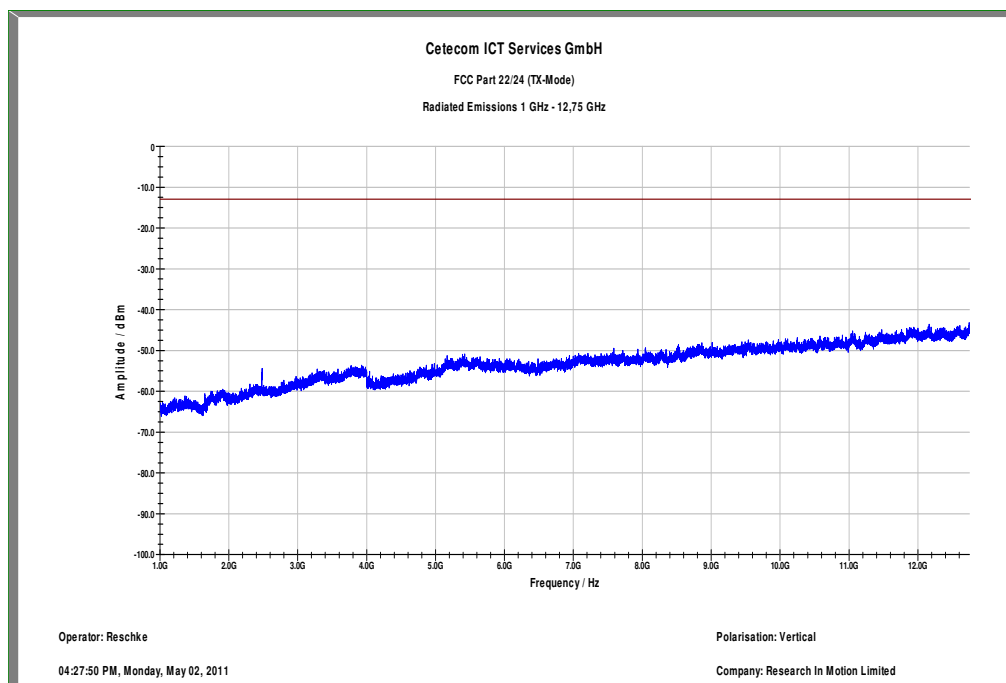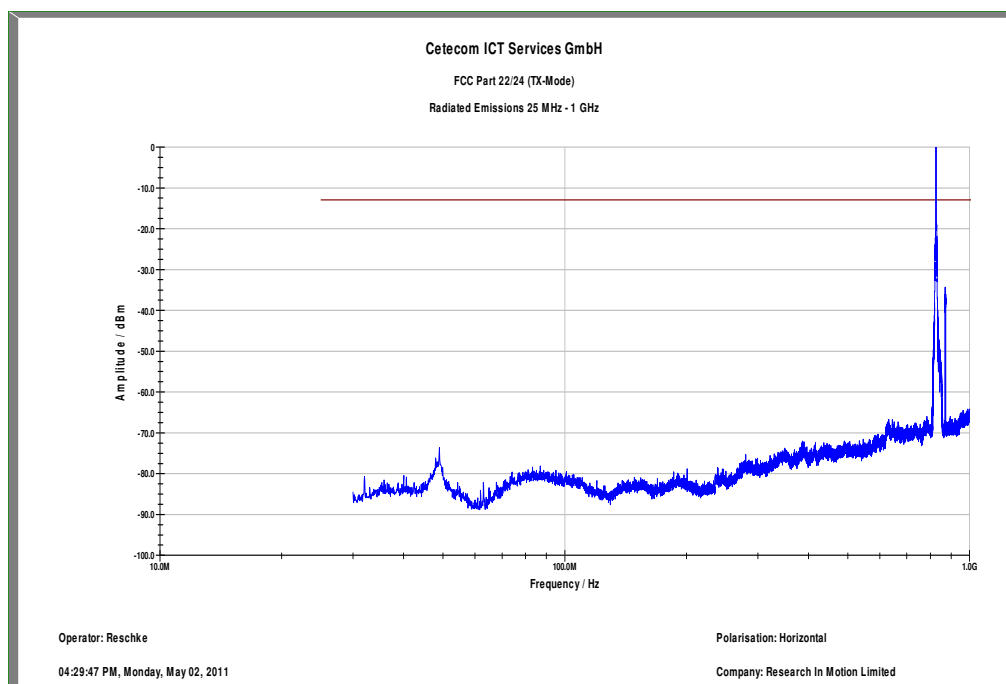Plot 3: Channel 4132 (1 GHz – 12.75 GHz) – vertical**Plot 4: Channel 4132 (30 MHz - 1 GHz) – horizontal**


Plot 5: Channel 4132 (1 GHz – 12.75 GHz) – horizontal

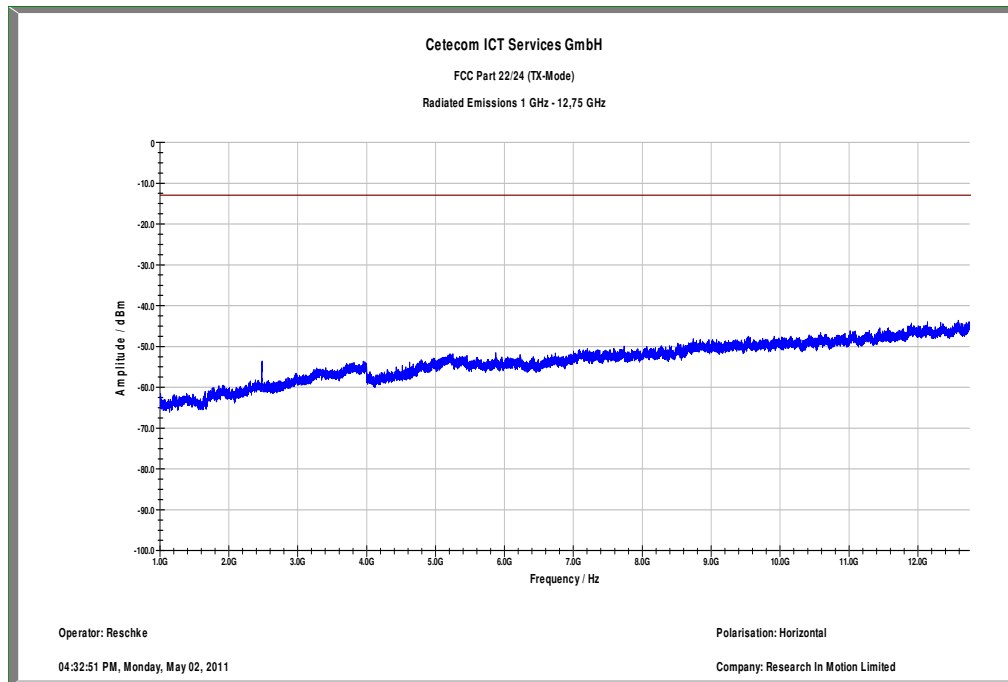


Plot 6: Channel 4180 (Traffic mode up to 30 MHz)

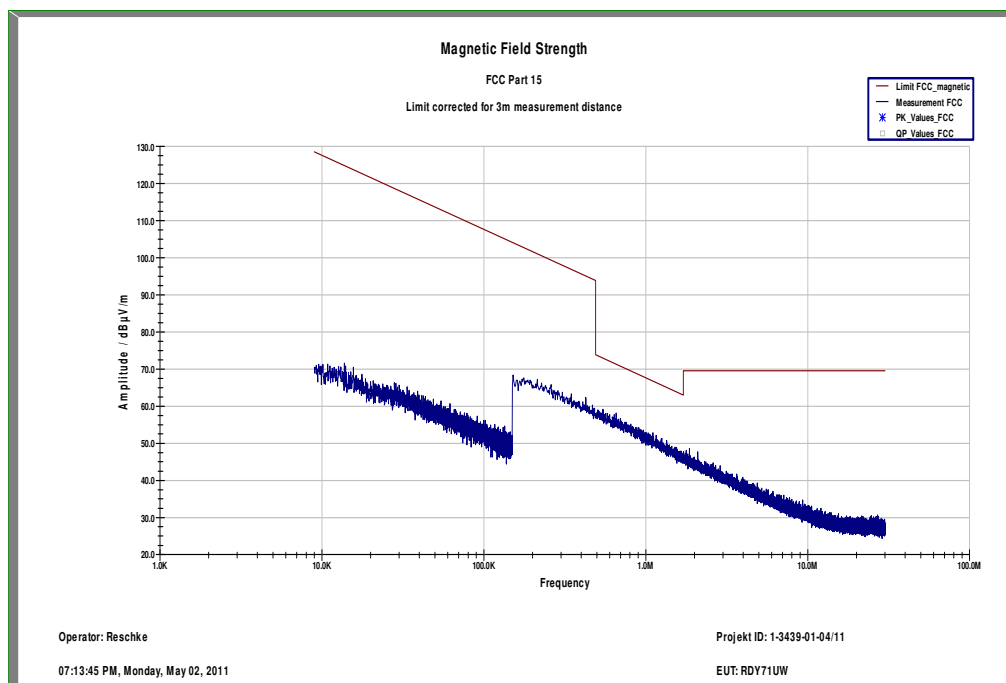


Plot 7: Channel 4180 (30 MHz - 1 GHz) – vertical

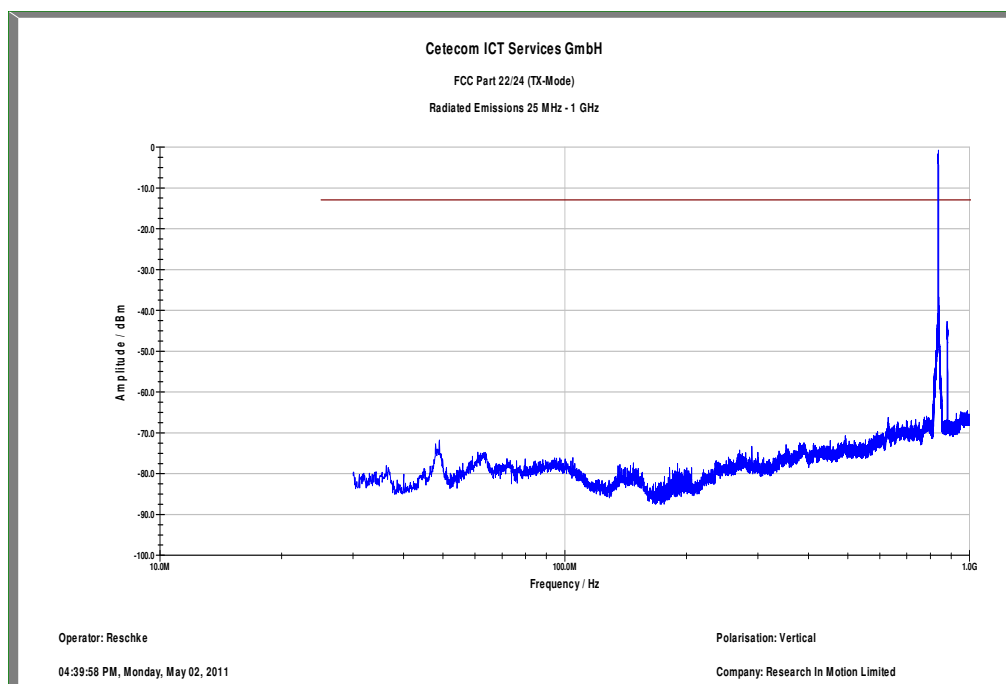


Plot 8: Channel 4180 (1 GHz – 12.75 GHz) – vertical

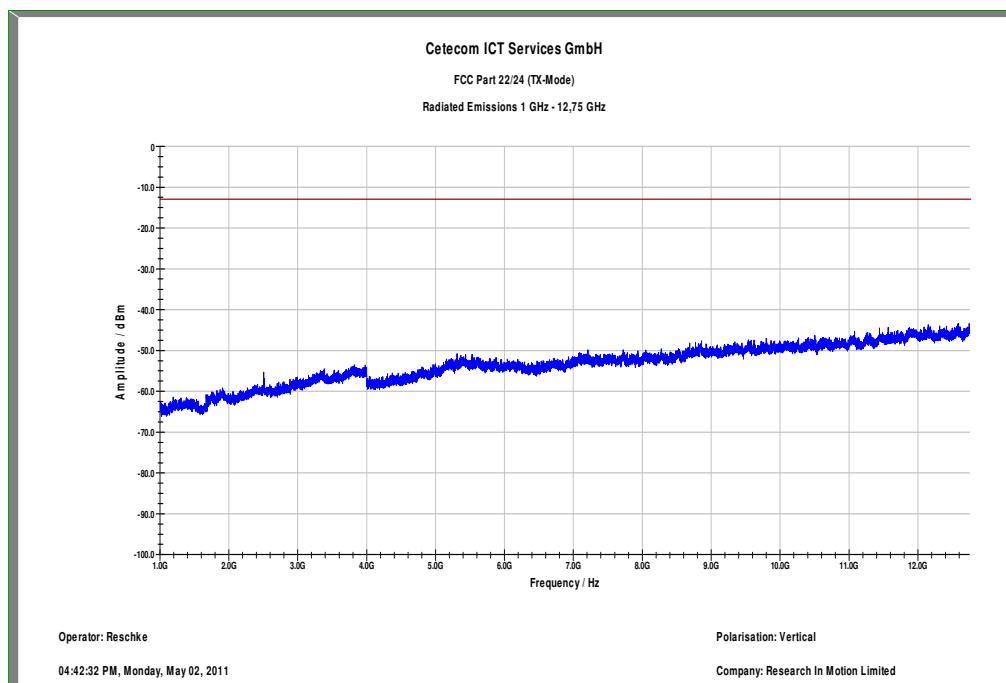


Plot 9: Channel 4180 (30 MHz - 1 GHz) – horizontal

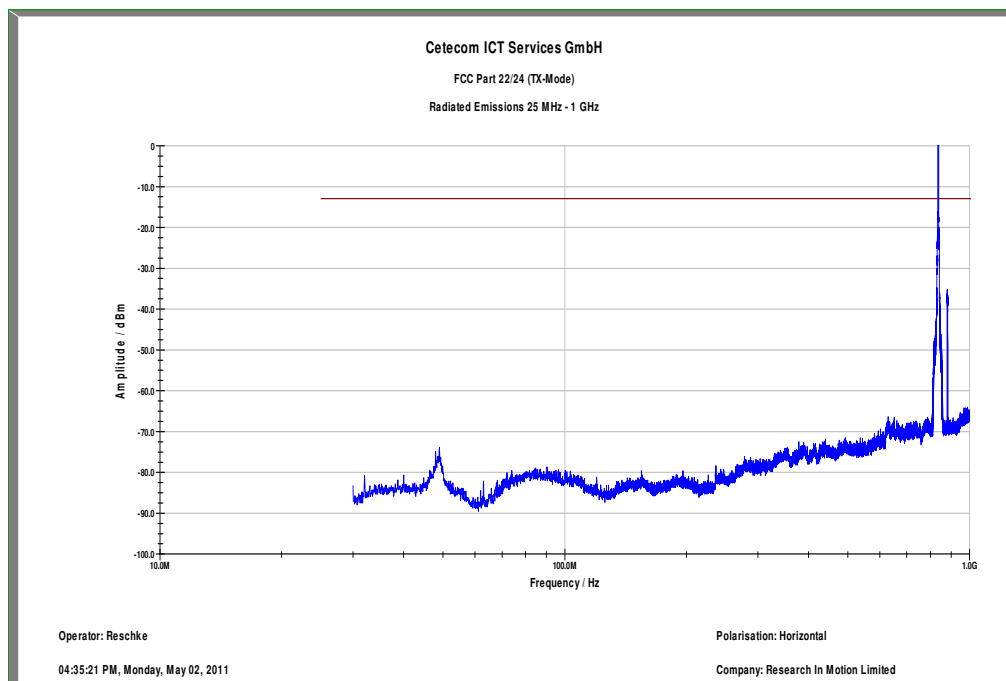


Plot 10: Channel 4180 (1 GHz – 12.75 GHz) – horizontal

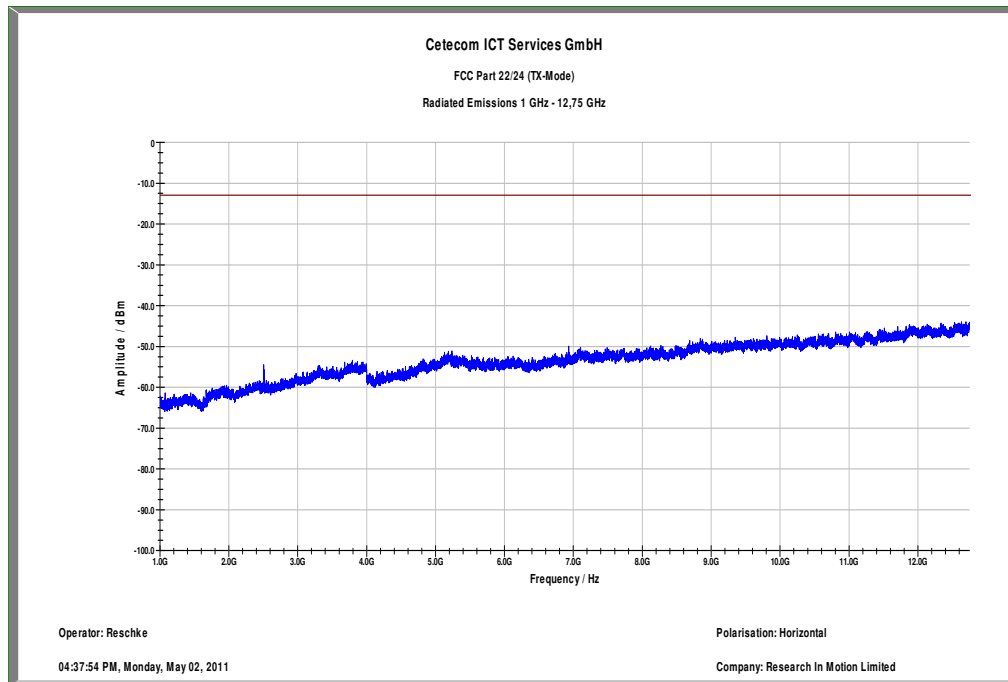


Plot 11: Channel 4233 (Traffic mode up to 30 MHz)

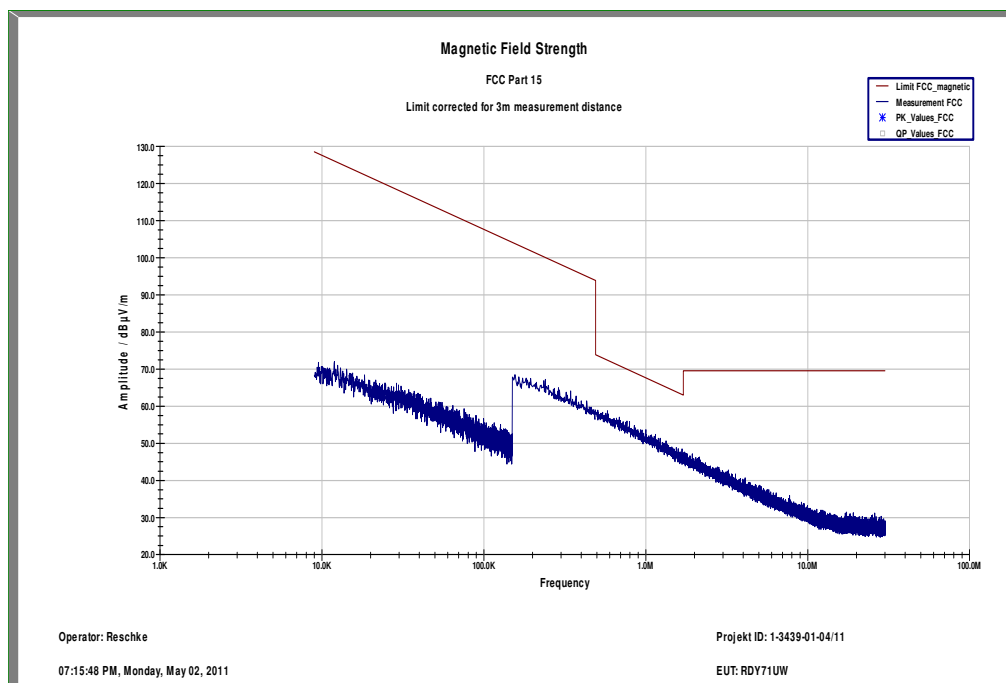


Plot 12: Channel 4233 (30 MHz - 1 GHz) – vertical

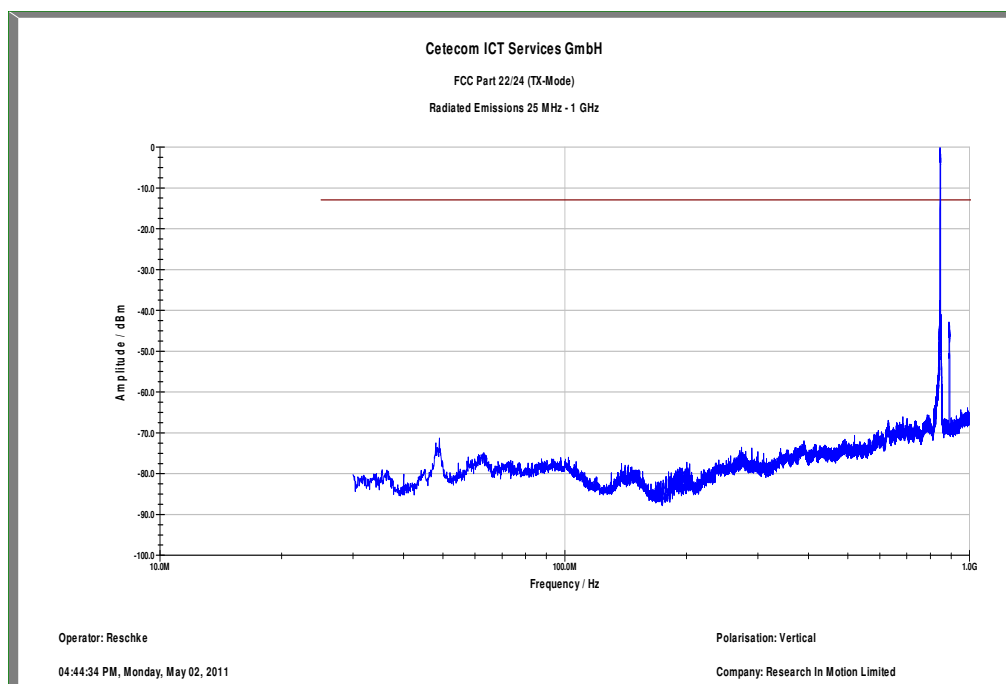


Plot 13: Channel 4233 (1 GHz – 12.75 GHz) – vertical

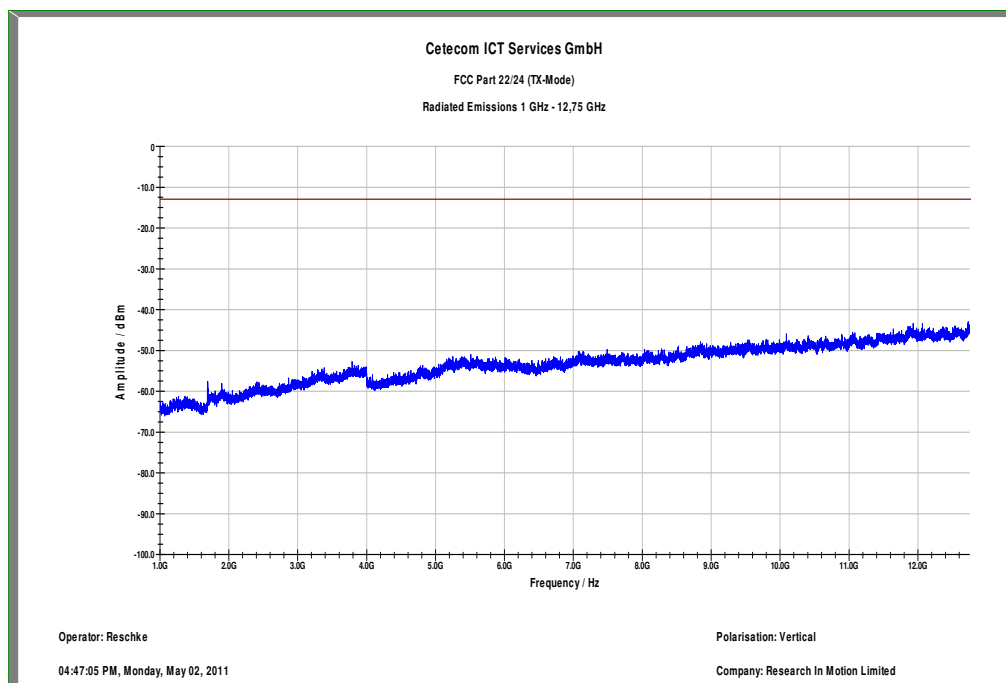

Plot 14: Channel 4233 (30 MHz - 1 GHz) – horizontal

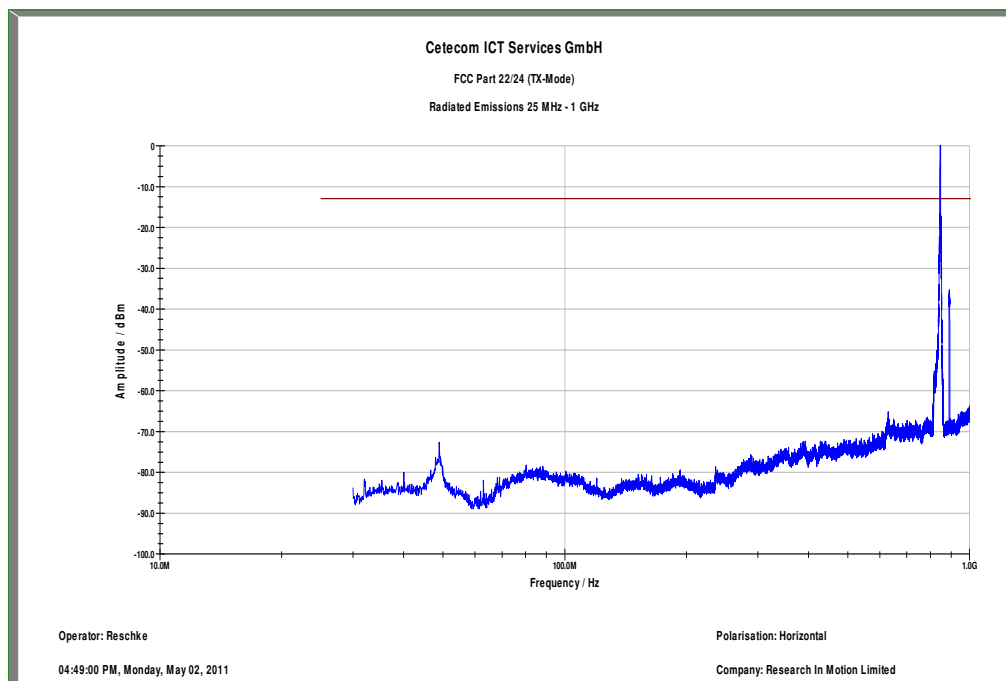

Plot 15: Channel 4233 (1 GHz – 12.75 GHz) – horizontal

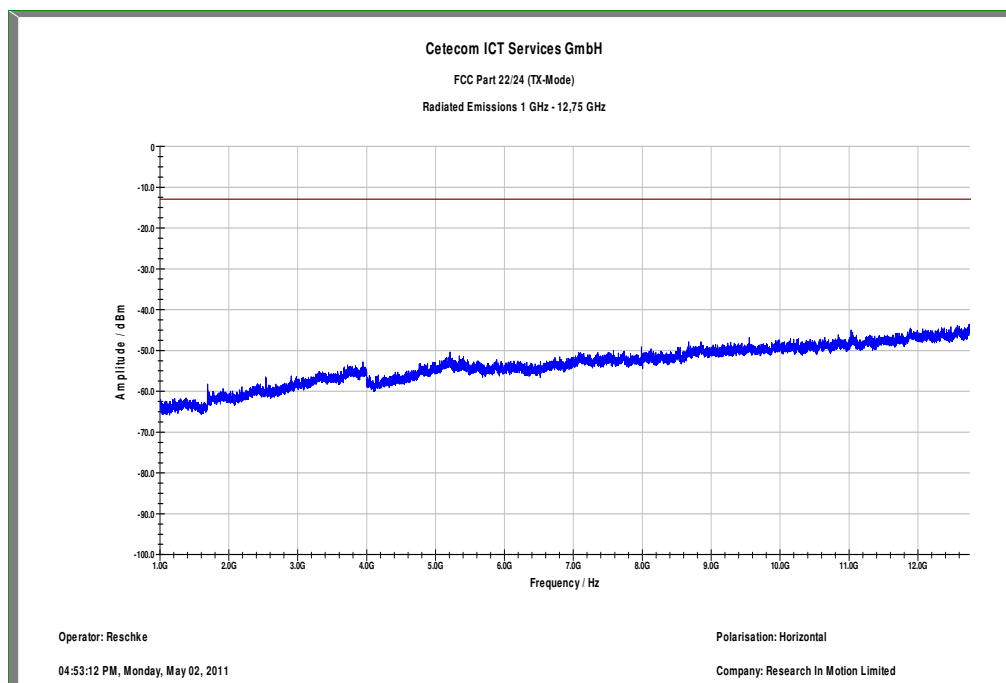

9 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
11	n. a.	Isolating Transformer	RT5A	Grundig	8041	300001626	g		
2	n. a.	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2818A03450	300001040	Ve	08.01.2009	08.01.2012
3	n. a.	Coaxial Attenuator 30dB/500W	8325	Bird	1530	300001595	ev		
4	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vlKI!	05.03.2009	05.09.2011
5	n. a.	Active Loop Antenna	6502	EMCO	2210	300001015	ne		
6	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996		23.03.2009	
7	Spec.A. 2_2e	System rack for EMI measurement solution	85900	HP I.V.	*	300000222	ne		
8	9	Artificial Mains 9 kHz to 30 MHz	ESH3-Z5	R&S	828576/020	300001210	Ve	06.01.2010	06.01.2012
9	n. a.	Relais Matrix	3488A	HP Meßtechnik	2719A15013	300001156	ne		
10	n. a.	Relais Matrix	PSU	R&S	890167/024	300001168	ne		
11	n. a.	Isolating Transformer	RT5A	Grundig	9242	300001263	ne		
12	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
13	n. a.	Switch / Control Unit	3488A	HP	2605e08770	300001443	ne		
14	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
15	n. a.	Band Reject filter	WRCG1855/1910-1835/1925-40/8SS	Wainwright	7	300003350	ev		
16	n. a.	Band Reject filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev		
17	n. a.	TILE-Software Emission	Quantum Change, Modell TILE-ICS/FULL	EMCO	none	300003451	ne		
18	n. a.	Highpass Filter	WHKX2.9/18G-12SS	Wainwright	1	300003492	ev		
19	n. a.	Highpass Filter	WHK1.1/15G-10SS	Wainwright	3	300003255	ev		
20	n. a.	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789	ne		
21	n. a.	PSA Spectrum Analyzer 3 Hz - 26.5 GHz	E4440A	Agilent Technologies	MY48250080	300003812	k	08.09.2010	08.09.2012
22	n. a.	MXG Microwave Analog Signal Generator	N5183A	Agilent Technologies	MY47420220	300003813	k	13.09.2010	13.09.2012
23	n. a.	RF Filter Section 9kHz - 1GHz	N9039A	Agilent Technologies	MY48260003	300003825	vlKI!	08.09.2010	08.09.2012
24	n. a.	TRILOG	VULB9163	Schwarzbeck	371	300003854	vlKI!	17.12.2008	17.12.2011

		Broadband Test-Antenna 30 MHz - 3 GHz							
25	11b	Microwave System Amplifier, 0.5-26.5 GHz; 25 dB gain	83017A	HP Meßtechnik	00419	300002268	ev	10.03.2011	12.01.2012
26	A026	Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda	00419	300000787	ne	10.03.2011	
27	A029	Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda		300002442	ne		
28	n. a.	Universal Communication Tester	CMU200	R&S	103992	300003231	vlKI!	30.06.2010	30.06.2012

Agenda: Kind of Calibration

k calibration / calibrated
 ne not required (k, ev, izw, zw not required)
 ev periodic self verification
 Ve long-term stability recognized
 vlKI! Attention: extended calibration interval
 NK! Attention: not calibrated

EK limited calibration
 zw cyclical maintenance (external cyclical maintenance)
 izw internal cyclical maintenance
 g blocked for accredited testing
 *) next calibration ordered / currently in progress

Annex A Document history

Version	Applied changes	Date of release
1.0	Initial release	2011-05-06

Annex B Further information**Glossary**

DUT	-	Device under Test
EMC	-	Electromagnetic Compatibility
EUT	-	Equipment under Test
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	not applicable
S/N	-	Serial Number
SW	-	Software