
	Document <b>Appendix B for the BlackBerry® Smartphone Model  RDD71UW/REM71UW SAR Report</b>			Page <b>1(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW  L6AREM70UW</b>

**APPENDIX B: SAR DISTRIBUTION PLOTS FOR HEAD CONFIGURATION**

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>2(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 5/10/2011 3:40:50 PM, Date/Time: 5/10/2011 3:46:11 PM

Test Laboratory: RIM Testing Services

**RightHandSide\_EDGE835\_low\_chan\_amb\_temp\_22..8\_liq\_temp\_22.0C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: EDGE 850 (2slots); Frequency: 824.2 MHz; Communication System PAR: 6.232 dB

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.912$  mho/m;  $\epsilon_r = 42.389$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid:  
dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.917 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 8.960 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.092 W/kg


**SAR(1 g) = 0.838 mW/g; SAR(10 g) = 0.605 mW/g**

Maximum value of SAR (measured) = 0.877 mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model          RDD71UW/REM71UW SAR Report</b>			Page <b>3(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW          L6AREM70UW</b>

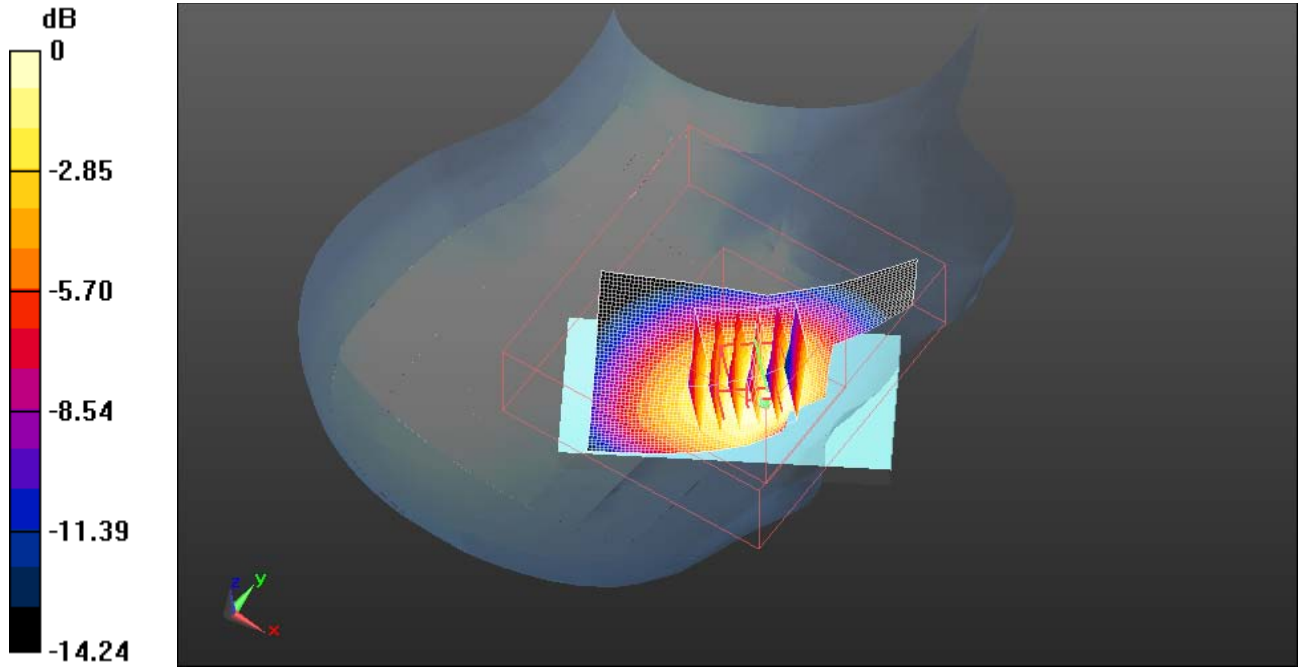

0 dB = 0.880mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>4(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 5/10/2011 3:19:46 PM, Date/Time: 5/10/2011 3:25:07 PM

Test Laboratory: RIM Testing Services

**RightHandSide\_EDGE835\_mid\_chan\_amb\_temp\_23.0\_liq\_temp\_22.2C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz; Communication System PAR: 6.232 dB

Medium parameters used (interpolated):  $f = 836.8$  MHz;  $\sigma = 0.923$  mho/m;  $\epsilon_r = 42.256$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.313 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 10.741 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.617 W/kg

**SAR(1 g) = 1.21 mW/g; SAR(10 g) = 0.871 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.253 mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model          RDD71UW/REM71UW SAR Report</b>			Page <b>5(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW          L6AREM70UW</b>

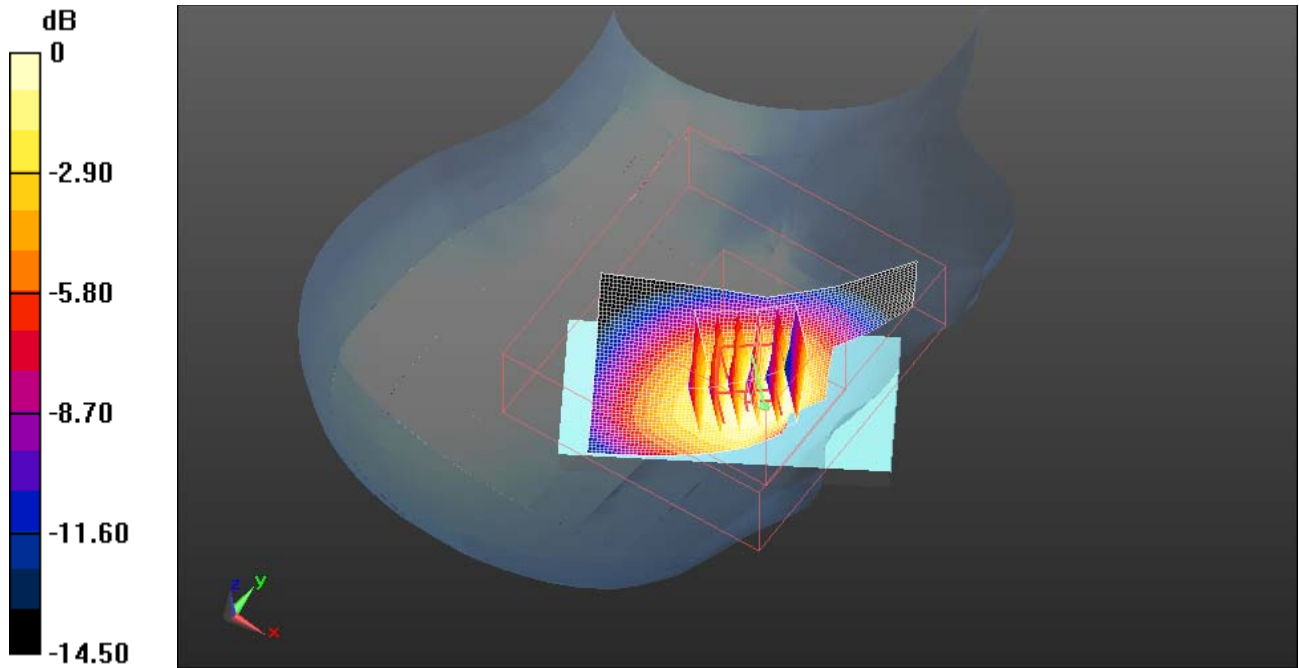

0 dB = 1.250mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>6(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 5/10/2011 5:06:36 PM, Date/Time: 5/10/2011 5:11:51 PM

Test Laboratory: RIM Testing Services

**RightHandSide\_Tilt\_EDGE835\_mid\_chan\_amb\_temp\_23.0\_liq\_temp\_22**  
**.0C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz; Communication System PAR: 6.232 dB

Medium parameters used (interpolated):  $f = 836.8$  MHz;  $\sigma = 0.923$  mho/m;  $\epsilon_r = 42.256$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

**Info: Interpolated medium parameters used for SAR evaluation.**

Maximum value of SAR (interpolated) = 0.747 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.616 V/m; Power Drift = -0.21 dB


Peak SAR (extrapolated) = 0.835 W/kg


**SAR(1 g) = 0.677 mW/g; SAR(10 g) = 0.511 mW/g**

	Document <b>Appendix B for the BlackBerry® Smartphone Model  RDD71UW/REM71UW SAR Report</b>			Page <b>7(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW  L6AREM70UW</b>

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.715 mW/g

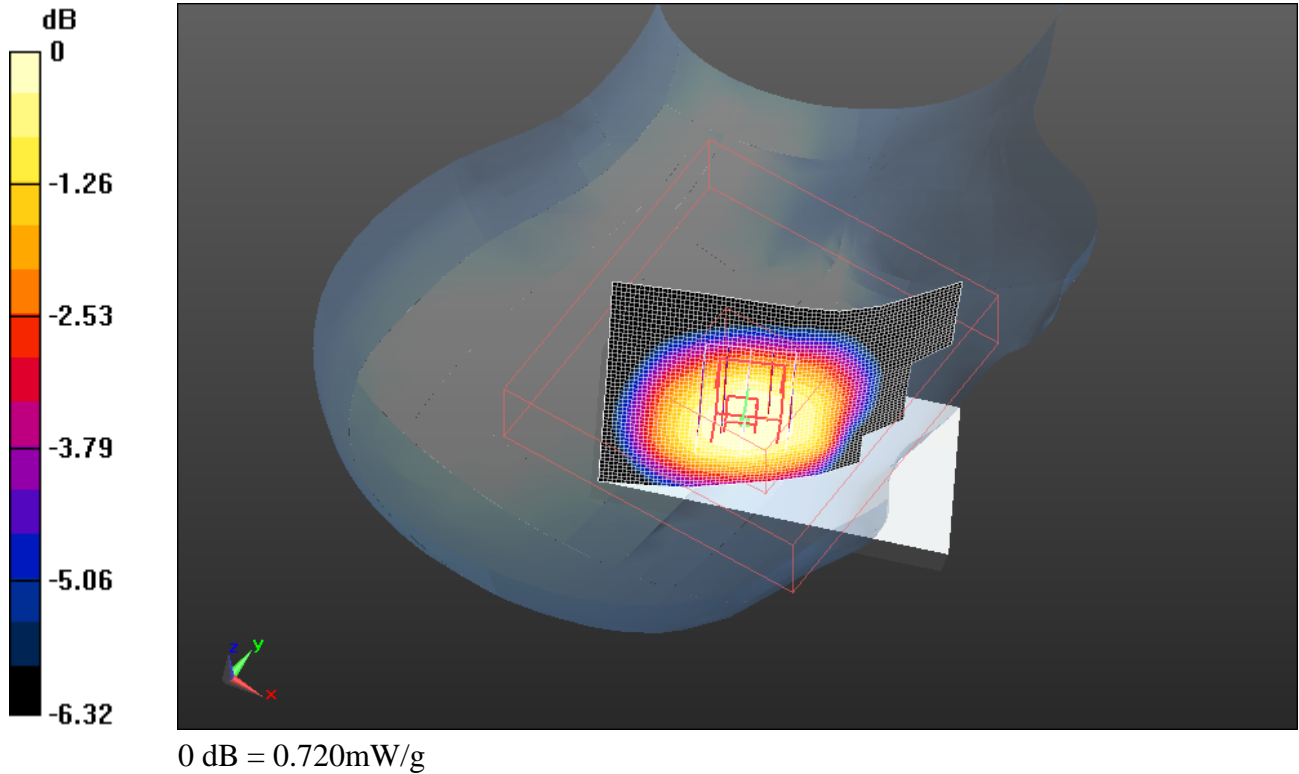

	Document <b>Appendix B for the BlackBerry® Smartphone Model  RDD71UW/REM71UW SAR Report</b>			Page <b>8(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW  L6AREM70UW</b>

Date/Time: 5/10/2011 5:36:28 PM, Date/Time: 5/10/2011 5:42:48 PM

Test Laboratory: RIM Testing Services

**LeftHandSide\_EDGE850\_low\_chan\_amb\_temp\_23.3\_liq\_temp\_22.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: EDGE 850 (2slots); Frequency: 824.2 MHz; Communication System PAR: 6.232 dB

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.912$  mho/m;  $\epsilon_r = 42.389$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (61x81x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.048 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 10.209 V/m; Power Drift = -0.0051 dB


Peak SAR (extrapolated) = 1.419 W/kg

**SAR(1 g) = 0.935 mW/g; SAR(10 g) = 0.624 mW/g**


Maximum value of SAR (measured) = 1.014 mW/g



	Document <b>Appendix B for the BlackBerry® Smartphone Model          RDD71UW/REM71UW SAR Report</b>			Page <b>9(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW          L6AREM70UW</b>

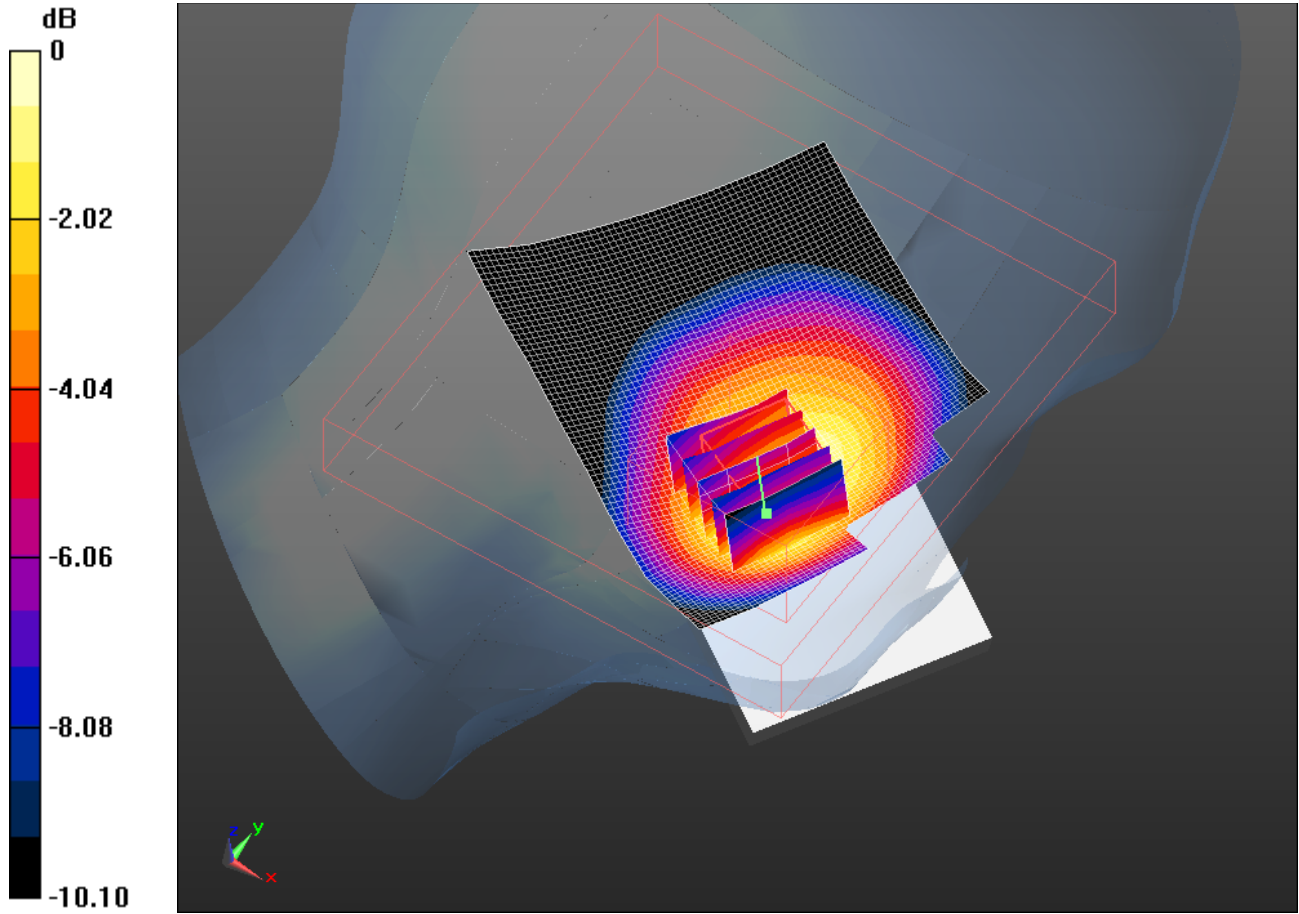

0 dB = 1.010mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>10(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 5/10/2011 5:22:17 PM, Date/Time: 5/10/2011 5:28:36 PM

Test Laboratory: RIM Testing Services

## LeftHandSide\_EDGE850\_mid\_chan\_amb\_temp\_23.9\_liq\_temp\_22.5C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz; Communication System PAR: 6.232 dB

Medium parameters used (interpolated):  $f = 836.8$  MHz;  $\sigma = 0.923$  mho/m;  $\epsilon_r = 42.256$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (61x81x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.374 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.524 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.836 W/kg

**SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.818 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.331 mW/g


Author Data  
**Andrew Becker**

Dates of Test  
**Apr 13 – July 4, 2011**


Test Report No  
**RTS-2579-1106-34C**

FCC ID:  
**L6ARDD70UW  
L6AREM70UW**

IC ID  
**2503A-RDD70UW  
2503A-REM70UW**

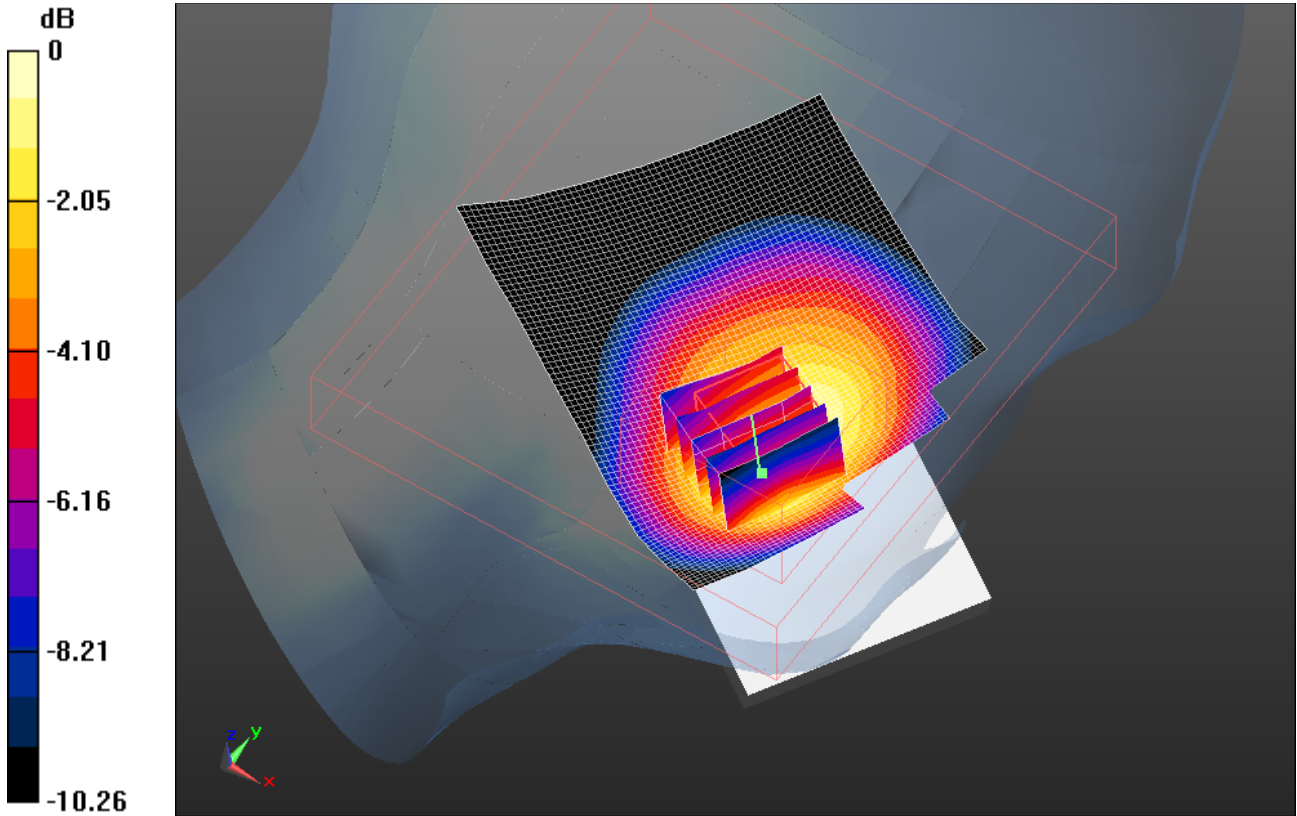

0 dB = 1.330mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>12(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 5/10/2011 6:20:54 PM, Date/Time: 5/10/2011 6:26:49 PM

Test Laboratory: RIM Testing Services

## LeftHandSide\_GSM850\_mid\_chan\_amb\_temp\_23.3\_liq\_temp\_22.3C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Communication System PAR: 9.191 dB

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.923$  mho/m;  $\epsilon_r = 42.258$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (61x81x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.096 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.616 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.611 W/kg

**SAR(1 g) = 0.988 mW/g; SAR(10 g) = 0.642 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.061 mW/g


Author Data  
**Andrew Becker**

Dates of Test  
**Apr 13 – July 4, 2011**


Test Report No  
**RTS-2579-1106-34C**

FCC ID:  
**L6ARDD70UW  
L6AREM70UW**

IC ID  
**2503A-RDD70UW  
2503A-REM70UW**

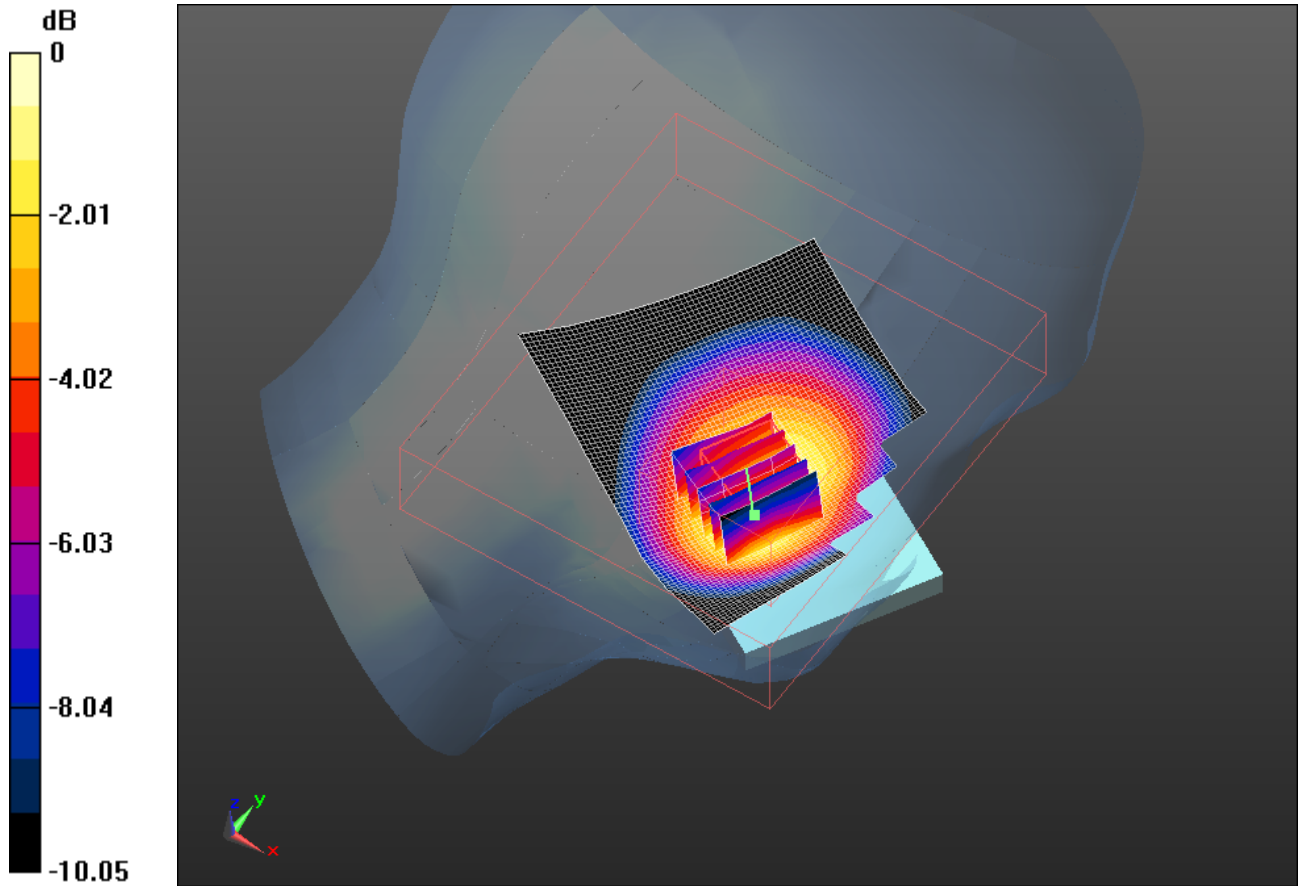

0 dB = 1.060mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>14(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 5/10/2011 6:07:12 PM, Date/Time: 5/10/2011 6:13:31 PM

Test Laboratory: RIM Testing Services

**LeftHandSide\_Tilt\_EDGE850\_mid\_chan\_amb\_temp\_23.3\_liq\_temp\_22.3**

**C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: EDGE 850 (2slots); Frequency: 848.8 MHz; Communication System PAR: 6.232 dB

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.933$  mho/m;  $\epsilon_r = 42.09$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.11, 6.11, 6.11); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (61x81x1):** Measurement grid: dx=15mm, dy=15mm

**Info:** Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.749 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:**


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.991 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.861 W/kg


**SAR(1 g) = 0.705 mW/g; SAR(10 g) = 0.534 mW/g**



	Document <b>Appendix B for the BlackBerry® Smartphone Model          RDD71UW/REM71UW SAR Report</b>			Page <b>15(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW          L6AREM70UW</b>

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 0.737 mW/g

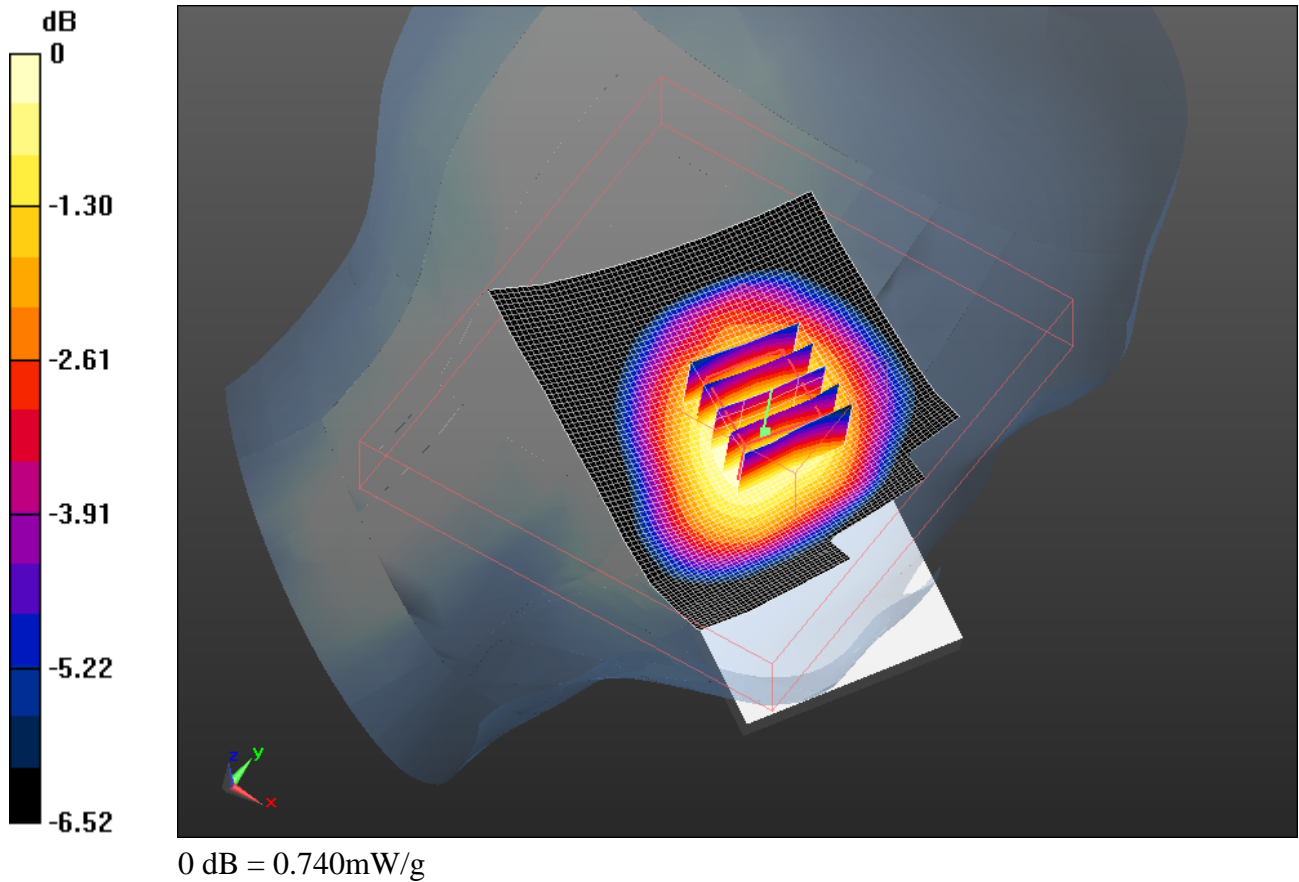

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>16(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 6/7/2011 11:20:02 PM, Date/Time: 6/7/2011 11:25:29 PM

Test Laboratory: RIM Testing Services

## RightHandSide\_EDGE850\_high\_chan\_amb\_temp\_23.0\_liq\_temp\_22.2C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 279CCF51**

Communication System: EDGE 850 (2slots); Communication System Band: EDGE 850;  
Frequency: 848.8 MHz; Communication System PAR: 6.232 dB  
Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.906$  mho/m;  $\epsilon_r = 39.971$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section  
Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.222 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm  
Reference Value = 11.827 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 1.497 W/kg  
**SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.817 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.189 mW/g




Author Data  
**Andrew Becker**

Dates of Test  
**Apr 13 – July 4, 2011**


Test Report No  
**RTS-2579-1106-34C**

FCC ID:  
**L6ARDD70UW  
L6AREM70UW**

IC ID  
**2503A-RDD70UW  
2503A-REM70UW**

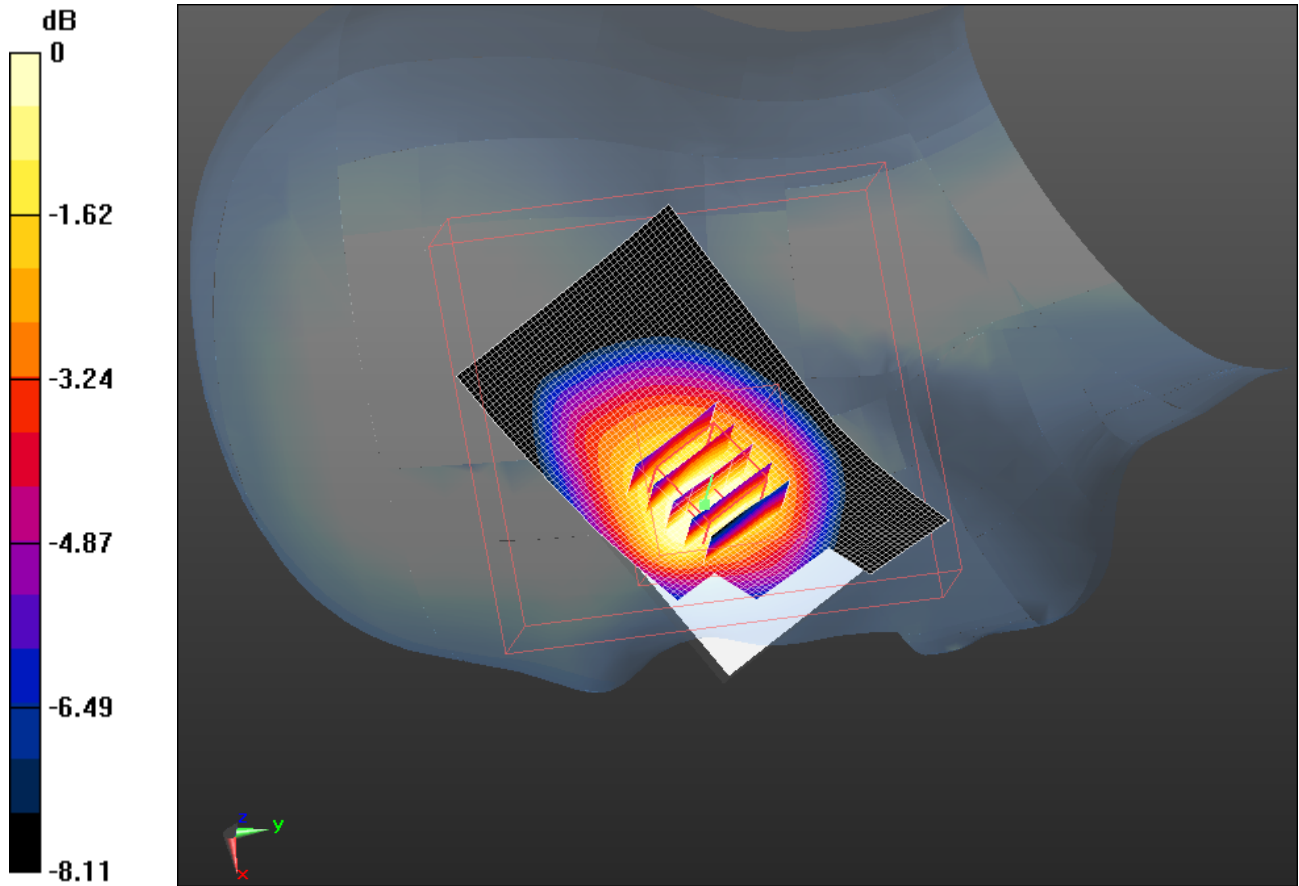

0 dB = 1.190mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>18(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 6/7/2011 11:02:44 PM, Date/Time: 6/7/2011 11:08:00 PM

Test Laboratory: RIM Testing Services

**LeftHandSide\_EDGE850\_high\_chan\_amb\_temp\_23.2\_liq\_temp\_22.1C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 279CCF51**

Communication System: EDGE 850 (2slots); Communication System Band: EDGE 850;  
Frequency: 848.8 MHz; Communication System PAR: 6.232 dB  
Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.906$  mho/m;  $\epsilon_r = 39.971$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (interpolated) = 1.312 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x5)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm  
Reference Value = 11.643 V/m; Power Drift = -0.18 dB  
Peak SAR (extrapolated) = 1.806 W/kg  
**SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.817 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.269 mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>19(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

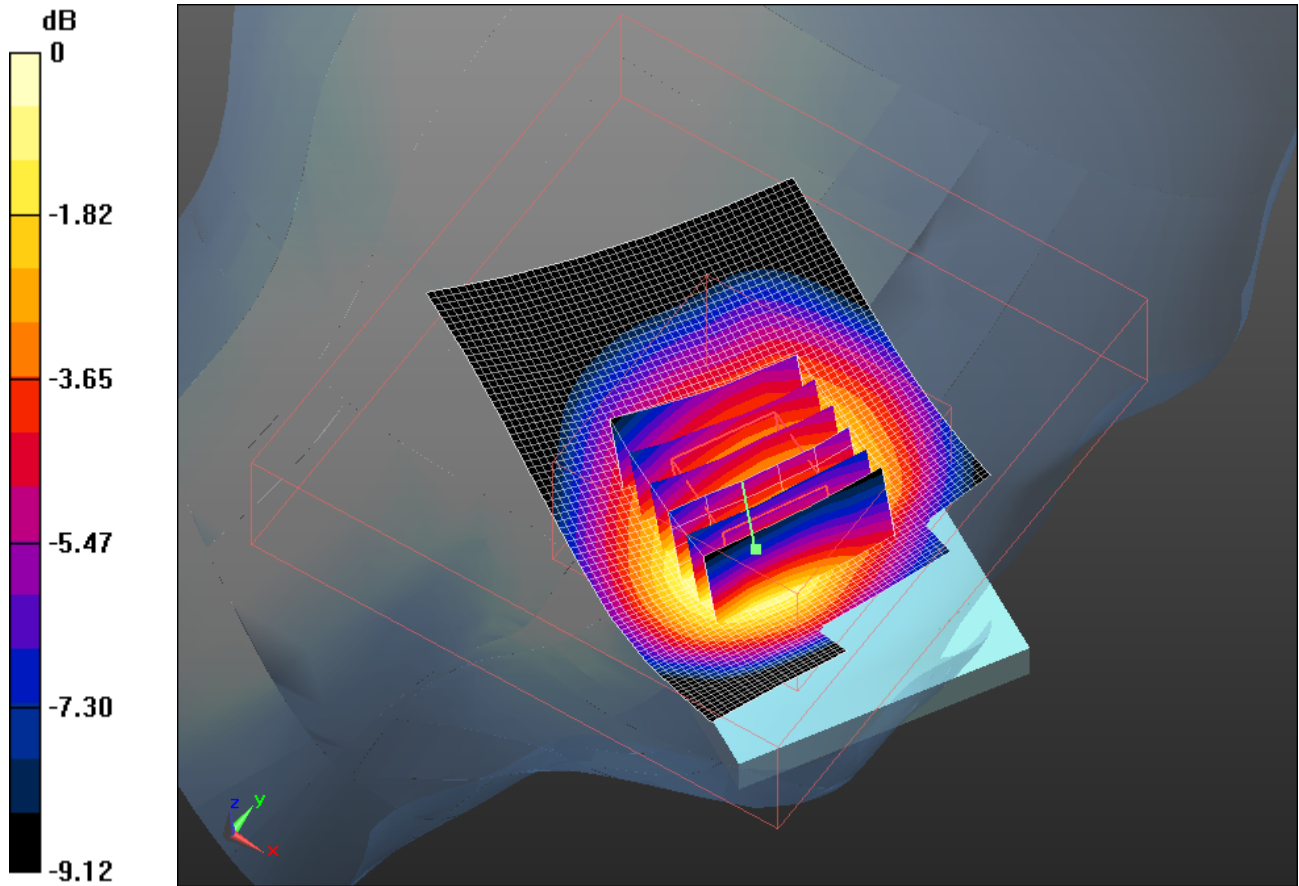

0 dB = 1.270mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>20(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 5/6/2011 10:21:03 AM, Date/Time: 5/6/2011 10:26:45 AM, Date/Time: 5/6/2011 10:33:55 AM

Test Laboratory: RIM Testing Services

**RightHandSide\_EDGE1900\_low\_chan\_amb\_temp\_23.1\_liq\_temp\_22.1C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: EDGE 1900; Frequency: 1850.2 MHz; Communication System PAR: 6.232 dB

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.3$  mho/m;  $\epsilon_r = 38.629$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.977 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x5)/Cube 0:**


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.694 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.386 W/kg

**SAR(1 g) = 0.867 mW/g; SAR(10 g) = 0.524 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


	Document <b>Appendix B for the BlackBerry® Smartphone Model  RDD71UW/REM71UW SAR Report</b>			Page <b>21(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW  L6AREM70UW</b>

Maximum value of SAR (measured) = 0.919 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) 2 (7x6x5)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm  
Reference Value = 10.694 V/m; Power Drift = -0.12 dB  
Peak SAR (extrapolated) = 1.396 W/kg  
**SAR(1 g) = 0.872 mW/g; SAR(10 g) = 0.528 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

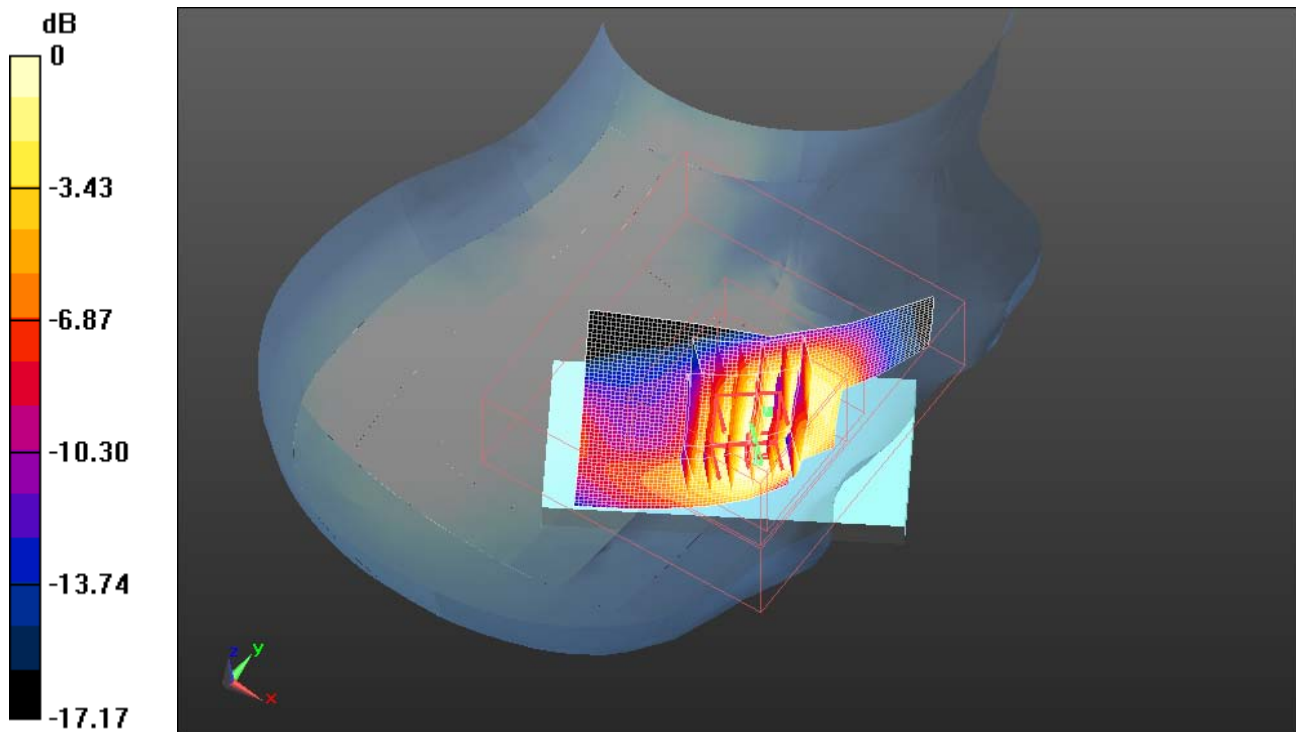

0 dB = 0.920mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>22(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 5/6/2011 9:52:37 AM, Date/Time: 5/6/2011 9:57:57 AM, Date/Time:  
5/6/2011 10:06:47 AM

Test Laboratory: RIM Testing Services

**RightHandSide\_EDGE1900\_mid\_chan\_amb\_temp\_23.0\_liq\_temp\_22.0**

**C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: EDGE 1900; Frequency: 1880 MHz; Communication System  
PAR: 6.232 dB

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.329$  mho/m;  $\epsilon_r = 38.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.882 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.551 V/m; Power Drift = 0.22 dB

Peak SAR (extrapolated) = 1.321 W/kg


**SAR(1 g) = 0.827 mW/g; SAR(10 g) = 0.501 mW/g**

Maximum value of SAR (measured) = 0.880 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) 2 (7x6x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm




	Document <b>Appendix B for the BlackBerry® Smartphone Model          RDD71UW/REM71UW SAR Report</b>			Page <b>23(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW          L6AREM70UW</b>

Reference Value = 9.551 V/m; Power Drift = 0.16 dB  
 Peak SAR (extrapolated) = 1.283 W/kg  
**SAR(1 g) = 0.821 mW/g; SAR(10 g) = 0.497 mW/g**  
 Maximum value of SAR (measured) = 0.862 mW/g

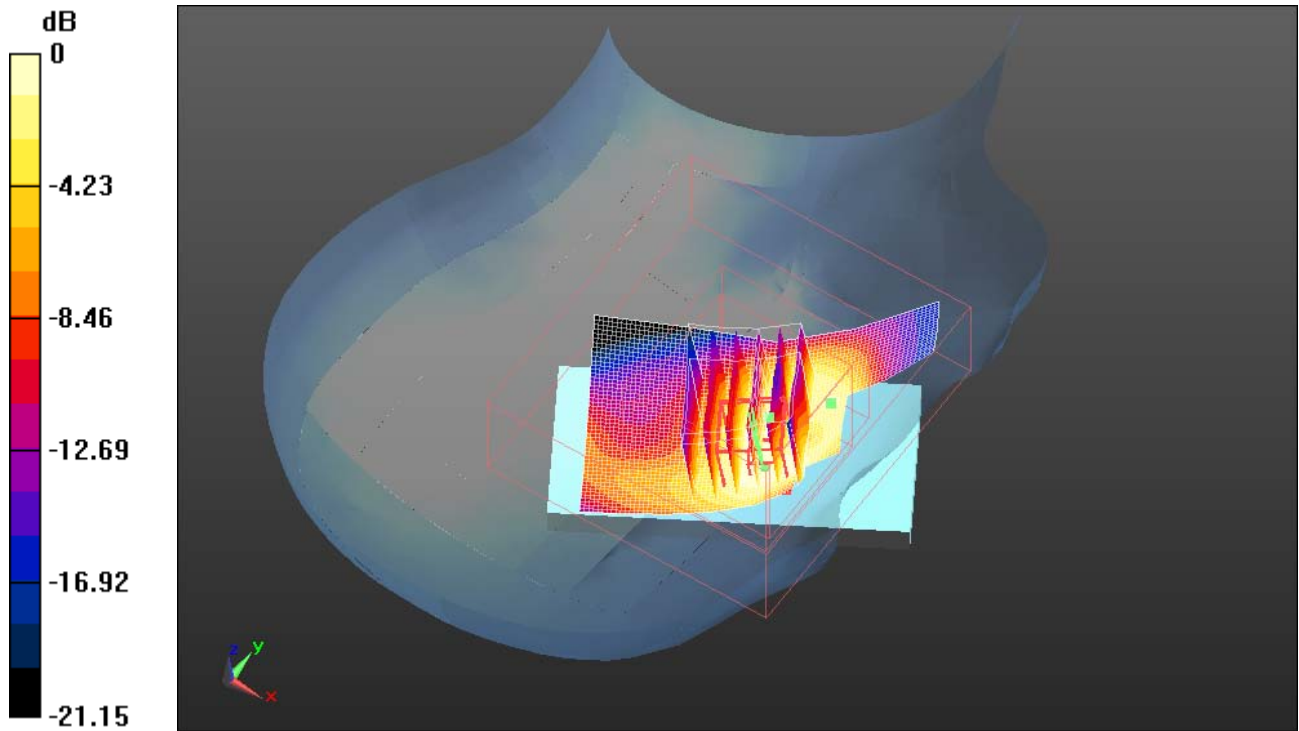

0 dB = 0.860mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>24(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 5/6/2011 10:44:26 AM, Date/Time: 5/6/2011 10:52:30 AM, Date/Time:  
5/6/2011 10:59:49 AM

Test Laboratory: RIM Testing Services

**RightHandSide\_EDGE1900\_high\_chan\_amb\_temp\_23.2\_liq\_temp\_22.2**  
**C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: EDGE 1900; Frequency: 1909.8 MHz; Communication System  
PAR: 6.232 dB

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.356$  mho/m;  $\epsilon_r = 38.402$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.805 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x5)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.443 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.153 W/kg


**SAR(1 g) = 0.728 mW/g; SAR(10 g) = 0.440 mW/g**

Maximum value of SAR (measured) = 0.778 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) 2 (7x6x5)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm




	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>25(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Reference Value = 9.443 V/m; Power Drift = 0.06 dB  
 Peak SAR (extrapolated) = 1.158 W/kg  
**SAR(1 g) = 0.732 mW/g; SAR(10 g) = 0.442 mW/g**  
 Maximum value of SAR (measured) = 0.767 mW/g

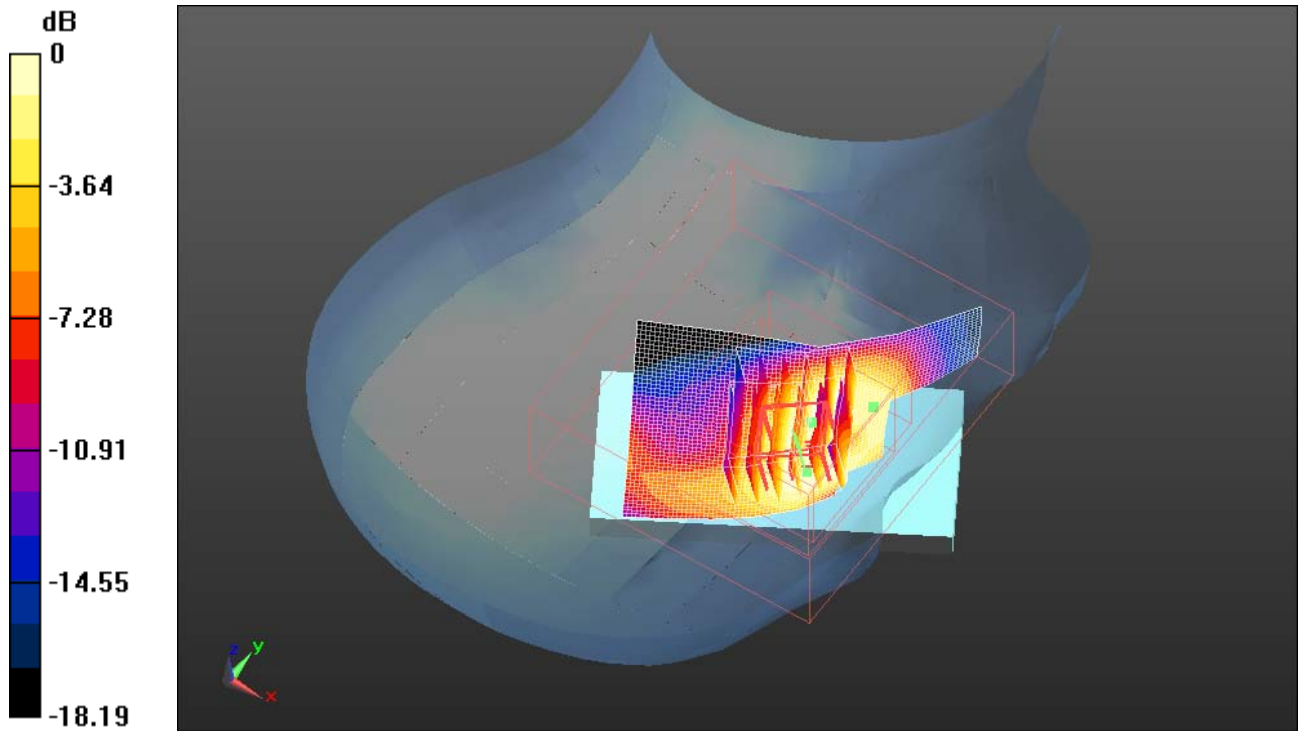

0 dB = 0.770mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>26(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 5/3/2011 10:57:47 AM, Date/Time: 5/3/2011 11:07:56 AM, Date/Time:  
5/3/2011 11:14:44 AM

Test Laboratory: RIM Testing Services

**RightHandSide\_GSM1900\_mid\_chan\_amb\_temp\_23.0\_liq\_temp\_22.0C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: GSM 1900; Frequency: 1880 MHz; Communication System

PAR: 9.191 dB

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.335$  mho/m;  $\epsilon_r = 38.14$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.631 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.470 V/m; Power Drift = -0.32 dB

Peak SAR (extrapolated) = 0.887 W/kg

**SAR(1 g) = 0.568 mW/g; SAR(10 g) = 0.349 mW/g**


Maximum value of SAR (measured) = 0.605 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) 2 (8x7x7)/Cube 0:**


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.470 V/m; Power Drift = -0.54 dB


Peak SAR (extrapolated) = 0.860 W/kg

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>27(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

**SAR(1 g) = 0.576 mW/g; SAR(10 g) = 0.356 mW/g**  
Maximum value of SAR (measured) = 0.613 mW/g

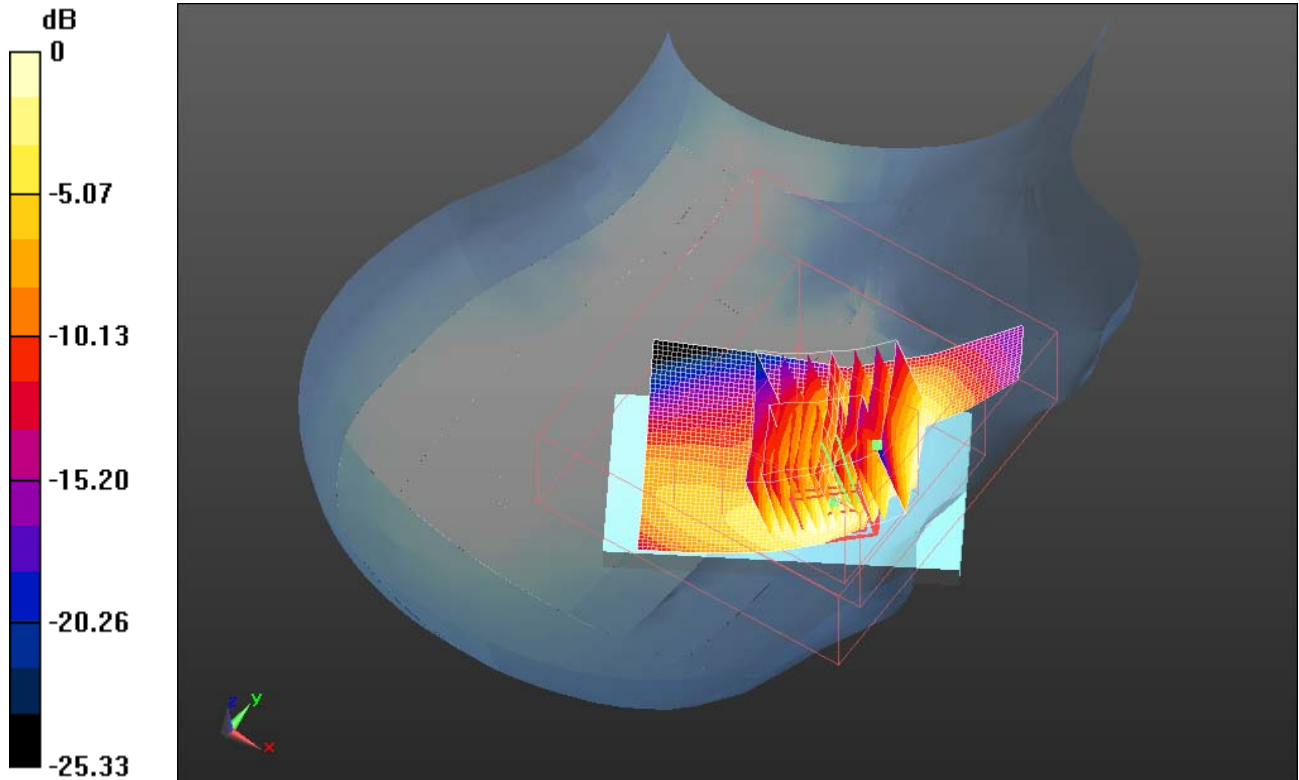

0 dB = 0.610mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>28(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 5/3/2011 11:31:47 AM, Date/Time: 5/3/2011 11:37:26 AM

Test Laboratory: RIM Testing Services

## RightHandSide\_Tilt\_GSM1900\_mid\_chan\_amb\_temp\_23.1\_liq\_temp\_22 .1C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: GSM 1900; Frequency: 1880 MHz; Communication System

PAR: 9.191 dB

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.335$  mho/m;  $\epsilon_r = 38.14$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.335 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:**


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 13.377 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.473 W/kg


**SAR(1 g) = 0.295 mW/g; SAR(10 g) = 0.171 mW/g**

Maximum value of SAR (measured) = 0.317 mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>29(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

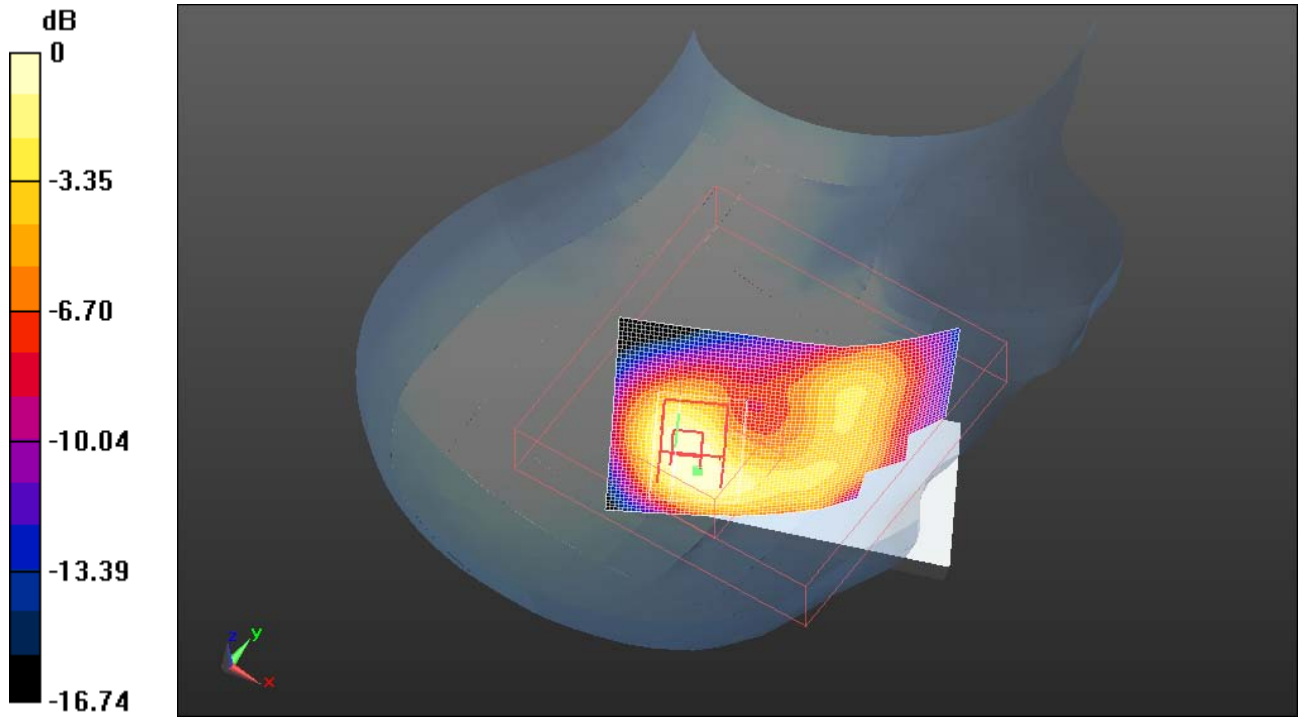

0 dB = 0.320mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model  RDD71UW/REM71UW SAR Report</b>			Page <b>30(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW  L6AREM70UW</b>

Date/Time: 5/6/2011 11:11:53 AM, Date/Time: 5/6/2011 11:16:56 AM

Test Laboratory: RIM Testing Services

**LeftHandSide\_EDGE1900\_low\_chan\_amb\_temp\_23.3\_liq\_temp\_22.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: EDGE 1900; Frequency: 1850.2 MHz; Communication System  
PAR: 6.232 dB

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.3$  mho/m;  $\epsilon_r = 38.629$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.001 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.252 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.432 W/kg

**SAR(1 g) = 0.906 mW/g; SAR(10 g) = 0.523 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.966 mW/g


Author Data  
**Andrew Becker**

Dates of Test  
**Apr 13 – July 4, 2011**

Test Report No  
**RTS-2579-1106-34C**


FCC ID:  
**L6ARDD70UW  
L6AREM70UW**

IC ID  
**2503A-RDD70UW  
2503A-REM70UW**

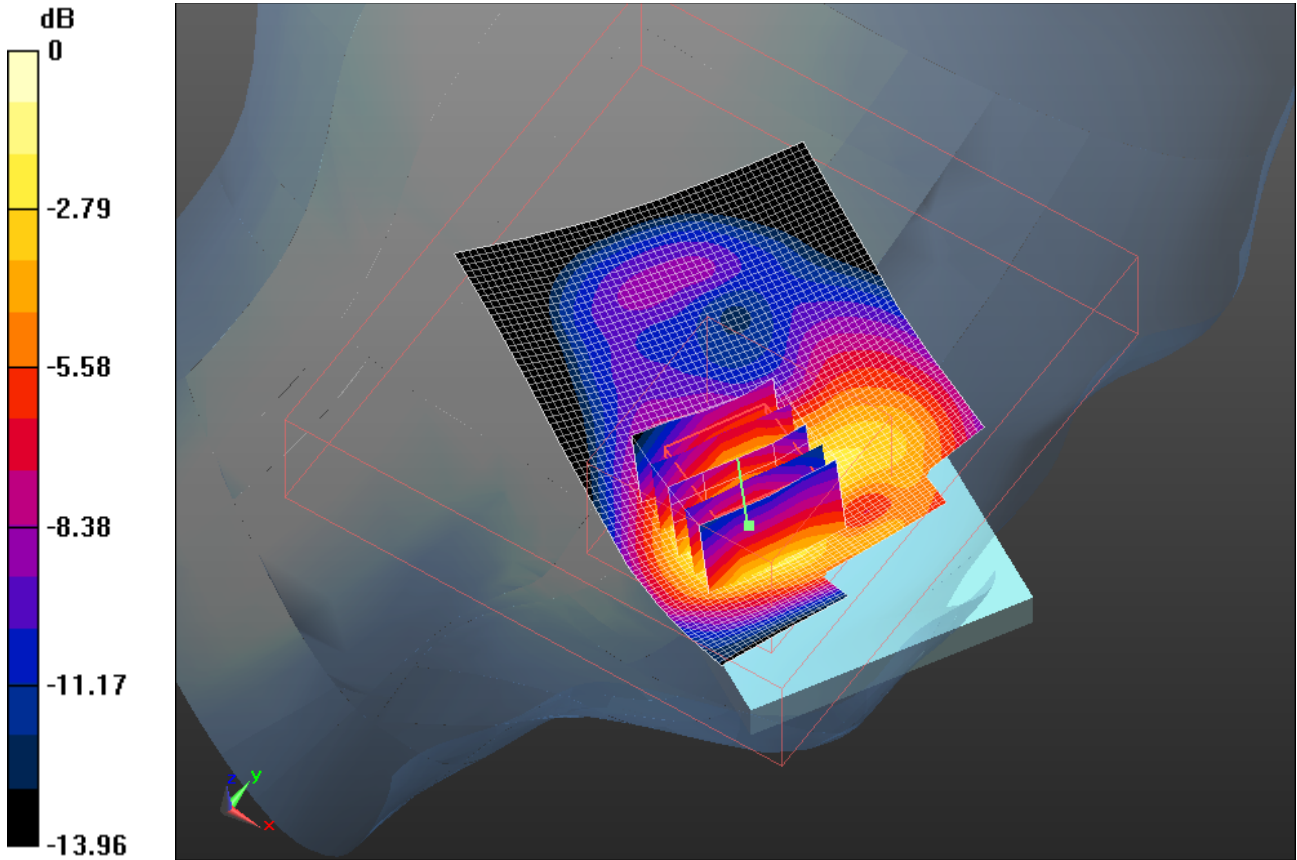

0 dB = 0.970mW/g



	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>32(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 5/3/2011 11:58:13 AM, Date/Time: 5/3/2011 12:03:17 PM

Test Laboratory: RIM Testing Services

## LeftHandSide\_GSM1900\_low\_chan\_amb\_temp\_23.3\_liq\_temp\_22.3C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: GSM 1900; Frequency: 1850.2 MHz; Communication System

PAR: 9.191 dB

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.304$  mho/m;  $\epsilon_r = 38.282$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.330 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.597 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.990 W/kg


**SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.701 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 1.388 mW/g



	Document <b>Appendix B for the BlackBerry® Smartphone Model          RDD71UW/REM71UW SAR Report</b>			Page <b>33(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW          L6AREM70UW</b>

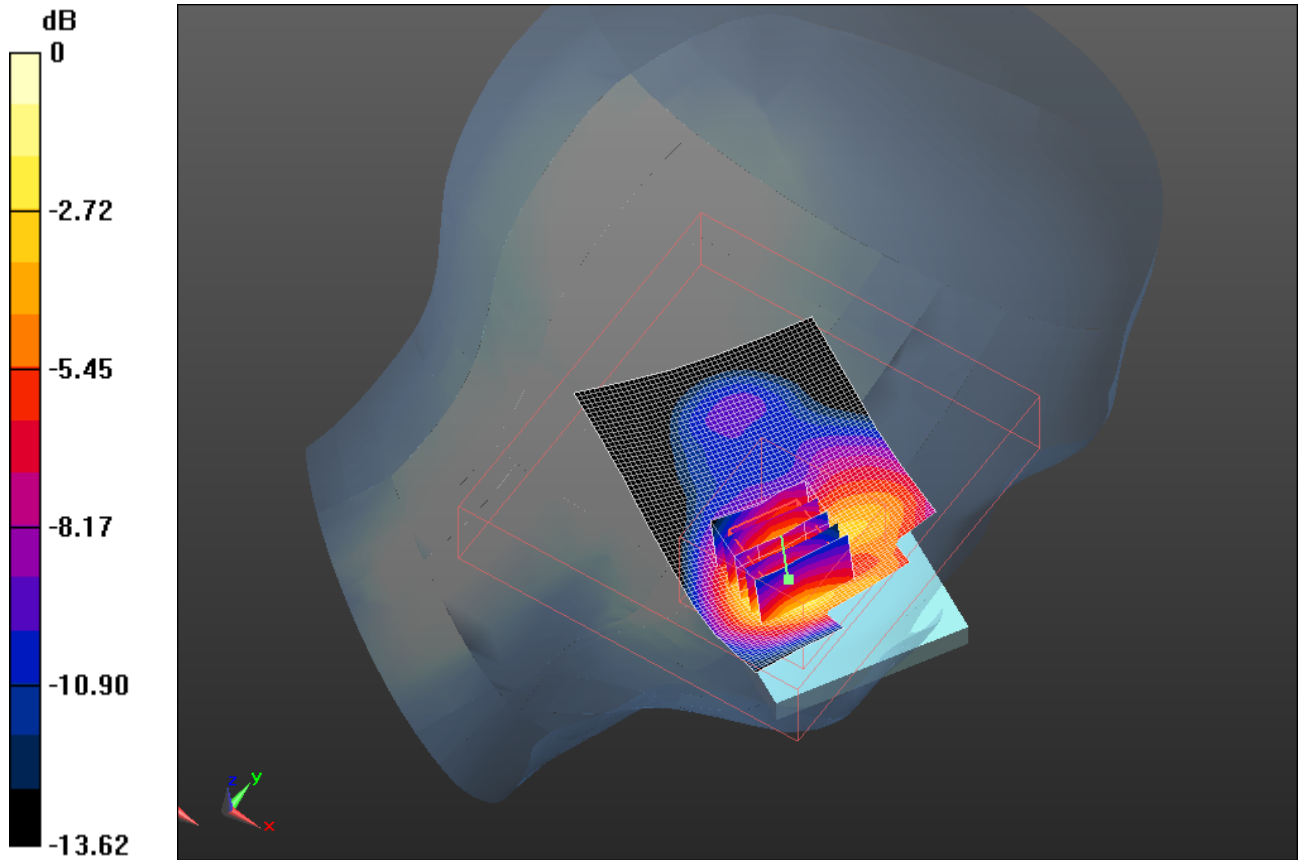

0 dB = 1.390mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model  RDD71UW/REM71UW SAR Report</b>			Page <b>34(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW  L6AREM70UW</b>

Date/Time: 5/3/2011 11:46:38 AM, Date/Time: 5/3/2011 11:51:41 AM

Test Laboratory: RIM Testing Services

## LeftHandSide\_GSM1900\_mid\_chan\_amb\_temp\_23.1\_liq\_temp\_22.1C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: GSM 1900; Frequency: 1880 MHz; Communication System

PAR: 9.191 dB

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.335$  mho/m;  $\epsilon_r = 38.14$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.947 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:**


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 8.622 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.454 W/kg


**SAR(1 g) = 0.912 mW/g; SAR(10 g) = 0.506 mW/g**

Maximum value of SAR (measured) = 1.009 mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model          RDD71UW/REM71UW SAR Report</b>			Page <b>35(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW          L6AREM70UW</b>

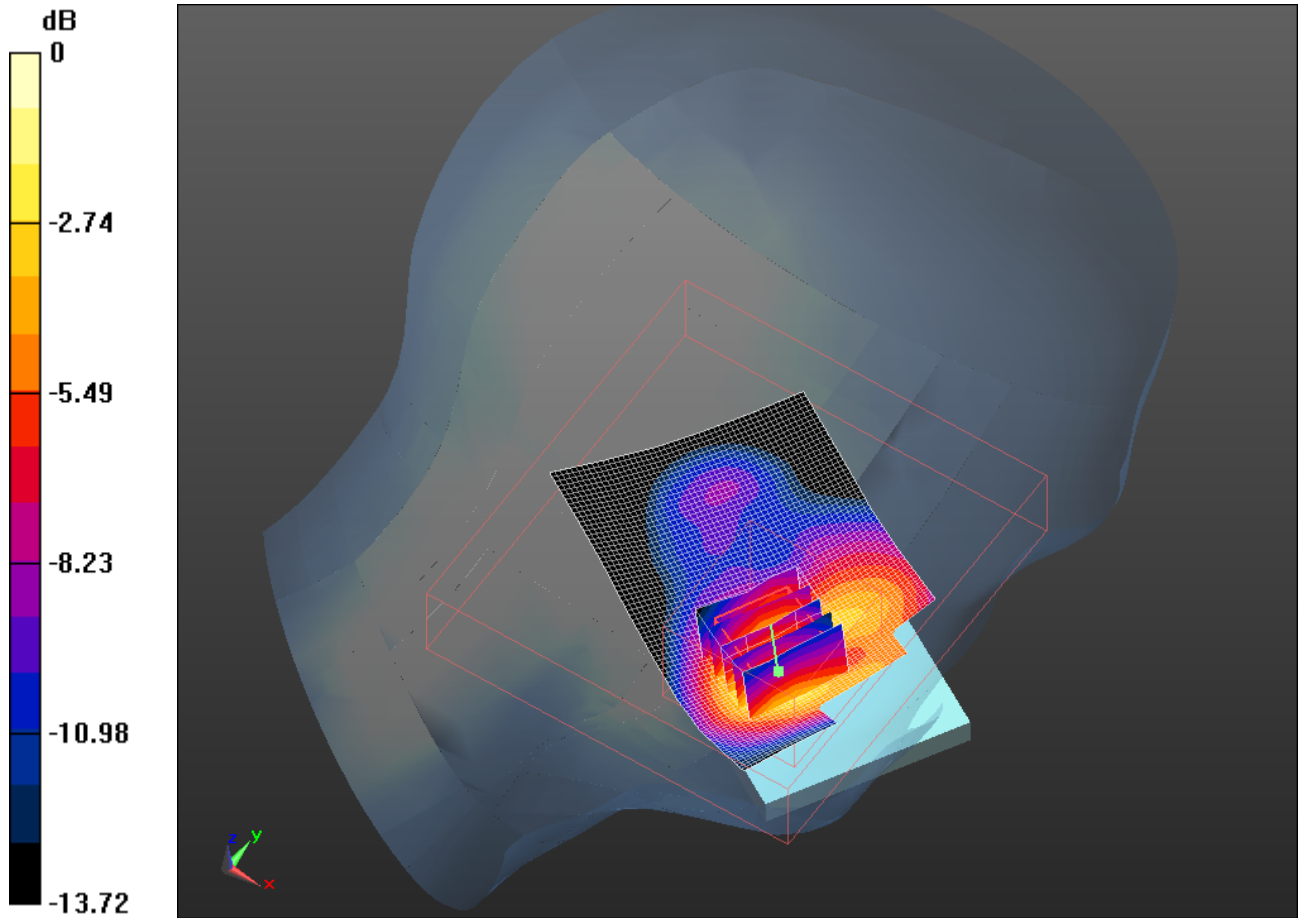

0 dB = 1.010mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model  RDD71UW/REM71UW SAR Report</b>			Page <b>36(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW  L6AREM70UW</b>

Date/Time: 5/3/2011 12:10:24 PM, Date/Time: 5/3/2011 12:15:28 PM

Test Laboratory: RIM Testing Services

## LeftHandSide\_GSM1900\_high\_chan\_amb\_temp\_23.4\_liq\_temp\_22.4C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: GSM 1900; Frequency: 1909.8 MHz; Communication System

PAR: 9.191 dB

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.364$  mho/m;  $\epsilon_r = 38.041$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.759 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.541 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.154 W/kg

**SAR(1 g) = 0.723 mW/g; SAR(10 g) = 0.400 mW/g**

Maximum value of SAR (measured) = 0.799 mW/g


Author Data  
**Andrew Becker**

Dates of Test  
**Apr 13 – July 4, 2011**


Test Report No  
**RTS-2579-1106-34C**

FCC ID:  
**L6ARDD70UW  
L6AREM70UW**

IC ID  
**2503A-RDD70UW  
2503A-REM70UW**

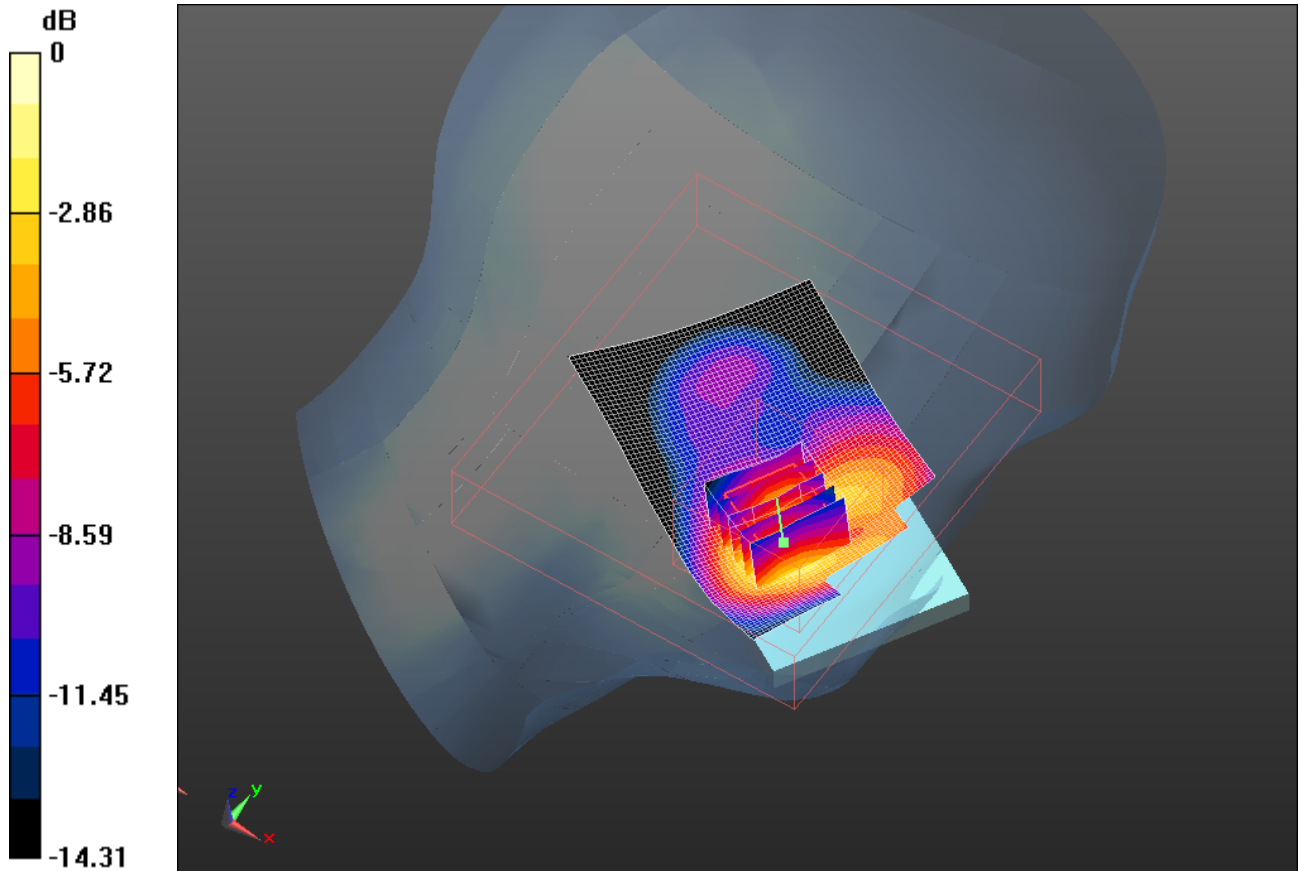

0 dB = 0.800mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>38(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 5/3/2011 12:34:30 PM, Date/Time: 5/3/2011 12:39:40 PM

Test Laboratory: RIM Testing Services

**LeftHandSide\_Tilt\_GSM1900\_mid\_chan\_amb\_temp\_23.3\_liq\_temp\_22.3**

**C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: GSM 1900; Frequency: 1880 MHz; Communication System

PAR: 9.191 dB

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.335$  mho/m;  $\epsilon_r = 38.14$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.317 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:**


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 14.858 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.455 W/kg

**SAR(1 g) = 0.290 mW/g; SAR(10 g) = 0.168 mW/g**


Maximum value of SAR (measured) = 0.322 mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model          RDD71UW/REM71UW SAR Report</b>			Page <b>39(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW          L6AREM70UW</b>

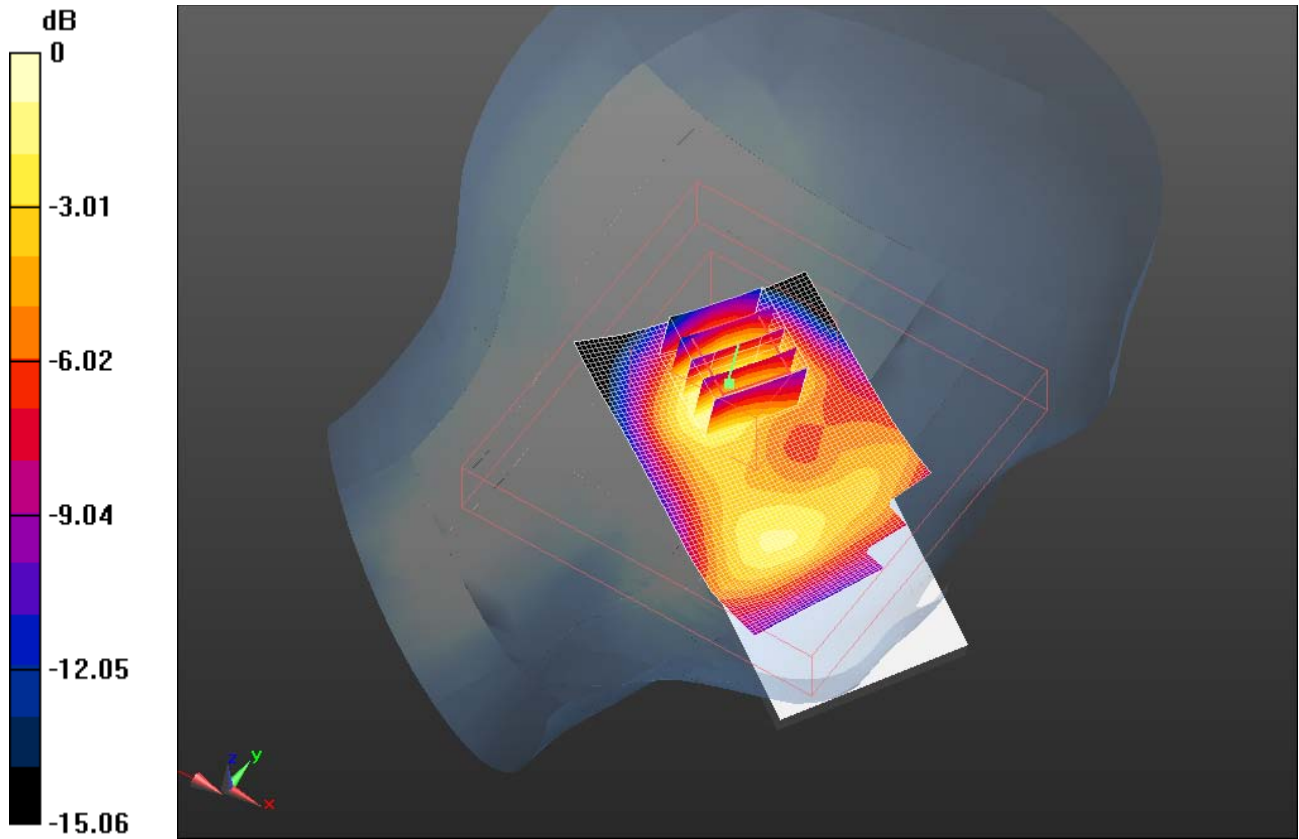

0 dB = 0.320mW/g



	Document <b>Appendix B for the BlackBerry® Smartphone Model  RDD71UW/REM71UW SAR Report</b>			Page <b>40(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW  L6AREM70UW</b>

Date/Time: 6/8/2011 9:15:42 PM, Date/Time: 6/8/2011 9:20:50 PM, Date/Time:  
6/8/2011 9:28:15 PM

Test Laboratory: RIM Testing Services

**RightHandSide\_EDGE1900\_low\_chan\_amb\_temp\_23.5\_liq\_temp\_22.6C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 279CCF51**

Communication System: EDGE 1900; Communication System Band: EDGE 1900;  
Frequency: 1850.2 MHz; Communication System PAR: 6.232 dB  
Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.321$  mho/m;  $\epsilon_r = 40$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.038 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x5)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm  
Reference Value = 10.089 V/m; Power Drift = -0.10 dB  
Peak SAR (extrapolated) = 1.596 W/kg  
**SAR(1 g) = 0.964 mW/g; SAR(10 g) = 0.572 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.070 mW/g



	Document <b>Appendix B for the BlackBerry® Smartphone Model          RDD71UW/REM71UW SAR Report</b>			Page <b>41(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW          L6AREM70UW</b>

**Configuration/Touch position -/Zoom Scan (5x5x7) 2 (6x6x5)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 10.089 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.395 W/kg


**SAR(1 g) = 0.927 mW/g; SAR(10 g) = 0.585 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.975 mW/g

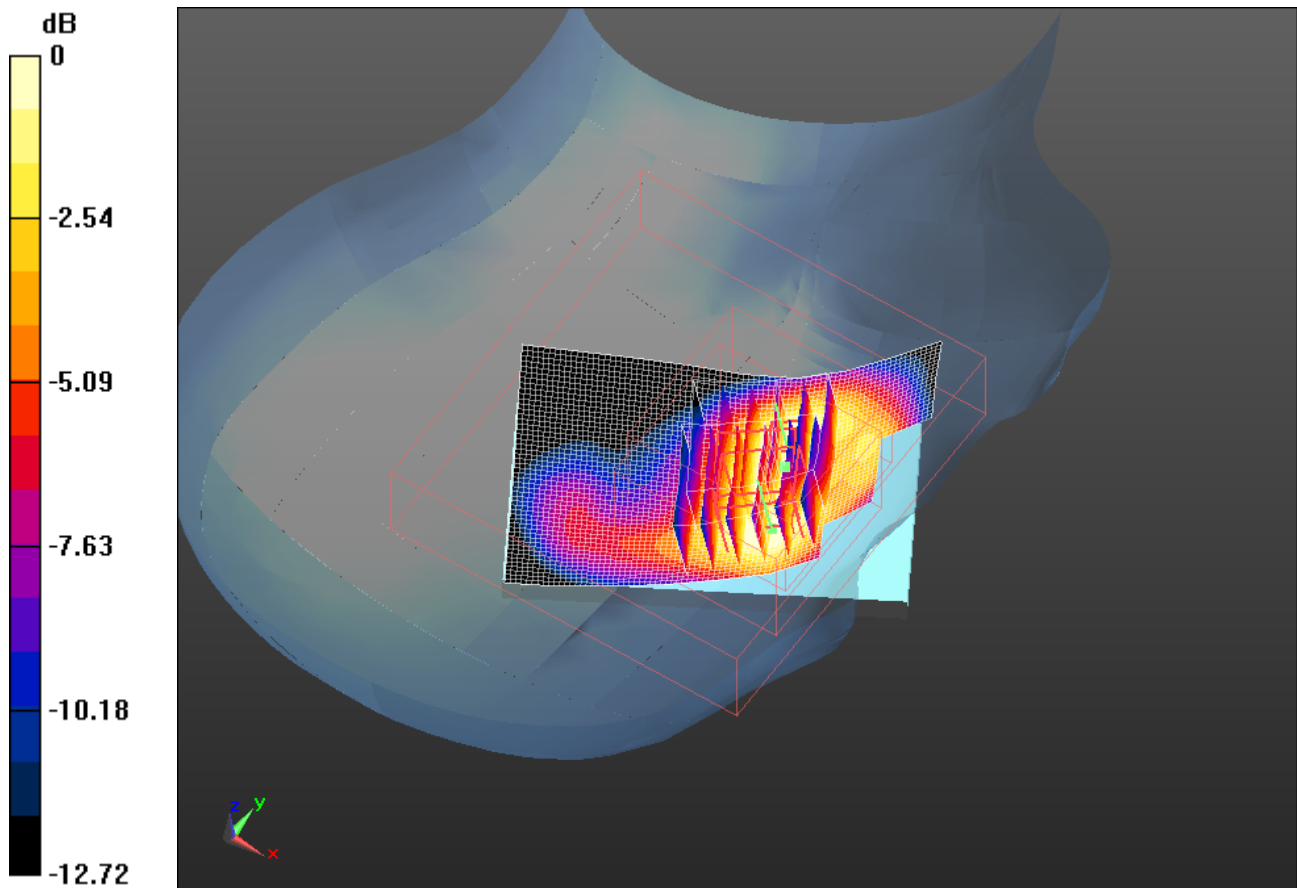

0 dB = 0.980mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>42(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 6/8/2011 9:39:21 PM, Date/Time: 6/8/2011 9:44:23 PM

Test Laboratory: RIM Testing Services

## LeftHandSide\_EDGE1900\_low\_chan\_amb\_temp\_23.2\_liq\_temp\_22.4C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 279CCF51**

Communication System: EDGE 1900; Communication System Band: EDGE 1900;  
Frequency: 1850.2 MHz; Communication System PAR: 6.232 dB  
Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.321$  mho/m;  $\epsilon_r = 40$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.477 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x5)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 10.928 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 2.194 W/kg

**SAR(1 g) = 1.41 mW/g; SAR(10 g) = 0.802 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.514 mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>43(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

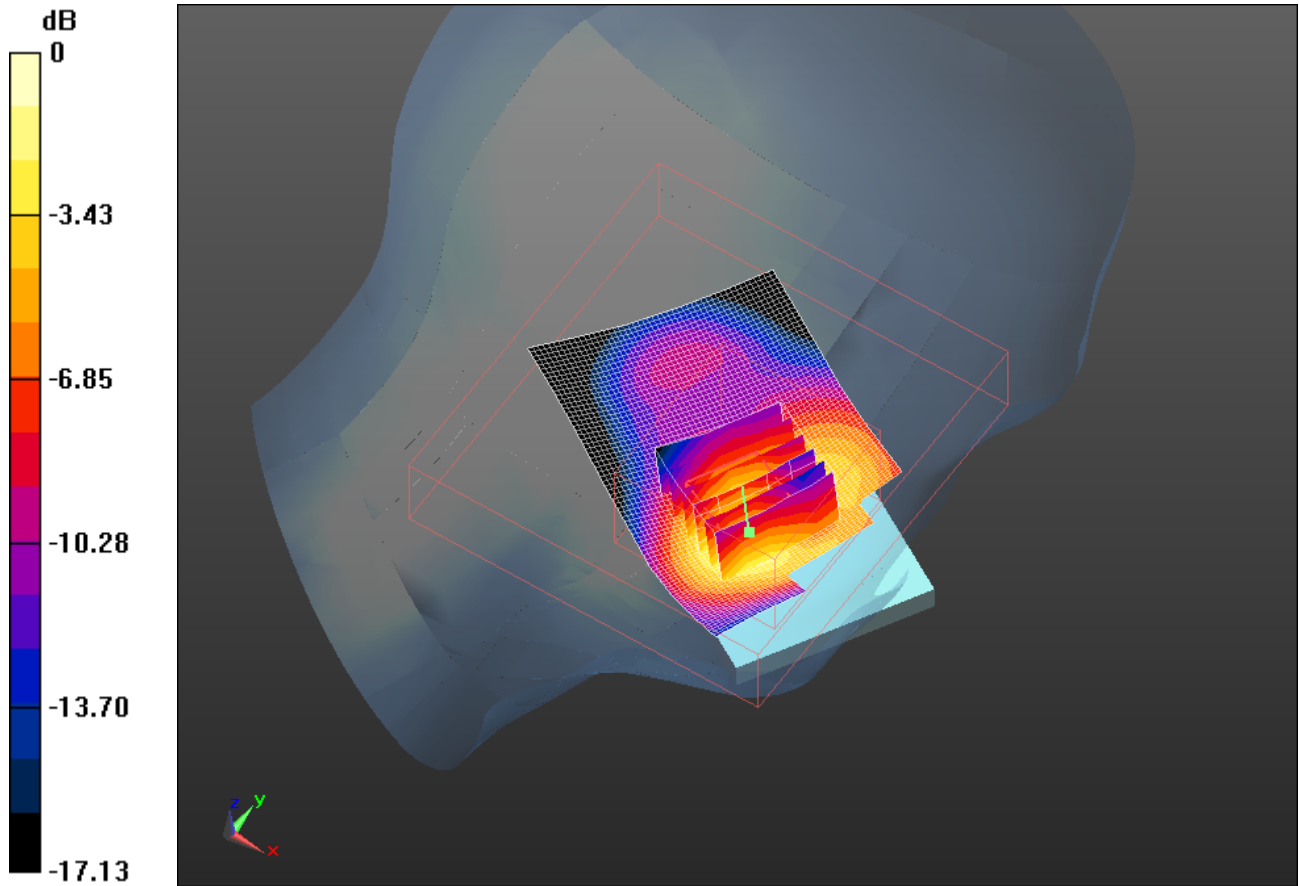

0 dB = 1.510mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model  RDD71UW/REM71UW SAR Report</b>			Page <b>44(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW  L6AREM70UW</b>

Date/Time: 4/13/2011 5:36:45 PM, Date/Time: 4/13/2011 5:42:04 PM, Date/Time:  
4/13/2011 5:52:59 PM

Test Laboratory: RIM Testing Services

## RightHandSide\_UMTS\_band\_IV\_low\_chan\_amb\_temp\_23.6\_liq\_temp\_2 2.4C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: WCDMA FDD IV; Frequency: 1712.4 MHz; Communication  
System PAR: 0 dB

Medium parameters used (interpolated):  $f = 1712.4$  MHz;  $\sigma = 1.22$  mho/m;  $\epsilon_r = 38.676$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.075 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.207 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.470 W/kg

**SAR(1 g) = 0.920 mW/g; SAR(10 g) = 0.561 mW/g**

	Document <b>Appendix B for the BlackBerry® Smartphone Model          RDD71UW/REM71UW SAR Report</b>			Page <b>45(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW          L6AREM70UW</b>

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.961 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) 2 (8x6x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 11.207 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.446 W/kg


**SAR(1 g) = 0.937 mW/g; SAR(10 g) = 0.576 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.012 mW/g

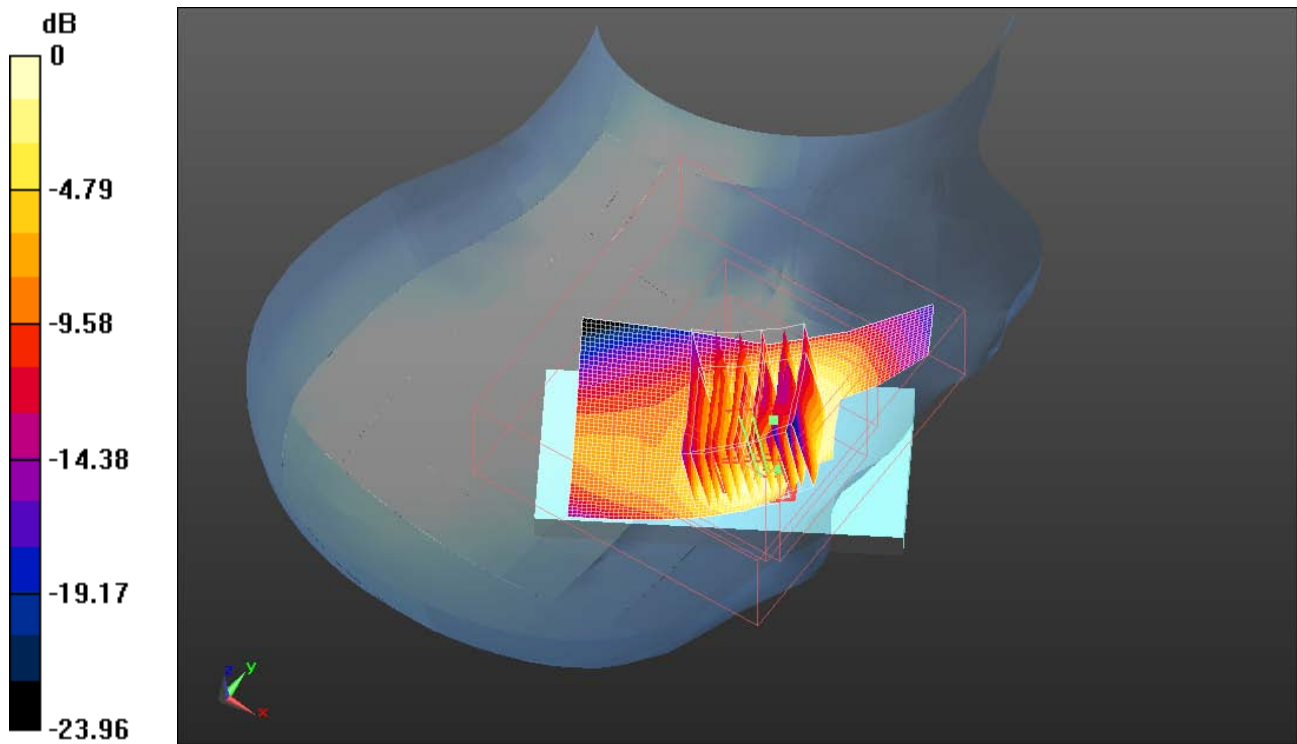

0 dB = 1.010mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>46(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 4/13/2011 5:03:12 PM, Date/Time: 4/13/2011 5:08:32 PM, Date/Time:  
4/13/2011 5:22:20 PM

Test Laboratory: RIM Testing Services

## RightHandSide\_UMTS\_band\_IV\_mid\_chan\_amb\_temp\_23.5\_liq\_temp\_2

### 2.3C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: WCDMA FDD IV; Frequency: 1732.6 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.215$  mho/m;  $\epsilon_r = 38.53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.034 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.973 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.465 W/kg

**SAR(1 g) = 0.916 mW/g; SAR(10 g) = 0.554 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

	Document <b>Appendix B for the BlackBerry® Smartphone Model  RDD71UW/REM71UW SAR Report</b>			Page <b>47(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW  L6AREM70UW</b>


Maximum value of SAR (measured) = 0.952 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) 2 (8x6x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm  
Reference Value = 10.973 V/m; Power Drift = -0.26 dB  
Peak SAR (extrapolated) = 1.471 W/kg  
**SAR(1 g) = 0.916 mW/g; SAR(10 g) = 0.567 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.984 mW/g

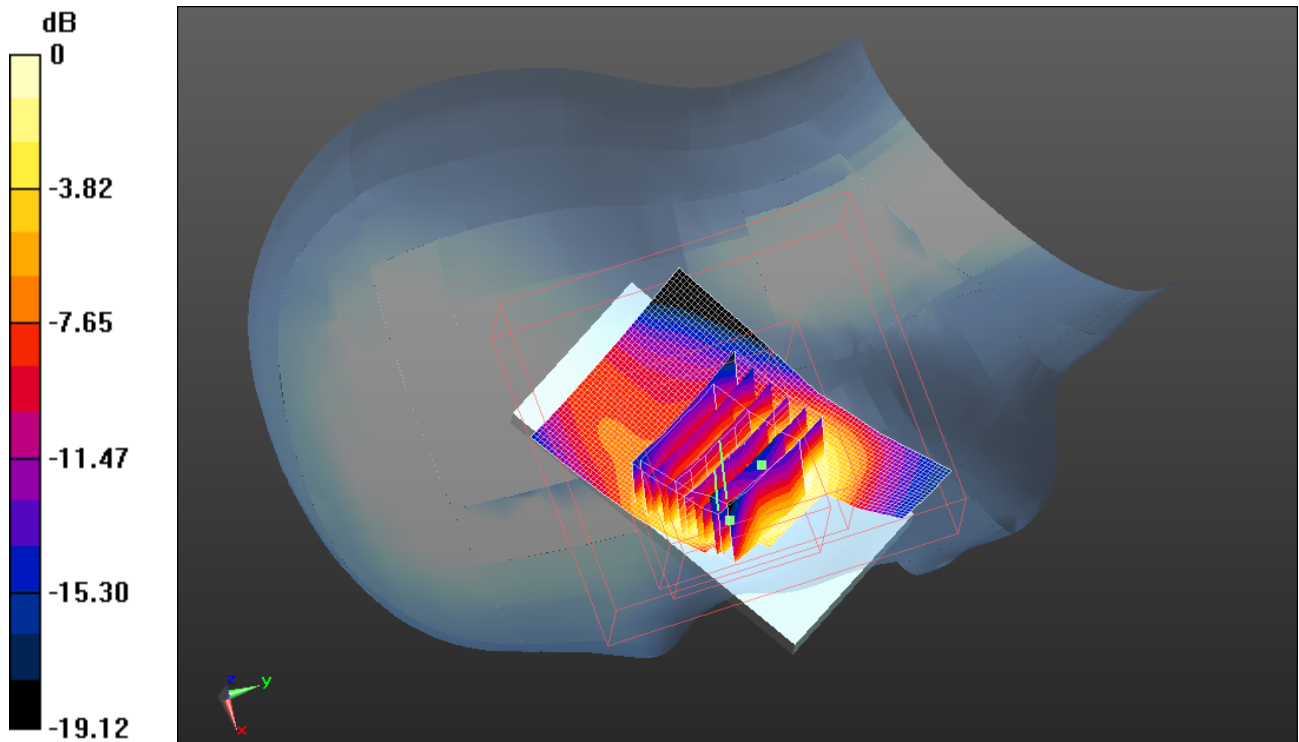

0 dB = 0.980mW/g



	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>48(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 4/13/2011 6:24:25 PM, Date/Time: 4/13/2011 6:29:44 PM, Date/Time:  
4/13/2011 6:38:19 PM

Test Laboratory: RIM Testing Services

## RightHandSide\_UMTS\_band\_IV\_high\_chan\_amb\_temp\_23.7\_liq\_temp\_22.5C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: WCDMA FDD IV; Frequency: 1752.6 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated):  $f = 1752.6$  MHz;  $\sigma = 1.264$  mho/m;  $\epsilon_r = 38.243$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.025 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.862 V/m; Power Drift = -0.22 dB

Peak SAR (extrapolated) = 1.436 W/kg

**SAR(1 g) = 0.881 mW/g; SAR(10 g) = 0.544 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

	Document <b>Appendix B for the BlackBerry® Smartphone Model  RDD71UW/REM71UW SAR Report</b>			Page <b>49(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW  L6AREM70UW</b>


Maximum value of SAR (measured) = 0.951 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) 2 (6x6x7)/Cube 0:**


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm  
Reference Value = 9.862 V/m; Power Drift = -0.21 dB  
Peak SAR (extrapolated) = 1.429 W/kg  
**SAR(1 g) = 0.878 mW/g; SAR(10 g) = 0.531 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.946 mW/g

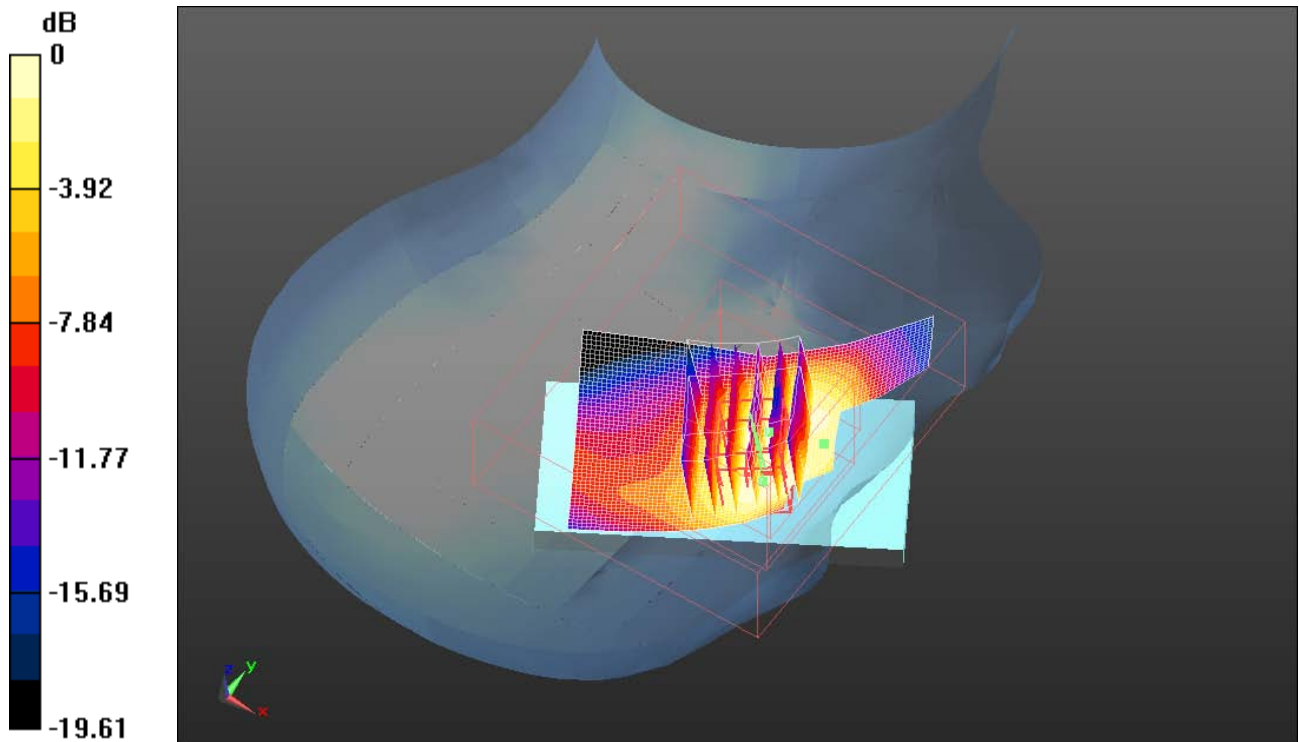

0 dB = 0.950mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>50(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 4/13/2011 6:55:17 PM, Date/Time: 4/13/2011 7:00:35 PM

Test Laboratory: RIM Testing Services

**RightHandSide\_Tilt\_UMTS\_band\_IV\_mid\_chan\_amb\_temp\_23.7\_liq\_temperatures\_22.5C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: WCDMA FDD IV; Frequency: 1752.6 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated):  $f = 1752.6$  MHz;  $\sigma = 1.264$  mho/m;  $\epsilon_r = 38.243$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.272 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 14.029 V/m; Power Drift = -0.0052 dB


Peak SAR (extrapolated) = 0.358 W/kg

**SAR(1 g) = 0.224 mW/g; SAR(10 g) = 0.128 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.248 mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>51(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

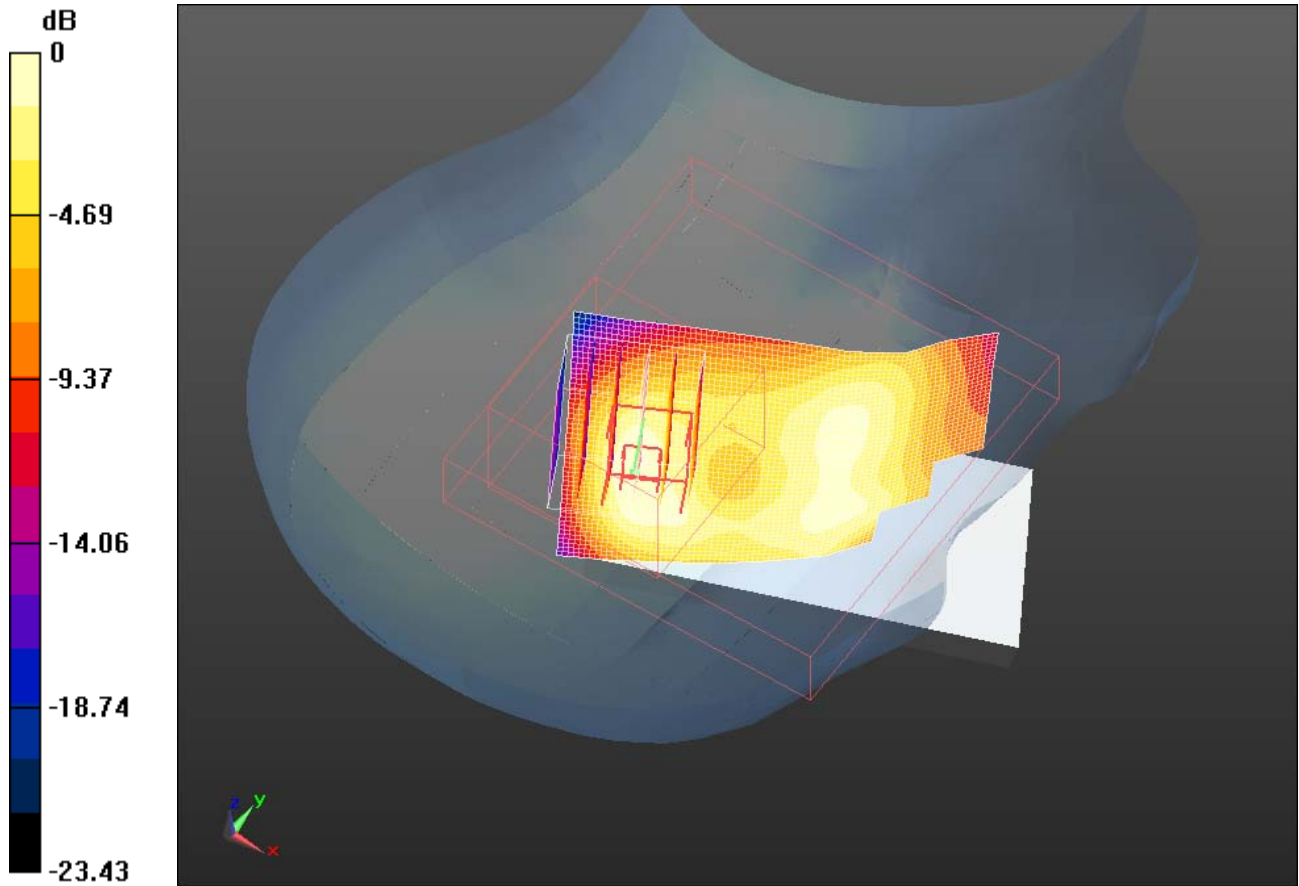

0 dB = 0.250mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model  RDD71UW/REM71UW SAR Report</b>			Page <b>52(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW  L6AREM70UW</b>

Date/Time: 4/13/2011 3:54:59 PM, Date/Time: 4/13/2011 3:59:39 PM

Test Laboratory: RIM Testing Services

**LeftHandSide\_UMTS\_band\_IV\_low\_chan\_amb\_temp\_24.4\_liq\_temp\_22.5C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: WCDMA FDD IV; Frequency: 1712.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated):  $f = 1712.4$  MHz;  $\sigma = 1.22$  mho/m;  $\epsilon_r = 38.676$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position - Low/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.529 mW/g

**Configuration/Touch position - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 9.878 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 2.256 W/kg

**SAR(1 g) = 1.42 mW/g; SAR(10 g) = 0.788 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.477 mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model          RDD71UW/REM71UW SAR Report</b>			Page <b>53(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW          L6AREM70UW</b>

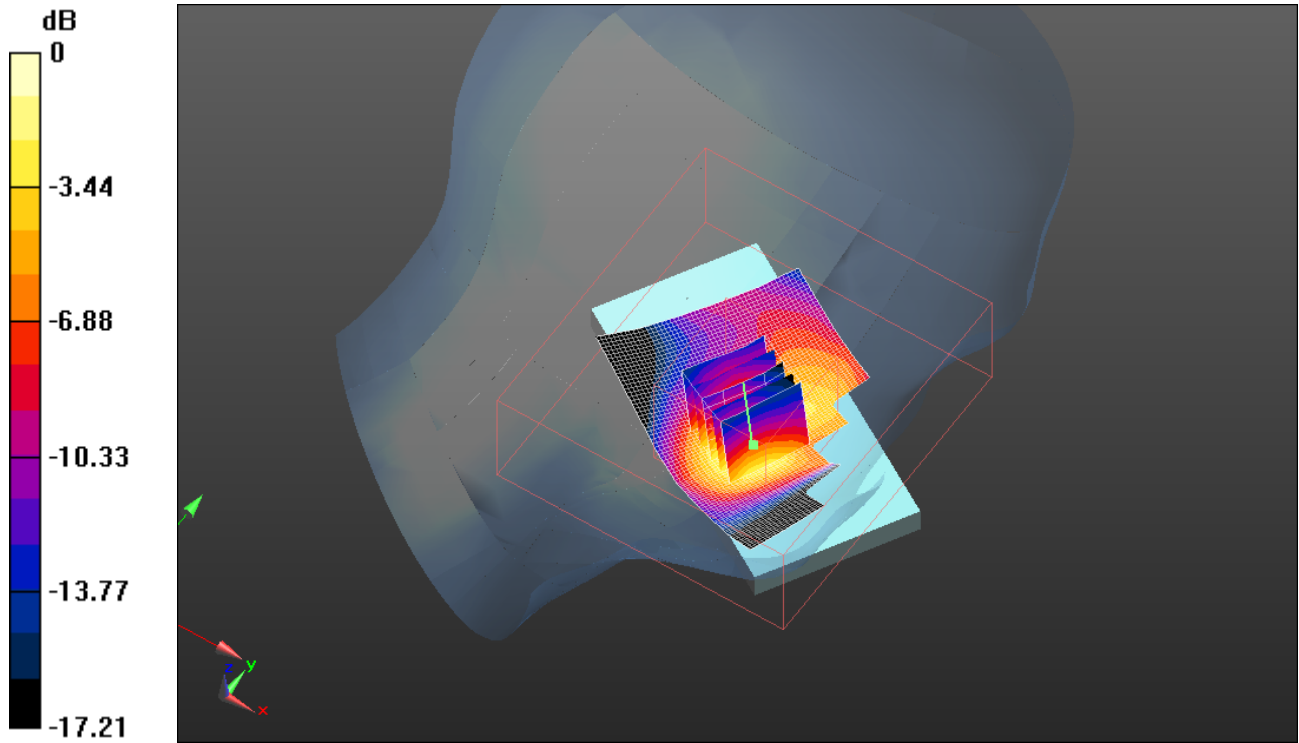

0 dB = 1.480mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>54(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 4/13/2011 3:37:02 PM, Date/Time: 4/13/2011 3:43:25 PM

Test Laboratory: RIM Testing Services

## LeftHandSide\_UMTS\_band\_IV\_mid\_chan\_amb\_temp\_24.6\_liq\_temp\_22 .7C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: WCDMA FDD IV; Frequency: 1732.6 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.215$  mho/m;  $\epsilon_r = 38.53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position - Mid/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.502 mW/g

**Configuration/Touch position - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.039 V/m; Power Drift = -0.30 dB


Peak SAR (extrapolated) = 2.190 W/kg


**SAR(1 g) = 1.37 mW/g; SAR(10 g) = 0.762 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 1.453 mW/g



	Document <b>Appendix B for the BlackBerry® Smartphone Model          RDD71UW/REM71UW SAR Report</b>			Page <b>55(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW          L6AREM70UW</b>

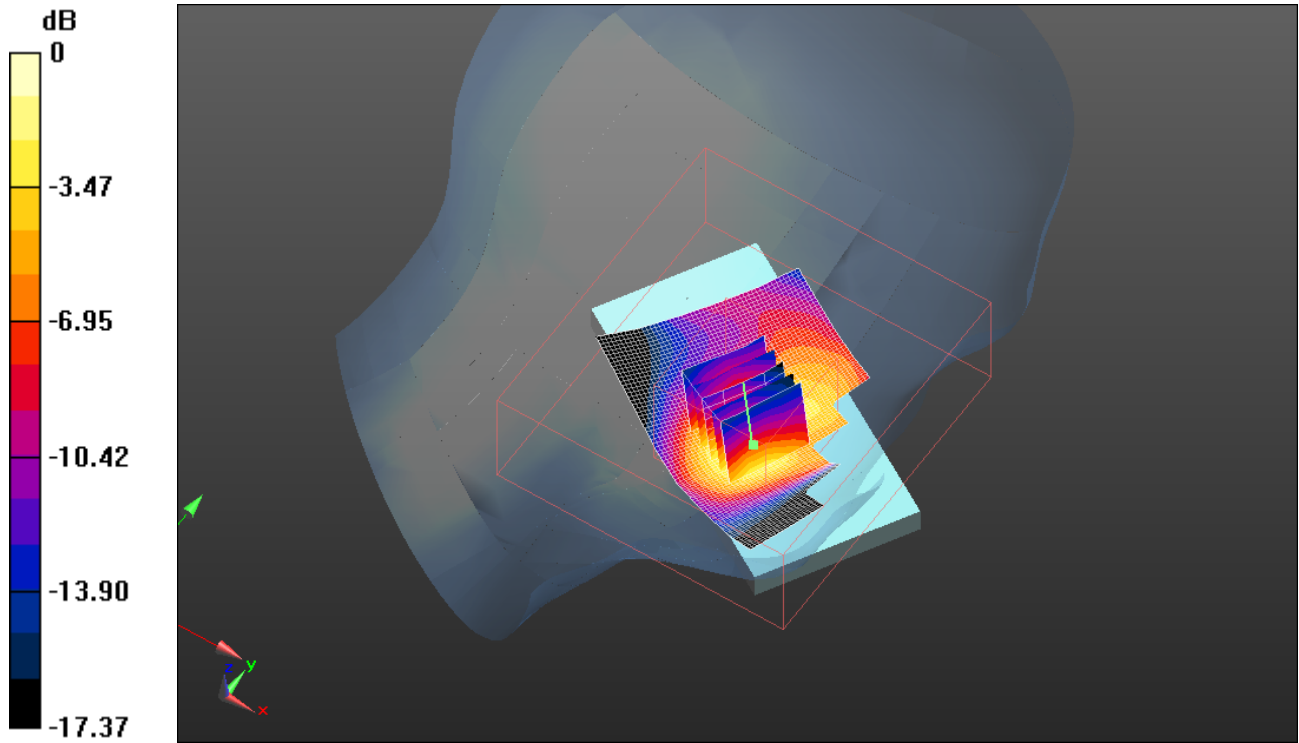

0 dB = 1.450mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>56(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 4/13/2011 4:25:52 PM, Date/Time: 4/13/2011 4:30:34 PM

Test Laboratory: RIM Testing Services

## LeftHandSide\_UMTS\_band\_IV\_high\_chan\_amb\_temp\_24.6\_liq\_temp\_2 2.4C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: WCDMA FDD IV; Frequency: 1752.6 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated):  $f = 1752.6$  MHz;  $\sigma = 1.264$  mho/m;  $\epsilon_r = 38.243$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.319 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 8.940 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.963 W/kg

**SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.678 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.282 mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>57(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

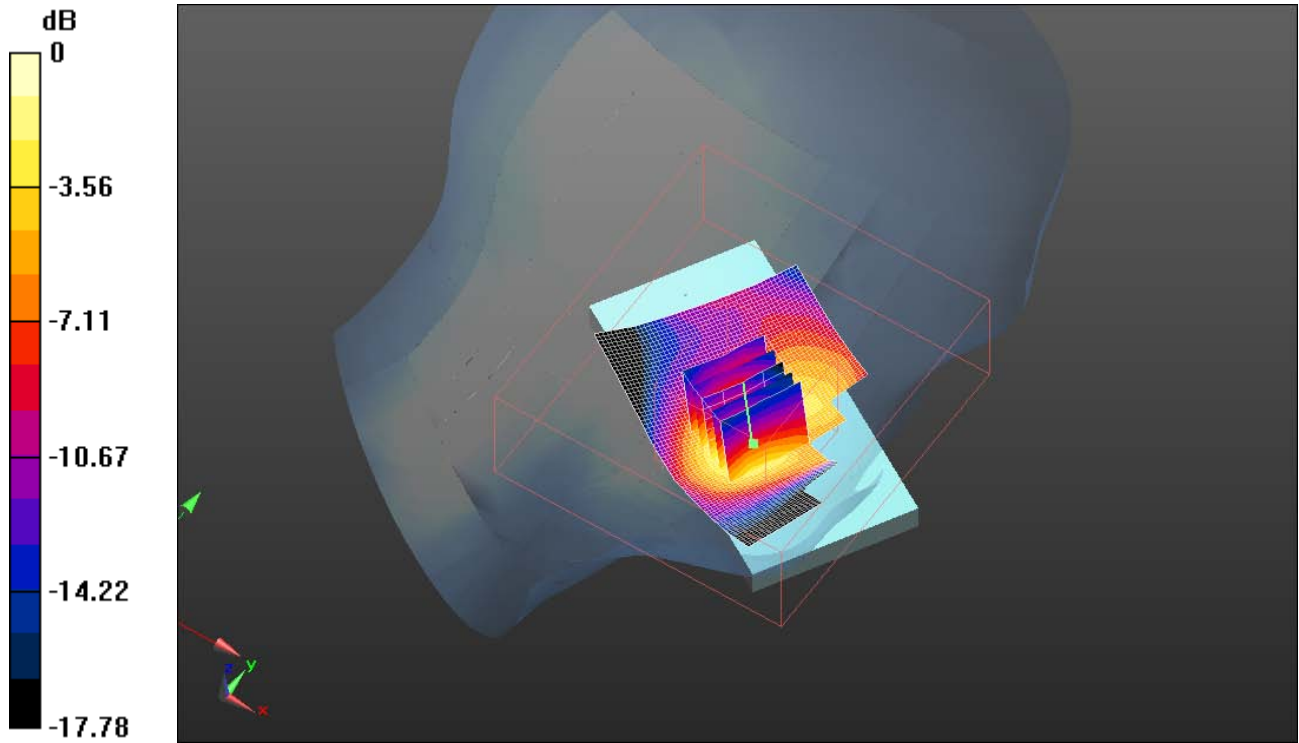

0 dB = 1.280mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model  RDD71UW/REM71UW SAR Report</b>			Page <b>58(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW  L6AREM70UW</b>

Date/Time: 4/13/2011 4:45:16 PM, Date/Time: 4/13/2011 4:50:25 PM

Test Laboratory: RIM Testing Services

## LeftHandSide\_Tilt\_UMTS\_band\_IV\_mid\_chan\_amb\_temp\_24.9\_liq\_tem p\_22.6C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: Frequency: 1732.6 MHz; Communication System PAR: 0 dB  
Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.215$  mho/m;  $\epsilon_r = 38.53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.353 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.577 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.480 W/kg

**SAR(1 g) = 0.321 mW/g; SAR(10 g) = 0.196 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.352 mW/g


Author Data  
**Andrew Becker**

Dates of Test  
**Apr 13 – July 4, 2011**


Test Report No  
**RTS-2579-1106-34C**

FCC ID:  
**L6ARDD70UW  
L6AREM70UW**

IC ID  
**2503A-RDD70UW  
2503A-REM70UW**

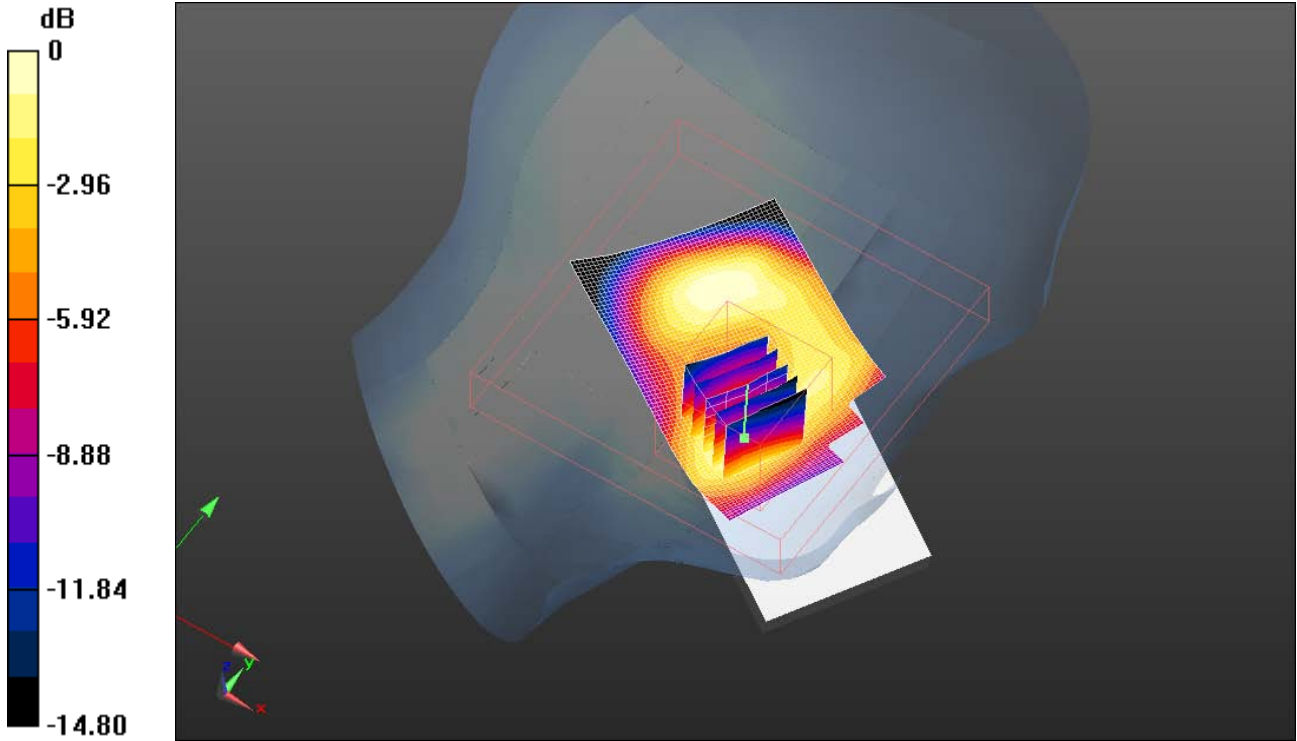

0 dB = 0.350mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>60(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 4/27/2011 5:08:17 PM, Date/Time: 4/27/2011 5:17:14 PM

Test Laboratory: RIM Testing Services

**RightHandSide\_802.11b\_low\_chan\_amb\_temp\_23.1\_liq\_temp\_21.9C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: 802.11 b (2450); Frequency: 2412 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated):  $f = 2412$  MHz;  $\sigma = 1.846$  mho/m;  $\epsilon_r = 39.148$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.6, 4.6, 4.6); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.454 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x6x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 15.509 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.982 W/kg

**SAR(1 g) = 0.471 mW/g; SAR(10 g) = 0.228 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 0.550 mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>61(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

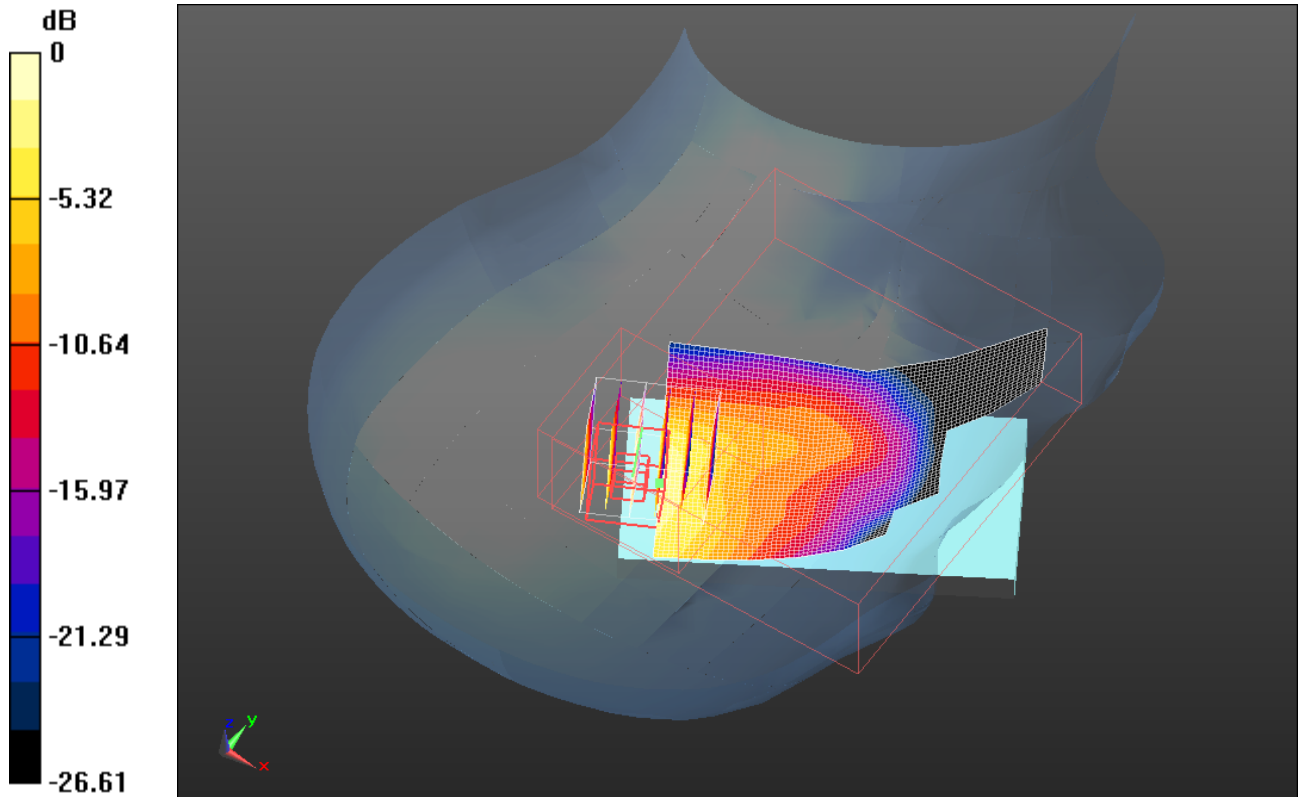

0 dB = 0.550mW/g



	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>62(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 4/27/2011 5:27:14 PM, Date/Time: 4/27/2011 5:32:33 PM

Test Laboratory: RIM Testing Services

**RightHandSide\_Tilt\_802.11b\_low\_chan\_amb\_temp\_23.1\_liq\_temp\_22.0**

**C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: 802.11 b (2450); Frequency: 2412 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated):  $f = 2412$  MHz;  $\sigma = 1.846$  mho/m;  $\epsilon_r = 39.148$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.6, 4.6, 4.6); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

**Info:** Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.544 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.478 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.958 W/kg

**SAR(1 g) = 0.487 mW/g; SAR(10 g) = 0.235 mW/g**


	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>63(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.548 mW/g

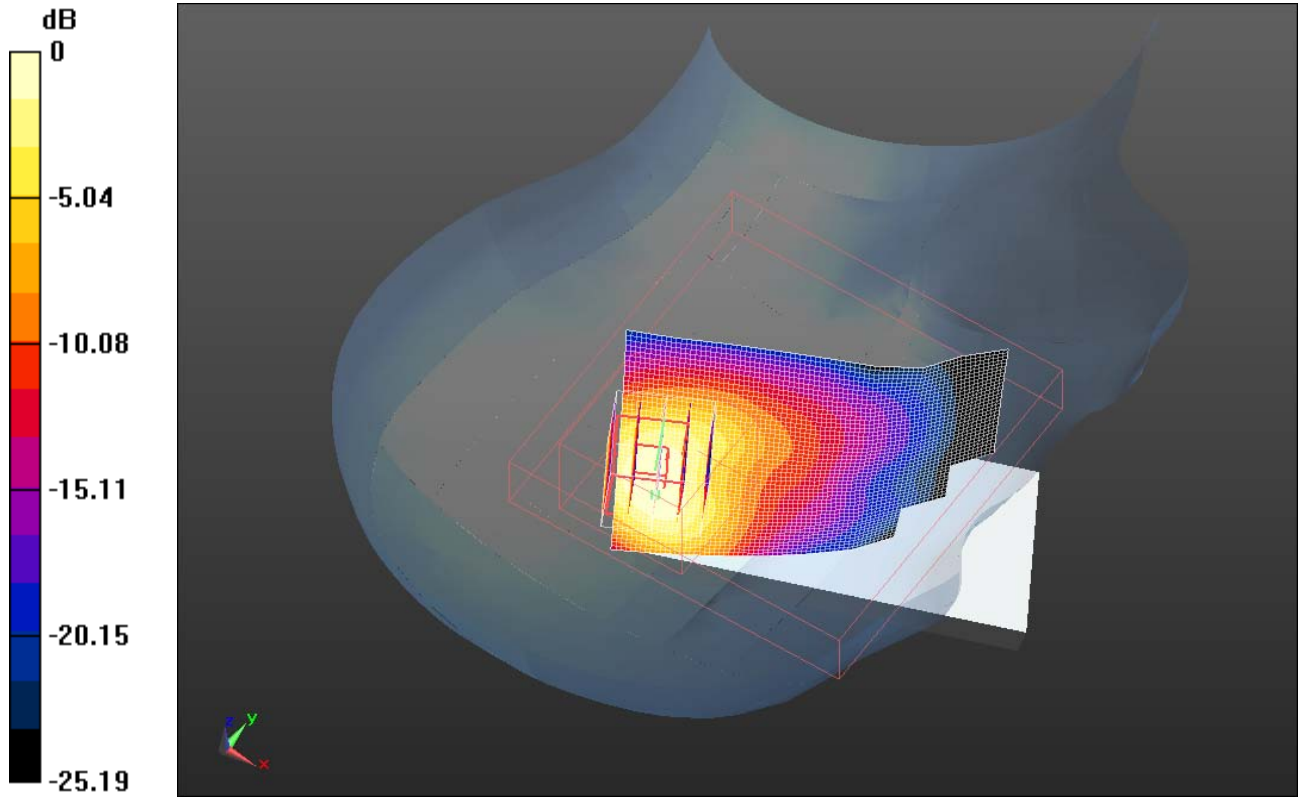

0 dB = 0.550mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model  RDD71UW/REM71UW SAR Report</b>			Page <b>64(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW  L6AREM70UW</b>

Date/Time: 4/27/2011 5:44:56 PM, Date/Time: 4/27/2011 5:51:06 PM

Test Laboratory: RIM Testing Services

## LeftHandSide\_802.11b\_low\_chan\_amb\_temp\_22.9\_liq\_temp\_22.0C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: 802.11 b (2450); Frequency: 2412 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated):  $f = 2412$  MHz;  $\sigma = 1.846$  mho/m;  $\epsilon_r = 39.148$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.6, 4.6, 4.6); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (61x81x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.480 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 14.356 V/m; Power Drift = 0.45 dB


Peak SAR (extrapolated) = 0.885 W/kg

**SAR(1 g) = 0.474 mW/g; SAR(10 g) = 0.235 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.551 mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model          RDD71UW/REM71UW SAR Report</b>			Page <b>65(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW          L6AREM70UW</b>

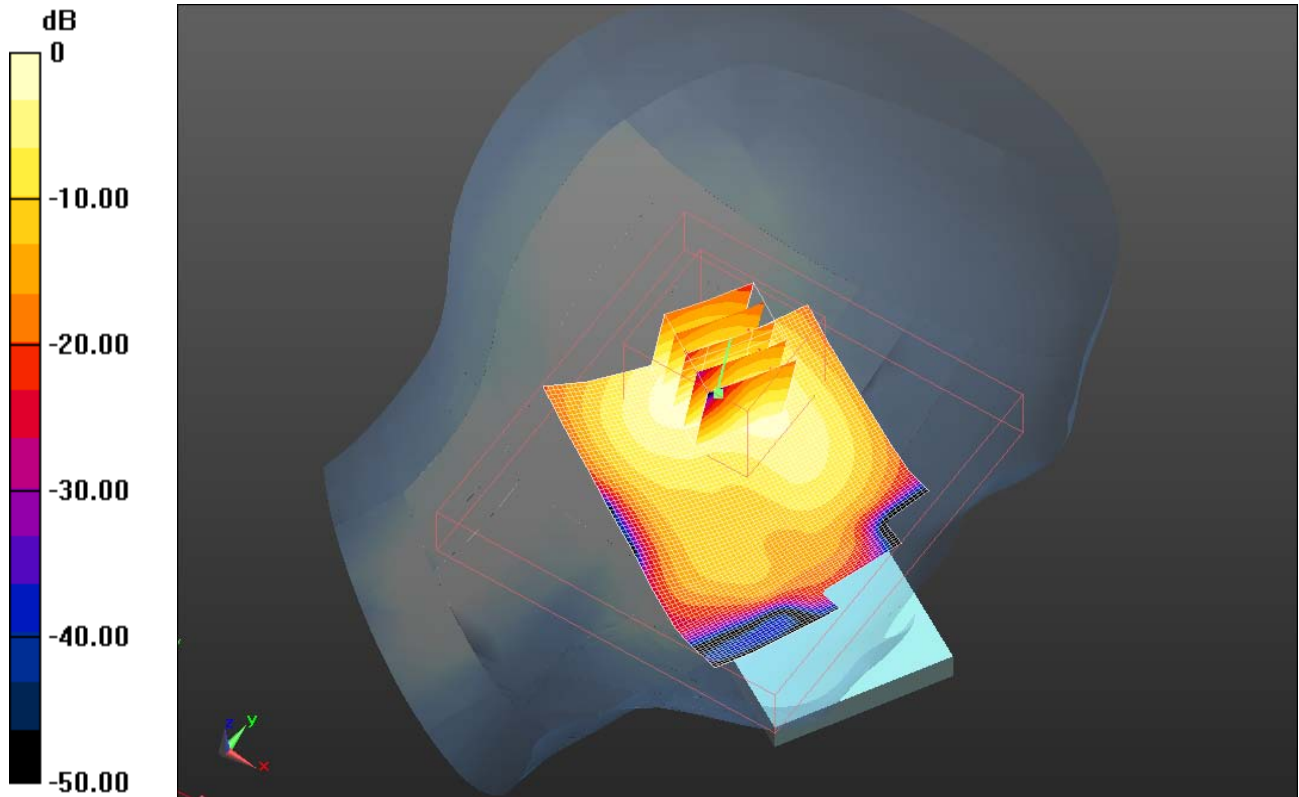

0 dB = 0.550mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>66(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 4/27/2011 5:59:30 PM, Date/Time: 4/27/2011 6:05:45 PM

Test Laboratory: RIM Testing Services

## LeftHandSide\_Tilt\_802.11b\_low\_chan\_amb\_temp\_22.9\_liq\_temp\_22.1C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE**

Communication System: 802.11 b (2450); Frequency: 2412 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated):  $f = 2412$  MHz;  $\sigma = 1.846$  mho/m;  $\epsilon_r = 39.148$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.6, 4.6, 4.6); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (61x81x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.549 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.540 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.959 W/kg

**SAR(1 g) = 0.516 mW/g; SAR(10 g) = 0.253 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.568 mW/g


Author Data  
**Andrew Becker**

Dates of Test  
**Apr 13 – July 4, 2011**


Test Report No  
**RTS-2579-1106-34C**

FCC ID:  
**L6ARDD70UW  
L6AREM70UW**

IC ID  
**2503A-RDD70UW  
2503A-REM70UW**

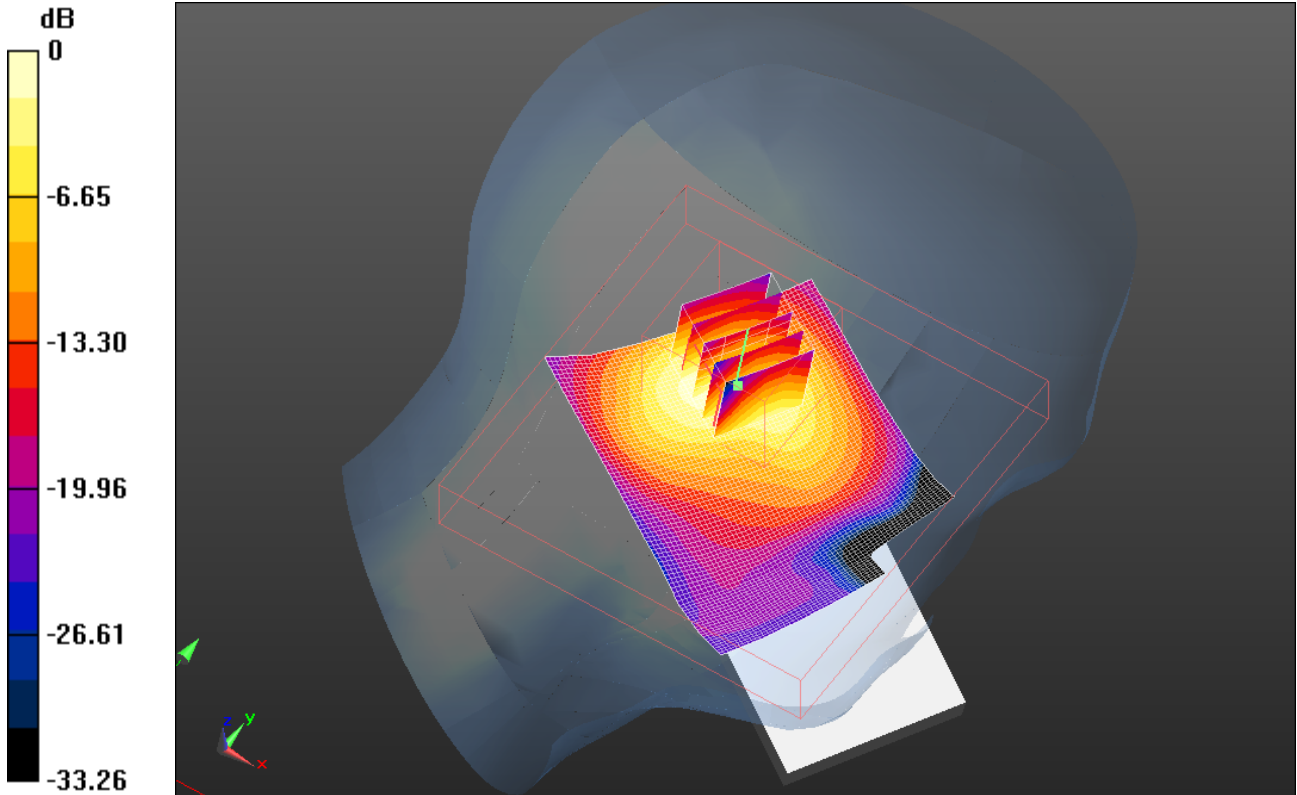

0 dB = 0.570mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>68(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 6/16/2011 9:39:12 AM, Date/Time: 6/16/2011 9:44:29 AM

Test Laboratory: RIM Testing Services

## RightHandSide\_BT\_mid\_chan\_amb\_temp\_23.4\_liq\_temp\_22.3C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 279CCF51**

Communication System: Bluetooth; Communication System Band: Bluetooth;  
Frequency: 2441 MHz; Communication System PAR: 0 dB  
Medium parameters used (interpolated):  $f = 2441$  MHz;  $\sigma = 1.883$  mho/m;  $\epsilon_r = 40.624$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.6, 4.6, 4.6); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.012 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 1.124 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.016 W/kg

**SAR(1 g) = 0.0078 mW/g; SAR(10 g) = 0.00382 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.00918 mW/g




Author Data  
**Andrew Becker**

Dates of Test  
**Apr 13 – July 4, 2011**


Test Report No  
**RTS-2579-1106-34C**

FCC ID:  
**L6ARDD70UW  
L6AREM70UW**

IC ID  
**2503A-RDD70UW  
2503A-REM70UW**

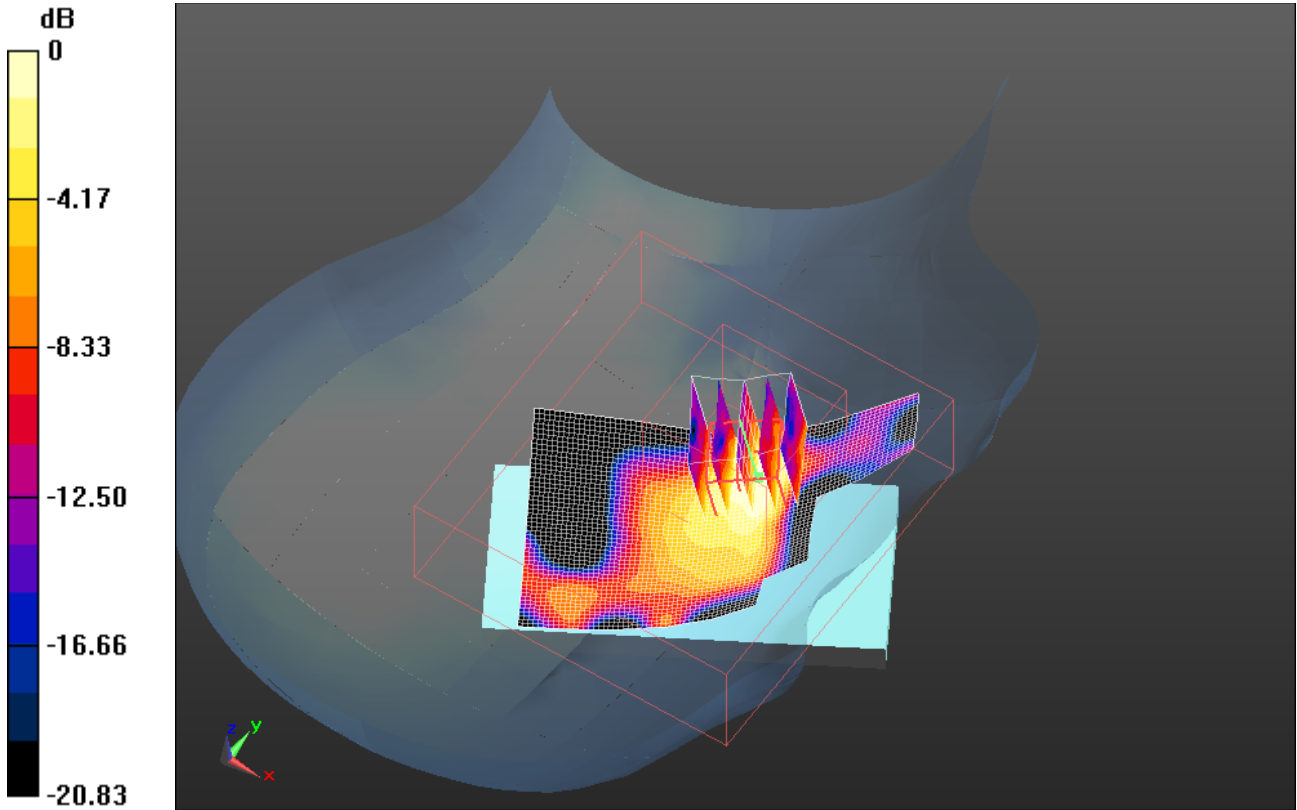

0 dB = 0.0092mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>70(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 6/16/2011 9:17:06 AM, Date/Time: 6/16/2011 9:22:53 AM

Test Laboratory: RIM Testing Services

## LeftHandSide\_BT\_mid\_chan\_amb\_temp\_23.3\_liq\_temp\_22.5C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 279CCF51**

Communication System: Bluetooth; Communication System Band: Bluetooth;  
Frequency: 2441 MHz; Communication System PAR: 0 dB  
Medium parameters used (interpolated):  $f = 2441$  MHz;  $\sigma = 1.883$  mho/m;  $\epsilon_r = 40.624$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section  
Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.6, 4.6, 4.6); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (61x81x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.00848 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm  
Reference Value = 1.192 V/m; Power Drift = -0.04 dB  
Peak SAR (extrapolated) = 0.00634 W/kg  
**SAR(1 g) = 0.00378 mW/g; SAR(10 g) = 0.00213 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.00407 mW/g


Author Data  
**Andrew Becker**

Dates of Test  
**Apr 13 – July 4, 2011**


Test Report No  
**RTS-2579-1106-34C**

FCC ID:  
**L6ARDD70UW  
L6AREM70UW**

IC ID  
**2503A-RDD70UW  
2503A-REM70UW**

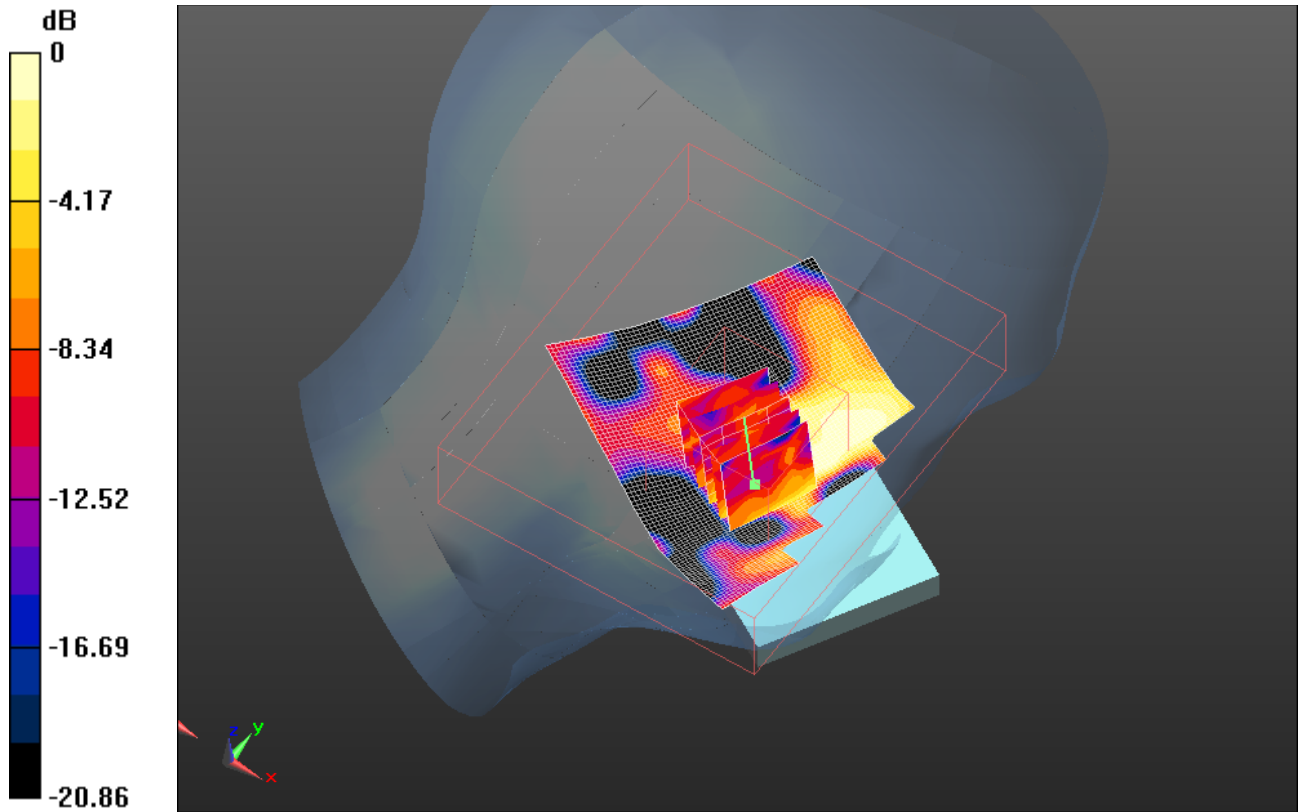


0 dB = 0.0041mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model          RDD71UW/REM71UW SAR Report</b>			Page <b>72(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW          L6AREM70UW</b>

**Z axis plot for the worst case head configuration:**



	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>73(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 7/4/2011 7:30:32 PM, Date/Time: 7/4/2011 7:35:51 PM, Date/Time:  
7/4/2011 7:43:12 PM

Test Laboratory: RIM Testing Services

## RightHandSide\_UMTS\_band\_IV\_mid\_chan\_amb\_temp\_23.7\_liq\_temp\_2 2.7C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27BC66F6**

Communication System: WCDMA FDD IV; Communication System Band: UMTS band IV; Frequency: 1732.6 MHz; Communication System PAR: 0 dB  
Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.354$  mho/m;  $\epsilon_r = 40.82$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)


**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.938 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x5)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm  
Reference Value = 10.216 V/m; Power Drift = -0.08 dB  
Peak SAR (extrapolated) = 1.203 W/kg  
**SAR(1 g) = 0.758 mW/g; SAR(10 g) = 0.456 mW/g**

	Document <b>Appendix B for the BlackBerry® Smartphone Model  RDD71UW/REM71UW SAR Report</b>			Page <b>74(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW  L6AREM70UW</b>

**Info: Interpolated medium parameters used for SAR evaluation.**

Maximum value of SAR (measured) = 0.792 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) 2 (8x6x5)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 10.216 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.174 W/kg


**SAR(1 g) = 0.770 mW/g; SAR(10 g) = 0.466 mW/g**

**Info: Interpolated medium parameters used for SAR evaluation.**

Maximum value of SAR (measured) = 0.819 mW/g

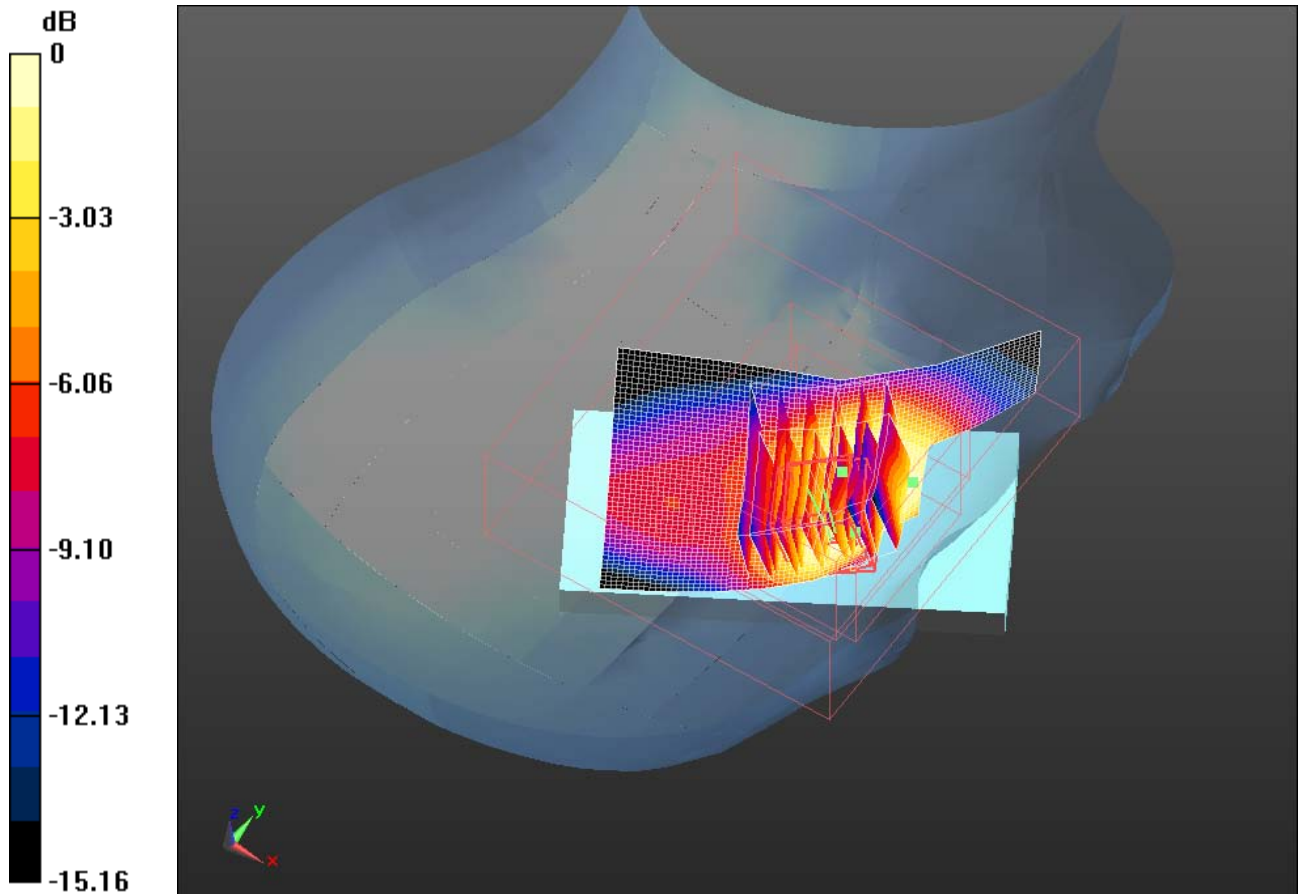

0 dB = 0.820mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>75(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 7/4/2011 7:56:23 PM, Date/Time: 7/4/2011 8:01:42 PM

Test Laboratory: RIM Testing Services

## RightHandSide\_Tilt\_UMTS\_band\_IV\_mid\_chan\_amb\_temp\_23.6\_liq\_tem p\_22.6C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27BC66F6**

Communication System: WCDMA FDD IV; Communication System Band: UMTS band IV; Frequency: 1732.6 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.354$  mho/m;  $\epsilon_r = 40.82$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position -/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.305 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x7x5)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.782 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.459 W/kg

**SAR(1 g) = 0.293 mW/g; SAR(10 g) = 0.176 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.314 mW/g




Author Data  
**Andrew Becker**

Dates of Test  
**Apr 13 – July 4, 2011**


Test Report No  
**RTS-2579-1106-34C**

FCC ID:  
**L6ARDD70UW  
L6AREM70UW**

IC ID  
**2503A-RDD70UW  
2503A-REM70UW**

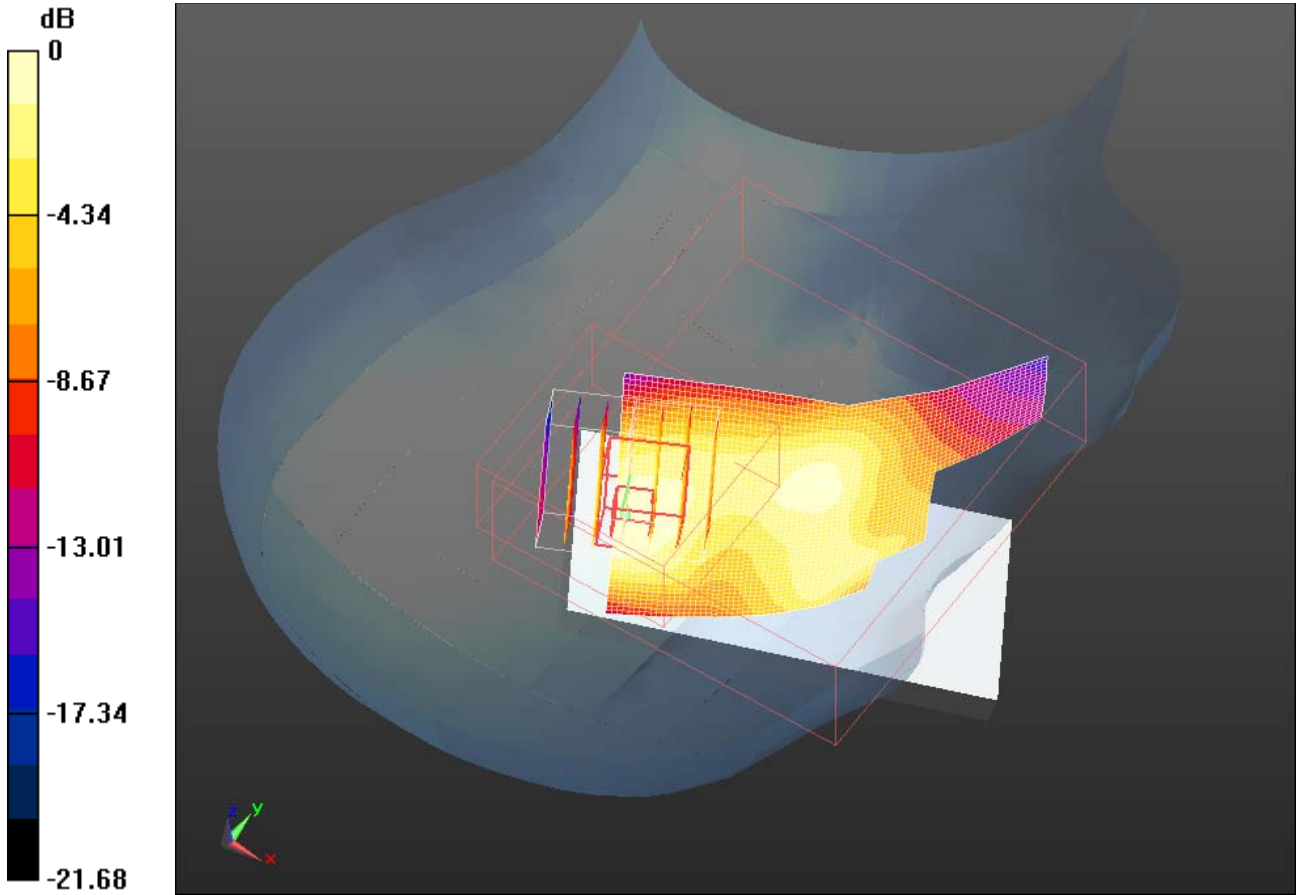

0 dB = 0.310mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>77(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 7/4/2011 9:09:43 PM, Date/Time: 7/4/2011 9:14:44 PM

Test Laboratory: RIM Testing Services

**LeftHandSide\_UMTS\_band\_IV\_low\_chan\_amb\_temp\_23.5\_liq\_temp\_22.**

**5C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27BC66F6**

Communication System: WCDMA FDD IV; Communication System Band: UMTS band IV; Frequency: 1712.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated):  $f = 1712.4$  MHz;  $\sigma = 1.339$  mho/m;  $\epsilon_r = 40.946$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position - Mid/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.912 mW/g

**Configuration/Touch position - Mid/Zoom Scan (5x5x7) (5x5x5)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 7.131 V/m; Power Drift = 0.0083 dB


Peak SAR (extrapolated) = 1.346 W/kg

**SAR(1 g) = 0.827 mW/g; SAR(10 g) = 0.455 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.921 mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>78(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

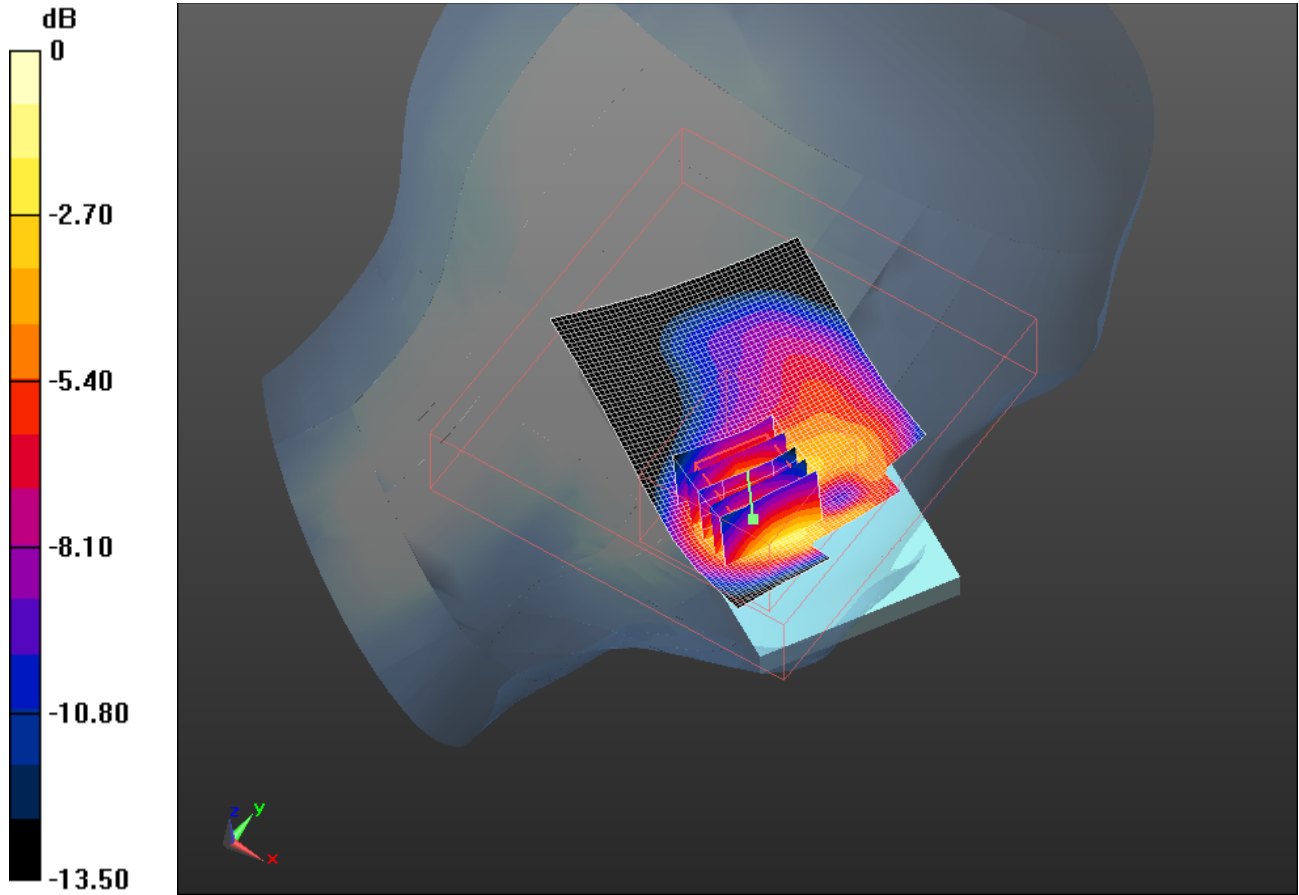

0 dB = 0.920mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>79(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 7/4/2011 8:58:44 PM, Date/Time: 7/4/2011 9:03:45 PM

Test Laboratory: RIM Testing Services

## LeftHandSide\_UMTS\_band\_IV\_mid\_chan\_amb\_temp\_23.5\_liq\_temp\_22 .5C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27BC66F6**

Communication System: WCDMA FDD IV; Communication System Band: UMTS band IV; Frequency: 1732.6 MHz; Communication System PAR: 0 dB  
Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.354$  mho/m;  $\epsilon_r = 40.82$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section  
Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position - Mid/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (interpolated) = 1.111 mW/g


**Configuration/Touch position - Mid/Zoom Scan (5x5x7) (5x5x5)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm  
Reference Value = 8.120 V/m; Power Drift = -0.13 dB  
Peak SAR (extrapolated) = 1.635 W/kg  
**SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.563 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.122 mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model          RDD71UW/REM71UW SAR Report</b>			Page <b>80(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW          L6AREM70UW</b>

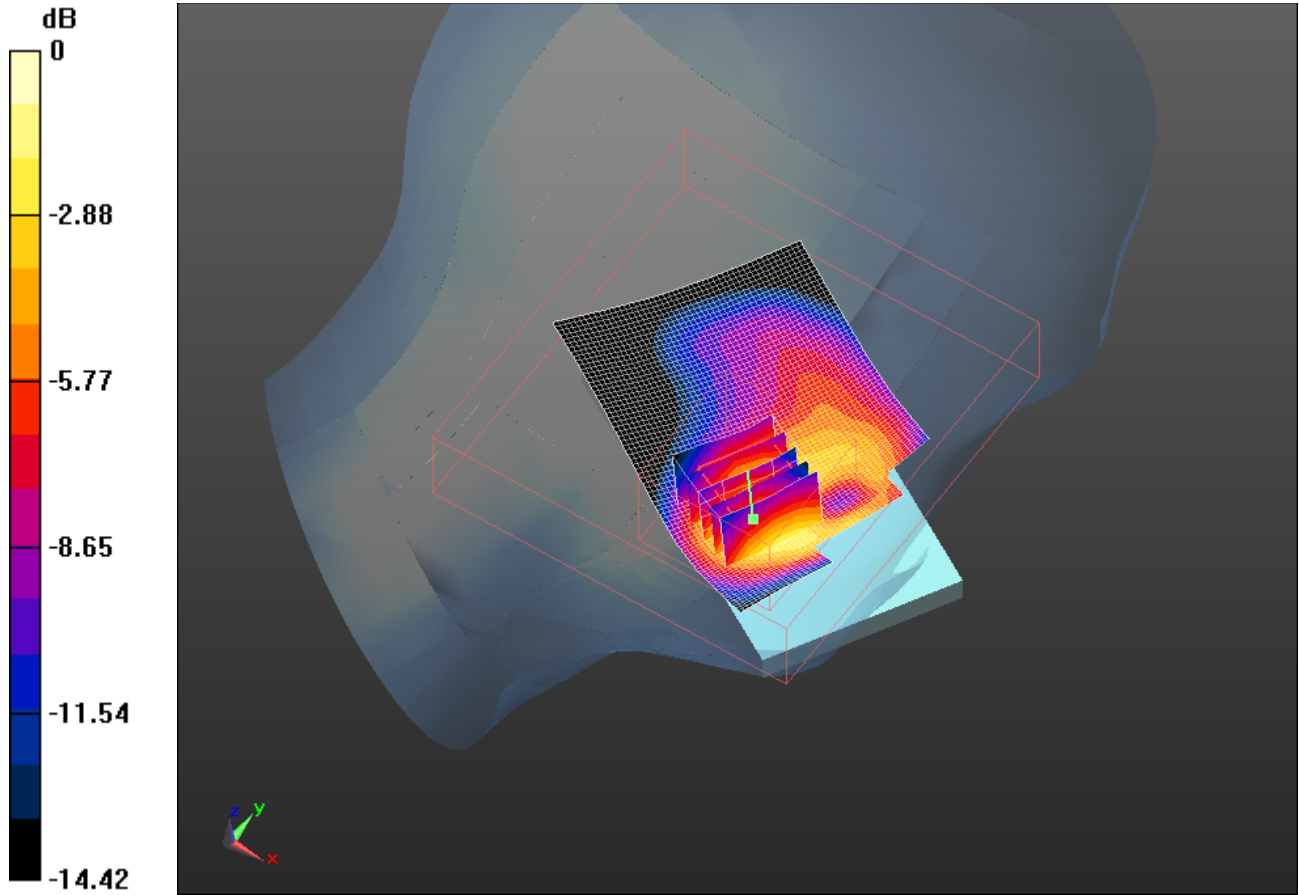

0 dB = 1.120mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>81(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 7/4/2011 9:21:32 PM, Date/Time: 7/4/2011 9:26:33 PM

Test Laboratory: RIM Testing Services

## LeftHandSide\_UMTS\_band\_IV\_high\_chan\_amb\_temp\_23.4\_liq\_temp\_2

### 2.4C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27BC66F6**

Communication System: WCDMA FDD IV; Communication System Band: UMTS band IV; Frequency: 1752.6 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated):  $f = 1752.6$  MHz;  $\sigma = 1.376$  mho/m;  $\epsilon_r = 40.773$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position - Mid/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.119 mW/g


**Configuration/Touch position - Mid/Zoom Scan (5x5x7) (5x5x5)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.214 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.660 W/kg

**SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.563 mW/g**

	Document <b>Appendix B for the BlackBerry® Smartphone Model          RDD71UW/REM71UW SAR Report</b>			Page <b>82(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW          L6AREM70UW</b>


Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.133 mW/g

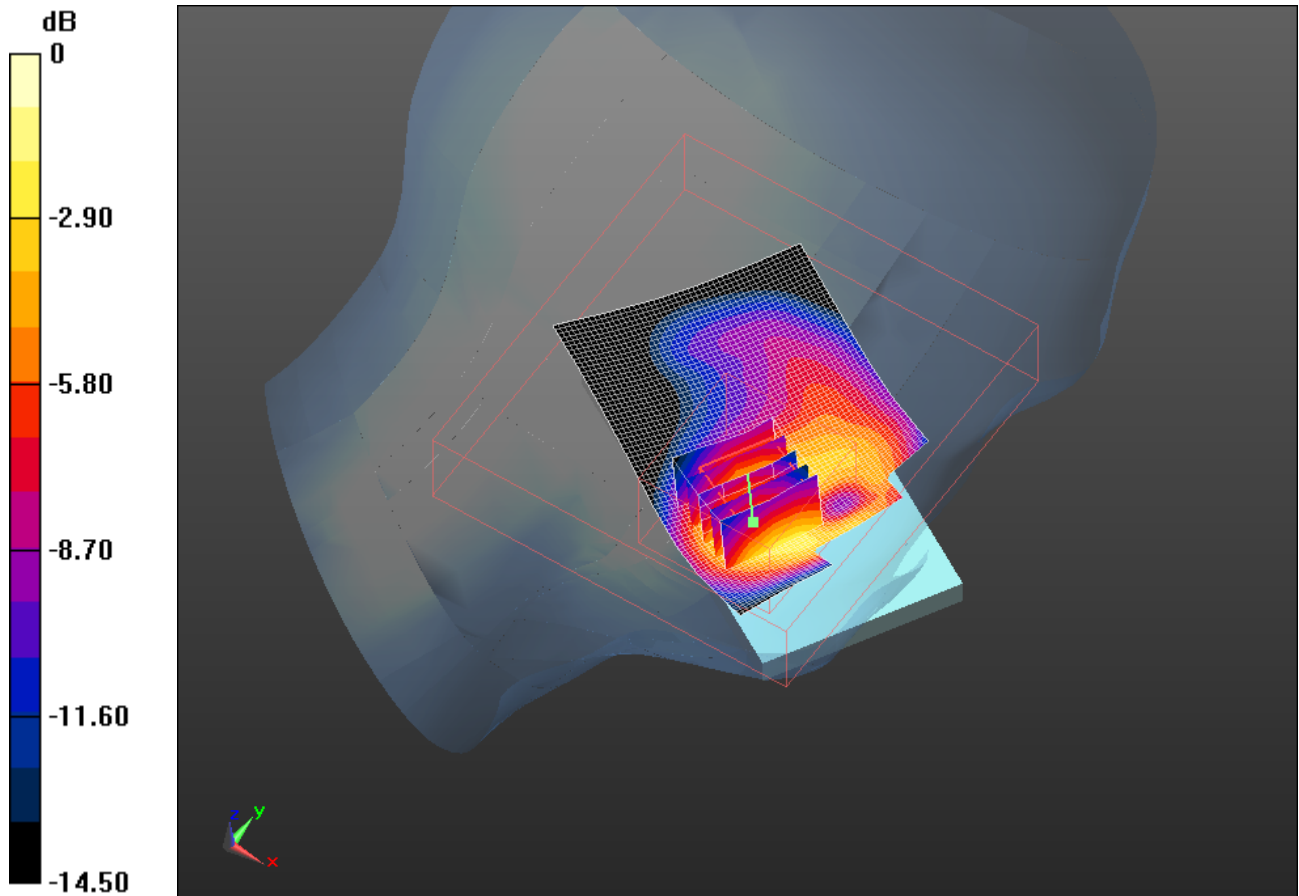

0 dB = 1.130mW/g



	Document <b>Appendix B for the BlackBerry® Smartphone Model</b> <b>RDD71UW/REM71UW SAR Report</b>			Page <b>83(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW</b> <b>L6AREM70UW</b>

Date/Time: 7/4/2011 9:33:05 PM, Date/Time: 7/4/2011 9:38:07 PM

Test Laboratory: RIM Testing Services

**LeftHandSide\_Tilt\_UMTS\_band\_IV\_mid\_chan\_amb\_temp\_23.4\_liq\_tem  
p\_22.4C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27BC66F6**

Communication System: WCDMA FDD IV; Communication System Band: UMTS band IV; Frequency: 1732.6 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.354$  mho/m;  $\epsilon_r = 40.82$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

**Configuration/Touch position - Mid/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.371 mW/g

**Configuration/Touch position - Mid/Zoom Scan (5x5x7) (5x5x5)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 14.261 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.430 W/kg

**SAR(1 g) = 0.299 mW/g; SAR(10 g) = 0.192 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.319 mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model  RDD71UW/REM71UW SAR Report</b>			Page <b>84(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW  L6AREM70UW</b>

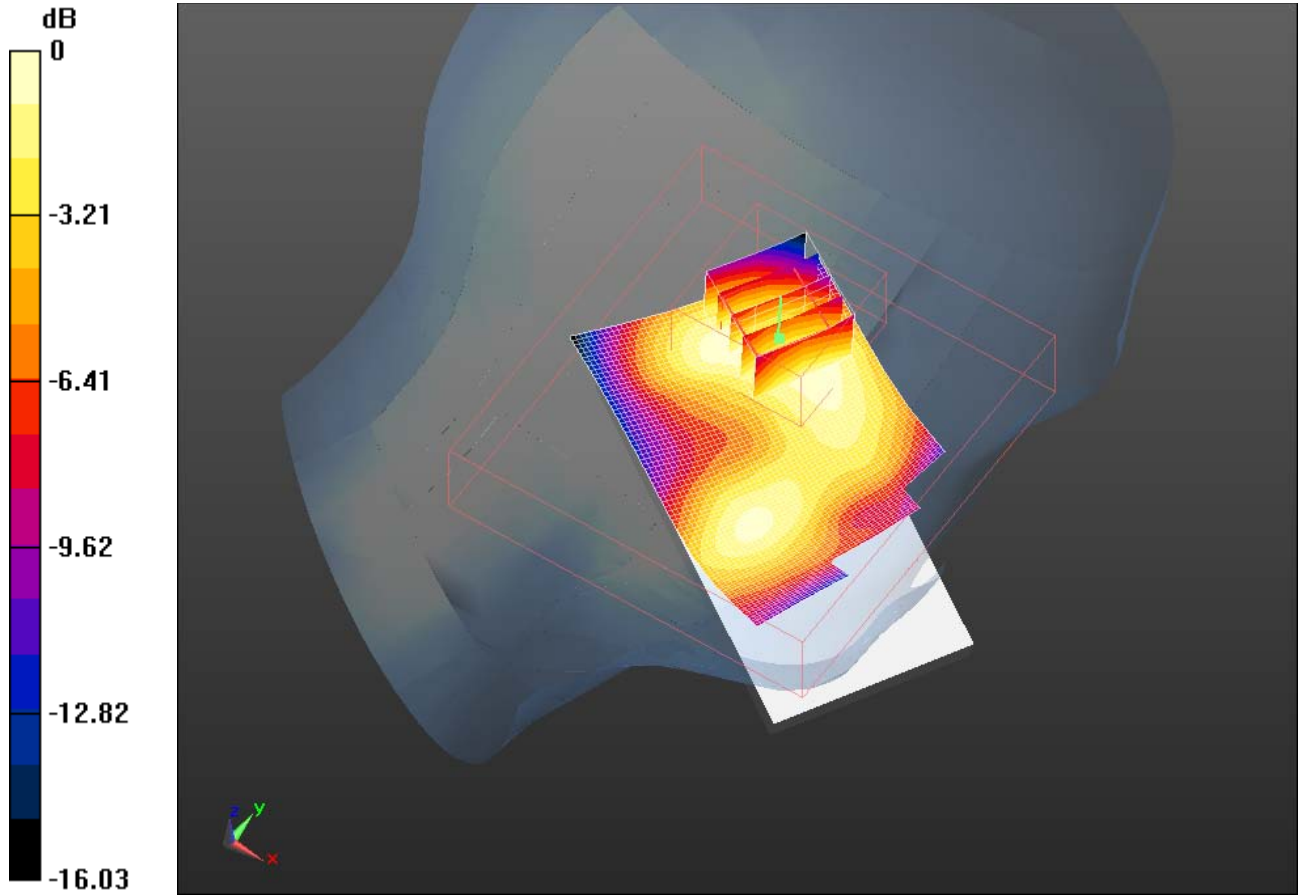

0 dB = 0.320mW/g

	Document <b>Appendix B for the BlackBerry® Smartphone Model          RDD71UW/REM71UW SAR Report</b>			Page <b>85(85)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Apr 13 – July 4, 2011</b>	Test Report No <b>RTS-2579-1106-34C</b>	FCC ID: <b>L6ARDD70UW          L6AREM70UW</b>

**Z axis plot for the worst case head configuration:**

