

	Document Appendix A for the BlackBerry® Smartphone Model RFM121LW SAR Report			Page 1(4)
Author Data Andrew Becker	Dates of Test March 26-28, 2014 Dec. 10-12, 2014	Test Report No RTS-6026-1404-02 Rev 2	FCC ID: L6ARFM120LW	

APPENDIX A: SAR DISTRIBUTION COMPARISON FOR ACCURACY VERIFICATION

	Document Appendix A for the BlackBerry® Smartphone Model RFM121LW SAR Report			Page 2(4)
Author Data Andrew Becker	Dates of Test March 26-28, 2014 Dec. 10-12, 2014	Test Report No RTS-6026-1404-02 Rev 2	FCC ID: L6ARFM120LW	

Date/Time: 12/11/2014 11:19:02 AM

Test Laboratory: BlackBerry RTS

**DipoleValidation_5200-
5800MHz_12_11_14_Amb_Tem_23.7C_Liq_Tem_22.4C**

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN 1033

Communication System: UID 0, CW (0); Frequency: 5200 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.773$ S/m; $\epsilon_r = 34.828$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.63, 4.63, 4.63); Calibrated: 11/10/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS 52.8.8(1222); SEMCAD X 14.6.10(7331)

**System Performance Check at Frequency 5.2 GHz/d=10mm,
Pin=1000mW, dist=2.0mm (EX-Probe)/Area Scan (61x91x1):** Interpolated
grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 177 W/kg

**System Performance Check at Frequency 5.2 GHz/d=10mm,
Pin=1000mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x12)
(7x7x12)/Cube 0:** Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 197.9 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 330 W/kg
SAR(1 g) = 82.8 W/kg; SAR(10 g) = 24.1 W/kg (SAR corrected for target medium)
Maximum value of SAR (measured) = 168 W/kg

	Document Appendix A for the BlackBerry® Smartphone Model RFM121LW SAR Report			Page 3(4)
Author Data Andrew Becker	Dates of Test March 26-28, 2014 Dec. 10-12, 2014	Test Report No RTS-6026-1404-02 Rev 2	FCC ID: L6ARFM120LW	

Date/Time: 12/11/2014 12:09:25 PM

Test Laboratory: BlackBerry RTS

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN 1033

Communication System: UID 0, CW (0); Frequency: 5800 MHz

Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 5.424 \text{ S/m}$; $\epsilon_r = 34.285$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.34, 4.34, 4.34); Calibrated: 11/10/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS 52.8.8(1222); SEMCAD X 14.6.10(7331)

System Performance Check at Frequency 5.8 GHz/d=10mm,

Pin=1000mW, dist=2.0mm (EX-Probe)/Area Scan (61x91x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 187 W/kg

System Performance Check at Frequency 5.8 GHz/d=10mm,

Pin=1000mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x12)

(7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$



Reference Value = 191.7 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 376 W/kg

SAR(1 g) = 86.2 W/kg; SAR(10 g) = 24.7 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 177 W/kg

	Document Appendix A for the BlackBerry® Smartphone Model RFM121LW SAR Report			Page 4(4)
Author Data Andrew Becker	Dates of Test March 26-28, 2014 Dec. 10-12, 2014	Test Report No RTS-6026-1404-02 Rev 2	FCC ID: L6ARFM120LW	

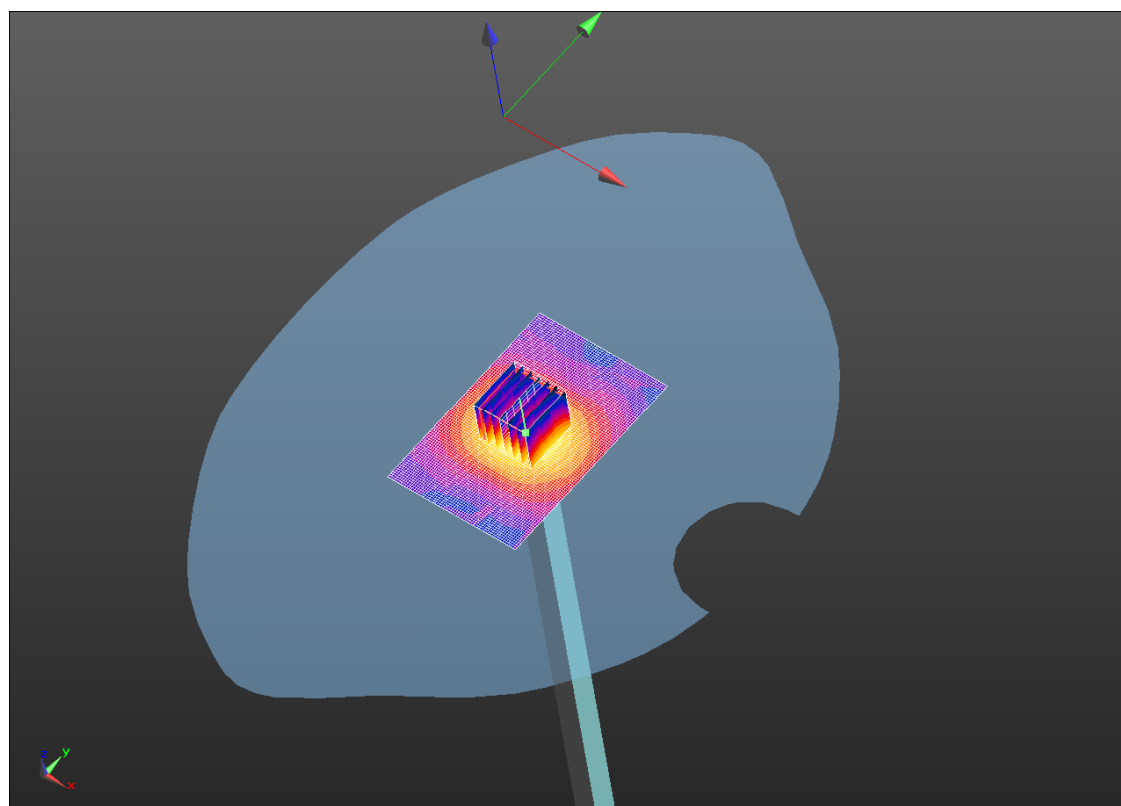

0 dB = 177 W/kg = 22.48 dBW/kg