



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	COMTREND Corporation
Applicant Address	3F-1, 10 Lane 609, Chung Hsin Road, Section 5, San Chung Dist, New Taipei City 24159, Taiwan
FCC ID	L9VPG9172AC
Manufacturer's company	Datamax Electronics (Dong Guan) Co., Ltd.
Manufacturer Address	Niu shan Foreign Economic Industrial park, Dong Cheng District, Dong Guan City, Guang Dong , China.

Product Name	G.hn+11ac WiFi Powerline Adapter
Brand Name	COMTREND
Model No.	PG-9172AC
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Jul. 22, 2016
Final Test Date	Aug. 02, 2017
Submission Type	Original Equipment

Statement

Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB558074 D01 v04 and KDB 662911 D01 v02r01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	5
3.5. Table for Test Modes	6
3.6. Table for Testing Locations.....	7
3.7. Table for Supporting Units	7
3.8. Table for Parameters of Test Software Setting	7
3.9. EUT Operation during Test	8
3.10. Duty Cycle.....	8
3.11. Test Configurations	9
4. TEST RESULT	11
4.1. AC Power Line Conducted Emissions Measurement.....	11
4.2. Maximum Conducted Output Power Measurement.....	15
4.3. Power Spectral Density Measurement	17
4.4. 6dB Spectrum Bandwidth Measurement	24
4.5. Radiated Emissions Measurement	31
4.6. Emissions Measurement	56
4.7. Antenna Requirements	88
5. LIST OF MEASURING EQUIPMENTS	89
6. MEASUREMENT UNCERTAINTY.....	91
APPENDIX A. TEST PHOTOS	A1 ~ A4
APPENDIX B. RADIATED EMISSION CO-LOCATION REPORT.....	B1 ~ B3
PHOTOGRAPHS OF EUT V01	

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR710518AA	Rev. 01	Initial issue of report	Aug. 22, 2017

1. VERIFICATION OF COMPLIANCE

Product Name : G.hn+11ac WiFi Powerline Adapter
Brand Name : COMTREND
Model No. : PG-9172AC
Applicant : COMTREND Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jul. 22, 2016 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Cliff Chang

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C			
Part	Rule Section	Description of Test	Result
4.1	15.207	AC Power Line Conducted Emissions	Complies
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies
4.3	15.247(e)	Power Spectral Density	Complies
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies
4.5	15.247(d)	Radiated Emissions	Complies
4.6	15.247(d)	Band Edge Emissions	Complies
4.7	15.203	Antenna Requirements	Complies

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	IEEE 802.11b: WLAN (1TX, 1RX) IEEE 802.11g: WLAN (2TX, 2RX) IEEE 802.11n: WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: see the below table
Data Modulation	IEEE 802.11b: DSSS (BPSK / QPSK / CCK) IEEE 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	IEEE 802.11b: DSSS (1/ 2/ 5.5/11) IEEE 802.11g: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n: see the below table
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Bandwidth (99%)	IEEE 802.11b: 12.24 MHz IEEE 802.11g: 17.63 MHz IEEE 802.11n MCS0 (HT20): 18.58 MHz IEEE 802.11n MCS0 (HT40): 37.34 MHz
Maximum Conducted Output Power	IEEE 802.11b: 22.93 dBm IEEE 802.11g: 25.03 dBm IEEE 802.11n MCS0 (HT20): 25.01 dBm IEEE 802.11n MCS0 (HT40): 21.09 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description
Beamforming Function	☒ With beamforming ☐ Without beamforming

Note: The product has beamforming function for 802.11a/n/ac in 5GHz band.

Antenna and Bandwidth

Antenna	Single (TX)		Two (TX)	
Bandwidth Mode	20 MHz	40 MHz	20 MHz	40 MHz
IEEE 802.11b	V	X	X	X
IEEE 802.11g	X	X	V	X
IEEE 802.11n	X	X	V	V

IEEE 11n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS 0-15
802.11n (HT40)	2	MCS 0-15
Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT supports HT20 and HT40. Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n		

3.2. Accessories

Others
Power cable 1, non-shielded 1.5m (Round head)
Power cable 2, non-shielded 1.5m (Flat head)

3.3. Table for Filed Antenna

Ant.	Brand Holder	Model Name	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	Master Wave Technology Co., Ltd.	502219-293	Dipole Antenna	I-PEX	2.41	3.80
2	Master Wave Technology Co., Ltd.	502219-292	Dipole Antenna	I-PEX	2.31	3.62

Note: The EUT has two antennas.

For 2.4GHz WLAN function

For IEEE 802.11b mode (1TX, 1RX):

The EUT supports the antenna with TX/RX diversity function.

Ant. 1 generated the worst case than Ant. 2, so it is tested and recorded in the report.

For IEEE 802.11g/n mode (2TX, 2RX):

Ant. 1 and Ant. 2 can be used as transmitting/receiving antennas.

Ant. 1 and Ant. 2 could transmit/receive simultaneously.

For 5GHz WLAN function

For IEEE 802.11a/n/ac mode (2TX, 2RX):

Ant. 1 and Ant. 2 can be used as transmitting/receiving antennas.

Ant. 1 and Ant. 2 could transmit/receive simultaneously.

3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Ant.
AC Power Line Conducted Emissions	CTX	-	-	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/3/6/9/11	1
	11g/BPSK	6 Mbps	1/3/6/9/11	1+2
	11n HT20	MCS0	1/3/6/9/11	1+2
	11n HT40	MCS0	3/6/9	1+2
Power Spectral Density	11b/CCK	1 Mbps	1/3/6/9/11	1
	11g/BPSK	6 Mbps	1/3/6/9/11	1+2
	11n HT20	MCS0	1/3/6/9/11	1+2
	11n HT40	MCS0	3/6/9	1+2
6dB Spectrum Bandwidth	11b/CCK	1 Mbps	1/3/6/9/11	1
	11g/BPSK	6 Mbps	1/3/6/9/11	1+2
	11n HT20	MCS0	1/3/6/9/11	1+2
	11n HT40	MCS0	3/6/9	1+2
Radiated Emissions 9kHz~1GHz	CTX	-	-	-
Radiated Emissions 1GHz~10 th Harmonic	11b/CCK	1 Mbps	1/3/6/9/11	1
	11g/BPSK	6 Mbps	1/3/6/9/11	1+2
	11n HT20	MCS0	1/3/6/9/11	1+2
	11n HT40	MCS0	3/6/9	1+2
Band Edge Emissions	11b/CCK	1 Mbps	1/3/6/9/11	1
	11g/BPSK	6 Mbps	1/3/6/9/11	1+2
	11n HT20	MCS0	1/3/6/9/11	1+2
	11n HT40	MCS0	3/6/9	1+2

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. CTX-EUT

For Radiated Emission test:

The EUT was performed at Y axis and Z axis position. The worst case was found at Y axis, so it was selected to perform test and its test result was written in the report.

Mode 1. CTX- EUT in Y axis

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA710518) and Radiated Emission Co-location (please refer to Appendix B) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Designation No.	IC File No.
03CH01-CB	SAC	Hsin Chu	TW0006	IC 4086D
CO01-CB	Conduction	Hsin Chu	TW0006	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: 03CH01-CB and TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	Telnet				
Mode	Test Frequency (MHz)				
	NCB: 20MHz				
	2412 MHz	2422 MHz	2437 MHz	2452 MHz	2462 MHz
802.11b	12	12	14	14	16
802.11g	19/16	25/23	30/28	23/20	17/15
802.11n MCS0 HT20	17/14	25/21	30/28	24/20	16/15

Test Software Version	Telnet		
Mode	Test Frequency (MHz)		
	NCB: 40MHz		
	2422 MHz	2437 MHz	2452 MHz
802.11n MCS0 HT40	14/11	20/18	9/7

3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.10. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b	1.000	1.000	100.00%	0.00	0.01
802.11g	1.000	1.000	100.00%	0.00	0.01
802.11n MCS0 HT20	1.000	1.000	100.00%	0.00	0.01
802.11n MCS0 HT40	1.000	1.000	100.00%	0.00	0.01


3.11. Test Configurations

3.11.1. AC Power Line Conduction Emissions Test Configuration

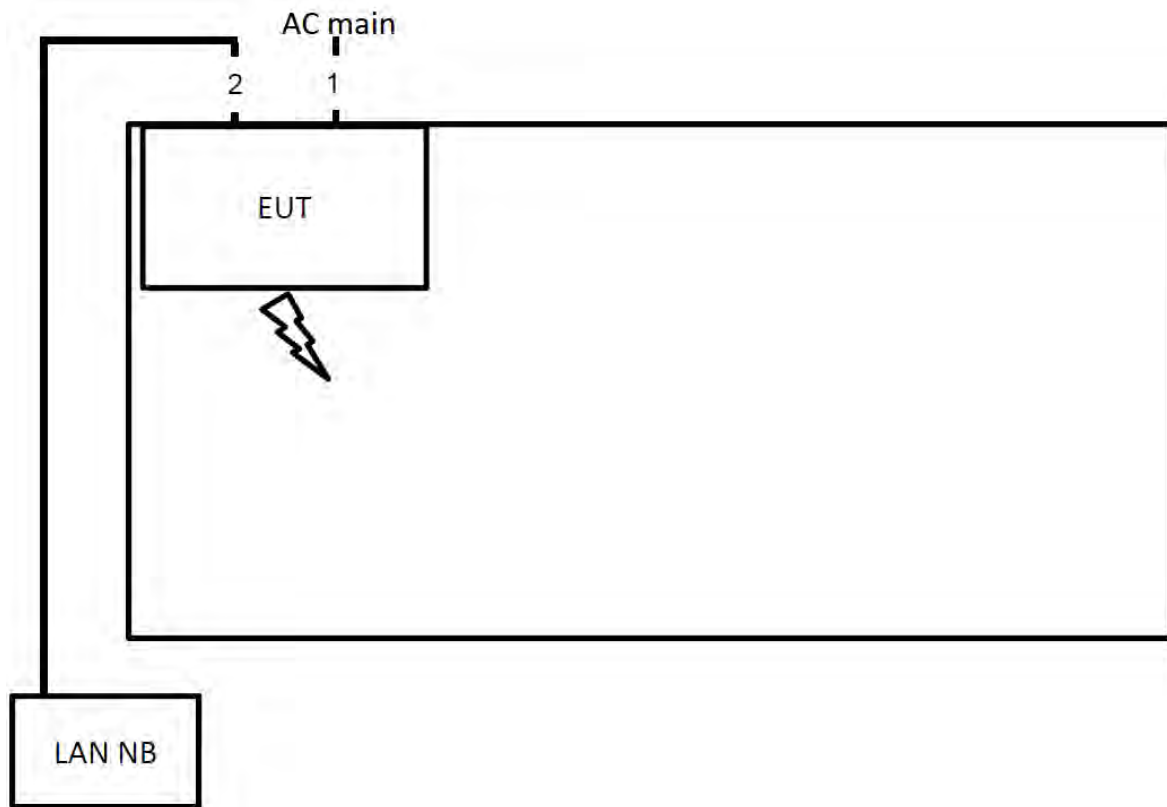

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

3.11.2. Radiation Emissions Test Configuration

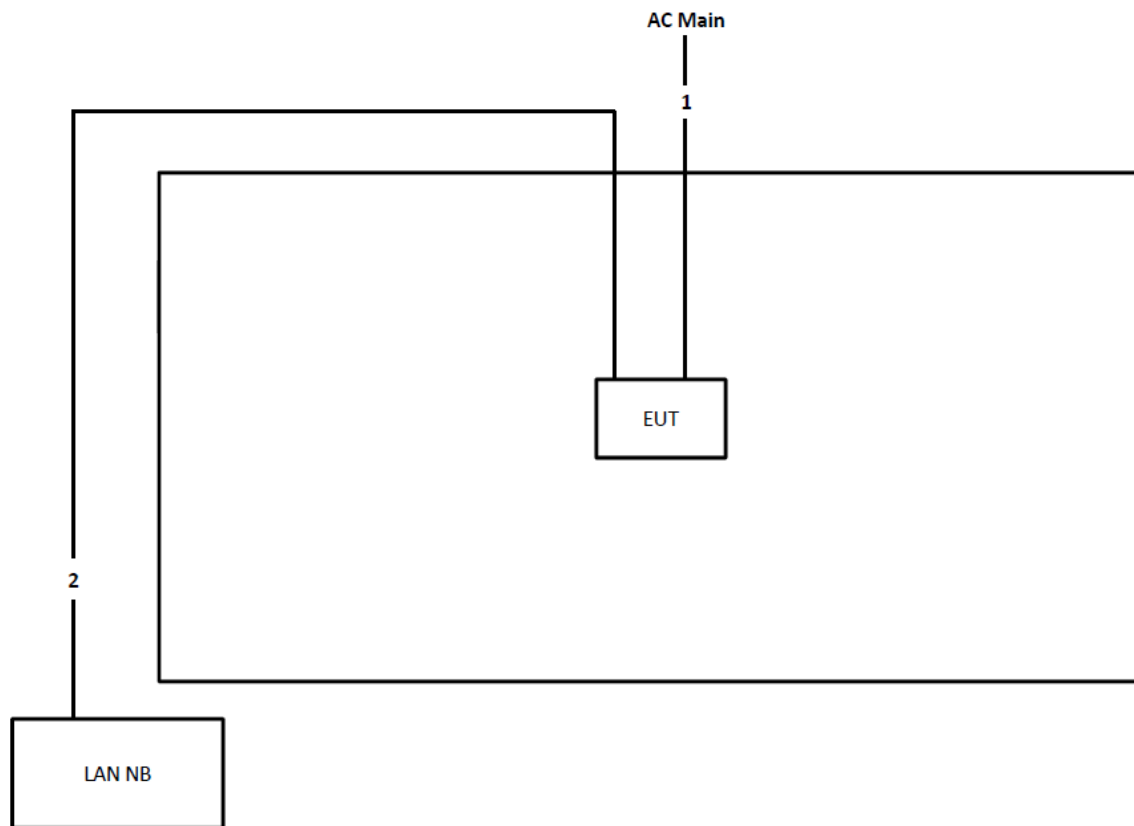

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

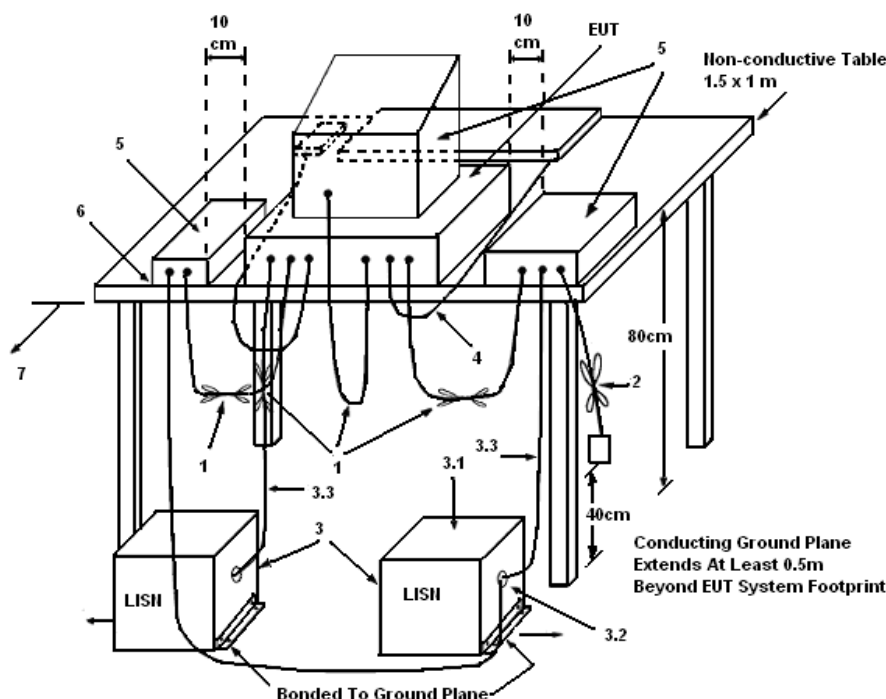

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	22°C	Humidity	57%
Test Engineer	Kane Liu	Phase	Line
Configuration	CTX		

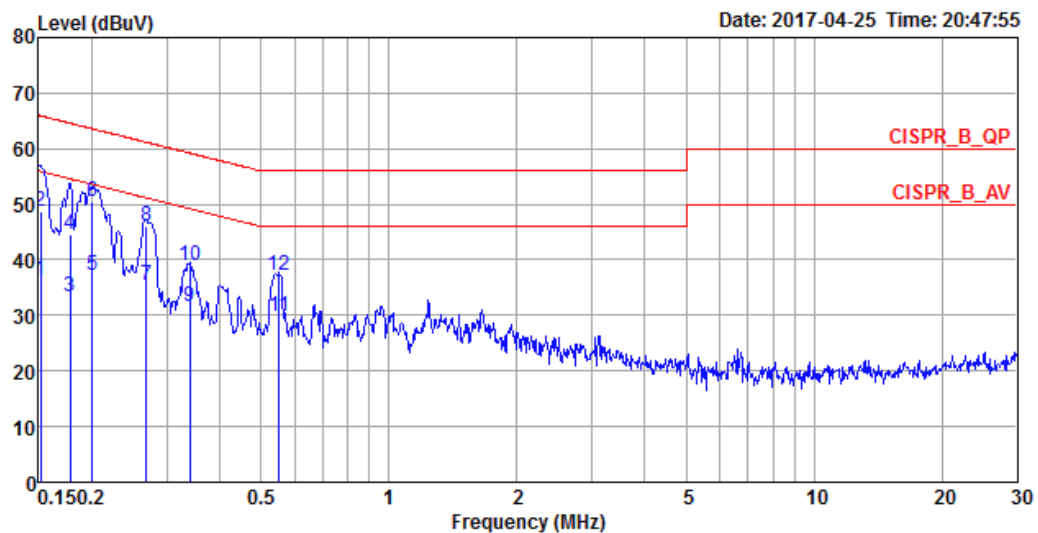

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1516	36.38	-19.53	55.91	26.39	9.95	0.04	Average	LINE
2	0.1516	48.65	-17.26	65.91	38.66	9.95	0.04	QP	LINE
3	0.1777	33.39	-21.20	54.59	23.40	9.94	0.05	Average	LINE
4	0.1777	44.52	-20.07	64.59	34.53	9.94	0.05	QP	LINE
5	0.2007	37.30	-16.28	53.58	27.32	9.93	0.05	Average	LINE
6	0.2007	50.60	-12.98	63.58	40.62	9.93	0.05	QP	LINE
7	0.2687	35.42	-15.74	51.16	25.46	9.91	0.05	Average	LINE
8	0.2687	46.07	-15.09	61.16	36.11	9.91	0.05	QP	LINE
9	0.3392	31.71	-17.51	49.22	21.77	9.90	0.04	Average	LINE
10	0.3392	39.05	-20.17	59.22	29.11	9.90	0.04	QP	LINE
11	0.5523	29.79	-16.21	46.00	19.83	9.92	0.04	Average	LINE
12	0.5523	37.29	-18.71	56.00	27.33	9.92	0.04	QP	LINE

Temperature	22°C	Humidity	57%
Test Engineer	Kane Liu	Phase	Neutral
Configuration	CTX		

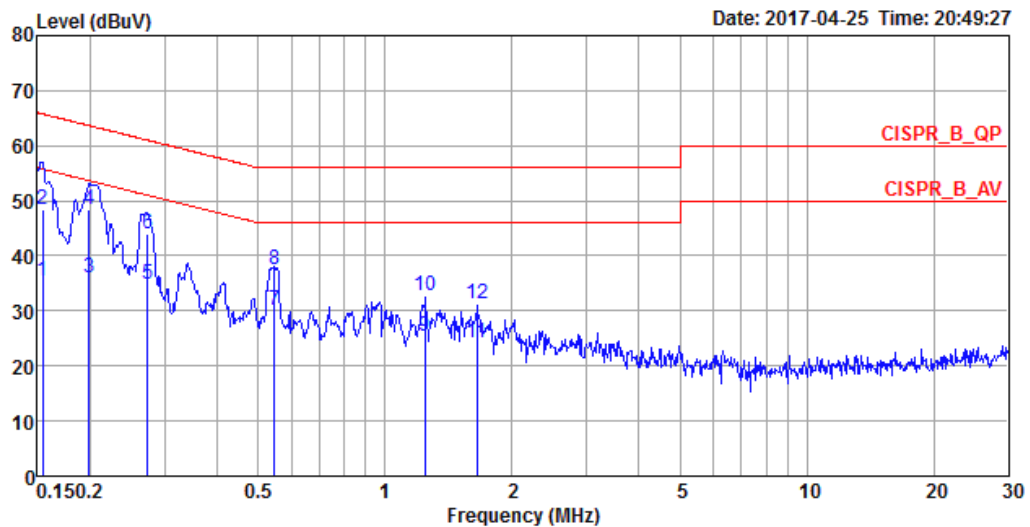

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1540	35.44	-20.34	55.78	25.46	9.94	0.04	Average	NEUTRAL
2	0.1540	48.48	-17.30	65.78	38.50	9.94	0.04	QP	NEUTRAL
3	0.1986	35.90	-17.77	53.67	25.87	9.98	0.05	Average	NEUTRAL
4	0.1986	48.39	-15.28	63.67	38.36	9.98	0.05	QP	NEUTRAL
5	0.2730	34.79	-16.24	51.03	24.77	9.97	0.05	Average	NEUTRAL
6	0.2730	43.94	-17.09	61.03	33.92	9.97	0.05	QP	NEUTRAL
7	0.5464	30.00	-16.00	46.00	19.99	9.97	0.04	Average	NEUTRAL
8	0.5464	37.37	-18.63	56.00	27.36	9.97	0.04	QP	NEUTRAL
9	1.2422	25.36	-20.64	46.00	15.32	9.98	0.06	Average	NEUTRAL
10	1.2422	32.71	-23.29	56.00	22.67	9.98	0.06	QP	NEUTRAL
11	1.6537	24.35	-21.65	46.00	14.31	9.97	0.07	Average	NEUTRAL
12	1.6537	31.30	-24.70	56.00	21.26	9.97	0.07	QP	NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

The limit for output power is 30dBm.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB558074 D01 v04 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

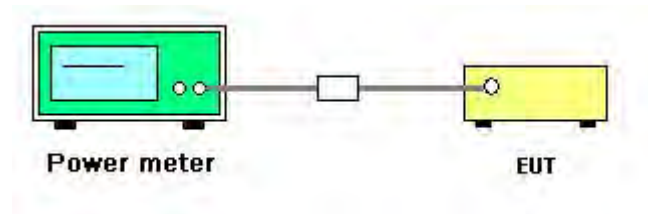

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	20°C	Humidity	60%
Test Engineer	Ron Huang / Serway Li	Test Date	Mar. 11, 2017 ~ Aug. 02, 2017

Mode	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
802.11b	2412 MHz	21.99	30.00	Complies
	2422 MHz	20.35	30.00	Complies
	2437 MHz	22.54	30.00	Complies
	2452 MHz	21.15	30.00	Complies
	2462 MHz	22.93	30.00	Complies

Mode	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
802.11g	2412 MHz	17.41	17.58	20.51	30.00	Complies
	2422 MHz	21.80	22.23	25.03	30.00	Complies
	2437 MHz	21.50	21.70	24.61	30.00	Complies
	2452 MHz	21.82	21.71	24.78	30.00	Complies
	2462 MHz	16.89	17.11	20.01	30.00	Complies
802.11n MCS0 HT20	2412 MHz	16.69	16.96	19.84	30.00	Complies
	2422 MHz	21.96	22.03	25.01	30.00	Complies
	2437 MHz	21.68	21.77	24.74	30.00	Complies
	2452 MHz	21.66	21.54	24.61	30.00	Complies
	2462 MHz	16.76	17.24	20.02	30.00	Complies
802.11n MCS0 HT40	2422 MHz	14.99	15.32	18.17	30.00	Complies
	2437 MHz	17.92	18.24	21.09	30.00	Complies
	2452 MHz	13.72	13.46	16.60	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test was performed in accordance with KDB558074 D01 v04 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

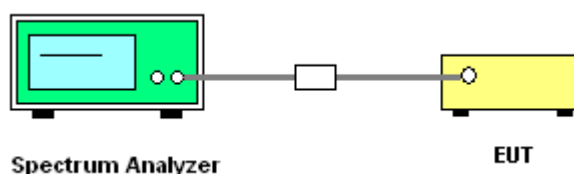

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	20°C	Humidity	60%
Test Engineer	Ron Huang / Serway Li		

Mode	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
802.11b	2412 MHz	-7.54	8.00	Complies
	2422 MHz	-7.78	8.00	Complies
	2437 MHz	-6.94	8.00	Complies
	2452 MHz	-7.56	8.00	Complies
	2462 MHz	-6.05	8.00	Complies

Mode	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Total		
802.11g	2412 MHz	-10.42	-10.25	-7.32	8.00	Complies
	2422 MHz	-8.29	-8.14	-5.20	8.00	Complies
	2437 MHz	-8.30	-8.24	-5.26	8.00	Complies
	2452 MHz	-8.10	-8.47	-5.27	8.00	Complies
	2462 MHz	-11.83	-11.42	-8.61	8.00	Complies
802.11n MCS0 HT20	2412 MHz	-12.11	-12.07	-9.08	8.00	Complies
	2422 MHz	-8.78	-8.40	-5.58	8.00	Complies
	2437 MHz	-8.35	-8.14	-5.23	8.00	Complies
	2452 MHz	-8.08	-8.32	-5.19	8.00	Complies
	2462 MHz	-11.55	-11.51	-8.52	8.00	Complies
802.11n MCS0 HT40	2422 MHz	-15.63	-15.38	-12.49	8.00	Complies
	2437 MHz	-12.86	-12.67	-9.75	8.00	Complies
	2452 MHz	-16.26	-16.93	-13.57	8.00	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ant}} \left\{ \sum_{k=1}^{N_{freq}} G_{j,k} \right\}^2}{N_{ANT}} \right] = 5.37\text{dBi} < 6\text{dBi}, \text{ so the limit doesn't reduce.}$$

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz / Ant. 1




Date: 11.MAR.2017 03:48:16

Power Density Plot on Configuration IEEE 802.11g / 2422 MHz / Ant. 1

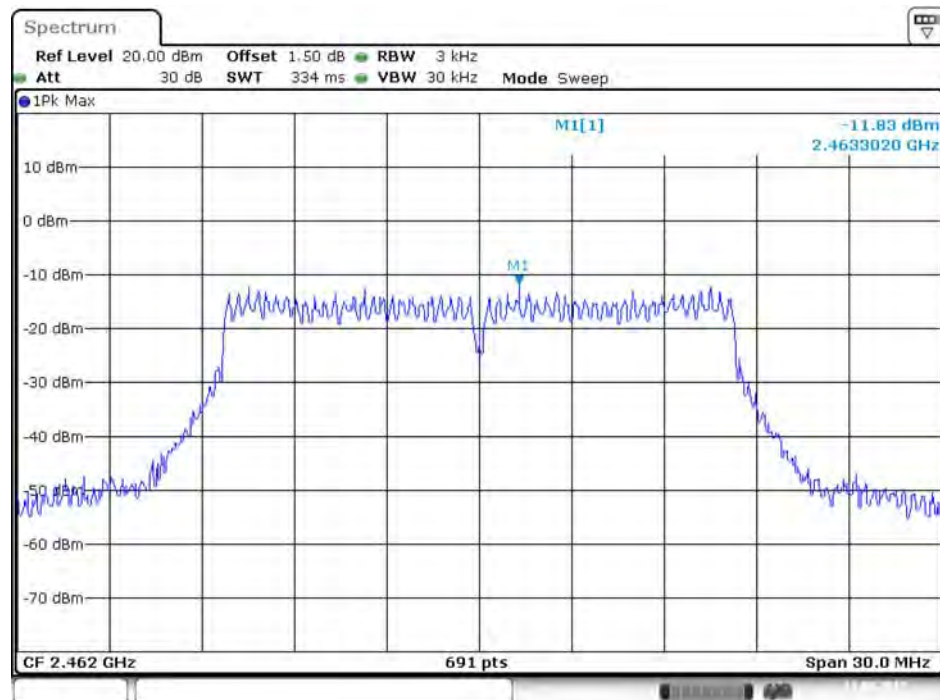


Date: 11.MAR.2017 04:16:42

Power Density Plot on Configuration IEEE 802.11g / 2422 MHz / Ant. 2

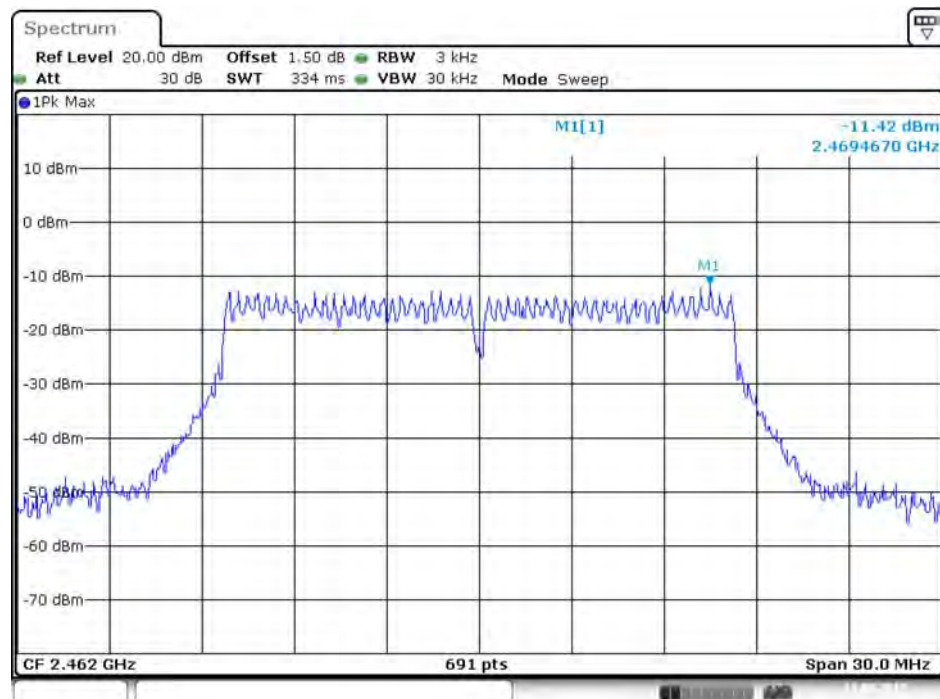


Date: 11.MAR.2017 04:16:28

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2452 MHz / Ant. 1

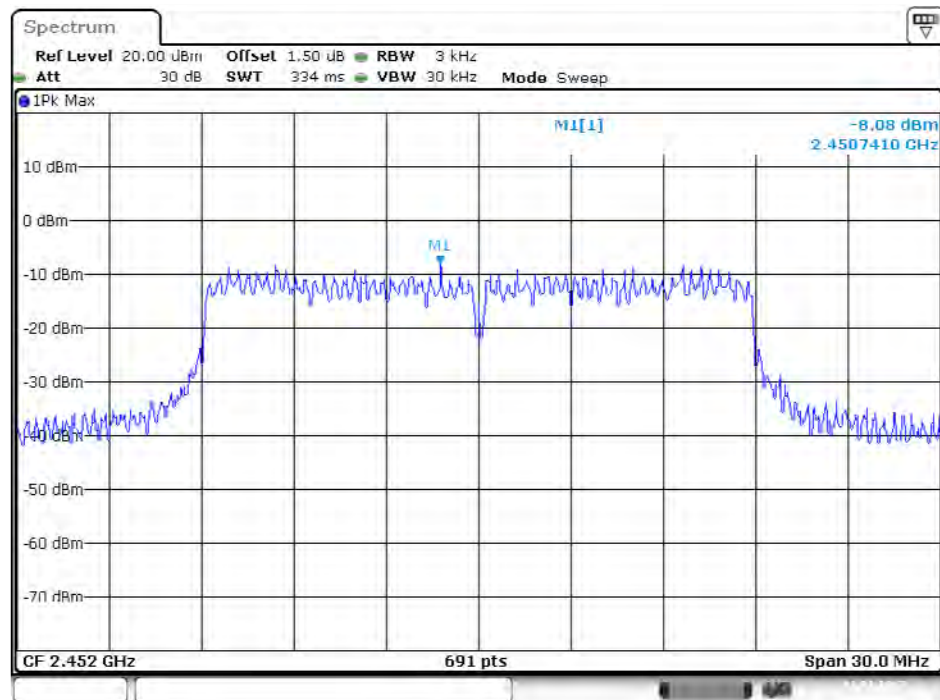


Date: 11.MAR.2017 04:30:21

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2452 MHz / Ant. 2

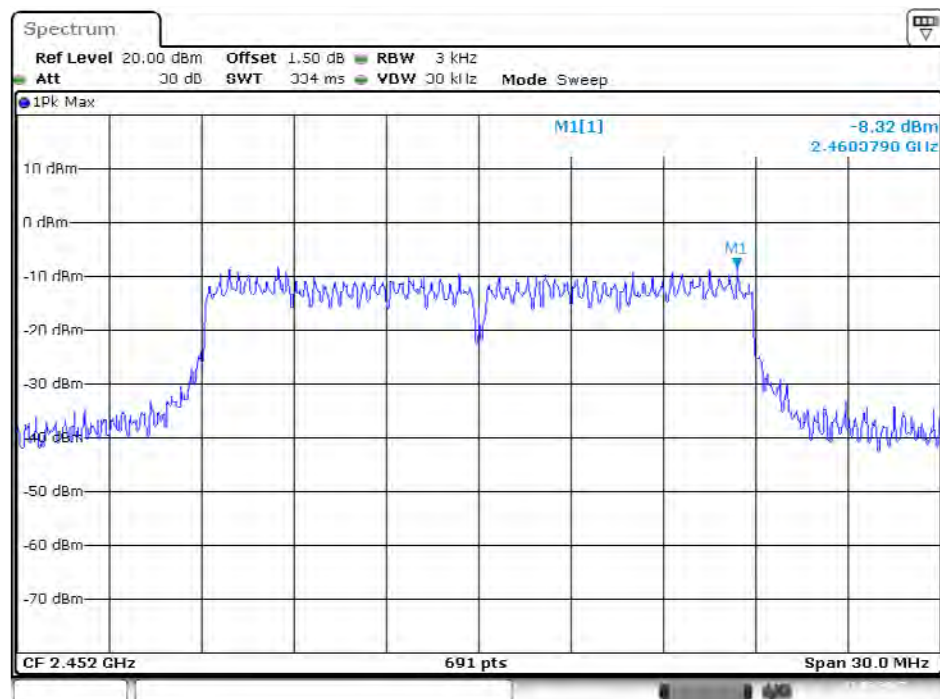


Date: 11.MAR.2017 04:30:40

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Ant. 1

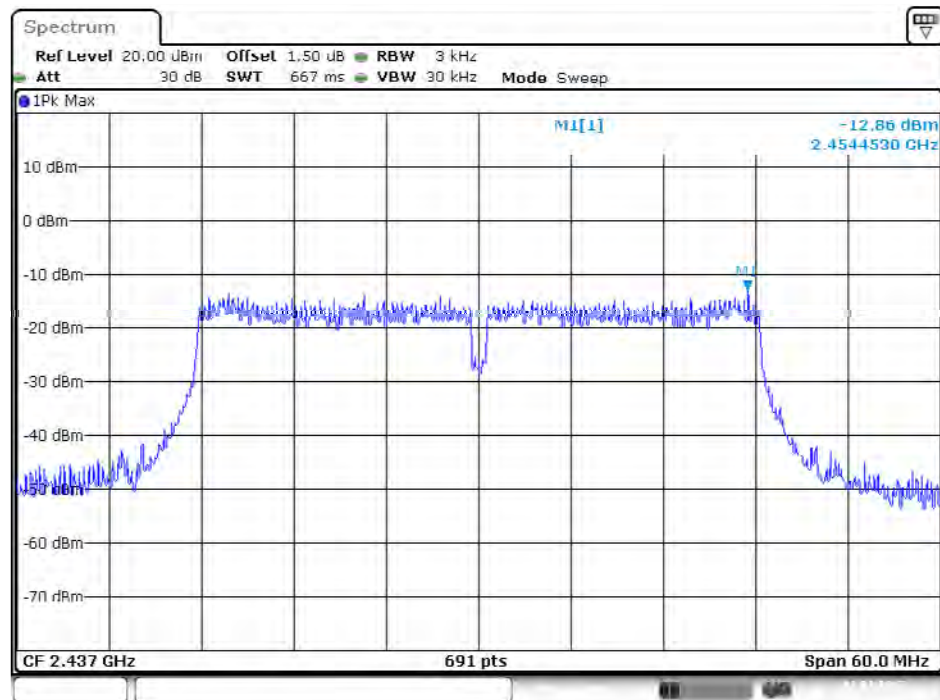

Date: 11.MAR.2017 04:47:29

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Ant. 2

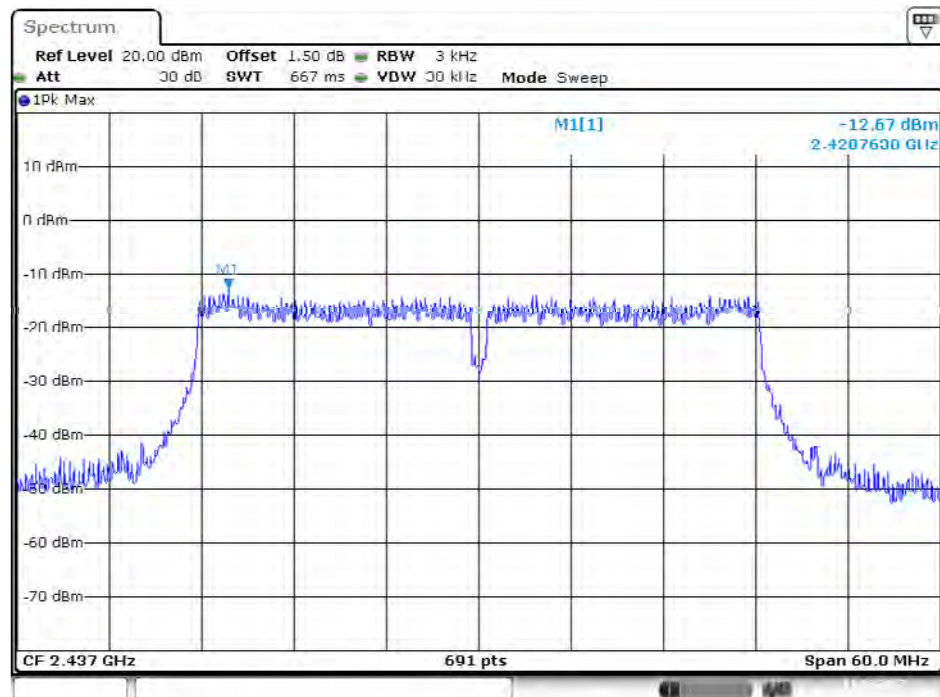

Date: 11.MAR.2017 04:46:40

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB558074 D01 v04 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth= > 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth


Temperature	20°C	Humidity	60%
Test Engineer	Ron Huang / Serway Li		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	10.03	12.24	500	Complies
	2422 MHz	10.03	12.24	500	Complies
	2437 MHz	10.03	12.24	500	Complies
	2452 MHz	10.03	12.24	500	Complies
	2462 MHz	10.03	12.24	500	Complies
802.11g	2412 MHz	16.06	17.02	500	Complies
	2422 MHz	15.71	17.19	500	Complies
	2437 MHz	15.65	17.63	500	Complies
	2452 MHz	16.35	17.11	500	Complies
	2462 MHz	16.29	17.02	500	Complies
802.11n MCS0 HT20	2412 MHz	16.87	17.89	500	Complies
	2422 MHz	16.41	18.15	500	Complies
	2437 MHz	17.04	18.58	500	Complies
	2452 MHz	16.35	17.97	500	Complies
	2462 MHz	17.22	17.80	500	Complies
802.11n MCS0 HT40	2422 MHz	36.06	36.90	500	Complies
	2437 MHz	36.06	37.34	500	Complies
	2452 MHz	35.71	37.05	500	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Ant. 1

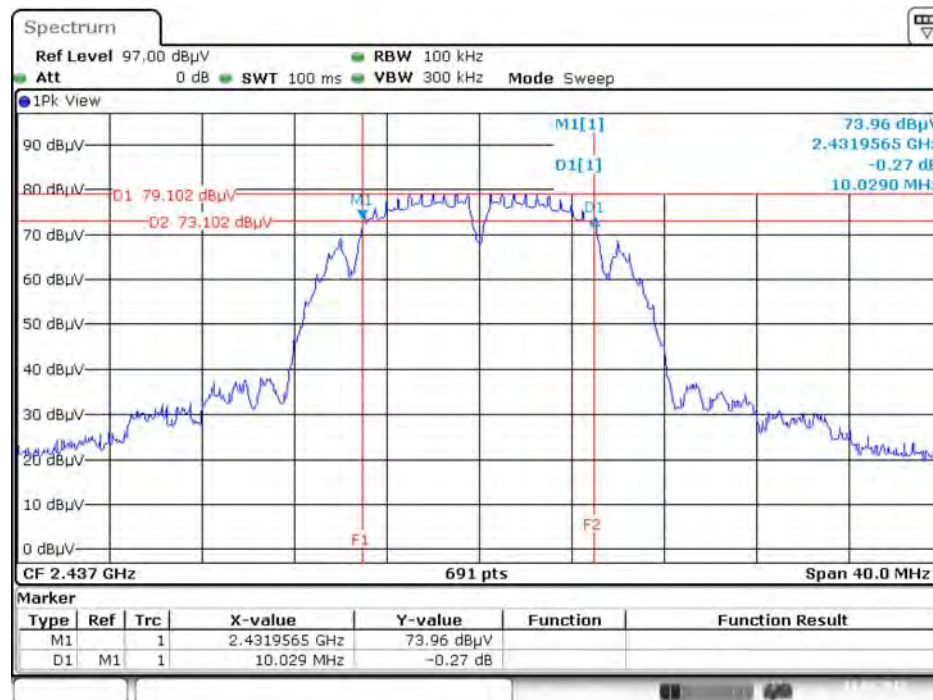


Date: 11.MAR.2017 02:32:41

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Ant. 1



Date: 11.MAR.2017 03:06:20


6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 1 + Ant. 2

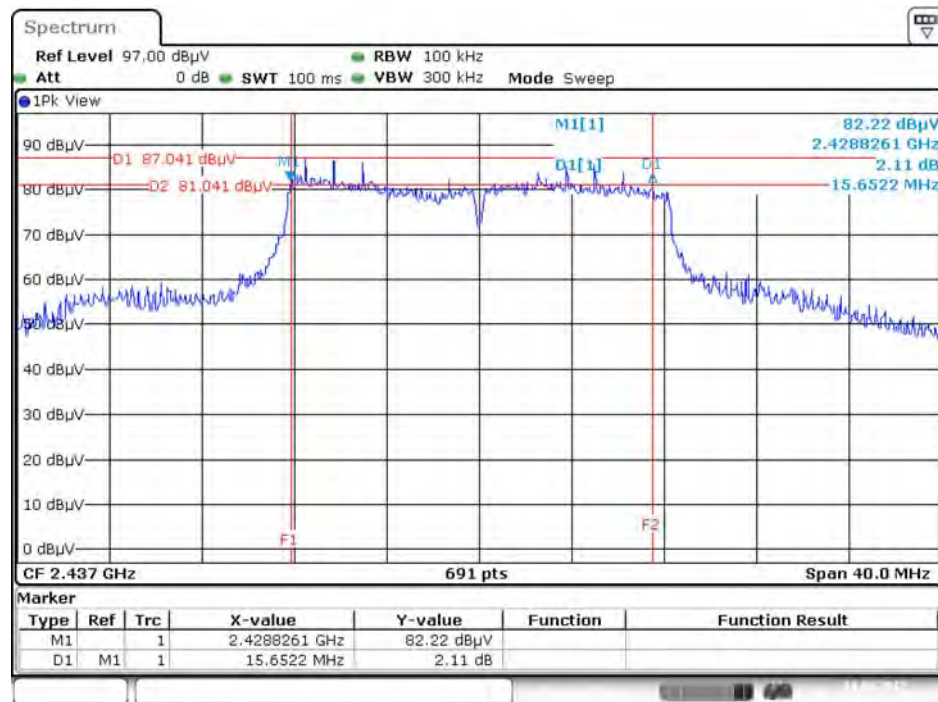

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 1 + Ant. 2



6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2452 MHz / Ant. 1 + Ant. 2

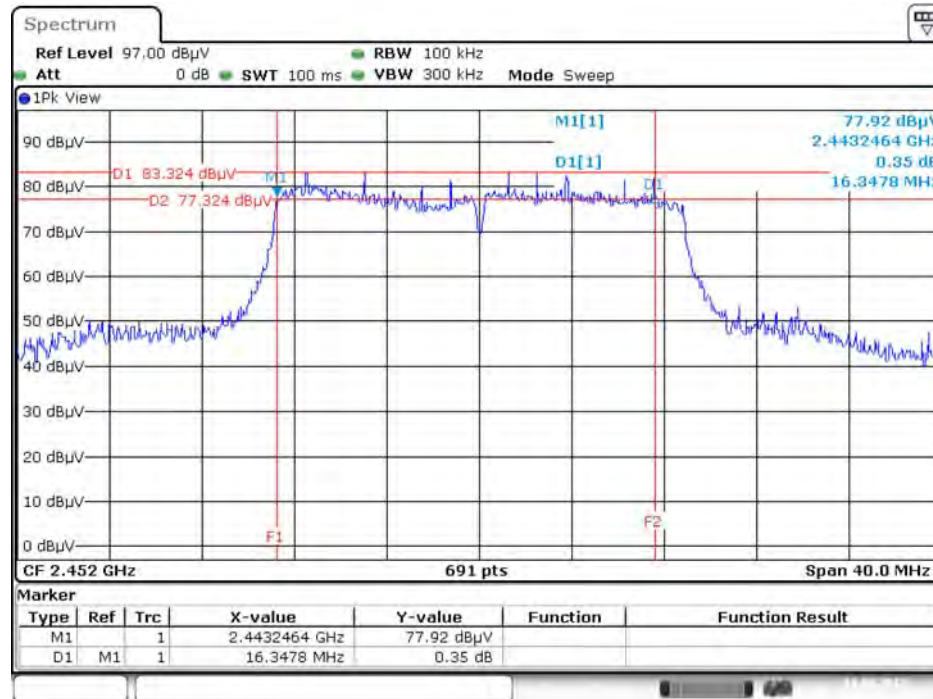


Date: 11.MAR.2017 02:52:32

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Ant. 1 + Ant. 2



Date: 11.MAR.2017 03:22:12

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2452 MHz / Ant. 1 + Ant. 2

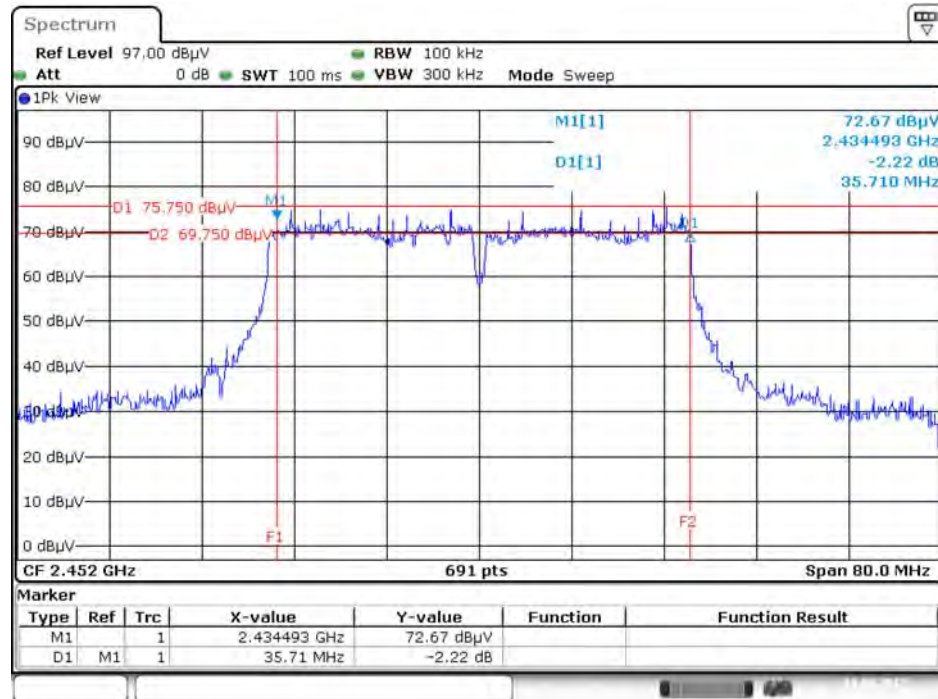

Date: 11.MAR.2017 02:59:05

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Ant. 1 + Ant. 2



Date: 11.MAR.2017 03:32:01

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

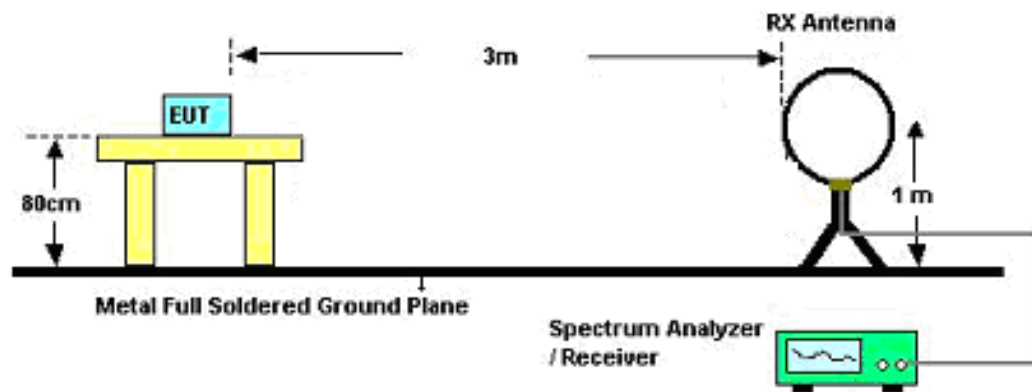

For Radiated Emissions: 30MHz~1GHz

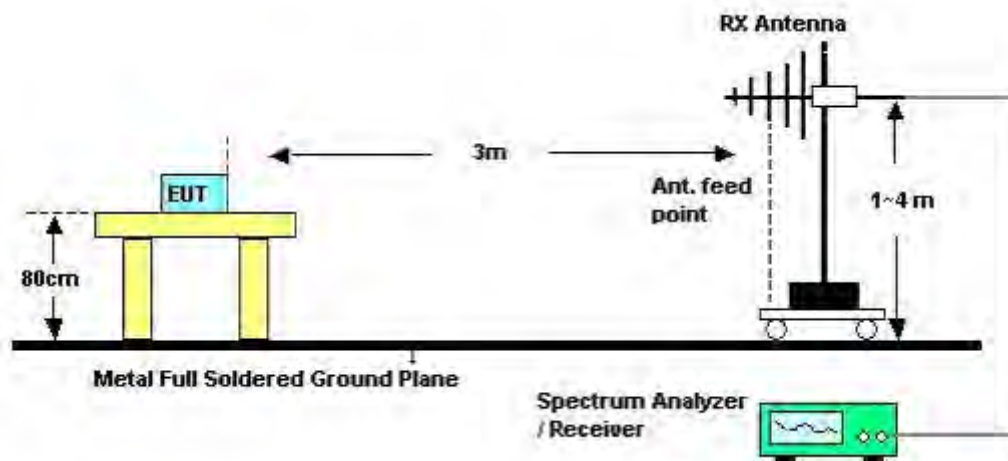

For Radiated Emissions: Above 1GHz

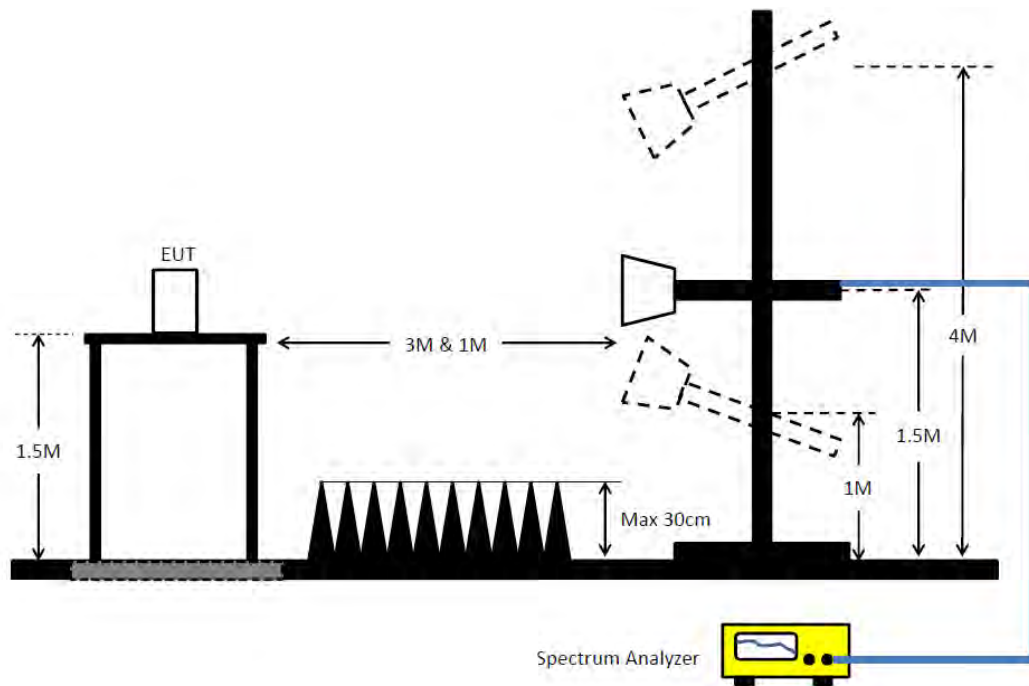

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	CTX
Test Date	Feb. 08, 2017		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	CTX

Horizontal

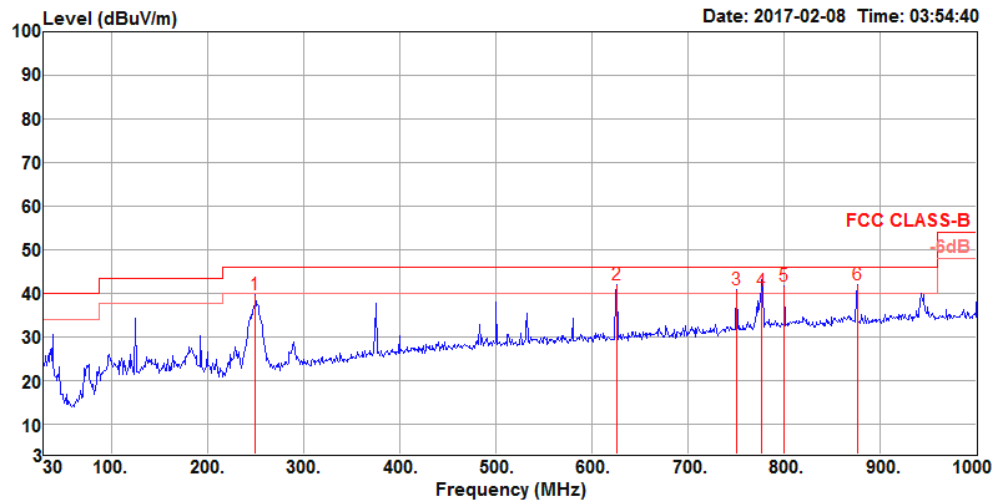

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	250.19	39.68	46.00	-6.32	50.44	2.74	18.80	32.30	100	130	Peak
2	625.58	41.84	46.00	-4.16	44.62	4.44	25.16	32.38	150	30	Peak
3	750.71	40.69	46.00	-5.31	41.99	4.87	26.10	32.27	200	349	Peak
4	776.90	40.61	46.00	-5.39	41.49	4.97	26.38	32.23	200	281	QP
5	800.18	41.72	46.00	-4.28	42.27	5.05	26.60	32.20	200	214	Peak
6	875.84	41.92	46.00	-4.08	41.22	5.30	27.20	31.80	100	7	Peak

Vertical

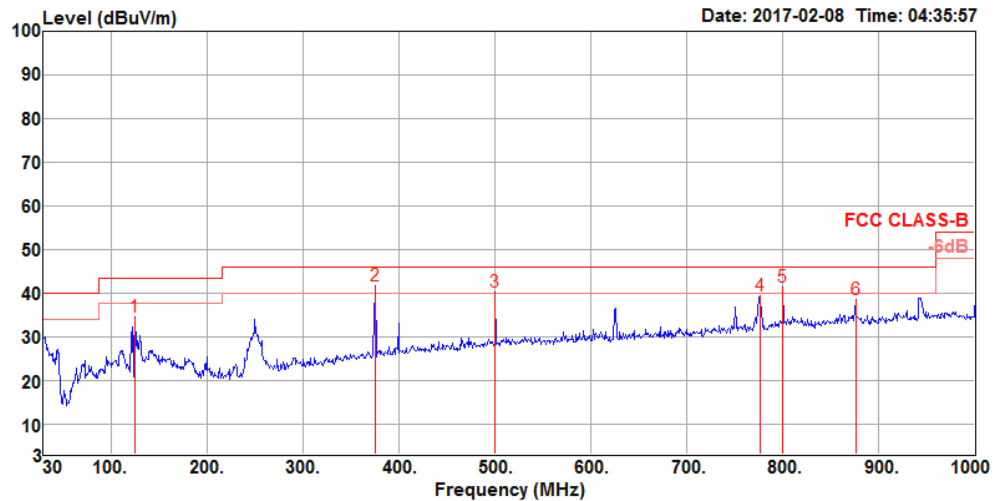

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	125.06	34.36	43.50	-9.14	46.39	1.90	18.45	32.38	100	183 Peak	VERTICAL
2	375.32	41.72	46.00	-4.28	48.82	3.40	21.78	32.28	150	308 Peak	VERTICAL
3	500.45	40.11	46.00	-5.89	44.67	3.96	23.82	32.34	100	271 Peak	VERTICAL
4	775.93	39.48	46.00	-6.52	40.36	4.97	26.38	32.23	200	53 Peak	VERTICAL
5	800.18	41.46	46.00	-4.54	42.01	5.05	26.60	32.20	150	112 Peak	VERTICAL
6	875.84	38.61	46.00	-7.39	37.91	5.30	27.20	31.80	200	356 Peak	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	IEEE 802.11b CH 1 / Ant. 1
Test Date	Feb. 08, 2017		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.97	53.71	54.00	-0.29	47.19	7.14	31.12	31.74	229	327	Average	HORIZONTAL
2	4824.01	56.62	74.00	-17.38	50.10	7.14	31.12	31.74	229	327	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.98	48.95	54.00	-5.05	42.43	7.14	31.12	31.74	100	137	Average	VERTICAL
2	4824.07	53.29	74.00	-20.71	46.77	7.14	31.12	31.74	100	137	Peak	VERTICAL

Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	IEEE 802.11b CH 3 / Ant. 1
Test Date	Feb. 08, 2017		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4843.95	56.75	74.00	-17.25	50.15	7.17	31.16	31.73	210	322	Peak	HORIZONTAL
2	4843.97	53.66	54.00	-0.34	47.06	7.17	31.16	31.73	210	322	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4843.97	49.55	54.00	-4.45	42.95	7.17	31.16	31.73	102	143	Average	VERTICAL
2	4844.04	53.30	74.00	-20.70	46.70	7.17	31.16	31.73	102	143	Peak	VERTICAL

Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	IEEE 802.11b CH 6 / Ant. 1
Test Date	Feb. 08, 2017		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.97	53.62	54.00	-0.38	46.93	7.20	31.21	31.72	199	298	Average	HORIZONTAL
2	4874.03	56.14	74.00	-17.86	49.45	7.20	31.21	31.72	199	298	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.94	53.29	74.00	-20.71	46.60	7.20	31.21	31.72	100	138	Peak	VERTICAL
2	4874.00	49.60	54.00	-4.40	42.91	7.20	31.21	31.72	100	138	Average	VERTICAL

Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	IEEE 802.11b CH 9 / Ant. 1
Test Date	Feb. 08, 2017		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4903.99	53.80	54.00	-0.20	47.03	7.23	31.25	31.71	215	323	Average	HORIZONTAL
2	4904.00	56.68	74.00	-17.32	49.91	7.23	31.25	31.71	215	323	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4903.92	53.85	74.00	-20.15	47.08	7.23	31.25	31.71	103	140	Peak	VERTICAL
2	4904.00	50.39	54.00	-3.61	43.62	7.23	31.25	31.71	103	140	Average	VERTICAL

Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	IEEE 802.11b CH 11 / Ant. 1
Test Date	Feb. 08, 2017		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.96	53.78	54.00	-0.22	46.92	7.27	31.29	31.70	204	294	Average	HORIZONTAL
2	4924.02	56.25	74.00	-17.75	49.39	7.27	31.29	31.70	204	294	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4924.02	48.94	54.00	-5.06	42.08	7.27	31.29	31.70	101	138	Average	VERTICAL
2	4924.07	52.81	74.00	-21.19	45.95	7.27	31.29	31.70	101	138	Peak	VERTICAL

Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	IEEE 802.11g CH 1 / Ant. 1 + Ant. 2
Test Date	Jul. 23, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4823.96	43.19	54.00	-10.81	36.75	6.26	33.11	32.93	218	305	Average	HORIZONTAL
2	4824.02	55.76	74.00	-18.24	49.32	6.26	33.11	32.93	218	305	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4824.05	41.88	54.00	-12.12	35.44	6.26	33.11	32.93	155	232	Average	VERTICAL
2	4824.83	50.32	74.00	-23.68	43.88	6.26	33.11	32.93	155	232	Peak	VERTICAL

Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	IEEE 802.11g CH 3 / Ant. 1 + Ant. 2
Test Date	Feb. 08, 2017		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4843.15	58.85	74.00	-15.15	52.25	7.17	31.16	31.73	202	287	Peak	HORIZONTAL
2	4843.98	45.97	54.00	-8.03	39.37	7.17	31.16	31.73	202	287	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4843.39	44.43	54.00	-9.57	37.83	7.17	31.16	31.73	105	245	Average	VERTICAL
2	4844.06	56.34	74.00	-17.66	49.74	7.17	31.16	31.73	105	245	Peak	VERTICAL

Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	IEEE 802.11g CH 6 / Ant. 1 + Ant. 2
Test Date	Jul. 23, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4874.14	44.59	54.00	-9.41	38.01	6.28	33.23	32.93	208	304	Average	HORIZONTAL
2	4874.23	56.79	74.00	-17.21	50.21	6.28	33.23	32.93	208	304	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4873.99	39.14	54.00	-14.86	32.56	6.28	33.23	32.93	196	264	Average	VERTICAL
2	4874.33	51.45	74.00	-22.55	44.87	6.28	33.23	32.93	196	264	Peak	VERTICAL

Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	IEEE 802.11g CH 9 / Ant. 1 + Ant. 2
Test Date	Feb. 08, 2017		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4903.99	45.12	54.00	-8.88	38.35	7.23	31.25	31.71	136	237	Average	HORIZONTAL
2	4904.01	57.20	74.00	-16.80	50.43	7.23	31.25	31.71	136	237	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4904.00	54.82	74.00	-19.18	48.05	7.23	31.25	31.71	100	173	Peak	VERTICAL
2	4904.00	43.25	54.00	-10.75	36.48	7.23	31.25	31.71	100	173	Average	VERTICAL

Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	IEEE 802.11g CH 11 / Ant. 1 + Ant. 2
Test Date	Jul. 23, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.97	52.65	74.00	-21.35	45.93	6.29	33.35	32.92	189	312	Peak	HORIZONTAL
2	4924.05	40.87	54.00	-13.13	34.15	6.29	33.35	32.92	189	312	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.99	49.16	74.00	-24.84	42.44	6.29	33.35	32.92	128	327	Peak	VERTICAL
2	4924.07	38.72	54.00	-15.28	32.00	6.29	33.35	32.92	128	327	Average	VERTICAL

Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Ant. 1 + Ant. 2
Test Date	Jul. 23, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.82	56.01	74.00	-17.99	49.57	6.26	33.11	32.93	192	307	Peak	HORIZONTAL
2	4823.93	41.80	54.00	-12.20	35.36	6.26	33.11	32.93	192	307	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.29	49.56	74.00	-24.44	43.12	6.26	33.11	32.93	197	360	Peak	VERTICAL
2	4823.85	41.05	54.00	-12.95	34.61	6.26	33.11	32.93	197	360	Average	VERTICAL

Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 3 / Ant. 1 + Ant. 2
Test Date	Feb. 08, 2017		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4843.24	56.95	74.00	-17.05	50.35	7.17	31.16	31.73	231	302	Peak	HORIZONTAL
2	4843.32	44.86	54.00	-9.14	38.26	7.17	31.16	31.73	231	302	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4843.85	43.93	54.00	-10.07	37.33	7.17	31.16	31.73	103	185	Average	VERTICAL
2	4844.14	55.36	74.00	-18.64	48.76	7.17	31.16	31.73	103	185	Peak	VERTICAL

Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Ant. 1 + Ant. 2
Test Date	Jul. 23, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4866.18	56.55	74.00	-17.45	50.01	6.27	33.20	32.93	211	301	Peak	HORIZONTAL
2	4867.27	42.58	54.00	-11.42	36.00	6.28	33.23	32.93	211	301	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4866.05	39.10	54.00	-14.90	32.56	6.27	33.20	32.93	200	360	Average	VERTICAL
2	4866.30	49.31	74.00	-24.69	42.77	6.27	33.20	32.93	200	360	Peak	VERTICAL

Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 9 / Ant. 1 + Ant. 2
Test Date	Feb. 08, 2017		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4903.77	44.56	54.00	-9.44	37.79	7.23	31.25	31.71	153	295	Average	HORIZONTAL
2	4904.32	56.70	74.00	-17.30	49.93	7.23	31.25	31.71	153	295	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4903.59	54.72	74.00	-19.28	47.95	7.23	31.25	31.71	101	156	Peak	VERTICAL
2	4904.10	42.63	54.00	-11.37	35.86	7.23	31.25	31.71	101	156	Average	VERTICAL

Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Ant. 1 + Ant. 2
Test Date	Jul. 23, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4923.24	51.56	74.00	-22.44	44.87	6.29	33.32	32.92	221	316 Peak	HORIZONTAL
2	4924.02	40.45	54.00	-13.55	33.73	6.29	33.35	32.92	221	316 Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4923.97	38.64	54.00	-15.36	31.92	6.29	33.35	32.92	185	246 Average	VERTICAL
2	4924.15	47.61	74.00	-26.39	40.89	6.29	33.35	32.92	185	246 Peak	VERTICAL

Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Ant. 1 + Ant. 2
Test Date	Sep. 30, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4821.52	34.39	54.00	-19.61	27.95	6.26	33.11	32.93	123	167 Average	HORIZONTAL
2	4826.27	46.57	74.00	-27.43	40.09	6.27	33.14	32.93	123	167 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4823.73	33.63	54.00	-20.37	27.19	6.26	33.11	32.93	138	207 Average	VERTICAL
2	4824.94	47.54	74.00	-26.46	41.10	6.26	33.11	32.93	138	207 Peak	VERTICAL

Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Ant. 1 + Ant. 2
Test Date	Sep. 30, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4865.40	37.30	54.00	-16.70	30.76	6.27	33.20	32.93	176	284 Average	HORIZONTAL
2	4865.60	49.48	74.00	-24.52	42.94	6.27	33.20	32.93	176	284 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4857.90	47.61	74.00	-26.39	41.07	6.27	33.20	32.93	145	333 Peak	VERTICAL
2	4859.50	34.08	54.00	-19.92	27.54	6.27	33.20	32.93	145	333 Average	VERTICAL

Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Ant. 1 + Ant. 2
Test Date	Sep. 30, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4903.82	47.96	74.00	-26.04	41.31	6.28	33.29	32.92	129	219	Peak	HORIZONTAL
2	4904.03	37.24	54.00	-16.76	30.59	6.28	33.29	32.92	129	219	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4903.78	46.93	74.00	-27.07	40.28	6.28	33.29	32.92	191	118	Peak	VERTICAL
2	4904.03	34.05	54.00	-19.95	27.40	6.28	33.29	32.92	191	118	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

The test procedure is the same as section 4.5.3.

For Radiated Out of Band Emission Measurement:

Test was performed in accordance with KDB558074 D01 v04 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 11.0 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.


4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	IEEE 802.11b CH 1, 3, 6, 9, 11 / Ant. 1


Channel 1

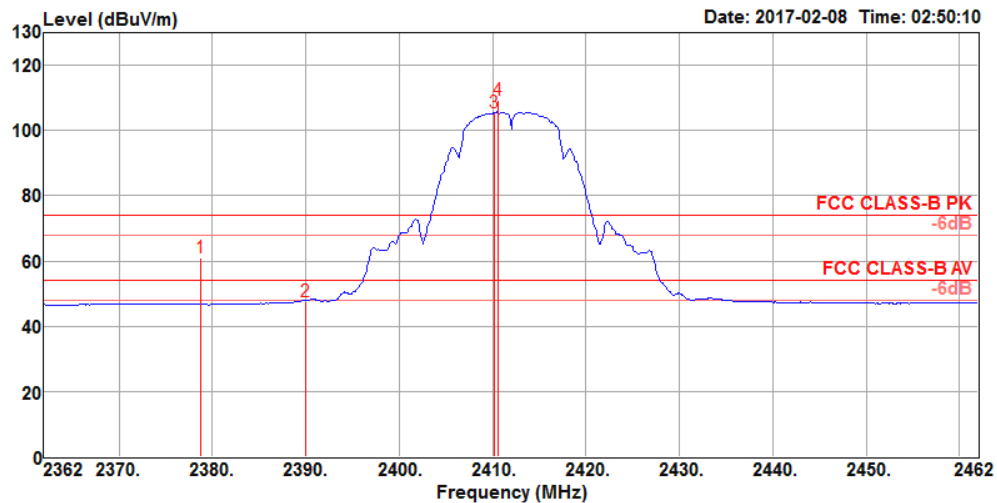

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2378.80	60.97	74.00	-13.03	27.85	6.06	27.06	0.00	153	208 Peak	VERTICAL
2	2390.00	47.70	54.00	-6.30	14.56	6.07	27.07	0.00	153	208 Average	VERTICAL
3 @	2410.20	105.60			72.39	6.10	27.11	0.00	153	208 Average	VERTICAL
4 @	2410.60	109.16			75.95	6.10	27.11	0.00	153	208 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.


Channel 3

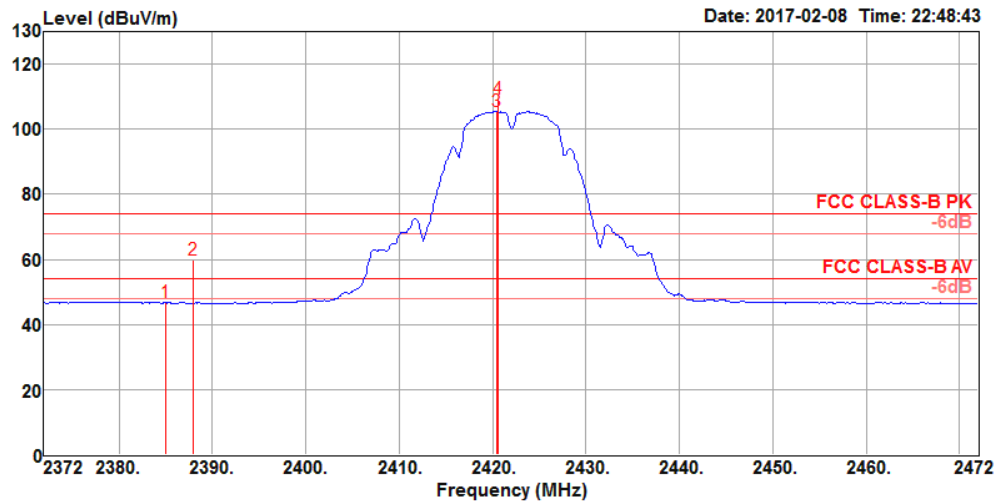

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2385.00	46.76	54.00	-7.24	13.62	6.07	27.07	0.00	147	136 Average	VERTICAL
2	2388.00	59.69	74.00	-14.31	26.55	6.07	27.07	0.00	147	136 Peak	VERTICAL
3 @	2420.40	105.64			72.38	6.12	27.14	0.00	147	136 Average	VERTICAL
4 @	2420.60	109.19			75.93	6.12	27.14	0.00	147	136 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.


Channel 6

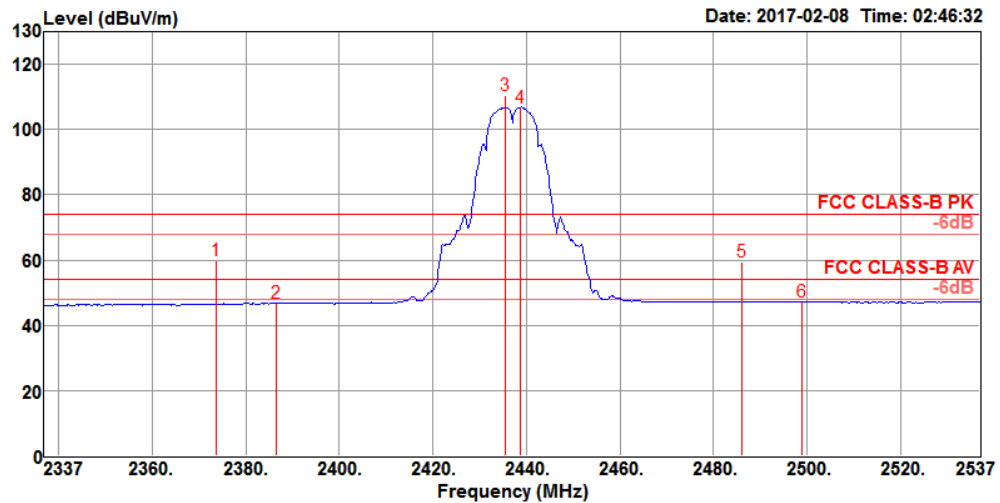

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2373.80	59.75	74.00	-14.25	26.66	6.05	27.04	0.00	148	148 Peak	VERTICAL
2	2386.60	46.97	54.00	-7.03	13.83	6.07	27.07	0.00	148	148 Average	VERTICAL
3 @	2435.40	110.28			76.97	6.14	27.17	0.00	148	148 Peak	VERTICAL
4 @	2438.60	106.79			73.48	6.14	27.17	0.00	148	148 Average	VERTICAL
5	2486.20	59.62	74.00	-14.38	26.14	6.21	27.27	0.00	148	148 Peak	VERTICAL
6	2499.00	47.33	54.00	-6.67	13.79	6.24	27.30	0.00	148	148 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.


Channel 9

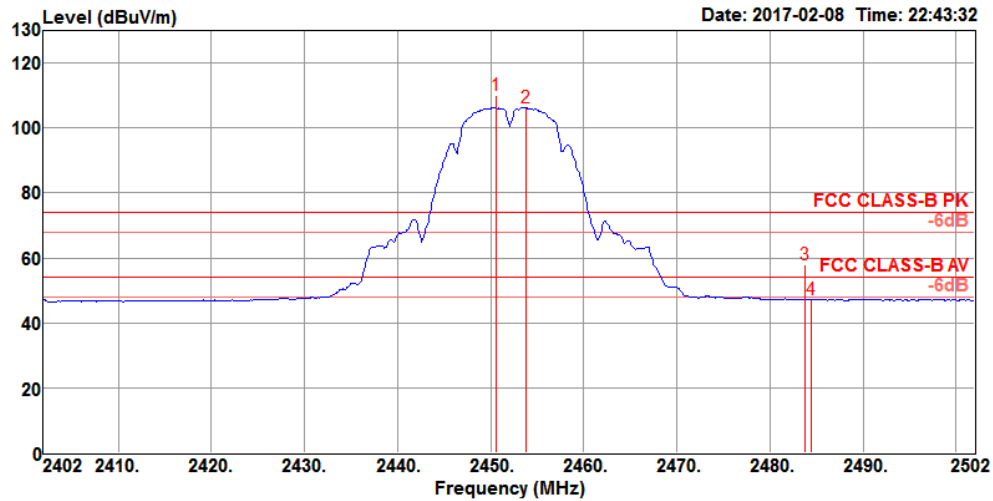

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1 @	2450.60	109.97			76.61	6.16	27.20	0.00	155	22 Peak	VERTICAL
2 @	2453.80	106.41			73.03	6.17	27.21	0.00	155	22 Average	VERTICAL
3	2483.80	58.07	74.00	-15.93	24.59	6.21	27.27	0.00	155	22 Peak	VERTICAL
4	2484.40	47.23	54.00	-6.77	13.75	6.21	27.27	0.00	155	22 Average	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Channel 11

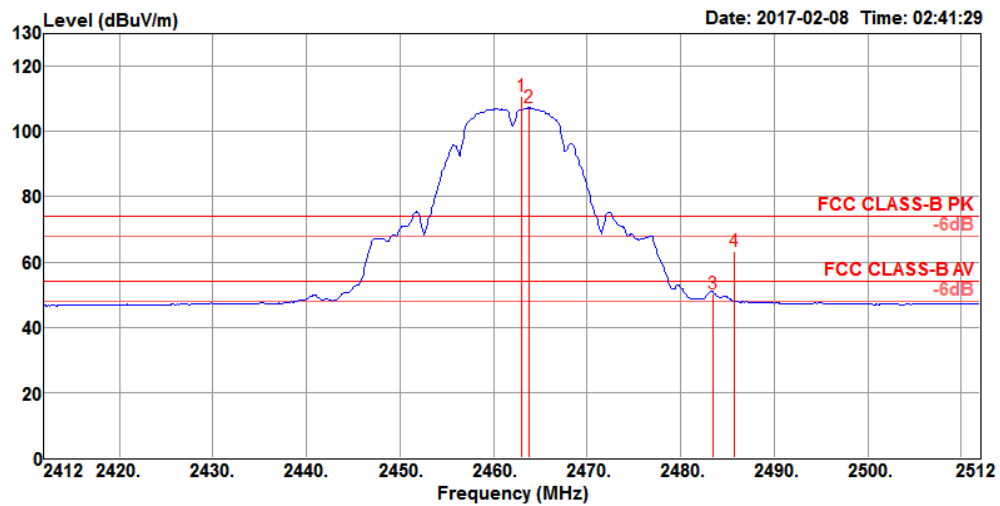


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1 @	2463.00	110.80			77.39	6.18	27.23	0.00	148	206 Peak	VERTICAL
2 @	2463.80	107.32			73.91	6.18	27.23	0.00	148	206 Average	VERTICAL
3	2483.50	50.43	54.00	-3.57	16.95	6.21	27.27	0.00	148	206 Average	VERTICAL
4	2485.80	63.48	74.00	-10.52	30.00	6.21	27.27	0.00	148	206 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	IEEE 802.11g CH 1, 3, 6, 9, 11 / Ant. 1 + Ant. 2


Channel 1

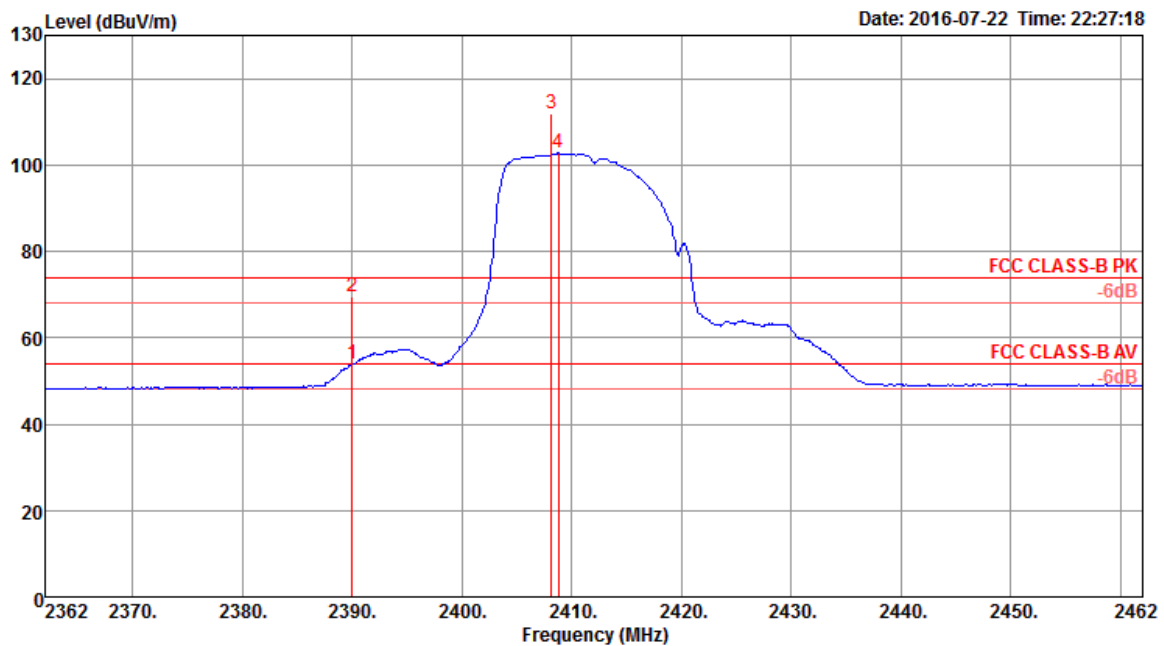

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2390.00	53.84	54.00	-0.16	21.93	3.60	28.31	0.00	224	145	Average	VERTICAL
2	2390.00	69.63	74.00	-4.37	37.72	3.60	28.31	0.00	224	145	Peak	VERTICAL
3	2408.15	111.75			79.78	3.62	28.35	0.00	224	145	Peak	VERTICAL
4	2408.80	102.69			70.72	3.62	28.35	0.00	224	145	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.


Channel 3

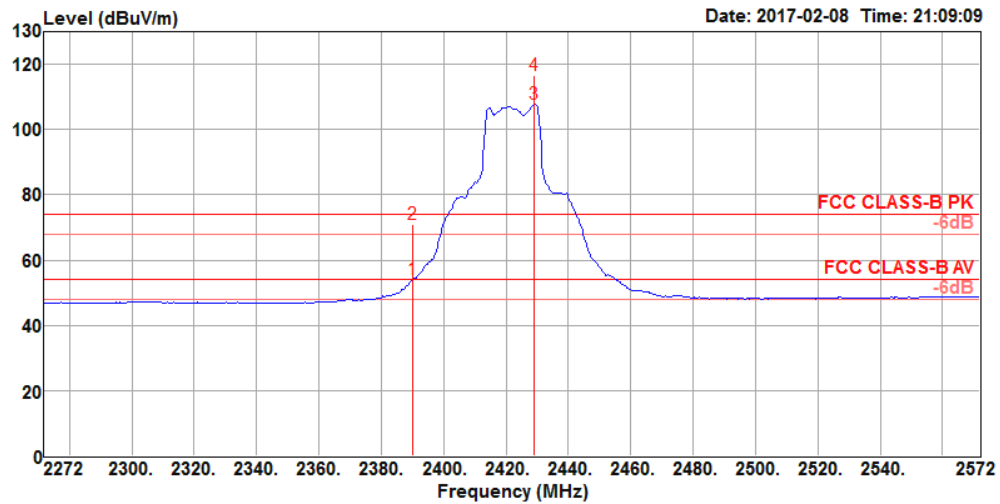

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2390.00	53.91	54.00	-0.09	20.77	6.07	27.07	0.00	153	183 Average	VERTICAL
2	2390.00	70.85	74.00	-3.15	37.71	6.07	27.07	0.00	153	183 Peak	VERTICAL
3 @	2429.20	107.71			74.42	6.13	27.16	0.00	153	183 Average	VERTICAL
4 @	2429.20	116.57			83.28	6.13	27.16	0.00	153	183 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.


Channel 6

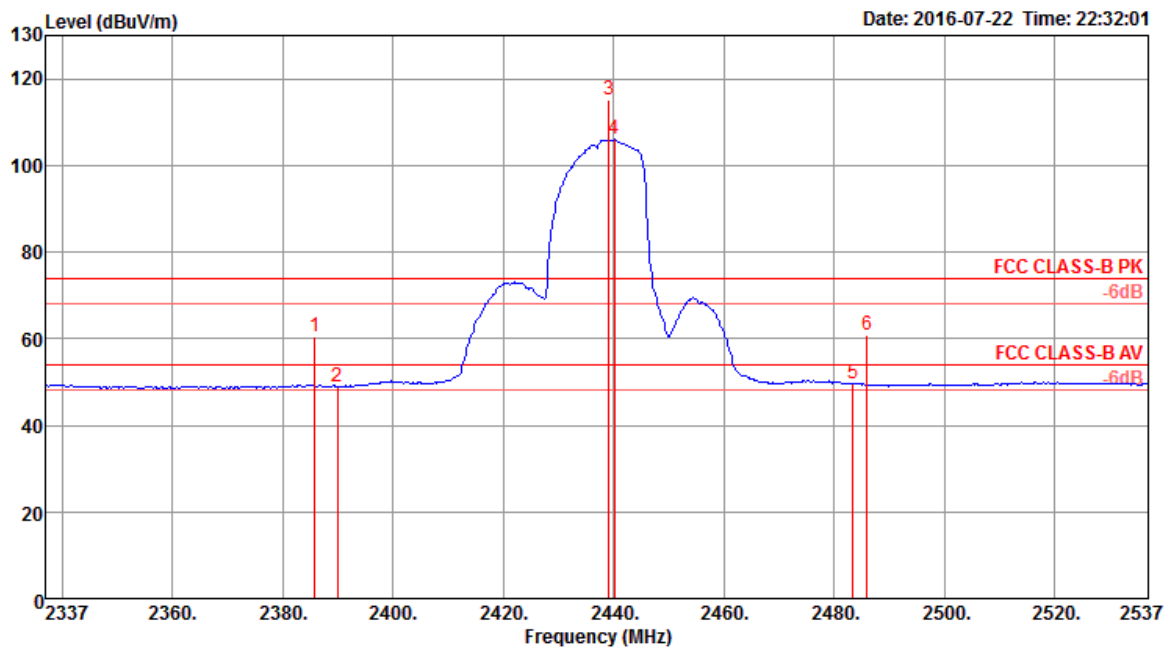

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2385.83	60.49	74.00	-13.51	28.58	3.60	28.31	0.00	248	148	Peak
2	2390.00	49.00	54.00	-5.00	17.09	3.60	28.31	0.00	248	148	Average
3	2437.24	114.99			82.94	3.64	28.41	0.00	248	148	Peak
4	2440.21	105.94			73.89	3.64	28.41	0.00	248	148	Average
5	2483.50	49.62	54.00	-4.38	17.46	3.68	28.48	0.00	248	148	Average
6	2486.06	60.74	74.00	-13.26	28.58	3.68	28.48	0.00	248	148	Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.


Channel 9

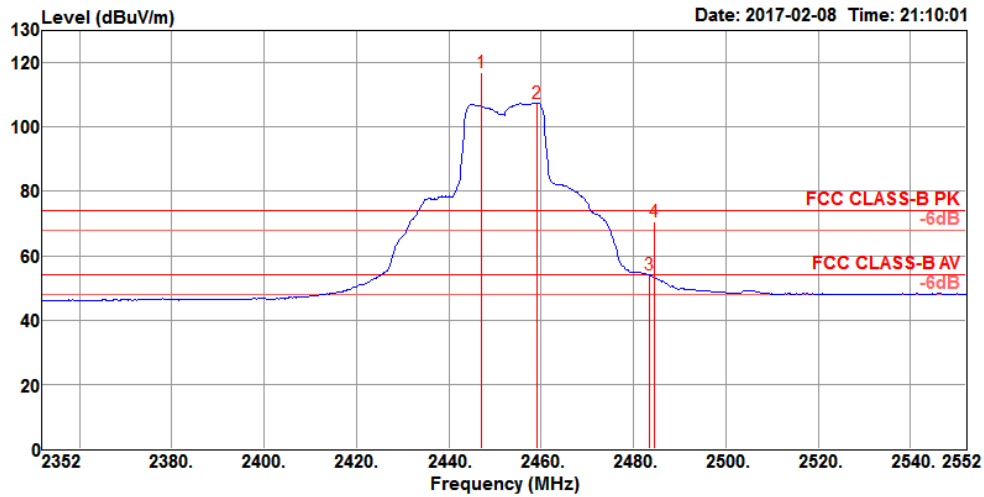

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1 @	2447.00	117.15			83.79	6.16	27.20	0.00	135	157 Peak	VERTICAL
2 @	2459.20	107.29			73.91	6.17	27.21	0.00	135	157 Average	VERTICAL
3	2483.50	53.96	54.00	-0.04	20.48	6.21	27.27	0.00	135	157 Average	VERTICAL
4	2484.40	70.69	74.00	-3.31	37.21	6.21	27.27	0.00	135	157 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Channel 11

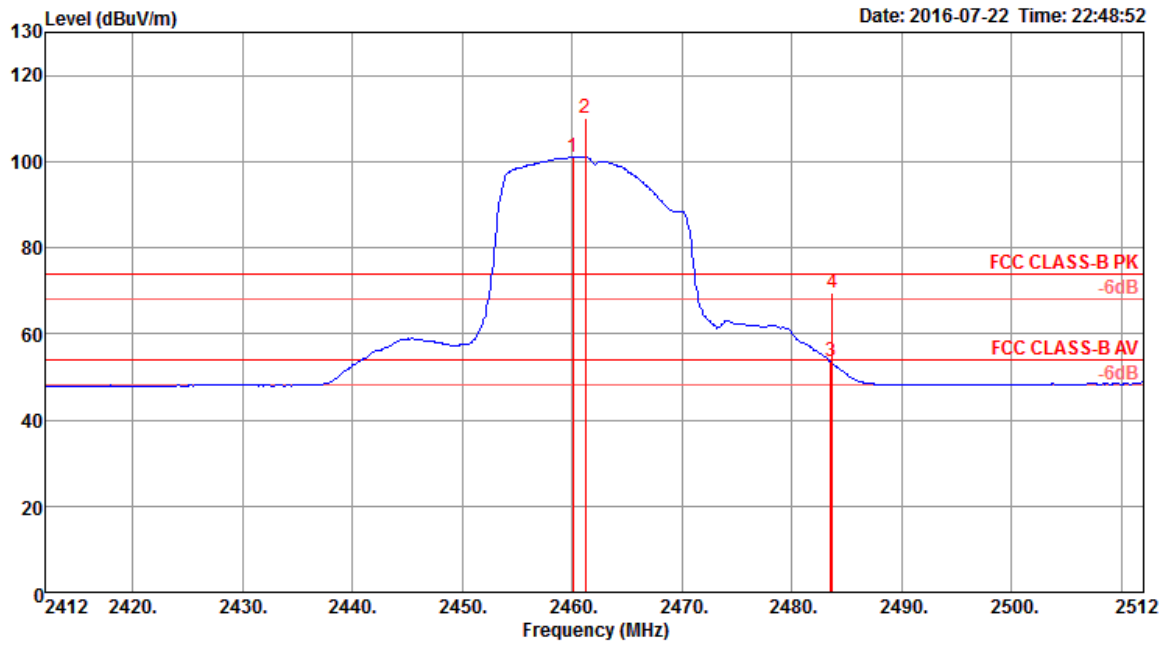


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2460.08	101.08			68.99	3.66	28.43	0.00	191	127 Average	VERTICAL
2	2461.20	110.26			78.16	3.66	28.44	0.00	191	127 Peak	VERTICAL
3	2483.50	53.48	54.00	-0.52	21.32	3.68	28.48	0.00	191	127 Average	VERTICAL
4	2483.64	69.59	74.00	-4.41	37.43	3.68	28.48	0.00	191	127 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 1, 3, 6, 9, 11 / Ant. 1 + Ant. 2


Channel 1

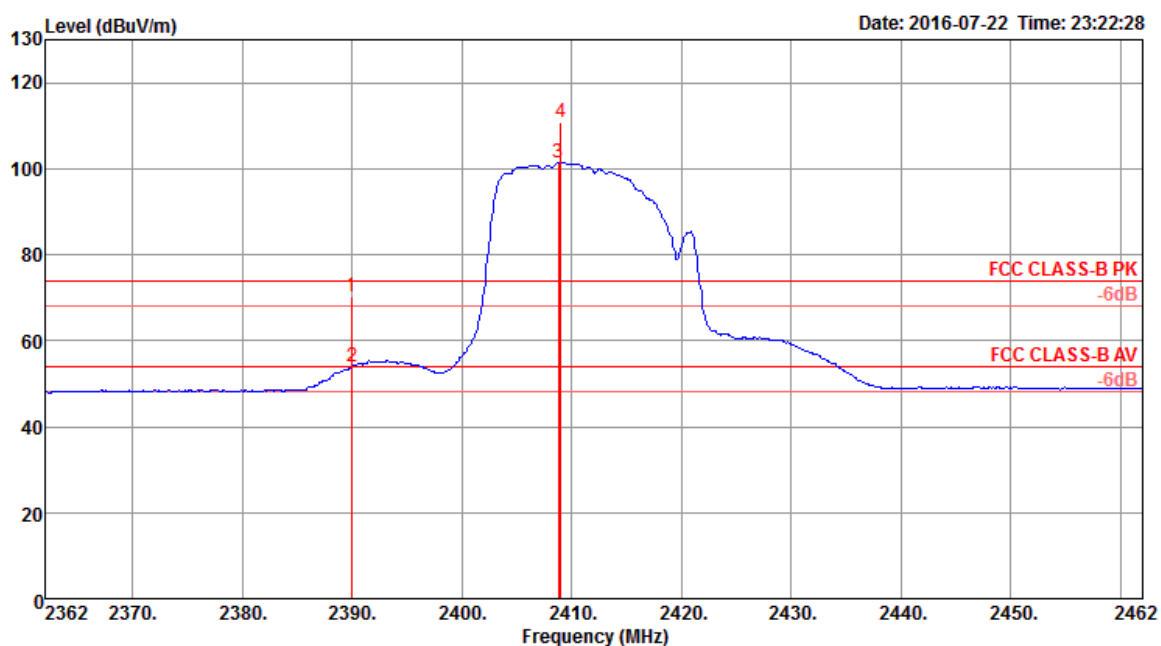

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2389.89	70.36	74.00	-3.64	38.45	3.60	28.31	0.00	225	146	Peak	VERTICAL
2	2390.00	53.87	54.00	-0.13	21.96	3.60	28.31	0.00	225	146	Average	VERTICAL
3	2408.80	101.39			69.42	3.62	28.35	0.00	225	146	Average	VERTICAL
4	2408.96	110.97			79.00	3.62	28.35	0.00	225	146	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.


Channel 3

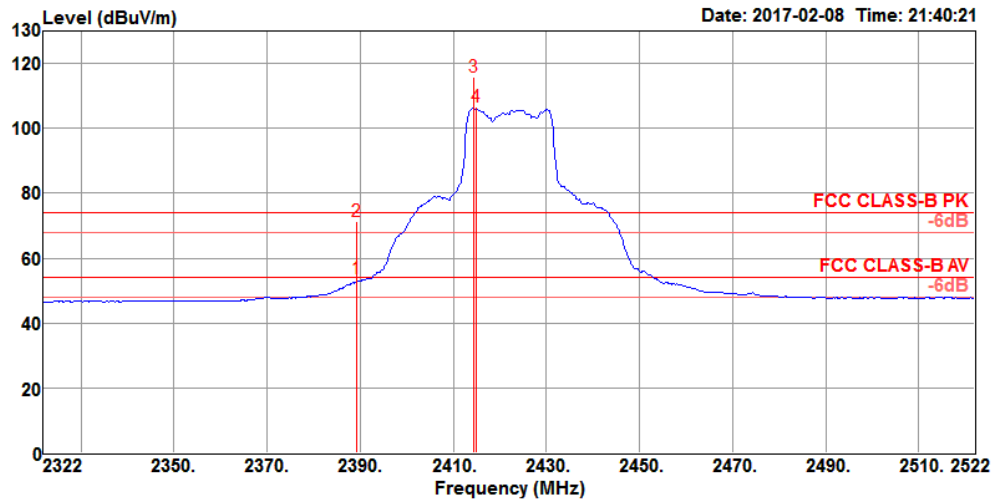

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2389.20	53.71	54.00	-0.29	20.57	6.07	27.07	0.00	150	148 Average	VERTICAL
2	2389.20	71.28	74.00	-2.72	38.14	6.07	27.07	0.00	150	148 Peak	VERTICAL
3 @	2414.40	115.85			82.61	6.11	27.13	0.00	150	148 Peak	VERTICAL
4 @	2415.00	106.69			73.45	6.11	27.13	0.00	150	148 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.


Channel 6

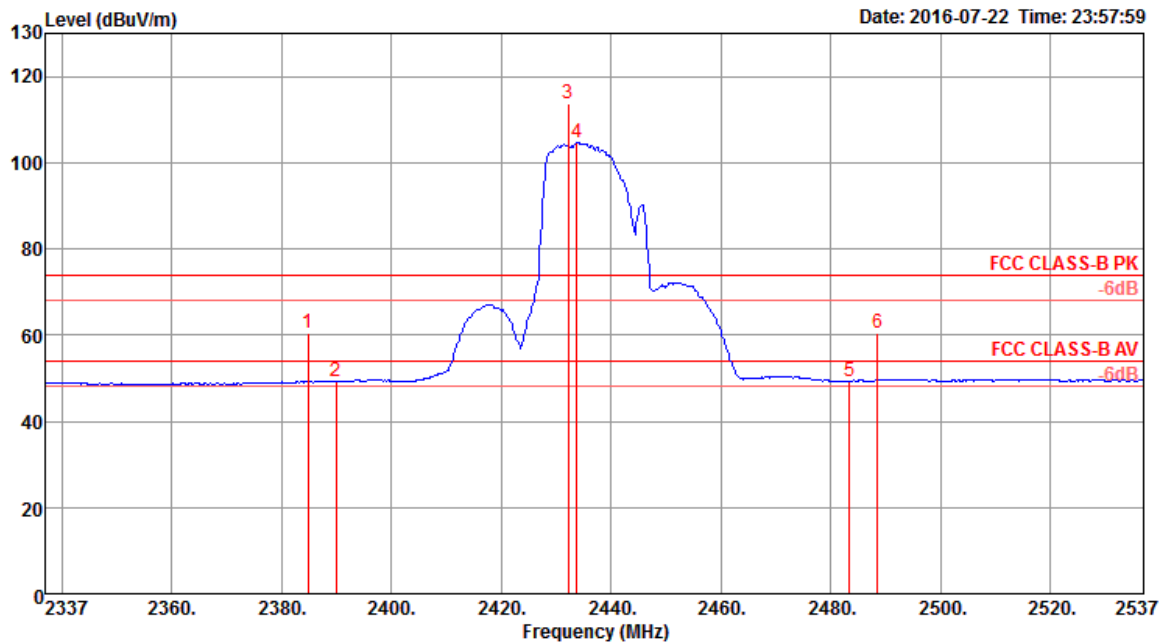

	Freq	Level	Limit	Over	Read	CableAntenna	Preampl	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2384.87	60.57	74.00	-13.43	28.66	3.60	28.31	0.00	243	148	Peak
2	2390.00	49.08	54.00	-4.92	17.17	3.60	28.31	0.00	243	148	Average
3	2432.19	113.57			81.54	3.64	28.39	0.00	243	148	Peak
4	2433.80	104.62			72.59	3.64	28.39	0.00	243	148	Average
5	2483.50	49.22	54.00	-4.78	17.06	3.68	28.48	0.00	243	148	Average
6	2488.63	60.61	74.00	-13.39	28.45	3.68	28.48	0.00	243	148	Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.


Channel 9

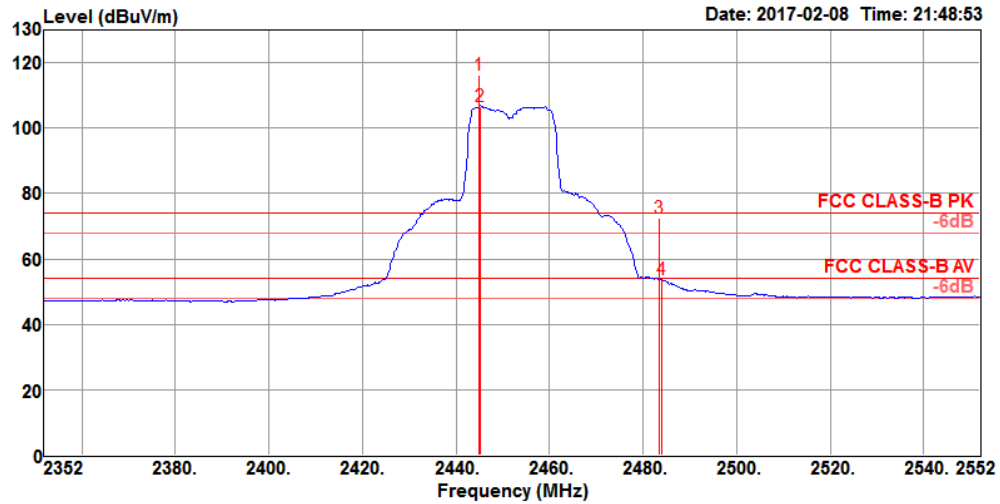

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 @	2444.80	116.19			82.85	6.15	27.19	0.00	158	158	Peak	VERTICAL
2 @	2445.20	106.80			73.46	6.15	27.19	0.00	158	158	Average	VERTICAL
3	2483.50	72.66	74.00	-1.34	39.18	6.21	27.27	0.00	158	158	Peak	VERTICAL
4	2484.00	53.53	54.00	-0.47	20.05	6.21	27.27	0.00	158	158	Average	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Channel 11

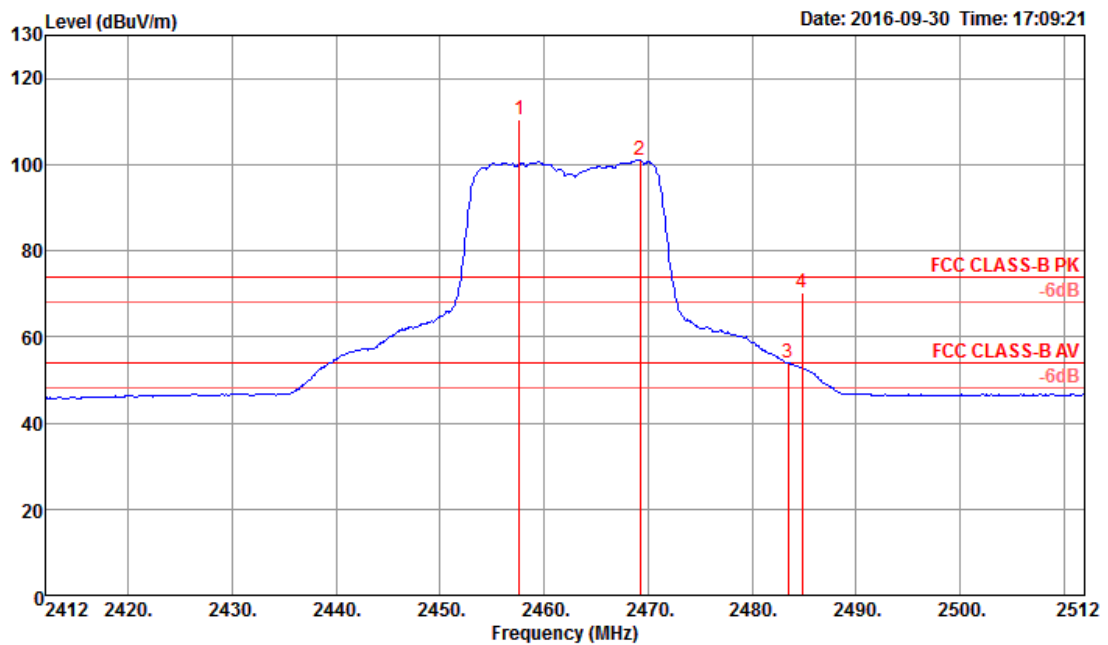


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1 @	2457.60	110.54			78.45	3.66	28.43	0.00	260	62 Peak	VERTICAL
2 @	2469.20	101.01			68.89	3.67	28.45	0.00	260	62 Average	VERTICAL
3	2483.50	53.82	54.00	-0.18	21.66	3.68	28.48	0.00	260	62 Average	VERTICAL
4	2484.80	70.41	74.00	-3.59	38.25	3.68	28.48	0.00	260	62 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Ant. 1 + Ant. 2


Channel 3

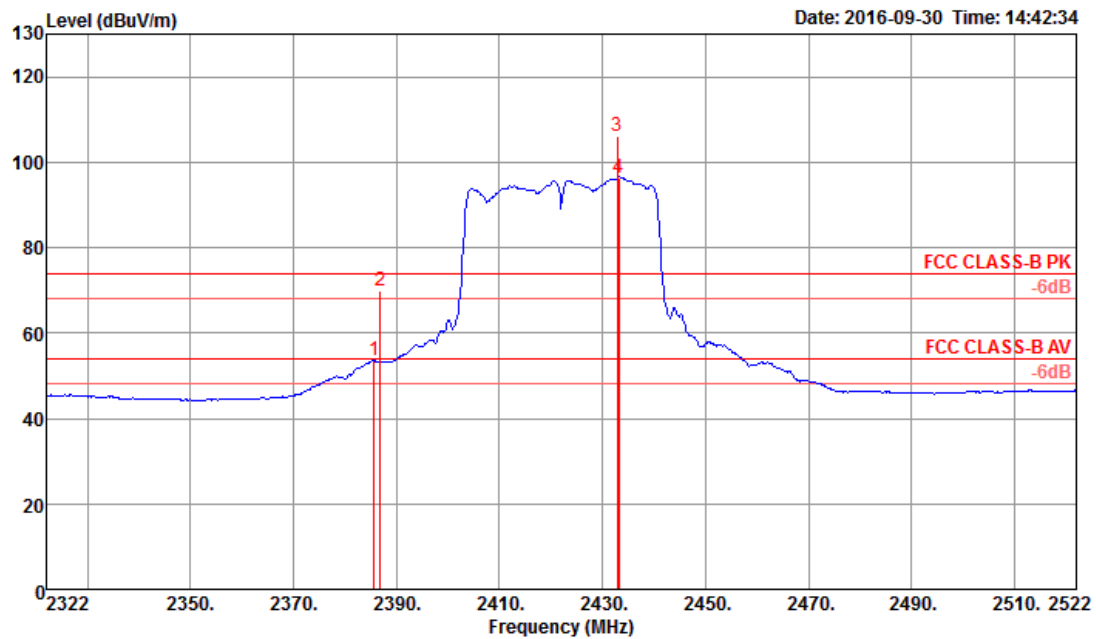

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2385.60	53.76	54.00	-0.24	21.85	3.60	28.31	0.00	211	260	Average	VERTICAL
2	2386.80	69.73	74.00	-4.27	37.82	3.60	28.31	0.00	211	260	Peak	VERTICAL
3 @	2432.80	106.17			74.14	3.64	28.39	0.00	211	260	Peak	VERTICAL
4 @	2433.20	96.38			64.35	3.64	28.39	0.00	211	260	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.


Channel 6

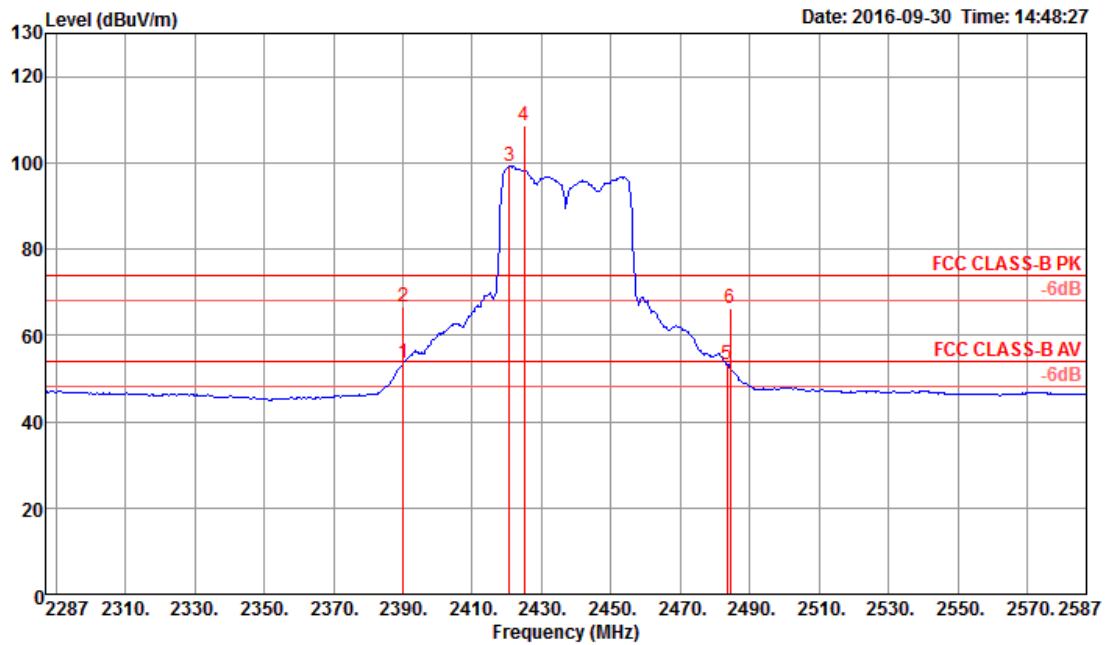

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2390.00	53.53	54.00	-0.47	21.62	3.60	28.31	0.00	261	77 Average	VERTICAL
2	2390.00	66.66	74.00	-7.34	34.75	3.60	28.31	0.00	261	77 Peak	VERTICAL
3 @	2420.80	99.22			67.22	3.63	28.37	0.00	261	77 Average	VERTICAL
4 @	2425.00	108.58			76.58	3.63	28.37	0.00	261	77 Peak	VERTICAL
5	2483.50	53.39	54.00	-0.61	21.23	3.68	28.48	0.00	261	77 Average	VERTICAL
6	2484.40	66.16	74.00	-7.84	34.00	3.68	28.48	0.00	261	77 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

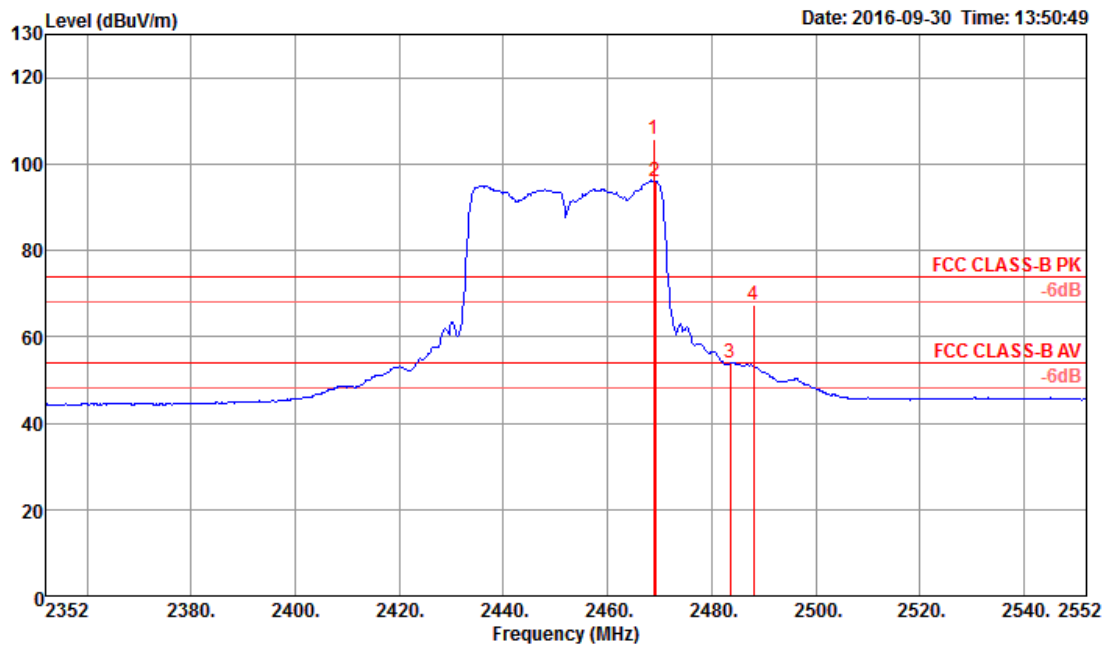

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 @	2468.80	105.72			73.60	3.67	28.45	0.00	277	42	Peak	VERTICAL
2 @	2469.20	96.06			63.94	3.67	28.45	0.00	277	42	Average	VERTICAL
3	2483.50	53.91	54.00	-0.09	21.75	3.68	28.48	0.00	277	42	Average	VERTICAL
4	2488.00	67.20	74.00	-6.80	35.04	3.68	28.48	0.00	277	42	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11b / Reference Level

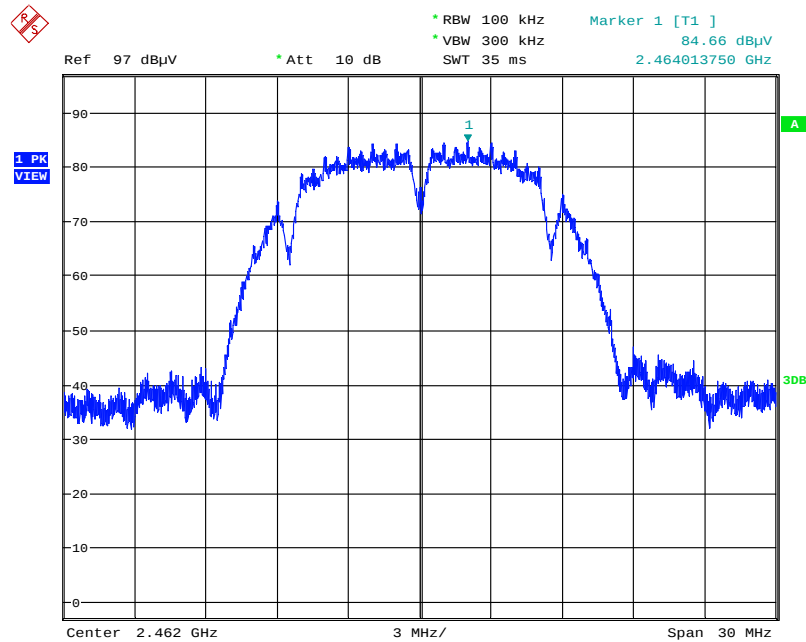


Date: 23.JUL.2016 02:45:10

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

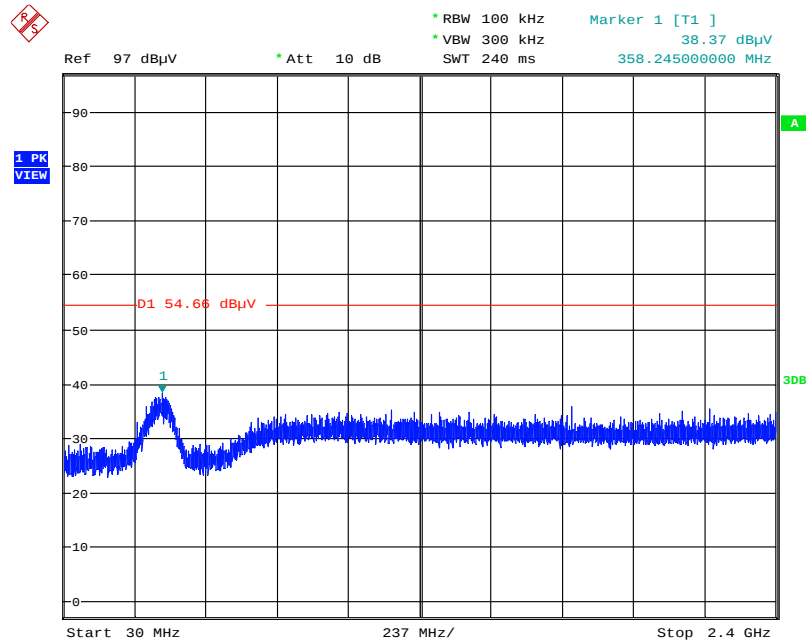


Date: 23.JUL.2016 02:50:03

Plot on Configuration IEEE 802.11b / CH 1 / 2483.5MHz~26500MHz (down 30dBc)

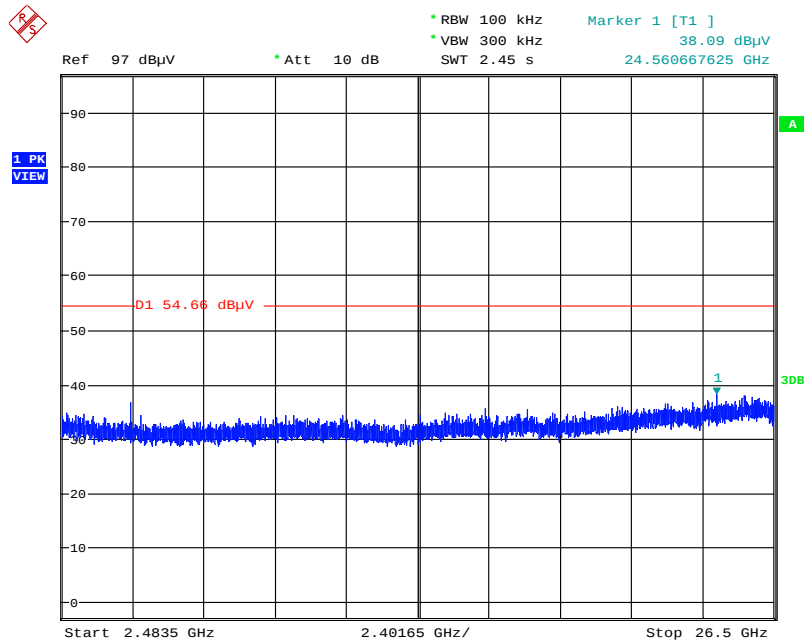


Date: 23.JUL.2016 02:49:22

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

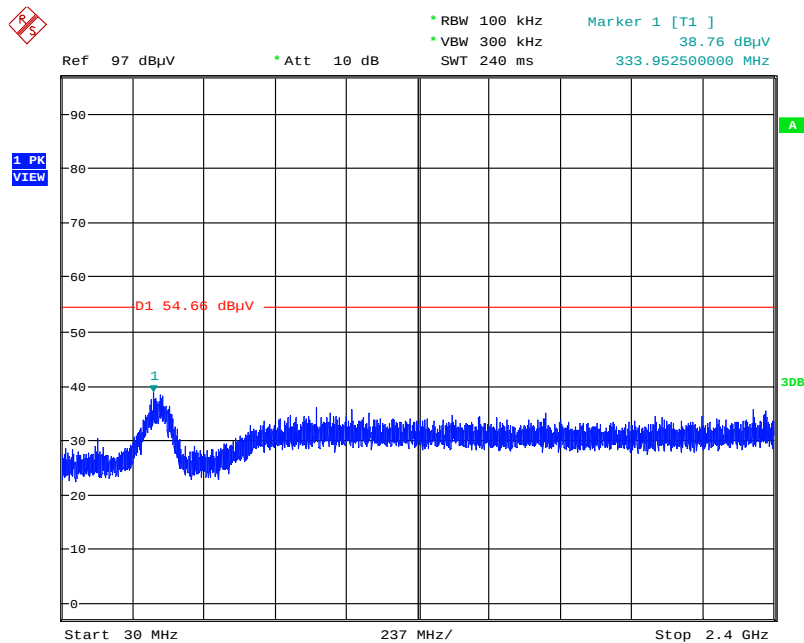


Date: 23.JUL.2016 02:46:36

Plot on Configuration IEEE 802.11b / CH 11 / 2483.5MHz~26500MHz (down 30dBc)

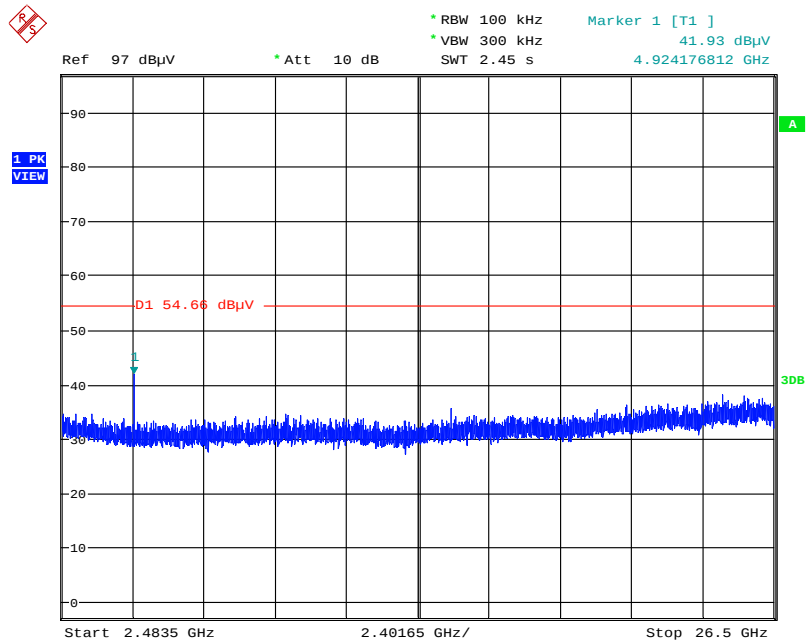


Date: 23.JUL.2016 02:47:28

Plot on Configuration IEEE 802.11g / Reference Level

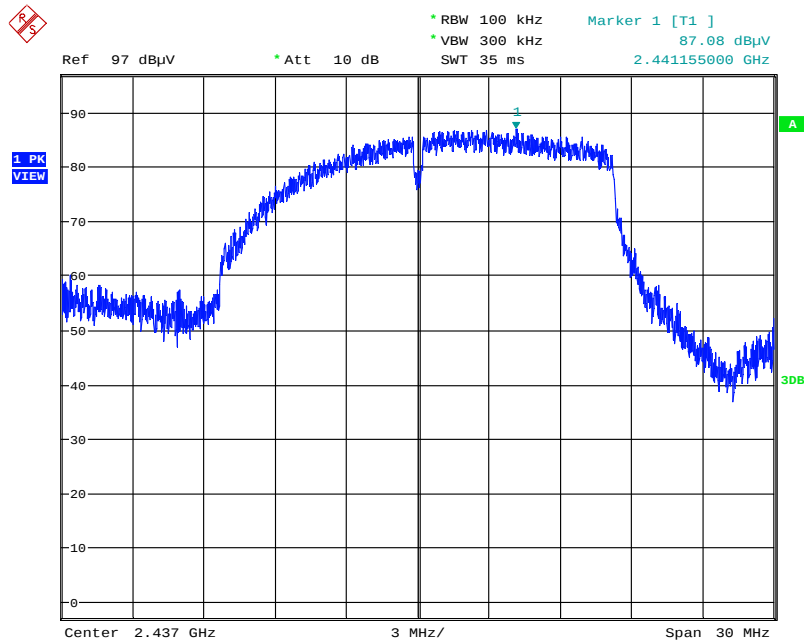


Date: 23.JUL.2016 02:51:57

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

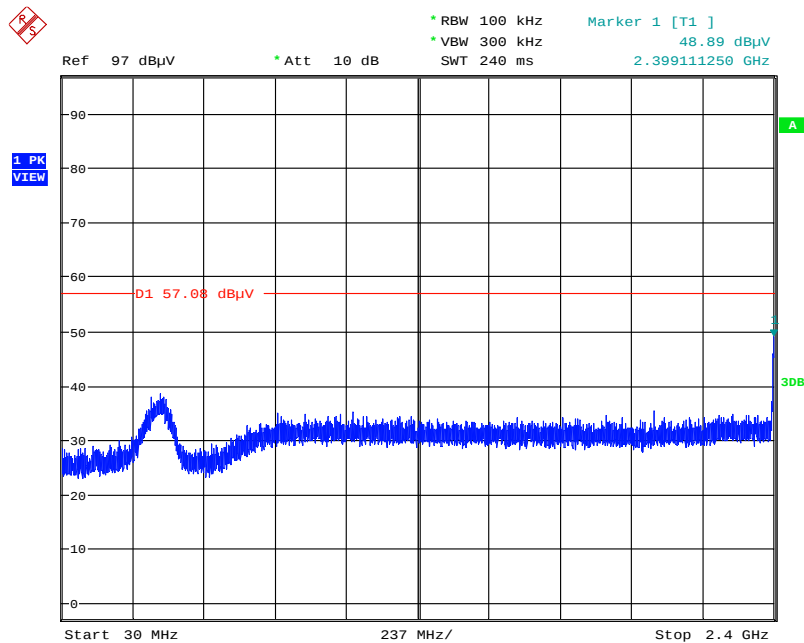


Date: 23.JUL.2016 02:53:21

Plot on Configuration IEEE 802.11g / CH 1 / 2483.5MHz~26500MHz (down 30dBc)

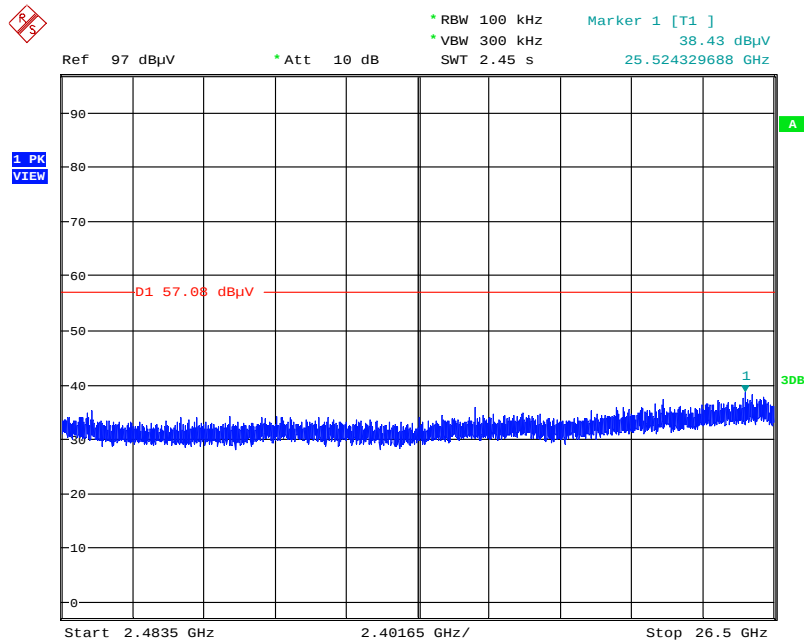


Date: 23.JUL.2016 02:53:49

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

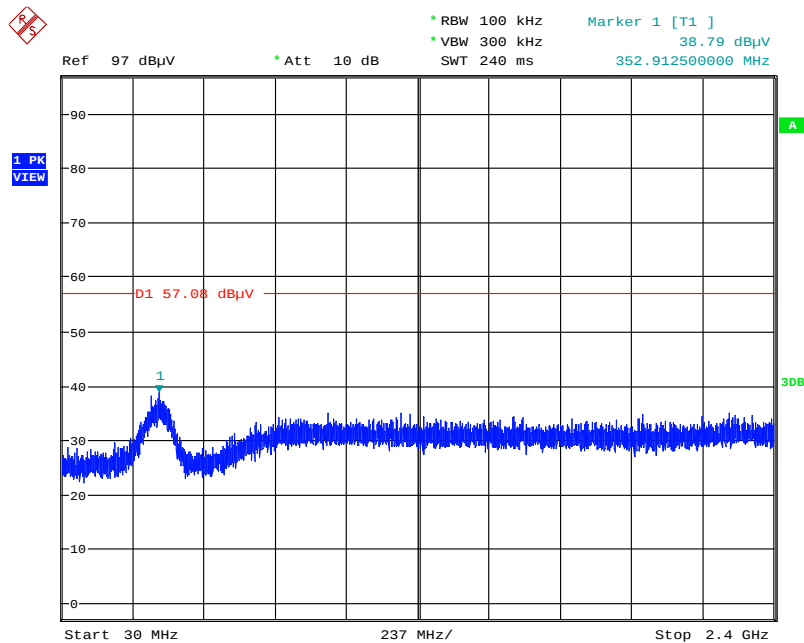


Date: 23.JUL.2016 02:55:36

Plot on Configuration IEEE 802.11g / CH 11 / 2483.5MHz~26500MHz (down 30dBc)

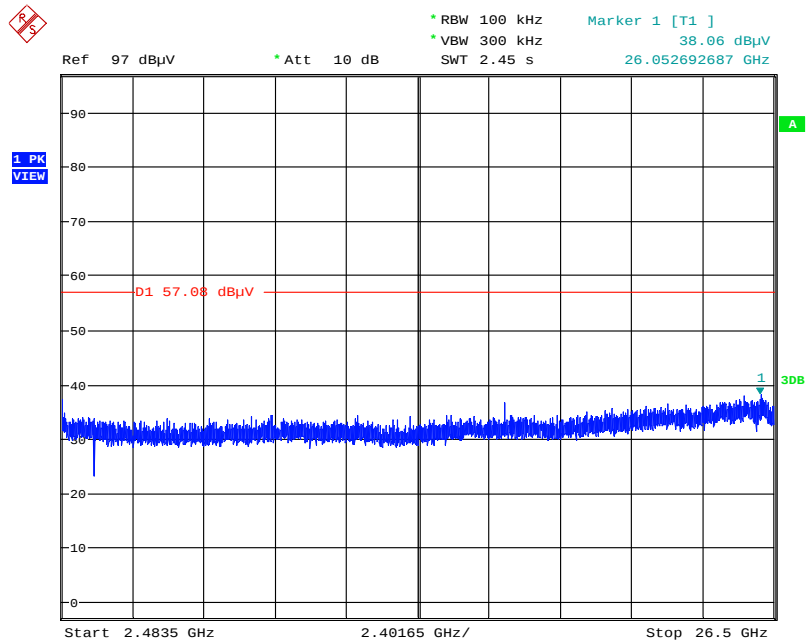


Date: 23.JUL.2016 02:55:10

Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level

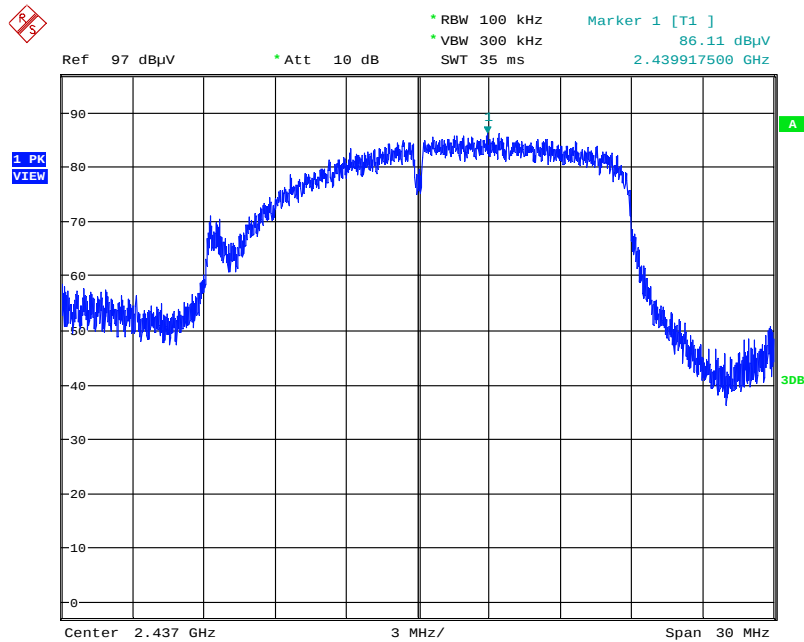


Date: 23.JUL.2016 02:57:59

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

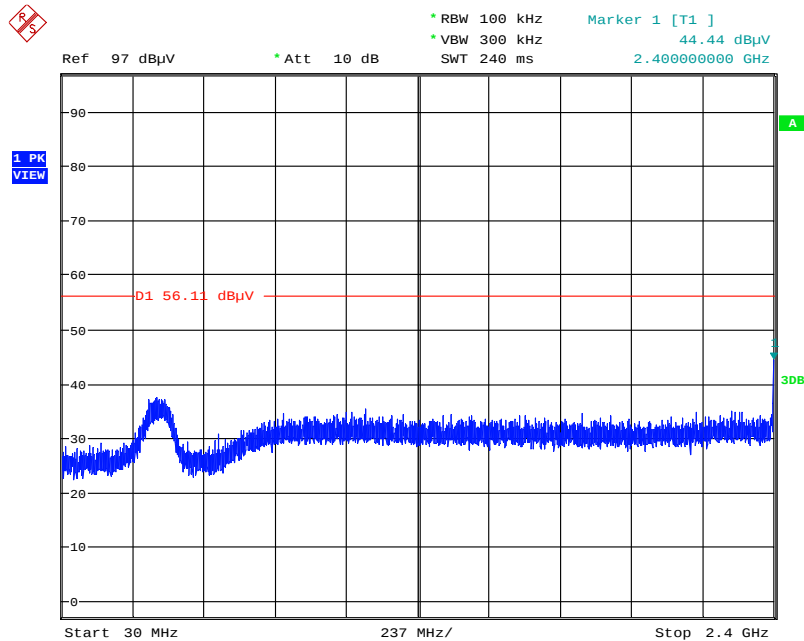


Date: 23.JUL.2016 02:59:20

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2483.5MHz~26500MHz (down 30dBc)

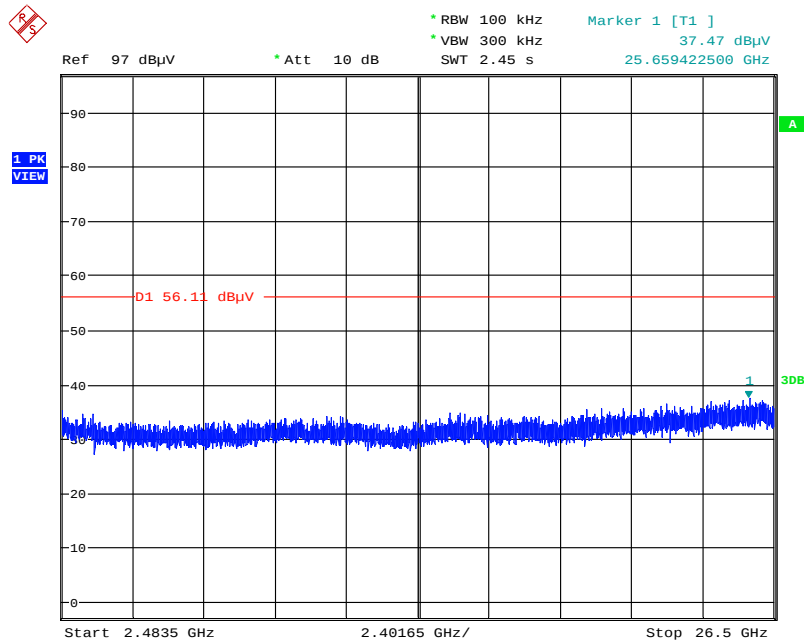


Date: 23.JUL.2016 02:59:46

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

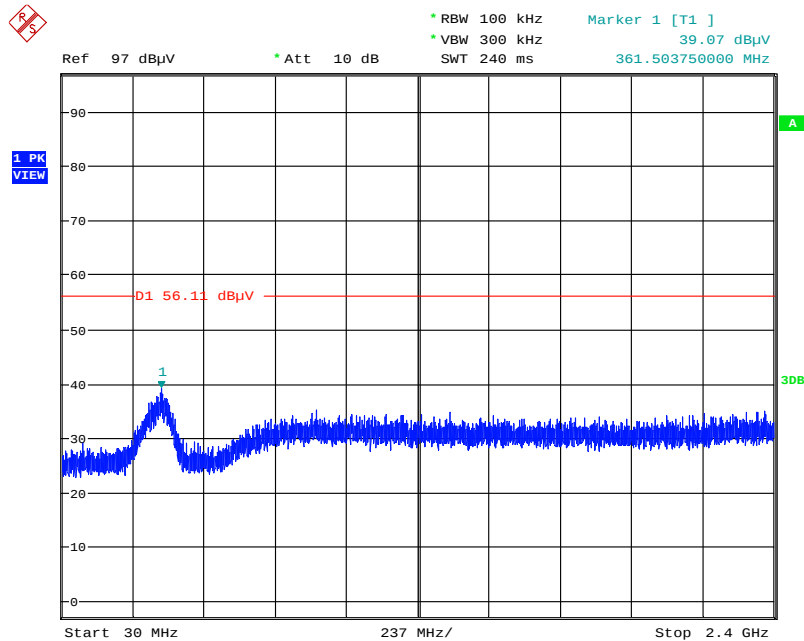


Date: 23.JUL.2016 03:01:28

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2483.5MHz~26500MHz (down 30dBc)

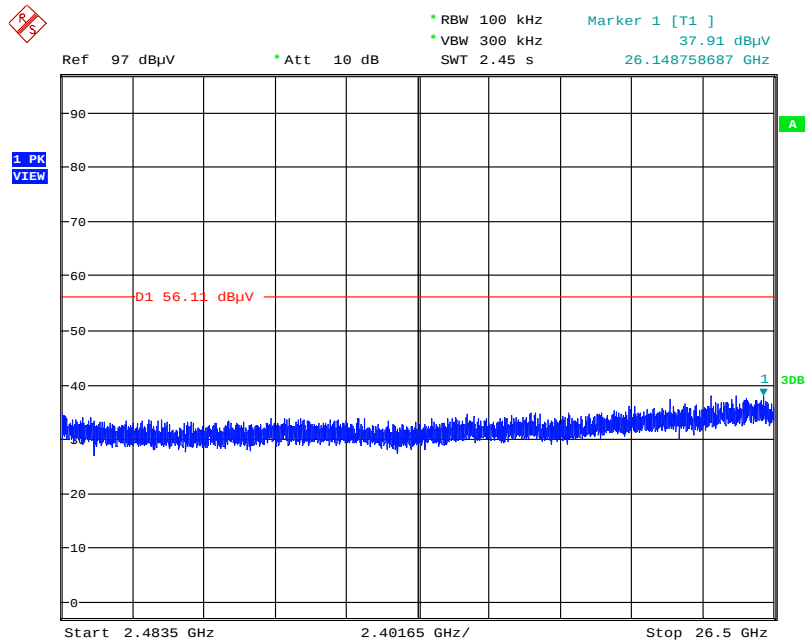


Date: 23.JUL.2016 03:01:08

Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level

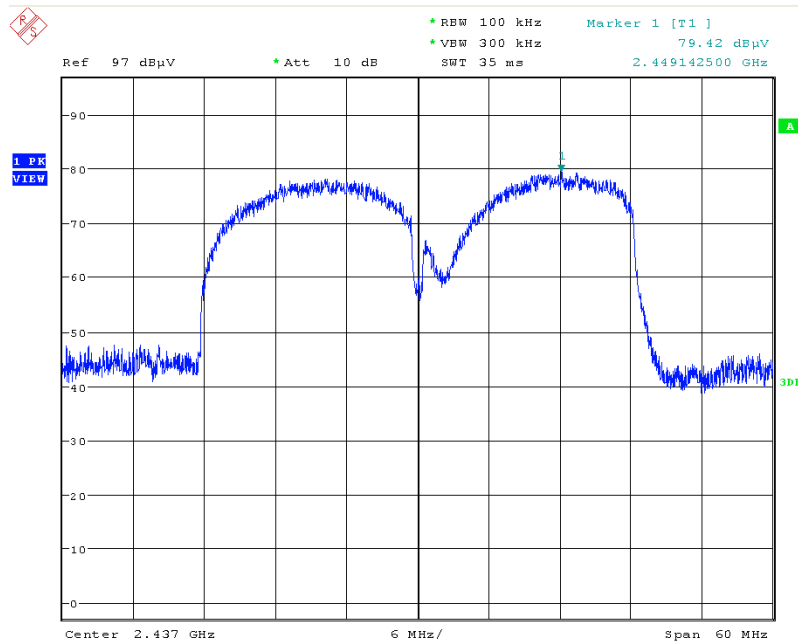


Date: 23.JUL.2016 03:06:27

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

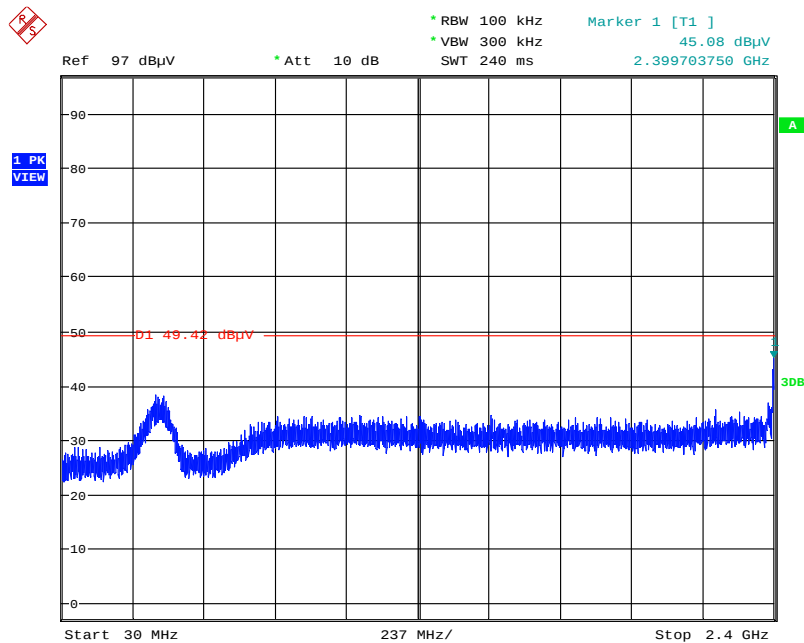


Date: 23.JUL.2016 03:07:52

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2483.5MHz~26500MHz (down 30dBc)

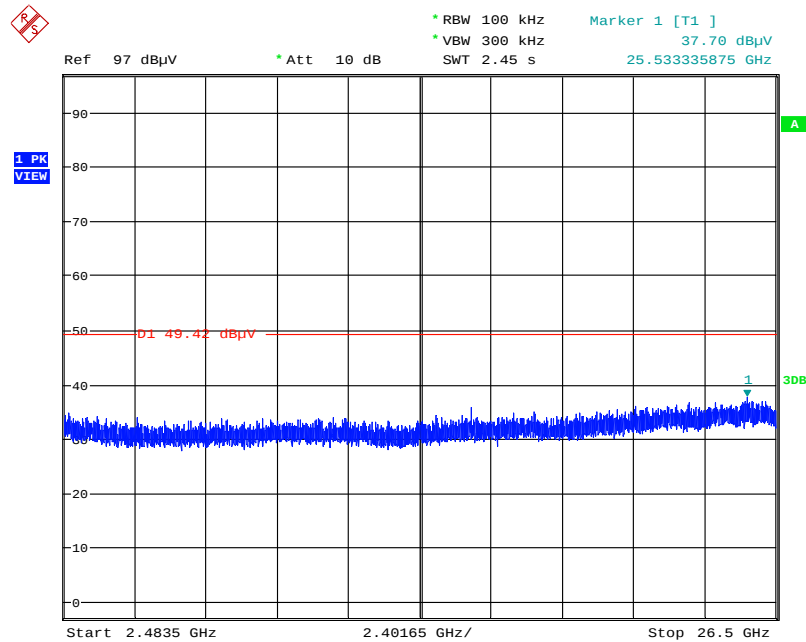


Date: 23.JUL.2016 03:08:27

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

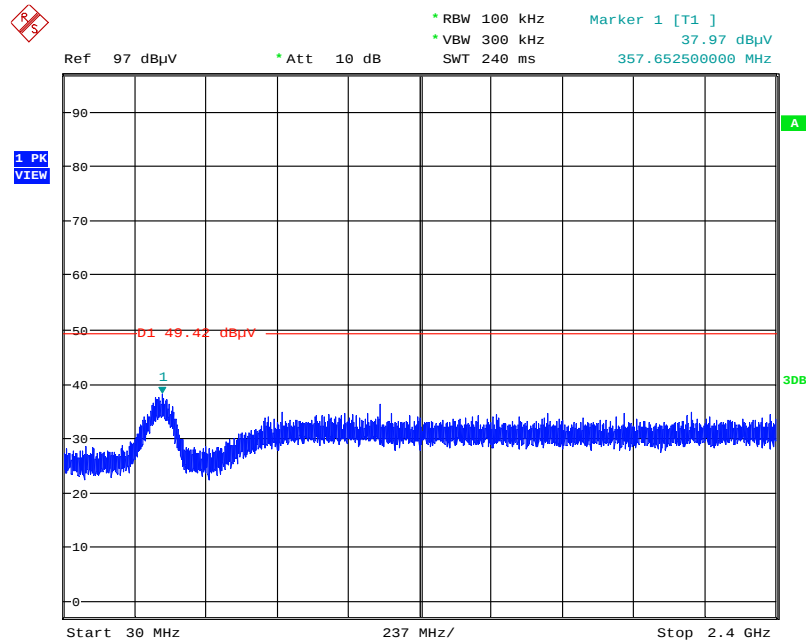

Date: 23.JUL.2016 03:09:29

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2483.5MHz~26500MHz (down 30dBc)

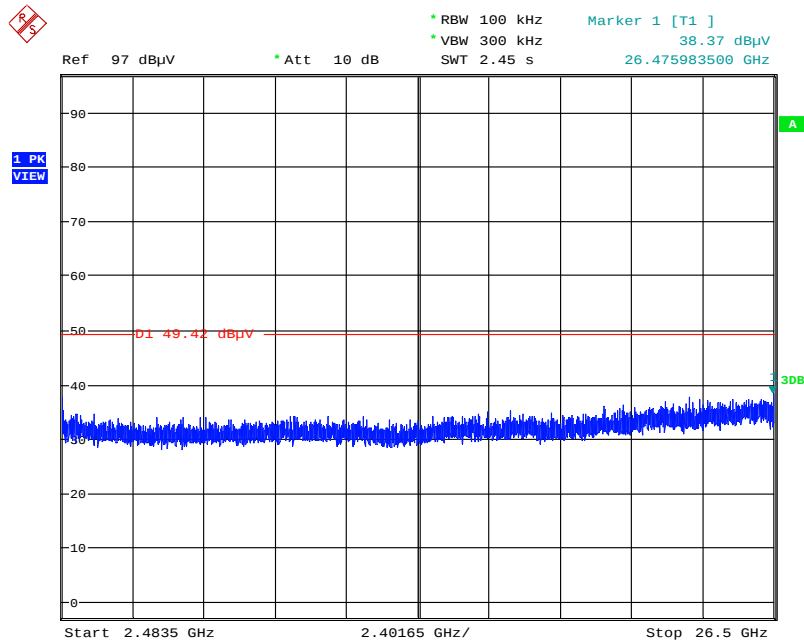

Date: 23.JUL.2016 03:09:11

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 23, 2017	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 14, 2016	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 21, 2016	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 24, 2016	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA with 6dB Attenuator	TESEQ & EMCi	CBL6112D & N-6-06	37880 & AT-N0609	20MHz ~ 2GHz	Aug. 30, 2016	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2016*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Nov. 10, 2016	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Mar. 01, 2016	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 05, 2017	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Mar. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 18, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 16, 2017	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 13, 2015	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jul. 10, 2017	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 22, 2016	Radiation (03CH01-CB)
EMI Test	R&S	ESCS	100355	9kHz ~ 2.75GHz	May 16, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-16+17	N/A	30 MHz ~ 1 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16+17	N/A	1 GHz ~ 18 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-40G#1	N/A	18GHz ~ 40 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#2	N/A	18GHz ~ 40 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-I0-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 26, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 22, 2016	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY


Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%
Output Power Measurement	1.33 dB	Confidence levels of 95%
Power Density Measurement	1.27 dB	Confidence levels of 95%
Bandwidth Measurement	9.74×10^{-8}	Confidence levels of 95%

Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	21°C	Humidity	50%
Test Engineer	Mason Chen	Configurations	2.4GHz + 5GHz

Horizontal

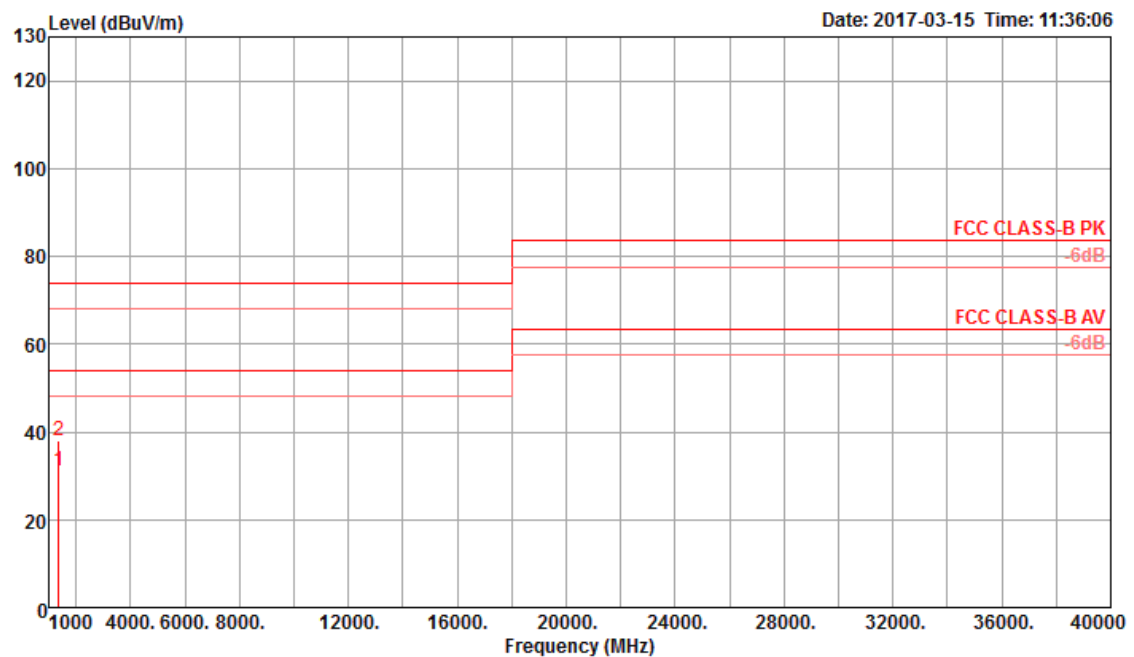

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1375.00	31.22	54.00	-22.78	37.65	3.13	24.90	34.46	223	166	Average
2	1375.00	38.02	74.00	-35.98	44.45	3.13	24.90	34.46	223	166	Peak

Vertical

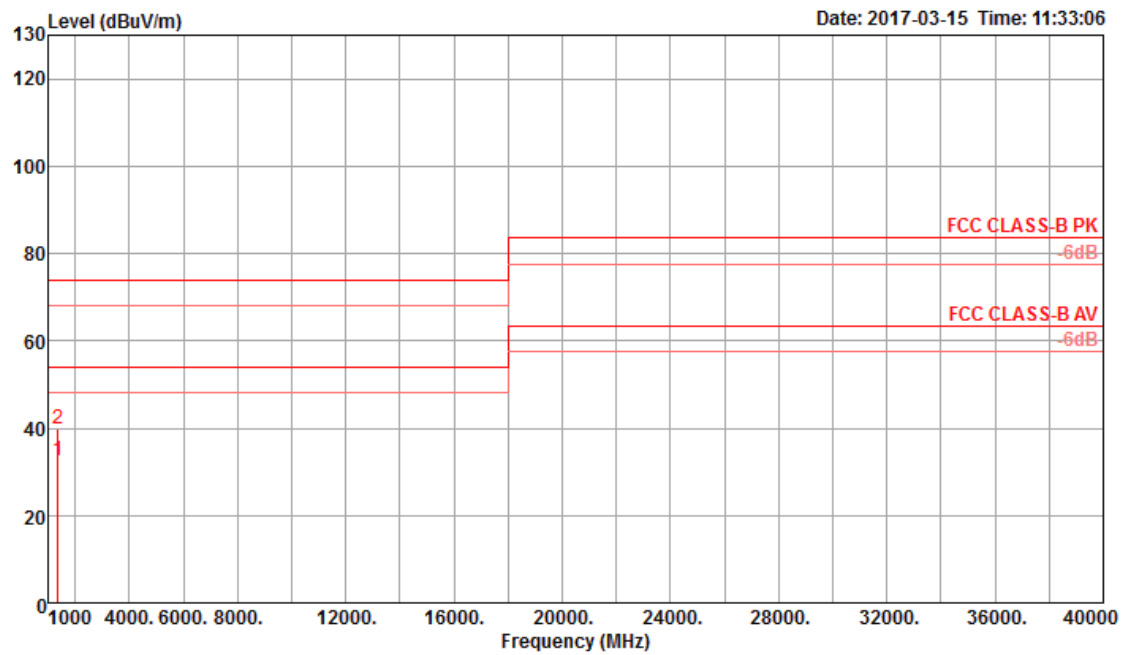

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1375.00	32.56	54.00	-21.44	38.99	3.13	24.90	34.46	213	50 Average	VERTICAL
2	1375.00	39.75	74.00	-34.25	46.18	3.13	24.90	34.46	213	50 Peak	VERTICAL