

Straubing, March 8, 2005

TEST - REPORT

No. 50511-40907-2 (Edition 1)

for

Solid Radar FMR 25x

Level Measuring Transmitter

Applicant: Endress & Hauser GmbH & Co. KG

Test Specifications: FCC Code of Federal Regulations,
CFR 47, Part 15,
Sections 15.205, 15.207 and 15.209

Industry Canada Radio Standards
Specification RSS-210 Issue 5,
Sections 6.2.1, 6.3 and 6.6
(Category I Equipment)

Note:

The test data of this report is related only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.

Table of Contents

1	Description of the Equipment Under Test (EUT)	3
2	Administrative Data	4
3	Identification of the Test Laboratory	5
4	Summary	6
5	Operation Mode and Configuration of EUT.....	7
6	Measuring Methods	8
6.1	Conducted AC powerline emission.....	8
6.2	Radiated emission in Fully Anechoic Room	10
6.3	Radiated emission at Open Field Test Site	12
6.4	Desensitization of pulsed Emissions	13
7	Photographs Taken During Testing	15
8	Test Results.....	20
8.1	Occupied Bandwidth.....	21
8.2	Emission Bandwidth	23
8.3	Designation of Emissions	24
8.4	Duty Cycle Measurement	25
8.5	Restricted bands of operation.....	28
8.6	Conducted Powerline Emission Measurement 150 kHz to 30 MHz.....	29
8.7	Radiated Emission Measurement 30 MHz to 110 GHz	30
9	Referenced Regulations	31
10	Charts taken during testing	32

1 Description of the Equipment Under Test (EUT)

General data of EUT	
Type designation ¹ :	Solid Radar FMR 25x
Parts ² :	
Serial number(s):	71004301083
Manufacturer:	Endress & Hauser GmbH & Co. KG
Type of equipment:	Level Measuring Transmitter
Version:	
FCC ID:	
Additional parts/accessories:	

Technical data of EUT	
Application frequency range:	24.00 – 24.12 GHz
Frequency range:	24.00 – 24.12 GHz
Operating frequency:	24.12 GHz (nominal)
Type of modulation:	1G08P0NAN
Pulse train:	558.5 ns
Pulse width:	2.79 ns
Number of RF-channels:	1
Channel spacing:	Not Applicable
Designation of emissions ³ :	1G08P0NAN
Type of antenna:	Dish Antenna
Size/length of antenna:	Ø 20 cm
Type of power supply:	DC supply
Specifications for power supply:	nominal voltage: 24 V minimum voltage: 16 V maximum voltage: 36 V

¹ Type designation of the system if EUT consists of more than one part.

² Type designations of the parts of the system, if applicable.

³ Also known as "Class of Emission".

2 Administrative Data

Application details	
Applicant (full address):	Endress & Hauser GmbH & Co. KG Hauptstraße 1 D 79689 Maulburg Germany
Contact person:	Mr. Peter Klöfer
Contract identification:	
Receipt of EUT:	January 2005
Date(s) of test:	February – March 2005
Note(s):	

Report details	
Report number:	50511-40907-2
Edition:	1
Issue date:	March 8, 2005

3 Identification of the Test Laboratory

Details of the Test Laboratory	
Company name:	Senton GmbH EMI/EMC Test Center
Address:	Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
Laboratory Accreditation:	DAR-Registration No. DAT-P-171/94-02
FCC Test Site registration number	90926
Industry Canada Test site registration:	IC 3050
Contact person:	Mr. Johann Roidt
	Phone: (+49) (0)9421 5522-0 Fax: (+49) (0)9421 5522-99

4 Summary

Summary of test results

The tested sample complies with the requirements set forth in the

Code of Federal Regulations CFR 47, Part 15, Sections 15.205, 15.207 and 15.209

of the Federal Communication Commission (FCC) and the

Radio Standards Specification RSS-210 Issue 5, Sections 6.2.1, 6.3 and 6.6 (Category I Equipment)
of Industry Canada (IC).

Personnel involved in this report

Laboratory Manager:



Mr. Johann Roidt

Responsible for testing:

Mr. Johann Roidt

Responsible for test report:

Mr. Johann Roidt

5 Operation Mode and Configuration of EUT

Operation Mode

Normal operation mode: Measurement with pulsed signal.

Configuration of EUT

FCC test setup.
 DC 24 V power supply.
 EUT in vertical position.

List of ports and cables

<i>Port</i>	<i>Description</i>	<i>Classification⁴</i>	<i>Cable type</i>	<i>Cable length</i>
1	DC supply with HART communication	dc power signal/control port	Shielded	> 3 m

List of devices connected to EUT

<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>

List of support devices


<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>

⁴ Ports shall be classified as ac power, dc power or signal/control port

6 Measuring Methods

6.1 Conducted AC powerline emission

Measurement Procedure:	
Rules and Specifications:	CFR 47 Part 15, section 15.207 IC RSS-210 Issue 5, section 6.6
Guide:	ANSI C63.4 / CISPR 22
Conducted emission tests in the frequency range 150 kHz to 30 MHz are performed using Line Impedance Stabilization Networks (LISNs). To simplify testing with quasi-peak and average detector the following procedure is used: First the whole spectrum of emission caused by the equipment under test (EUT) is recorded with detector set to peak using CISPR bandwidth of 10 kHz. After that all emission levels having less margin than 10 dB to or exceeding the average (CFR 47 Part 15) or quasi-peak (IC RSS-210) limit are retested with detector set to quasi-peak. If average limit is kept with quasi-peak levels no additional scan with average detector is necessary. In cases of emission levels between quasi-peak and average limit an additional scan with detector set to average is performed. According to ANSI C63.4, section 13.1.3.1, testing of intentional radiators with detachable antenna shall be performed using a suitable dummy load connected to the antenna output terminals. Otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. Testing with dummy load may be necessary to distinguish (unintentional) conducted emissions on the supply lines from (intentional) emissions radiated by the antenna and coupling directly to supply lines and/or LISN. Usage of dummy load has to be stated in the appropriate test record(s) and notes should be added to clarify the test setup.	

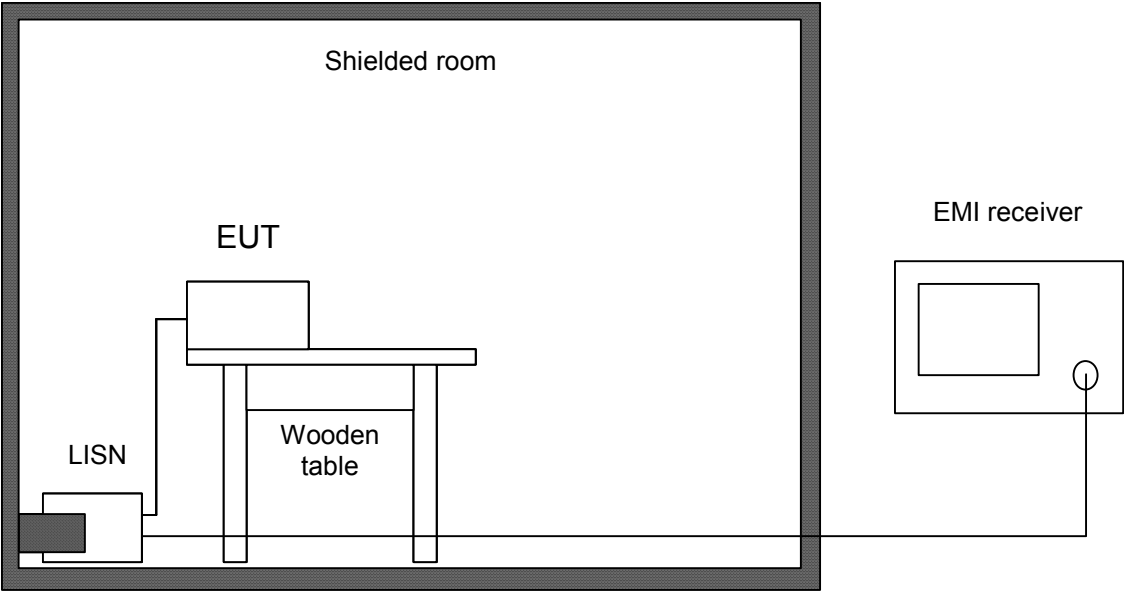


Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
☒	EMI receiver	ESHS 10	860043/016	Rohde & Schwarz
☒	LISN	ESH3-Z5	862770/021	Rohde & Schwarz
☐	LISN	ESH3-Z5	830952/025	Rohde & Schwarz
☐	Shielded room	No. 1	1451	Albatross Projects
☒	Shielded room	No. 4	3FD-100 544	Euroshield

6.2 Radiated emission in Fully Anechoic Room

Measurement Procedure:	
Rules and Specifications:	CFR 47 Part 15, section 15.209 IC RSS-210 Issue 5, section 6.2.1
Guide:	ANSI C63.4
Radiated emission in fully anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33. Measurements are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz). Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used. All tests below 18 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance is reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary. If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions. For final testing below 1 GHz an open field test-site is used and the plots recorded in the fully anechoic room are indicated as prescans.	

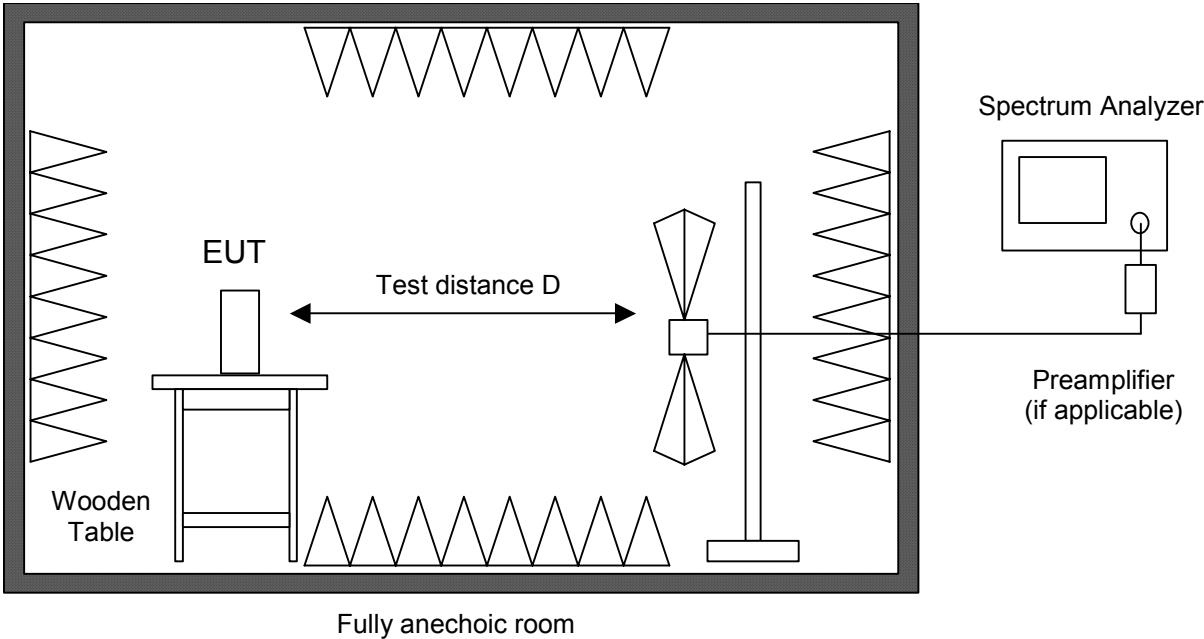

Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
☒	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
☐	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
☒	Preamplifier	CPA9231A	3393	Schaffner
☒	Preamplifier 1-8 GHz	AFS3-00100800-32-LN	847743	Miteq
☐	Preamplifier 0.5-8 GHz	AMF-4D-005080-25-13P	860149	Miteq
☒	Preamplifier 8-18 GHz	ACO/180-3530	32641	CTT
☒	External Mixer	WM782A	845881/005	Tektronix
☒	Harmonic Mixer	FS-Z30	843389/007	Rohde & Schwarz
	Accessories			
☒	Trilog broadband antenna	VULB 9163	9163-188	Schwarzbeck
☒	Horn antenna	3115	9508-4553	EMCO
☐	Horn antenna	3160-03	9112-1003	EMCO
☐	Horn antenna	3160-04	9112-1001	EMCO
☒	Horn antenna	3160-05	9112-1001	EMCO
☒	Horn antenna	3160-06	9112-1001	EMCO
☒	Horn antenna	3160-07	9112-1008	EMCO
☒	Horn antenna	3160-08	9112-1002	EMCO
☒	Horn antenna	3160-09	9403-1025	EMCO
☒	Horn antenna	3160-10	399185	EMCO
☒	Fully anechoic room	No. 2	1452	Albatross Projects

6.3 Radiated emission at Open Field Test Site

Measurement Procedure:

Rules and Specifications: CFR 47 Part 15, section 15.209
 IC RSS-210 Issue 5, section 6.2.1


Guide: ANSI C63.4

Radiated emission at open field test site is measured in the frequency range 30 MHz to 1 GHz using a biconical antenna up to 300 MHz and a logarithmic periodic antenna above. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in the fully anechoic room. EUT is rotated all around and receiving antenna is raised and lowered within 1 meter to 4 meters to find the maximum levels of emission. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.

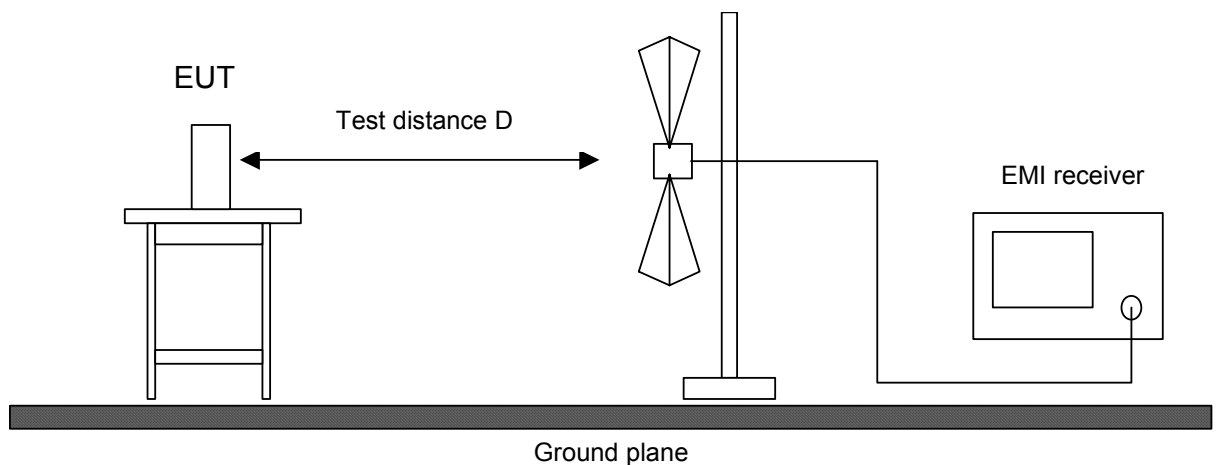

Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
☐	EMI receiver	ESVP	881414/009	Rohde & Schwarz
☐	Biconical antenna	EG 1 HK 116	842204/001	Rohde & Schwarz
☐	Log. per. antenna	EG 1 HL 223	841516/023	Rohde & Schwarz
☐	Open field test site	EG 1	1450	Senton

6.4 Desensitization of pulsed Emissions

Since the EUT transmits pulsed energy, the desensitization factor α has been calculated and included in the calculation for the final peak value.

In the HP Application Note 150-2 the analyzer settings to measure a line spectrum are defined as follows:

a) Bandwidth $B < 0.3 \times \text{PRF}$

b) Scan time $T_s > F_s / B^2$

With the pulse repetition frequency (PRF) of the EUT of 3.6 MHz and the selected measuring bandwidth of $B = 1 \text{ MHz}$ the requirement a) was observed.

The scan width of $F_s = 3 \text{ GHz}$ and Bandwidth of $B = 1 \text{ MHz}$ leads to following values:

$$F_s/B^2 = 3 \text{ GHz} / (1 \text{ GHz})^2 = 3 \times 10^{-9} \text{ s}$$

The selected scan time of $T_s = 20 \text{ ms}$ meets requirement b). Hence, a line spectrum was measured, which could be seen, when the Pseudo-Noise-mode of the EUT was switched off (no influence on the measured amplitudes) and the frequency scale of the analyser zoomed.

The desensitization factor α_i was calculated according to HP Application note 150-2:

$$\alpha_i = 20 \log (\tau_{\text{eff}} / T) = - 46 \text{ dB}$$

The calculation based on the pulse width $\tau_{\text{eff}} = 2.79 \text{ ns}$ and the pulse period $T = 558.5 \text{ ns}$, which have been supplied by the applicant.

To avoid overloading the spectrum analyzer the internal preselector has been activated during final testing. A linearity check by adding a 3 dB attenuator to the input was used to ensure integrity of the test data.

Sample Calculation of Field Strength values for pulsed systems:


- 1) Measure Peak value with analyzer RBW set to 1 MHz, VBW set to 1 MHz, Ts set to 20 ms
- 2) Calculate Field Strength by adding antenna correction factor
- 3) Calculate True Peak Field Strength by adding Desensitization Factor
- 4) Calculate Average value by subtracting Duty Cycle Correction Factor from True Peak Field Strength Value

7 Photographs Taken During Testing


Test setup for conducted DC powerline emission measurement



**Test setup for conducted DC powerline emission measurement
- continued -**

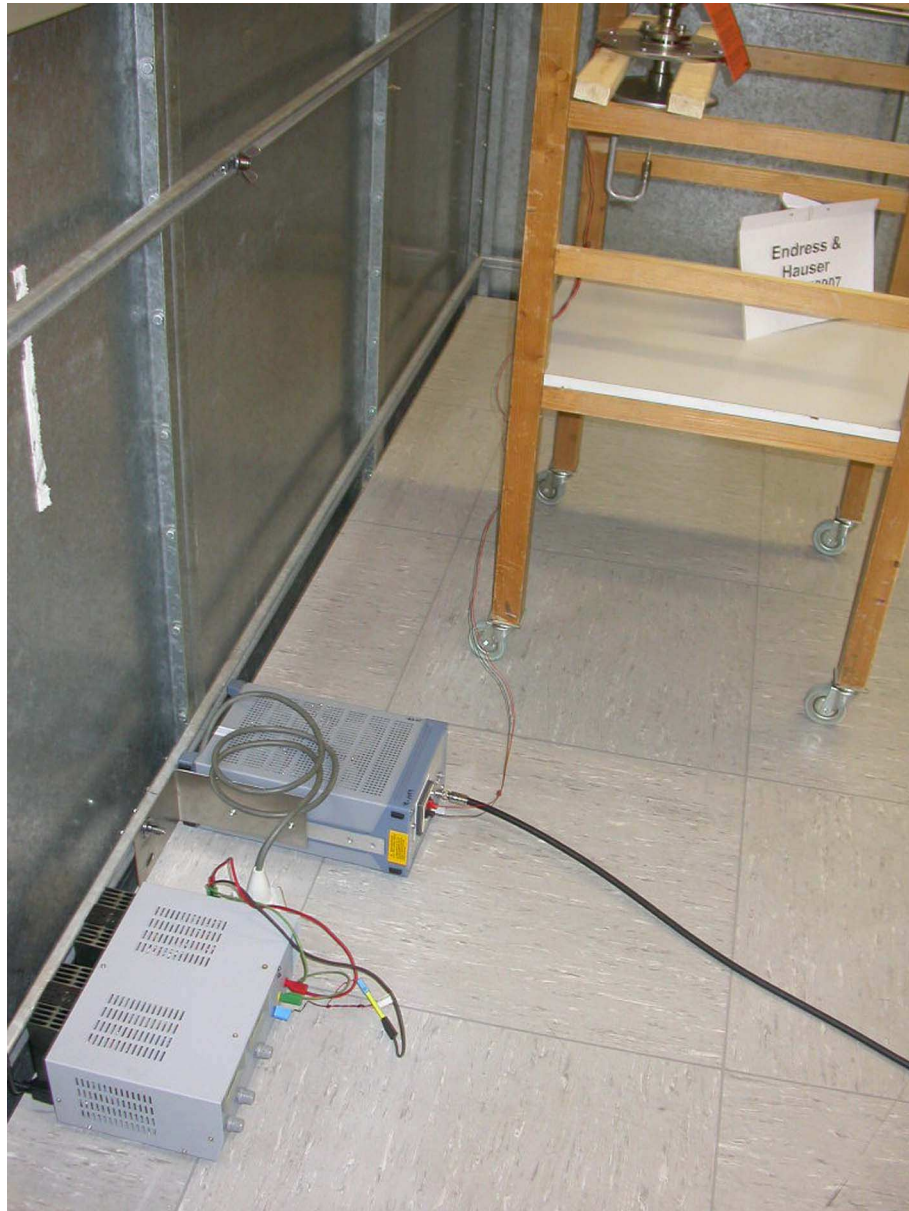

**Test setup for radiated emission measurement
(fully anechoic room)**

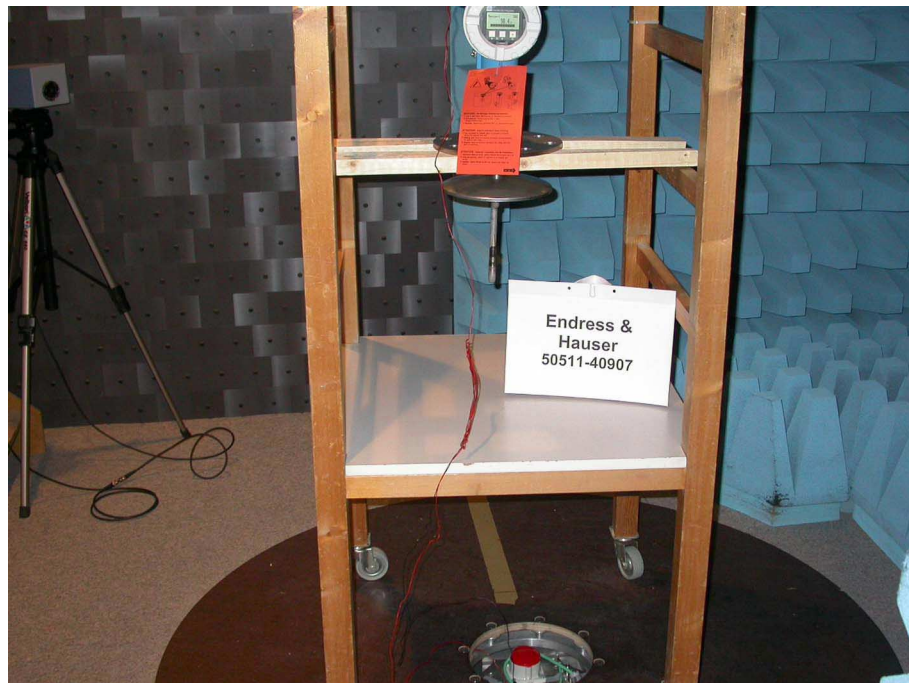

**Test setup for radiated emission measurement
(fully anechoic room) - continued -**



8 Test Results

FCC CFR 47 Parts 2 and 15			
Section(s)	Test	Page	Result
2.202(a)	Occupied bandwidth	21	Recorded
2.201, 2.202	Class of emission	24	Calculated
15.35(c)	Pulse train measurement for pulsed operation	25	Recorded
15.205(a)	Restricted bands of operation	28	Test passed
15.207	Conducted AC powerline emission 150 kHz to 30 MHz	29	Test passed ⁵
15.205(b) 15.209	Radiated emission 9 kHz to 30 MHz	---	Not applicable
15.205(b) 15.209	Radiated emission 30 MHz to 110 GHz	30	Test passed

IC RSS-210 Issue 5			
Section(s)	Test	Page	Result
5.9.1	Emission bandwidth	23	Recorded
5.9.2	Designation of emissions	24	Calculated
6.5	Pulsed operation	25	Recorded
6.3(a)	Restricted bands and unwanted emission frequencies	28	Test passed
6.6	Transmitter AC wireline conducted emissions 450 kHz to 30 MHz	29	Test passed ⁵
6.2.1 6.3(b)-(d)	Field strength of emissions 9 kHz to 30 MHz	---	Not applicable
6.2.1 6.3(b)-(d)	Field strength of emissions 30 MHz to 110 GHz	30	Test passed

⁵ Conducted AC powerline emission not applicable. Conducted DC powerline emission performed instead.


8.1 Occupied Bandwidth

Rules and specifications:	CFR 47 Part 2, section 2.202(a) ANSI C63.4, annex H.6	
Guide:	ANSI C63.4	
Description:	The occupied bandwidth according to CFR 47 Part 2, section 2.202(a), is measured as the 99% emission bandwidth, i.e. below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission. The occupied bandwidth according to ANSI C63.4, annex H.6; is measured as the frequency range defined by the points that are 26 dB down relative to the maximum level of the modulated carrier. The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
	The video bandwidth shall be at least three times greater than the resolution bandwidth.	
Comment:	Test performed until 26.5 GHz only	
Date of test:	11 March 2005	
Test site:	Fully anechoic room, cabin no. 2	

Occupied Bandwidth (-26 dB):

Ref.Level 47 dB μ V
5 dB/Div.

ATT 0 dB

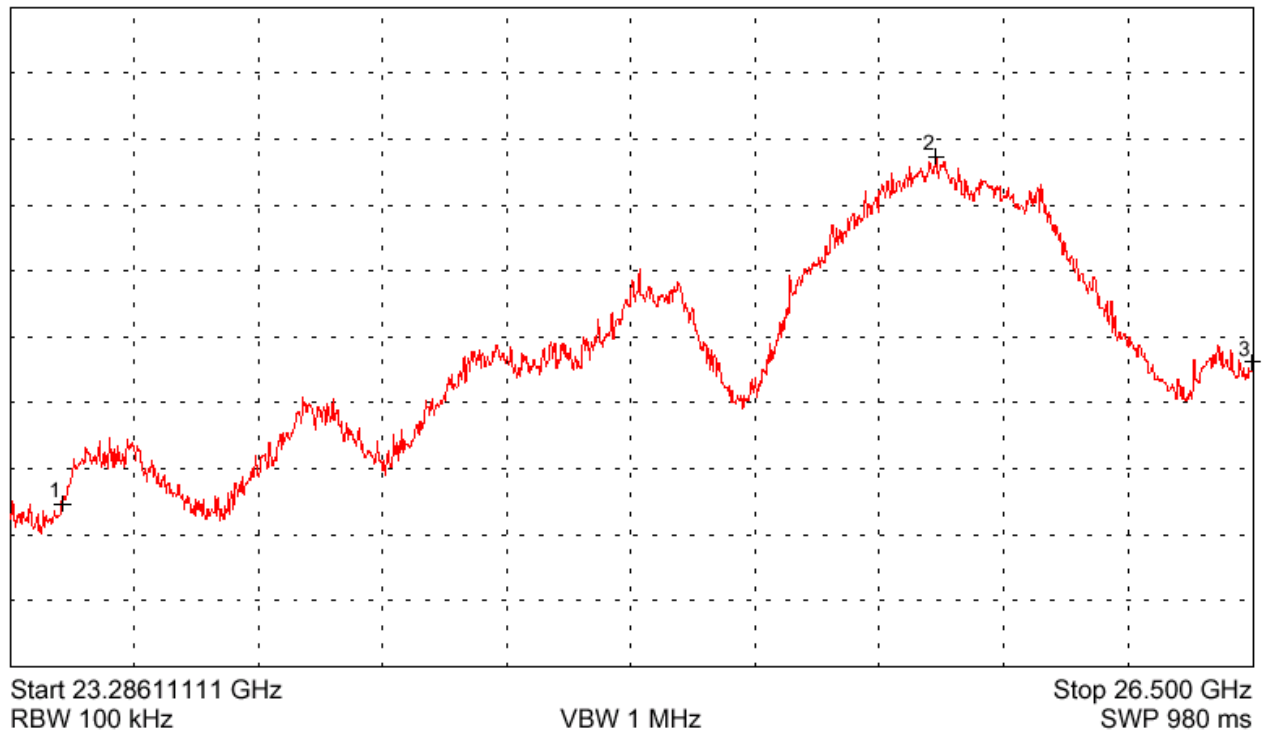


Occupied Bandwidth (-26 dB): **> 3.0 GHz**

8.2 Emission Bandwidth

Rules and specifications:	IC RSS-210 Issue 5, section 5.9.1
Guide:	IC RSS-210 Issue 5, section 5.9.1
Description:	The 20 dB bandwidth is measured at the points when the spectral density of the signal is 20 dB down from the inband spectral density of the modulated signal, with the transmitter modulated by a representative signal. Spectral density (power per unit bandwidth) is measured with a spectrum analyzer with resolution bandwidth set to 300 Hz or alternatively equal to approximately 1.0% of the emission bandwidth. The video bandwidth shall be at least three times greater than the resolution bandwidth.

Comment:	Test performed until 26.5 GHz only
Date of test:	11 March 2005
Test site:	Fully anechoic room, cabin no. 2

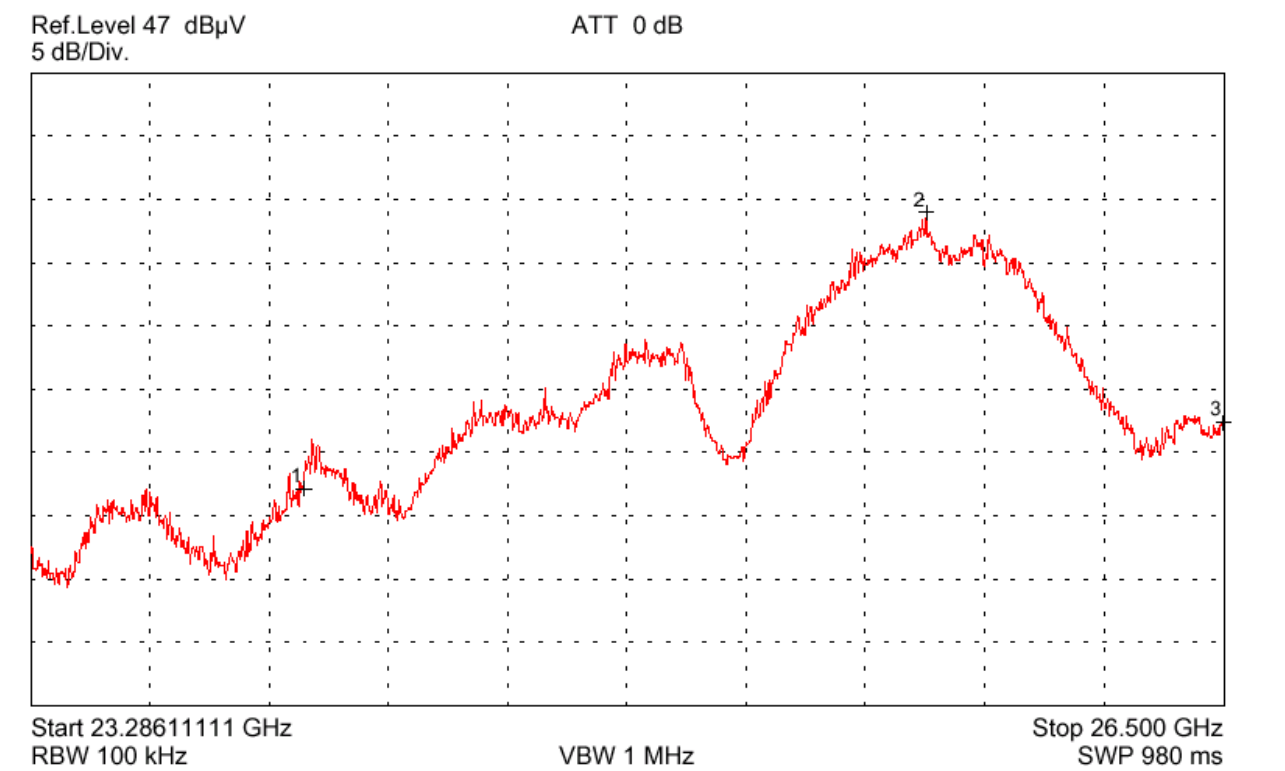

Emission bandwidth (-20 dB):	> 2.5 GHz
------------------------------	-----------

8.3 Designation of Emissions

Rules and specifications:	CFR 47 Part 2, sections 2.201 and 2.202 IC RSS-210 Issue 5, section 5.9.2
Guide:	ANSI C63.4 / TRC-43

Type of modulation:	Unmodulated Pulse Emission
---------------------	----------------------------

B_n = Necessary Bandwidth	$B_n = 2 K / t$
K = Overall numerical factor	$K = 1.5$
t = Pulse duration in seconds at half-amplitude	$t = 2.79\text{ns}$
Calculation:	$B_n = 2 \cdot 1.5 / 2.79\text{ns} = 1.075 \text{ GHz}$


Designation of Emissions:	1G08P0NAN
---------------------------	------------------

8.4 Duty Cycle Measurement


Rules and specifications:	CFR 47 Part 15, section 15.35(c) IC RSS-210 Issue 5, section 6.5
Guide:	ANSI C63.4


Comment:	Measurement with negative diode detector.
Date of test:	8 March 2005
Test site:	Fully anechoic room, cabin no. 2

Total Pulse Train:

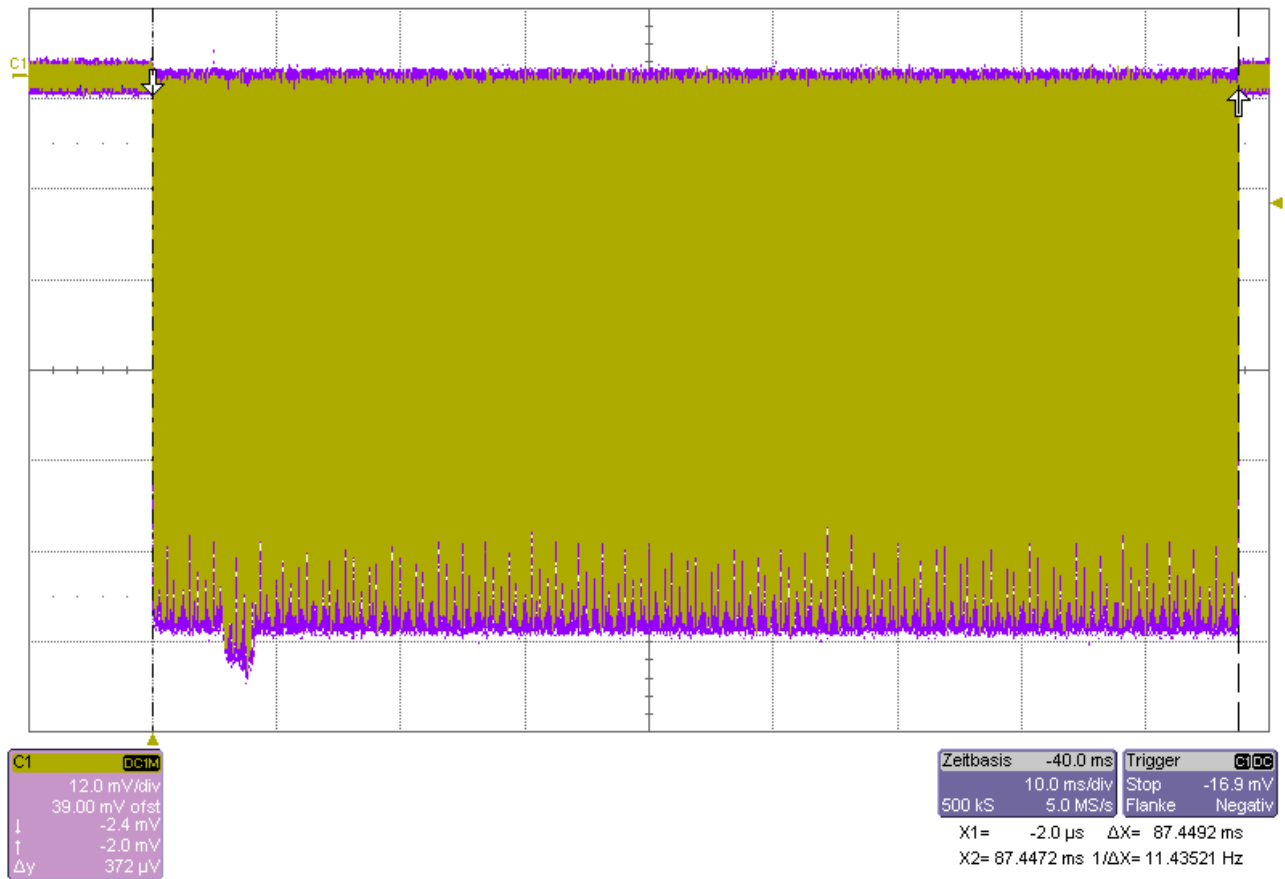

Worst case:

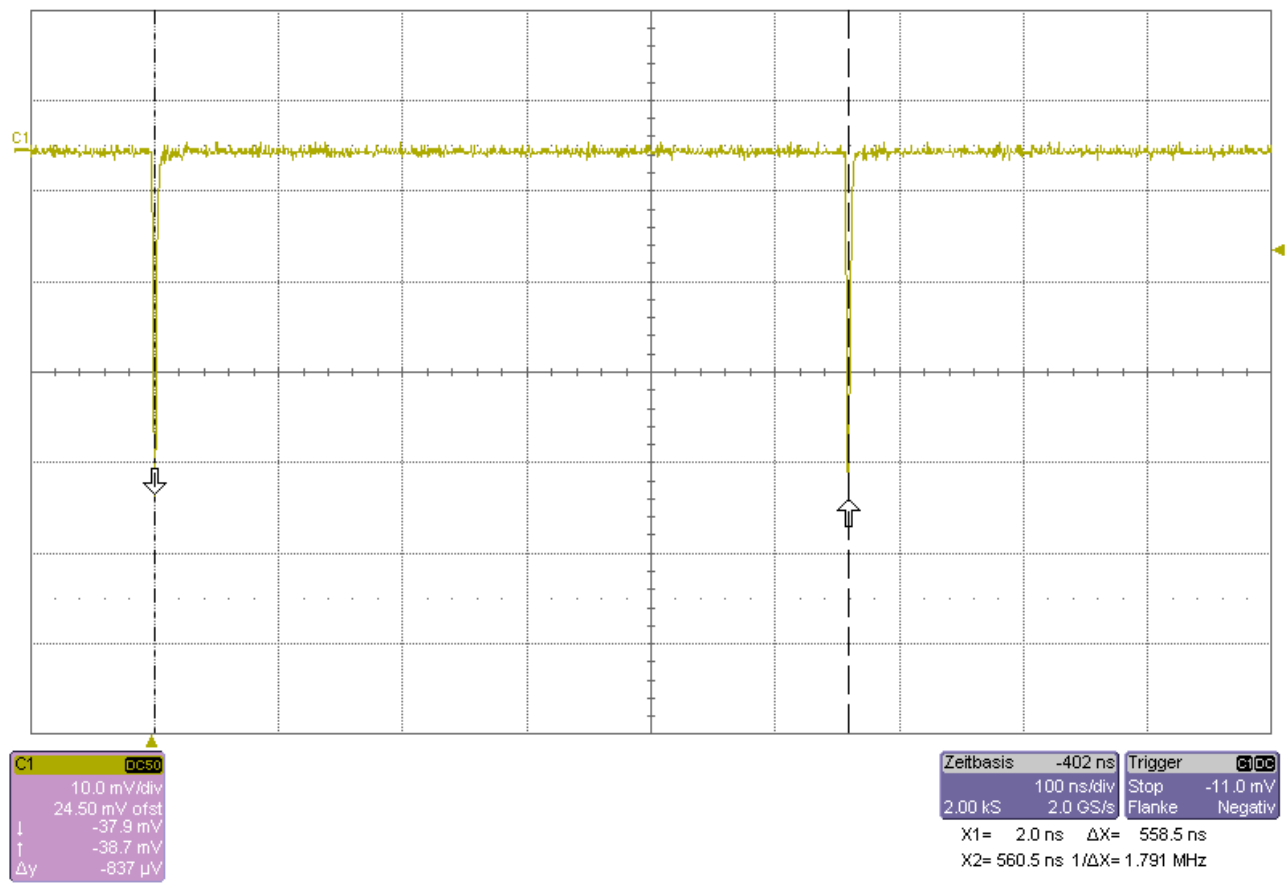

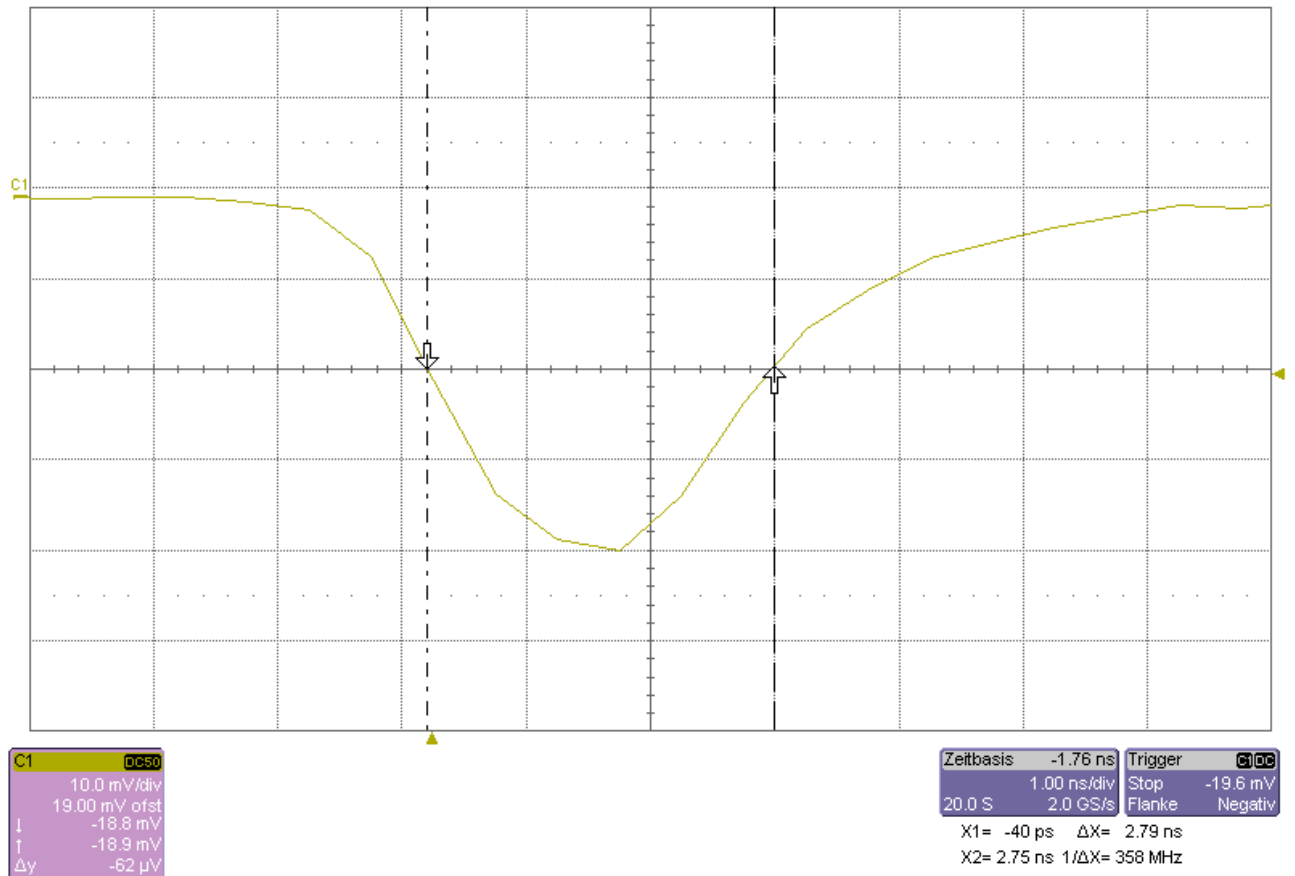


Calculation of Duty cycle correction:

TX-On-Time (worst case):	T_{on}	=	2.79 ns
Pulse Train Time:	T_{pt}	=	558.5 ns
Period Time:	T_{period}	=	558.5 ns
Pulse Train Correction:	C_{pt}	=	$20 \cdot \log(T_{on} / T_{period})$ dB
		=	-46.0 dB

8.5 Restricted bands of operation

Rules and specifications:	CFR 47 Part 15, section 15.205(a) IC RSS-210 Issue 5, section 6.3(a)
Guide:	ANSI C63.4
Limit:	Only spurious emissions are permitted in any of the frequency bands listed in CFR 47 Part 15, section 15.205(a) or IC RSS-210 Issue 5, section 6.3(a).

Comment:	
Date of test:	
Test site:	Fully anechoic room, cabin no. 2
Test distance:	3 meters

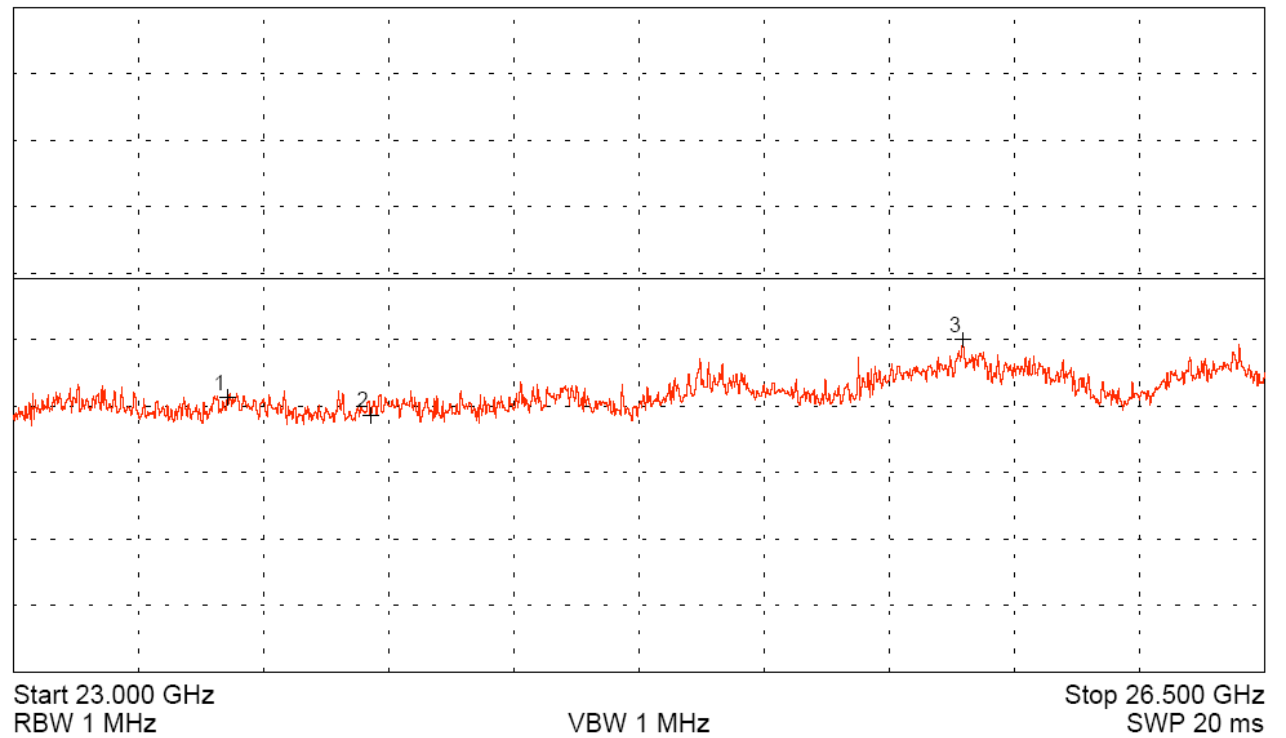

Test Result:	Test passed
--------------	-------------

8.6 Conducted Powerline Emission Measurement 150 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, section 15.207 IC RSS-210 Issue 5, section 6.6				
Guide:	ANSI C63.4 / CISPR 22				
Limit:	CFR 47 Part 15			IC RSS-210	
	Frequency of Emission (MHz)	Conducted Limit (dBµV)		Frequency of Emission (MHz)	Conducted Limit (dBµV)
		Quasi-peak	Average		Quasi-peak
	0.15 - 0.5	66 to 56	56 to 46	0.45 - 30	48
	0.5 - 5	56	46		
	5 - 30	60	50		

Comment:	EUT has no AC mains supply. Test performed on DC supply instead.
Date of test:	21 February 2005
Test site:	Shielded room, cabin no. 4

Test Result:	Test passed
--------------	-------------

Tested on:	DC supply: PLUS
------------	-----------------

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	CFR 47 Part 15 Limit (dBµV)	Margin (dB)	RSS-210 Limit (dBµV)	Margin (dB)
0.150 - 30	Quasi-Peak	0.0	0.0	***				

*** No measurements above noise level detected.

Tested on:	DC supply: MINUS
------------	------------------

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	CFR 47 Part 15 Limit (dBµV)	Margin (dB)	RSS-210 Limit (dBµV)	Margin (dB)
0.150 - 30	Quasi-Peak	0.0	0.0	***				

*** No measurements above noise level detected.

Sample calculation of final values:

$$\text{Final Value (dBµV)} = \text{Reading Value (dBµV)} + \text{Correction Factor (dB)}$$

8.7 Radiated Emission Measurement 30 MHz to 110 GHz

Rules and specifications:	CFR 47 Part 15, section 15.209 IC RSS-210 Issue 5, section 6.2.1		
Guide:	ANSI C63.4		
Limit:	Frequency of Emission (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0

Comment:	
Date of test:	
Test site:	
	Frequencies ≤ 1 GHz: Open field test site Frequencies > 1 GHz: Fully anechoic room, cabin no. 2
Test distance:	3 meters

Test Result:	Test passed
--------------	-------------

Frequency (MHz)	Polarization	Detector	Reading (dBµV)	Correction (dB/m)	Pulse Train Corr. (dB)	Final Value (dBµV(m)	Limit (dBµV/m)	Margin (dB)
25900,000	horizontal	Peak	5,4	43,0	0,0	48,4	54,0	5,6

9 Referenced Regulations

All tests were performed with reference to the following regulations and standards:

☒	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)	October 10, 2004
☒	CFR 47 Part 15	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)	April 5, 2005
☒	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	December 11, 2003 (published on January 30, 2004)
☒	RSS-210	Radio Standards Specification RSS-210 Issue 5 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands), published by Industry Canada	November 2001
☐	ICES-003	Interference-Causing Equipment Standard ICES-003 Issue 4 for Digital Apparatus, published by Industry Canada	February 2004
☒	CISPR 22	Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement"	1997
☐	CAN/CSA-CEI/IEC CISPR 22	Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment	2002
☒	TRC-43	Notes Regarding Designation of Emission (Including Necessary Bandwidth and Classification), Class of Station and Nature of Service, published by Industry Canada	October 9, 1982

10 Charts taken during testing

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:
Solid Radar FMR 25x

Serial no.:
71004301083

Applicant:
Endres + Hauser GmbH & Co. KG

Test site:
Shielded room, cabin no. 4

Tested on:
Linecord DC-supply
plus

Date of test: 02/21/2005
Operator: M. Steindl

Test performed: semi automatically
File name:


Mode:
- DC 24 V power supply
with 330 Ohms communication resistor

- EUT in vertical position

- continuous measurment

Detector:
Peak / Final Results: QP

Final results:
20 dB Margin 25 Subranges

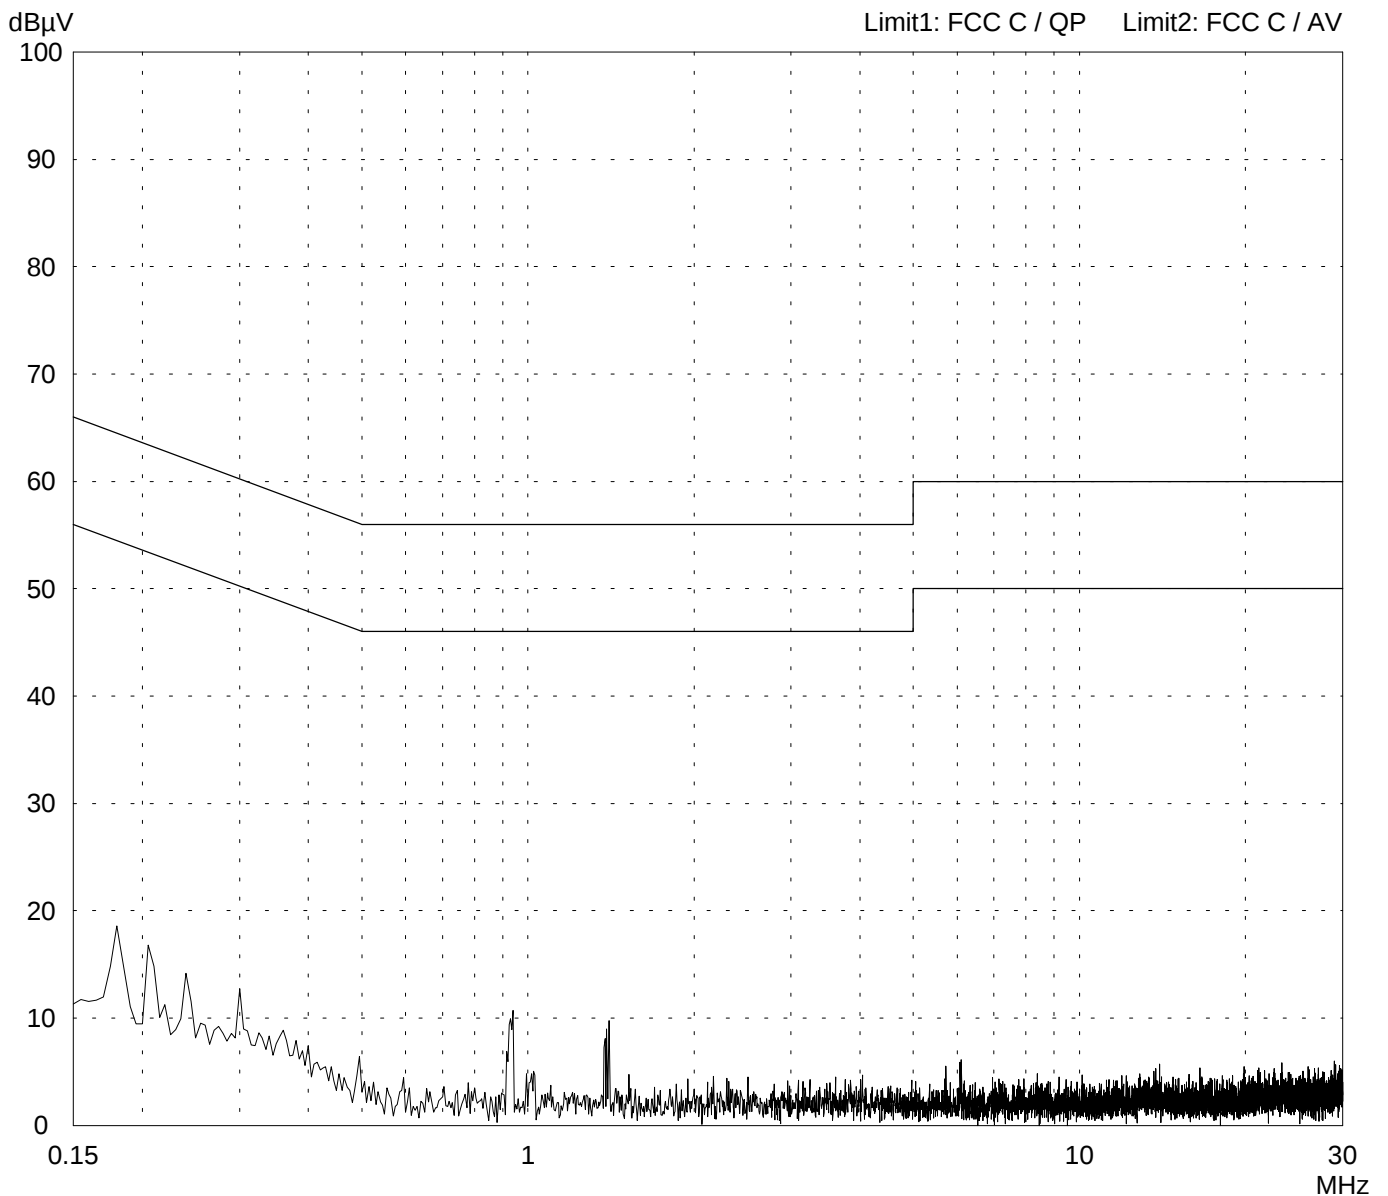

Result:
Limit kept

Project file:
50511-40907

Page 33 of 54 Pages

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:
Solid Radar FMR 25x

Serial no.:
71004301083

Applicant:
Endres + Hauser GmbH & Co. KG

Test site:
Shielded room, cabin no. 4

Tested on:
Linecord DC-supply
minus

Date of test: 02/21/2005
Operator: M. Steindl

Test performed: semi automatically
File name:


Mode:
- DC 24 V power supply
with 330 Ohms communication resistor

- EUT in vertical position

- continuous measurment

Detector:
Peak / Final Results: QP

Final results:
20 dB Margin 25 Subranges

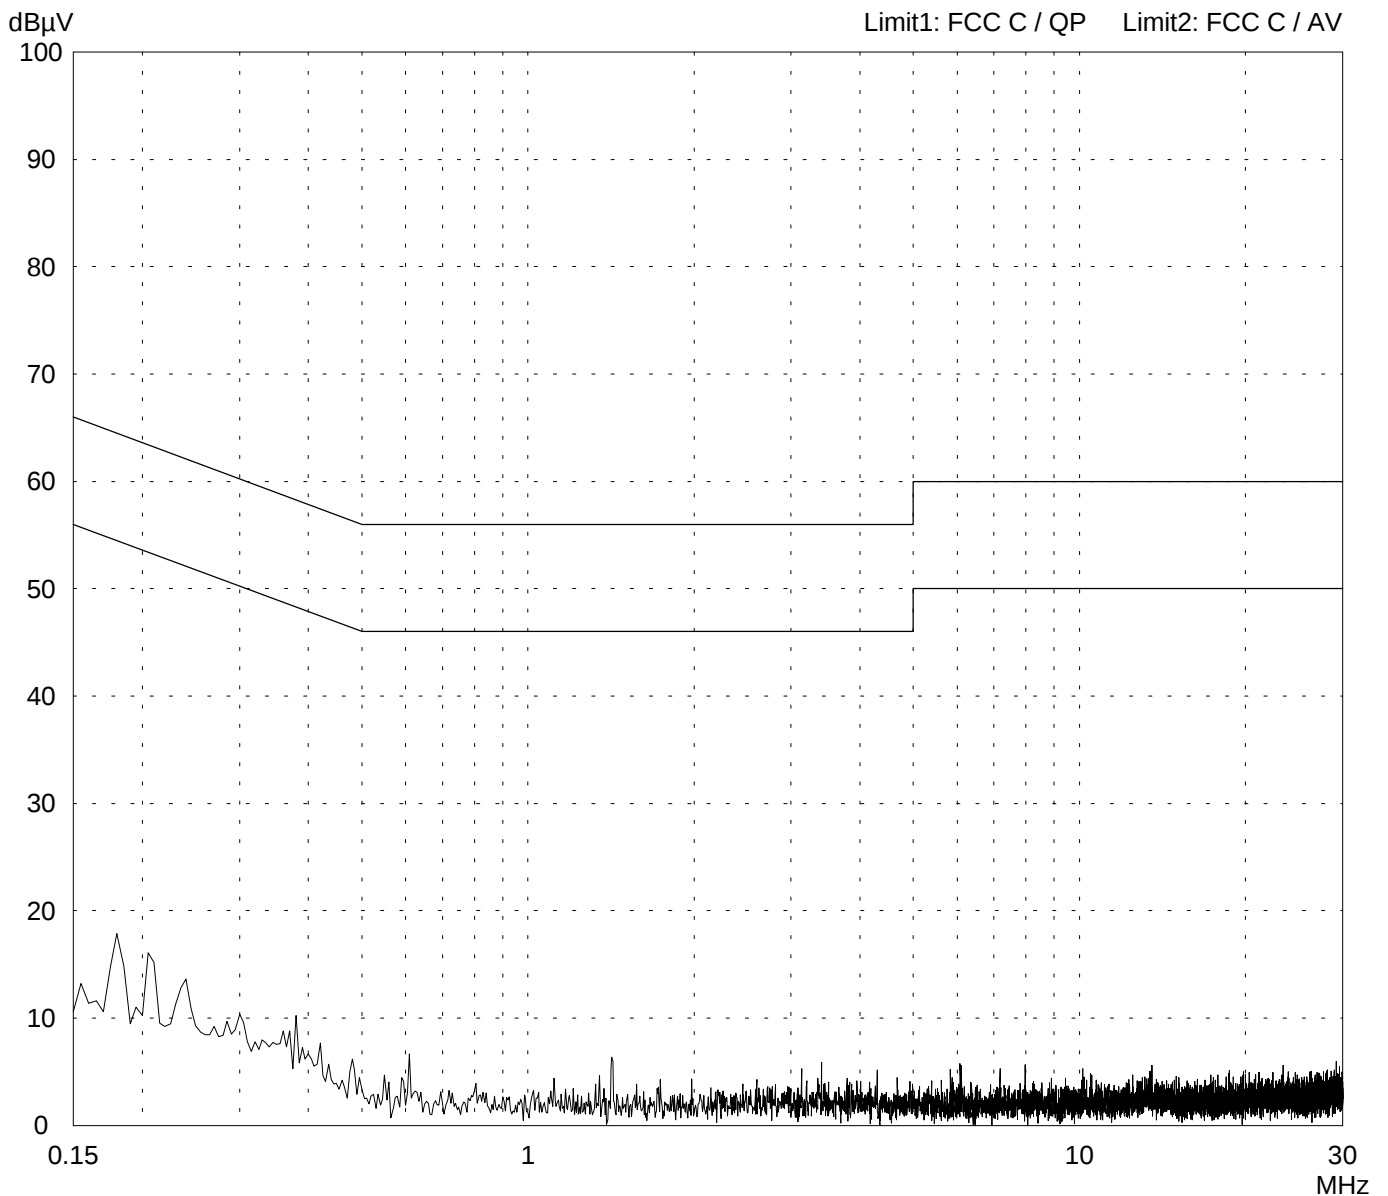

Result:
Limit kept

Project file:
50511-40907

Page 34 of 54 Pages

Radiated Emission Test 9 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:
FMR 25x

Serial no.:
Prototype

Applicant:
Endress + Hauser

Test site:
Shielded room, cabin no. 1

Tested on:
Test distance 3 metres

Date of test:
07/26/2005

Operator:
J. Roidt

Test performed:
automatically

File name:

Mode:
Normal operation, EUT vertical

Detector:
Peak / Final Results: QP


Final results:
20 dB Margin

25 Subranges

dB μ V/m

Limit1: FCC Subpart C

Transducer: HFH2-Z2

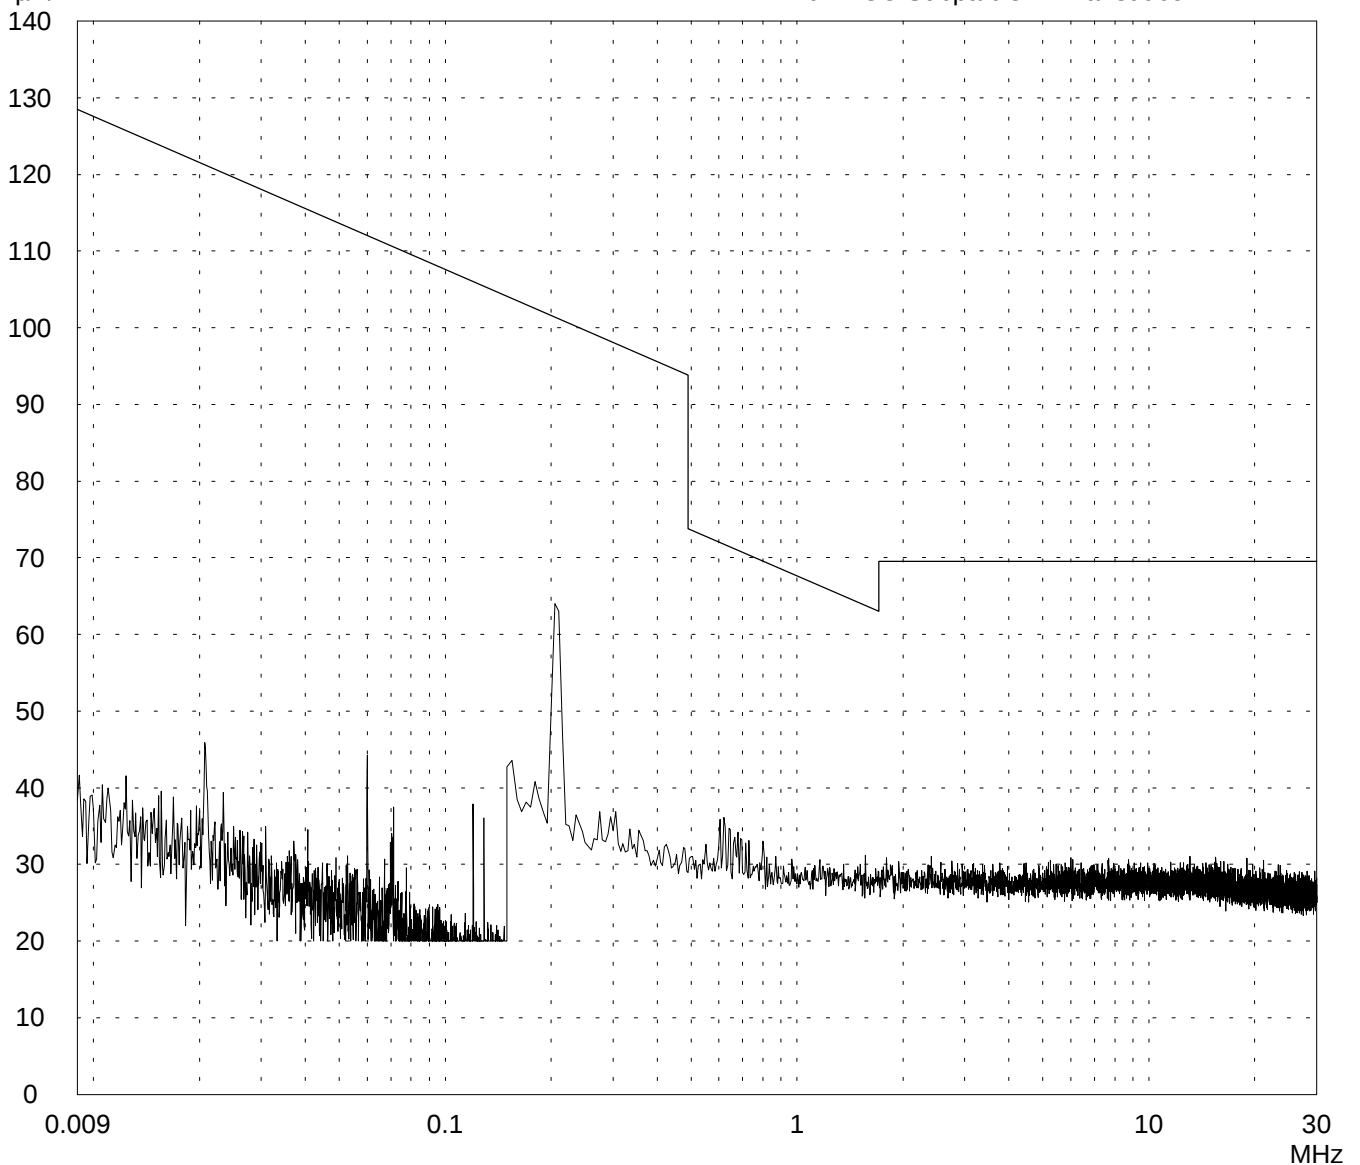

Result:
Limit kept


Project file:
50511-40907

Page 35 of 54 Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: Solid Radar FMR 25x	Comment: - DC 24 V power supply with 330 Ohms communication resistor - EUT in vertical position - continuous measurement
Serial no.: 71004301083	
Applicant: Endres + Hauser GmbH & Co. KG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 02/18/2005	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

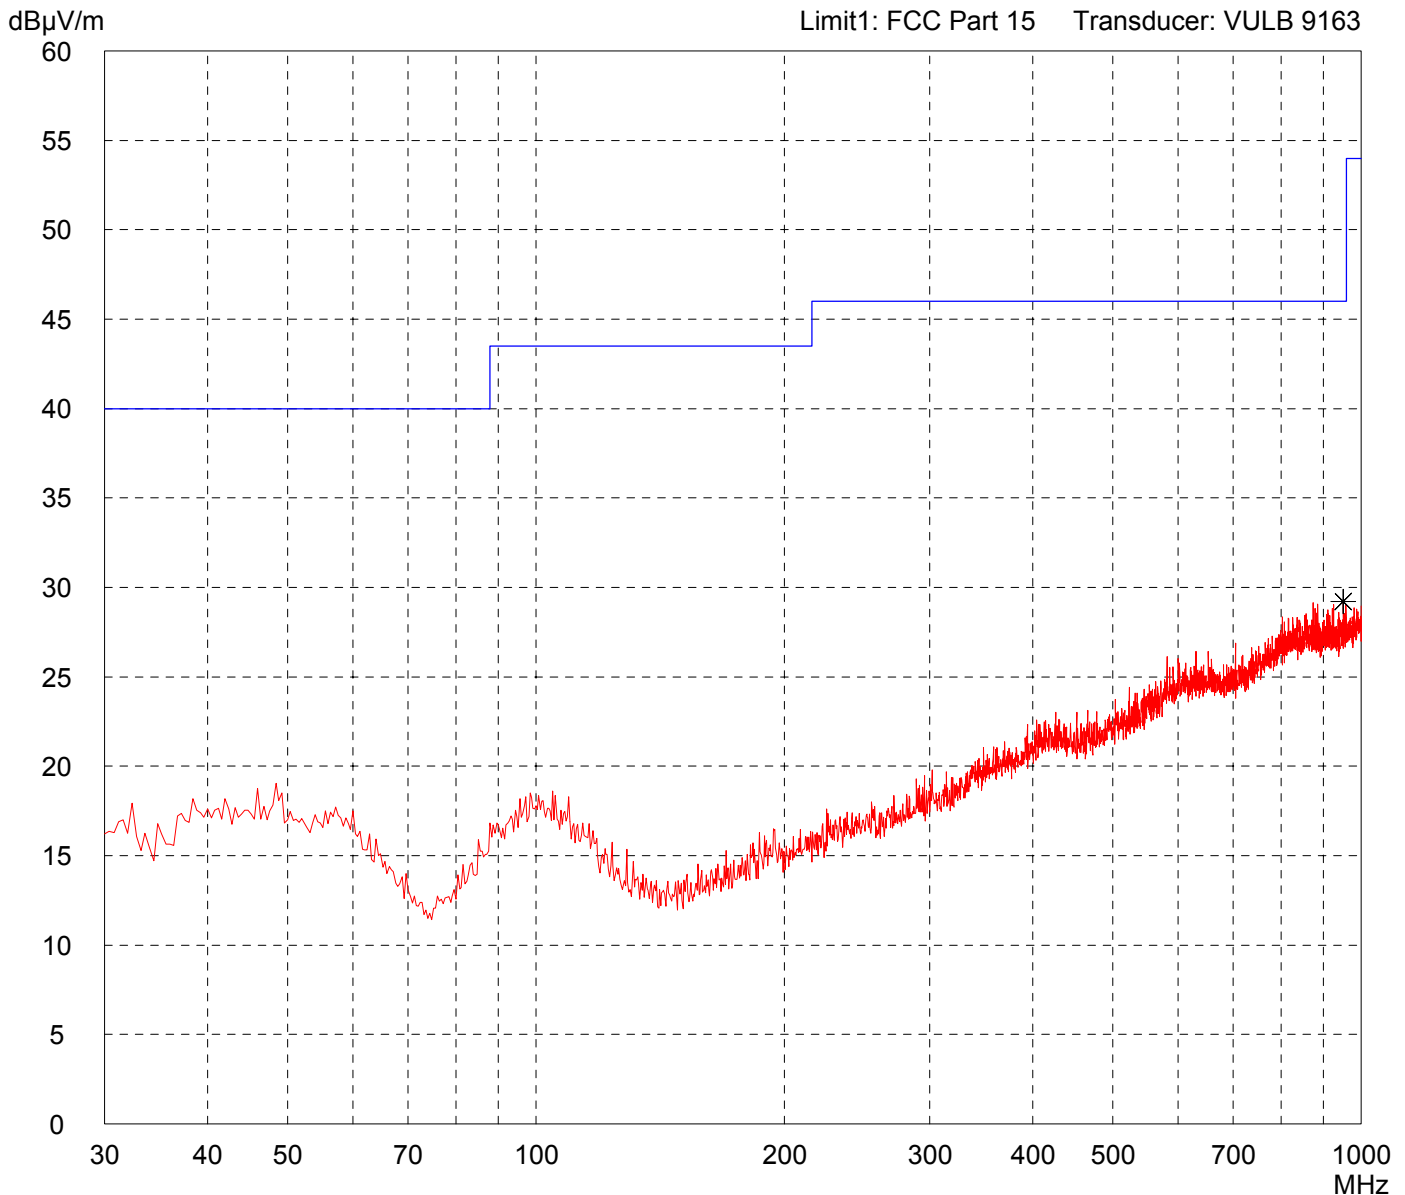


Result: Prescan	Project file: 50511-40907
	Page 36 of 54 Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: Solid Radar FMR 25x	Comment: - DC 24 V power supply with 330 Ohms communication resistor - EUT in vertical position - continuous measurement
Serial no.: 71004301083	
Applicant: Endres + Hauser GmbH & Co. KG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 02/18/2005	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

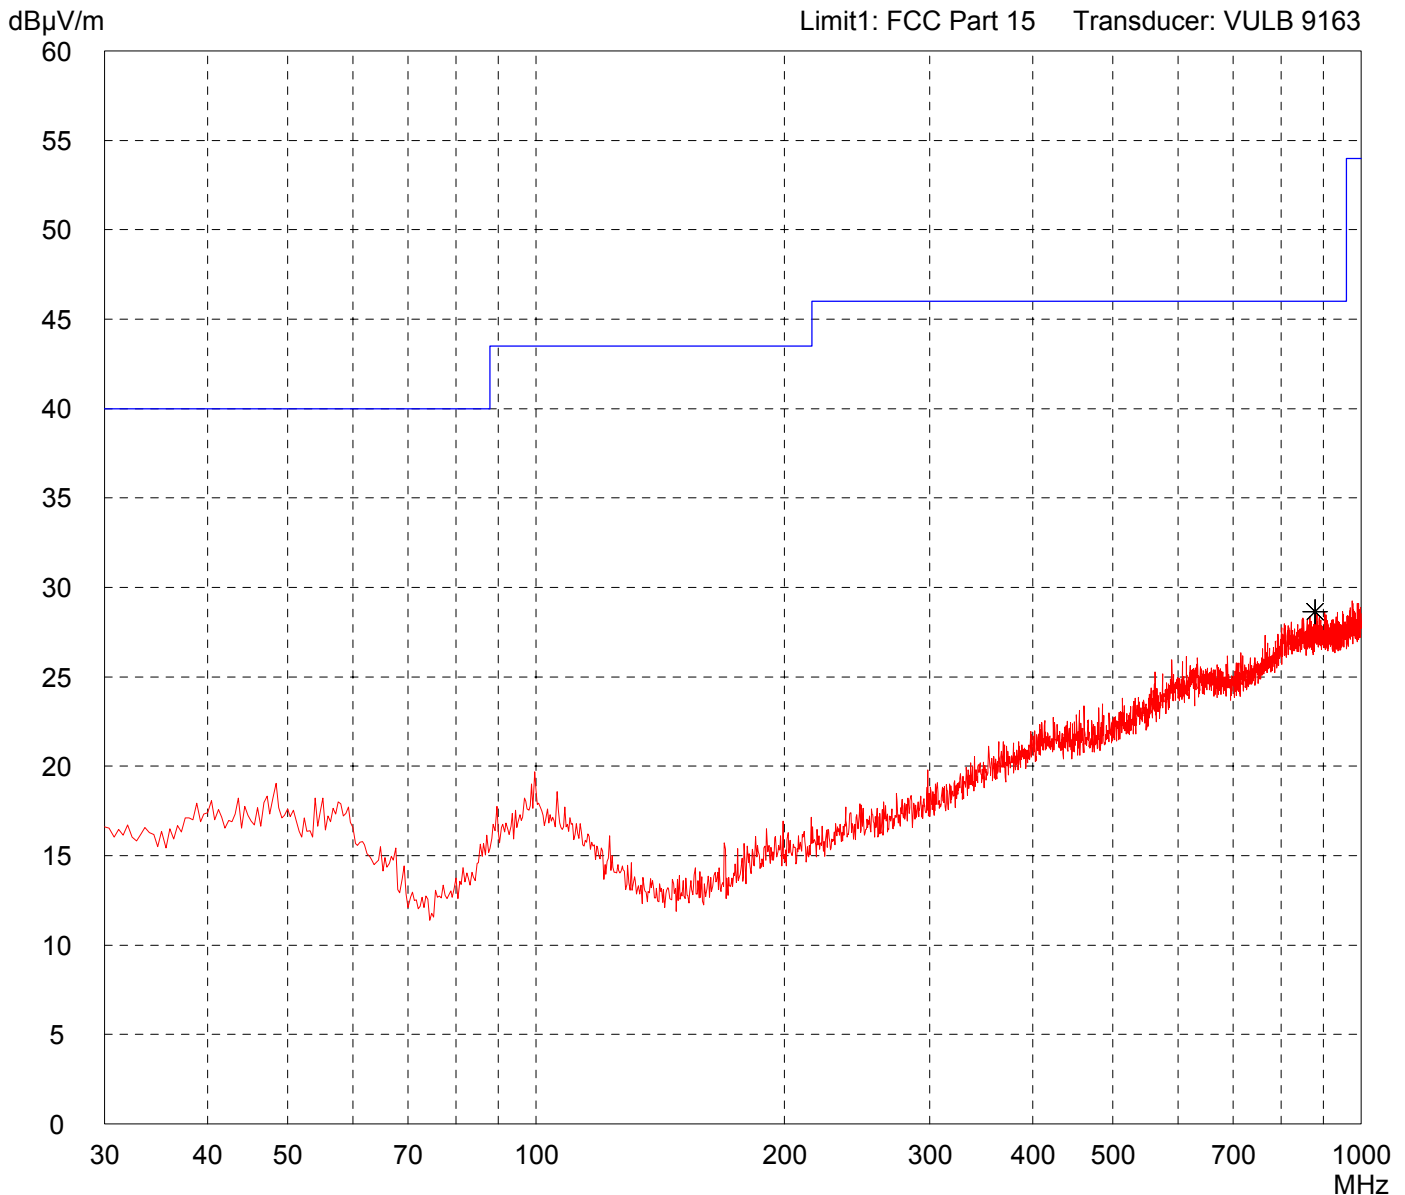


Result: Prescan	Project file: 50511-40907
---------------------------	-------------------------------------

Page 37 of 54 Pages

Radiated Emission Test 1 GHz - 4 GHz acc. to FCC Part 15 (EMCO 3115)

Model: Solid Radar FMR 25x		Comment: - DC 24 V power supply with 330 Ohms communication resistor - EUT in vertical position - continuous measurement
Serial no.: 71004301083		
Applicant: Endres + Hauser GmbH & Co. KG		
Test site: Fully anechoic room, cabin no. 2		
Tested on: Test distance 3 metres Horizontal Polarization		
Date of test: 02/18/2005	Operator: M. Steindl	
Test performed: automatically	File name: default.emi	
Detector: Peak		List of values: Selected by hand

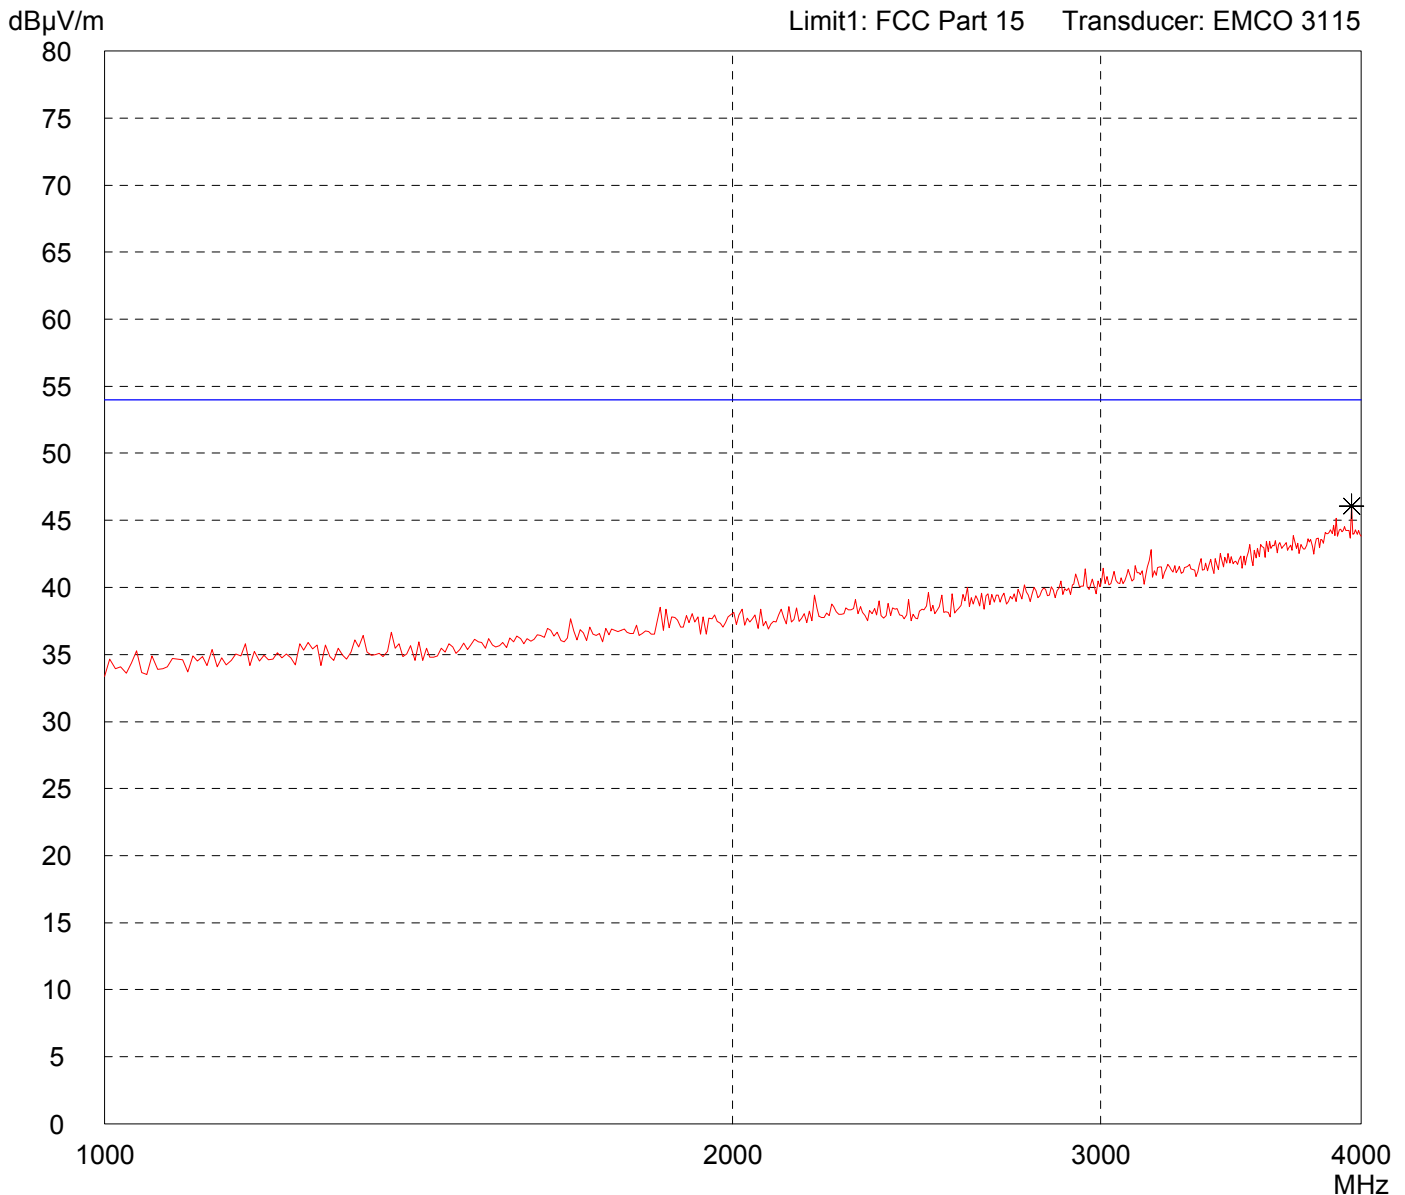


Result: Prescan	Project file: 50511-40907
Page 38 of 54 Pages	

Radiated Emission Test 1 GHz - 4 GHz acc. to FCC Part 15 (EMCO 3115)

Model: Solid Radar FMR 25x		Comment: - DC 24 V power supply with 330 Ohms communication resistor - EUT in vertical position - continuous measurement
Serial no.: 71004301083		
Applicant: Endres + Hauser GmbH & Co. KG		
Test site: Fully anechoic room, cabin no. 2		
Tested on: Test distance 3 metres Vertical Polarization		
Date of test: 02/18/2005	Operator: M. Steindl	
Test performed: automatically	File name: default.emi	

Detector: Peak	List of values: 10 dB Margin 50 Subranges
--------------------------	--

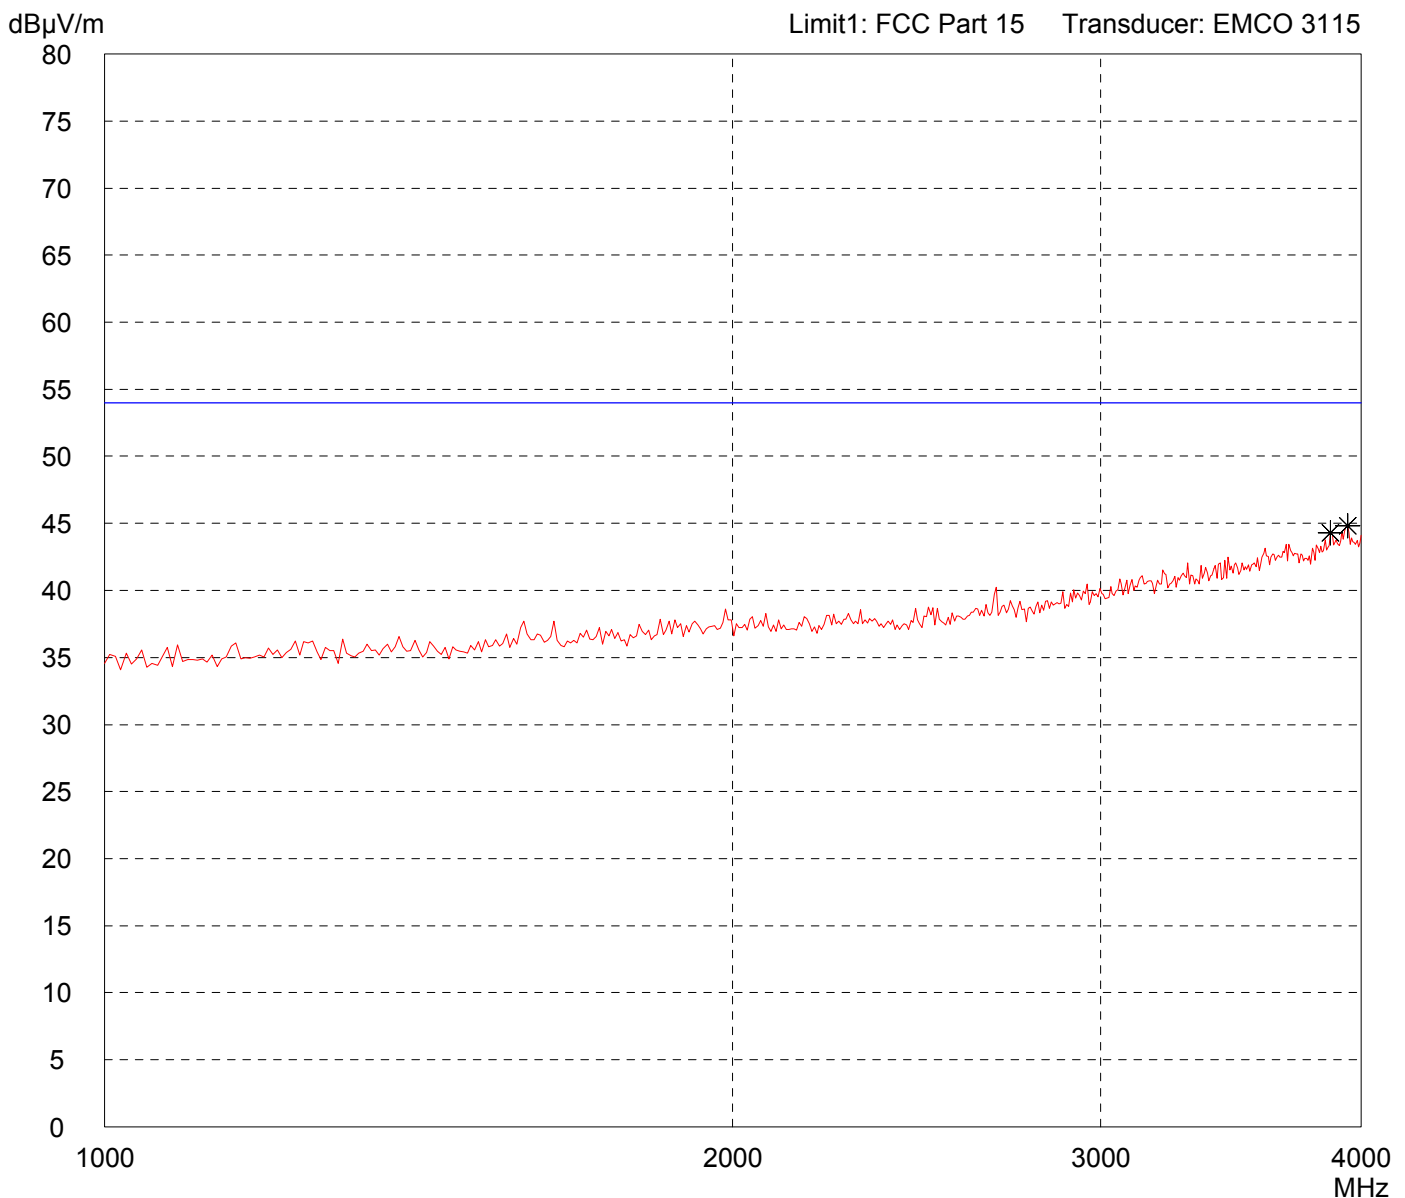


Result: Prescan	Project file: 50511-40907 Page 39 of 54 Pages
---------------------------	---

Radiated Emission Test 3.95 GHz - 5.85 GHz acc. to FCC Part 15 (EMCO 3160)

Model: Solid Radar FMR 25x	Comment: - DC 24 V power supply with 330 Ohms communication resistor - EUT in vertical position - continuous measurement
Serial no.: 71004301083	
Applicant: Endres + Hauser GmbH & Co. KG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 02/18/2005	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

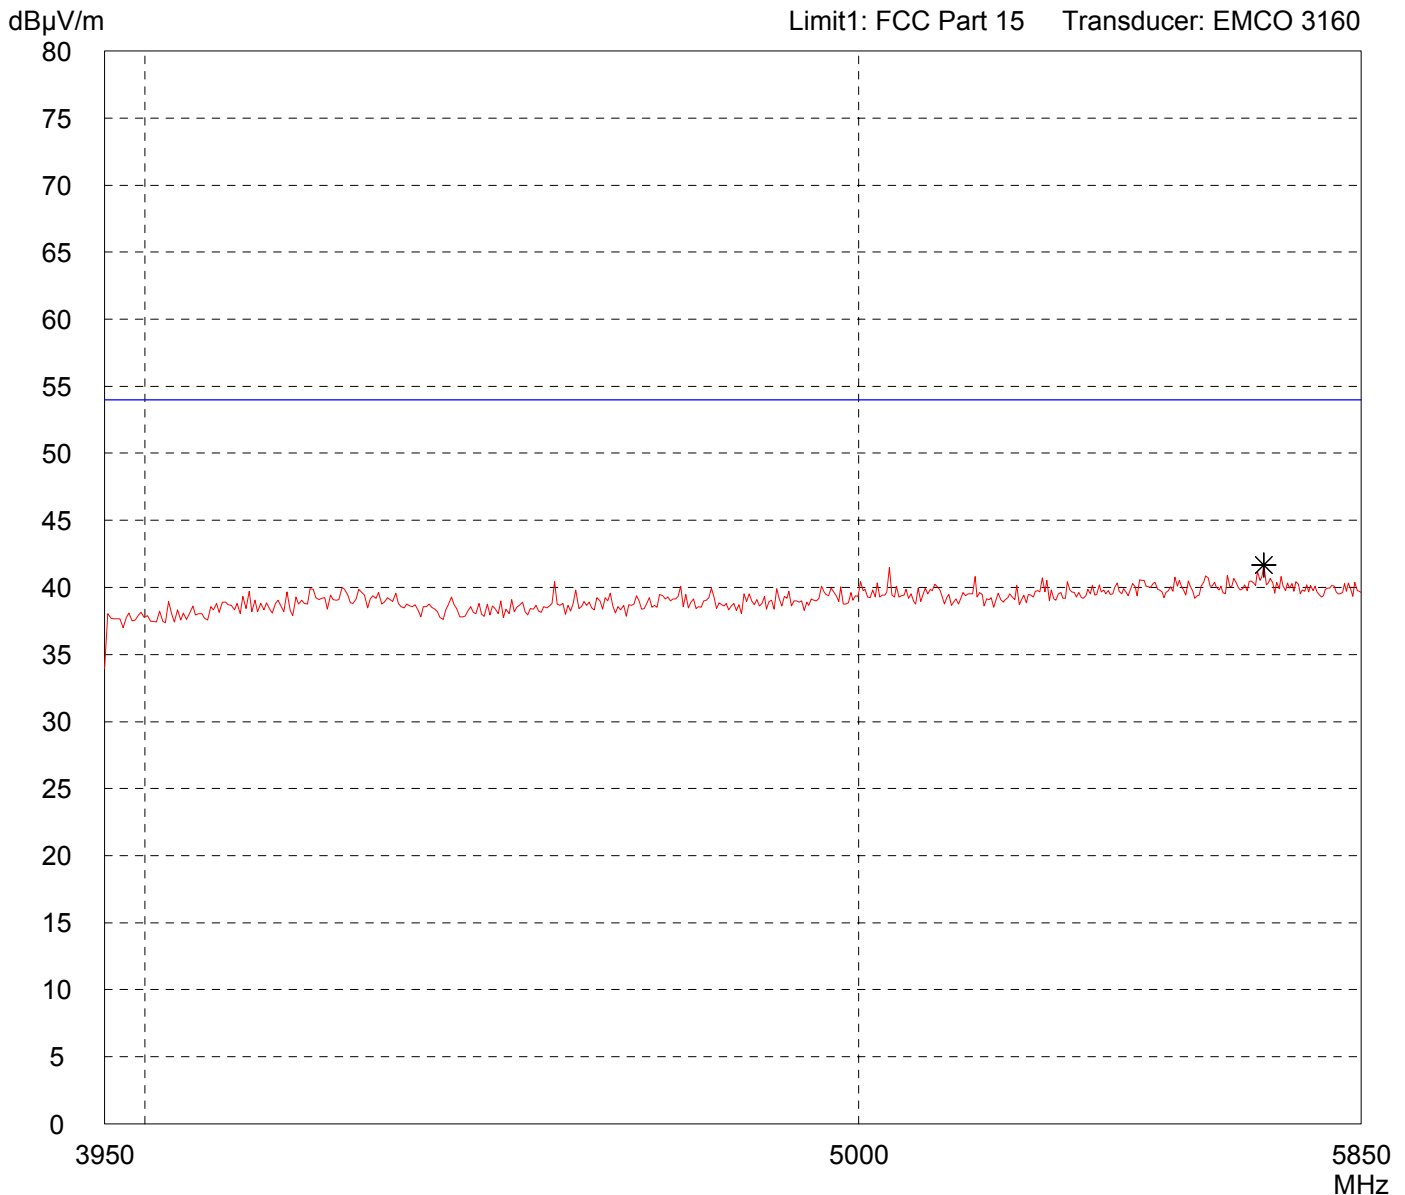


Result: Limit kept	Project file: 50511-40907
Page 40 of 54 Pages	

Radiated Emission Test 3.95 GHz - 5.85 GHz acc. to FCC Part 15 (EMCO 3160)

Model: Solid Radar FMR 25x	Comment: - DC 24 V power supply with 330 Ohms communication resistor - EUT in vertical position - continuous measurement
Serial no.: 71004301083	
Applicant: Endres + Hauser GmbH & Co. KG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 02/18/2005	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

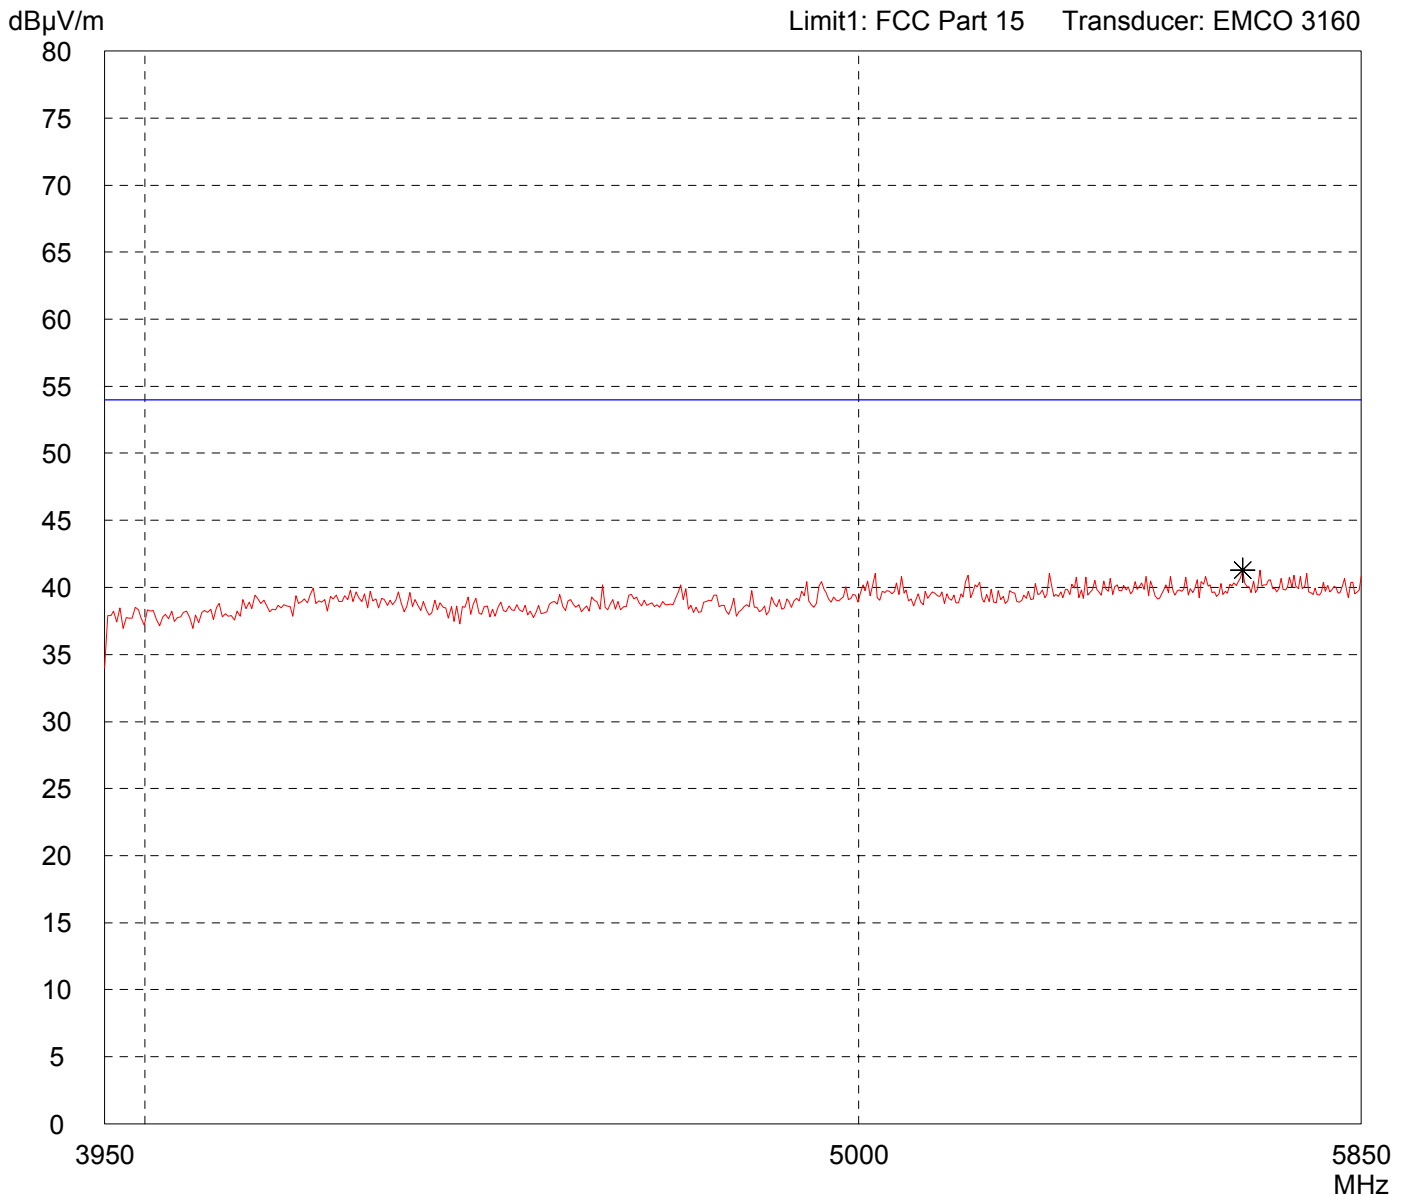


Result: Prescan	Project file: 50511-40907
	Page 41 of 54 Pages

Radiated Emission Test 5.85 GHz - 8.2 GHz acc. to FCC Part 15 (EMCO 3160)

Model: Solid Radar FMR 25x	Comment: - DC 24 V power supply with 330 Ohms communication resistor - EUT in vertical position - continuous measurement
Serial no.: 71004301083	
Applicant: Endres + Hauser GmbH & Co. KG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 02/18/2005	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

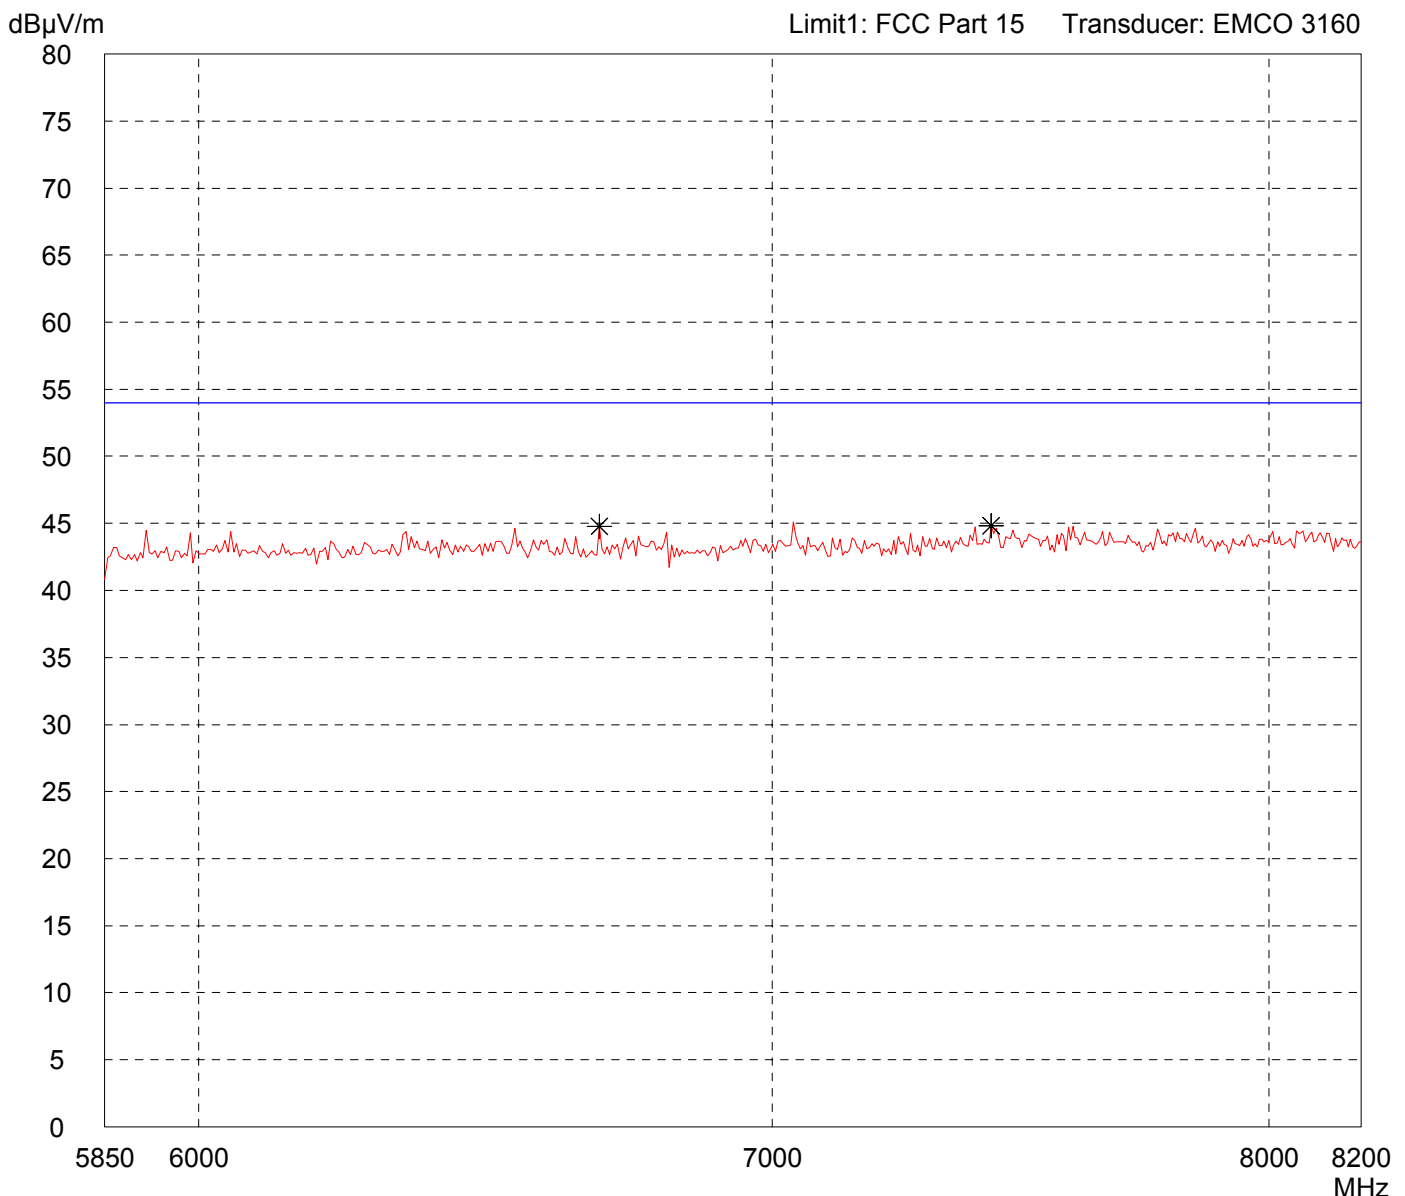


Result: Prescan	Project file: 50511-40907
	Page 42 of 54 Pages

Radiated Emission Test 5.85 GHz - 8.2 GHz acc. to FCC Part 15 (EMCO 3160)

Model: Solid Radar FMR 25x	Comment: - DC 24 V power supply with 330 Ohms communication resistor - EUT in vertical position - continuous measurement
Serial no.: 71004301083	
Applicant: Endres + Hauser GmbH & Co. KG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 02/18/2005	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

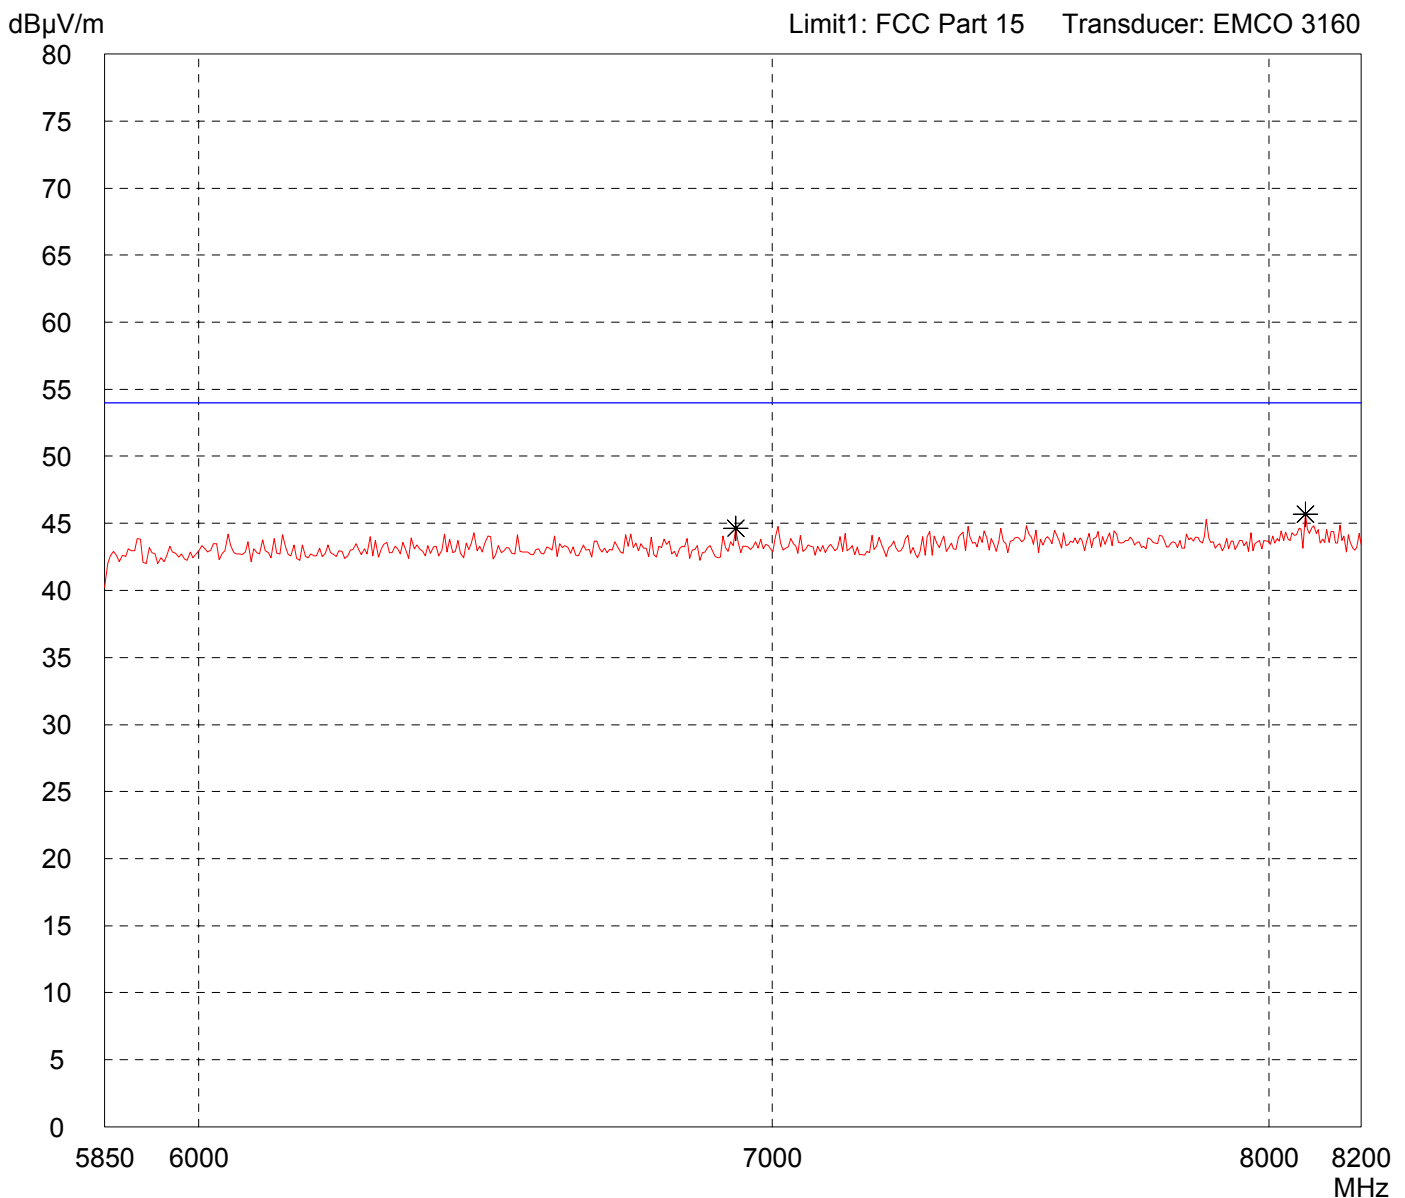


Result: Prescan	Project file: 50511-40907
Page 43 of 54 Pages	

Radiated Emission Test 8.2 GHz - 12.4 GHz acc. to FCC Part 15 (EMCO 3160)

Model: Solid Radar FMR 25x	Comment: - DC 24 V power supply with 330 Ohms communication resistor - EUT in vertical position - continuous measurement
Serial no.: 71004301083	
Applicant: Endres + Hauser GmbH & Co. KG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Horizontal Polarization	
Date of test: 02/18/2005	Operator: M. Steindl
Test performed: automatically	File name: default.emi


Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

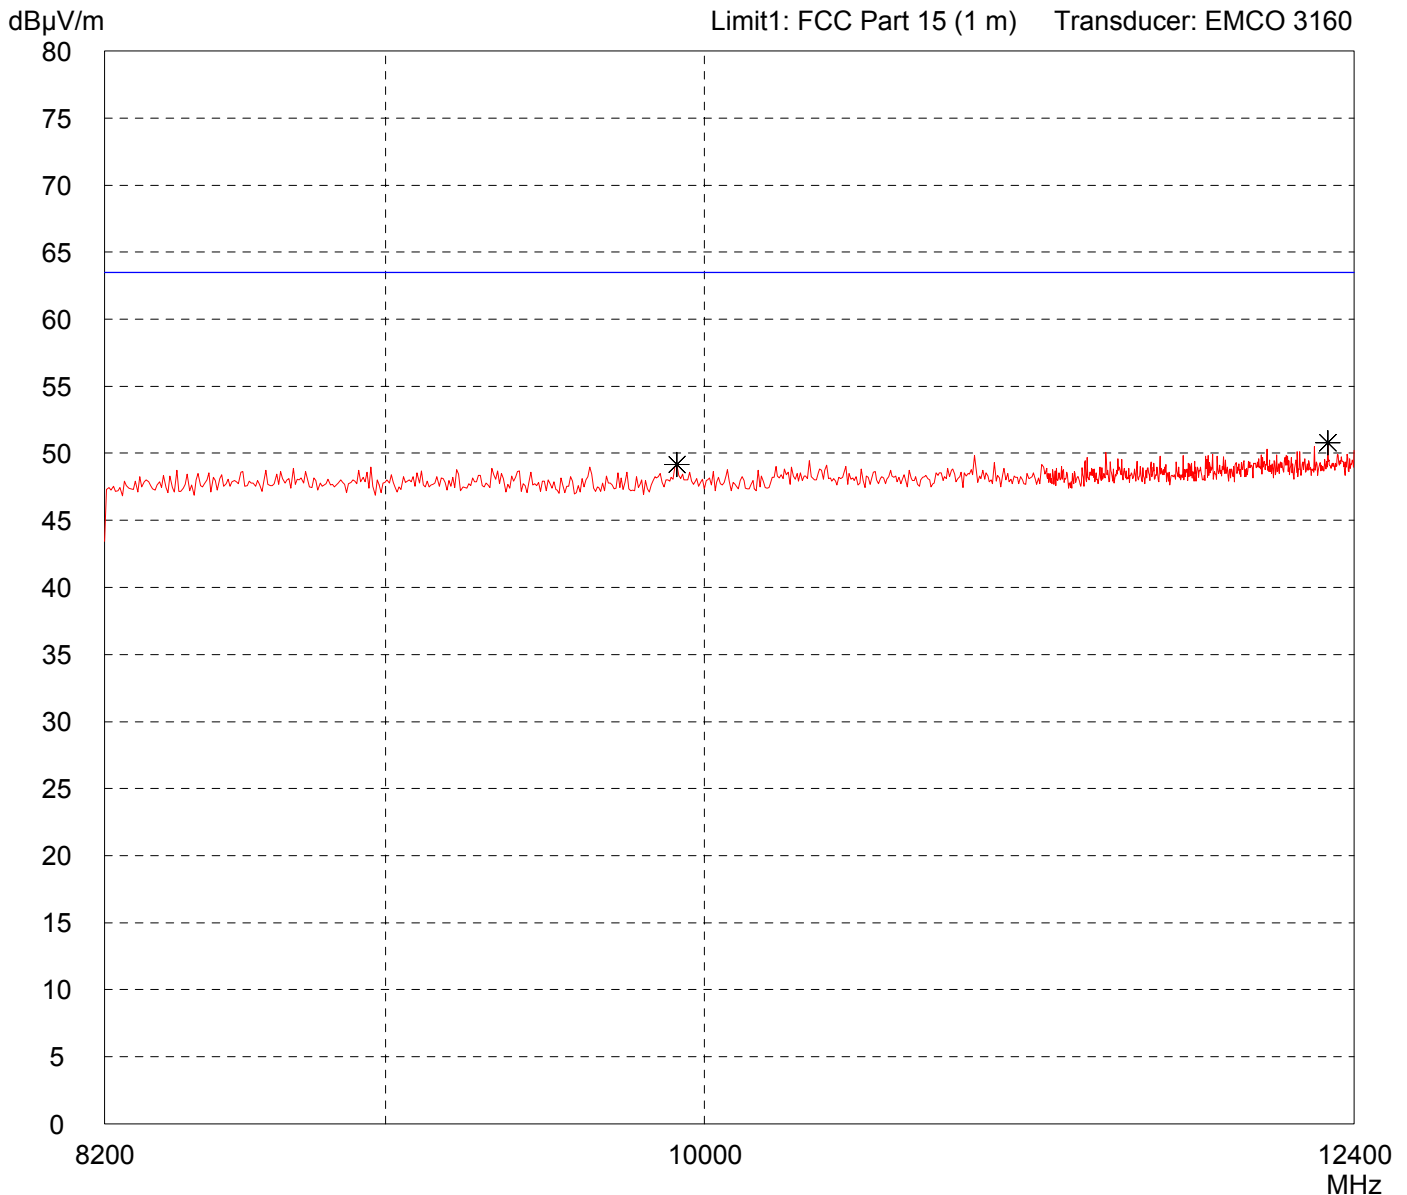

Result: Prescan	Project file: 50511-40907
	Page 44 of 54 Pages

Radiated Emission Test 8.2 GHz - 12.4 GHz acc. to FCC Part 15 (EMCO 3160)

Model: Solid Radar FMR 25x		Comment: - DC 24 V power supply with 330 Ohms communication resistor - EUT in vertical position - continuous measurment
Serial no.: 71004301083		
Applicant: Endres + Hauser GmbH & Co. KG		
Test site: Fully anechoic room, cabin no. 2		
Tested on: Test distance 1 meter Vertical Polarization		
Date of test: 02/18/2005	Operator: M. Steindl	List of values: Selected by hand
Test performed: automatically	File name: default.emi	
Detector: Peak		

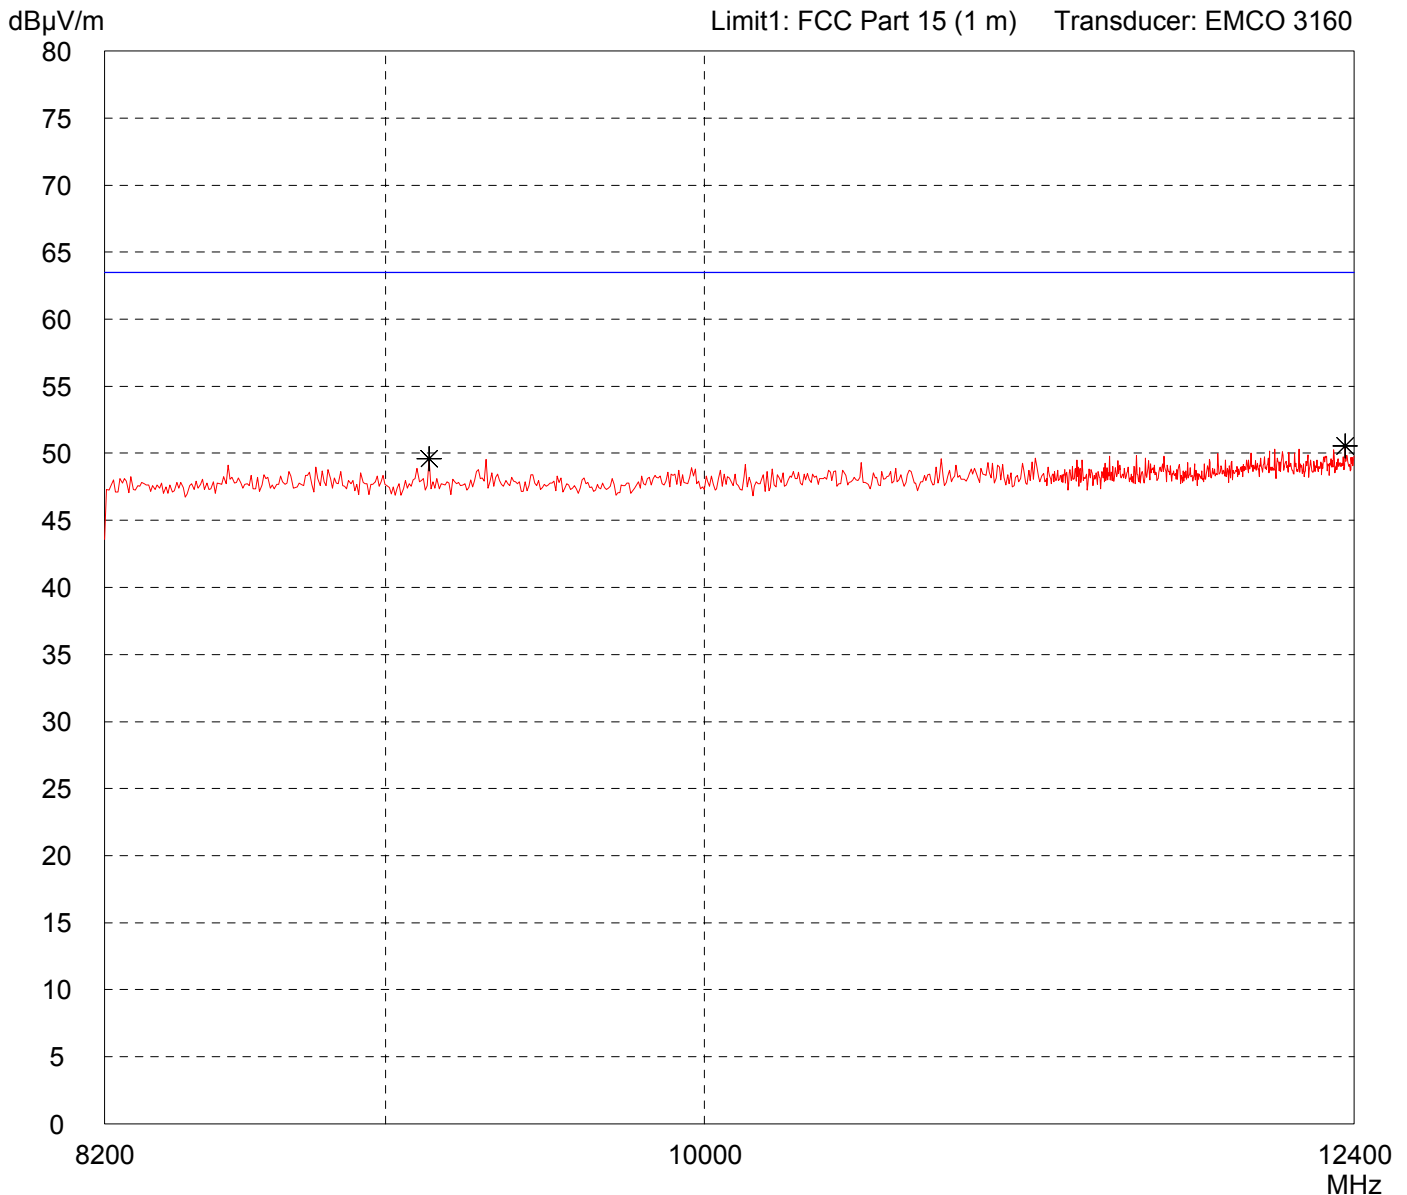


Result: Prescan	Project file: 50511-40907	Page 45 of 54 Pages
---------------------------	-------------------------------------	---------------------

Radiated Emission Test 12.4 GHz - 18 GHz acc. to FCC Part 15 (EMCO 3160)

Model: Solid Radar FMR 25x	Comment: - DC 24 V power supply with 330 Ohms communication resistor - EUT in vertical position - continuous measurment
Serial no.: 71004301083	
Applicant: Endres + Hauser GmbH & Co. KG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Horizontal Polarization	
Date of test: 02/18/2005	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

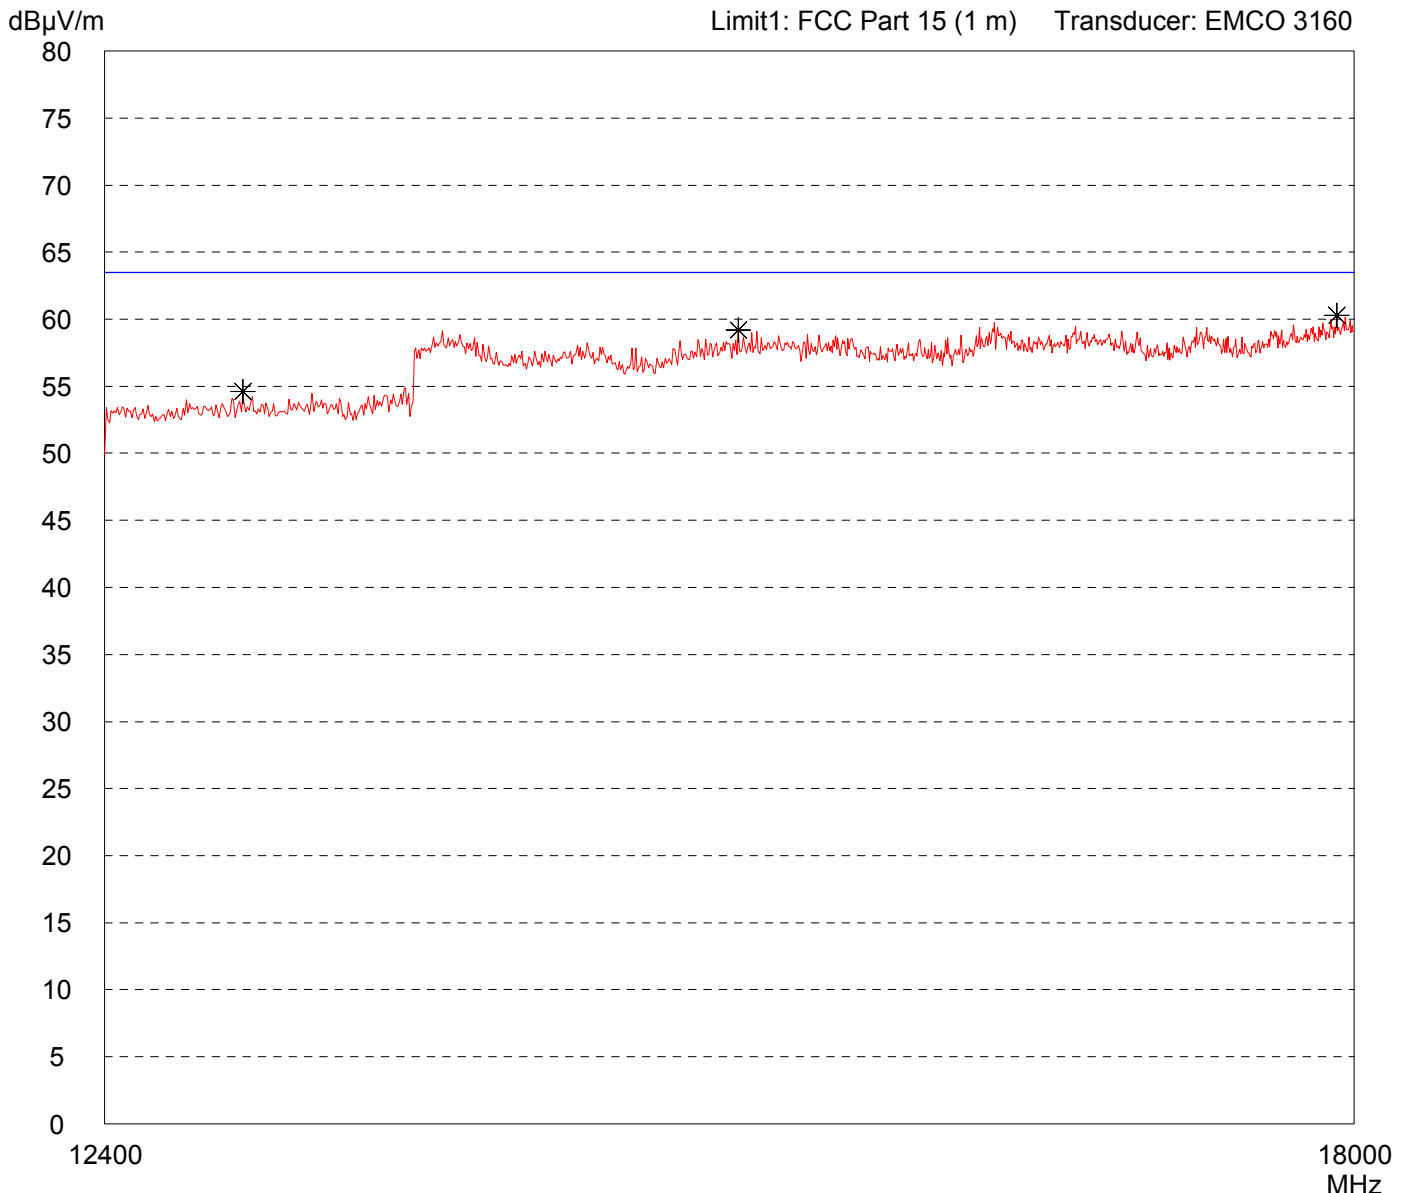


Result: Prescan	Project file: 50511-40907
	Page 46 of 54 Pages

Radiated Emission Test 12.4 GHz - 18 GHz acc. to FCC Part 15 (EMCO 3160)

Model: Solid Radar FMR 25x	Comment: - DC 24 V power supply with 330 Ohms communication resistor - EUT in vertical position - continuous measurement
Serial no.: 71004301083	
Applicant: Endres + Hauser GmbH & Co. KG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Vertical Polarization	
Date of test: 02/18/2005	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

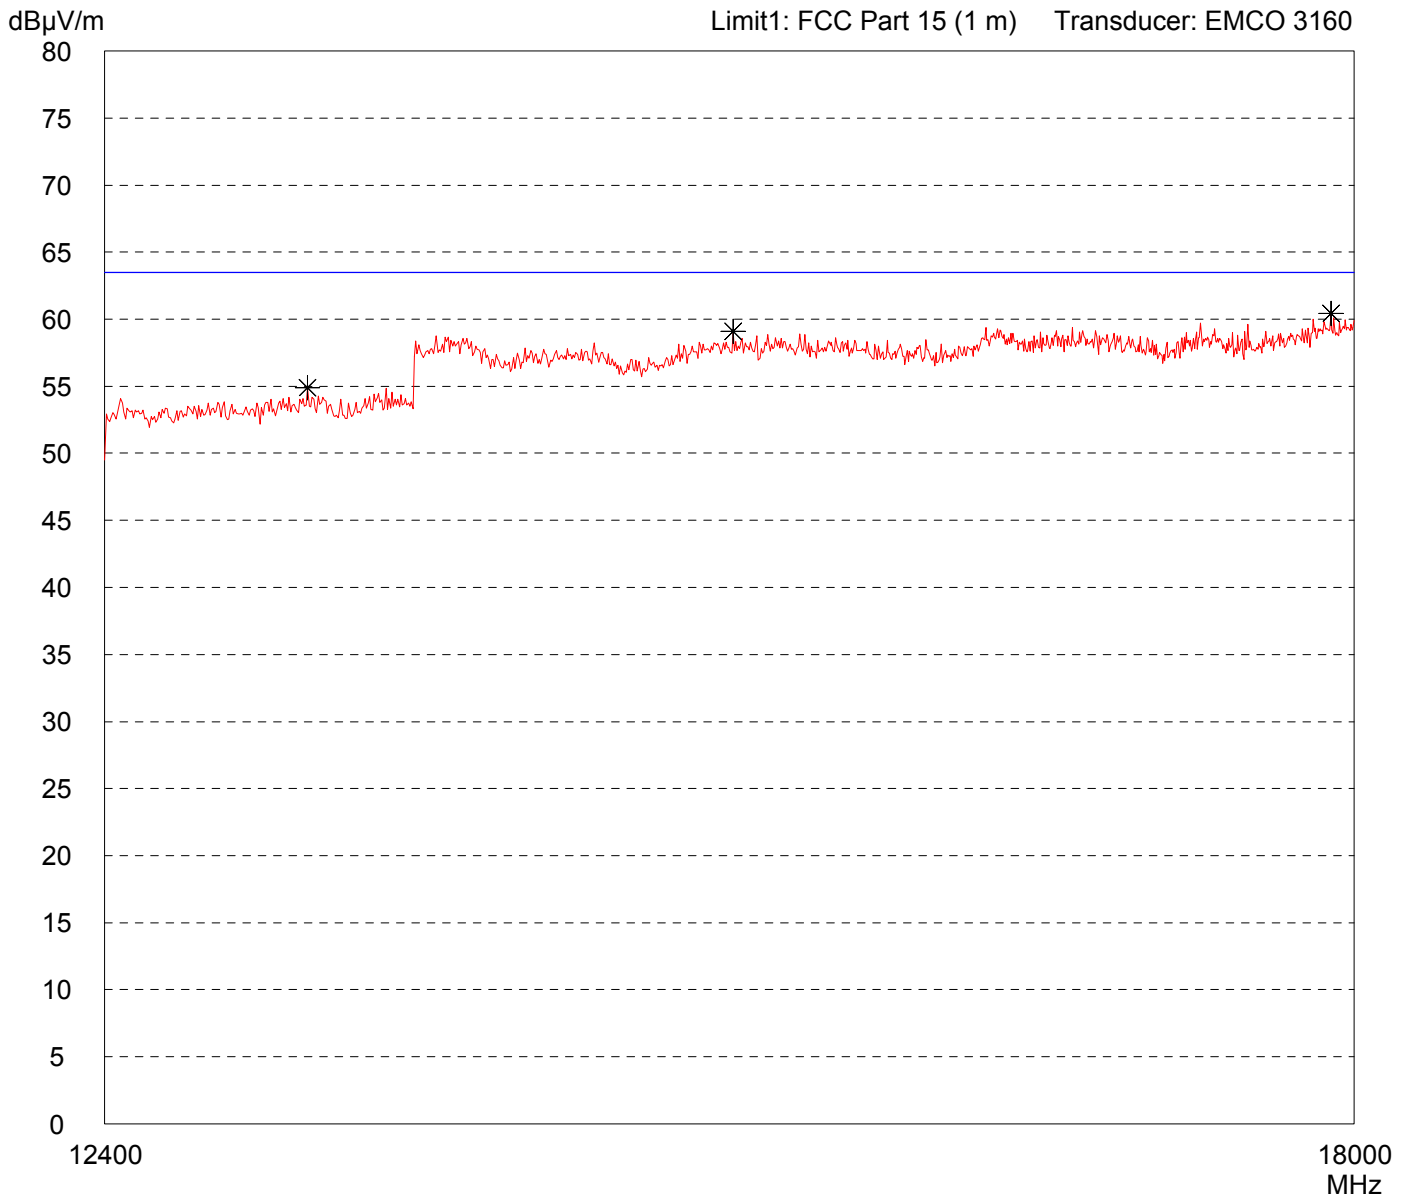

Result: Prescan	Project file: 50511-40907
	Page 47 of 54 Pages

Spurious emissions according to FCC 15 C

Model:
Solid Radar 25x

Serial No.:
71004301083

Applicant:
Endres + Hauser GmbH & Co. KG

Mode:

- DC 24 V power supply
with 330 Ohms communication resistor

- EUT in vertical position

- continuous measurement


- Measurement Distance: 0.50 m

- Polarisation: horizontal

Ref.Level 75 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset 43 dB

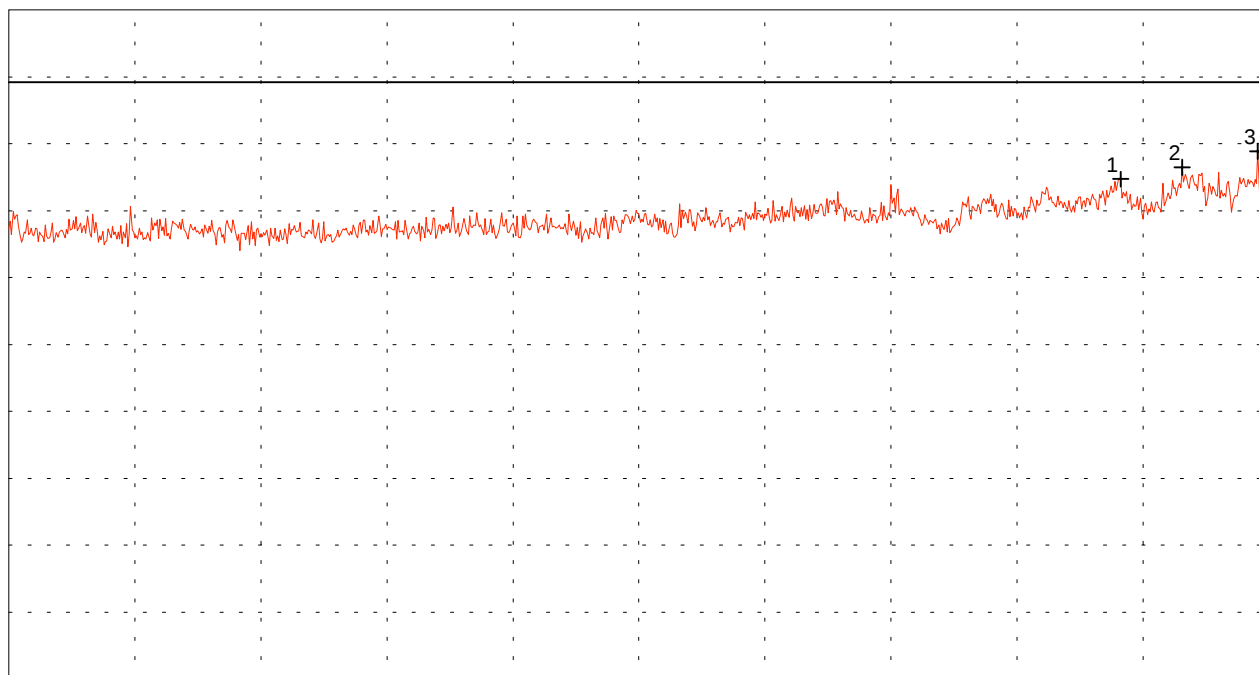

Start 18.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 26.000 GHz
SWP 40 ms

Multi Marker List

No. 1	25.057778 GHz	62.36 dB μ V
No. 2	25.448889 GHz	63.24 dB μ V
No. 3	25.928889 GHz	64.43 dB μ V

Tested by:
M. Steindl

Date:
02/22/2005

Project-No.:
50511-40907

Page 48 of 54 Pages

Spurious emissions according to FCC 15 C

Model:
Solid Radar 25x

Serial No.:
71004301083

Applicant:
Endres + Hauser GmbH & Co. KG

Mode:

- DC 24 V power supply
with 330 Ohms communication resistor

- EUT in vertical position

- continuous measurement


- Measurement Distance: 0.50 m

- Polarisation: vertical

Ref.Level 75 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset 43 dB

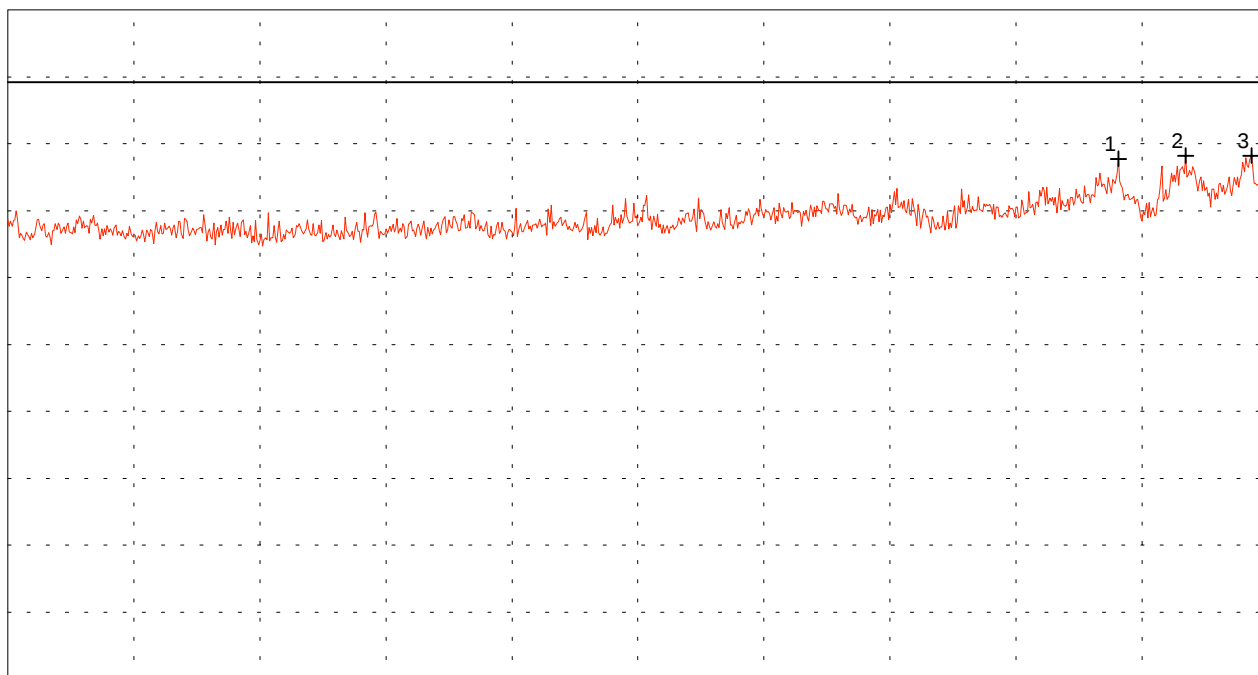

Start 18.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 26.000 GHz
SWP 40 ms

Multi Marker List

No. 1	25.048889 GHz	63.88 dB μ V
No. 2	25.475556 GHz	64.11 dB μ V
No. 3	25.893333 GHz	64.11 dB μ V

Tested by:
M. Steindl

Date:
02/22/2005

Project-No.:
50511-40907

Page 49 of 54 Pages

Spurious emissions according to FCC 15 C

Model:
Solid Radar 25x

Serial No.:
71004301083

Applicant:
Endres + Hauser GmbH & Co. KG

Mode:

- DC 24 V power supply
with 330 Ohms communication resistor

- EUT in vertical position


- continuous measurement

- Measurement Distance: 0.50 m

- Polarisation: horizontal

Ref.Level 22 dB μ V
5 dB/Div.

ATT 0 dB

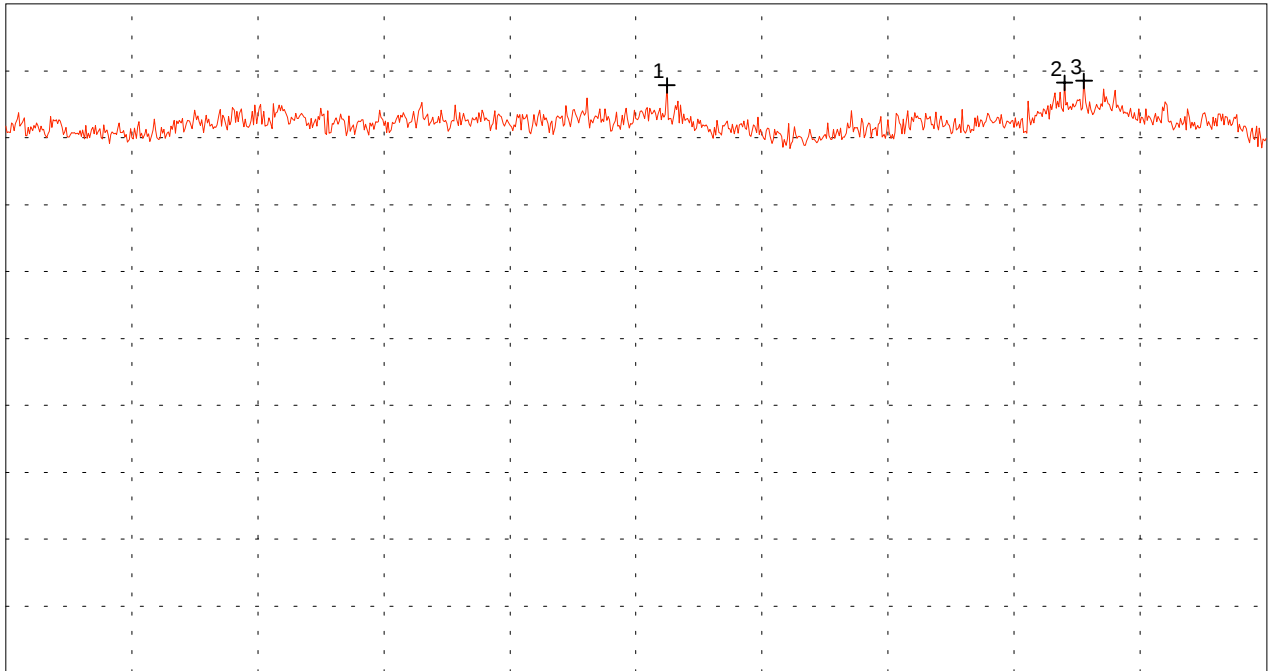

Start 26.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 40.000 GHz
SWP 60 ms

Multi Marker List

No. 1	33.342222 GHz	15.91 dB μ V
No. 2	37.760000 GHz	16.11 dB μ V
No. 3	37.977778 GHz	16.25 dB μ V

Tested by:
M. Steindl

Date:
02/22/2005

Project-No.:
50511-40907

Page 50 of 54 Pages

Spurious emissions according to FCC 15 C

Model:
Solid Radar 25x

Serial No.:
71004301083

Applicant:
Endres + Hauser GmbH & Co. KG

Mode:

- DC 24 V power supply
with 330 Ohms communication resistor

- EUT in vertical position


- continuous measurement

- Measurement Distance: 0.50 m

- Polarisation: vertical

Ref.Level 22 dB μ V
5 dB/Div.

ATT 0 dB

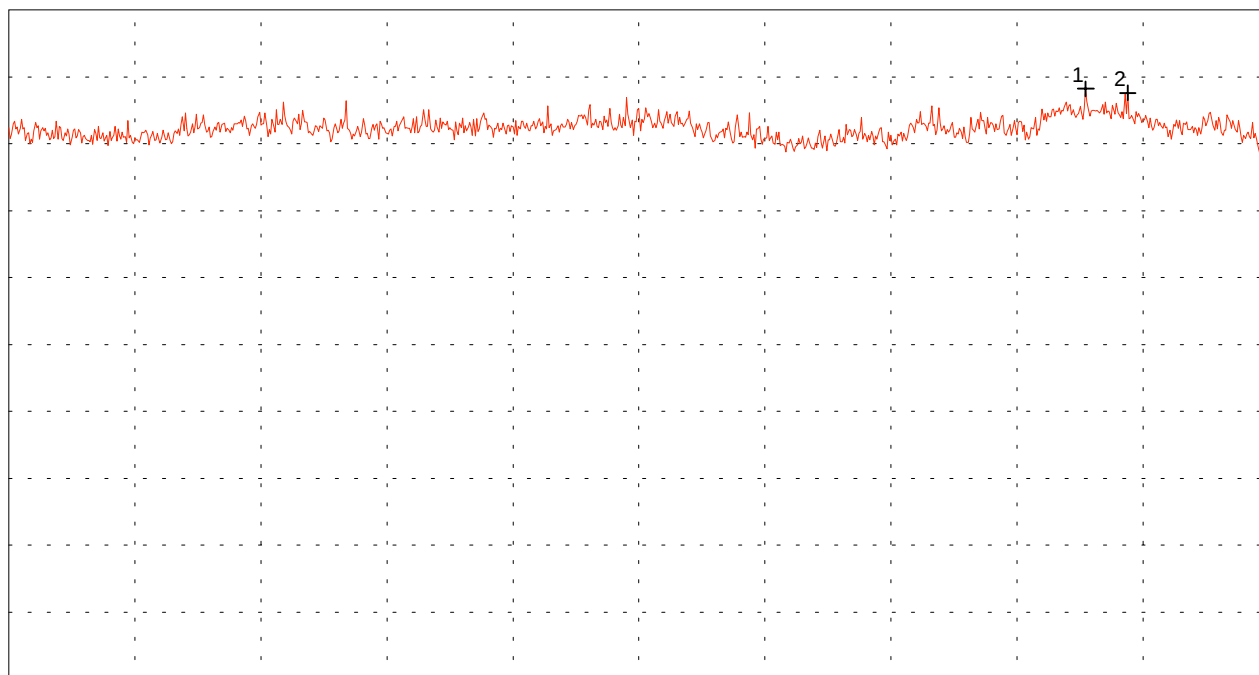

Start 26.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 40.000 GHz
SWP 60 ms

Multi Marker List


No. 1	37.962222 GHz	16.11 dB μ V
No. 2	38.428889 GHz	15.80 dB μ V

Tested by:
M. Steindl

Date:
02/22/2005

Project-No.:
50511-40907

Page 51 of 54 Pages

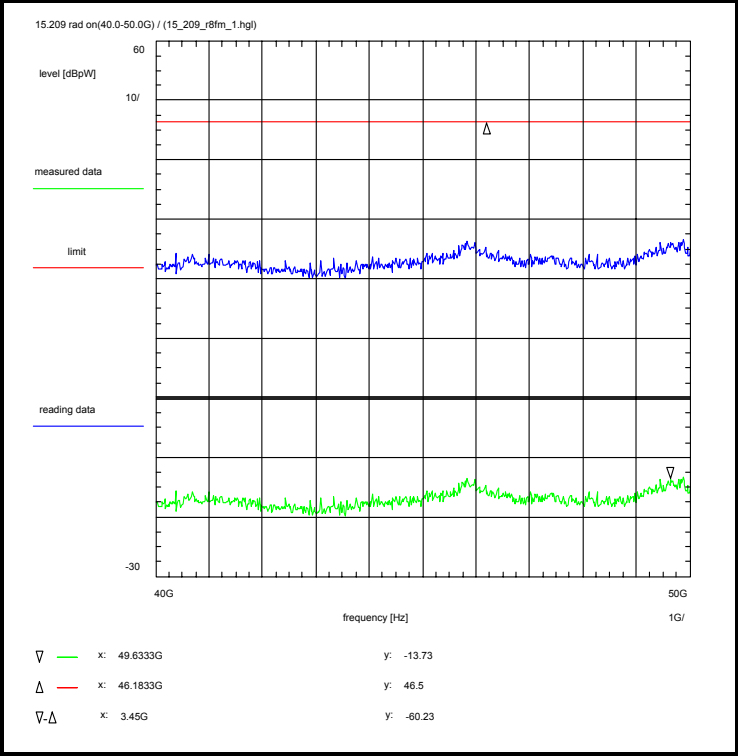

Information on the measurement:

Environment condition:
Date & Time: Wed 15/Jun/2005 11:40:00
Location: CETECOM ICT Services GmbH, Laboratory RSC-Sat
Temperature: 22 °C
Humidity: 55 %
Voltage: 24 Vdc

Setup of measurement equipment:

Start frequency: 40 GHz
Stop frequency: 50 GHz
Center frequency: 45 GHz
Frequency span: 10 GHz
Input attenuation: 0 dB
Resolution-BW: 1 MHz
Video-BW: 1 MHz
Video-Average: 1 sweep(s) (>1)
Detector-Mode: 2 Pos Peak (Maximum-Hold)

Correction (average):

Directional coupler + 0.0 dB
Coaxial cable (C217) + 4.3 dB
DUT-Antenna + 0.0 dBi
Test antenna (A_50) - 24.2 dB
BW correction factor + 0.0 dB
Atten. between HPA and feedhorn - 0.0 dB
Distance correction factor (3->0.3m) - 20.0 dB
TOTAL CORRECTION: -39.9 dB

Limit:

Limit acc. to 15.209): 54.0 dBuV/m (at 3m)
this corresponds to 46.5 dBpW (at 3m)

calculation: $p = e - 17 + 20 \cdot \log(d)$ with:

d = Distance (m)

e = Field Strength level (dBuV/m)

p = Radiated Power level (dBpW)

Remarks:

Measurement with a measuring antenna close to the DUT-cabinets (about 0.3m distance).
If any critical spurious radiations are detected a measurement in an exactly defined distance will be carried out.

Subclause: 15.209) Emission limitations
DUT normal operation mode
Radiation coming out of DUT-cabinet(s) and antenna: 40.0 GHz - 50.0 GHz

Test results:
see plot (an explicit table was not generated)

Operating condition of DUT:
operating condition 1, see section 1.5.2


Test setup:
see annex 1: 2.3

Test equipment:
see annex 2: A_50, C217, R001

Data of correction:
see annex 4

Remark:

Test result: Test passed

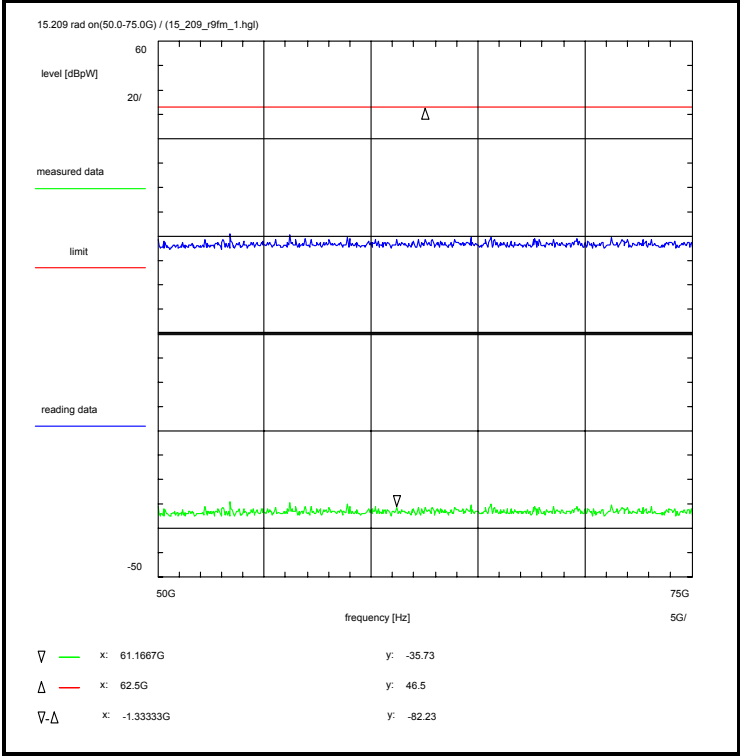

Subclause: 15.209) Emission limitations
DUT normal operation mode
Radiation coming out of DUT-cabinet(s) and antenna: 50.0 GHz - 75.0 GHz

Test results:
see plot (an explicit table was not generated)

Operating condition of DUT:
operating condition 1, see section 1.5.2

Test setup:
see annex 1: 2.4

Test equipment:
see annex 2: A_75, R001; R025

Data of correction:
see annex 4

Remark:

Test result: Test passed

Information on the measurement:


Environment condition:
Date & Time: Wed 15/Jun/2005 11:49:57
Location: CETECOM ICT Services GmbH, Laboratory RSC-Sat
Temperature: 22 °C
Humidity: 55 %
Voltage: 24 Vdc

Setup of measurement equipment:
Start frequency: 50 GHz
Stop frequency: 75 GHz
Center frequency: 62.5 GHz
Frequency span: 25 GHz
Input attenuation: 0 dB
Resolution-BW: 1 MHz
Video-BW: 1 MHz
Video-Average: 1 sweep(s) (>1)
Detector-Mode: 2 Pos Peak (Maximum-Hold)

Correction (average):
Directional coupler + 0.0 dB
Coaxial cable + 0.0 dB
DUT-Antenna + 0.0 dBi
Test antenna (A_75) - 25.4 dB
BW correction factor + 0.0 dB
Atten. between HPA and feedhorn - 0.0 dB
Distance correction factor (3->0.1m) - 29.5 dB
TOTAL CORRECTION: -54.9 dB

Limit:
Limit acc. to 15.209): 54.0 dBuV/m (at 3m)
this corresponds to 46.5 dBpW (at 3m)
calculation: $p = e - 17 + 20 \cdot \log(d)$ with:
d = Distance (m)
e = Field Strength level (dBuV/m)
p = Radiated Power level (dBpW)

Remarks:
Measurement with a measuring antenna
close to the DUT-cabinets (about 1m distance).
If any critical spurious radiations are detected a measurement
in an exactly defined distance will be carried out.

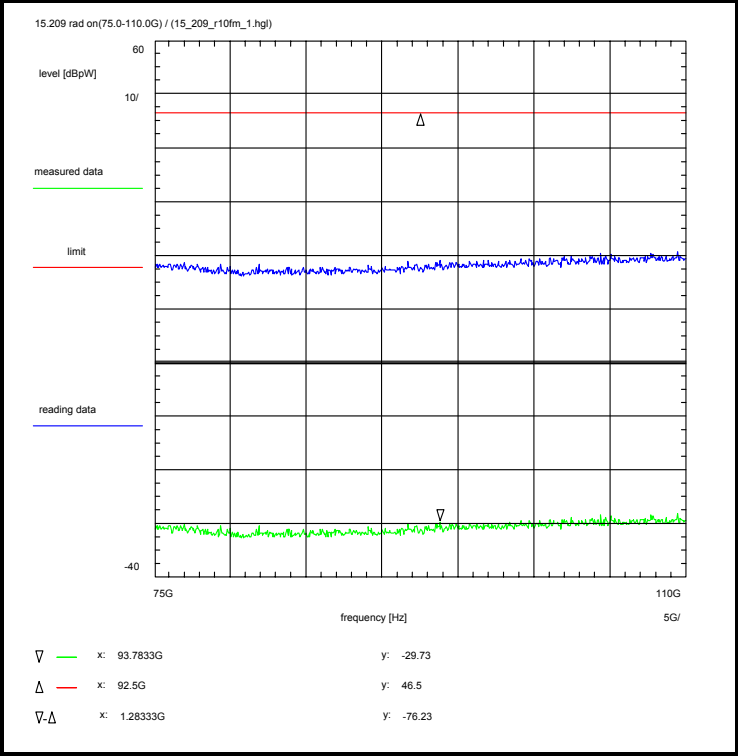

Information on the measurement:

Environment condition:
Date & Time: Wed 15/Jun/2005 11:58:50
Location: CETECOM ICT Services GmbH, Laboratory RSC-Sat
Temperature: 22 °C
Humidity: 55 %
Voltage: 24 Vdc

Setup of measurement equipment:
Start frequency: 75 GHz
Stop frequency: 110 GHz
Center frequency: 92.5 GHz
Frequency span: 35 GHz
Input attenuation: 0 dB
Resolution-BW: 1 MHz
Video-BW: 1 MHz
Video-Average: 1 sweep(s) (>1)
Detector-Mode: 2 Pos Peak (Maximum-Hold)

Correction (average):
Directional coupler + 0.0 dB
Coaxial cable + 0.0 dB
DUT-Antenna + 0.0 dBi
Test antenna (A028) - 19.4 dB
BW correction factor + 0.0 dB
Atten. between HPA and feedhorn - 0.0 dB
Distance correction factor (3->0.1m) - 29.5 dB
TOTAL CORRECTION: - 48.9 dB

Limit:
Limit acc. to 15.209: 54.0 dBuV/m (at 3m)
this corresponds to 46.5 dBpW (at 3m)
calculation: $p = e - 17 + 20 \cdot \log(d)$ with:
d = Distance (m)
e = Field Strength level (dBuV/m)
p = Radiated Power level (dBpW)

Subclause: 15.209) Emission limitations
DUT normal operation mode
Radiation coming out of DUT-cabinet(s) and antenna: 75.0 GHz - 100.0 GHz

Test results:
see plot (an explicit table was not generated)

Operating condition of DUT:
operating condition 1, see section 1.5.2

Test setup:
see annex 1: 2.4

Test equipment:
see annex 2: A028, R001, R029

Data of correction:
see annex 4

Remark:

Test result: Test passed

Remarks:
Measurement with a measuring antenna
close to the DUT-cabinets (about 1m distance).
If any critical spurious radiations are detected a measurement
in an exactly defined distance will be carried out.