



Product Service

Choose certainty.
Add value.

December 19,
2016

Page 1 of 75

Prüfbericht / Test Report

Nr. / No. 80452-81620-3e (Edition 4)

Applicant: Endress + Hauser GmbH & Co. KG
Type of equipment: Level Probing Radar
Type designation: FMR10 + R7, FMR20+R7, FMR20+R8
Order No.: 5002110
Test standards: FCC Code of Federal Regulations,
CFR 47, Part 15,
Sections 15.205, 15.207, 15.209, 15.215 and 15.256

Industry Canada Radio Standards Specifications
RSS-GEN Issue 4, Sections 8.8, 8.9 and 8.10 (Category I Equipment)
RSS-211 Issue 1

Note:

The test data of this report is related only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.

Table of Contents

1	Description of the Equipment Under Test (EUT)	3
2	Administrative Data	4
3	Identification of the Test Laboratory	5
4	Summary	6
5	Operation Mode and Configuration of EUT	7
6	Measurement Procedures	8
6.1	Bandwidth Measurements.....	8
6.2	Conducted AC Powerline Emission	9
6.3	Radiated Emission Measurement 9 kHz to 30 MHz.....	11
6.4	Radiated Emission in Fully or Semi Anechoic Room	13
6.5	Radiated Emission at Alternative Test Site	16
7	Photographs Taken During Testing.....	18
8	Test Results	27
8.1	Bandwidth of Emission – Fundamental Bandwidth	29
8.2	Designation of Emissions.....	32
8.3	Fundamental Emission Limits (boresight)	33
8.4	Antenna beamwidth – Antenna side lobe gain	38
8.5	Conducted Powerline Emission Measurement 150 kHz to 30 MHz	41
8.6	Radiated Emission Measurement 9 kHz to 30 MHz.....	44
8.7	Radiated Emission Measurement 30 MHz to 100 GHz.....	47
8.8	Exposure of Humans to RF Fields	58
9	Referenced Regulations.....	62
10	Test Equipment List with Calibration Data.....	64
11	Test data for antennas diagrams.....	66
12	Revision History	75

1 Description of the Equipment Under Test (EUT)

General data of EUT

Type designation ¹ :	FMR10 + R7, FMR20+R7, FMR20+R8
Parts ² :	
Serial number(s):	L400200117A, L300300117A
Manufacturer:	Endress + Hauser GmbH & Co. KG
Type of equipment:	Level Probing Radar
Version:	As received
FCC ID:	LCGFMR2XKF
IC ID:	2519A-2KF
Additional parts/accessories:	

Technical data of EUT

Application frequency range:	24.05 GHz - 29.00 GHz
Frequency range:	24.05 GHz – 26.50 GHz
Operating frequency:	24.9 GHz
Type of modulation:	Unmodulated Pulse Emission
Pulse train:	1.085 µs
Pulse width:	2 ns
Number of RF-channels:	1
Channel spacing:	---
Designation of emissions ³ :	1G50P0NAN
Type of antenna:	Integrated
Size/length of antenna:	N/A
Connection of antenna:	☐ detachable ☒ not detachable
Type of power supply:	DC supply
Specifications for power supply:	nominal voltage: 24.0 V

¹ Type designation of the system if EUT consists of more than one part.

² Type designations of the parts of the system, if applicable.

³ Also known as "Class of Emission".

2 Administrative Data

Application details

Applicant (full address):	Endress + Hauser GmbH & Co. KG Hauptstr. 1 79689 Maulburg Germany
Contact person:	Mr. Ralf Reimelt
Order number:	5002110
Receipt of EUT:	2016-05-11
Date(s) of test:	2016-05-11 to 2016-06-02; 2016-12-01
Note(s):	Mr. Reimelt, representing the applicant, and Mr. Gätzi attended tests on 2016-05-11 and 2016-05-12.

Report details

Report number:	80452-81620-3e
Edition:	4
Issue date:	2016-12-19

3 Identification of the Test Laboratory

Details of the Test Laboratory

Company name:	TÜV SÜD Product Service GmbH
Address:	Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
Laboratory accreditation:	DAkKS Registration No. D-PL-11321-11-01
FCC test site registration number	90926
Industry Canada test site registration:	3050A-2
Contact person:	Mr. Johann Roidt
	Phone: +49 9421 5522-0 Fax: +49 9421 5522-99

4 Summary

Summary of test results

The tested sample complies with the requirements set forth in the

Code of Federal Regulations CFR 47, Part 15, Sections 15.205, 15.207, 15.209, 15.215 and 15.256
of the Federal Communication Commission (FCC) and the

Radio Standards Specifications
RSS-GEN Issue 4, Sections 8.8, 8.9 and 8.10 (Category I Equipment)
RSS-211 Issue 1

of Industry Canada (IC).

Personnel involved in this report

Laboratory Manager:



Mr. Johann Roidt

Responsible for testing:



Mr. Martin Steindl

Responsible for test report:

Mr. Martin Steindl

5 Operation Mode and Configuration of EUT

Operation Mode(s)

Normal operation mode: Measurement with pulsed signal

Configuration(s) of EUT

FCC test setup, DC 24 V power supply, EUT in vertical position.
 The FMR10 / FMR20 was equipment with antennas DN40 and DN80, each.

List of ports and cables

Port	Description	Classification ⁴	Cable type	Cable length
1	DC supply with HART communication interface	signal/control port	Shielded	2 m

List of devices connected to EUT

Item	Description	Type Designation	Serial no. or ID	Manufacturer

List of support devices

Item	Description	Type Designation	Serial no. or ID	Manufacturer

⁴ Ports shall be classified as ac power, dc power or signal/control port

6 Measurement Procedures

6.1 Bandwidth Measurements

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 2, section 2.202(a) CFR 47 Part 15, sections 15.215(c) and 15.256 IC RSS-Gen Issue 4, section 6.6 IC RSS-211 Issue 1 ANSI C63.10, section 6.9.1
Guide:	ANSI C63.10
Measurement setup:	☐ Conducted: See below ☒ Radiated: Radiated Emission in Fully or Semi Anechoic Room (6.4)
If antenna is detachable bandwidth measurements shall be performed at the antenna connector (conducted measurement) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable. If radiated measurements are performed the same test setups and instruments are used as with radiated emission measurements for the appropriate frequency range. The analyzer settings are specified by the test description of the appropriate test record(s).	

6.2 Conducted AC Powerline Emission

Measurement Procedure:

Rules and specifications: CFR 47 Part 15, section 15.207
 IC RSS-GEN Issue 4, section 8.8

Guide: ANSI C63.10 / CISPR 22


Conducted emission tests in the frequency range 150 kHz to 30 MHz are performed using Line Impedance Stabilization Networks (LISNs). To simplify testing with quasi-peak and average detector the following procedure is used:

First the whole spectrum of emission caused by the equipment under test (EUT) is recorded with detector set to peak using CISPR bandwidth of 10 kHz. After that all emission levels having less margin than 10 dB to or exceeding the average limit are retested with detector set to quasi-peak.

If average limit is kept with quasi-peak levels no additional scan with average detector is necessary. In cases of emission levels between quasi-peak and average limit an additional scan with detector set to average is performed.

According to ANSI C63.10, section 6.2.5, testing of intentional radiators with detachable antenna shall be performed using a suitable dummy load connected to the antenna output terminals. Otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended.

Testing with dummy load may be necessary to distinguish (unintentional) conducted emissions on the supply lines from (intentional) emissions radiated by the antenna and coupling directly to supply lines and/or LISN. Usage of dummy load has to be stated in the appropriate test record(s) and notes should be added to clarify the test setup.

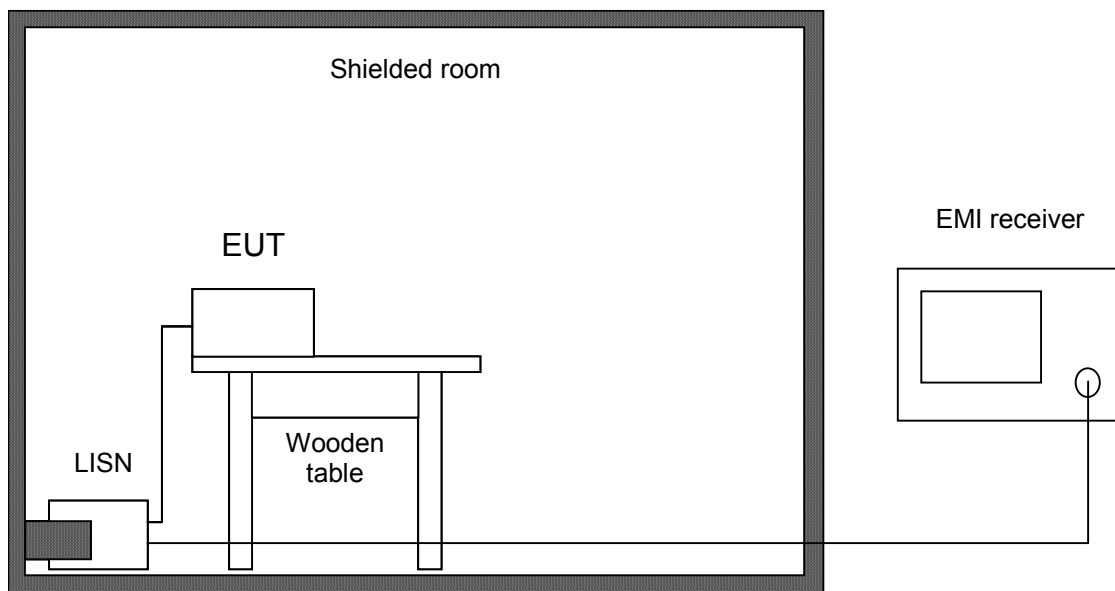

Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
☒ Test receiver	ESHS 10	1028	860043/016	Rohde & Schwarz
☒ V-network	ESH 3-Z5	1059	894785/005	Rohde & Schwarz
☐ V-network	ESH 3-Z5	1218	830952/025	Rohde & Schwarz
☐ Artificial mains network	ESH 2-Z5	1536	842966/004	Rohde & Schwarz
☐ Microwave cable	FB293C1080005050	2157	72110-02	Rosenberger Micro-Coax
☐ Coax cable	RG214 N/N 5m	1188	---	Senton
☐ Shielded room	No. 1	1451	---	Albatross
☐ Shielded room	No. 4	1454	3FD 100 544	Euroshield
☒ Shielded room	No. 9		---	Albatross

6.3 Radiated Emission Measurement 9 kHz to 30 MHz

Measurement Procedure:

Rules and specifications: CFR 47 Part 15, sections 15.209, 15.215 and 15.256
 IC RSS-GEN Issue 4, sections 8.9 and 8.10
 IC RSS-210 Issue 1

Guide: ANSI C63.4

Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators.


Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

If worst case emission of the EUT cannot be recorded with EUT in standard position and loop antenna in vertical polarization the EUT (or the radiating part of the EUT) is rotated by 90 degrees instead of changing the loop antenna to horizontal polarization. This procedure is selected to minimize the influence of the environment (e.g. effects caused by the floor especially with longer distances).

Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

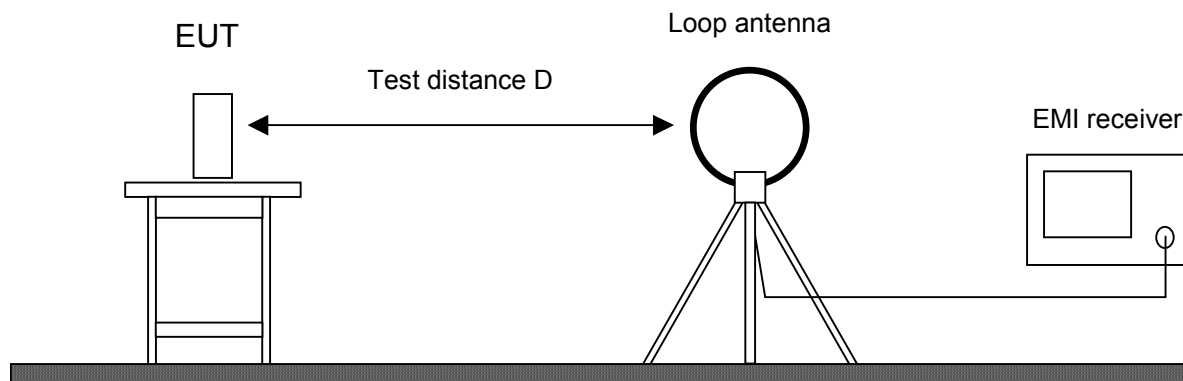

Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
☐ Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
☐ EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
☐ Test receiver	ESHS 10	1028	860043/016	Rohde & Schwarz
☐ EMI test receiver	ESU8	2044	100232	Rohde & Schwarz
☐ Preamplifier Cabin no. 2	CPA9231A	1716	3557	Schaffner
☒ Loop antenna	HFH2-Z2	1016	882964/1	Rohde & Schwarz
☐ Microwave cable Cabin no. 2	UFA210A-FG	1681	23516	Rosenberger Micro-Coax
☐ Microwave cable Cabin no. 2	KKSF1040016	2020	289854/4	Huber + Suhner
☐ Microwave cable Cabin no. 2	FA210AF020000000	2060	64566-2	Rosenberger Micro-Coax
☐ Microwave cable Cabin no. 8	EF393	2053	---	Albatross Projects
☐ Microwave cable Cabin no. 8	FB293C1050005050	2054	63834-1	Rosenberger Micro-Coax
☒ Microwave cable Cabin no. 8	FB293C1080005050	2055	63833-1	Rosenberger Micro-Coax
☐ Microwave cable Cabin no. 8	LCF12-50	2057	P1.3.9	RFS
☐ Microwave cable Cabin no. 8	LCF12-50	2057	P1.4.12	RFS
☒ Microwave cable Cabin no. 8	LCF12-50	2057	P1.6.19	RFS
☐ Microwave cable Cabin no. 8	FA210AF040005050G	2127	72061-01	Rosenberger Micro-Coax
☐ Microwave cable Cabin no. 8	FA210AF04000505G	2056	64567-01	Rosenberger Micro-Coax
☒ Microwave cable Cabin no. 8	FA210AF04000505	2068	64610-1	Rosenberger Micro-Coax
☐ Fully anechoic room	No. 2	1452	---	Albatross
☐ Semi anechoic room	No. 3	1453	---	Siemens
☒ Semi anechoic room	No. 8	2057	---	Albatross

6.4 Radiated Emission in Fully or Semi Anechoic Room

Measurement Procedure:

Rules and specifications:	CFR 47 Part 15, sections 15.209, 15.215 and 15.256 IC RSS-GEN Issue 4, section 8.9 IC RSS-211 Issue 1
---------------------------	---

Guide:	ANSI C63.4
--------	------------

Radiated emission in fully or semi anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33.

Measurements are made in both the horizontal and vertical planes of polarization using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz).

Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used.


All tests below 8.2 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance may be reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

For final testing below 1 GHz a semi anechoic room complying with the NSA requirements of ANSI C63.4 respectively ANSI C63.10 for alternative test sites is used (see 6.5). If prescans are recorded in fully anechoic room they are indicated appropriately.

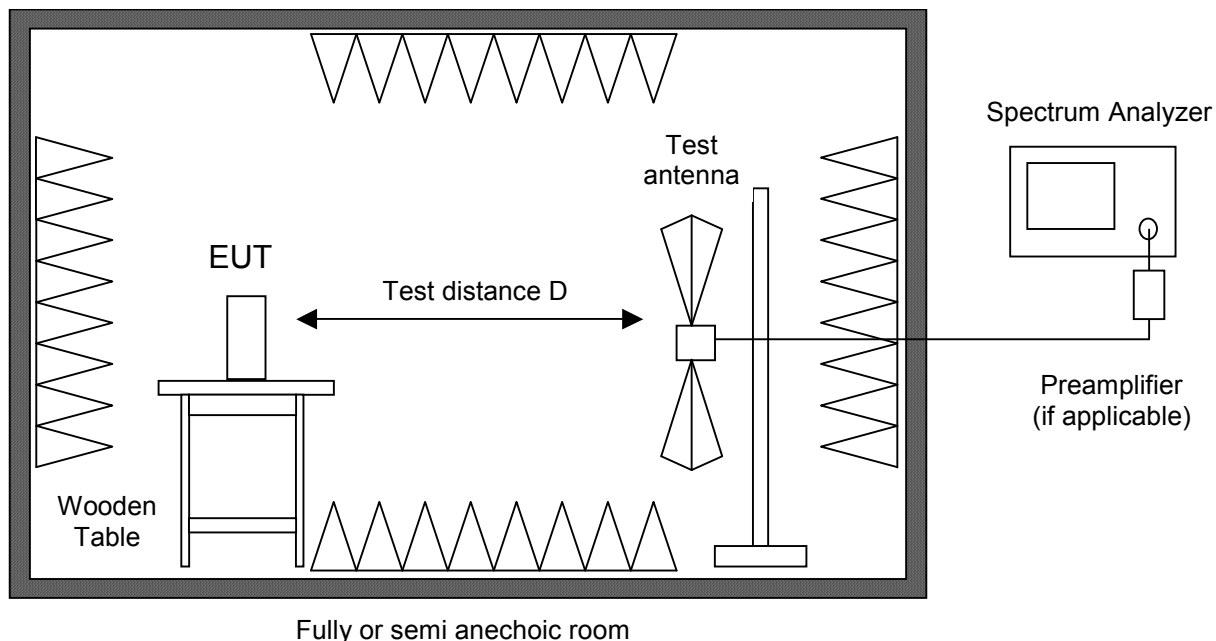


Test instruments used:

Type		Designation	Inv.-no.	Serial No. or ID	Manufacturer
☒	Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
☒	Spectrum analyzer	FSV40			Rohde & Schwarz
☐	EMI test receiver	Cabin no. 3 ESPI7	2010	101018	Rohde & Schwarz
☐	EMI test receiver	ESU8	2044	100232	Rohde & Schwarz
☐	EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
☒	Preamplifier	Cabin no. 2 CPA9231A	1716	3557	Schaffner
☐	Preamplifier	R14601	1142	13120026	Advantest
☒	Preamplifier (1 - 8 GHz)	AFS3-00100800-32-LN	1684	847743	Miteq
☐	Preamplifier (0.5 - 8 GHz)	AMF-4D-005080-25-13P	1685	860149	Miteq
☒	Preamplifier (8 - 18 GHz)	ACO/180-3530	1484	32641	CTT

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
☒ External Mixer	WM780U	2085	B030121	Tektronix
☒ External Mixer	WM782V	2140	B030132	Tektronix
☒ External Mixer	WM782W	2181	B010193	Tektronix
☐ Harmonic Mixer Accessories	FS-Z30	1577	624413/003	Rohde & Schwarz
☐ Trilog antenna Cabin no. 2	VULB 9163	1802	9163-214	Schwarzbeck
☐ Trilog antenna Cabin no. 3	VULB 9163	1722	9163-188	Schwarzbeck
☐ Trilog antenna Cabin no. 8	VULB 9163	2058	9163-408	Schwarzbeck
☐ Trilog antenna Cabin no. 2	VULB 9162	2256	9162-048	Schwarzbeck
☒ Horn antenna	3115	1516	9508-4553	EMCO
☐ Horn antenna	3160-03	1010	9112-1003	EMCO
☐ Horn antenna	3160-04	1011	9112-1001	EMCO
☐ Horn antenna	3160-05	1012	9112-1001	EMCO
☐ Horn antenna	3160-06	1013	9112-1001	EMCO
☒ Horn antenna	3160-07	1014	9112-1008	EMCO
☒ Horn antenna	3160-08	1015	9112-1002	EMCO
☒ Horn antenna	3160-09	1265	9403-1025	EMCO
☒ Horn antenna	3160-10	1575	399185	EMCO
☒ Horn antenna	24240-20	2086	157845	FLANN
☒ Horn antenna	25240-25	2180	205900	FLANN
☒ Horn antenna	27240-25	2182	204260	FLANN
☐ Microwave cable Cabin no. 2	UFA210A-FG	1681	23516	Rosenberger Micro-Coax
☐ Microwave cable Cabin no. 2	KKSF1040016	2020	289854/4	Huber + Suhner
☐ Microwave cable Cabin no. 2	FA210AF020000000	2060	64566-2	Rosenberger Micro-Coax
☐ Microwave cable Cabin no. 8	EF393	2053	---	Albatross Projects
☐ Microwave cable Cabin no. 8	FB293C1050005050	2054	63834-1	Rosenberger Micro-Coax
☐ Microwave cable Cabin no. 8	FB293C1080005050	2055	63833-1	Rosenberger Micro-Coax
☐ Microwave cable Cabin no. 8	LCF12-50	2057	P1.3.9	RFS
☐ Microwave cable Cabin no. 8	LCF12-50	2057	P1.4.12	RFS
☐ Microwave cable Cabin no. 8	LCF12-50	2057	P1.6.19	RFS
☐ Microwave cable Cabin no. 8	FA210AF040005050G	2127	72061-01	Rosenberger Micro-Coax
☐ Microwave cable Cabin no. 8	FA210AF04000505G	2056	64567-01	Rosenberger Micro-Coax
☐ Microwave cable Cabin no. 8	FA210AF04000505	2068	64610-1	Rosenberger Micro-Coax
☐ Fully anechoic room	No. 2	1452	---	Albatross
☐ Semi anechoic room	No. 8	2057	---	Albatross

6.5 Radiated Emission at Alternative Test Site

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.209, 15.215 and 15.256 IC RSS-GEN Issue 4, section 8.9 IC RSS-211 Issue 1
Guide:	ANSI C63.10
Radiated emission in the frequency range 30 MHz to 1 GHz is measured within a semi-anechoic room with groundplane complying with the NSA requirements of ANSI C63.4 respectively ANSI C63.10 for alternative test sites. A linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna") is used. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected. If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value. Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in fully anechoic room. If no prescan in a fully anechoic room is used first a peak scan is performed in four positions to get the whole spectrum of emission caused by EUT with the measuring antenna raised and lowered from 1 to 4 m to find table position, antenna height and antenna polarization for the maximum emission levels. Data reduction is applied to these results to select those levels having less margin than 10 dB to or exceeding the limit using subranges and limited number of maximums. Further maximization is following. With detector of the test receiver set to quasi-peak final measurements are performed immediately after frequency zoom (for drifting disturbances) and maximum adjustment. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions. In cases where prescans in a fully anechoic room are taken (e. g. if EUT is operating for a short time only or battery is discharged quickly) final measurements with quasi-peak detector are performed manually at frequencies indicated by prescan with EUT rotating all around and receiving antenna raising and lowering within 1 meter to 4 meters to find the maximum levels of emission. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions. For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.	

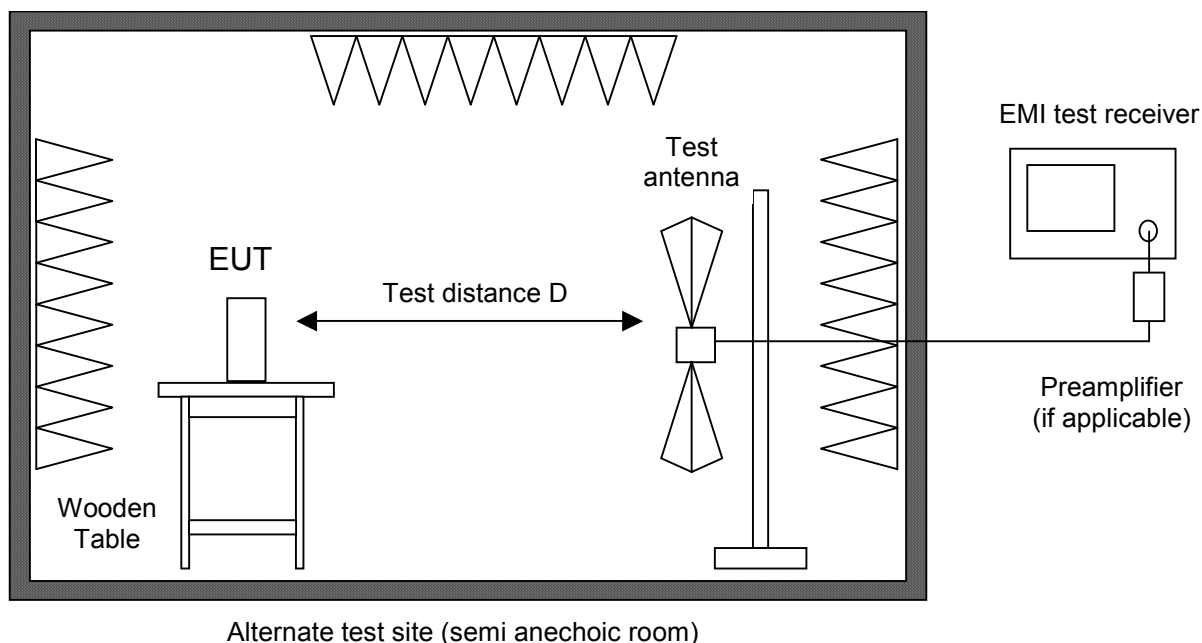

Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
☒ EMI test receiver	ESU8	2044	100232	Rohde & Schwarz
☒ Trilog antenna Cabin no. 8	VULB 9163	2058	9163-408	Schwarzbeck
☒ Microwave cable Cabin no. 8	EF393	2053	---	Albatross Projects
☐ Microwave cable Cabin no. 8	LCF12-50	2057	P1.6.19	RFS
☒ Microwave cable Cabin no. 8	LCF12-50	2057	P1.3.9	RFS
☐ Microwave cable Cabin no. 8	FA210AF04000505	2068	64610-1	Rosenberger Micro-Coax
☒ Microwave cable Cabin no. 8	FA210AF040005050G	2127	72061-01	Rosenberger Micro-Coax
☒ Semi anechoic room	No. 8	2057	---	Albatross

7 Photographs Taken During Testing


Test setup for conducted DC powerline emission measurement



Test setup for radiated emission measurement 9 kHz – 30 MHz




DN40 with horn

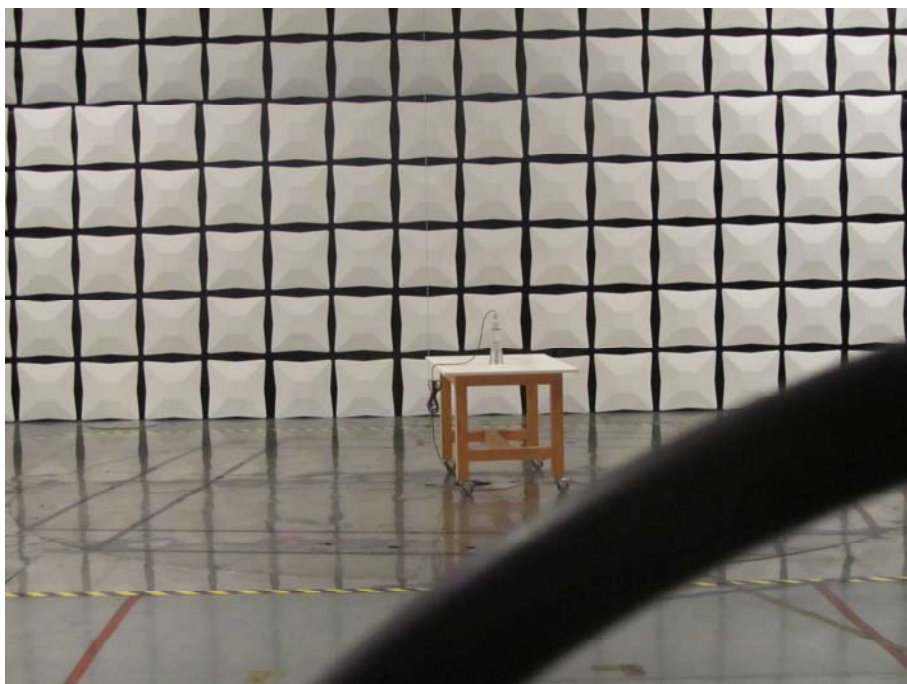

DN80 with horn

Test setup for radiated emission measurement (fully anechoic room)

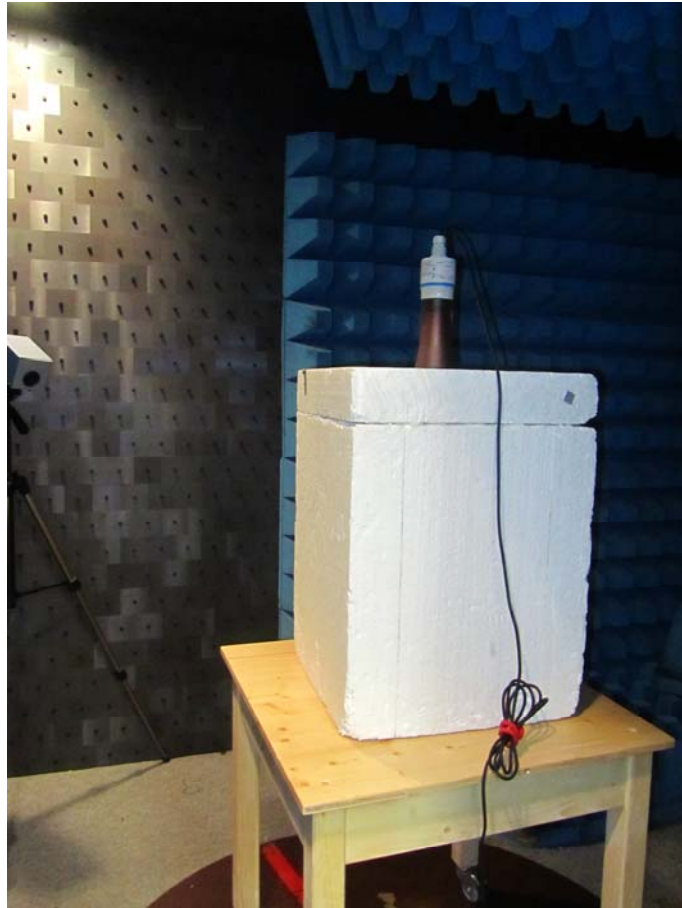


DN40 with horn

Test setup for radiated emission measurement (fully anechoic room) - continued -



DN80 with horn

Test setup for radiated emission measurement (alternate test site)

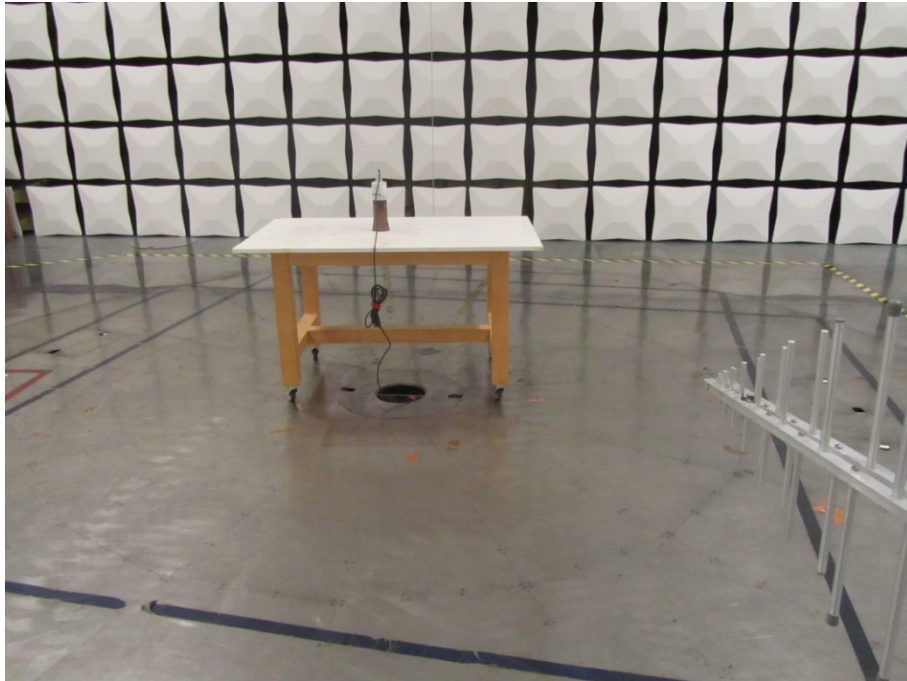

DN40 with horn



DN40 with horn

Test setup for radiated emission measurement (alternate test site) - continued -



DN40 with horn



DN40 with horn

Test setup for radiated emission measurement (alternate test site) - continued -



DN80 with horn



DN80 with horn

Test setup for radiated emission measurement (alternate test site) - continued -



DN80 with horn



DN80 with horn

8 Test Results

FCC CFR 47 Parts 2 and 15			
Section(s)	Test	Page	Result
2.1046(a)	Conducted output power	---	Not applicable
2.201, 2.202	Class of emission	32	Calculated
15.35(c)	Pulse train measurement for pulsed operation	---	Not applicable
15.205(a)	Restricted bands of operation	--- ⁵	Test passed
15.207	Conducted AC powerline emission 150 kHz to 30 MHz	41	Test passed
15.209 15.215(c) 15.256(h) 15.256(k)	Radiated emission 9 kHz to 30 MHz	44	Test passed
15.209 15.215(c) 15.256(h) 15.256(k)	Radiated emission 30 MHz to 100 GHz	47	Test passed
15.215(c) 15.256(f)	Bandwidth of Emission – Fundamental Bandwidth	29	Test passed
15.256(g)	Fundamental Emissions Limits	33	Test passed
15.256(i)	Antenna beamwidth	38	Test passed
15.256(j)	Antenna side lobe gain	38	Test passed

⁵ See "Unwanted emissions".

IC RSS-GEN Issue 4

Section(s)	Test	Page	Result
6.12	Transmitter output power (conducted)	---	Not applicable
6.6	Occupied Bandwidth	29	Recorded
9	Designation of emissions	32	Calculated
6.10	Pulsed operation	---	Not applicable
8.8	Transmitter AC power lines conducted emissions 150 kHz to 30 MHz	41	Test passed
8.10	Restricted bands and unwanted emission frequencies	---	Not applicable
6.4, 6.13, 8.9	Unwanted emissions 9 kHz to 30 MHz	44	Test passed
6.4, 6.13, 8.9	Unwanted emissions 30 MHz to 100 GHz	47	Test passed
3.2	Exposure of Humans to RF Fields	58	Exempted from SAR and RF eval- uation

IC RSS-211 Issue 1


Section(s)	Test	Page	Result
5.1 (a)	Bandwidth of Emission – Fundamental Bandwidth	29	Test passed
5.1 (b)	Designated bands	29	Test passed
5.1 (c)	Restricted bands	--- ⁶	Test passed
5.1 (d)	Unwanted emissions 9 kHz to 30 MHz	44	Test passed
5.1 (d)	Unwanted emissions 30 MHz to 100 GHz	47	Test passed
5.2 (a)	Half-power beamwidth	38	Test passed
5.2 (b)	Emission limits	33	Test passed
5.2 (c)	Lobe gain	38	Test passed
5.3 (b)	Leakage of RF field outside the container	---	Not applicable

⁶ See "Unwanted emissions".

8.1 Bandwidth of Emission – Fundamental Bandwidth

Rules and specifications:	CFR 47 Part 15, sections 15.215(c) and 15.256(f) IC RSS-211 Issue 1, sections 5.1 (a) and 5.1 (b)
Guide:	ANSI C63.10
Description and Limit:	Intentional radiators operating under the alternative provisions to the general emission limit must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated The fundamental bandwidth of an LPR emission is defined as the width of the signal between two points, on below (f_L) and one above (f_H) the center frequency, outside of which all emissions are attenuated by at least 10 dB relative to the maximum transmitter output power when measured in an equivalent resolution bandwidth. The minimum fundamental emission bandwidth shall be 50 MHz for LPR operation under the provisions of this section. LPR devices operating under this section must confine their fundamental emission bandwidth within the 5925 MHz – 7250 MHz, 24.05 GHz – 29.00 GHz, and 75 GHz – 85 GHz bands under all conditions of operation. The video bandwidth shall be at least three times greater than the resolution bandwidth.
Measurement procedure:	Bandwidth Measurements (6.1)
Comment:	Parameter K27 was set to 50.
Date of test:	2016-12-19
Test site:	Fully anechoic room, cabin no. 2
Test Result:	Test passed


Antenna DN40:

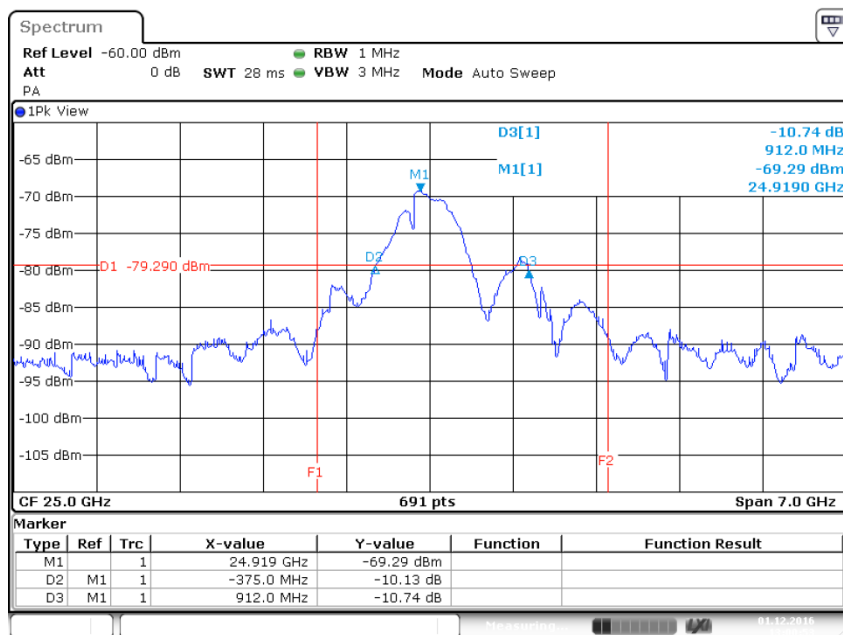

Date: 1.DEC.2016 13:00:53

Minimum frequency f_L :	24.5440 GHz		
Maximum frequency f_H :	25.8380 GHz		
Bandwidth of the emission:	1.287 GHz		
Minimum bandwidth requirement:	≥ 50 MHz	Test passed	
Emission within the designated band:	24.05 GHz – 29.00 GHz	Test passed	

Antenna DN80:

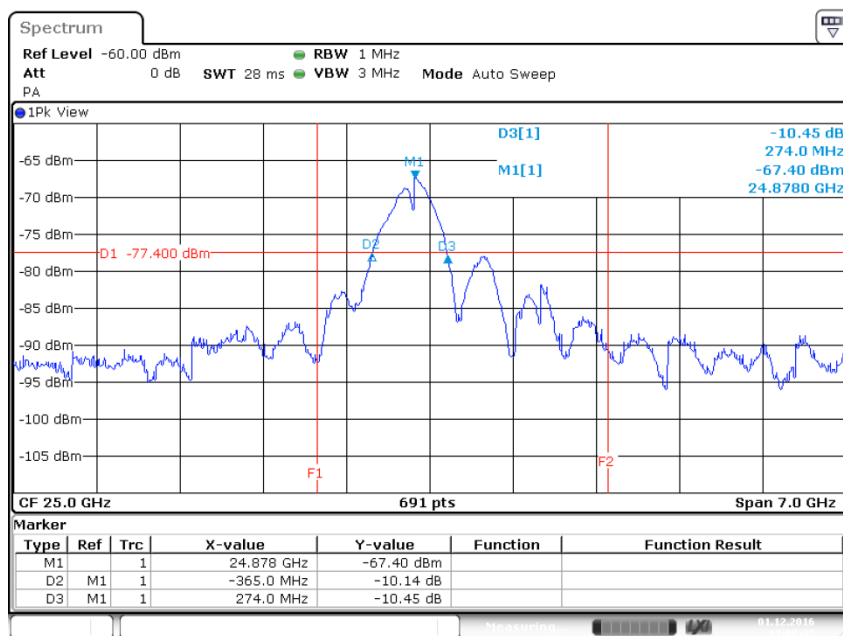

Date: 1.DEC.2016 13:08:43

DN80

Minimum frequency f_L :	24.5130 GHz	
Maximum frequency f_H :	25.1520 GHz	
Bandwidth of the emission:	639 MHz	
Minimum bandwidth requirement:	≥ 50 MHz	Test passed
Emission within the designated band:	24.05 GHz – 29.00 GHz	Test passed

8.2 Designation of Emissions

Rules and specifications:	CFR 47 Part 15, section 2.201 and 2.202 IC RSS-Gen Issue 4, section 9
Guide:	ANSI C63.10 / TRC-43

Type of modulation:	Unmodulated Pulse Emission
---------------------	----------------------------

B_n = Necessary Bandwidth	$B_n = 2K/t$
t = Pulse duration at half amplitude	$t = 2 \text{ ns}$
K = Overall numerical factor	$K = 1.5$
Calculation:	$B_n = 2 \cdot 1.5 / 2 \text{ ns} = 1.5 \text{ GHz}$


Designation of Emissions:	1G50P0NAN
---------------------------	------------------

8.3 Fundamental Emission Limits (boresight)

Rules and specifications:	CFR 47 Part 15, section 15.256(f) IC RSS-211 Issue 1, section 5.2 (b)		
Guide:	ANSI C63.10		
Limit	<i>Frequency band of operation (GHz)</i>	<i>Average emission limit (EIRP in dBm measured in 1 MHz)</i>	<i>Peak emission limit (EIRP in dBm measured in 50 MHz)</i>
	24.05 – 29.00	-14	26
	Note: The EIRP in 1 MHz is computed from the maximum power level measured within any 1 MHz bandwidth using a power averaging detector. The EIRP in 50 MHz is computed from the maximum power level measured with a peak detector in a 50 MHz bandwidth centered on the frequency at which the maximum average power level is realized and this 50 MHz bandwidth must be contained within the authorized operating bandwidth. For a RBW less than 50 MHz, the peak EIRP limit (in dBm) is reduced by $20 \log(\text{RBW}/50)$ dB where RBW is the resolution bandwidth in MHz. The RBW shall not be lower than 1 MHz or greater than 50 MHz. The video bandwidth shall not be less than the RBW.		
Measurement procedure:	Radiated Emission in Fully or Semi Anechoic Room (6.4)		
Date of test:	2016-05-16		
Test site:	Fully anechoic room, cabin no. 2		


<i>Antenna</i>	<i>RBW (MHz)</i>	<i>Average emission (dBm e.i.r.p.)</i>	<i>Peak emission (dBm e.i.r.p.)</i>	<i>Limit (dBm e.i.r.p.)</i>
DN40	1	-28.4	-4.1	-14.0
	10			12.0
DN80	1	-21.7	0.0	-14.0
	10			12.0

Plots for antenna DN40 – Average:

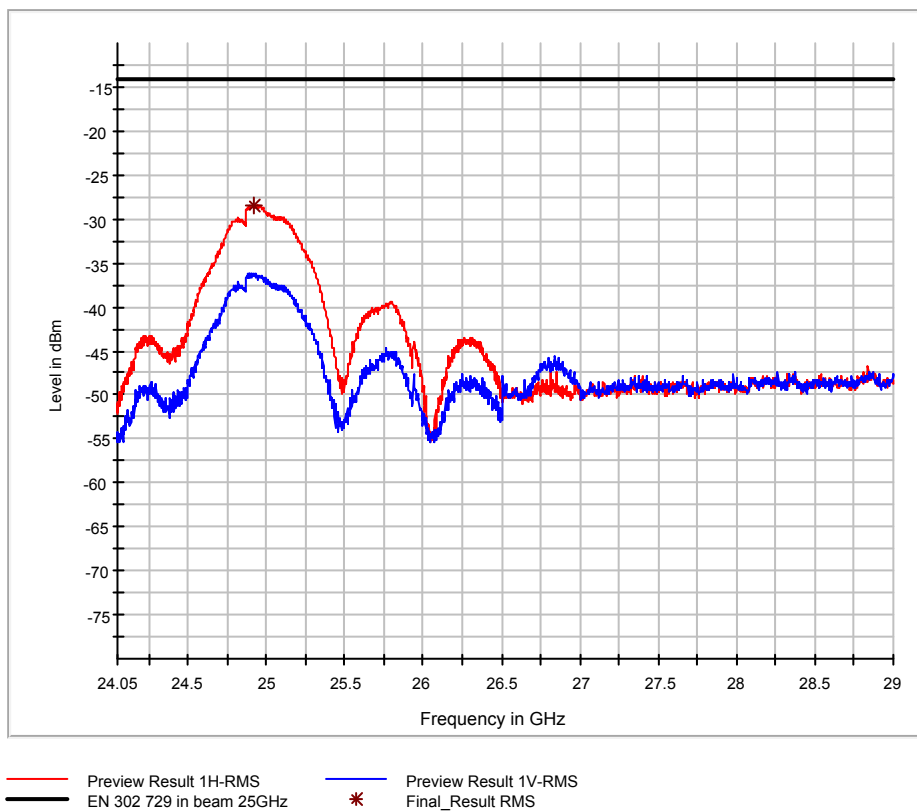


Frequency MHz	RMS dBm	Bandwidth kHz	Pol	Azimuth deg	Corr. dB
23731.125	-49.8	1000	H	0.0	-62.0
24925.375	-28.4	1000	H	0.0	-61.9

Plots for antenna DN40 – Peak:

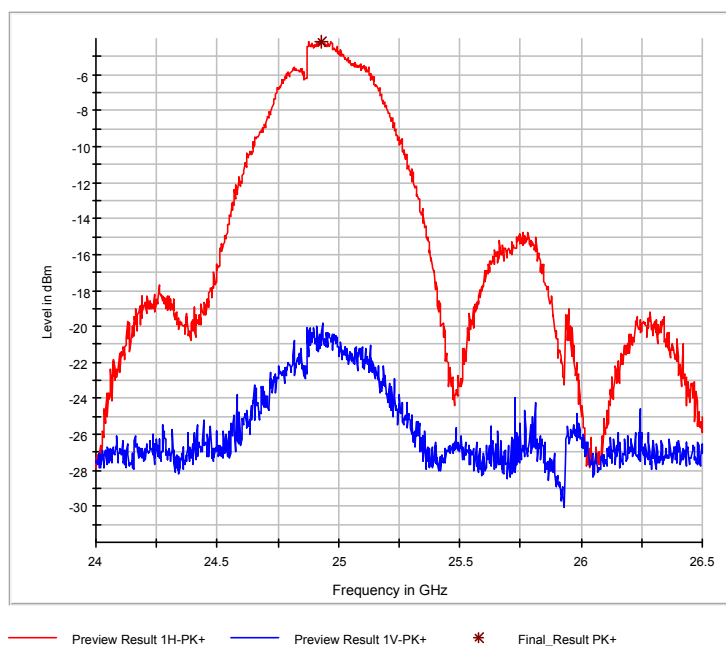


Frequency MHz	MaxPeak dBm	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
24930.000	-4.1	10000	150.0	H	86.0	-52.4

Plots for antenna DN80 – Average:

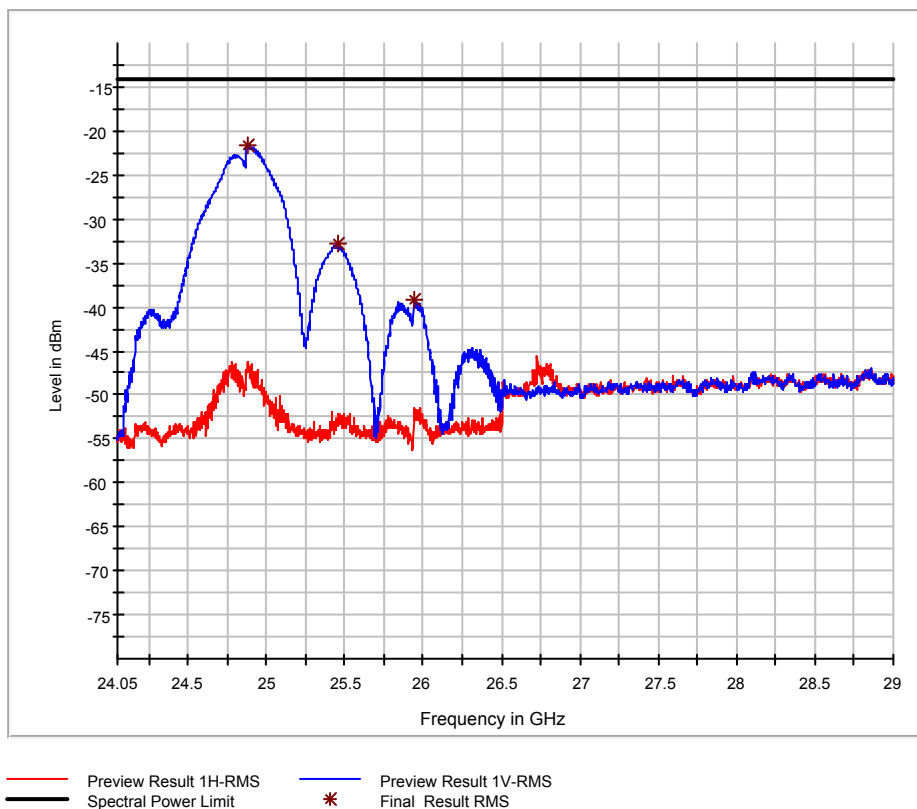

Frequency MHz	RMS dBm	Bandwidth kHz	Pol	Azimuth deg	Corr. dB
23461.250	-46.9	1000	V	4.0	-62.1
23873.500	-45.7	1000	V	4.0	-61.9
24885.000	-21.7	1000	V	4.0	-61.9
25452.375	-32.9	1000	V	4.0	-62.0
25939.000	-39.2	1000	V	4.0	-61.9

Plots for antenna DN80 – Peak:

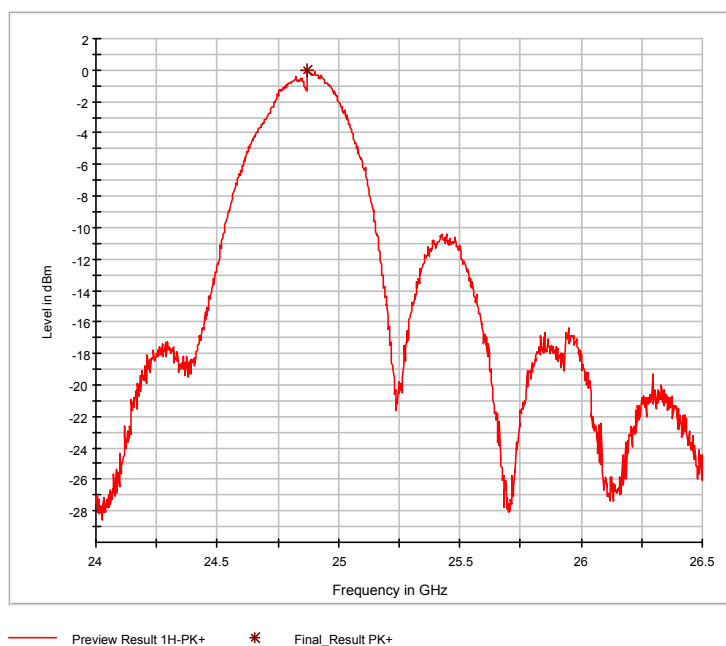



Frequency MHz	MaxPeak dBm	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
24870.000	0.01	10000	150	H	84.0	-52.4

8.4 Antenna beamwidth – Antenna side lobe gain



Rules and specifications:	CFR 47 Part 15, sections 15.256(i) and 15.256(j) IC RSS-211 Issue 1, sections 5.2 (a) and 5.2 (c)
Guide:	ANSI C63.10
Description:	§15.256(i): LPR devices operating within the 24.05 GHz – 29.00 GHz band must use an antenna with a -3 dB beamwidth no greater than 12 degrees. §15.256(j): LPR devices operating under the provisions of this section must limit the side lobe beam gain for off-axis angles from the main beam or greater than 60 degrees to at least -27 dBc.
Note:	See Test data for antennas diagrams (11) for detailed test data.
Date of test:	2016-05-16
Test site:	Fully anechoic room, cabin no. 2
Measurement description:	Radiated Emission in Fully or Semi Anechoic Room (6.4)

Degrees out of main beam	Antenna DN40 (dBc)		Antenna DN80 (dBc)	
	Horizontal	Vertical	Horizontal	Vertical
-6°	-3.96	-5.78	-3.74	-3.65
-5°	-3.33	-3.86	-2.44	-2.82
-4°	-2.49	-2.41	-1.58	-2.05
-3°	-1.64	-1.40	-0.88	-1.35
-2°	-0.86	-0.87	-0.31	-0.62
-1°	-0.28	-0.43	-0.02	-0.30
0°	0.00	0.00	0.00	0.00
1°	-0.06	-0.21	-0.21	-0.07
2°	-0.66	-0.84	-0.24	-0.32
3°	-1.61	-1.72	-0.69	-1.03
4°	-3.09	-3.06	-1.18	-1.92
5°	-5.21	-4.75	-1.99	-3.27
6°	-8.30	-6.96	-3.03	-4.82
Antenna beam-width	9°	9°	12°	11°
Limit	≤ 12°	≤ 12°	≤ 12°	≤ 12°
Result	Pass	Pass	Pass	Pass

Plots for antenna DN40:

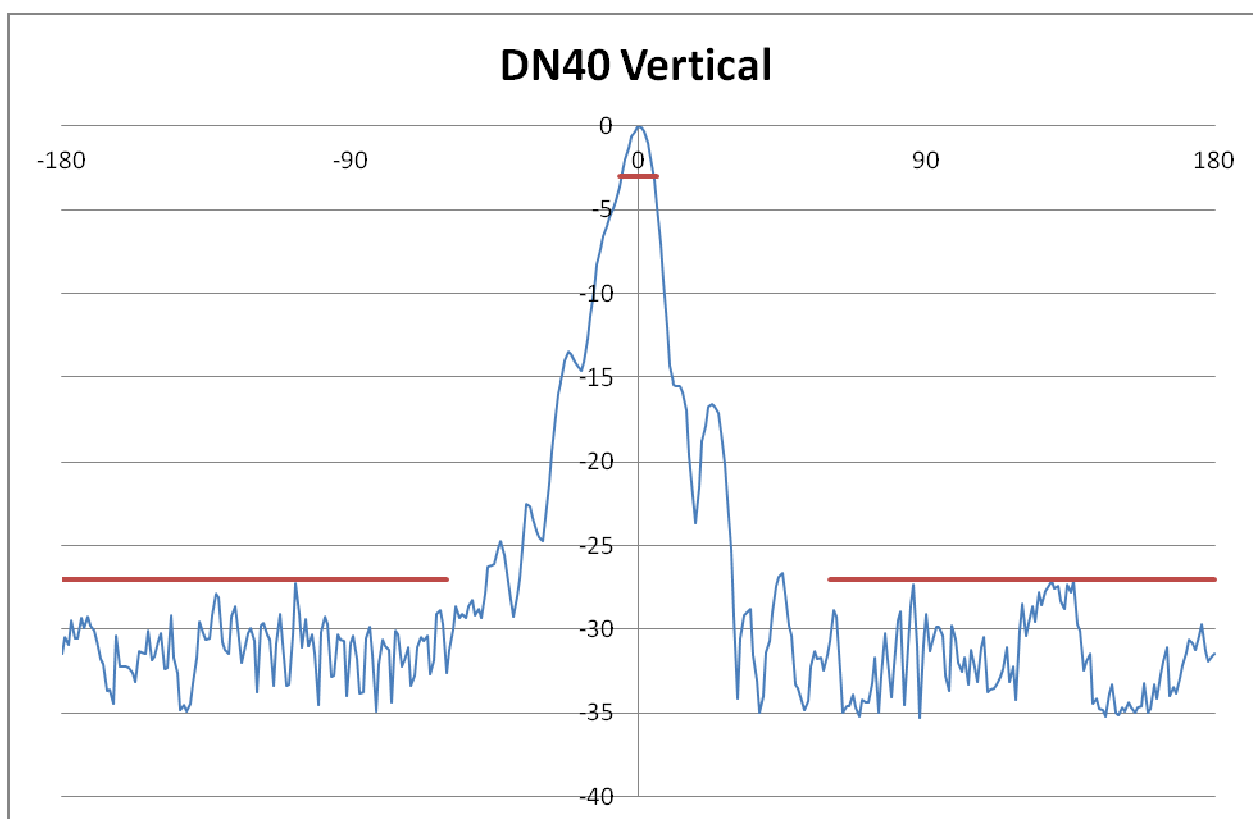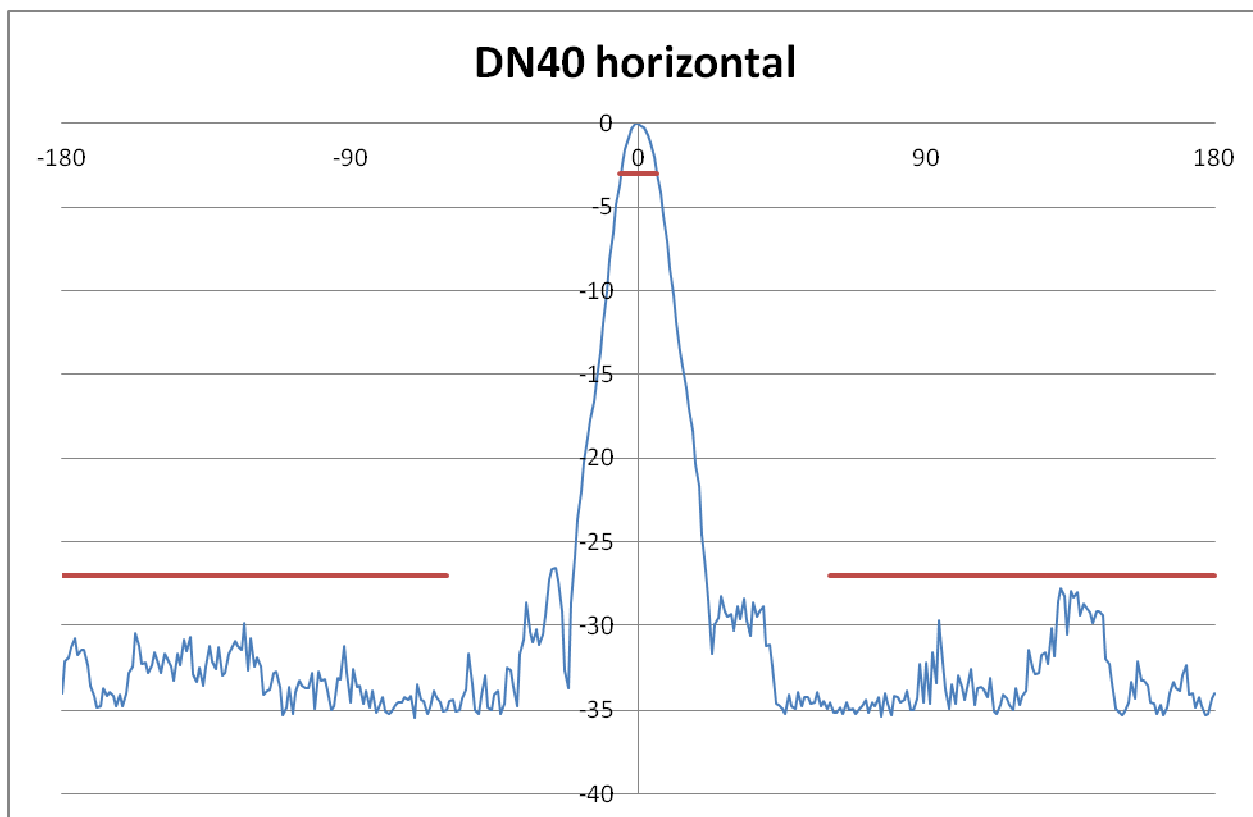

Plots for antenna DN80:

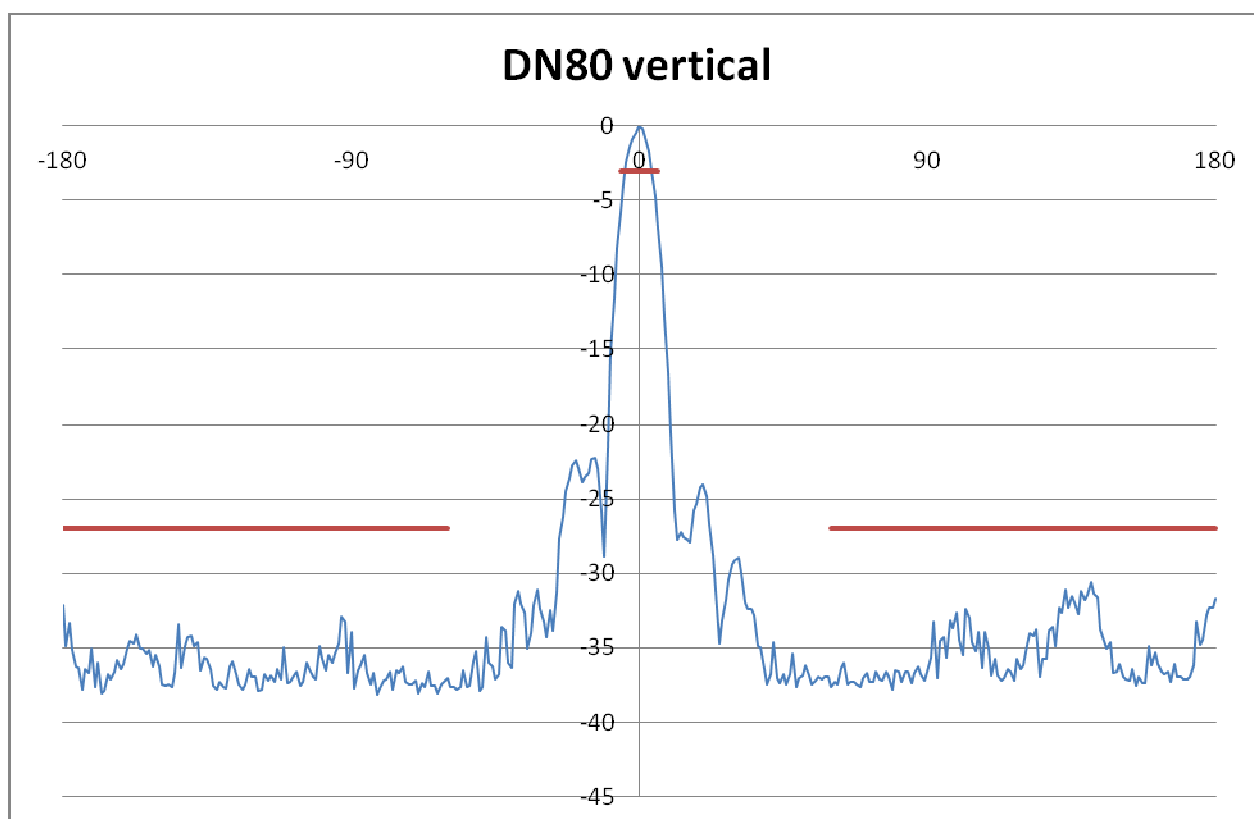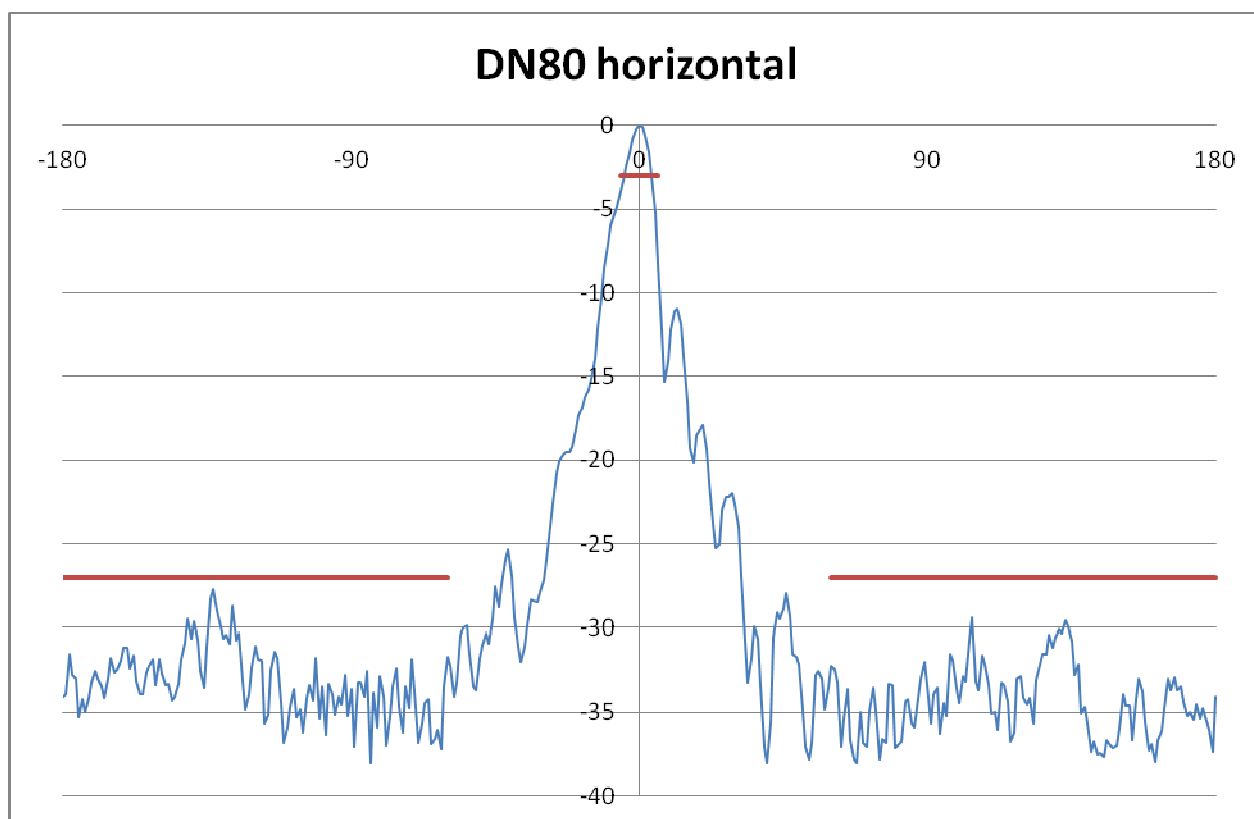

8.5 Conducted Powerline Emission Measurement 150 kHz to 30 MHz


Rules and specifications:	CFR 47 Part 15, section 15.207 IC RSS-GEN Issue 4, section 8.8		
Guide:	ANSI C63.10 / CISPR 22		
Limit:	Frequency of Emission (MHz)	Conducted Limit (dBµV)	
		Quasi-peak	Average
	0.15 - 0.5	66 to 56	56 to 46
	0.5 - 5	56	46
	5 - 30	60	50
Measurement procedure:	Conducted AC Powerline Emission (6.2)		

Comment:	
Date of test:	2016-05-31
Test site:	Shielded room, cabin no. 4

Test Result:	Test passed
--------------	-------------


Tested on:

Plus

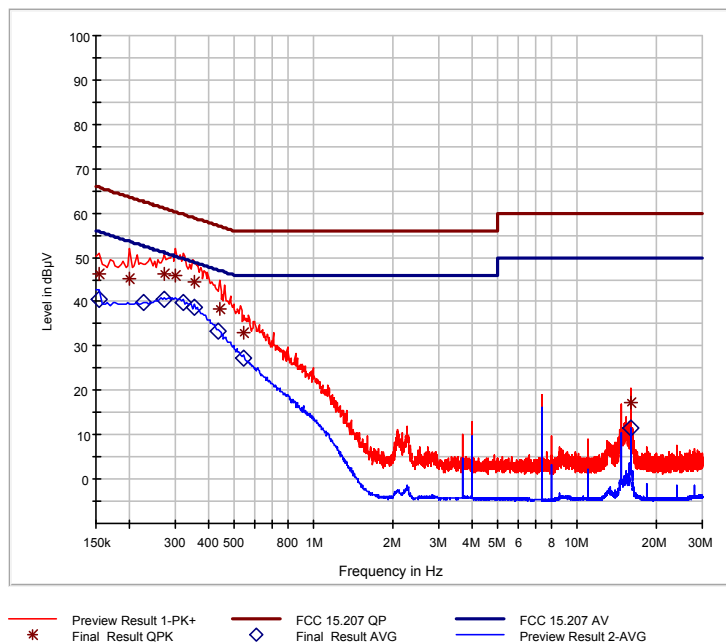

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0.154	Average	40.6	0.0	40.6	55.8	15.2
0.154	Quasi-Peak	46.1	0.0	46.1	65.8	19.7
0.202	Quasi-Peak	45.1	0.0	45.1	63.5	18.4
0.226	Average	39.7	0.0	39.7	52.6	12.9
0.274	Average	40.5	0.0	40.5	51.0	10.5
0.274	Quasi-Peak	46.2	0.0	46.2	61.0	14.8
0.302	Quasi-Peak	46.0	0.0	46.0	60.2	14.2
0.322	Average	39.9	0.0	39.9	49.7	9.8
0.354	Average	38.6	0.0	38.6	48.9	10.2
0.354	Quasi-Peak	44.4	0.0	44.4	58.9	14.5
0.434	Average	33.4	0.0	33.4	47.2	13.8
0.442	Quasi-Peak	38.6	0.0	38.6	57.0	18.5
0.546	Average	27.3	0.0	27.3	46.0	18.7
0.546	Quasi-Peak	32.9	0.0	32.9	56.0	23.1
15.998	Average	11.0	0.4	11.4	50.0	38.6
16.002	Quasi-Peak	16.8	0.4	17.2	60.0	42.8

Tested on: Minus

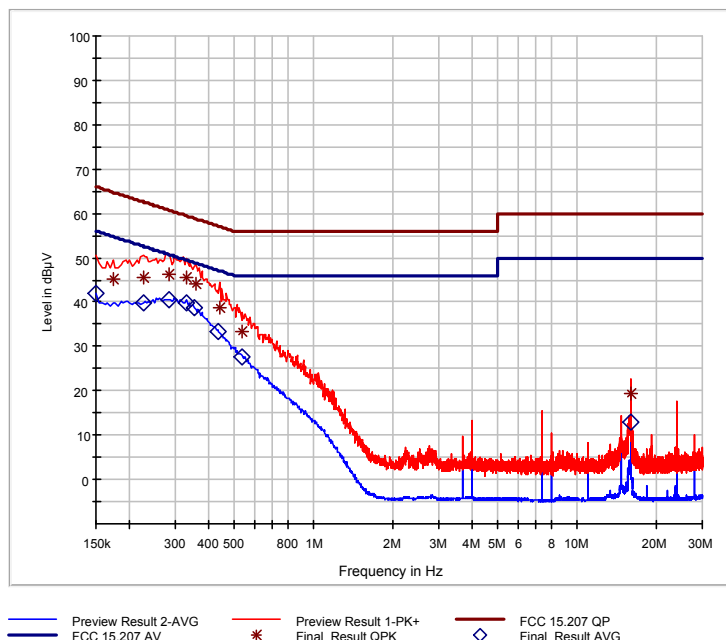

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0.150	Average	42.1	0.0	42.1	56.0	13.9
0.174	Quasi-Peak	45.3	0.0	45.3	64.8	19.5
0.226	Average	39.8	0.0	39.8	52.6	12.8
0.226	Quasi-Peak	45.4	0.0	45.4	62.6	17.2
0.282	Average	40.6	0.0	40.6	50.8	10.2
0.282	Quasi-Peak	46.3	0.0	46.3	60.8	14.5
0.330	Average	39.7	0.0	39.7	49.5	9.8
0.330	Quasi-Peak	45.4	0.0	45.4	59.5	14.1
0.354	Average	38.6	0.0	38.6	48.9	10.3
0.358	Quasi-Peak	44.1	0.0	44.1	58.8	14.6
0.434	Average	33.3	0.0	33.3	47.2	13.8
0.442	Quasi-Peak	38.8	0.0	38.8	57.0	18.2
0.538	Average	27.7	0.0	27.7	46.0	18.3
0.538	Quasi-Peak	33.3	0.0	33.3	56.0	22.7
15.998	Average	12.6	0.4	13.0	50.0	37.0
15.998	Quasi-Peak	18.9	0.4	19.3	60.0	40.7

Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB)}$$

8.6 Radiated Emission Measurement 9 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, sections 15.205 and 15.209 IC RSS-GEN Issue 4, sections 8.9 and 8.10 IC RSS-211 Issue 1, section 5.1 (d)			
Guide:	ANSI C63.10			
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Measurement Distance d (meters)
	0.009 - 0.490	$2400/F(\text{kHz})$	$67.6 - 20 \cdot \log(F(\text{kHz}))$	300
	0.490 - 1.705	$24000/F(\text{kHz})$	$87.6 - 20 \cdot \log(F(\text{kHz}))$	30
	1.705 - 30.000	30	29.5	30
Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.				
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.3)			

Test Result:	Test passed
--------------	-------------

Comment:	Antenna DN40
Date of test:	2016-05-27
Test site:	Open field test site

Extrapolation factor: -40 dB/decade


Frequency (MHz)	Detector	Distance d1 (m)	d (m)	Reading Value (dBµV)	Correction Factor (dB/m)	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
0.07455	Average	10	300	6.5	20.0	-59.1		-32.6	30.2	62.7

Sample calculation of final values:

$$\text{Extrapolation Factor (dB)} = (\text{Log}(d) - \text{Log}(d_1)) \cdot \text{Extrapolation Factor (dB/decade)}$$

$$\text{Final Value (dBµV/m)} = \text{Reading Value } d_1 \text{ (dBµV)} + \text{Correction Factor (dB/m)} + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)}$$

Note: Extrapolation factor (dB) and final value (dBµV/m) are relating to distance d.

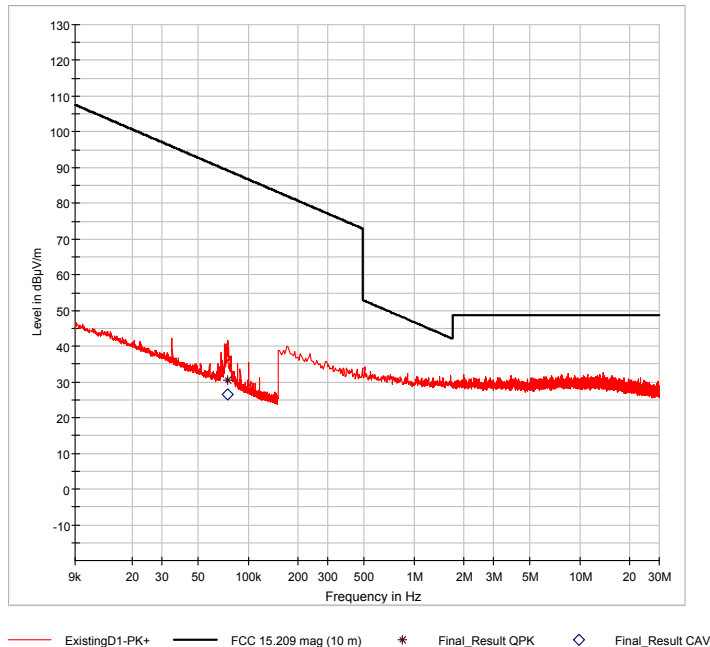

Comment:	Antenna DN80
Date of test:	2016-05-27
Test site:	Open field test site

Extrapolation factor: -40 dB/decade


Frequency (MHz)	Detector	Distance d1 (m)	d (m)	Reading Value (dBµV)	Correction Factor (dB/m)	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
0.07490	Average	10	300	6.6	20.0	-59.1		-32.5	30.1	62.6
0.58600	Quasi-Peak	10	30	7.0	20.0	-19.1		7.9	32.2	24.3

Sample calculation of final values:

Extrapolation Factor (dB) = (Log(d) - Log(d₁)) · Extrapolation Factor (dB/decade)

Final Value (dBµV/m) = Reading Value d₁ (dBµV) + Correction Factor (dB/m) + Extrapolation Factor (dB) + Pulse Train Correction (dB)

Note: Extrapolation factor (dB) and final value (dBµV/m) are relating to distance d.

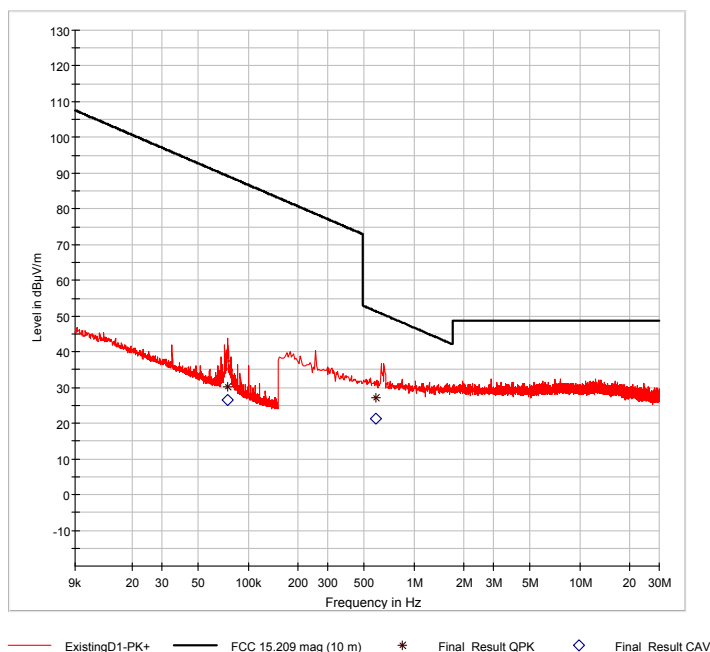

8.7 Radiated Emission Measurement 30 MHz to 100 GHz

Rules and specifications:	CFR 47 Part 15, section 15.209 IC RSS-GEN Issue 4, section 8.9 IC RSS-211 Issue 1, section 5.1 (d)		
Guide:	ANSI C63.10		
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0
Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.			
Measurement procedures:	Radiated Emission in Fully or Semi Anechoic Room (6.4) Radiated Emission at Alternative Test Site (6.5)		

Comment:			
Date of test:	2016-05-29 to 2016-06-02		
Test site:	Frequencies ≤ 1 GHz: Semi-anechoic room, cabin no. 8 Frequencies > 1 GHz: Fully anechoic room, cabin no. 2		
Test distance:	Frequencies ≤ 8.2 GHz:	3 meters	
	Frequencies > 8.2 GHz to ≤ 26 GHz:	1 meter	
	Frequencies > 26 GHz to ≤ 40 GHz:	0.25 meters	
	Frequencies > 40 GHz:	0.1 meters	

Test Result:	Test passed
--------------	-------------



Comment: Antenna DN40


Test Result: Test passed

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBµV)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
218.670	horizontal	Quasi-Peak	0.0	12.7		9.0	46.0	37.0
449.730	vertical	Quasi-Peak	0.0	17.8		30.6	46.0	15.4
932.830	vertical	Quasi-Peak	0.0	25.1		23.7	46.0	22.3
1882.000	vertical	Peak	0.0	-1.1		45.8	74.0	28.2
1882.000	vertical	Average	0.0	-1.1		41.1	54.0	12.9
2438.000	vertical	Peak	0.0	0.6		51.7	74.0	22.3
2438.000	vertical	Average	0.0	0.6		47.3	54.0	6.7

Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} + \text{Pulse Train Correction (dB)}$$

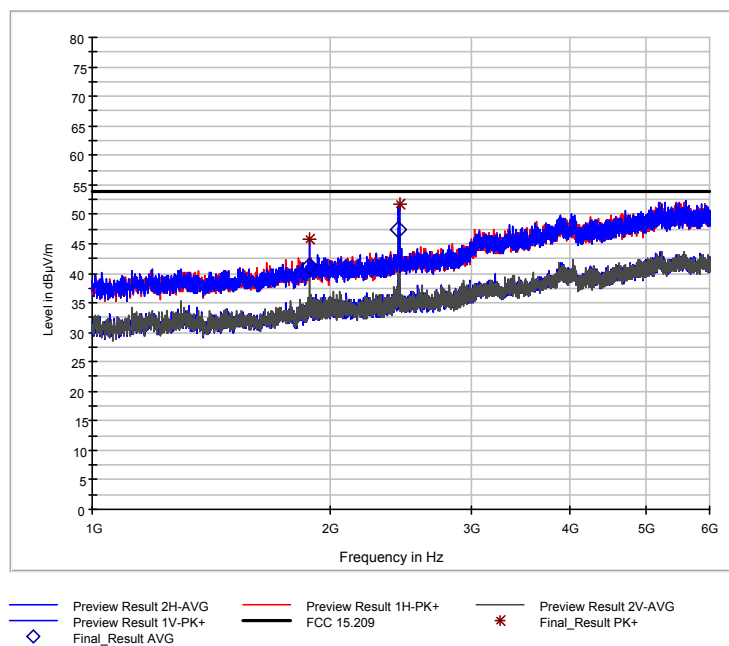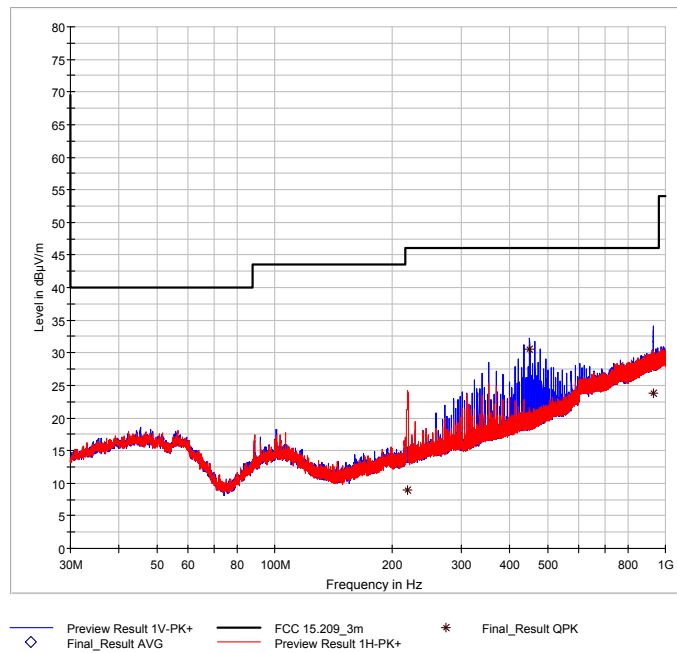


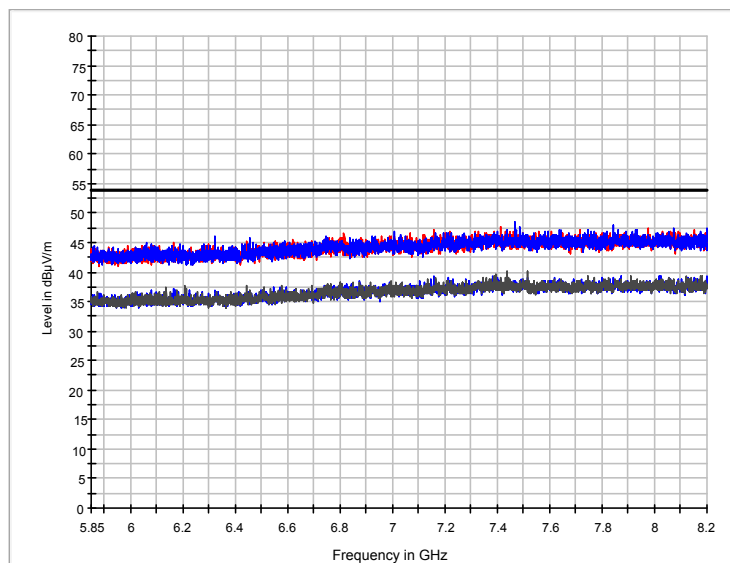

Preview Result 2H-AVG
 Preview Result 1V-PK+
 Final_Result AVG

Preview Result 1H-PK+
 FCC 15.209

Preview Result 2V-AVG
 Final_Result PK+

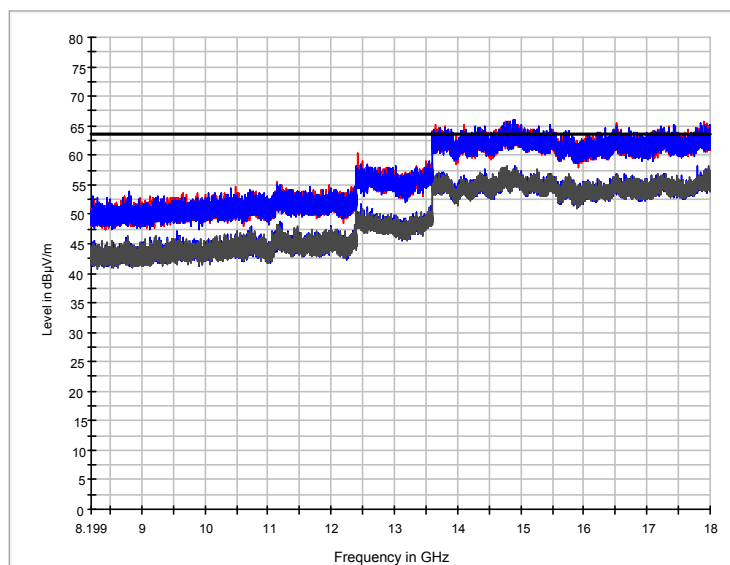


Preview Result 2H-AVG
 Preview Result 1V-PK+
 Final_Result AVG


Preview Result 1H-PK+
 FCC 15.209 (1m)

Preview Result 2V-AVG
 Final_Result PK+

Horizontal polarization

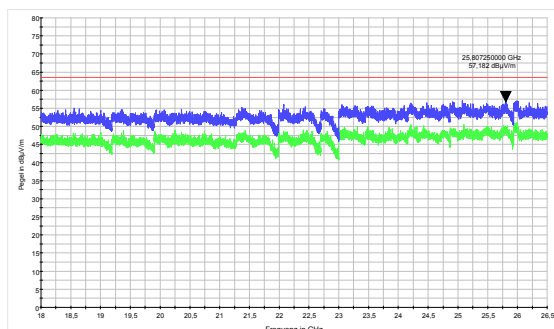


AVG_MAXH-AVG PK+_MAXH-PK+ FCC §15.209 (1 m)

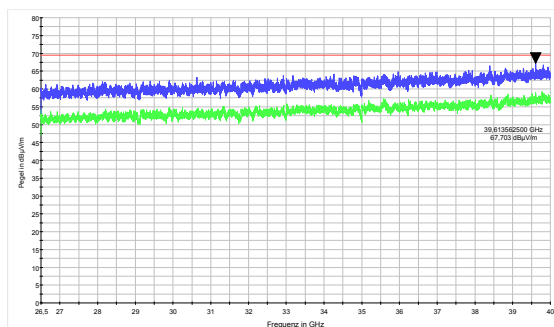


AVG_MAXH-AVG PK+_MAXH-PK+ FCC §15.209 (0.5 m)

Vertical polarisation

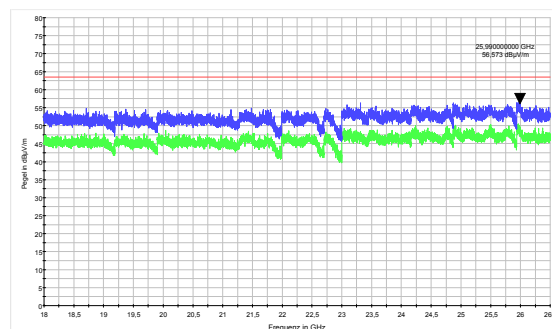


AVG_MAXH-AVG PK+_MAXH-PK+ FCC §15.209 (1 m)

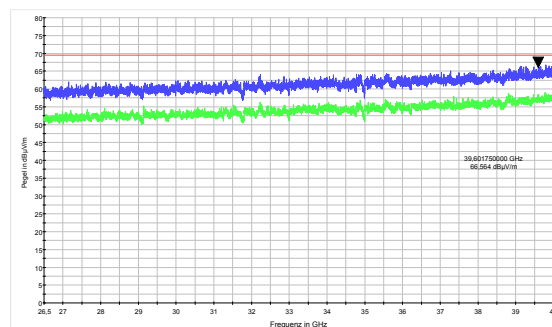


AVG_MAXH-AVG PK+_MAXH-PK+ FCC §15.209 (0.5 m)


Horizontal polarization

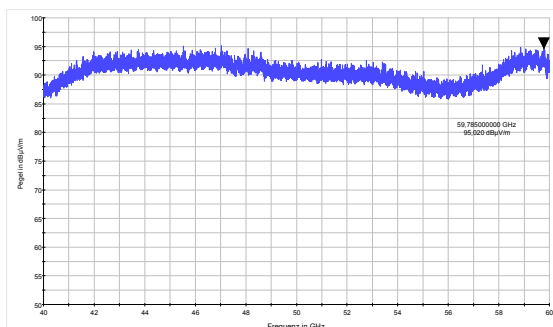

PK+ MAX1-PK+

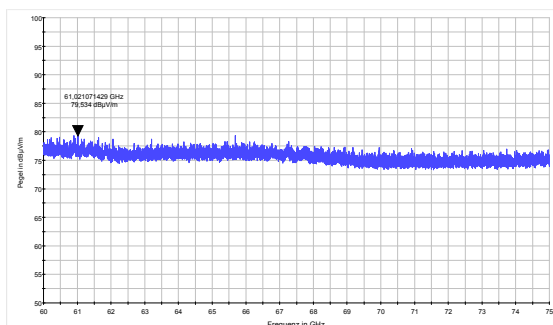


PK+ MAX1-PK+

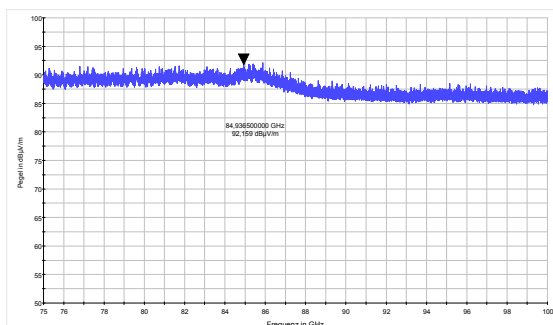


PK+ MAX1-PK+


Vertical polarisation

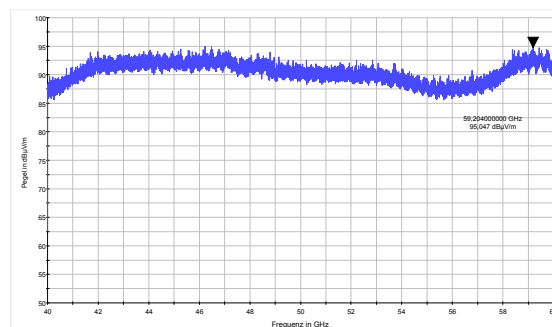

PK+ MAX1-PK+

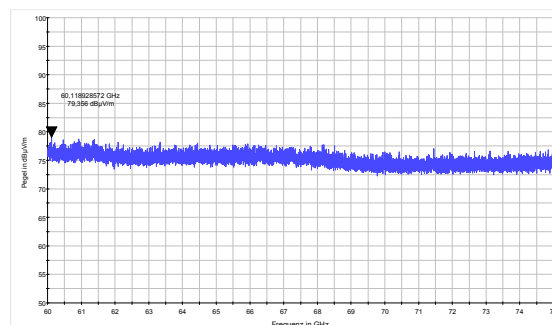

PK+ MAX1-PK+

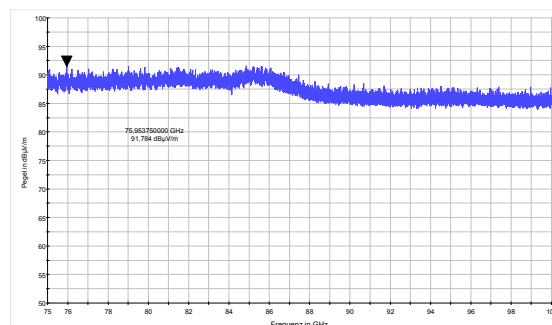

PK+ MAX1-PK+



Comment: Antenna D80


Test Result: Test passed

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBµV)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
604.600	vertical	Quasi-Peak	6.4	21.2		27.6	46.0	18.4
929.530	vertical	Quasi-Peak	7.6	25.1		32.7	46.0	13.3
2438.500	horizontal	Peak	46.1	0.6		46.7	74.0	27.3
2438.500	horizontal	Average	39.6	0.6		40.2	54.0	13.8

Sample calculation of final values:

$$\text{Final Value (dBµV/m)} = \text{Reading Value (dBµV)} + \text{Correction Factor (dB/m)} + \text{Pulse Train Correction (dB)}$$

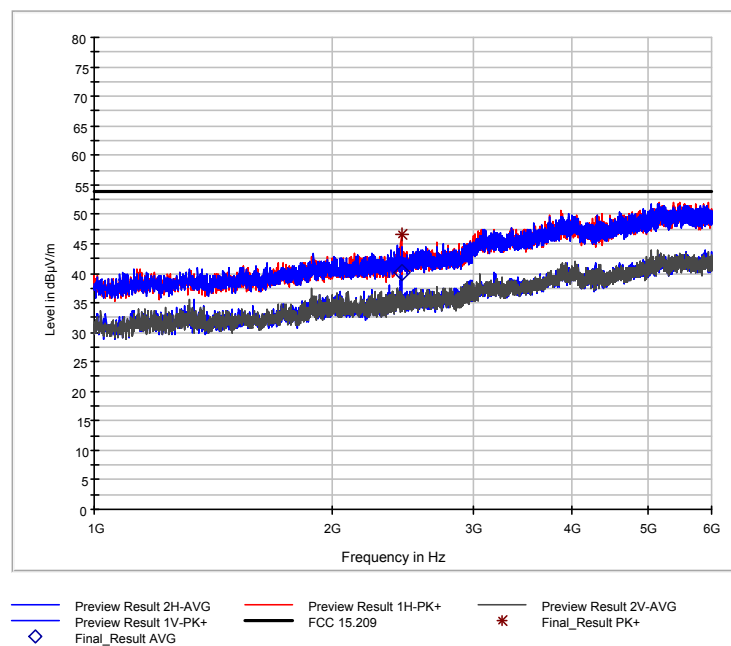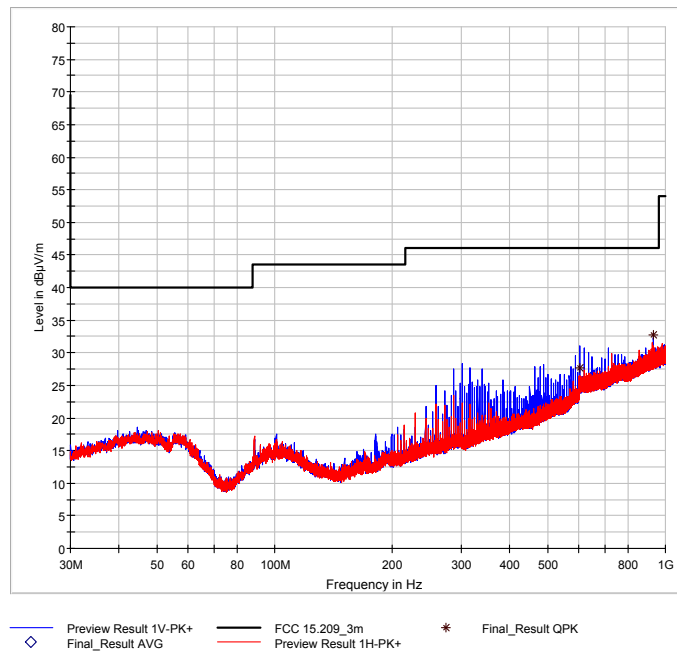


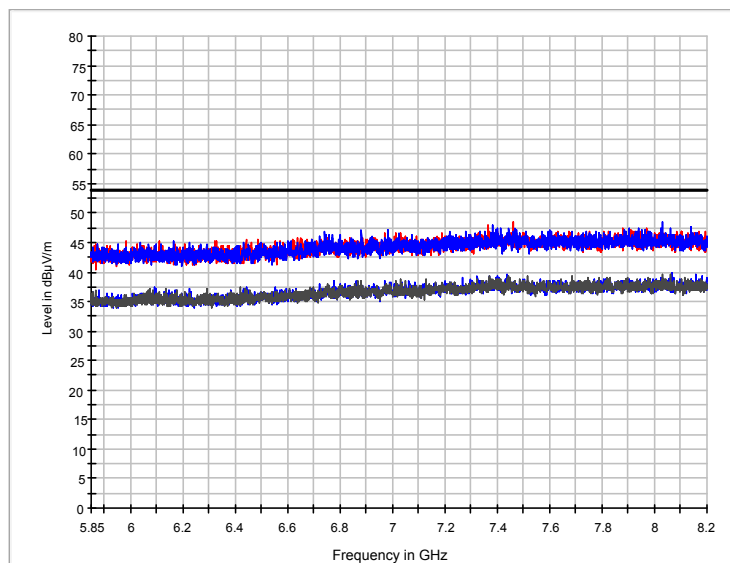

Preview Result 2H-AVG
 Preview Result 1V-PK+
 Final_Result AVG

Preview Result 1H-PK+
 FCC 15.209

Preview Result 2V-AVG
 Final_Result PK+

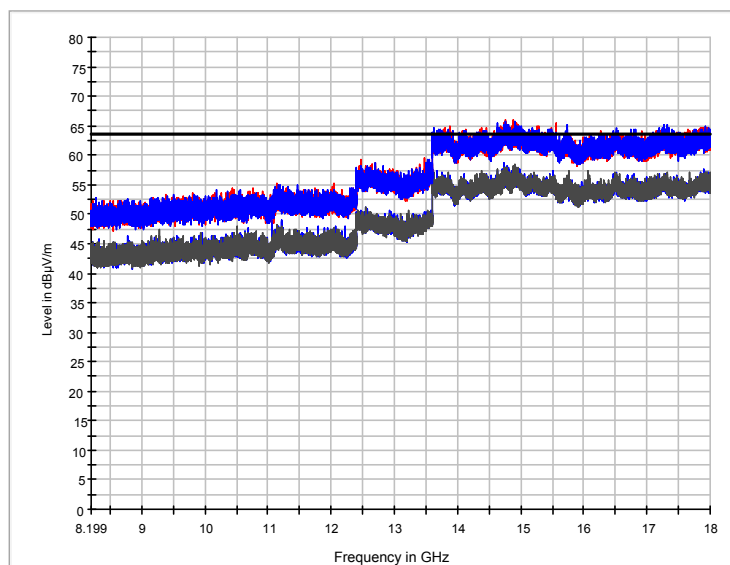


Preview Result 2H-AVG
 Preview Result 1V-PK+
 Final_Result AVG



Preview Result 1H-PK+
 FCC 15.209 (1m)

Preview Result 2V-AVG
 Final_Result PK+


Horizontal polarization

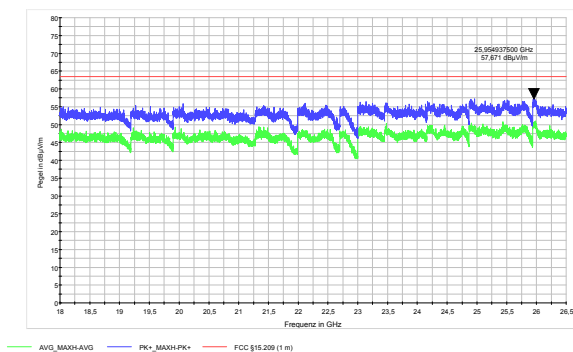

Vertical polarisation

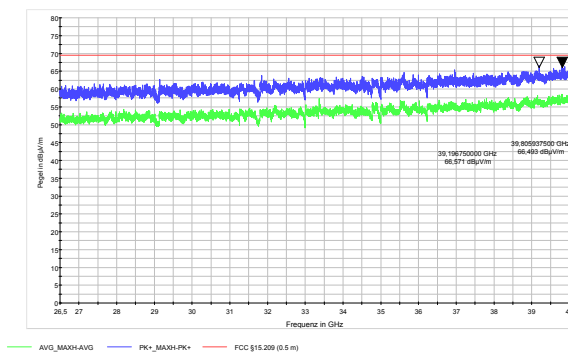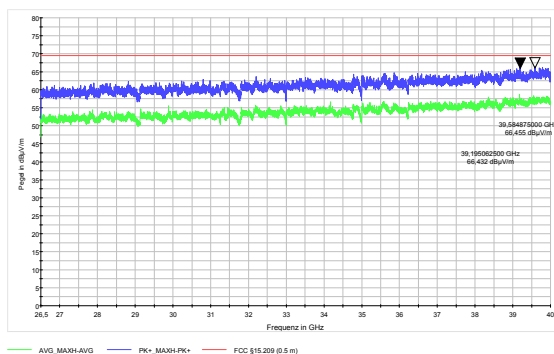


Horizontal polarization

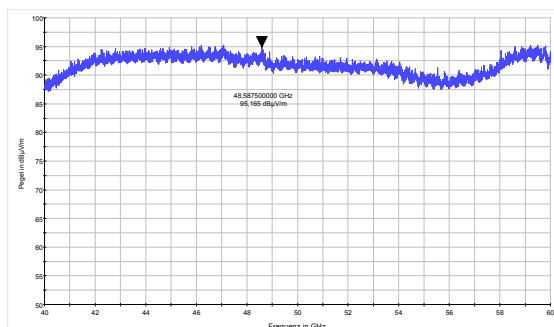


PK*_MAXH-PK*


Vertical polarisation

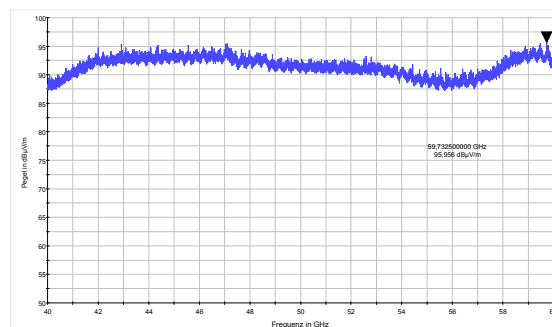


PK*_MAXH-PK*

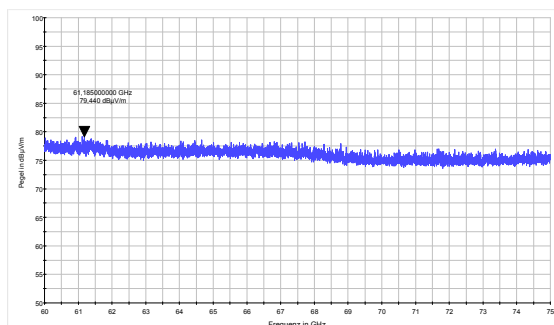


PK*_MAXH-PK*

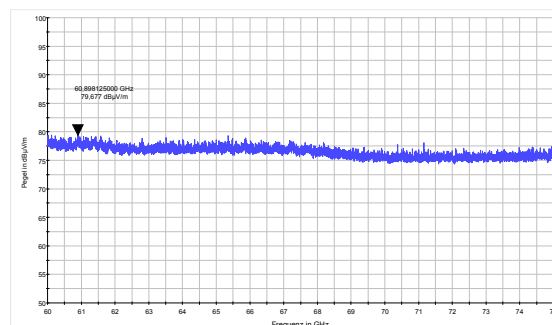

PK*_MAXH-PK*

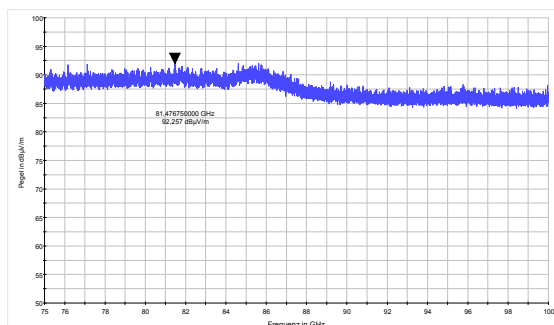

PK*_MAXH-PK*

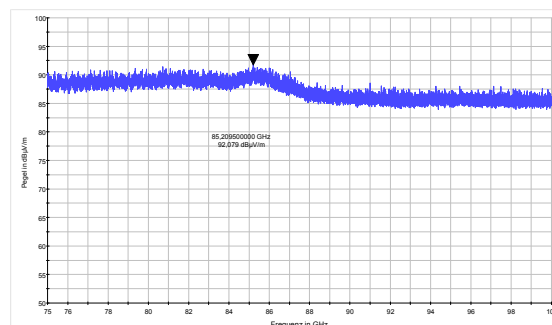

PK*_MAXH-PK*

8.8 Exposure of Humans to RF Fields

Rules and specifications:	IC RSS-Gen Issue 4, section 3.2
Guide:	IC RSS-102 Issue 5, section 2.5

Exposure of Humans to RF Fields	Applicable	Declared by applicant	Measured	Exemption
The antenna is				
☐ detachable				
The conducted output power (CP in watts) is measured at the antenna connector: $CP = \dots\dots\dots \text{ W}$ The effective isotropic radiated power (EIRP in watts) is calculated using ☐ the numerical antenna gain: $G = \dots\dots\dots$ $EIRP = G \cdot CP \Rightarrow EIRP = \dots\dots\dots \text{ W}$ ☐ the field strength⁷ in V/m: $FS = \dots\dots\dots \text{ V/m}$ $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \dots\dots\dots \text{ W}$ with: Distance between the antennas in m: $D = \dots\dots\dots \text{ m}$			☐	
☐ not detachable				
A field strength measurement is used to determine the effective isotropic radiated power (EIRP in watts) given by⁷: $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \dots\dots\dots \text{ W}$ with: Field strength in V/m: $FS = \dots\dots\dots \text{ V/m}$ Distance between the two antennas in m: $D = \dots\dots\dots \text{ m}$			☐	
Selection of output power				
The output power TP is the higher of the conducted or effective isotropic radiated power (e.i.r.p.): $TP = \dots\dots\dots \text{ W}$				

⁷ The conversion formula is valid only for properly matched antennas. In other cases the transmitter output power may have to be measured by a terminated measurement when applying the exemption clauses. If an open area test site is used for field strength measurement, the effect due to the metal ground reflecting plane should be subtracted from the maximum field strength value in order to reference it to free space, before calculating TP.

Exposure of Humans to RF Fields (continued)	Applicable	Declared by applicant	Measured	Exemption
Separation distance between the user and the transmitting device is				
☐ less than or equal to 20 cm		☐		
☐ greater than 20 cm				
Transmitting device is				
☐ in the vicinity of the human head		☐		
☐ body-worn				

SAR evaluation

SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in the table.

For controlled use devices where the 8 W/kg for 1 gram of tissue applies, the exemption limits for routine evaluation in the table are multiplied by a factor of 5. For limb-worn devices where the 10 gram value applies, the exemption limits for routine evaluation in the table are multiplied by a factor of 2.5. If the operating frequency of the device is between two frequencies located in the table, linear interpolation shall be applied for the applicable separation distance. For test separation distance less than 5 mm, the exemption limits for a separation distance of 5 mm can be applied to determine if a routine evaluation is required.

For medical implants devices, the exemption limit for routine evaluation is set at 1 mW. The output power of a medical implants device is defined as the higher of the conducted or e.i.r.p to determine whether the device is exempt from the SAR evaluation.

Frequency (MHz)	Exemption limits (mW) ⁸ at separation distance of									
	≤5 mm	10 mm	15 mm	20 mm	25 mm	30 mm	35 mm	40 mm	45 mm	≥50 mm
≤300 ⁹	71	101	132	162	193	223	254	284	315	345
450	52	70	88	106	123	141	159	177	195	213
835	17	30	42	55	67	80	92	105	117	130
1900	7	10	18	34	60	99	153	225	316	431
2450	4	7	15	30	52	83	123	173	235	309
3500	2	6	16	32	55	86	124	170	225	290
5800	1	6	15	27	41	56	71	85	97	106

Carrier frequency: f = MHz

Distance: d = mm

Transmitter output power: TP = mW

Limit: TP_{limit} = mW

☐ SAR evaluation is documented in test report no.

⁸ The exemption limit in the table are based on measurements and simulations on half-wave dipole antennas at separation distances of 5 mm to 25 mm from a flat phantom, providing a SAR value of approximately 0.4 W/kg for 1 g of tissue. For low frequencies (300 MHz to 835 MHz), the exemption limits are derived from a linear fit. For high frequencies (1900 MHz and above), the exemption limits are derived from a third order polynomial fit.

⁹ Transmitters operating between 3 kHz and 10 MHz, meeting the exemption from routine SAR evaluation, shall demonstrate compliance to the instantaneous limits in IC RSS-102, issue 5, section 4.

Exposure of Humans to RF Fields (continued)	Applicable	Declared by applicant	Measured	Exemption
RF exposure evaluation				
RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows: ☐ below 20 MHz¹⁰ and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance). ☐ between 3 kHz and 10 MHz exposure limits apply as following: ☐ In a uncontrolled environment the basic restriction for the instantaneous internal electric field strength is equal to or less than $2.7 \cdot 10^{-4} f \text{ V/m}_{\text{rms}}$ at any part of the body where f is in Hz. The instantaneous RF field strength is equal or less than $83 \text{ V/m}_{\text{rms}}$ and equal or less than $90 \text{ A/m}_{\text{rms}}$. ☐ In a controlled environment the basic restriction for the instantaneous internal electric field strength is equal to or less than $1.35 \cdot 10^{-4} f \text{ V/m}_{\text{rms}}$ at any part of the body where f is in Hz. The instantaneous RF field strength is equal or less than $170 \text{ V/m}_{\text{rms}}$ and equal or less than $180 \text{ A/m}_{\text{rms}}$. ☐ at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $4.49/f^{0.5} \text{ W}$ (adjusted for tune-up tolerance, where f is in MHz). ☐ at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance). ☐ at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \cdot 10^{-2} f^{0.6834} \text{ W}$ (adjusted for tune-up tolerance), where f is in MHz. ☒ at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance). In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.				
Carrier frequency: f = MHz Transmitter output power: TP = 1 mW e.i.r.p. Limit: TP_{limit} = 5000 mW				☒
☐ RF exposure evaluation is documented in test report no.				

¹⁰ Transmitters operating between 3 kHz and 10 MHz, meeting the exemption from routine RF Exposure evaluation, shall demonstrate compliance to the instantaneous limits in IC RSS-102, issue 5, section 4.

9 Referenced Regulations

All tests were performed with reference to the following regulations and standards:

☒	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)	October 1, 2015
☒	CFR 47 Part 15	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)	October 1, 2015
☐	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	June 13, 2014 (published on June 20, 2014)
☒	ANSI C63.10	American national Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	June 27, 2013 (published on September 13, 2013)
☒	RSS-Gen	Radio Standards Specification RSS-Gen Issue 4 containing General Requirements for Compliance of Radio Apparatus, published by Industry Canada	November 2014
☐	RSS-210	Radio Standards Specification RSS-210 Issue 8 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, published by Industry Canada	December 2010
☒	RSS-211	Radio Standards Specification RSS-211 Issue 1 for Level Probing Radar Equipment	March 2015
☐	RSS-310	Radio Standards Specification RSS-310 Issue 3 for Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment, published by Industry Canada	December 2010
☒	RSS-102	Radio Standards Specification RSS-102 Issue 5: Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), published by Industry Canada	March 2015
☐	ICES-003	Interference-Causing Equipment Standard ICES-003 Issue 6: Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement, published by Industry Canada	January 2016
☒	CISPR 22	Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement"	1997

☐	CAN/CSA CISPR 22-10	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement (Adopted IEC CISPR 22:2008, sixth edition, 2008-09)	2010
☒	TRC-43	Designation of Emissions, Class of Station and Na- ture of Service, published by Industry Canada	November 2012

10 Test Equipment List with Calibration Data

Type	Inv.-No.	Type Designation	Serial Number	Manufacturer	Calibration Organization	Last Calibration	Next Calibration
EMI test receiver	1028	ESHS10	860043/016	Rohde & Schwarz	Rohde & Schwarz	10/2015	10/2016
EMI test receiver	2044	ESU8	100232	Rohde & Schwarz	Rohde & Schwarz	10/2015	10/2016
Spectrum analyser	1666	FSP30	100063	Rohde & Schwarz	Rohde & Schwarz	06/2015	06/2016
Spectrum analyser	2364	FSV40	101448	Rohde & Schwarz	Rohde & Schwarz	08/2015	08/2016
Preamplifier	1484	ACO/180-3530	32641	CTT	TÜV SÜD PS-EMC-STR	07/2015	07/2017
Preamplifier	1684	AFS3-00100800-32-LN	847743	MITEQ	TÜV SÜD PS-EMC-STR	11/2015	11/2017
Preamplifier	1716	CPA9231A	3557	Schaffner EMC Systems	TÜV SÜD PS-EMC-STR	11/2015	11/2017
V-network	1059	ESH3-Z5	894785/005	Rohde & Schwarz	Rohde & Schwarz	08/2013	08/2016
Double ridged waveguide horn antenna	1516	3115	9508-4553	EMCO Elektronik	Seibersdorf Laboratories	01/2015	01/2017
Horn antenna	1014	3160-07	9112-1008	EMCO Elektronik		see note 1	
Horn antenna	1015	3160-08	9112-1002	EMCO Elektronik		see note 1	
Horn antenna	1265	3160-09	9403-1025 (931941-010)	EMCO Elektronik		see note 1	
Horn antenna	1575	3160-10	399185	EMCO Elektronik		see note 1	
Horn antenna	2086	24240-20	157845	Flann		see note 1	
Horn antenna	2180	25240-25	205900	Flann		see note 1	
Horn antenna	2182	27240-25	204260	Flann		see note 1	
Loop antenna	1016	HFH2-Z2	882964/0001	Rohde & Schwarz	Rohde & Schwarz	05/2014	05/2016
TRILOG Broadband Antenna	2058	VULB 9163	9163-408	Schwarzbeck	Rohde & Schwarz	06/2014	06/2016
Waveguide mixer	2085	WM780U	B030121	Tektronix	Rohde & Schwarz	01/2013	01/2017
Waveguide mixer	2140	WM782V	B030132	Tektronix	Rohde & Schwarz	01/2013	01/2017
Waveguide mixer	2181	WM782W	B010193	Tektronix	Rohde & Schwarz	01/2013	01/2017

Note 1: No calibration required.



-
- Note 2: Not calibrated separately but with the whole test system when recording calibration data.
Note 3: No calibration required. Devices are checked before use.
Note 4: No calibration required. Devices are checked by calibrated equipment during test.

11 Test data for antennas diagrams

Degrees out of main beam	Antenna DN40		Antenna DN80		Limit
	Horizontal	Vertical	Horizontal	Vertical	
-180	-34.04	-32.12	-33.99	-31.46	-27
-179	-33.89	-34.88	-32.08	-30.44	-27
-178	-31.56	-33.37	-31.88	-30.97	-27
-177	-32.75	-35.12	-31.21	-29.44	-27
-176	-33.03	-36.23	-30.67	-30.53	-27
-175	-35.31	-36.34	-31.70	-30.52	-27
-174	-34.19	-37.83	-31.37	-29.34	-27
-173	-34.99	-36.44	-31.36	-29.91	-27
-172	-34.15	-36.66	-32.30	-29.28	-27
-171	-33.25	-35.05	-33.55	-29.79	-27
-170	-32.54	-37.65	-34.17	-30.06	-27
-169	-32.96	-36.04	-34.87	-30.72	-27
-168	-33.46	-38.04	-34.77	-31.79	-27
-167	-34.14	-37.90	-33.70	-32.07	-27
-166	-33.02	-36.75	-34.15	-33.72	-27
-165	-31.78	-37.10	-33.88	-33.65	-27
-164	-32.65	-36.62	-34.15	-34.46	-27
-163	-32.47	-35.85	-34.72	-30.39	-27
-162	-31.90	-36.47	-34.04	-32.27	-27
-161	-31.18	-36.12	-34.73	-32.26	-27
-160	-31.18	-35.03	-33.99	-32.21	-27
-159	-32.38	-34.53	-32.78	-32.33	-27
-158	-31.65	-34.68	-32.35	-32.62	-27
-157	-33.14	-34.08	-30.42	-33.12	-27
-156	-33.89	-35.07	-31.20	-31.33	-27
-155	-33.89	-35.10	-32.24	-31.43	-27
-154	-32.59	-35.36	-32.18	-31.46	-27
-153	-32.22	-35.12	-32.75	-30.13	-27
-152	-31.85	-36.26	-32.30	-31.83	-27
-151	-33.40	-35.45	-31.53	-31.63	-27
-150	-31.84	-36.24	-32.21	-30.67	-27
-149	-32.66	-37.47	-32.78	-30.26	-27
-148	-33.42	-37.56	-31.60	-32.36	-27
-147	-33.33	-37.44	-31.92	-32.30	-27
-146	-34.31	-37.67	-32.41	-29.16	-27
-145	-34.05	-36.67	-33.20	-31.69	-27
-144	-33.29	-33.44	-31.63	-32.58	-27
-143	-31.85	-36.31	-32.33	-34.81	-27
-142	-30.89	-34.85	-30.78	-34.50	-27
-141	-29.46	-34.31	-31.48	-34.95	-27
-140	-30.66	-34.22	-30.60	-34.47	-27
-139	-29.67	-34.92	-32.84	-33.25	-27

<i>Degrees out of main beam</i>	<i>Antenna DN40</i>		<i>Antenna DN80</i>		<i>Limit</i>
	<i>Horizontal</i>	<i>Vertical</i>	<i>Horizontal</i>	<i>Vertical</i>	
-138	-30.73	-34.62	-33.34	-31.69	-27
-137	-32.54	-36.53	-32.48	-29.58	-27
-136	-33.55	-35.62	-33.56	-30.25	-27
-135	-31.08	-35.78	-32.36	-30.66	-27
-134	-28.25	-36.43	-31.14	-30.58	-27
-133	-27.73	-37.57	-32.08	-29.21	-27
-132	-29.02	-37.84	-32.53	-27.85	-27
-131	-29.65	-37.31	-31.24	-28.13	-27
-130	-30.63	-37.63	-32.89	-30.74	-27
-129	-30.40	-37.69	-32.74	-31.26	-27
-128	-30.91	-36.31	-31.64	-31.48	-27
-127	-28.74	-35.92	-31.34	-29.26	-27
-126	-30.73	-36.74	-30.86	-28.66	-27
-125	-30.34	-37.47	-31.18	-29.91	-27
-124	-33.18	-37.85	-31.36	-32.01	-27
-123	-34.85	-37.49	-29.84	-31.32	-27
-122	-33.93	-36.48	-32.65	-30.23	-27
-121	-32.32	-36.92	-30.72	-29.91	-27
-120	-31.11	-36.94	-32.41	-30.73	-27
-119	-31.85	-37.86	-31.83	-33.74	-27
-118	-31.89	-37.78	-32.36	-29.79	-27
-117	-35.64	-36.79	-34.06	-29.66	-27
-116	-35.16	-37.21	-33.83	-30.33	-27
-115	-32.49	-36.90	-33.74	-30.65	-27
-114	-31.43	-37.32	-32.74	-33.38	-27
-113	-31.77	-36.46	-32.67	-30.82	-27
-112	-34.44	-37.10	-33.60	-29.06	-27
-111	-36.81	-34.93	-35.30	-30.84	-27
-110	-35.90	-37.36	-34.84	-33.40	-27
-109	-34.71	-37.33	-33.60	-33.32	-27
-108	-33.59	-36.86	-35.24	-30.33	-27
-107	-35.32	-36.59	-33.95	-27.29	-27
-106	-34.85	-37.54	-33.24	-29.12	-27
-105	-36.22	-37.30	-33.52	-31.09	-27
-104	-34.15	-35.99	-33.70	-29.43	-27
-103	-33.39	-36.44	-33.66	-30.98	-27
-102	-34.33	-36.95	-32.78	-30.30	-27
-101	-31.81	-37.16	-34.87	-31.48	-27
-100	-35.38	-34.89	-32.72	-34.52	-27
-99	-33.43	-35.72	-33.24	-30.13	-27
-98	-36.37	-36.56	-33.18	-29.24	-27
-97	-33.27	-35.48	-33.81	-29.74	-27
-96	-33.95	-35.98	-34.96	-32.86	-27
-95	-35.12	-35.42	-34.74	-32.80	-27
-94	-34.07	-34.72	-33.11	-30.32	-27

Degrees out of main beam	Antenna DN40		Antenna DN80		Limit
	Horizontal	Vertical	Horizontal	Vertical	
-93	-34.50	-32.88	-33.14	-30.63	-27
-92	-32.80	-33.27	-31.16	-30.69	-27
-91	-35.18	-36.66	-32.77	-34.01	-27
-90	-33.57	-33.95	-34.55	-30.87	-27
-89	-37.08	-37.69	-32.55	-30.38	-27
-88	-33.26	-36.50	-33.59	-31.78	-27
-87	-33.23	-36.21	-33.50	-33.85	-27
-86	-34.08	-35.51	-34.62	-33.79	-27
-85	-32.52	-36.69	-33.85	-30.52	-27
-84	-38.07	-37.44	-34.81	-29.84	-27
-83	-33.83	-36.69	-33.81	-31.56	-27
-82	-35.94	-38.12	-35.17	-34.91	-27
-81	-32.84	-37.73	-34.87	-32.04	-27
-80	-34.04	-37.24	-34.26	-30.66	-27
-79	-36.96	-37.10	-35.08	-31.04	-27
-78	-35.21	-36.64	-35.18	-31.21	-27
-77	-33.42	-37.85	-35.09	-34.36	-27
-76	-32.39	-36.51	-34.70	-30.12	-27
-75	-34.71	-36.70	-34.53	-30.29	-27
-74	-36.22	-36.31	-34.50	-32.25	-27
-73	-33.42	-37.30	-34.19	-31.86	-27
-72	-34.74	-37.46	-34.38	-31.12	-27
-71	-31.87	-37.46	-34.12	-33.37	-27
-70	-34.77	-37.22	-35.44	-32.80	-27
-69	-36.79	-38.09	-33.48	-31.10	-27
-68	-35.71	-37.34	-34.34	-30.50	-27
-67	-34.49	-37.60	-34.48	-30.70	-27
-66	-34.25	-36.63	-35.21	-30.41	-27
-65	-36.92	-37.58	-34.87	-32.69	-27
-64	-36.57	-37.54	-33.86	-31.88	-27
-63	-36.06	-38.09	-34.23	-29.09	-27
-62	-37.19	-37.46	-34.55	-28.87	-27
-61	-33.43	-37.32	-35.09	-29.68	-27
-60	-31.73	-37.02	-34.99	-32.64	-27
-59	-32.25	-37.68	-34.42	-31.28	
-58	-34.08	-37.63	-34.39	-30.01	
-57	-33.19	-37.84	-35.07	-28.66	
-56	-30.39	-37.62	-34.98	-29.29	
-55	-30.04	-36.50	-34.33	-29.11	
-54	-29.89	-37.66	-33.75	-29.29	
-53	-31.55	-37.57	-31.62	-28.64	
-52	-33.45	-35.89	-33.43	-28.24	
-51	-33.70	-35.27	-34.98	-29.17	
-50	-31.77	-37.88	-35.23	-28.81	
-49	-31.00	-37.65	-34.13	-29.30	

<i>Degrees out of main beam</i>	<i>Antenna DN40</i>		<i>Antenna DN80</i>		<i>Limit</i>
	<i>Horizontal</i>	<i>Vertical</i>	<i>Horizontal</i>	<i>Vertical</i>	
-48	-30.35	-34.26	-32.93	-27.86	
-47	-30.91	-36.01	-34.85	-26.27	
-46	-29.50	-36.22	-34.98	-26.19	
-45	-27.53	-37.14	-34.10	-26.12	
-44	-28.83	-36.74	-33.87	-25.19	
-43	-27.41	-33.61	-35.23	-24.73	
-42	-25.94	-33.84	-34.61	-25.60	
-41	-25.35	-36.01	-32.45	-26.66	
-40	-26.97	-36.38	-32.60	-28.26	
-39	-29.38	-32.02	-33.61	-29.23	
-38	-31.06	-31.17	-34.75	-28.06	
-37	-31.99	-32.00	-31.61	-26.95	
-36	-31.06	-32.62	-30.76	-24.31	
-35	-29.85	-35.03	-28.64	-22.50	
-34	-28.35	-34.01	-30.32	-22.69	
-33	-28.41	-32.14	-30.94	-23.40	
-32	-28.52	-31.13	-30.27	-24.16	
-31	-27.88	-32.36	-31.08	-24.51	
-30	-27.17	-33.24	-30.44	-24.74	
-29	-25.95	-34.26	-29.38	-23.35	
-28	-24.00	-32.46	-27.27	-21.32	
-27	-22.62	-33.83	-26.67	-19.37	
-26	-20.77	-31.30	-26.57	-17.22	
-25	-20.04	-27.69	-27.37	-15.90	
-24	-19.65	-26.18	-29.14	-14.84	
-23	-19.56	-24.51	-32.64	-14.05	
-22	-19.56	-23.63	-33.65	-13.45	
-21	-19.21	-22.78	-28.61	-13.63	
-20	-18.19	-22.37	-25.87	-14.12	
-19	-17.34	-22.96	-23.63	-14.37	
-18	-16.84	-23.89	-22.02	-14.63	
-17	-16.25	-23.56	-20.19	-14.12	
-16	-15.76	-23.29	-18.76	-12.75	
-15	-15.15	-22.35	-17.71	-11.34	
-14	-13.94	-22.25	-16.61	-9.84	
-13	-12.09	-22.96	-15.29	-8.26	
-12	-10.29	-25.82	-13.65	-7.37	
-11	-8.55	-28.85	-11.97	-6.61	
-10	-7.11	-21.52	-10.06	-6.02	
-9	-6.02	-15.26	-8.10	-5.47	
-8	-5.30	-11.53	-6.52	-4.90	

<i>Degrees out of main beam</i>	<i>Antenna DN40</i>		<i>Antenna DN80</i>		<i>Limit</i>
	<i>Horizontal</i>	<i>Vertcial</i>	<i>Horizontal</i>	<i>Vertcial</i>	
-7	-4.82	-8.22	-4.88	-4.48	
-6	-3.96	-5.78	-3.74	-3.65	-3
-5	-3.33	-3.86	-2.44	-2.82	-3
-4	-2.49	-2.41	-1.58	-2.05	-3
-3	-1.64	-1.40	-0.88	-1.35	-3
-2	-0.86	-0.87	-0.31	-0.62	-3
-1	-0.28	-0.43	-0.02	-0.30	-3
0	0.00	0.00	0.00	0.00	-3
1	-0.06	-0.21	-0.21	-0.07	-3
2	-0.66	-0.84	-0.24	-0.32	-3
3	-1.61	-1.72	-0.69	-1.03	-3
4	-3.09	-3.06	-1.18	-1.92	-3
5	-5.21	-4.75	-1.99	-3.27	-3
6	-8.30	-6.96	-3.03	-4.82	-3
7	-12.26	-9.48	-4.13	-7.10	
8	-15.31	-12.83	-5.54	-9.29	
9	-14.12	-16.60	-7.06	-12.03	
10	-12.17	-20.57	-8.64	-14.32	
11	-11.15	-25.80	-10.27	-15.37	
12	-10.95	-27.75	-11.86	-15.49	
13	-11.85	-27.19	-13.63	-15.47	
14	-13.84	-27.55	-14.54	-15.85	
15	-16.54	-27.73	-15.85	-16.96	
16	-19.33	-27.94	-17.06	-19.60	
17	-20.15	-25.76	-18.40	-22.07	
18	-18.51	-25.33	-20.40	-23.66	
19	-18.14	-24.24	-21.67	-21.49	
20	-17.92	-24.00	-24.55	-18.74	
21	-19.36	-24.78	-26.73	-17.82	
22	-21.36	-26.67	-28.46	-16.67	
23	-23.81	-28.79	-31.60	-16.58	
24	-25.29	-31.16	-29.94	-16.73	
25	-25.07	-34.67	-29.55	-17.11	
26	-23.00	-33.19	-28.28	-18.22	
27	-22.19	-31.82	-29.20	-20.14	
28	-22.24	-30.43	-29.49	-22.30	
29	-22.01	-29.35	-29.31	-25.24	
30	-22.68	-29.14	-30.26	-29.24	
31	-24.04	-28.93	-28.86	-34.15	
32	-26.94	-30.02	-29.59	-30.54	
33	-30.81	-31.92	-28.41	-29.17	
34	-33.26	-32.38	-29.67	-29.02	
35	-31.76	-32.39	-30.53	-28.76	
36	-29.92	-32.84	-28.66	-31.58	
37	-30.63	-34.87	-29.46	-33.06	

Degrees out of main beam	Antenna DN40		Antenna DN80		Limit
	Horizontal	Vertical	Horizontal	Vertical	
38	-33.42	-34.96	-29.14	-35.00	
39	-37.06	-36.45	-28.89	-33.96	
40	-38.07	-37.44	-31.17	-31.40	
41	-35.59	-36.74	-31.07	-30.71	
42	-30.55	-34.62	-32.41	-29.04	
43	-29.12	-37.07	-34.58	-27.41	
44	-29.45	-37.37	-34.66	-26.85	
45	-28.87	-36.78	-34.94	-26.65	
46	-27.98	-37.48	-35.23	-27.85	
47	-29.32	-36.82	-34.07	-29.79	
48	-31.57	-35.44	-34.74	-30.37	
49	-31.71	-37.68	-34.88	-33.32	
50	-32.15	-37.05	-33.90	-33.53	
51	-34.91	-36.86	-34.73	-34.33	
52	-37.09	-36.17	-34.19	-34.86	
53	-37.81	-36.90	-34.19	-34.29	
54	-36.84	-37.47	-34.60	-32.26	
55	-32.79	-37.22	-34.57	-31.33	
56	-32.52	-36.93	-33.88	-31.76	
57	-33.00	-37.09	-34.75	-31.70	
58	-34.81	-36.94	-34.48	-32.45	
59	-33.57	-36.99	-34.94	-31.53	
60	-32.25	-37.61	-34.52	-30.71	-27
61	-32.43	-37.34	-35.14	-28.88	-27
62	-33.27	-37.49	-35.17	-29.28	-27
63	-37.09	-36.33	-34.82	-32.54	-27
64	-35.41	-35.97	-35.20	-34.99	-27
65	-33.60	-37.51	-34.53	-34.59	-27
66	-36.71	-37.27	-35.00	-34.61	-27
67	-37.84	-37.32	-34.93	-33.93	-27
68	-38.03	-37.46	-35.24	-34.65	-27
69	-34.97	-37.63	-34.92	-35.25	-27
70	-36.82	-37.02	-34.74	-34.23	-27
71	-37.04	-36.71	-34.34	-34.37	-27
72	-34.91	-37.29	-35.18	-34.35	-27
73	-33.55	-37.33	-34.54	-33.26	-27
74	-34.95	-36.63	-34.78	-31.69	-27
75	-37.80	-37.09	-34.25	-35.02	-27
76	-36.57	-37.25	-35.36	-32.76	-27
77	-36.82	-36.59	-33.98	-30.28	-27
78	-33.29	-36.96	-34.64	-31.88	-27
79	-33.40	-37.83	-35.32	-34.03	-27
80	-37.17	-36.55	-34.14	-32.16	-27
81	-36.89	-36.62	-34.22	-29.45	-27
82	-36.78	-37.32	-34.53	-28.98	-27

Degrees out of main beam	Antenna DN40		Antenna DN80		Limit
	Horizontal	Vertical	Horizontal	Vertical	
83	-34.36	-36.62	-34.36	-34.56	-27
84	-34.25	-36.60	-33.86	-32.13	-27
85	-35.67	-37.36	-35.00	-28.55	-27
86	-35.94	-36.66	-34.97	-27.32	-27
87	-34.15	-36.30	-34.33	-31.00	-27
88	-32.96	-36.78	-32.23	-35.28	-27
89	-32.03	-37.21	-34.51	-30.91	-27
90	-33.37	-36.59	-32.12	-29.11	-27
91	-35.67	-35.65	-34.59	-31.35	-27
92	-33.90	-33.26	-31.53	-30.69	-27
93	-33.50	-37.04	-33.37	-29.85	-27
94	-36.26	-34.58	-29.73	-29.89	-27
95	-34.43	-34.30	-32.19	-30.40	-27
96	-35.23	-35.65	-33.80	-32.74	-27
97	-31.53	-33.13	-34.88	-33.70	-27
98	-31.89	-33.67	-33.45	-29.82	-27
99	-33.61	-32.64	-34.60	-30.63	-27
100	-34.44	-34.44	-32.94	-32.01	-27
101	-32.82	-35.46	-33.58	-32.50	-27
102	-33.16	-32.37	-34.34	-31.72	-27
103	-30.71	-33.01	-33.32	-33.34	-27
104	-29.37	-34.63	-32.53	-31.28	-27
105	-33.16	-35.23	-34.65	-32.33	-27
106	-33.70	-33.95	-33.70	-33.19	-27
107	-31.59	-36.35	-33.60	-31.11	-27
108	-32.14	-33.91	-33.77	-30.49	-27
109	-33.40	-35.06	-34.24	-33.73	-27
110	-35.09	-36.84	-33.10	-33.60	-27
111	-34.97	-35.76	-35.07	-33.56	-27
112	-36.07	-36.85	-35.21	-33.30	-27
113	-33.21	-37.23	-34.67	-32.84	-27
114	-33.40	-37.07	-34.09	-32.41	-27
115	-34.39	-36.46	-34.29	-31.05	-27
116	-36.73	-36.60	-34.65	-33.12	-27
117	-36.23	-37.23	-34.96	-32.22	-27
118	-33.01	-35.78	-33.66	-34.24	-27
119	-32.88	-36.43	-34.71	-30.12	-27
120	-34.15	-36.14	-34.18	-28.45	-27
121	-34.52	-34.77	-33.84	-30.37	-27
122	-34.12	-34.06	-31.39	-29.65	-27
123	-35.70	-34.20	-32.45	-28.63	-27
124	-33.07	-33.78	-32.82	-29.57	-27
125	-32.17	-36.95	-32.78	-27.83	-27
126	-31.57	-35.71	-31.73	-28.57	-27
127	-31.56	-35.75	-31.57	-27.73	-27

<i>Degrees out of main beam</i>	<i>Antenna DN40</i>		<i>Antenna DN80</i>		<i>Limit</i>
	<i>Horizontal</i>	<i>Vertical</i>	<i>Horizontal</i>	<i>Vertical</i>	
128	-30.41	-33.81	-32.21	-27.46	-27
129	-31.20	-33.58	-30.16	-27.08	-27
130	-30.51	-34.90	-31.74	-27.54	-27
131	-30.07	-32.31	-28.59	-27.45	-27
132	-30.35	-32.68	-27.81	-28.30	-27
133	-29.59	-31.10	-28.26	-28.76	-27
134	-29.91	-32.31	-30.50	-27.36	-27
135	-30.75	-31.53	-27.98	-27.82	-27
136	-32.78	-31.95	-28.35	-27.10	-27
137	-32.14	-32.72	-28.00	-29.71	-27
138	-35.08	-31.15	-29.38	-30.08	-27
139	-34.65	-31.81	-28.71	-32.48	-27
140	-35.66	-31.48	-28.95	-31.90	-27
141	-37.34	-30.62	-29.24	-31.49	-27
142	-36.78	-31.36	-29.86	-34.48	-27
143	-37.52	-31.62	-29.20	-34.18	-27
144	-37.46	-33.77	-29.17	-34.78	-27
145	-37.66	-34.54	-29.44	-34.80	-27
146	-36.67	-35.09	-31.90	-35.23	-27
147	-37.01	-34.63	-32.22	-33.85	-27
148	-37.09	-36.74	-33.35	-33.29	-27
149	-37.00	-36.60	-34.95	-34.97	-27
150	-36.02	-36.08	-35.04	-35.11	-27
151	-33.88	-36.98	-35.29	-34.67	-27
152	-34.59	-37.15	-35.04	-34.92	-27
153	-34.59	-37.24	-34.53	-34.35	-27
154	-36.67	-36.40	-33.33	-34.71	-27
155	-34.19	-37.52	-34.32	-35.01	-27
156	-32.99	-36.92	-32.09	-34.65	-27
157	-33.80	-37.38	-33.23	-34.59	-27
158	-35.60	-37.40	-33.21	-33.20	-27
159	-37.25	-34.87	-33.53	-34.96	-27
160	-36.94	-36.21	-34.55	-34.76	-27
161	-37.97	-35.33	-34.58	-33.33	-27
162	-36.66	-36.05	-35.19	-34.11	-27
163	-36.14	-36.59	-34.65	-32.68	-27
164	-34.72	-36.76	-35.30	-31.95	-27
165	-32.98	-36.62	-34.85	-31.09	-27
166	-33.65	-37.31	-33.96	-34.01	-27
167	-32.93	-36.08	-33.27	-33.44	-27
168	-33.69	-36.92	-33.65	-33.84	-27
169	-33.46	-36.94	-33.84	-32.93	-27
170	-34.36	-37.16	-32.89	-32.18	-27
171	-35.18	-37.10	-32.28	-31.40	-27
172	-34.97	-36.97	-34.08	-30.64	-27

<i>Degrees out of main beam</i>	<i>Antenna DN40</i>		<i>Antenna DN80</i>		<i>Limit</i>
	<i>Horizontal</i>	<i>Vertcial</i>	<i>Horizontal</i>	<i>Vertcial</i>	
173	-35.42	-36.16	-34.02	-30.85	-27
174	-34.53	-33.28	-34.80	-31.21	-27
175	-35.38	-34.79	-34.23	-30.41	-27
176	-34.78	-34.48	-34.78	-29.69	-27
177	-35.49	-32.79	-35.31	-31.31	-27
178	-36.07	-32.31	-35.21	-31.93	-27
179	-37.38	-32.33	-34.32	-31.66	-27
180	-34.04	-31.70	-33.99	-31.46	-27

12 Revision History

Revision History			
<i>Edition</i>	<i>Date</i>	<i>Issued by</i>	<i>Modifications</i>
1	2016-06-17	M. Steindl (as)	First Edition
2	2016-06-23	M. Steindl (as)	Applicant geändert
3	2016-11-08	M. Steindl (as)	Tank-spezifische Abschnitte entfernt.
4	2016-12-19	M. Steindl (as)	Neuprüfung der Modulationsbandbreite