



FCC RADIO TEST REPORT

FCC ID : LDK-SMST9105AXI

Equipment : Catalyst 9105AX 802.11ax Access Point,
Catalyst 1105AX 802.11ax Access Point

Brand Name : Cisco

Model Name : C9105AXI-B, C9105AXI-C, C9105AXI-D, C9105AXI-F,
C9105AXI-N, C9105AXI-S, C9105AXI-K, C9105AXI-x,
C1105AXI-B, C1105AXI-C, C1105AXI-D, C1105AXI-F,
C1105AXI-N, C1105AXI-S, C1105AXI-K, C1105AXI-x
(Refer to section 1.1.5 for more details)

Applicant : Cisco Systems, Inc.
125 West Tasman Drive, San Jose, California, United
States, 95134-1706

Manufacturer : Cisco Systems, Inc.
125 West Tasman Drive, San Jose, California, United
States, 95134-1706

Standard : 47 CFR FCC Part 15.247

The product was received on Apr. 20, 2020, and testing was started from Apr. 28, 2020 and completed on Jun. 01, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Cliff Chang

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	9
1.3 Testing Location Information	9
1.4 Measurement Uncertainty	10
2 Test Configuration of EUT	11
2.1 Test Channel Mode	11
2.2 The Worst Case Measurement Configuration	12
2.3 EUT Operation during Test	13
2.4 Accessories	13
2.5 Support Equipment.....	14
2.6 Test Setup Diagram	15
3 Transmitter Test Result	18
3.1 AC Power-line Conducted Emissions	18
3.2 DTS Bandwidth.....	20
3.3 Maximum Conducted Output Power	21
3.4 Power Spectral Density	24
3.5 Emissions in Non-restricted Frequency Bands	26
3.6 Emissions in Restricted Frequency Bands.....	27
4 Test Equipment and Calibration Data	32
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of DTS Bandwidth	
Appendix C. Test Results of Maximum Conducted Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Emissions in Non-restricted Frequency Bands	
Appendix F. Test Results of Emissions in Restricted Frequency Bands	
Appendix G. Test Results of Radiated Emission Co-location	
Appendix H. Test Photos	

Photographs of EUT v01

TEL : 886-3-656-9065

FAX : 886-3-656-9085

Report Template No.: CB-A10_10 Ver1.1

Page Number : 2 of 33

Issued Date : Jun. 10, 2020

Report Version : 01



History of this test report

TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A10_10 Ver1.1

Page Number : 3 of 33
Issued Date : Jun. 10, 2020
Report Version : 01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

1. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.
2. The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Sandy Chuang



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
2400-2483.5	b, g, n (HT20), ax (HEW20)	2412-2462	1-11 [11]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.11b	20	1TX, 2TX
2.4-2.4835GHz	802.11g	20	1TX, 2TX
2.4-2.4835GHz	802.11n HT20	20	1TX, 2TX
2.4-2.4835GHz	802.11n HT20-BF	20	2TX
2.4-2.4835GHz	802.11ax HEW20	20	1TX, 2TX
2.4-2.4835GHz	802.11ax HEW20-BF	20	2TX

Note:

- 11b mode uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- 11g, HT20 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- HEW20 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- BWch is the nominal channel bandwidth.
- Nss-Min is the minimum number of spatial streams.
- Nant is the number of outputs. e.g., 2(2,3) means have 2 outputs for port 2 and port 3. 2 means have 2 outputs for port 1 and port 2.

1.1.2 Antenna Information

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	1	PEGATRON	WIFI_1 ANT	IFA (Inverted-F antenna)	I-PEX	Note 1
2	2	PEGATRON	WIFI_2 ANT	IFA (Inverted-F antenna)	I-PEX	
3	1	PEGATRON	BLE ANT	IFA (Inverted-F antenna)	I-PEX	

Note 1:

Ant.	Port	Gain (dBi)										
		WLAN 2.4GHz			WLAN 5GHz					Bluetooth / Zigbee		
		2400 MHz	2450 MHz	2500 MHz	5150 MHz	5300 MHz	5500 MHz	5700 MHz	5850 MHz	2400 MHz	2450 MHz	2500 MHz
1	1	3.03	3.43	3.02	4.28	4.48	4.63	4.89	4.52	-	-	-
2	2	2.92	3.41	3.11	4.68	4.52	4.49	4.66	4.72	-	-	-
3	1	-	-	-	-	-	-	-	-	2.08	2.30	2.18

Note 2: The above information was declared by manufacturer.

Note 3:

For 2.4GHz function:

For IEEE 802.11 b/g/n/ax (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

For IEEE 802.11 b/g/n/ax (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11a/n/ac/ax (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

For IEEE 802.11a/n/ac/ax (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For Bluetooth function:

Only Port 1 can be used as transmitting/receiving antenna.

For Zigbee function:

Only Port 1 can be used as transmitting/receiving antenna.

**1.1.3 Mode Test Duty Cycle****<2T1S>**

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11b	0.91	0.41	1.442m	1k
802.11g	0.989	0.05	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)
802.11ax HEW20	0.986	0.06	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)
802.11ax HEW20-BF	0.985	0.07	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)

<2T2S>

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11ax HEW20	0.974	0.11	892.188u	3k

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.



1.1.4 EUT Operational Condition

EUT Power Type	From PoE		
Beamforming Function	☒	With beamforming	☐ Without beamforming
	The product has beamforming function for n/ax in 2.4GHz and a/n/ac/ax in 5GHz.		
Test Software Version	Feb14 2020 05:22:27 version 17.18.2 (r782430 WLTEST)		

Note: The above information was declared by manufacturer.

1.1.5 Table for Multiple Listing

The equipment names/model names in the following table are all refer to the identical product.

Equipment Name	Model Name	Description
Catalyst 9105AX 802.11ax Access Point	C9105AXI-B	All the models are identical, the difference equipment names/model names for difference marketing strategy.
	C9105AXI-C	
	C9105AXI-D	
	C9105AXI-F	
	C9105AXI-N	
	C9105AXI-S	
	C9105AXI-K	
	C9105AXI-x (x can be A-Z, regional country code)	
Catalyst 1105AX 802.11ax Access Point	C1105AXI-B	
	C1105AXI-C	
	C1105AXI-D	
	C1105AXI-F	
	C1105AXI-N	
	C1105AXI-S	
	C1105AXI-K	
	C1105AXI-x (x can be A-Z, regional country code)	

From the above models, model: C9105AXI-B was selected as representative model for the test and its data was recorded in this report.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 558074 D01 v05r02
- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location		
☐	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL : 886-3-327-3456 FAX : 886-3-327-0973
☒	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-CB	Owen Hsu	22.5-23.8°C / 56-58%	Apr. 28, 2020 May 28, 2020
Radiated (Cabinet_Above 1GHz)	03CH06-CB	RJ Huang	21.9-22.4°C / 57-60 %	Apr. 30, 2020~ Jun. 01, 2020
Radiated (Below 1GHz)	03CH06-CB	Stim Sung	22.4-23.3°C / 57-60 %	May 19, 2020
Radiated (Radiated Emission Co-location)	03CH06-CB	RJ Huang	23.4-25.5°C / 63-69%	May 25, 2020
AC Conduction	CO02-CB	GN Hou	22~24°C / 65~68%	May 28, 2020

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086D with Industry Canada.



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	5.1 dB	Confidence levels of 95%
Conducted Emission	2.4 dB	Confidence levels of 95%
Output Power Measurement	1.5 dB	Confidence levels of 95%
Power Density Measurement	2.4 dB	Confidence levels of 95%
Bandwidth Measurement	2%	Confidence levels of 95%

2 Test Configuration of EUT

2.1 Test Channel Mode

<2T1S>

Mode	Power Setting
802.11b_Nss1,(1Mbps)_2TX	-
2412MHz	16
2437MHz	17
2462MHz	17
802.11g_Nss1,(6Mbps)_2TX	-
2412MHz	15
2437MHz	17
2462MHz	14
802.11ax HEW20_Nss1,(MCS0)_2TX	-
2412MHz	14
2437MHz	17
2462MHz	14
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-
2412MHz	14
2437MHz	17
2462MHz	14

<2T2S>

Mode	Power Setting
802.11ax HEW20_Nss2,(MCS0)_2TX	-
2412MHz	15
2462MHz	15

Note:

- ◆ There are two modes of EUT, one is beamforming mode, and the other is non-beamforming mode for 11n/11ax in 2.4GHz and 11a/11n/11ac/11ax in 5GHz. Both modes have been tested and recorded in this test report.
- ◆ The STBC mode covered by 2T2S mode.
- ◆ The beamforming mode only evaluate power and power density.
- ◆ This function has 1TX/2TX, and only 2TX was test and record in the test report was declared by the manufacturer.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	CTX
1	EUT_2.4GHz + PoE
2	EUT_5GHz + PoE
3	EUT_Bluetooth LE + PoE
4	EUT_Zigbee + PoE
For operating mode 2 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands Emissions in Restricted Frequency Bands (Above 1GHz)
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement
Operating Mode < 1GHz	CTX
	The EUT was performed at X axis, Y axis and Z axis position for Emissions in Restricted Frequency Bands above 1GHz. The worst case was found at Z axis in 2.4GHz, Zigbee and at X axis in 5GHz, Bluetooth LE, thus the measurement will follow this same test configuration.
1	EUT in Z axis_2.4GHz + PoE
2	EUT in X axis_5GHz + PoE
3	EUT in X axis_Bluetooth LE + PoE
4	EUT in Z axis_Zigbee + PoE
For operating mode 1 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX (Cabinet)
	The EUT was performed at X axis, Y axis and Z axis position. The worst case was found at Z axis, thus the measurement will follow this same test configuration.
1	EUT in Z axis_2.4GHz



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	Normal Link
Z-axis generated the worst result for Emissions in Restricted Frequency Bands (above 1GHz), thus the measurement will follow this same test configuration.	
1	EUT in Z axis_WLAN 2.4GHz + WLAN 5GHz
Refer to Appendix G for Radiated Emission Co-location.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz + WLAN 5GHz + Bluetooth LE
2	WLAN 2.4GHz + WLAN 5GHz + Zigbee
Refer to Sporton Test Report No.: FA992016-02 for Co-location RF Exposure Evaluation.	

Note: It was supplied power by PoE for EUT, and the PoE is for measurement only, would not be marketed.

<For Conducted emissions and Radiated measurement (below 1GHz)>

Equipment	Brand Name	Model Name	FCC ID
PoE	PHIHONG	POE29U-1AT(PL)	N/A

<For other tests>

Equipment	Brand Name	Model Name	FCC ID
PoE	CERIO	POE-G30	N/A

2.3 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

2.4 Accessories

Accessories				
No.	Equipment Name	Brand Name	Model Name	Remark
1	Mounting bracket*1	Cisco	AIR-AP-BRACKET-8	-



2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	PHIHONG	POE29U-1AT(PL)	N/A

For Radiated (below 1GHz):


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	PHIHONG	POE29U-1AT(PL)	N/A
B	Notebook	DELL	E4300	N/A

For Radiated (above 1GHz) and RF Conducted:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	CERIO	POE-G30	N/A
B	Notebook	DELL	E4300	N/A

2.6 Test Setup Diagram


Test Setup Diagram – AC Line Conducted Emission Test

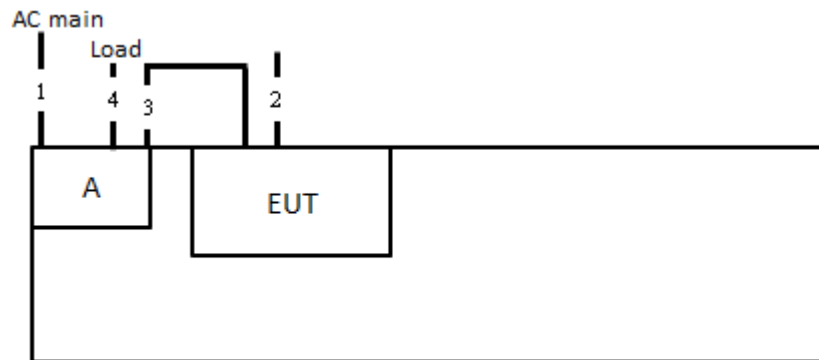

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RS232 to RJ-45 console cable	No	1.9m
3	RJ-45 cable	No	1.5m
4	RJ-45 cable	No	1.5m

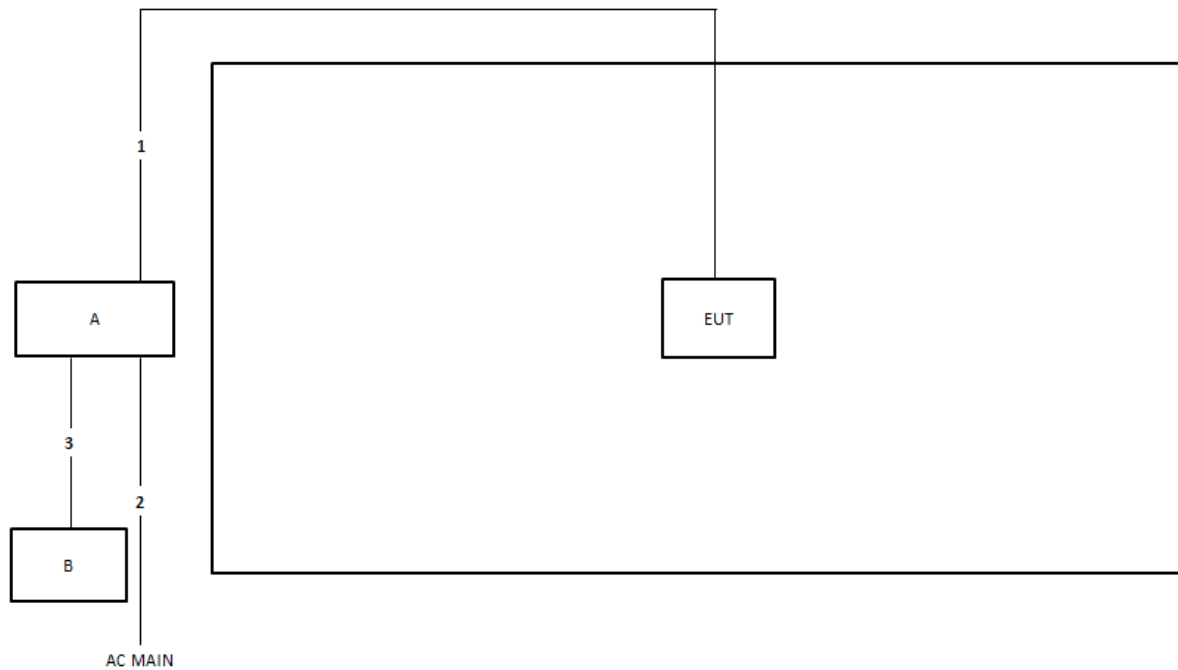Test Setup Diagram - Radiated Test < 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.5m
3	RJ-45 cable	No	1.5m

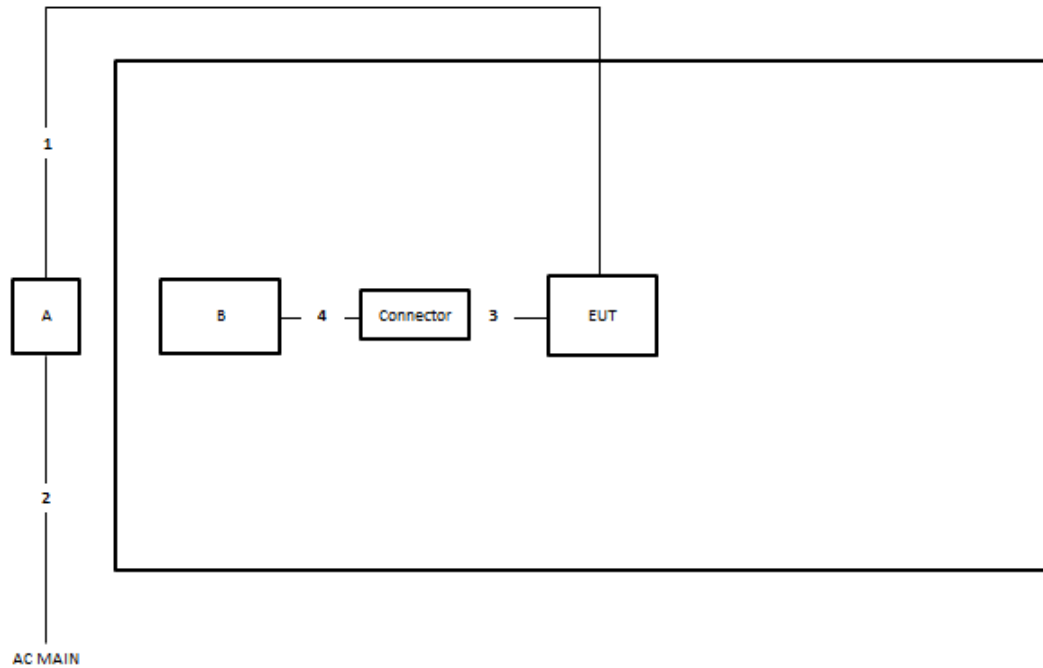Test Setup Diagram - Radiated Test > 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.5m
3	RS232 to RJ-45 console cable	No	1.9m
4	RS232 to USB console cable	No	1.5m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

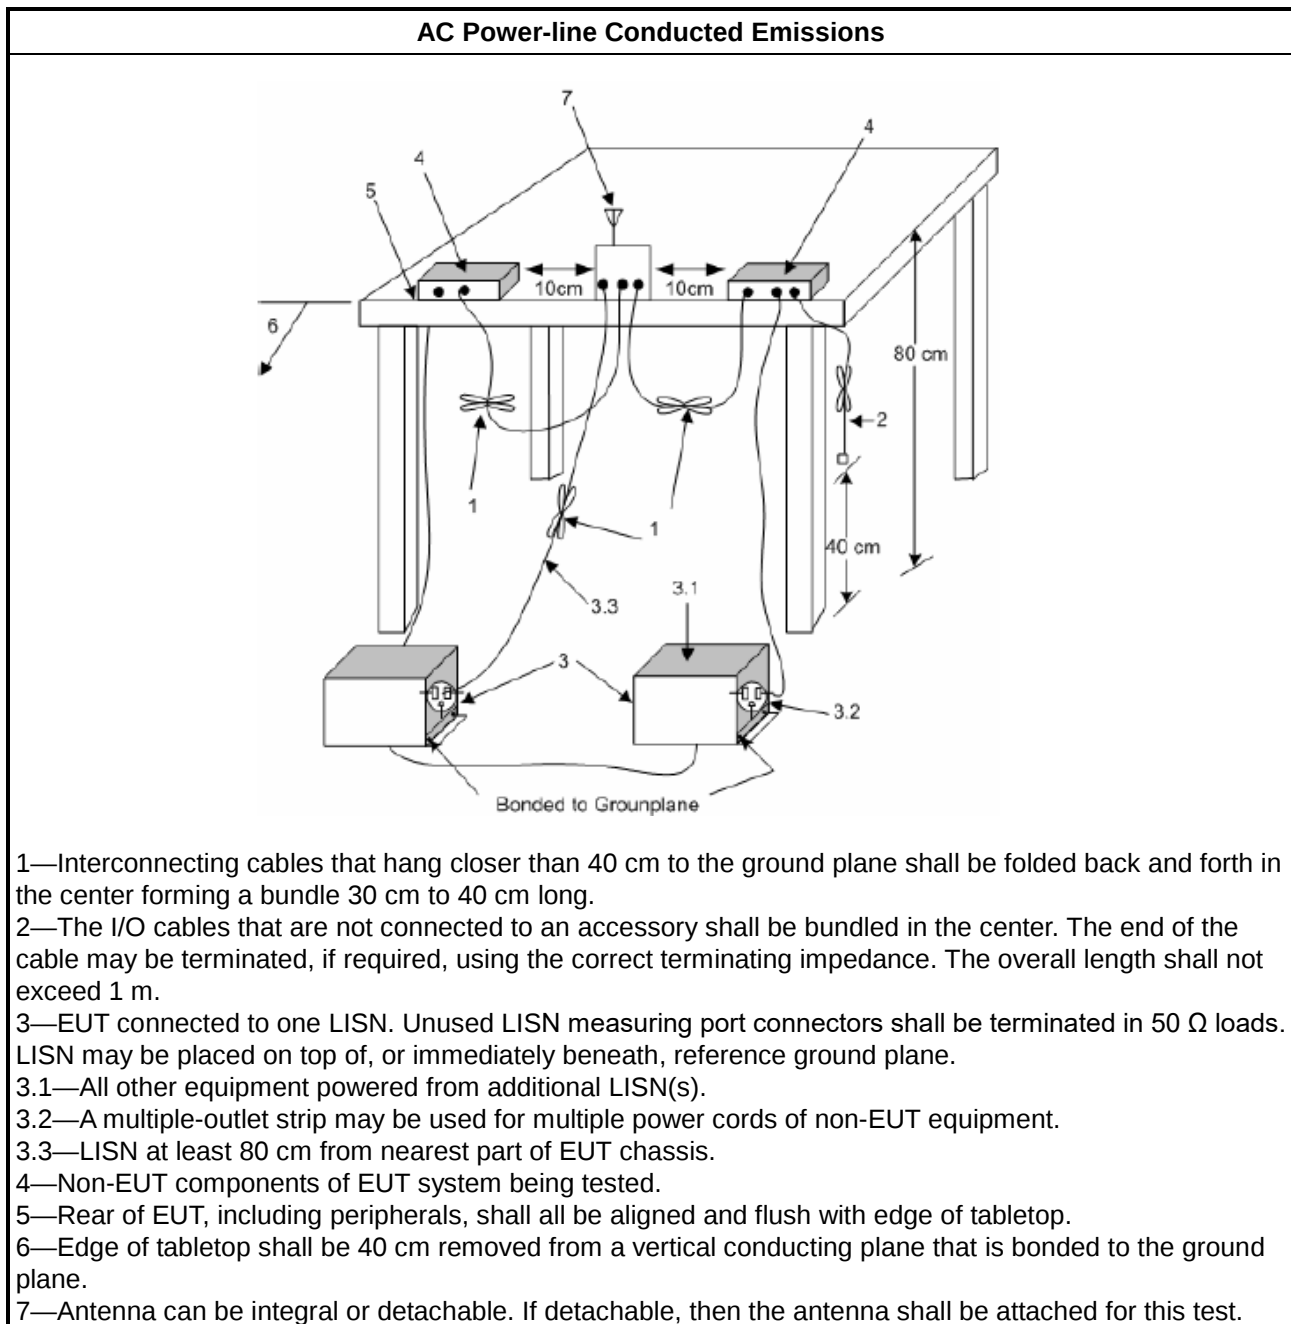

3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
▪	6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
▪	For the emission bandwidth shall be measured using one of the options below:
☒	Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
☐	Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

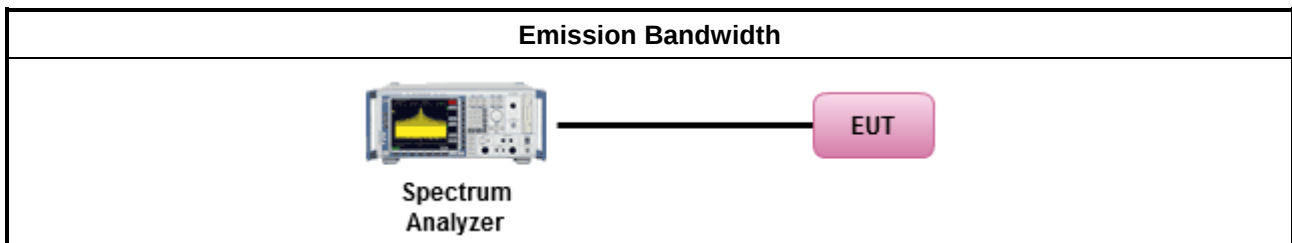

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit						
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)					
	▪ If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm					
	▪ Smart antenna system (SAS):					
	<table> <tr> <td>-</td><td>Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm</td></tr> <tr> <td>-</td><td>Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm</td></tr> <tr> <td>-</td><td>Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm</td></tr> </table>	-	Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm	-	Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm	-
-	Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm					
-	Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm					
-	Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm					
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.						


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Peak Conducted Output Power	
☐	Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
☐	Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
Maximum Conducted Output Power	
[duty cycle ≥ 98% or external video / power trigger]	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
☐	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
☒	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

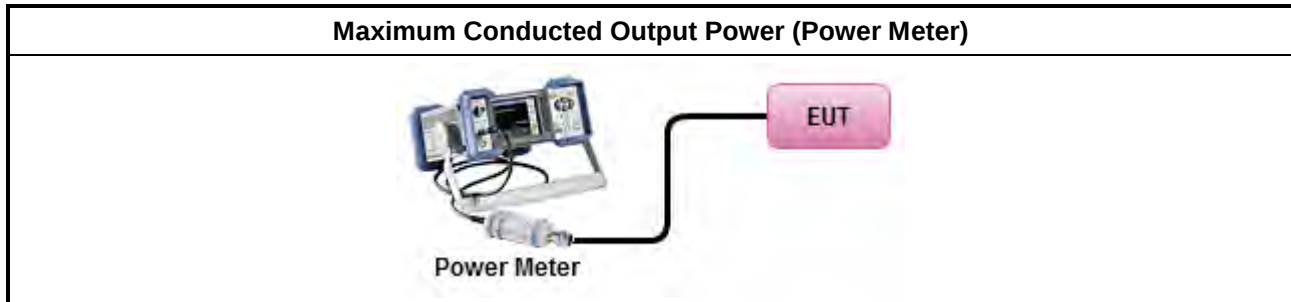

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method			
Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).			
☒ Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD.			
- For conducted measurement. - If The EUT supports multiple transmit chains using options given below: <table border="1"> <tr> <td> ☒ Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace. </td></tr> <tr> <td> ☐ Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits, </td></tr> <tr> <td> ☐ Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit. </td></tr> </table>	☒ Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.	☐ Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,	☐ Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
☒ Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.			
☐ Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,			
☐ Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.			

3.4.4 Test Setup

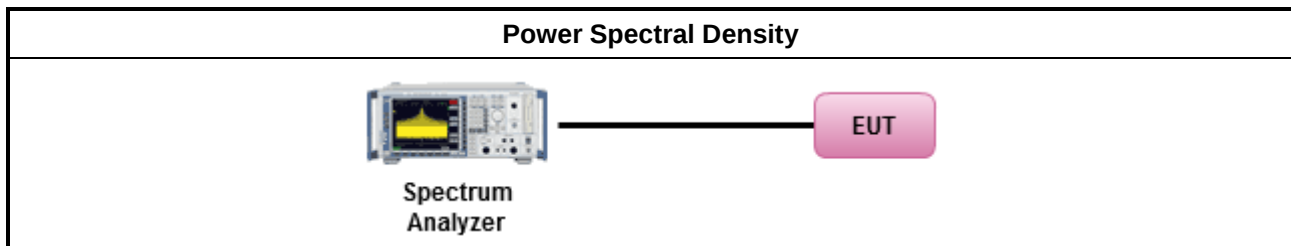

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

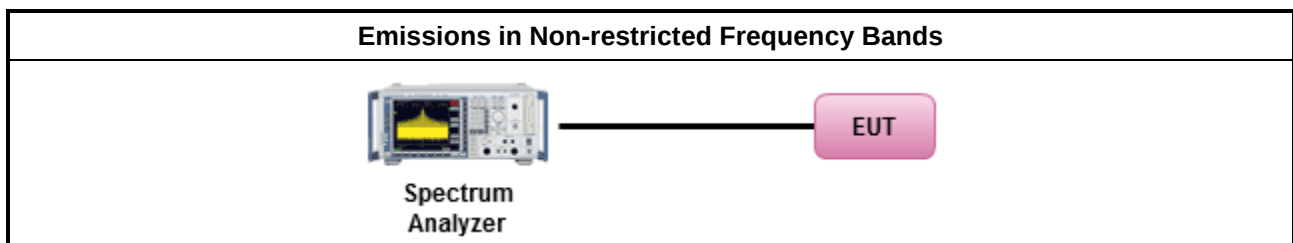

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E



3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




3.6.3 Test Procedures



Test Method	
The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$).
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
For the transmitter band-edge emissions shall be measured using following options below:	
	Refer as FCC KDB 558074 clause 8.7 & C63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.



Test Method	
	▪ For conducted and cabinet radiation measurement, refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.2.
	▪ For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
	▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

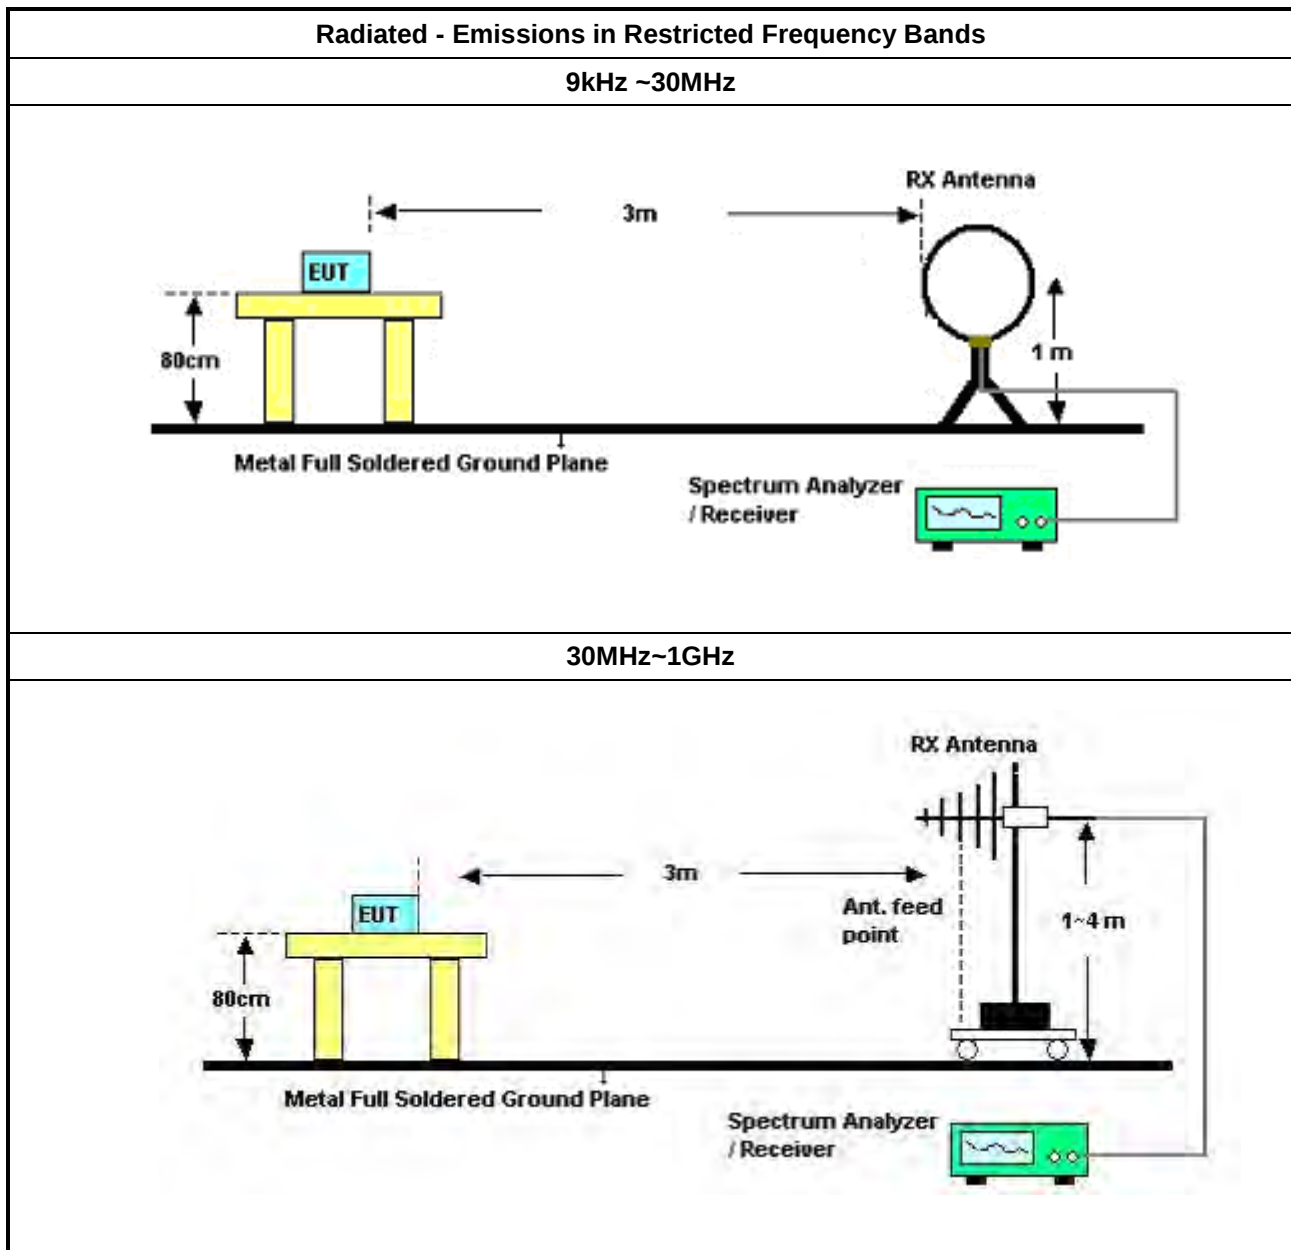

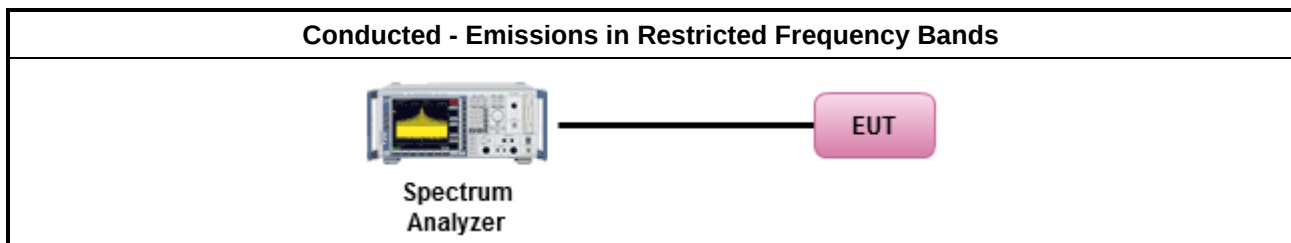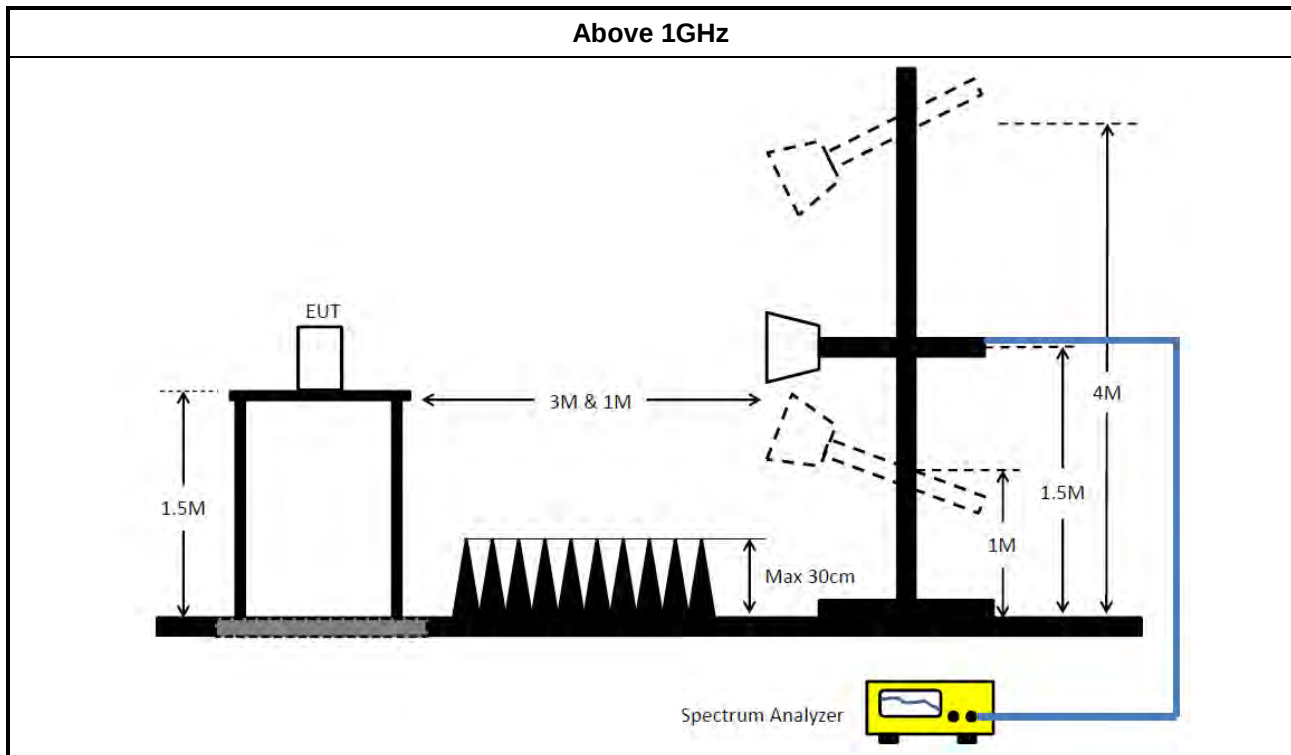

3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10 harmonic or 40 GHz, whichever is appropriate.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 21, 2019	Nov. 20, 2020	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Oct. 30, 2019	Oct. 29, 2020	Conduction (CO02-CB)
EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 8.4GHz	Mar. 10, 2020	Mar. 09, 2021	Conduction (CO02-CB)
COND Cable	Woken	Cable	2	0.15MHz ~ 30MHz	Oct. 21, 2019	Oct. 20, 2020	Conduction (CO02-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	N.C.R.	Conduction (CO02-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Apr. 13, 2020	Apr. 12, 2021	Radiation (03CH06-CB)
Bilog Antenna with 6 dB attenuator	TESEQ & EMCI	CBL6112D & N-6-06	37878 & AT-N0606	20MHz ~ 2GHz	Aug. 03, 2019	Aug. 02, 2020	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1292	1GHz~18GHz	Jul. 17, 2019	Jul. 16, 2020	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Jun. 12, 2019	Jun. 11, 2020	Radiation (03CH06-CB)
Pre-Amplifier	Agilent	310N	187290	0.1MHz ~ 1GHz	Apr. 28, 2020	Apr. 27, 2021	Radiation (03CH06-CB)
Pre-Amplifier	Agilent	83017A	MY53270064	0.5GHz ~ 26.5GHz	May 08, 2019	May 07, 2020	Radiation (03CH06-CB)
Pre-Amplifier	Agilent	83017A	MY53270064	0.5GHz ~ 26.5GHz	May 07, 2020	May 06, 2021	Radiation (03CH06-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jul. 03, 2019	Jul. 02, 2020	Radiation (03CH06-CB)
Spectrum analyzer	R&S	FSP40	100080	9kHz~40GHz	Oct. 21, 2019	Oct. 20, 2020	Radiation (03CH06-CB)
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	May 15, 2019	May 14, 2020	Radiation (03CH06-CB)
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	May 13, 2020	May 12, 2021	Radiation (03CH06-CB)
RF Cable-low	HUBER+SUHNER	RG402	Low Cable-05+24	30MHz~1GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH06-CB)
RF Cable-high	HUBER+SUHNER	RG402	High Cable-05	1GHz~18GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH06-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	HUBER+SUHNER	RG402	High Cable-05+24	1GHz~18GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz ~ 40 GHz	Jul. 24, 2019	Jul. 23, 2020	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz ~ 40 GHz	Jul. 24, 2019	Jul. 23, 2020	Radiation (03CH06-CB)
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Jul. 02, 2019	Jul. 01, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz –26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz –26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz –26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz –26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-28	1 GHz –26.5 GHz	Nov. 18, 2019	Nov. 17, 2020	Conducted (TH01-CB)
Power Sensor	Agilent	E9327A	US40442088	50MHz~18GHz	Feb. 07, 2020	Feb. 06, 2021	Conducted (TH01-CB)
Power Meter	Agilent	E4416A	GB41291199	50MHz~18GHz	Feb. 07, 2020	Feb. 06, 2021	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.



AC Power Port Conducted Emission Result



Appendix A

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition
Mode 2	Pass	AV	25.337M	43.53	50.00	-6.47	10.88	Line

Mode 2



28/05/2020

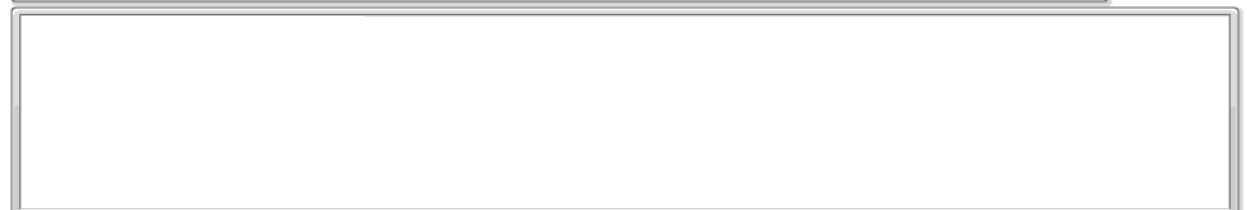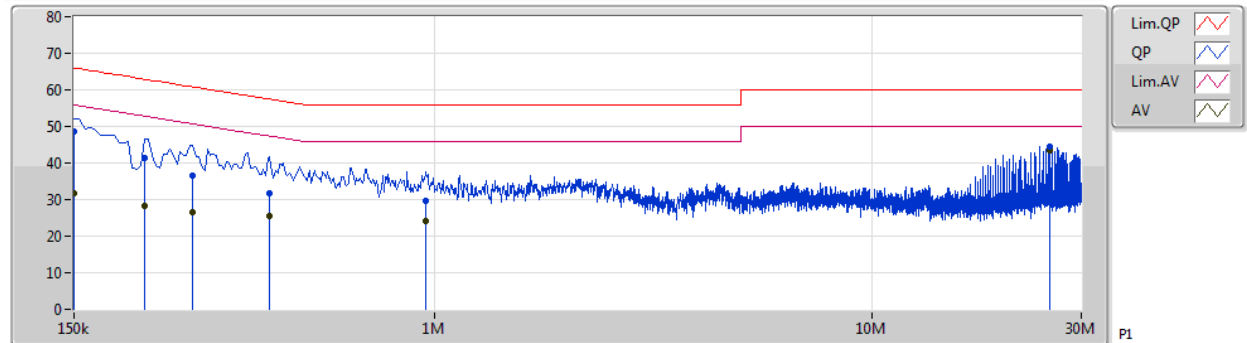

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	AF (dB)	CL (dB)	AT (dB)			
QP	150k	48.48	66.00	-17.52	10.20	Line	-	38.28	0.05	0.05	10.10			
AV	150k	31.87	56.00	-24.13	10.20	Line	-	21.67	0.05	0.05	10.10			
QP	217.5k	41.40	62.92	-21.52	10.22	Line	-	31.18	0.05	0.07	10.10			
AV	217.5k	28.36	52.92	-24.56	10.22	Line	-	18.14	0.05	0.07	10.10			
QP	280.5k	36.39	60.80	-24.41	10.22	Line	-	26.17	0.05	0.07	10.10			
AV	280.5k	26.62	50.80	-24.18	10.22	Line	-	16.40	0.05	0.07	10.10			
QP	420k	31.76	57.45	-25.69	10.23	Line	-	21.53	0.05	0.08	10.10			
AV	420k	25.68	47.45	-21.77	10.23	Line	-	15.45	0.05	0.08	10.10			
QP	955.5k	29.54	56.00	-26.46	10.28	Line	-	19.26	0.06	0.12	10.10			
AV	955.5k	24.20	46.00	-21.80	10.28	Line	-	13.92	0.06	0.12	10.10			
QP	25.337M	44.40	60.00	-15.60	10.88	Line	-	33.52	0.53	0.23	10.12			
AV	25.337M	43.53	50.00	-6.47	10.88	Line	"Worst"	32.65	0.53	0.23	10.12			

Mode 2

28/05/2020

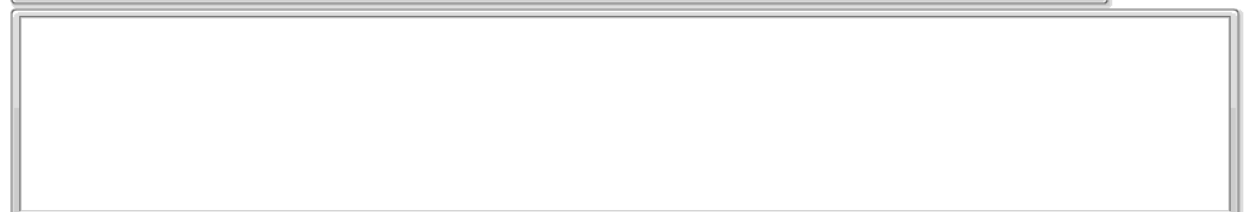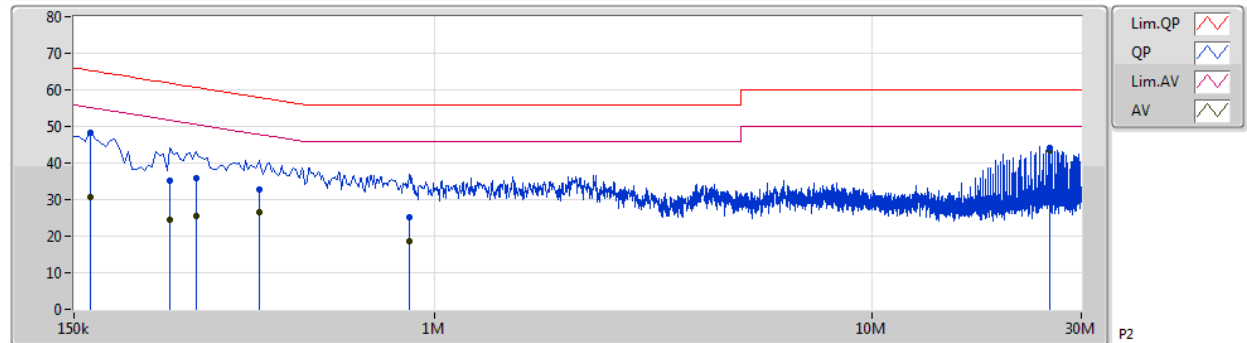

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	AF (dB)	CL (dB)	AT (dB)			
QP	163.5k	48.19	65.27	-17.08	10.21	Neutral	-	37.98	0.05	0.06	10.10			
AV	163.5k	30.63	55.27	-24.64	10.21	Neutral	-	20.42	0.05	0.06	10.10			
QP	249k	35.34	61.79	-26.45	10.22	Neutral	-	25.12	0.05	0.07	10.10			
AV	249k	24.44	51.79	-27.35	10.22	Neutral	-	14.22	0.05	0.07	10.10			
QP	285k	35.80	60.67	-24.87	10.23	Neutral	-	25.57	0.05	0.08	10.10			
AV	285k	25.62	50.67	-25.05	10.23	Neutral	-	15.39	0.05	0.08	10.10			
QP	397.5k	32.68	57.91	-25.23	10.23	Neutral	-	22.45	0.05	0.08	10.10			
AV	397.5k	26.68	47.91	-21.23	10.23	Neutral	-	16.45	0.05	0.08	10.10			
QP	874.5k	25.28	56.00	-30.72	10.27	Neutral	-	15.01	0.06	0.11	10.10			
AV	874.5k	18.49	46.00	-27.51	10.27	Neutral	-	8.22	0.06	0.11	10.10			
QP	25.337M	44.22	60.00	-15.78	10.67	Neutral	-	33.55	0.32	0.23	10.12			
AV	25.337M	43.44	50.00	-6.56	10.67	Neutral	"Worst"	32.77	0.32	0.23	10.12			

<2T1S>

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	7.025M	10.27M	10M3G1D	6.025M	10.195M
802.11g_Nss1,(6Mbps)_2TX	16.325M	16.767M	16M8D1D	16.3M	16.667M
802.11ax HEW20_Nss1,(MCS0)_2TX	18.975M	19.04M	19M0D1D	18.9M	19.015M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	7M	10.22M	6.55M	10.245M
2437MHz	Pass	500k	6.025M	10.22M	7M	10.245M
2462MHz	Pass	500k	6.55M	10.195M	7.025M	10.27M
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	16.325M	16.667M	16.3M	16.717M
2437MHz	Pass	500k	16.325M	16.692M	16.325M	16.767M
2462MHz	Pass	500k	16.325M	16.667M	16.325M	16.742M
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	18.975M	19.015M	18.925M	19.015M
2437MHz	Pass	500k	18.9M	19.015M	18.95M	19.015M
2462MHz	Pass	500k	18.975M	19.04M	18.9M	19.015M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

802.11b_Nss1,(1Mbps)_2TX
EBW
2412MHz

30/04/2020

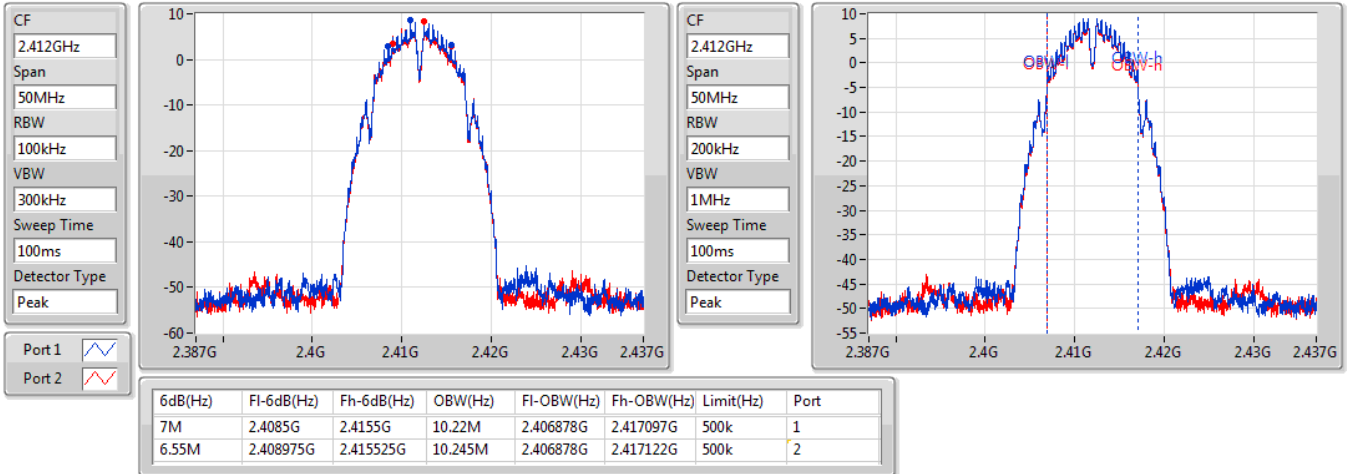

802.11b_Nss1,(1Mbps)_2TX
EBW
2437MHz

30/04/2020

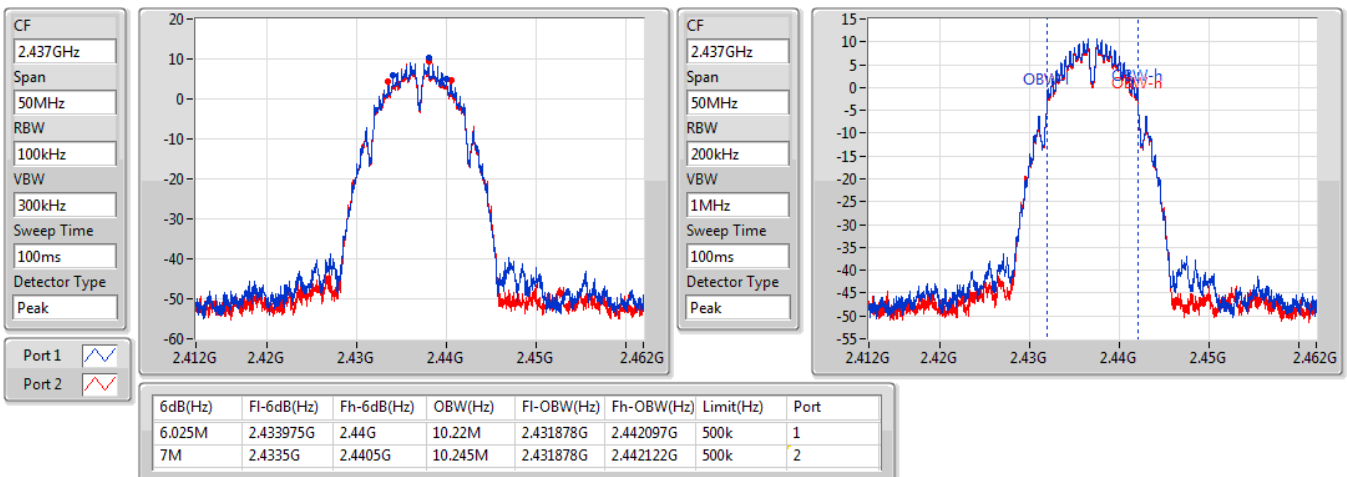


802.11b_Nss1,(1Mbps)_2TX
EBW
2462MHz

30/04/2020

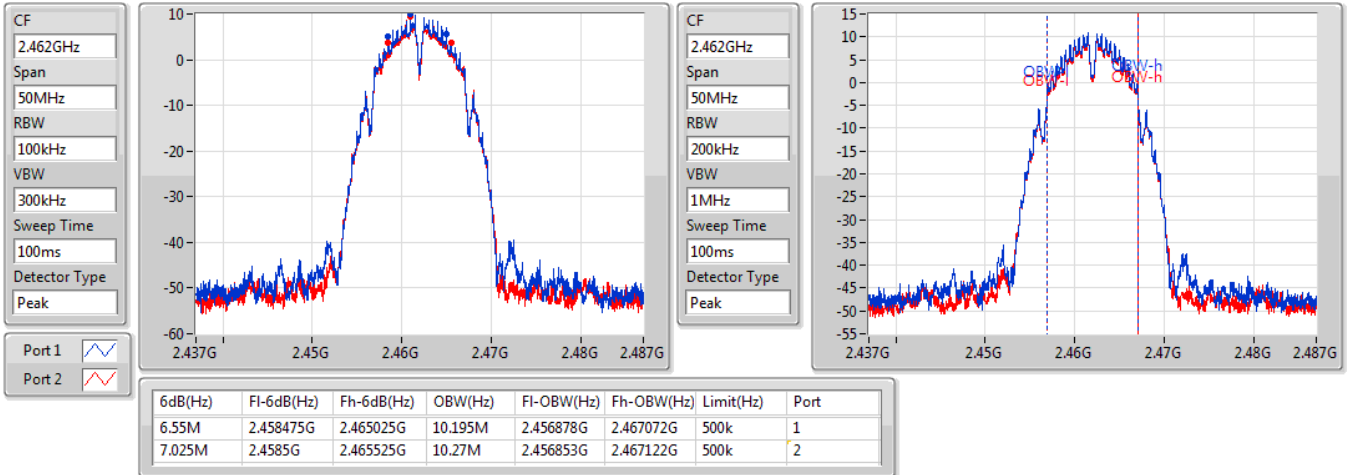

802.11g_Nss1,(6Mbps)_2TX
EBW
2412MHz

30/04/2020

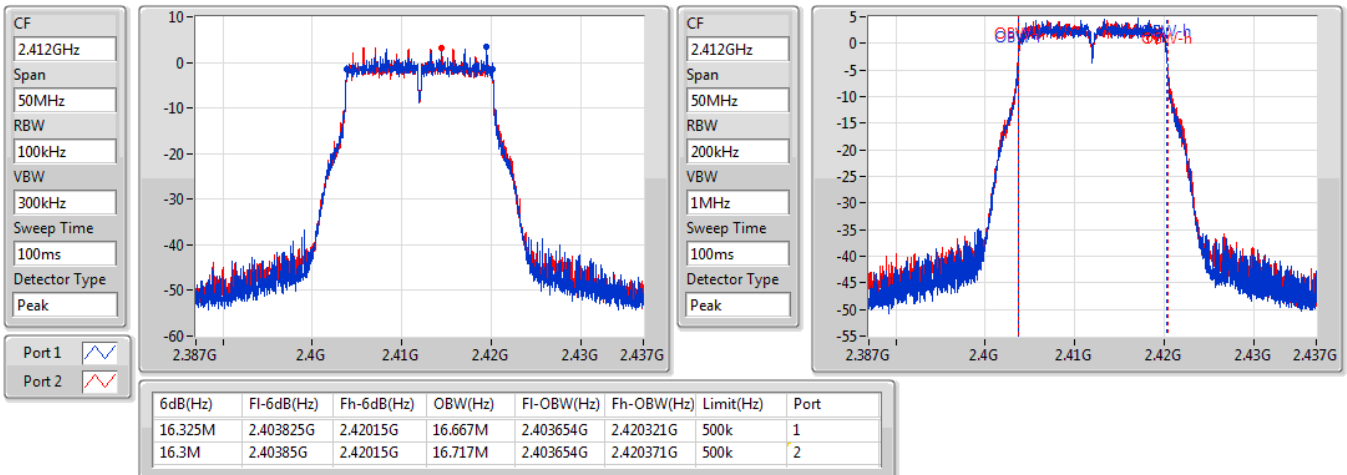


802.11g_Nss1,(6Mbps)_2TX
EBW
2437MHz

30/04/2020

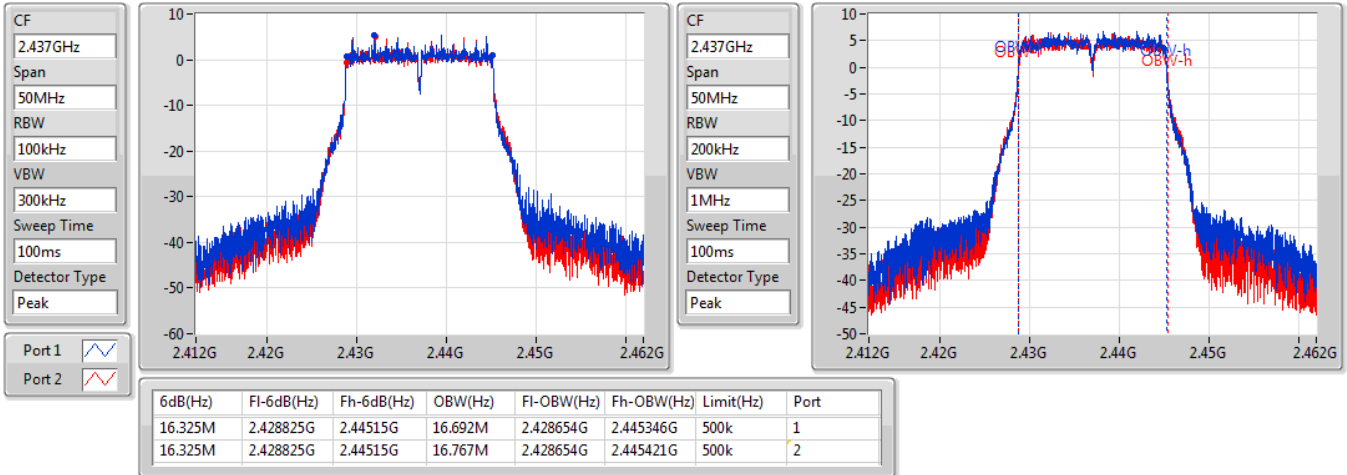

802.11g_Nss1,(6Mbps)_2TX
EBW
2462MHz

30/04/2020

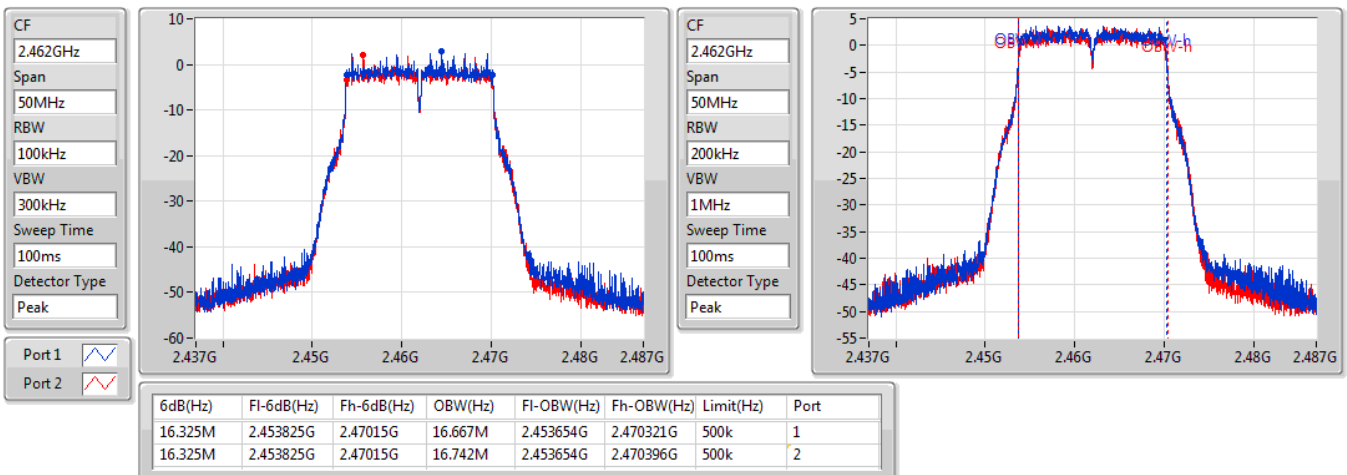


802.11ax HEW20_Nss1,(MCS0)_2TX
EBW
2412MHz

30/04/2020

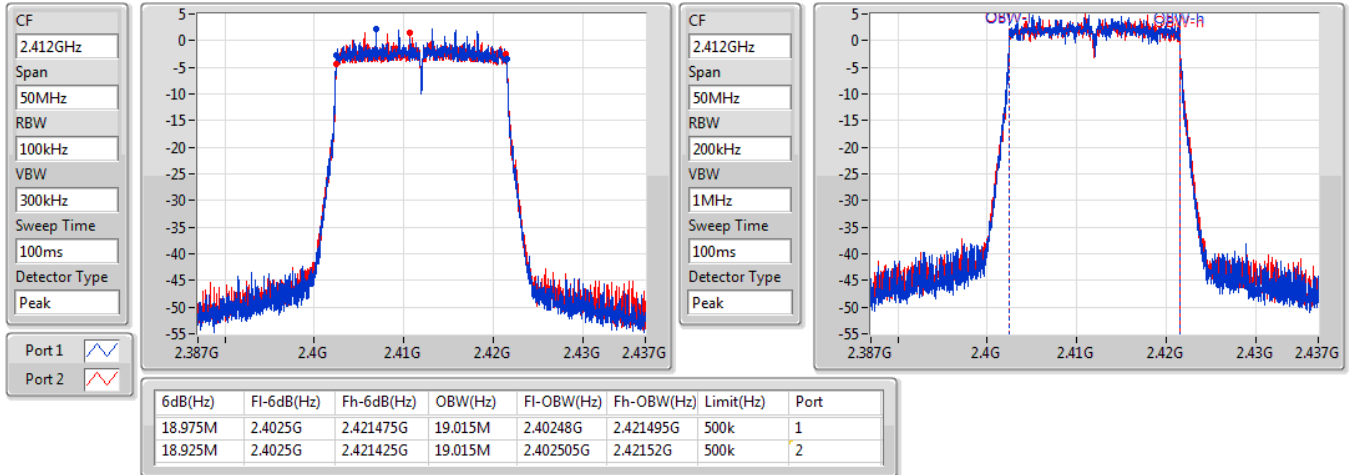
802.11ax HEW20_Nss1,(MCS0)_2TX
EBW
2437MHz


30/04/2020

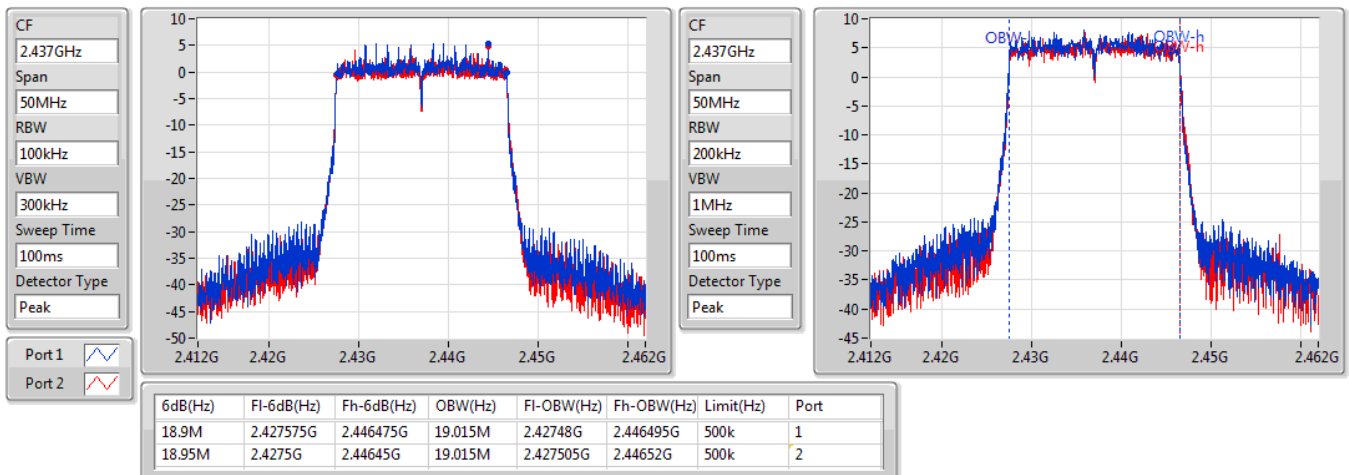

802.11ax HEW20_Nss1,(MCS0)_2TX

2462MHz

30/04/2020

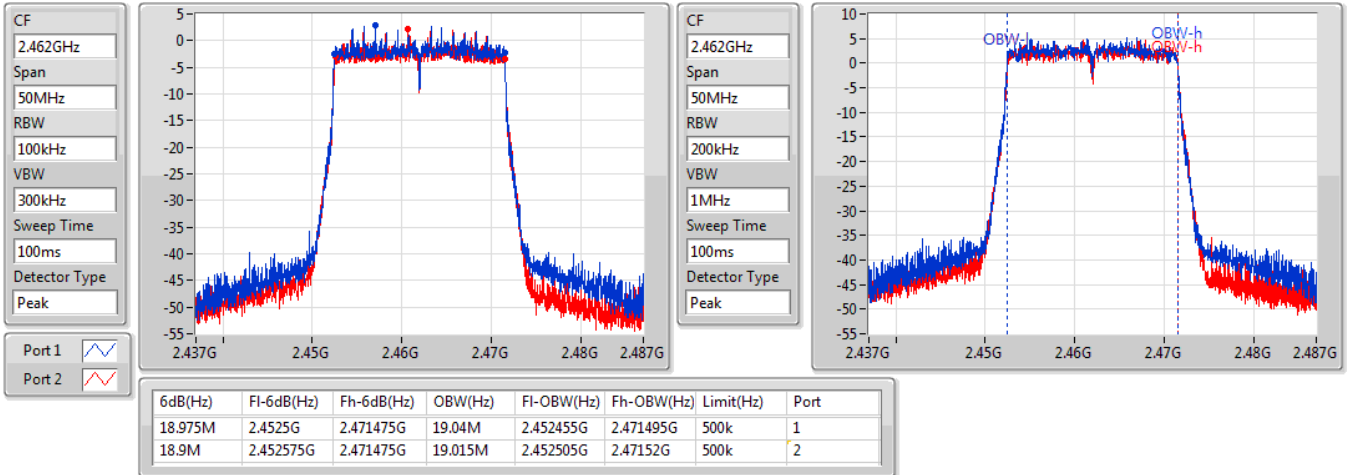

<2T2S>

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	19.025M	19.09M	19M1D1D	18.6M	19.015M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;**Min-N dB** = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	18.65M	19.04M	19.025M	19.065M
2462MHz	Pass	500k	18.6M	19.015M	19M	19.09M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

802.11ax HEW20_Nss2,(MCS0)_2TX
EBW
2412MHz

11/05/2020

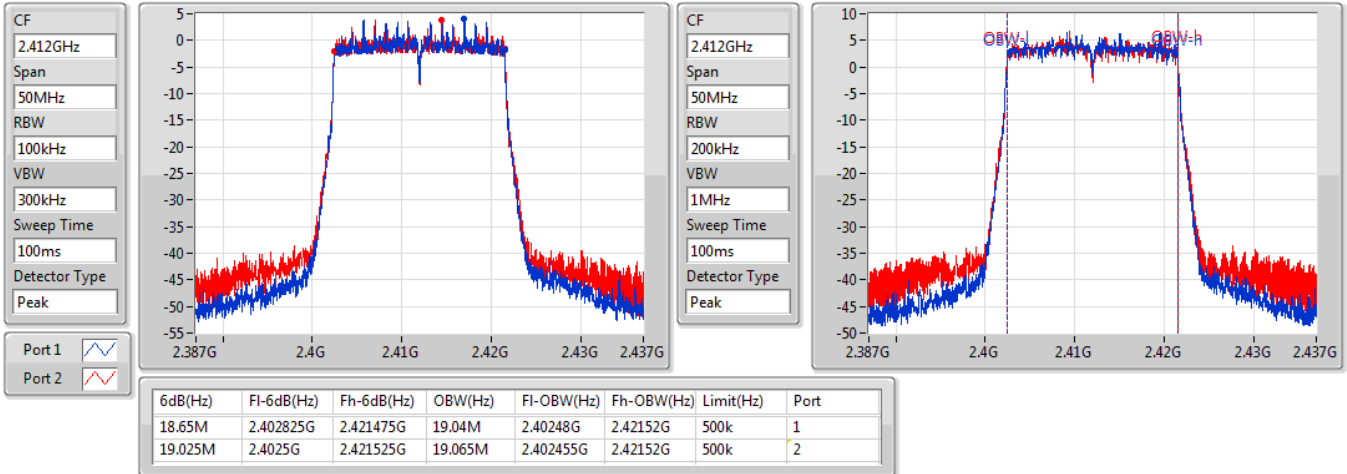
802.11ax HEW20_Nss2,(MCS0)_2TX
EBW
2462MHz

11/05/2020

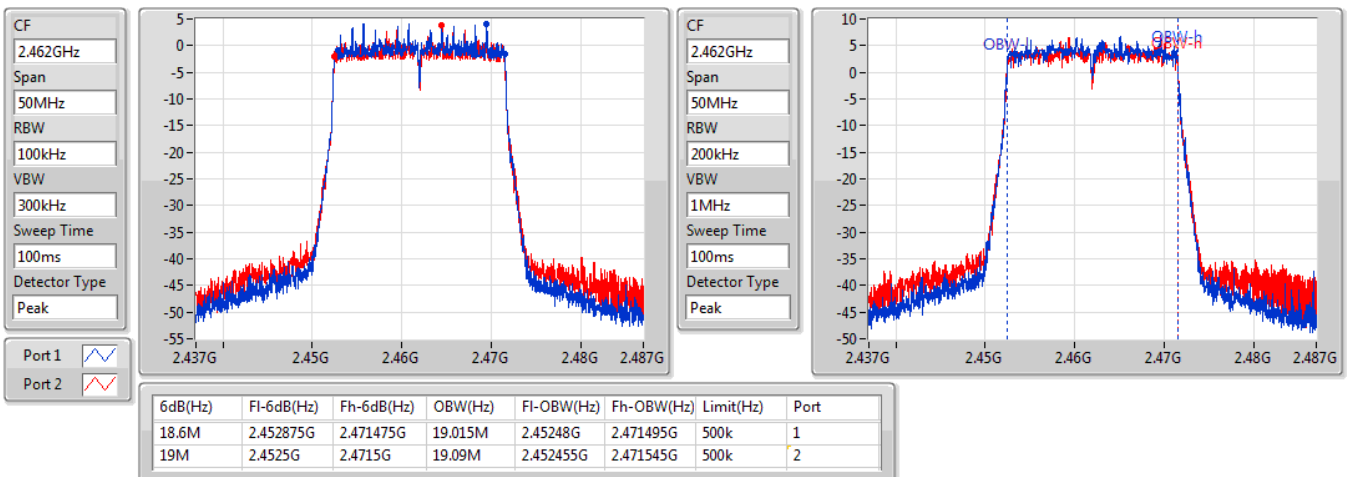



<2T1S>

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
2.4-2.4835GHz	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	20.51	0.11246	23.94	0.24774
802.11g_Nss1,(6Mbps)_2TX	20.27	0.10641	23.70	0.23442
802.11ax HEW20_Nss1,(MCS0)_2TX	20.43	0.11041	23.86	0.24322
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	20.46	0.11117	26.89	0.48865

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP Power (dBm)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-		-
2412MHz	Pass	3.03	15.99	16.13	19.07	30.00	22.10
2437MHz	Pass	3.43	17.66	17.34	20.51	30.00	23.94
2462MHz	Pass	3.43	17.34	17.28	20.32	30.00	23.75
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-
2412MHz	Pass	3.03	15.21	15.16	18.20	30.00	21.23
2437MHz	Pass	3.43	17.39	17.12	20.27	30.00	23.70
2462MHz	Pass	3.43	14.64	14.04	17.36	30.00	20.79
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
2412MHz	Pass	3.03	14.72	14.48	17.61	30.00	20.64
2437MHz	Pass	3.43	17.62	17.20	20.43	30.00	23.86
2462MHz	Pass	3.43	14.89	14.35	17.64	30.00	21.07
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
2412MHz	Pass	5.99	14.75	14.47	17.62	30.00	23.61
2437MHz	Pass	6.43	17.58	17.32	20.46	29.57	26.89
2462MHz	Pass	6.43	14.77	14.25	17.53	29.57	23.96

DG = Directional Gain; **Port X** = Port X output power



<2T2S>

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
2.4-2.4835GHz	-	-	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	18.90	0.07762	22.29	0.16943



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP Power (dBm)
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
2412MHz	Pass	2.98	15.91	15.87	18.90	30.00	21.88
2462MHz	Pass	3.42	16.03	15.68	18.87	30.00	22.29

DG = Directional Gain; **Port X** = Port X output power

<2T1S>

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_2TX	-3.04
802.11g_Nss1,(6Mbps)_2TX	-5.15
802.11ax HEW20_Nss1,(MCS0)_2TX	-6.88
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-6.37

RBW = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	5.99	-6.21	-6.53	-4.91	8.00
2437MHz	Pass	6.43	-4.34	-4.92	-3.04	7.57
2462MHz	Pass	6.43	-4.93	-6.21	-3.09	7.57
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	5.99	-10.65	-10.94	-8.14	8.00
2437MHz	Pass	6.43	-7.42	-9.06	-5.15	7.57
2462MHz	Pass	6.43	-11.04	-12.32	-8.84	7.57
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	5.99	-12.52	-12.51	-10.45	8.00
2437MHz	Pass	6.43	-9.64	-9.53	-6.88	7.57
2462MHz	Pass	6.43	-12.84	-12.69	-10.33	7.57
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	5.99	-12.04	-12.78	-9.75	8.00
2437MHz	Pass	6.43	-7.91	-9.33	-6.37	7.57
2462MHz	Pass	6.43	-11.48	-13.08	-9.74	7.57

DG = Directional Gain; **RBW** = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

802.11b_Nss1,(1Mbps)_2TX

PSD

2412MHz

30/04/2020

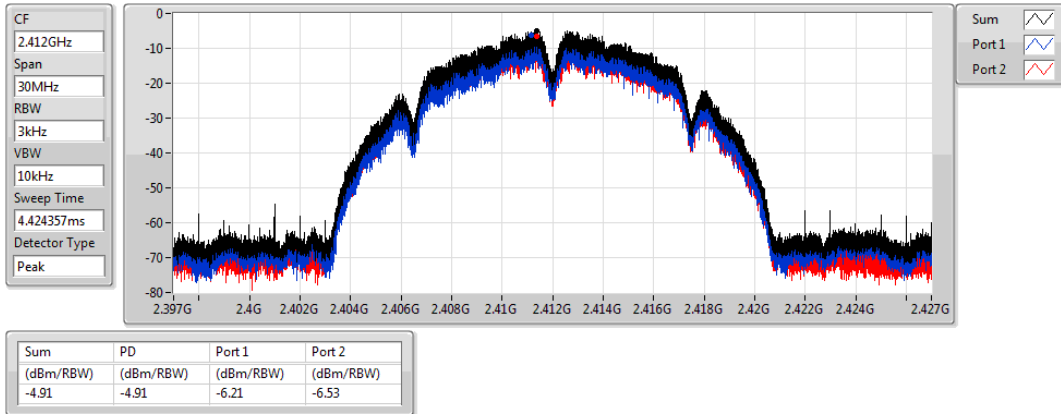


802.11b_Nss1,(1Mbps)_2TX

PSD

2437MHz

30/04/2020

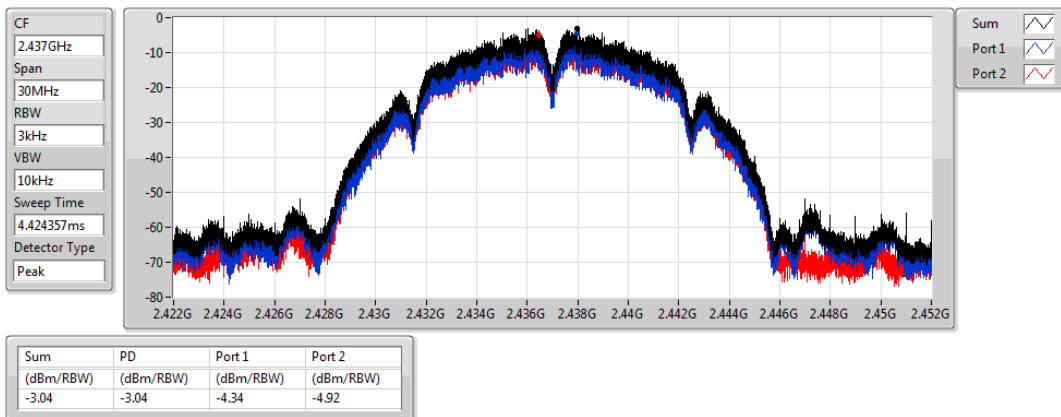


802.11b_Nss1,(1Mbps)_2TX

PSD

2462MHz

30/04/2020

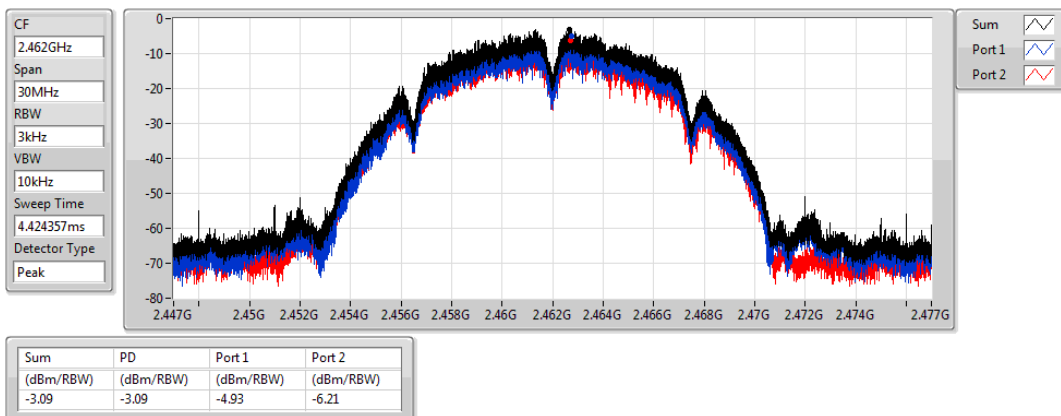


802.11g_Nss1,(6Mbps)_2TX

PSD

2412MHz

30/04/2020

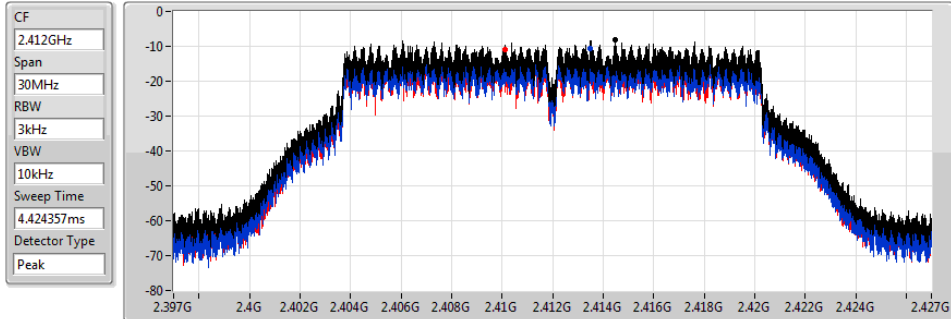


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.14	-8.14	-10.65	-10.94

802.11g_Nss1,(6Mbps)_2TX

PSD

2437MHz

30/04/2020

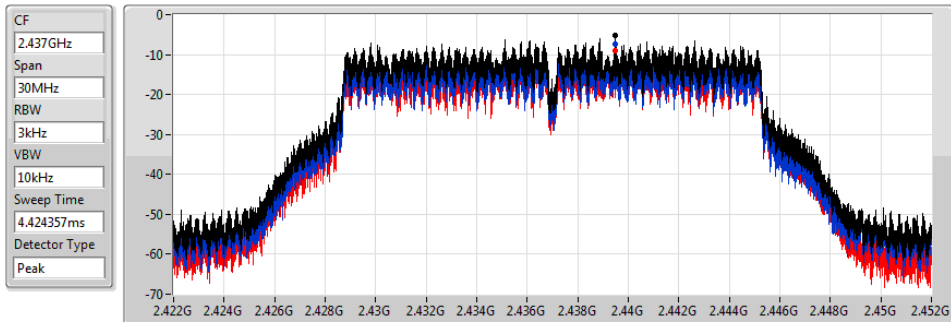


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-5.15	-5.15	-7.42	-9.06

802.11g_Nss1,(6Mbps)_2TX

PSD

2462MHz

30/04/2020

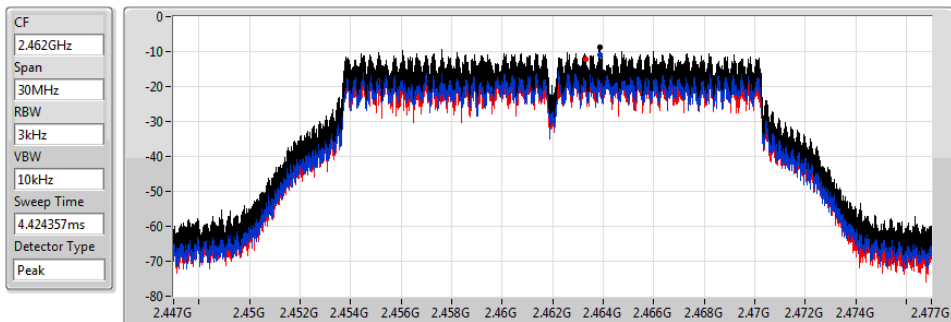


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.84	-8.84	-11.04	-12.32

802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

2412MHz

30/04/2020

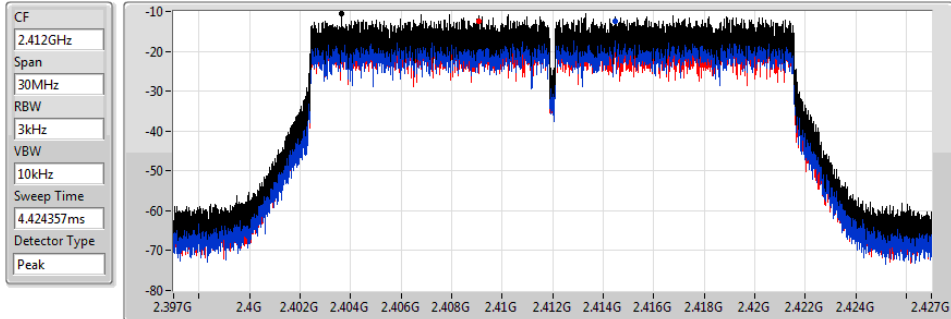

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.45	-10.45	-12.52	-12.51

802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

2437MHz

30/04/2020

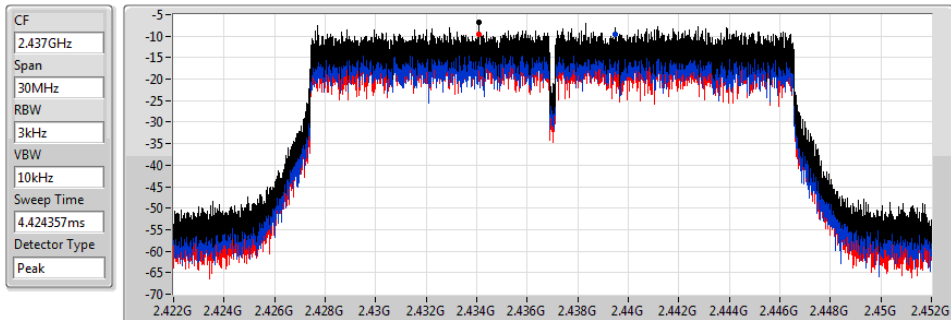

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.88	-6.88	-9.64	-9.53

802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

2462MHz

30/04/2020

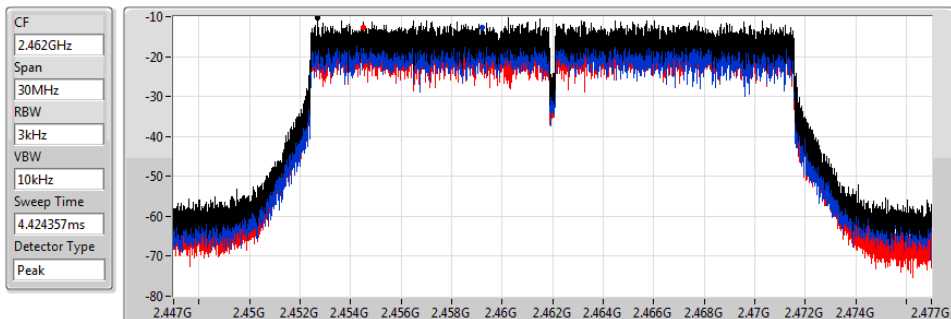

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.33	-10.33	-12.84	-12.69

802.11ax HEW20-BF_Nss1,(MCS0)_2TX

PSD

2412MHz

30/04/2020

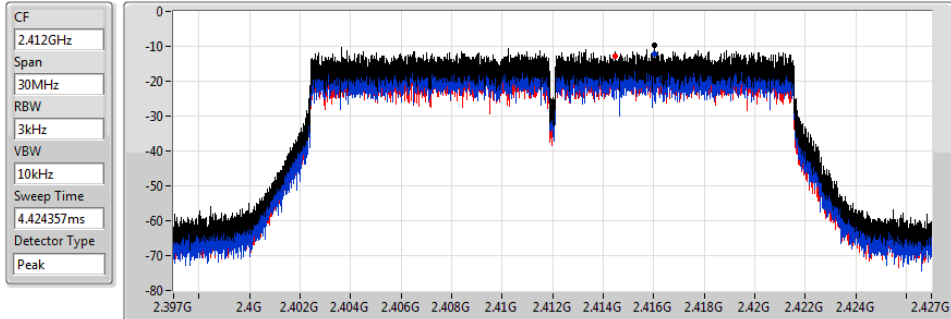


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-9.75	-9.75	-12.04	-12.78

802.11ax HEW20-BF_Nss1,(MCS0)_2TX

PSD

2437MHz

30/04/2020

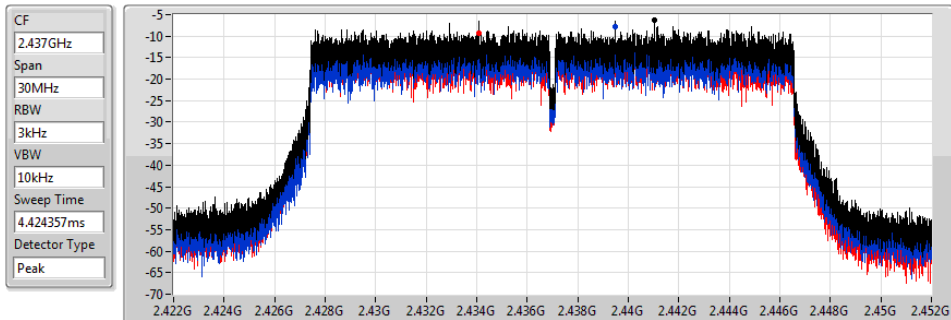


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-6.37	-6.37	-7.91	-9.33

802.11ax HEW20-BF_Nss1,(MCS0)_2TX

PSD

2462MHz

30/04/2020

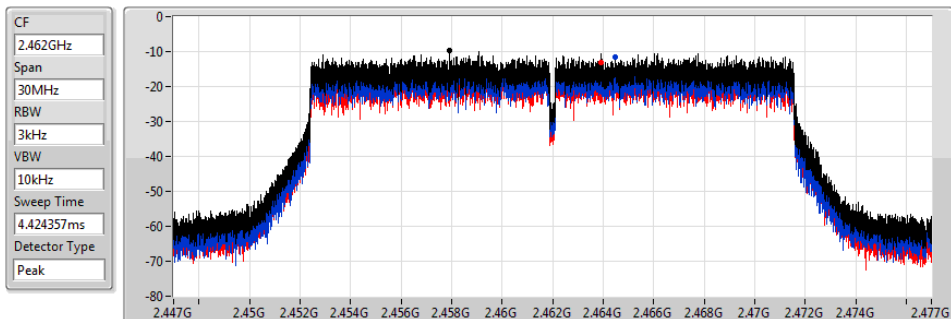

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-9.74	-9.74	-11.48	-13.08

<2T2S>

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11ax HEW20_Nss2,(MCS0)_2TX	-8.42

RBW = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	2.98	-11.32	-10.51	-9.69	8.00
2462MHz	Pass	3.42	-10.53	-10.68	-8.42	8.00

DG = Directional Gain; **RBW** = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

802.11ax HEW20_Nss2,(MCS0)_2TX

PSD

2412MHz

11/05/2020

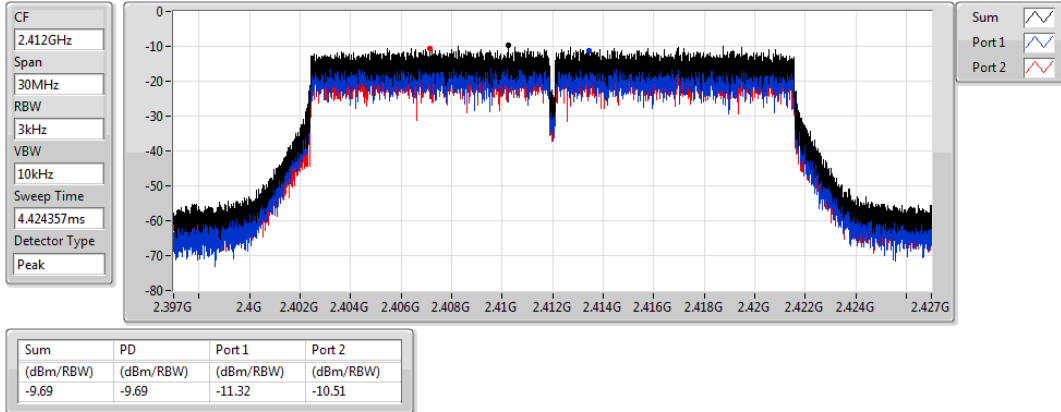


802.11ax HEW20_Nss2,(MCS0)_2TX

PSD

2462MHz

11/05/2020

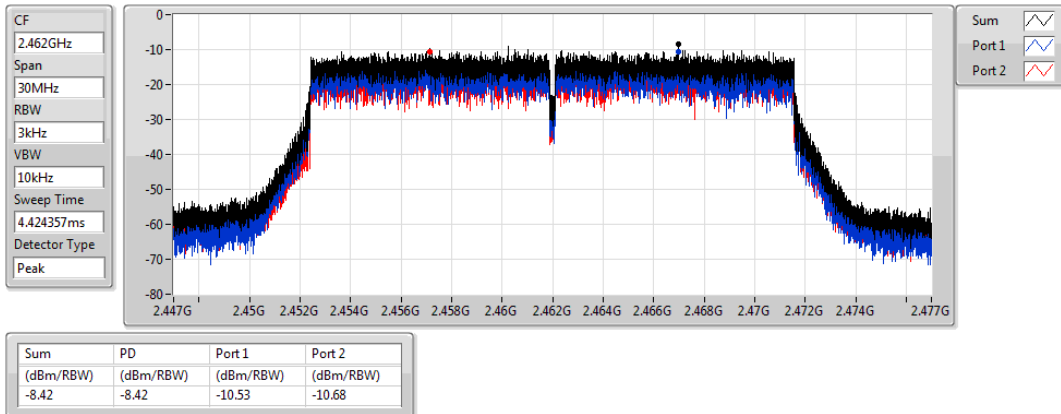



<2T1S>

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	Pass	2.43849G	9.51	-20.49	902M	-54.00	2.39348G	-46.60	2.4G	-51.66	2.50642G	-50.85	17.6839G	-43.21	2
802.11g_Nss1,(6Mbps)_2TX	Pass	2.44196G	5.66	-24.34	2.30641G	-52.83	2.39888G	-38.05	2.4G	-40.12	2.49106G	-51.17	24.69376G	-42.17	1
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	2.43198G	5.77	-24.23	880.74M	-53.07	2.39996G	-41.72	2.4G	-42.85	2.48748G	-50.14	16.50669G	-42.74	2

Result


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43849G	9.51	-20.49	748.51M	-53.48	2.39652G	-46.73	2.4G	-49.12	2.48546G	-50.97	23.35922G	-42.85	1
2412MHz	Pass	2.43849G	9.51	-20.49	902M	-54.00	2.39348G	-46.60	2.4G	-51.66	2.50642G	-50.85	17.6839G	-43.21	2
2437MHz	Pass	2.43849G	9.51	-20.49	2.30233G	-54.04	2.39232G	-50.08	2.4G	-50.63	2.4939G	-49.82	16.20045G	-42.31	1
2437MHz	Pass	2.43849G	9.51	-20.49	840.26M	-53.88	2.3992G	-50.87	2.4835G	-53.20	2.49586G	-49.66	17.60804G	-43.38	2
2462MHz	Pass	2.43849G	9.51	-20.49	345.72M	-54.38	2.3996G	-51.21	2.4835G	-52.28	2.48474G	-48.24	24.65723G	-42.90	1
2462MHz	Pass	2.43849G	9.51	-20.49	901.71M	-53.47	2.39826G	-51.89	2.4835G	-52.09	2.48794G	-49.67	24.75557G	-41.85	2
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.44196G	5.66	-24.34	2.30641G	-52.83	2.39888G	-38.05	2.4G	-40.12	2.49106G	-51.17	24.69376G	-42.17	1
2412MHz	Pass	2.44196G	5.66	-24.34	830.06M	-53.21	2.39924G	-39.55	2.4G	-40.82	2.49362G	-50.37	17.44509G	-42.55	2
2437MHz	Pass	2.44196G	5.66	-24.34	2.30059G	-52.42	2.39948G	-47.58	2.4G	-50.58	2.48808G	-49.27	16.57693G	-42.21	1
2437MHz	Pass	2.44196G	5.66	-24.34	758.42M	-54.02	2.39866G	-48.90	2.4835G	-51.39	2.48428G	-49.55	24.38471G	-43.01	2
2462MHz	Pass	2.44196G	5.66	-24.34	1.83284G	-53.85	2.39196G	-52.29	2.4835G	-49.06	2.4857G	-45.51	16.28755G	-43.13	1
2462MHz	Pass	2.44196G	5.66	-24.34	702.79M	-53.63	2.39426G	-51.43	2.4835G	-50.58	2.48458G	-48.82	16.5685G	-42.65	2
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43198G	5.77	-24.23	2.30029G	-53.97	2.3997G	-42.28	2.4G	-42.56	2.48844G	-51.64	16.54603G	-42.17	1
2412MHz	Pass	2.43198G	5.77	-24.23	880.74M	-53.07	2.39996G	-41.72	2.4G	-42.85	2.48748G	-50.14	16.50669G	-42.74	2
2437MHz	Pass	2.43198G	5.77	-24.23	2.30292G	-54.18	2.3939G	-47.54	2.4G	-49.53	2.48356G	-48.93	15.22272G	-43.17	1
2437MHz	Pass	2.43198G	5.77	-24.23	826.57M	-53.46	2.39438G	-47.02	2.4G	-51.14	2.49128G	-50.20	16.49826G	-42.43	2
2462MHz	Pass	2.43198G	5.77	-24.23	950.93M	-52.92	2.39866G	-51.96	2.4835G	-45.39	2.48424G	-43.14	14.64114G	-43.12	1
2462MHz	Pass	2.43198G	5.77	-24.23	2.10341G	-53.27	2.3951G	-52.37	2.4835G	-51.46	2.48462G	-44.68	24.62352G	-42.39	2

802.11b_Nss1,(1Mbps)_2TX

CSE NdB

2412MHz

30/04/2020

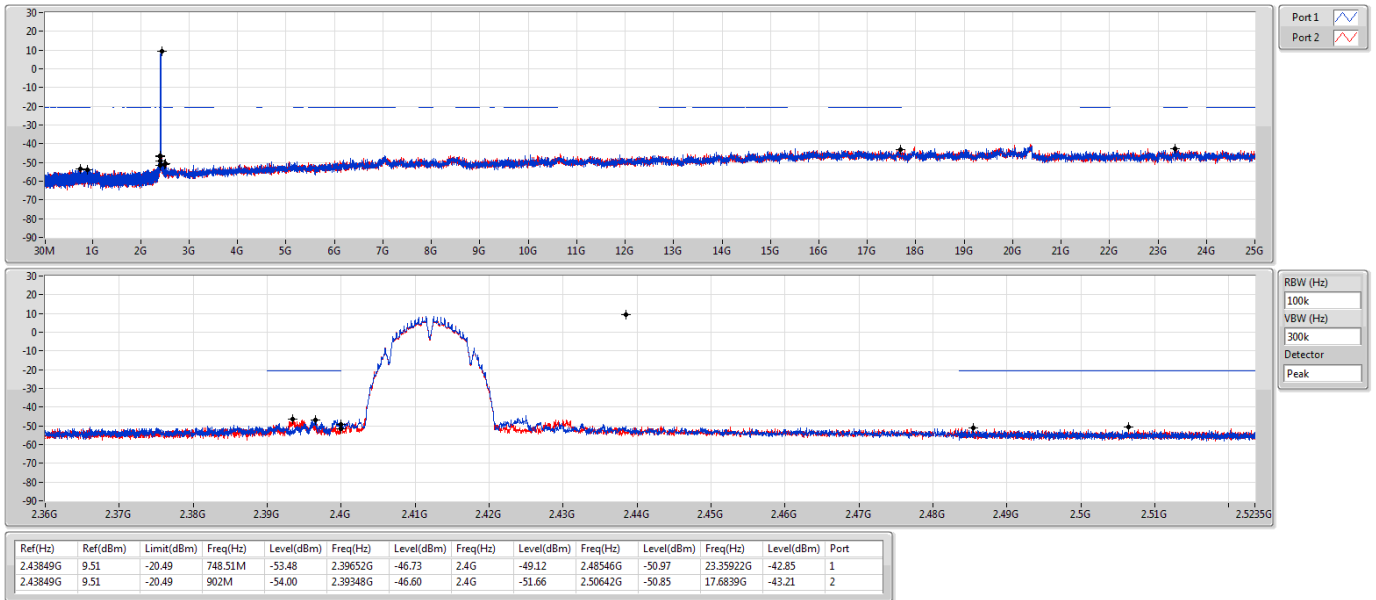


802.11b_Nss1,(1Mbps)_2TX

CSE NdB

2437MHz


30/04/2020

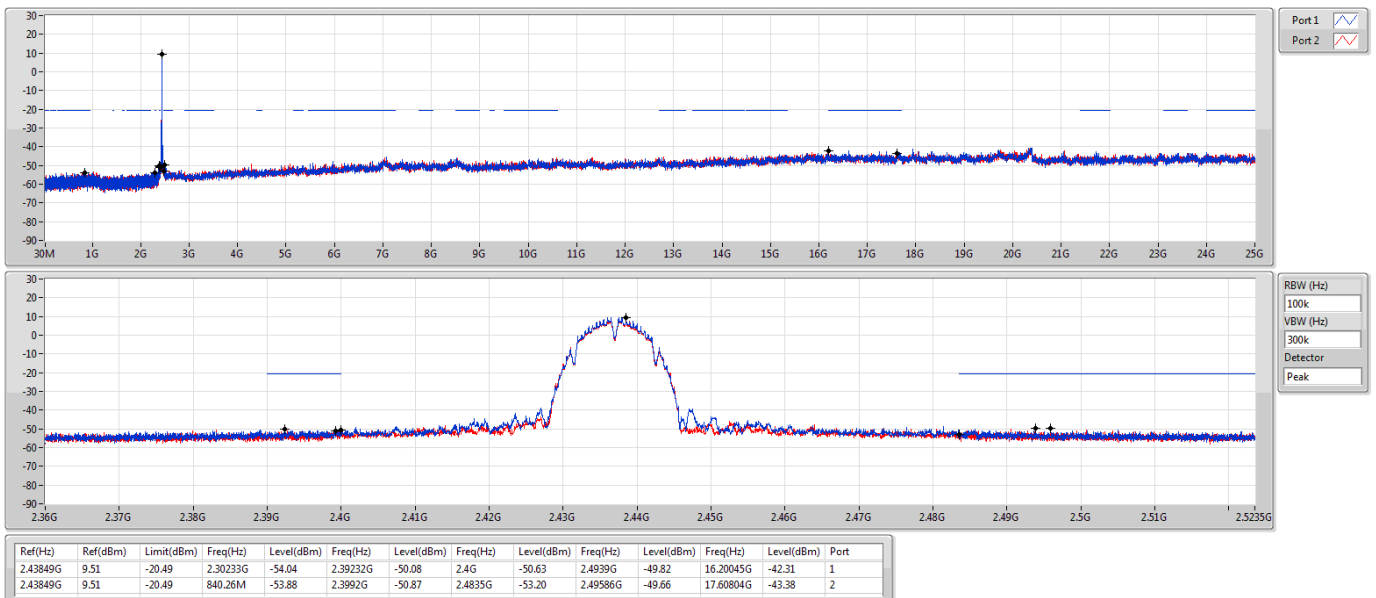

802.11b_Nss1,(1Mbps)_2TX

2462MHz


CSE NdB

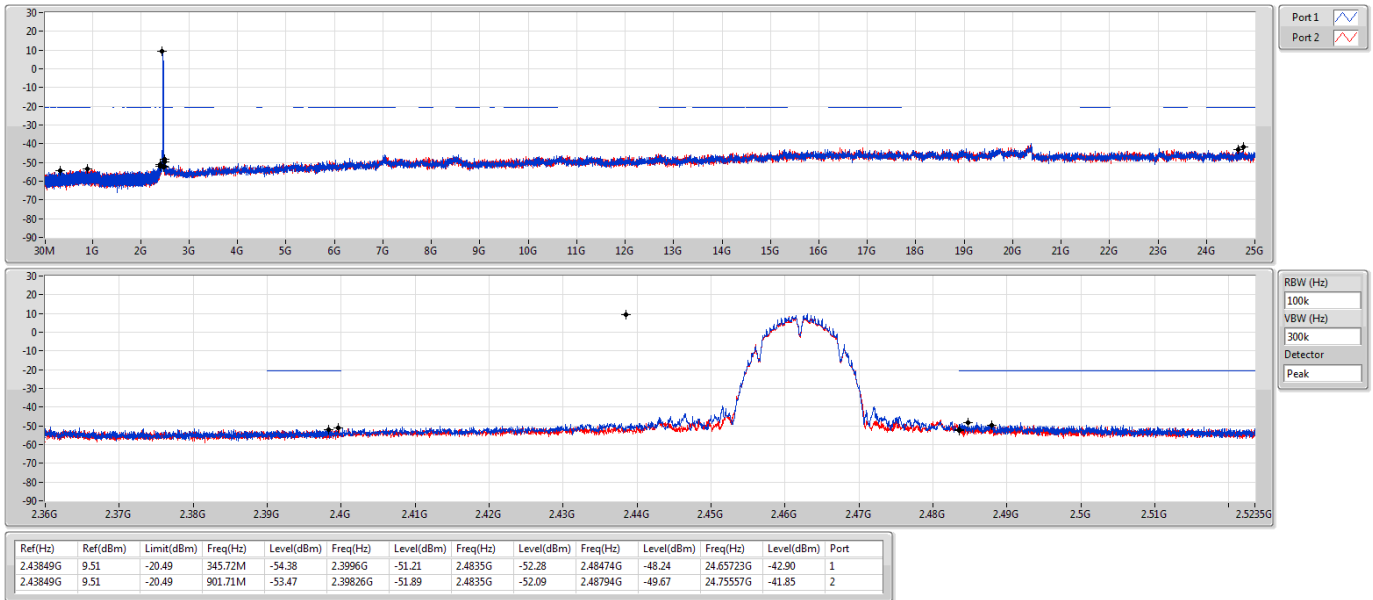

802.11g_Nss1,(6Mbps)_2TX

2412MHz


CSE NdB

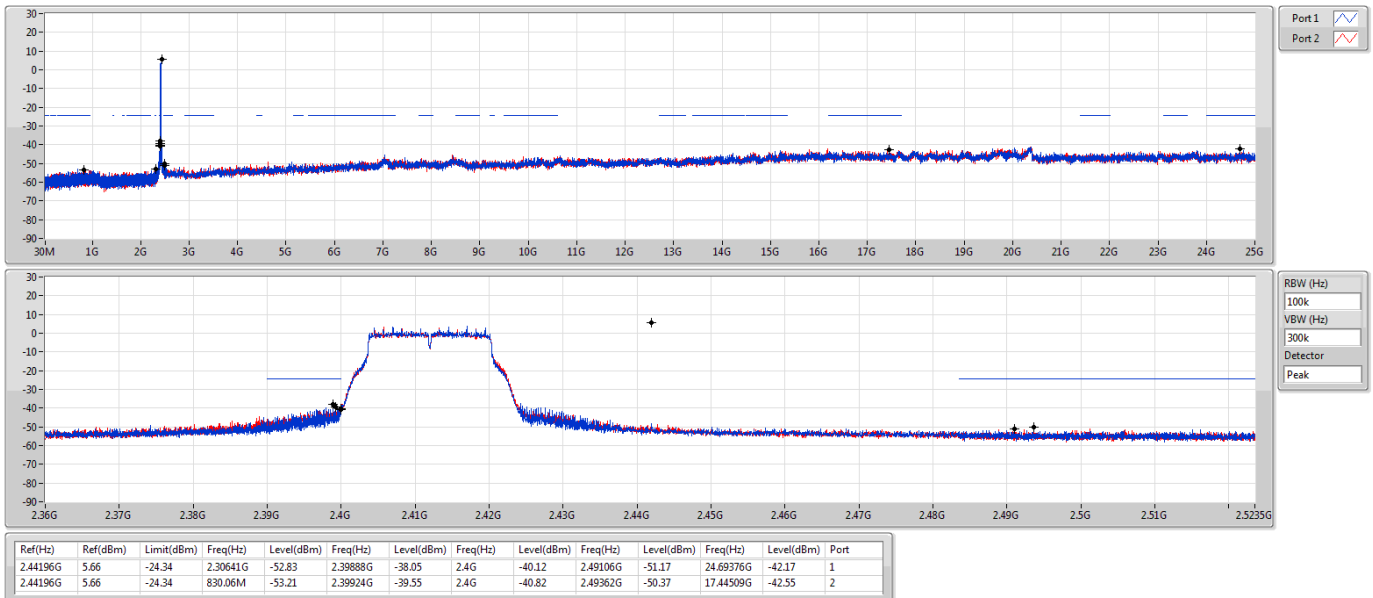

802.11g_Nss1,(6Mbps)_2TX

2437MHz


CSE NdB

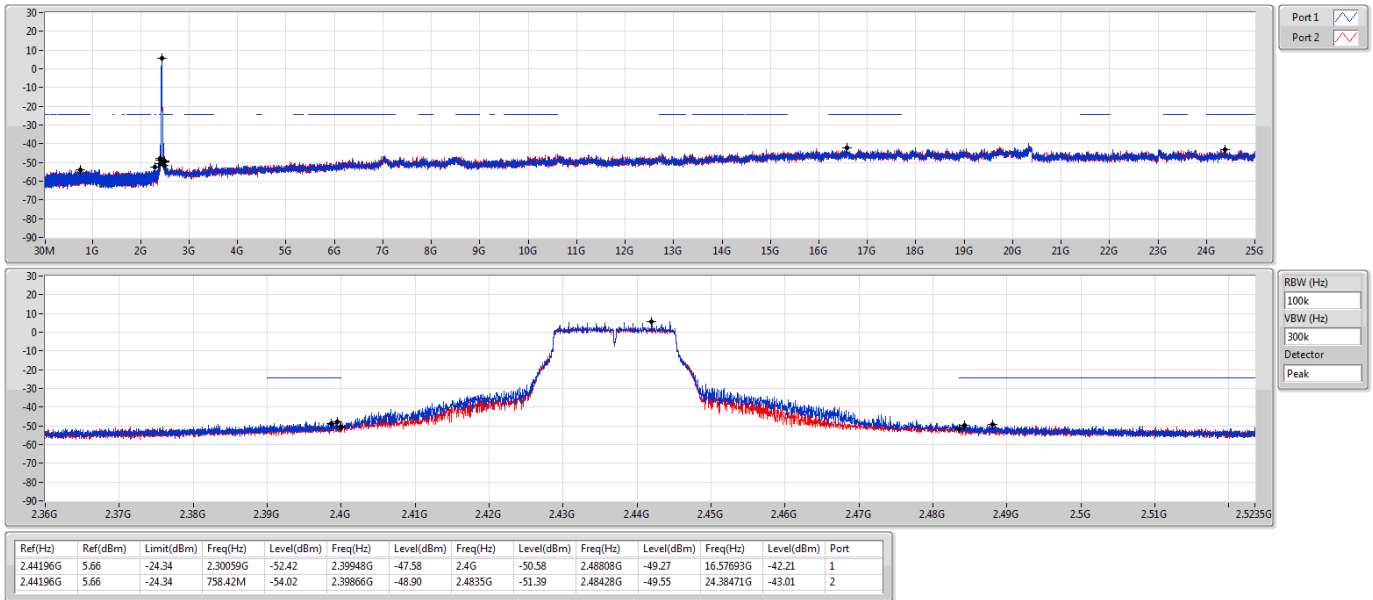

802.11g_Nss1,(6Mbps)_2TX

2462MHz


CSE NdB

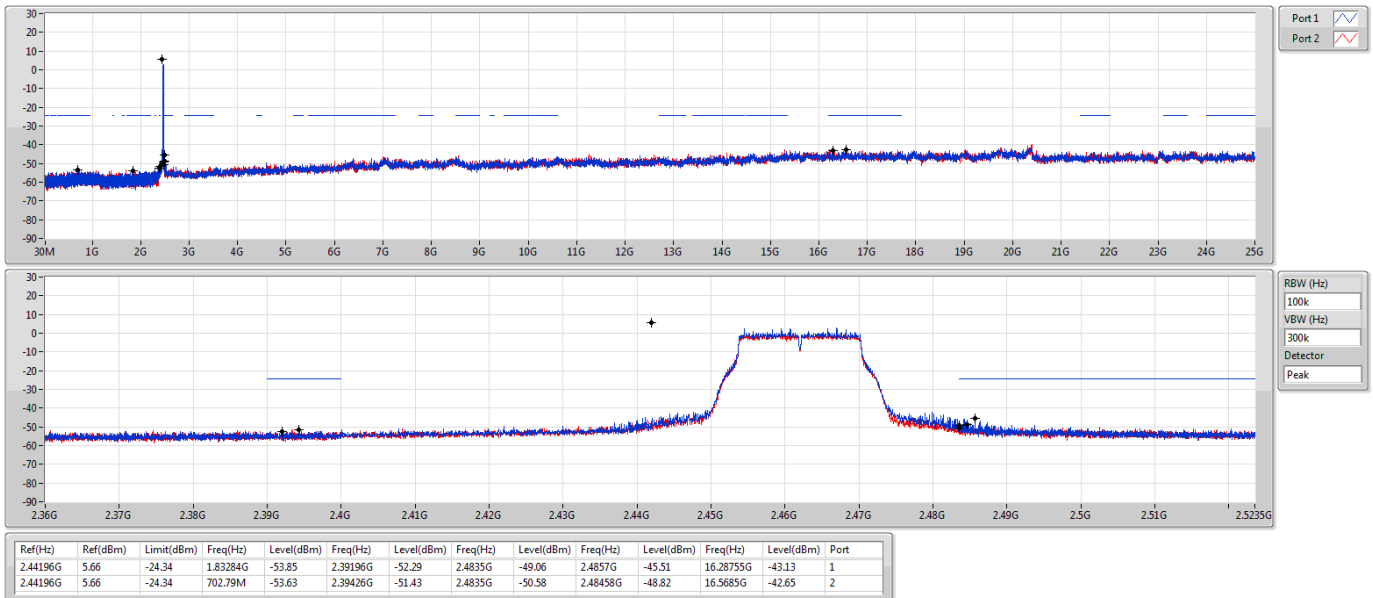

802.11ax HEW20_Nss1,(MCS0)_2TX

CSE NdB


2412MHz

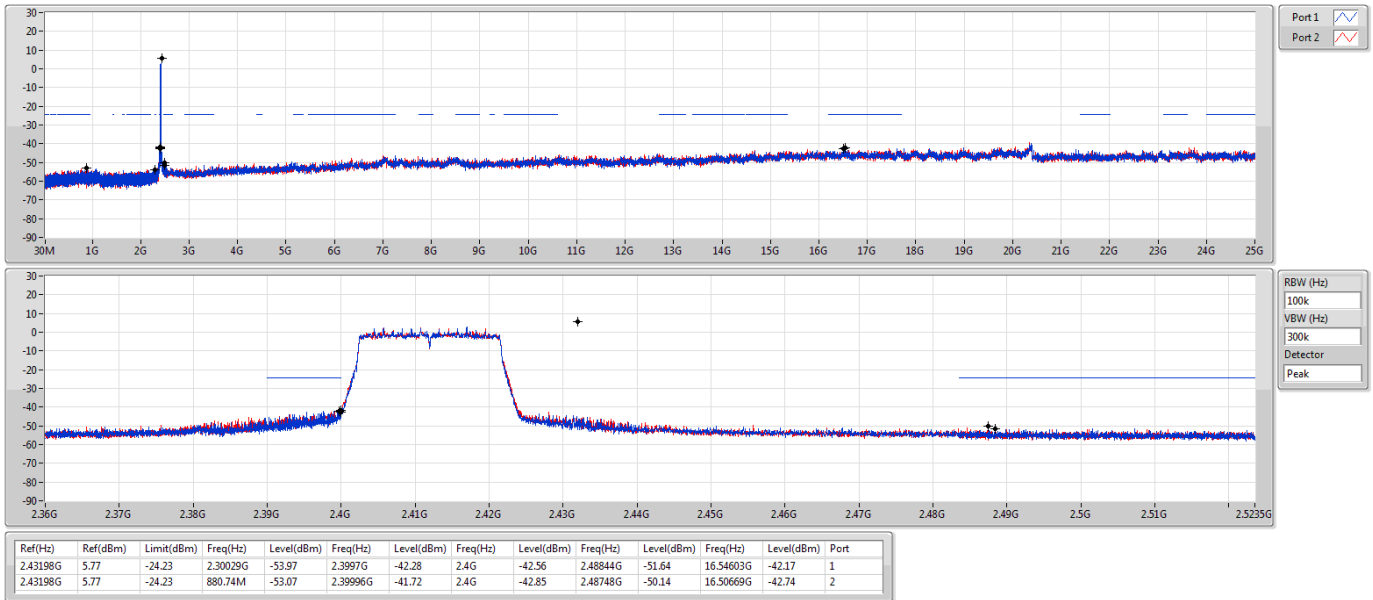

802.11ax HEW20_Nss1,(MCS0)_2TX

CSE NdB


2437MHz

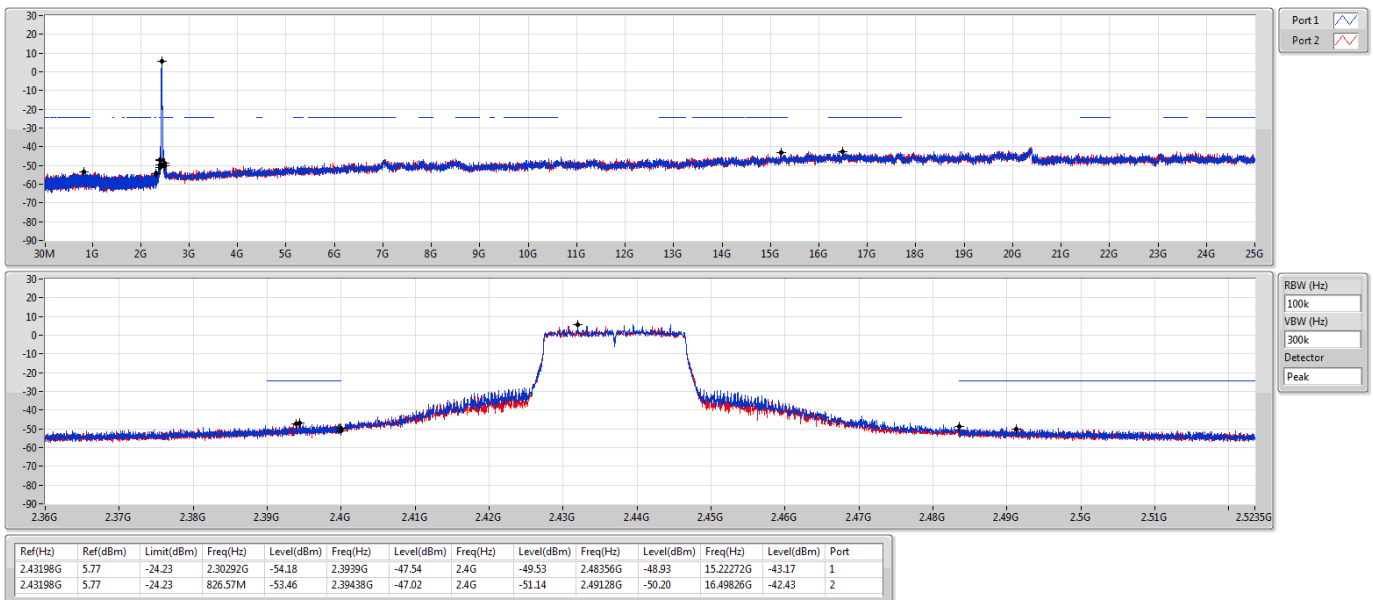

802.11ax HEW20_Nss1,(MCS0)_2TX

CSE NdB

2462MHz

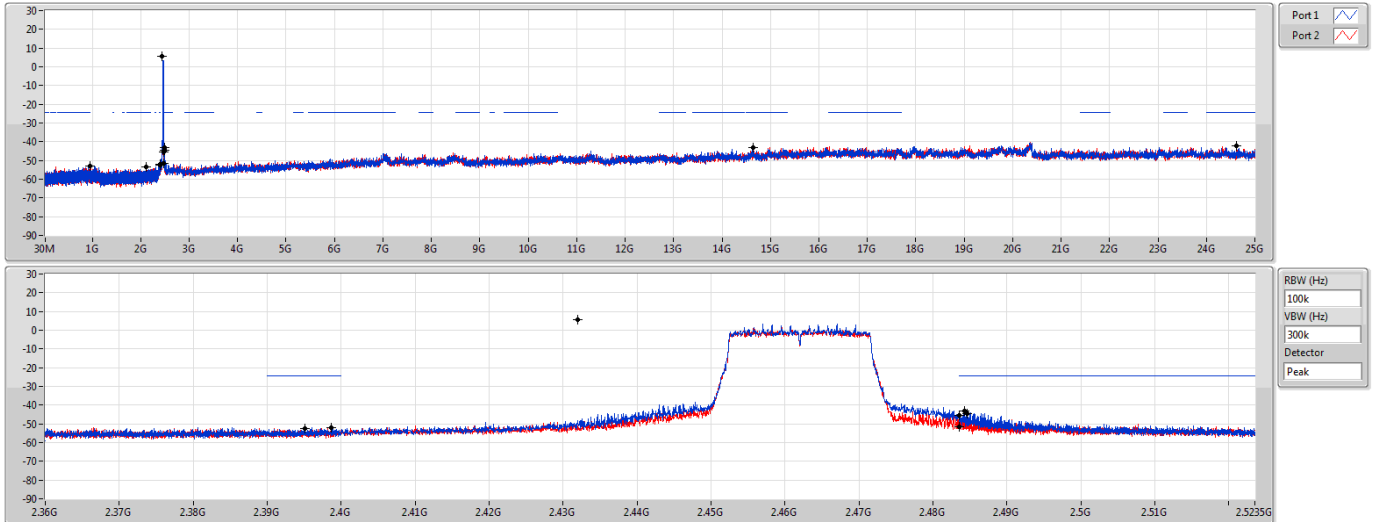

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43198G	5.77	-24.23	950.93M	-52.92	2.39866G	-51.96	2.4835G	-45.39	2.48424G	-43.14	14.64114G	-43.12	1
2.43198G	5.77	-24.23	2.10341G	-53.27	2.3951G	-52.37	2.4835G	-51.46	2.48462G	-44.68	24.62352G	-42.39	2



<2T2S>

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	Pass	2.41699G	3.79	-26.21	2.14011G	-52.71	2.3999G	-37.80	2.4G	-37.96	2.50556G	-51.16	17.25685G	-43.10	2

Result


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.41449G	3.92	-26.08	832.39M	-52.25	2.39968G	-40.32	2.4G	-41.09	2.48558G	-50.37	24.97471G	-43.66	1
2412MHz	Pass	2.41699G	3.79	-26.21	2.14011G	-52.71	2.3999G	-37.80	2.4G	-37.96	2.50556G	-51.16	17.25685G	-43.10	2
2462MHz	Pass	2.46697G	4.64	-25.36	617.16M	-52.00	2.39992G	-50.62	2.4835G	-49.89	2.48586G	-43.72	24.02508G	-43.24	1
2462MHz	Pass	2.46701G	3.60	-26.40	2.30699G	-52.52	2.3989G	-50.15	2.4835G	-47.39	2.48366G	-41.72	24.97471G	-42.99	2

802.11ax HEW20_Nss2,(MCS0)_2TX

CSE NdB

2412MHz

11/05/2020

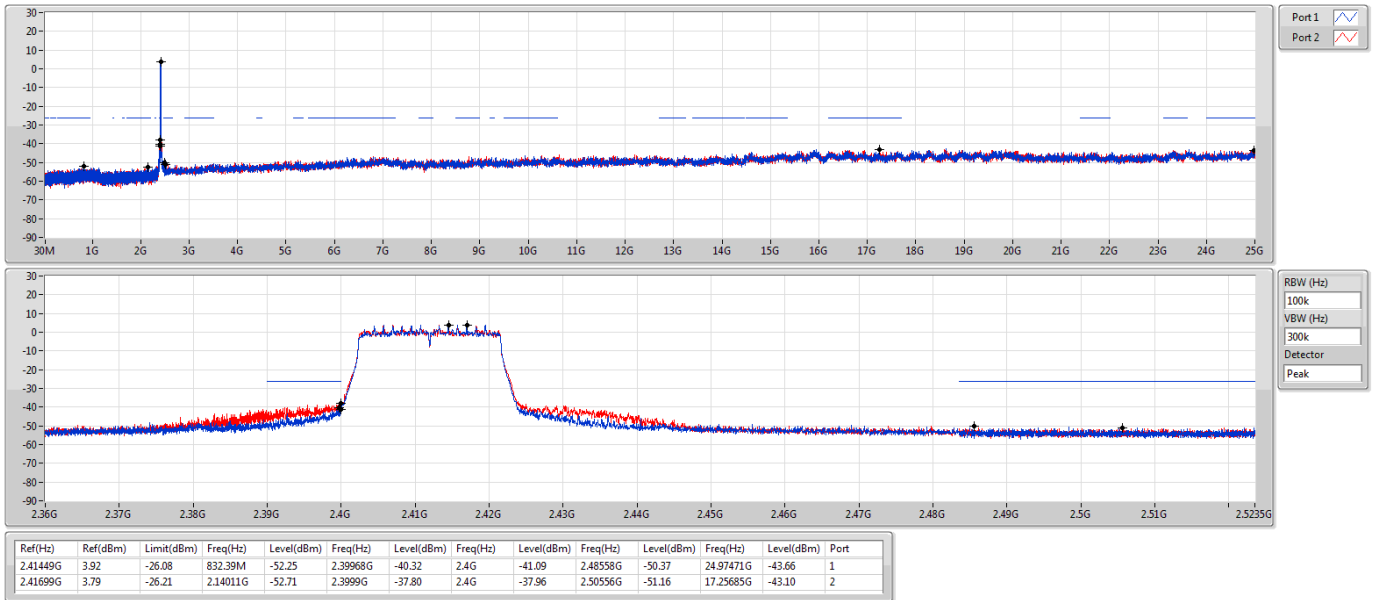


802.11ax HEW20_Nss2,(MCS0)_2TX

CSE NdB

2462MHz

11/05/2020

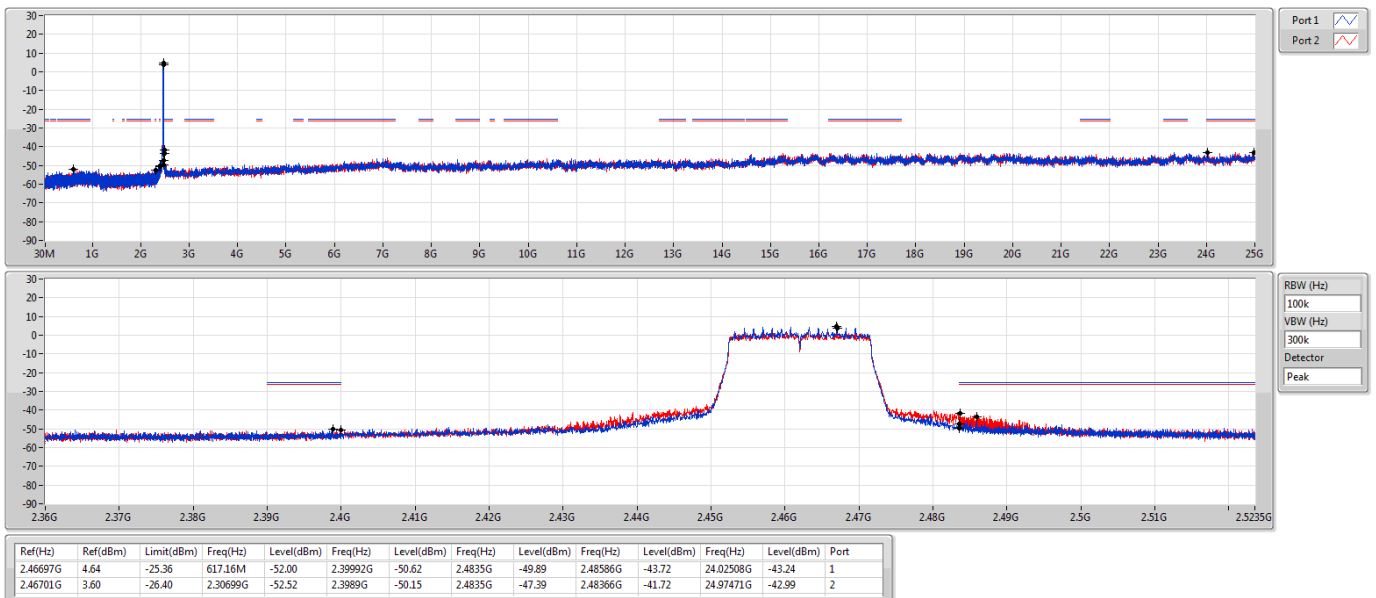



Radiated Emissions below 1GHz


Appendix F.1

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	PK	35.82M	36.33	40.00	-3.67	Vertical

Mode 1


19/05/2020

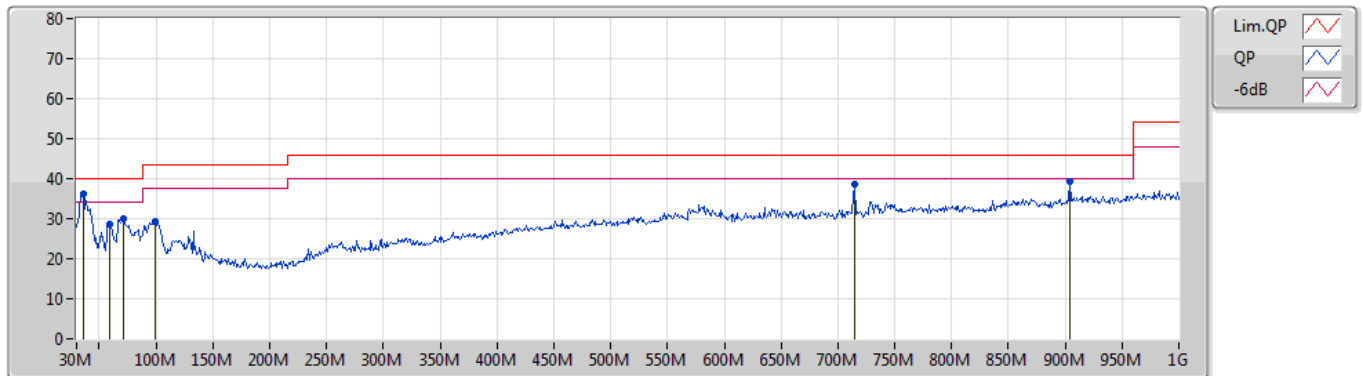

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
PK	35.82M	36.33	40.00	-3.67	-9.67	3	Vertical	0	1.00	"Worst"	46.00	21.21	1.60	32.48
PK	59.1M	28.67	40.00	-11.33	-18.74	3	Vertical	22	3.00	-	47.41	12.22	1.58	32.54
PK	70.74M	29.83	40.00	-10.17	-18.60	3	Vertical	99	1.50	-	48.43	12.13	1.71	32.44
PK	98.87M	29.44	43.50	-14.06	-13.80	3	Vertical	166	1.00	-	43.24	16.47	2.08	32.35
PK	714.82M	38.67	46.00	-7.33	-1.72	3	Vertical	357	3.00	-	40.39	25.01	5.59	32.32
PK	903.97M	39.29	46.00	-6.71	1.49	3	Vertical	252	2.00	-	37.80	26.60	6.60	31.71

Mode 1

19/05/2020

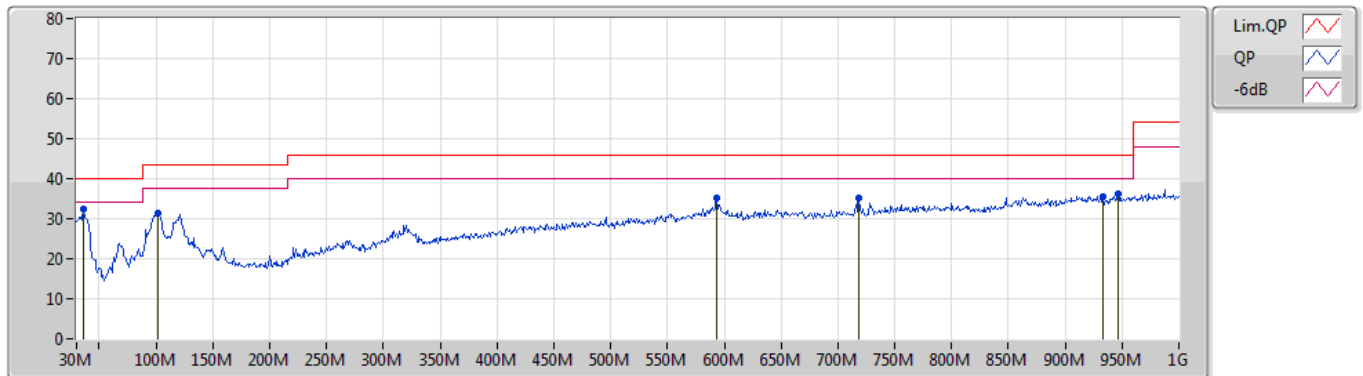

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
PK	35.82M	32.54	40.00	-7.46	-9.67	3	Horizontal	0	1.50	"Worst"	42.21	21.21	1.60	32.48
PK	101.78M	31.27	43.50	-12.23	-13.45	3	Horizontal	93	2.00	-	44.72	16.81	2.12	32.38
PK	593.57M	35.21	46.00	-10.79	-2.49	3	Horizontal	276	2.00	-	37.70	24.68	5.07	32.24
PK	718.7M	35.15	46.00	-10.85	-1.61	3	Horizontal	30	1.00	-	36.76	25.07	5.61	32.29
PK	933.07M	35.61	46.00	-10.39	1.66	3	Horizontal	211	2.00	-	33.95	26.58	6.60	31.52
PK	946.65M	36.18	46.00	-9.82	1.90	3	Horizontal	273	1.25	-	34.28	26.73	6.60	31.43



For Radiated Cabinet:


Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	Pass	AV	7.31024G	44.43	54.00	-9.57	3	Vertical	42	1.00	-

802.11b_Nss1,(1Mbps)_2TX

30/04/2020

2437MHz_TX

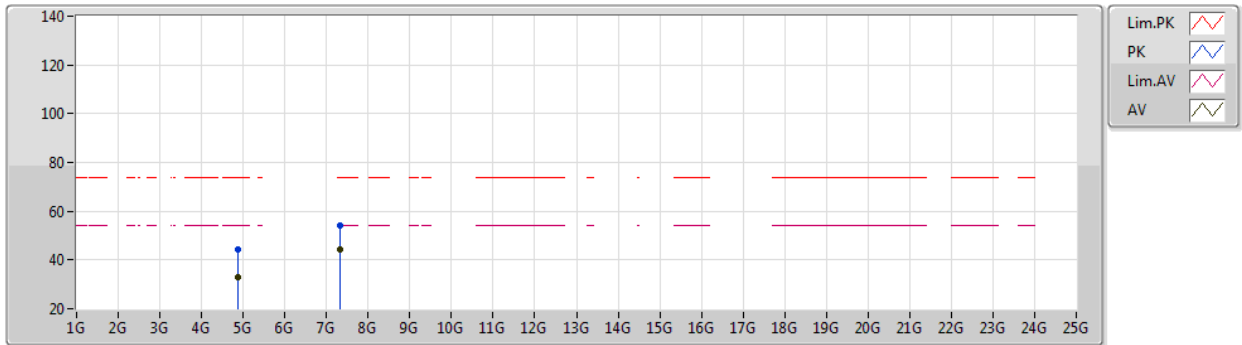


EUT_Z_2TX
Setting 17
06-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87388G	44.46	74.00	-29.54	39.63	3	Vertical	44	2.62	-	31.07	5.40	31.64
AV	4.874G	32.80	54.00	-21.20	27.97	3	Vertical	44	2.62	-	31.07	5.40	31.64
PK	7.31102G	54.09	74.00	-19.91	43.65	3	Vertical	42	1.00	-	36.40	6.96	32.92
AV	7.31024G	44.43	54.00	-9.57	33.99	3	Vertical	42	1.00	-	36.40	6.96	32.92

802.11b_Nss1,(1Mbps)_2TX

30/04/2020

2437MHz_TX

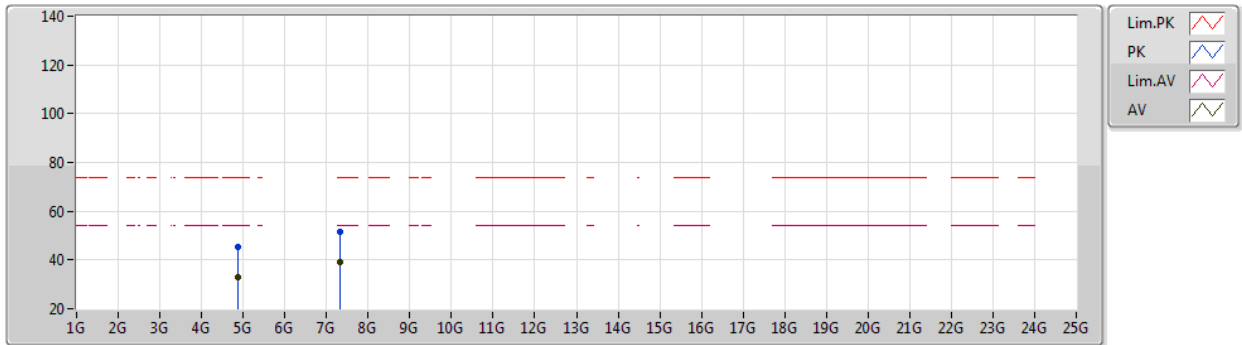

EUT_Z_2TX
Setting 17
06-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87354G	45.47	74.00	-28.53	40.64	3	Horizontal	106	1.06	-	31.07	5.40	31.64
AV	4.87396G	33.16	54.00	-20.84	28.33	3	Horizontal	106	1.06	-	31.07	5.40	31.64
PK	7.3124G	51.48	74.00	-22.52	41.04	3	Horizontal	37	2.48	-	36.40	6.96	32.92
AV	7.3103G	39.18	54.00	-14.82	28.74	3	Horizontal	37	2.48	-	36.40	6.96	32.92



<2T1S>

For Conducted Harmonic (1~3GHz):

Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1(1Mbps)_2TX	Pass	2.4835G	2.5235G	AV	2.50126G	6.43	-52.24	-56.88	-50.96	-44.53	-41.20	-3.33
802.11g_Nss1(6Mbps)_2TX	Pass	2.36G	2.4G	AV	2.3792G	5.99	-54.27	-53.89	-51.07	-45.08	-41.20	-3.88
802.11ax HEW20_Nss1(MCS0)_2TX	Pass	2.36G	2.4G	AV	2.38088G	5.99	-54.68	-53.17	-50.85	-44.86	-41.20	-3.66

DG = Directional Gain;

PX=Port X; Psum=P1+.P2+...PX

Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11b_Nss1(1Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	1G	2.36G	AV	2.35609G	5.99	-57.02	-58.91	-54.85	-48.86	-41.20	-7.66
2412MHz	Pass	2.36G	2.4G	AV	2.38024G	5.99	-55.33	-56.34	-52.80	-46.81	-41.20	-5.61
2412MHz	Pass	2.4G	2.4835G	AV	2.4835G	5.99	-65.43	-65.33	-62.37	-56.38	-41.20	-15.18
2412MHz	Pass	2.4835G	2.5235G	AV	2.50526G	5.99	-59.92	-59.92	-56.91	-50.92	-41.20	-9.72
2412MHz	Pass	2.5235G	3G	AV	2.52731G	5.99	-61.63	-61.55	-58.58	-52.59	-41.20	-11.39
2412MHz	Pass	1G	2.36G	PK	2.35864G	5.99	-47.08	-48.84	-44.86	-38.87	-21.20	-17.67
2412MHz	Pass	2.36G	2.4G	PK	2.37528G	5.99	-44.89	-46.88	-42.76	-36.77	-21.20	-15.57
2412MHz	Pass	2.4G	2.4835G	PK	2.4835G	5.99	-55.59	-56.00	-52.78	-46.79	-21.20	-25.59
2412MHz	Pass	2.4835G	2.5235G	PK	2.51134G	5.99	-49.98	-49.54	-46.74	-40.75	-21.20	-19.55
2412MHz	Pass	2.5235G	3G	PK	2.52553G	5.99	-49.55	-52.75	-47.85	-41.86	-21.20	-20.66
2437MHz	Pass	1G	2.36G	AV	2.35711G	6.43	-58.32	-59.13	-55.70	-49.27	-41.20	-8.07
2437MHz	Pass	2.36G	2.4G	AV	2.37256G	6.43	-56.59	-58.47	-54.42	-47.99	-41.20	-6.79
2437MHz	Pass	2.4G	2.4835G	AV	2.4835G	6.43	-65.53	-65.69	-62.60	-56.17	-41.20	-14.97
2437MHz	Pass	2.4835G	2.5235G	AV	2.50182G	6.43	-56.66	-57.85	-54.20	-47.77	-41.20	-6.57
2437MHz	Pass	2.5235G	3G	AV	2.52672G	6.43	-60.06	-58.72	-56.33	-49.90	-41.20	-8.70
2437MHz	Pass	1G	2.36G	PK	2.35558G	6.43	-49.48	-51.27	-47.27	-40.84	-21.20	-19.64
2437MHz	Pass	2.36G	2.4G	PK	2.3748G	6.43	-46.92	-47.21	-44.05	-37.62	-21.20	-16.42
2437MHz	Pass	2.4G	2.4835G	PK	2.4835G	6.43	-56.52	-56.75	-53.62	-47.19	-21.20	-25.99
2437MHz	Pass	2.4835G	2.5235G	PK	2.50302G	6.43	-47.18	-47.40	-44.28	-37.85	-21.20	-16.65
2437MHz	Pass	2.5235G	3G	PK	2.52576G	6.43	-48.68	-48.71	-45.68	-39.25	-21.20	-18.05
2462MHz	Pass	1G	2.36G	AV	2.36G	6.43	-57.39	-59.98	-55.48	-49.05	-41.20	-7.85
2462MHz	Pass	2.36G	2.4G	AV	2.3612G	6.43	-56.11	-57.71	-53.83	-47.40	-41.20	-6.20
2462MHz	Pass	2.4G	2.4835G	AV	2.4835G	6.43	-65.44	-65.89	-62.65	-56.22	-41.20	-15.02
2462MHz	Pass	2.4835G	2.5235G	AV	2.50126G	6.43	-52.24	-56.88	-50.96	-44.53	-41.20	-3.33
2462MHz	Pass	2.5235G	3G	AV	2.52743G	6.43	-56.95	-58.20	-54.52	-48.09	-41.20	-6.89
2462MHz	Pass	1G	2.36G	PK	2.3583G	6.43	-51.68	-49.53	-47.46	-41.03	-21.20	-19.83
2462MHz	Pass	2.36G	2.4G	PK	2.36304G	6.43	-46.84	-49.31	-44.89	-38.46	-21.20	-17.26
2462MHz	Pass	2.4G	2.4835G	PK	2.4835G	6.43	-56.14	-54.55	-52.26	-45.83	-21.20	-24.63
2462MHz	Pass	2.4835G	2.5235G	PK	2.50006G	6.43	-44.13	-46.51	-42.15	-35.72	-21.20	-14.52
2462MHz	Pass	2.5235G	3G	PK	2.52719G	6.43	-46.40	-48.65	-44.37	-37.94	-21.20	-16.74
802.11g_Nss1(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	1G	2.36G	AV	2.35592G	5.99	-56.18	-58.96	-54.34	-48.35	-41.20	-7.15
2412MHz	Pass	2.36G	2.4G	AV	2.3792G	5.99	-54.27	-53.89	-51.07	-45.08	-41.20	-3.88
2412MHz	Pass	2.4G	2.4835G	AV	2.4835G	5.99	-65.49	-65.68	-62.57	-56.58	-41.20	-15.38
2412MHz	Pass	2.4835G	2.5235G	AV	2.50238G	5.99	-60.30	-59.63	-56.94	-50.95	-41.20	-9.75
2412MHz	Pass	2.5235G	3G	AV	2.52517G	5.99	-61.53	-61.28	-58.39	-52.40	-41.20	-11.20
2412MHz	Pass	1G	2.36G	PK	2.35813G	5.99	-46.86	-48.12	-44.43	-38.44	-21.20	-17.24
2412MHz	Pass	2.36G	2.4G	PK	2.38272G	5.99	-39.59	-36.86	-35.00	-29.01	-21.20	-7.81
2412MHz	Pass	2.4G	2.4835G	PK	2.4835G	5.99	-56.90	-55.66	-53.23	-47.24	-21.20	-26.04
2412MHz	Pass	2.4835G	2.5235G	PK	2.50142G	5.99	-50.29	-48.00	-45.99	-40.00	-21.20	-18.80
2412MHz	Pass	2.5235G	3G	PK	2.52755G	5.99	-51.13	-51.52	-48.31	-42.32	-21.20	-21.12
2437MHz	Pass	1G	2.36G	AV	2.35592G	6.43	-57.29	-58.33	-54.77	-48.34	-41.20	-7.14
2437MHz	Pass	2.36G	2.4G	AV	2.37512G	6.43	-55.42	-56.62	-52.97	-46.54	-41.20	-5.34
2437MHz	Pass	2.4G	2.4835G	AV	2.4835G	6.43	-65.36	-65.57	-62.45	-56.02	-41.20	-14.82
2437MHz	Pass	2.4835G	2.5235G	AV	2.50398G	6.43	-55.60	-56.77	-53.14	-46.71	-41.20	-5.51
2437MHz	Pass	2.5235G	3G	AV	2.52898G	6.43	-58.22	-59.24	-55.69	-49.26	-41.20	-8.06
2437MHz	Pass	1G	2.36G	PK	2.33858G	6.43	-47.20	-51.40	-45.80	-39.37	-21.20	-18.17
2437MHz	Pass	2.36G	2.4G	PK	2.3812G	6.43	-42.07	-46.38	-40.70	-34.27	-21.20	-13.07
2437MHz	Pass	2.4G	2.4835G	PK	2.4835G	6.43	-55.68	-54.57	-52.08	-45.65	-21.20	-24.45
2437MHz	Pass	2.4835G	2.5235G	PK	2.51166G	6.43	-47.46	-44.57	-42.77	-36.34	-21.20	-15.14
2437MHz	Pass	2.5235G	3G	PK	2.5347G	6.43	-47.47	-49.10	-45.20	-38.77	-21.20	-17.57
2462MHz	Pass	1G	2.36G	AV	1.96951G	6.43	-60.08	-59.17	-56.59	-50.16	-41.20	-8.96



CSE (Restricted Band)

Appendix F.3

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2462MHz	Pass	2.36G	2.4G	AV	2.3648G	6.43	-59.12	-59.04	-56.07	-49.64	-41.20	-8.44
2462MHz	Pass	2.4G	2.4835G	AV	2.4835G	6.43	-65.80	-64.92	-62.33	-55.90	-41.20	-14.70
2462MHz	Pass	2.4835G	2.5235G	AV	2.50406G	6.43	-54.93	-57.86	-53.14	-46.71	-41.20	-5.51
2462MHz	Pass	2.5235G	3G	AV	2.52457G	6.43	-58.79	-59.19	-55.98	-49.55	-41.20	-8.35
2462MHz	Pass	1G	2.36G	PK	2.35541G	6.43	-51.54	-49.41	-47.34	-40.91	-21.20	-19.71
2462MHz	Pass	2.36G	2.4G	PK	2.37192G	6.43	-48.06	-49.38	-45.66	-39.23	-21.20	-18.03
2462MHz	Pass	2.4G	2.4835G	PK	2.4835G	6.43	-56.36	-55.78	-53.05	-46.62	-21.20	-25.42
2462MHz	Pass	2.4835G	2.5235G	PK	2.50502G	6.43	-43.85	-45.98	-41.78	-35.35	-21.20	-14.15
2462MHz	Pass	2.5235G	3G	PK	2.5428G	6.43	-48.85	-49.61	-46.20	-39.77	-21.20	-18.57
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	1G	2.36G	AV	2.3583G	5.99	-57.10	-57.55	-54.31	-48.32	-41.20	-7.12
2412MHz	Pass	2.36G	2.4G	AV	2.38088G	5.99	-54.68	-53.17	-50.85	-44.86	-41.20	-3.66
2412MHz	Pass	2.4G	2.4835G	AV	2.4835G	5.99	-65.59	-65.56	-62.56	-56.57	-41.20	-15.37
2412MHz	Pass	2.4835G	2.5235G	AV	2.50102G	5.99	-59.94	-60.36	-57.13	-51.14	-41.20	-9.94
2412MHz	Pass	2.5235G	3G	AV	2.52934G	5.99	-61.98	-61.29	-58.61	-52.62	-41.20	-11.42
2412MHz	Pass	1G	2.36G	PK	2.35983G	5.99	-48.70	-47.74	-45.18	-39.19	-21.20	-17.99
2412MHz	Pass	2.36G	2.4G	PK	2.38256G	5.99	-40.00	-38.91	-36.41	-30.42	-21.20	-9.22
2412MHz	Pass	2.4G	2.4835G	PK	2.4835G	5.99	-56.02	-54.00	-51.88	-45.89	-21.20	-24.69
2412MHz	Pass	2.4835G	2.5235G	PK	2.5055G	5.99	-48.68	-49.23	-45.94	-39.95	-21.20	-18.75
2412MHz	Pass	2.5235G	3G	PK	2.52731G	5.99	-51.28	-50.86	-48.05	-42.06	-21.20	-20.86
2437MHz	Pass	1G	2.36G	AV	2.3583G	6.43	-57.60	-58.83	-55.16	-48.73	-41.20	-7.53
2437MHz	Pass	2.36G	2.4G	AV	2.38032G	6.43	-54.78	-55.59	-52.16	-45.73	-41.20	-4.53
2437MHz	Pass	2.4G	2.4835G	AV	2.4835G	6.43	-65.39	-65.33	-62.35	-55.92	-41.20	-14.72
2437MHz	Pass	2.4835G	2.5235G	AV	2.5007G	6.43	-55.87	-56.12	-52.98	-46.55	-41.20	-5.35
2437MHz	Pass	2.5235G	3G	AV	2.52612G	6.43	-59.13	-58.08	-55.56	-49.13	-41.20	-7.93
2437MHz	Pass	1G	2.36G	PK	2.35762G	6.43	-46.87	-49.29	-44.90	-38.47	-21.20	-17.27
2437MHz	Pass	2.36G	2.4G	PK	2.37336G	6.43	-43.60	-41.19	-39.22	-32.79	-21.20	-11.59
2437MHz	Pass	2.4G	2.4835G	PK	2.4835G	6.43	-55.78	-55.57	-52.66	-46.23	-21.20	-25.03
2437MHz	Pass	2.4835G	2.5235G	PK	2.50078G	6.43	-46.11	-44.92	-42.46	-36.03	-21.20	-14.83
2437MHz	Pass	2.5235G	3G	PK	2.53494G	6.43	-48.89	-47.96	-45.39	-38.96	-21.20	-17.76
2462MHz	Pass	1G	2.36G	AV	2.35779G	6.43	-58.90	-60.87	-56.76	-50.33	-41.20	-9.13
2462MHz	Pass	2.36G	2.4G	AV	2.36352G	6.43	-58.76	-60.18	-56.40	-49.97	-41.20	-8.77
2462MHz	Pass	2.4G	2.4835G	AV	2.4835G	6.43	-64.80	-65.54	-62.14	-55.71	-41.20	-14.51
2462MHz	Pass	2.4835G	2.5235G	AV	2.49854G	6.43	-55.42	-57.44	-53.30	-46.87	-41.20	-5.67
2462MHz	Pass	2.5235G	3G	AV	2.52684G	6.43	-58.48	-59.39	-55.90	-49.47	-41.20	-8.27
2462MHz	Pass	1G	2.36G	PK	2.35031G	6.43	-51.33	-51.00	-48.15	-41.72	-21.20	-20.52
2462MHz	Pass	2.36G	2.4G	PK	2.36792G	6.43	-48.87	-49.81	-46.30	-39.87	-21.20	-18.67
2462MHz	Pass	2.4G	2.4835G	PK	2.4835G	6.43	-56.24	-56.71	-53.46	-47.03	-21.20	-25.83
2462MHz	Pass	2.4835G	2.5235G	PK	2.4975G	6.43	-41.53	-44.57	-39.78	-33.35	-21.20	-12.15
2462MHz	Pass	2.5235G	3G	PK	2.52612G	6.43	-49.34	-47.09	-45.06	-38.63	-21.20	-17.43


DG = Directional Gain;
PX=Port X; Psum=P1+.P2+...PX

802.11b_Nss1,(1Mbps)_2TX

2412MHz

CSE-PK

30/04/2020

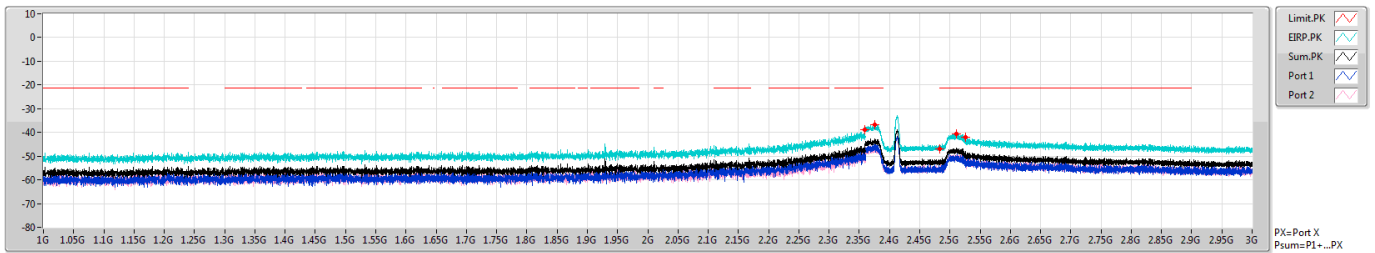


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	PK	2.35864G	-38.87	-21.20	-17.67	5.99	0.00	-44.86	-47.08	-48.84
2.36G	2.4G	1M	PK	2.37528G	-36.77	-21.20	-15.57	5.99	0.00	-42.76	-44.89	-46.88
2.4G	2.4835G	1M	PK	2.4835G	-46.79	-21.20	-25.59	5.99	0.00	-52.78	-55.59	-56.00
2.4835G	2.5235G	1M	PK	2.51134G	-40.75	-21.20	-19.55	5.99	0.00	-46.74	-49.98	-49.54
2.5235G	3G	1M	PK	2.52553G	-41.86	-21.20	-20.66	5.99	0.00	-47.85	-49.55	-52.75

802.11b_Nss1,(1Mbps)_2TX

2412MHz

CSE-AV

30/04/2020

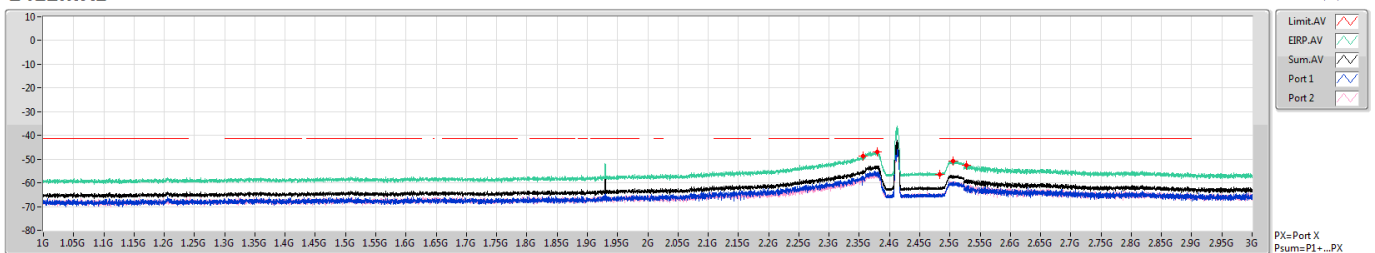


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	AV	2.35609G	-48.86	-41.20	-7.66	5.99	0.00	-54.85	-57.02	-58.91
2.36G	2.4G	1M	AV	2.38024G	-46.81	-41.20	-5.61	5.99	0.00	-52.80	-55.33	-56.34
2.4G	2.4835G	1M	AV	2.4835G	-56.38	-41.20	-15.18	5.99	0.00	-62.37	-65.43	-65.33
2.4835G	2.5235G	1M	AV	2.50526G	-50.92	-41.20	-9.72	5.99	0.00	-56.91	-59.92	-59.92
2.5235G	3G	1M	AV	2.52731G	-52.59	-41.20	-11.39	5.99	0.00	-58.58	-61.63	-61.55

802.11b_Nss1,(1Mbps)_2TX

2437MHz

CSE-PK

30/04/2020

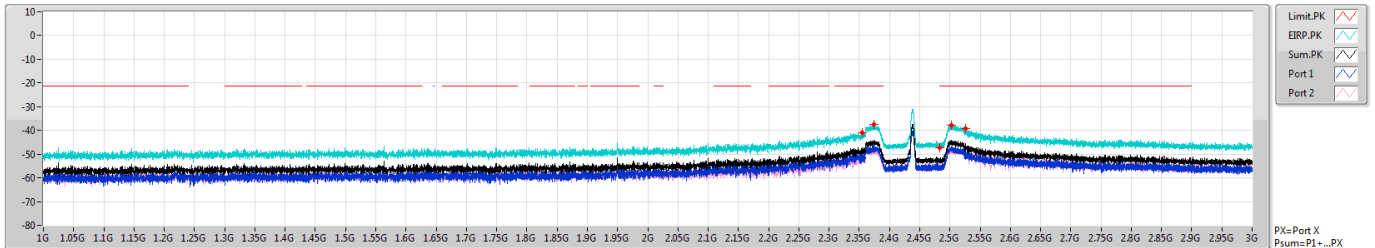


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	PK	2.35558G	-40.84	-21.20	-19.64	6.43	0.00	-47.27	-49.48	-51.27
2.36G	2.4G	1M	PK	2.3748G	-37.62	-21.20	-16.42	6.43	0.00	-44.05	-46.92	-47.21
2.4G	2.4835G	1M	PK	2.4835G	-47.19	-21.20	-25.99	6.43	0.00	-53.62	-56.52	-56.75
2.4835G	2.5235G	1M	PK	2.50302G	-37.85	-21.20	-16.65	6.43	0.00	-44.28	-47.18	-47.40
2.5235G	3G	1M	PK	2.52576G	-39.25	-21.20	-18.05	6.43	0.00	-45.68	-48.68	-48.71

802.11b_Nss1,(1Mbps)_2TX

2437MHz

CSE-AV

30/04/2020

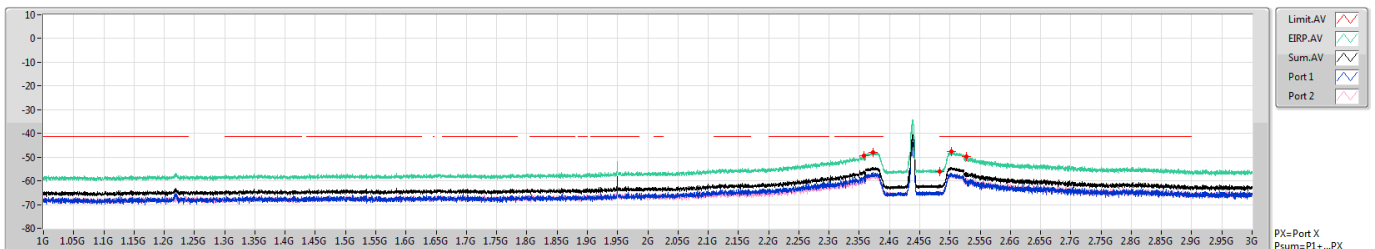


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	AV	2.35711G	-49.27	-41.20	-8.07	6.43	0.00	-55.70	-58.32	-59.13
2.36G	2.4G	1M	AV	2.37256G	-47.99	-41.20	-6.79	6.43	0.00	-54.42	-56.59	-58.47
2.4G	2.4835G	1M	AV	2.4835G	-56.17	-41.20	-14.97	6.43	0.00	-62.60	-65.53	-65.69
2.4835G	2.5235G	1M	AV	2.50182G	-47.77	-41.20	-6.57	6.43	0.00	-54.20	-56.66	-57.85
2.5235G	3G	1M	AV	2.52672G	-49.90	-41.20	-8.70	6.43	0.00	-56.33	-60.06	-58.72

802.11b_Nss1,(1Mbps)_2TX

2462MHz

CSE-PK

30/04/2020

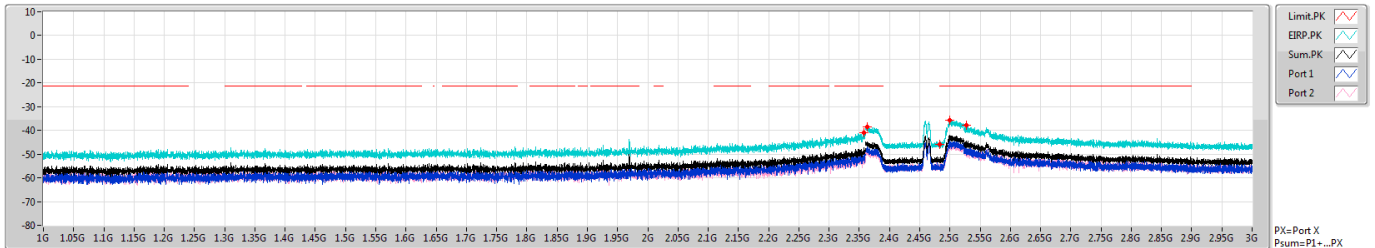


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	PK	2.3583G	-41.03	-21.20	-19.83	6.43	0.00	-47.46	-51.68	-49.53
2.36G	2.4G	1M	PK	2.36304G	-38.46	-21.20	-17.26	6.43	0.00	-44.89	-46.84	-49.31
2.4G	2.4835G	1M	PK	2.4835G	-45.83	-21.20	-24.63	6.43	0.00	-52.26	-56.14	-54.55
2.4835G	2.5235G	1M	PK	2.50006G	-35.72	-21.20	-14.52	6.43	0.00	-42.15	-44.13	-46.51
2.5235G	3G	1M	PK	2.52719G	-37.94	-21.20	-16.74	6.43	0.00	-44.37	-46.40	-48.65

802.11b_Nss1,(1Mbps)_2TX

2462MHz

CSE-AV

30/04/2020

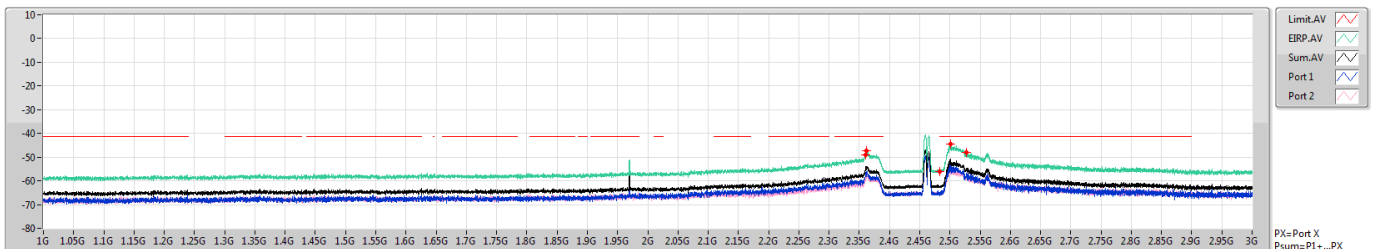


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	AV	2.36G	-49.05	-41.20	-7.85	6.43	0.00	-55.48	-57.39	-59.98
2.36G	2.4G	1M	AV	2.3612G	-47.40	-41.20	-6.20	6.43	0.00	-53.83	-56.11	-57.71
2.4G	2.4835G	1M	AV	2.4835G	-56.22	-41.20	-15.02	6.43	0.00	-62.65	-65.44	-65.89
2.4835G	2.5235G	1M	AV	2.50126G	-44.53	-41.20	-3.33	6.43	0.00	-50.96	-52.24	-56.88
2.5235G	3G	1M	AV	2.52743G	-48.09	-41.20	-6.89	6.43	0.00	-54.52	-56.95	-58.20

802.11g_Nss1,(6Mbps)_2TX

2412MHz

CSE-PK

30/04/2020

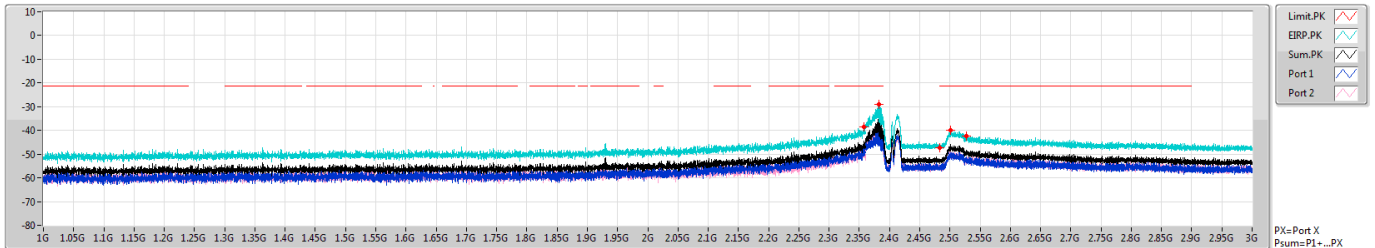

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	PK	2.35813G	-38.44	-21.20	-17.24	5.99	0.00	-44.43	-46.86	-48.12
2.36G	2.4G	1M	PK	2.38272G	-29.01	-21.20	-7.81	5.99	0.00	-35.00	-39.59	-36.86
2.4G	2.4835G	1M	PK	2.4835G	-47.24	-21.20	-26.04	5.99	0.00	-53.23	-56.90	-55.66
2.4835G	2.5235G	1M	PK	2.50142G	-40.00	-21.20	-18.80	5.99	0.00	-45.99	-50.29	-48.00
2.5235G	3G	1M	PK	2.52755G	-42.32	-21.20	-21.12	5.99	0.00	-48.31	-51.13	-51.52


PX=Port X
Psum=P1+...PX

802.11g_Nss1,(6Mbps)_2TX

2412MHz

CSE-AV

30/04/2020

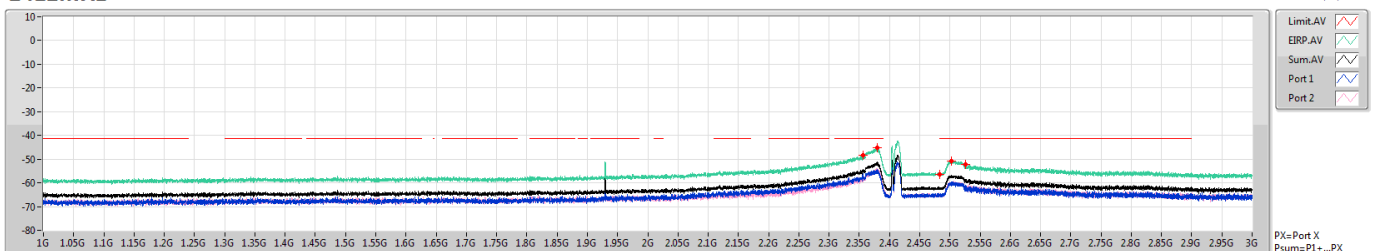

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	AV	2.3592G	-48.35	-41.20	-7.15	5.99	0.00	-54.34	-56.18	-58.96
2.36G	2.4G	1M	AV	2.3792G	-45.08	-41.20	-3.88	5.99	0.00	-51.07	-54.27	-53.89
2.4G	2.4835G	1M	AV	2.4835G	-56.58	-41.20	-15.38	5.99	0.00	-62.57	-65.49	-65.68
2.4835G	2.5235G	1M	AV	2.50238G	-50.95	-41.20	-9.75	5.99	0.00	-56.94	-60.30	-59.63
2.5235G	3G	1M	AV	2.52517G	-52.40	-41.20	-11.20	5.99	0.00	-58.39	-61.53	-61.28


PX=Port X
Psum=P1+...PX

802.11g_Nss1,(6Mbps)_2TX

2437MHz

CSE-PK

30/04/2020

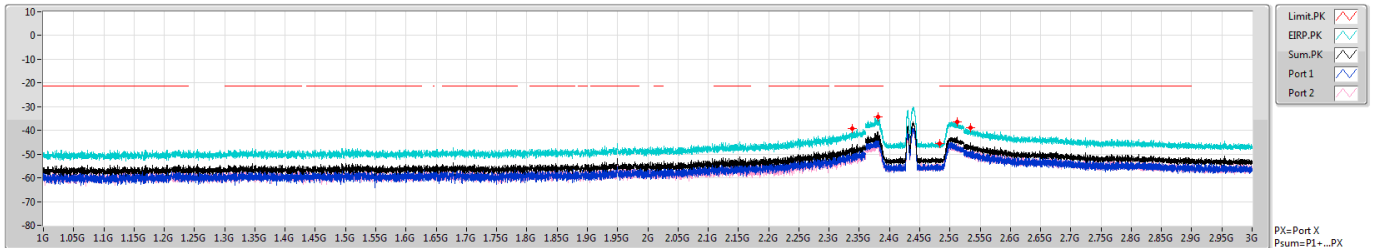


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	PK	2.33858G	-39.37	-21.20	-18.17	6.43	0.00	-45.80	-47.20	-51.40
2.36G	2.4G	1M	PK	2.3812G	-34.27	-21.20	-13.07	6.43	0.00	-40.70	-42.07	-46.38
2.4G	2.4835G	1M	PK	2.4835G	-45.65	-21.20	-24.45	6.43	0.00	-52.08	-55.68	-54.57
2.4835G	2.5235G	1M	PK	2.51166G	-36.34	-21.20	-15.14	6.43	0.00	-42.77	-47.46	-44.57
2.5235G	3G	1M	PK	2.5347G	-38.77	-21.20	-17.57	6.43	0.00	-45.20	-47.47	-49.10

802.11g_Nss1,(6Mbps)_2TX

2437MHz

CSE-AV

30/04/2020

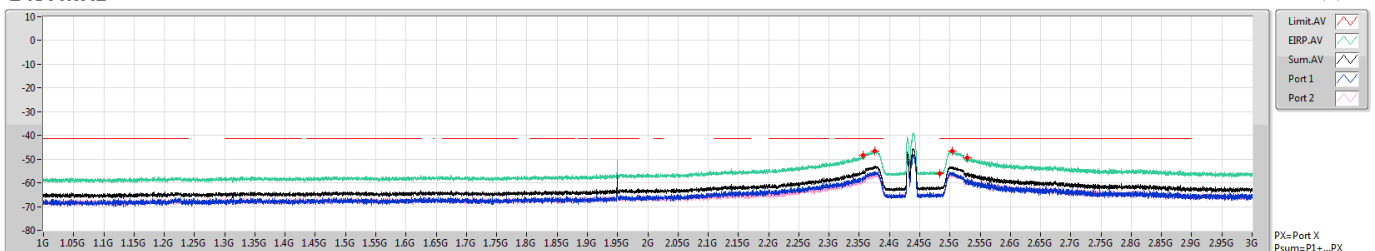


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	AV	2.3592G	-48.34	-41.20	-7.14	6.43	0.00	-54.77	-57.29	-58.33
2.36G	2.4G	1M	AV	2.37512G	-46.54	-41.20	-5.34	6.43	0.00	-52.97	-55.42	-56.62
2.4G	2.4835G	1M	AV	2.4835G	-56.02	-41.20	-14.82	6.43	0.00	-62.45	-65.36	-65.57
2.4835G	2.5235G	1M	AV	2.50398G	-46.71	-41.20	-5.51	6.43	0.00	-53.14	-55.60	-56.77
2.5235G	3G	1M	AV	2.52898G	-49.26	-41.20	-8.06	6.43	0.00	-55.69	-58.22	-59.24

802.11g_Nss1,(6Mbps)_2TX 2462MHz

CSE-PK

30/04/2020

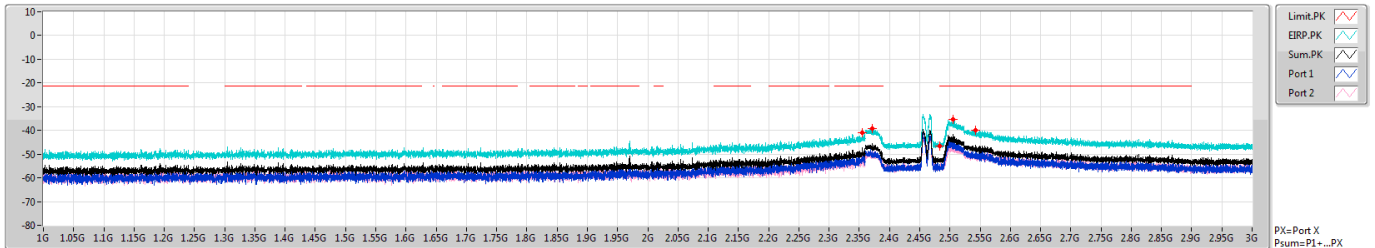


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	PK	2.35541G	-40.91	-21.20	-19.71	6.43	0.00	-47.34	-51.54	-49.41
2.36G	2.4G	1M	PK	2.37192G	-39.23	-21.20	-18.03	6.43	0.00	-45.66	-48.06	-49.38
2.4G	2.4835G	1M	PK	2.4835G	-46.62	-21.20	-25.42	6.43	0.00	-53.05	-56.36	-55.78
2.4835G	2.5235G	1M	PK	2.50902G	-35.35	-21.20	-14.15	6.43	0.00	-41.78	-43.85	-45.98
2.5235G	3G	1M	PK	2.5428G	-39.77	-21.20	-18.57	6.43	0.00	-46.20	-48.85	-49.61

802.11g_Nss1,(6Mbps)_2TX 2462MHz

CSE-AV

30/04/2020

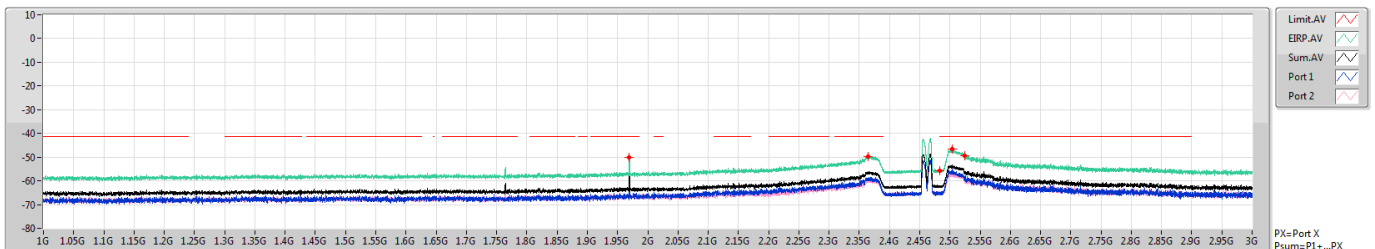


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	AV	1.96951G	-50.16	-41.20	-8.96	6.43	0.00	-56.59	-60.08	-59.17
2.36G	2.4G	1M	AV	2.3648G	-49.64	-41.20	-8.44	6.43	0.00	-56.07	-59.12	-59.04
2.4G	2.4835G	1M	AV	2.4835G	-55.90	-41.20	-14.70	6.43	0.00	-62.33	-65.80	-64.92
2.4835G	2.5235G	1M	AV	2.50406G	-46.71	-41.20	-5.51	6.43	0.00	-53.14	-54.93	-57.86
2.5235G	3G	1M	AV	2.52457G	-49.55	-41.20	-8.35	6.43	0.00	-55.98	-58.79	-59.19

802.11ax HEW20_Nss1,(MCS0)_2TX
2412MHz


CSE-PK

30/04/2020

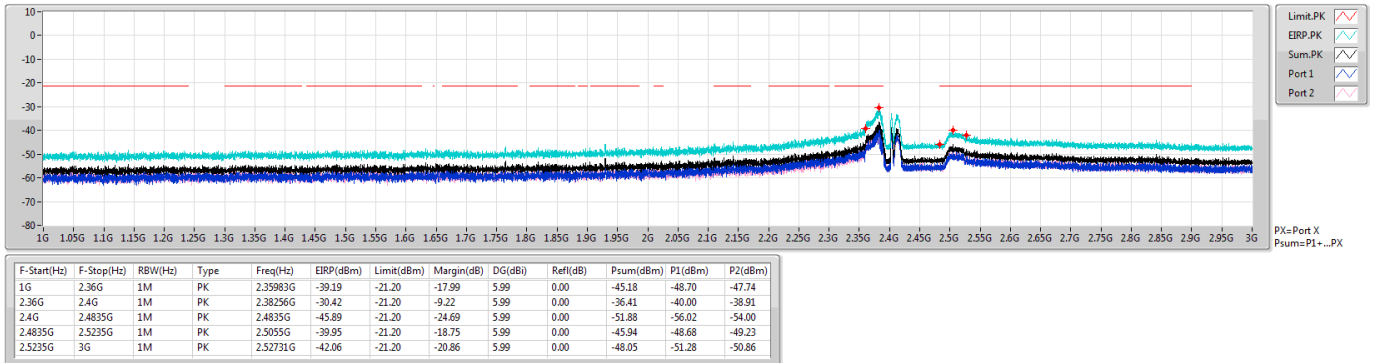**802.11ax HEW20_Nss1,(MCS0)_2TX**
2412MHz

CSE-AV


30/04/2020

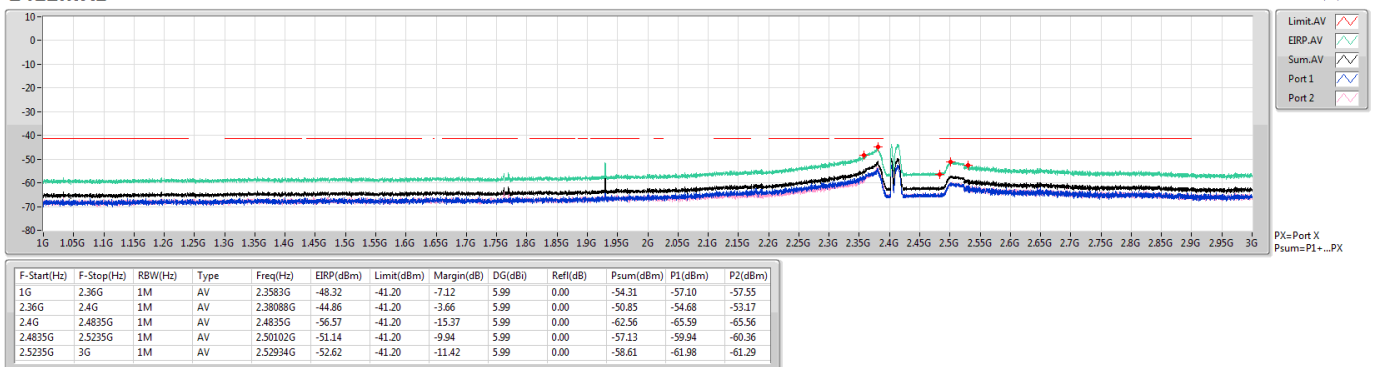

802.11ax HEW20_Nss1,(MCS0)_2TX 2437MHz

CSE-PK

30/04/2020

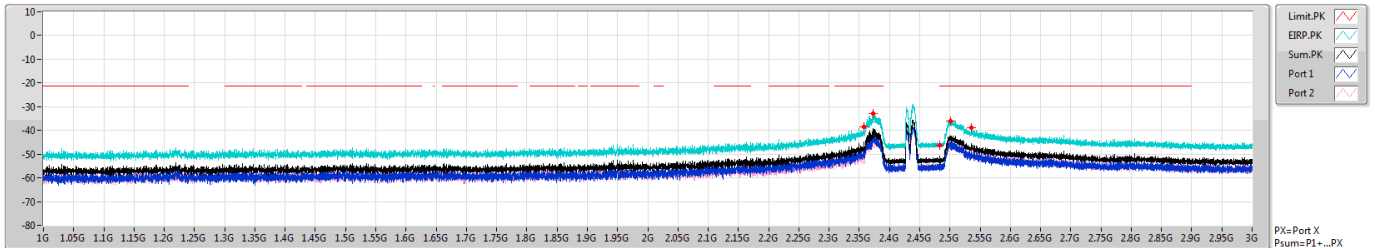


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	PK	2.35762G	-38.47	-21.20	-17.27	6.43	0.00	-44.90	-46.87	-49.29
2.36G	2.4G	1M	PK	2.37336G	-32.79	-21.20	-11.59	6.43	0.00	-39.22	-43.60	-41.19
2.4G	2.4835G	1M	PK	2.4835G	-46.23	-21.20	-25.03	6.43	0.00	-52.66	-55.78	-55.57
2.4835G	2.5235G	1M	PK	2.50078G	-36.03	-21.20	-14.83	6.43	0.00	-42.46	-46.11	-44.92
2.5235G	3G	1M	PK	2.53494G	-38.96	-21.20	-17.76	6.43	0.00	-45.39	-48.89	-47.96

802.11ax HEW20_Nss1,(MCS0)_2TX 2437MHz

CSE-AV

30/04/2020

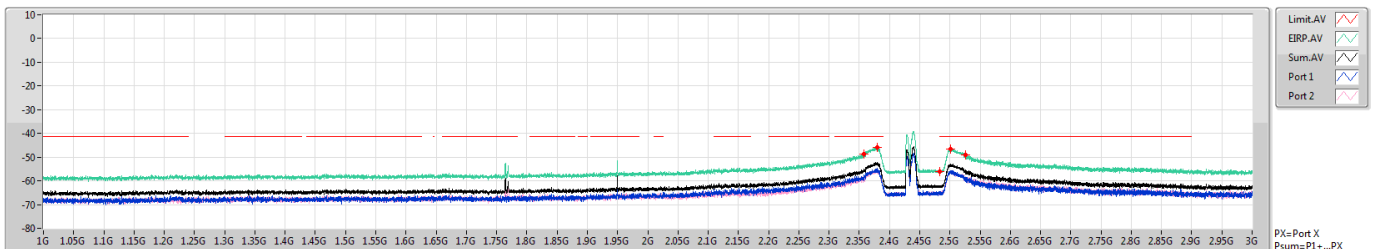


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	AV	2.3583G	-48.73	-41.20	-7.53	6.43	0.00	-55.16	-57.60	-58.83
2.36G	2.4G	1M	AV	2.38032G	-45.73	-41.20	-4.53	6.43	0.00	-52.16	-54.78	-55.59
2.4G	2.4835G	1M	AV	2.4835G	-55.92	-41.20	-14.72	6.43	0.00	-62.35	-65.39	-65.33
2.4835G	2.5235G	1M	AV	2.5007G	-46.55	-41.20	-5.35	6.43	0.00	-52.98	-55.87	-56.12
2.5235G	3G	1M	AV	2.52612G	-49.13	-41.20	-7.93	6.43	0.00	-55.56	-59.13	-58.08

802.11ax HEW20_Nss1,(MCS0)_2TX
2462MHz


CSE-PK

30/04/2020

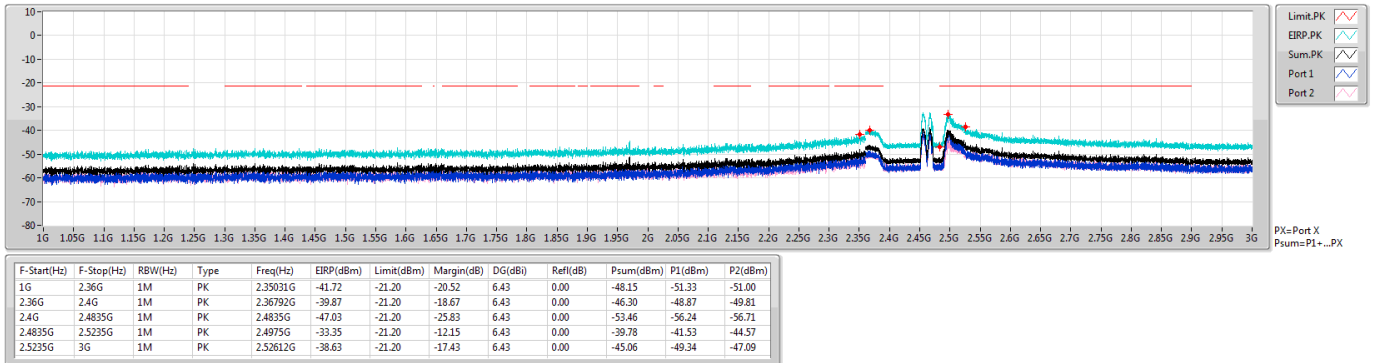**802.11ax HEW20_Nss1,(MCS0)_2TX**
2462MHz

CSE-AV

30/04/2020

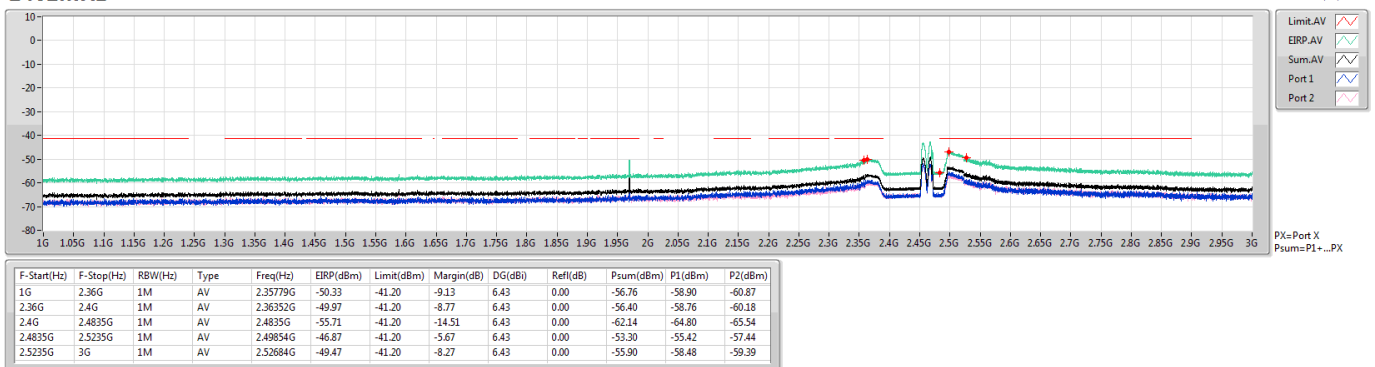



<2T2S>

For Conducted Harmonic (1~3GHz):

Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss2(MCS0)_2TX	Pass	2.36G	2.4G	AV	2.38088G	2.98	-50.48	-52.17	-48.23	-45.25	-41.20	-4.05

DG = Directional Gain;
PX=Port X; Psum=P1+.P2+...PX

**Result**

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11ax HEW20_Nss2_(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	1G	2.36G	AV	2.35813G	2.98	-56.70	-58.63	-54.55	-51.57	-41.20	-10.37
2412MHz	Pass	2.36G	2.4G	AV	2.38088G	2.98	-50.48	-52.17	-48.23	-45.25	-41.20	-4.05
2412MHz	Pass	2.4G	2.4835G	AV	2.4835G	2.98	-63.79	-63.87	-60.82	-57.84	-41.20	-16.64
2412MHz	Pass	2.4835G	2.5235G	AV	2.50414G	2.98	-60.13	-58.94	-56.48	-53.50	-41.20	-12.30
2412MHz	Pass	2.5235G	3G	AV	2.53065G	2.98	-60.48	-60.84	-57.65	-54.67	-41.20	-13.47
2412MHz	Pass	1G	2.36G	PK	2.35694G	2.98	-47.09	-50.99	-45.61	-42.63	-21.20	-21.43
2412MHz	Pass	2.36G	2.4G	PK	2.3804G	2.98	-35.66	-40.40	-34.40	-31.42	-21.20	-10.22
2412MHz	Pass	2.4G	2.4835G	PK	2.4835G	2.98	-54.83	-53.24	-50.95	-47.97	-21.20	-26.77
2412MHz	Pass	2.4835G	2.5235G	PK	2.51702G	2.98	-49.46	-48.42	-45.90	-42.92	-21.20	-21.72
2412MHz	Pass	2.5235G	3G	PK	2.52934G	2.98	-52.08	-49.43	-47.55	-44.57	-21.20	-23.37
2462MHz	Pass	1G	2.36G	AV	1.96968G	3.42	-58.51	-59.30	-55.88	-52.46	-41.20	-11.26
2462MHz	Pass	2.36G	2.4G	AV	2.36936G	3.42	-58.22	-58.04	-55.12	-51.70	-41.20	-10.50
2462MHz	Pass	2.4G	2.4835G	AV	2.4835G	3.42	-64.55	-63.52	-60.99	-57.57	-41.20	-16.37
2462MHz	Pass	2.4835G	2.5235G	AV	2.49686G	3.42	-53.63	-56.60	-51.86	-48.44	-41.20	-7.24
2462MHz	Pass	2.5235G	3G	AV	2.5235G	3.42	-58.01	-58.76	-55.36	-51.94	-41.20	-10.74
2462MHz	Pass	1G	2.36G	PK	2.35388G	3.42	-49.31	-51.30	-47.18	-43.76	-21.20	-22.56
2462MHz	Pass	2.36G	2.4G	PK	2.3696G	3.42	-47.17	-48.50	-44.77	-41.35	-21.20	-20.15
2462MHz	Pass	2.4G	2.4835G	PK	2.4835G	3.42	-53.30	-53.34	-50.31	-46.89	-21.20	-25.69
2462MHz	Pass	2.4835G	2.5235G	PK	2.4999G	3.42	-37.46	-45.61	-36.84	-33.42	-21.20	-12.22
2462MHz	Pass	2.5235G	3G	PK	2.52493G	3.42	-46.12	-49.44	-44.46	-41.04	-21.20	-19.84


DG = Directional Gain;
PX=Port X; Psum=P1+.P2+...PX

802.11ax HEW20_Nss2,(MCS0)_2TX

2412MHz

CSE-PK

11/05/2020

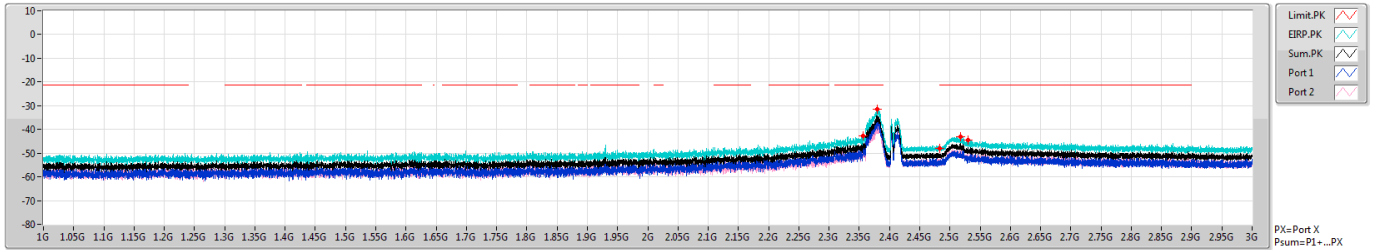


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	PK	2.35694G	-42.63	-21.20	-21.43	2.98	0.00	-45.61	-47.09	-50.99
2.36G	2.4G	1M	PK	2.3804G	-31.42	-21.20	-10.22	2.98	0.00	-34.40	-35.66	-40.40
2.4G	2.4835G	1M	PK	2.4835G	-47.97	-21.20	-26.77	2.98	0.00	-50.95	-54.83	-53.24
2.4835G	2.5235G	1M	PK	2.51702G	-42.92	-21.20	-21.72	2.98	0.00	-45.90	-49.46	-48.42
2.5235G	3G	1M	PK	2.52934G	-44.57	-21.20	-23.37	2.98	0.00	-47.55	-52.08	-49.43

802.11ax HEW20_Nss2,(MCS0)_2TX

2412MHz

CSE-AV

11/05/2020

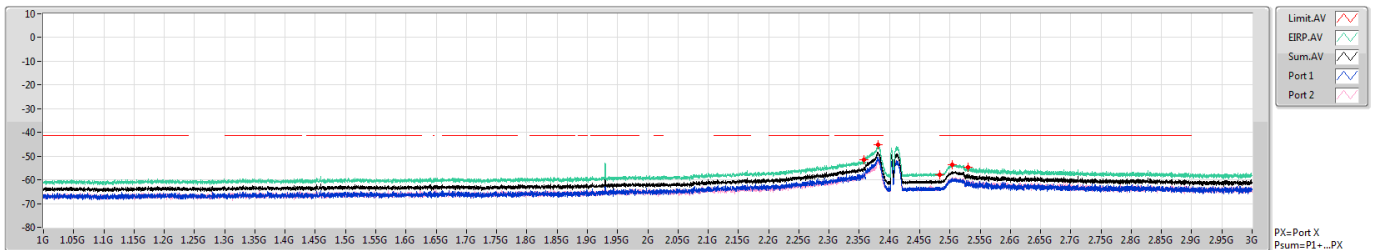


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	AV	2.35813G	-51.57	-41.20	-10.37	2.98	0.00	-54.55	-56.70	-58.63
2.36G	2.4G	1M	AV	2.38088G	-45.25	-41.20	-4.05	2.98	0.00	-48.23	-50.48	-52.17
2.4G	2.4835G	1M	AV	2.4835G	-57.84	-41.20	-16.64	2.98	0.00	-60.82	-63.79	-63.87
2.4835G	2.5235G	1M	AV	2.50414G	-53.50	-41.20	-12.30	2.98	0.00	-56.48	-60.13	-58.94
2.5235G	3G	1M	AV	2.53065G	-54.67	-41.20	-13.47	2.98	0.00	-57.65	-60.48	-60.84

802.11ax HEW20_Nss2,(MCS0)_2TX
2462MHz


CSE-PK

11/05/2020

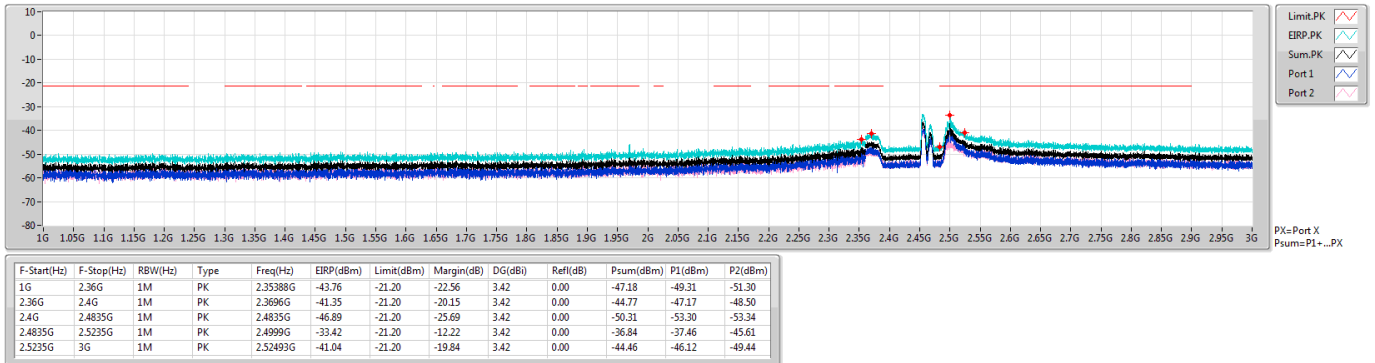**802.11ax HEW20_Nss2,(MCS0)_2TX**
2462MHz

CSE-AV

11/05/2020

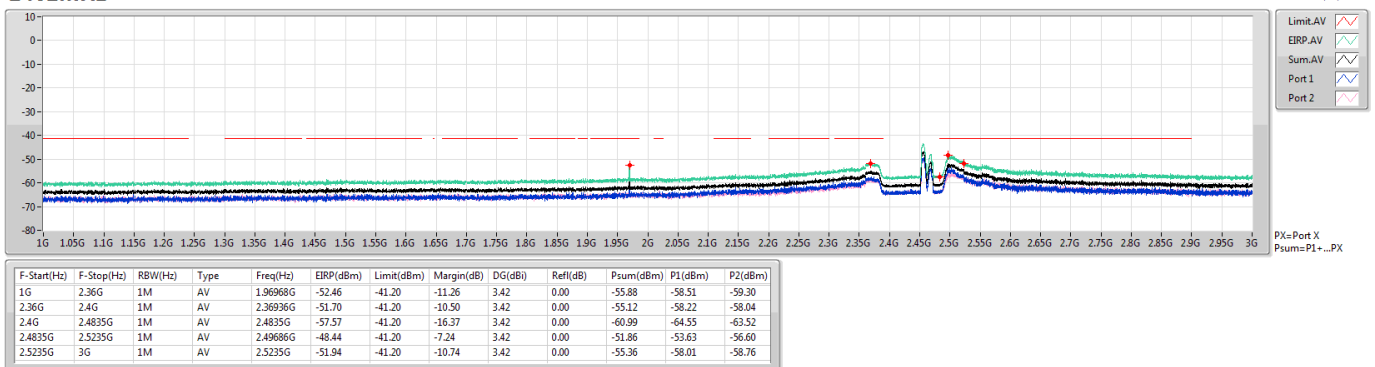



<2T1S>

For Conducted Harmonic (3~25GHz):

Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1(1Mbps)_2TX	Pass	7.5G	25G	AV	20.37125G	6.43	-60.66	-60.56	-57.60	-51.17	-41.20	-9.97
802.11g_Nss1(6Mbps)_2TX	Pass	7.5G	25G	AV	20.35156G	6.43	-60.60	-61.62	-58.07	-51.64	-41.20	-10.44
802.11ax HEW20_Nss1(MCS0)_2TX	Pass	7.5G	25G	AV	20.36906G	6.43	-60.92	-61.06	-57.98	-51.55	-41.20	-10.35

DG = Directional Gain;
PX=Port X; Psum=P1+.P2+...PX

**Result**

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11b_Nss1(1Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	3G	7.5G	AV	4.82419G	5.99	-58.85	-64.98	-57.90	-51.91	-41.20	-10.71
2412MHz	Pass	7.5G	25G	AV	20.36688G	5.99	-61.52	-60.11	-57.75	-51.76	-41.20	-10.56
2412MHz	Pass	3G	7.5G	PK	4.82363G	5.99	-56.12	-60.03	-54.64	-48.65	-21.20	-27.45
2412MHz	Pass	7.5G	25G	PK	20.35375G	5.99	-52.67	-50.54	-48.47	-42.48	-21.20	-21.28
2437MHz	Pass	3G	7.5G	AV	4.87425G	6.43	-59.22	-64.32	-58.05	-51.62	-41.20	-10.42
2437MHz	Pass	7.5G	25G	AV	20.35813G	6.43	-60.15	-61.17	-57.62	-51.19	-41.20	-9.99
2437MHz	Pass	3G	7.5G	PK	4.87369G	6.43	-56.45	-60.48	-55.00	-48.57	-21.20	-27.37
2437MHz	Pass	3G	7.5G	PK	7.31381G	6.43	-59.98	-55.27	-54.01	-47.58	-21.20	-26.38
2437MHz	Pass	7.5G	25G	PK	20.35813G	6.43	-51.87	-52.54	-49.18	-42.75	-21.20	-21.55
2462MHz	Pass	3G	7.5G	AV	4.92375G	6.43	-62.05	-66.01	-60.58	-54.15	-41.20	-12.95
2462MHz	Pass	7.5G	25G	AV	20.37125G	6.43	-60.66	-60.56	-57.60	-51.17	-41.20	-9.97
2462MHz	Pass	3G	7.5G	PK	4.92375G	6.43	-58.40	-60.80	-56.43	-50.00	-21.20	-28.80
2462MHz	Pass	3G	7.5G	PK	7.3875G	6.43	-58.39	-56.44	-54.30	-47.87	-21.20	-26.67
2462MHz	Pass	7.5G	25G	PK	20.35813G	6.43	-49.87	-52.37	-47.93	-41.50	-21.20	-20.30
802.11g_Nss1(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	3G	7.5G	AV	3.61763G	5.99	-69.91	-61.30	-60.74	-54.75	-41.20	-13.55
2412MHz	Pass	3G	7.5G	AV	4.82306G	5.99	-70.19	-71.51	-67.79	-61.80	-41.20	-20.60
2412MHz	Pass	7.5G	25G	AV	20.39094G	5.99	-61.76	-60.10	-57.84	-51.85	-41.20	-10.65
2412MHz	Pass	3G	7.5G	PK	4.8225G	5.99	-60.74	-61.96	-58.30	-52.31	-21.20	-31.11
2412MHz	Pass	3G	7.5G	PK	7.25081G	5.99	-55.98	-58.98	-54.22	-48.23	-21.20	-27.03
2412MHz	Pass	7.5G	25G	PK	20.38875G	5.99	-52.91	-51.75	-49.28	-43.29	-21.20	-22.09
2437MHz	Pass	3G	7.5G	AV	3.65531G	6.43	-67.19	-62.46	-61.20	-54.77	-41.20	-13.57
2437MHz	Pass	3G	7.5G	AV	4.872G	6.43	-69.42	-71.69	-67.40	-60.97	-41.20	-19.77
2437MHz	Pass	7.5G	25G	AV	20.35156G	6.43	-60.60	-61.62	-58.07	-51.64	-41.20	-10.44
2437MHz	Pass	3G	7.5G	PK	4.87144G	6.43	-58.18	-63.85	-57.14	-50.71	-21.20	-29.51
2437MHz	Pass	3G	7.5G	PK	7.3155G	6.43	-60.50	-54.97	-53.90	-47.47	-21.20	-26.27
2437MHz	Pass	7.5G	25G	PK	20.35375G	6.43	-53.31	-51.36	-49.22	-42.79	-21.20	-21.59
2462MHz	Pass	3G	7.5G	AV	4.92544G	6.43	-70.87	-72.08	-68.42	-61.99	-41.20	-20.79
2462MHz	Pass	3G	7.5G	AV	7.39031G	6.43	-68.61	-68.22	-65.40	-58.97	-41.20	-17.77
2462MHz	Pass	7.5G	25G	AV	20.37344G	6.43	-61.08	-61.11	-58.08	-51.65	-41.20	-10.45
2462MHz	Pass	3G	7.5G	PK	4.91981G	6.43	-60.91	-63.59	-59.04	-52.61	-21.20	-31.41
2462MHz	Pass	3G	7.5G	PK	7.38694G	6.43	-60.50	-58.20	-56.19	-49.76	-21.20	-28.56
2462MHz	Pass	7.5G	25G	PK	20.37125G	6.43	-51.81	-53.10	-49.40	-42.97	-21.20	-21.77
802.11ax HEW20_Nss1.(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	3G	7.5G	AV	3.61763G	5.99	-72.43	-60.91	-60.61	-54.62	-41.20	-13.42
2412MHz	Pass	3G	7.5G	AV	4.82419G	5.99	-70.95	-72.27	-68.55	-62.56	-41.20	-21.36
2412MHz	Pass	7.5G	25G	AV	20.38875G	5.99	-60.98	-60.77	-57.86	-51.87	-41.20	-10.67
2412MHz	Pass	3G	7.5G	PK	4.82081G	5.99	-62.64	-62.51	-59.56	-53.57	-21.20	-32.37
2412MHz	Pass	3G	7.5G	PK	7.25138G	5.99	-57.55	-60.82	-55.87	-49.88	-21.20	-28.68
2412MHz	Pass	7.5G	25G	PK	20.3975G	5.99	-53.08	-51.61	-49.27	-43.28	-21.20	-22.08



CSE (Restricted Band)

Appendix F.5

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2437MHz	Pass	3G	7.5G	AV	3.65531G	6.43	-67.82	-61.69	-60.74	-54.31	-41.20	-13.11
2437MHz	Pass	3G	7.5G	AV	4.88044G	6.43	-68.62	-72.69	-67.18	-60.75	-41.20	-19.55
2437MHz	Pass	7.5G	25G	AV	20.35813G	6.43	-61.33	-61.03	-58.17	-51.74	-41.20	-10.54
2437MHz	Pass	3G	7.5G	PK	4.87706G	6.43	-59.66	-63.61	-58.19	-51.76	-21.20	-30.56
2437MHz	Pass	3G	7.5G	PK	7.31213G	6.43	-58.94	-57.03	-54.87	-48.44	-21.20	-27.24
2437MHz	Pass	7.5G	25G	PK	20.36688G	6.43	-52.57	-52.21	-49.38	-42.95	-21.20	-21.75
2462MHz	Pass	3G	7.5G	AV	4.92319G	6.43	-70.63	-72.03	-68.26	-61.83	-41.20	-20.63
2462MHz	Pass	3G	7.5G	AV	7.37006G	6.43	-68.06	-68.76	-65.39	-58.96	-41.20	-17.76
2462MHz	Pass	7.5G	25G	AV	20.36906G	6.43	-60.92	-61.06	-57.98	-51.55	-41.20	-10.35
2462MHz	Pass	3G	7.5G	PK	4.91813G	6.43	-62.44	-62.78	-59.60	-53.17	-21.20	-31.97
2462MHz	Pass	3G	7.5G	PK	7.39256G	6.43	-59.97	-57.94	-55.83	-49.40	-21.20	-28.20
2462MHz	Pass	7.5G	25G	PK	20.35813G	6.43	-53.34	-51.49	-49.31	-42.88	-21.20	-21.68


DG = Directional Gain;
PX=Port X; Psum=P1+.P2+...PX

802.11b_Nss1,(1Mbps)_2TX

2412MHz

CSE-PK

30/04/2020

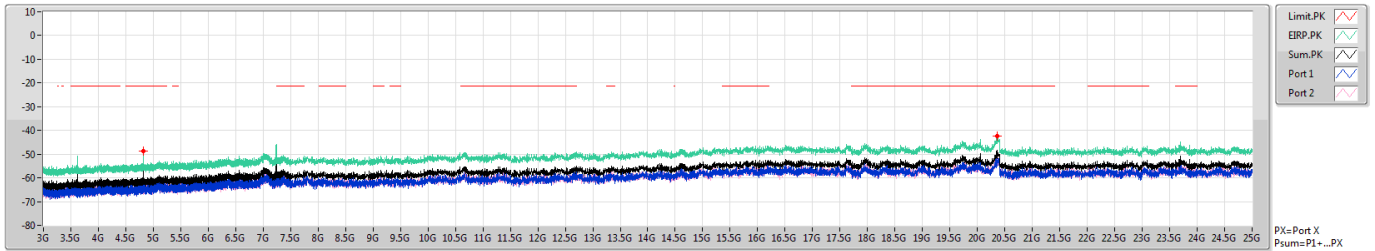


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dBi)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	PK	4.82363G	-48.65	-21.20	-27.45	5.99	0.00	-54.64	-56.12	-60.03
7.5G	25G	1M	PK	20.35379G	-42.48	-21.20	-21.28	5.99	0.00	-48.47	-52.67	-50.54

802.11b_Nss1,(1Mbps)_2TX

2412MHz

CSE-AV

30/04/2020

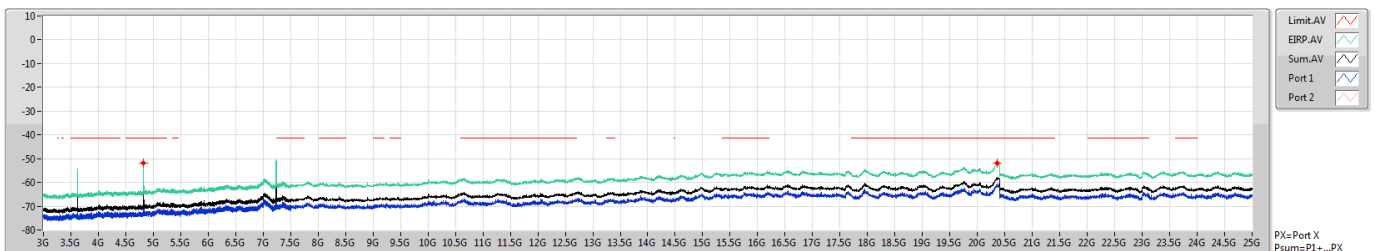


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dBi)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	AV	4.82419G	-51.91	-41.20	-10.71	5.99	0.00	-57.90	-58.85	-64.98
7.5G	25G	1M	AV	20.36688G	-51.76	-41.20	-10.56	5.99	0.00	-57.75	-61.52	-60.11

802.11b_Nss1,(1Mbps)_2TX

2437MHz

CSE-PK

30/04/2020

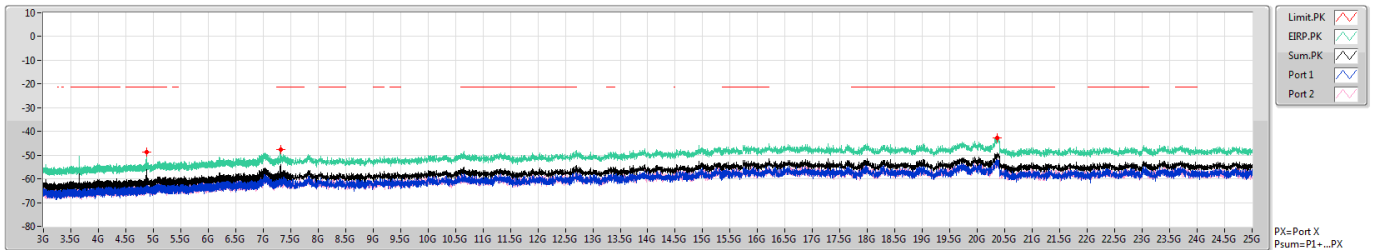


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	PK	4.87369G	-48.57	-21.20	-27.37	6.43	0.00	-55.00	-56.45	-60.48
3G	7.5G	1M	PK	7.31381G	-47.58	-21.20	-26.38	6.43	0.00	-54.01	-59.98	-55.27
7.5G	25G	1M	PK	20.35813G	-42.75	-21.20	-21.55	6.43	0.00	-49.18	-51.87	-52.54

802.11b_Nss1,(1Mbps)_2TX

2437MHz

CSE-AV

30/04/2020

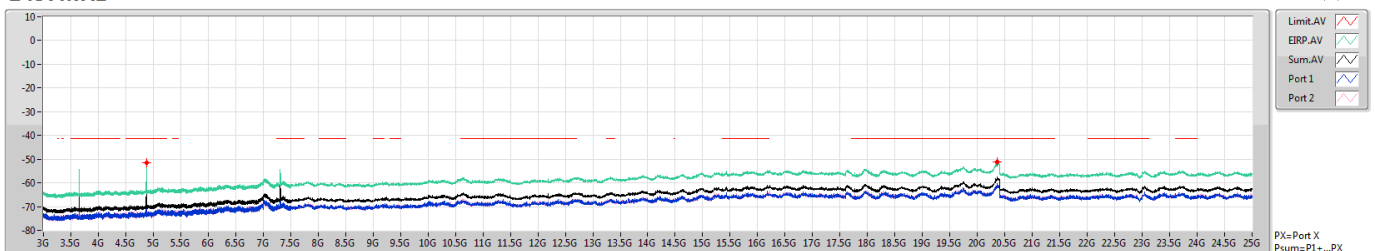


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	AV	4.87425G	-51.62	-41.20	-10.42	6.43	0.00	-58.05	-59.22	-64.32
7.5G	25G	1M	AV	20.35813G	-51.19	-41.20	-9.99	6.43	0.00	-57.62	-60.15	-61.17

802.11b_Nss1,(1Mbps)_2TX

2462MHz

CSE-PK

30/04/2020

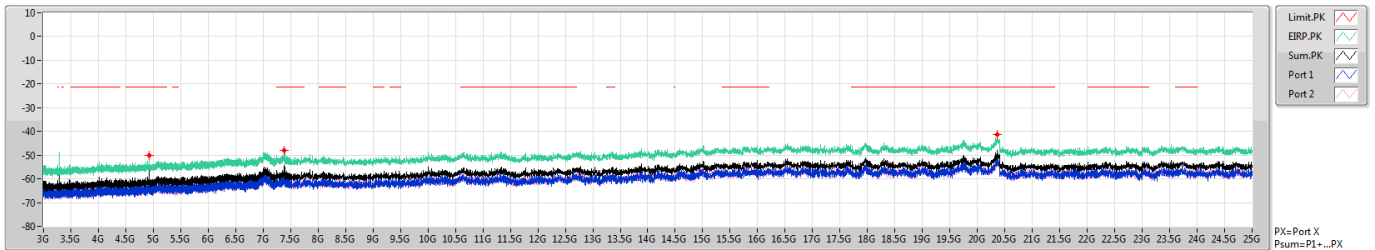


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	PK	4.92375G	-50.00	-21.20	-28.80	6.43	0.00	-56.43	-58.40	-60.80
3G	7.5G	1M	PK	7.3875G	-47.87	-21.20	-26.67	6.43	0.00	-54.30	-58.39	-56.44
7.5G	25G	1M	PK	20.35813G	-41.50	-21.20	-20.30	6.43	0.00	-47.93	-49.87	-52.37

802.11b_Nss1,(1Mbps)_2TX

2462MHz

CSE-AV

30/04/2020

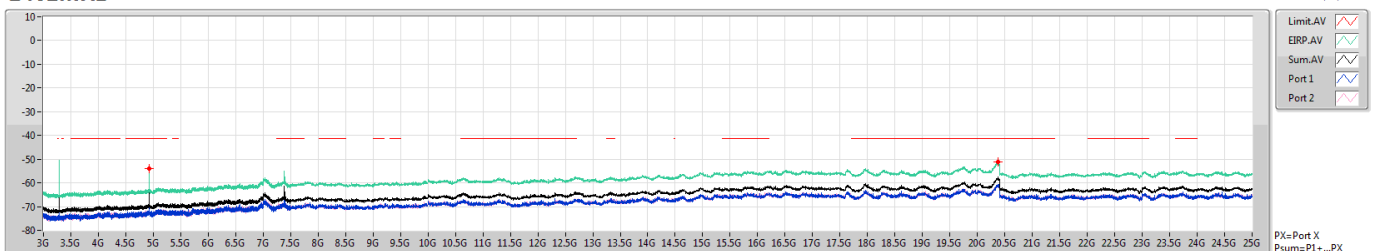


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	AV	4.92375G	-54.15	-41.20	-12.95	6.43	0.00	-60.58	-62.05	-66.01
7.5G	25G	1M	AV	20.37125G	-51.17	-41.20	-9.97	6.43	0.00	-57.60	-60.66	-60.56

802.11g_Nss1,(6Mbps)_2TX

2412MHz

CSE-PK

30/04/2020

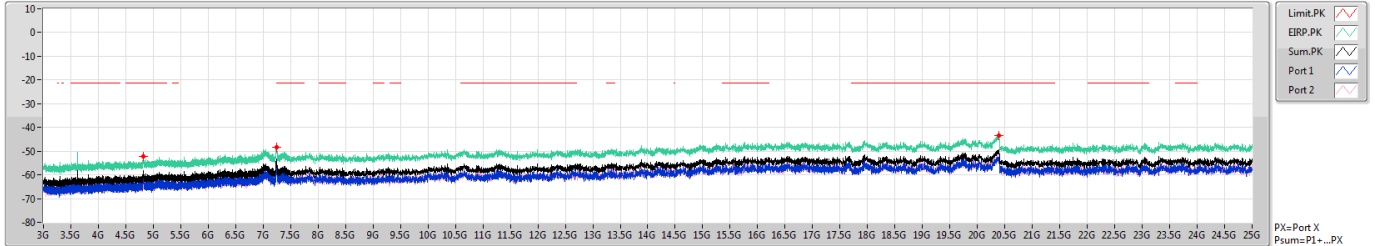


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	PK	4.8225G	-52.31	-21.20	-31.11	5.99	0.00	-58.30	-60.74	-61.96
3G	7.5G	1M	PK	7.25081G	-48.23	-21.20	-27.03	5.99	0.00	-54.22	-55.98	-58.98
7.5G	25G	1M	PK	20.38875G	-43.29	-21.20	-22.09	5.99	0.00	-49.28	-52.91	-51.75

802.11g_Nss1,(6Mbps)_2TX

2412MHz

CSE-AV

30/04/2020

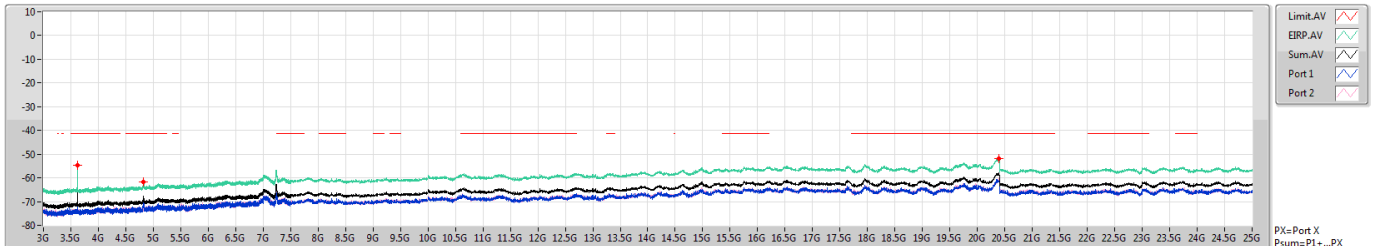


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	AV	3.61763G	-54.75	-41.20	-13.55	5.99	0.00	-60.74	-69.91	-61.30
3G	7.5G	1M	AV	4.82306G	-61.80	-41.20	-20.60	5.99	0.00	-67.79	-70.19	-71.51
7.5G	25G	1M	AV	20.39094G	-51.85	-41.20	-10.65	5.99	0.00	-57.84	-61.76	-60.10

802.11g_Nss1,(6Mbps)_2TX

2437MHz

CSE-PK

30/04/2020

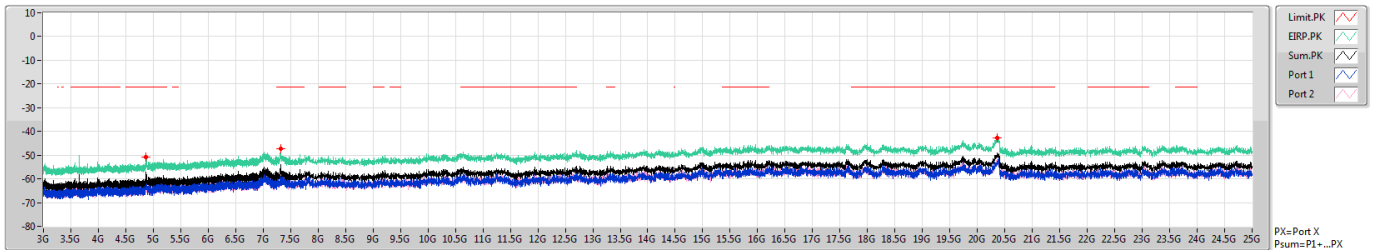


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dBi)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	PK	4.87144G	-50.71	-21.20	-29.51	6.43	0.00	-57.14	-58.18	-63.85
3G	7.5G	1M	PK	7.3155G	-47.47	-21.20	-26.27	6.43	0.00	-53.90	-60.50	-54.97
7.5G	25G	1M	PK	20.33375G	-42.79	-21.20	-21.59	6.43	0.00	-49.22	-53.31	-51.36

802.11g_Nss1,(6Mbps)_2TX

2437MHz

CSE-AV

30/04/2020

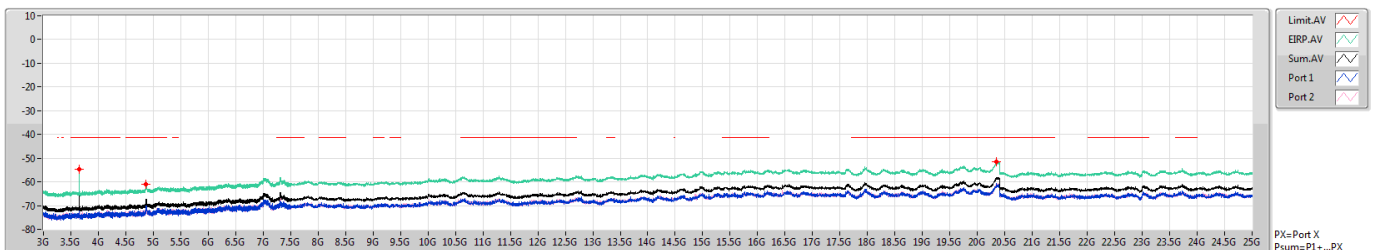


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dBi)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	AV	3.65531G	-54.77	-41.20	-13.57	6.43	0.00	-61.20	-67.19	-62.46
3G	7.5G	1M	AV	4.872G	-60.97	-41.20	-19.77	6.43	0.00	-67.40	-69.42	-71.69
7.5G	25G	1M	AV	20.33156G	-51.64	-41.20	-10.44	6.43	0.00	-58.07	-60.60	-61.62

802.11g_Nss1,(6Mbps)_2TX

2462MHz

CSE-PK

30/04/2020

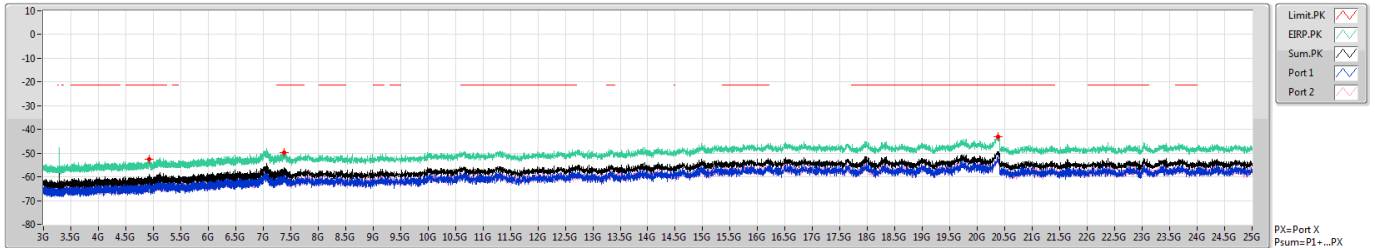


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	PK	4.91981G	-52.61	-21.20	-31.41	6.43	0.00	-59.04	-60.91	-63.59
3G	7.5G	1M	PK	7.38694G	-49.76	-21.20	-28.56	6.43	0.00	-56.19	-60.50	-58.20
7.5G	25G	1M	PK	20.37125G	-42.97	-21.20	-21.77	6.43	0.00	-49.40	-51.81	-53.10

802.11g_Nss1,(6Mbps)_2TX

2462MHz

CSE-AV

30/04/2020

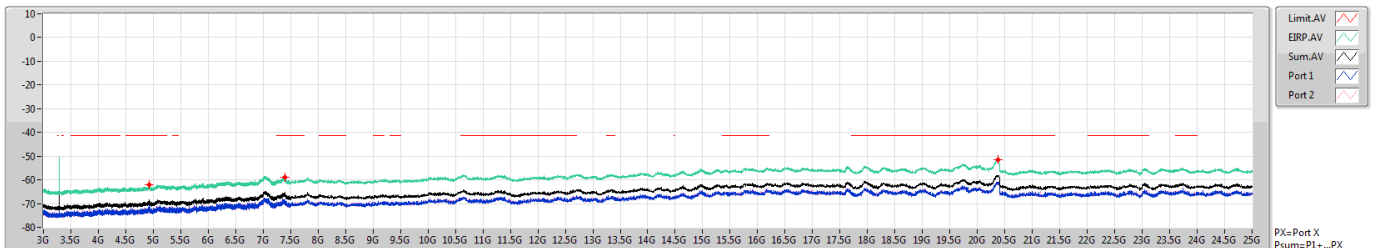


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	AV	4.92544G	-61.99	-41.20	-20.79	6.43	0.00	-68.42	-70.87	-72.08
3G	7.5G	1M	AV	7.39031G	-58.97	-41.20	-17.77	6.43	0.00	-65.40	-68.61	-68.22
7.5G	25G	1M	AV	20.37344G	-51.65	-41.20	-10.45	6.43	0.00	-58.08	-61.08	-61.11

802.11ax HEW20_Nss1,(MCS0)_2TX

2412MHz

CSE-PK

30/04/2020

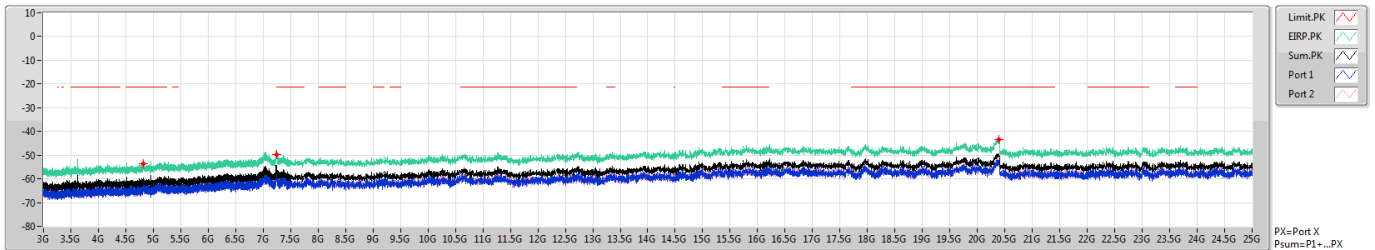


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dBi)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	PK	4.82081G	-53.57	-21.20	-32.37	5.99	0.00	-59.56	-62.64	-62.51
3G	7.5G	1M	PK	7.25138G	-49.88	-21.20	-28.68	5.99	0.00	-55.87	-57.55	-60.82
7.5G	25G	1M	PK	20.3975G	-43.28	-21.20	-22.08	5.99	0.00	-49.27	-53.08	-51.61

802.11ax HEW20_Nss1,(MCS0)_2TX

2412MHz

CSE-AV

30/04/2020

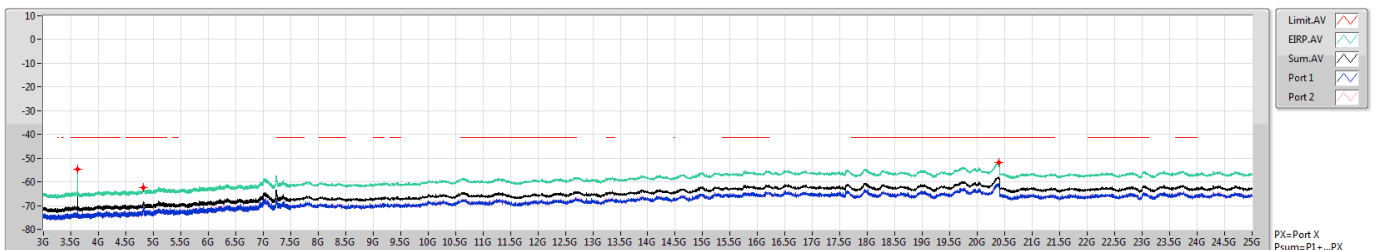


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dBi)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	AV	3.61763G	-54.62	-41.20	-13.42	5.99	0.00	-60.61	-72.43	-60.91
3G	7.5G	1M	AV	4.82419G	-62.56	-41.20	-21.36	5.99	0.00	-68.55	-70.95	-72.27
7.5G	25G	1M	AV	20.38875G	-51.87	-41.20	-10.67	5.99	0.00	-57.86	-60.98	-60.77

802.11ax HEW20_Nss1,(MCS0)_2TX

2437MHz

CSE-PK

30/04/2020

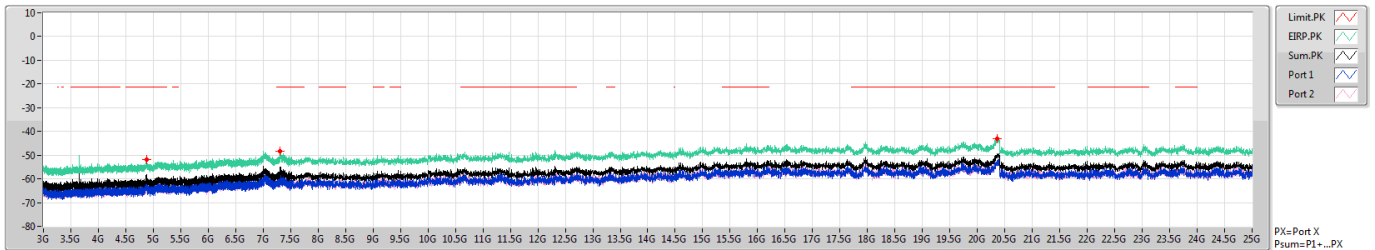


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	PK	4.87706G	-51.76	-21.20	-30.56	6.43	0.00	-58.19	-59.66	-63.61
3G	7.5G	1M	PK	7.31213G	-48.44	-21.20	-27.24	6.43	0.00	-54.87	-58.94	-57.03
7.5G	25G	1M	PK	20.36688G	-42.95	-21.20	-21.75	6.43	0.00	-49.38	-52.57	-52.21

802.11ax HEW20_Nss1,(MCS0)_2TX

2437MHz

CSE-AV

30/04/2020

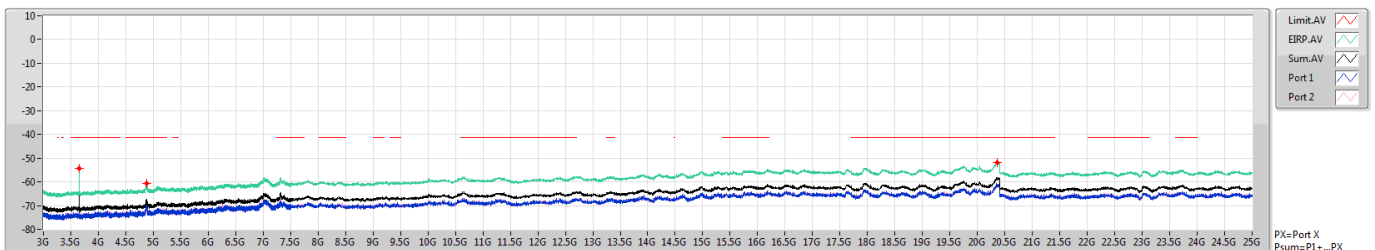


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	AV	3.65531G	-54.31	-41.20	-13.11	6.43	0.00	-60.74	-67.82	-61.69
3G	7.5G	1M	AV	4.88044G	-60.75	-41.20	-19.55	6.43	0.00	-67.18	-68.62	-72.69
7.5G	25G	1M	AV	20.35813G	-51.74	-41.20	-10.54	6.43	0.00	-58.17	-61.33	-61.03

802.11ax HEW20_Nss1,(MCS0)_2TX

2462MHz

CSE-PK

30/04/2020

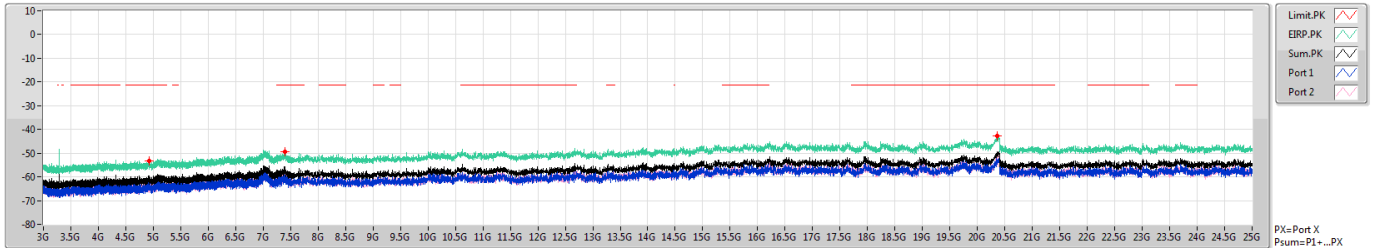

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dBi)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	PK	4.91813G	-53.17	-21.20	-31.97	6.43	0.00	-59.60	-62.44	-62.78
3G	7.5G	1M	PK	7.39256G	-49.40	-21.20	-28.20	6.43	0.00	-55.83	-59.97	-57.94
7.5G	25G	1M	PK	20.35813G	-42.88	-21.20	-21.68	6.43	0.00	-49.31	-53.34	-51.49


PX=Port X
Psum=P1+...PX

802.11ax HEW20_Nss1,(MCS0)_2TX

2462MHz

CSE-AV

30/04/2020

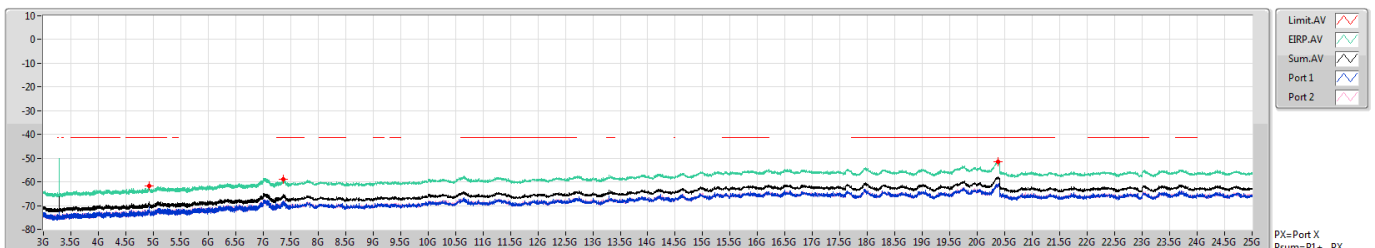

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dBi)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	AV	4.92319G	-61.83	-41.20	-20.63	6.43	0.00	-68.26	-70.63	-72.03
3G	7.5G	1M	AV	7.37006G	-58.96	-41.20	-17.76	6.43	0.00	-65.39	-68.06	-68.76
7.5G	25G	1M	AV	20.36906G	-51.55	-41.20	-10.35	6.43	0.00	-57.98	-60.92	-61.06

PX=Port X
Psum=P1+...PX



<2T2S>

For Conducted Harmonic (3~25GHz):

Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss2(MCS0)_2TX	Pass	3G	7.5G	AV	7.38469G	3.42	-57.26	-59.26	-55.14	-51.72	-41.20	-10.52

DG = Directional Gain;
PX=Port X; Psum=P1+.P2+...PX



Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	3G	7.5G	AV	3.61763G	2.98	-70.05	-60.98	-60.47	-57.49	-41.20	-16.29
2412MHz	Pass	3G	7.5G	AV	4.82475G	2.98	-70.01	-69.26	-66.61	-63.63	-41.20	-22.43
2412MHz	Pass	7.5G	25G	AV	12.06094G	2.98	-62.96	-62.82	-59.88	-56.90	-41.20	-15.70
2412MHz	Pass	3G	7.5G	PK	4.82194G	2.98	-60.64	-59.74	-57.16	-54.18	-21.20	-32.98
2412MHz	Pass	3G	7.5G	PK	7.25025G	2.98	-57.42	-54.56	-52.75	-49.77	-21.20	-28.57
2412MHz	Pass	7.5G	25G	PK	12.05219G	2.98	-52.81	-54.89	-50.72	-47.74	-21.20	-26.54
2437MHz												
2462MHz	Pass	3G	7.5G	AV	4.91981G	3.42	-69.41	-71.23	-67.22	-63.80	-41.20	-22.60
2462MHz	Pass	3G	7.5G	AV	7.38469G	3.42	-57.26	-59.26	-55.14	-51.72	-41.20	-10.52
2462MHz	Pass	7.5G	25G	AV	18.94063G	3.42	-63.95	-63.67	-60.80	-57.38	-41.20	-16.18
2462MHz	Pass	3G	7.5G	PK	4.91981G	3.42	-60.22	-62.70	-58.28	-54.86	-21.20	-33.66
2462MHz	Pass	3G	7.5G	PK	7.37738G	3.42	-47.53	-48.66	-45.05	-41.63	-21.20	-20.43
2462MHz	Pass	7.5G	25G	PK	19.93594G	3.42	-54.89	-53.77	-51.28	-47.86	-21.20	-26.66

DG = Directional Gain;


PX=Port X; Psum=P1+.P2+...PX

802.11ax HEW20_Nss2,(MCS0)_2TX

2412MHz

CSE-PK

11/05/2020

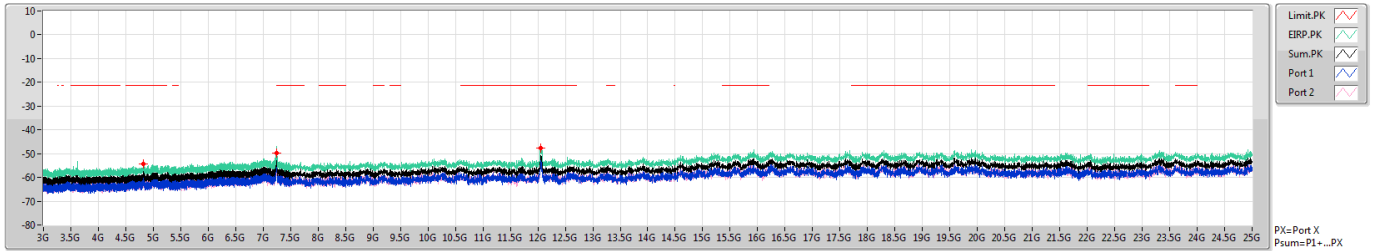


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	ERP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	PK	4.82194G	-54.18	-21.20	-32.98	2.98	0.00	-57.16	-60.64	-59.74
3G	7.5G	1M	PK	7.25025G	-49.77	-21.20	-28.57	2.98	0.00	-52.75	-57.42	-54.56
7.5G	25G	1M	PK	12.05219G	-47.74	-21.20	-26.54	2.98	0.00	-50.72	-52.81	-54.89

802.11ax HEW20_Nss2,(MCS0)_2TX

2412MHz

CSE-AV

11/05/2020

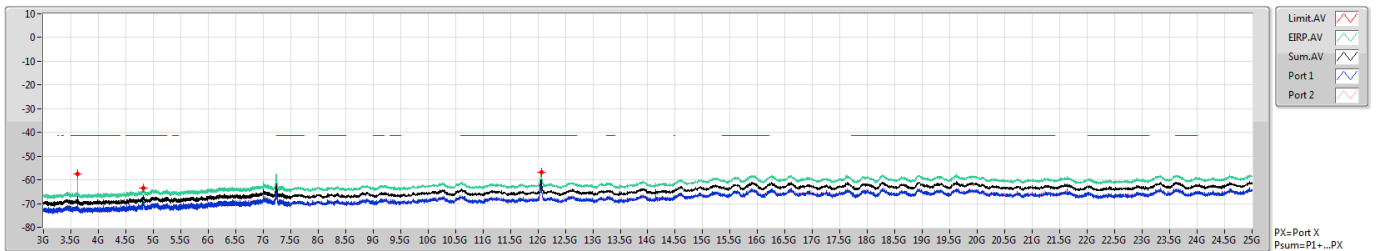


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	ERP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	AV	3.61763G	-57.49	-41.20	-16.29	2.98	0.00	-60.47	-70.05	-60.98
3G	7.5G	1M	AV	4.82475G	-63.63	-41.20	-22.43	2.98	0.00	-66.61	-70.01	-69.26
7.5G	25G	1M	AV	12.06094G	-56.90	-41.20	-15.70	2.98	0.00	-59.88	-62.96	-62.82

802.11ax HEW20_Nss2,(MCS0)_2TX

2462MHz

CSE-PK

11/05/2020

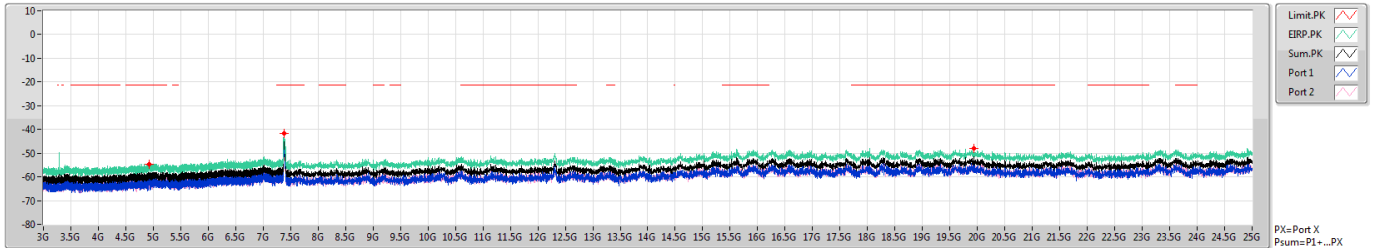


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	PK	4.91981G	-54.86	-21.20	-33.66	3.42	0.00	-58.28	-60.22	-62.70
3G	7.5G	1M	PK	7.37738G	-41.63	-21.20	-20.43	3.42	0.00	-45.05	-47.53	-48.66
7.5G	25G	1M	PK	19.93594G	-47.86	-21.20	-26.66	3.42	0.00	-51.28	-54.89	-53.77

802.11ax HEW20_Nss2,(MCS0)_2TX

2462MHz

CSE-AV

11/05/2020

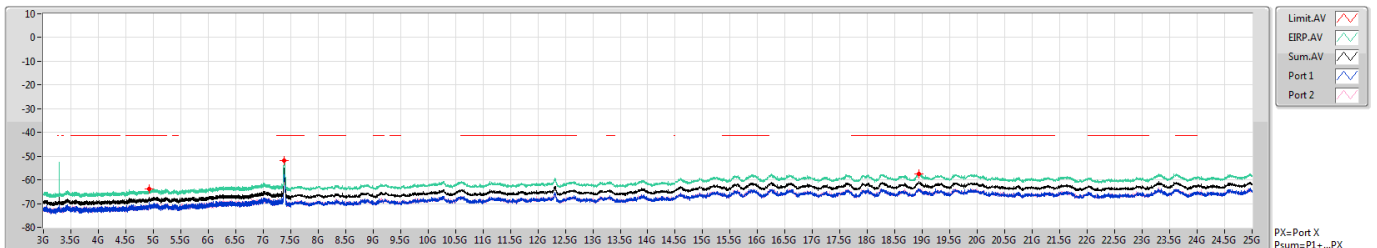

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	AV	4.91981G	-63.80	-41.20	-22.60	3.42	0.00	-67.22	-69.41	-71.23
3G	7.5G	1M	AV	7.38469G	-51.72	-41.20	-10.52	3.42	0.00	-55.14	-57.26	-59.26
7.5G	25G	1M	AV	18.94063G	-57.38	-41.20	-16.18	3.42	0.00	-60.80	-63.95	-63.67



<2T1S>

For Conducted Bandedge:

Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1(1Mbps)_2TX	Pass	2.4835G	2.5235G	AV	2.48566G	6.43	-51.77	-55.75	-50.31	-43.88	-41.2	-2.68
802.11g_Nss1(6Mbps)_2TX	Pass	2.36G	2.4G	PK	2.389G	5.99	-31.65	-29.97	-27.72	-21.73	-21.2	-0.53
802.11ax HEW20_Nss1(MCS0)_2TX	Pass	2.4835G	2.5235G	PK	2.48418G	6.43	-29.82	-33.45	-28.26	-21.83	-21.2	-0.63

DG = Directional Gain;

PX=Port X; Psum=P1+.P2+...PX

**Result**

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11b_Nss1(1Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.3G	2.36G	AV	2.35664G	5.99	-58.77	-58.89	-55.82	-49.83	-41.2	-8.63
2412MHz	Pass	2.36G	2.4G	AV	2.38828G	5.99	-55.44	-54.65	-52.02	-46.03	-41.2	-4.83
2412MHz	Pass	2.4G	2.4835G	AV	2.4835G	5.99	-60.48	-60.38	-57.42	-51.43	-41.2	-10.23
2412MHz	Pass	2.4835G	2.5235G	AV	2.48378G	5.99	-60.01	-60.54	-57.26	-51.27	-41.2	-10.07
2412MHz	Pass	2.5235G	2.6G	AV	2.52472G	5.99	-62.99	-62.54	-59.75	-53.76	-41.2	-12.56
2412MHz	Pass	2.3G	2.36G	PK	2.34956G	5.99	-47.08	-46.04	-43.52	-37.53	-21.2	-16.33
2412MHz	Pass	2.36G	2.4G	PK	2.38888G	5.99	-42.94	-43.43	-40.17	-34.18	-21.2	-12.98
2412MHz	Pass	2.4G	2.4835G	PK	2.4835G	5.99	-49.41	-49.65	-46.52	-40.53	-21.2	-19.33
2412MHz	Pass	2.4835G	2.5235G	PK	2.49254G	5.99	-47.07	-49.1	-44.96	-38.97	-21.2	-17.77
2412MHz	Pass	2.5235G	2.6G	PK	2.52641G	5.99	-50.35	-49.85	-47.08	-41.09	-21.2	-19.89
2437MHz	Pass	2.3G	2.36G	AV	2.35904G	6.43	-59.41	-61.02	-57.13	-50.70	-41.2	-9.50
2437MHz	Pass	2.36G	2.4G	AV	2.38868G	6.43	-55.67	-58.17	-53.73	-47.30	-41.2	-6.10
2437MHz	Pass	2.4G	2.4835G	AV	2.4835G	6.43	-57.24	-58.09	-54.63	-48.20	-41.2	-7.00
2437MHz	Pass	2.4835G	2.5235G	AV	2.48542G	6.43	-54.52	-58.15	-52.96	-46.53	-41.2	-5.33
2437MHz	Pass	2.5235G	2.6G	AV	2.52365G	6.43	-60.2	-60.5	-57.34	-50.91	-41.2	-9.71
2437MHz	Pass	2.3G	2.36G	PK	2.35874G	6.43	-46.85	-47.92	-44.34	-37.91	-21.2	-16.71
2437MHz	Pass	2.36G	2.4G	PK	2.38688G	6.43	-42.81	-47.24	-41.47	-35.04	-21.2	-13.84
2437MHz	Pass	2.4G	2.4835G	PK	2.4835G	6.43	-45.32	-47.01	-43.07	-36.64	-21.2	-15.44
2437MHz	Pass	2.4835G	2.5235G	PK	2.48562G	6.43	-43.98	-45.57	-41.69	-35.26	-21.2	-14.06
2437MHz	Pass	2.5235G	2.6G	PK	2.53781G	6.43	-48.62	-47.78	-45.17	-38.74	-21.2	-17.54
2462MHz	Pass	2.3G	2.36G	AV	2.3597G	6.43	-58.78	-60.08	-56.37	-49.94	-41.2	-8.74
2462MHz	Pass	2.36G	2.4G	AV	2.36124G	6.43	-57.08	-59.11	-54.97	-48.54	-41.2	-7.34
2462MHz	Pass	2.4G	2.4835G	AV	2.4835G	6.43	-54.19	-54.88	-51.51	-45.08	-41.2	-3.88
2462MHz	Pass	2.4835G	2.5235G	AV	2.48566G	6.43	-51.77	-55.75	-50.31	-43.88	-41.2	-2.68
2462MHz	Pass	2.5235G	2.6G	AV	2.56114G	6.43	-58.61	-58.83	-55.71	-49.28	-41.2	-8.08
2462MHz	Pass	2.3G	2.36G	PK	2.3594G	6.43	-47.64	-49	-45.26	-38.83	-21.2	-17.63
2462MHz	Pass	2.36G	2.4G	PK	2.36324G	6.43	-47.32	-47.05	-44.17	-37.74	-21.2	-16.54
2462MHz	Pass	2.4G	2.4835G	PK	2.4835G	6.43	-42.71	-44.15	-40.36	-33.93	-21.2	-12.73
2462MHz	Pass	2.4835G	2.5235G	PK	2.49166G	6.43	-40.88	-44.13	-39.2	-32.77	-21.2	-11.57
2462MHz	Pass	2.5235G	2.6G	PK	2.52641G	6.43	-46.27	-46.79	-43.51	-37.08	-21.2	-15.88
802.11g_Nss1(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.3G	2.36G	AV	2.35982G	5.99	-58.02	-58.51	-55.25	-49.26	-41.2	-8.06
2412MHz	Pass	2.36G	2.4G	AV	2.38972G	5.99	-53.51	-52.28	-49.84	-43.85	-41.2	-2.65
2412MHz	Pass	2.4G	2.4835G	AV	2.4835G	5.99	-60.14	-60.23	-57.17	-51.18	-41.2	-9.98
2412MHz	Pass	2.4835G	2.5235G	AV	2.4843G	5.99	-60.14	-59.87	-56.99	-51.00	-41.2	-9.80
2412MHz	Pass	2.5235G	2.6G	AV	2.52564G	5.99	-62.55	-62.4	-59.46	-53.47	-41.2	-12.27
2412MHz	Pass	2.3G	2.36G	PK	2.35724G	5.99	-46.55	-45.3	-42.87	-36.88	-21.2	-15.68
2412MHz	Pass	2.36G	2.4G	PK	2.389G	5.99	-31.65	-29.97	-27.72	-21.73	-21.2	-0.53
2412MHz	Pass	2.4G	2.4835G	PK	2.4835G	5.99	-48.3	-48.33	-45.3	-39.31	-21.2	-18.11
2412MHz	Pass	2.4835G	2.5235G	PK	2.48538G	5.99	-48.22	-47.18	-44.66	-38.67	-21.2	-17.47
2412MHz	Pass	2.5235G	2.6G	PK	2.52457G	5.99	-50.93	-49.31	-47.03	-41.04	-21.2	-19.84
2437MHz	Pass	2.3G	2.36G	AV	2.36G	6.43	-58.77	-59.72	-56.21	-49.78	-41.2	-8.58
2437MHz	Pass	2.36G	2.4G	AV	2.38944G	6.43	-54.65	-56.07	-52.29	-45.86	-41.2	-4.66
2437MHz	Pass	2.4G	2.4835G	AV	2.4835G	6.43	-54.64	-55.48	-52.03	-45.60	-41.2	-4.40
2437MHz	Pass	2.4835G	2.5235G	AV	2.48358G	6.43	-54.72	-55.81	-52.22	-45.79	-41.2	-4.59
2437MHz	Pass	2.5235G	2.6G	AV	2.52434G	6.43	-59.77	-59.56	-56.65	-50.22	-41.2	-9.02
2437MHz	Pass	2.3G	2.36G	PK	2.35628G	6.43	-45.65	-48.55	-43.85	-37.42	-21.2	-16.22
2437MHz	Pass	2.36G	2.4G	PK	2.38816G	6.43	-39.85	-38.65	-36.2	-29.77	-21.2	-8.57
2437MHz	Pass	2.4G	2.4835G	PK	2.4835G	6.43	-39.22	-44.39	-38.07	-31.64	-21.2	-10.44
2437MHz	Pass	2.4835G	2.5235G	PK	2.48358G	6.43	-37.22	-42.94	-36.19	-29.76	-21.2	-8.56
2437MHz	Pass	2.5235G	2.6G	PK	2.52794G	6.43	-47.4	-47.63	-44.5	-38.07	-21.2	-16.87
2462MHz	Pass	2.3G	2.36G	AV	2.3594G	6.43	-60.58	-61.82	-58.15	-51.72	-41.2	-10.52



CSE (Restricted Band)

Appendix F.7

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2462MHz	Pass	2.36G	2.4G	AV	2.3894G	6.43	-59.97	-60.54	-57.24	-50.81	-41.2	-9.61
2462MHz	Pass	2.4G	2.4835G	AV	2.4835G	6.43	-54.06	-55.47	-51.7	-45.27	-41.2	-4.07
2462MHz	Pass	2.4835G	2.5235G	AV	2.48366G	6.43	-54.44	-55.36	-51.87	-45.44	-41.2	-4.24
2462MHz	Pass	2.5235G	2.6G	AV	2.52358G	6.43	-59.82	-59.92	-56.86	-50.43	-41.2	-9.23
2462MHz	Pass	2.3G	2.36G	PK	2.35802G	6.43	-48.18	-49.73	-45.88	-39.45	-21.2	-18.25
2462MHz	Pass	2.36G	2.4G	PK	2.38776G	6.43	-47.46	-48.53	-44.95	-38.52	-21.2	-17.32
2462MHz	Pass	2.4G	2.4835G	PK	2.4835G	6.43	-33.56	-35.34	-31.35	-24.92	-21.2	-3.72
2462MHz	Pass	2.4835G	2.5235G	PK	2.48434G	6.43	-32.38	-35.51	-30.66	-24.23	-21.2	-3.03
2462MHz	Pass	2.5235G	2.6G	PK	2.52381G	6.43	-47.61	-47.08	-44.33	-37.90	-21.2	-16.70
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.3G	2.36G	AV	2.35922G	5.99	-58.81	-58.86	-55.82	-49.83	-41.2	-8.63
2412MHz	Pass	2.36G	2.4G	AV	2.38992G	5.99	-53.97	-53.21	-50.56	-44.57	-41.2	-3.37
2412MHz	Pass	2.4G	2.4835G	AV	2.4835G	5.99	-60.63	-61.07	-57.83	-51.84	-41.2	-10.64
2412MHz	Pass	2.4835G	2.5235G	AV	2.48486G	5.99	-60.52	-60.84	-57.67	-51.68	-41.2	-10.48
2412MHz	Pass	2.5235G	2.6G	AV	2.52365G	5.99	-62.82	-62.79	-59.79	-53.80	-41.2	-12.60
2412MHz	Pass	2.3G	2.36G	PK	2.35712G	5.99	-45.2	-46.87	-42.94	-36.95	-21.2	-15.75
2412MHz	Pass	2.36G	2.4G	PK	2.38952G	5.99	-32.68	-32.7	-29.68	-23.69	-21.2	-2.49
2412MHz	Pass	2.4G	2.4835G	PK	2.4835G	5.99	-48.14	-49.7	-45.84	-39.85	-21.2	-18.65
2412MHz	Pass	2.4835G	2.5235G	PK	2.48606G	5.99	-48.1	-48.48	-45.28	-39.29	-21.2	-18.09
2412MHz	Pass	2.5235G	2.6G	PK	2.52878G	5.99	-51.27	-49.86	-47.5	-41.51	-21.2	-20.31
2437MHz	Pass	2.3G	2.36G	AV	2.35916G	6.43	-58.87	-59.91	-56.35	-49.92	-41.2	-8.72
2437MHz	Pass	2.36G	2.4G	AV	2.38992G	6.43	-54.4	-55.19	-51.77	-45.34	-41.2	-4.14
2437MHz	Pass	2.4G	2.4835G	AV	2.4835G	6.43	-55.07	-55.77	-52.4	-45.97	-41.2	-4.77
2437MHz	Pass	2.4835G	2.5235G	AV	2.48438G	6.43	-54.7	-55.75	-52.18	-45.75	-41.2	-4.55
2437MHz	Pass	2.5235G	2.6G	AV	2.52396G	6.43	-59.76	-60.08	-56.91	-50.48	-41.2	-9.28
2437MHz	Pass	2.3G	2.36G	PK	2.35862G	6.43	-44.97	-48.1	-43.25	-36.82	-21.2	-15.62
2437MHz	Pass	2.36G	2.4G	PK	2.38976G	6.43	-38.4	-37.22	-34.76	-28.33	-21.2	-7.13
2437MHz	Pass	2.4G	2.4835G	PK	2.4835G	6.43	-39.43	-42.29	-37.62	-31.19	-21.2	-9.99
2437MHz	Pass	2.4835G	2.5235G	PK	2.4835G	6.43	-38.82	-40.4	-36.53	-30.10	-21.2	-8.90
2437MHz	Pass	2.5235G	2.6G	PK	2.5235G	6.43	-47.49	-46.81	-44.13	-37.70	-21.2	-16.50
2462MHz	Pass	2.3G	2.36G	AV	2.35778G	6.43	-60.98	-61.9	-58.41	-51.98	-41.2	-10.78
2462MHz	Pass	2.36G	2.4G	AV	2.38948G	6.43	-60.17	-60.68	-57.41	-50.98	-41.2	-9.78
2462MHz	Pass	2.4G	2.4835G	AV	2.4835G	6.43	-51.21	-55.39	-49.81	-43.38	-41.2	-2.18
2462MHz	Pass	2.4835G	2.5235G	AV	2.48362G	6.43	-51.2	-55.3	-49.77	-43.34	-41.2	-2.14
2462MHz	Pass	2.5235G	2.6G	AV	2.52434G	6.43	-59.98	-60.25	-57.1	-50.67	-41.2	-9.47
2462MHz	Pass	2.3G	2.36G	PK	2.35286G	6.43	-48.48	-50.7	-46.44	-40.01	-21.2	-18.81
2462MHz	Pass	2.36G	2.4G	PK	2.38924G	6.43	-47.84	-48.14	-44.98	-38.55	-21.2	-17.35
2462MHz	Pass	2.4G	2.4835G	PK	2.4835G	6.43	-30.94	-36.71	-29.92	-23.49	-21.2	-2.29
2462MHz	Pass	2.4835G	2.5235G	PK	2.48418G	6.43	-29.82	-33.45	-28.26	-21.83	-21.2	-0.63
2462MHz	Pass	2.5235G	2.6G	PK	2.52526G	6.43	-47.07	-47.87	-44.44	-38.01	-21.2	-16.81


DG = Directional Gain;
PX=Port X; Psum=P1+.P2+...PX

802.11b_Nss1,(1Mbps)_2TX

2412MHz

CSE-PK

30/04/2020

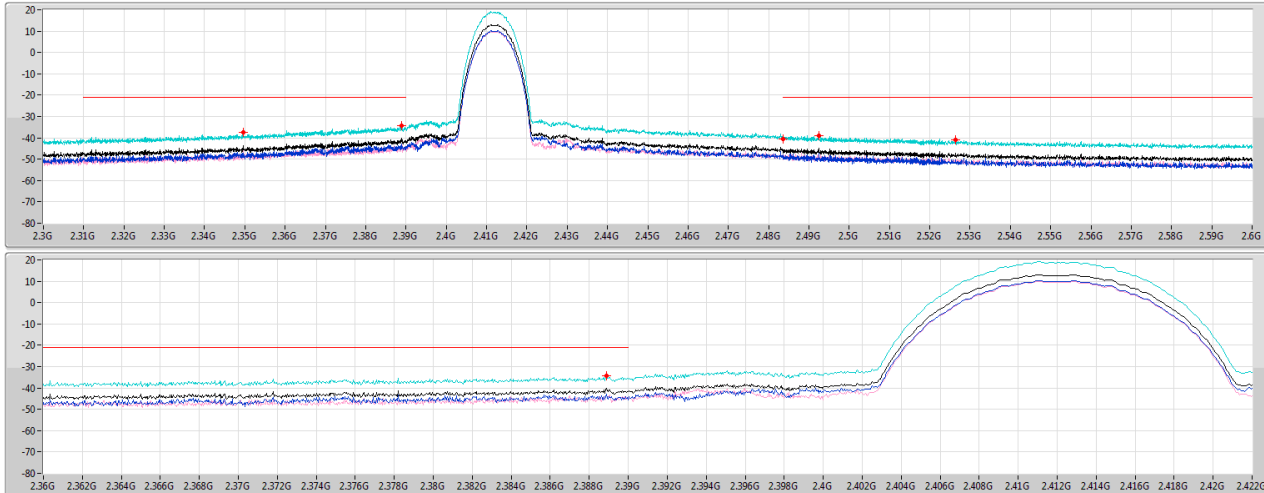


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
2.3G	2.36G	1M	PK	2.34956G	-37.53	-21.20	-16.33	5.99	0.00	-43.52	-47.08	-46.04
2.36G	2.4G	1M	PK	2.38888G	-34.18	-21.20	-12.98	5.99	0.00	-40.17	-42.94	-43.43
2.4G	2.4835G	1M	PK	2.4835G	-40.53	-21.20	-19.33	5.99	0.00	-46.52	-49.41	-49.65
2.4835G	2.5235G	1M	PK	2.49254G	-38.97	-21.20	-17.77	5.99	0.00	-44.96	-47.07	-49.10
2.5235G	2.6G	1M	PK	2.52641G	-41.09	-21.20	-19.89	5.99	0.00	-47.08	-50.35	-49.85

802.11b_Nss1,(1Mbps)_2TX

2412MHz

CSE-AV

30/04/2020

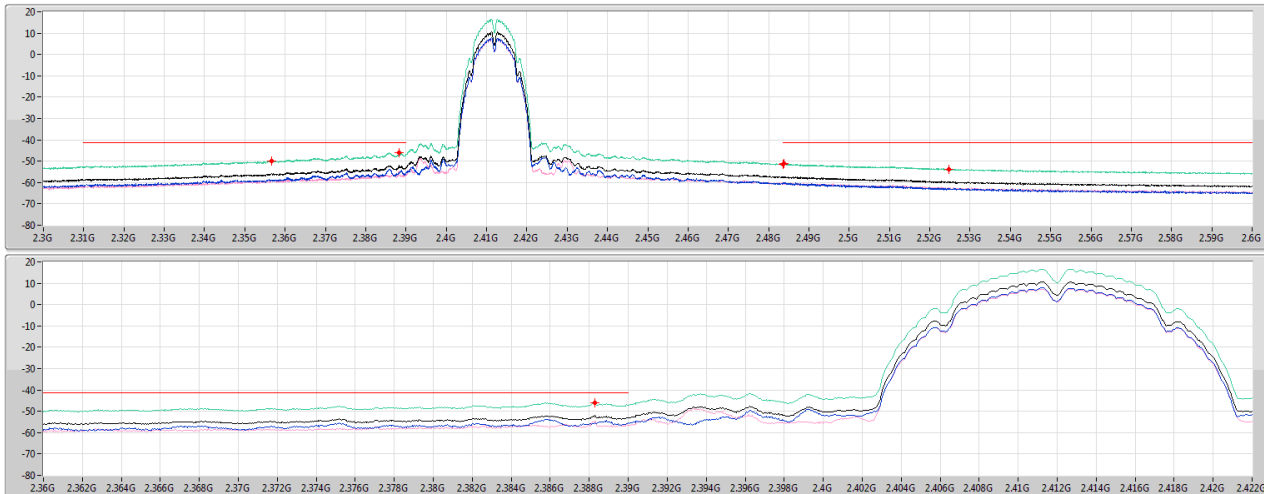


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
2.3G	2.36G	1M	AV	2.35664G	-49.83	-41.20	-8.63	5.99	0.00	-55.82	-58.77	-58.89
2.36G	2.4G	1M	AV	2.38828G	-46.03	-41.20	-4.83	5.99	0.00	-52.02	-55.44	-54.65
2.4G	2.4835G	1M	AV	2.4835G	-51.43	-41.20	-10.23	5.99	0.00	-57.42	-60.48	-60.38
2.4835G	2.5235G	1M	AV	2.48378G	-51.27	-41.20	-10.07	5.99	0.00	-57.26	-60.01	-60.54
2.5235G	2.6G	1M	AV	2.52472G	-53.76	-41.20	-12.56	5.99	0.00	-59.75	-62.99	-62.54

802.11b_Nss1,(1Mbps)_2TX

2437MHz

CSE-PK

30/04/2020

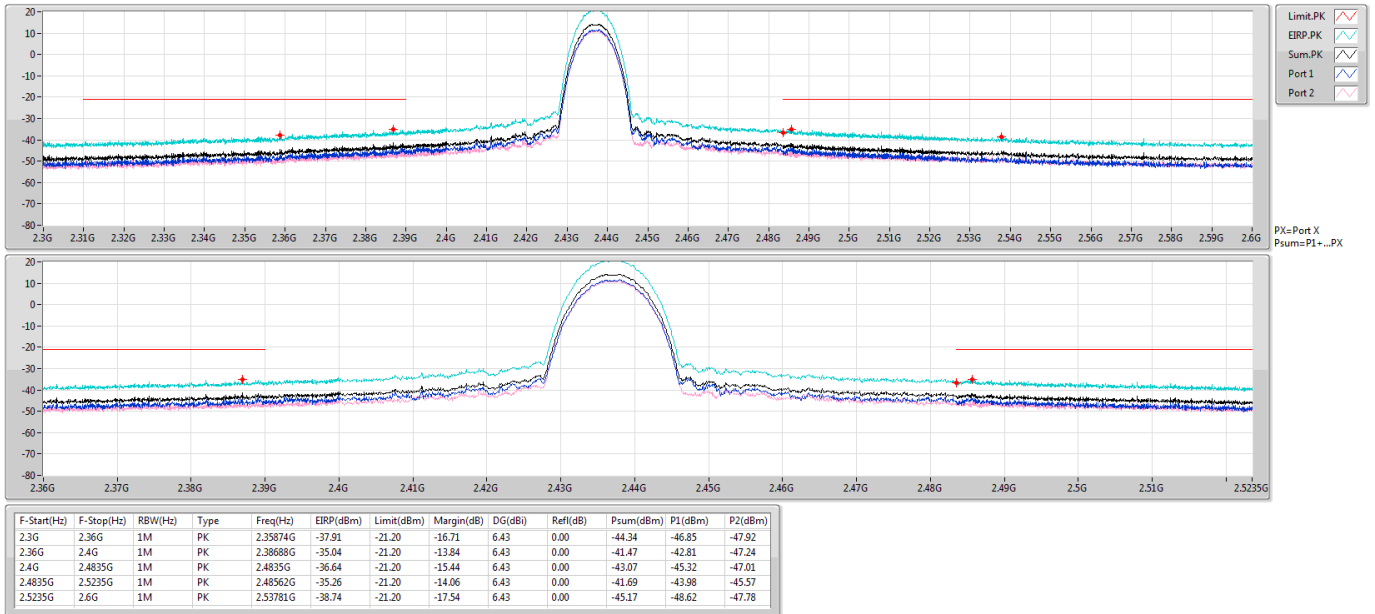


802.11b_Nss1,(1Mbps)_2TX

2437MHz

CSE-AV

30/04/2020

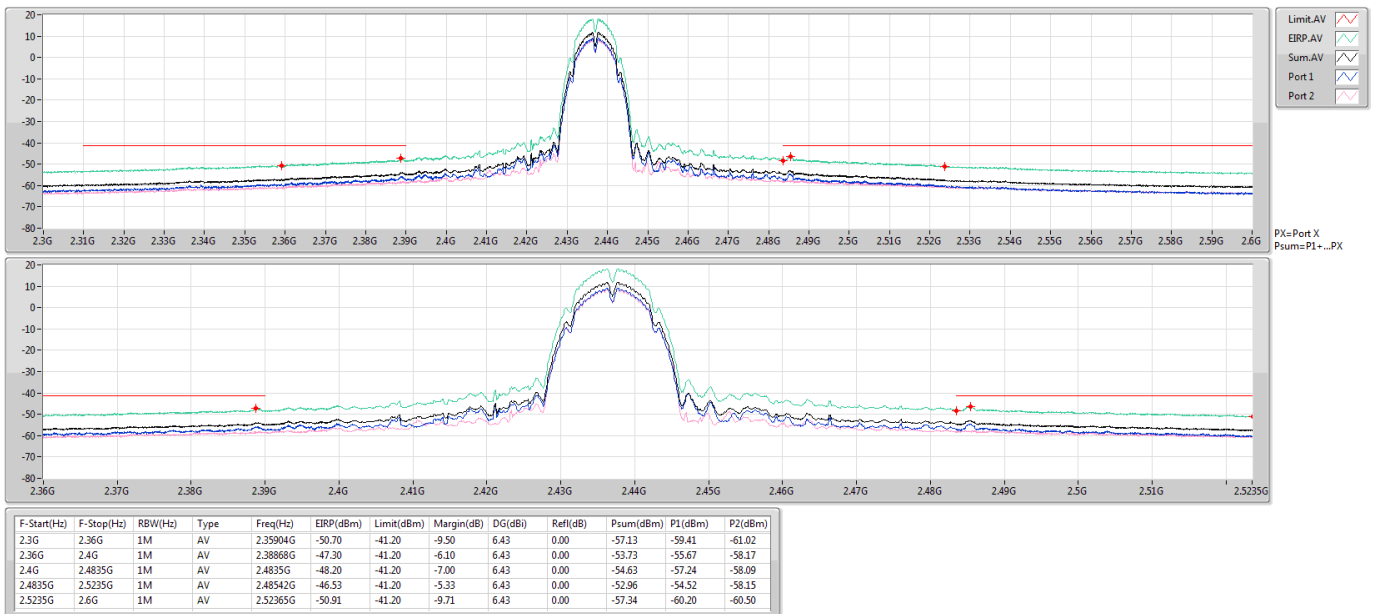


802.11b_Nss1,(1Mbps)_2TX

2462MHz

CSE-PK

30/04/2020

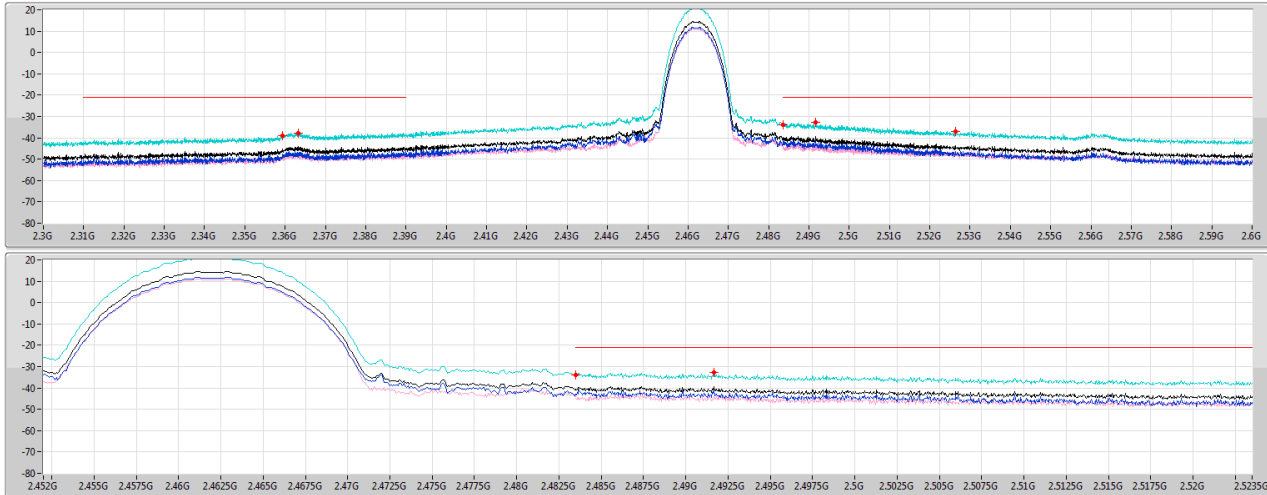


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
2.3G	2.36G	1M	PK	2.3594G	-38.83	-21.20	-17.63	6.43	0.00	-45.26	-47.64	-49.00
2.36G	2.4G	1M	PK	2.36324G	-37.74	-21.20	-16.54	6.43	0.00	-44.17	-47.32	-47.05
2.4G	2.4835G	1M	PK	2.4835G	-33.93	-21.20	-12.73	6.43	0.00	-40.36	-42.71	-44.15
2.4835G	2.5235G	1M	PK	2.49166G	-32.77	-21.20	-11.57	6.43	0.00	-39.20	-40.88	-44.13
2.5235G	2.6G	1M	PK	2.52641G	-37.08	-21.20	-15.88	6.43	0.00	-43.51	-46.27	-46.79

802.11b_Nss1,(1Mbps)_2TX

2462MHz

CSE-AV

30/04/2020

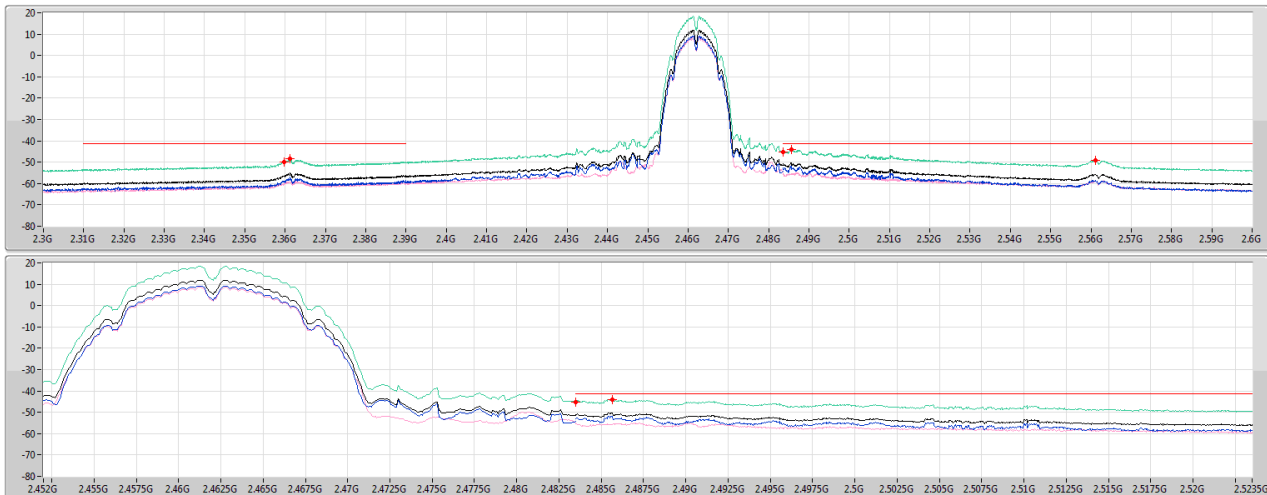


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
2.3G	2.36G	1M	AV	2.3597G	-49.94	-41.20	-8.74	6.43	0.00	-56.37	-58.78	-60.08
2.36G	2.4G	1M	AV	2.36124G	-48.54	-41.20	-7.34	6.43	0.00	-54.97	-57.08	-59.11
2.4G	2.4835G	1M	AV	2.4835G	-45.08	-41.20	-3.88	6.43	0.00	-51.51	-54.19	-54.88
2.4835G	2.5235G	1M	AV	2.48566G	-43.88	-41.20	-2.68	6.43	0.00	-50.31	-51.77	-55.75
2.5235G	2.6G	1M	AV	2.56114G	-49.28	-41.20	-8.08	6.43	0.00	-55.71	-58.61	-58.83

802.11g_Nss1,(6Mbps)_2TX

2412MHz

CSE-PK

30/04/2020

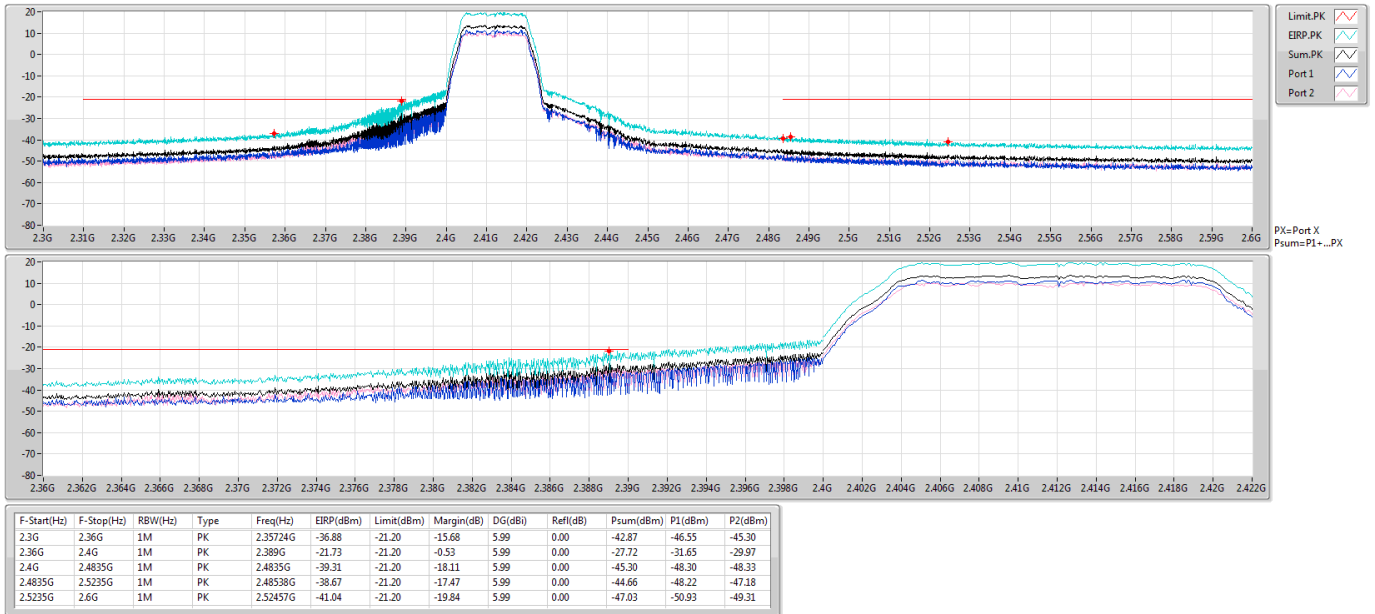


802.11g_Nss1,(6Mbps)_2TX

2412MHz

CSE-AV

30/04/2020

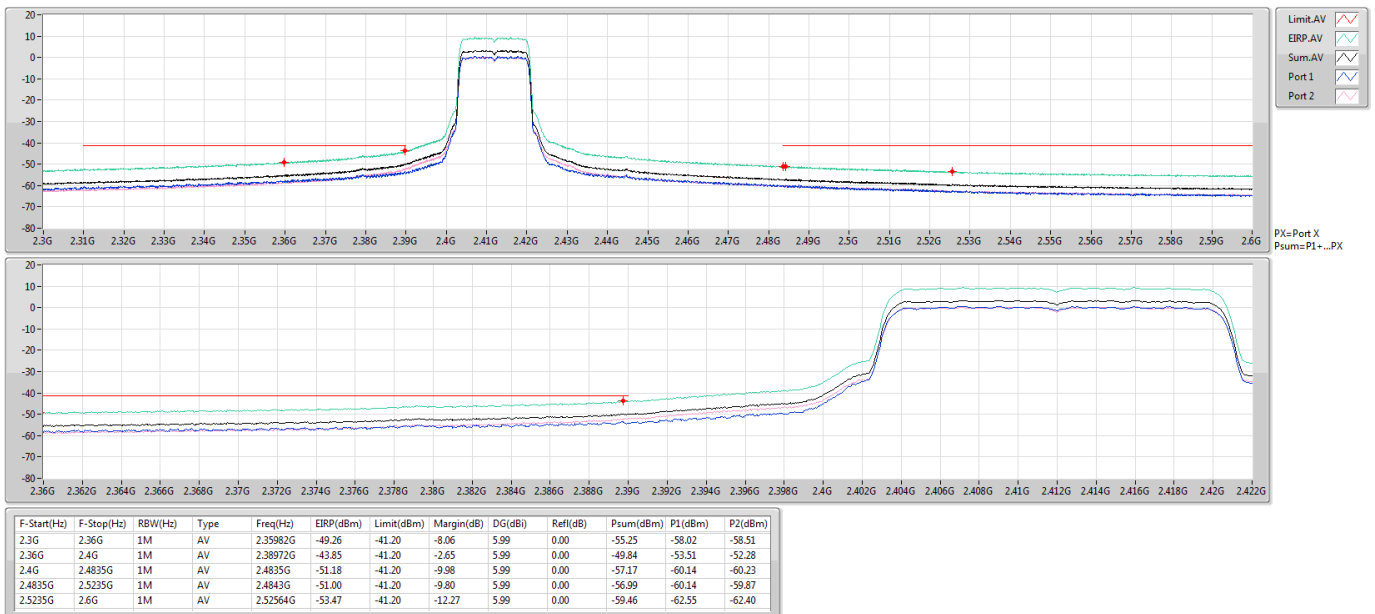


802.11g_Nss1,(6Mbps)_2TX

2437MHz

CSE-PK

30/04/2020

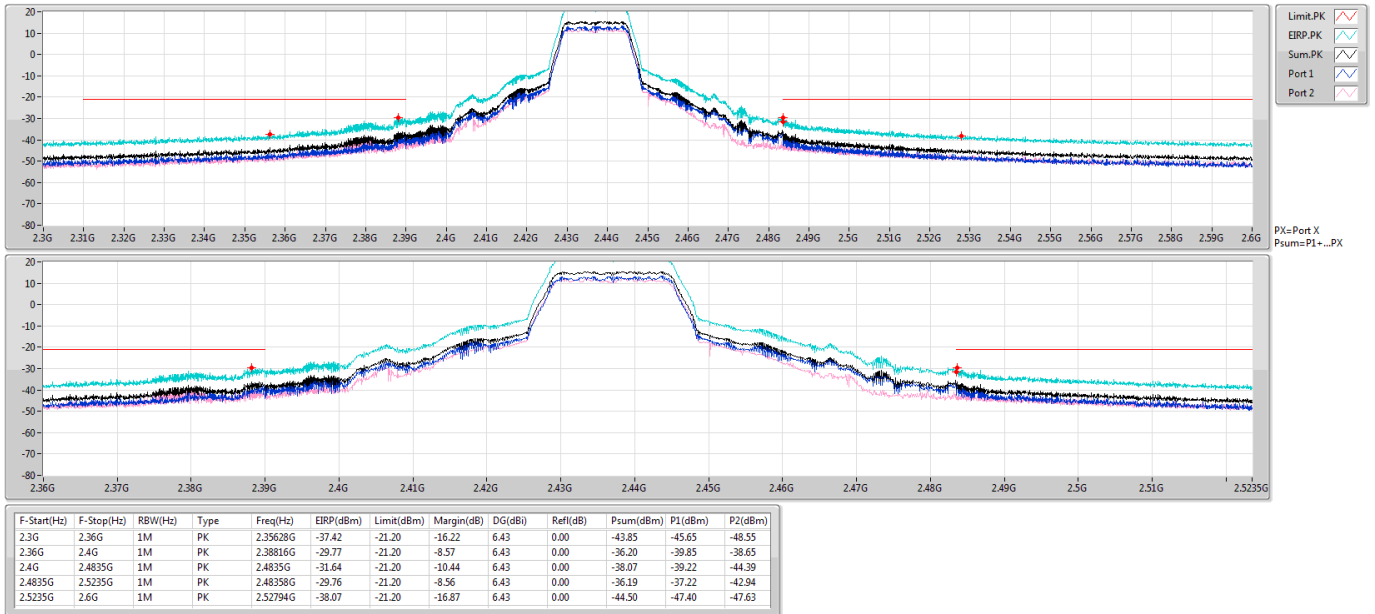


802.11g_Nss1,(6Mbps)_2TX

2437MHz

CSE-AV

30/04/2020

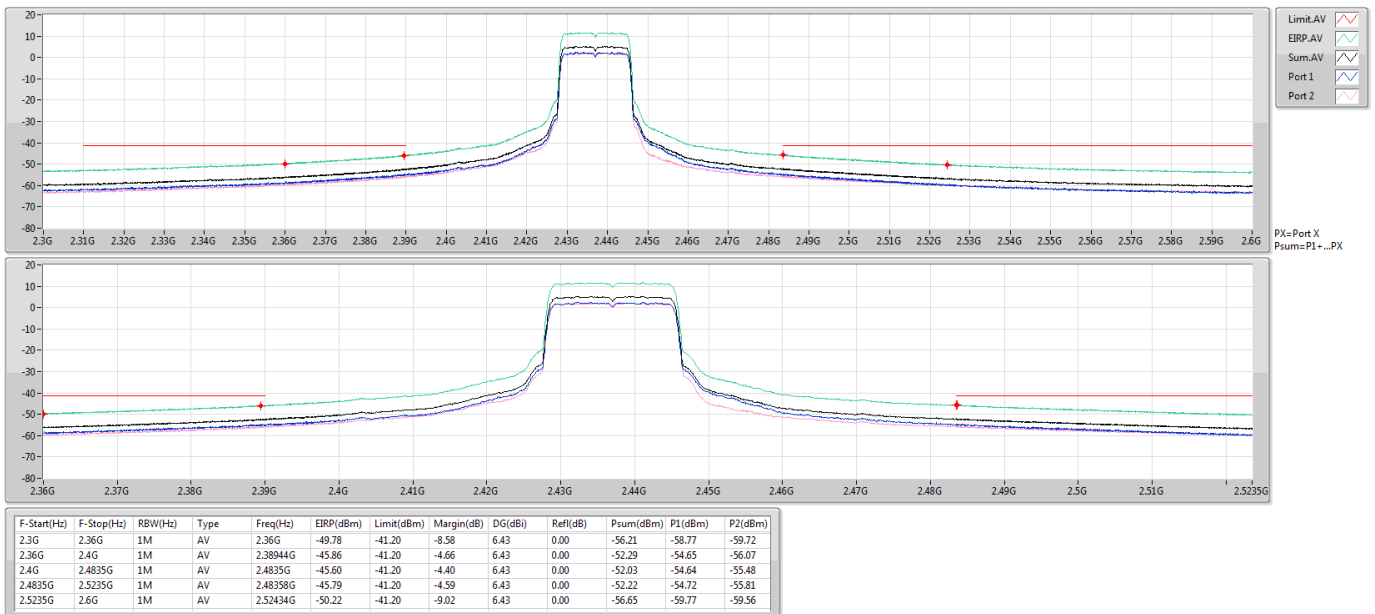


802.11g_Nss1,(6Mbps)_2TX

2462MHz

CSE-PK

30/04/2020

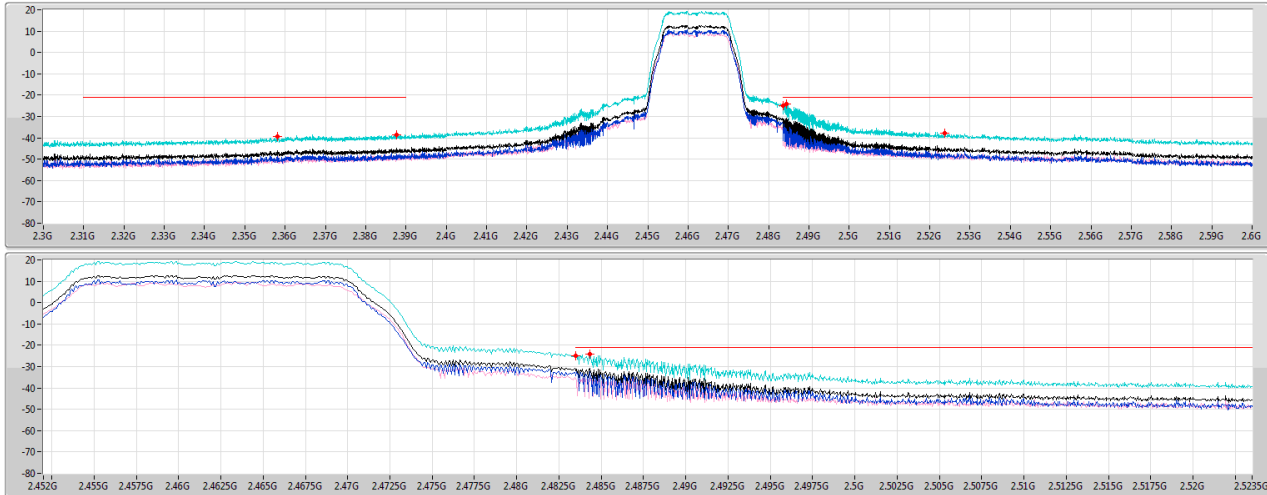

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
2.3G	2.36G	1M	PK	2.35802G	-39.45	-21.20	-18.25	6.43	0.00	-45.88	-48.18	-49.73
2.36G	2.4G	1M	PK	2.38776G	-38.52	-21.20	-17.32	6.43	0.00	-44.95	-47.46	-48.53
2.4G	2.4835G	1M	PK	2.4835G	-24.92	-21.20	-3.72	6.43	0.00	-31.35	-33.56	-35.34
2.4835G	2.5235G	1M	PK	2.48434G	-24.23	-21.20	-3.03	6.43	0.00	-30.66	-32.38	-35.51
2.5235G	2.6G	1M	PK	2.52381G	-37.90	-21.20	-16.70	6.43	0.00	-44.33	-47.61	-47.08

802.11g_Nss1,(6Mbps)_2TX

2462MHz

CSE-AV

30/04/2020

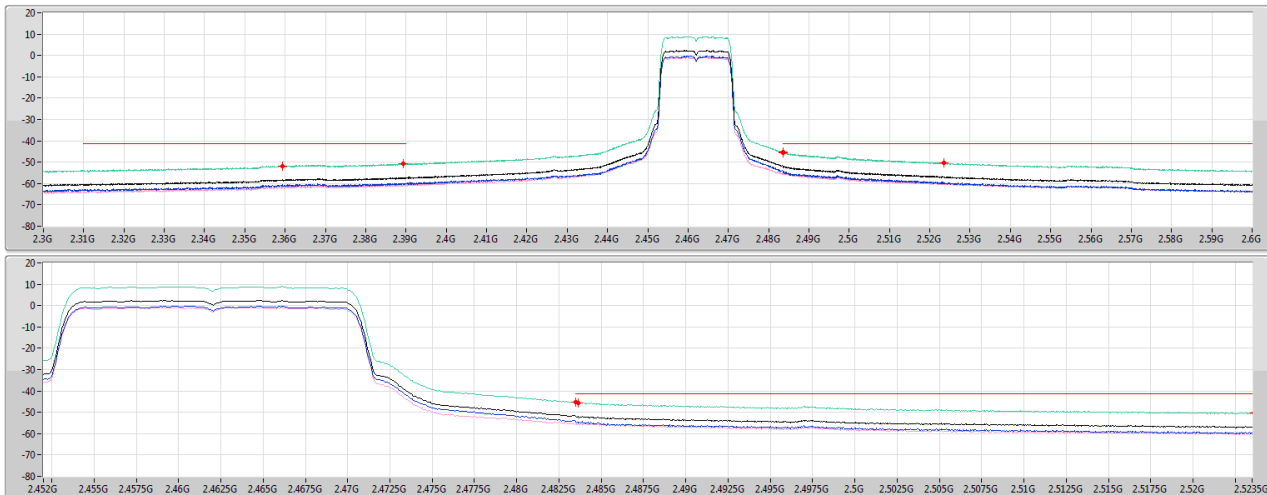


PX=Port X
Psum=P1+...PX

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
2.3G	2.36G	1M	AV	2.3594G	-51.72	-41.20	-10.52	6.43	0.00	-58.15	-60.58	-61.82
2.36G	2.4G	1M	AV	2.3894G	-50.81	-41.20	-9.61	6.43	0.00	-57.24	-59.97	-60.54
2.4G	2.4835G	1M	AV	2.4835G	-45.27	-41.20	-4.07	6.43	0.00	-51.70	-54.06	-55.47
2.4835G	2.5235G	1M	AV	2.48366G	-45.44	-41.20	-4.24	6.43	0.00	-51.87	-54.44	-55.36
2.5235G	2.6G	1M	AV	2.5238G	-50.43	-41.20	-9.23	6.43	0.00	-56.86	-59.82	-59.92

802.11ax HEW20_Nss1,(MCS0)_2TX

CSE-PK


2412MHz

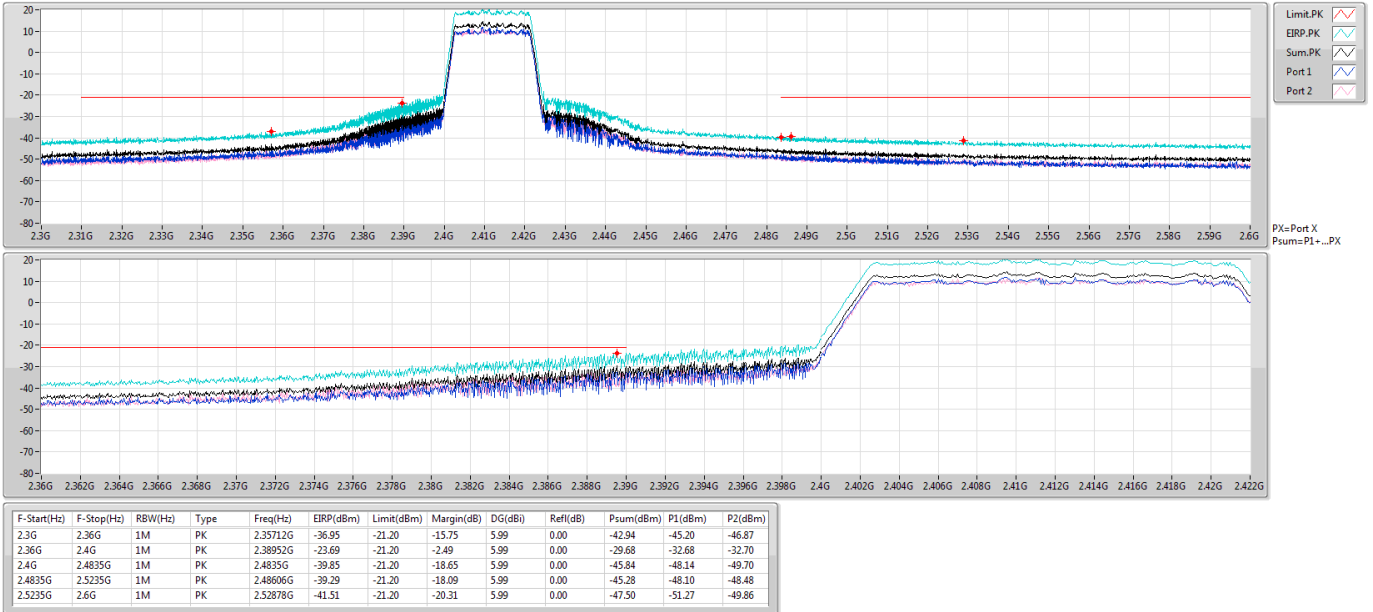

802.11ax HEW20_Nss1,(MCS0)_2TX

CSE-AV

2412MHz

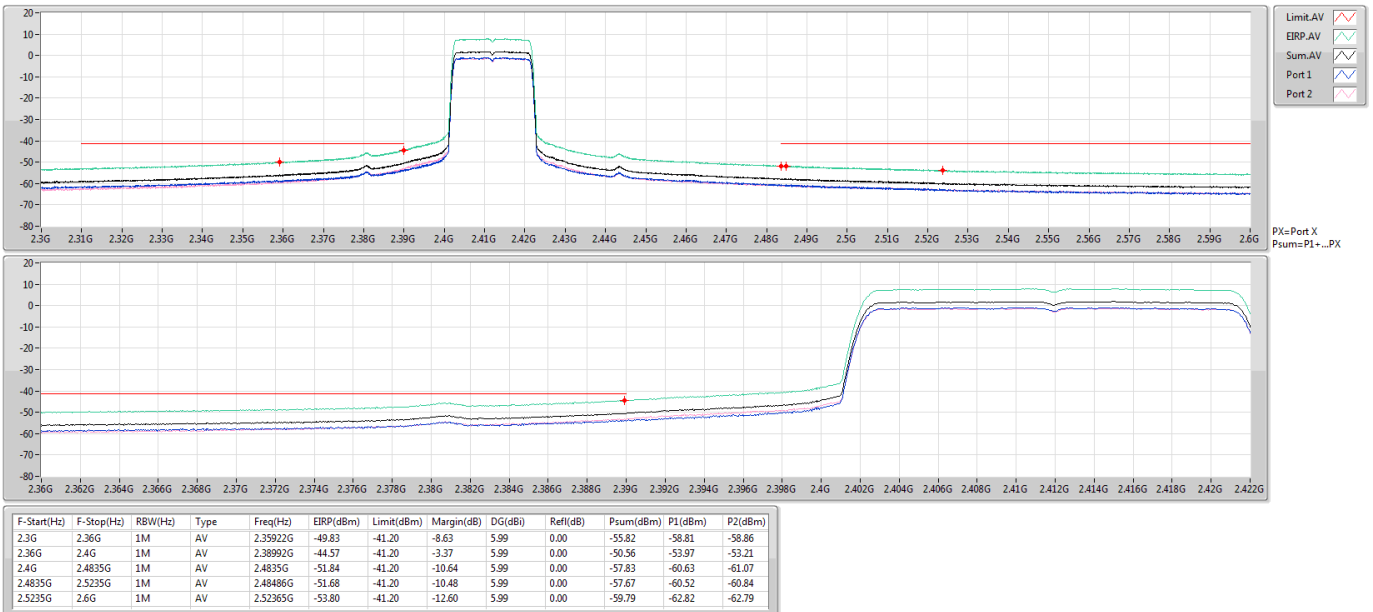


802.11ax HEW20_Nss1,(MCS0)_2TX

2437MHz

CSE-PK

30/04/2020

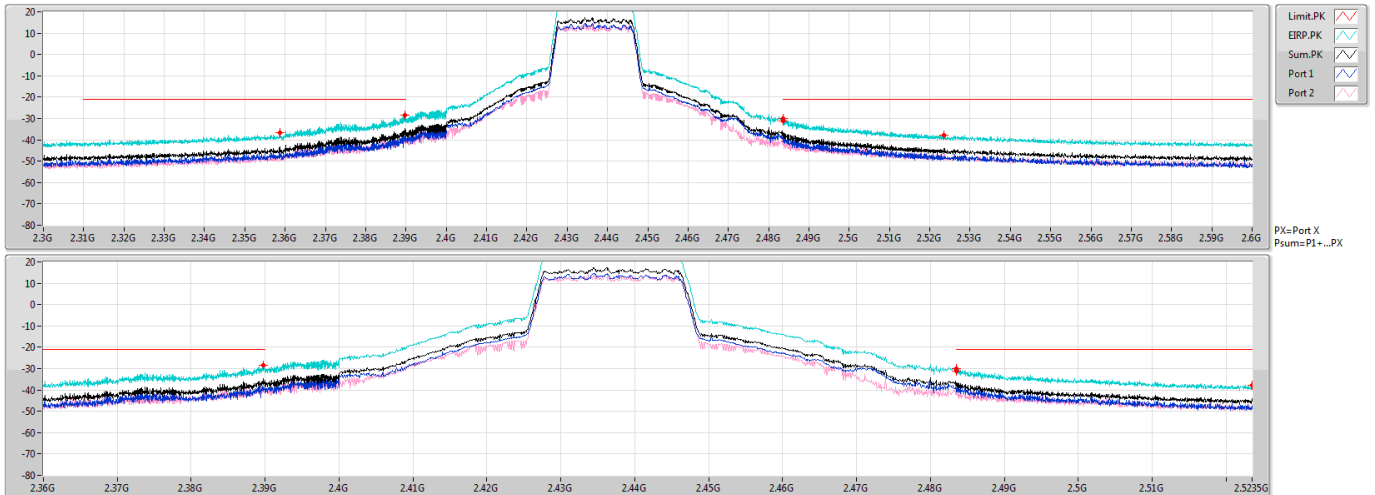


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
2.3G	2.36G	1M	PK	2.35862G	-36.82	-21.20	-15.62	6.43	0.00	-43.25	-44.97	-48.10
2.36G	2.4G	1M	PK	2.38976G	-28.33	-21.20	-7.13	6.43	0.00	-34.76	-38.40	-37.22
2.4G	2.4835G	1M	PK	2.4835G	-31.19	-21.20	-9.99	6.43	0.00	-37.62	-39.43	-42.29
2.4835G	2.5235G	1M	PK	2.4835G	-30.10	-21.20	-8.90	6.43	0.00	-36.53	-38.82	-40.40
2.5235G	2.6G	1M	PK	2.5235G	-37.70	-21.20	-16.50	6.43	0.00	-44.13	-47.49	-46.81

802.11ax HEW20_Nss1,(MCS0)_2TX

2437MHz

CSE-AV

30/04/2020

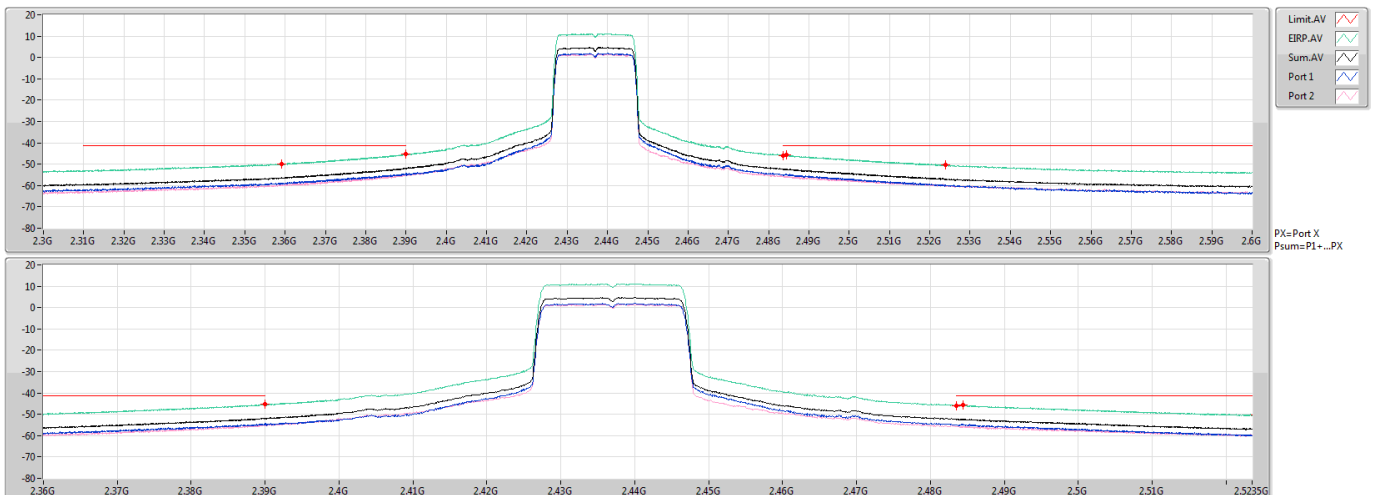


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
2.3G	2.36G	1M	AV	2.35916G	-49.92	-41.20	-8.72	6.43	0.00	-56.35	-58.87	-59.91
2.36G	2.4G	1M	AV	2.38992G	-45.34	-41.20	-4.14	6.43	0.00	-51.77	-54.40	-55.19
2.4G	2.4835G	1M	AV	2.4835G	-45.97	-41.20	-4.77	6.43	0.00	-52.40	-55.07	-55.77
2.4835G	2.5235G	1M	AV	2.48438G	-45.75	-41.20	-4.55	6.43	0.00	-52.18	-54.70	-55.75
2.5235G	2.6G	1M	AV	2.52396G	-50.48	-41.20	-9.28	6.43	0.00	-56.91	-59.76	-60.08

802.11ax HEW20_Nss1,(MCS0)_2TX

2462MHz

CSE-PK

30/04/2020

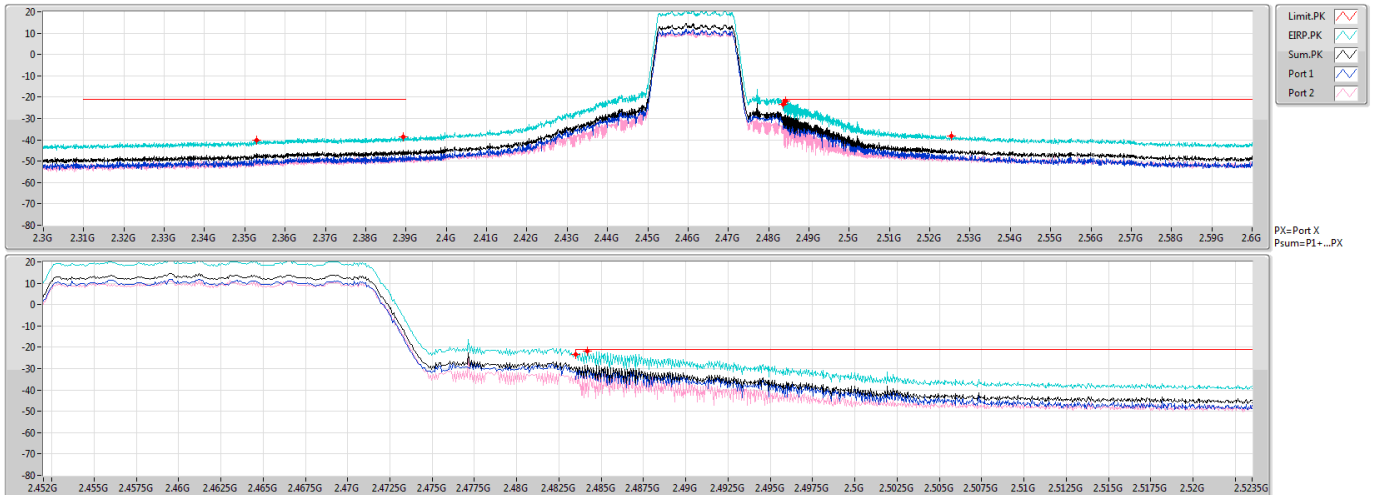


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
2.3G	2.36G	1M	PK	2.35286G	-40.01	-21.20	-18.81	6.43	0.00	-46.44	-48.48	-50.70
2.36G	2.4G	1M	PK	2.38924G	-38.55	-21.20	-17.35	6.43	0.00	-44.98	-47.84	-48.14
2.4G	2.4835G	1M	PK	2.4835G	-23.49	-21.20	-2.29	6.43	0.00	-29.92	-30.94	-36.71
2.4835G	2.5235G	1M	PK	2.48418G	-21.83	-21.20	-0.63	6.43	0.00	-28.26	-29.82	-33.45
2.5235G	2.6G	1M	PK	2.52526G	-38.01	-21.20	-16.81	6.43	0.00	-44.44	-47.07	-47.87

802.11ax HEW20_Nss1,(MCS0)_2TX

2462MHz

CSE-AV

30/04/2020

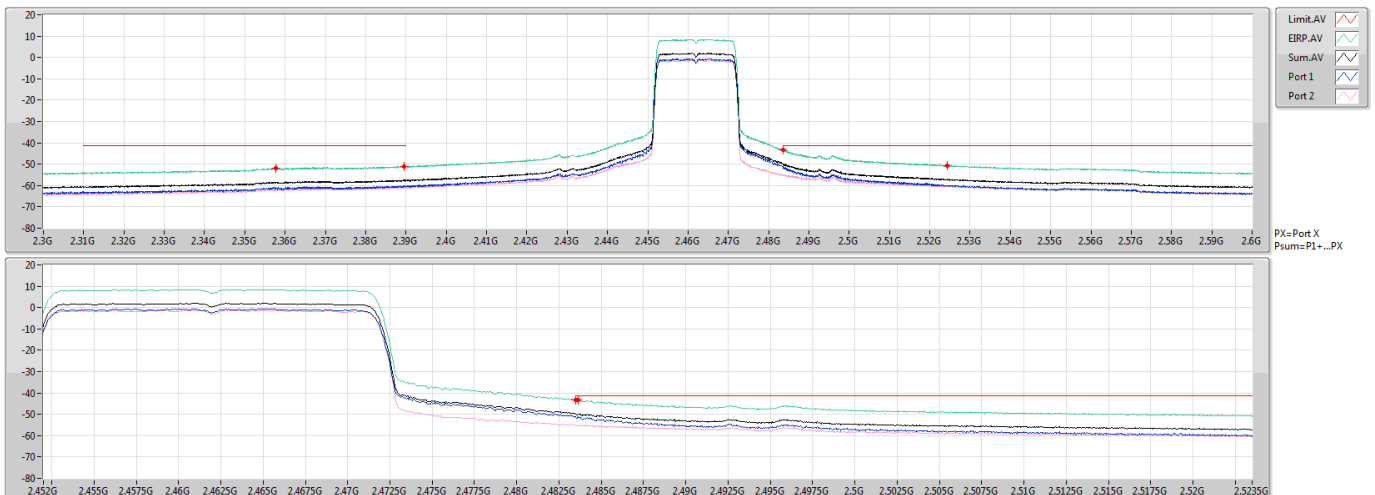

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
2.3G	2.36G	1M	AV	2.35778G	-51.98	-41.20	-10.78	6.43	0.00	-58.41	-60.98	-61.90
2.36G	2.4G	1M	AV	2.38948G	-50.98	-41.20	-9.78	6.43	0.00	-57.41	-60.17	-60.68
2.4G	2.4835G	1M	AV	2.4835G	-43.38	-41.20	-2.18	6.43	0.00	-49.81	-51.21	-55.39
2.4835G	2.5235G	1M	AV	2.48362G	-43.34	-41.20	-2.14	6.43	0.00	-49.77	-51.20	-55.30
2.5235G	2.6G	1M	AV	2.52434G	-50.67	-41.20	-9.47	6.43	0.00	-57.10	-59.98	-60.25



<2T2S>

For Conducted Bandedge:

Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	Pass	2.4835G	2.5235G	PK	2.48498G	3.42	-29.75	-27.60	-25.53	-22.11	-21.20	-0.91

DG = Directional Gain;
PX=Port X; Psum=P1+.P2+...PX

**Result**

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.3G	2.36G	AV	2.36G	2.98	-57.91	-57.72	-54.80	-51.82	-41.20	-10.62
2412MHz	Pass	2.36G	2.4G	AV	2.39G	2.98	-51.73	-49.56	-47.50	-44.52	-41.20	-3.32
2412MHz	Pass	2.4G	2.4835G	AV	2.4835G	2.98	-60.01	-59.09	-56.52	-53.54	-41.20	-12.34
2412MHz	Pass	2.4835G	2.5235G	AV	2.4835G	2.98	-59.70	-59.20	-56.43	-53.45	-41.20	-12.25
2412MHz	Pass	2.5235G	2.6G	AV	2.52381G	2.98	-61.83	-61.63	-58.72	-55.74	-41.20	-14.54
2412MHz	Pass	2.3G	2.36G	PK	2.3597G	2.98	-46.51	-41.60	-40.38	-37.40	-21.20	-16.20
2412MHz	Pass	2.36G	2.4G	PK	2.38892G	2.98	-36.93	-27.04	-26.62	-23.64	-21.20	-2.44
2412MHz	Pass	2.4G	2.4835G	PK	2.4835G	2.98	-46.82	-47.54	-44.15	-41.17	-21.20	-19.97
2412MHz	Pass	2.4835G	2.5235G	PK	2.4835G	2.98	-48.38	-46.39	-44.26	-41.28	-21.20	-20.08
2412MHz	Pass	2.5235G	2.6G	PK	2.5505G	2.98	-48.72	-49.53	-46.10	-43.12	-21.20	-21.92
2462MHz	Pass	2.3G	2.36G	AV	2.35898G	3.42	-59.91	-60.49	-57.18	-53.76	-41.20	-12.56
2462MHz	Pass	2.36G	2.4G	AV	2.3882G	3.42	-59.11	-59.42	-56.25	-52.83	-41.20	-11.63
2462MHz	Pass	2.4G	2.4835G	AV	2.4835G	3.42	-52.11	-50.41	-48.17	-44.75	-41.20	-3.55
2462MHz	Pass	2.4835G	2.5235G	AV	2.48354G	3.42	-52.10	-50.14	-48.00	-44.58	-41.20	-3.38
2462MHz	Pass	2.5235G	2.6G	AV	2.52465G	3.42	-58.48	-58.65	-55.55	-52.13	-41.20	-10.93
2462MHz	Pass	2.3G	2.36G	PK	2.35928G	3.42	-47.25	-49.16	-45.09	-41.67	-21.20	-20.47
2462MHz	Pass	2.36G	2.4G	PK	2.38576G	3.42	-44.27	-47.41	-42.55	-39.13	-21.20	-17.93
2462MHz	Pass	2.4G	2.4835G	PK	2.4835G	3.42	-33.90	-26.87	-26.08	-22.66	-21.20	-1.46
2462MHz	Pass	2.4835G	2.5235G	PK	2.48498G	3.42	-29.75	-27.60	-25.53	-22.11	-21.20	-0.91
2462MHz	Pass	2.5235G	2.6G	PK	2.53031G	3.42	-47.55	-44.69	-42.88	-39.46	-21.20	-18.26


DG = Directional Gain;
PX=Port X; Psum=P1+.P2+...PX

802.11ax HEW20_Nss2,(MCS0)_2TX

2412MHz

CSE-PK

11/05/2020

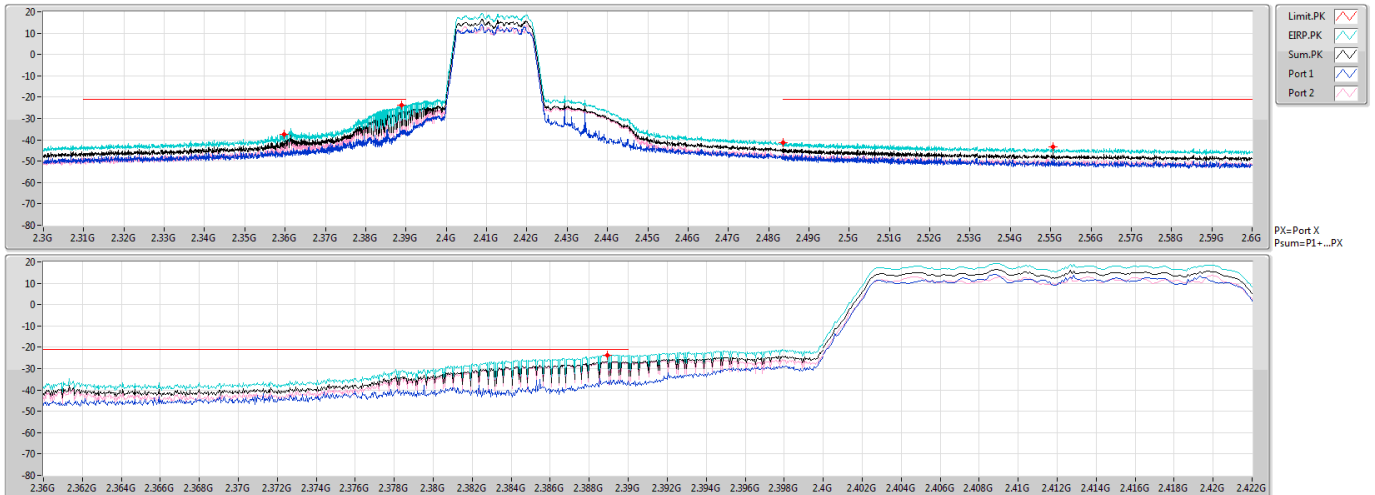


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
2.3G	2.36G	1M	PK	2.3597G	-37.40	-21.20	-16.20	2.98	0.00	-40.38	-46.51	-41.60
2.36G	2.4G	1M	PK	2.38892G	-23.64	-21.20	-2.44	2.98	0.00	-26.62	-36.93	-27.04
2.4G	2.4835G	1M	PK	2.4835G	-41.17	-21.20	-19.97	2.98	0.00	-44.15	-46.82	-47.54
2.4835G	2.5235G	1M	PK	2.4835G	-41.28	-21.20	-20.08	2.98	0.00	-44.26	-48.38	-46.39
2.5235G	2.6G	1M	PK	2.5505G	-43.12	-21.20	-21.92	2.98	0.00	-46.10	-48.72	-49.53

802.11ax HEW20_Nss2,(MCS0)_2TX

2412MHz

CSE-AV

11/05/2020

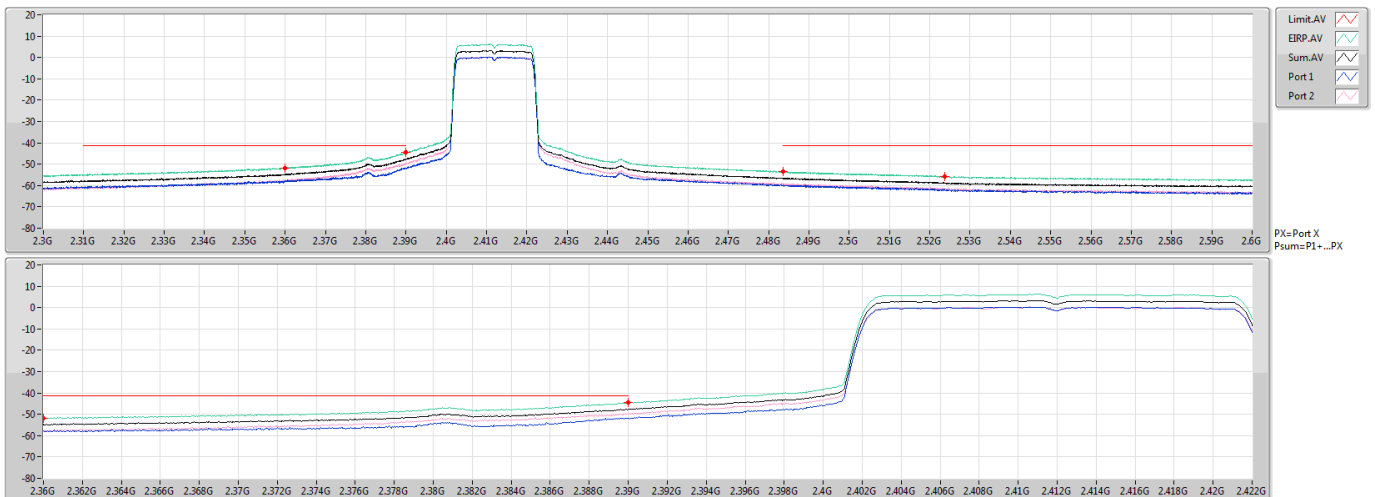


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
2.3G	2.36G	1M	AV	2.36G	-51.82	-41.20	-10.62	2.98	0.00	-54.80	-57.91	-57.72
2.36G	2.4G	1M	AV	2.39G	-44.52	-41.20	-3.32	2.98	0.00	-47.50	-51.73	-49.56
2.4G	2.4835G	1M	AV	2.4835G	-53.54	-41.20	-12.34	2.98	0.00	-56.52	-60.01	-59.09
2.4835G	2.5235G	1M	AV	2.4835G	-53.45	-41.20	-12.25	2.98	0.00	-56.43	-59.70	-59.20
2.5235G	2.6G	1M	AV	2.52981G	-55.74	-41.20	-14.54	2.98	0.00	-58.72	-61.83	-61.63

802.11ax HEW20_Nss2,(MCS0)_2TX

2462MHz

CSE-PK

11/05/2020

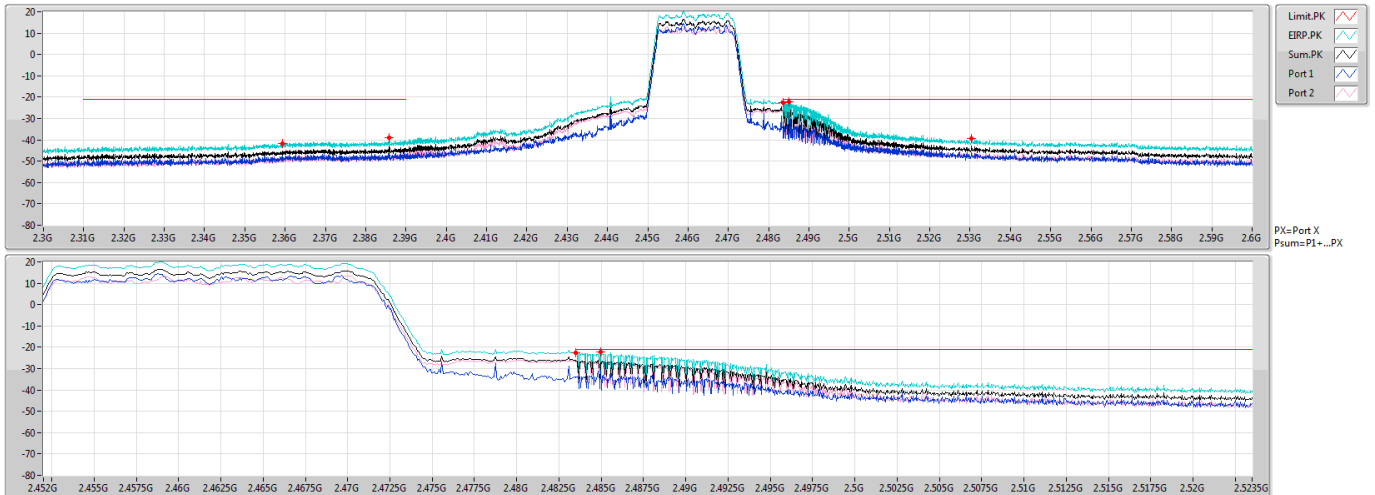


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
2.3G	2.36G	1M	PK	2.35928G	-41.67	-21.20	-20.47	3.42	0.00	-45.09	-47.25	-49.16
2.36G	2.4G	1M	PK	2.38576G	-39.13	-21.20	-17.93	3.42	0.00	-42.55	-44.27	-47.41
2.4G	2.4835G	1M	PK	2.4835G	-22.66	-21.20	-1.46	3.42	0.00	-26.08	-33.90	-26.87
2.4835G	2.5235G	1M	PK	2.48498G	-22.11	-21.20	-0.91	3.42	0.00	-25.53	-29.75	-27.60
2.5235G	2.6G	1M	PK	2.53031G	-39.46	-21.20	-18.26	3.42	0.00	-42.88	-47.55	-44.69

802.11ax HEW20_Nss2,(MCS0)_2TX

2462MHz

CSE-AV

11/05/2020

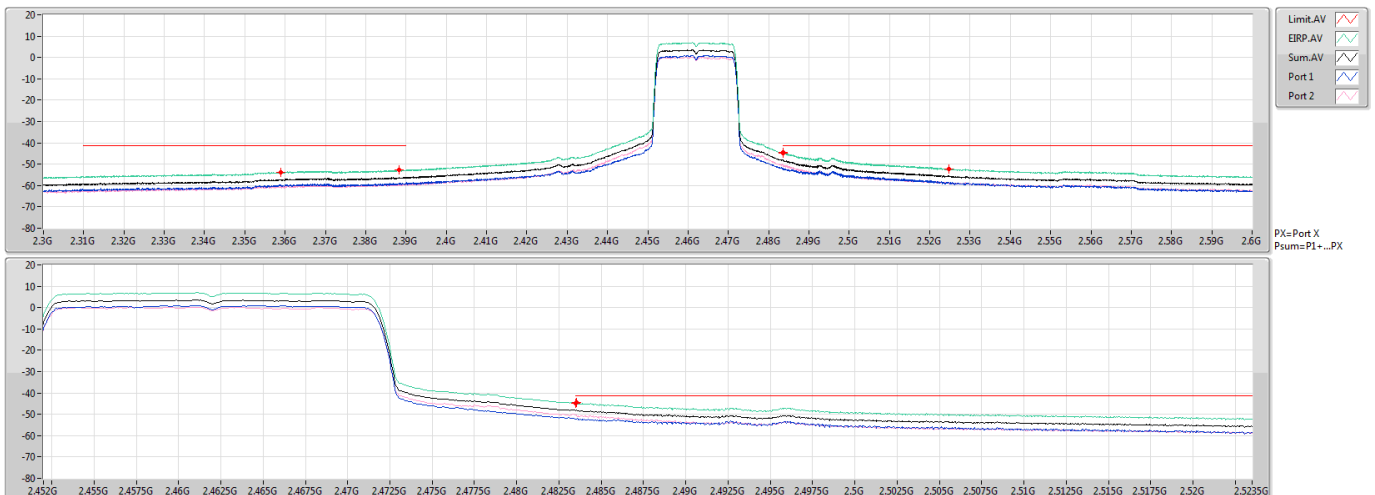

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
2.3G	2.36G	1M	AV	2.35988G	-53.76	-41.20	-12.56	3.42	0.00	-57.18	-59.91	-60.49
2.36G	2.4G	1M	AV	2.3882G	-52.83	-41.20	-11.63	3.42	0.00	-56.25	-59.11	-59.42
2.4G	2.4835G	1M	AV	2.4835G	-44.75	-41.20	-3.55	3.42	0.00	-48.17	-52.11	-50.41
2.4835G	2.5235G	1M	AV	2.48354G	-44.58	-41.20	-3.38	3.42	0.00	-48.00	-52.10	-50.14
2.5235G	2.6G	1M	AV	2.52465G	-52.13	-41.20	-10.93	3.42	0.00	-55.55	-58.48	-58.65




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	7.31153G	43.99	54.00	-10.01	Vertical

Mode 1


25/05/2020

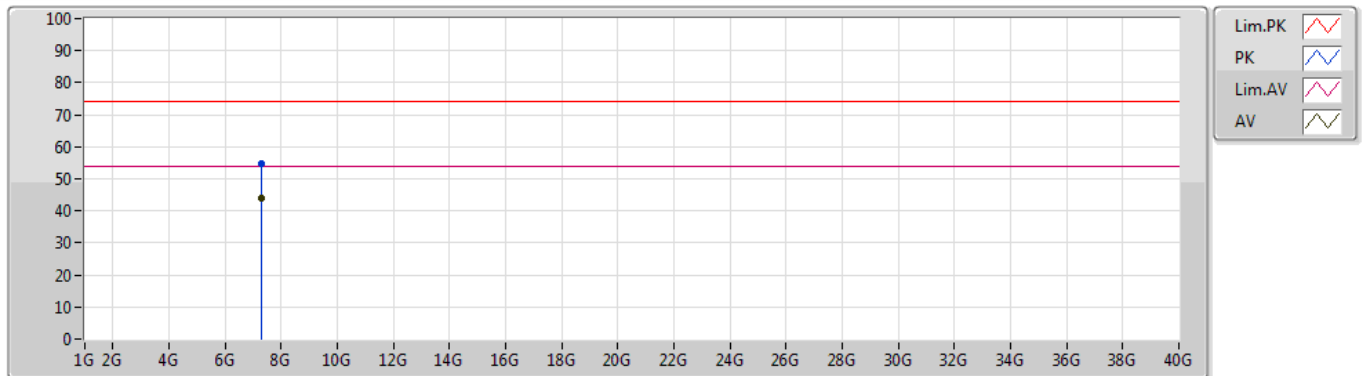

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comment	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
PK	7.3115G	54.53	74.00	-19.47	8.68	3	Vertical	32	1.06	-	45.85	36.58	7.34	35.24
AV	7.31153G	43.99	54.00	-10.01	8.68	3	Vertical	32	1.06	"Worst"	35.31	36.58	7.34	35.24

Mode 1

27/05/2020

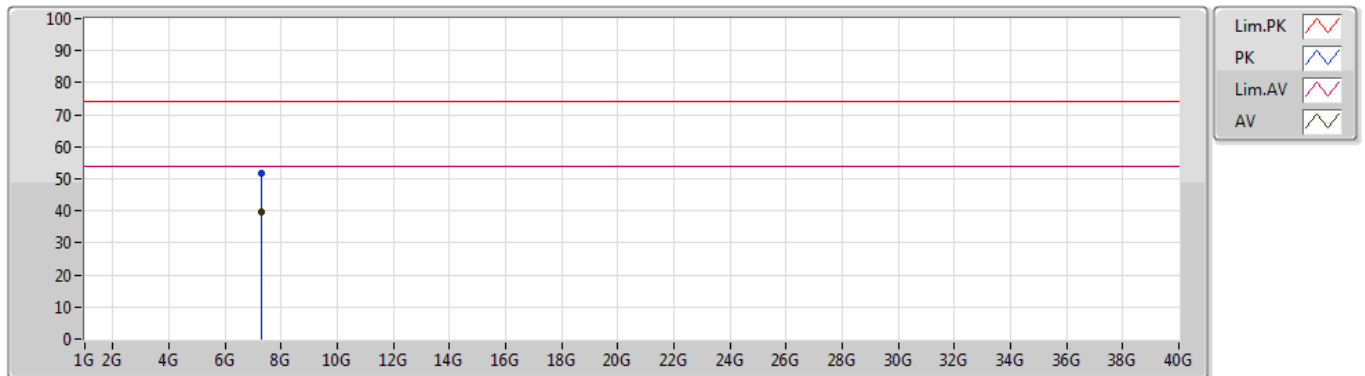

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comment	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
PK	7.3102G	51.71	74.00	-22.29	8.68	3	Horizontal	40	2.31	-	43.03	36.58	7.34	35.24
AV	7.31016G	39.65	54.00	-14.35	8.68	3	Horizontal	40	2.31	"Worst"	30.97	36.58	7.34	35.24