

## Test Report

AIR-AP1562I-B-K9  
AIR-AP1562D-B-K9  
FCC ID: LDK102104

AIR-AP1562I-A-K9  
AIR-AP1562D-A-K9  
IC: 2461B-102104

Cisco Aironet 802.11ac Dual Band Outdoor Access Points

**5725-5850 MHz**

Against the following Specifications:

CFR47 Part 15.407


RSS-247



Cisco Systems

170 West Tasman Drive

San Jose, CA 95134

	
<b>Author:</b> Jose Aguirre <b>Tested By:</b>	<b>Approved By:</b> Jim Nicholson <b>Title:</b> Technical Leader, Engineering <b>Revision:</b> 1

This report replaces any previously entered test report under EDCS – **11386275**. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

**Page No:** 1 of 92

This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

<b>SECTION 1: OVERVIEW .....</b>	<b>3</b>
<b>SECTION 2: ASSESSMENT INFORMATION .....</b>	<b>4</b>
2.1 GENERAL .....	4
2.2 DATE OF TESTING .....	6
2.3 REPORT ISSUE DATE .....	6
2.4 TESTING FACILITIES .....	6
2.5 EQUIPMENT ASSESSED (EUT).....	6
2.6 EUT DESCRIPTION.....	7
<b>SECTION 3: RESULT SUMMARY.....</b>	<b>9</b>
3.1 RESULTS SUMMARY TABLE.....	9
<b>SECTION 4: SAMPLE DETAILS.....</b>	<b>10</b>
4.1 SAMPLE DETAILS .....	10
4.2 SYSTEM DETAILS .....	10
4.3 MODE OF OPERATION DETAILS.....	10
<b>APPENDIX A: EMISSION TEST RESULTS .....</b>	<b>11</b>
CONDUCTED TEST SETUP DIAGRAM.....	11
TARGET MAXIMUM CHANNEL POWER .....	11
Antenna Gain: 4 dBi .....	11
Antenna Gain: 10 dBi .....	12
A.1 6dB BANDWIDTH.....	13
A.2 99% AND 26dB BANDWIDTH .....	21
A.3 MAXIMUM CONDUCTED OUTPUT POWER .....	29
Antenna Gain: 4 dBi .....	30
Antenna Gain: 10 dBi .....	34
A.4 POWER SPECTRAL DENSITY .....	38
Antenna Gain: 4 dBi .....	39
Antenna Gain: 10 dBi .....	43
A.5 CONDUCTED SPURIOUS EMISSIONS .....	47
A.6 CONDUCTED BANDEDGE.....	58
<b>APPENDIX B: EMISSION TEST RESULTS .....</b>	<b>66</b>
RADIATED EMISSION SETUP DIAGRAM-BELOW 1G .....	66
B.1 RADIATED SPURIOUS EMISSIONS .....	67
B.2 RECEIVER SPURIOUS EMISSIONS .....	78
B.3 RADIATED EMISSIONS 30MHz TO 1GHz .....	81
B.4 AC CONDUCTED EMISSIONS .....	84
<b>APPENDIX C: LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST .....</b>	<b>88</b>
<b>APPENDIX E: ABBREVIATION KEY AND DEFINITIONS.....</b>	<b>91</b>

## Section 1: Overview

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

<b>Specifications:</b>
CFR47 Part 15.407
RSS-247

Measurements were made in accordance with

- ANSI C63.10:2013
- KDB 789033 D02 General UNII Test Procedures New Rules v01r03
- KDB 662911 D01 Multiple Transmitter Output v02r01

## Section 2: Assessment Information

### 2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature                    15°C to 35°C (54°F to 95°F)

Atmospheric Pressure    860mbar to 1060mbar (25.4" to 31.3")

Humidity                    10% to 75\*%

- e) All AC testing was performed at one or more of the following supply voltages:

110V 60 Hz (+/-20%)

### Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

Emission level [dBuV] = Indicated voltage level [dBuV] + Cable Loss [dB] + Other correction factors [dB]

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss

Note: to convert the results from dBuV/m to uV/m use the following formula:-

Level in uV/m = Common Antilogarithm  $[(X \text{ dBuV/m})/20] = Y \text{ uV/m}$

## Measurement Uncertainty Values

voltage and power measurements	± 2 dB
conducted EIRP measurements	± 1.4 dB
radiated measurements	± 3.2 dB
frequency measurements	± 2.4 10-7
temperature measurements	± 0.54°
humidity measurements	± 2.3%
DC and low frequency measurements	± 2.5%

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## Radiated emissions (expanded uncertainty, confidence interval 95%)

30 MHz - 300 MHz	+/- 3.8 dB
300 MHz - 1000 MHz	+/- 4.3 dB
1 GHz - 10 GHz	+/- 4.0 dB
10 GHz - 18GHz	+/- 8.2 dB
18GHz - 26.5GHz	+/- 4.1 dB
26.5GHz - 40GHz	+/- 3.9 dB

## Conducted emissions (expanded uncertainty, confidence interval 95%)

30 MHz – 40GHz	+/- 0.38 dB
----------------	-------------

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

**This report must not be reproduced except in full, without written approval of Cisco Systems.**

**2.2 Date of testing**

20-April-16 - 08-Aug-16

**2.3 Report Issue Date**

09-September-2016

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled.

**2.4 Testing facilities**

This assessment was performed by:

**Testing Laboratory**

Cisco Systems, Inc.,  
125 West Tasman Drive  
San Jose, CA 95134, USA

**Registration Numbers for Industry Canada**

<b>Cisco System Site</b>	<b>Address</b>	<b>Site Identifier</b>
Building P, 10m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-2
Building P, 5m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-1
Building I, 5m Chamber	285 W. Tasman Drive San Jose, California 95134	Company #: 2461M-1

**Test Engineers**

Jose Aguirre

**2.5 Equipment Assessed (EUT)**

AIR-AP1562I-B-K9

## 2.6 EUT Description

The Cisco Aironet 802.11ac Radio supports the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

802.11n/ac - Non HT20, One Antenna, 6 to 54 Mbps  
802.11n/ac - Non HT20, Two Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT20, Three Antennas, 6 to 54 Mbps

802.11n/ac - Non HT20 Beam Forming, Two Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT20 Beam Forming, Three Antennas, 6 to 54 Mbps

802.11n/ac - HT/VHT20, One Antenna, M0 to M7  
802.11n/ac - HT/VHT20, Two Antennas, M0 to M7  
802.11n/ac - HT/VHT20, Two Antennas, M8 to M15  
802.11n/ac - HT/VHT20, Three Antennas, M0 to M7  
802.11n/ac - HT/VHT20, Three Antennas, M8 to M15

802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M0 to M7  
802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M8 to M15  
802.11n/ac - HT/VHT20 Beam Forming, Three Antennas, M0 to M7  
802.11n/ac - HT/VHT20 Beam Forming, Three Antennas, M8 to M15

802.11n/ac - HT/VHT20 STBC, Two Antennas, M0 to M7  
802.11n/ac - HT/VHT20 STBC, Three Antennas, M0 to M7

802.11n/ac - Non HT40 Duplicate, One Antenna, 6 to 54 Mbps  
802.11n/ac - Non HT40 Duplicate, Two Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT40 Duplicate, Three Antennas, 6 to 54 Mbps

802.11n/ac - HT/VHT40, One Antenna, M0 to M7  
802.11n/ac - HT/VHT40, Two Antennas, M0 to M7  
802.11n/ac - HT/VHT40, Two Antennas, M8 to M15  
802.11n/ac - HT/VHT40, Three Antennas, M0 to M7  
802.11n/ac - HT/VHT40, Three Antennas, M8 to M15

802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M0 to M7  
802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M8 to M15  
802.11n/ac - HT/VHT40 Beam Forming, Three Antennas, M0 to M7  
802.11n/ac - HT/VHT40 Beam Forming, Three Antennas, M8 to M15

802.11n/ac - HT/VHT40 STBC, Two Antennas, M0 to M7  
802.11n/ac - HT/VHT40 STBC, Three Antennas, M0 to M7

802.11n/ac - Non HT80 Duplicate, One Antenna, 6 to 54 Mbps  
802.11n/ac - Non HT80 Duplicate, Two Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT80 Duplicate, Three Antennas, 6 to 54 Mbps

802.11ac - VHT80, One Antenna, M0 to M9 1ss  
802.11ac - VHT80, Two Antennas, M0 to M9 1ss  
802.11ac - VHT80, Two Antennas, M0 to M9 2ss  
802.11ac - VHT80, Three Antennas, M0 to M9 1ss  
802.11ac - VHT80, Three Antennas, M0 to M9 2ss

802.11ac - VHT80 Beam Forming, Two Antennas, M0 to M9 1ss  
802.11ac - VHT80 Beam Forming, Two Antennas, M0 to M9 2ss  
802.11ac - VHT80 Beam Forming, Three Antennas, M0 to M9 1ss  
802.11ac - VHT80 Beam Forming, Three Antennas, M0 to M9 2ss

802.11ac - VHT80 STBC, Two Antennas, M0 to M9 1ss

802.11ac - VHT80 STBC, Three Antennas, M0 to M9 1ss

The following antennas are supported by this product series.

The data included in this report represent the worst case data for all antennas.

Frequency	Part Number	Antenna Type	Antenna Gain (dBi)
<b>5 GHz</b>	Internal (*)	Omni	4
	Internal (**)	Directional (Cross Polarized)	10

(\*) Internal antenna for AIR-AP1562I-x-K9

(\*\*) Internal antenna for AIR-AP1562D-x-K9

### Section 3: Result Summary

#### 3.1 Results Summary Table

##### Conducted emissions

Basic Standard	Technical Requirements / Details	Result
FCC 15.407 RSS-247	<b>6dB Bandwidth:</b> Systems using digital modulation techniques may operate in the 2400-2483.5MHz band. The minimum 6dB bandwidth shall be at least 500 kHz.	Pass
FCC 15.407 RSS-GEN	<b>99% &amp; 26 dB Bandwidth:</b> The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.  The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.	Pass
FCC 15.407 RSS-247	<b>Output Power:</b> For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.	Pass
FCC 15.407 RSS-247	<b>Power Spectral Density:</b> <b>15.407</b> The maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.	Pass
FCC 15.407 RSS-247	<b>Conducted Spurious Emissions / Band-Edge:</b> For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.	Pass
FCC 15.209 FCC 152.05 RSS-GEN	<b>Restricted band:</b> Unwanted emissions falling within the restricted bands, as defined in FCC 15.205 (a) must also comply with the radiated emission limits specified in FCC 15.209 (a).	Pass

##### Radiated Emissions (General requirements)

Basic Standard	Technical Requirements / Details	Result
FCC 15.209 FCC 15.205 RSS-GEN	<b>TX Spurious Emissions:</b> Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the field strength limits table in this section.	Pass
FCC 15.207 RSS-GEN	<b>AC conducted Emissions:</b> Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.	Pass

\* MPE calculation is recorded in a separate report

## Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

### 4.1 Sample Details

Sample No.	Equipment Details	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	AIR-AP1562I-B-K9	Cisco Systems	P2	9.1.8.1	9.0.5.5-W8964	RFDP2BML009
S02*	AIR-PWRADPT-RGD1	Meanwell	A0	NA	NA	EB3F71752

(\*) S02 is support equipment Power supply for EUT S01

### 4.2 System Details

System #	Description	Samples
1	AIR-AP1562I-B-K9	S01
2	AIR-PWRADPT-RGD1	S02

### 4.3 Mode of Operation Details

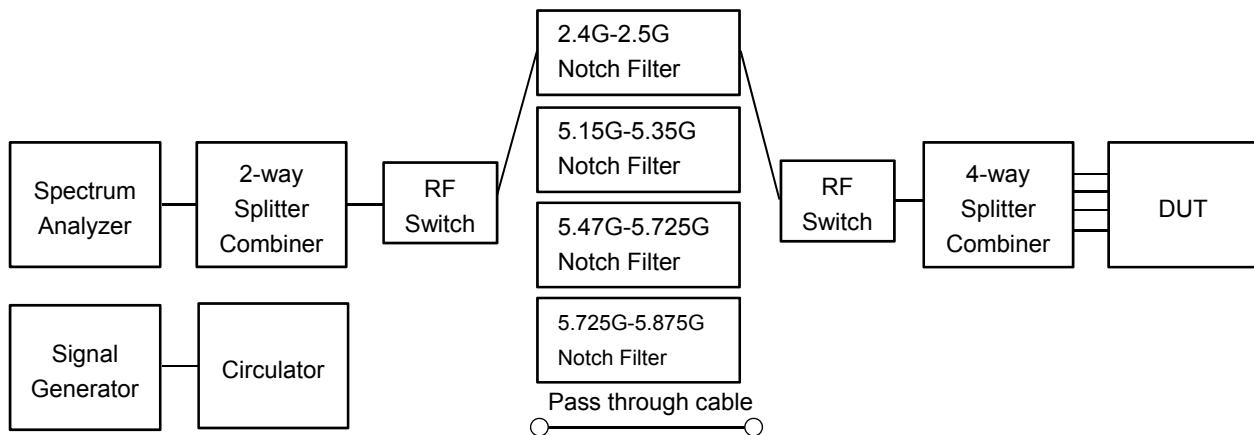
Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting ≥98% duty cycle

All measurements were made in accordance with

- ANSI C63.10:2013
- KDB 789033 D02 General UNII Test Procedures New Rules v01r03
- KDB 662911 D01 Multiple Transmitter Output v02r01

## Appendix A: Emission Test Results

### Conducted Test Setup Diagram



### Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

#### Antenna Gain: 4 dBi

Operating Mode	Maximum Channel Power (dBm)		
	Frequency (MHz)		
	5745	5785	5825
Non HT20, 6 to 54 Mbps	29	25	25
Non HT20 Beam Forming, 6 to 54 Mbps	27	20	18
HT/VHT20, M0 to M15	25	25	25
HT/VHT20 Beam Forming, M0 to M15	25	25	25
HT/VHT20 STBC, M0 to M7	25	25	25
	5755	5795	
Non HT40, 6 to 54 Mbps	26	23	
HT/VHT40, M0 to M15	25	26	
HT/VHT40 Beam Forming, M0 to M15	24	26	
HT/VHT40 STBC, M0 to M7	25	26	
	5775		
Non HT80, 6 to 54 Mbps	24		
VHT80, M0 to M9, M0 to M9 1-1ss	27		
VHT80 Beam Forming, M0 to M9, M0 to M9 1-1ss	27		
VHT80 STBC, M0 to M9 1ss	27		

## Antenna Gain: 10 dBi

Operating Mode	Maximum Channel Power (dBm)		
	Frequency (MHz)		
	5745	5785	5825
Non HT20, 6 to 54 Mbps	25	18	17
Non HT20 Beam Forming, 6 to 54 Mbps	24	15	14
HT/VHT20, M0 to M15	24	18	17
HT/VHT20 Beam Forming, M0 to M15	20	15	15
HT/VHT20 STBC, M0 to M7	20	15	15
	5755	5795	
Non HT40, 6 to 54 Mbps	24	16	
HT/VHT40, M0 to M15	24	18	
HT/VHT40 Beam Forming, M0 to M15	19	15	
HT/VHT40 STBC, M0 to M7	19	15	
	5775		
Non HT80, 6 to 54 Mbps	22		
VHT80, M0 to M9, M0 to M9 1-1ss	24		
VHT80 Beam Forming, M0 to M9, M0 to M9 1-1ss	19		
VHT80 STBC, M0 to M9 1ss	19		

## A.1 6dB Bandwidth

**15.407 / RSS-247** Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01r03  
ANSI C63.10: 2013

<b>6 BW</b>	
Test Procedure	
1.	Set the radio in the continuous transmitting mode.
2.	Allow the trace to stabilize.
3.	Setting the x-dB bandwidth mode to -6dB within the measurement set up function.
4.	Select the automatic OBW measurement function of an instrument to perform bandwidth measurement.
5.	Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01r03  
ANSI C63.10: 2013 section 11.8.2 Option 2

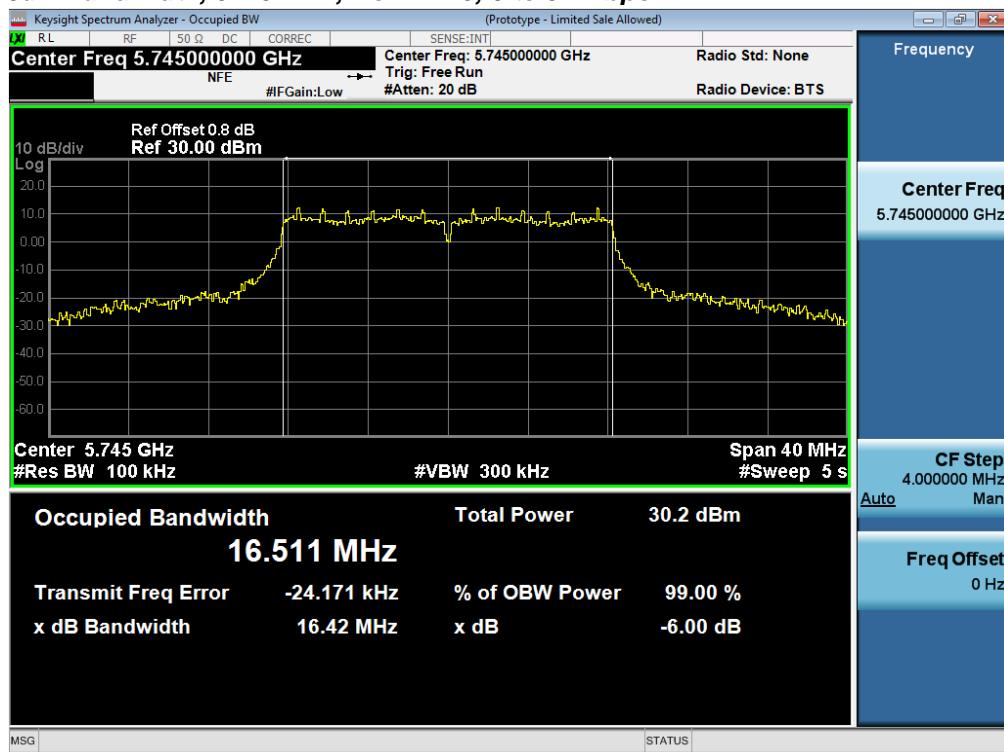
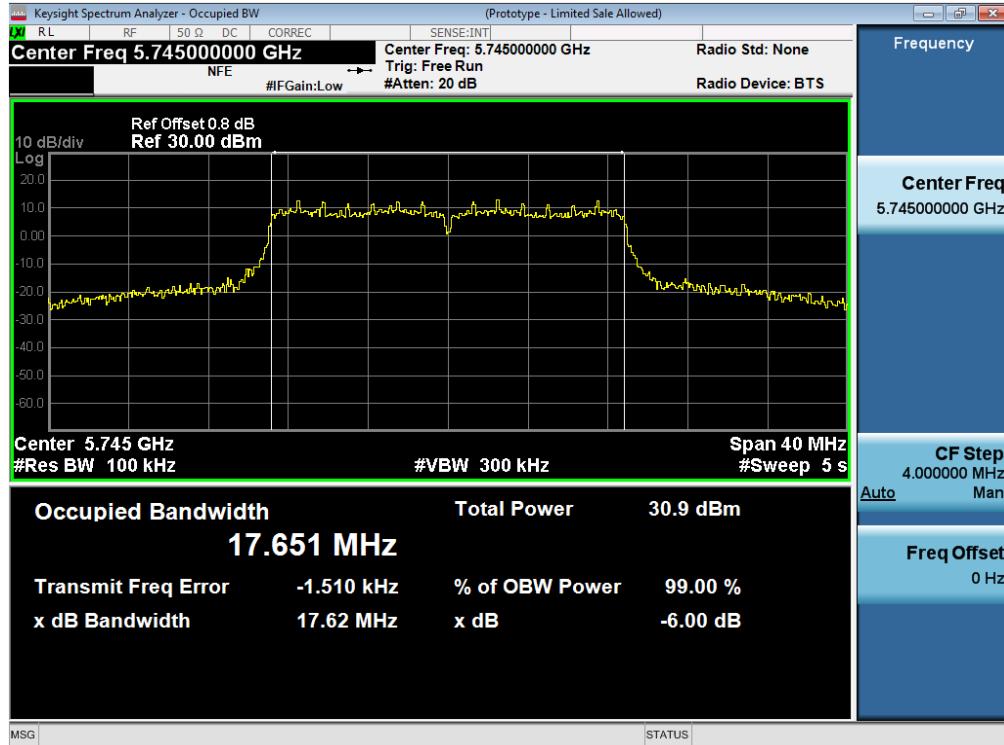
<b>6 BW</b>	
Test parameters	
X dB BW = 6dB (using the OBW function of the spectrum analyzer)	
Span = Large enough to capture the entire EBW	
RBW = 100 KHz	
VBW $\geq$ 3 x RBW	
Sweep = Auto couple	
Detector = Peak or where practical sample shall be used	
Trace = Max. Hold	

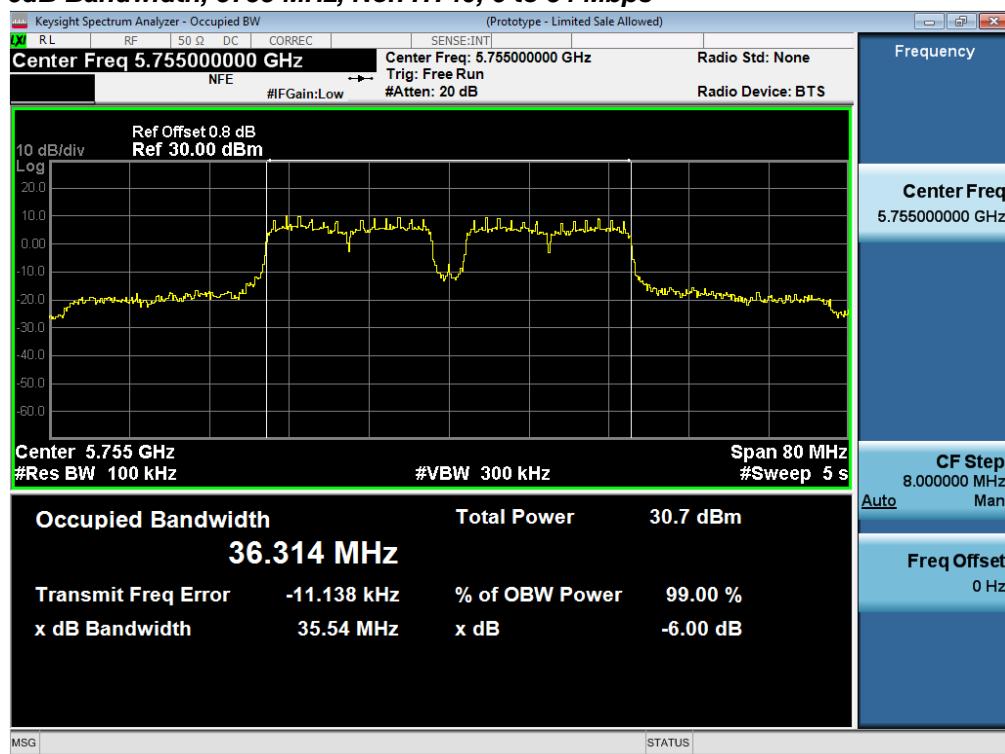
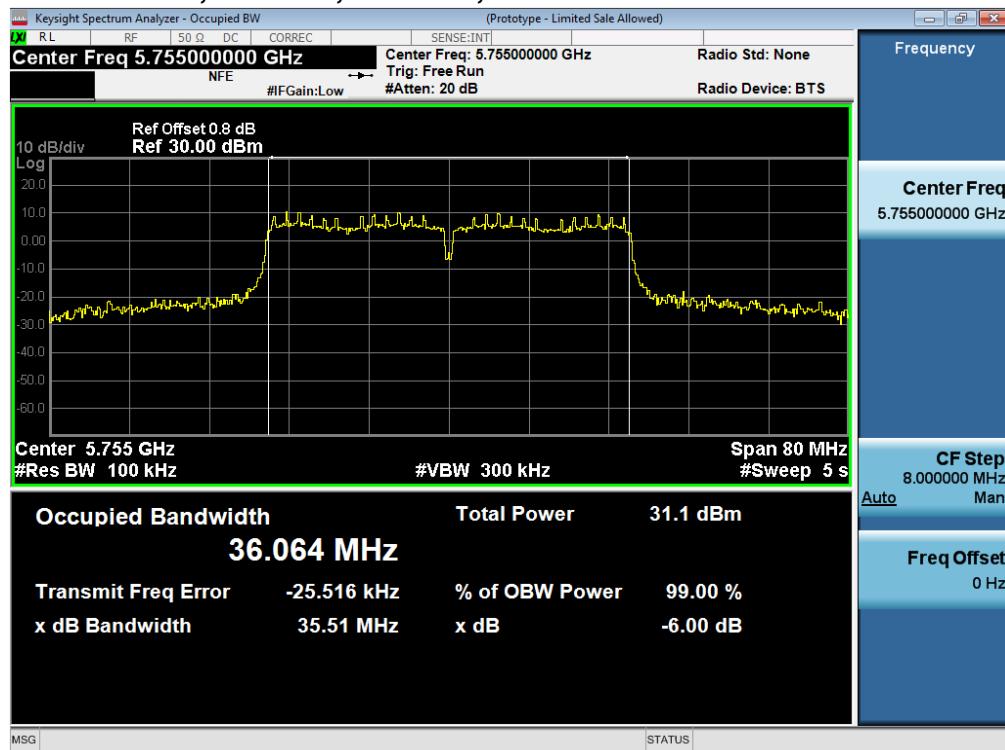
System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

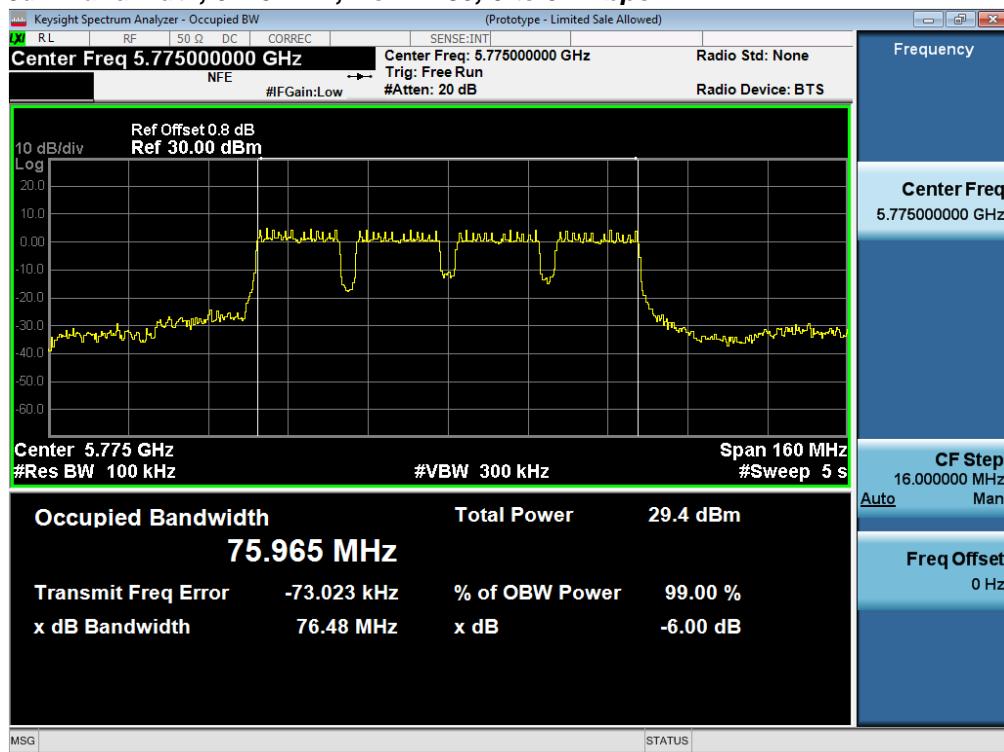
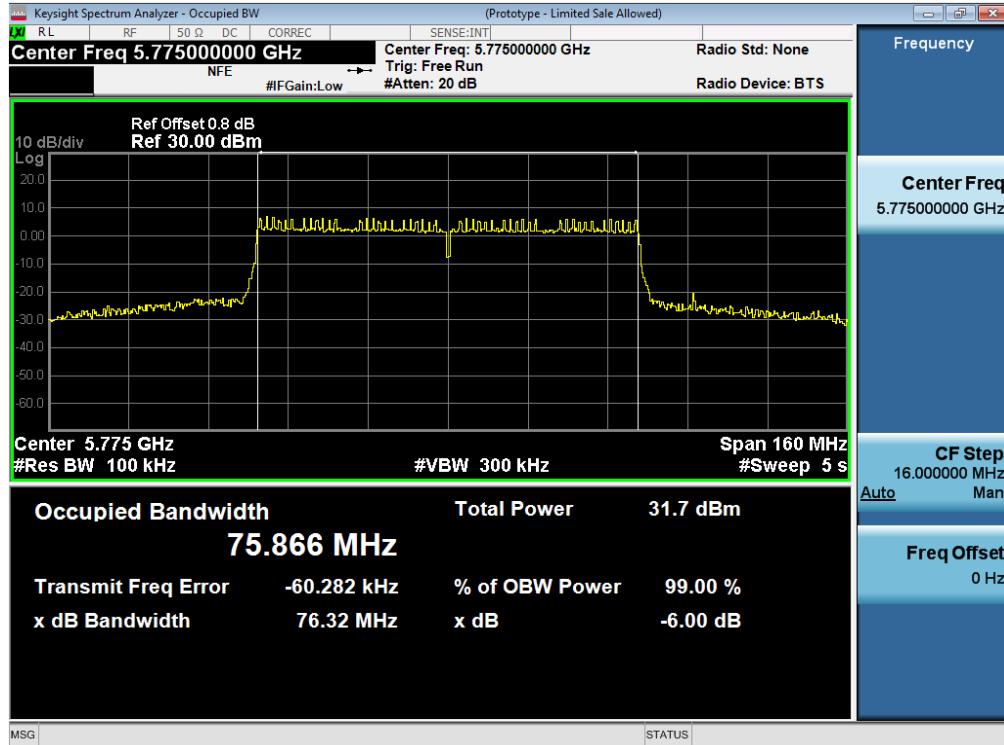
<b>Tested By :</b> Jose Aguirre	<b>Date of testing:</b> 20-April-16 - 08-Aug-16
<b>Test Result : PASS</b>	

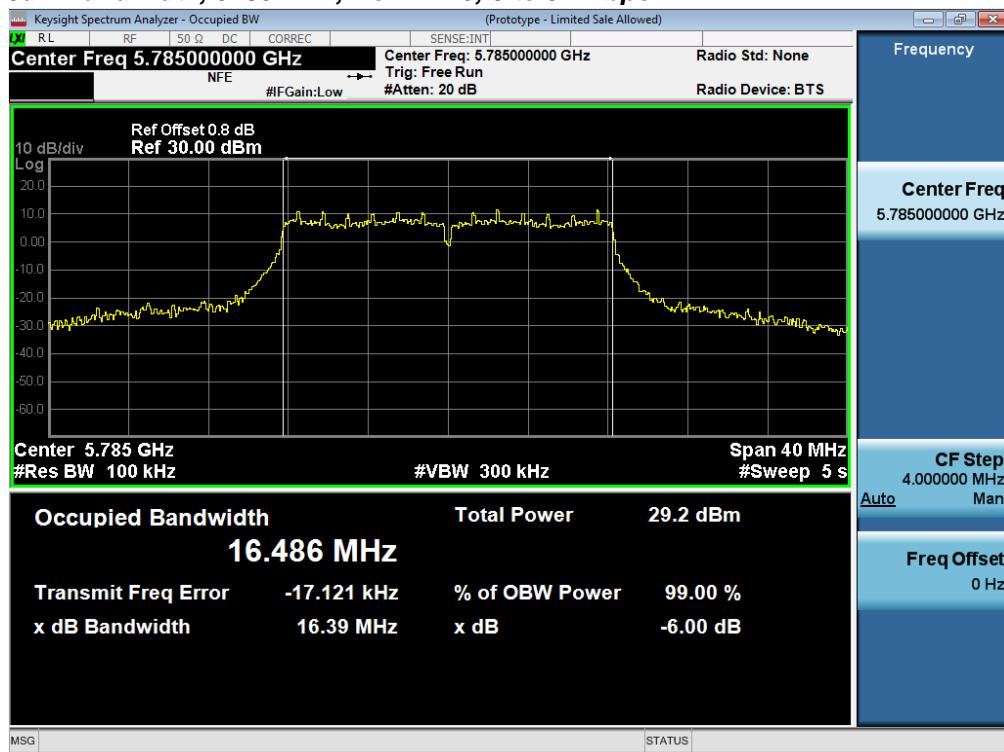
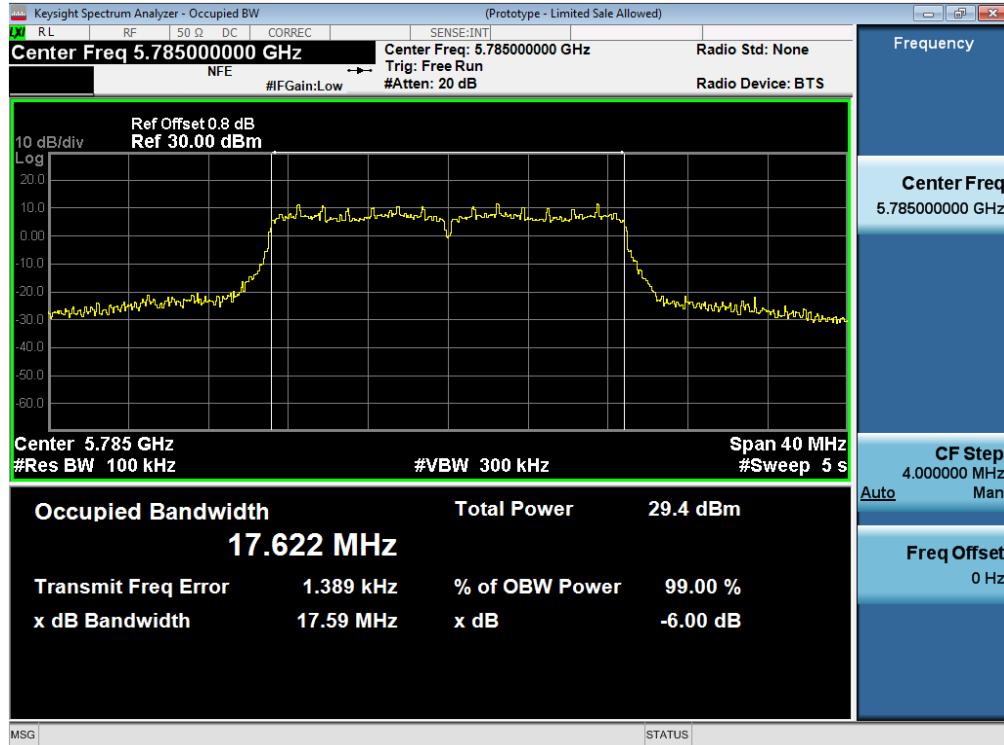
See Appendix C for list of test equipment

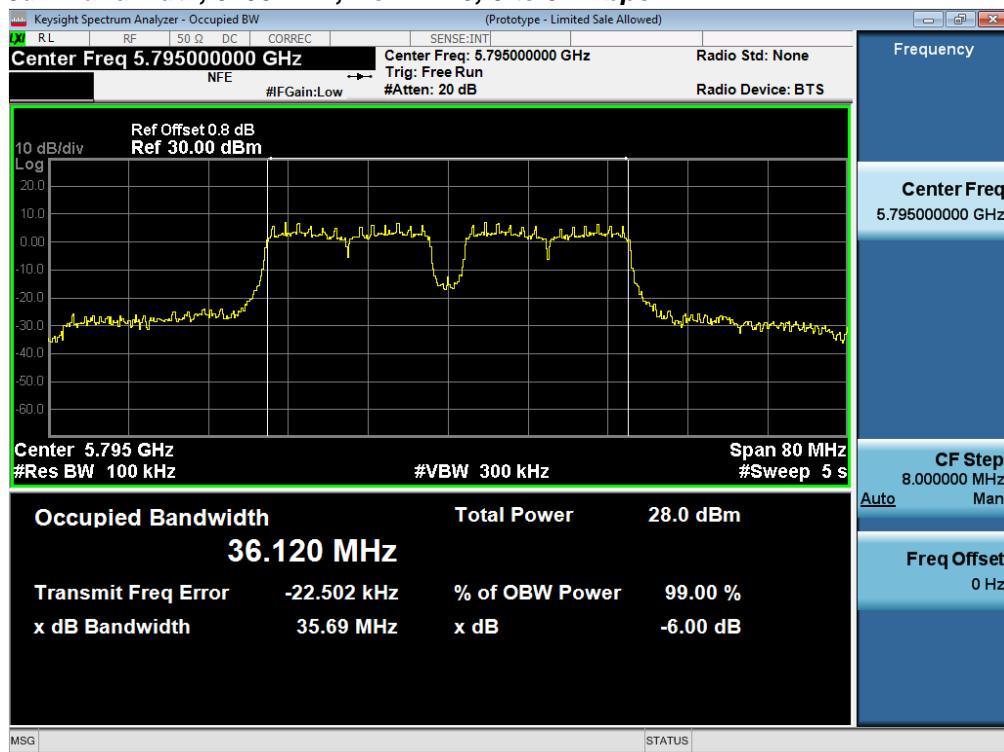
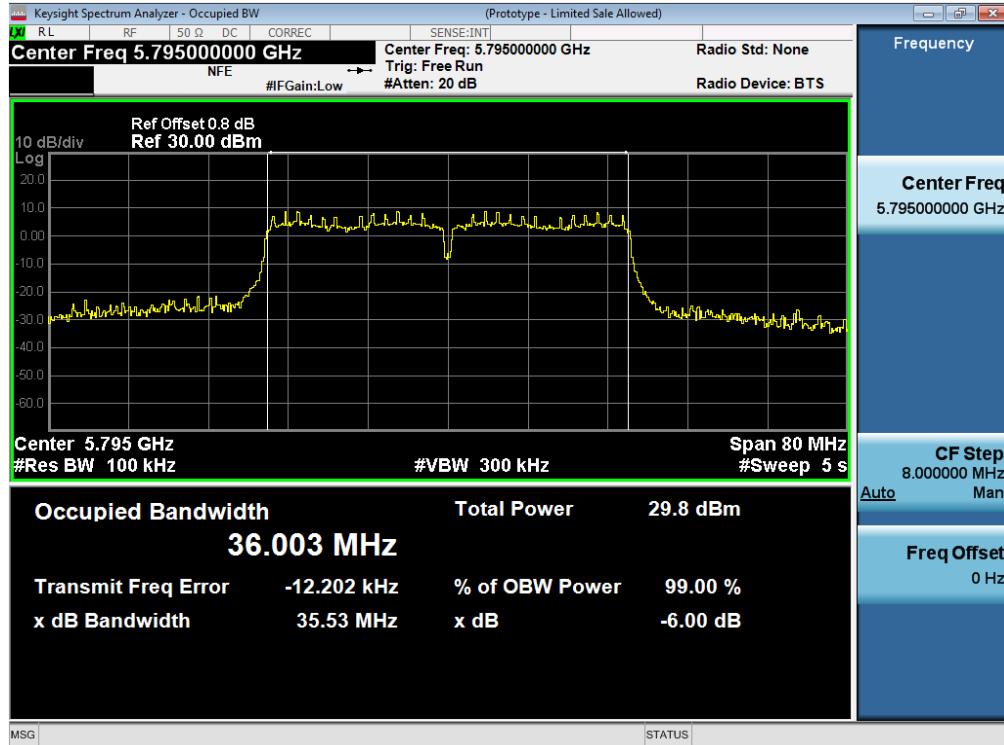
Frequency (MHz)	Mode	Data Rate (Mbps)	6dB BW (MHz)	Limit (kHz)	Margin (MHz)
5745	Non HT20, 6 to 54 Mbps	6	16.4	>500	15.9
	HT/VHT20, M0 to M15	m0	17.6	>500	17.1
5755	Non HT40, 6 to 54 Mbps	6	35.5	>500	35.0
	HT/VHT40, M0 to M15	m0	35.5	>500	35.0
5775	Non HT80, 6 to 54 Mbps	6	76.5	>500	76.0
	VHT80, M0 to M9, M0 to M9 1-1ss	m0x1	76.3	>500	75.8
5785	Non HT20, 6 to 54 Mbps	6	16.4	>500	15.9
	HT/VHT20, M0 to M15	m0	17.6	>500	17.1
5795	Non HT40, 6 to 54 Mbps	6	35.7	>500	35.2
	HT/VHT40, M0 to M15	m0	35.5	>500	35.0
5825	Non HT20, 6 to 54 Mbps	6	16.4	>500	15.9
	HT/VHT20, M0 to M15	m0	17.6	>500	17.1

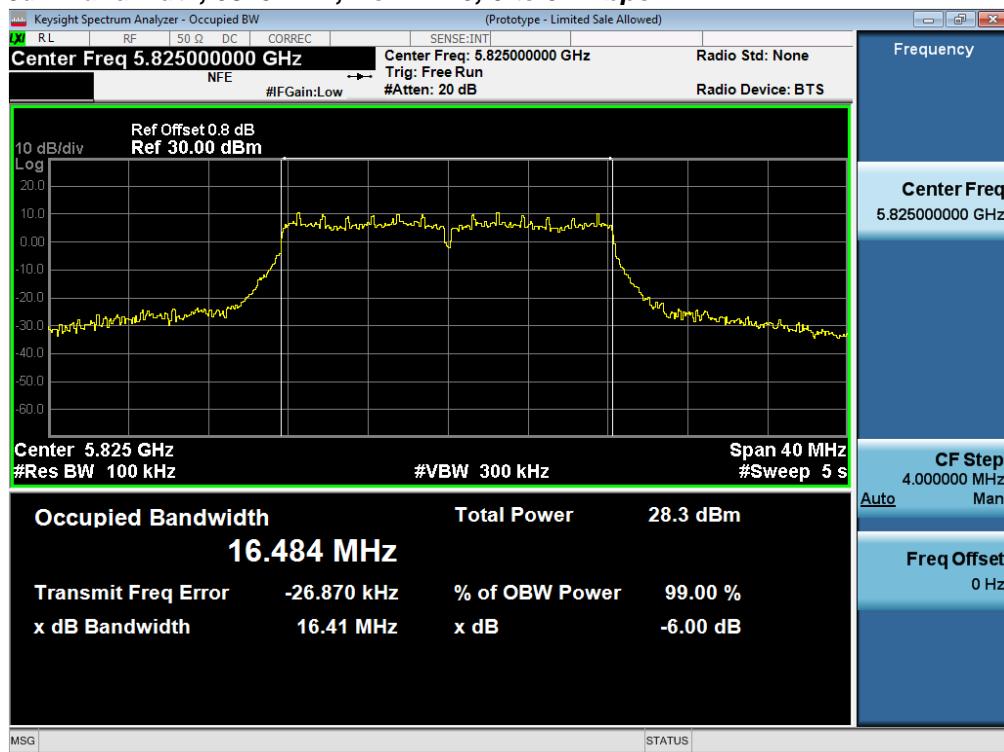
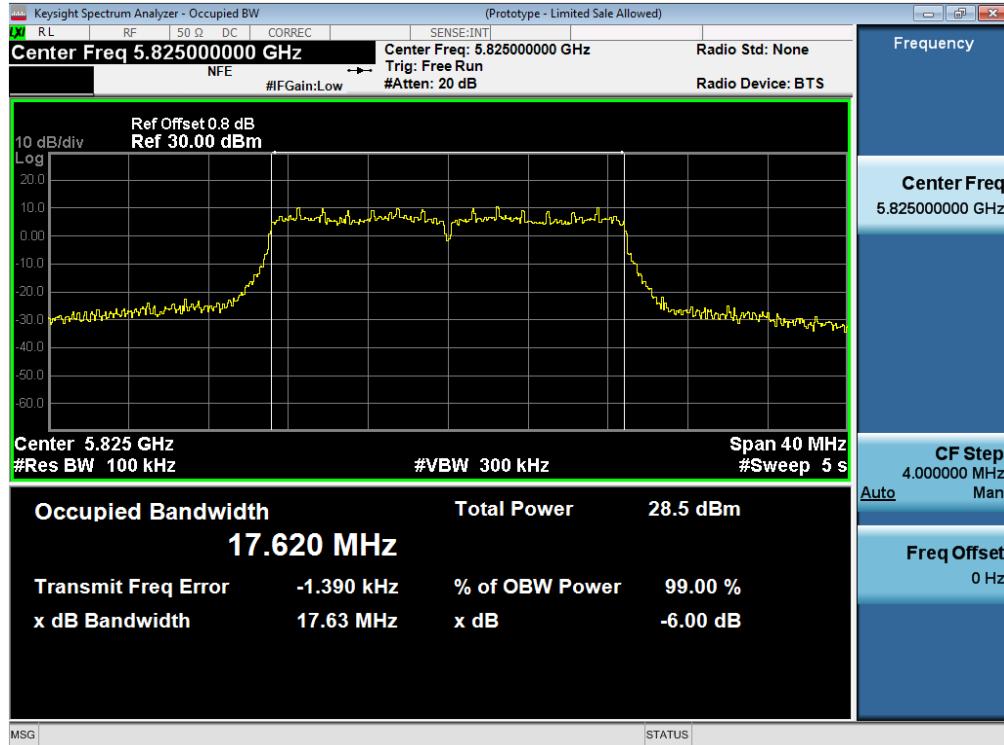
**6dB Bandwidth, 5745 MHz, Non HT20, 6 to 54 Mbps**

**6dB Bandwidth, 5745 MHz, HT/VHT20, M0 to M15**


**6dB Bandwidth, 5755 MHz, Non HT40, 6 to 54 Mbps**

**6dB Bandwidth, 5755 MHz, HT/VHT40, M0 to M15**


**6dB Bandwidth, 5775 MHz, Non HT80, 6 to 54 Mbps**

**6dB Bandwidth, 5775 MHz, VHT80, M0 to M9, M0 to M9 1-1ss**


**6dB Bandwidth, 5785 MHz, Non HT20, 6 to 54 Mbps****6dB Bandwidth, 5785 MHz, HT/VHT20, M0 to M15**

**6dB Bandwidth, 5795 MHz, Non HT40, 6 to 54 Mbps**

**6dB Bandwidth, 5795 MHz, HT/VHT40, M0 to M15**


**6dB Bandwidth, 5825 MHz, Non HT20, 6 to 54 Mbps****6dB Bandwidth, 5825 MHz, HT/VHT20, M0 to M15**

## A.2 99% and 26dB Bandwidth

**FCC 15.407 / RSS-GEN** The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.

The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

### Test Procedure

Ref. ANSI C63.10: 2013 Section 6.9.3

#### 99% BW and EBW (-26dB)

##### Test Procedure

1. Set the radio in the continuous transmitting mode.
2. Allow the trace to stabilize.
3. Setting the x-dB bandwidth mode to -26dB and OBW power function to 99% within the measurement set up function.
4. Select the automatic OBW measurement function of an instrument to perform bandwidth measurement.
5. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 Section 6.9.3

#### 99% BW and EBW (-26dB)

##### Test parameters

Span = 1.5 x to 5.0 times OBW

RBW = approx. 1% to 5% of the OBW

VBW  $\geq$  3 x RBW

Detector = Peak or where practical sample shall be used

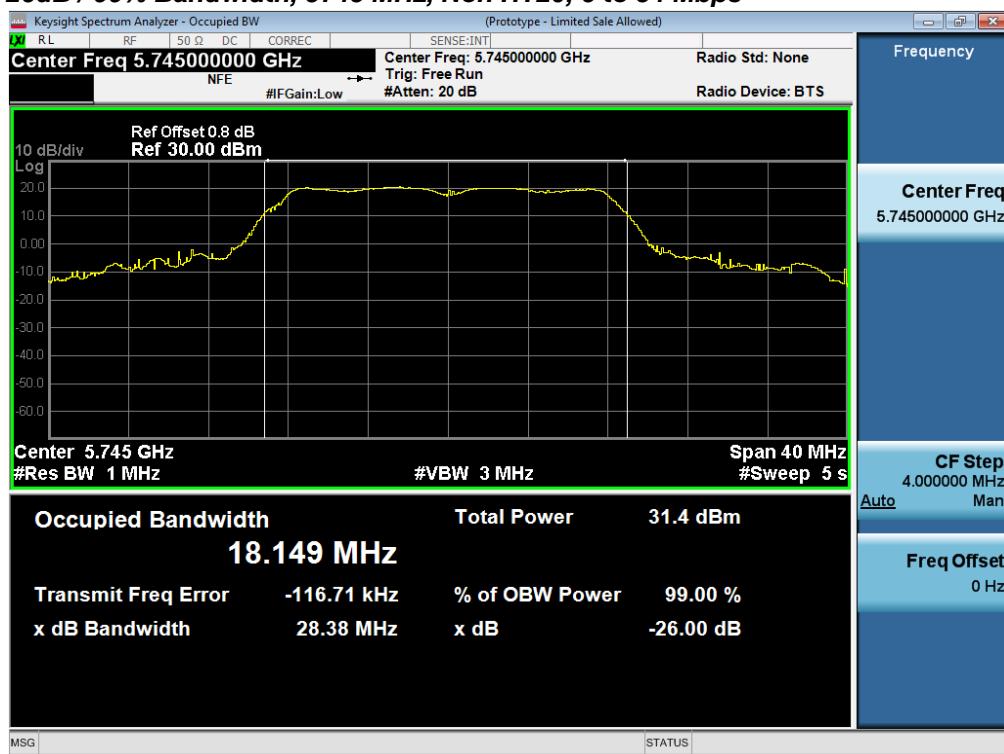
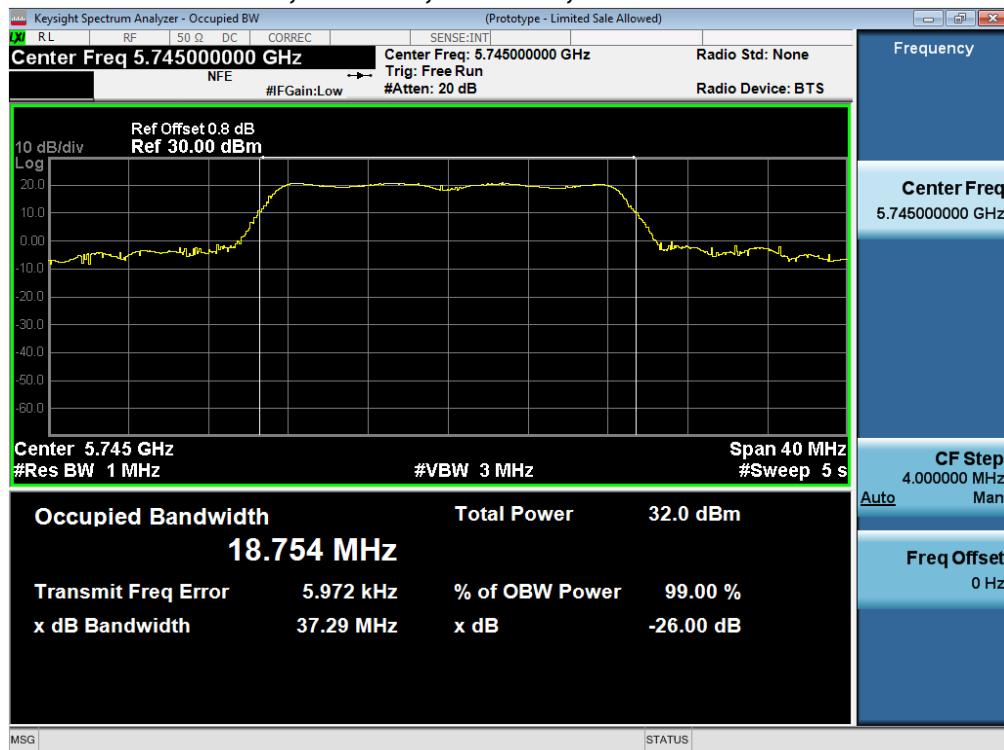
Trace = Max. Hold

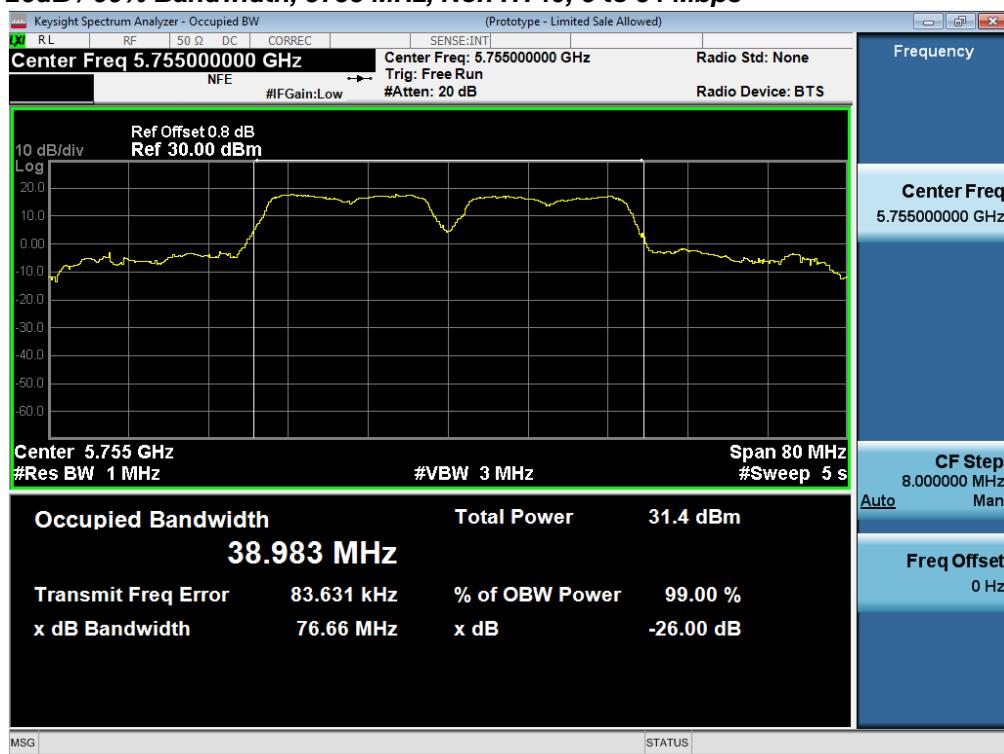
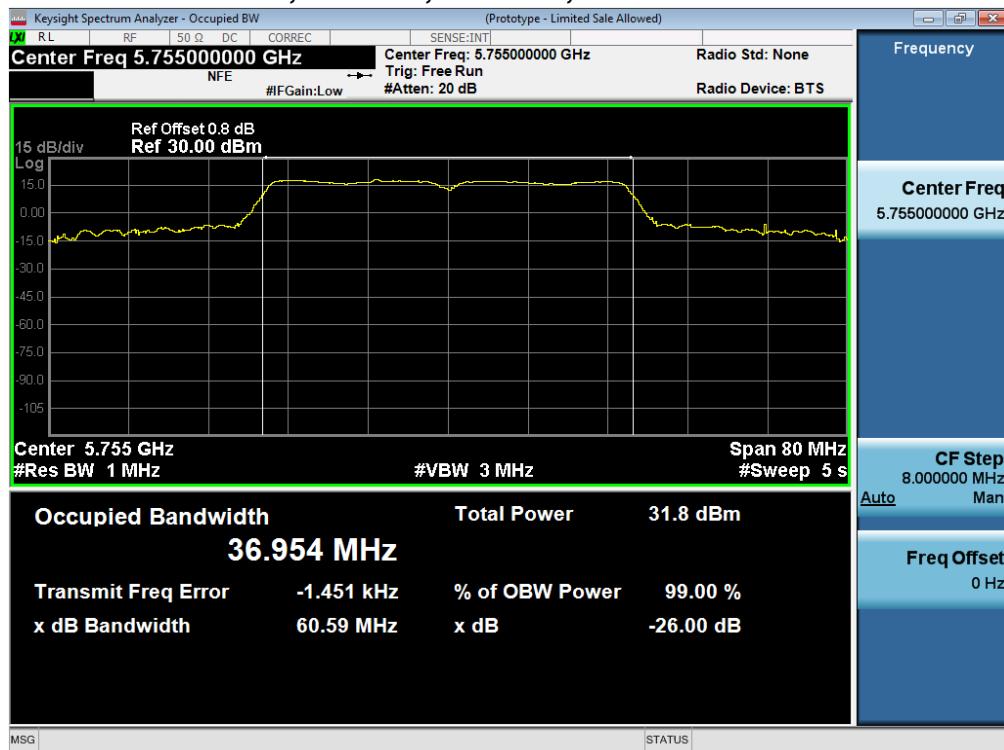
System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

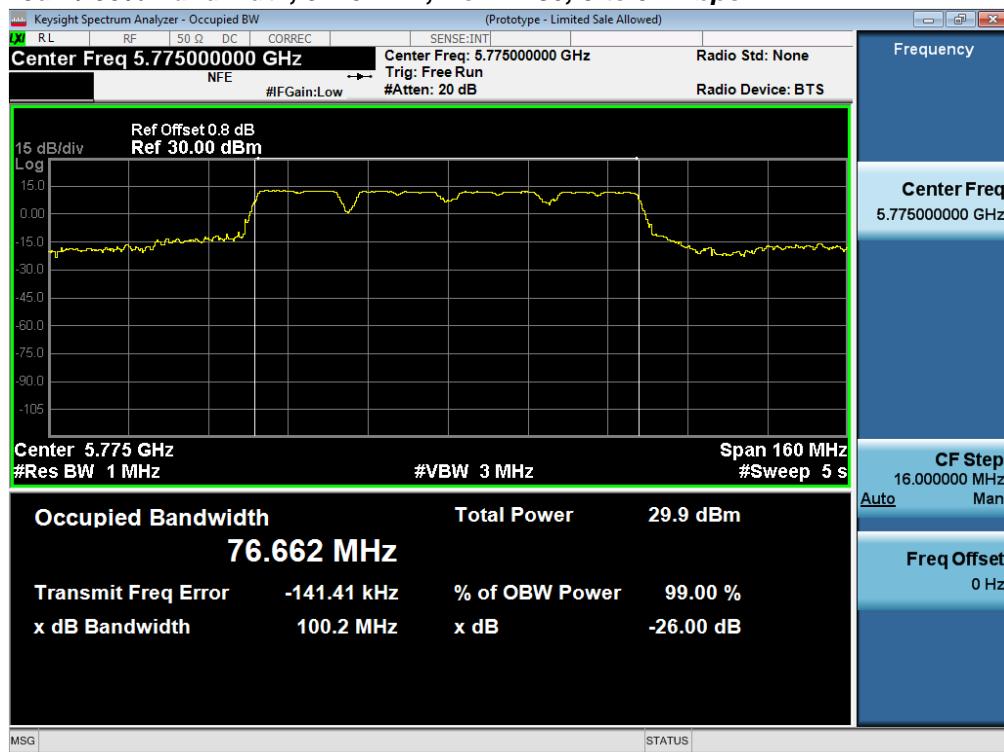
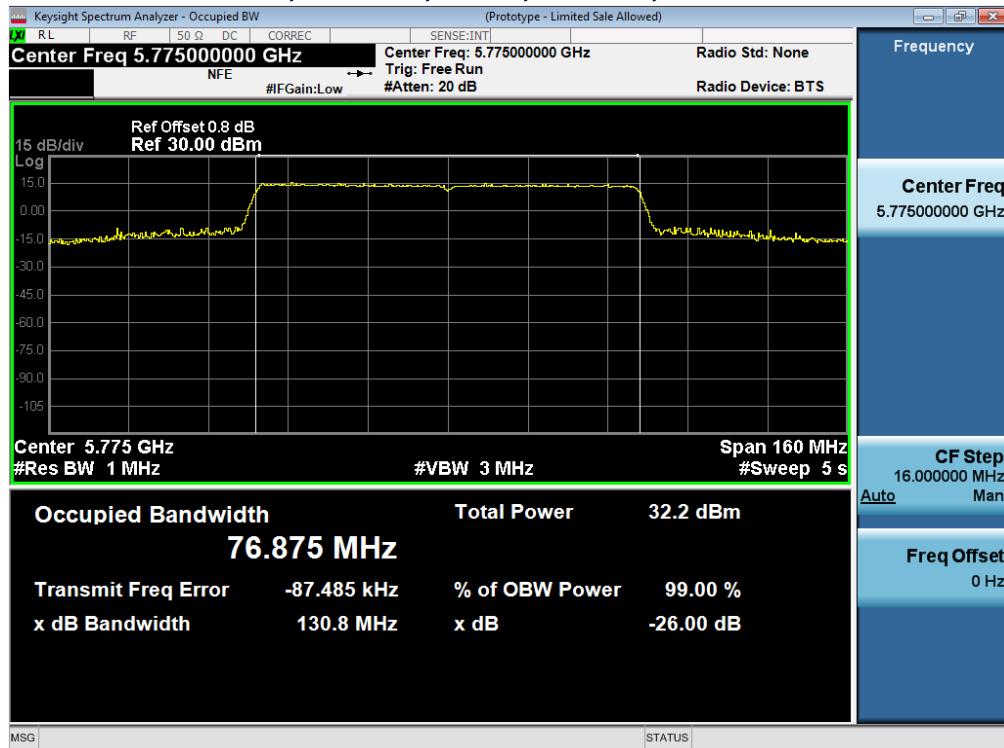
Tested By :	Date of testing:
Jose Aguirre	20-April-16 - 08-Aug-16
<b>Test Result : PASS</b>	

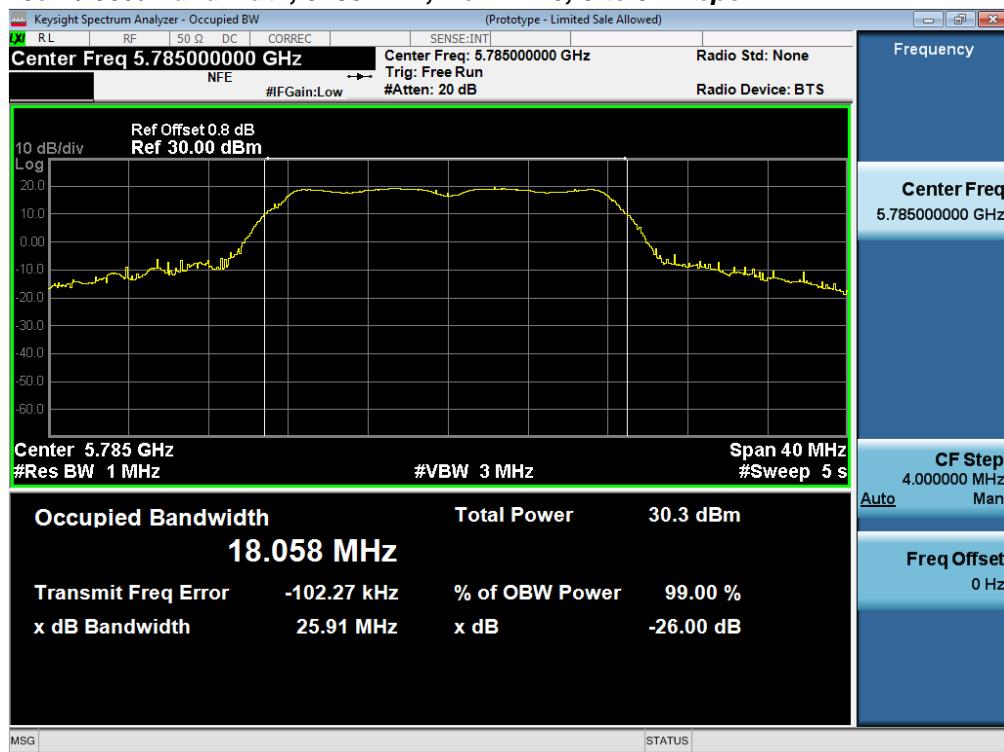
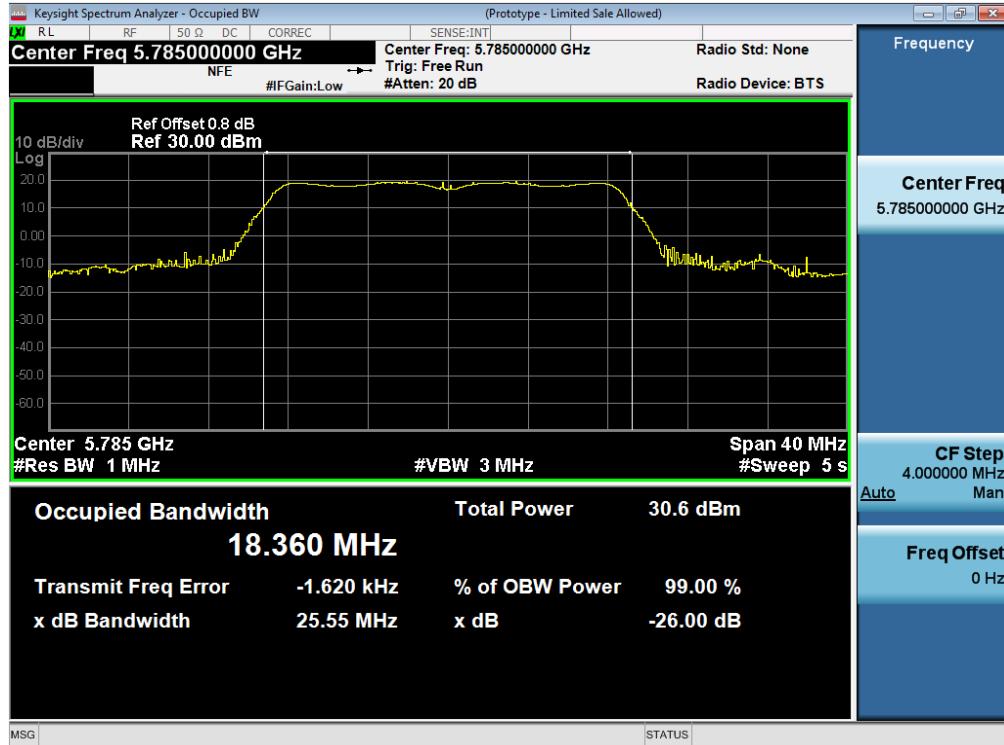
See Appendix C for list of test equipment

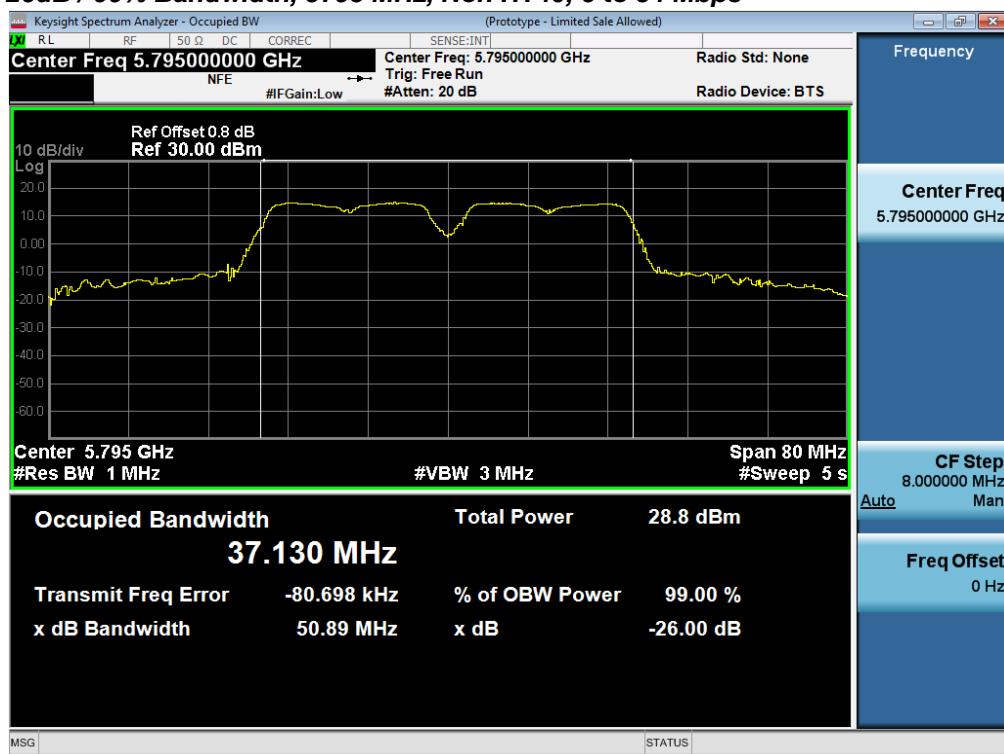
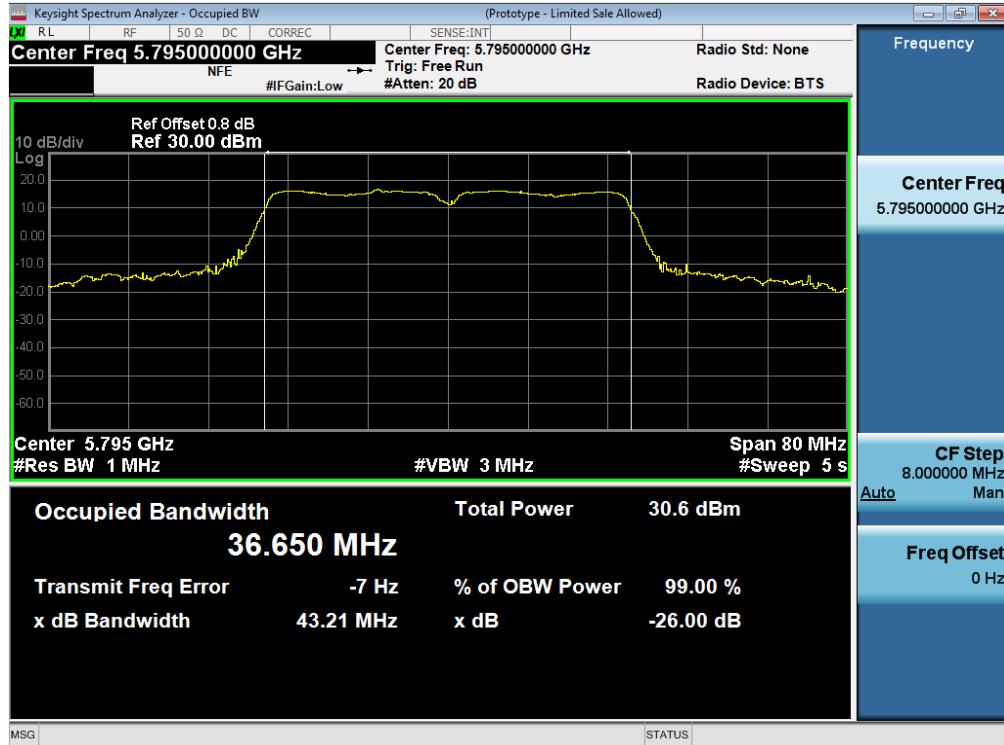
Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
5745	Non HT20, 6 to 54 Mbps	6	28.9	18.159
	HT/VHT20, M0 to M15	m0	36.5	18.739
5755	Non HT40, 6 to 54 Mbps	6	76.7	38.983
	HT/VHT40, M0 to M15	m0	57.3	36.960
5775	Non HT80, 6 to 54 Mbps	6	93.2	76.637
	VHT80, M0 to M9, M0 to M9 1-1ss	m0x1	105.9	76.828
5785	Non HT20, 6 to 54 Mbps	6	25.9	18.058
	HT/VHT20, M0 to M15	m0	25.5	18.360
5795	Non HT40, 6 to 54 Mbps	6	50.9	37.130
	HT/VHT40, M0 to M15	m0	43.2	36.650
5825	Non HT20, 6 to 54 Mbps	6	22.3	18.027
	HT/VHT20, M0 to M15	m0	25.5	18.361

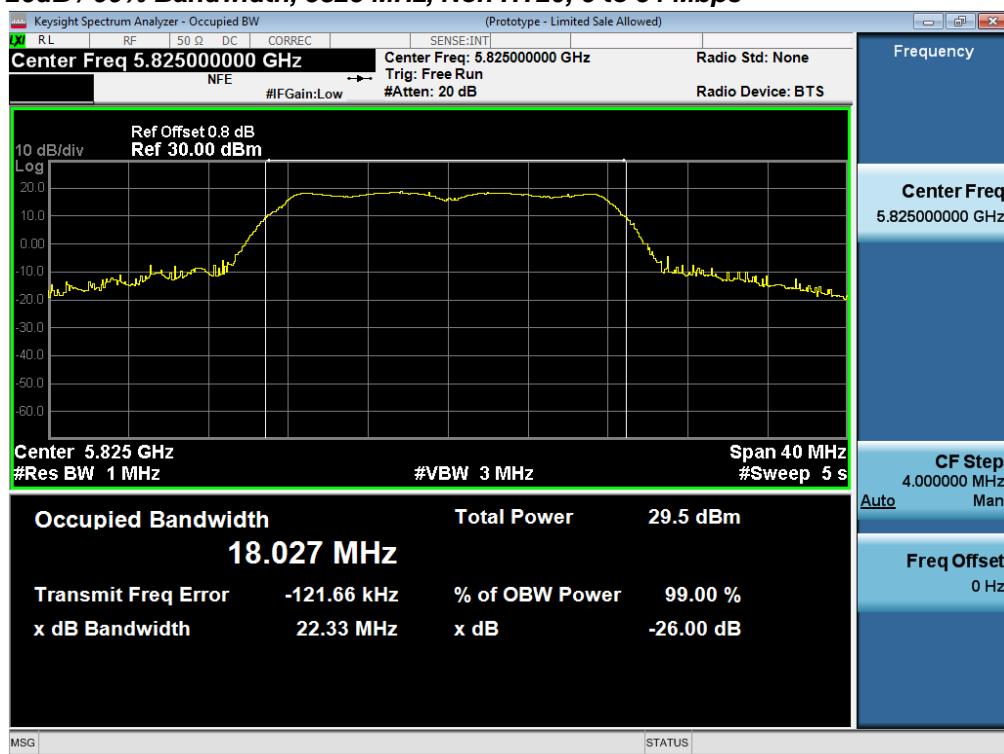
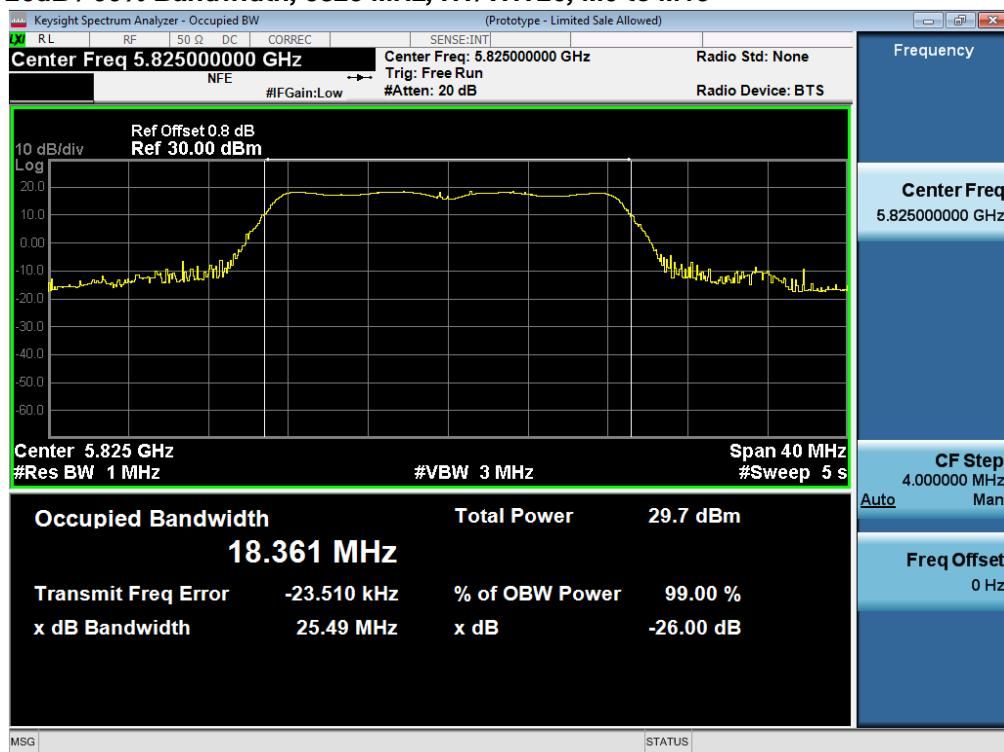
**26dB / 99% Bandwidth, 5745 MHz, Non HT20, 6 to 54 Mbps**

**26dB / 99% Bandwidth, 5745 MHz, HT/VHT20, M0 to M15**


**26dB / 99% Bandwidth, 5755 MHz, Non HT40, 6 to 54 Mbps**

**26dB / 99% Bandwidth, 5755 MHz, HT/VHT40, M0 to M15**


**26dB / 99% Bandwidth, 5775 MHz, Non HT80, 6 to 54 Mbps**

**26dB / 99% Bandwidth, 5775 MHz, VHT80, M0 to M9, M0 to M9 1-1ss**


**26dB / 99% Bandwidth, 5785 MHz, Non HT20, 6 to 54 Mbps**

**26dB / 99% Bandwidth, 5785 MHz, HT/VHT20, M0 to M15**


**26dB / 99% Bandwidth, 5795 MHz, Non HT40, 6 to 54 Mbps**

**26dB / 99% Bandwidth, 5795 MHz, HT/VHT40, M0 to M15**


**26dB / 99% Bandwidth, 5825 MHz, Non HT20, 6 to 54 Mbps**

**26dB / 99% Bandwidth, 5825 MHz, HT/VHT20, M0 to M15**


## A.3 Maximum Conducted Output Power

**15.407 / RSS-247** For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

The peak correlated gain for each mode is listed in the table below. See the Theory of Operation for details on the correlated gain for each mode.

### Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01r03  
ANSI C63.10: 2013

Output Power
Test Procedure
1. Set the radio in the continuous transmitting mode at full power
2. Compute power by integrating the spectrum across the EBW (or alternatively entire 99% OBW) of the signal using the instrument's band power measurement function. The integration shall be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW or the OBW band edges.
3. Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01r03  
ANSI C63.10: 2013 section 12.3.2.2 Method SA-1

Output Power
Test parameters
Span = >1.5 times the OBW
RBW = 1MHz
VBW $\geq$ 3 x RBW
Sweep = Auto couple
Detector = sample
Trace = Trace Average 100

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. (See ANSI C63.10 section 14.3.2.2)

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By :	Date of testing:
Jose Aguirre	20-April-16 - 08-Aug-16

### Test Result : PASS

See Appendix C for list of test equipment

## Antenna Gain: 4 dBi

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Tx 3 Max Power (dBm)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
5745	Non HT20, 6 to 54 Mbps	1	4	23.5			23.5	30.0	6.5
	Non HT20, 6 to 54 Mbps	2	4	23.5	24.1		26.8	30.0	3.2
	Non HT20, 6 to 54 Mbps	3	4	23.5	24.1	24.9	29.0	30.0	1.0
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	23.5	24.1		26.8	29.0	2.2
	<b>Non HT20 Beam Forming, 6 to 54 Mbps</b>	<b>3</b>	<b>9</b>	<b>20.7</b>	<b>21.2</b>	<b>21.9</b>	<b>26.1</b>	<b>27.0</b>	<b>0.9</b>
	HT/VHT20, M0 to M7	1	4	24.1			24.1	30.0	5.9
	HT/VHT20, M0 to M7	2	4	21.8	22.4		25.1	30.0	4.9
	HT/VHT20, M8 to M15	2	4	21.8	22.4		25.1	30.0	4.9
	HT/VHT20, M0 to M7	3	4	19.8	20.4	21.0	25.2	30.0	4.8
	HT/VHT20, M8 to M15	3	4	19.8	20.4	21.0	25.2	30.0	4.8
	HT/VHT20 Beam Forming, M0 to M7	2	7	18.3	19.4		21.9	29.0	7.1
	HT/VHT20 Beam Forming, M8 to M15	2	4	21.8	22.4		25.1	30.0	4.9
	HT/VHT20 Beam Forming, M0 to M7	3	9	14.3	14.4	15.3	19.5	27.0	7.5
	HT/VHT20 Beam Forming, M8 to M15	3	6	16.2	16.9	17.8	21.8	30.0	8.2
	HT/VHT20 STBC, M0 to M7	2	4	21.8	22.4		25.1	30.0	4.9
	HT/VHT20 STBC, M0 to M7	3	4	19.8	20.4	21.0	25.2	30.0	4.8
5755	Non HT40, 6 to 54 Mbps	1	4	23.5			23.5	30.0	6.5
	Non HT40, 6 to 54 Mbps	2	4	22.7	23.1		25.9	30.0	4.1
	Non HT40, 6 to 54 Mbps	3	4	17.9	19.4	20.0	24.0	30.0	6.0
	HT/VHT40, M0 to M7	1	4	23.7			23.7	30.0	6.3
	HT/VHT40, M0 to M7	2	4	20.7	21.1		23.9	30.0	6.1
	HT/VHT40, M8 to M15	2	4	20.7	21.1		23.9	30.0	6.1
	HT/VHT40, M0 to M7	3	4	19.8	20.2	20.7	25.0	30.0	5.0
	HT/VHT40, M8 to M15	3	4	19.8	20.2	20.7	25.0	30.0	5.0
	HT/VHT40 Beam Forming, M0 to M7	2	7	19.8	20.2		23.0	29.0	6.0
	HT/VHT40 Beam Forming, M8 to M15	2	4	20.7	21.1		23.9	30.0	6.1
	HT/VHT40 Beam Forming, M0 to M7	3	9	14.2	14.3	15.1	19.3	27.0	7.7
	HT/VHT40 Beam Forming, M8 to M15	3	6	16.1	16.7	17.6	21.6	30.0	8.4
	HT/VHT40 STBC, M0 to M7	2	4	20.7	21.1		23.9	30.0	6.1
	HT/VHT40 STBC, M0 to M7	3	4	19.8	20.2	20.7	25.0	30.0	5.0

5775	Non HT80, 6 to 54 Mbps	1	4	21.9			21.9	30.0	8.1
	Non HT80, 6 to 54 Mbps	2	4	20.3	20.8		23.6	30.0	6.4
	Non HT80, 6 to 54 Mbps	3	4	14.1	15.0	14.1	19.2	30.0	10.8
	VHT80, M0 to M9 1ss	1	4	23.6			23.6	30.0	6.4
	VHT80, M0 to M9 1ss	2	4	23.6	24.1		26.9	30.0	3.1
	VHT80, M0 to M9 2ss	2	4	23.6	24.1		26.9	30.0	3.1
	VHT80, M0 to M9 1ss	3	4	18.1	19.2	18.2	23.3	30.0	6.7
	VHT80, M0 to M9 2ss	3	4	18.1	19.2	18.2	23.3	30.0	6.7
	VHT80 Beam Forming, M0 to M9 1ss	2	7	22.4	23.1		25.8	29.0	3.2
	VHT80 Beam Forming, M0 to M9 2ss	2	4	23.6	24.1		26.9	30.0	3.1
	VHT80 Beam Forming, M0 to M9 1ss	3	9	14.0	14.2	14.0	18.8	27.0	8.2
	VHT80 Beam Forming, M0 to M9 2ss	3	6	16.8	16.8	16.8	21.6	30.0	8.4
	VHT80 STBC, M0 to M9 1ss	2	4	23.6	24.1		26.9	30.0	3.1
	VHT80 STBC, M0 to M9 1ss	3	4	18.1	19.2	18.2	23.3	30.0	6.7
5785	Non HT20, 6 to 54 Mbps	1	4	22.4			22.4	30.0	7.6
	Non HT20, 6 to 54 Mbps	2	4	21.5	22.6		25.1	30.0	4.9
	Non HT20, 6 to 54 Mbps	3	4	16.8	17.2	16.7	21.7	30.0	8.3
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	15.8	17.1		19.5	29.0	9.5
	Non HT20 Beam Forming, 6 to 54 Mbps	3	9	11.9	12.8	12.2	17.1	27.0	9.9
	HT/VHT20, M0 to M7	1	4	22.6			22.6	30.0	7.4
	HT/VHT20, M0 to M7	2	4	21.7	22.7		25.2	30.0	4.8
	HT/VHT20, M8 to M15	2	4	21.7	22.7		25.2	30.0	4.8
	HT/VHT20, M0 to M7	3	4	17.0	17.3	16.8	21.8	30.0	8.2
	HT/VHT20, M8 to M15	3	4	17.0	17.3	16.8	21.8	30.0	8.2
	HT/VHT20 Beam Forming, M0 to M7	2	7	16.0	17.3		19.7	29.0	9.3
	HT/VHT20 Beam Forming, M8 to M15	2	4	21.7	22.7		25.2	30.0	4.8
	HT/VHT20 Beam Forming, M0 to M7	3	9	12.0	12.9	12.3	17.2	27.0	9.8
	HT/VHT20 Beam Forming, M8 to M15	3	6	16.0	17.3	16.7	21.5	30.0	8.5
	HT/VHT20 STBC, M0 to M7	2	4	21.7	22.7		25.2	30.0	4.8
	HT/VHT20 STBC, M0 to M7	3	4	17.0	17.3	16.8	21.8	30.0	8.2
5795	Non HT40, 6 to 54 Mbps	1	4	20.8			20.8	30.0	9.2
	Non HT40, 6 to 54 Mbps	2	4	19.4	21.0		23.3	30.0	6.7
	Non HT40, 6 to 54 Mbps	3	4	16.3	15.8	14.9	20.5	30.0	9.5
	HT/VHT40, M0 to M7	1	4	22.6			22.6	30.0	7.4
	HT/VHT40, M0 to M7	2	4	22.6	23.4		26.0	30.0	4.0
	HT/VHT40, M8 to M15	2	4	22.6	23.4		26.0	30.0	4.0
	HT/VHT40, M0 to M7	3	4	18.0	18.5	17.6	22.8	30.0	7.2
	HT/VHT40, M8 to M15	3	4	18.0	18.5	17.6	22.8	30.0	7.2
	HT/VHT40 Beam Forming, M0 to M7	2	7	16.0	15.9		19.0	29.0	10.0
	HT/VHT40 Beam Forming, M8 to M15	2	4	22.6	23.4		26.0	30.0	4.0
	HT/VHT40 Beam Forming, M0 to M7	3	9	11.9	12.7	11.7	16.9	27.0	10.1

	HT/VHT40 Beam Forming, M8 to M15	3	6	15.1	15.8	14.9	20.1	30.0	9.9
	HT/VHT40 STBC, M0 to M7	2	4	22.6	23.4		26.0	30.0	4.0
	HT/VHT40 STBC, M0 to M7	3	4	18.0	18.5	17.6	22.8	30.0	7.2
<hr/>									
5825	Non HT20, 6 to 54 Mbps	1	4	21.6			21.6	30.0	8.4
	Non HT20, 6 to 54 Mbps	2	4	21.6	21.8		24.7	30.0	5.3
	Non HT20, 6 to 54 Mbps	3	4	16.8	16.4	15.9	21.2	30.0	8.8
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	14.9	15.2		18.1	29.0	10.9
	Non HT20 Beam Forming, 6 to 54 Mbps	3	9	10.9	11.3	10.6	15.7	27.0	11.3
	HT/VHT20, M0 to M7	1	4	21.7			21.7	30.0	8.3
	HT/VHT20, M0 to M7	2	4	21.7	21.9		24.8	30.0	5.2
	HT/VHT20, M8 to M15	2	4	21.7	21.9		24.8	30.0	5.2
	HT/VHT20, M0 to M7	3	4	17.0	16.5	16.0	21.3	30.0	8.7
	HT/VHT20, M8 to M15	3	4	17.0	16.5	16.0	21.3	30.0	8.7
	HT/VHT20 Beam Forming, M0 to M7	2	7	14.9	15.3		18.1	29.0	10.9
	HT/VHT20 Beam Forming, M8 to M15	2	4	21.7	21.9		24.8	30.0	5.2
	HT/VHT20 Beam Forming, M0 to M7	3	9	11.0	11.4	10.6	15.8	27.0	11.2
	HT/VHT20 Beam Forming, M8 to M15	3	6	14.9	15.3	14.7	19.7	30.0	10.3
	HT/VHT20 STBC, M0 to M7	2	4	21.7	21.9		24.8	30.0	5.2
	HT/VHT20 STBC, M0 to M7	3	4	17.0	16.5	16.0	21.3	30.0	8.7

### Peak Output Power, 5745 MHz, Non HT20 Beam Forming, 6 to 54 Mbps



Antenna A



Antenna B



Antenna C

## Antenna Gain: 10 dBi

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Tx 3 Max Power (dBm)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
5745	Non HT20, 6 to 54 Mbps	1	10	23.5			23.5	26.0	2.5
	Non HT20, 6 to 54 Mbps	2	10	20.7	21.2		24.0	26.0	2.0
	<b>Non HT20, 6 to 54 Mbps</b>	<b>3</b>	<b>10</b>	<b>19.7</b>	<b>20.3</b>	<b>21.1</b>	<b>25.2</b>	<b>26.0</b>	<b>0.8</b>
	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	20.7	21.2		24.0	26.0	2.0
	Non HT20 Beam Forming, 6 to 54 Mbps	3	13	17.0	16.8	17.8	22.0	23.0	1.0
	HT/VHT20, M0 to M7	1	10	24.1			24.1	26.0	1.9
	HT/VHT20, M0 to M7	2	10	16.2	16.9		19.6	26.0	6.4
	HT/VHT20, M8 to M15	2	10	16.2	16.9		19.6	26.0	6.4
	HT/VHT20, M0 to M7	3	10	13.4	13.3	14.2	18.4	26.0	7.6
	HT/VHT20, M8 to M15	3	10	13.4	13.3	14.2	18.4	26.0	7.6
	HT/VHT20 Beam Forming, M0 to M7	2	10	16.2	16.9		19.6	26.0	6.4
	HT/VHT20 Beam Forming, M8 to M15	2	10	16.2	16.9		19.6	26.0	6.4
	HT/VHT20 Beam Forming, M0 to M7	3	13	12.3	12.4	13.3	17.5	23.0	5.5
	HT/VHT20 Beam Forming, M8 to M15	3	10	13.4	13.3	14.2	18.4	26.0	7.6
	HT/VHT20 STBC, M0 to M7	2	10	16.2	16.9		19.6	26.0	6.4
	HT/VHT20 STBC, M0 to M7	3	10	13.4	13.3	14.2	18.4	26.0	7.6
5755	Non HT40, 6 to 54 Mbps	1	10	23.5			23.5	26.0	2.5
	Non HT40, 6 to 54 Mbps	2	10	16.0	16.8		19.4	26.0	6.6
	Non HT40, 6 to 54 Mbps	3	10	13.2	13.5	14.1	18.4	26.0	7.6
	HT/VHT40, M0 to M7	1	10	23.7			23.7	26.0	2.3
	HT/VHT40, M0 to M7	2	10	16.1	16.7		19.4	26.0	6.6
	HT/VHT40, M8 to M15	2	10	16.1	16.7		19.4	26.0	6.6
	HT/VHT40, M0 to M7	3	10	13.0	13.2	13.9	18.2	26.0	7.8
	HT/VHT40, M8 to M15	3	10	13.0	13.2	13.9	18.2	26.0	7.8
	HT/VHT40 Beam Forming, M0 to M7	2	10	16.1	16.7		19.4	26.0	6.6
	HT/VHT40 Beam Forming, M8 to M15	2	10	16.1	16.7		19.4	26.0	6.6
	HT/VHT40 Beam Forming, M0 to M7	3	13	13.0	13.2	13.9	18.2	23.0	4.8
	HT/VHT40 Beam Forming, M8 to M15	3	10	13.0	13.2	13.9	18.2	26.0	7.8
	HT/VHT40 STBC, M0 to M7	2	10	16.1	16.7		19.4	26.0	6.6
	HT/VHT40 STBC, M0 to M7	3	10	13.0	13.2	13.9	18.2	26.0	7.8

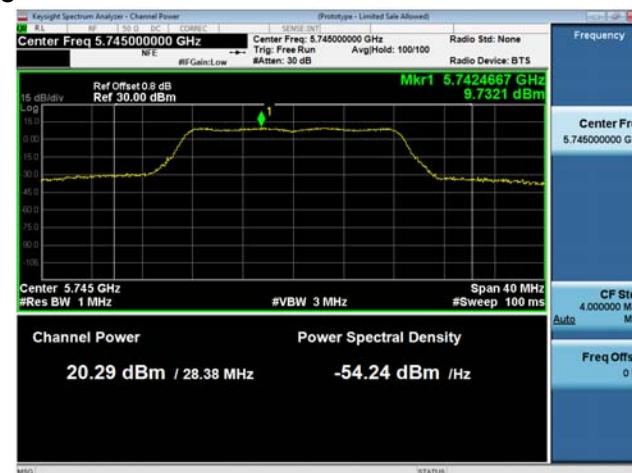
5775	Non HT80, 6 to 54 Mbps	1	10	22.1			22.1	26.0	3.9
	Non HT80, 6 to 54 Mbps	2	10	14.1	15.0		17.6	26.0	8.4
	Non HT80, 6 to 54 Mbps	3	10	10.4	10.8	10.6	15.4	26.0	10.6
	VHT80, M0 to M9 1ss	1	10	23.6			23.6	26.0	2.4
	VHT80, M0 to M9 1ss	2	10	15.9	16.7		19.3	26.0	6.7
	VHT80, M0 to M9 2ss	2	10	15.9	16.7		19.3	26.0	6.7
	VHT80, M0 to M9 1ss	3	10	12.8	13.2	13.0	17.8	26.0	8.2
	VHT80, M0 to M9 2ss	3	10	12.8	13.2	13.0	17.8	26.0	8.2
	VHT80 Beam Forming, M0 to M9 1ss	2	10	15.9	16.7		19.3	26.0	6.7
	VHT80 Beam Forming, M0 to M9 2ss	2	10	15.9	16.7		19.3	26.0	6.7
	VHT80 Beam Forming, M0 to M9 1ss	3	13	12.8	13.2	13.0	17.8	23.0	5.2
	VHT80 Beam Forming, M0 to M9 2ss	3	10	12.8	13.2	13.0	17.8	26.0	8.2
	VHT80 STBC, M0 to M9 1ss	2	10	15.9	16.7		19.3	26.0	6.7
	VHT80 STBC, M0 to M9 1ss	3	10	12.8	13.2	13.0	17.8	26.0	8.2
5785	Non HT20, 6 to 54 Mbps	1	10	17.9			17.9	26.0	8.1
	Non HT20, 6 to 54 Mbps	2	10	11.9	12.8		15.4	26.0	10.6
	Non HT20, 6 to 54 Mbps	3	10	10.0	10.8	10.2	15.1	26.0	10.9
	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	11.9	12.8		15.4	26.0	10.6
	Non HT20 Beam Forming, 6 to 54 Mbps	3	13	8.1	8.9	8.3	13.2	23.0	9.8
	HT/VHT20, M0 to M7	1	10	18.0			18.0	26.0	8.0
	HT/VHT20, M0 to M7	2	10	12.0	12.9		15.5	26.0	10.5
	HT/VHT20, M8 to M15	2	10	12.0	12.9		15.5	26.0	10.5
	HT/VHT20, M0 to M7	3	10	10.1	10.9	10.3	15.2	26.0	10.8
	HT/VHT20, M8 to M15	3	10	10.1	10.9	10.3	15.2	26.0	10.8
	HT/VHT20 Beam Forming, M0 to M7	2	10	12.0	12.9		15.5	26.0	10.5
	HT/VHT20 Beam Forming, M8 to M15	2	10	12.0	12.9		15.5	26.0	10.5
	HT/VHT20 Beam Forming, M0 to M7	3	13	7.2	7.9	7.2	12.2	23.0	10.8
	HT/VHT20 Beam Forming, M8 to M15	3	10	10.1	10.9	10.3	15.2	26.0	10.8
	HT/VHT20 STBC, M0 to M7	2	10	12.0	12.9		15.5	26.0	10.5
	HT/VHT20 STBC, M0 to M7	3	10	10.1	10.9	10.3	15.2	26.0	10.8
5795	Non HT40, 6 to 54 Mbps	1	10	16.3			16.3	26.0	9.7
	Non HT40, 6 to 54 Mbps	2	10	10.4	11.1		13.8	26.0	12.2
	Non HT40, 6 to 54 Mbps	3	10	8.4	8.9	7.9	13.2	26.0	12.8
	HT/VHT40, M0 to M7	1	10	18.0			18.0	26.0	8.0
	HT/VHT40, M0 to M7	2	10	11.9	12.7		15.3	26.0	10.7
	HT/VHT40, M8 to M15	2	10	11.9	12.7		15.3	26.0	10.7
	HT/VHT40, M0 to M7	3	10	10.0	10.6	9.6	14.9	26.0	11.1
	HT/VHT40, M8 to M15	3	10	10.0	10.6	9.6	14.9	26.0	11.1
	HT/VHT40 Beam Forming, M0 to M7	2	10	11.9	12.7		15.3	26.0	10.7
	HT/VHT40 Beam Forming, M8 to M15	2	10	11.9	12.7		15.3	26.0	10.7
	HT/VHT40 Beam Forming, M0 to M7	3	13	7.2	7.8	6.7	12.0	23.0	11.0

	HT/VHT40 Beam Forming, M8 to M15	3	10	10.0	10.6	9.6	14.9	26.0	11.1
	HT/VHT40 STBC, M0 to M7	2	10	11.9	12.7		15.3	26.0	10.7
	HT/VHT40 STBC, M0 to M7	3	10	10.0	10.6	9.6	14.9	26.0	11.1
<hr/>									
5825	Non HT20, 6 to 54 Mbps	1	10	16.8			16.8	26.0	9.2
	Non HT20, 6 to 54 Mbps	2	10	10.9	11.3		14.1	26.0	11.9
	Non HT20, 6 to 54 Mbps	3	10	10.0	10.1	9.5	14.6	26.0	11.4
	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	10.9	11.3		14.1	26.0	11.9
	Non HT20 Beam Forming, 6 to 54 Mbps	3	13	8.1	8.3	7.6	12.8	23.0	10.2
	HT/VHT20, M0 to M7	1	10	17.0			17.0	26.0	9.0
	HT/VHT20, M0 to M7	2	10	11.0	11.4		14.2	26.0	11.8
	HT/VHT20, M8 to M15	2	10	11.0	11.4		14.2	26.0	11.8
	HT/VHT20, M0 to M7	3	10	10.1	10.2	9.5	14.7	26.0	11.3
	HT/VHT20, M8 to M15	3	10	10.1	10.2	9.5	14.7	26.0	11.3
	HT/VHT20 Beam Forming, M0 to M7	2	10	11.0	11.4		14.2	26.0	11.8
	HT/VHT20 Beam Forming, M8 to M15	2	10	11.0	11.4		14.2	26.0	11.8
	HT/VHT20 Beam Forming, M0 to M7	3	13	8.1	8.3	7.6	12.8	23.0	10.2
	HT/VHT20 Beam Forming, M8 to M15	3	10	10.1	10.2	9.5	14.7	26.0	11.3
	HT/VHT20 STBC, M0 to M7	2	10	11.0	11.4		14.2	26.0	11.8
	HT/VHT20 STBC, M0 to M7	3	10	10.1	10.2	9.5	14.7	26.0	11.3

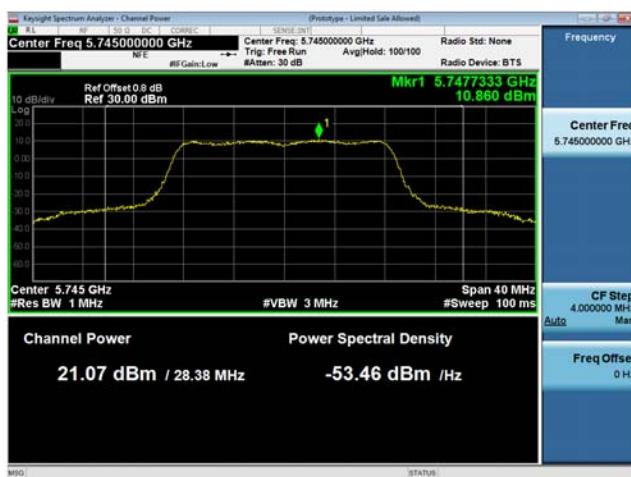
### Peak Output Power, 5745 MHz, Non HT20, 6 to 54 Mbps



Antenna A



Antenna B



Antenna C

## A.4 Power Spectral Density

**15.407 / RSS-247** The power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01

Power Spectral Density	
Test Procedure	
1.	Connect the antenna port(s) to the spectrum analyzer input.
2.	Set the radio in the continuous transmitting mode at full power
3.	Configure Spectrum analyzer as per test parameters below and Peak search marker
4.	Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 v01 section F.5

Power Spectral Density	
Test parameters	
Span = >1.5 times the OBW	
RBW = 500 kHz	
VBW $\geq$ 3 x RBW	
Sweep = 10s	
Detector = Peak	
Trace = Single Sweep	
Marker = Peak Search	

The “Measure and add  $10 \log(N)$  dB technique”, where N is the number of outputs, is used for measuring in-band Power Spectral Density. With this technique, spectrum measurements are performed at each output of the device, and the quantity  $10 \log(4)$  (or 6dB) is added to the worst case spectrum value before comparing to the emission limit. (ANSI C63.10 2013 section 14.3.2.3)

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By :	Date of testing:
Jose Aguirre	20-April-16 - 08-Aug-16

### Test Result : PASS

See Appendix C for list of test equipment

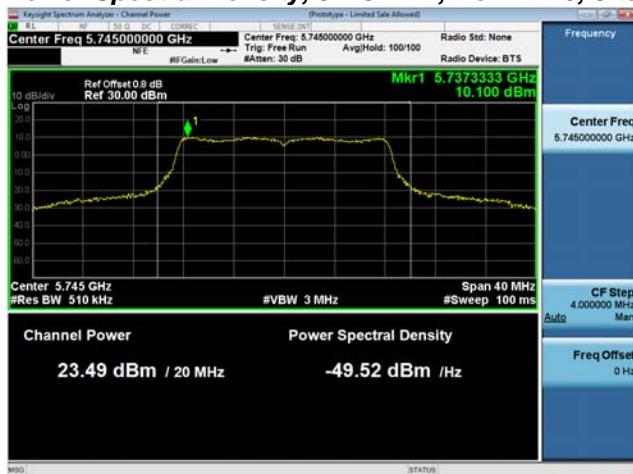
## Antenna Gain: 4 dBi

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Tx 3 PSD (dBm/MHz)	Total PSD (dBm/500MHz)	Limit (dBm/500MHz)	Margin (dB)
5745	Non HT20, 6 to 54 Mbps	1	4	10.1			10.1	30.0	19.9
	Non HT20, 6 to 54 Mbps	2	7	10.1	10.3		13.2	29.0	15.8
	<b>Non HT20, 6 to 54 Mbps</b>	<b>3</b>	<b>9</b>	<b>10.1</b>	<b>10.3</b>	<b>11.8</b>	<b>15.6</b>	<b>27.0</b>	<b>11.4</b>
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	10.1	10.3		13.2	29.0	15.8
	Non HT20 Beam Forming, 6 to 54 Mbps	3	9	7.2	7.6	8.8	12.7	27.0	14.3
	HT/VHT20, M0 to M7	1	4	10.6			10.6	30.0	19.4
	HT/VHT20, M0 to M7	2	7	8.3	8.7		11.5	29.0	17.5
	HT/VHT20, M8 to M15	2	4	8.3	8.7		11.5	30.0	18.5
	HT/VHT20, M0 to M7	3	9	5.9	6.8	7.3	11.5	27.0	15.5
	HT/VHT20, M8 to M15	3	6	5.9	6.8	7.3	11.5	30.0	18.5
	HT/VHT20 Beam Forming, M0 to M7	2	7	4.8	5.8		8.3	29.0	20.7
	HT/VHT20 Beam Forming, M8 to M15	2	4	8.3	8.7		11.5	30.0	18.5
	HT/VHT20 Beam Forming, M0 to M7	3	9	1.0	0.7	1.7	5.9	27.0	21.1
	HT/VHT20 Beam Forming, M8 to M15	3	6	2.7	3.5	4.0	8.2	30.0	21.8
5755	HT/VHT20 STBC, M0 to M7	2	4	8.3	8.7		11.5	30.0	18.5
	HT/VHT20 STBC, M0 to M7	3	6	5.9	6.8	7.3	11.5	30.0	18.5
	Non HT40, 6 to 54 Mbps	1	4	7.2			7.2	30.0	22.8
	Non HT40, 6 to 54 Mbps	2	7	6.5	6.6		9.6	29.0	19.4
	Non HT40, 6 to 54 Mbps	3	9	1.7	2.8	4.0	7.7	27.0	19.3
	HT/VHT40, M0 to M7	1	4	7.2			7.2	30.0	22.8
	HT/VHT40, M0 to M7	2	7	4.0	4.5		7.3	29.0	21.7
	HT/VHT40, M8 to M15	2	4	4.0	4.5		7.3	30.0	22.7
	HT/VHT40, M0 to M7	3	9	3.2	3.2	4.1	8.3	27.0	18.7
	HT/VHT40, M8 to M15	3	6	3.2	3.2	4.1	8.3	30.0	21.7
	HT/VHT40 Beam Forming, M0 to M7	2	7	3.2	3.2		6.2	29.0	22.8
	HT/VHT40 Beam Forming, M8 to M15	2	4	4.0	4.5		7.3	30.0	22.7
	HT/VHT40 Beam Forming, M0 to M7	3	9	-2.0	-2.5	-1.4	2.8	27.0	24.2
	HT/VHT40 Beam Forming, M8 to M15	3	6	-0.4	0.1	0.9	5.0	30.0	25.0
	HT/VHT40 STBC, M0 to M7	2	4	4.0	4.5		7.3	30.0	22.7
	HT/VHT40 STBC, M0 to M7	3	6	3.2	3.2	4.1	8.3	30.0	21.7

5775	Non HT80, 6 to 54 Mbps	1	4	2.4			2.4	30.0	27.6
	Non HT80, 6 to 54 Mbps	2	7	0.6	1.3		4.0	29.0	25.0
	Non HT80, 6 to 54 Mbps	3	9	-5.1	-4.9	-5.2	-0.3	27.0	27.3
	VHT80, M0 to M9 1ss	1	4	3.5			3.5	30.0	26.5
	VHT80, M0 to M9 1ss	2	7	3.5	3.6		6.6	29.0	22.4
	VHT80, M0 to M9 2ss	2	4	3.5	3.6		6.6	30.0	23.4
	VHT80, M0 to M9 1ss	3	9	-2.0	-1.0	-1.6	3.3	27.0	23.7
	VHT80, M0 to M9 2ss	3	6	-2.0	-1.0	-1.6	3.3	30.0	26.7
	VHT80 Beam Forming, M0 to M9 1ss	2	7	2.3	2.7		5.5	29.0	23.5
	VHT80 Beam Forming, M0 to M9 2ss	2	4	3.5	3.6		6.6	30.0	23.4
	VHT80 Beam Forming, M0 to M9 1ss	3	9	-6.0	-6.1	-6.1	-1.3	27.0	28.3
	VHT80 Beam Forming, M0 to M9 2ss	3	6	-3.1	-3.3	-3.0	1.6	30.0	28.4
	VHT80 STBC, M0 to M9 1ss	2	4	3.5	3.6		6.6	30.0	23.4
	VHT80 STBC, M0 to M9 1ss	3	4	-2.0	-1.0	-1.6	3.3	30.0	26.7
5785	Non HT20, 6 to 54 Mbps	1	4	9.3			9.3	30.0	20.7
	Non HT20, 6 to 54 Mbps	2	7	8.0	9.1		11.6	29.0	17.4
	Non HT20, 6 to 54 Mbps	3	9	3.3	4.0	3.3	8.3	27.0	18.7
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	2.2	3.6		6.0	29.0	23.0
	Non HT20 Beam Forming, 6 to 54 Mbps	3	9	-1.8	-0.6	-1.1	3.6	27.0	23.4
	HT/VHT20, M0 to M7	1	4	9.0			9.0	30.0	21.0
	HT/VHT20, M0 to M7	2	7	8.1	9.2		11.7	29.0	17.3
	HT/VHT20, M8 to M15	2	4	8.1	9.2		11.7	30.0	18.3
	HT/VHT20, M0 to M7	3	9	3.1	3.8	3.3	8.2	27.0	18.8
	HT/VHT20, M8 to M15	3	6	3.1	3.8	3.3	8.2	30.0	21.8
	HT/VHT20 Beam Forming, M0 to M7	2	7	2.1	3.7		6.0	29.0	23.0
	HT/VHT20 Beam Forming, M8 to M15	2	4	8.1	9.2		11.7	30.0	18.3
	HT/VHT20 Beam Forming, M0 to M7	3	9	-1.7	-1.0	-1.3	3.4	27.0	23.6
	HT/VHT20 Beam Forming, M8 to M15	3	6	2.1	3.7	3.3	7.9	30.0	22.1
	HT/VHT20 STBC, M0 to M7	2	4	8.1	9.2		11.7	30.0	18.3
	HT/VHT20 STBC, M0 to M7	3	6	3.1	3.8	3.3	8.2	30.0	21.8
5795	Non HT40, 6 to 54 Mbps	1	4	4.5			4.5	30.0	25.5
	Non HT40, 6 to 54 Mbps	2	7	2.8	4.7		6.9	29.0	22.1
	Non HT40, 6 to 54 Mbps	3	9	-0.1	-0.5	-1.1	4.2	27.0	22.8
	HT/VHT40, M0 to M7	1	4	5.8			5.8	30.0	24.2
	HT/VHT40, M0 to M7	2	7	5.8	6.8		9.3	29.0	19.7
	HT/VHT40, M8 to M15	2	4	5.8	6.8		9.3	30.0	20.7
	HT/VHT40, M0 to M7	3	9	1.5	1.9	1.3	6.3	27.0	20.7
	HT/VHT40, M8 to M15	3	6	1.5	1.9	1.3	6.3	30.0	23.7
	HT/VHT40 Beam Forming, M0 to M7	2	7	-0.7	-1.0		2.2	29.0	26.8
	HT/VHT40 Beam Forming, M8 to M15	2	4	5.8	6.8		9.3	30.0	20.7
	HT/VHT40 Beam Forming, M0 to M7	3	9	-4.9	-4.0	-4.8	0.2	27.0	26.8

	HT/VHT40 Beam Forming, M8 to M15	3	6	-1.5	-0.7	-1.5	3.6	30.0	26.4
	HT/VHT40 STBC, M0 to M7	2	4	5.8	6.8		9.3	30.0	20.7
	HT/VHT40 STBC, M0 to M7	3	6	1.5	1.9	1.3	6.3	30.0	23.7
<hr/>									
5825	Non HT20, 6 to 54 Mbps	1	4	8.2			8.2	30.0	21.8
	Non HT20, 6 to 54 Mbps	2	7	8.2	8.6		11.4	29.0	17.6
	Non HT20, 6 to 54 Mbps	3	9	3.3	3.0	2.5	7.7	27.0	19.3
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	1.5	2.0		4.8	29.0	24.2
	Non HT20 Beam Forming, 6 to 54 Mbps	3	9	-2.6	-2.1	-3.0	2.2	27.0	24.8
	HT/VHT20, M0 to M7	1	4	8.0			8.0	30.0	22.0
	HT/VHT20, M0 to M7	2	7	8.0	8.0		11.0	29.0	18.0
	HT/VHT20, M8 to M15	2	4	8.0	8.0		11.0	30.0	19.0
	HT/VHT20, M0 to M7	3	9	3.2	3.0	2.5	7.7	27.0	19.3
	HT/VHT20, M8 to M15	3	6	3.2	3.0	2.5	7.7	30.0	22.3
	HT/VHT20 Beam Forming, M0 to M7	2	7	1.6	1.5		4.6	29.0	24.4
	HT/VHT20 Beam Forming, M8 to M15	2	4	8.0	8.0		11.0	30.0	19.0
	HT/VHT20 Beam Forming, M0 to M7	3	9	-2.4	-2.0	-3.0	2.3	27.0	24.7
	HT/VHT20 Beam Forming, M8 to M15	3	6	1.6	1.5	1.0	6.1	30.0	23.9
	HT/VHT20 STBC, M0 to M7	2	4	8.0	8.0		11.0	30.0	19.0
	HT/VHT20 STBC, M0 to M7	3	6	3.2	3.0	2.5	7.7	30.0	22.3

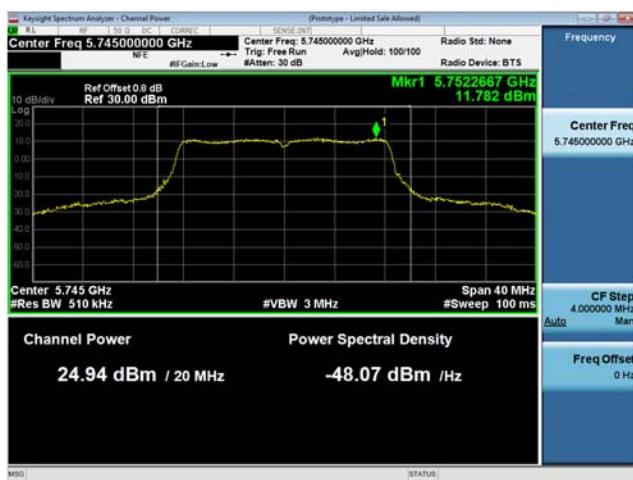
### Power Spectral Density, 5745 MHz, Non HT20, 6 to 54 Mbps



Antenna A



Antenna B



Antenna C

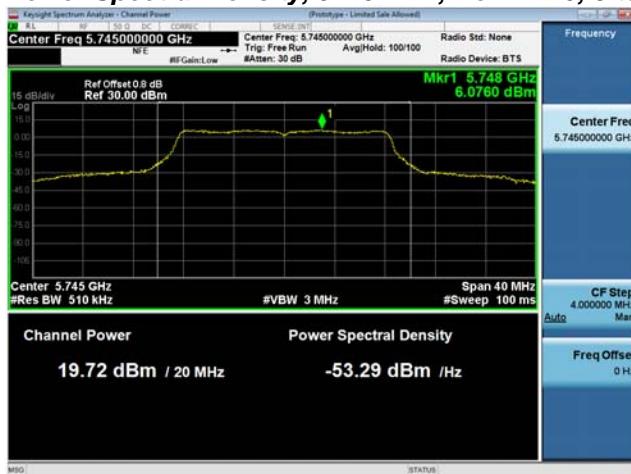
## Antenna Gain: 10 dBi

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Tx 3 PSD (dBm/MHz)	Total PSD (dBm/500MHz)	Limit (dBm/500MHz)	Margin (dB)
5745	Non HT20, 6 to 54 Mbps	1	10	10.1			10.1	26.0	15.9
	Non HT20, 6 to 54 Mbps	2	10	7.2	7.6		10.4	26.0	15.6
	<b>Non HT20, 6 to 54 Mbps</b>	<b>3</b>	<b>10</b>	<b>6.1</b>	<b>7.0</b>	<b>7.5</b>	<b>11.7</b>	<b>26.0</b>	<b>14.3</b>
	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	7.2	7.6		10.4	26.0	15.6
	Non HT20 Beam Forming, 6 to 54 Mbps	3	13	3.7	3.4	4.2	8.6	23.0	14.4
	HT/VHT20, M0 to M7	1	10	10.6			10.6	26.0	15.4
	HT/VHT20, M0 to M7	2	10	2.7	3.5		6.1	26.0	19.9
	HT/VHT20, M8 to M15	2	10	2.7	3.5		6.1	26.0	19.9
	HT/VHT20, M0 to M7	3	10	-0.1	0.0	0.5	4.9	26.0	21.1
	HT/VHT20, M8 to M15	3	10	-0.1	0.0	0.5	4.9	26.0	21.1
	HT/VHT20 Beam Forming, M0 to M7	2	10	2.7	3.5		6.1	26.0	19.9
	HT/VHT20 Beam Forming, M8 to M15	2	10	2.7	3.5		6.1	26.0	19.9
	HT/VHT20 Beam Forming, M0 to M7	3	13	-1.5	-1.1	-0.2	3.9	23.0	19.1
	HT/VHT20 Beam Forming, M8 to M15	3	10	-0.1	0.0	0.5	4.9	26.0	21.1
5755	HT/VHT20 STBC, M0 to M7	2	10	2.7	3.5		6.1	26.0	19.9
	HT/VHT20 STBC, M0 to M7	3	10	-0.1	0.0	0.5	4.9	26.0	21.1
	Non HT40, 6 to 54 Mbps	1	10	7.2			7.2	26.0	18.8
	Non HT40, 6 to 54 Mbps	2	10	-0.1	0.6		3.3	26.0	22.7
	Non HT40, 6 to 54 Mbps	3	10	-3.0	-3.0	-2.5	1.9	26.0	24.1
	HT/VHT40, M0 to M7	1	10	7.2			7.2	26.0	18.8
	HT/VHT40, M0 to M7	2	10	-0.4	0.1		2.9	26.0	23.1
	HT/VHT40, M8 to M15	2	10	-0.4	0.1		2.9	26.0	23.1
	HT/VHT40, M0 to M7	3	10	-3.5	-3.4	-2.7	1.6	26.0	24.4
	HT/VHT40, M8 to M15	3	10	-3.5	-3.4	-2.7	1.6	26.0	24.4
	HT/VHT40 Beam Forming, M0 to M7	2	10	-0.4	0.1		2.9	26.0	23.1
	HT/VHT40 Beam Forming, M8 to M15	2	10	-0.4	0.1		2.9	26.0	23.1
	HT/VHT40 Beam Forming, M0 to M7	3	13	-3.5	-3.4	-2.7	1.6	23.0	21.4
	HT/VHT40 Beam Forming, M8 to M15	3	10	-3.5	-3.4	-2.7	1.6	26.0	24.4
	HT/VHT40 STBC, M0 to M7	2	10	-0.4	0.1		2.9	26.0	23.1
	HT/VHT40 STBC, M0 to M7	3	10	-3.5	-3.4	-2.7	1.6	26.0	24.4

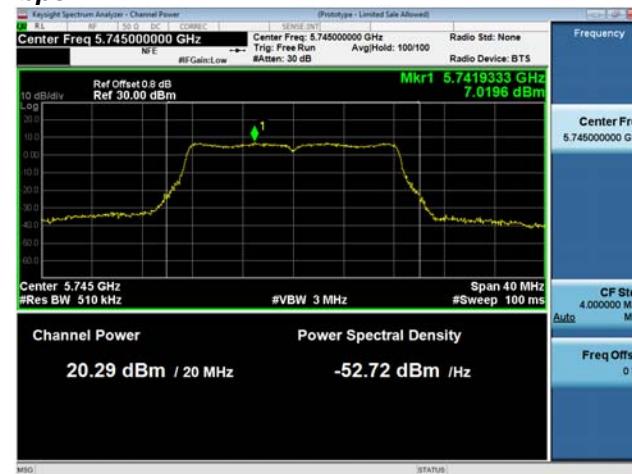
5775	Non HT80, 6 to 54 Mbps	1	10	2.5			2.5	26.0	23.5
	Non HT80, 6 to 54 Mbps	2	10	-5.1	-4.9		-2.0	26.0	28.0
	Non HT80, 6 to 54 Mbps	3	10	-9.0	-9.2	-8.4	-4.1	26.0	30.1
	VHT80, M0 to M9 1ss	1	10	3.5			3.5	26.0	22.5
	VHT80, M0 to M9 1ss	2	10	-3.9	-3.8		-0.8	26.0	26.8
	VHT80, M0 to M9 2ss	2	10	-3.9	-3.8		-0.8	26.0	26.8
	VHT80, M0 to M9 1ss	3	10	-7.1	-7.3	-6.6	-2.2	26.0	28.2
	VHT80, M0 to M9 2ss	3	10	-7.1	-7.3	-6.6	-2.2	26.0	28.2
	VHT80 Beam Forming, M0 to M9 1ss	2	10	-3.9	-3.8		-0.8	26.0	26.8
	VHT80 Beam Forming, M0 to M9 2ss	2	10	-3.9	-3.8		-0.8	26.0	26.8
	VHT80 Beam Forming, M0 to M9 1ss	3	13	-7.1	-7.3	-6.6	-2.2	23.0	25.2
	VHT80 Beam Forming, M0 to M9 2ss	3	10	-7.1	-7.3	-6.6	-2.2	26.0	28.2
	VHT80 STBC, M0 to M9 1ss	2	10	-3.9	-3.8		-0.8	26.0	26.8
	VHT80 STBC, M0 to M9 1ss	3	10	-7.1	-7.3	-6.6	-2.2	26.0	28.2
5785	Non HT20, 6 to 54 Mbps	1	10	4.5			4.5	26.0	21.5
	Non HT20, 6 to 54 Mbps	2	10	-1.8	-0.6		1.9	26.0	24.1
	Non HT20, 6 to 54 Mbps	3	10	-3.3	-2.7	-2.7	1.9	26.0	24.1
	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-1.8	-0.6		1.9	26.0	24.1
	Non HT20 Beam Forming, 6 to 54 Mbps	3	13	-5.4	-4.4	-5.2	-0.2	23.0	23.2
	HT/VHT20, M0 to M7	1	10	4.3			4.3	26.0	21.7
	HT/VHT20, M0 to M7	2	10	-1.7	-1.0		1.7	26.0	24.3
	HT/VHT20, M8 to M15	2	10	-1.7	-1.0		1.7	26.0	24.3
	HT/VHT20, M0 to M7	3	10	-3.6	-2.9	-3.3	1.5	26.0	24.5
	HT/VHT20, M8 to M15	3	10	-3.6	-2.9	-3.3	1.5	26.0	24.5
	HT/VHT20 Beam Forming, M0 to M7	2	10	-1.7	-1.0		1.7	26.0	24.3
	HT/VHT20 Beam Forming, M8 to M15	2	10	-1.7	-1.0		1.7	26.0	24.3
	HT/VHT20 Beam Forming, M0 to M7	3	13	-6.4	-5.5	-6.3	-1.3	23.0	24.3
	HT/VHT20 Beam Forming, M8 to M15	3	10	-3.6	-2.9	-3.3	1.5	26.0	24.5
	HT/VHT20 STBC, M0 to M7	2	10	-1.7	-1.0		1.7	26.0	24.3
	HT/VHT20 STBC, M0 to M7	3	10	-3.6	-2.9	-3.3	1.5	26.0	24.5
5795	Non HT40, 6 to 54 Mbps	1	10	-0.1			-0.1	26.0	26.1
	Non HT40, 6 to 54 Mbps	2	10	-6.0	-5.1		-2.5	26.0	28.5
	Non HT40, 6 to 54 Mbps	3	10	-7.8	-7.6	-8.2	-3.1	26.0	29.1
	HT/VHT40, M0 to M7	1	10	1.5			1.5	26.0	24.5
	HT/VHT40, M0 to M7	2	10	-4.9	-4.0		-1.4	26.0	27.4
	HT/VHT40, M8 to M15	2	10	-4.9	-4.0		-1.4	26.0	27.4
	HT/VHT40, M0 to M7	3	10	-6.6	-6.4	-6.6	-1.8	26.0	27.8
	HT/VHT40, M8 to M15	3	10	-6.6	-6.4	-6.6	-1.8	26.0	27.8
	HT/VHT40 Beam Forming, M0 to M7	2	10	-4.9	-4.0		-1.4	26.0	27.4
	HT/VHT40 Beam Forming, M8 to M15	2	10	-4.9	-4.0		-1.4	26.0	27.4
	HT/VHT40 Beam Forming, M0 to M7	3	13	-9.4	-9.0	-9.3	-4.5	23.0	27.5

	HT/VHT40 Beam Forming, M8 to M15	3	10	-6.6	-6.4	-6.6	-1.8	26.0	27.8
	HT/VHT40 STBC, M0 to M7	2	10	-4.9	-4.0		-1.4	26.0	27.4
	HT/VHT40 STBC, M0 to M7	3	10	-6.6	-6.4	-6.6	-1.8	26.0	27.8
<hr/>									
5825	Non HT20, 6 to 54 Mbps	1	10	3.3			3.3	26.0	22.7
	Non HT20, 6 to 54 Mbps	2	10	-2.6	-2.1		0.7	26.0	25.3
	Non HT20, 6 to 54 Mbps	3	10	-3.3	-3.4	-3.8	1.3	26.0	24.7
	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-2.6	-2.1		0.7	26.0	25.3
	Non HT20 Beam Forming, 6 to 54 Mbps	3	13	-5.4	-4.9	-6.0	-0.6	23.0	23.6
	HT/VHT20, M0 to M7	1	10	3.2			3.2	26.0	22.8
	HT/VHT20, M0 to M7	2	10	-2.4	-2.0		0.8	26.0	25.2
	HT/VHT20, M8 to M15	2	10	-2.4	-2.0		0.8	26.0	25.2
	HT/VHT20, M0 to M7	3	10	-3.7	-3.3	-4.1	1.1	26.0	24.9
	HT/VHT20, M8 to M15	3	10	-3.7	-3.3	-4.1	1.1	26.0	24.9
	HT/VHT20 Beam Forming, M0 to M7	2	10	-2.4	-2.0		0.8	26.0	25.2
	HT/VHT20 Beam Forming, M8 to M15	2	10	-2.4	-2.0		0.8	26.0	25.2
	HT/VHT20 Beam Forming, M0 to M7	3	13	-5.4	-5.3	-5.9	-0.8	23.0	23.8
	HT/VHT20 Beam Forming, M8 to M15	3	10	-3.7	-3.3	-4.1	1.1	26.0	24.9
	HT/VHT20 STBC, M0 to M7	2	10	-2.4	-2.0		0.8	26.0	25.2
	HT/VHT20 STBC, M0 to M7	3	10	-3.7	-3.3	-4.1	1.1	26.0	24.9

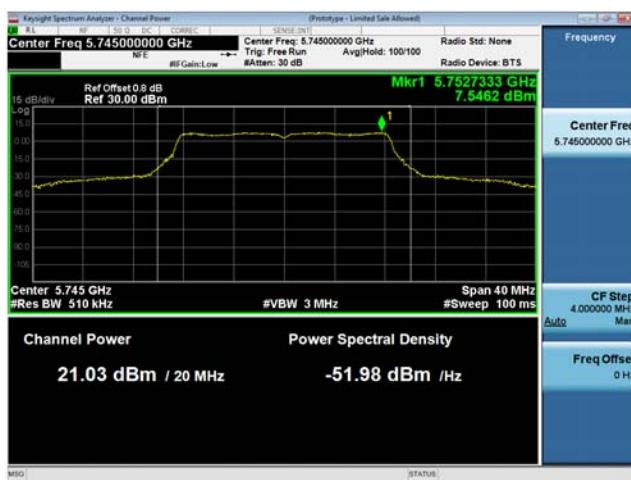
### Power Spectral Density, 5745 MHz, Non HT20, 6 to 54 Mbps



Antenna A



Antenna B



Antenna C

## A.5 Conducted Spurious Emissions

**15.205 / 15.209 / LP0002** - Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

**RSS-Gen 8.9:** Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 4 and Table 5 below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

**RSS-Gen 8.10 (b)** Unwanted emissions that fall into restricted bands of Table 6 shall comply with the limits specified in RSS-Gen; and **(c)** Unwanted emissions that do not fall within the restricted frequency bands of Table 6 shall comply either with the limits specified in the applicable RSS or with those specified in this RSS-Gen.

Use formula below to substitute conducted measurements in place of radiated measurements

$$E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77, \text{ where } E = \text{field strength and } d = 3 \text{ meter}$$

- 1) Average Plot, Limit= -41.25 dBm eirp
- 2) Peak plot, Limit = -21.25 dBm eirp

### Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01r03  
ANSI C63.10: 2013

Conducted Spurious Emissions	
Test Procedure	
1. Connect the antenna port(s) to the spectrum analyzer input.	
2. Place the radio in continuous transmit mode. Use the procedures in KDB 789033 D02 General UNII Test Procedures New Rules v01r03 to substitute conducted measurements in place of radiated measurements.	
3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).	
4. Record the marker waveform peak to spur difference. Also measure any emissions in the restricted bands.	
5. The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded.	
6. Capture graphs and record pertinent measurement data.	

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01r03  
ANSI C63.10: 2013 section 12.7.7.3 (average) & 12.7.6 (peak)

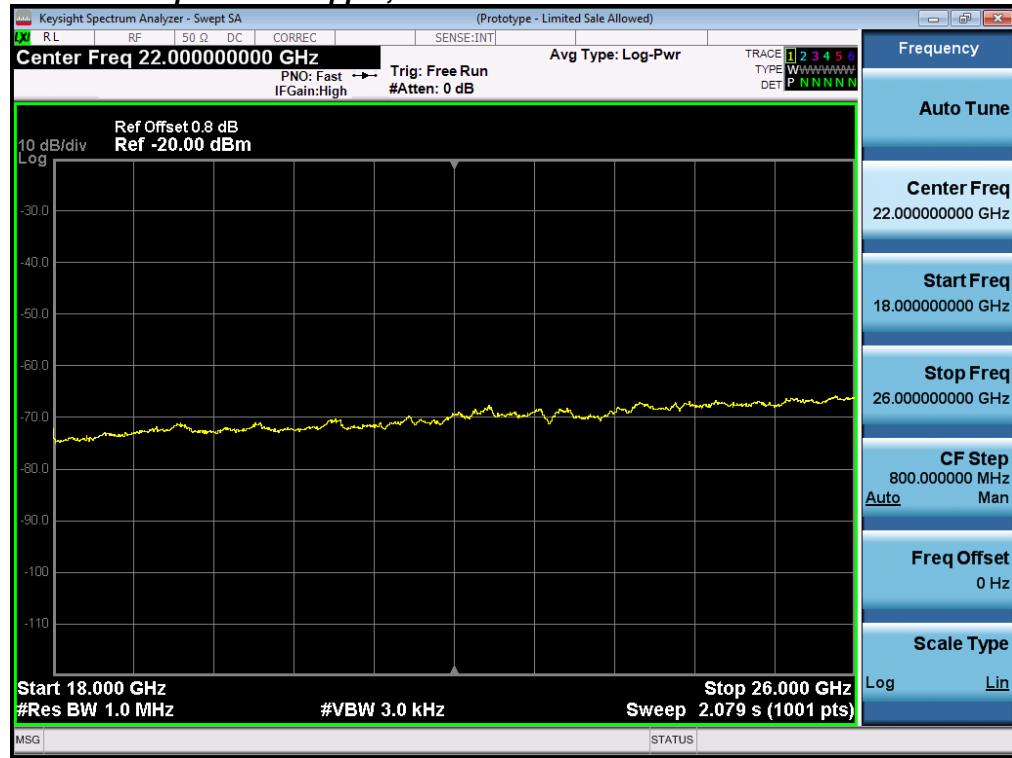
Conducted Spurious Emissions	
Test parameters	
Span = 30MHz to 18GHz / 18GHz to 40GHz	
RBW = 1 MHz	
VBW $\geq$ 3 x RBW for Peak, 1kHz for Average	
Sweep = Auto couple	
Detector = Peak	
Trace = Max Hold.	

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

<b>Tested By :</b> Jose Aguirre	<b>Date of testing:</b> 20-April-16 - 08-Aug-16
<b>Test Result : PASS</b>	

See Appendix C for list of test equipment

**Conducted Spurs Average Upper, All Antennas**

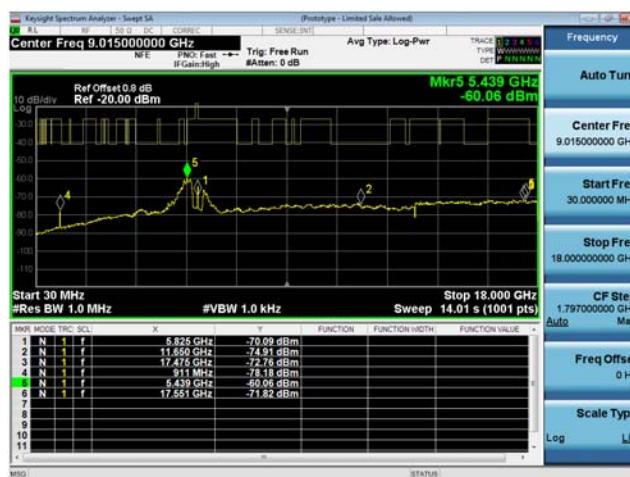
**Conducted Spurs Peak Upper, All Antennas**


**Conducted Spurious Emission results below represent the worst case for all antenna gain**

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5745	Non HT20, 6 to 54 Mbps	1	10	-71.3			-61.3	-41.25	20.1
	Non HT20, 6 to 54 Mbps	2	10	-72.4	-72.9		-59.6	-41.25	18.4
	Non HT20, 6 to 54 Mbps	3	10	-72.7	-72.9	-66.8	-55.0	-41.25	13.8
	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-72.4	-72.9		-59.6	-41.25	18.4
	Non HT20 Beam Forming, 6 to 54 Mbps	3	13	-73.3	-74.0	-70.6	-54.6	-41.25	13.4
	HT/VHT20, M0 to M7	1	10	-52.9			-42.9	-41.25	1.7
	HT/VHT20, M0 to M7	2	10	-73.4	-52.4		-42.4	-41.25	1.1
	HT/VHT20, M8 to M15	2	10	-73.4	-52.4		-42.4	-41.25	1.1
	HT/VHT20, M0 to M7	3	10	-73.2	-54.6	-54.5	-41.5	-41.25	0.3
	HT/VHT20, M8 to M15	3	10	-73.2	-54.6	-54.5	-41.5	-41.25	0.3
	HT/VHT20 Beam Forming, M0 to M7	2	10	-73.4	-52.4		-42.4	-41.25	1.1
	HT/VHT20 Beam Forming, M8 to M15	2	10	-73.4	-52.4		-42.4	-41.25	1.1
	HT/VHT20 Beam Forming, M0 to M7	3	13	-74.0	-73.7	-55.0	-41.9	-41.25	0.6
	HT/VHT20 Beam Forming, M8 to M15	3	10	-73.2	-54.6	-54.5	-41.5	-41.25	0.3
	HT/VHT20 STBC, M0 to M7	2	10	-73.4	-52.4		-42.4	-41.25	1.1
	HT/VHT20 STBC, M0 to M7	3	10	-73.2	-54.6	-54.5	-41.5	-41.25	0.3
5755	Non HT40, 6 to 54 Mbps	1	10	-52.3			-42.3	-41.25	1.1
	Non HT40, 6 to 54 Mbps	2	10	-70.0	-70.0		-57.0	-41.25	15.7
	Non HT40, 6 to 54 Mbps	3	10	-71.8	-70.1	-53.9	-43.7	-41.25	2.5
	HT/VHT40, M0 to M7	1	10	-52.7			-42.7	-41.25	1.5
	HT/VHT40, M0 to M7	2	10	-71.6	-51.9		-41.9	-41.25	0.6
	HT/VHT40, M8 to M15	2	10	-71.6	-51.9		-41.9	-41.25	0.6
	HT/VHT40, M0 to M7	3	10	-73.6	-74.3	-54.6	-44.5	-41.25	3.2
	HT/VHT40, M8 to M15	3	10	-73.6	-74.3	-54.6	-44.5	-41.25	3.2
	HT/VHT40 Beam Forming, M0 to M7	2	10	-71.6	-51.9		-41.9	-41.25	0.6
	HT/VHT40 Beam Forming, M8 to M15	2	10	-71.6	-51.9		-41.9	-41.25	0.6
	HT/VHT40 Beam Forming, M0 to M7	3	13	-73.6	-74.3	-54.6	-41.5	-41.25	0.2
	HT/VHT40 Beam Forming, M8 to M15	3	10	-73.6	-74.3	-54.6	-44.5	-41.25	3.2
	HT/VHT40 STBC, M0 to M7	2	10	-71.6	-51.9		-41.9	-41.25	0.6
	HT/VHT40 STBC, M0 to M7	3	10	-73.6	-74.3	-54.6	-44.5	-41.25	3.2

5775	Non HT80, 6 to 54 Mbps	1	10	-52.3			-42.3	-41.25	1.1
	Non HT80, 6 to 54 Mbps	2	10	-71.5	-70.1		-57.7	-41.25	16.5
	Non HT80, 6 to 54 Mbps	3	10	-71.5	-72.3	-55.8	-45.6	-41.25	4.3
	VHT80, M0 to M9 1ss	1	10	-52.0			-42.0	-41.25	0.8
	VHT80, M0 to M9 1ss	2	10	-74.3	-51.8		-41.8	-41.25	0.5
	VHT80, M0 to M9 2ss	2	10	-74.3	-51.8		-41.8	-41.25	0.5
	VHT80, M0 to M9 1ss	3	10	-73.0	-74.4	-54.6	-44.5	-41.25	3.2
	VHT80, M0 to M9 2ss	3	10	-73.0	-74.4	-54.6	-44.5	-41.25	3.2
	VHT80 Beam Forming, M0 to M9 1ss	2	10	-74.3	-51.8		-41.8	-41.25	0.5
	VHT80 Beam Forming, M0 to M9 2ss	2	10	-74.3	-51.8		-41.8	-41.25	0.5
	VHT80 Beam Forming, M0 to M9 1ss	3	13	-73.0	-74.4	-54.6	-41.5	-41.25	0.2
	VHT80 Beam Forming, M0 to M9 2ss	3	10	-73.0	-74.4	-54.6	-44.5	-41.25	3.2
	VHT80 STBC, M0 to M9 1ss	2	10	-74.3	-51.8		-41.8	-41.25	0.5
	VHT80 STBC, M0 to M9 1ss	3	10	-73.0	-74.4	-54.6	-44.5	-41.25	3.2
5785	Non HT20, 6 to 54 Mbps	1	10	-51.4			-41.4	-41.25	0.2
	Non HT20, 6 to 54 Mbps	2	10	-57.5	-54.2		-42.5	-41.25	1.3
	Non HT20, 6 to 54 Mbps	3	10	-58.5	-58.2	-58.2	-43.5	-41.25	2.3
	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-57.5	-54.2		-42.5	-41.25	1.3
	Non HT20 Beam Forming, 6 to 54 Mbps	3	13	-59.5	-58.9	-59.4	-41.5	-41.25	0.2
	HT/VHT20, M0 to M7	1	10	-51.4			-41.4	-41.25	0.2
	HT/VHT20, M0 to M7	2	10	-57.3	-54.1		-42.4	-41.25	1.2
	HT/VHT20, M8 to M15	2	10	-57.3	-54.1		-42.4	-41.25	1.2
	HT/VHT20, M0 to M7	3	10	-58.5	-57.4	-58.0	-43.2	-41.25	1.9
	HT/VHT20, M8 to M15	3	10	-58.5	-57.4	-58.0	-43.2	-41.25	1.9
	HT/VHT20 Beam Forming, M0 to M7	2	10	-57.3	-54.1		-42.4	-41.25	1.2
	HT/VHT20 Beam Forming, M8 to M15	2	10	-57.3	-54.1		-42.4	-41.25	1.2
	HT/VHT20 Beam Forming, M0 to M7	3	13	-59.8	-73.4	-59.9	-43.7	-41.25	2.5
	HT/VHT20 Beam Forming, M8 to M15	3	10	-58.5	-57.4	-58.0	-43.2	-41.25	1.9
	HT/VHT20 STBC, M0 to M7	2	10	-57.3	-54.1		-42.4	-41.25	1.2
	HT/VHT20 STBC, M0 to M7	3	10	-58.5	-57.4	-58.0	-43.2	-41.25	1.9
5795	Non HT40, 6 to 54 Mbps	1	10	-51.8			-41.8	-41.25	0.5
	Non HT40, 6 to 54 Mbps	2	10	-58.2	-54.6		-43.0	-41.25	1.8
	Non HT40, 6 to 54 Mbps	3	10	-59.1	-59.3	-59.9	-44.6	-41.25	3.4
	HT/VHT40, M0 to M7	1	10	-51.8			-41.8	-41.25	0.5
	HT/VHT40, M0 to M7	2	10	-57.8	-54.4		-42.8	-41.25	1.5
	HT/VHT40, M8 to M15	2	10	-57.8	-54.4		-42.8	-41.25	1.5
	HT/VHT40, M0 to M7	3	10	-58.7	-57.3	-57.8	-43.1	-41.25	1.9
	HT/VHT40, M8 to M15	3	10	-58.7	-57.3	-57.8	-43.1	-41.25	1.9
	HT/VHT40 Beam Forming, M0 to M7	2	10	-57.8	-54.4		-42.8	-41.25	1.5
	HT/VHT40 Beam Forming, M8 to M15	2	10	-57.8	-54.4		-42.8	-41.25	1.5
	HT/VHT40 Beam Forming, M0 to M7	3	13	-59.3	-59.5	-60.6	-42.0	-41.25	0.7

	HT/VHT40 Beam Forming, M8 to M15	3	10	-58.7	-57.3	-57.8	-43.1	-41.25	1.9
	HT/VHT40 STBC, M0 to M7	2	10	-57.8	-54.4		-42.8	-41.25	1.5
	HT/VHT40 STBC, M0 to M7	3	10	-58.7	-57.3	-57.8	-43.1	-41.25	1.9
<hr/>									
5825	Non HT20, 6 to 54 Mbps	1	10	-51.6			-41.6	-41.25	0.4
	Non HT20, 6 to 54 Mbps	2	10	-57.6	-54.6		-42.8	-41.25	1.6
	Non HT20, 6 to 54 Mbps	3	10	-57.9	-57.3	-58.8	-43.2	-41.25	1.9
	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-57.6	-54.6		-42.8	-41.25	1.6
	<b>Non HT20 Beam Forming, 6 to 54 Mbps</b>	<b>3</b>	<b>13</b>	<b>-58.8</b>	<b>-58.6</b>	<b>-60.1</b>	<b>-41.3</b>	<b>-41.25</b>	<b>0.1</b>
	HT/VHT20, M0 to M7	1	10	-51.7			-41.7	-41.25	0.5
	HT/VHT20, M0 to M7	2	10	-57.6	-54.6		-42.8	-41.25	1.6
	HT/VHT20, M8 to M15	2	10	-57.6	-54.6		-42.8	-41.25	1.6
	HT/VHT20, M0 to M7	3	10	-58.1	-57.5	-58.9	-43.4	-41.25	2.1
	HT/VHT20, M8 to M15	3	10	-58.1	-57.5	-58.9	-43.4	-41.25	2.1
	HT/VHT20 Beam Forming, M0 to M7	2	10	-57.6	-54.6		-42.8	-41.25	1.6
	HT/VHT20 Beam Forming, M8 to M15	2	10	-57.6	-54.6		-42.8	-41.25	1.6
	HT/VHT20 Beam Forming, M0 to M7	3	13	-58.8	-58.9	-60.2	-41.5	-41.25	0.2
	HT/VHT20 Beam Forming, M8 to M15	3	10	-58.1	-57.5	-58.9	-43.4	-41.25	2.1
	HT/VHT20 STBC, M0 to M7	2	10	-57.6	-54.6		-42.8	-41.25	1.6
	HT/VHT20 STBC, M0 to M7	3	10	-58.1	-57.5	-58.9	-43.4	-41.25	2.1

**Conducted Spurs Average, 5825 MHz, Non HT20 Beam Forming, 6 to 54 Mbps**
**Antenna A****Antenna B****Antenna C**

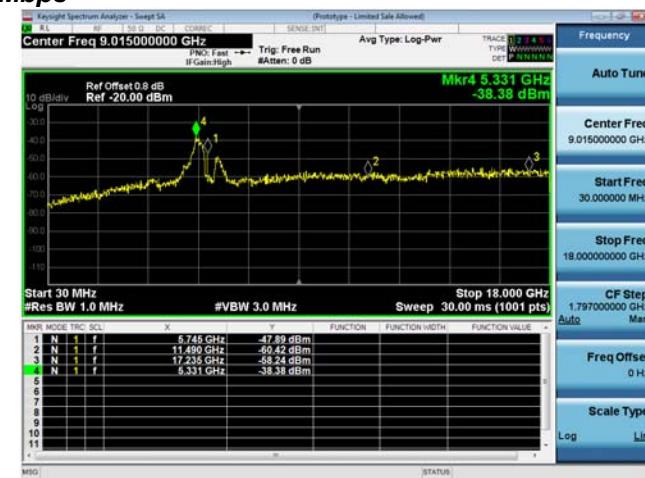
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5745	Non HT20, 6 to 54 Mbps	1	10	-58.6			-48.6	-21.25	27.4
	<b>Non HT20, 6 to 54 Mbps</b>	<b>2</b>	<b>10</b>	<b>-57.2</b>	<b>-38.4</b>		<b>-28.3</b>	<b>-21.25</b>	<b>7.1</b>
	Non HT20, 6 to 54 Mbps	3	10	-59.3	-57.6	-58.3	-43.6	-21.25	22.3
	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-57.2	-38.4		-28.3	-21.25	7.1
	Non HT20 Beam Forming, 6 to 54 Mbps	3	13	-58.6	-41.7	-57.2	-28.5	-21.25	7.2
	HT/VHT20, M0 to M7	1	10	-55.0			-45.0	-21.25	23.8
	HT/VHT20, M0 to M7	2	10	-57.9	-42.1		-32.0	-21.25	10.7
	HT/VHT20, M8 to M15	2	10	-57.9	-42.1		-32.0	-21.25	10.7
	HT/VHT20, M0 to M7	3	10	-58.5	-44.4	-58.1	-34.1	-21.25	12.8
	HT/VHT20, M8 to M15	3	10	-58.5	-44.4	-58.1	-34.1	-21.25	12.8
	HT/VHT20 Beam Forming, M0 to M7	2	10	-57.9	-42.1		-32.0	-21.25	10.7
	HT/VHT20 Beam Forming, M8 to M15	2	10	-57.9	-42.1		-32.0	-21.25	10.7
	HT/VHT20 Beam Forming, M0 to M7	3	13	-54.8	-45.8	-45.9	-29.6	-21.25	8.3
	HT/VHT20 Beam Forming, M8 to M15	3	10	-58.5	-44.4	-58.1	-34.1	-21.25	12.8
	HT/VHT20 STBC, M0 to M7	2	10	-57.9	-42.1		-32.0	-21.25	10.7
	HT/VHT20 STBC, M0 to M7	3	10	-58.5	-44.4	-58.1	-34.1	-21.25	12.8
5755	Non HT40, 6 to 54 Mbps	1	10	-59.2			-49.2	-21.25	28.0
	Non HT40, 6 to 54 Mbps	2	10	-56.8	-39.9		-29.8	-21.25	8.6
	Non HT40, 6 to 54 Mbps	3	10	-59.7	-59.0	-43.7	-33.5	-21.25	12.2
	HT/VHT40, M0 to M7	1	10	-57.8			-47.8	-21.25	26.6
	HT/VHT40, M0 to M7	2	10	-57.7	-42.5		-32.4	-21.25	11.1
	HT/VHT40, M8 to M15	2	10	-57.7	-42.5		-32.4	-21.25	11.1
	HT/VHT40, M0 to M7	3	10	-58.4	-57.2	-60.0	-43.6	-21.25	22.4
	HT/VHT40, M8 to M15	3	10	-58.4	-57.2	-60.0	-43.6	-21.25	22.4
	HT/VHT40 Beam Forming, M0 to M7	2	10	-57.7	-42.5		-32.4	-21.25	11.1
	HT/VHT40 Beam Forming, M8 to M15	2	10	-57.7	-42.5		-32.4	-21.25	11.1
	HT/VHT40 Beam Forming, M0 to M7	3	13	-58.4	-57.2	-60.0	-40.6	-21.25	19.4
	HT/VHT40 Beam Forming, M8 to M15	3	10	-58.4	-57.2	-60.0	-43.6	-21.25	22.4
	HT/VHT40 STBC, M0 to M7	2	10	-57.7	-42.5		-32.4	-21.25	11.1
	HT/VHT40 STBC, M0 to M7	3	10	-58.4	-57.2	-60.0	-43.6	-21.25	22.4

5775	Non HT80, 6 to 54 Mbps	1	10	-58.4			-48.4	-21.25	27.2
	Non HT80, 6 to 54 Mbps	2	10	-59.9	-58.2		-46.0	-21.25	24.7
	Non HT80, 6 to 54 Mbps	3	10	-59.4	-59.4	-60.2	-44.9	-21.25	23.6
	VHT80, M0 to M9 1ss	1	10	-58.3			-48.3	-21.25	27.1
	VHT80, M0 to M9 1ss	2	10	-58.3	-42.5		-32.4	-21.25	11.1
	VHT80, M0 to M9 2ss	2	10	-58.3	-42.5		-32.4	-21.25	11.1
	VHT80, M0 to M9 1ss	3	10	-58.4	-58.0	-44.2	-33.9	-21.25	12.6
	VHT80, M0 to M9 2ss	3	10	-58.4	-58.0	-44.2	-33.9	-21.25	12.6
	VHT80 Beam Forming, M0 to M9 1ss	2	10	-58.3	-42.5		-32.4	-21.25	11.1
	VHT80 Beam Forming, M0 to M9 2ss	2	10	-58.3	-42.5		-32.4	-21.25	11.1
	VHT80 Beam Forming, M0 to M9 1ss	3	13	-58.4	-58.0	-44.2	-30.9	-21.25	9.6
	VHT80 Beam Forming, M0 to M9 2ss	3	10	-58.4	-58.0	-44.2	-33.9	-21.25	12.6
	VHT80 STBC, M0 to M9 1ss	2	10	-58.3	-42.5		-32.4	-21.25	11.1
	VHT80 STBC, M0 to M9 1ss	3	10	-58.4	-58.0	-44.2	-33.9	-21.25	12.6
5785	Non HT20, 6 to 54 Mbps	1	10	-42.3			-32.3	-21.25	11.1
	Non HT20, 6 to 54 Mbps	2	10	-48.5	-44.1		-32.8	-21.25	11.5
	Non HT20, 6 to 54 Mbps	3	10	-48.0	-48.1	-49.1	-33.6	-21.25	12.4
	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-48.5	-44.1		-32.8	-21.25	11.5
	Non HT20 Beam Forming, 6 to 54 Mbps	3	13	-49.4	-49.2	-49.6	-31.6	-21.25	10.4
	HT/VHT20, M0 to M7	1	10	-39.3			-29.3	-21.25	8.1
	HT/VHT20, M0 to M7	2	10	-47.2	-44.7		-32.8	-21.25	11.5
	HT/VHT20, M8 to M15	2	10	-47.2	-44.7		-32.8	-21.25	11.5
	HT/VHT20, M0 to M7	3	10	-48.5	-47.2	-48.2	-33.2	-21.25	11.9
	HT/VHT20, M8 to M15	3	10	-48.5	-47.2	-48.2	-33.2	-21.25	11.9
	HT/VHT20 Beam Forming, M0 to M7	2	10	-47.2	-44.7		-32.8	-21.25	11.5
	HT/VHT20 Beam Forming, M8 to M15	2	10	-47.2	-44.7		-32.8	-21.25	11.5
	HT/VHT20 Beam Forming, M0 to M7	3	13	-49.7	-49.8	-50.3	-32.2	-21.25	10.9
	HT/VHT20 Beam Forming, M8 to M15	3	10	-48.5	-47.2	-48.2	-33.2	-21.25	11.9
	HT/VHT20 STBC, M0 to M7	2	10	-47.2	-44.7		-32.8	-21.25	11.5
	HT/VHT20 STBC, M0 to M7	3	10	-48.5	-47.2	-48.2	-33.2	-21.25	11.9
5795	Non HT40, 6 to 54 Mbps	1	10	-42.2			-32.2	-21.25	11.0
	Non HT40, 6 to 54 Mbps	2	10	-48.5	-45.9		-34.0	-21.25	12.7
	Non HT40, 6 to 54 Mbps	3	10	-49.7	-49.4	-50.9	-35.2	-21.25	13.9
	HT/VHT40, M0 to M7	1	10	-41.5			-31.5	-21.25	10.3
	HT/VHT40, M0 to M7	2	10	-48.8	-44.5		-33.1	-21.25	11.9
	HT/VHT40, M8 to M15	2	10	-48.8	-44.5		-33.1	-21.25	11.9
	HT/VHT40, M0 to M7	3	10	-50.0	-48.7	-47.8	-34.0	-21.25	12.7
	HT/VHT40, M8 to M15	3	10	-50.0	-48.7	-47.8	-34.0	-21.25	12.7
	HT/VHT40 Beam Forming, M0 to M7	2	10	-48.8	-44.5		-33.1	-21.25	11.9
	HT/VHT40 Beam Forming, M8 to M15	2	10	-48.8	-44.5		-33.1	-21.25	11.9
	HT/VHT40 Beam Forming, M0 to M7	3	13	-49.1	-49.7	-49.3	-31.6	-21.25	10.3

	HT/VHT40 Beam Forming, M8 to M15	3	10	-50.0	-48.7	-47.8	-34.0	-21.25	12.7
	HT/VHT40 STBC, M0 to M7	2	10	-48.8	-44.5		-33.1	-21.25	11.9
	HT/VHT40 STBC, M0 to M7	3	10	-50.0	-48.7	-47.8	-34.0	-21.25	12.7
<hr/>									
5825	Non HT20, 6 to 54 Mbps	1	10	-42.0			-32.0	-21.25	10.8
	Non HT20, 6 to 54 Mbps	2	10	-46.3	-43.2		-31.5	-21.25	10.2
	Non HT20, 6 to 54 Mbps	3	10	-49.2	-48.4	-49.1	-34.1	-21.25	12.9
	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-46.3	-43.2		-31.5	-21.25	10.2
	Non HT20 Beam Forming, 6 to 54 Mbps	3	13	-48.0	-48.8	-49.2	-30.9	-21.25	9.6
	HT/VHT20, M0 to M7	1	10	-43.0			-33.0	-21.25	11.8
	HT/VHT20, M0 to M7	2	10	-47.9	-44.3		-32.7	-21.25	11.5
	HT/VHT20, M8 to M15	2	10	-47.9	-44.3		-32.7	-21.25	11.5
	HT/VHT20, M0 to M7	3	10	-48.4	-47.8	-49.1	-33.6	-21.25	12.4
	HT/VHT20, M8 to M15	3	10	-48.4	-47.8	-49.1	-33.6	-21.25	12.4
	HT/VHT20 Beam Forming, M0 to M7	2	10	-47.9	-44.3		-32.7	-21.25	11.5
	HT/VHT20 Beam Forming, M8 to M15	2	10	-47.9	-44.3		-32.7	-21.25	11.5
	HT/VHT20 Beam Forming, M0 to M7	3	13	-48.1	-48.0	-48.1	-30.3	-21.25	9.0
	HT/VHT20 Beam Forming, M8 to M15	3	10	-48.4	-47.8	-49.1	-33.6	-21.25	12.4
	HT/VHT20 STBC, M0 to M7	2	10	-47.9	-44.3		-32.7	-21.25	11.5
	HT/VHT20 STBC, M0 to M7	3	10	-48.4	-47.8	-49.1	-33.6	-21.25	12.4

**Conducted Spurs Peak, 5745 MHz, Non HT20, 6 to 54 Mbps**


Antenna A



Antenna B

## A.6 Conducted Bandedge

**15.205 / 15.247 / LP0002 / RSS-247** In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

### Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01r03  
ANSI C63.10: 2013

<b>Conducted Bandedge</b>	
Test Procedure	
1.	Connect the antenna port(s) to the spectrum analyzer input.
2.	Place the radio in continuous transmit mode. Use the procedures in ANSI C63.10: 2013 to substitute conducted measurements in place of radiated measurements.
3.	Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
4.	Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands.
5.	The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded.
6.	Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands
7.	Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 section 12.7.6 (peak) & 12.7.7.3 (average, Method VB-A (Alternative))

<b>Conducted Bandedge</b>	
Test parameters restricted Band	
RBW = 1 MHz	
VBW $\geq$ 3 x RBW for Peak, 100Hz for Average	
Sweep = Auto couple	
Detector = Peak	
Trace = Max Hold.	

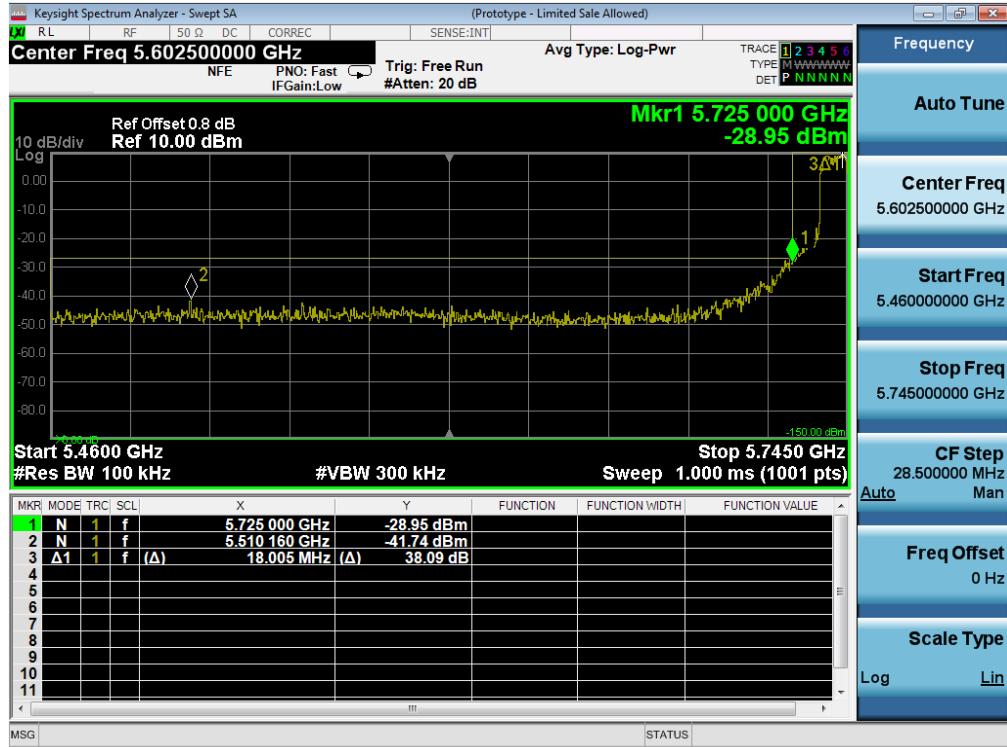
System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

<b>Tested By :</b> Jose Aguirre	<b>Date of testing:</b> 20-April-16 - 08-Aug-16
<b>Test Result : PASS</b>	

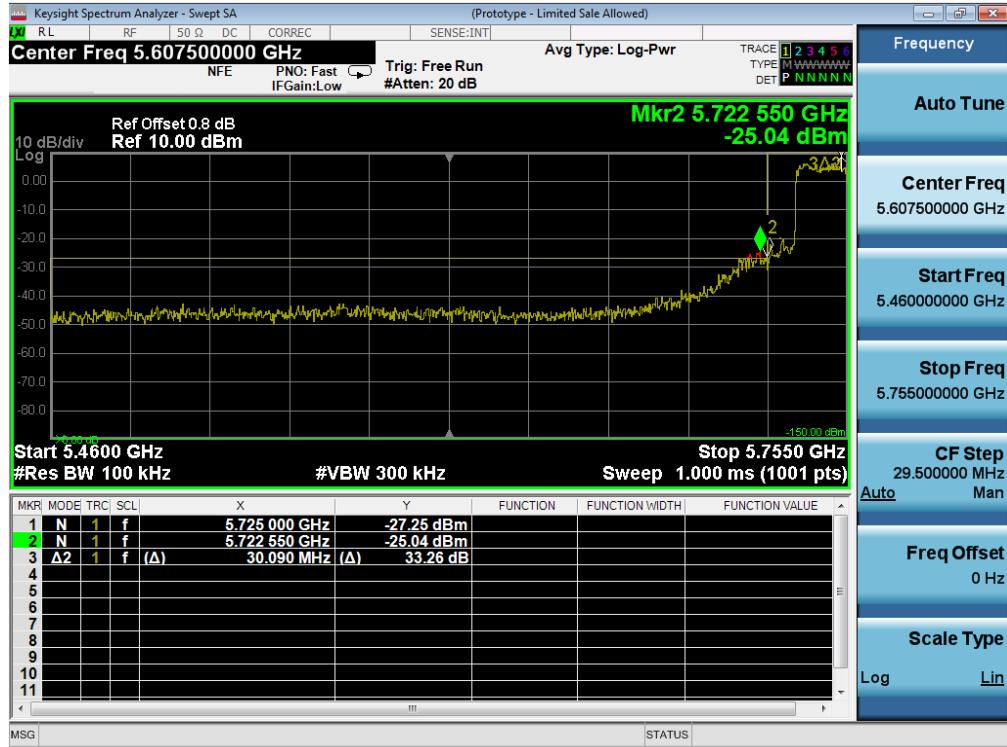
See Appendix C for list of test equipment

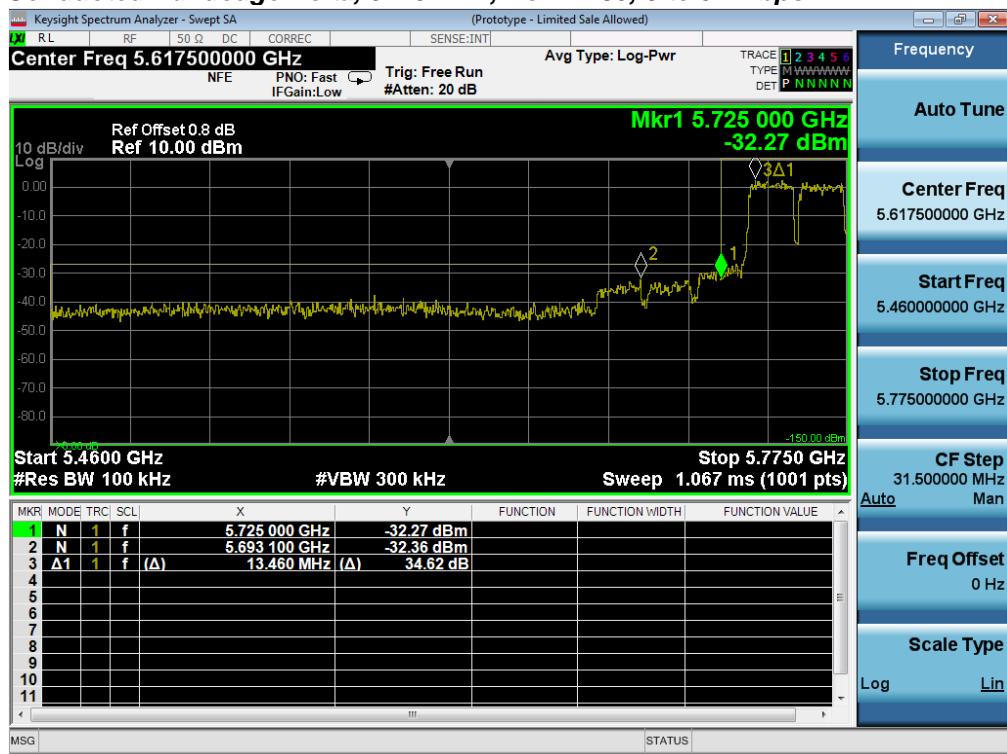
Frequency (MHz)	Mode	Data Rate (Mbps)	Conducted Bandedge Delta (dB)	Limit (dBc)	Margin (dB)
5745	Non HT20, 6 to 54 Mbps	6	40.8	>30	10.8
	HT/VHT20, M0 to M15	m0	38.1	>30	8.1
5755	Non HT40, 6 to 54 Mbps	6	31.2	>30	1.2
	HT/VHT40, M0 to M15	m0	33.3	>30	3.3
5775	Non HT80, 6 to 54 Mbps	6	34.6	>30	4.6
	VHT80, M0 to M9, M0 to M9 1-1ss	m0x1	32.3	>30	2.3
5795	Non HT40, 6 to 54 Mbps	6	47.0	>30	17.0
	HT/VHT40, M0 to M15	m0	45.8	>30	15.8
5825	Non HT20, 6 to 54 Mbps	6	43.5	>30	13.5
	HT/VHT20, M0 to M15	m0	43.6	>30	13.6

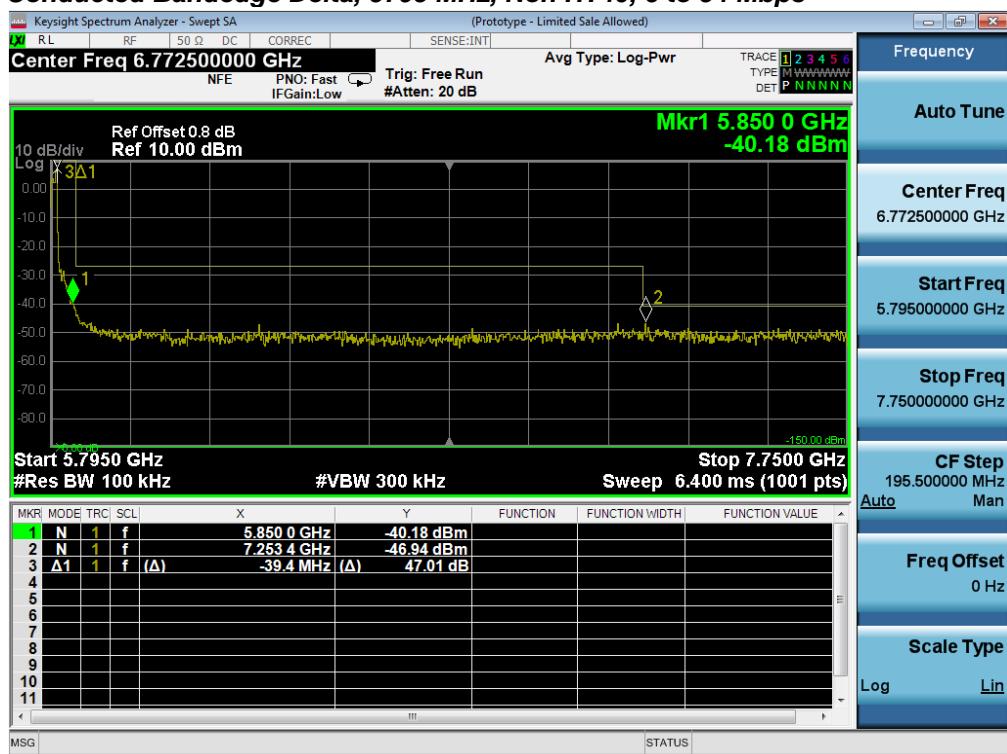
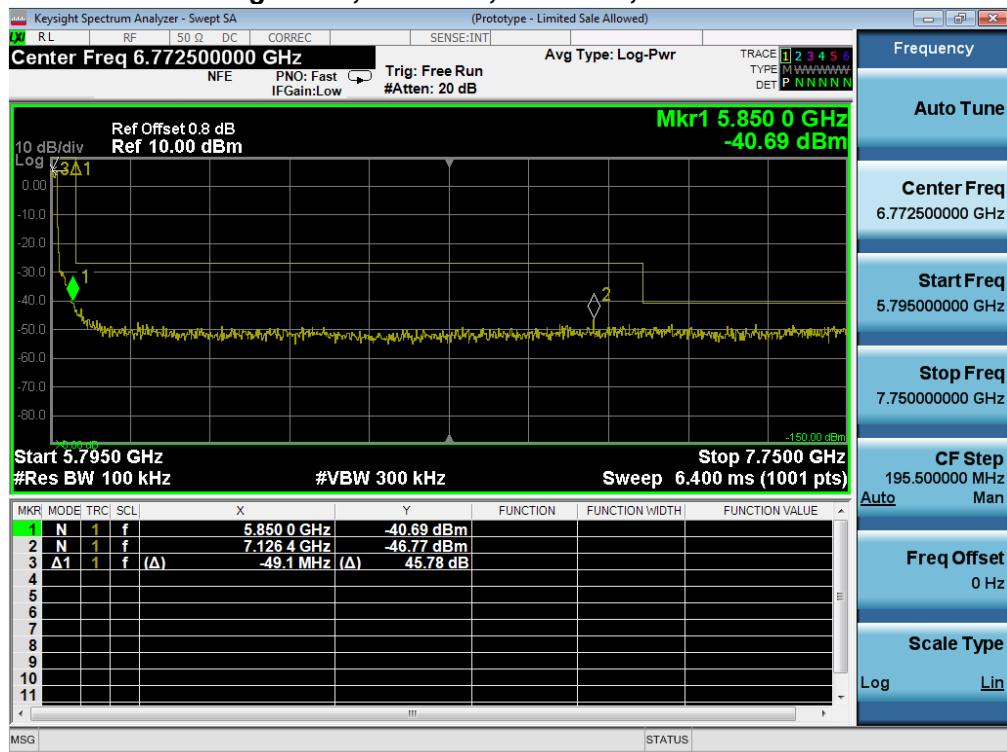
**Conducted Bandedge Delta, 5745 MHz, Non HT20, 6 to 54 Mbps**

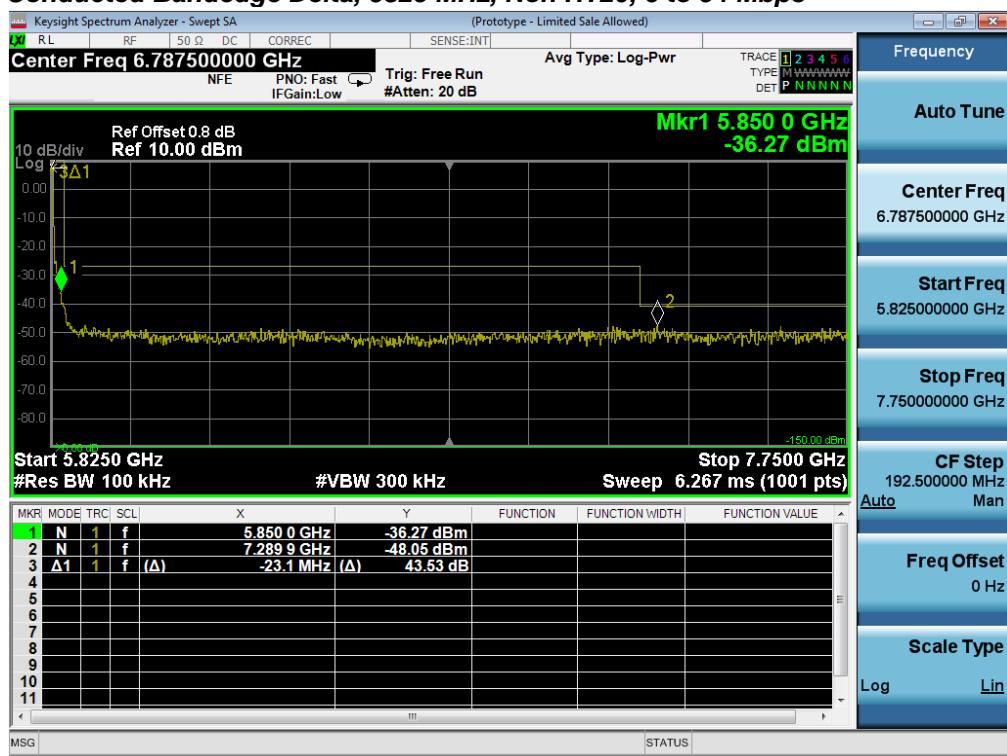
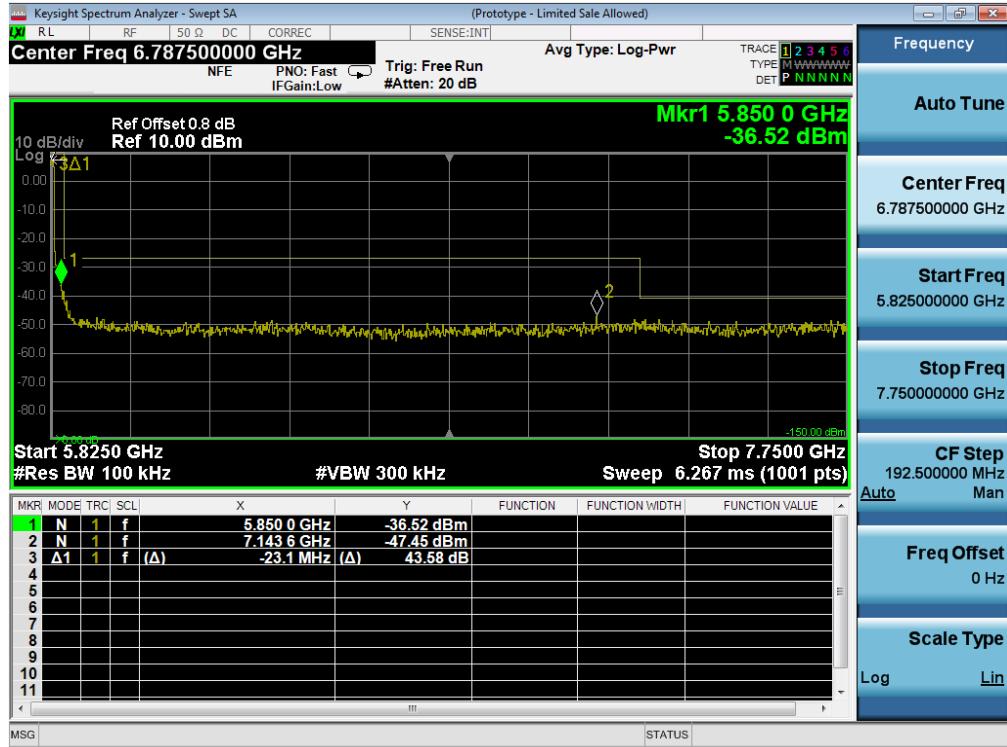
**Conducted Bandedge Delta, 5745 MHz, HT/VHT20, M0 to M15**


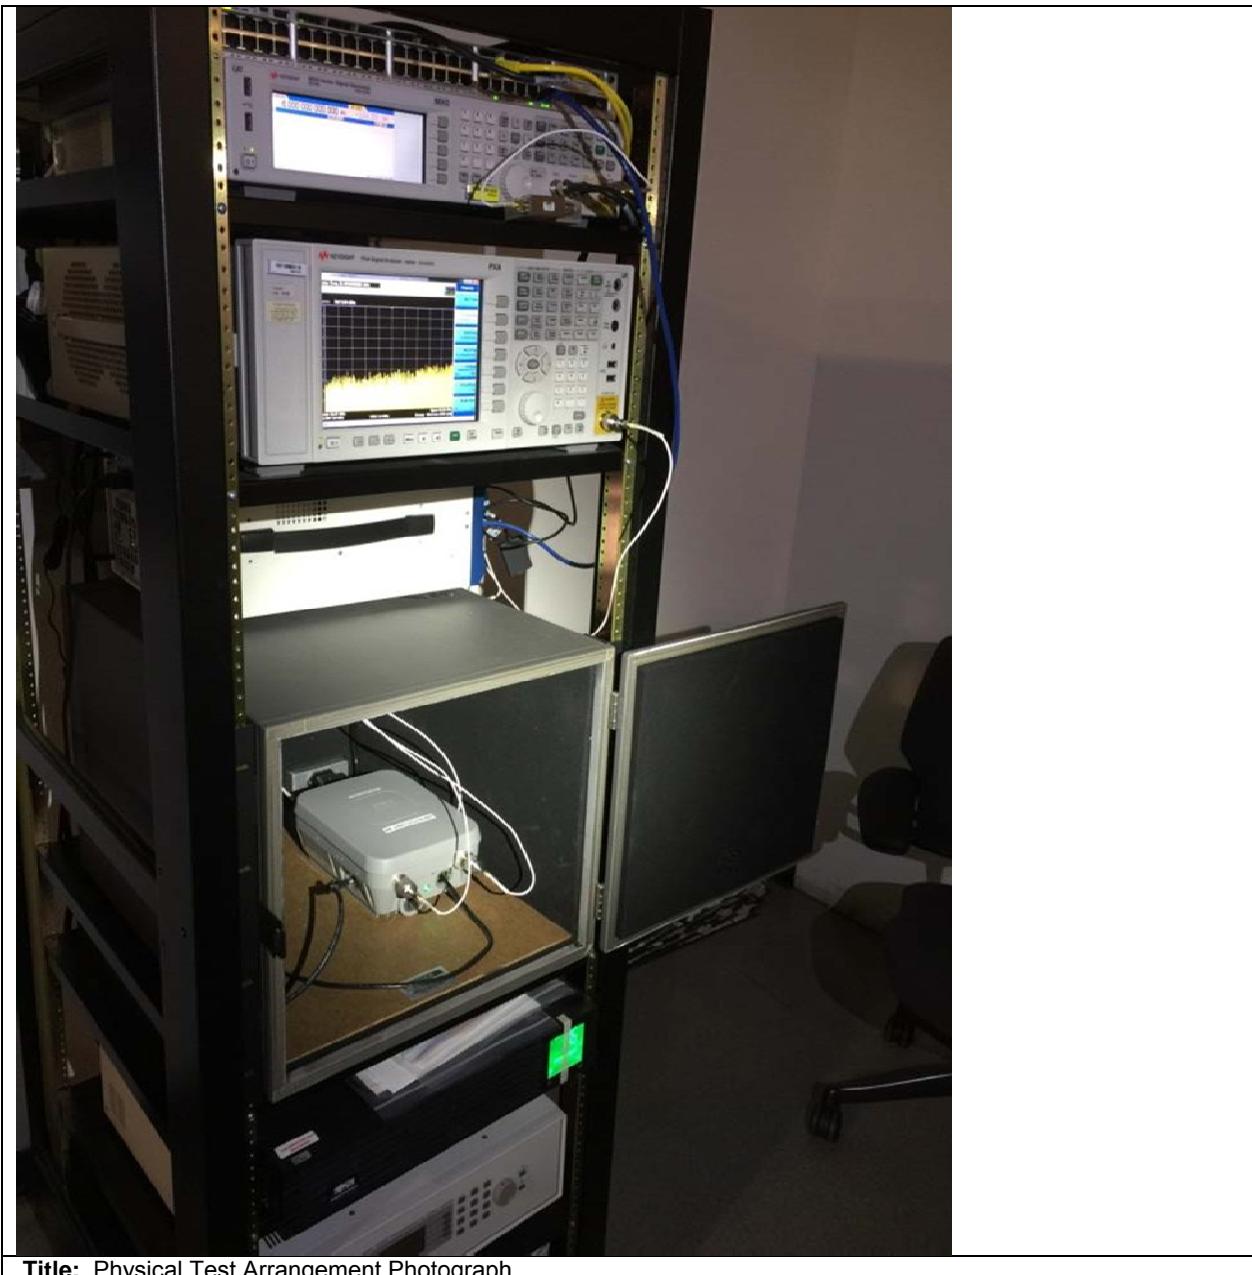
**Conducted Bandedge Delta, 5755 MHz, Non HT40, 6 to 54 Mbps**

**Conducted Bandedge Delta, 5755 MHz, HT/VHT40, M0 to M15**


**Conducted Bandedge Delta, 5775 MHz, Non HT80, 6 to 54 Mbps**

**Conducted Bandedge Delta, 5775 MHz, VHT80, M0 to M9, M0 to M9 1-1ss**


**Conducted Bandedge Delta, 5795 MHz, Non HT40, 6 to 54 Mbps**

**Conducted Bandedge Delta, 5795 MHz, HT/VHT40, M0 to M15**


**Conducted Bandedge Delta, 5825 MHz, Non HT20, 6 to 54 Mbps**

**Conducted Bandedge Delta, 5825 MHz, HT/VHT20, M0 to M15**




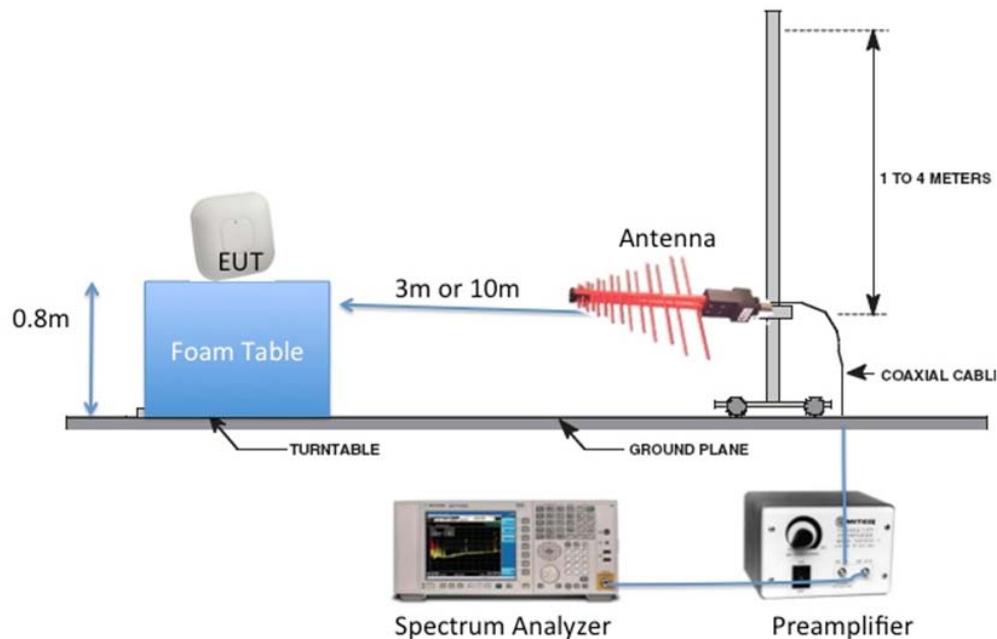
**Title:** Physical Test Arrangement Photograph

This is a dual band 2.4GHz / 5GHz device. All ports in this test set up photo are connected as all testing is automated. Section 2.6 of this test report given an overview of the different Tx antenna combinations used by this device.

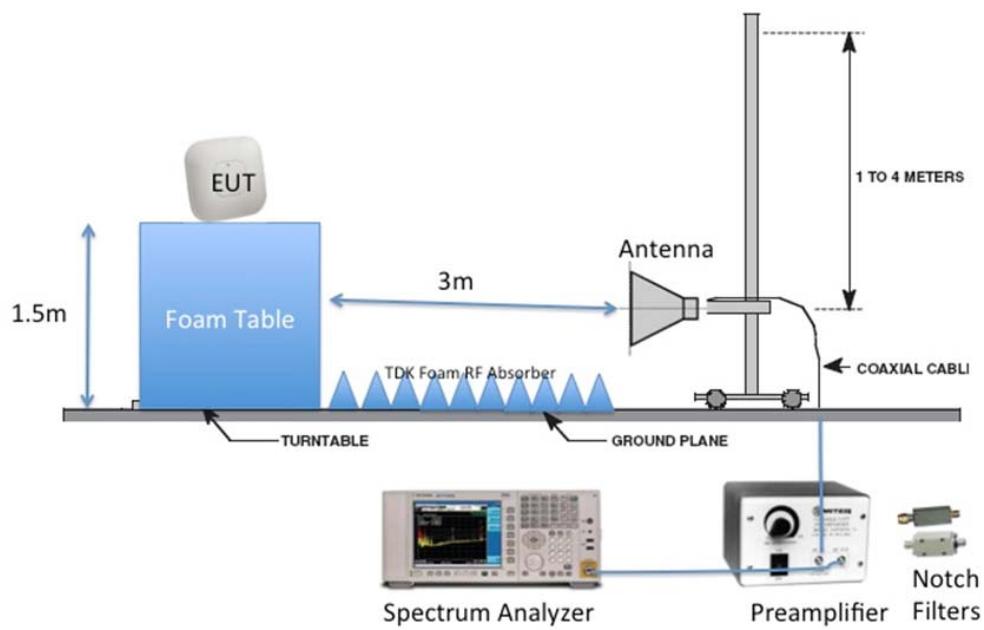
## Appendix B: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 125 West Tasman Drive, San Jose, CA 95134, USA

### Radiated Emission Setup Diagram-Below 1G



### Radiated Emission Setup Diagram-Above 1G



## B.1 Radiated Spurious Emissions

**15.407 / 15.209 / 15.205** For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz. Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in 15.209. The provisions of §15.205 apply to intentional radiators operating under this section. When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits

**RSS-GEN** Radiated emissions which fall in the restricted bands, as defined in RSS-GEN section 8.10. must also comply with the radiated limits specified in RSS-GEN section 8.9

Ref. ANSI C63.10: 2013 section 12.7.6 (peak) & 12.7.7.3 (average)

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span:	1GHz – 18 GHz/18GHz-26G/26GHz-40GHz
Reference Level:	80 dBuV
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	1MHz
Video Bandwidth:	3 MHz for peak, 1 KHz for average
Detector:	Peak

Terminate the access Point RF ports with 50 ohm loads.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots:     1) Average plot (Vertical and Horizontal), Limit= 54dBuV/m @3m  
                   2) Peak plot (Vertical and Horizontal), Limit = 74dBuV/m @3m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.  
     Also measure any emissions in the restricted bands.

This report represents the worst case data for all supported operating modes and antennas. There are no measurable emissions above 18 GHz.

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

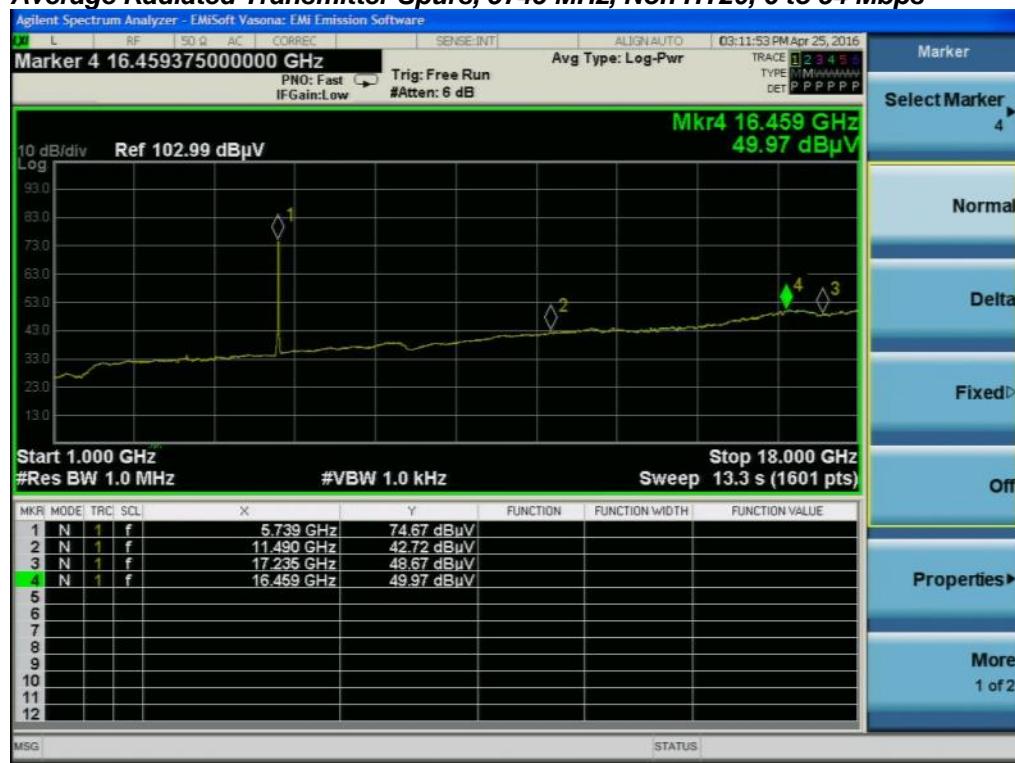
<b>Tested By :</b> Jose Aguirre	<b>Date of testing:</b> 20-April-16 - 08-Aug-16
<b>Test Result : PASS</b>	

See Appendix C for list of test equipment

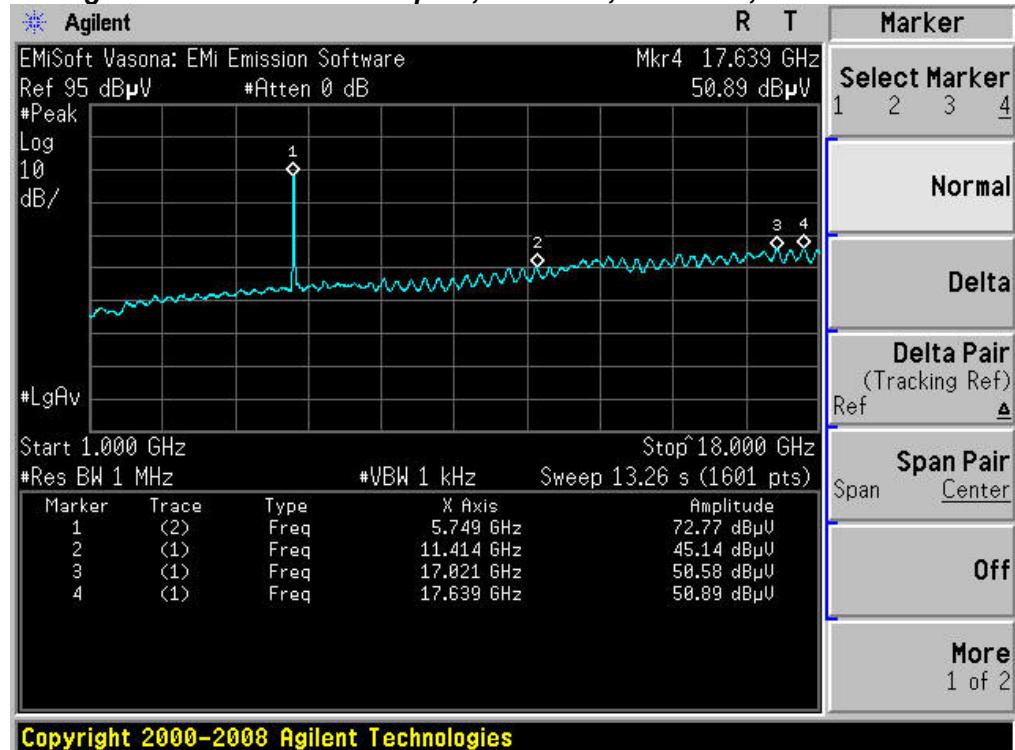
### B.1.A Transmitter Radiated Spurious Emissions-Average Worst Case

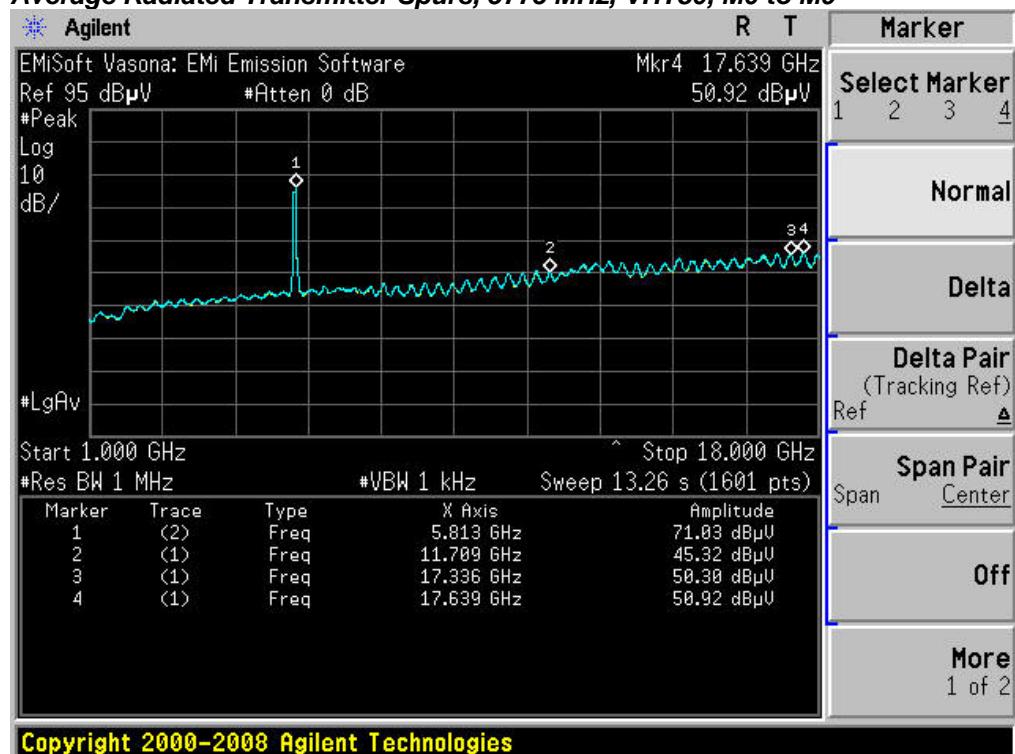
Frequency (MHz)	Mode	Data Rate (Mbps)	Spurious Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (MHz)
5745	Non HT20, 6 to 54 Mbps	6	50.0	54.0	4.0
5755	HT/VHT40, M0 to M23	m0	50.9	54.0	3.1
5775	VHT80, M0 to M9	m0x1	50.9	54.0	3.1
5785	Non HT20, 6 to 54 Mbps	6	52.1	54.0	1.9
5795	HT/VHT40, M0 to M23	m0	50.9	54.0	3.1
5825	Non HT20, 6 to 54 Mbps	6	53.4	54.0	0.6

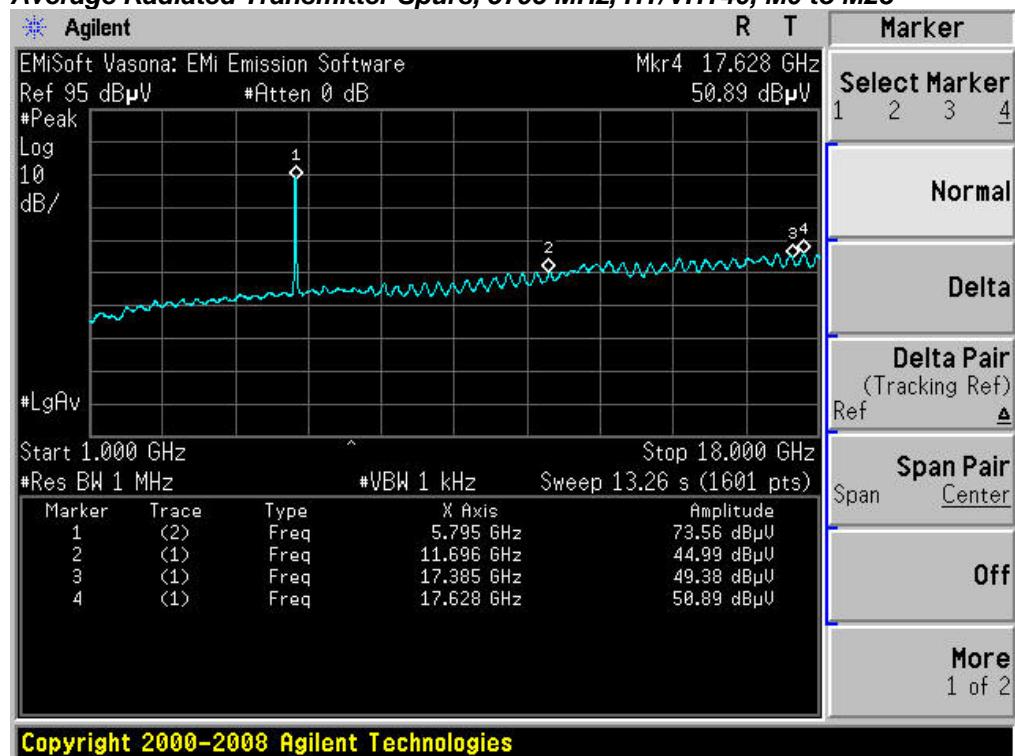
### Average Radiated Transmitter Spurs, 5745 MHz, Non HT20, 6 to 54 Mbps



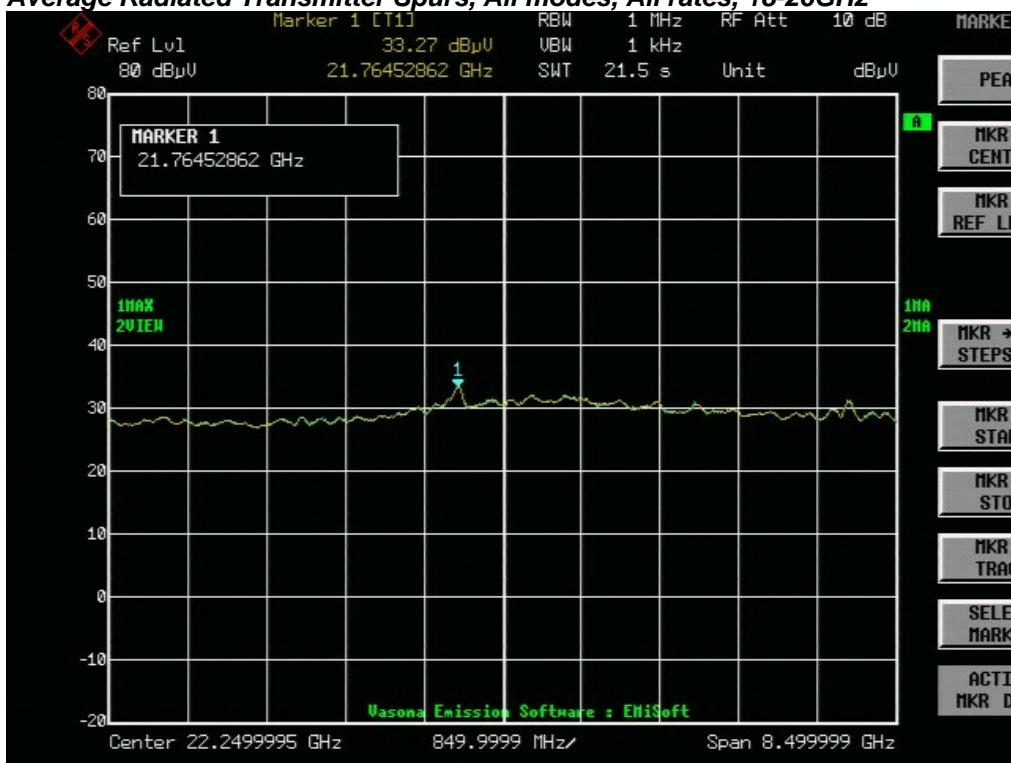
### Average Radiated Transmitter Spurs, 5755 MHz, HT/VHT40, M0 to M23



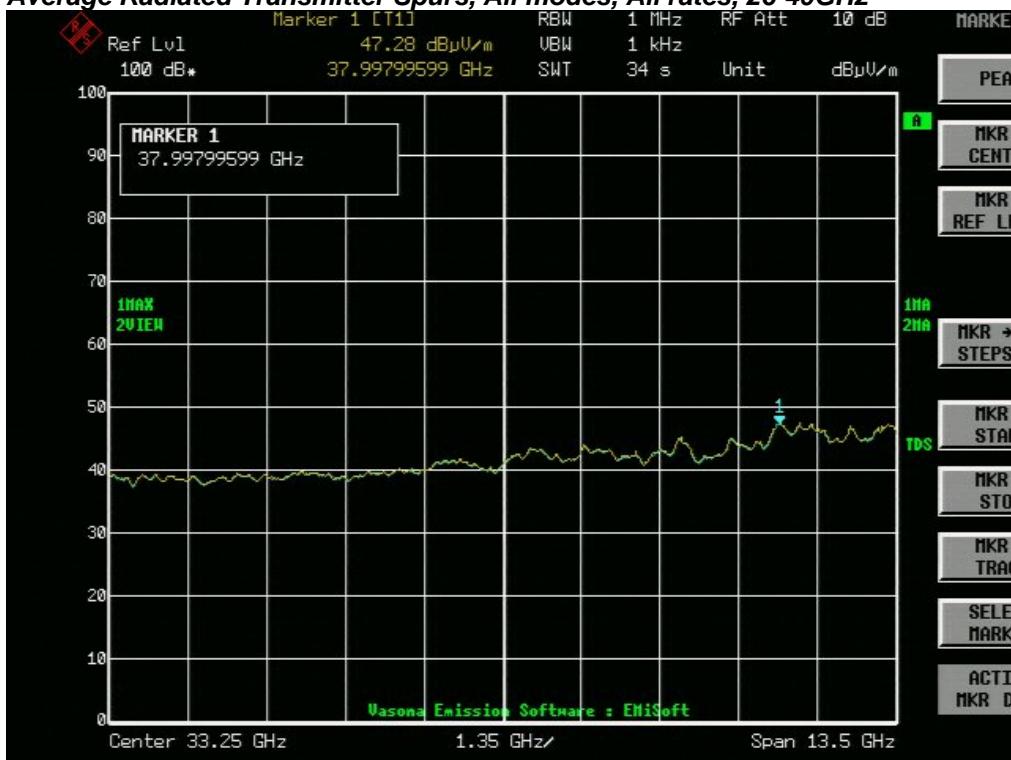
**Average Radiated Transmitter Spurs, 5775 MHz, VHT80, M0 to M9**

**Average Radiated Transmitter Spurs, 5785 MHz, Non HT20, 6 to 54 Mbps**


**Average Radiated Transmitter Spurs, 5795 MHz, HT/VHT40, M0 to M23****Average Radiated Transmitter Spurs, 5825 MHz, Non HT20, 6 to 54 Mbps**

#### **Average Radiated Transmitter Spurs, All modes, All rates, 18-26GHz**

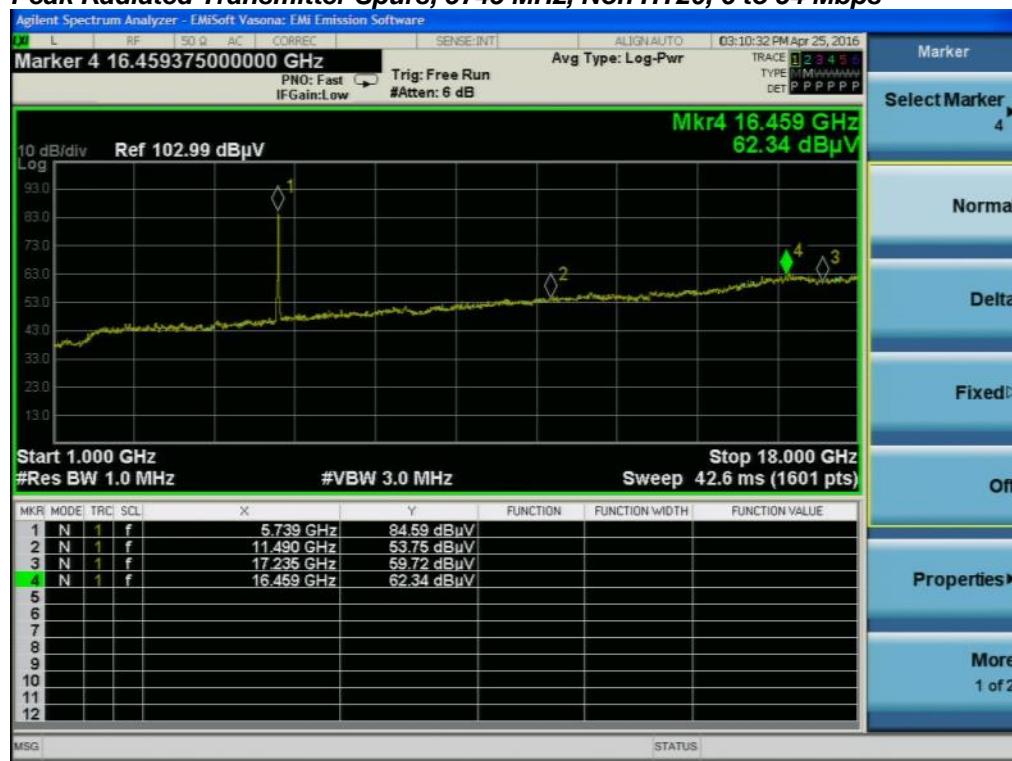
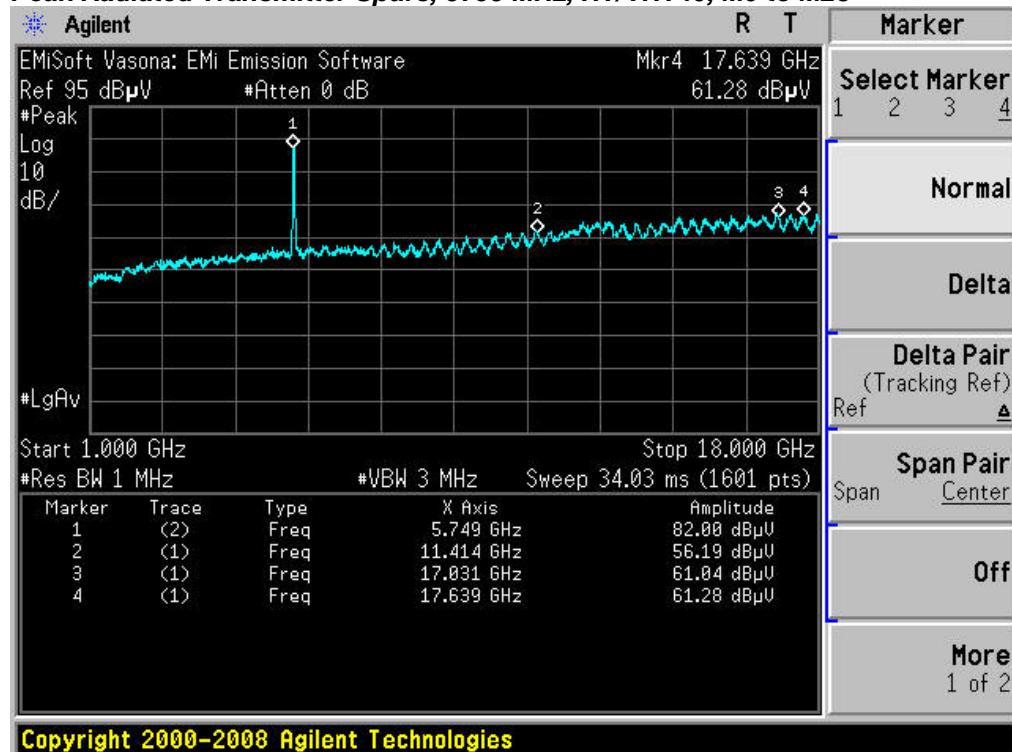


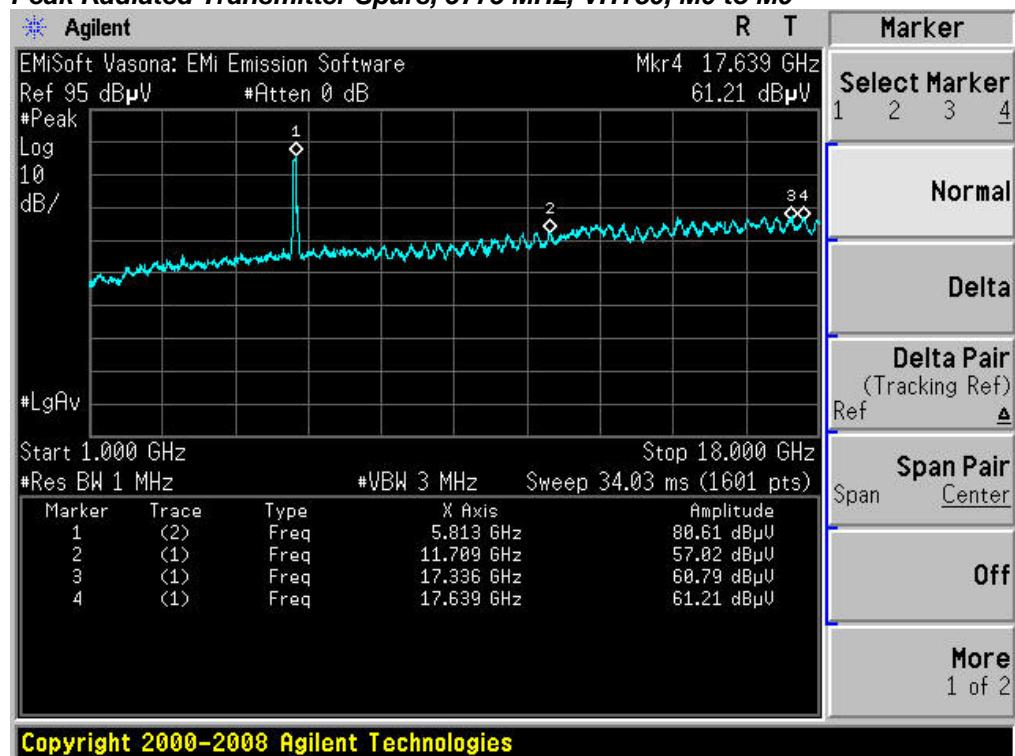
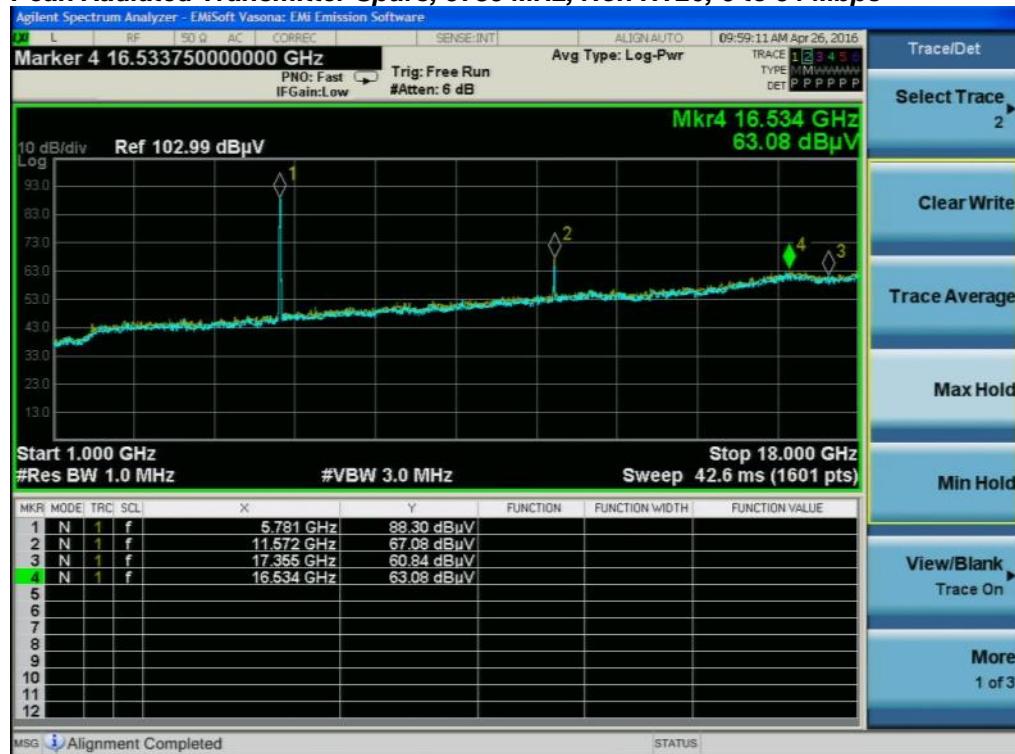
## **Average Radiated Transmitter Spurs, All modes, All rates, 26-40GHz**

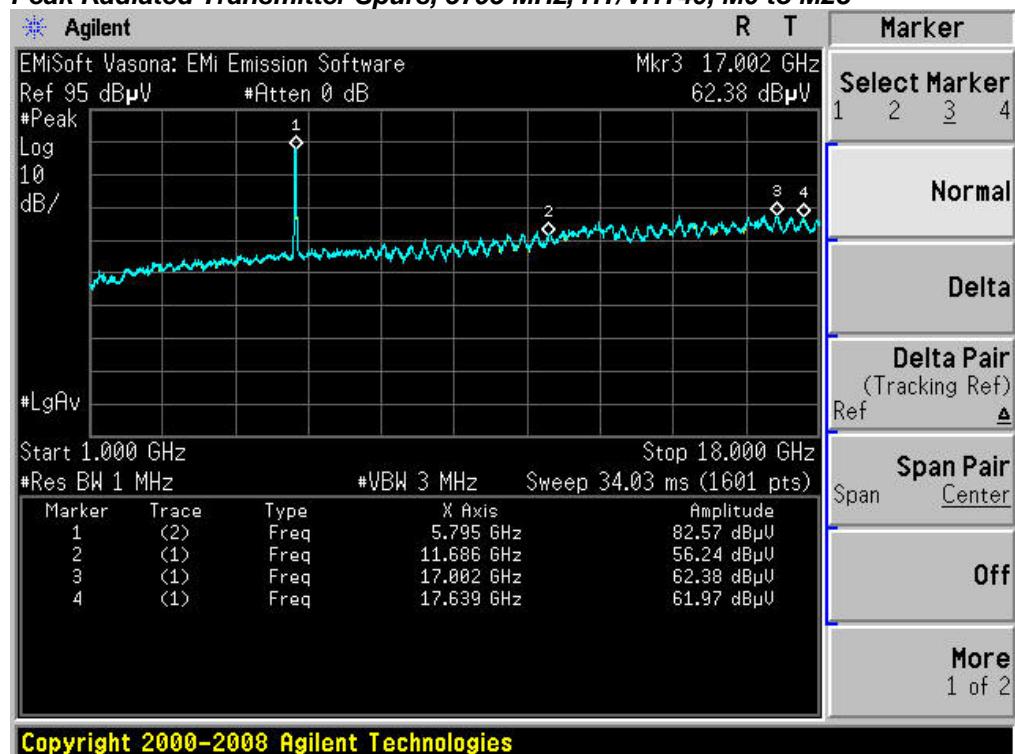
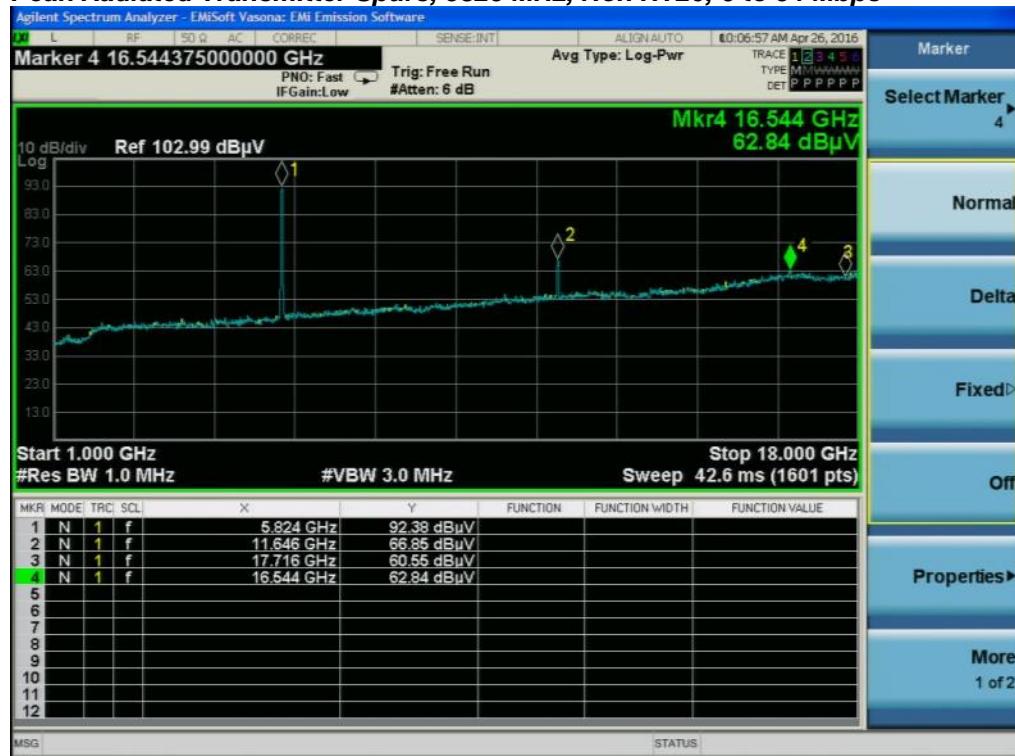


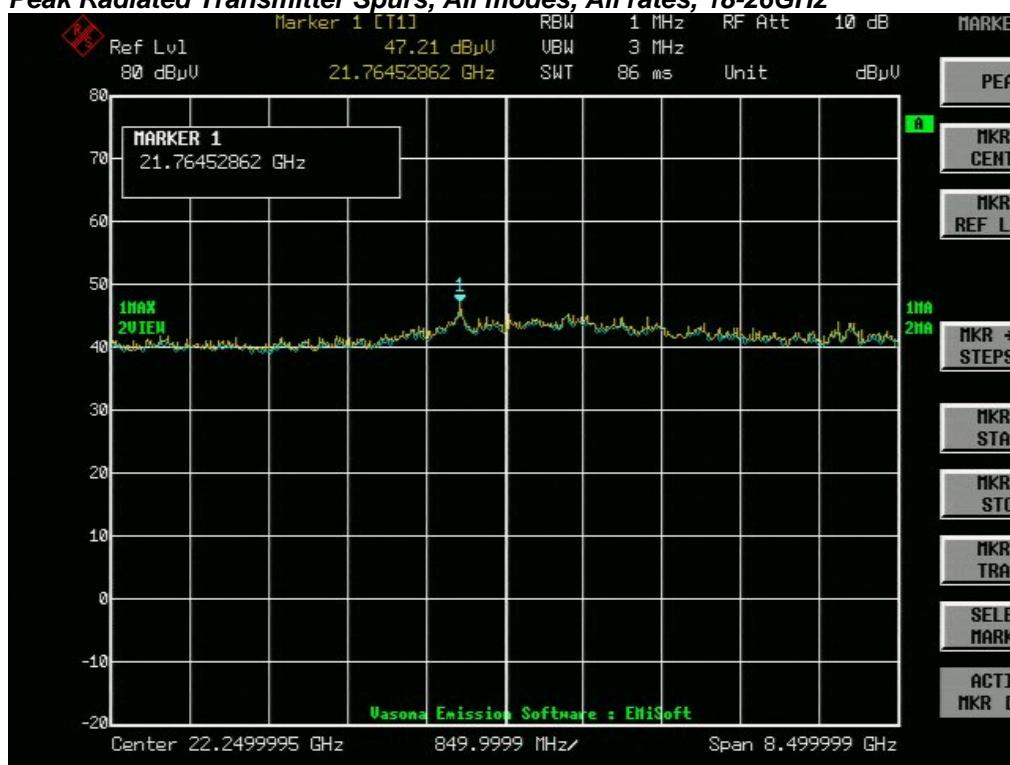
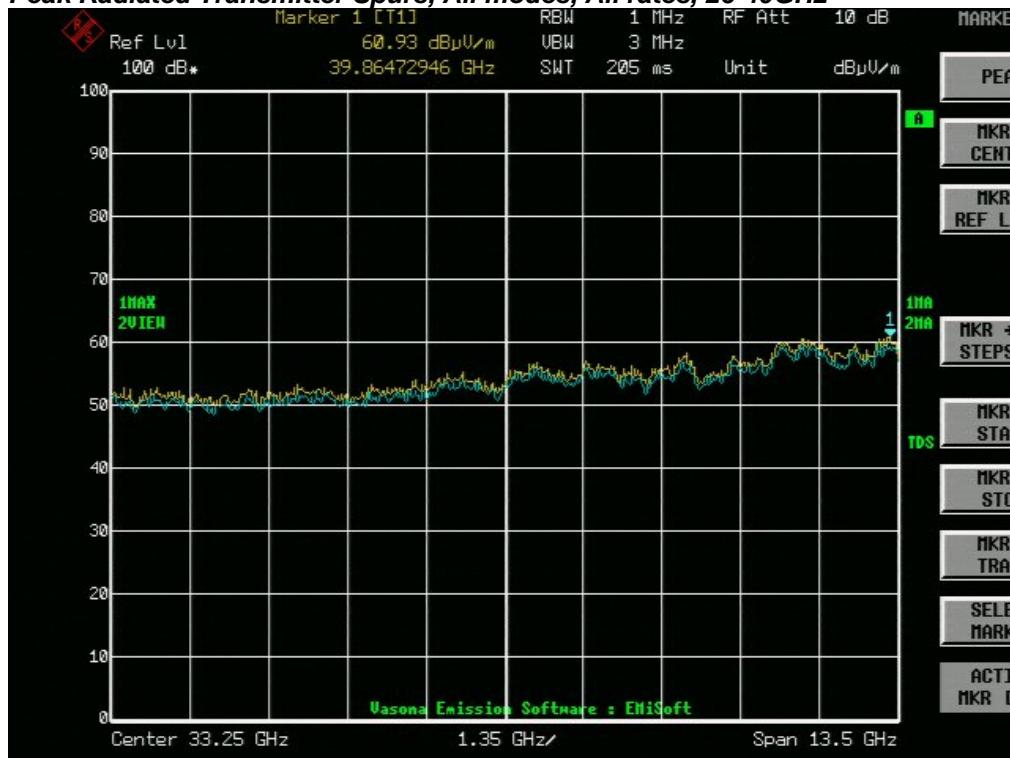
### B.1.P Transmitter Radiated Spurious Emissions-Peak Worst Case

Frequency (MHz)	Mode	Data Rate (Mbps)	Spurious Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (MHz)
5745	Non HT20, 6 to 54 Mbps	6	62.3	74.0	11.7
5755	HT/VHT40, M0 to M23	m0	61.3	74.0	12.7
5775	VHT80, M0 to M9	m0x1	62.2	74.0	11.8
5785	Non HT20, 6 to 54 Mbps	6	67.1	74.0	6.9
5795	HT/VHT40, M0 to M23	m0	62.4	74.0	11.6
5825	Non HT20, 6 to 54 Mbps	6	66.9	74.0	7.1

**Peak Radiated Transmitter Spurs, 5745 MHz, Non HT20, 6 to 54 Mbps**

**Peak Radiated Transmitter Spurs, 5755 MHz, HT/VHT40, M0 to M23**


**Peak Radiated Transmitter Spurs, 5775 MHz, VHT80, M0 to M9**

**Peak Radiated Transmitter Spurs, 5785 MHz, Non HT20, 6 to 54 Mbps**


**Peak Radiated Transmitter Spurs, 5795 MHz, HT/VHT40, M0 to M23**

**Peak Radiated Transmitter Spurs, 5825 MHz, Non HT20, 6 to 54 Mbps**


**Peak Radiated Transmitter Spurs, All modes, All rates, 18-26GHz**

**Peak Radiated Transmitter Spurs, All modes, All rates, 26-40GHz**


## B.2 Receiver Spurious Emissions

**RSS-Gen** Receivers are required to comply with the limits of spurious emissions as set out in this section. Receiver emission measurements are to be performed as per the normative test method referenced in Section 3.

Radiated emissions which fall in the restricted bands, as defined in RSS-Gen section 8.10, must also comply with the radiated emission limits specified in RSS-Gen section 8.9.

For emissions at frequencies below 1 GHz, measurements shall be performed using a CISPR quasi-peak detector and the related measurement bandwidth. At frequencies above 1 GHz, measurements shall be performed using a linear average detector with a minimum resolution bandwidth of 1 MHz.

Ref. RSS-Gen section 8.9 & 8.10  
ANSI C63.10: 2013 section 4.1.4.2.2, 4.1.4.2.3, 6.6.4 & 11.12.2

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span:	1GHz – 18 GHz
Reference Level:	80 dBuV
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	1MHz
Video Bandwidth:	3MHz for Peak, 1 kHz for average
Detector:	Peak

Radiated emission measurements shall be performed with the receiver antenna connected to the receiver antenna terminals.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save plot:  
1) Average Plot (Vertical and Horizontal), Limit= 54dBuV/m @3m  
2) Peak Plot (Vertical and Horizontal), Limit= 74dBuV/m @3m

This report represents the worst case data for all supported operating modes and antennas. There are no measurable emissions above 18 GHz.

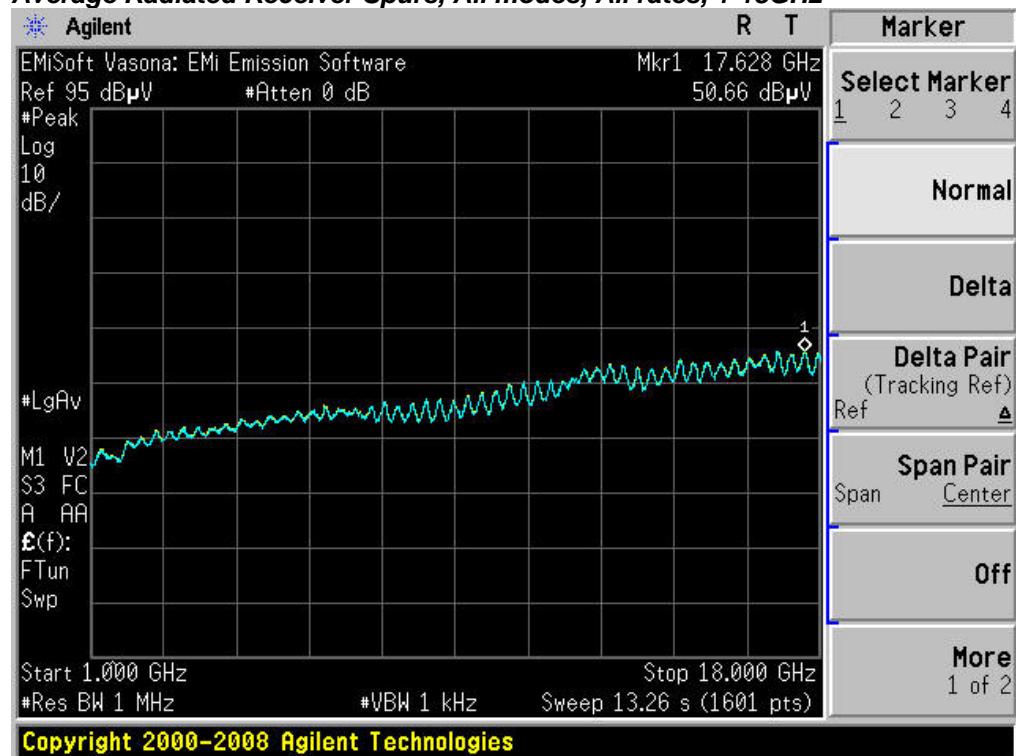
System Number	Description	Samples	System under test	Support equipment
2	EUT	S03	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S04	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By :	Date of testing:
Jose Aguirre	20-April-16 - 08-Aug-16
<b>Test Result : PASS</b>	

See Appendix C for list of test equipment

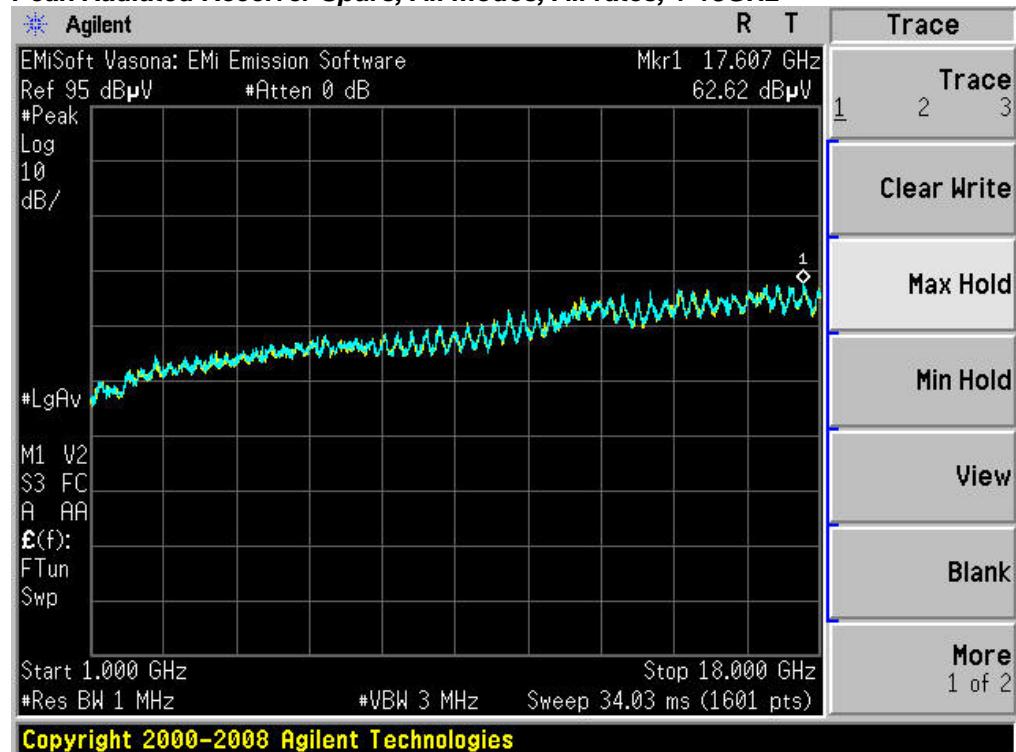
## B.2.A Receiver Radiated Spurious Emissions (Average Measurements)

Average Radiated Receiver Spurs, All modes, All rates, 1-18GHz



## B.2.A Receiver Radiated Spurious Emissions (Peak Measurements)

### Peak Radiated Receiver Spurs, All modes, All rates, 1-18GHz



## B.3 Radiated Emissions 30MHz to 1GHz

**15.205 / 15.209 / RSS-Gen / LP0002:3.10.1(5)/2.8** Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)) and RSS-Gen section 8.9.

Ref. ANSI C63.10: 2013 section 6.5

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span:	30MHz – 1GHz
Reference Level:	80 dBuV
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	100kHz
Video Bandwidth:	300kHz
Detector:	Peak for Pre-scan, Quasi-Peak Compliance shall be determined using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

Terminate the access Point RF ports with 50 ohm loads.

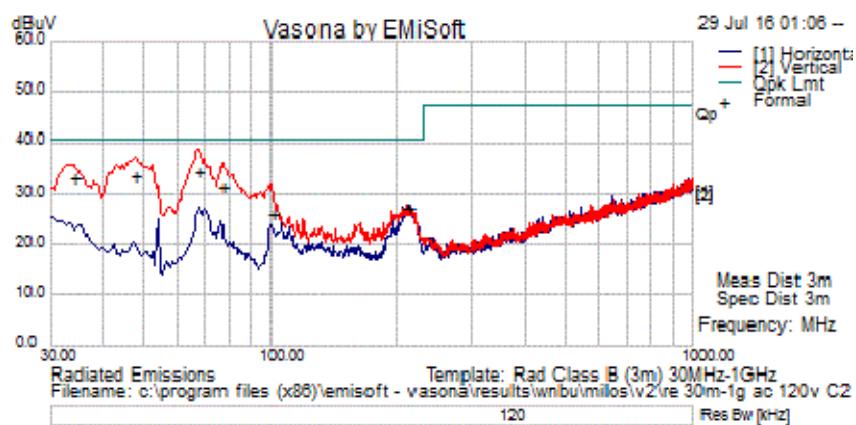
Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

This report represents the worst case data for all supported operating modes and antennas.

System Number	Description	Samples	System under test	Support equipment
2	EUT	S03	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S04	<input type="checkbox"/>	<input checked="" type="checkbox"/>

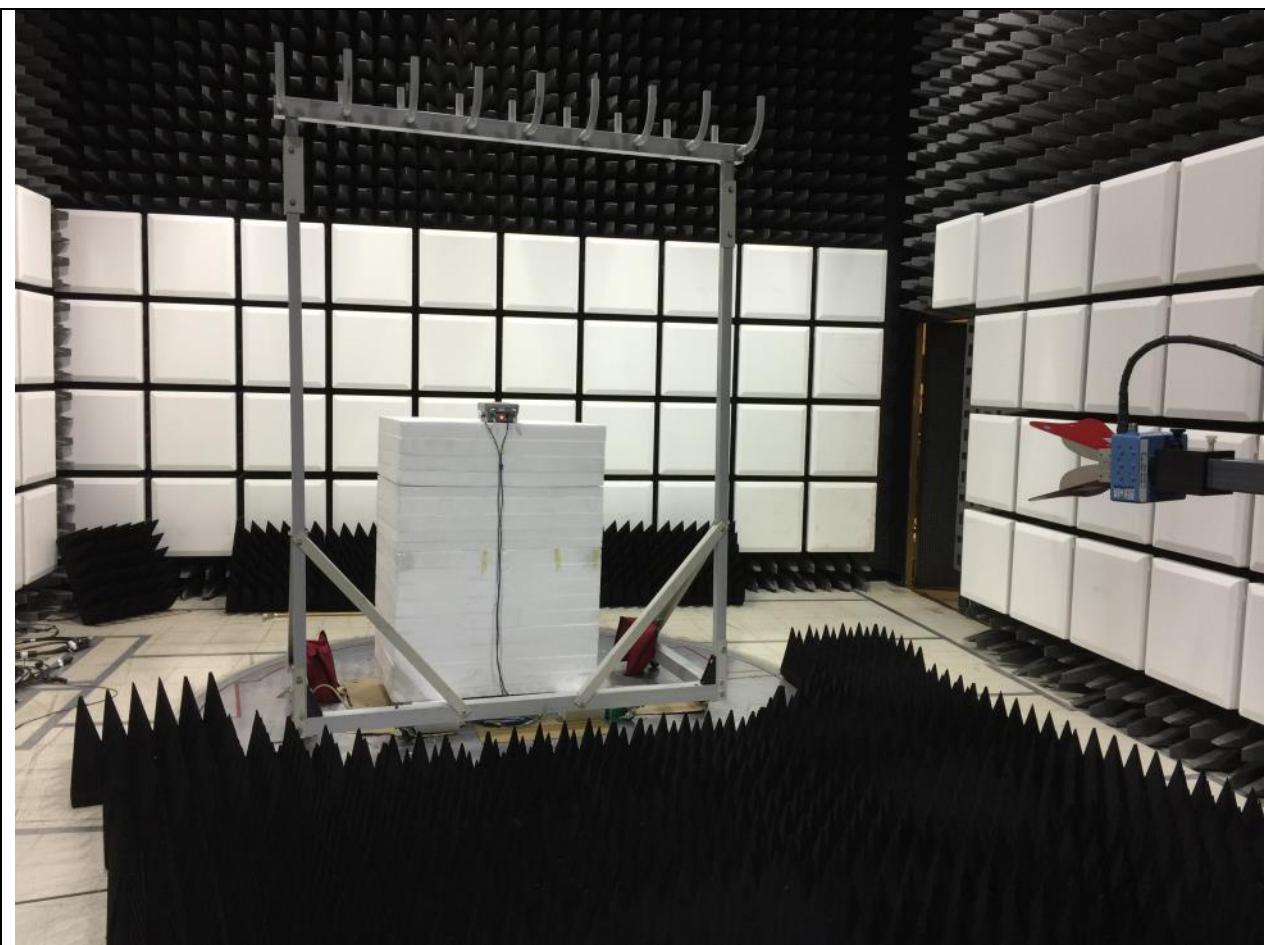
Tested By :	Date of testing:
Jose Aguirre	20-April-16 - 08-Aug-16
<b>Test Result : PASS</b>	

See Appendix C for list of test equipment



### Test Results Table

Frequency (MHz)	Raw (dBuV)	Cable Loss	AF (dB)	Level (dBuV/m)	Measurement Type	Pol	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass/Fail	Comments
34.24375	14.29	0.69	17.95	32.93	Quasi Max	H	105	12	40.50	-7.57	Pass	
47.58125	24.03	0.80	8.83	33.66	Quasi Max	H	113	36	40.50	-6.84	Pass	
212.48125	14.97	1.77	10.50	27.24	Quasi Max	V	117	182	40.50	-13.26	Pass	
100.325	14.43	1.20	10.39	26.02	Quasi Max	H	233	244	40.50	-14.48	Pass	
66.98125	25.03	1.00	8.26	34.29	Quasi Max	H	113	292	40.50	-6.21	Pass	
76.68125	22.45	1.06	8.19	31.70	Quasi Max	H	128	344	40.50	-8.80	Pass	



**Title:** Radiated Emissions Configuration Photograph

## B.4 AC Conducted Emissions

**FCC 15.207 (a) & RSS-Gen 8.8 / LP0002:2.3** Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.

### Measurement Procedure

Accordance with ANSI C63.10:2013 section 6.2

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

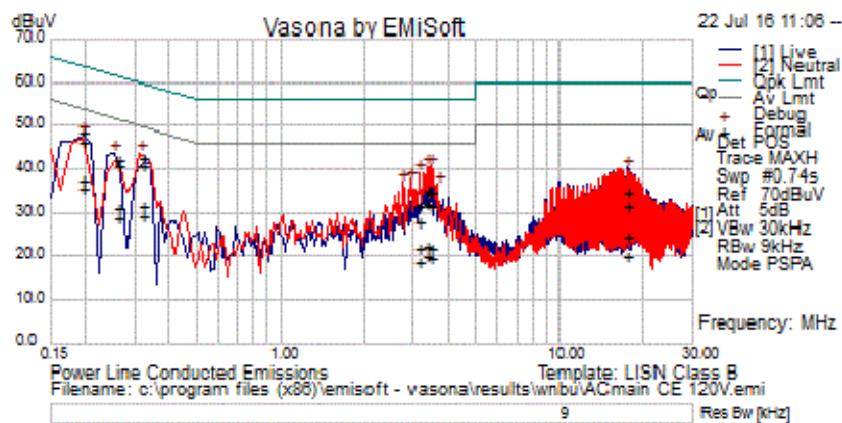
Span:	150 KHz – 30 MHz
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	9 KHz
Video Bandwidth:	30 KHz
Detector:	Quasi-Peak / Average

System Number	Description	Samples	System under test	Support equipment
2	EUT	S03	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S04	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By :	Date of testing:
Jose Aguirre	20-April-16 - 08-Aug-16

### Test Result : PASS

See separate EMC test report for test data.



### Test Results Table

Frequency (MHz)	Raw (dBuV)	Cable Loss	Factors (dB)	Level (dBuV/m)	Measurement Type	Line	Limit (dBuV/m)	Margin (dB)	Pass/Fail	Comments
.318	22.63	20.28	0.04	42.96	Quasi Peak	Live	59.76	-16.80	Pass	
3.446	14.92	19.99	0.05	34.95	Quasi Peak	Live	56.00	-21.05	Pass	
3.135	11.83	19.98	0.06	31.86	Quasi Peak	Live	56.00	-24.14	Pass	
.195	27.83	20.78	0.05	48.66	Quasi Peak	Live	63.82	-15.16	Pass	
17.358	14.25	20.33	0.19	34.77	Quasi Peak	Live	60.00	-25.23	Pass	
3.350	15.24	19.98	0.05	35.27	Quasi Peak	Live	56.00	-20.73	Pass	
.261	21.84	20.48	0.04	42.36	Quasi Peak	Live	61.40	-19.04	Pass	
3.446	11.71	19.99	0.05	31.75	Quasi Peak	Neutral	56.00	-24.25	Pass	
.195	25.78	20.78	0.05	46.61	Quasi Peak	Neutral	63.82	-17.21	Pass	
3.350	11.97	19.98	0.05	32.01	Quasi Peak	Neutral	56.00	-23.99	Pass	
3.135	8.12	19.98	0.06	28.16	Quasi Peak	Neutral	56.00	-27.84	Pass	
.261	20.21	20.48	0.04	40.73	Quasi Peak	Neutral	61.40	-20.67	Pass	
17.358	4.23	20.33	0.19	24.75	Quasi Peak	Neutral	60.00	-35.25	Pass	
.318	20.63	20.28	0.04	40.95	Quasi Peak	Neutral	59.76	-18.81	Pass	
.318	11.54	20.28	0.04	31.87	Average	Live	49.76	-17.89	Pass	
3.446	1.77	19.99	0.05	21.81	Average	Live	46.00	-24.19	Pass	
3.135	1.82	19.98	0.06	21.86	Average	Live	46.00	-24.14	Pass	
.195	17.05	20.78	0.05	37.87	Average	Live	53.82	-15.95	Pass	
17.358	11.08	20.33	0.19	31.59	Average	Live	50.00	-18.41	Pass	
3.350	2.45	19.98	0.05	22.49	Average	Live	46.00	-23.51	Pass	
.261	10.69	20.48	0.04	31.21	Average	Live	51.40	-20.19	Pass	
3.446	-0.15	19.99	0.05	19.89	Average	Neutral	46.00	-26.11	Pass	
.195	14.85	20.78	0.05	35.68	Average	Neutral	53.82	-18.14	Pass	
3.350	0.12	19.98	0.05	20.16	Average	Neutral	46.00	-25.84	Pass	
3.135	-1.39	19.98	0.06	18.64	Average	Neutral	46.00	-27.36	Pass	
.261	8.30	20.48	0.04	28.82	Average	Neutral	51.40	-22.58	Pass	

Frequency (MHz)	Raw (dBuV)	Cable Loss	Factors (dB)	Level (dBuV/m)	Measurement Type	Line	Limit (dBuV/m)	Margin (dB)	Pass/Fail	Comments
17.358	-0.50	20.33	0.19	20.02	Average	Neutral	50.00	-29.98	Pass	
.318	9.08	20.28	0.04	29.41	Average	Neutral	49.76	-20.35	Pass	



**Title:** Conducted Emissions Configuration Photograph

## Appendix C: List of Test Equipment Used to perform the test

Test Equipment used for Radiated Emissions					
Equip#	Manufacturer/ Model	Description	Last Cal	Next Cal	Test Item
CIS051796	TTA1800-30-HG Miteq	SMA 18 GHz Pre-Amplifier	29-Sep-15	29-Sep-16	B.1, B.2
CIS035285	3117 ETS-Lindgren	Double Ridged Waveguide Horn Antenna	30-Sep-15	30-Sep-16	B.1, B.2
CIS008447	NSA 10m Chamber Cisco	NSA 10m Chamber	14-Oct-15	14-Oct-16	B.3
CIS045096	TH0118 Cisco	Mast Mount Preamplifier Array, 1-18GHz	4-Nov-15	4-Nov-16	B.1, B.2
CIS030652	JB1 Sunol Sciences	Combination Antenna, 30MHz-2GHz	4-Dec-15	4-Dec-16	B.3
CIS041929	iBTHP-5-DB9 Newport	5 inch Temp/RH/Press Sensor w/20ft cable	22-Dec-15	22-Dec-16	B.1, B.2, B.3
CIS043124	Above 1GHz Site Cal Cisco	Above 1GHz Cispr Site Verification	14-Jan-16	14-Jan-17	B.1, B.2
CIS047300	N9038A Agilent Technologies	MXE EMI Receiver 20Hz to 26.5 Ghz	28-Jan-16	28-Jan-17	B.1, B.2, B.3
CIS051642	Sucoflex 106PA Huber+Suhner	RF N Type Cable 8.5m	11-Feb-16	11-Feb-17	B.1, B.2, B.3
CIS030559	UFB311A-1-0950-504504 Micro-Coax	RF Coaxial Cable, to 18GHz, 95 in	15-Feb-16	15-Feb-17	B.1, B.2, B.3
CIS020975	UFB311A-0-1344-520520 Micro-Coax	RF Coaxial Cable, to 18GHz, 134.4 in	17-Feb-16	17-Feb-17	B.1, B.2, B.3
CIS051708	UFB293C-2-0840-300504 Micro-Coax	RF Coaxial SMA-N Type Cable	28-Jun-16	28-Jun-17	B.1, B.2, B.3
CIS044940	ESU40 Rohde & Schwarz	EMI Test Receiver, 20Hz-40GHz	2-Nov-15	2-Nov-16	B.1, B.2
CIS034075	RSG 2000 Schaffner	Reference Spectrum Generator, 1-18GHz	Cal Not Required		
CIS041979	1840 Cisco	18-40GHz EMI Test Head/ Verification Fixture	13-Jul-15	13-Jul-16	B.1, B.2
CIS044940	ESU40 Rohde & Schwarz	EMI Test Receiver, 20Hz-40GHz	2-Nov-15	2-Nov-16	B.1, B.2,
CIS030652	JB1 Sunol Sciences	Combination Antenna, 30MHz-2GHz	4-Dec-15	4-Dec-16	B.3
CIS003003	83731B HP	Synthesized Signal Generator	29-Jan-16	29-Jan-17	B.1, B.2
CIS037236	50CB-015 JFW	GPIB Control Box			B.1, B.2

Test Equipment used for AC Mains Conducted Emissions					
Equip#	Manufacturer/ Model	Description	Last Cal	Next Cal	Test Item
8510	Fischer Custom Communications FCC-450B-2.4-N	Instrumentation Limiter	5/16/16	5/16/17	B.4
23802	Fischer Custom Communications FCC-801-M2-50A	CDN, 2-LINE 50A	1/12/16	1/12/17	B.4
45995	Fischer Custom Communications F-090527-1009-2	Lisn Adapter	6/17/16	6/17/17	B.4
49468	Coleman RG223	BNC 25 ft Cable	3/9/16	3/9/17	B.4
31918	Midwest Microwave TRM-2048-MC-BNC-10	50 Ohm, 5W Terminator, Type BNC	11/9/15	11/9/16	B.4
49531	TTE H785-150K-50-21378	High Pass Filter	5/3/16	5/3/17	B.4
45994	Fischer Custom Communications F-090527-1009-1	Line Impedance Stabilization Network	6/17/16	6/17/17	B.4
18963	York CNE V	Comparison Noise Emitter, 30 - 1000MHz	Cal Not Required	Cal Not Required	B.4
45050	Rohde & Schwarz ESCI	EMI Test Receiver	11/3/15	11/3/16	B.4
51721	Teseq CDN ST08A	Coupling Decoupling Network	6/7/16	6/7/17	B.4
54231	Newport iBTHP-5-DB9	5 inch Temp/RH/Press Sensor w/20ft cable	2/10/16	2/10/17	B.4

Test Equipment used for RF Conducted Tests					
Equip#	Manufacturer/ Model	Description	Last Cal	Next Cal	Test Item
CIS054666	RA08-S1S1-18 MegaPhase	SMA 18" Cable	25-Sep-15	25-Sep-16	A1 thru A7
CIS054667	RA08-S1S1-18 MegaPhase	SMA 18" Cable	25-Sep-15	25-Sep-16	A1 thru A7
CIS054668	RA08-S1S1-18 MegaPhase	SMA 18" Cable	25-Sep-15	25-Sep-16	A1 thru A7
CIS054669	RA08-S1S1-18 MegaPhase	SMA 18" Cable	25-Sep-15	25-Sep-16	A1 thru A7
CIS054686	NI PXI-2796 National Instruments	Plug-in switch module	6-Oct-15	6-Oct-16	A1 thru A7
CIS055166	RFLT4WDC40GK RF Lambda	4 Way Power Divider 40GHz	23-Nov-15	23-Nov-16	A1 thru A7
CIS054662	RFLT4WDC40GK RF Lambda	SMA 36" cable	24-Sep-15	24-Sep-16	A1 thru A7
CIS054656	BRC50705-02 Micro-Tronics	Band Reject Filter	24-Sep-15	24-Sep-16	A1 thru A7
CIS054655	BRC50704-02 Micro-Tronics	Notch Filter, SB:5.470-5.725GHz, to 12GHz	24-Sep-15	24-Sep-16	A1 thru A7
CIS054654	BRC50703-02	Notch Filter,	24-Sep-15	24-Sep-16	A1 thru A7

	Micro-Tronics	SB:5.150-5.350GHz, to 11GHz			
CIS054653	BRM50702-02 Micro-Tronics	Notch Filter, SB:2.400-2.500GHz, to 18GHz	24-Sep-15	24-Sep-16	A1 thru A7
CIS054678	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A7
CIS054677	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A7
CIS054676	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A7
CIS054675	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A7
CIS054674	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A7
CIS054673	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A7
CIS054672	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A7
CIS054671	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A7
CIS054670	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A7
CIS054664	GC12-8181-16 MegaPhase	SMA 16" Cable	25-Sep-15	25-Sep-16	A1 thru A7
CIS054663	F120-S1S1-48 MegaPhase	SMA 48" Cable	25-Sep-15	25-Sep-16	A1 thru A7
CIS054686	NI PXI-2796 National Instruments	Plug-in switch module	6-Oct-15	6-Oct-16	A1 thru A7
CIS042005	BWS30W2+ Mini-Circuits	SMA 30dB Attenuator	16-Oct-15	16-Oct-16	A1 thru A7
CIS041995	BW-S6W2 Mini-Circuits	6dB Attenuator	16-Oct-15	16-Oct-16	A1 thru A7
CIS054695	D3C2060 Ditom	Circulator	20-Oct-15	20-Oct-16	A1 thru A7
CIS055146	RA08-S1S1-12 Megaphase	12" SMA Cable	17-Nov-15	17-Nov-16	A1 thru A7
CIS050721	N9030A Keysight	PXA Signal Analyzer	30-Mar-16	30-Mar-17	A1 thru A7
CIS054303	N5182B Keysight	MXG X-Series RF Vector Signal Generator	6-Apr-16	6-Apr-17	A1 thru A7
CIS055358	ZFSC-2-10G Mini-Circuits	Splitter	11-Apr-16	11-Apr-17	A1 thru A7
CIS055099	SMART2200RM2U Tripp-Lite	Power Supply	Cal Not Required		A1 thru A7
CIS055094	PXI-1042 National Instruments	Chassis	Cal Not Required		A1 thru A7

## Appendix E: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

Abbreviation	Description	Abbreviation	Description
EMC	Electro Magnetic Compatibility	°F	Degrees Fahrenheit
EMI	Electro Magnetic Interference	°C	Degrees Celsius
EUT	Equipment Under Test	Temp	Temperature
ITE	Information Technology Equipment	S/N	Serial Number
TAP	Test Assessment Schedule	Qty	Quantity
ESD	Electro Static Discharge	emf	Electromotive force
EFT	Electric Fast Transient	RMS	Root mean square
EDCS	Engineering Document Control System	Qp	Quasi Peak
Config	Configuration	Av	Average
CIS#	Cisco Number (unique identification number for Cisco test equipment)	Pk	Peak
Cal	Calibration	kHz	Kilohertz ( $1 \times 10^3$ )
EN	European Norm	MHz	MegaHertz ( $1 \times 10^6$ )
IEC	International Electro technical Commission	GHz	Gigahertz ( $1 \times 10^9$ )
CISPR	International Special Committee on Radio Interference	H	Horizontal
CDN	Coupling/Decoupling Network	V	Vertical
LISN	Line Impedance Stabilization Network	dB	decibel
PE	Protective Earth	V	Volt
GND	Ground	kV	Kilovolt ( $1 \times 10^3$ )
L1	Line 1	µV	Microvolt ( $1 \times 10^{-6}$ )
L2	Line2	A	Amp
L3	Line 3	µA	Micro Amp ( $1 \times 10^{-6}$ )
DC	Direct Current	mS	Milli Second ( $1 \times 10^{-3}$ )
RAW	Uncorrected measurement value, as indicated by the measuring device	µS	Micro Second ( $1 \times 10^{-6}$ )
RF	Radio Frequency	µS	Micro Second ( $1 \times 10^{-6}$ )
SLCE	Signal Line Conducted Emissions	m	Meter
Meas dist	Measurement distance	Spec dist	Specification distance
N/A or NA	Not Applicable	SL	Signal Line (or Telecom Line)
P	Power Line	L	Live Line
N	Neutral Line	R	Return
S	Supply	AC	Alternating Current

# End

---

**Page No:** 92 of 92