

# BLE Radio Test Report **C9115AXE-B, C9115AXE-A, C9115AXE-T**

**FCC ID: LDKSLTSP1905**

**IC: 2461N-SLTSP1905**

**2400-2483.5 MHz**

Against the following Specifications:

CFR47 Part 15.247

RSS-247

RSS-Gen Issue 5

LP0002 (2018-01-10)



Cisco Systems  
170 West Tasman Drive  
San Jose, CA 95134

|                                                                                     |                                                                                               |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
|  |           |
| <b>Author:</b> Julian Land<br><b>Tested By:</b> Julian Land                         | <b>Approved By:</b> Gerard Thorpe<br><b>Title:</b> Compliance Manager<br><b>Revision:</b> 1.3 |

This report replaces any previously entered test report under EDCS – 17191925. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system. Test Report Template EDCS# 703456.

|                                                                                 |           |
|---------------------------------------------------------------------------------|-----------|
| <b>SECTION 1: OVERVIEW .....</b>                                                | <b>4</b>  |
| 1.1 TEST SUMMARY .....                                                          | 4         |
| <b>SECTION 2: ASSESSMENT INFORMATION.....</b>                                   | <b>5</b>  |
| 2.1 GENERAL.....                                                                | 5         |
| 2.2 UNITS OF MEASUREMENT .....                                                  | 5         |
| 2.3 DATE OF TESTING (INITIAL SAMPLE RECEIPT DATE TO LAST DATE OF TESTING) ..... | 7         |
| 2.4 REPORT ISSUE DATE.....                                                      | 7         |
| 2.5 TESTING FACILITIES.....                                                     | 7         |
| 2.6 EQUIPMENT ASSESSED (EUT) .....                                              | 8         |
| 2.7 EUT DESCRIPTION.....                                                        | 8         |
| <b>SECTION 3: RESULT SUMMARY .....</b>                                          | <b>9</b>  |
| 3.1 RESULTS SUMMARY TABLE.....                                                  | 9         |
| 3.1.1 Radio Port Results.....                                                   | 9         |
| 3.1.2 Radiated Emissions (General requirements) .....                           | 11        |
| <b>SECTION 4: SAMPLE DETAILS .....</b>                                          | <b>12</b> |
| 4.1 SAMPLE DETAILS .....                                                        | 12        |
| 4.2 SYSTEM DETAILS .....                                                        | 12        |
| 4.3 MODE OF OPERATION DETAILS .....                                             | 12        |
| <b>SECTION 5: RADIO PORT RESULTS .....</b>                                      | <b>13</b> |
| 5.1 DUTY CYCLE.....                                                             | 13        |
| 5.1.1 Duty Cycle Test Requirement.....                                          | 13        |
| 5.1.2 Duty Cycle Test Method .....                                              | 14        |
| 5.1.3 Duty Cycle Test Information .....                                         | 15        |
| 5.1.4 Duty Cycle Data Table.....                                                | 16        |
| 5.1.5 Duty Cycle Data Screenshots.....                                          | 17        |
| 5.2 6dB BANDWIDTH.....                                                          | 18        |
| 5.2.1 6dB Bandwidth Test Requirement .....                                      | 18        |
| 5.2.2 6dB Bandwidth Test Procedure .....                                        | 19        |
| 5.2.3 6dB Bandwidth Test Information.....                                       | 20        |
| 5.2.4 6dB Bandwidth Data Table .....                                            | 21        |
| 5.2.5 6dB Bandwidth Screenshots.....                                            | 22        |
| 5.3 OCCUPIED BANDWIDTH .....                                                    | 24        |
| 5.3.1 Occupied Bandwidth Test Requirement .....                                 | 24        |
| 5.3.2 Occupied Bandwidth Test Method .....                                      | 25        |
| 5.3.3 Occupied Bandwidth Test Information .....                                 | 26        |
| 5.3.4 Occupied Bandwidth Data Table .....                                       | 27        |
| 5.3.5 Occupied Bandwidth Screenshots.....                                       | 28        |
| 5.4 MAXIMUM CONDUCTED OUTPUT POWER .....                                        | 30        |
| 5.4.1 Maximum Conducted Output Power Test Requirement.....                      | 30        |
| 5.4.2 Maximum Conducted Output Power Test Method .....                          | 31        |
| 5.4.3 Maximum Conducted Output Power Test Information .....                     | 32        |
| 5.4.4 Maximum Conducted Output Power Data Table .....                           | 33        |
| 5.4.5 Maximum Conducted Output Power Screenshots .....                          | 34        |

|                                                                                   |                                                                      |           |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------|-----------|
| 5.5                                                                               | POWER SPECTRAL DENSITY .....                                         | 36        |
| 5.5.1                                                                             | Power Spectral Density Test Requirement .....                        | 36        |
| 5.5.2                                                                             | Power Spectral Density Test Method.....                              | 37        |
| 5.5.3                                                                             | Power Spectral Density Test Information.....                         | 38        |
| 5.5.4                                                                             | Power Spectral Density Data Table .....                              | 39        |
| 5.5.5                                                                             | Power Spectral Density Screenshots.....                              | 40        |
| 5.6                                                                               | CONDUCTED SPURIOUS EMISSIONS .....                                   | 42        |
| 5.6.1                                                                             | Conducted Spurious Emissions Test Requirement .....                  | 42        |
| 5.6.2                                                                             | Conducted Spurious Emissions Test Method .....                       | 43        |
| 5.6.3                                                                             | Conducted Spurious Emissions Test Information .....                  | 44        |
| 5.6.4                                                                             | Conducted Spurious Emissions Data Table - Peak .....                 | 45        |
| 5.6.5                                                                             | Conducted Spurious Peak Screenshots 1GHz-12GHz.....                  | 46        |
| 5.6.6                                                                             | Conducted Spurious Emissions Data Table – Average .....              | 48        |
| 5.6.7                                                                             | Conducted Spurious Peak Screenshots 1GHz – 12GHz.....                | 49        |
| 5.6.8                                                                             | Conducted Spurious Upper Screenshots 12GHz-26GHz .....               | 51        |
| 5.7                                                                               | CONDUCTED BAND EDGE .....                                            | 52        |
| 5.7.1                                                                             | Conducted Band Edge Test Requirement .....                           | 52        |
| 5.7.2                                                                             | Conducted Band Edge Test Method.....                                 | 53        |
| 5.7.3                                                                             | Conducted Band Edge Test Information.....                            | 53        |
| 5.7.4                                                                             | Conducted Band Edge (Restricted Band) Screenshots Average.....       | 56        |
| 5.7.5                                                                             | Conducted Band Edge (Restricted Band) Data Table Peak .....          | 57        |
| 5.7.6                                                                             | Conducted Band Edge Screenshots Peak.....                            | 58        |
| 5.8                                                                               | CONDUCTED BAND EDGE (NON-RESTRICTED BAND) .....                      | 59        |
| 5.8.1                                                                             | Emissions in non-restricted frequency bands - Test Requirement.....  | 59        |
| 5.8.2                                                                             | Emissions in non-restricted frequency bands - Test Method .....      | 60        |
| 5.8.3                                                                             | Emissions in non-restricted frequency bands – Test Information ..... | 61        |
| 5.8.4                                                                             | Emissions in non-restricted frequency bands – Data Tables .....      | 62        |
| 5.8.5                                                                             | Emissions in non-restricted frequency bands – Screenshots .....      | 63        |
| <b>SECTION 6: SYSTEM TEST RESULTS .....</b>                                       |                                                                      | <b>64</b> |
| 6.1                                                                               | RADIATED SPURIOUS EMISSIONS .....                                    | 64        |
| 6.2                                                                               | AC CONDUCTED EMISSIONS.....                                          | 65        |
| <b>APPENDIX A: LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST .....</b>          |                                                                      | <b>66</b> |
| <b>APPENDIX B: ABBREVIATION KEY AND DEFINITIONS.....</b>                          |                                                                      | <b>67</b> |
| <b>APPENDIX C: SOFTWARE USED TO PERFORM TESTING.....</b>                          |                                                                      | <b>68</b> |
| <b>APPENDIX D: TEST PROCEDURES .....</b>                                          |                                                                      | <b>69</b> |
| <b>APPENDIX E: SCOPE OF ACCREDITATION (A2LA CERTIFICATE NUMBER 1178-01) .....</b> |                                                                      | <b>70</b> |
| <b>APPENDIX F: TEST ASSESSMENT PLAN .....</b>                                     |                                                                      | <b>71</b> |
| <b>APPENDIX G: TEST SETUP PHOTOS .....</b>                                        |                                                                      | <b>72</b> |

## Section 1: Overview

### 1.1 Test Summary

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

| Specifications                                                                                     |
|----------------------------------------------------------------------------------------------------|
| CFR47 Part 15.247<br>RSS-247 Issue 2: Feb 2017<br>RSS-Gen Issue 5: Apr 2018<br>LP0002 (2018-01-10) |

## Section 2: Assessment Information

### 2.1 General

This report contains an assessment of an apparatus against Radio Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).

d) All testing was performed under the following environmental conditions:

|                      |                                      |
|----------------------|--------------------------------------|
| Temperature          | 15°C to 35°C (54°F to 95°F)          |
| Atmospheric Pressure | 860mbar to 1060mbar (25.4" to 31.3") |
| Humidity             | 10% to 75*%                          |

1. All AC testing was performed at one or more of the following supply voltages:

110V 60 Hz (+/-20%)

### 2.2 Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

Emission level [dBuV] = Indicated voltage level [dBuV] + Cable Loss [dB] + Other correction factors [dB]

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include: -

Antenna Factors, Pre-Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss.

Note: to convert the results from dBuV/m to uV/m use the following formula: -

Level in uV/m = Common Antilogarithm [(X dBuV/m)/20] = Y uV/m

## Measurement Uncertainty Values

|                                   |                         |
|-----------------------------------|-------------------------|
| voltage and power measurements    | $\pm 2$ dB              |
| conducted EIRP measurements       | $\pm 1.4$ dB            |
| radiated measurements             | $\pm 3.2$ dB            |
| frequency measurements            | $\pm 2.4 \cdot 10^{-7}$ |
| temperature measurements          | $\pm 0.54^\circ$ .      |
| humidity measurements             | $\pm 2.3\%$             |
| DC and low frequency measurements | $\pm 2.5\%$ .           |

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Radiated emissions (expanded uncertainty, confidence interval 95%)

|                    |            |
|--------------------|------------|
| 30 MHz - 300 MHz   | +/- 3.8 dB |
| 300 MHz - 1000 MHz | +/- 4.3 dB |
| 1 GHz - 10 GHz     | +/- 4.0 dB |
| 10 GHz - 18GHz     | +/- 8.2 dB |
| 18GHz - 26.5GHz    | +/- 4.1 dB |
| 26.5GHz - 40GHz    | +/- 3.9 dB |

Conducted emissions (expanded uncertainty, confidence interval 95%)

|                |             |
|----------------|-------------|
| 30 MHz – 40GHz | +/- 0.38 dB |
|----------------|-------------|

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

**This report must not be reproduced except in full, without written approval of Cisco Systems.**

**2.3 Date of testing (initial sample receipt date to last date of testing)**

May 8, 2019

**2.4 Report Issue Date**

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled

**2.5 Testing facilities**

This assessment was performed by:

**Headquarters**

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134  
USA

**Testing Laboratory**

Cisco Systems, Inc.  
125 West Tasman Drive (Building P)  
San Jose, CA 95134  
USA

**Registration Numbers for ISED (Innovation, Science and Economic Development Canada)**

| Cisco System Site       | Address                                                            | Site Identifier    |
|-------------------------|--------------------------------------------------------------------|--------------------|
| Building P, 10m Chamber | 125 West Tasman Dr<br>San Jose, CA 95134<br>United States          | Company #: 2461N-2 |
| Building P, 5m Chamber  | 125 West Tasman Dr<br>San Jose, CA 95134<br>United States          | Company #: 2461N-1 |
| Building I, 5m Chamber  | 285 W. Tasman Drive<br>San Jose, California 95134<br>United States | Company #: 2461M-1 |
| Building 7, 5m Chamber  | 425 E. Tasman Drive<br>San Jose, California 95134<br>United States | Company #: 2461N-3 |

**Test Engineers**

Julian Land

## 2.6 Equipment Assessed (EUT)

C9115AXE-B, C9115AXE-A, C9115AXE-T

## 2.7 EUT Description

The C9115AX is a next generation access point. The dual band 2.4GHz and 5GHz WIFI radio supports the next generation WIFI protocol of 802.11ax and is backwards compatible with 802.11a, b, g, n, ac. The access point features 4 external antennas and operates in a 4x4 configuration in both the 2.4GHz and 5GHz bands.

The following antennas are supported by this product series.  
The data included in this report represent the worst-case data for all antennas.

| Frequency     | Part Number       | Antenna Type                                       | Highest Antenna Gain (dBi) |
|---------------|-------------------|----------------------------------------------------|----------------------------|
| 2.4GHz / 5GHz | AIR-ANT2524DB-R=  | Dipole Ant., Black, connectors RP-TNC              | 2dBi@2.4GHz<br>4dBi@5GHz   |
| 2.4GHz / 5GHz | AIR-ANT2524DG-R=  | Dipole Ant., Gray, connectors RP-TNC               | 2dBi@2.4GHz<br>4dBi@5GHz   |
| 2.4GHz / 5GHz | AIR-ANT2524DW-R=  | Dipole Ant., White, connectors RP-TNC              | 2dBi@2.4GHz<br>4dBi@5GHz   |
| 2.4GHz / 5GHz | AIR-ANT2535SDW-R  | Low Profile Antenna, White, connectors RP-TNC      | 3dBi@2.4GHz<br>5dBi@5GHz   |
| 2.4GHz / 5GHz | AIR-ANT2566P4W-R= | Directional Ant., 4-port, connectors RP-TNC        | 6dBi@2.4GHz<br>6dBi@5GHz   |
| 2.4GHz / 5GHz | AIR-ANT2524V4C-R= | Ceiling Mount Omni Ant., 4-port, connectors RP-TNC | 2dBi@2.4GHz<br>4dBi@5GHz   |
| 2.4GHz / 5GHz | AIR-ANT2544V4M-R= | Wall Mount Omni Ant., 4-port, connectors RP-TNC    | 4dBi@2.4GHz<br>4dBi@5GHz   |
| 2.4GHz / 5GHz | AIR-ANT2566D4M-R= | 60 Deg. Patch Ant., 4-port, RP-TNC                 | 6dBi@2.4GHz<br>6dBi@5GHz   |

## Section 3: Result Summary

### 3.1 Results Summary Table

#### 3.1.1 Radio Port Results

| Basic Standard                                                        | Technical Requirements / Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Result |
|-----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| FCC 15.247<br>RSS-247<br>LP0002<br>(2018-01-10)<br>(3.10.1.6) (2)(A)  | <b>6dB Bandwidth</b><br>Systems using digital modulation techniques may operate in the 2400-2483.5MHz band. The minimum 6dB bandwidth shall be at least 500 kHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Pass   |
| FCC 15.247<br>RSS-247                                                 | <b>99%- &amp; 26-dB Bandwidth:</b><br>The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.<br><br>The 26-dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.                                                                                                    | Pass   |
| FCC 15.247<br>RSS-247<br>LP0002<br>(2018-01-10)<br>(3.10.1.2) (1) (C) | <b>Output Power:</b><br><b>15.247</b> The maximum conducted output power of the intentional radiator for systems using digital modulation in the 2400-2483.5 MHz band shall not exceed 1 Watt (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.<br><br><b>RSS-247</b> For DTSS employing digital modulation techniques operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(e), the e.i.r.p. shall not exceed 4 W. | Pass   |
| FCC 15.247<br>RSS-247<br>LP0002<br>(2018-01-10)<br>(3.10.1.6) (2) (B) | <b>Power Spectral Density</b><br>For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.                                                                                                                                                                                                                                                                                                                                                                                                           | Pass   |
| FCC 15.247<br>RSS-247<br>LP0002<br>(2018-01-10)<br>(3.10.1.5) 2.8     | <b>Conducted Spurious Emissions / Band-Edge:</b><br>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated                                                                                                                                                                                                                                                                       | Pass   |

|                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                  |      |
|--------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
|                                                        | measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required. |      |
| FCC 15.247<br>RSS-247<br>FCC 15.205<br>RSS-Gen Issue 5 | <b>Restricted band:</b><br>Unwanted emissions falling within the restricted bands, as defined in FCC 15.205 (a) and RSS-Gen 8.10 must also comply with the radiated emission limits specified in FCC 15.209 (a) and RSS-Gen 8.9                                                                                                                                                                                                  | Pass |

### 3.1.2 Radiated Emissions (General requirements)

| Basic Standard                                                            | Technical Requirements / Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Result                                          |
|---------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| FCC 15.209<br>RSS-Gen Issue 5<br>LP0002<br>(2018-01-10)<br>(3.10.1.5) 2.8 | <b>TX Spurious Emissions:</b> Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the filed strength limits table in this section.<br>Unwanted emissions falling within the restricted bands, as defined in FCC 15.205 (a) and RSS-Gen 8.10 must also comply with the radiated emission limits specified in FCC 15.209 (a) and RSS-Gen 8.9                                                                                                                                                                              | Pass                                            |
| RSS-Gen Issue 5<br>LP0002<br>(2018-01-10)<br>(3.10.1.5) 2.8               | <b>RX Spurious Emissions:</b><br><b>RSS-Gen 7.3</b> Radiated emission measurements shall be performed with the receiver antenna connected to the receiver antenna ports. The search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (e.g. local oscillator, intermediate or carrier frequency), or 30 MHz, whichever is higher, to at least five times the highest tunable or local oscillator frequency, whichever is higher, without exceeding 40 GHz.<br>Spurious emissions from receivers shall not exceed the radiated emissions limits shown in table 3 | Pass                                            |
| FCC 15.207<br>RSS-Gen Issue 5<br>LP0002<br>(2018-01-10)<br>2.3            | <b>AC conducted Emissions:</b> Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.                                                                                    | N/A<br>(Unit only powered by DC power i.e. POE) |

## Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

### 4.1 Sample Details

| Sample No. | Equipment Details     | Manufacturer        | Hardware Rev. | Firmware Rev.   | Software Rev. | Serial Number |
|------------|-----------------------|---------------------|---------------|-----------------|---------------|---------------|
| S01        | C9115AXE              | Cisco Systems, Inc. | V09           | 17.10 RC25.2101 | 8.8.1.10      | F0C22511RC6   |
| S02        | Catalyst 3850 48 PoE+ | Cisco Systems, Inc. | T0            | 1.18            | 03.03.05SE    | FCW1931C1U7   |

### 4.2 System Details

| System # | Description                            | Samples  |
|----------|----------------------------------------|----------|
| 1        | EUT and Power Supply (Conducted Tests) | S01, S02 |

### 4.3 Mode of Operation Details

| Mode# | Description | Comments         |
|-------|-------------|------------------|
| 1     | GFSK        | Receive and Idle |

## Section 5: Radio Port Results

### 5.1 Duty Cycle

#### 5.1.1 Duty Cycle Test Requirement

From KDB 558074, Section 6

##### 6.0 Duty cycle, transmission duration and maximum power control level

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (*i.e.*, with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be utilized to ensure that measurements are made only during transmissions at the maximum power control level. ... When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternate procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle. Within this guidance document, the duty cycle refers to the fraction of time over which the transmitter is on and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than  $\pm 2$  percent, otherwise the duty cycle is considered to be non-constant.

### 5.1.2 Duty Cycle Test Method

From KDB 558074, Section 6:

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value. Set  $VBW \geq RBW$ . Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

## 5.1.3 Duty Cycle Test Information

**Samples, Systems, and Modes**

| System Number | Description | Samples | System under test                   | Support equipment                   |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1             | EUT         | S01     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
|               | Support     | S02     | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

|                                  |                                        |
|----------------------------------|----------------------------------------|
| <b>Tested By:</b><br>Julian Land | <b>Date of testing:</b><br>May 8, 2019 |
| <b>Test Result:</b> Pass         |                                        |

**Test Equipment**


See Appendix A for list of test equipment

#### 5.1.4 Duty Cycle Data Table

Duty Cycle table and screen captures are shown below for power/psd modes.

| Mode | Duty Cycle (%) | Correction Factor (dB) |
|------|----------------|------------------------|
| GFSK | 100            | 0                      |

## 5.1.5 Duty Cycle Data Screenshots

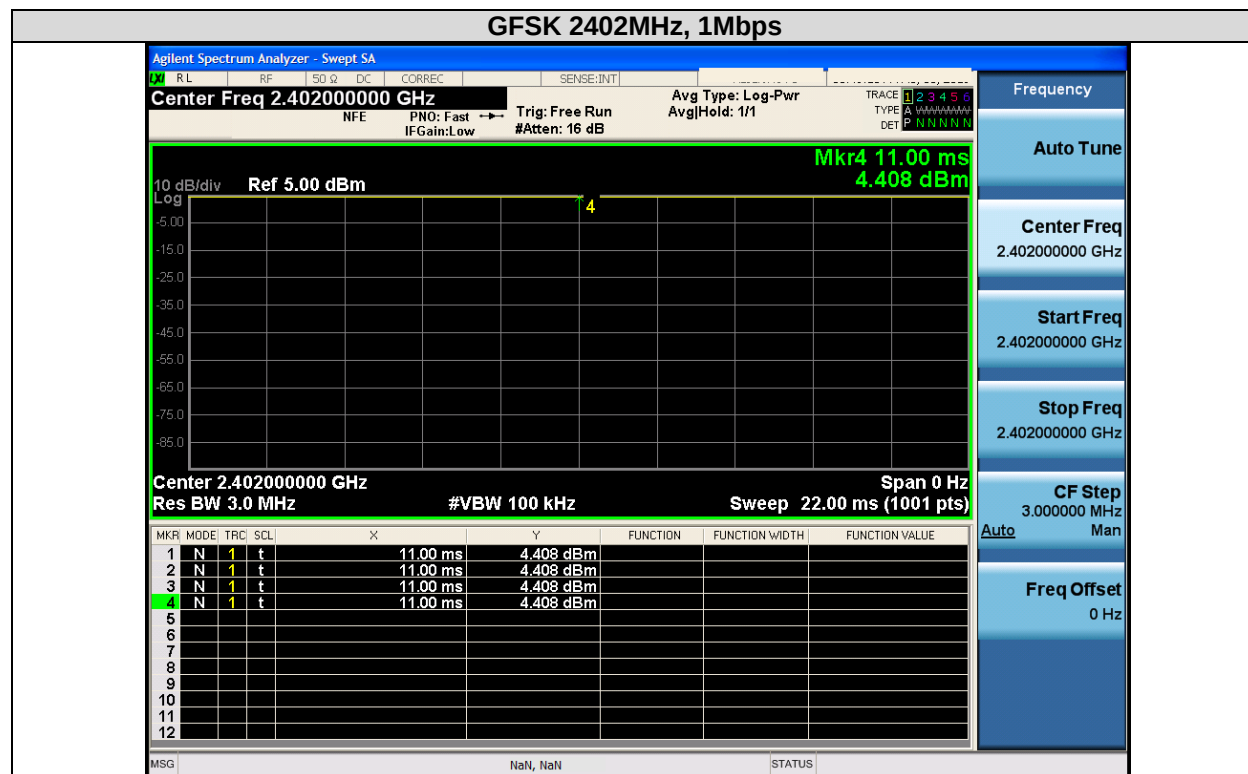

## 5.2 6dB Bandwidth

### 5.2.1 6dB Bandwidth Test Requirement

For the FCC / LP0002 (2018-01-10) (3.10.1.6) (2) (A):  
15.247 (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

For Industry Canada:  
RSS-247 5.2 (a)

#### 5.2 Digital transmission systems

DTSS include systems that employ digital modulation techniques resulting in spectral characteristics similar to direct sequence systems. The following applies to the bands 902-928 MHz and 2400-2483.5 MHz:

a) The minimum 6 dB bandwidth shall be 500 kHz.

## 5.2.2 6dB Bandwidth Test Procedure

Ref. KDB 558074 D01 DTS Meas. Guidance v04, 8.2 Option 2  
ANSI C63.10: 2013

|                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 6dB BW<br>Test Procedure                                                                                                                                                                                                                                                                                                                                                                                                     |
| <ol style="list-style-type: none"> <li>1. Set the radio in the continuous transmitting mode.</li> <li>2. Allow the trace to stabilize.</li> <li>3. Setting the x-dB bandwidth mode to -6dB within the measurement set up function.</li> <li>4. Select the automatic OBW measurement function of an instrument to perform bandwidth measurement.</li> <li>5. Capture graphs and record pertinent measurement data.</li> </ol> |

Ref. KDB 558074 D01 DTS Meas. Guidance v04, 8.2 Option 2  
ANSI C63.10: 2013 section 11.8.2 Option 2

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>6dB BW</b><br>Test parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <p><b>8.0 DTS bandwidth</b></p> <p>One of the following procedures may be used to determine the modulated <i>DTS bandwidth</i>.</p> <p><b>8.1 Option 1</b></p> <ol style="list-style-type: none"> <li>a) Set RBW = 100 kHz.</li> <li>b) Set the video bandwidth (VBW) <math>\geq 3 \times</math> RBW.</li> <li>c) Detector = Peak.</li> <li>d) Trace mode = max hold.</li> <li>e) Sweep = auto couple.</li> <li>f) Allow the trace to stabilize.</li> <li>g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.</li> </ol> <p><b>8.2 Option 2</b></p> <p>The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (<i>i.e.</i>, RBW = 100 kHz, VBW <math>\geq 3 \times</math> RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be <math>\geq 6</math> dB.</p> |

## 5.2.3 6dB Bandwidth Test Information

|                                  |                                        |
|----------------------------------|----------------------------------------|
| <b>Tested By:</b><br>Julian Land | <b>Date of testing:</b><br>May 8, 2019 |
| <b>Test Result:</b> Pass         |                                        |

**Test Equipment**

See Appendix A for list of test equipment



## Samples, Systems, and Modes


| System Number | Description | Samples | System under test                   | Support equipment                   |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1             | EUT         | S01     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
|               | Support     | S02     | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

## 5.2.4 6dB Bandwidth Data Table

| Frequency<br>(MHz) | Mode | Data Rate (Mbps) | 6dB BW<br>(MHz) | Limit<br>(kHz) | Margin<br>(MHz) |
|--------------------|------|------------------|-----------------|----------------|-----------------|
| 2402               | GFSK | 1                | 0.7             | >500           | 0.2             |
|                    |      |                  |                 |                |                 |
| 2426               | GFSK | 1                | 0.7             | >500           | 0.2             |
|                    |      |                  |                 |                |                 |
| 2480               | GFSK | 1                | 0.7             | >500           | 0.2             |

### 5.2.5 6dB Bandwidth Screenshots

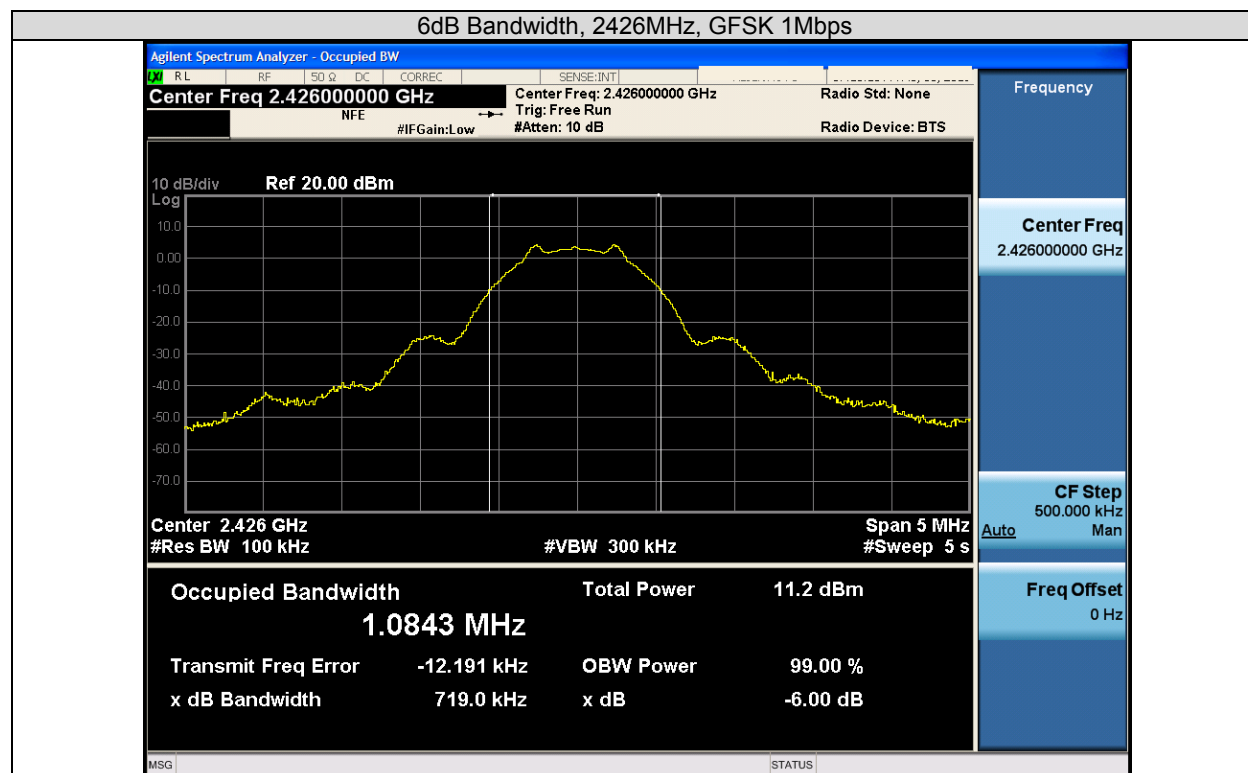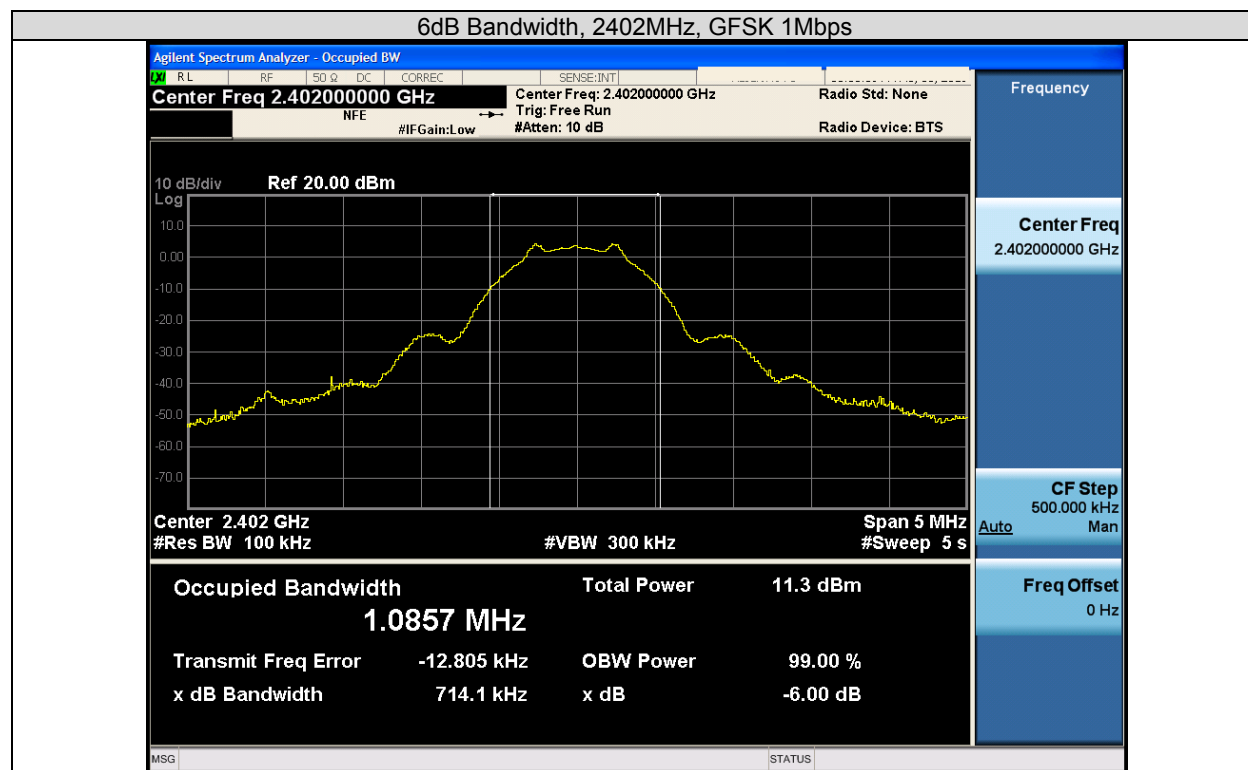

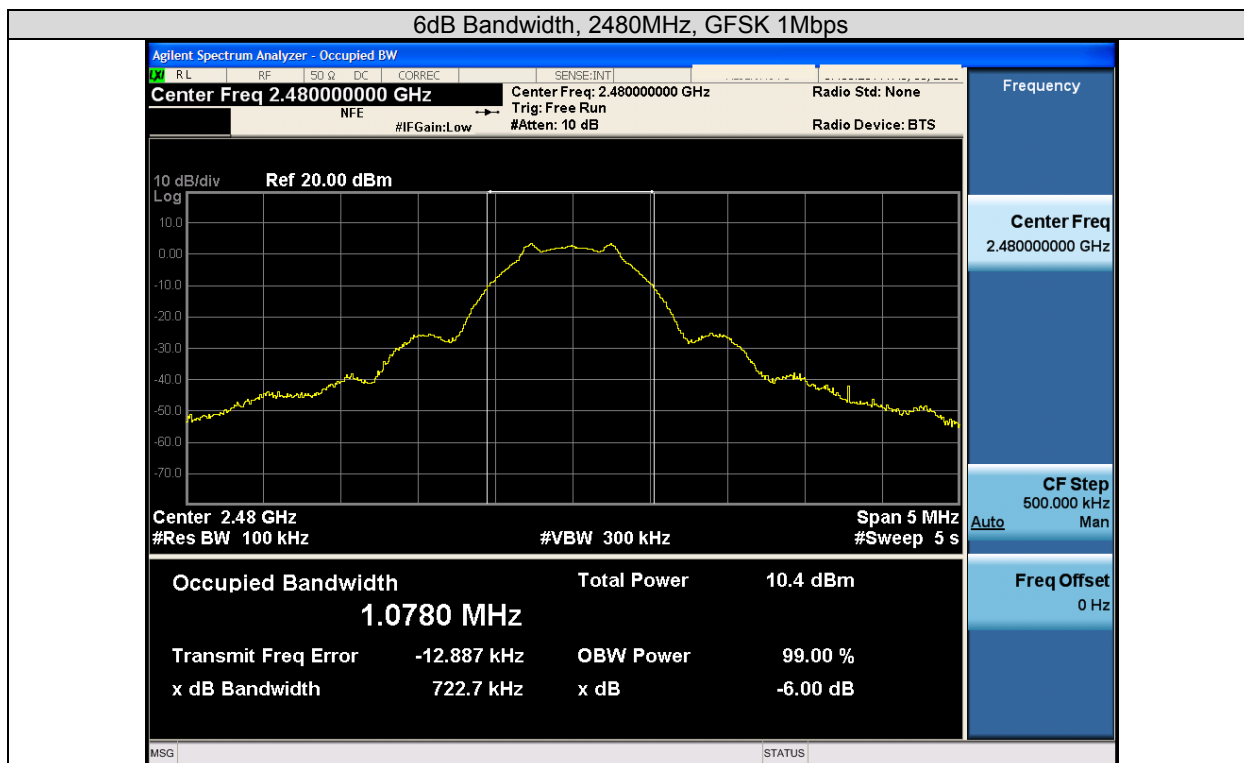

## 5.3 Occupied Bandwidth

### 5.3.1 Occupied Bandwidth Test Requirement

The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.

The 26-dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

### 5.3.2 Occupied Bandwidth Test Method

Ref. ANSI C63.10: 2013

|                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>26 BW &amp; 99% BW</b><br>Test Procedure                                                                                                                                                                                                                                                                                                                                                                                                    |
| <ol style="list-style-type: none"> <li>1. Set the radio in the continuous transmitting mode.</li> <li>2. Allow the trace to stabilize.</li> <li>3. Setting the x-dB bandwidth mode to -26dB &amp; OBW to 99% within the measurement set up function.</li> <li>4. Select the automatic OBW measurement function of an instrument to perform bandwidth measurement.</li> <li>5. Capture graphs and record pertinent measurement data.</li> </ol> |

Ref. ANSI C63.10: 2013 section 6.9.3

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>26 BW &amp; 99% BW</b><br>Test parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <p><b>6.9.3 Occupied bandwidth—power bandwidth (99%) measurement procedure</b></p> <p>The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:</p> <ol style="list-style-type: none"> <li>a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.</li> <li>b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.</li> <li>c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than <math>[10 \log (OBW/RBW)]</math> below the reference level. Specific guidance is given in 4.1.5.2.</li> <li>d) Step a) through step c) might require iteration to adjust within the specified range.</li> <li>e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.</li> <li>f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.</li> <li>g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.</li> <li>h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).</li> </ol> |

### 5.3.3 Occupied Bandwidth Test Information

|                                  |                                        |
|----------------------------------|----------------------------------------|
| <b>Tested By:</b><br>Julian Land | <b>Date of testing:</b><br>May 8, 2019 |
| <b>Test Result:</b> Pass         |                                        |

#### Test Equipment

See Appendix A for list of test equipment



#### Samples, Systems, and Modes


| System Number | Description | Samples | System under test                   | Support equipment                   |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1             | EUT         | S01     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
|               | Support     | S02     | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

## 5.3.4 Occupied Bandwidth Data Table

| Frequency<br>(MHz) | Mode | Data Rate<br>(Mbps) | 26dB BW<br>(MHz) | 99% BW<br>(MHz) |
|--------------------|------|---------------------|------------------|-----------------|
| 2402               | GFSK | 1                   | 1.3              | 1.070           |
|                    |      |                     |                  |                 |
| 2426               | GFSK | 1                   | 1.3              | 1.071           |
|                    |      |                     |                  |                 |
| 2480               | GFSK | 1                   | 1.3              | 1.062           |

### 5.3.5 Occupied Bandwidth Screenshots

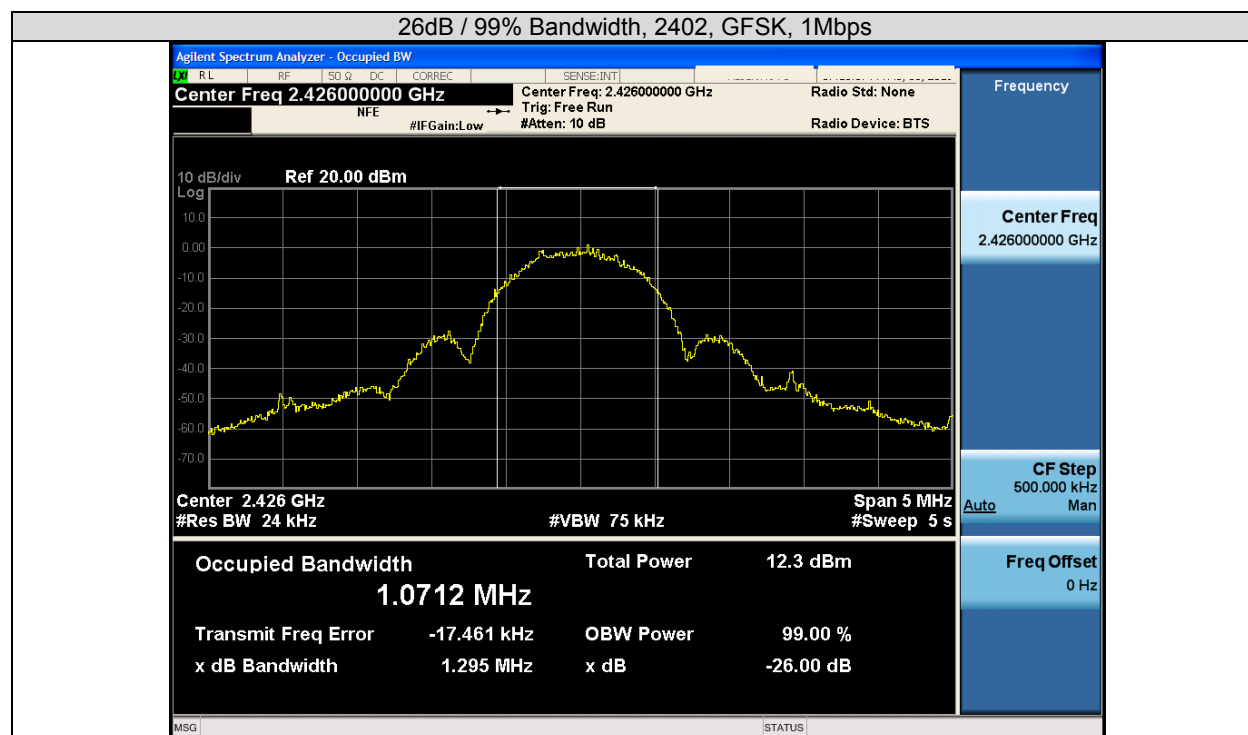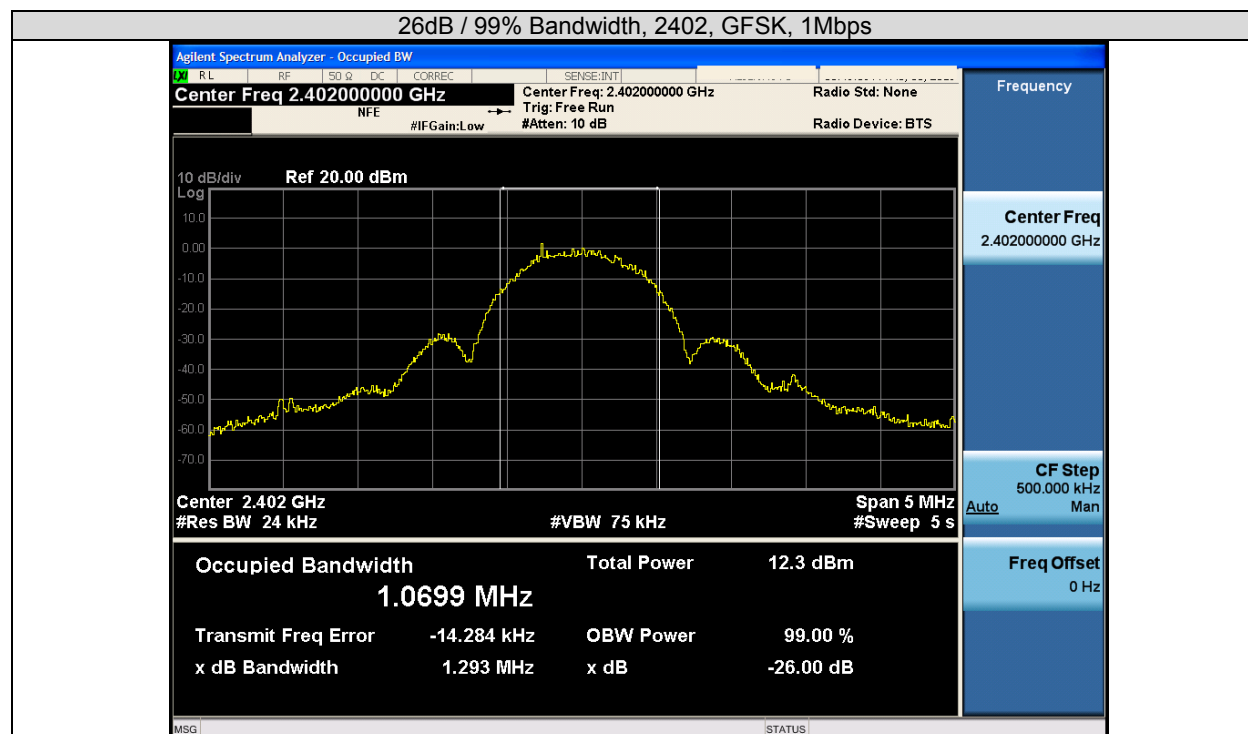

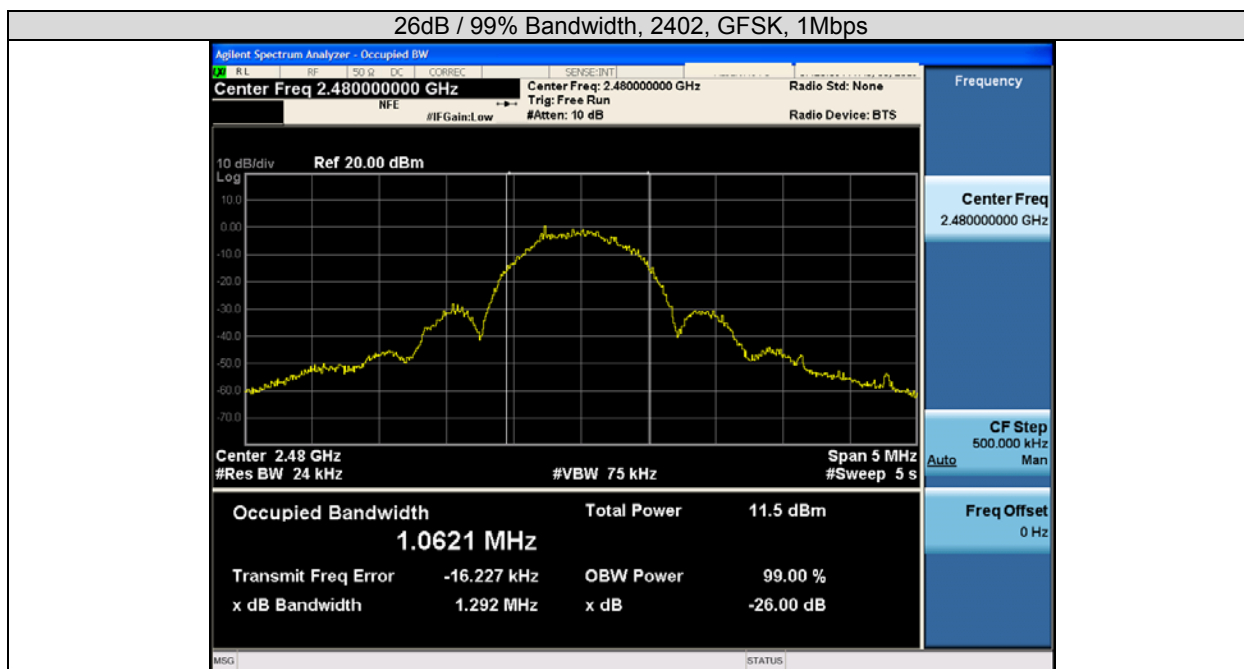

## 5.4 Maximum Conducted Output Power

### 5.4.1 Maximum Conducted Output Power Test Requirement

FCC, 15.247:

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (3) For systems using digital modulation in the 902-928 MHz, **2400-2483.5 MHz**, and 5725-5850 MHz bands: **1 Watt**. As an alternative to a peak power measurement, compliance with the one-Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Industry Canada, RSS-247:

5.4 Transmitter output power and equivalent isotropically radiated power (e.i.r.p.) requirements

d) For DTSSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

## 5.4.2 Maximum Conducted Output Power Test Method

Ref. KDB 558074 D01 DTS Meas. Guidance v04

ANSI C63.10: 2013

| <b>Maximum Conducted Output power</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Procedure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <ol style="list-style-type: none"> <li>1. Set the radio in the continuous transmitting mode at full power</li> <li>2. Compute power by integrating the spectrum across the EBW (or alternatively entire 99% OBW) of the signal using the instrument's band power measurement function. The integration shall be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW or the OBW band edges.</li> <li>3. Capture graphs and record pertinent measurement data.</li> </ol> |

Ref. 558074 D01 DTS Meas. Guidance v04, section 9.2.2.4 Method **AVGSA-2**

ANSI C63.10: 2013, section 11.9.2.2.4 **Method AVGSA-2**

| <b>Maximum Conducted Output power</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <p><b>9.2.2.4 Method AVGSA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction)</b></p> <ol style="list-style-type: none"> <li>a) Measure the duty cycle, <math>x</math>, of the transmitter output signal as described in 6.0.</li> <li>b) Set span to at least 1.5 times the OBW.</li> <li>c) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.</li> <li>d) Set VBW <math>\geq 3 \times</math> RBW.</li> <li>e) Number of points in sweep <math>\geq 2 \times \text{span} / \text{RBW}</math>. (This gives bin-to-bin spacing <math>\leq \text{RBW}/2</math>, so that narrowband signals are not lost between frequency bins.)</li> <li>f) Sweep time = auto.</li> <li>g) Detector = RMS (<i>i.e.</i>, power averaging), if available. Otherwise, use sample detector mode.</li> <li>h) Do not use sweep triggering. Allow the sweep to "free run".</li> <li>i) Trace average at least 100 traces in power averaging (<i>i.e.</i>, RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the on and off periods of the transmitter.</li> <li>j) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.</li> <li>k) Add <math>10 \log (1/x)</math>, where <math>x</math> is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add <math>10 \log (1/0.25) = 6</math> dB if the duty cycle is 25 %.</li> </ol> |

The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. (See ANSI C63.10 section 14.3 for Guidance)

## 5.4.3 Maximum Conducted Output Power Test Information

**Samples, Systems, and Modes**

| System Number | Description | Samples | System under test                   | Support equipment                   |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1             | EUT         | S01     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
|               | Support     | S02     | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

|                                  |                                        |
|----------------------------------|----------------------------------------|
| <b>Tested By:</b><br>Julian Land | <b>Date of testing:</b><br>May 8, 2019 |
| <b>Test Result:</b> Pass         |                                        |



**Test Equipment**


See Appendix A for list of test equipment

#### 5.4.4 Maximum Conducted Output Power Data Table

| Frequency (MHz) | Mode        | Tx Paths | Index Power (dBm) | Correlated Antenna Gain (dBi) | Total Conducted Channel Power (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------|----------|-------------------|-------------------------------|-------------------------------------|-------------|-------------|
| 2402            | GFSK, 1Mbps | 1        | 5                 | 6                             | 4.45                                | 30          | 25.55       |
|                 |             |          |                   |                               |                                     |             |             |
| 2426            | GFSK, 1Mbps | 1        | 5                 | 6                             | 4.47                                | 30          | 25.53       |
|                 |             |          |                   |                               |                                     |             |             |
| 2480            | GFSK, 1Mbps | 1        | 5                 | 6                             | 3.50                                | 30          | 26.50       |

### 5.4.5 Maximum Conducted Output Power Screenshots

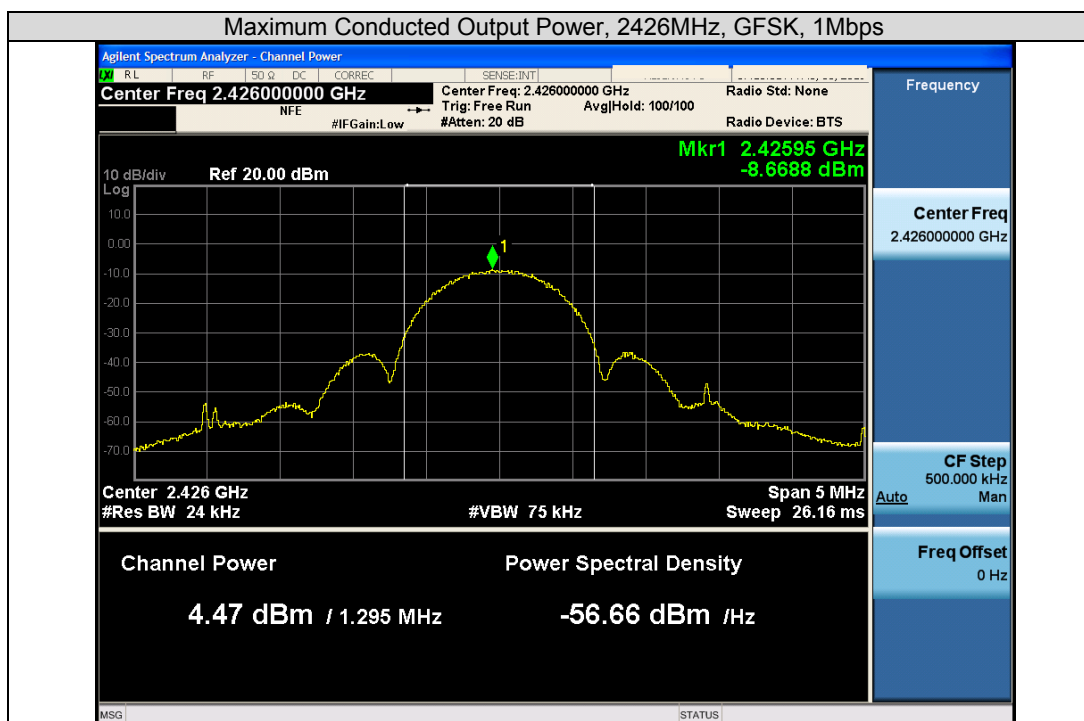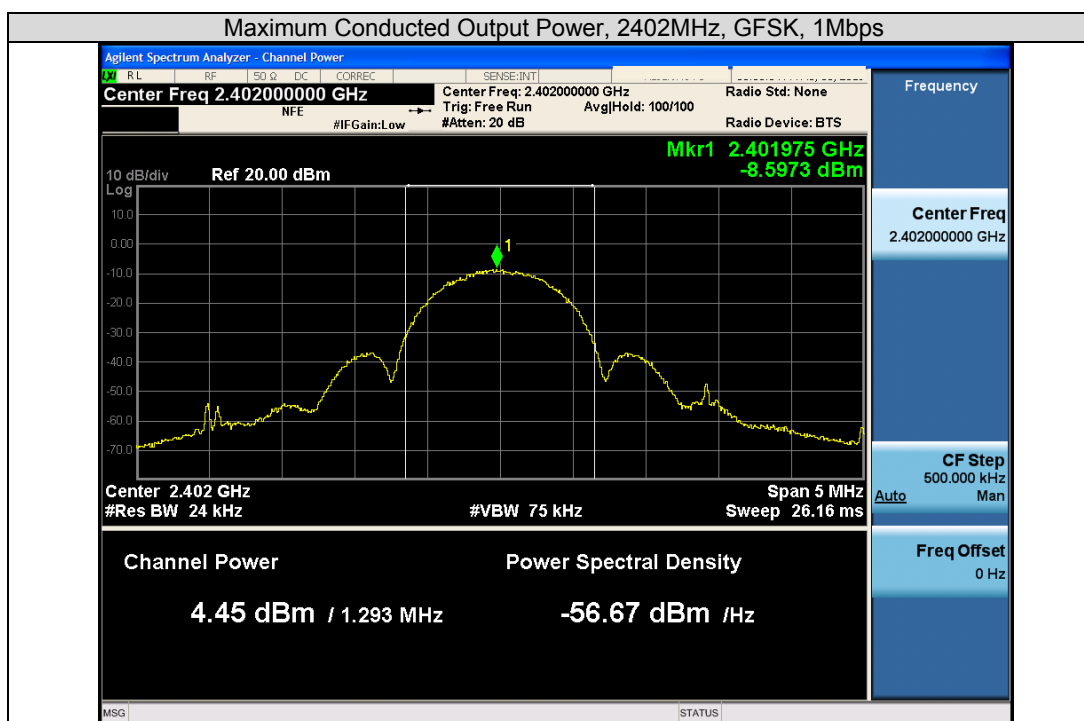

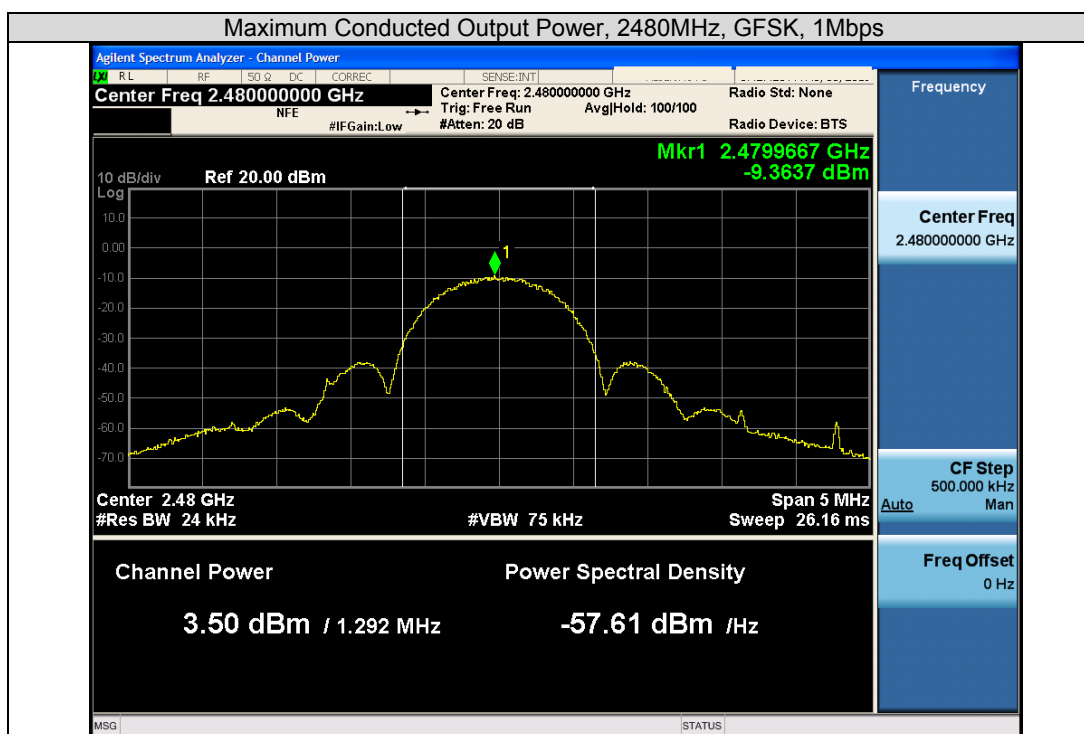

## 5.5 Power Spectral Density

### 5.5.1 Power Spectral Density Test Requirement

15.247 (e) / RSS-247 5.2 (b) / LP0002 (2018-01-10) (3.10.1.6) (2) (B):

#### 5.2 Digital transmission systems

DTSs include systems that employ digital modulation techniques resulting in spectral characteristics similar to direct sequence systems. The following applies to the bands 902-928 MHz and 2400-2483.5 MHz:

b) The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

## 5.5.2 Power Spectral Density Test Method

Ref. KDB 558074 D01 DTS Meas. Guidance v04  
ANSI C63.10: 2013

|                               |
|-------------------------------|
| <b>Power Spectral Density</b> |
|-------------------------------|

|                |
|----------------|
| Test Procedure |
|----------------|

- |                                                                                                                                                                                                                                                                                    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ol style="list-style-type: none"> <li>1. Set the radio in the continuous transmitting mode at full power</li> <li>2. Configure Spectrum analyzer as per test parameters below and Peak search marker</li> <li>3. Capture graphs and record pertinent measurement data.</li> </ol> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Ref. 558074 D01 DTS Meas. Guidance v04, section 10.2 Peak PSD  
ANSI C63.10: 2013, section 11.10.2 Peak PSD

|                               |
|-------------------------------|
| <b>Power Spectral Density</b> |
|-------------------------------|

|                 |
|-----------------|
| Test parameters |
|-----------------|

|                                     |
|-------------------------------------|
| <b>10.2 Method PKPSD (peak PSD)</b> |
|-------------------------------------|

|                                                                                                                                                                                                                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.</p> |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

- |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ol style="list-style-type: none"> <li>a) Set analyzer center frequency to DTS channel center frequency.</li> <li>b) Set the span to 1.5 times the <i>DTS bandwidth</i>.</li> <li>c) Set the RBW to: <math>3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}</math>.</li> <li>d) Set the VBW <math>\geq 3 \times \text{RBW}</math>.</li> <li>e) Detector = peak.</li> <li>f) Sweep time = auto couple.</li> <li>g) Trace mode = max hold.</li> <li>h) Allow trace to fully stabilize.</li> <li>i) Use the peak marker function to determine the maximum amplitude level within the RBW.</li> <li>j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.</li> </ol> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

The “Measure and add  $10 \log(N)$  dB technique”, where N is the number of outputs, is used for measuring in-band Power Spectral Density. With this technique, spectrum measurements are performed at each output of the device, and the quantity  $10 \log(4)$  (or 6dB) is added to the worst case spectrum value before comparing to the emission limit. (See ANSI C63.10 section 14.3.2.3)

### 5.5.3 Power Spectral Density Test Information

|                                  |                                        |
|----------------------------------|----------------------------------------|
| <b>Tested By:</b><br>Julian Land | <b>Date of testing:</b><br>May 8, 2019 |
| <b>Test Result:</b> Pass         |                                        |

#### Test Equipment

See Appendix A for list of test equipment



#### Samples, Systems, and Modes


| System Number | Description | Samples | System under test                   | Support equipment                   |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1             | EUT         | S01     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
|               | Support     | S02     | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

#### 5.5.4 Power Spectral Density Data Table

| Frequency (MHz) | Mode        | Tx Paths | Index Power (dBm) | Correlated Antenna Gain (dBi) | Total PSD - (dBm/3kHz) | Limit (dBm/3kHz) | Margin (dB) |
|-----------------|-------------|----------|-------------------|-------------------------------|------------------------|------------------|-------------|
| 2412            | GFSK, 1Mbps | 1        | 5                 | 6                             | -6.901                 | 8.0              | 14.901      |
|                 |             |          |                   |                               |                        |                  |             |
| 2426            | GFSK, 1Mbps | 1        | 5                 | 6                             | -6.784                 | 8.0              | 14.784      |
|                 |             |          |                   |                               |                        |                  |             |
| 2462            | GFSK, 1Mbps | 1        | 5                 | 6                             | -7.601                 | 8.0              | 15.601      |

### 5.5.5 Power Spectral Density Screenshots

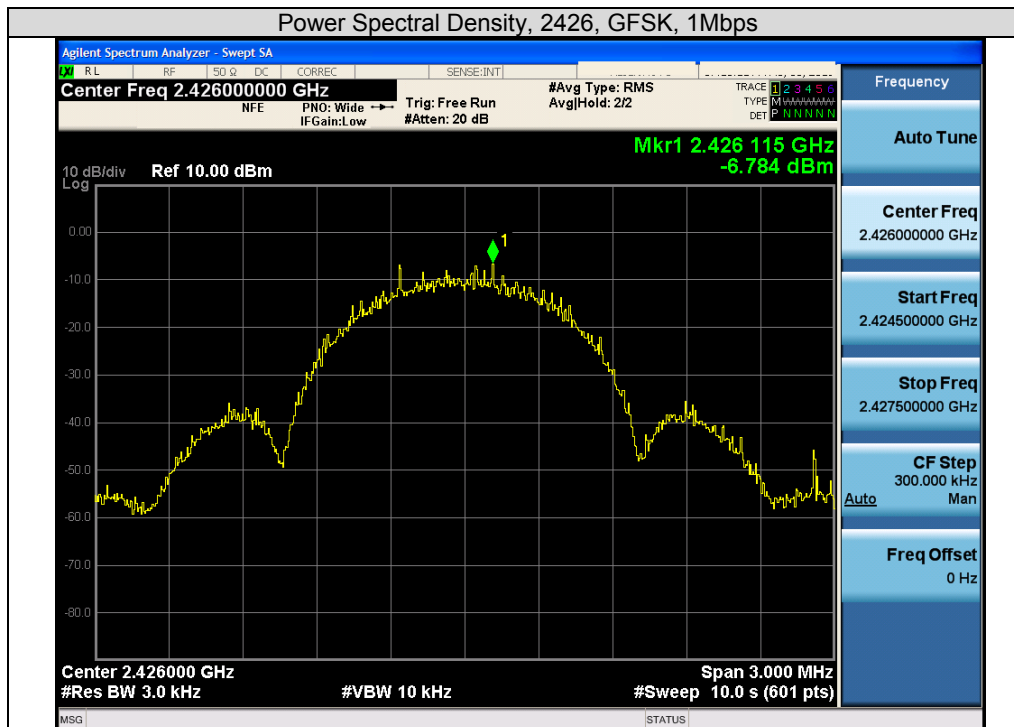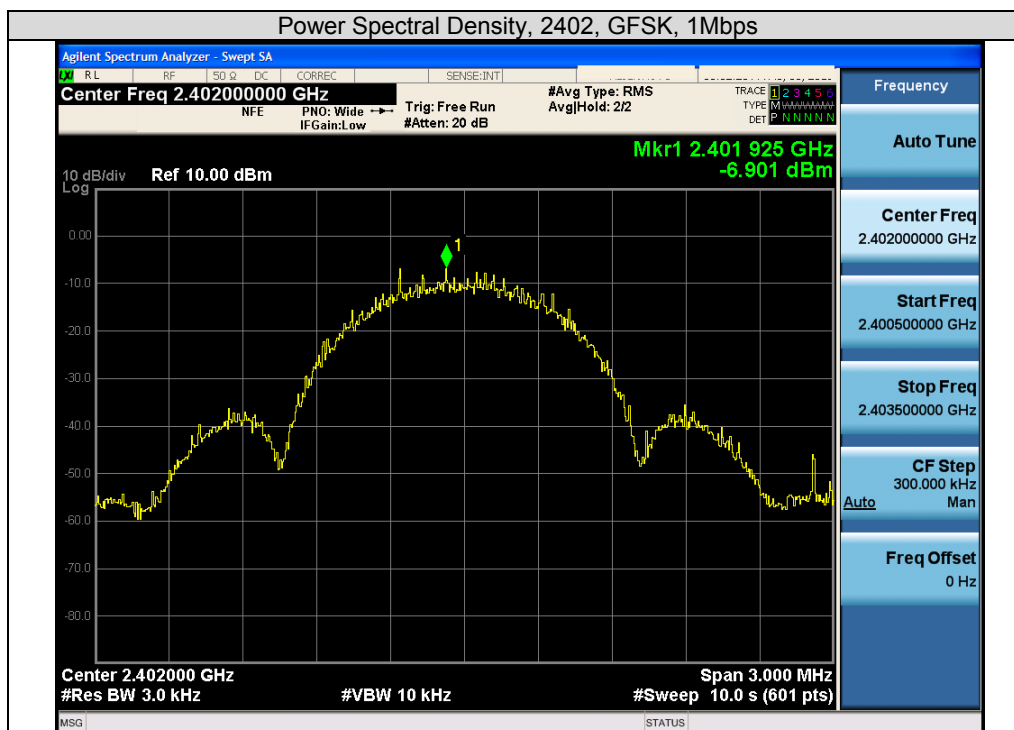

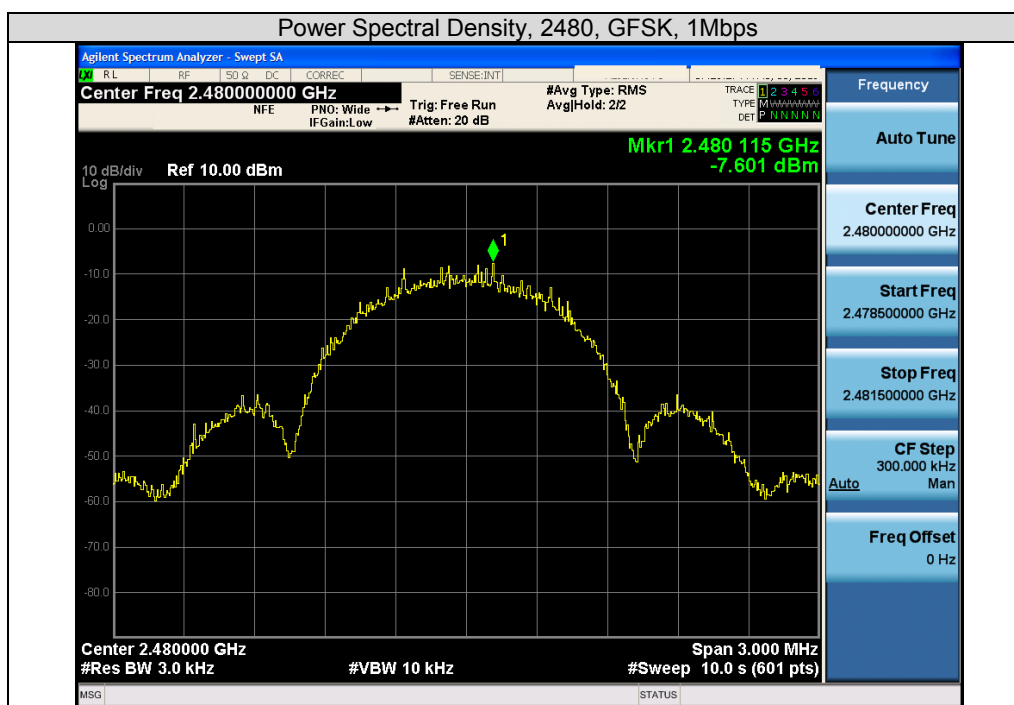

## 5.6 Conducted Spurious Emissions

### 5.6.1 Conducted Spurious Emissions Test Requirement

15.205 / RSS-Gen Issue 5 / LP0002 (2018-01-10) (3.10.1.5) (2.8)

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) and RSS-GEN section 8.10, must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)) and RSS-Gen Issue 5 section 8.9

RSS-Gen Issue 5 Section 8.9

Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

RSS-Gen Issue 5 Section 8.10

(b)

Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table 5 and table 6.

(c)

Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.

## 5.6.2 Conducted Spurious Emissions Test Method

Ref. KDB 558074 D01 DTS Meas. Guidance v04

ANSI C63.10: 2013

| <b>Conducted Spurious Emissions</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Procedure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <ol style="list-style-type: none"> <li>1. Connect the antenna port(s) to the spectrum analyzer input.</li> <li>2. Place the radio in continuous transmit mode</li> <li>3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).</li> <li>4. Use the marker function to determine the maximum spurs amplitude level.</li> <li>5. The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst-case output is recorded. (see ANSI C63.10 2013 section 14.3.2.2)</li> <li>6. Capture graphs and record pertinent measurement data.</li> </ol> |

Ref. 558074 D01 DTS Meas. Guidance v04 section 11.1b, 11.2-3, 12.2.4 & 12.2.5.3

ANSI C63.10: 2013 section 11.10.3 & 11.12.2.4 & 11.12.2.5.3

| <b>Conducted Spurious Emissions</b>                                                                                                                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test parameters                                                                                                                                                                 |
| Span = 30 MHz-18GHz / 18GHz –Tenth Harmonic<br>RBW = 1 MHz<br>VBW $\geq 3 \times$ RBW for Peak, 1kHz for Average<br>Sweep = Auto couple<br>Detector = Peak<br>Trace = Max Hold. |

KDB 558074 D01 DTS Meas. Guidance v04 section 12.2.2 © add the max antenna gain + ground reflection factor (4.7 dB for frequencies between 30 MHz and 1000 MHz, and 0 dB for frequencies > 1000 MHz).

### 5.6.3 Conducted Spurious Emissions Test Information

#### Samples, Systems, and Modes

| System Number | Description | Samples | System under test                   | Support equipment                   |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1             | EUT         | S01     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
|               | Support     | S02     | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

|                                  |                                        |
|----------------------------------|----------------------------------------|
| <b>Tested By:</b><br>Julian Land | <b>Date of testing:</b><br>May 8, 2019 |
| <b>Test Result:</b> Pass         |                                        |



#### Test Equipment


See Appendix A for list of test equipment

#### 5.6.4 Conducted Spurious Emissions Data Table - Peak

| Frequency (MHz) | Mode        | Tx Paths | Index Power (dBm) | Correlated Antenna Gain (dBi) | Conducted Spur TX (dBm/MHz) | Total Conducted Spur - EIRP (dBm/MHz) | Limit (dBm) | Margin (dB) |
|-----------------|-------------|----------|-------------------|-------------------------------|-----------------------------|---------------------------------------|-------------|-------------|
| 2412            | GFSK, 1Mbps | 1        | 5                 | 6                             | -66.8                       | -60.8                                 | -21.25      | 39.55       |
|                 |             |          |                   |                               |                             |                                       |             |             |
| 2426            | GFSK, 1Mbps | 1        | 5                 | 6                             | -67.4                       | -61.4                                 | -21.25      | 40.15       |
|                 |             |          |                   |                               |                             |                                       |             |             |
| 2480            | GFSK, 1Mbps | 1        | 5                 | 6                             | -66.7                       | -60.7                                 | -21.25      | 39.45       |

### 5.6.5 Conducted Spurious Peak Screenshots 1GHz-12GHz

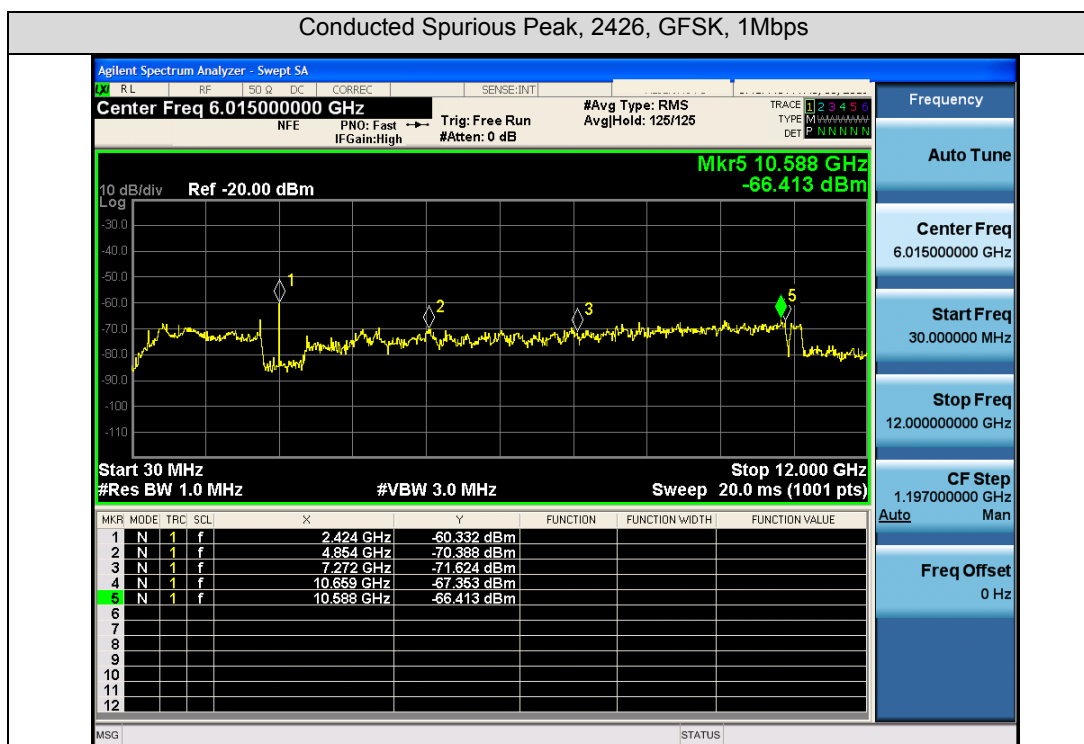
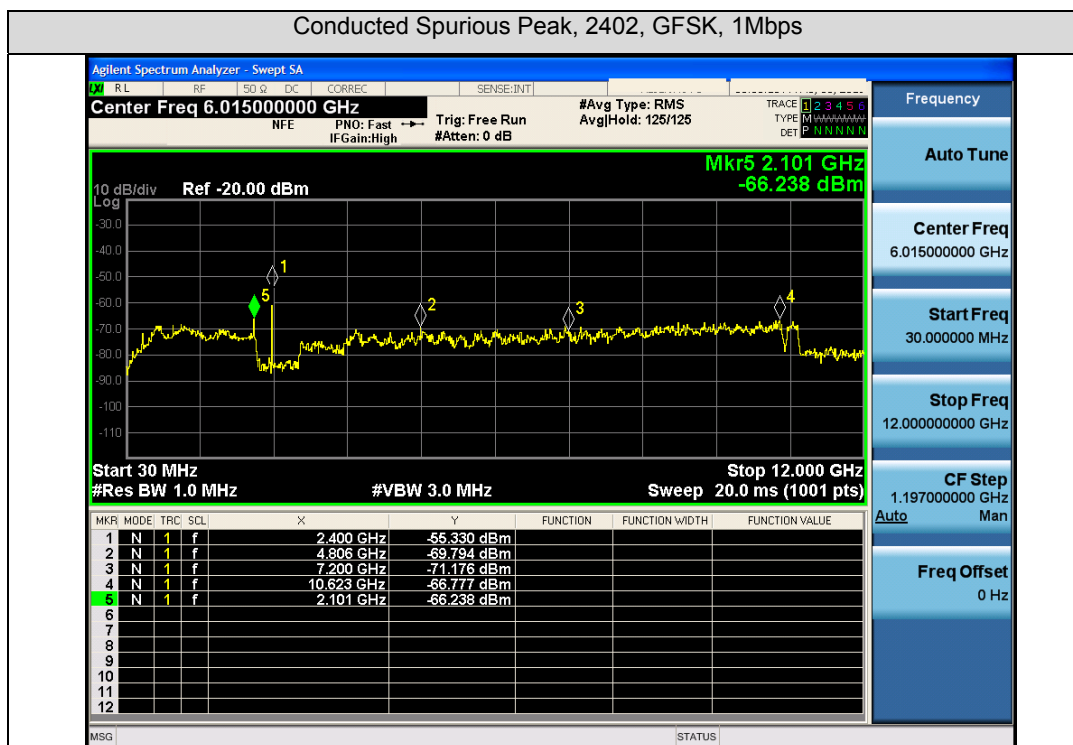


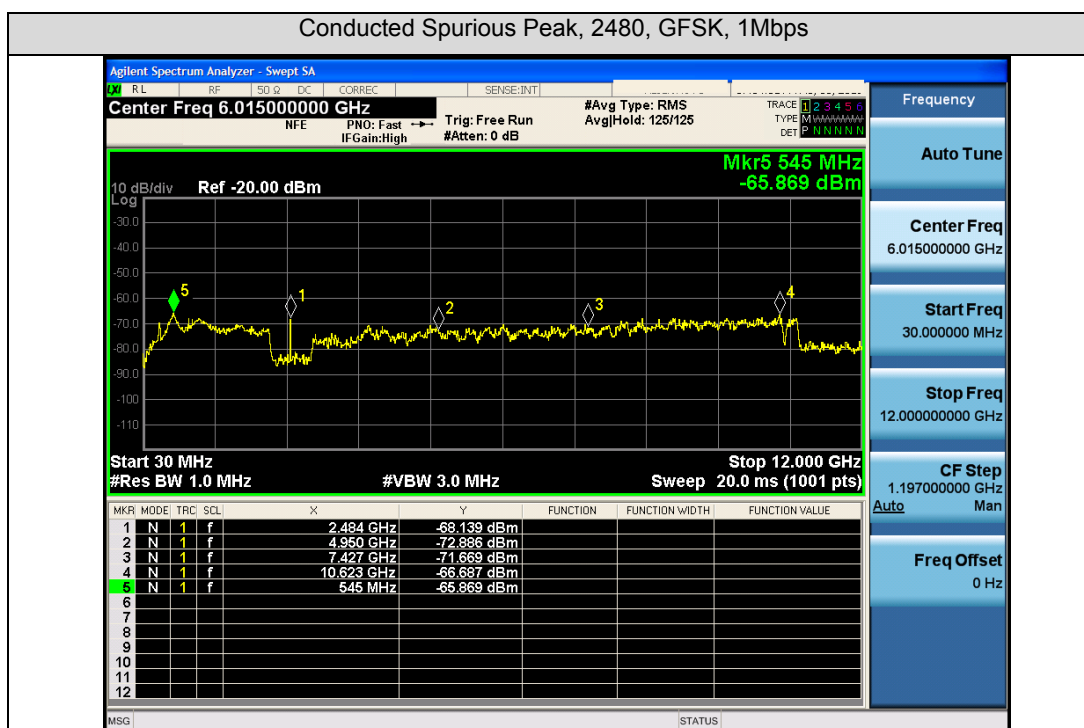


### 5.6.6 Conducted Spurious Emissions Data Table – Average

| Frequency (MHz) | Mode        | Tx Paths | Index Power (dBm) | Correlated Antenna Gain (dBi) | Conducted Spur TX (dBm/MHz) | Total Conducted Spur - EIRP (dBm/MHz) | Limit (dBm) | Margin (dB) |
|-----------------|-------------|----------|-------------------|-------------------------------|-----------------------------|---------------------------------------|-------------|-------------|
| 2412            | GFSK, 1Mbps | 1        | 5                 | 6                             | -79.2                       | -73.2                                 | -41.25      | 31.95       |
| 2426            | GFSK, 1Mbps | 1        | 5                 | 6                             | -78.9                       | -72.9                                 | -41.25      | 31.65       |
| 2480            | GFSK, 1Mbps | 1        | 5                 | 6                             | -77.1                       | -71.1                                 | -41.25      | 29.85       |


### 5.6.7 Conducted Spurious Peak Screenshots 1GHz – 12GHz

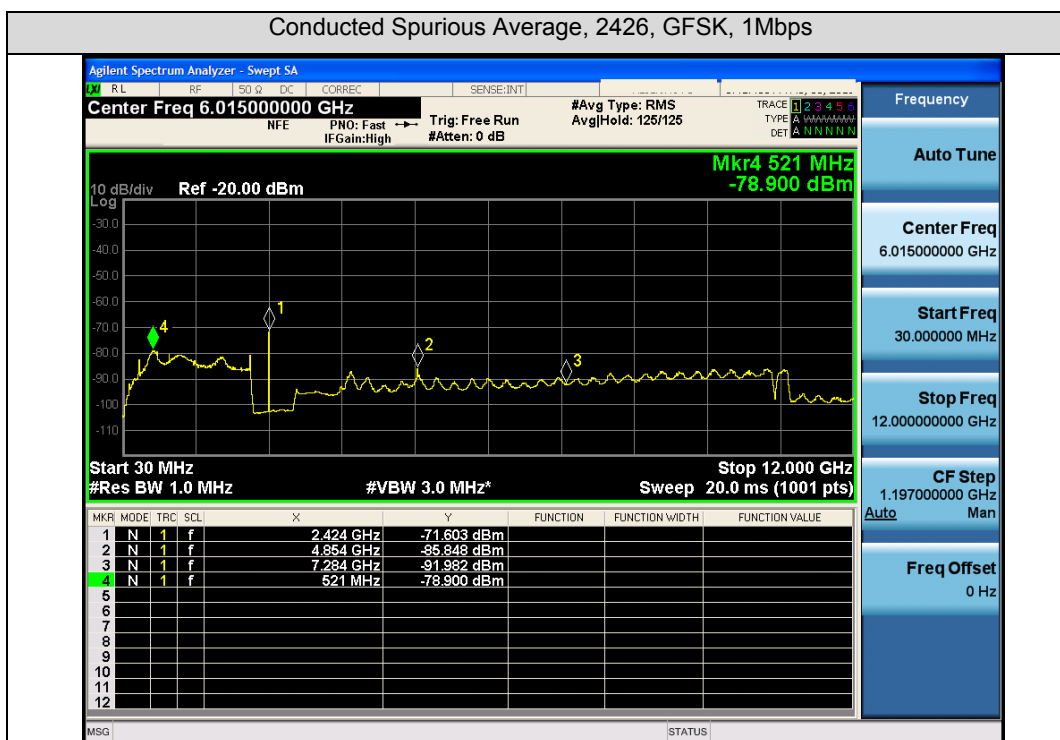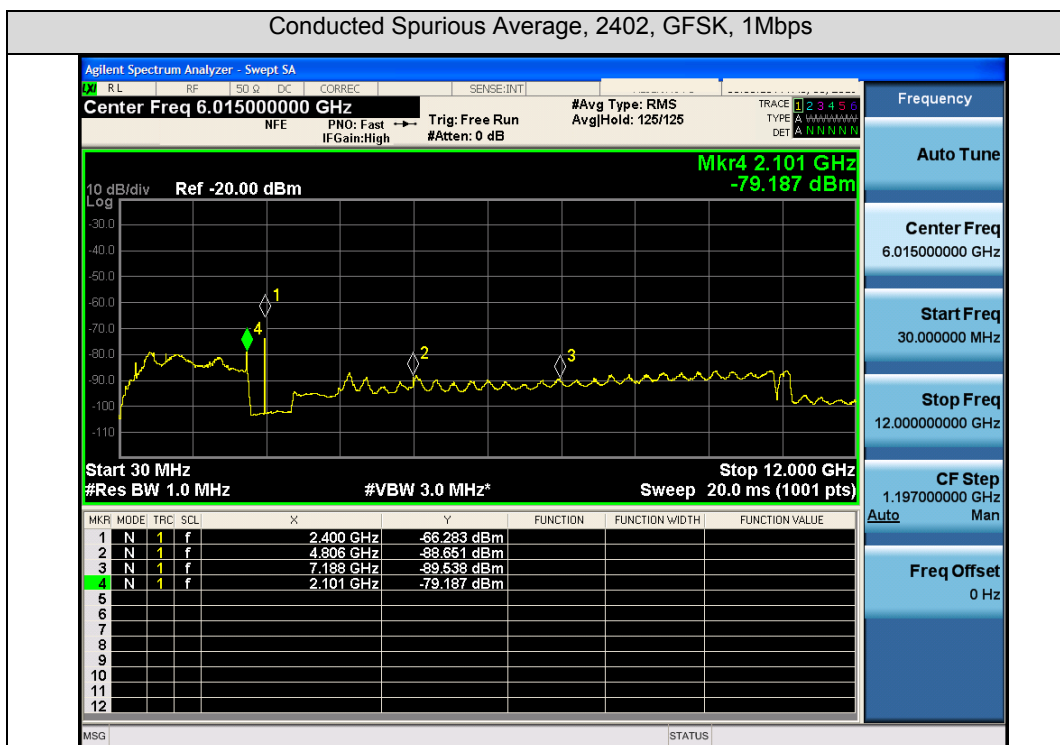

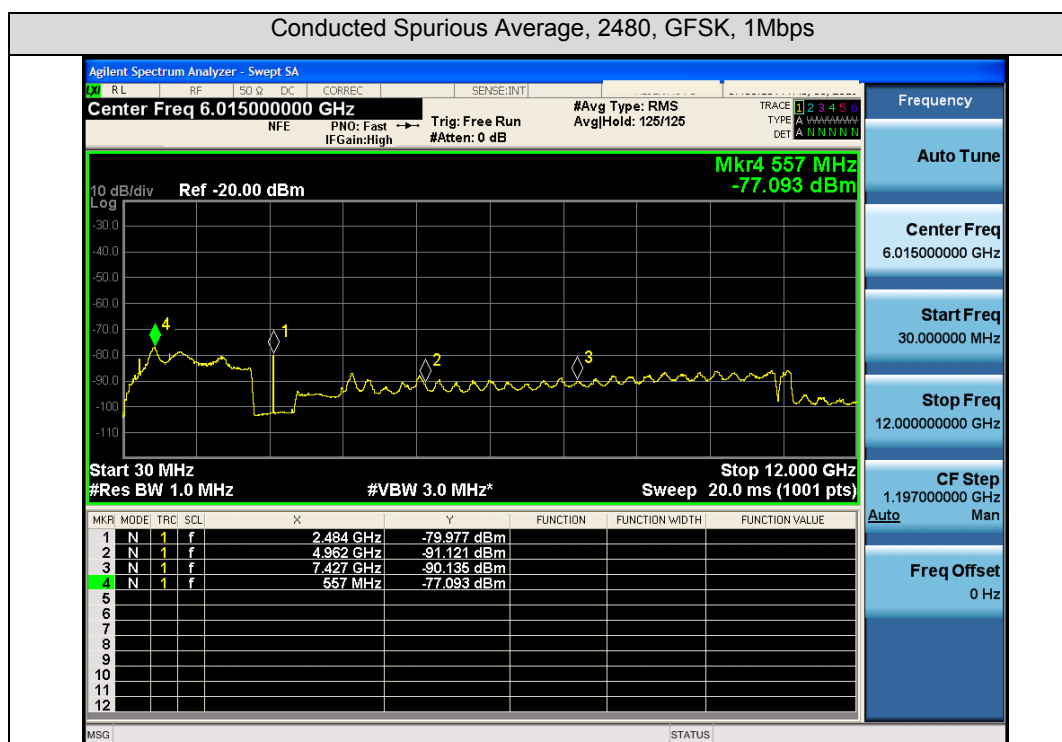

## 5.6.8 Conducted Spurious Upper Screenshots 12GHz-26GHz

Plots representative of all modes

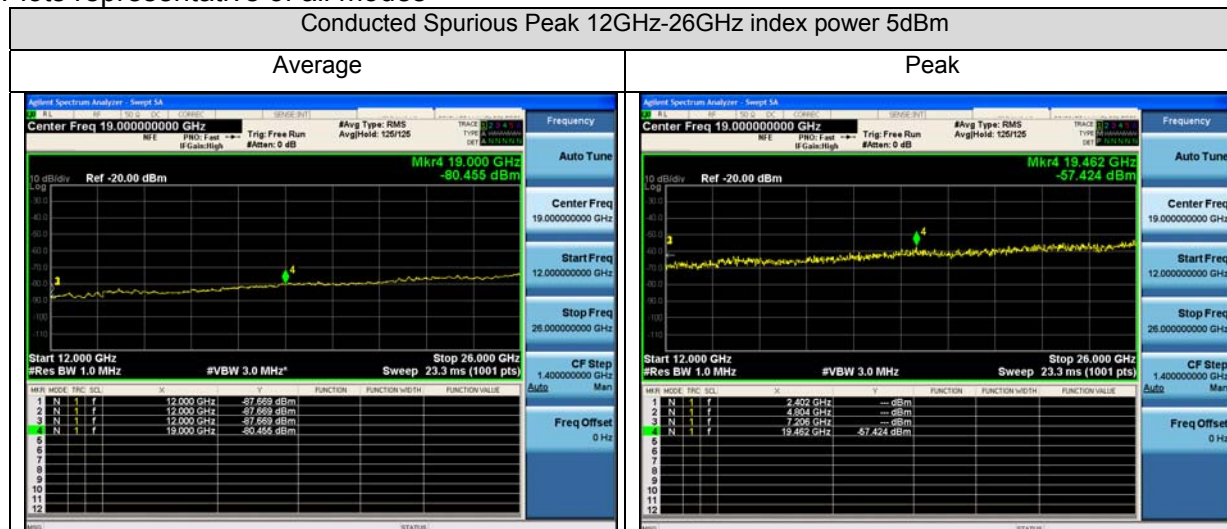

## 5.7 Conducted Band Edge

### 5.7.1 Conducted Band Edge Test Requirement

15.247 / LP0002 (2018-01-10) (3.10.1.5) (2.8):

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

RSS-247

#### 5.5 Unwanted emissions

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

15.205 / RSS-Gen Issue 5

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), and RSS-Gen Issue 5 Section 8.10 must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)) and RSS-Gen Issue 5 Section 8.9.

## 5.7.2 Conducted Band Edge Test Method

Ref. KDB 558074 D01 DTS Meas. Guidance v04  
ANSI C63.10: 2013

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                         |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Conducted Band Edge</b><br>Test Procedure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                         |
| 1. Connect the antenna port(s) to the spectrum analyzer input.<br>2. Place the radio in continuous transmit mode. Use the procedures in KDB 558074 D01 DTS Meas. Guidance v04 to substitute conducted measurements in place of radiated measurements.<br>3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).<br>4. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.<br>Also measure any emissions in the restricted bands.<br>5. The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst-case output is recorded.<br>6. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.<br>Also measure any emissions in the restricted bands<br>7. Capture graphs and record pertinent measurement data. |                                                                                                                                                                         |
| <b>Conducted Band Edge</b><br>Test parameters non-restricted Band<br>KDB 558074 D01 v04 section 11.1b, 11.2-3, also see<br>ANSI C63.10: 2013 section 11.10.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <b>Conducted Band Edge</b><br>Test parameters restricted Band<br>KDB 558074 D01 v04 section 12.2.4 & 12.2.5.3 also see ANSI<br>C63.10: 2013 section 11.12.4 & 11.12.5.3 |
| RBW = 100 kHz<br>VBW $\geq 3 \times$ RBW<br>Sweep = Auto couple<br>Detector = Peak<br>Trace = Max Hold.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | RBW = 1 MHz<br>VBW $\geq 3 \times$ RBW for Peak, 100Hz for Average<br>Sweep = Auto couple<br>Detector = Peak<br>Trace = Max Hold.                                       |

## 5.7.3 Conducted Band Edge Test Information

## Samples, Systems, and Modes

| System Number | Description | Samples | System under test                   | Support equipment                   |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1             | EUT         | S01     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
|               | Support     | S02     | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

|                                  |                                        |
|----------------------------------|----------------------------------------|
| <b>Tested By:</b><br>Julian Land | <b>Date of testing:</b><br>May 8, 2019 |
| <b>Test Result:</b> Pass         |                                        |



**Test Equipment**

See Appendix A for list of test equipment

## 5.7.4 Conducted Band Edge (Restricted Band) Data Table Average

| Frequency (MHz) | Mode        | Tx Paths | Index Power (dBm) | Correlated Antenna Gain (dBi) | Conducted Spur TX (dBm/MHz) | Total Conducted Spur EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------|----------|-------------------|-------------------------------|-----------------------------|---------------------------------|-------------|-------------|
| 2402            | GFSK, 1Mbps | 1        | 5                 | 6                             | -63.6                       | -57.6                           | -41.25      | 16.35       |
|                 |             |          |                   |                               |                             |                                 |             |             |
| 2480            | GFSK, 1Mbps | 1        | 5                 | 6                             | -52.3                       | -46.3                           | -41.25      | 5.05        |



### 5.7.4 Conducted Band Edge (Restricted Band) Screenshots Average

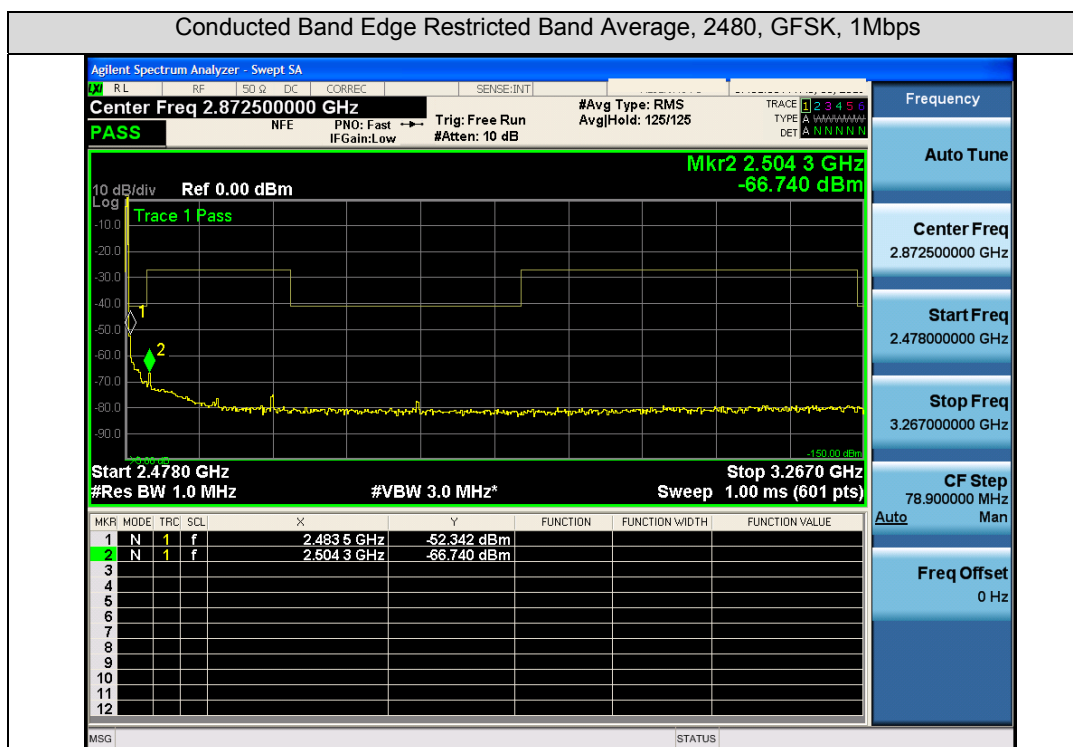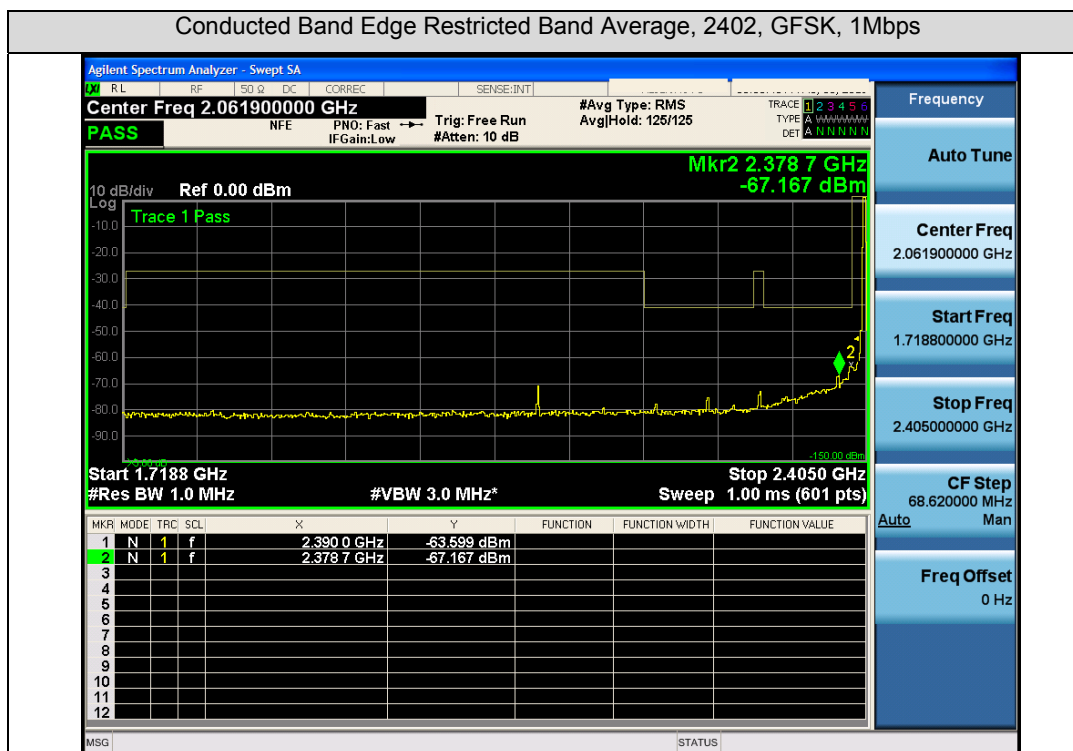

### 5.7.5 Conducted Band Edge (Restricted Band) Data Table Peak

| Frequency (MHz) | Mode        | Tx Paths | Index Power (dBm) | Correlated Antenna Gain (dBi) | Conducted Spur TX path 1 (dBm) | Total Conducted Spur EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------|----------|-------------------|-------------------------------|--------------------------------|---------------------------------|-------------|-------------|
| 2402            | GFSK, 1Mbps | 1        | 5                 | 6                             | -54.2                          | -48.2                           | -21.25      | 26.95       |
|                 |             |          |                   |                               |                                |                                 |             |             |
| 2480            | GFSK, 1Mbps | 1        | 5                 | 6                             | -47.8                          | -41.8                           | -21.25      | 20.55       |

### 5.7.6 Conducted Band Edge Screenshots Peak

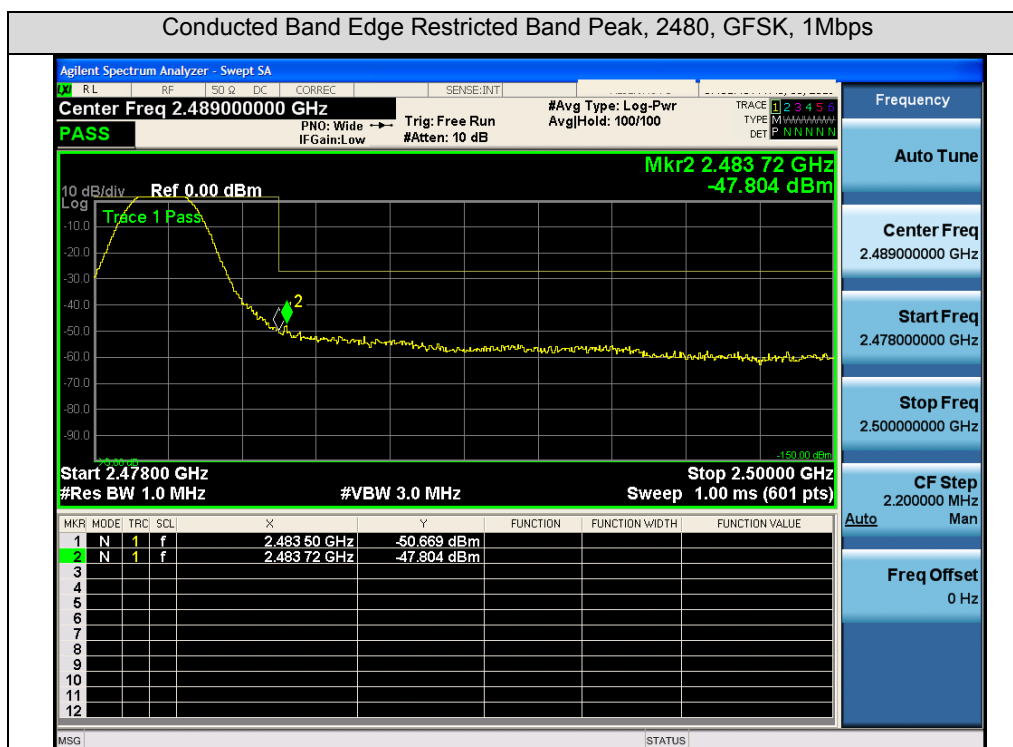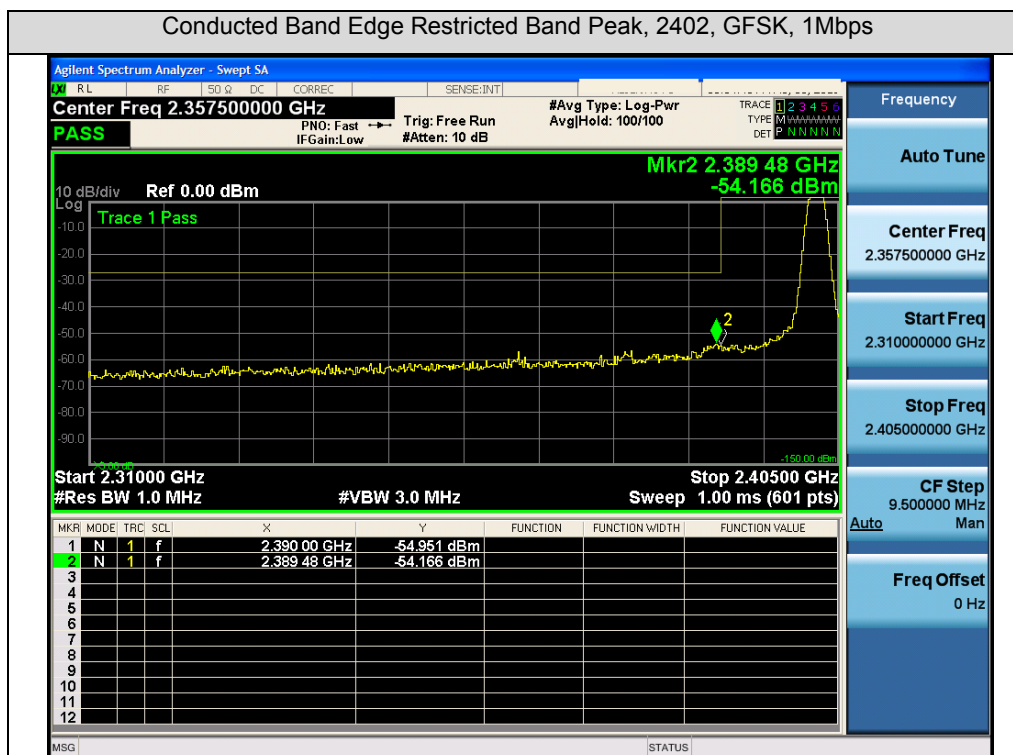

## 5.8 Conducted Band Edge (Non-Restricted Band)

### 5.8.1 Emissions in non-restricted frequency bands - Test Requirement

15.247 / LP0002 (2018-01-10) (3.10.1.5) (2.8):

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

RSS-Gen Issue 5 Section 8.9

Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

RSS-Gen Issue 5 Section 8.10

(b)

Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table 5 and table 6.

(c)

Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.

## 5.8.2 Emissions in non-restricted frequency bands - Test Method

Ref. KDB 558074 D01 DTS Meas. Guidance v04

ANSI C63.10: 2013

| <b>Emissions in non-restricted frequency bands - Conducted</b>                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Procedure                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <ol style="list-style-type: none"> <li>1. Connect the antenna port(s) to the spectrum analyzer input.</li> <li>2. Place the radio in continuous transmit mode</li> <li>3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).</li> <li>4. Use the marker function to determine the maximum spurs amplitude level.</li> <li>5. Capture graphs and record pertinent measurement data.</li> </ol> |

Ref. 558074 D01 DTS Meas. Guidance v04 section 11.1b, 11.2, 11.3

ANSI C63.10: 2013 section 11.11.1b, 11.11.12, 11.11.13

| <b>Emissions in non-restricted frequency bands - Conducted</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>11.2 Reference Level measurement</b><br>Establish a reference level by using the following procedure: <ol style="list-style-type: none"> <li>a) Set instrument center frequency to DTS channel center frequency.</li> <li>b) Set the span to <math>\geq 1.5 \times DTS \text{ bandwidth}</math>.</li> <li>c) Set the RBW = 100 kHz.</li> <li>d) Set the VBW <math>\geq 3 \times RBW</math>.</li> <li>e) Detector = peak.</li> <li>f) Sweep time = auto couple.</li> <li>g) Trace mode = max hold.</li> <li>h) Allow trace to fully stabilize.</li> <li>i) Use the peak marker function to determine the maximum PSD level.</li> </ol> | <b>11.3 Emission Level Measurement</b> <ol style="list-style-type: none"> <li>a) Set the center frequency and span to encompass frequency range to be measured.</li> <li>b) Set the RBW = 100 kHz.</li> <li>c) Set the VBW <math>\geq 3 \times RBW</math>.</li> <li>d) Detector = peak.</li> <li>e) Sweep time = auto couple.</li> <li>f) Trace mode = max hold.</li> <li>g) Allow trace to fully stabilize.</li> <li>h) Use the peak marker function to determine the maximum amplitude level.</li> </ol> |

### 5.8.3 Emissions in non-restricted frequency bands – Test Information

#### Samples, Systems, and Modes

| System Number | Description | Samples | System under test                   | Support equipment                   |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1             | EUT         | S01     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
|               | Support     | S02     | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

|                                  |                                        |
|----------------------------------|----------------------------------------|
| <b>Tested By:</b><br>Julian Land | <b>Date of testing:</b><br>May 8, 2019 |
| <b>Test Result:</b> Pass         |                                        |



#### Test Equipment

See Appendix A for list of test equipment

#### 5.8.4 Emissions in non-restricted frequency bands – Data Tables

| Frequency (MHz) | Mode        | Tx Paths | Index Power (dBm) | Conducted Spur TX path 1 (dBm/100kHz) | Conducted Spur Delta (dBc) | Limit (dBc) | Margin (dB) |
|-----------------|-------------|----------|-------------------|---------------------------------------|----------------------------|-------------|-------------|
| 2402            | GFSK, 1Mbps | 1        | 5                 | -44.89                                | 48.75                      | > 30        | 18.75       |
|                 |             |          |                   |                                       |                            |             |             |
| 2480            | GFSK, 1Mbps | 1        | 5                 | -57.71                                | 60.9                       | > 30        | 30.9        |

### 5.8.5 Emissions in non-restricted frequency bands – Screenshots

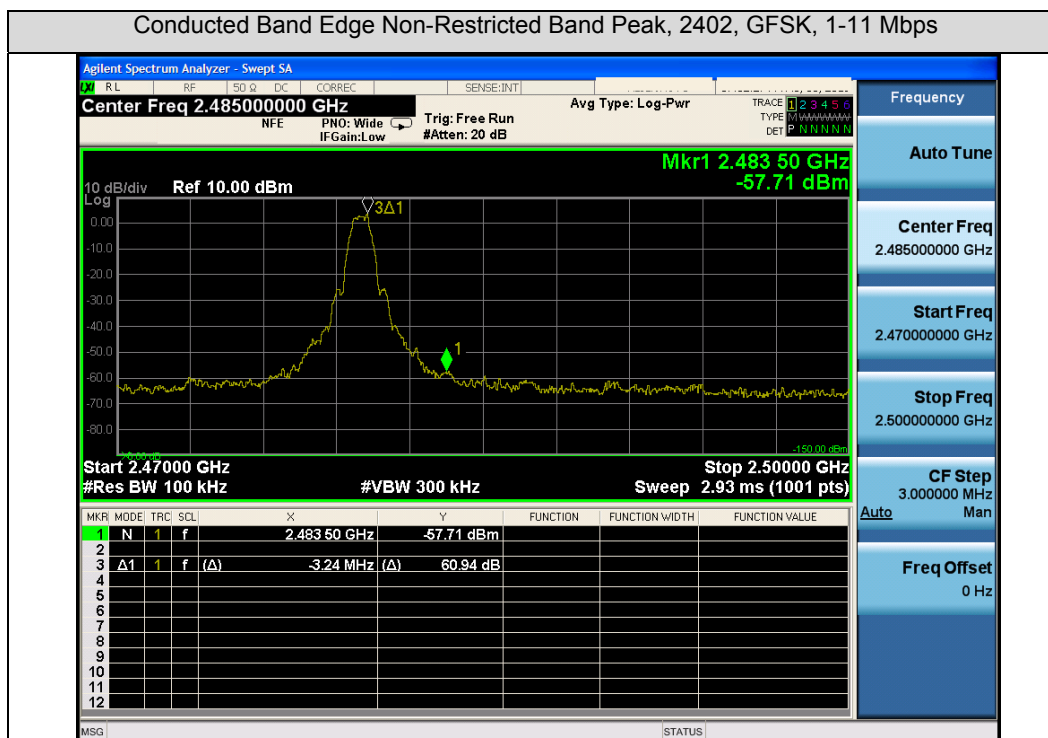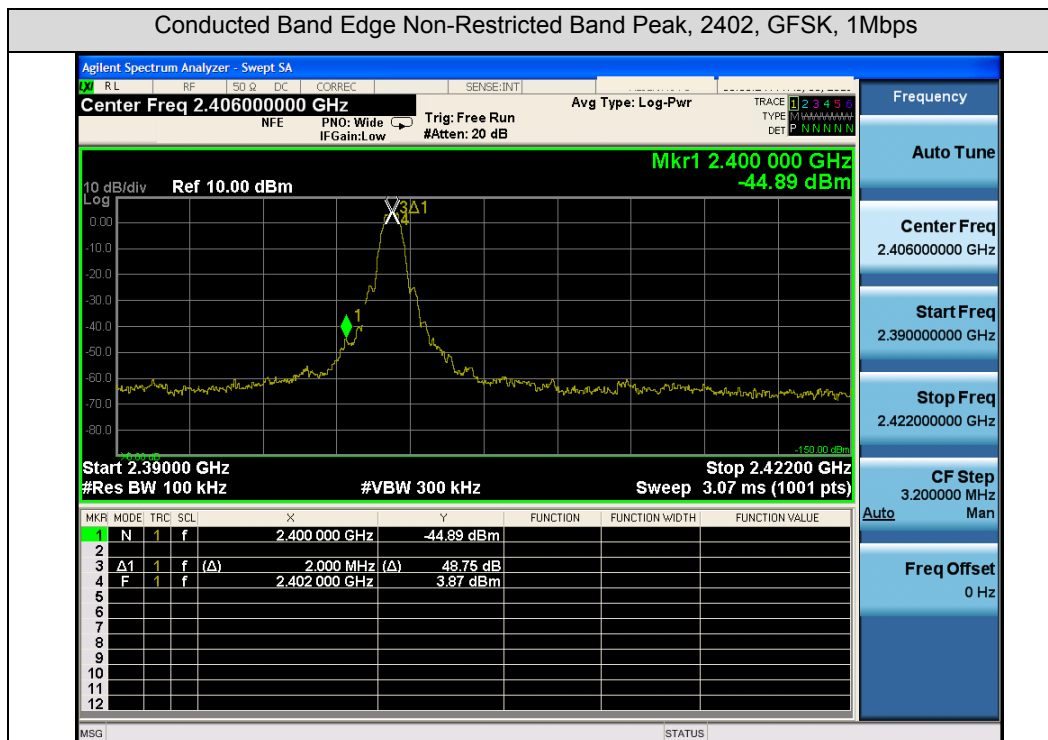

## Section 6: System Test Results

**Testing Laboratory:** Cisco Systems, Inc., 125 West Tasman Drive, San Jose, CA 95134, USA

### 6.1 Radiated Spurious Emissions

Note: Results for Transmitter Radiated Spurious Emissions are in EDCS# 17635567.

## **6.2 AC Conducted Emissions**

Note: Only DC power is supplied to the unit.

## Appendix A: List of Test Equipment Used to perform the test

| Equip#                                                   | Manufacturer/ Model                | Description                        | Last Cal          | Next Due          |
|----------------------------------------------------------|------------------------------------|------------------------------------|-------------------|-------------------|
| <b>RF Conducted test equipment 3/12/2019 – 4/29/2019</b> |                                    |                                    |                   |                   |
| 53614                                                    | Keysight (Agilent/HP) / N9030A-550 | PXA Signal Analyzer, 3Hz to 50GHz  | 17 Jul. 2018      | 17 Jul. 2019      |
| 57475                                                    | Cisco                              | Automated Radio Testing Station    | Verify Before Use | Verify Before Use |
| 54237                                                    | Keysight (Agilent/HP) / 8710-1765  | Preset Torque Wrench, 8in/lbs      | 14 Feb. 2019      | 14 Feb. 2020      |
| 06325                                                    | Lufft / 5063-33W                   | Dial Hygrometer                    | 27 Aug. 2018      | 27 Aug. 2019      |
| 49516                                                    | Keysight (Agilent/HP)              | PXA Signal Analyzer, 3Hz to 50GHz  | 29 Nov. 2018      | 29 Nov. 2019      |
| 57238                                                    | NATIONAL INSTRUMENTS / PXI-8115    | Embedded Controller                | Cal. not required | Cal. not required |
| 57247                                                    | NATIONAL INSTRUMENTS / PXI-2796    | 40 GHz Dual 6x1 Multiplexer (SP6T) | Verify Before Use | Verify Before Use |
| 57248                                                    | NATIONAL INSTRUMENTS / PXI-2799    | Switch 1x1                         | Verify Before Use | Verify Before Use |
| 56092                                                    | NATIONAL INSTRUMENTS / PXI-2796    | 40 GHz Dual 6x1 Multiplexer (SP6T) | Verify Before Use | Verify Before Use |

## Appendix B: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

| Abbreviation | Description                                                          | Abbreviation | Description                         |
|--------------|----------------------------------------------------------------------|--------------|-------------------------------------|
| EMC          | Electro Magnetic Compatibility                                       | °F           | Degrees Fahrenheit                  |
| EMI          | Electro Magnetic Interference                                        | °C           | Degrees Celsius                     |
| EUT          | Equipment Under Test                                                 | Temp         | Temperature                         |
| ITE          | Information Technology Equipment                                     | S/N          | Serial Number                       |
| TAP          | Test Assessment Schedule                                             | Qty          | Quantity                            |
| ESD          | Electro Static Discharge                                             | emf          | Electromotive force                 |
| EFT          | Electric Fast Transient                                              | RMS          | Root mean square                    |
| EDCS         | Engineering Document Control System                                  | Qp           | Quasi Peak                          |
| Config       | Configuration                                                        | Av           | Average                             |
| CIS#         | Cisco Number (unique identification number for Cisco test equipment) | Pk           | Peak                                |
| Cal          | Calibration                                                          | kHz          | Kilohertz ( $1 \times 10^3$ )       |
| EN           | European Norm                                                        | MHz          | MegaHertz ( $1 \times 10^6$ )       |
| IEC          | International Electro technical Commission                           | GHz          | Gigahertz ( $1 \times 10^9$ )       |
| CISPR        | International Special Committee on Radio Interference                | H            | Horizontal                          |
| CDN          | Coupling/Decoupling Network                                          | V            | Vertical                            |
| LISN         | Line Impedance Stabilization Network                                 | dB           | decibel                             |
| PE           | Protective Earth                                                     | V            | Volt                                |
| GND          | Ground                                                               | kV           | Kilovolt ( $1 \times 10^3$ )        |
| L1           | Line 1                                                               | $\mu$ V      | Microvolt ( $1 \times 10^{-6}$ )    |
| L2           | Line2                                                                | A            | Amp                                 |
| L3           | Line 3                                                               | $\mu$ A      | Micro Amp ( $1 \times 10^{-6}$ )    |
| DC           | Direct Current                                                       | mS           | Milli Second ( $1 \times 10^{-3}$ ) |
| RAW          | Uncorrected measurement value, as indicated by the measuring device  | $\mu$ S      | Micro Second ( $1 \times 10^{-6}$ ) |
| RF           | Radio Frequency                                                      | $\mu$ S      | Micro Second ( $1 \times 10^{-6}$ ) |
| SLCE         | Signal Line Conducted Emissions                                      | m            | Meter                               |
| Meas dist    | Measurement distance                                                 | Spec dist    | Specification distance              |
| N/A or NA    | Not Applicable                                                       | SL           | Signal Line (or Telecom Line)       |
| P            | Power Line                                                           | L            | Live Line                           |
| N            | Neutral Line                                                         | R            | Return                              |
| S            | Supply                                                               | AC           | Alternating Current                 |

## Appendix C: Software Used to Perform Testing

Automated Testing Software: RF\_Automation.vi version 49

Automated Testing Software: RF\_Automation.vi version 51

## Appendix D: Test Procedures

Measurements were made in accordance with

- KDB 558074 - D01 DTS Meas. Guidance v04
- KDB 662911 - MIMO
- ANSI C63.4 2014 Unintentional Radiators
- ANSI C63.10 2013 Intentional Radiators

Test procedures are summarized below

|                                |                |
|--------------------------------|----------------|
| FCC 2.4GHz Test Procedures     | EDCS # 1445042 |
| FCC 2.4GHz RSE Test Procedures | EDCS # 1480386 |

## **Appendix E: Scope of Accreditation (A2LA certificate number 1178-01)**

The scope of accreditation of Cisco Systems, Inc. can be found on the A2LA web page at:

<http://www.a2la.org/scopepdf/1178-01.pdf>

## Appendix F: Test Assessment Plan

Test Plan EDCS# 15438021  
Power Tables EDCS# 16904328

## Appendix G: Test Setup Photos

Please refer to the attachment