



ETS Dr.GenZ Taiwan PS Co., LTD

FCC Registration No.: 930600

Industry Canada filed test laboratory Reg. No. IC 5679

Accredited Testing Laboratory



A2LA Cert.No.: 2300.01

PTCRB Accredited Type Certification Test House

FCC TEST - REPORT

FCC RULES PART 15 / SUBPART C § 15.249

FCC ID : LE2SAV-2450SA

Test report no.: W6M20604-6788-P-15

TABLE OF CONTENTS

1	GENERAL INFORMATION	2
1.1	NOTES	2
1.2	TESTING LABORATORY	3
1.2.1	Location	3
1.2.2	Details of accreditation status	3
1.3	DETAILS OF APPROVAL HOLDER	3
1.4	APPLICATION DETAILS	4
1.5	GENERAL INFORMATION OF TEST ITEM	4
1.6	TEST STANDARDS	5
2	TECHNICAL TEST	6
2.1	SUMMARY OF TEST RESULTS	6
2.2	TEST ENVIRONMENT	6
2.3	TEST EQUIPMENT LIST	7
3	TEST RESULTS (ENCLOSURE).....	11
3.1	PEAK OUTPUT POWER (TRANSMITTER)	12
3.2	EQUIVALENT ISOTROPIC RADIATED POWER	13
3.2.1	Transmitter	13
3.3	RF EXPOSURE COMPLIANCE REQUIREMENTS	13
3.4	OUT OF BAND RADIATED EMISSIONS	13
3.5	SPURIOUS EMISSION (TX)	14
3.6	RADIATED EMISSIONS FROM RECEIVER SECTION	17
3.7	RADIATED EMISSION ON THE BANDEDGE	18
3.8	POWER LINE CONDUCTED EMISSION	19
	APPENDIX	21
	APPENDIX A	22
	APPENDIX B	23
	APPENDIX C	24
	APPENDIX D	25
	APPENDIX E	26

Registration number: W6M20604-6788-P-15
FCC ID: LE2SAV-2450SA

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has Passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the ETS DR. GENZ TAIWAN PS CO., LTD.

Tester:

Apr.07.2006

Jay Chaing



Date

ETS-Lab.

Name

Signature

Technical responsibility for area of testing:

Apr.07.2006

Steven Chuang



Date

ETS

Name

Signature

Registration number: W6M20604-6788-P-15
FCC ID: LE2SAV-2450SA

1.2 Testing laboratory

1.2.1 Location

OATS
No.5-1, Shuang Sing Village,
LiShuei Rd., Wanli Township,
Taipei County 207, Taiwan (R.O.C.)

Company
ETS DR. GENZ TAIWAN PS CO., LTD.
6F, NO. 58, LANE 188, RUEY-KUANG RD.
NEIHU, TAIPEI 114, TAIWAN R.O.C.
Tel : 886-2-66068877
Fax : 886-2-66068879

1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA-registration number: 2300.01

FCC filed test laboratory Reg. No. 930600

Industry Canada filed test laboratory Reg. No. IC 5679

PTCRB Accredited Type Certification Test House

1.3 Details of approval holder

Name:	JSW PACIFIC CORPORATION
Street:	3F-3, No. 700, Chung-Zheng Rd.
Town:	Chung Ho City, Taipei Hsien
Country:	Taiwan R.O.C.
Telephone:	+886-2-8227-8582
Fax:	+886-2-8227-8583

Contact	Mr. Lin Tsai Chen
Telephone:	+886-2-8227-8582

Registration number: W6M20604-6788-P-15
FCC ID: LE2SAV-2450SA

1.4 Application details

Date of receipt of application: Apr.07.2006
Date of receipt of test item: Apr.07.2006
Date of test: Apr.07.2006 to Apr.07.2006

1.5 General information of Test item

Type of test item : Wireless Dual-Mode Color Camera Kit
Model Number : SAV-2450S(A)
Serial number : without
Photos : see Annex

Technical data

Frequency band : 2.4 GHz – 2.4835 GHz
Operation Frequency : 2.412 , 2.450 , 2.472 GHz
Frequency 1 : 2.413 GHz
Frequency 2 : 2.450 GHz
Frequency 3 : 2.468 GHz
Number of Channels : 4
Operation modes : Simplex
Modulation Type : F8F
Antenna transmitter : integral antenna
Power supply Input : 120 VAC (AC/DC Adapter)
Output : 7.5 VDC



Registration number: W6M20604-6788-P-15
FCC ID: LE2SAV-2450SA

Manufacturer:
(if applicable)

Name : -/-
Street : -/-
Town : -/-
Country : -/-

Additional information : --

1.6 Test standards

Technical standard : FCC RULES PART 15 SUBPART B / SUBPART C § 15.249

Registration number: W6M20604-6788-P-15
FCC ID: LE2SAV-2450SA

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.



or

The deviations as specified in 2.5 were ascertained in the course of the tests performed.



2.2 Test environment

Temperature : 23 °C

Relative humidity content : 20 ... 75 %

Air pressure : 86 ... 103 kPa

Details of power supply Input : 120 VAC (AC/DC Adapter)

Output : 7.5 VDC

Extreme conditions parameters : Not required

Registration number: W6M20604-6788-P-15

FCC ID: LE2SAV-2450SA

2.3 Test Equipment List

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2005/10/27	2006/10/26
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW		
ETSTW-CE 004	ZWEILEITER-V- NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2005/10/25	2006/10/24
ETSTW-CE 005	Line-Impedance Stabilisation Network	NNBM 8126D	137	Schwarzbeck	2005/10/21	2006/10/20
ETSTW-CE 006	IMPULS-BEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2004/11/11	2006/11/10
ETSTW-CE 008	ABSORBING CLAMP	MDS 21	3469	ABSORPTIONS- MESSWANDLER- ZANGE	2005/10/24	2007/10/23
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40- 1P-U	MAA0305-009	GIANT FORCE	2005/8/18	2006/8/17
ETSTW-CS 001	SIGNAL GENERATOR	SMX	849254/003	R&S	2005/10/14	2006/10/13
ETSTW-CS 002	COUPLING AND DECOUPLING NETWORK	CDN S751	19263	SCHAFFNER	2005/10/14	2006/10/13
ETSTW-CS 003	COUPLING AND DECOUPLING NETWORK	CDN T400	19820	SCHAFFNER	2005/10/14	2006/10/13
ETSTW-CS 004	COUPLING AND DECOUPLING NETWORK	CDN M016	20053	SCHAFFNER	2005/10/27	2006/10/26
ETSTW-CS 005	RF Power Amplifier	100A250A	306547	AR	2005/10/14	2006/10/13
ETSTW-CS 004	6 dB Attenuator	HFP-5100-3/06 N M/F	2010876106			
ETSTW-RE 002	Function Generator	33220A	MY43004982	Agilent	2005/10/14	2007/10/13
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2005/10/24	2006/10/23
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2005/10/29	2006/10/30
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2005/10/16	2006/10/15
ETSTW-RE 015	ANTENNA	HK116	841489/003	R&S	2005/1/14	2007/1/11
ETSTW-RE 016	ANTENNA	HL223	848953/006	R&S	2005/1/14	2007/1/11
ETSTW-RE 017	ANTENNA	HL025	352886/001	R&S	2005/9/6	2007/9/3
ETSTW-RE 018	ANTENNA	AT4560	27212	AR	2004/11/8	2007/11/7
ETSTW-RE 021	SWEEP GENERATOR	SWM05	835130/010	R&S	2005/10/14	2006/10/13
ETSTW-RE 022	AMPLIFIER	8447D	2944A09837	Brüel&Kjær	2005/10/14	2006/10/13
ETSTW-RE 027	Passive Loop Antenna	6512	34563	EMCO	2004/6/30	2007/6/29

Registration number: W6M20604-6788-P-15

FCC ID: LE2SAV-2450SA

ETSTW-RE 030	Double-Ridged Waveguide Horn Antenna	3117	35224	EMCO	2004/5/5	2006/5/4
ETSTW-RE 032	Millivoltmeter	URV 55	849086/013	R&S	2005/10/17	2006/10/16
ETSTW-RE 034	Power Sensor	URV5-Z4	839313/006	R&S	2005/10/17	2006/10/16
ETSTW-RE 048	Triple Loop Antenna	HXYZ 9170	HXYZ 9170-134	Schwarzbeck	2005/3/22	2008/3/21
ETSTW-RE 049	TRILOG Super Broadband test Antenna	VULB 9160	9160-3185	Schwarzbeck	2005/5/19	2007/5/18
ETSTW-RE 055	SPECTRUM ANALYZER	FSU-26	200074	R&S	2005/9/6	2006/9/5
ETSTW-EMI 001	HARMONICS 1000	HAR1000-1P	93	EMC-PARTNER	2005/9/11	2006/11/10
ETSTW-EMS 001	Clamp BASELSTRASSE 160 CH-4242 LAUFEN	CN-EFT1000	354	EMC-PARTNER	2004/11/2	2006/11/1
ETSTW-EMS 003	EMC Immunity Test System	TRA2000IN6	579	EMC-PARTNER	2005/10/27	2006/10/26
ETSTW-EMS 004	ESD generator minizap	ESD2000	016	EMC-PARTNER	2005/10/27	2006/10/26
ETSTW-EMS 008	Safety Test Solutions	ELT-400	E-0039	Narda	2005/1/4	2007/1/3
ETSTW-EMS 009	Magnetic Field Antenna	MF1000-1	104	EMC-PARTNER	2004/12/3	2007/12/2
ETSTW-EMS 010	Coupling De-coupling Network	CDN-UTP8	014	EMC-PARTNER	2005/9/1	2008/8/31
ETSTW-EMS 012	EM Injection Clamp	F-2031-23MM	476	FCC	2005/8/11	2007/8/11
ETSTW-RS 003	RF Power Amplifier	30S1G3	306933	AR		
ETSTW-RS 004	RF Power Amplifier	150W1000	307009	AR	2005/10/21	2006/10/20
ETSTW-RS 005	Electric Field Probe Type 8.3	EMR-20	BN 2244/20	Narda	2005/9/7	2006/9/6
ETSTW-RS 006	SIGNAL GENERATOR	SML03	101551	R&S	2005/10/21	2006/10/20
ETSTW-GSM 01	SIM Simulator	IT3	B2004-50106	ORGA	2005/9/15	2006/9/14
ETSTW-GSM 02	Universal Radio Communication Tester	CMU 200	103489	R&S	2005/11/15	2006/11/14
ETSTW-GSM 03	Agilent 8960 Test Set 1	E5515C	GB44052675	Agilent	2004/7/14	2006/7/13
ETSTW-GSM 04	Agilent 8960 Test Set 2	E5515C	GB44052665	Agilent	2004/7/14	2006/7/13
ETSTW-GSM 05	Agilent 8960 Test Set 3	E5515C	GB44052652	Agilent	2004/7/17	2006/7/16
ETSTW-GSM 06	Agilent 8960 Test Set 4	E5515C	GB44052684	Agilent	2004/7/16	2006/7/15
ETSTW-GSM 07	Agilent 8960 Test Set 5	E5515C	GB44052658	Agilent	2004/7/14	2006/7/13
ETSTW-GSM 08	Agilent 8960 Test Set 6	E5515C	GB44052666	Agilent	2004/7/16	2006/7/15
ETSTW-GSM 10	Combiner Wessex / Anite	B4605/100	053	Wessex / Anite	2004/7/14	2006/7/13

Registration number: W6M20604-6788-P-15

FCC ID: LE2SAV-2450SA

ETSTW-GSM 11	GSM 850,900,1800,1900 Test system	TS8950G		R&S	2005/11/1	2006/10/31
ETSTW-GSM 12	Acoustical Calibrator	4231	2463874	Brüel&Kjær	2005/10/31	2006/10/30
ETSTW-GSM 13	Conditioning Amplifier	2690--0S2	2437856	Brüel&Kjær		
ETSTW-GSM 14	Telephone Test Head	4602B	2465324	Brüel&Kjær		
ETSTW-GSM 15	Mouth Simulator	4227	2462516	Brüel&Kjær		
ETSTW-GSM 16	TEMP.&HUMIDITY CHAMBER	GTH-120-40-1P-U	MAA0501002	GIANT FORCE	2005/12/29	2006/12/28
ETSTW-GSM 17	ANTENNT COPLER	CMU-Z10	100988	R&S		
ETSTW-GSM 18	AUDIO ANALYZER	UPL16	100173	R&S	2005/10/29	2006/10/28
ETSTW-GSM 23	SPLITTER	4901.19.A	None	SUHNER		
ETSTW-GSM 24	Vibration Testing System	VS-100V	5494	Vibration	2005/12/20	2006/12/19

Registration number: W6M20604-6788-P-15
FCC ID: LE2SAV-2450SA

2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.4-2003 using a 50 μ H LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.4-2003 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 23°C with a humidity of 40 %.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz)	METER READING + ACF + CABLE LOSS (to the receiver) = FS
33	20 dB μ V + 10.36 dB + 6 dB = 36.36 dB μ V/m @3m

ANSI STANDARD C63.4-2003 10.1.7 MEASUREMENT PROCEDURES: The UUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table). The UUT was placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to 10th harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes and the highest readings.

Measurements were made by ETS Dr. Genz Taiwan PS Co., Ltd. at the registered open field test site located at No.5-1, Shuang Sing Village, LiShuei Rd., Wanli Township, Taipei County 207, Taiwan (R.O.C.). The Registration Number: 930600.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

ANTENNA & GROUND:

This unit uses integral antenna. (see photo).

Registration number: W6M20604-6788-P-15

FCC ID: LE2SAV-2450SA

3 Test results (enclosure)

TEST CASE	Required	Test passed	Test failed
Peak Output Power 15.249 (b)	☒	☒	☐
Spurious Emissions radiated – Transmitter operating 15.249 (e)	☒	☒	☐
Spurious Emissions conducted – Transmitter operating 15.249 (e)	☐	☐	☐
Radiated Emission from Digital Part And Receiver L.O. 15.109	☒	☒	☐
Radiated Emission FCC part 15.109	☒	☒	☐
Out of Band Spurious Emission, Bandedge-Transmitter operating	☒	☒	☐
Power Line Conducted Emission 15.207	☒	☒	☐

The follows is intended to leave blank.

Registration number: W6M20604-6788-P-15

FCC ID: LE2SAV-2450SA

3.1 Peak Output Power (transmitter)

FCC Rule: 15.249 (b)

This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.

The power was measured with modulation (declared by the applicant).

Test conditions		Transmitter field strength of fundamental	Transmitter field strength of harmonics
Frequency 1		[dB μ V/m]	
T _{nom} = 23 °C	V _{nom} = 120 V	91.08	--
Measurement uncertainty		< 3 dB	

Test conditions		Transmitter field strength of fundamental	Transmitter field strength of harmonics
Frequency 2		[dB μ V/m]	
T _{nom} = 23 °C	V _{nom} = 120 V	90.45	--
Measurement uncertainty		< 3 dB	

Test conditions		Transmitter field strength of fundamental	Transmitter field strength of harmonics
Frequency 3		[dB μ V/m]	
T _{nom} = 23 °C	V _{nom} = 120 V	89.59	--
Measurement uncertainty		< 3 dB	

Test equipment used: ETSTW-RE 003, ETSTW-RE 012, ETSTW-RE 017, ETSTW-RE 024

Remarks: The diagrams for the field strength measurements are included in appendix.

Registration number: W6M20604-6788-P-15

FCC ID: LE2SAV-2450SA

3.2 Equivalent isotropic radiated power

Because using an permanent antenna there are no deviations from the radiated test results according 3.1.

3.2.1 Transmitter

Integral Antenna:

At the transmitter the measurement was transacted with the modulation declared by the manufacturer and the maximum available output power of the EUT.

In this arrangement the EUT fulfils the requirements of the FCC rules § 15.249, subpart C, This unit uses permanent antenna. There is no provision for an external antenna (see photo).

3.3 RF Exposure Compliance Requirements

Not applicable for this Wireless Dual-Mode Color Camera Kit for the low power level.

3.4 Out of Band Radiated Emissions

FCC Rule: 15.49 (d)(e), 15.35(b)

Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in section 15.209, whichever is the lesser attenuation.

For frequency above 1000 MHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Limits:

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 - 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.5
Above 960	500	54.0

For frequencies above 1 GHz (Peak measurements).

Limit + 20 dB

$54.0 \text{ dB}\mu\text{V/m} + 20 \text{ dB} = 74 \text{ dB}\mu\text{V/m}$

Or

Must be antenuatted at least 50dB below the level of fundament

Test equipment used: ETSTW-RE 003 , ETSTW-RE 012 , ETSTW-RE 015 , ETSTW-RE 016 ,
ETSTW-RE 017 , ETSTW-RE 024

Remark: see attached diagram

Registration number: W6M20604-6788-P-15

FCC ID: LE2SAV-2450SA

3.5 Spurious emission (tx)

Spurious emission was measured with modulation (declared by manufacturer).

Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in section 15.209, whichever is the lesser attenuation.

For frequencies above 1000 MHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

SAMPLE CALCULATION OF LIMIT. ALL results will be updated by an automatic measuring system in accordance with point 2.3.

The peak and average spurious emission plots was measured with the average limits.

The critical peak value listed in the table agree with the above calculated limits.

Summary table with radiated data of the test plots

Low Channel

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuv)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)
V	150.601202	1.45	15.39	PK	16.84	43.5	26.66	132
	435.671343	11.54	18.61	PK	30.15	46	15.85	88
	4828.23459	51.23	4.57	PK	55.80	74	18.2	23
	4828.23459	48.49	4.57	AV	53.06	54	0.94	23

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuv)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)
H	140.380762	0.16	14.82	PK	14.98	43.5	28.52	133
	801.202405	1.81	25.16	PK	26.97	46	19.03	213
	4825.651303	46.16	4.55	PK	50.71	54	23.29	68

Middle Channel

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuv)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)
V	35.450902	1.51	13.26	PK	14.77	40	25.23	181
	881.362725	0.94	25.84	PK	26.78	46	19.22	213
	4900.17911	52.90	4.96	PK	57.86	74	16.14	10
	4900.17911	48.46	4.96	AV	53.42	54	0.58	10


Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuv)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)
H	120.280561	2.35	13.42	PK	15.77	43.5	27.73	181
	940.681368	1.47	27.19	PK	28.66	46	17.34	121
	4900.23798	49.12	4.96	PK	54.08	74	19.92	63
	4900.23798	45.60	4.96	AV	50.56	54	3.44	63

High Channel

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuv)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)
V	34.428858	1.64	13.24	PK	14.88	40	25.12	324
	860.521042	1.28	25.66	PK	26.94	46	19.06	217
	4936.20053	54.14	4.64	PK	58.78	74	15.22	360
	4936.20053	49.04	4.64	AV	53.68	54	0.32	360

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuv)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)
H	160.480962	1.32	15.46	PK	16.78	43.5	26.72	196
	860.521042	1.51	25.66	PK	27.17	46	18.83	154
	4937.875752	48.52	4.64	PK	53.16	54	20.84	68

- Note
1. Correction Factor = Antenna factor + Cable loss - Preamplifier
 2. The formula of measured value as: Test Result = Corrected Reading + Correction Factor
 3. Detector function in the form : P = Peak, QP = Quasi Peak, AV = Average



Registration number: W6M20604-6788-P-15
FCC ID: LE2SAV-2450SA

Freq. – Frequency Range:

1:	30	-	200 MHz
2:	200	-	1000 MHz
3:	1	-	4 GHz
4:	4	-	8 GHz
5:	8	-	12 GHz
6:	12	-	17 GHz
7:	17	-	26.5 GHz

TEST RESULT (Transmitter): The unit DOES meet the FCC requirements.

Comment: see attached diagrams

Test equipment used: ETSTW-RE 003, ETSTW-RE 012, ETSTW-RE 015, ETSTW-RE 016,
ETSTW-RE 017, ETSTW-RE 024

Registration number: W6M20604-6788-P-15

FCC ID: LE2SAV-2450SA

3.6 Radiated Emissions from Receiver Section

Summary table with radiated data of the test plots

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)	Antenna Height (cm)
V	35.110220	9.85	13.26	PK	23.11	40	16.89	234	156
	676.152305	11.81	22.97	PK	34.78	46	11.22	173	133

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)	Antenna Height (cm)
H	41.242485	7.17	13.61	PK	20.78	40	19.22	246	217
	430.861723	12.34	18.44	PK	30.78	46	15.22	133	168

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Field Strength (dBmicrovolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

Test equipment used: ETSTW-RE 015, ETSTW-RE 016, ETSTW-RE 017, ETSTW-CS 001, ETSTW-RE 026, ETSTW-RE 003, ETSTW-RE 025

Comment: see attached diagram

Registration number: W6M20604-6788-P-15
FCC ID: LE2SAV-2450SA

3.7 Radiated Emission on the bandedge

From the following plots, they show that the fundamental emissions are confined in the specified band and hey at least 50 dB below the carrier level at band edge (2400,0 and 2483,5 MHz). It meets the requirement of section 15.249(d).

Test conditions Tnom = 23°C, Vnom = 120V Frequency [MHz]	Transmitter field strength of Radiated Emission (Peak Detector)	Transmitter field strength of Radiated Emission (Average Detector)
	[dBμV/m]	
2400	55.33	48.72
2483,5	55.72	48.11

Limit:

Frequency Range (MHz)	Limit (dBμV/m)	
	Peak	Average
902 – 928	74	54
2400 – 2483,5		
5725 – 5875		
24000 - 24250		

Test equipment used: ETSTW-RE 003, ETSTW-RE 012, ETSTW-RE 017, ETSTW-RE 024

Registration number: W6M20604-6788-P-15
FCC ID: LE2SAV-2450SA

3.8 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

LISN Type	Frequency Marker (MHz)	Corrected Reading (dBμV)	Correction Factor (dB)	Detector	Test Result (dBμV)	Compliance Limit (dBμV)	Margin
N	1.650	15.7	10.1	QP	25.8	56	30.2
	1.650	10.0	10.1	AV	20.1	46	25.9
	3.310	14.69	10.1	QP	24.79	56	31.21
	3.310	12.33	10.1	AV	22.43	46	23.57
	8.270	12.7	10.1	QP	22.8	60	37.2
	8.270	10.35	10.1	AV	20.45	50	29.55

LISN Type	Frequency Marker (MHz)	Corrected Reading (dBμV)	Correction Factor (dB)	Detector	Test Result (dBμV)	Compliance Limit (dBμV)	Margin
L1	1.650	12.11	10.1	QP	22.21	56	33.79
	1.650	10.04	10.1	AV	20.14	46	25.86
	3.30	13.34	10.1	QP	23.44	56	32.56
	3.30	9.39	10.1	AV	19.49	46	26.51
	9.89	15.42	10.1	QP	25.52	60	34.48
	9.89	11.17	10.1	AV	21.27	50	28.73

Note: 1. The formula of measured value as: Test Result = Corrected Reading + Correction Factor
2. The Correction Factor = Cable Loss + LISN Insertion Loss
3. Detector function in the form : P = Peak, QP = Quasi Peak, AV = Average

Registration number: W6M20604-6788-P-15

FCC ID: LE2SAV-2450SA

Frequency	Level (dB μ V)	
	quasi-peak	average
150 kHz	lower limit line	Lower limit line

Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test is not required the sample is battery used.

Test equipment used: ETSTW-CE 004, ETSTW-CE 001, ETSTW-RE 023

Comment: see attached diagrams

Appendix

- A Fundamental Field Strength
- B Spurious Emissions radiated – Transmitter operating
- C Radiated Emissions from Receiver Section
- D Radiated Emission on the bandedge
- E Power Line Conducted Emission
- F Pictures



Registration number: W6M20604-6788-P-15
FCC ID: LE2SAV-2450SA


Appendix A

Fundamental Field Strength

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) low channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025
Freq: 2.413GHz, Emax: 89.09dBμV/m, RBW: 1MHz

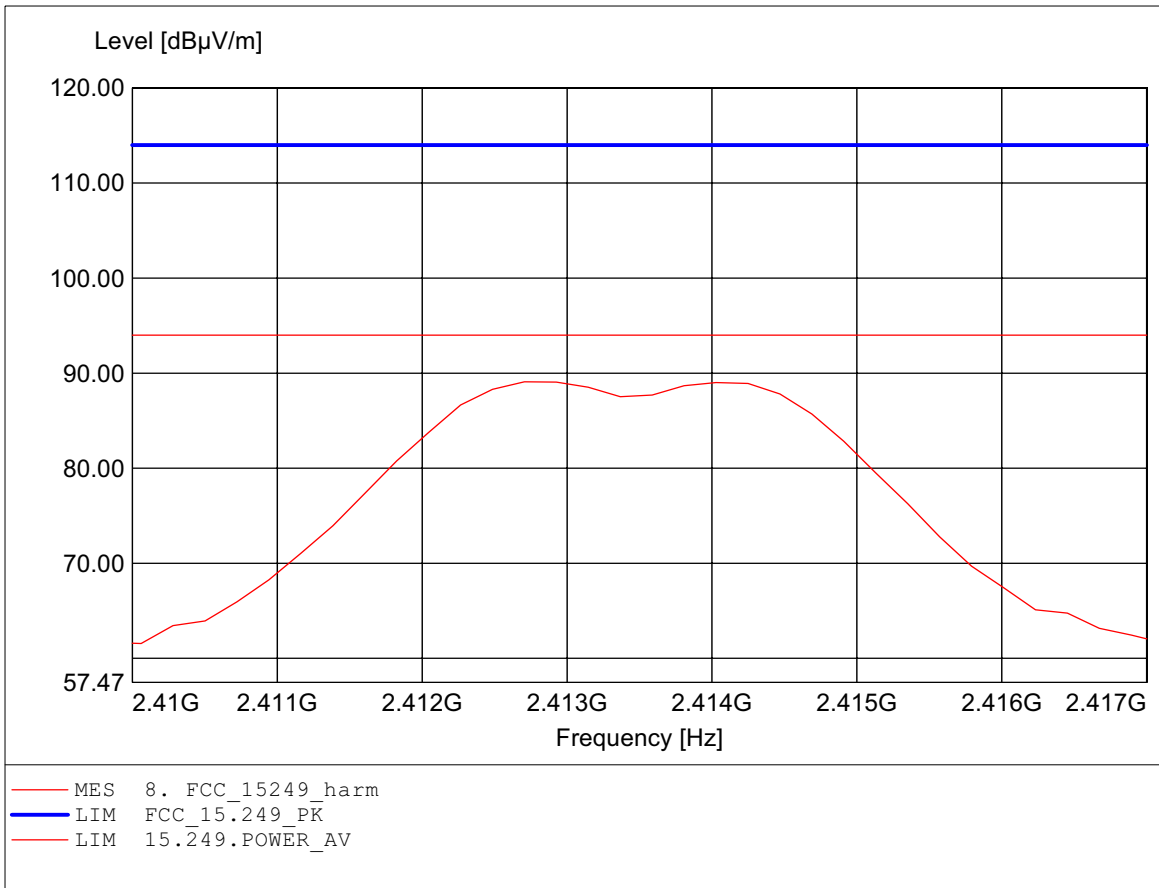

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) low channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025
Freq: 2.413GHz, Emax: 91.08dBμV/m, RBW: 1MHz

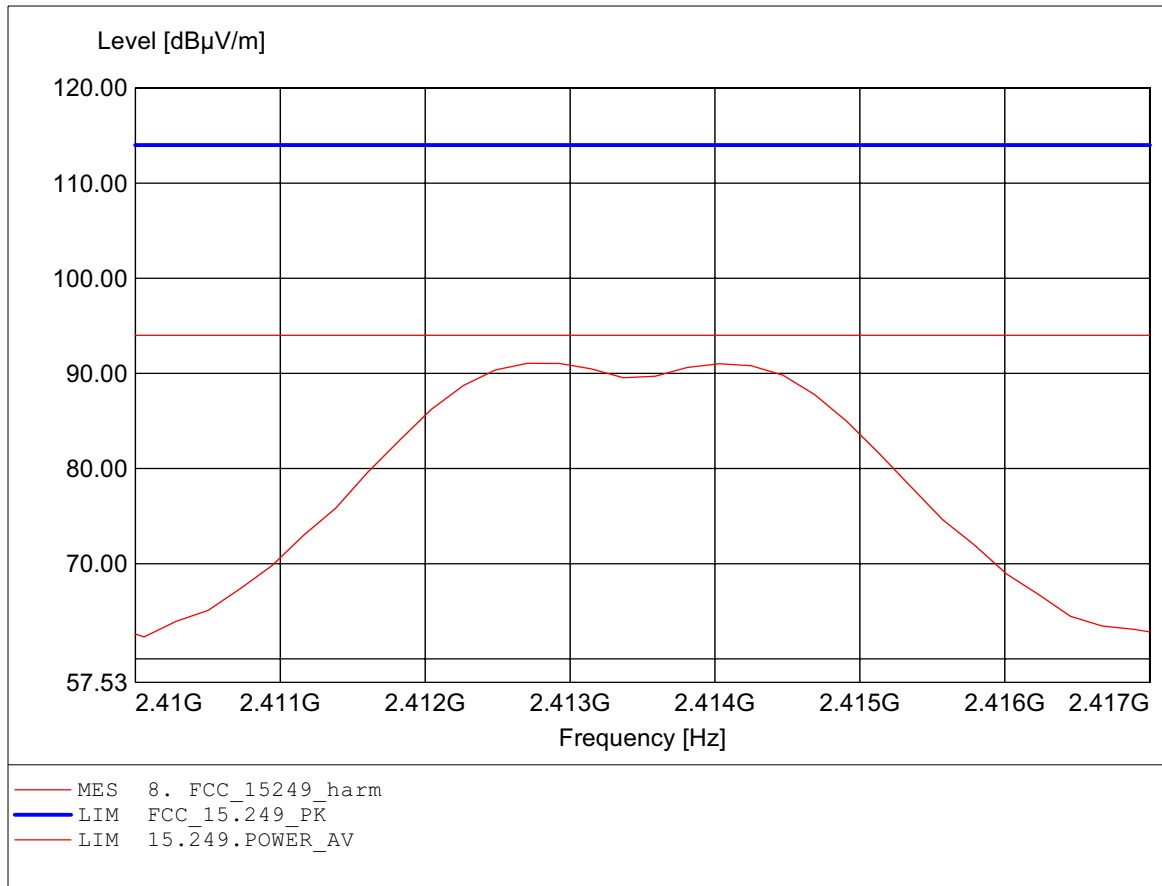

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C


ET: Wireless Dalmade C00 Camera Kt
MODE N.: SAV2450SA) middle hannel
Approval H0der: SW PACET CORPORATION
Test Site / Operat0: ES / Dennis
Temperatne/V0ltage: Temp.: 24.4C/ Unm.: 120 VAC(a0dcadapt0)
Test Spe0fiati0: a0ding to\$5.249,peak detet0
Cmment 1: Dist.: 3m,Ant.: HL025
Freq 2.450GHz,max 86.68dBu/m,RBW: 1MHz

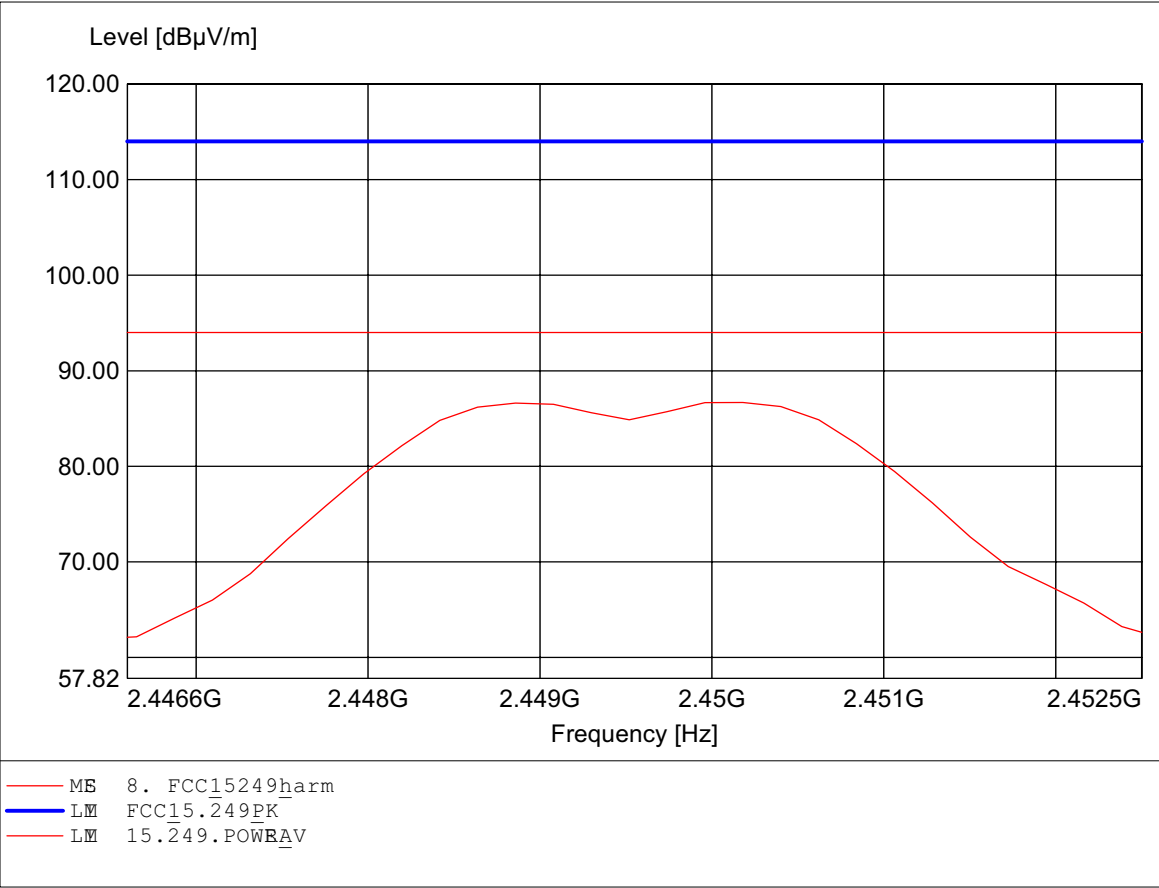

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C


ET: Wireless Dalmade C00 Camera Kt
MODE N.: SAV2450SA) middle hannel
Approval H0der: SW PACET CORPORATION
Test Site / Operat0: ES / Dennis
Temperature/V0ltage: Temp.: 24.4C/ Unm.: 120 VAC(a0dcadapt0)
Test Spe0ficiatin: a0ding to\$5.249,peak detet0
Comment 1: Dist.: 3m,Ant.: HL025
Freq 2.450GHz,max 90.45dBu/m,RBW: 1MHz

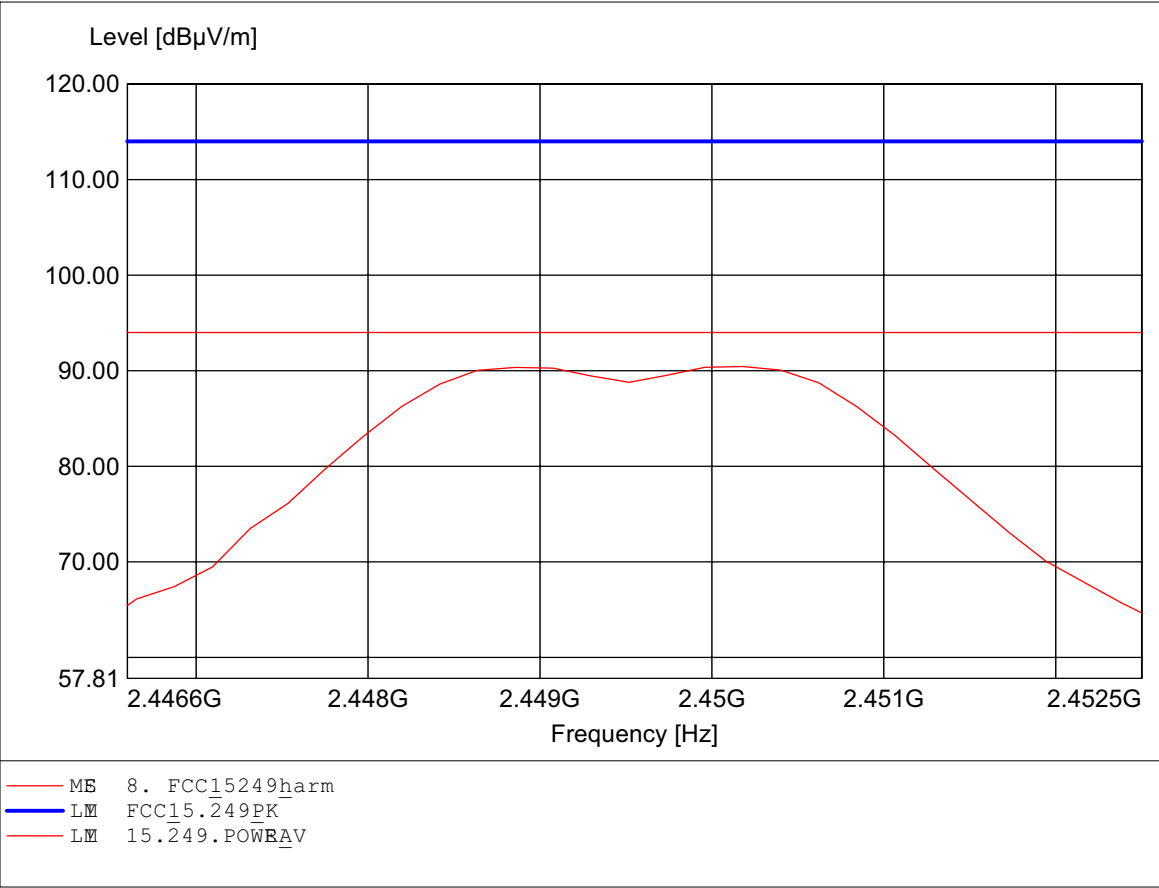

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) high channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025
Freq: 2.468GHz, Emax: 85.92dBμV/m, RBW: 1MHz

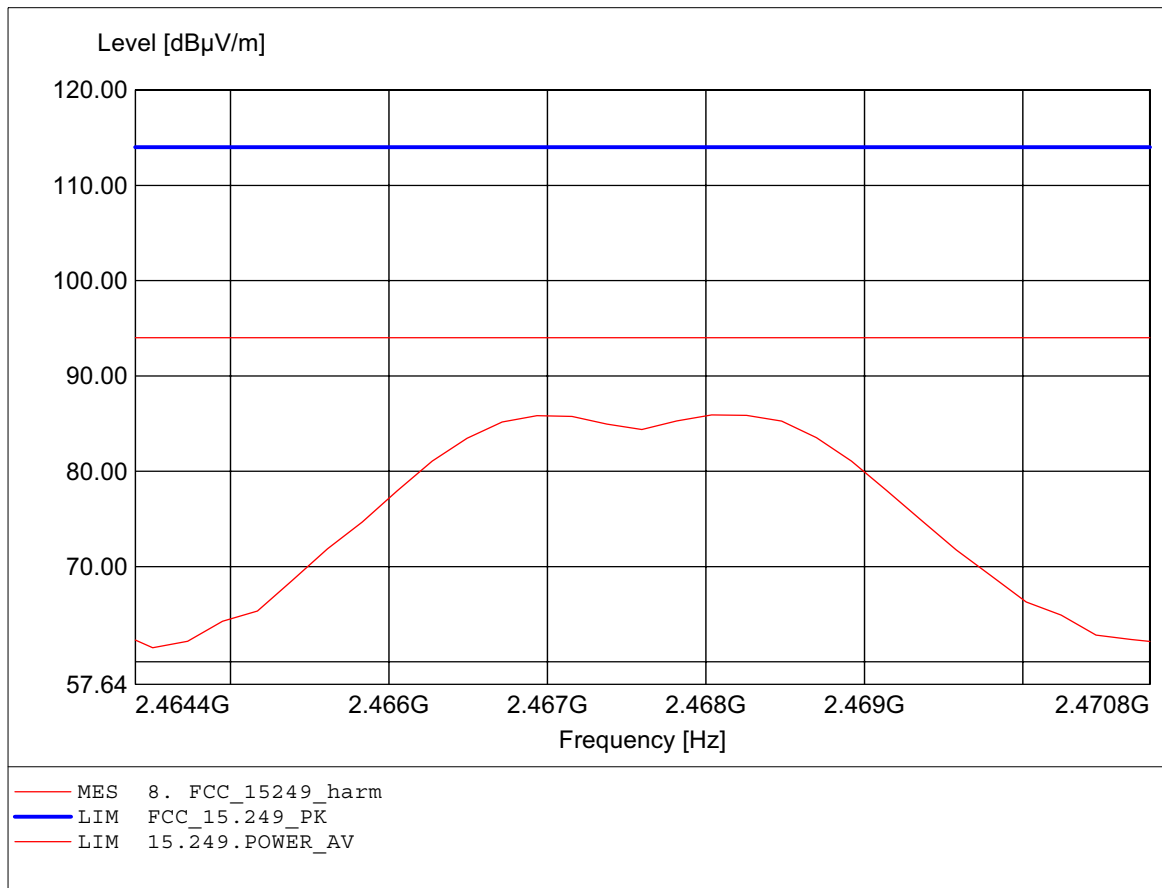


Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C

EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) high channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025
Freq: 2.468GHz, Emax: 89.59dBμV/m, RBW: 1MHz

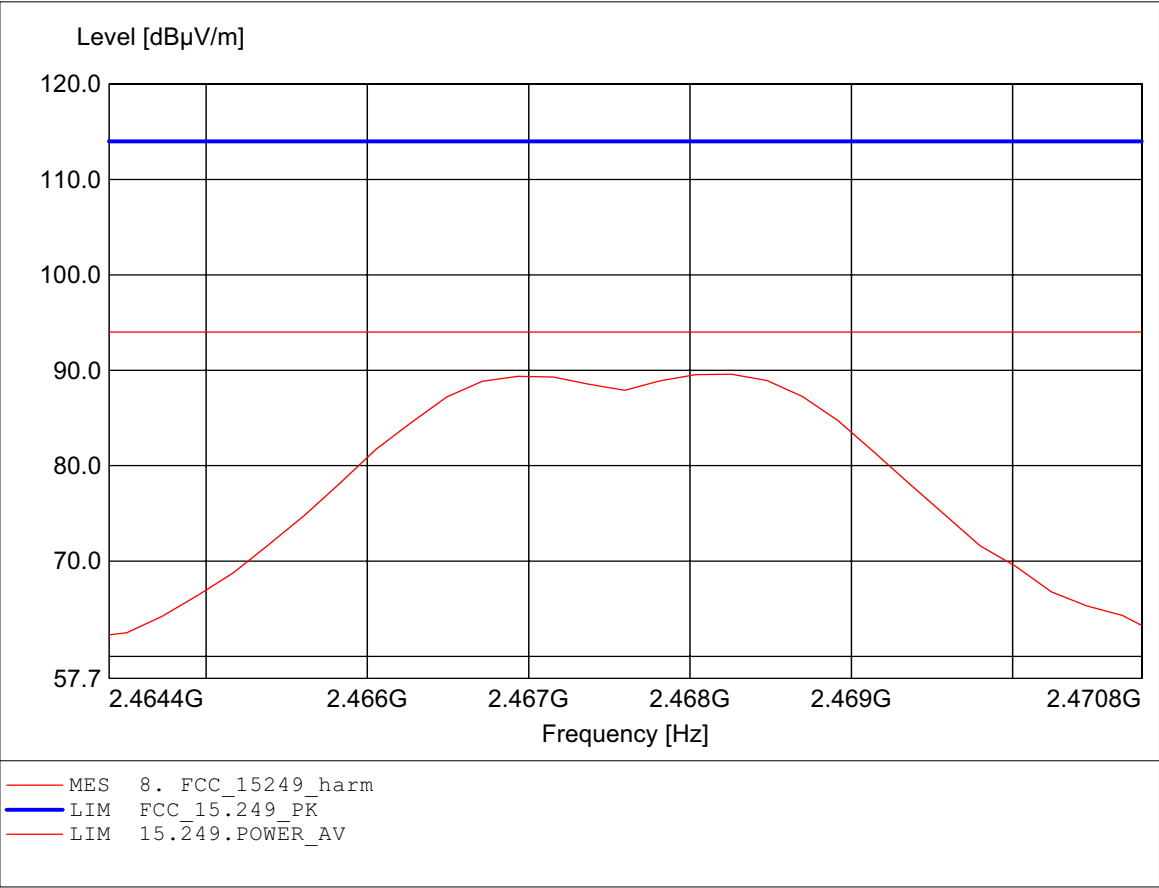



Registration number: W6M20604-6788-P-15
FCC ID: LE2SAV-2450SA

Appendix B


Spurious Emissions radiated – Transmitter operating

The measurement diagrams are wideband pre-scan results; only for reference. The final results are measured at OATS of 3 m. Please see final results as page 14 to 15.

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) low channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 195.912MHz, Emax: 24.37dBμV/m, RBW: 100kHz

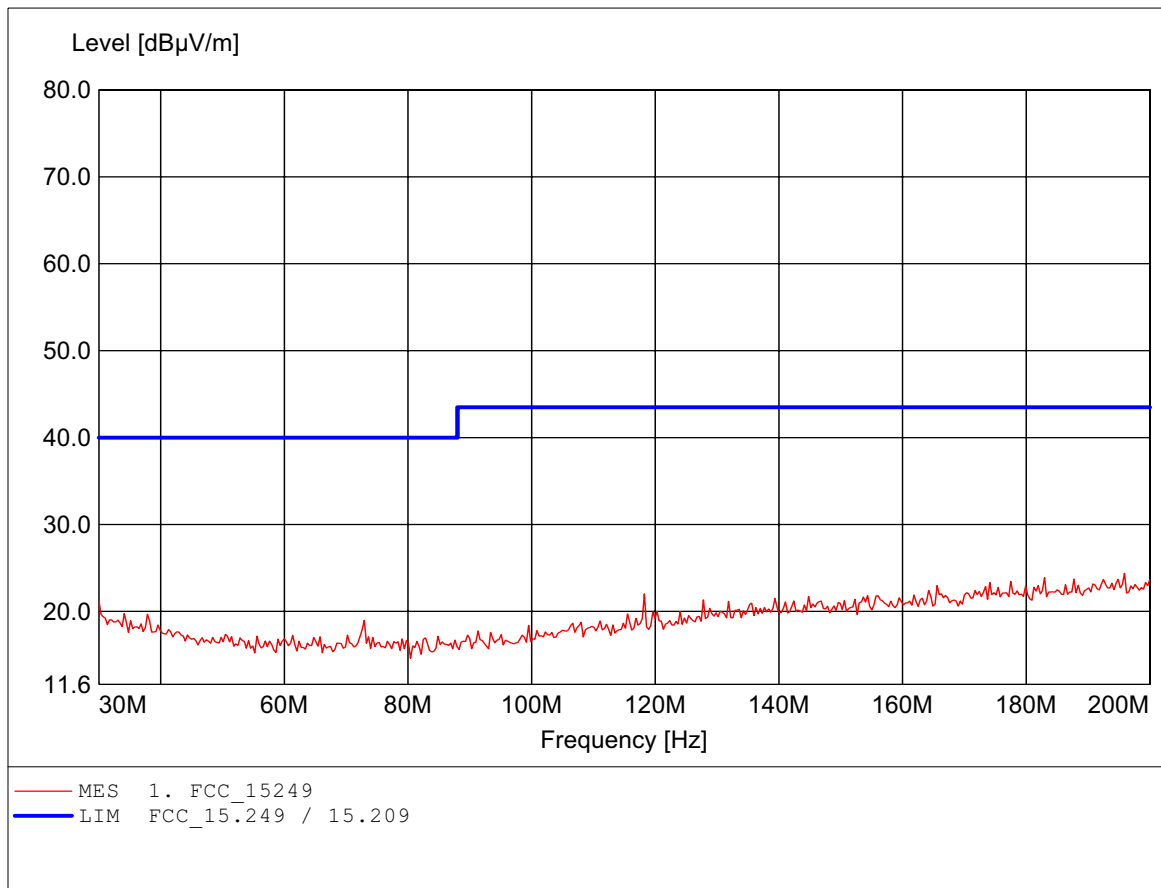

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) low channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Freq: 996.794MHz, Emax: 35.90dBμV/m, RBW: 100kHz

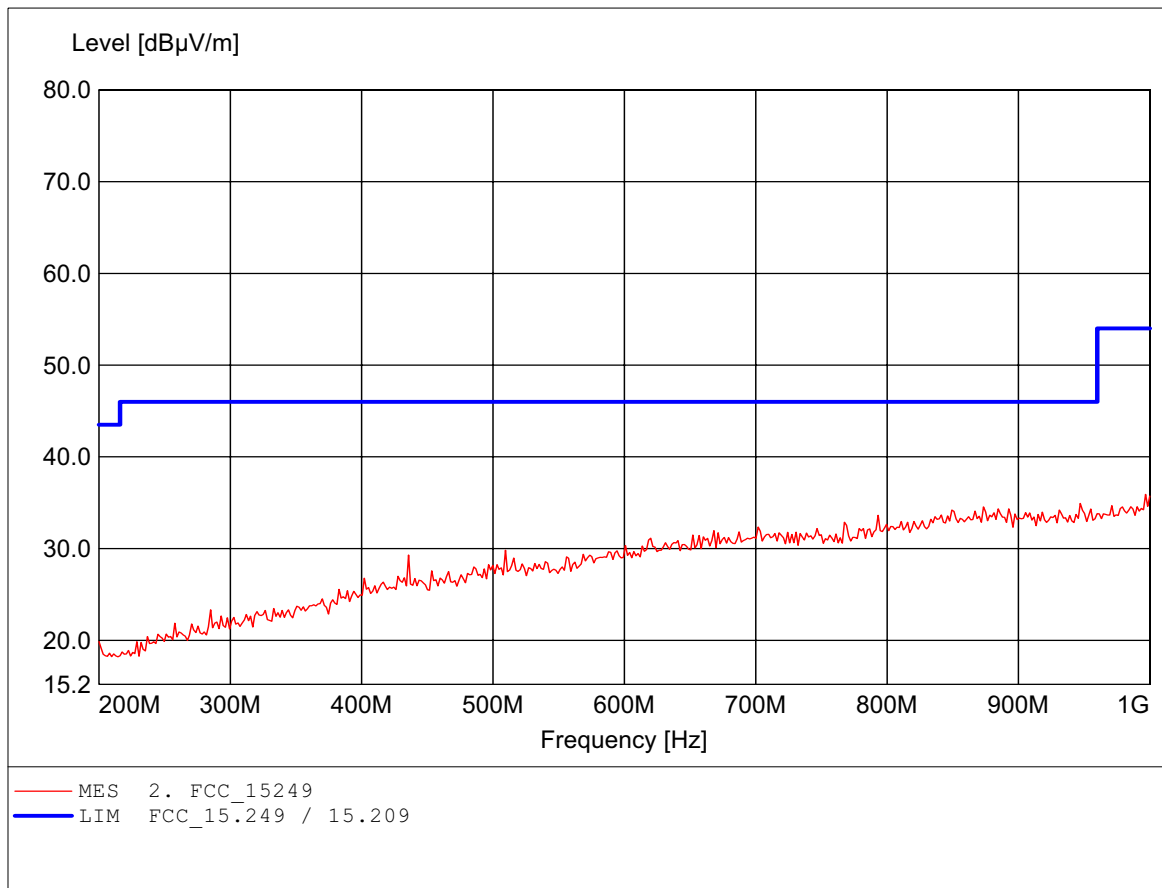

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) low channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Freq: 955.110MHz, Emax: 35.33dBμV/m, RBW: 100kHz

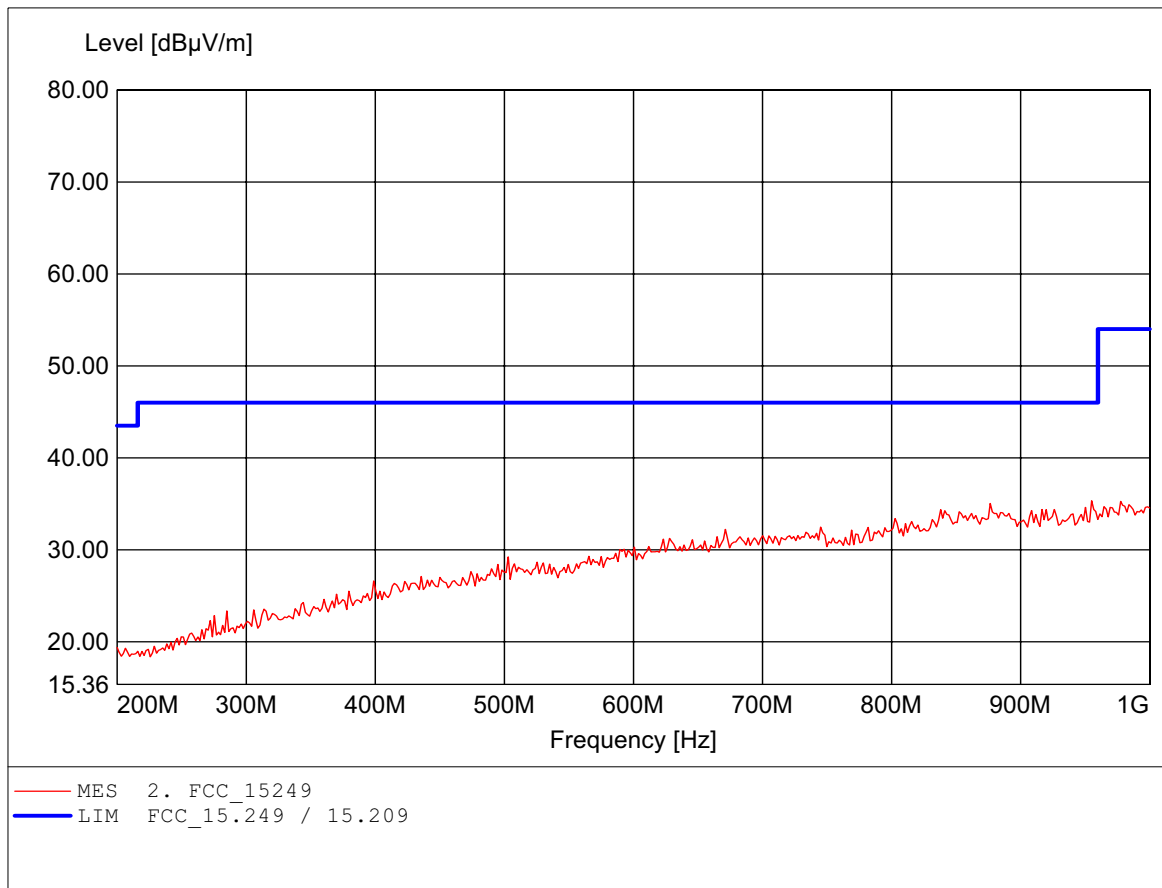

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) low channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.413GHz, Emax: 78.27dBμV/m, RBW: 1MHz

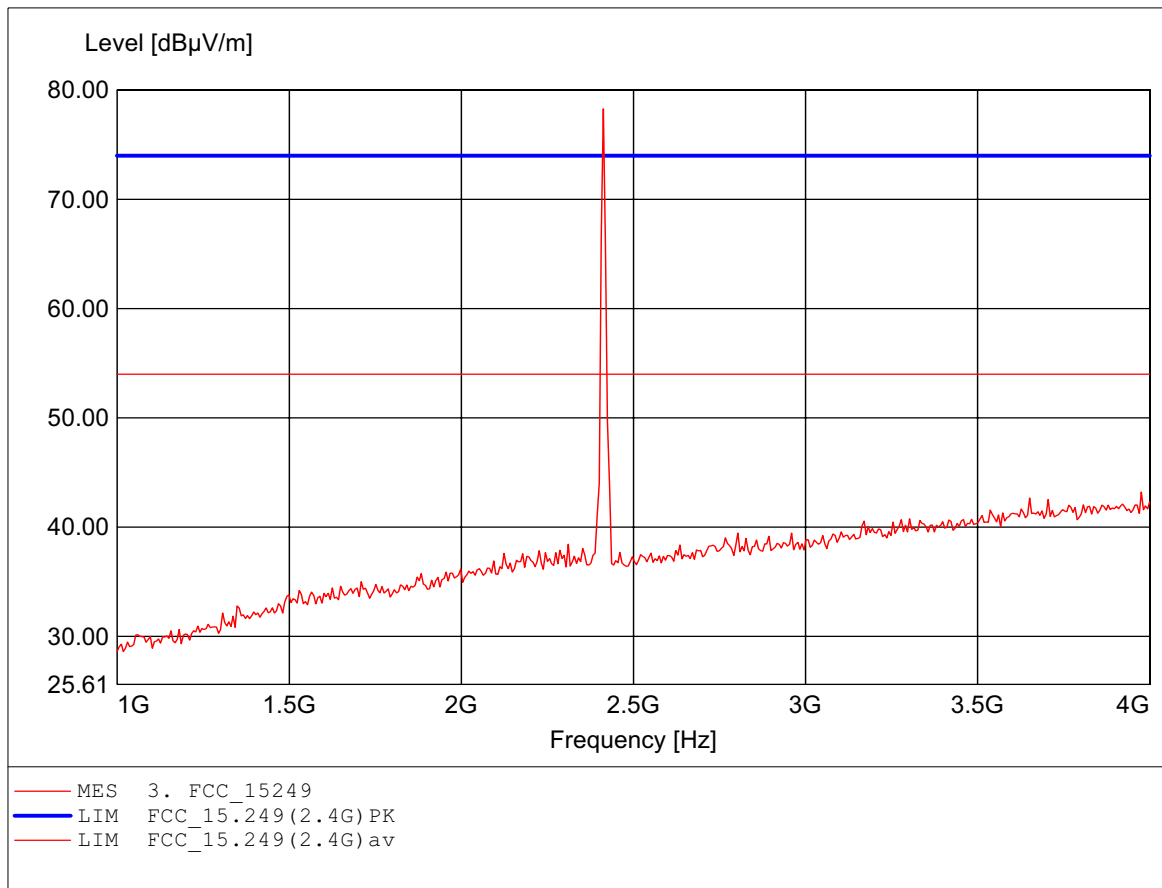

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) low channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.413GHz, Emax: 78.25dBμV/m, RBW: 1MHz

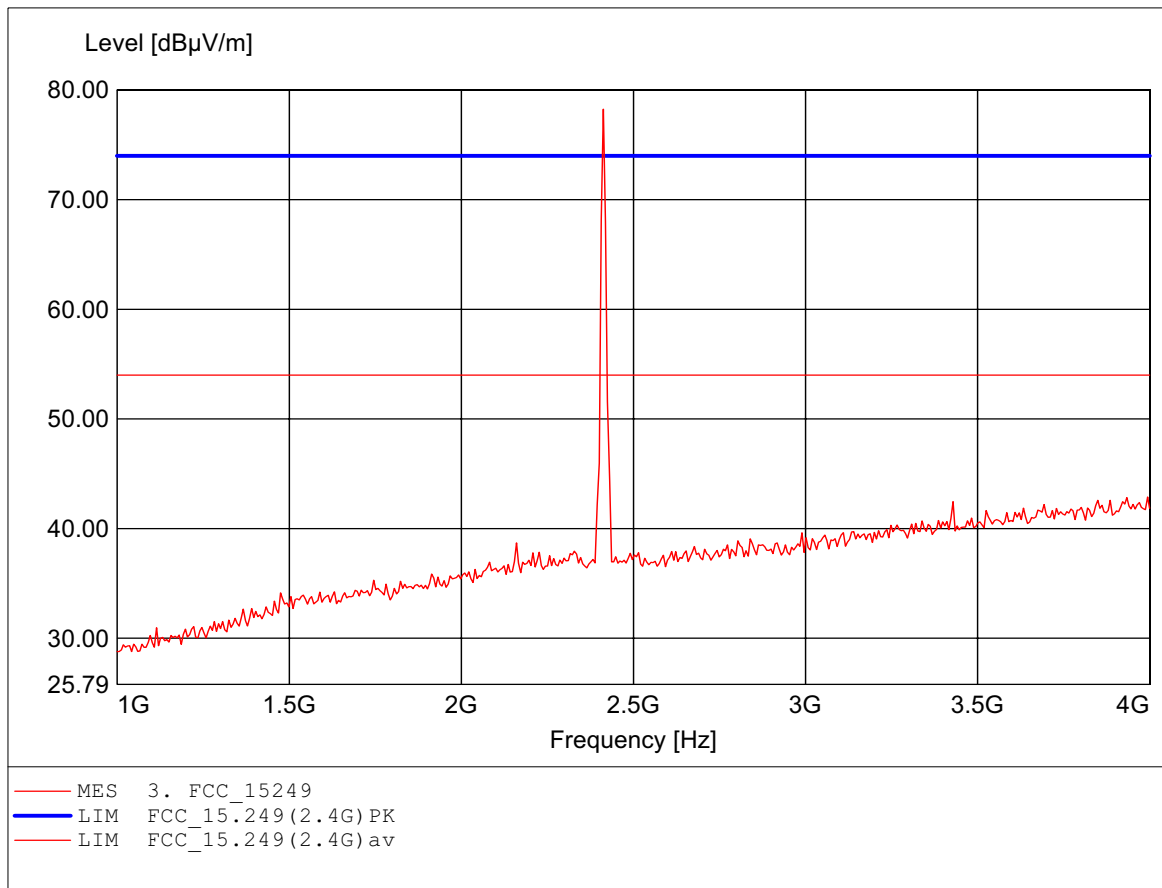

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) low channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 4.826GHz, Emax: 55.13dBμV/m, RBW: 1MHz

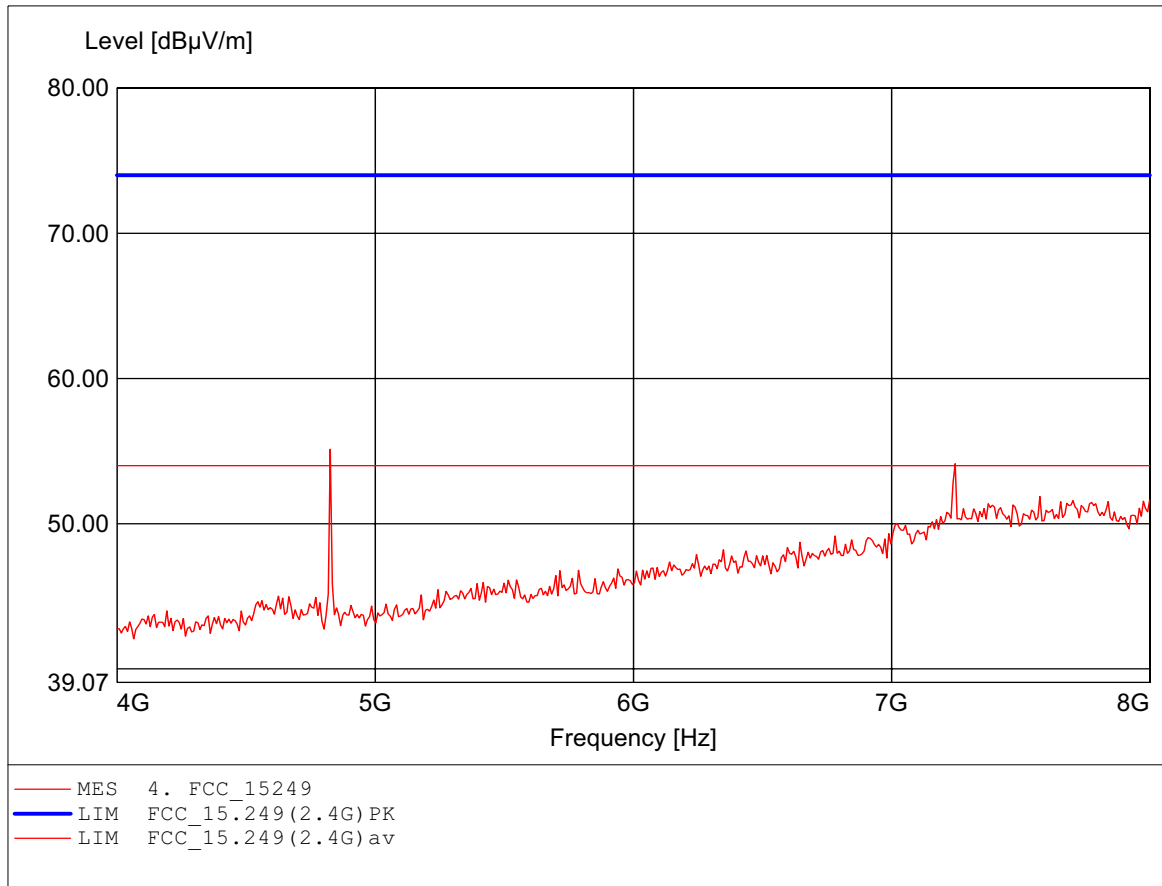

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) low channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 7.246GHz, Emax: 52.26dBμV/m, RBW: 1MHz

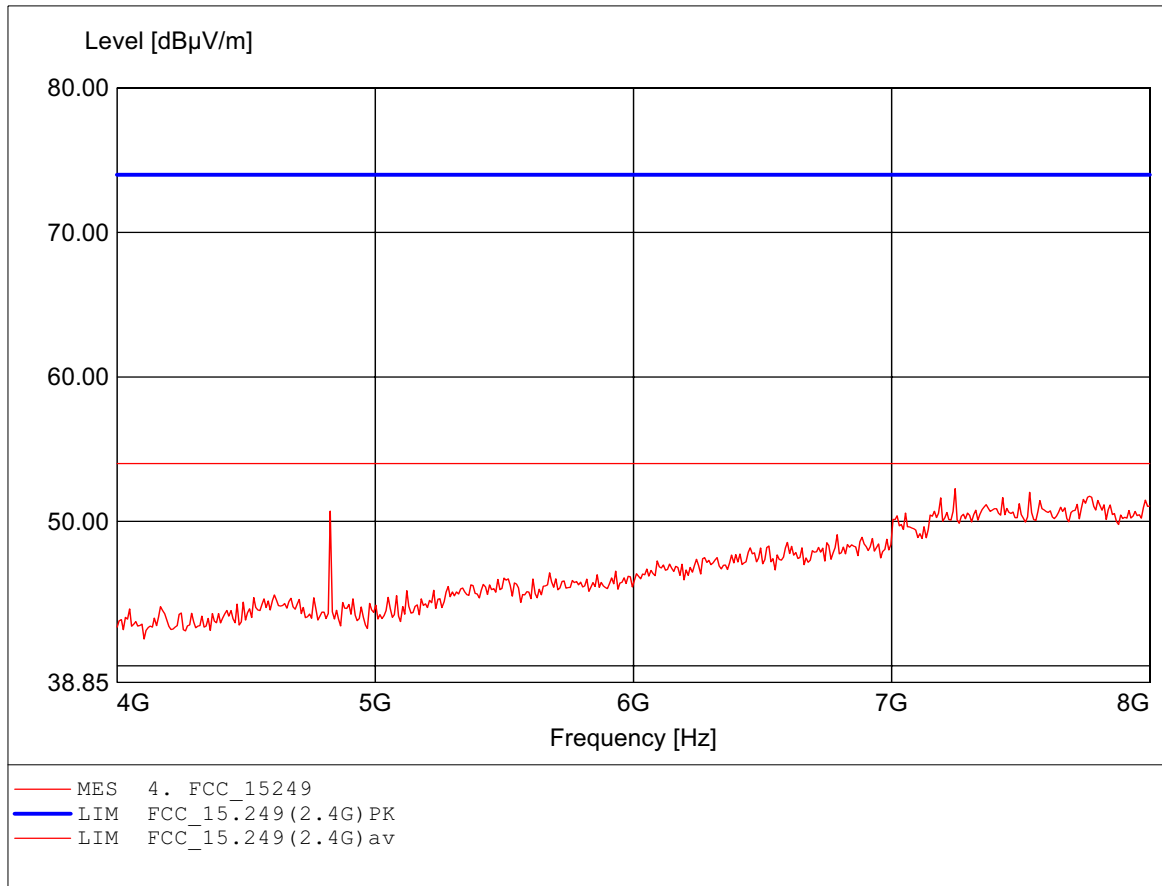

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


ET: Wireless DalMode Color Camera Kt
MODE N.: SAV2450SA) low hannel
Approval Holder: SW PACET CORPORATION
Test Site / Operator: ES / Dennis
Temperatne/Voltage: Temp.: 24.4C/ Unom.: 120 VAC(a/cdca adaptor)
Test Speçfiatìon: aording to §5.249,peak detetor
Comment 1: Dist.: 3m,Ant.: HK116
Freq 31.703MHz,Max 26.92dBµ/m,RBW: 100kHz

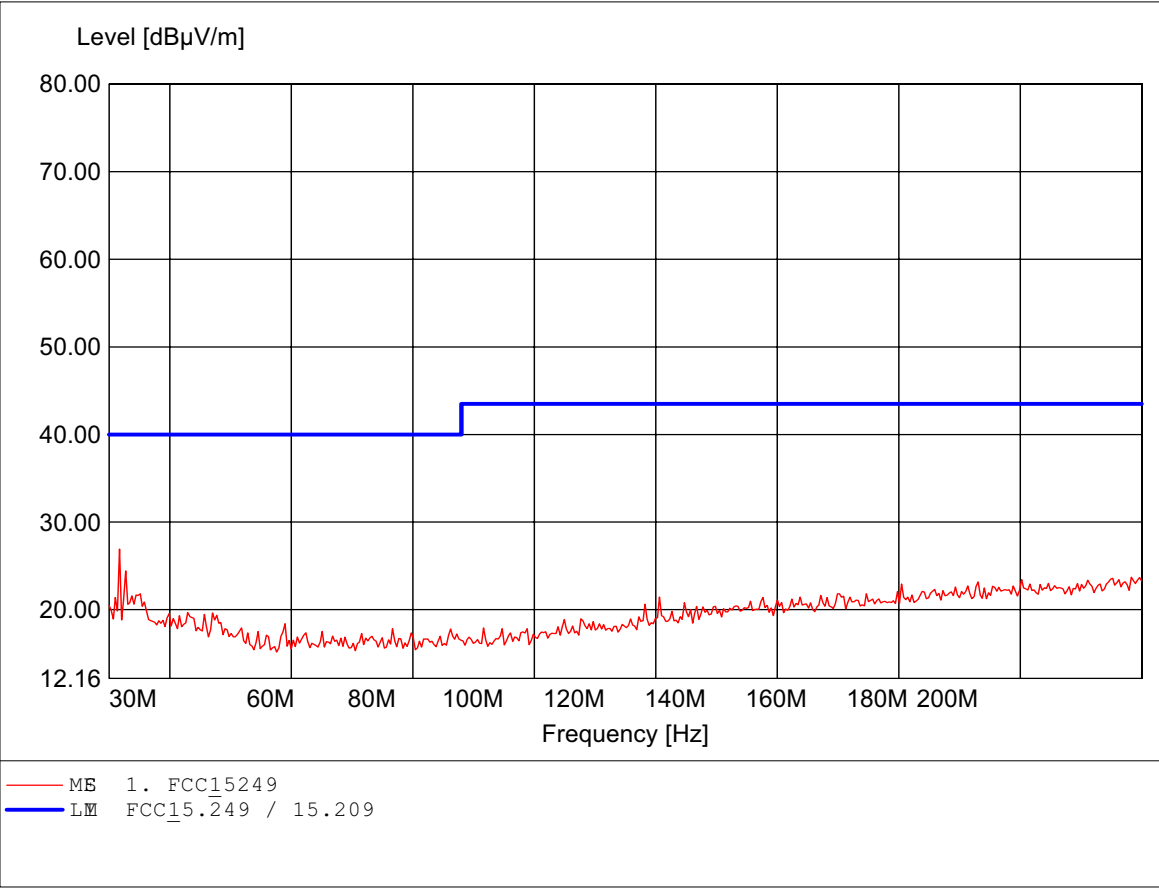

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


ET: Wireless DalMode Color Camera Kt
MODE N.: SAV2450SA) low hannel
Approval Holder: SW PACET CORPORATION
Test Site / Operator: ES / Dennis
Temperatne/Voltage: Temp.: 24.4C/ Unom.: 120 VAC(a/cdcadaptor)
Test Speçfiatation: aording to §5.249,peak detetor
Comment 1: Dist.: 3m,Ant.: HL025,ampl.#P.
Freq 11.768GHz,Max 51.60dBV/m,RBW: 1MHz

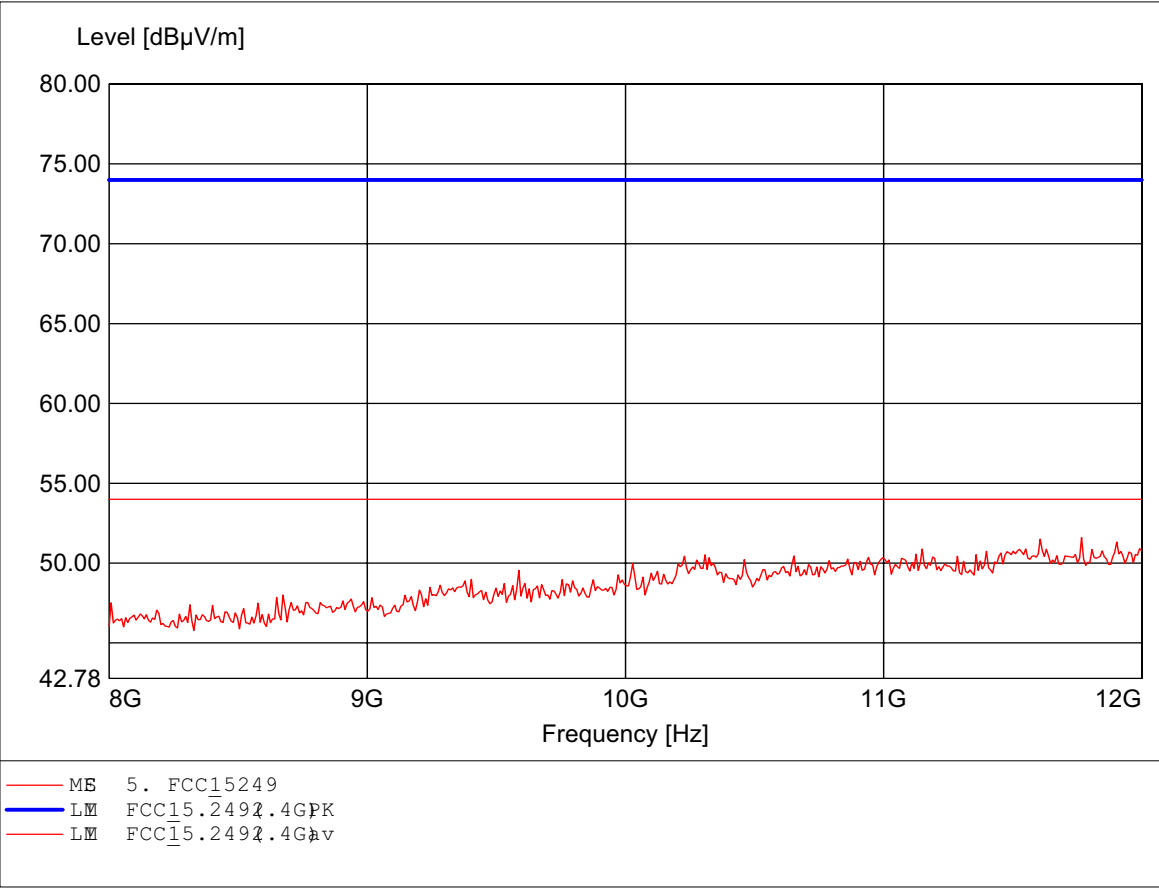

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


ET: Wireless DalMode Color Camera Kt
MODE N.: SAV2450SA) low hannel
Approval Holder: SW PACET CORPORATION
Test Site / Operator: ES / Dennis
Temperature/Voltage: Temp.: 24.4C/ Unom.: 120 VAC(acdcadaptor)
Test Specification: aording to §5.249,peak detector
Comment 1: Dist.: 3m,Ant.: HL025,ampl.#P.
Freq 11.936GHz,max 51.15dBV/m,RBW: 1MHz

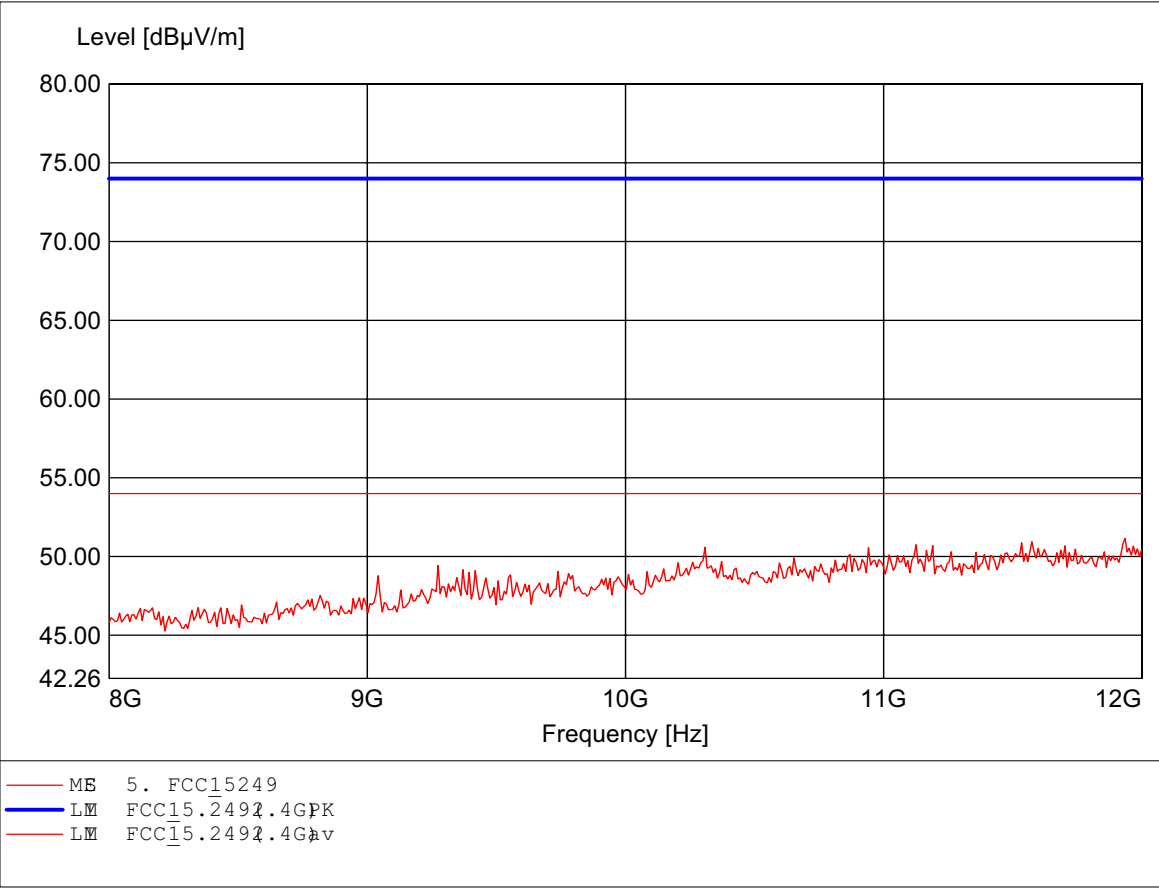

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


ET: Wireless DalMode Color Camera Kt
MODE N.: SAV2450SA) low hannel
Approval Holder: SW PACET CORPORATION
Test Site / Operator: ES / Dennis
Temperature/Voltage: Temp.: 24.4C/ Unom.: 120 VAC(acdcadaptor)
Test Specification: aording to §5.249,peak detector
Comment 1: Dist.: 3m,Ant.: HL025,ampl.#P.
Freq 17.808GHz,Max 50.36dBu/m,RBW: 1MHz

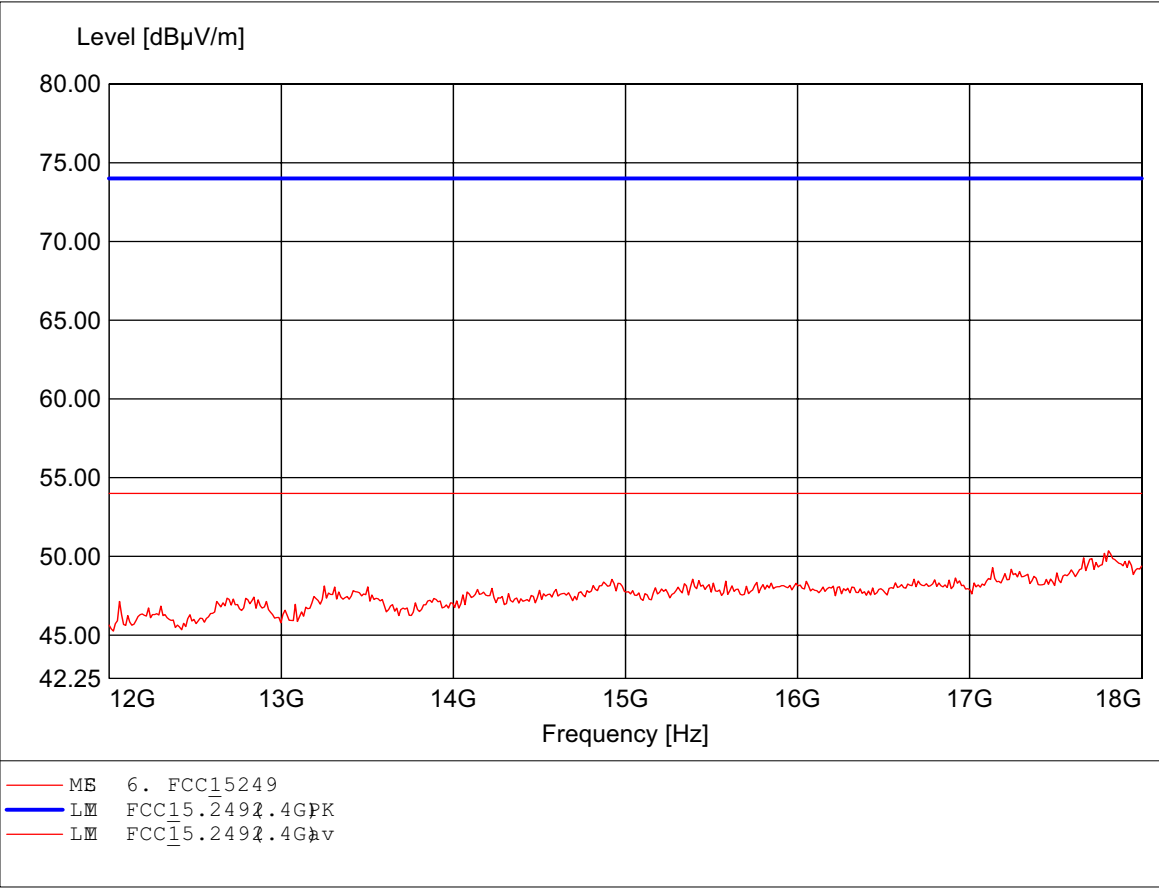

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


ET: Wireless DalMode Color Camera Kt
MODE N.: SAV2450SA) low hannel
Approval Holder: SW PACET CORPORATION
Test Site / Operator: ES / Dennis
Temperatne/Voltage: Temp.: 24.4C/ Unom.: 120 VAC(aedcadaptor)
Test Speeffiation: aording to §5.249,peak detetor
Comment 1: Dist.: 3m,Ant.: HL025,ampl.#P.
Freq 17.808GHz,Max 50.20dBV/m,RBW: 1MHz

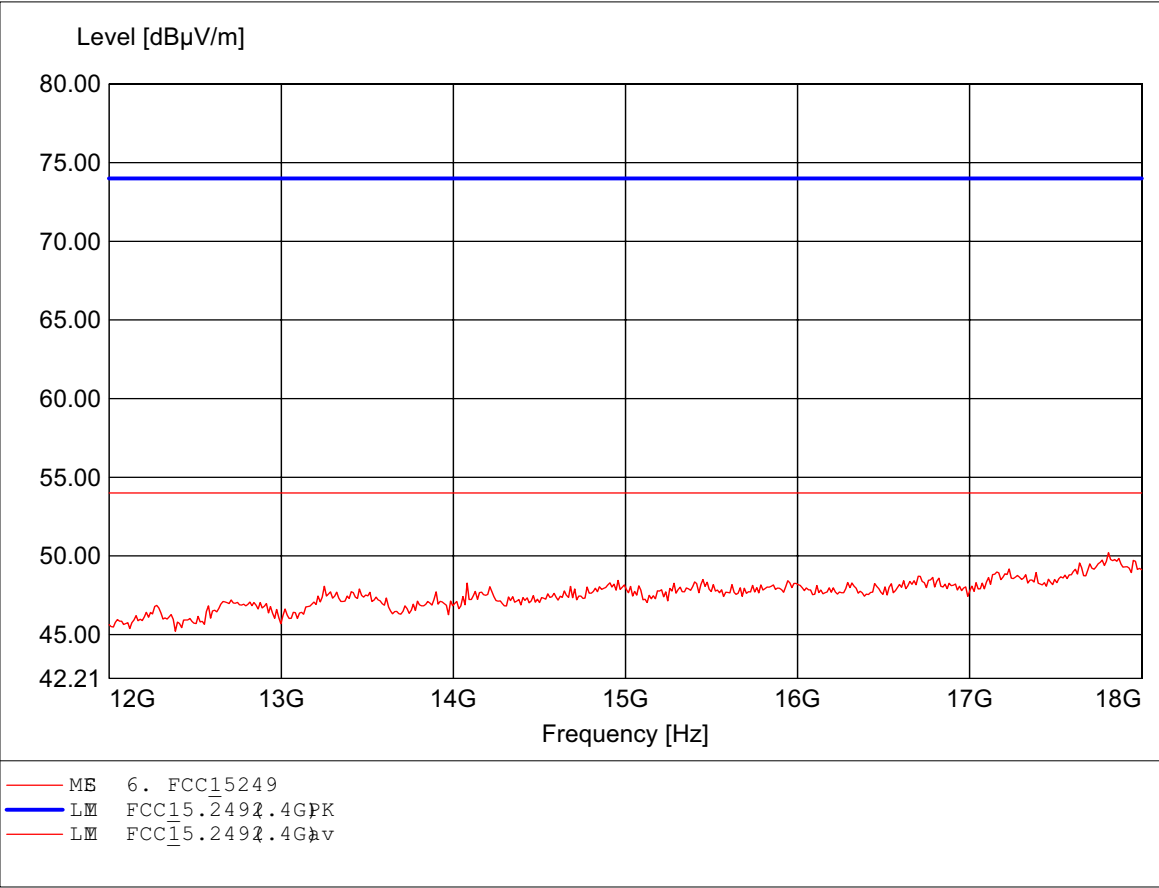

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) low channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 26.432GHz, Emax: 49.39dBμV/m, RBW: 1MHz

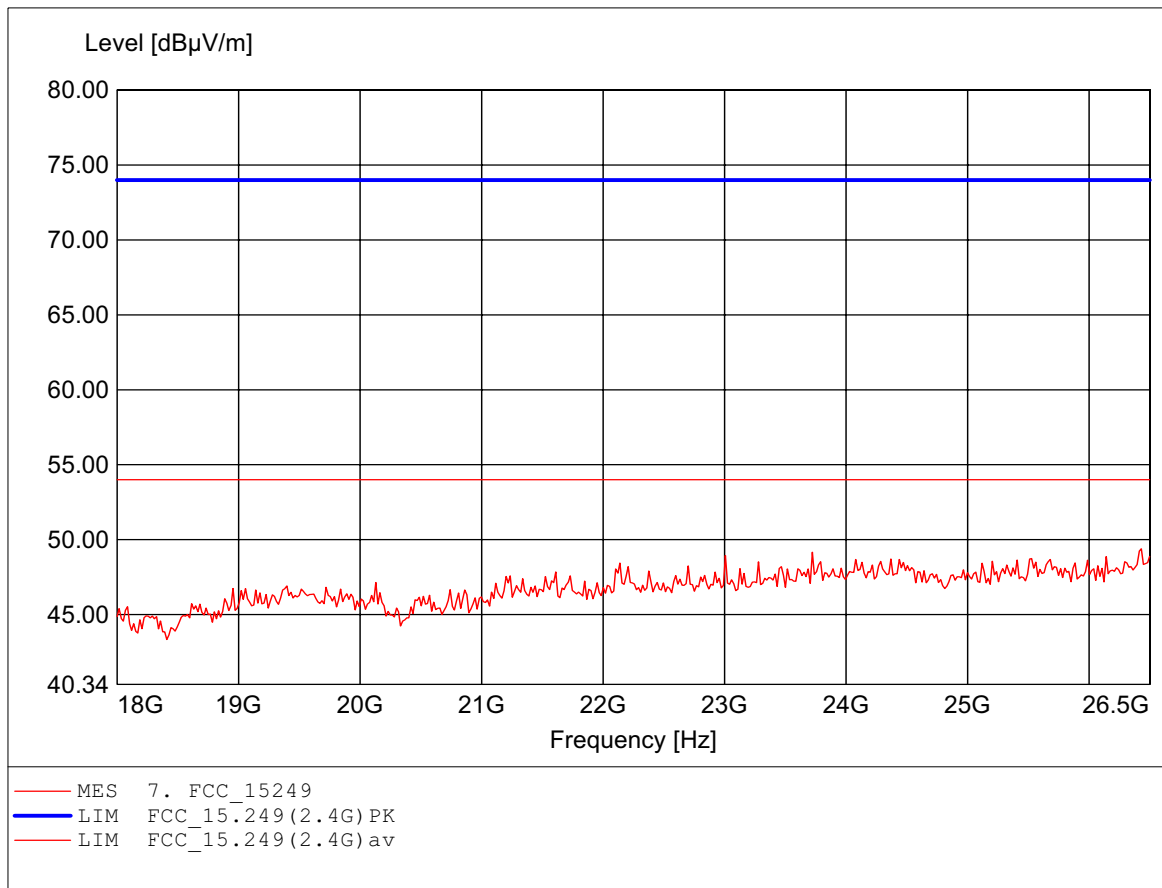

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) low channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 26.415GHz, Emax: 49.66dBμV/m, RBW: 1MHz

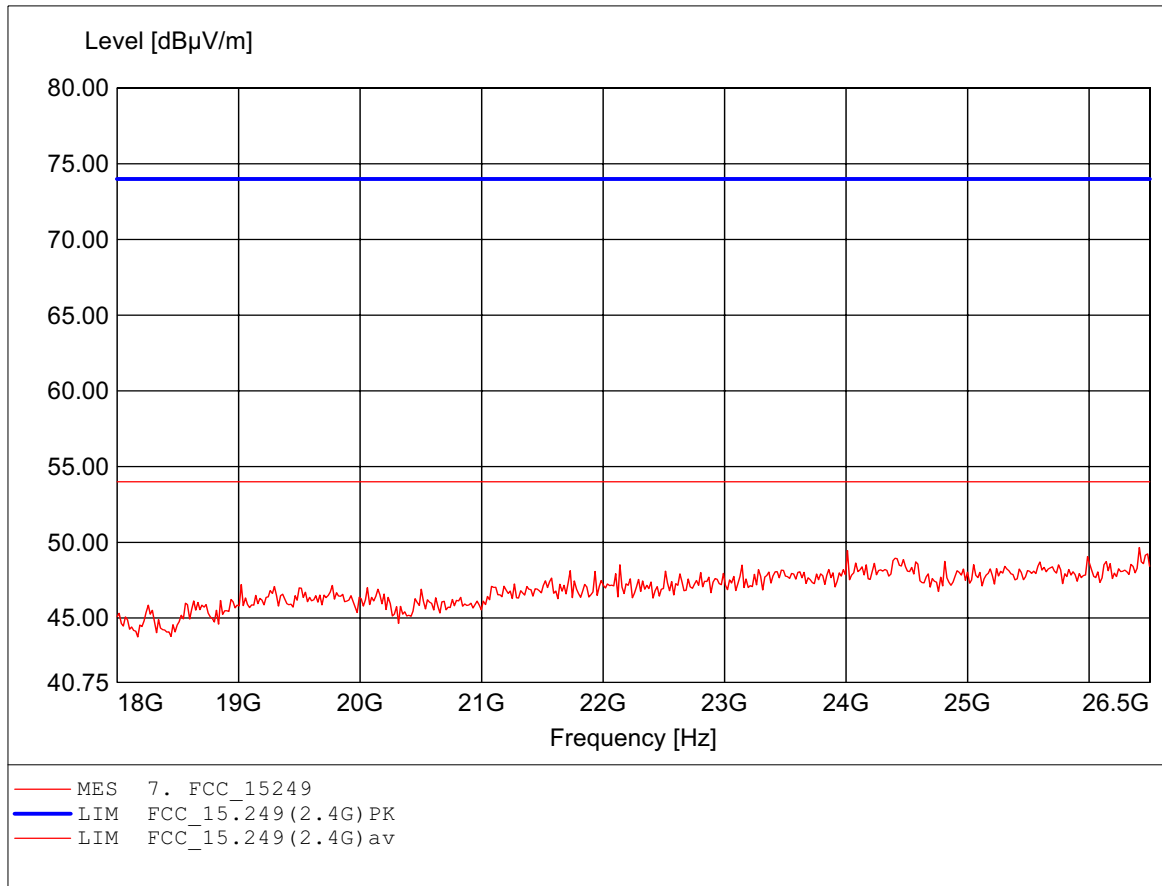

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


ET: Wireless Dalmade C00 Camera Kit
MODE N.: SAV2450SA) middle hannel
Approval H0der: SW PACET CORPORATION
Test Site / Operat0: ES / Dennis
Temperatne/V0ltage: Temp.: 24.4C/ Unm.: 120 VAC(a0dcadapt0)
Test Spe0fiatio: a0ding to15.249,peak detect0
Comment 1: Dist.: 3m,Ant.: HK116
Freq 196.593MHz,max 23.94dBW/m,RBW: 100kHz

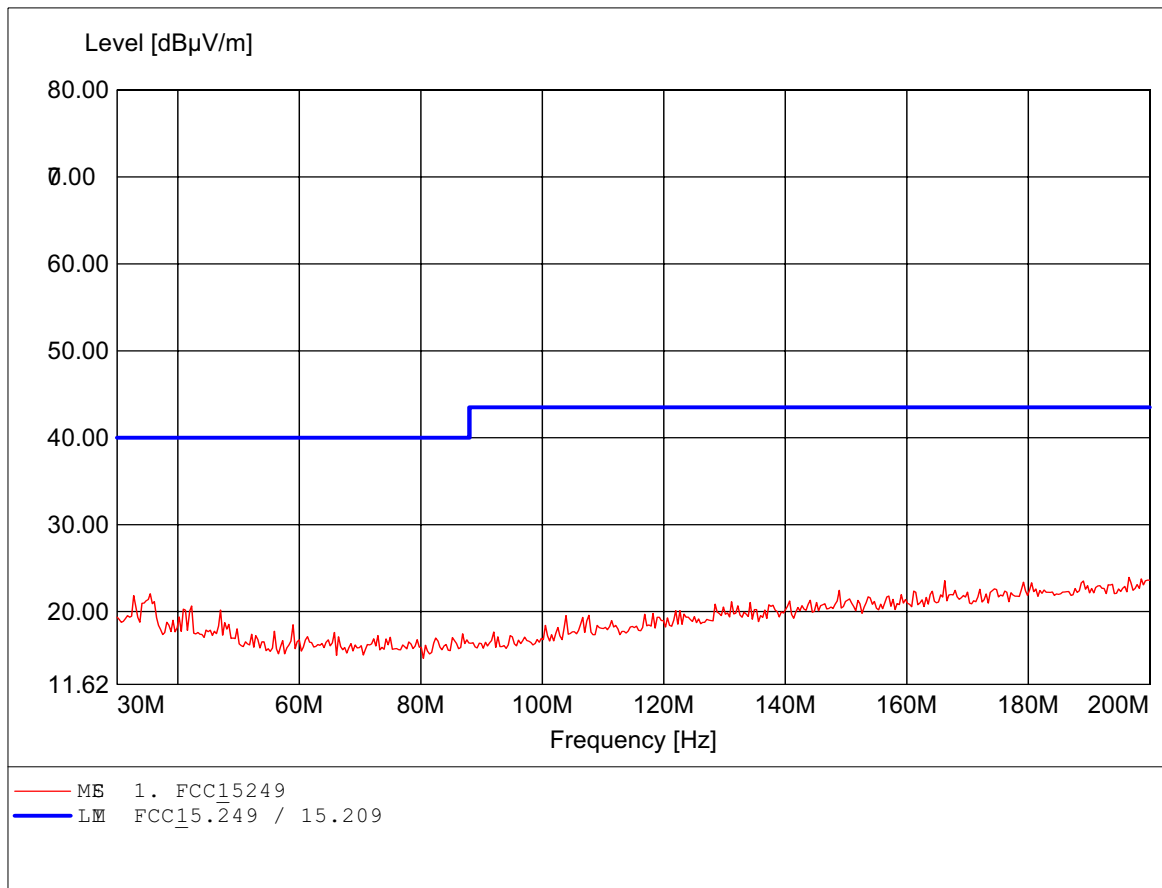

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


ET: Wireless Dalmode C00 Camera Kit
MODE N.: SAV2450SA) middle hannel
Approval H0der: SW PACET CORPORATION
Test Site / Operat0: ES / Dennis
Temperatne/V0ltage: Temp.: 24.4C/ Unm.: 120 VAC(a0dcadapt0)
Test Spe0fiatio: a0ding to15.249,peak detect0
Comment 1: Dist.: 3m,Ant.: HK116
Freq 198.637MHz,max 25.78dBW/m,RBW: 100kHz

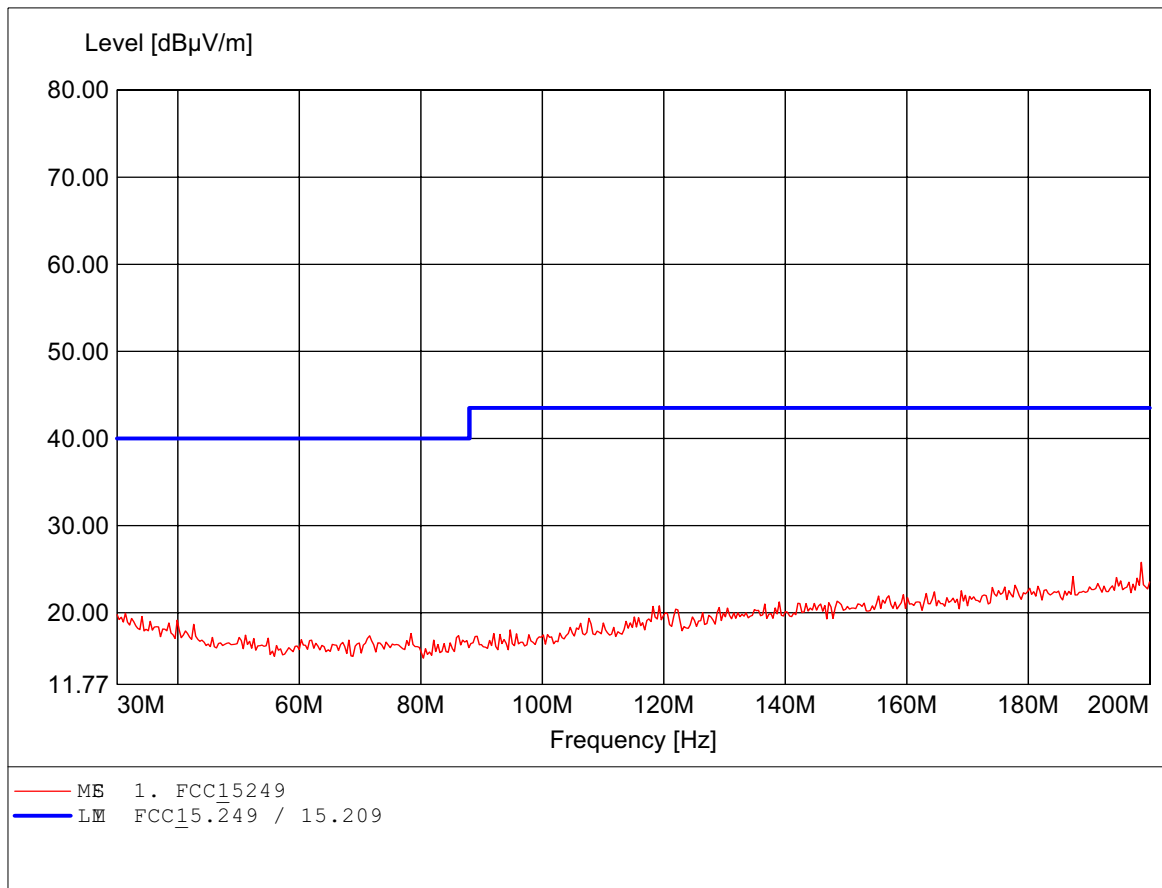

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


ET: Wireless Dalmade C00 Camera Kit
MODE N.: SAV2450SA) middle hannel
Approval H0der: SW PACET CORPORATION
Test Site / Operat0: ES / Dennis
Temperature/V0ltage: Temp.: 24.4C/ Unm.: 120 VAC(acdcadapt0)
Test Spe0ficiatin: a0ding toF5.249,peak detect0
Comment 1: Dist.: 3m,Ant.: HL 223,amplif.
Freq 878.156MHz,max 35.21dBu/m,RBW: 100kHz

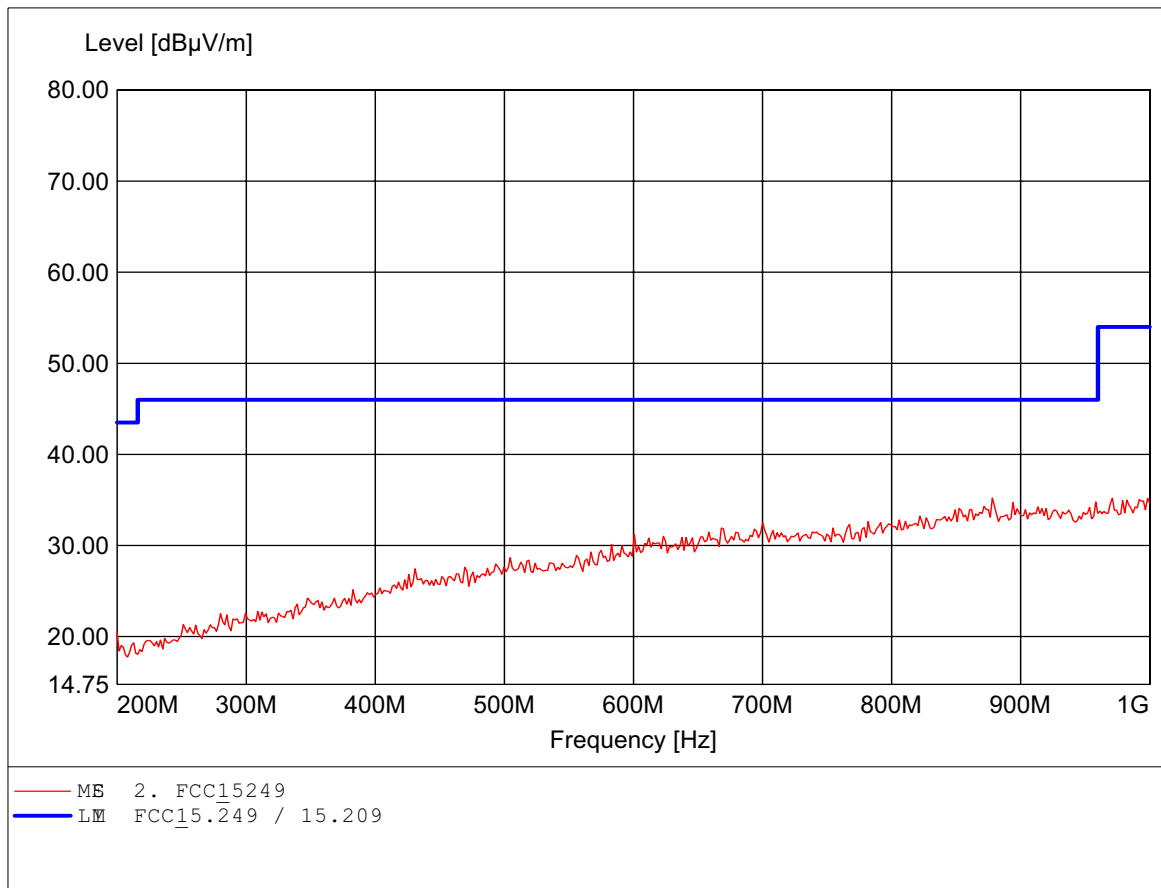

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


ET: Wireless Dalmade C00 Camera Kit
MODE N.: SAV2450SA) middle bannel
Approval H0der: SW PACET CORPORATION
Test Site / Operat0: ES / Dennis
Temperatne/V0ltage: Temp.: 24.4C/ Unm.: 120 VAC(a0dcadapt0)
Test Spe0fiatio: a0ding toF5.249,peak detet0
Comment 1: Dist.: 3m,Ant.: HL 223,amplif.
Freq 969.539MHz,max 35.49dBW/m,RBW: 100kHz

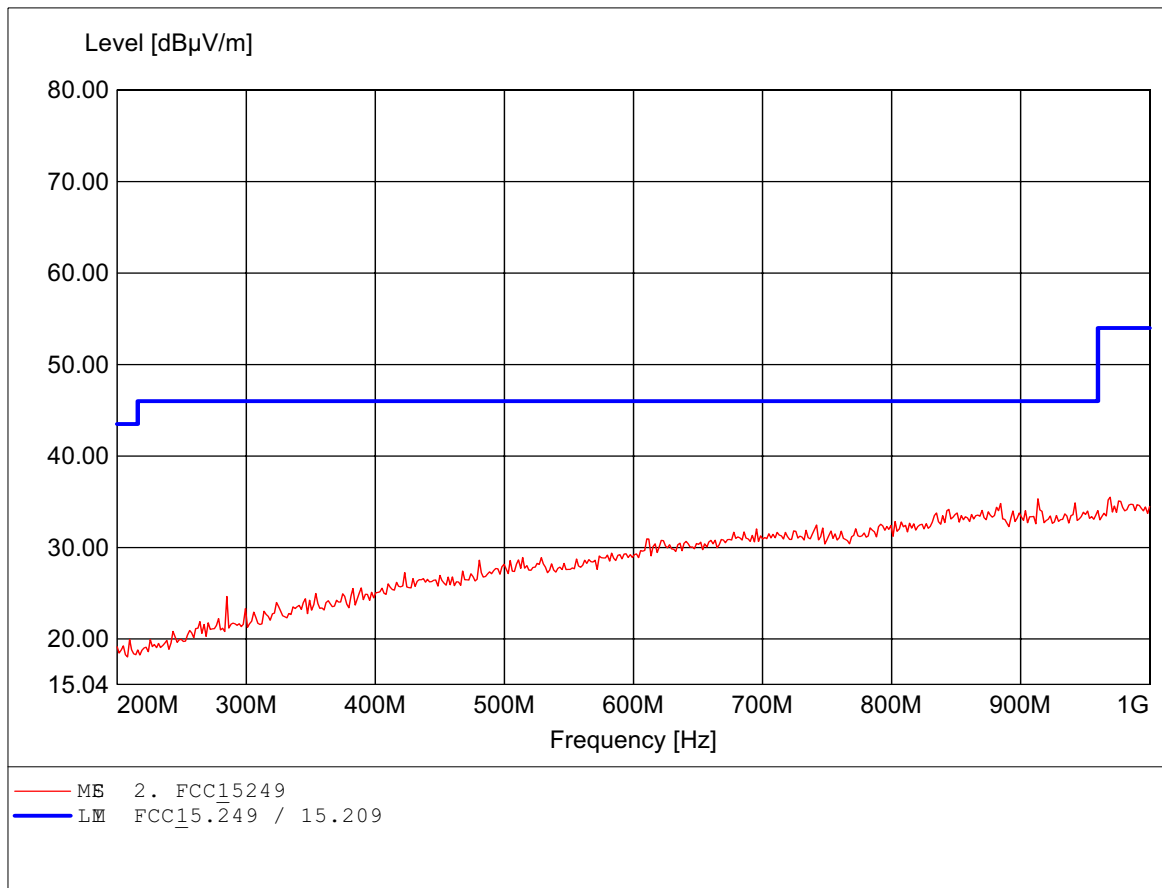

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


ET: Wireless Dalmade C00 Camera Kit
MODE N.: SAV2450SA) middle channel
Approval Holder: SW PACIFIC CORPORATION
Test Site / Operator: ES / Dennis
Temperature/Voltage: Temp.: 24.4C/ Unm.: 120 VAC(acdcadapt0)
Test Specification: adding to\$5.249,peak detect0
Comment 1: Dist.: 3m,Ant.: HL025,amplif.
Freq 2.449GHz,max 78.34dBu/m,RBW: 1MHz

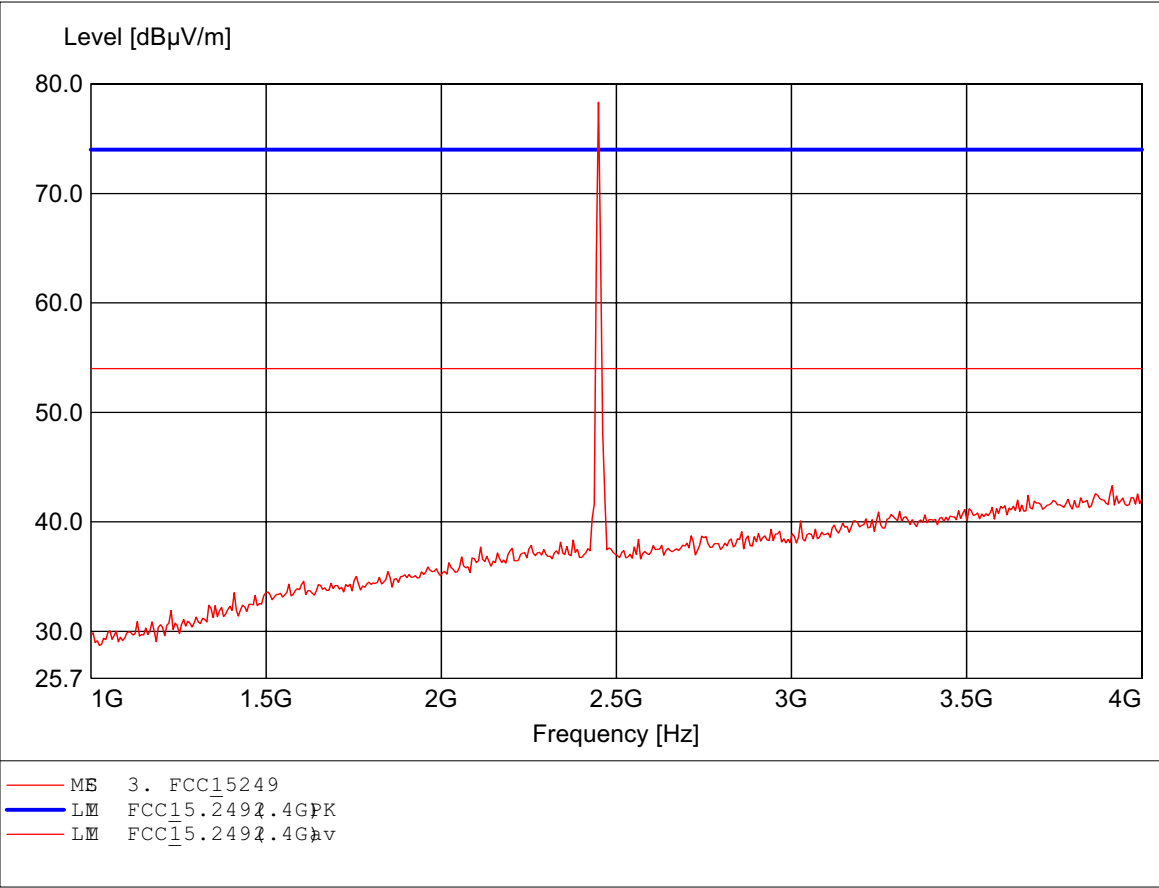

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


ET: Wireless Dalmode Camo Camera Kit
MODE N.: SAV2450SA) middle channel
Approval Holder: SW PACIFIC CORPORATION
Test Site / Operator: ES / Dennis
Temperature/Voltage: Temp.: 24.4C/ Unm.: 120 VAC (ac/dc adapter)
Test Specification: adding to 5.249, peak detect
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq 2.449GHz, Max 78.33dBu/m, RBW: 1MHz

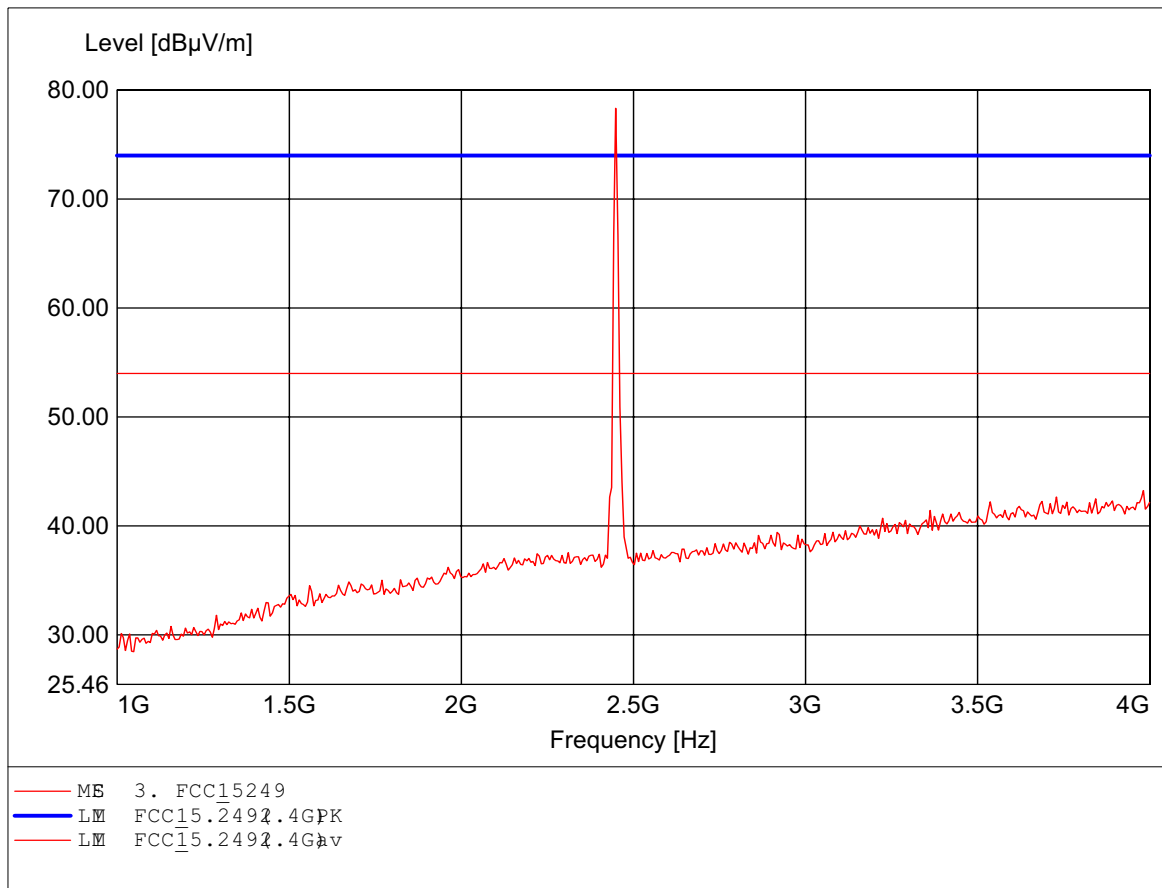

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


ET: Wireless Dalmade C00 Camera Kit
MODE N.: SAV2450SA) middle channel
Approval Holder: SW PACIFIC CORPORATION
Test Site / Operator: ES / Dennis
Temperature/Voltage: Temp.: 24.4C/ Unm.: 120 VAC(acdcadapt0)
Test Specification: adding to\$5.249,peak detect0
Comment 1: Dist.: 3m,Ant.: HL025,ampl.#P.
Freq 4.898GHz,max 57.85dBu/m,RBW: 1MHz

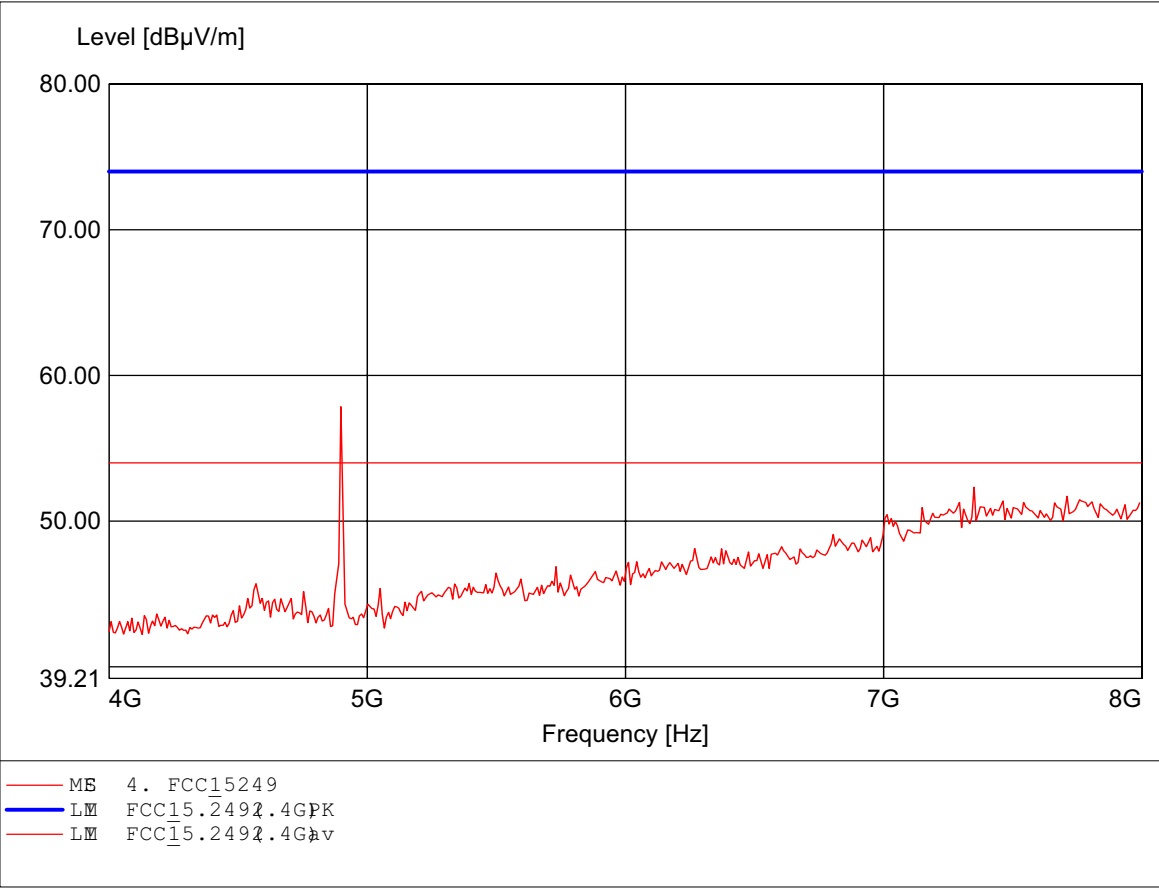

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


ET: Wireless Dalmade C00 Camera Kt
MODE N.: SAV2450SA) middle hannel
Approval H0der: SW PACET CORPORATION
Test Site / Operat0: ES / Dennis
Temperatne/V0ltage: Temp.: 24.4C/ Unm.: 120 VAC(a0dcadapt0)
Test Spe0fiatio: a0ding to\$5.249,peak detet0
Comment 1: Dist.: 3m,Ant.: HL025,ampl.#P.
Freq 4.898GHz,max 54.14dBW/m,RBW: 1MHz

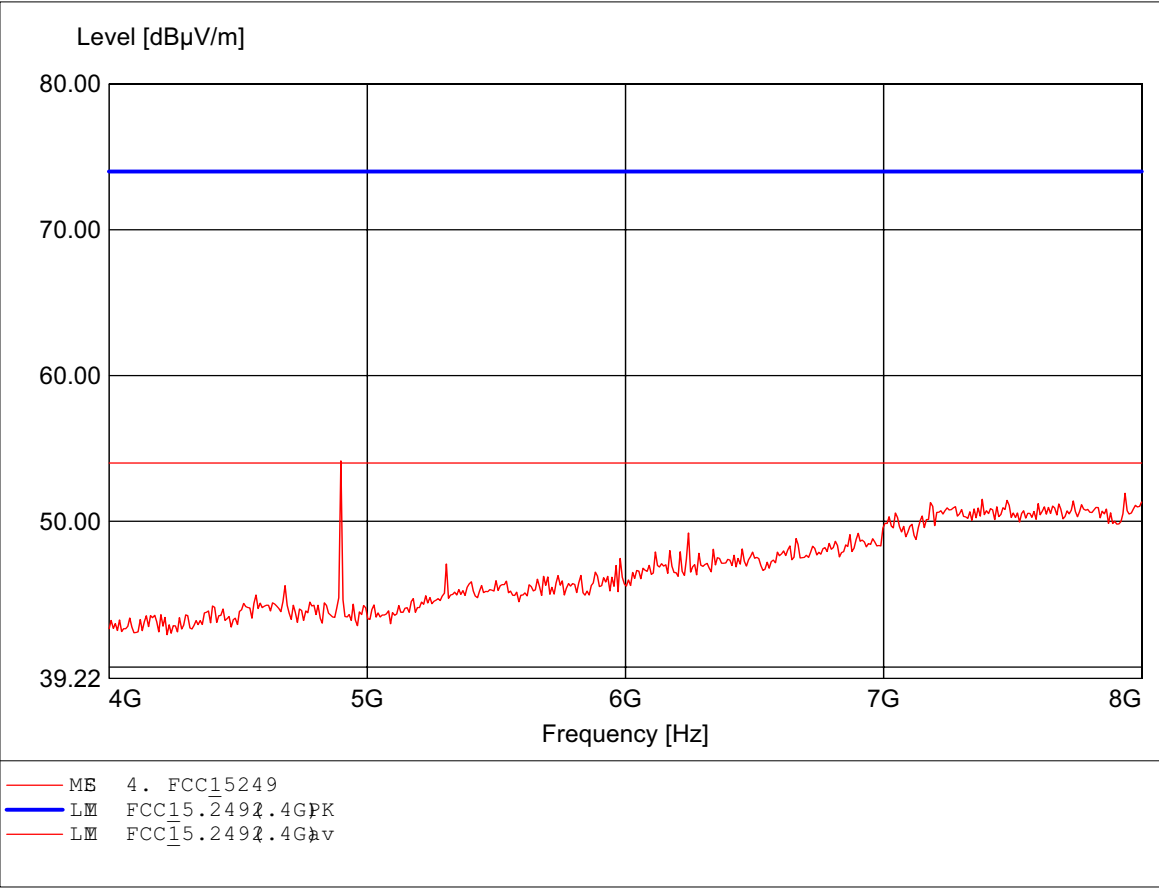

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


ET: Wireless Dalmade C00 Camera Kt
MODE N.: SAV2450SA) middle hannel
Approval H0der: SW PACET CORPORATION
Test Site / Operat0: ES / Dennis
Temperatne/V0ltage: Temp.: 24.4C/ Unm.: 120 VAC(a0dcadapt0)
Test Spe0fiatio: a0ding to\$5.249,peak dete0
Cmment 1: Dist.: 3m,Ant.: HL025,ampl.#P.
Freq 11.591GHz,Max 52.16dBW/m,RBW: 1MHz

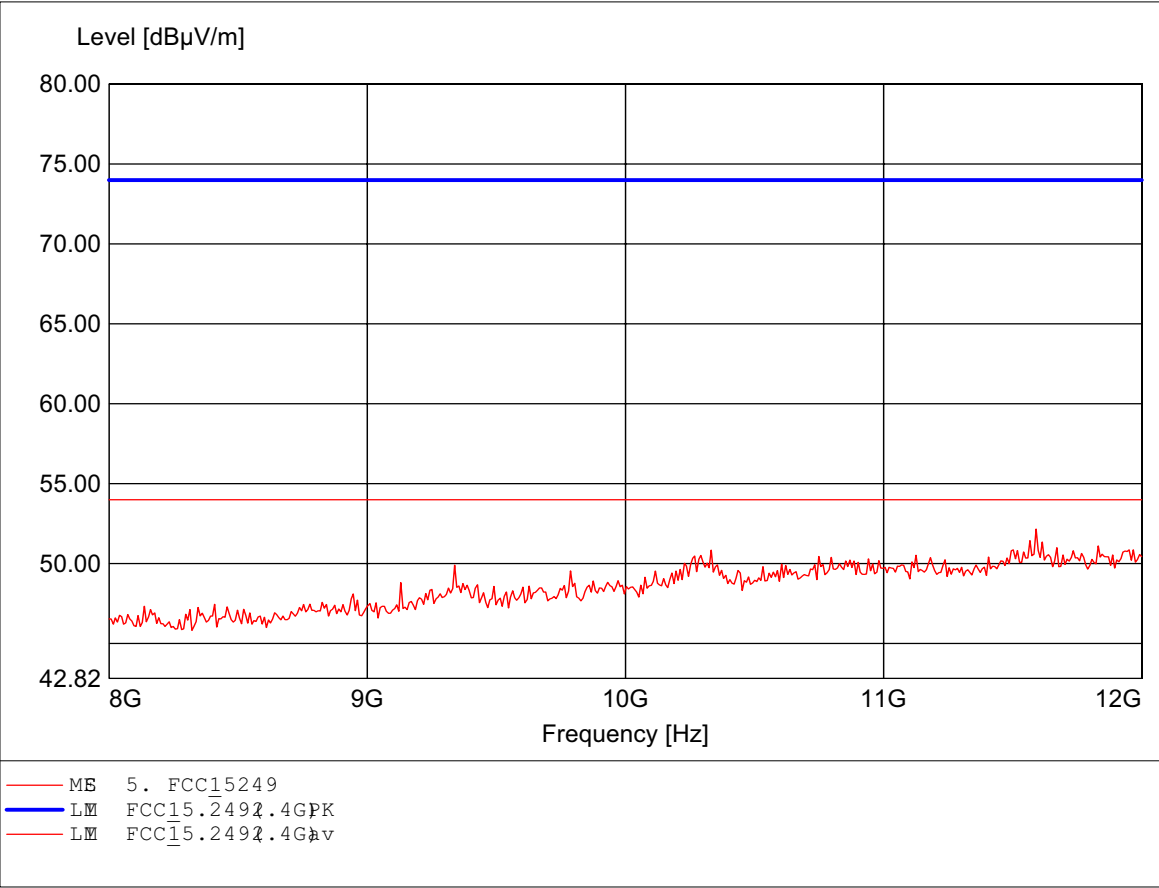

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


ET: Wireless Dalmade C00 Camera Kt
MODE N.: SAV2450SA) middle channel
Approval Holder: SW PACIFIC CORPORATION
Test Site / Operator: ES / Dennis
Temperature/Voltage: Temp.: 24.4C/ Unm.: 120 VAC(acdcadapt0)
Test Specification: adding to\$5.249,peak detect0
Comment 1: Dist.: 3m,Ant.: HL025,ampl.#P.
Freq 11.607GHz,max 51.58dBu/m,RBW: 1MHz

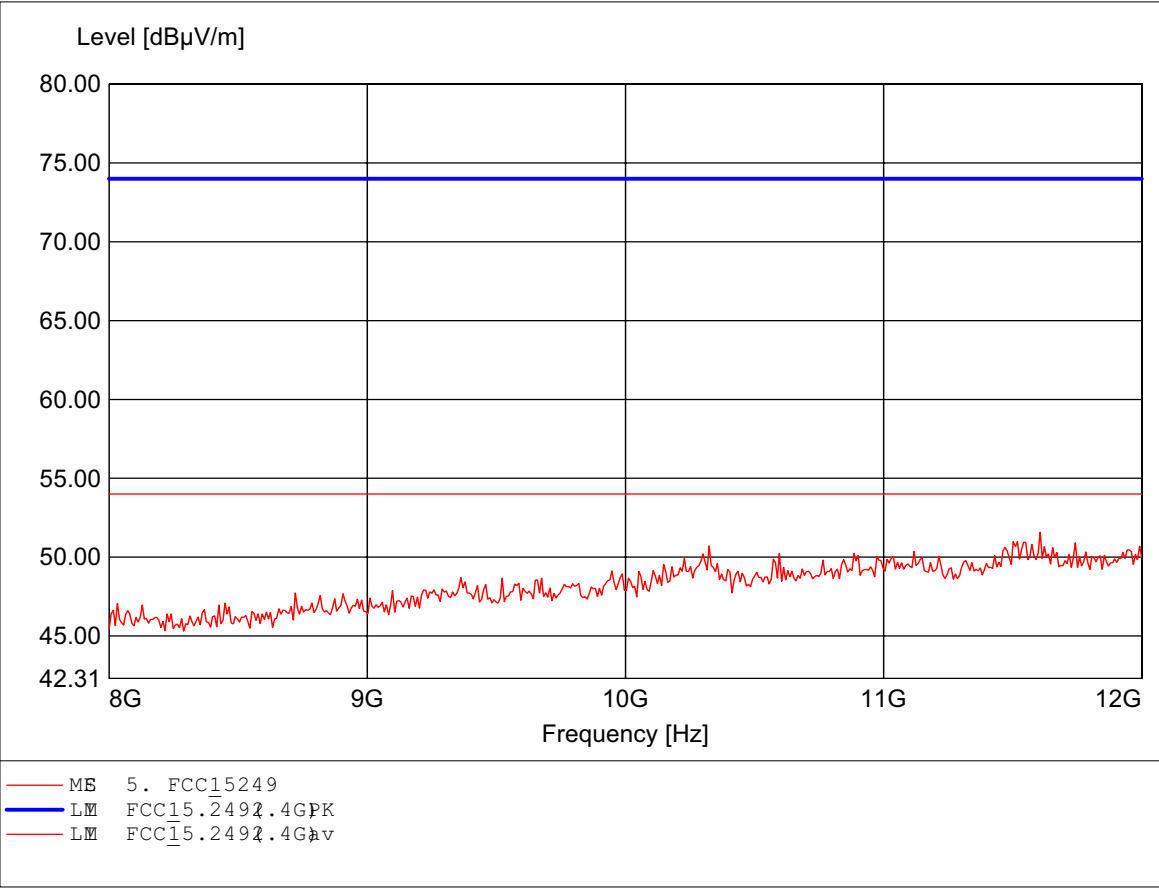

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


ET: Wireless Dalmade C00 Camera Kit
MODE N.: SAV2450SA) middle channel
Approval Holder: SW PACIFIC CORPORATION
Test Site / Operator: ES / Dennis
Temperature/Voltage: Temp.: 24.4C/ Unm.: 120 VAC(acdcadapt0)
Test Specification: adding to\$5.249,peak detect0
Comment 1: Dist.: 3m,Ant.: HL025,ampl.#P.
Freq 17.760GHz,Max 50.14dBu/m,RBW: 1MHz

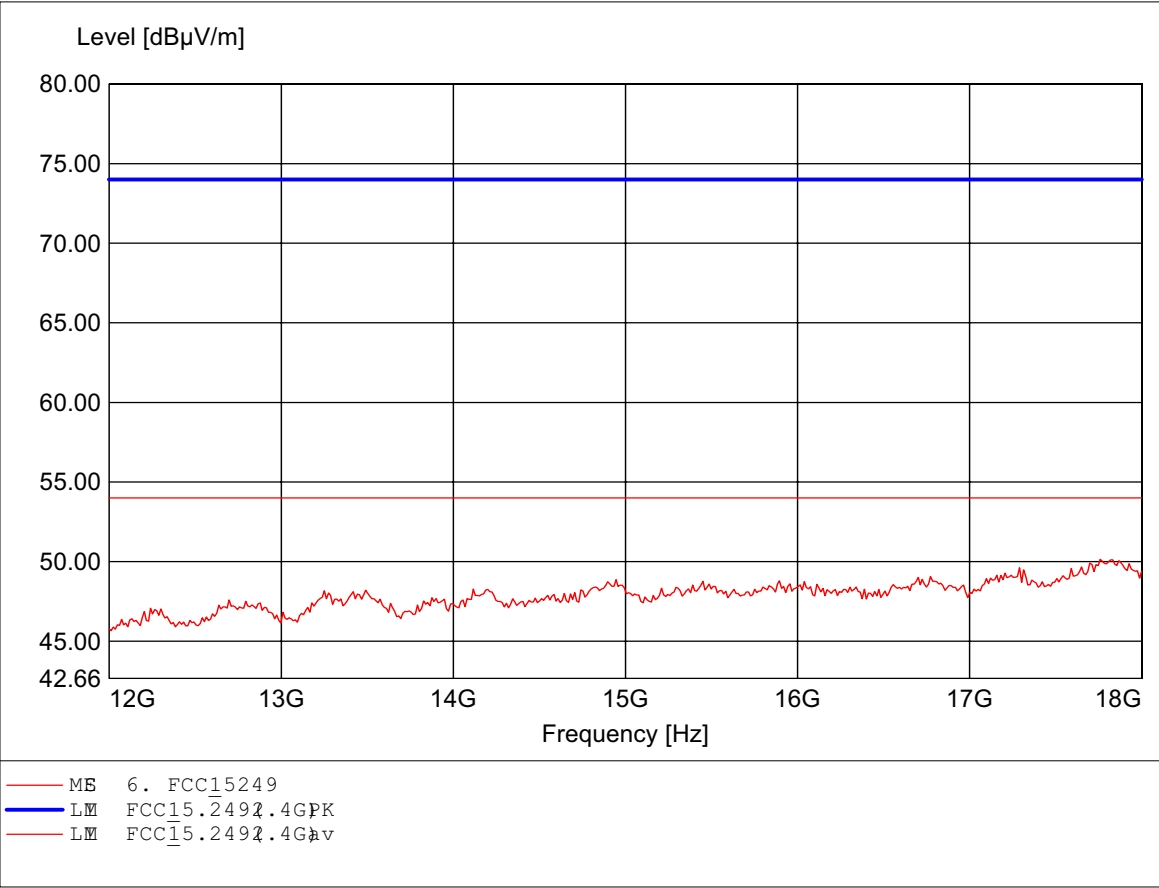

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


ET: Wireless Dalmade C00 Camera Kit
MODE N.: SAV2450SA) middle channel
Approval Holder: SW PACIFIC CORPORATION
Test Site / Operator: ES / Dennis
Temperature/Voltage: Temp.: 24.4C/ Unm.: 120 VAC(acdcadapt0)
Test Specification: adding to\$5.249,peak detect0
Comment 1: Dist.: 3m,Ant.: HL025,ampl.#P.
Freq 17.820GHz,Max 50.13dBu/m,RBW: 1MHz

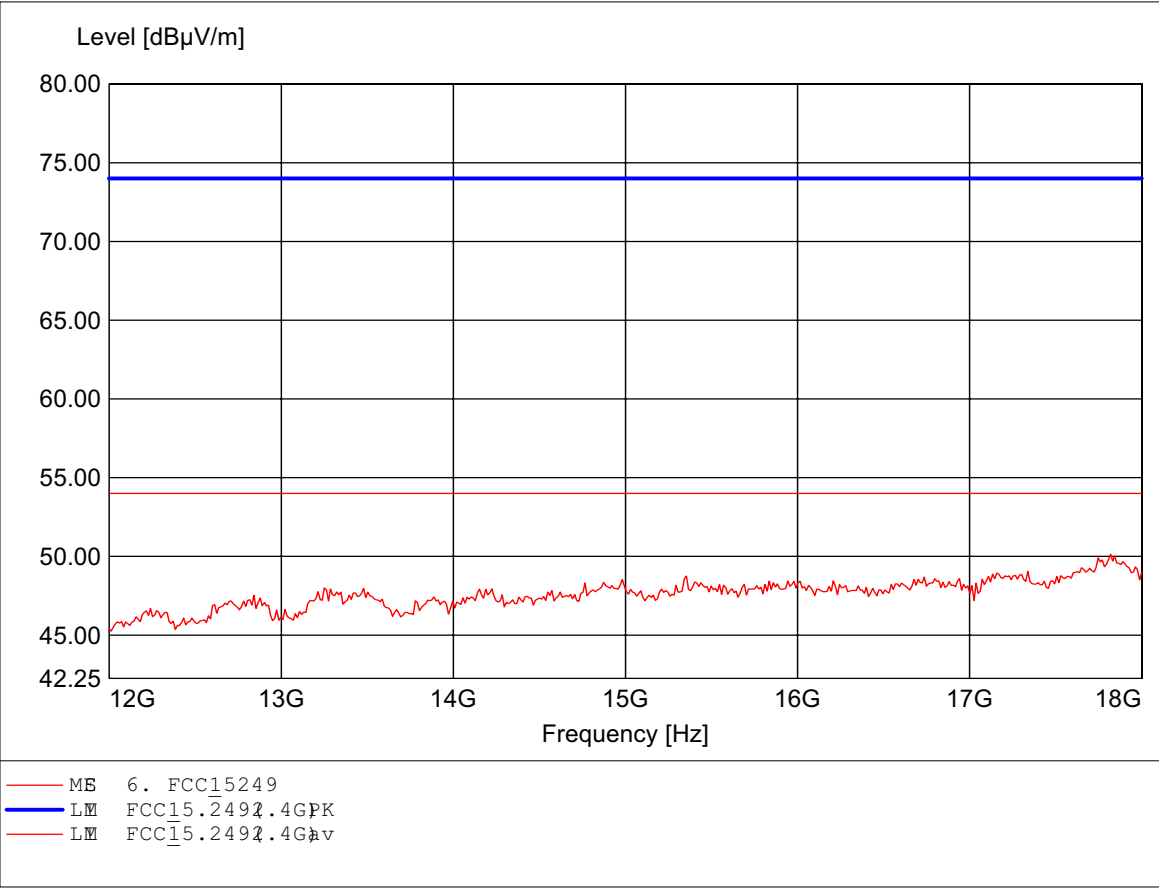

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) middle channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 26.296GHz, Emax: 49.12dBμV/m, RBW: 1MHz

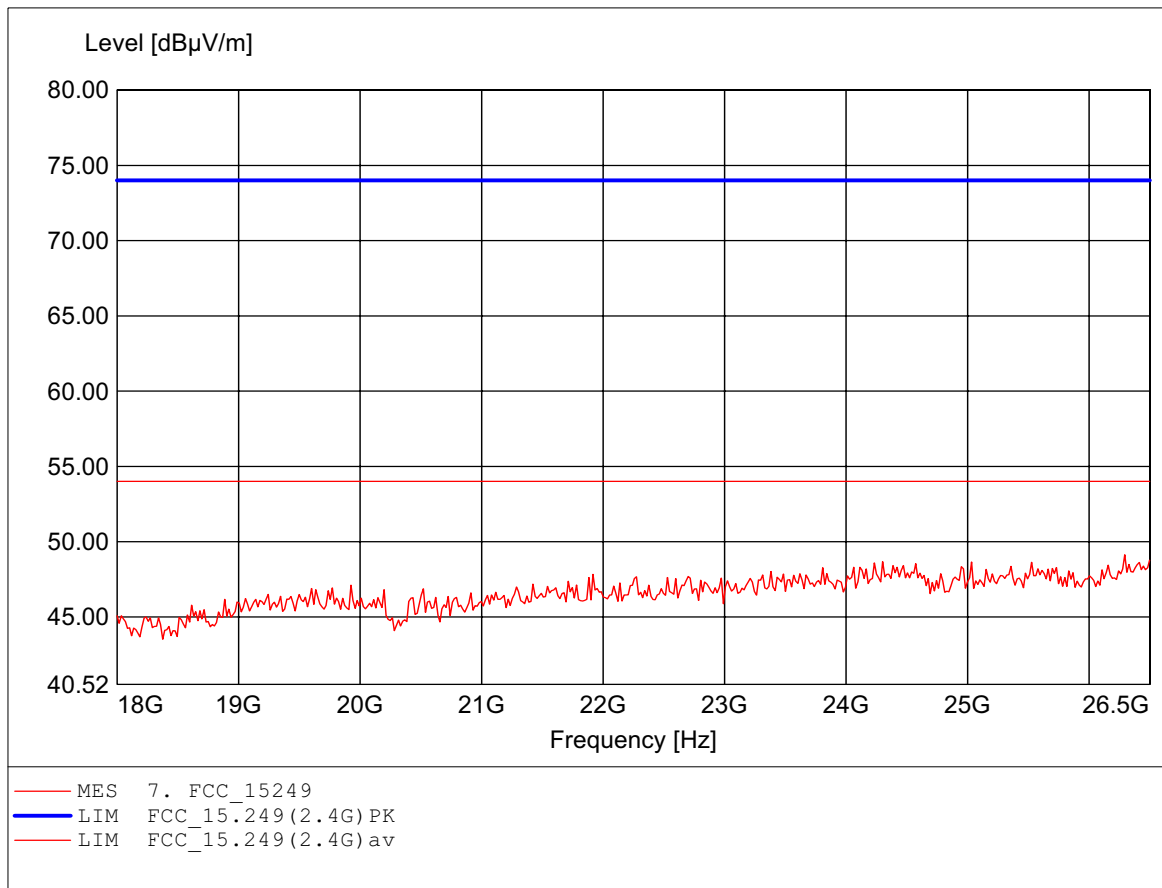

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) middle channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 26.364GHz, Emax: 49.53dBμV/m, RBW: 1MHz

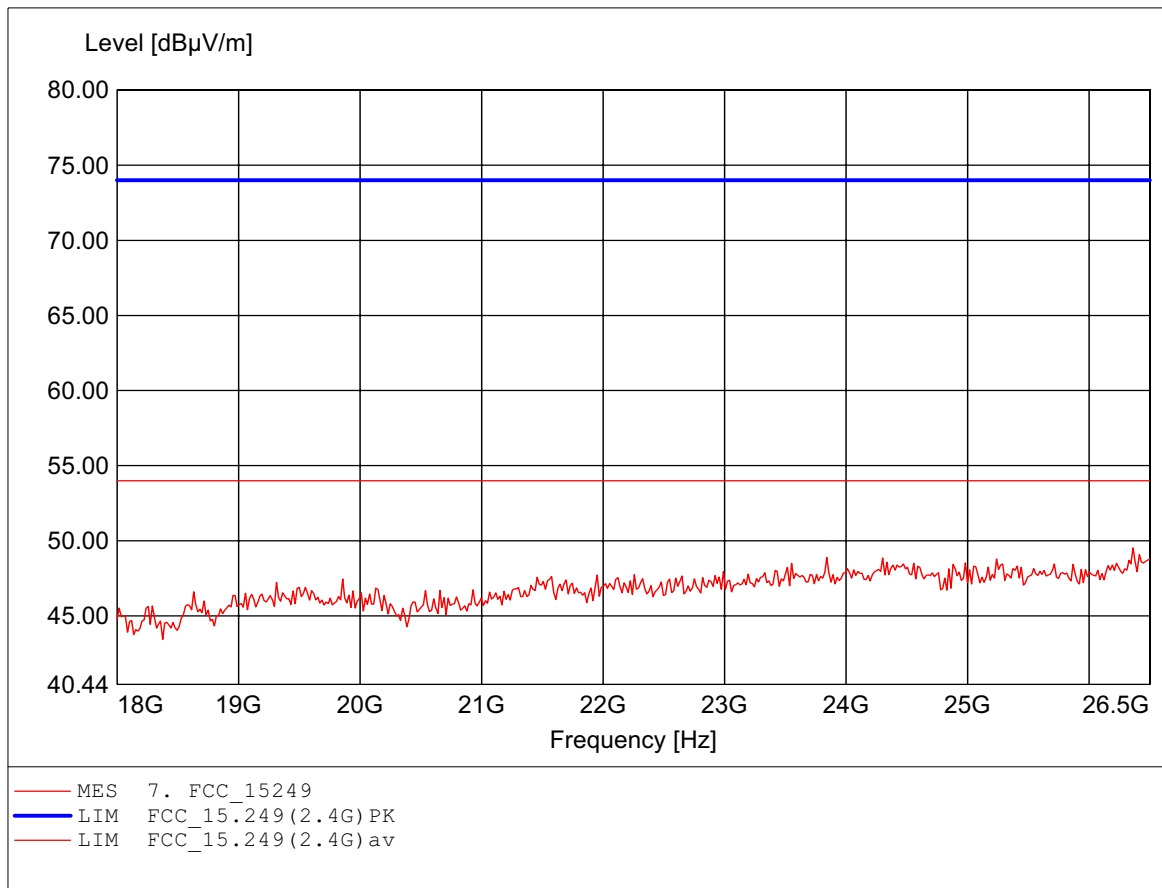

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) high channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 193.527MHz, Emax: 24.54dBμV/m, RBW: 100kHz

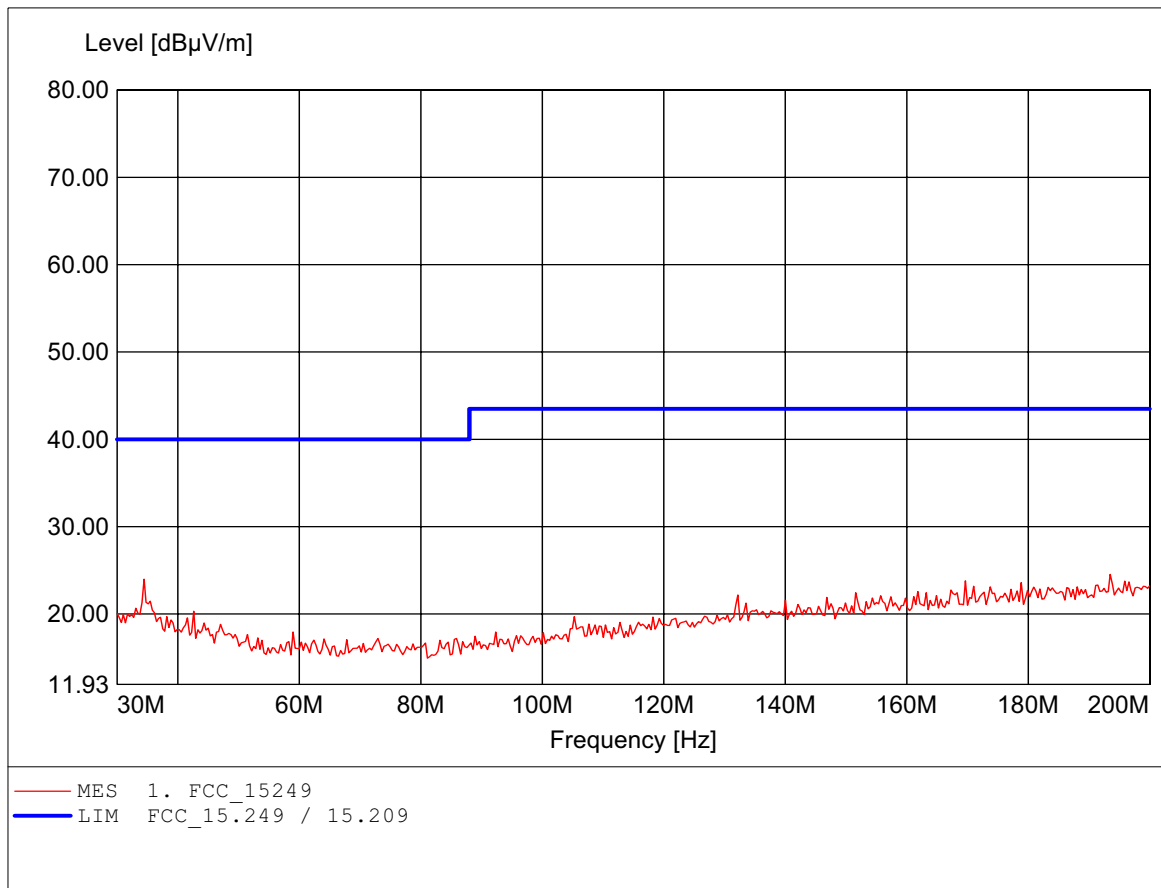

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) high channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 195.912MHz, Emax: 24.28dBμV/m, RBW: 100kHz

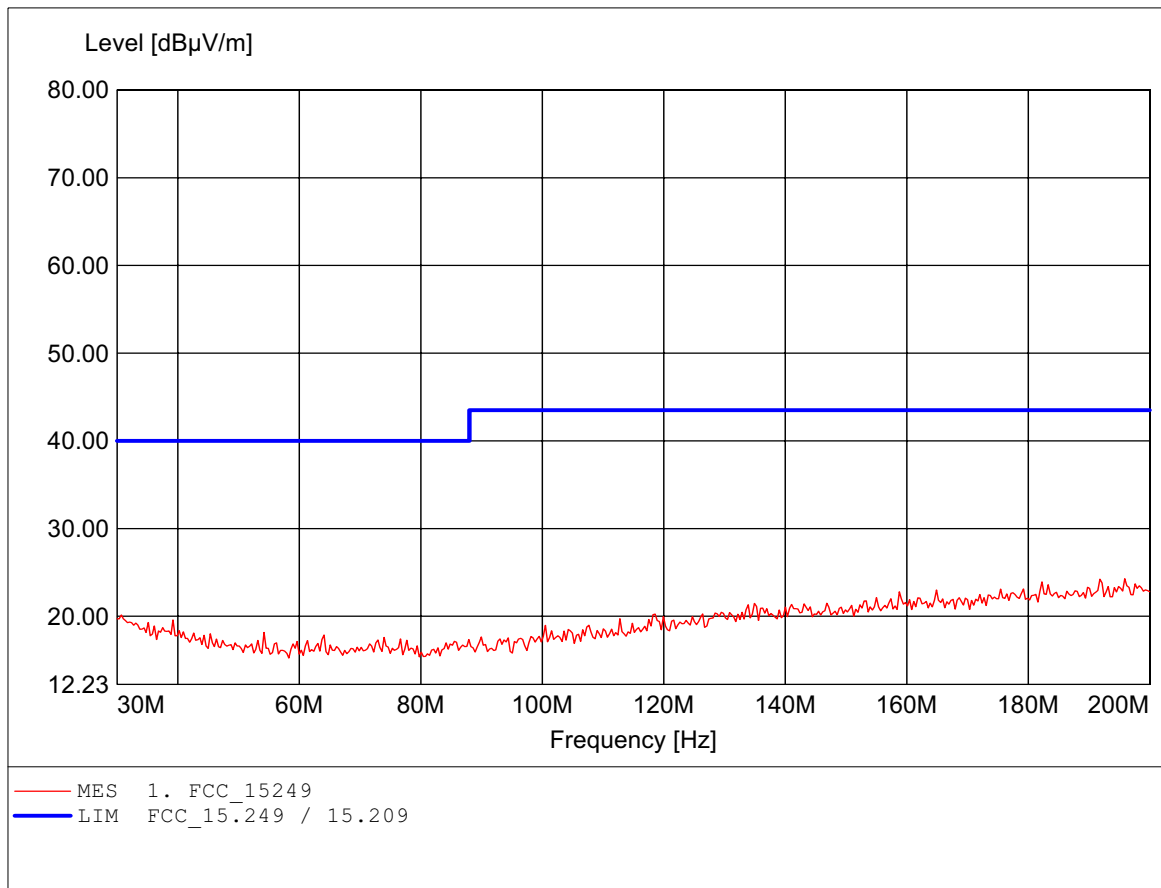

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) high channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Freq: 951.904MHz, Emax: 35.54dBμV/m, RBW: 100kHz

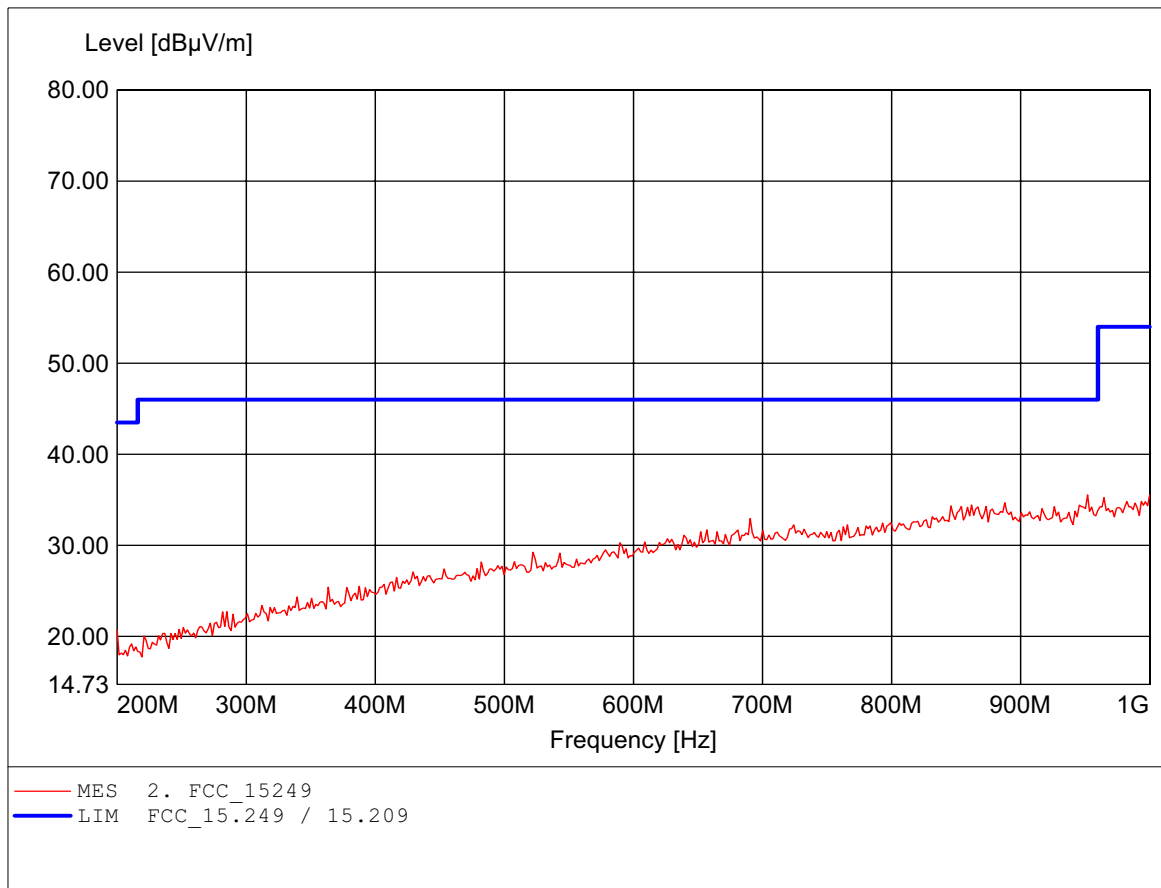

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) high channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Freq: 857.315MHz, Emax: 35.52dBμV/m, RBW: 100kHz

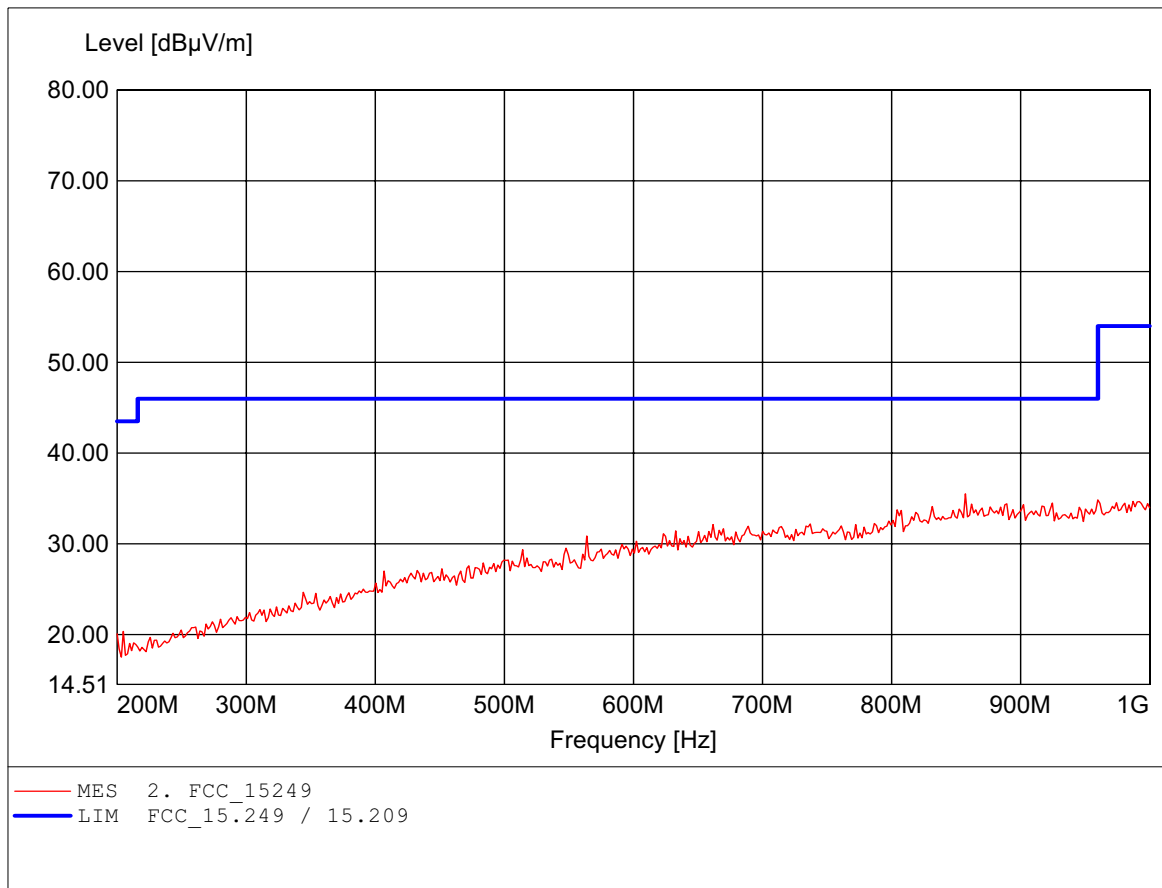

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) high channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.467GHz, Emax: 78.31dBμV/m, RBW: 1MHz

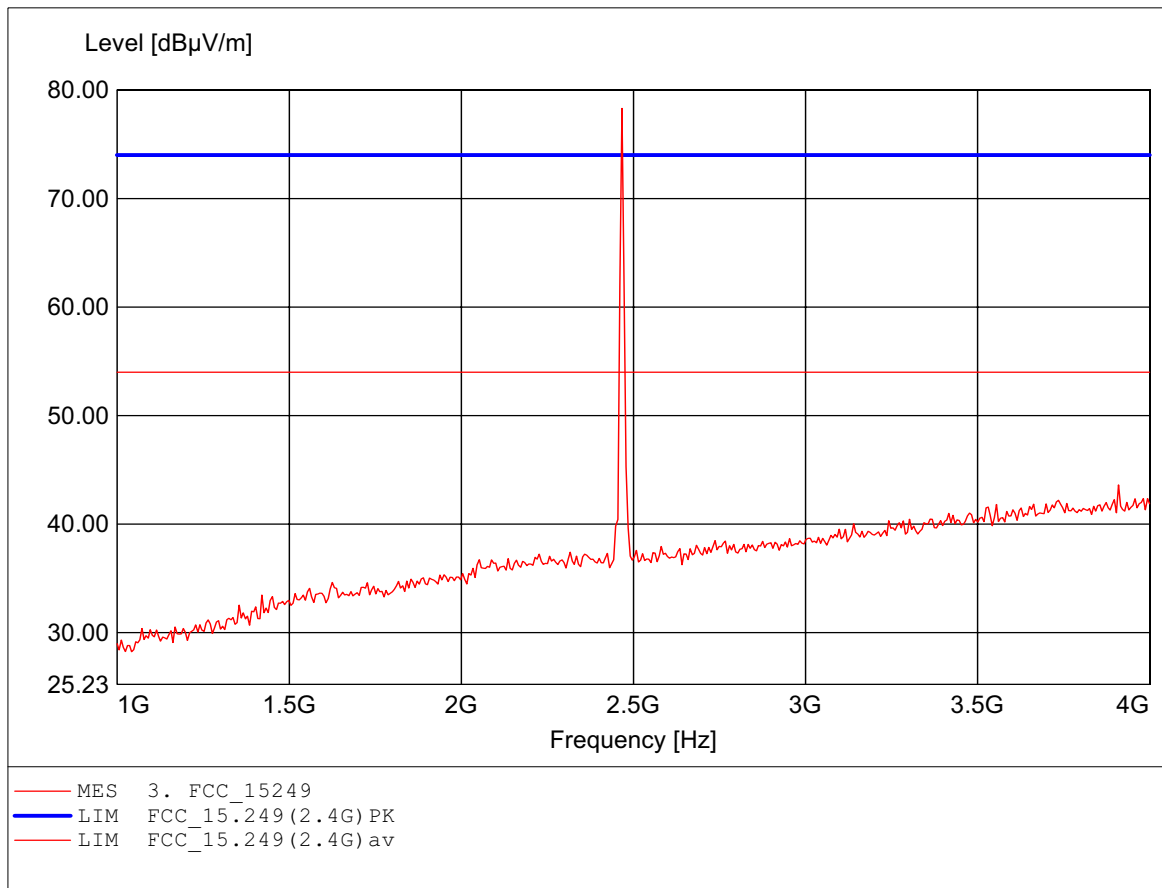

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) high channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.467GHz, Emax: 78.31dBμV/m, RBW: 1MHz

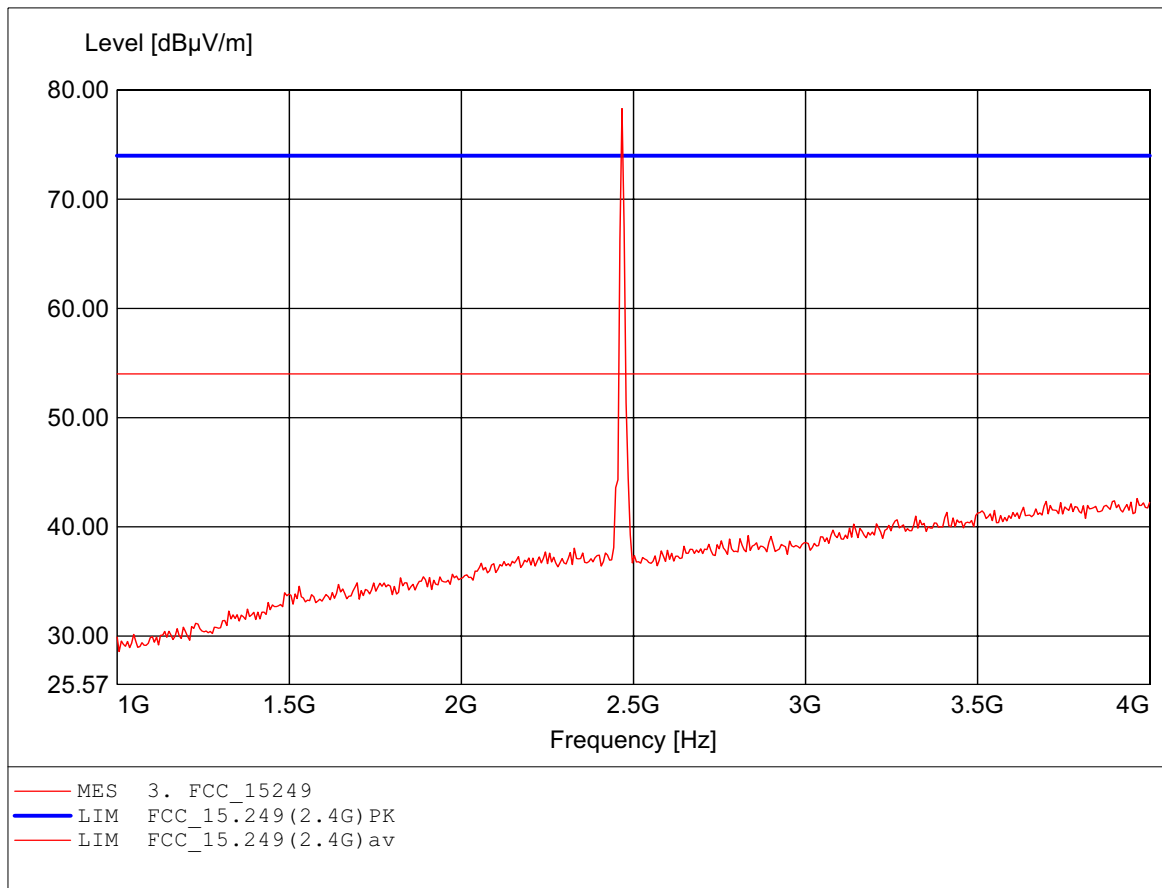

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) high channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 4.938GHz, Emax: 58.60dBμV/m, RBW: 1MHz

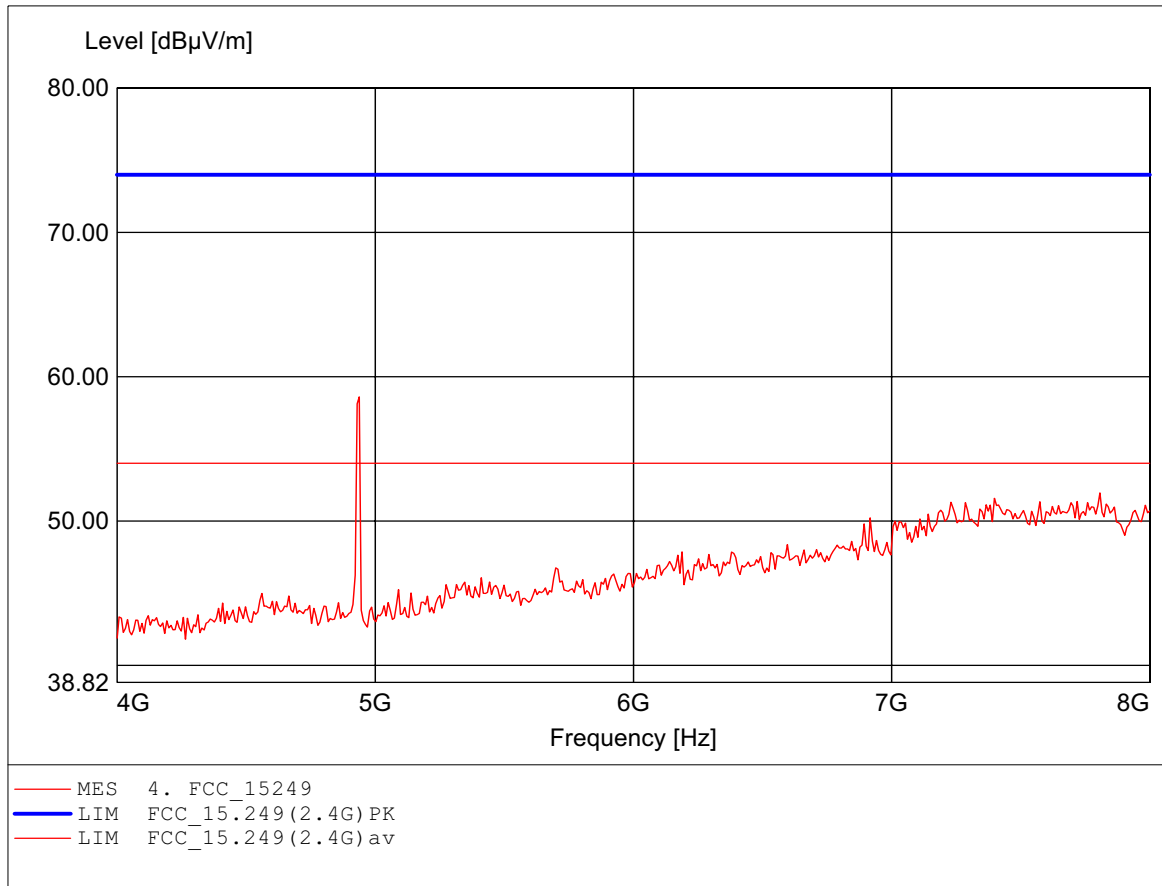

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) high channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 4.938GHz, Emax: 53.16dBμV/m, RBW: 1MHz

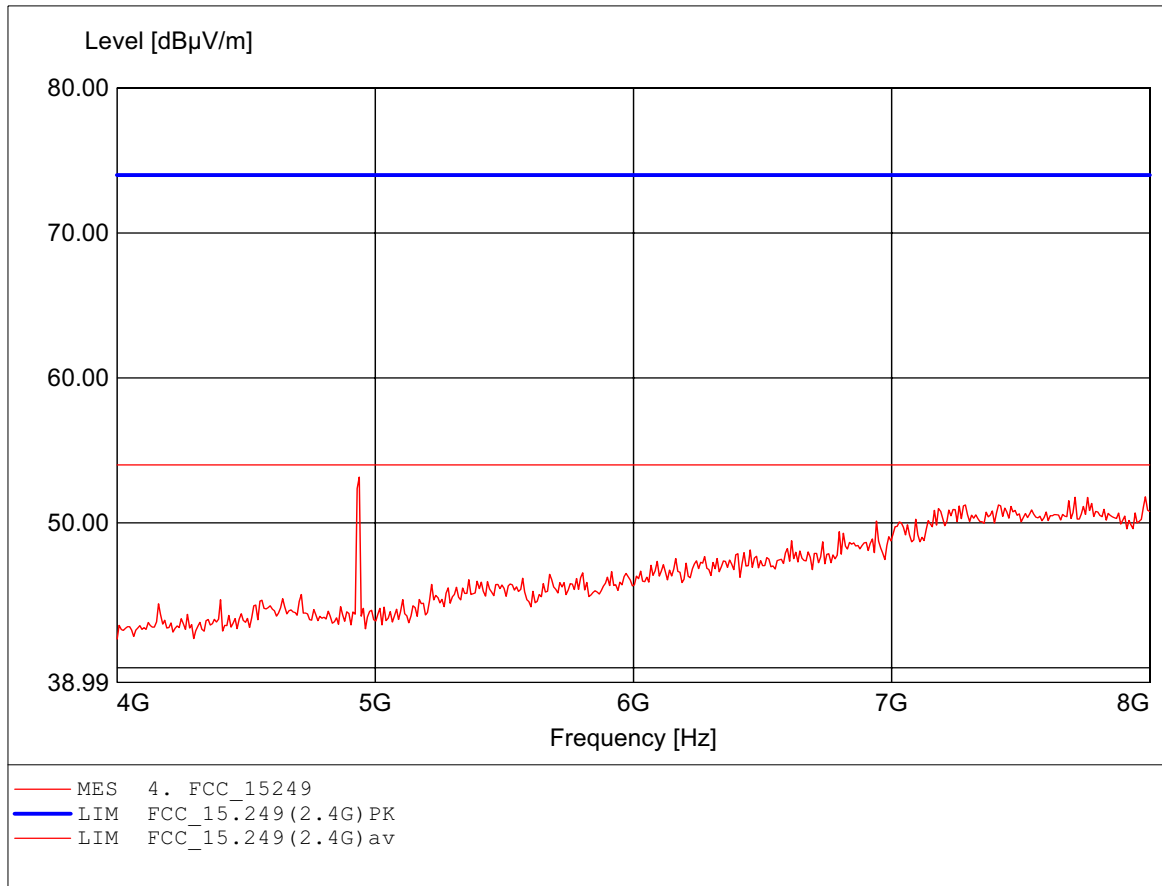

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) high channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 11.591GHz, Emax: 51.43dBμV/m, RBW: 1MHz

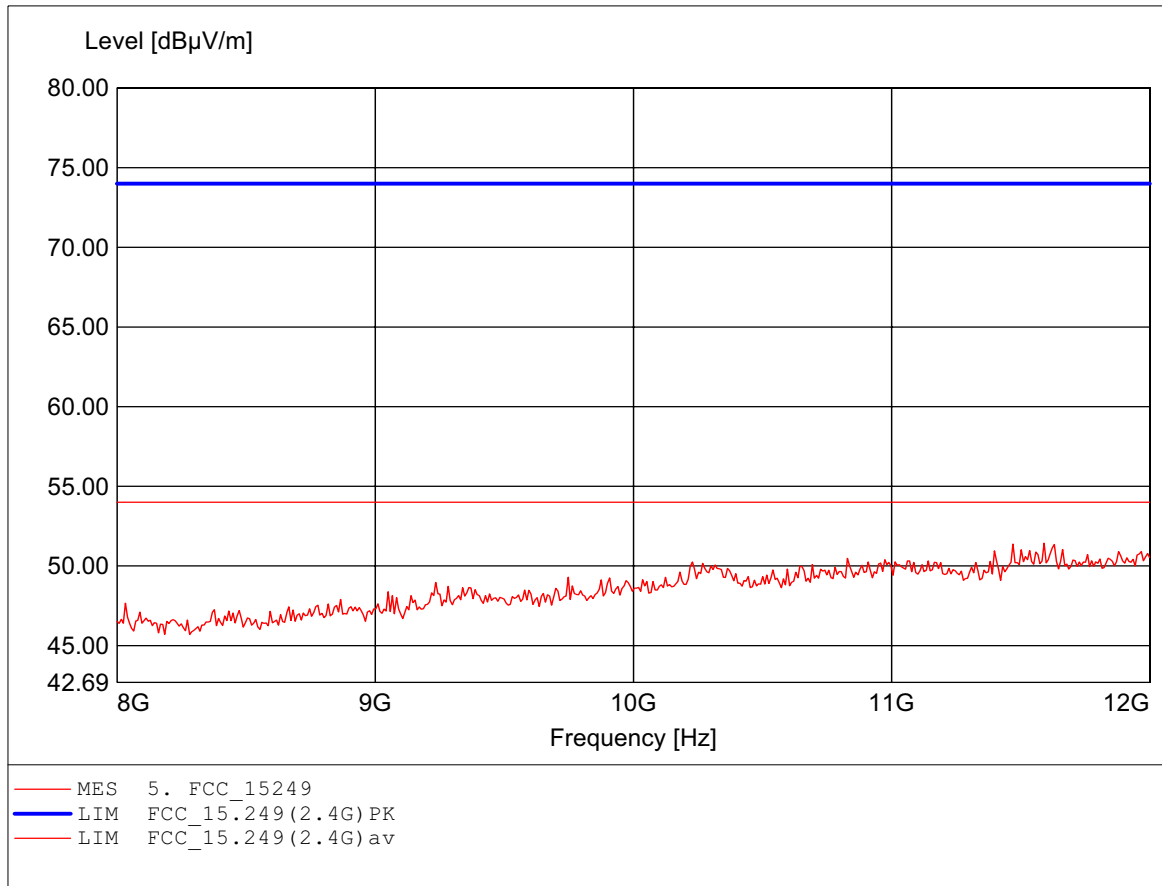

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) high channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 11.960GHz, Emax: 51.42dBμV/m, RBW: 1MHz

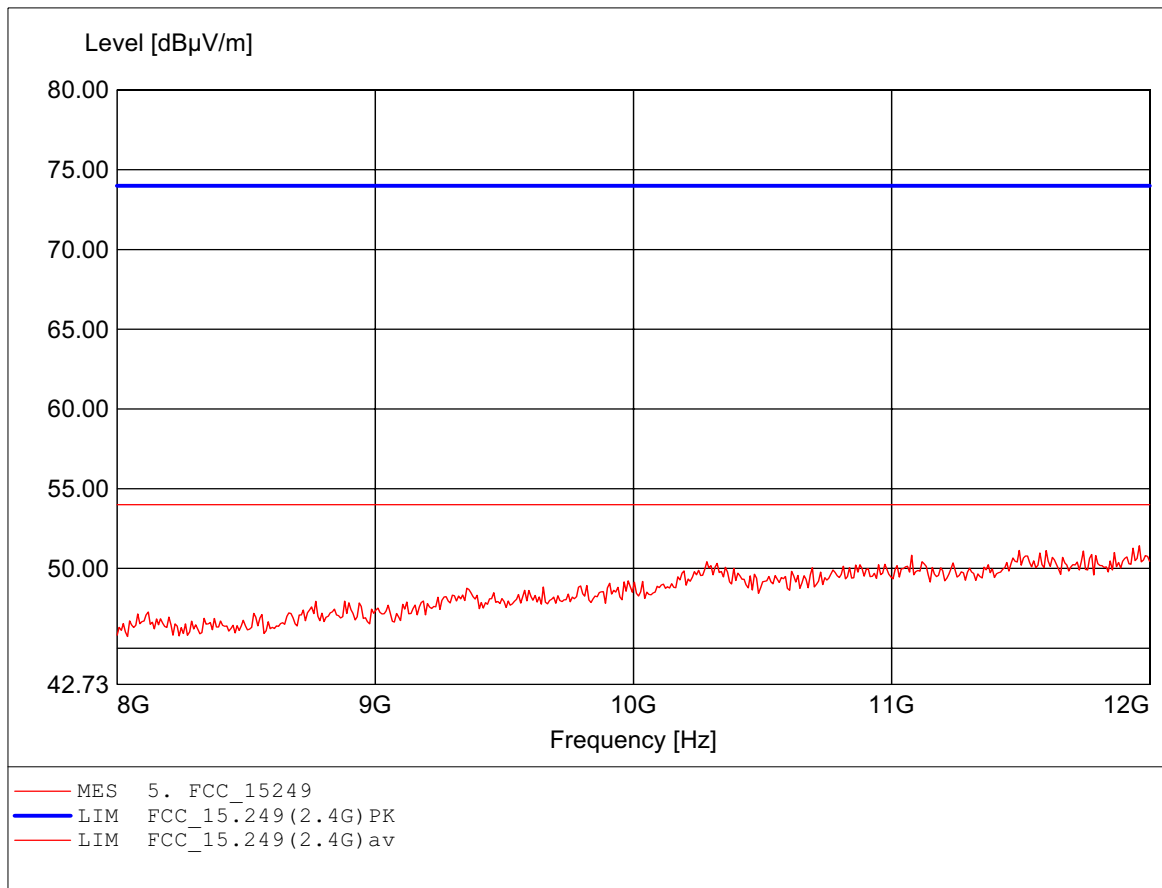

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) high channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.747GHz, Emax: 50.07dBμV/m, RBW: 1MHz

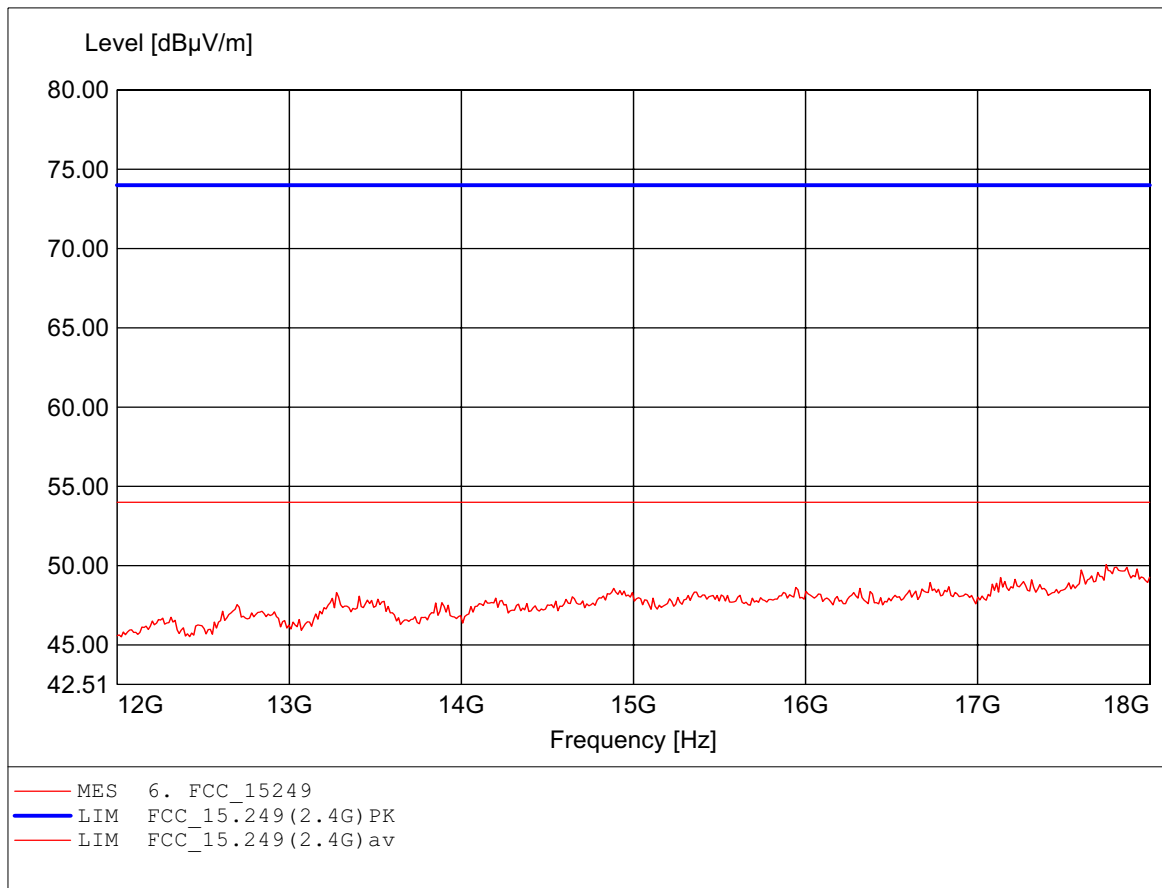

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) high channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.747GHz, Emax: 50.48dBμV/m, RBW: 1MHz

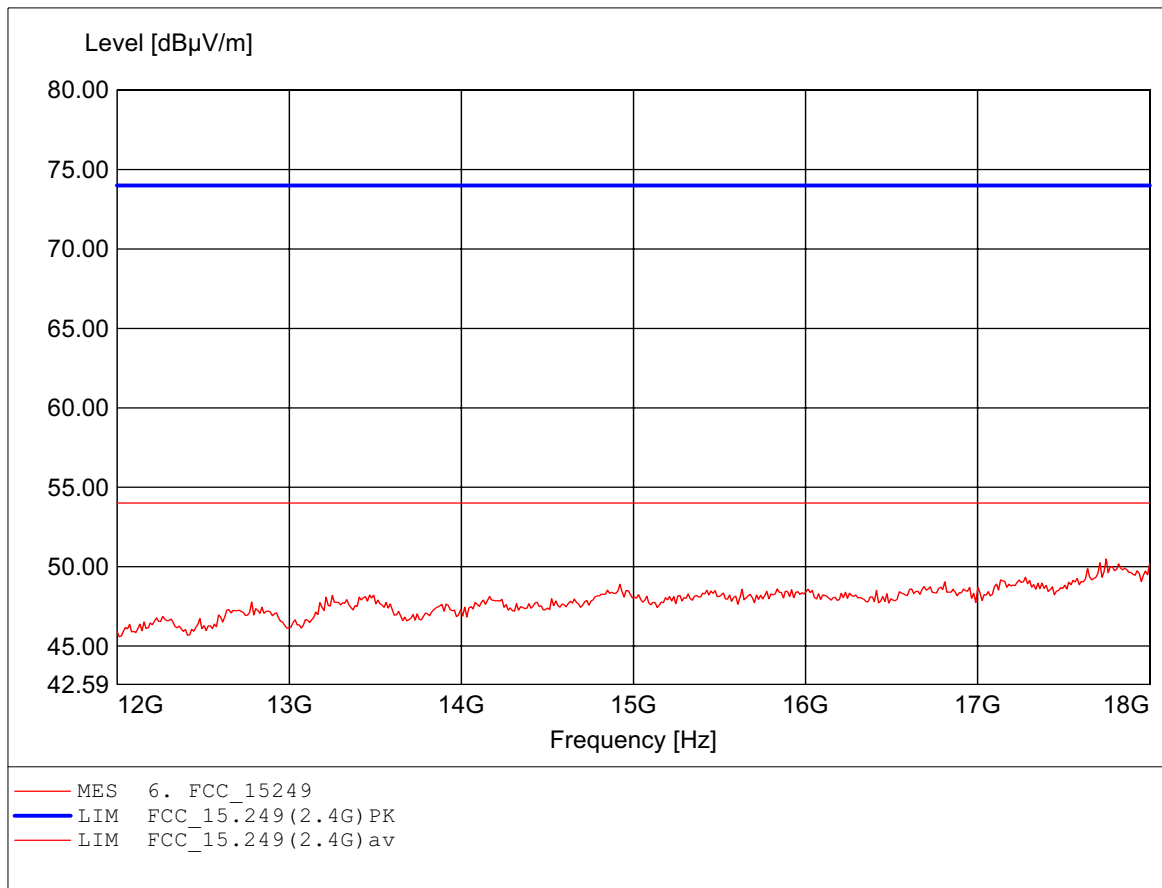

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) high channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 26.364GHz, Emax: 48.89dBμV/m, RBW: 1MHz

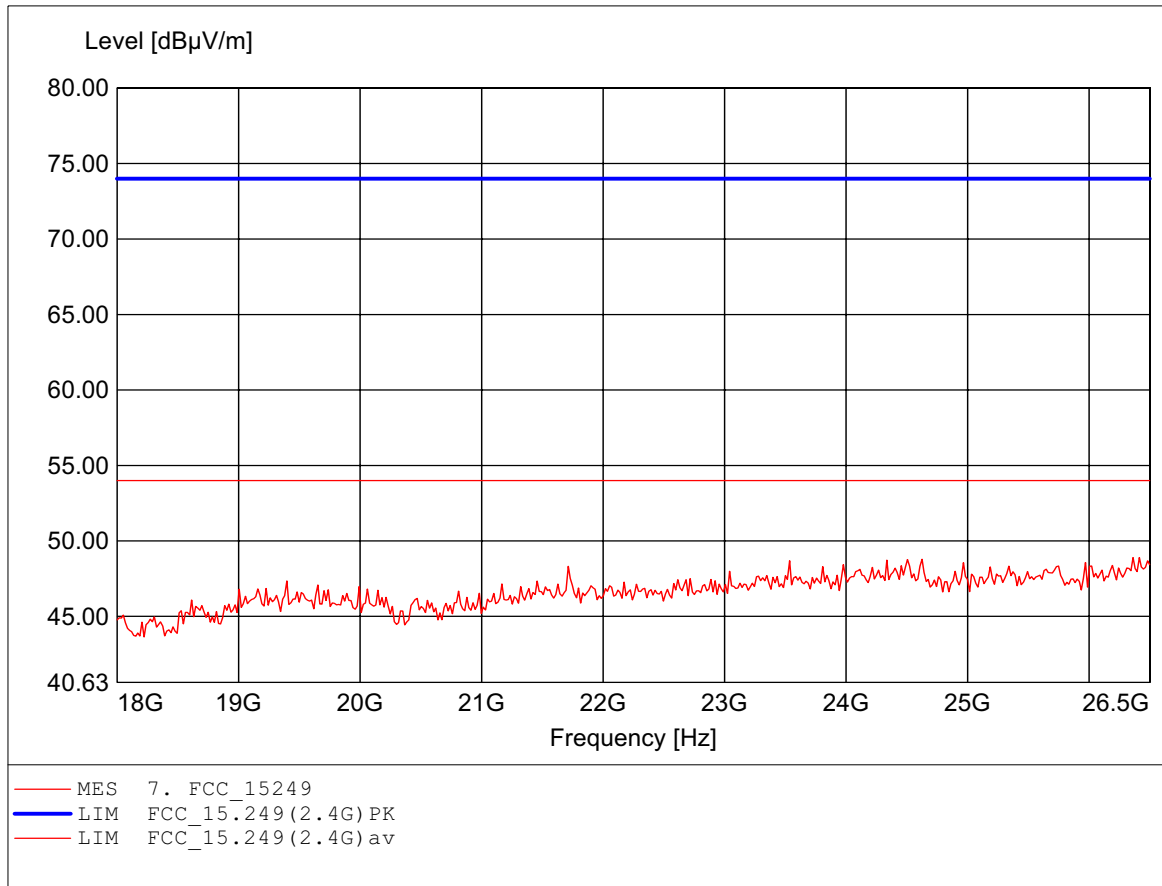

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

EUT: Wireless Dual-Mode Color Camera Kit
MODEL NO.: SAV-2450S(A) high channel
Approval Holder: JSW PACIFIC CORPORATION
Test Site / Operator: ETS / Dennis
Temperature/Voltage: Temp.: 24.4°C/ Unom.: 120 VAC(ac/dc adaptor)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 26.296GHz, Emax: 49.43dBμV/m, RBW: 1MHz

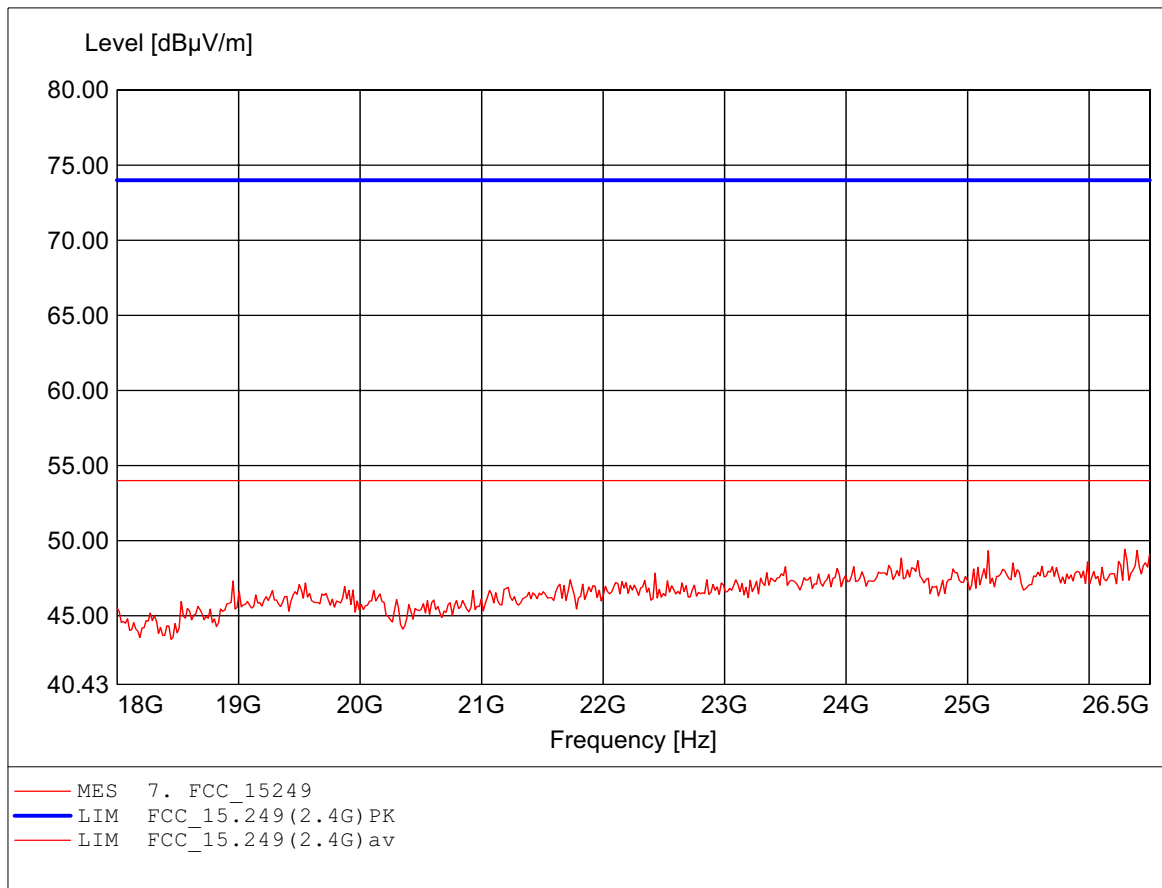

Appendix C


Radiated Emissions from Receiver Section

The measurement diagrams are wideband pre-scan results; only for reference. Please see final results as page 17.

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


ET: Wireless DalMode Color Camera Kt
MODE N.: SAV2450SA)
Approval Holder: SW PACET CORPORATION
Test Site / Operator: ES / Dennis
Temperature/Voltage: Temp.: 24.4C/ Unom.: 120 VAC(acdcadaptor)
Test Specification: aording to spart B
Comment 1: Dist.: 3m,Ant.: HK116
Freq192.505MHz Max24.02dBu/m RBW: 100 kHz

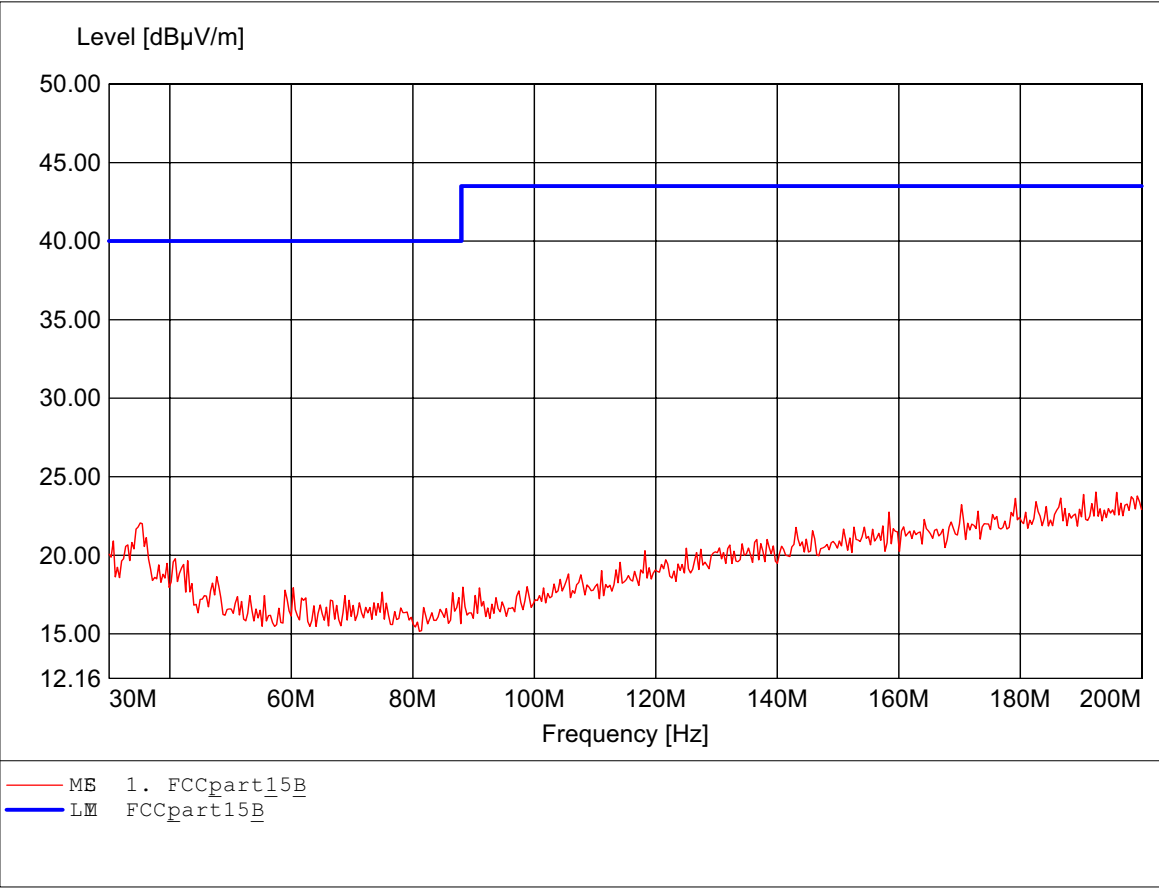

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


ET: Wireless DalMode Color Camera Kt
MODE N.: SAV2450SA)
Approval Holder: SW PACET CORPORATION
Test Site / Operator: ES / Dennis
Temperature/Voltage: Temp.: 24.4C/ Unom.: 120 VAC(acdcadaptor)
Test Specification: aording to spart B
Comment 1: Dist.: 3m,Ant.: HK116
Freq196.593MHz Max24.41dBu/m RBW: 100 kHz

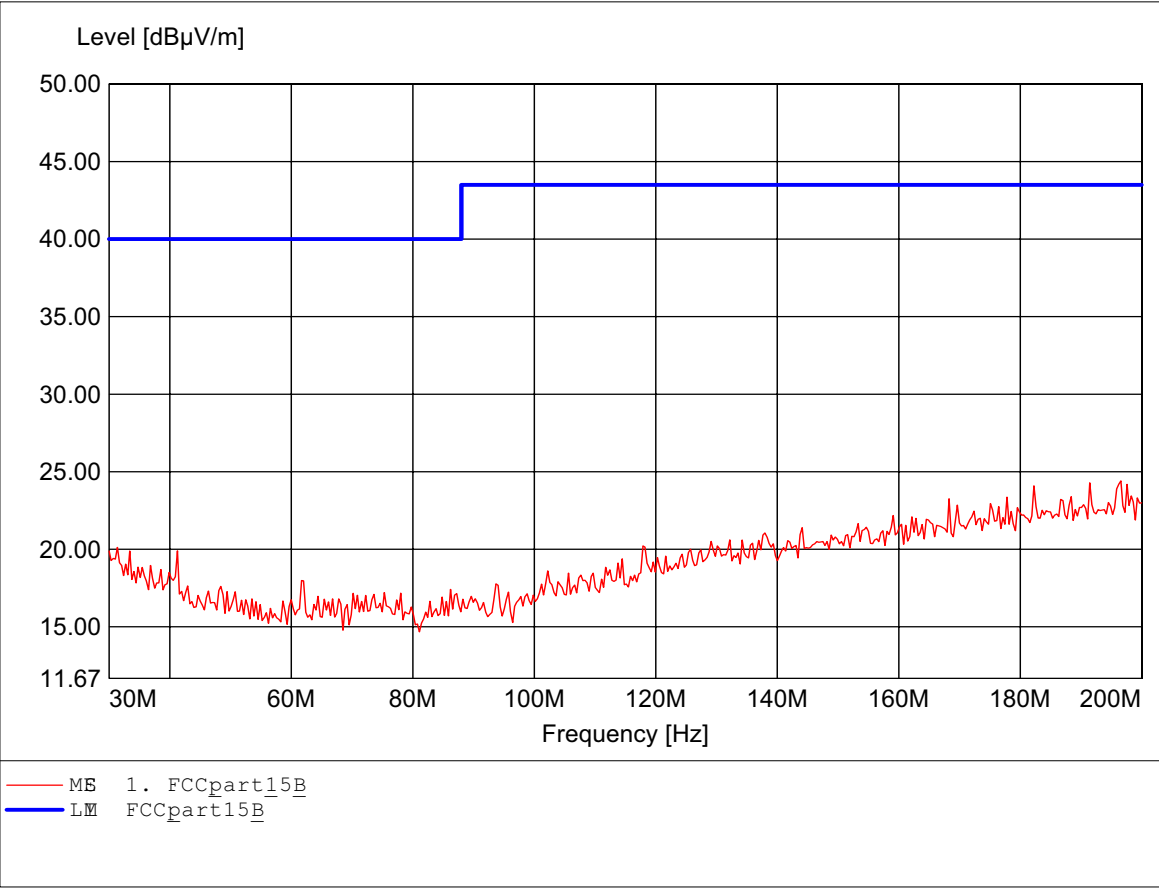

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


ET: Wireless DalMode Color Camera Kit
MODE N.: SAV2450SA
Approval Holder: SW PACIFIC CORPORATION
Test Site / Operator: ES / Dennis
Temperature/Voltage: Temp.: 24.4C/ Unom.: 120 VAC(acdcadaptor)
Test Specification: according to spart B
Comment 1: Dist.: 3m,Ant.: HL 223,ampl.
Freq975.952MHz Max35.14dBμ/m RBW: 100 kHz

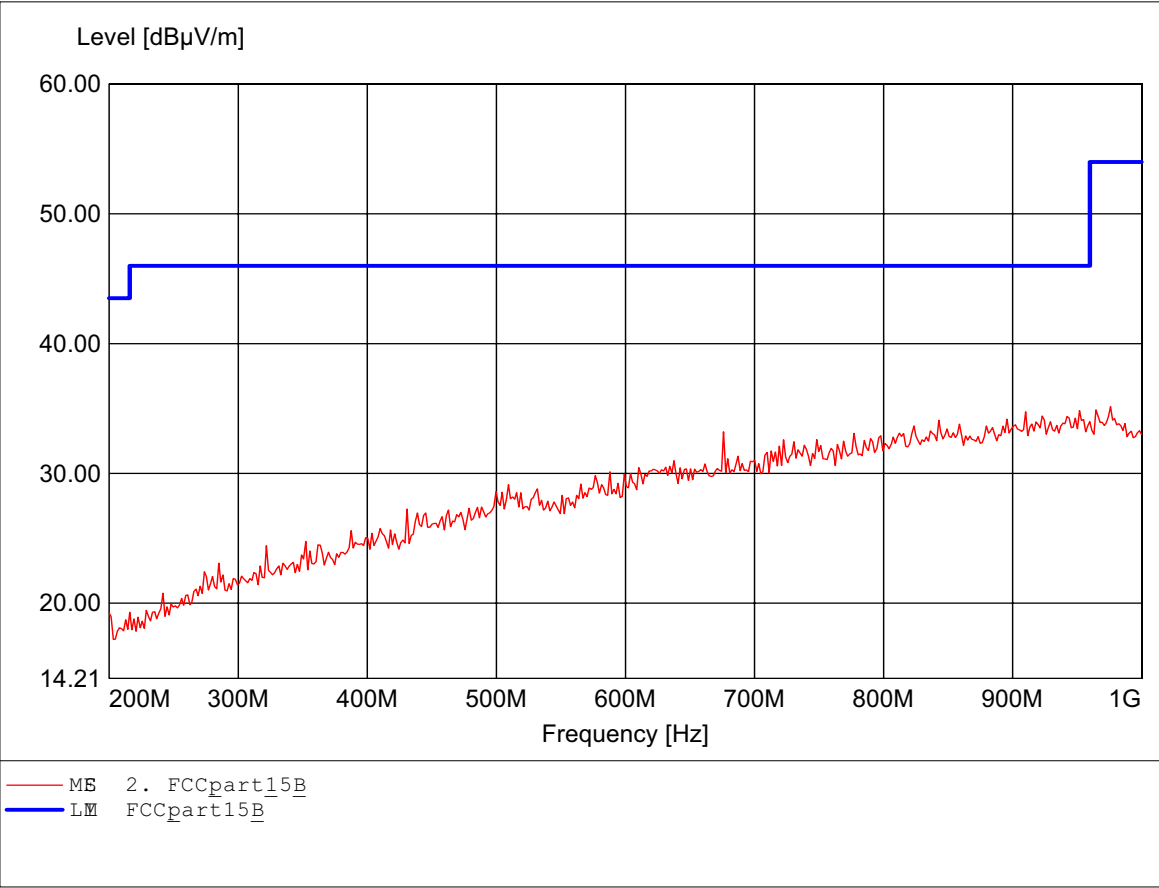

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B

ET: Wireless DalMode Color Camera Kit
MODE N.: SAV2450SA)
Approval Holder: SW PACIFIC CORPORATION
Test Site / Operator: ES / Dennis
Temperature/Voltage: Temp.: 24.4C/ Unom.: 120 VAC(acdcadaptor)
Test Specification: according to spart B
Comment 1: Dist.: 3m,Ant.: HL 223,ampl.
Freq942.285MHz Max34.68dBu/m RBW: 100 kHz

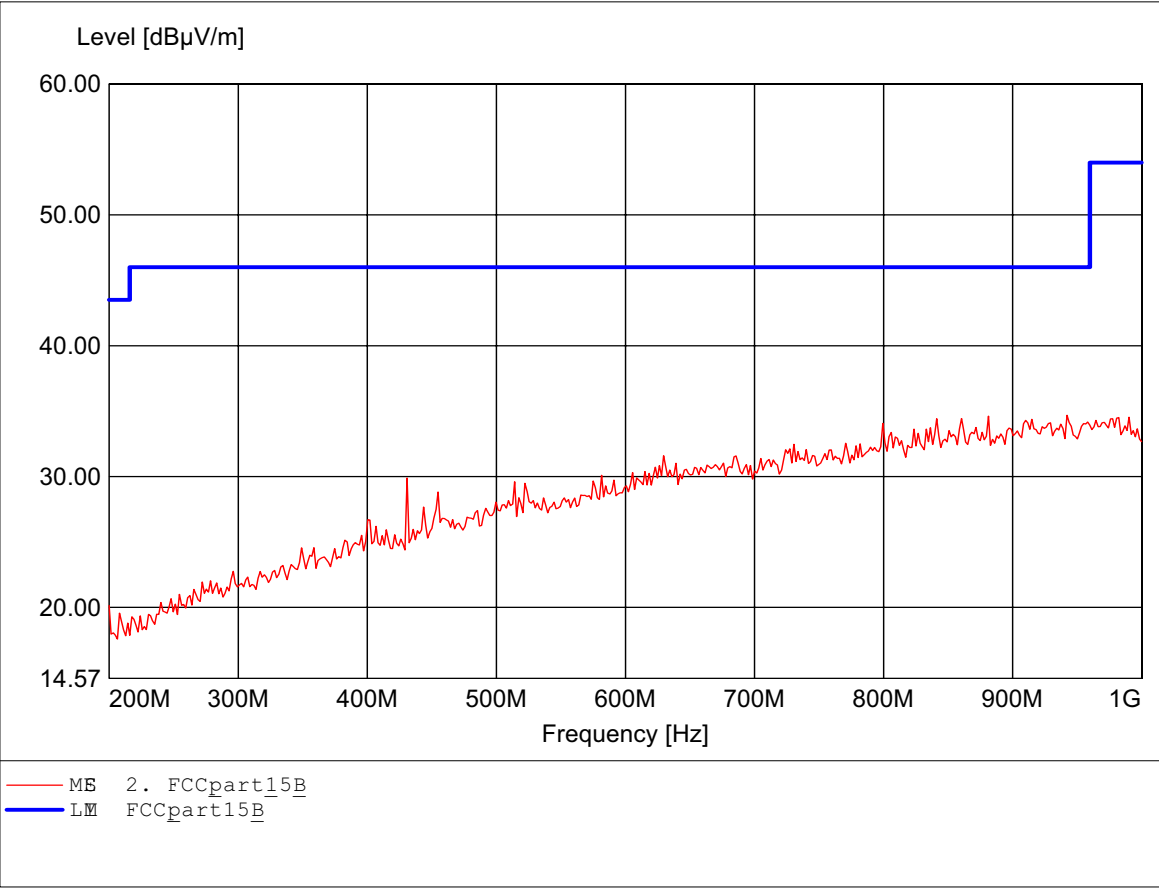




Registration number: W6M20604-6788-P-15
FCC ID: LE2SAV-2450SA

Appendix D

Radiated Emission on the bandedge




Marker 1 [T1] RBW 1 MHz RF Att 0 dB
Ref Lvl 54.31 dBV VBW 1 MHz
105 dBV 2.4000000 GHz SWT 5 ms Unit dBV

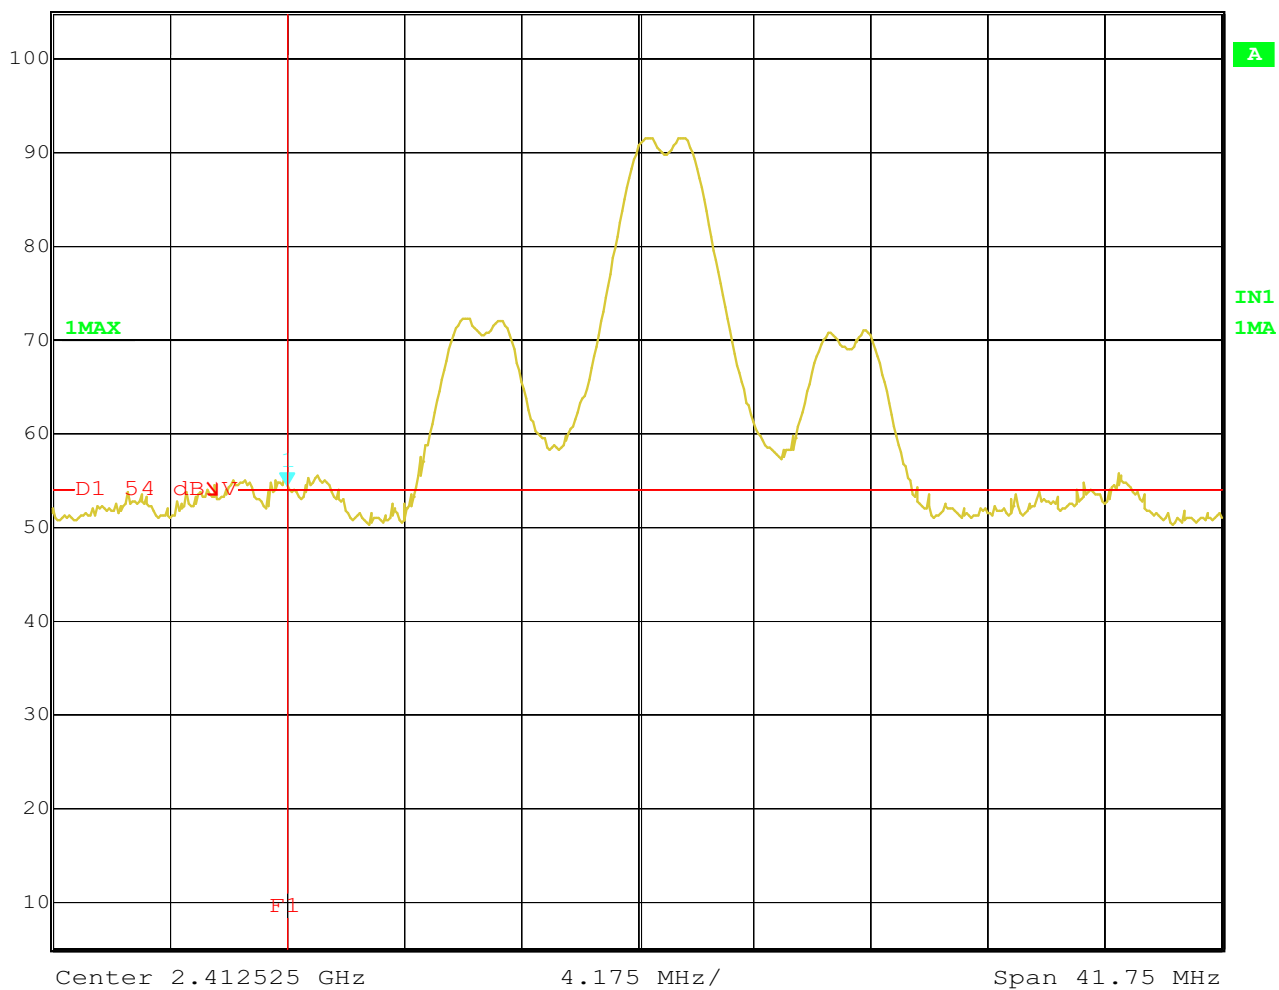

Title: Bandedge Ch Low
Date: 13.APR.2006 12:02:48



Marker 1 [T1] RBW 1 MHz RF Att 0 dB
Ref Lvl 56.21 dBV VBW 1 MHz
105 dBV 2.48350000 GHz SWT 5 ms Unit dBV

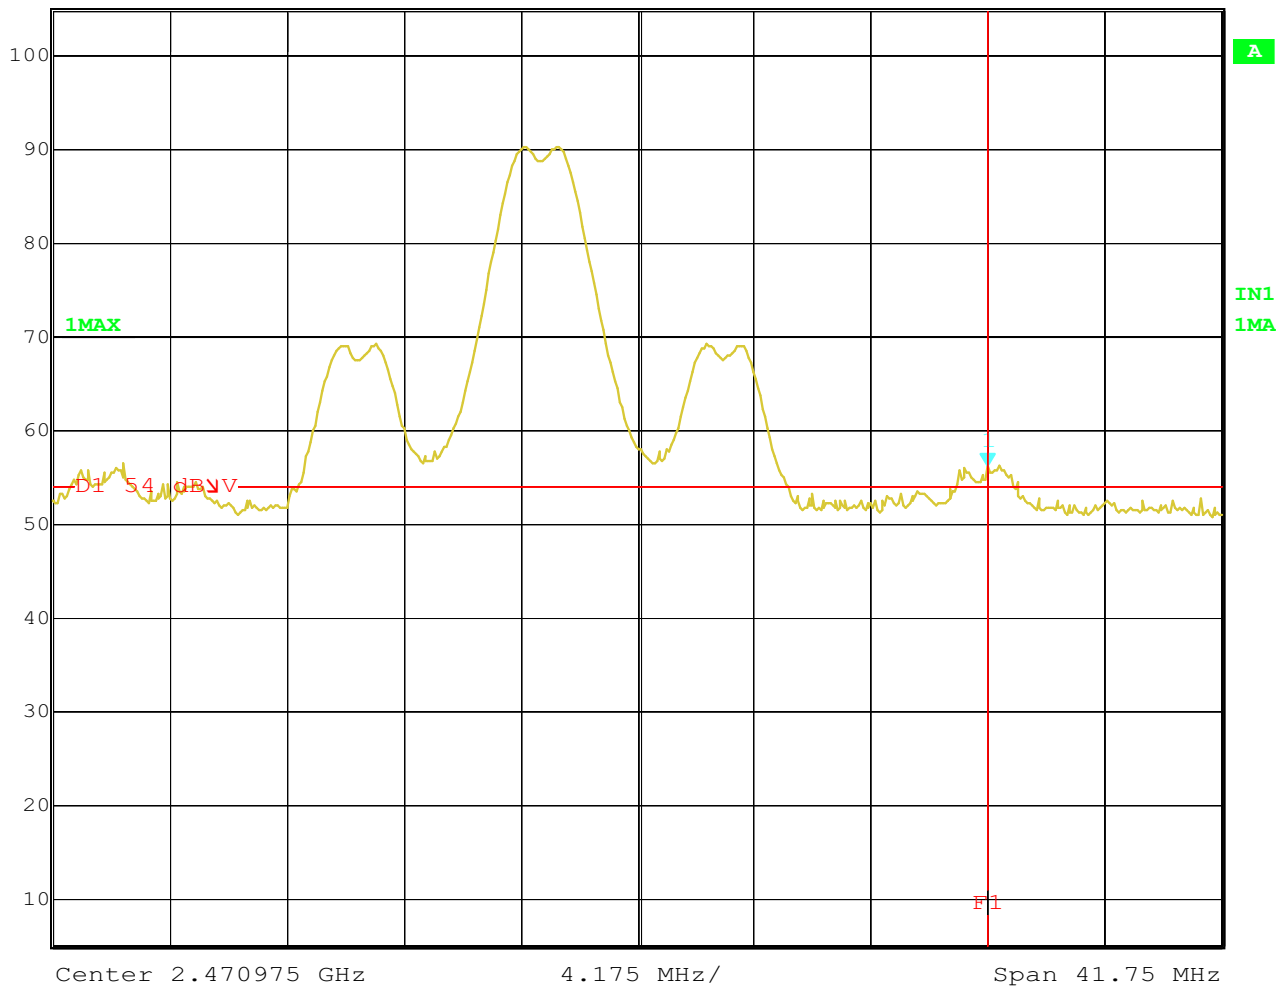

Title: Bandedge Ch High
Date: 13.APR.2006 12:07:06



Registration number: W6M20604-6788-P-15
FCC ID: LE2SAV-2450SA

Appendix E


Power Line Conducted Emission

The measurement diagrams are wideband pre-scan results; only for reference. Please see final results as page 19.

EMI voltage test in the ac-mains according to FCC Part 15

Class B


EUT: Wireless Dual-Mode Color Camera Kit
Approval Holder: JSW PACIFIC CORPORATION
Operating Condition: Unom : 120 VAC (ac / dc adaptor) , Tnom : 25.6°C
Test Site: ETS
Operator: Orville
Test Specification: V-network: ESH3-Z5 N
Comment:: model: SAV-2450S(A) mode: active

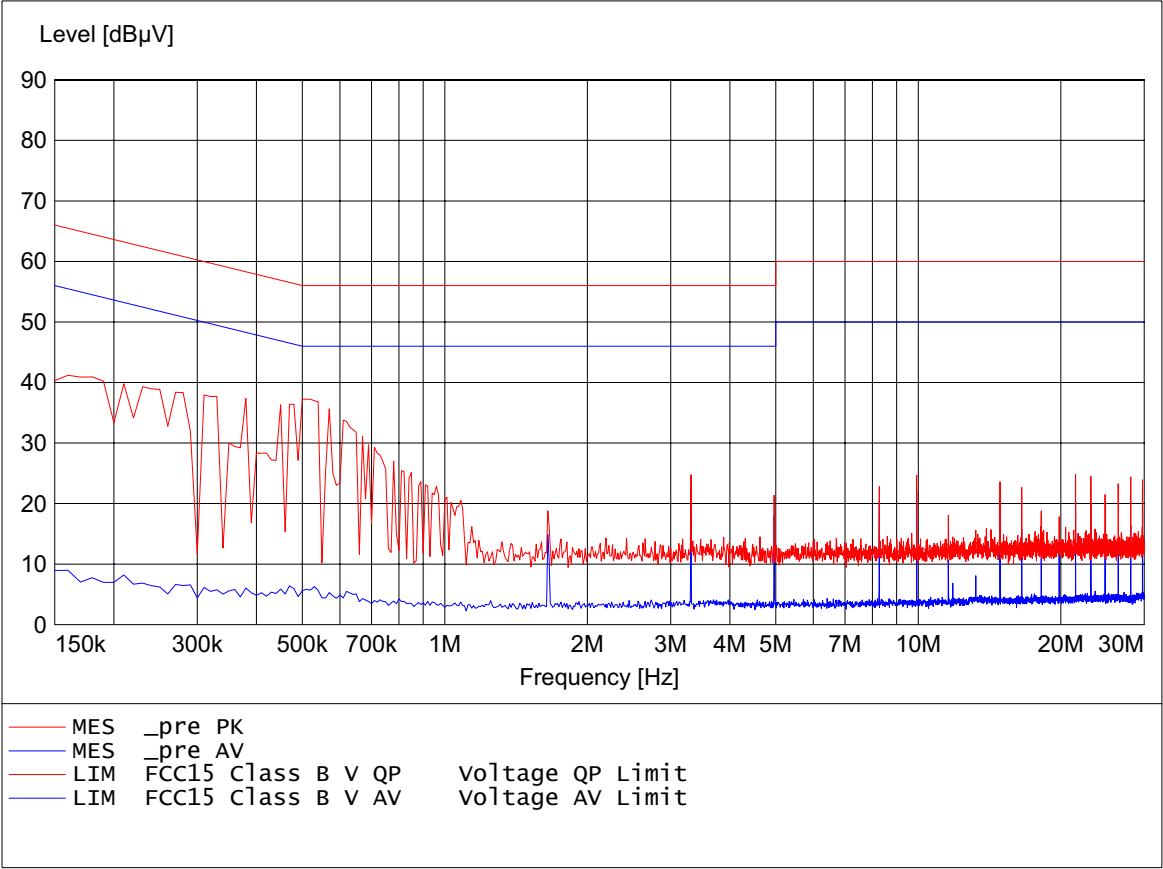


EMI voltage test in the ac-mains according to FCC Part 15

Class B

EUT: Wireless Dual-Mode Color Camera Kit
Approval Holder: JSW PACIFIC CORPORATION
Operating Condition: Unom : 120 VAC (ac / dc adaptor) , Tnom : 25.6°C
Test Site: ETS
Operator: Orville
Test Specification: V-network: ESH3-Z5 N
Comment:: model: SAV-2450S(A) mode: active

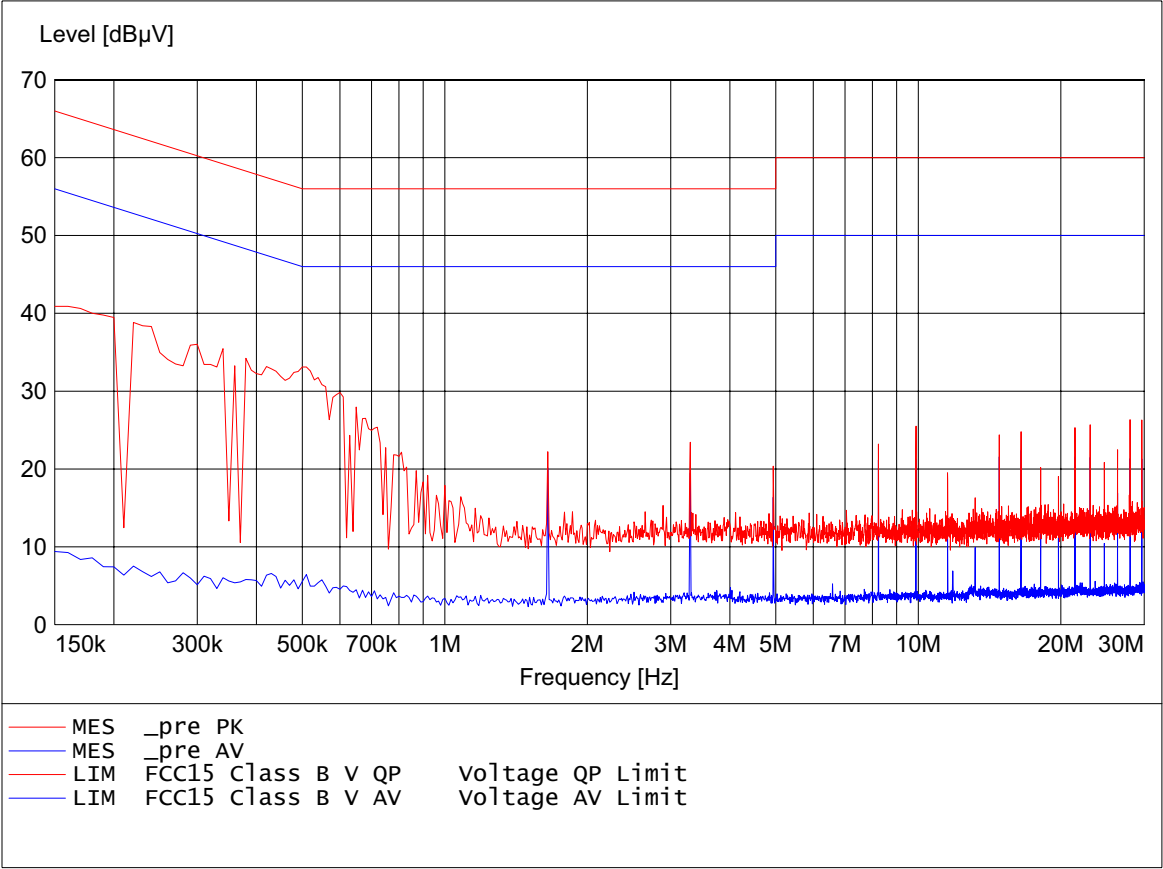



Registration number: W6M20604-6788-P-15
FCC ID: LE2SAV-2450SA

Appendix F

Pictures