

FCC Part 15E Compliance Test Report

Test Report no.:	FCC15E_RLAN_RM-696_43.docx	Date of Report:	26-Jul-2011
Number of pages:	11	Customer's Contact person:	Peltola Timo.Ta
Testing laboratory:	TCC Nokia Salo Laboratory P.O.Box(86) Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Customer:	Nokia Corporation P.O. Box 300 Yrtypellontie 6 FIN-90230 OULU, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 58300
FCC listing no.:	533467		
IC recognition no.:	661V-1		
Tested devices/ accessories:	Phone RM-696 / Headset WH-901 / AC-Charger AC-16E / Battery BV-5JW		
FCC ID:	LJPK	IC:	-
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart E, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards, RSS-210 (Issue 8, December 2010). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Kalle Hannila, Engineer , EMC

1. Summary for FCC Part 15E Compliance Test Report

Date of receipt	14-Apr-2011
Testing completed	26-Jun-2011
The customer's contact person	Peltola Timo.Ta
Test Plan referred to	T:\Projects\RM-696\TestPlan\RS_testplan_RM-696.xls
Notes	-
Document name	T:\Projects\RM-696\EMC\FCC15E_RLAN_RM-696_43.docx

1.1. EUT and Accessory Information

The EUT is a 9-band (GSM850/900/1800/1900 and WCDMA Band I/II(1900)/IV(1700)/V(850)/VIII) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-696	004402135480113	1501	-	0.2011.21-5-TA-INT-TEST-BUILD_001	15658
Headset	WH-901	proto ver.040A; Bno. B4.0A	3.2	4.0	-	15665
AC-Charger	AC-16E	4090491166580400050;0675491	0.31	0.3	-	15660
Battery	BV-5JW	-	00-04A	-	-	15711

1.2. Summary of Test Results

RLAN 5 GHz:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.407 (b)	A9.2	Band edge compliance of RF emissions	PASSED
15.407 (b)	A9.2	Spurious radiated emissions	PASSED

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 15E Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Band edge compliance of RF emissions (FCC §15.407 (b), RSS-210 A9.2)	4
2.2. Test method and limit	4
2.3. RLAN Test results	5
3. Spurious radiated emissions (FCC §15.407 (b), RSS-210 A9.2)	6
3.2. Test method and limit	6
3.3. RLAN Test results	8
4. Test Equipment	10
4.1. Conducted measurements	10
4.2. Radiated measurements	10

2. Band edge compliance of RF emissions (FCC §15.407 (b), RSS-210 A9.2)

EUT with DUT number	RM-696, DUT 15658
Accessories with DUT numbers	BV-5JW, DUT 15711; WH-901, DUT 15665; AC-16E, DUT 15660
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 45 / 101.4
Date of measurements	26-Jun-2011
Measured by	Sami Lehtonen / Kalle Hannila

2.1.1 Test Setup

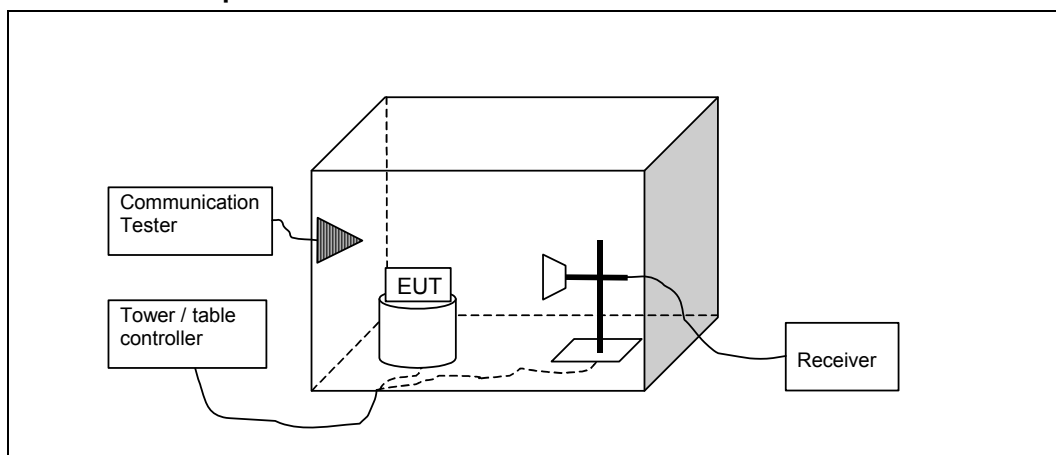

2.2. Test method and limit


The measurement is made according to Public Notice DA-02-2138A1 and IC standard RSS-210.

The limits in the table below are listed for the 100 MHz span around the band edges. Outside the 100 MHz span


Frequency band [MHz]	Limit
5150 - 5250	≤ 5.150 GHz: 54 dBuV/m (avg), 74 dBuV/m (pk)
5250 - 5350	≥ 5.350 GHz: 54 dBuV/m (avg), 74 dBuV/m (pk)
5470 - 5725	≤ 5.460 GHz: 54 dBuV/m (avg), 74 dBuV/m (pk) 5.460 - 5.470 GHz: -27 dBm/MHz (pk)
5725 - 5825	5.825 - 5.835 GHz: -17 dBm/MHz (pk) ≥ 5.825 GHz: -27 dBm/MHz (pk)

2.3. RLAN Test results

N-Mode, 6.5Mbit/s, channel 140 / 5700 MHz

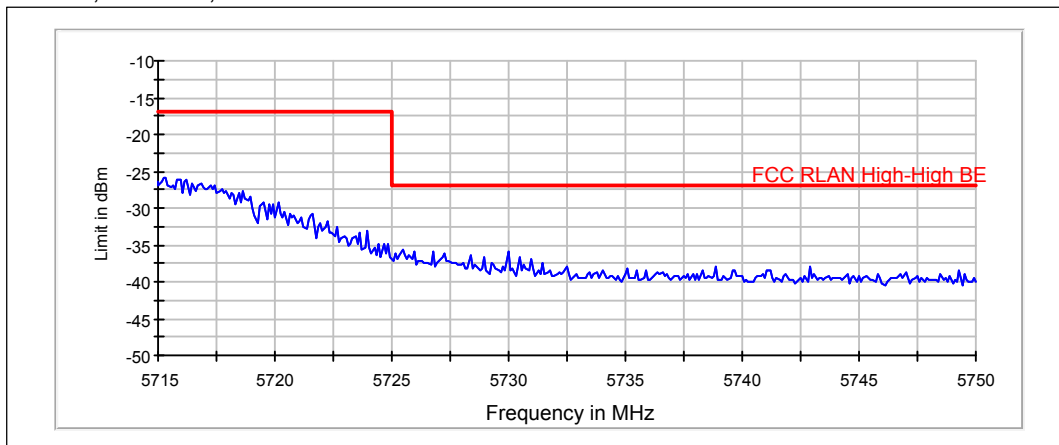


A-Mode, 6Mbit/s, channel 140 / 5700 MHz

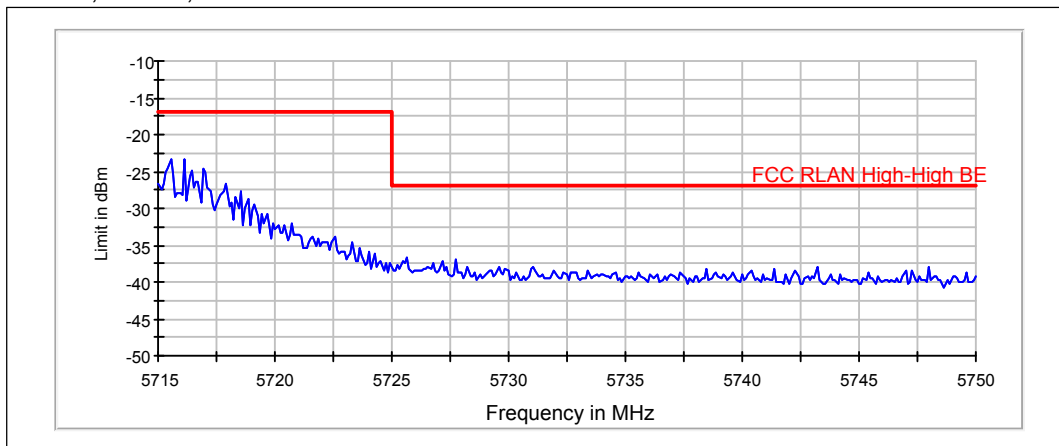

3. Spurious radiated emissions (FCC §15.407 (b), RSS-210 A9.2)

EUT with DUT number	RM-696, DUT 15658
Accessories with DUT numbers	BV-5JW, DUT 15711; WH-901, DUT 15665; AC-16E, DUT 15660
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 45 / 101.4
Date of measurements	26-Jun-2011
Measured by	Sami Lehtonen / Kalle Hannila

3.1.1 Test Setup

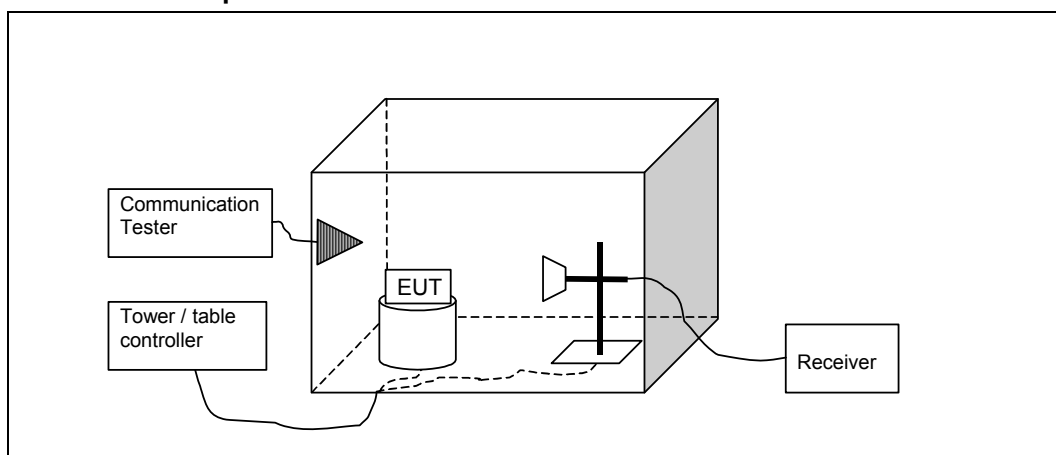

3.2. Test method and limit

The test is done using local instructions for radiated emission measurement with following additions:

- The EUT will be measured in three orientations so, that in each orientation two axes (XY, YZ, XZ) change place at time. The test is repeated for vertical and horizontal antenna polarizations.

There are 2 sets of limit lines. Part 15.209 limits apply below 1 GHz and on restricted bands above 1GHz. The other limits are described in the table below.

Frequency band [MHz]	Limit [dBm / MHz]
5150 - 5250	1 GHz – 5.15 GHz, 5.35 GHz – 40 GHz: -27
5250 - 5350	1 GHz – 5.25 GHz, 5.35 GHz – 40 GHz: -27
5470 - 5725	1 GHz – 5.47 GHz, 5.725 GHz – 40 GHz: -27
5725 - 5825	1 GHz – 5.715 GHz, 5.835 GHz – 40 GHz: -27 5.715 GHz – 5.725 GHz, 5.825 GHz – 5.835 GHz: -17

3.3. RLAN Test results

3.3.1 N-mode 6.5Mbit/s

Channel 140 / 5700 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
36.98	29.82	30.963	44.07	-14.25	VERTICAL	PASSED
36.991	30.22	32.423	44.47	-14.25	VERTICAL	PASSED
37.115	30.74	34.451	45.07	-14.33	VERTICAL	PASSED
37.224	30.77	34.534	45.16	-14.39	VERTICAL	PASSED
37.234	30.7	34.257	45.1	-14.4	VERTICAL	PASSED
37.255	30.88	35.003	45.29	-14.41	VERTICAL	PASSED
37.313	30.62	33.943	45.07	-14.45	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
11400	52.43	418.264	43.61	8.82	HORIZONTAL	PASSED
12750.4	49.98	315.5	43.08	6.9	HORIZONTAL	PASSED
17100.4	57.93	788.315	46.1	11.83	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
11400	39.93	99.186	31.11	8.82	HORIZONTAL	PASSED
12750.4	37.04	71.097	30.14	6.9	HORIZONTAL	PASSED
17100.4	44.13	160.916	32.3	11.83	VERTICAL	PASSED

3.3.2 A-mode 6Mbit/s, Sub band Low

Channel 140 / 57000

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
37.254	35.06	56.591	49.47	-14.41	VERTICAL	PASSED
37.255	34.67	54.119	49.08	-14.41	VERTICAL	PASSED
37.276	34.67	54.163	49.1	-14.43	VERTICAL	PASSED
37.296	35.07	56.715	49.51	-14.44	VERTICAL	PASSED
37.355	34.78	54.815	49.25	-14.47	VERTICAL	PASSED
37.433	35.29	58.11	49.81	-14.52	VERTICAL	PASSED
37.504	35.15	57.207	49.71	-14.56	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
11400	50.64	340.565	42.21	8.43	HORIZONTAL	PASSED
12750.4	49.97	315.246	43.07	6.9	HORIZONTAL	PASSED
17100.4	51.88	392.69	42.21	9.67	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
11400	37.87	78.253	29.44	8.43	HORIZONTAL	PASSED
12750.4	37.05	71.17	30.15	6.9	HORIZONTAL	PASSED
17100.4	38.88	87.912	29.21	9.67	VERTICAL	PASSED

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1759	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
1916	Communication Tester	CMTA84	R&S	15B
1986	GPS Antenna	AMHP10-15R/390	European Antenna	15C, 15B
1992	Signal Generator	83630B	Agilent	15C, 15B
2039	Power Supply	PL330QMD	Thurlby	15C, 15B
2060	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
2068	CDN	S1	NMP	15C, 15B
2097	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
2156	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2180	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2206	Signal Generator	SMX	R&S	15C, 15B
2347	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2352	Spectrum Analyzer	FSP-30	R&S	22/24/27, 15C
2359	Temperature Test Chamber	VT4002	Vötsch	22/24/27
2360	Serial Bus Converter	Serial 488A	IO Tech	22/24/27
2362	Power Supply	NGPX 70/5	R&S	22/24/27
2388	Bluetooth Tester	CBT	R&S	15B
2389	Signal Generator	SMJ 100A	R&S	15B
2390	Directional Coupler	DC2600	AR	-
6009	GPS Antenna	SA-700	Chronos	15C
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	15C
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	15C
6012	CDN	CDN USB/c	Teseq	-
6015	Receiver	ESI	R&S	22/24, 15C, 15B
6016	ESD gun	PESD 1610	HAEFELY	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B
6036	Data Logger	175-H2	Testo	22/24/27, 15C, 15B
6038	Data Logger	Testo 580	Testo	22/24/27, 15C, 15B
6039	USB Interface	5541765	Testo	22/24/27, 15C, 15B
2059	V-network	ESH3-Z6	R&S	-
6044	V-network	ESH3-Z6	R&S	-
6045	Power splitter	11667B	Agilent	22/24/27, 15C
6046	Attenuator 10dB	8493C	Agilent	22/24/27, 15C
6047	Attenuator 20dB	8493C	Agilent	22/24/27, 15C

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1917	Communication Tester	CMTA84	R&S	15B
1984	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C, 15B
1986	GPS Antenna	AMHP10-15R/390	European Antenna	15C, 15B
1988	Antenna	HL562	R&S	22/24/27, 15C, 15B
1989	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
2009	Signal Generator	SMP 22	R&S	22/24/27, 15C, 15B
2027	CDN	M2 (modified) DC1	MEB	22/24/27, 15C, 15B
2028	CDN	M3 (modified) DC2	MEB	22/24/27, 15C, 15B
2029	Power Supply	PL330	Thurlby	22/24/27, 15C
2043	Band Reject Filter	WRCA824/849-0.2-6SS	Wainwright	22
2047	Band Reject Filter	WRCC1800/2000-0.2-10SS	Wainwright	24

Eq. No	Equipment	Type	Manufacturer	Used in
2051	High Pass Filter	4HC1700-1-KK	R&S	22
2109	Power Supply	PL330QMD	Thurlby	22/24/27, 15C, 15B
2116	Controller	EMCO 2090	ETS	22/24/27, 15C, 15B
2135	CDN	CDN 801-M3	Lüthi	22/24/27, 15C, 15B
2140	Antenna	EMCO93110B	EMCO	22/24/27, 15C
2142	Antenna	3146	EMCO	22/24/27, 15C
2150	High Pass Filter	F-15041	RLC	22/24/27, 15C
2156	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2176	CDN	CDN 801-M3	Lüthi	22/24/27, 15C, 15B
2180	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2188	Preamplifier	AFS4-00100300-20-23P-6	Miteq	22/24/27, 15C, 15B
2347	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2348	Controller	G-1000DXC	Yaesu	22/24/27, 15C, 15B
2349	Computer Controller	GS-232B	Yaesu	22/24/27, 15C, 15B
2350	Preamplifier	AMF-6D-020180-29-20P	Miteq	22/24/27, 15C, 15B
2353	Receiver	ESIB26	R&S	22/24/27, 15C, 15B
2357	Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	15C
2361	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	Euroshield	22/24/27, 15C, 15B
2364	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	24
2366	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
2384	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	22
2388	Bluetooth Tester	CBT	R&S	15B
2389	Signal Generator	SMJ 100A	R&S	15B
2391	Band Reject Filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
6009	GPS Antenna	SA-700	Chronos	15C
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	15C
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	15C
6014	Substitute Calibration Cable	Sucoflex 104PB	Suhner	-
6017	Antenna	SBA 9113	Schwarzbeck	22 / 24 / 27
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B
-	RF immunity / Emission Software	EMC32	R&S	22/24/27, 15C, 15B
6037	Data Logger	175-H2	Testo	22/24/27, 15C, 15B
6038	Data Logger	Testo 580	Testo	22/24/27, 15C, 15B
6039	USB Interface	5541765	Testo	22/24/27, 15C, 15B