

HSCR50 Remocon Spec




Hitron Systems

FCC COMPLIANCE STATEMENT

CAUTION: CHANGES OR MODIFICATIONS NOT EXPRESSLY APPROVED BY THE PARTY RESPONSIBLE FOR COMPLIANCE COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

1. Key definition of Remocon

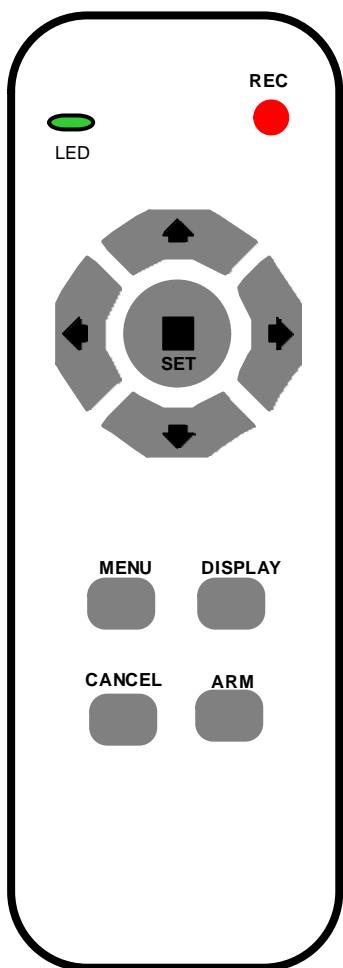

- REC : Recording, record current image when this button is push down.
- MENU : Display menu to configure camera options.
- DISPLAY : Change mode from live view mode to display mode(manual, auto and fast playback modes).
- Cancel : Escape from current menu mode.
- ARM / : Toggle between arm and disarm. when arm mode, start recording with an event and arming
- DISARM : Delay time configured by user in view mode, when disarm mode, stop recording.
- UP : Scroll up selection of menu items or options in menu mode / playback forward by event unit in display mode
- DOWN : Scroll down selection of menu items or options in menu mode / playback reverse by event unit in display mode
- LEFT : Scroll left selection of menu items or options in menu mode / playback reverse by page unit in display mode
- RIGHT : Scroll right selection of menu items or options in menu mode / playback forward by page unit in display mode
- SET : Set or select menu items of options in menu mode / Stop playing image in display mode

2. RF SPEC of Remote Controller

- Transmission Frequency : 433.92MHz
- Output power : 4dBm under
- Data rate : 2400bps
- Binary FSK Frequency Deviation: 64KHz under
- Harmonics : -20dBc over
- Occupied Bandwidth : 1.1MHz under
(20dB)
- Transmit Current : 40mA under