

Company: Actiontec Electronics Inc

Test of: WCB6240Q

To: FCC CFR 47 Part 15 Subpart E 15.407

Report No.: ATEC09-U8b Radiated (non-DFS) Rev A

## **RADIATED TEST REPORT**



# RADIATED TEST REPORT



Test of: Actiontec Electronics Inc WCB6240Q  
to

To: FCC CFR 47 Part 15 Subpart E 15.407

Test Report Serial No.: ATEC09-U8b Radiated (non-DFS) Rev A

This report supersedes: NONE

Note: this report is one of a set of three reports that together address the requirements for certification purposes

Report Number	Test Report Type
ATEC09-U5a, b	2.4 GHz Conducted & Radiated Test Reports
ATEC09-U8a, b	5 GHz (non-DFS) Conducted, Radiated Test Reports
ATEC09-U11a, b, c	5 GHz (DFS) Conducted, Radiated, DFS Test Reports
ATEC09-U2	FCC Part 15B / ICES-003 Test Report

Applicant: Actiontec Electronics Inc  
760 N Mary Avenue  
Sunnyvale, California 94085  
USA

Product Function: Wireless Access Point and  
Ethernet Router

Issue Date: 27<sup>th</sup> October 2015

## **This Test Report is Issued Under the Authority of:**

**MiCOM Labs, Inc.**  
575 Boulder Court  
Pleasanton California 94566  
USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



**MiCOM Labs is an ISO 17025 Accredited Testing Laboratory**



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 3 of 58

---

## Table of Contents

<b>1. ACCREDITATION, LISTINGS &amp; RECOGNITION.....</b>	<b>4</b>
1.1. TESTING ACCREDITATION.....	4
1.2. RECOGNITION .....	5
1.3. PRODUCT CERTIFICATION .....	6
<b>2. DOCUMENT HISTORY .....</b>	<b>7</b>
<b>3. TEST RESULT CERTIFICATE.....</b>	<b>8</b>
<b>4. REFERENCES AND MEASUREMENT UNCERTAINTY .....</b>	<b>9</b>
4.1. Normative References .....	9
4.2. Test and Uncertainty Procedure .....	10
<b>5. PRODUCT DETAILS AND TEST CONFIGURATIONS.....</b>	<b>11</b>
5.1. Technical Details .....	11
5.2. Scope Of Test Program .....	12
5.3. Equipment Model(s) and Serial Number(s) .....	15
5.4. Antenna Details .....	15
5.5. Cabling and I/O Ports .....	15
5.6. Test Configurations.....	16
5.7. Equipment Modifications .....	16
5.8. Deviations from the Test Standard .....	16
<b>6. TEST SUMMARY .....</b>	<b>17</b>
<b>7. TEST EQUIPMENT CONFIGURATION(S) .....</b>	<b>18</b>
<b>8. MEASUREMENT AND PRESENTATION OF TEST DATA .....</b>	<b>20</b>
<b>9. TEST RESULTS .....</b>	<b>21</b>
9.1. Radiated .....	21
9.1.1. <i>Restricted Band Emissions</i> .....	24
9.1.1.1. Galtronics Custom PCB SMT .....	24
9.1.2. <i>Restricted Band-Edge Emissions</i> .....	30
9.1.2.2. Galtronics Custom PCB SMT .....	30
9.1.3. <i>Digital Emissions</i> .....	35
<b>A. APPENDIX - GRAPHICAL IMAGES .....</b>	<b>37</b>
A.1. Radiated .....	38
A.1.1. <i>Restricted Band Emissions</i> .....	38
A.1.1.1. Galtronics Custom PCB SMT .....	38
A.1.2. <i>Restricted Band-Edge Emissions</i> .....	44
A.1.2.2. Galtronics Custom PCB SMT .....	44
A.1.3. <i>Digital Emissions</i> .....	56

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 1. ACCREDITATION, LISTINGS & RECOGNITION

### 1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2005. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 5 of 58

## 1.2. RECOGNITION

MiCOM Labs, Inc has widely recognized wireless testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA countries. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2 4143A-3
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

EU MRA – European Union Mutual Recognition Agreement.

NB – Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### 1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)  
Industry Canada – Certification Body, CAB Identifier – US0159  
Europe – Notified Body (NB), NB Identifier - 2280  
Japan – Recognized Certification Body (RCB), RCB Identifier - 210



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 7 of 58

---

## 2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	13 <sup>th</sup> October 2015	
Draft	19 <sup>th</sup> October 2015	
Rev A	27 <sup>th</sup> October 2015	Initial Release
.		
.		
.		
.		
.		

In the above table the latest report revision will replace all earlier versions.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 8 of 58

### 3. TEST RESULT CERTIFICATE

<b>Manufacturer:</b> Actiontec Electronics Inc 760 N Mary Avenue Sunnyvale California 94085 USA	<b>Tested By:</b> MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
<b>Model:</b> WCB6240Q	<b>Telephone:</b> +1 925 462 0304 <b>Fax:</b> +1 925 462 0306
<b>Type Of Equipment:</b> 802.11a/b/g/n/ac Wireless Router	
<b>S/N's:</b> GWXA5360700016	
<b>Test Date(s):</b> 25 <sup>th</sup> September – 6 <sup>th</sup> October 2015	<b>Website:</b> www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC CFR 47 Part 15 Subpart E 15.407 (non-DFS Bands Only)	EQUIPMENT COMPLIES


MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

#### Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

**Approved & Released for MiCOM Labs, Inc. by:**

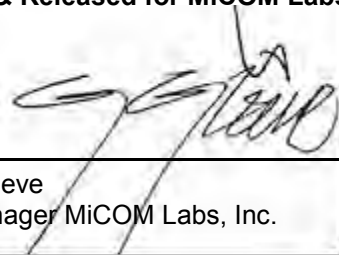

  
\_\_\_\_\_  
Graeme Grieve  
Quality Manager MiCOM Labs, Inc.

  
\_\_\_\_\_  
Gordon Hurst  
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



## 4. REFERENCES AND MEASUREMENT UNCERTAINTY

### 4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	KDB 662911	Oct 31 2013	Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band
II	KDB 905462 D07 v01	10th June 2015	Test guidance to demonstrate compliance for U-NII devices subject to DFS requirements.
III	KDB 926956 DO1 v01r02	17th October 2014	U-NII Device Transition Plan
IV	KDB 789033 D02 v01	6th June 2014	General UNII Test Procedures New Rules V01
V	A2LA	June 2015	R105 - Requirement's When Making Reference to A2LA Accreditation Status
VI	ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices
VII	ANSI C63.4	2009	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
VIII	CISPR 22	2008	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement
IX	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
X	FCC 06-96	Jun 3 2006	Memorandum Opinion and Order
XI	FCC 47 CFR Part 15.407	2014	Radio Frequency Devices; Subpart E –Unlicensed National Information Infrastructure Devices
XII	ICES-003	Issue 5 2012	Spectrum Management and Telecommunications; Interference-Causing Equipment Standard. Information Technology Equipment (ITE) – Limits and methods of measurement.
XIII	M 3003	Edition 3 Nov. 2012	Expression of Uncertainty and Confidence in Measurements
XIV	RSS-247 Issue 1	May 2015	Digital Transmission Systems (DTSS), Frequency Hopping System (FHSS) and Licence-Exempt Local Area Network (LE-LAN) Devices
XV	RSS-Gen Issue 4	November 2014	General Requirements and Information for the Certification of Radiocommunication Equipment
XVI	KDB 644545 D03 v01	August 14th 2014	Guidance for IEEE 802.11ac New Rules
XVII	FCC 47 CFR Part 2.1033	2014	FCC requirements and rules regarding photographs and test setup diagrams.



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 10 of 58

---

#### **4.2. Test and Uncertainty Procedure**

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 11 of 58

## 5. PRODUCT DETAILS AND TEST CONFIGURATIONS

### 5.1. Technical Details

Details	Description
Purpose:	Test of the Actiontec Electronics Inc WCB6240Q to FCC CFR 47 Part 15 Subpart E 15.407
Applicant:	Actiontec Electronics Inc 760 N Mary Avenue Sunnyvale California 94085 USA
Manufacturer:	As Applicant
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	ATEC09-U8b Radiated (non-DFS)
Date EUT received:	15 <sup>th</sup> September 2015
Standard(s) applied:	FCC CFR 47 Part 15 Subpart E 15.407
Dates of test (from - to):	25 <sup>th</sup> September – 6 <sup>th</sup> October 2015
No of Units Tested:	2
Type of Equipment:	802.11a/b/g/n/ac Wireless Router
Product Family Name:	802.11ac Wireless 4-Port Ethernet Bridge with Optional MoCA
Model(s):	Tested Device: WCB6240Q + WEB6040Q
Location for use:	Indoor
Declared Frequency Range(s):	5150 - 5250; 5725 - 5850 MHz;
Primary function of equipment:	Wireless Access Point and Ethernet Router
Secondary function of equipment:	Optional Cable MoCA Bridge
Type of Modulation:	OFDM
EUT Modes of Operation:	802.11a; 802.11n HT-20/40; 802.11ac-24/40/80
Declared Nominal Output Power (Ave):	5150 - 5250 MHz & 5725 - 5850 MHz: +30 dBm
Transmit/Receive Operation:	Transceiver - Half Duplex
Rated Input Voltage and Current:	AC/ DC adaptor (adaptor sold with unit) 12Vdc, 2A
Operating Temperature Range:	Declared Range 0°C to 40°C
ITU Emission Designator:	802.11a: 16M4D1D 802.11ac-80: 75M9D1D 802.11n HT-20: 17M7D1D 802.11n HT-40: 36M2D1D
Equipment Dimensions:	9 x 1.5 x 5.75 inches
Weight:	1.1 lbs
Hardware Rev:	AM3
Software Rev:	1.1.01.19yfa

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 12 of 58

---

## **5.2. Scope Of Test Program**

### **Actiontec Electronics Inc WCB6240Q**

The scope of the test program was to test the Actiontec Electronics Inc WCB6240Q configurations in the frequency ranges 5150 - 5250 MHz; 5725 - 5850 MHz; for compliance against the following specification:

### **FCC CFR 47 Part 15 Subpart E 15.407**

Radio Frequency Devices; Subpart E –Unlicensed National Information Infrastructure Devices

### **Manufacturers Declaration of Similarity**

FCC ID: LNQWXB6X40Q

Actiontec Models: WxB6x40Q

Product Similarities;

Actiontec Models: WCB6240Q and WEB6040Q To whom it may concern: We, Actiontec Electronics, Inc., hereby to declare the mentioned two models have electrically identical Wireless circuitry with the same electromagnetic emissions and electromagnetic compatibility characteristics. Descriptions of the differences between these two models are as follows;

WCB6240Q – 802.11ac Wireless 4-Port Ethernet Bridge with Bonded MoCA

WEB6040Q – 802.11ac Wireless 4-Port Ethernet Bridge without MoCA.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

**Actiontec Electronics Inc WCB6240Q**





**Actiontec Electronics Inc WCB6240Q**





**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 15 of 58

### 5.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	Wireless Router	Actiontec	WCB6240Q	GWXA5360700016
EUT	Power Adapter 100 - 240Vac 50/60Hz 0.7A 12 Vdc 2.0 A	Actiontec	WA-24Q12FU	DJ87714D14043198400
Support	Laptop PC	IBM	Thinkpad	None

### 5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
integral	Galtronics	Custom PCB SMT	Dipole	4.5	2.5	360	Y	5150 – 5250
integral	Galtronics	Custom Internal Cabled	Dipole	4.5	1.8	360	Y	5725 - 5850

BF Gain - Beamforming Gain  
Dir BW - Directional BeamWidth  
X-Pol - Cross Polarization

### 5.5. Cabling and I/O Ports

Port Type	Max Cable Length	# Of Ports	Screened	Conn Type	Data Type
Ethernet	100m GbE LAN	4	N	RJ45	Packet Data

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





## 5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode(s) (802.11a/b/g/n/ac)	Data Rate with Highest Power MBit/s	Channel Frequency (MHz)		
		Low	Mid	High
5150 - 5250 MHz				
802.11a	6	5,180.00	5,200.00	5,240.00
802.11ac-80	29.3	5,210.00	--	--
802.11n HT-20	6.5	5,180.00	--	--
802.11n HT-40	13.5	5,190.00	--	--
5725 - 5850 MHz				
802.11a	6	5,745.00	5,785.00	--
802.11ac-80	29.3	5,775.00	--	--
802.11n HT-20	6.5	--	--	5,825.00
802.11n HT-40	13.5	5,755.00	--	5,795.00

## 5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

## 5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 17 of 58

---

## 6. TEST SUMMARY

List of Measurements

Test Header	Result	Data Link
(b)(2) Radiated	-	-
i).. Restricted Band Emissions	Complies	<a href="#">Click Here</a>
ii).. Restricted Band-Edge Emissions	Complies	<a href="#">Click Here</a>
iv).. Digital Emissions	Complies	<a href="#">Click Here</a>


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 7. TEST EQUIPMENT CONFIGURATION(S)

The following tests were performed using the radiated test set-up shown in the diagram. Radiated emissions below 1GHz. Radiated Emissions above 1GHz.

- 1).. Restricted Band Emissions
- 2).. Restricted Band-Edge Emissions
- 3).. Digital Emissions

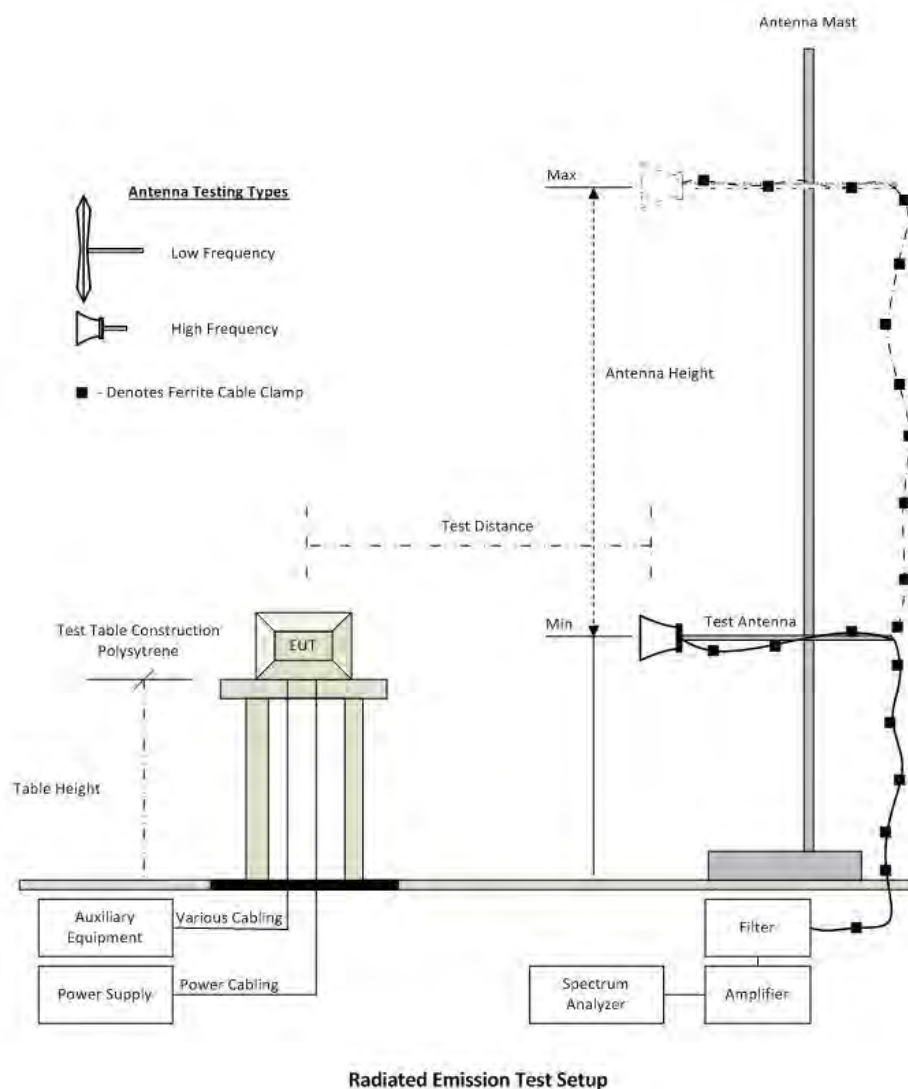

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 19 of 58

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
158	Barometer/Thermometer	Control Company	4196	E2846	04 Dec 2015
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CY101	04R08507	Not Required
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	27 Aug 2016
310	SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001	30 Oct 2015
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	15 Aug 2016
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	18 Aug 2016
393	DC - 1050 MHz Low Pass Filter	Microcircuits	VLFX-1050	N/A	08 Oct 2016
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	24 Feb 2016
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	10 Nov 2015
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	28 May 2016
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0.73	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	25 Feb 2016
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	25 Feb 2016
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	25 Feb 2016
480	Cable - Bulkhead to Amp	SRC Haverhill	157-157-3050360	480	11 Aug 2016
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-151-3050787	481	11 Aug 2016
482	Cable - Amp to Antenna	SRC Haverhill	157-157-3051574	482	11 Aug 2016

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 21 of 58

## 9. TEST RESULTS

### 9.1. Radiated

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions			
<b>Standard:</b>	FCC CFR 47:15.407	<b>Ambient Temp. (°C):</b>	20.0 - 24.5
<b>Test Heading:</b>	Radiated Spurious and Band-Edge Emissions	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.407 (b), 15.205, 15.209	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for Radiated Spurious and Band-Edge Emissions

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Undesirable Measurement were per the Radiated Test Set-up specified in this document.

15.407 (b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

(8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

#### Limits for Restricted Bands (15.205, 15.209)

**Peak emission: 74 dBuV/m**

**Average emission: 54 dBuV/m**

#### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

**Example:**

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength (dBμV/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz equates to 68.23 dBuV/m

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:

Level (dBmV/m) = 20 \* Log (level (mV/m))

40 dBmV/m = 100 mV/m

48 dBmV/m = 250 mV/m

#### Restricted Bands of Operation (15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 23 of 58

12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

(1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.

(2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.

(3) Cable locating equipment operated pursuant to §15.213.

(4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.

(5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.

(6) Transmitters operating under the provisions of subparts D or F of this part.

(7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.

(8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).

(9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 24 of 58

### 9.1.1. Restricted Band Emissions

#### 9.1.1.1. Galtronics Custom PCB SMT

##### Equipment Configuration for Radiated Spurious - Restricted Band Emissions

<b>Antenna:</b>	Galtronics Custom PCB SMT	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	2.50	<b>Duty Cycle (%):</b>	98
<b>Channel Frequency (MHz):</b>	5180.00	<b>Data Rate:</b>	6.00 MBit/s
<b>Power Setting:</b>	23	<b>Tested By:</b>	SB

##### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	3503.46	45.68	3.11	-11.26	37.53	Peak (Scan)	Vertical	148	0	--	--	
#2	3503.46	36.50	3.11	-11.26	28.35	Max Avg	Vertical	129	42	54.0	-25.7	Pass
#3	3503.46	48.50	3.11	-11.26	40.35	Max Peak	Vertical	129	42	74.0	-33.7	Pass
#4	6906.74	56.48	4.11	-7.54	53.05	Max Avg	Vertical	158	267	54.0	-1.0	Pass
#5	6906.74	59.38	4.11	-7.54	55.95	Max Peak	Vertical	158	267	74.0	-18.1	Pass
#6	10386.42	35.25	5.44	-5.12	35.57	Max Avg	Vertical	100	163	54.0	-18.4	Pass
#7	10386.42	47.28	5.44	-5.12	47.60	Max Peak	Vertical	100	163	74.0	-26.4	Pass
#8	10386.42	44.41	5.44	-5.12	44.73	Peak (Scan)	Vertical	148	0	--	--	

Test Notes: ethernet cable connect to laptop (outside)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 25 of 58

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions

<b>Antenna:</b>	Galtronics Custom PCB SMT	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	2.50	<b>Duty Cycle (%):</b>	98
<b>Channel Frequency (MHz):</b>	5200.00	<b>Data Rate:</b>	6.00 MBit/s
<b>Power Setting:</b>	23	<b>Tested By:</b>	SB

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	3466.66	58.41	3.11	-11.25	50.27	Max Avg	Vertical	102	266	54.0	-3.7	Pass
#2	3466.66	60.88	3.11	-11.25	52.74	Max Peak	Vertical	102	266	74.0	-21.3	Pass
#3	6933.19	61.14	4.11	-7.49	57.76	Max Avg	Vertical	147	271	54.0	-3.8	Pass
#4	6933.19	62.98	4.11	-7.49	59.60	Max Peak	Vertical	147	271	74.0	-14.4	Pass
#5	6933.19	51.44	4.11	-7.49	48.06	Peak (Scan)	Vertical	151	1	--	--	

Test Notes: ethernet cable connect to laptop (outside)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 26 of 58

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions

<b>Antenna:</b>	Galtronics Custom PCB SMT	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	2.50	<b>Duty Cycle (%):</b>	98
<b>Channel Frequency (MHz):</b>	5240.00	<b>Data Rate:</b>	6.00 MBit/s
<b>Power Setting:</b>	23	<b>Tested By:</b>	SB

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	3493.42	59.42	3.11	-11.26	51.27	Max Avg	Horizontal	109	247	54.0	-2.7	Pass
#2	3493.42	61.44	3.11	-11.26	53.29	Max Peak	Horizontal	109	247	74.0	-20.7	Pass
#3	6986.65	60.51	4.13	-7.45	57.19	Max Avg	Vertical	146	263	54.0	-3.2	Pass
#4	6986.65	62.57	4.13	-7.45	59.25	Max Peak	Vertical	146	263	74.0	-14.8	Pass
#5	6986.65	52.68	4.13	-7.45	49.36	Peak (Scan)	Vertical	198	0	--	--	
#6	10479.80	48.05	5.42	-4.46	49.01	Peak (Scan)	Vertical	198	160	--	--	
#7	10479.80	46.55	5.42	-4.46	47.51	Max Avg	Vertical	180	254	54.0	-6.5	Pass
#8	10479.80	52.08	5.42	-4.46	53.04	Max Peak	Vertical	180	254	74.0	-21.0	Pass

Test Notes: ethernet cable connect to laptop (outside)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 27 of 58

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions

<b>Antenna:</b>	Galtronics Custom PCB SMT	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	1.80	<b>Duty Cycle (%):</b>	98
<b>Channel Frequency (MHz):</b>	5745.00	<b>Data Rate:</b>	6.00 MBit/s
<b>Power Setting:</b>	23	<b>Tested By:</b>	SB

#### Test Measurement Results

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5752.02	59.25	3.84	-10.62	52.47	Peak (Scan)	Horizontal	148	52	--	--	
#2	5752.02	59.25	3.84	-10.62	52.47	Fundamental	Horizontal	148	52	--	--	
#3	7660.12	51.68	4.37	-6.95	49.10	Max Avg	Vertical	194	60	54.0	-4.9	Pass
#4	7660.12	59.39	4.37	-6.95	56.81	Max Peak	Vertical	194	60	74.0	-17.2	Pass
#5	7660.12	28.10	4.37	-6.95	25.52	Max Avg	Horizontal	134	25	54.0	-28.5	Pass
#6	7660.12	39.70	4.37	-6.95	37.12	Max Peak	Horizontal	134	25	74.0	-36.9	Pass
#7	7660.12	55.56	4.37	-6.95	52.98	Peak (Scan)	Vertical	198	52	--	--	
#8	7660.12	55.56	4.37	-6.95	52.98	Peak (NRB)	Vertical	198	52	--	--	Pass
#9	11486.18	50.23	5.46	-4.86	50.83	Max Avg	Vertical	195	73	54.0	-3.2	Pass
#10	11486.18	62.33	5.46	-4.86	62.93	Max Peak	Vertical	195	73	74.0	-11.1	Pass
#11	11486.18	28.35	5.46	-4.86	28.95	Max Avg	Horizontal	172	169	54.0	-25.1	Pass
#12	11486.18	40.64	5.46	-4.86	41.24	Max Peak	Horizontal	172	169	74.0	-32.8	Pass

Test Notes: ethernet cable connected to laptop (outside)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 28 of 58

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions

<b>Antenna:</b>	Galtronics Custom PCB SMT	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	1.80	<b>Duty Cycle (%):</b>	98
<b>Channel Frequency (MHz):</b>	5785.00	<b>Data Rate:</b>	6.00 MBit/s
<b>Power Setting:</b>	23	<b>Tested By:</b>	SB

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5789.54	62.07	3.79	-10.42	55.44	Peak (Scan)	Vertical	148	48	--	--	
#2	5789.54	62.07	3.79	-10.42	55.44	Fundamental	Vertical	148	48	--	--	
#3	7713.47	49.70	4.41	-6.85	47.26	Peak (Scan)	Vertical	198	48	--	--	
#4	7713.47	49.70	4.41	-6.85	47.26	Peak (NRB)	Vertical	198	48	--	--	Pass
#5	7713.47	52.10	4.41	-6.85	49.66	Max Avg	Vertical	197	67	54.0	-4.3	Pass
#6	7713.47	61.19	4.41	-6.85	58.75	Max Peak	Vertical	197	67	74.0	-15.3	Pass
#7	7713.47	28.18	4.41	-6.85	25.74	Max Avg	Horizontal	164	297	54.0	-28.3	Pass
#8	7713.47	39.95	4.41	-6.85	37.51	Max Peak	Horizontal	164	297	74.0	-36.5	Pass
#9	11580.44	43.88	5.41	-4.60	44.69	Max Avg	Vertical	193	88	54.0	-9.3	Pass
#10	11580.44	58.33	5.41	-4.60	59.14	Max Peak	Vertical	193	88	74.0	-14.9	Pass
#11	11580.44	28.42	5.41	-4.60	29.23	Max Avg	Horizontal	197	326	54.0	-24.8	Pass
#12	11580.44	40.07	5.41	-4.60	40.88	Max Peak	Horizontal	197	326	74.0	-33.1	Pass

Test Notes: ethernet cable connected to laptop (outside)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 29 of 58

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions

<b>Antenna:</b>	Galtronics Custom PCB SMT	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	1.80	<b>Duty Cycle (%):</b>	98
<b>Channel Frequency (MHz):</b>	5825.00	<b>Data Rate:</b>	6.00 MBit/s
<b>Power Setting:</b>	23	<b>Tested By:</b>	SB

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5819.54	62.07	0.00	0.00	--	Fundamental	Vertical	148	48	--	--	
#2	7713.47	53.10	4.41	-6.85	50.66	Max Avg	Vertical	197	67	54.0	-3.3	Pass
#3	7713.47	60.19	4.41	-6.85	57.75	Max Peak	Vertical	197	67	74.0	-16.3	Pass
#4	11580.44	44.88	5.41	-2.60	45.69	Max Avg	Vertical	193	88	54.0	-8.3	Pass
#5	11580.44	56.33	5.41	-4.60	61.14	Max Peak	Vertical	193	88	74.0	-12.9	Pass

Test Notes: ethernet cable connected to laptop (outside)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 30 of 58

### 9.1.2. Restricted Band-Edge Emissions

#### 9.1.2.2. Galtronics Custom PCB SMT

##### RESULTS SUMMARY FOR RADIATED BAND-EDGE EMISSIONS

Galtronics Custom PCB SMT		Band-Edge Freq	Peak (Limit 74.0dBµV/m)	Average (Limit 54.0dBµV/m)	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dBµV/m	dBµV/m	
802.11a	5180.00	5150.00	66.64	53.19	23.00
802.11a	5745.00	5725.00	<a href="#">-35.29</a>	<a href="#">-48.33</a>	23.00
802.11a	5825.00	5850.00	<a href="#">-36.08</a>	<a href="#">-47.21</a>	23.00
802.11ac-80	5210.00	5150.00	68.43	52.47	13.00
802.11ac-80	5775.00	5725.00	<a href="#">-27.93</a>	<a href="#">-46.32</a>	16.00
802.11ac-80	5775.00	5850.00	<a href="#">-27.81</a>	<a href="#">-46.97</a>	21.00
802.11n HT-20	5180.00	5150.00	67.45	53.38	23.00
802.11n HT-20	5745.00	5725.00	<a href="#">-29.00</a>	<a href="#">-44.44</a>	23.00
802.11n HT-20	5825.00	5850.00	<a href="#">-21.66</a>	<a href="#">-46.97</a>	23.00
802.11n HT-40	5190.00	5150.00	67.89	53.31	20.00
802.11n HT-40	5755.00	5725.00	<a href="#">-29.81</a>	<a href="#">-44.68</a>	23.00
802.11n HT-40	5815.00	5850.00	<a href="#">-24.76</a>	<a href="#">-44.64</a>	23.00

Click on the links to view the data.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 31 of 58

#### Equipment Configuration for Restricted Lower Band-Edge Emissions

<b>Antenna:</b>	Galtronics Custom PCB SMT	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	2.50	<b>Duty Cycle (%):</b>	98
<b>Channel Frequency (MHz):</b>	5180.00	<b>Data Rate:</b>	6.00 MBit/s
<b>Power Setting:</b>	23	<b>Tested By:</b>	SB

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5133.07	61.10	3.69	-11.60	53.19	Max Avg	Vertical	150	75	54.0	-0.8	Pass
#2	5150.00	74.56	3.67	-11.59	66.64	Max Peak	Vertical	150	75	74.0	-7.4	Pass

Test Notes: ethernet cable connected to laptop (outside)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 32 of 58

#### Equipment Configuration for Restricted Lower Band-Edge Emissions

<b>Antenna:</b>	Galtronics Custom PCB SMT	<b>Variant:</b>	802.11ac-80
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	2.50	<b>Duty Cycle (%):</b>	98
<b>Channel Frequency (MHz):</b>	5210.00	<b>Data Rate:</b>	29.30 MBit/s
<b>Power Setting:</b>	13	<b>Tested By:</b>	SB

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5148.70	76.35	3.67	-11.59	68.43	Max Peak	Vertical	150	75	74.0	-5.6	Pass
#2	5150.00	60.39	3.67	-11.59	52.47	Max Avg	Vertical	150	75	54.0	-1.5	Pass

Test Notes: ethernet cable connected to laptop (outside)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 33 of 58

#### Equipment Configuration for Restricted Lower Band-Edge Emissions

<b>Antenna:</b>	Galtronics Custom PCB SMT	<b>Variant:</b>	802.11n HT-20
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	2.50	<b>Duty Cycle (%):</b>	98
<b>Channel Frequency (MHz):</b>	5180.00	<b>Data Rate:</b>	6.50 MBit/s
<b>Power Setting:</b>	23	<b>Tested By:</b>	SB

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5133.07	61.29	3.69	-11.60	53.38	Max Avg	Vertical	150	75	54.0	-0.6	Pass
#2	5150.00	75.37	3.67	-11.59	67.45	Max Peak	Vertical	150	75	74.0	-6.6	Pass

Test Notes: ethernet cable connected to laptop (outside)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 34 of 58

#### Equipment Configuration for Restricted Lower Band-Edge Emissions

<b>Antenna:</b>	Galtronics Custom PCB SMT	<b>Variant:</b>	802.11n HT-40
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	2.50	<b>Duty Cycle (%):</b>	98
<b>Channel Frequency (MHz):</b>	5190.00	<b>Data Rate:</b>	13.50 MBit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	SB

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5148.70	75.81	3.67	-11.59	67.89	Max Peak	Vertical	150	75	74.0	-6.1	Pass
#2	5150.00	61.23	3.67	-11.59	53.31	Max Avg	Vertical	150	75	54.0	-0.7	Pass

Test Notes: ethernet cable connected to laptop (outside)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 35 of 58

### 9.1.3. Digital Emissions

#### Equipment Configuration for Digital Emissions (0.03 - 1 GHz)

<b>Antenna:</b>	Integral	<b>Variant:</b>	802.11g/a
<b>Antenna Gain (dBi):</b>	Not Applicable	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	2437/5200	<b>Data Rate:</b>	6 MBit/s
<b>Power Setting:</b>	Nom	<b>Tested By:</b>	SB

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	35.01	48.49	3.46	-13.58	38.37	MaxQP	Vertical	100	281	40.0	-1.6	Pass
#2	35.01	53.83	3.46	-13.58	43.71	Peak (Scan)	Vertical	100	1	--	--	
#3	52.97	55.14	3.59	-23.92	34.81	MaxQP	Vertical	122	0	40.0	-5.2	Pass
#4	52.97	61.15	3.59	-23.92	40.82	Peak (Scan)	Vertical	100	1	--	--	
#5	189.44	54.76	4.30	-19.71	39.35	MaxQP	Vertical	100	126	43.0	-3.7	Pass
#6	189.44	54.01	4.30	-19.71	38.60	Peak (Scan)	Vertical	100	1	--	--	
#7	374.99	55.66	4.94	-15.36	45.24	MaxQP	Horizontal	100	267	46.0	-0.8	Pass
#8	624.95	44.52	5.67	-10.99	39.20	MaxQP	Vertical	100	116	46.0	-6.8	Pass
#9	624.95	43.45	5.67	-10.99	38.13	Peak (Scan)	Vertical	100	1	--	--	
#10	750.02	38.89	5.99	-9.42	35.46	Peak (Scan)	Horizontal	100	1	--	--	
#11	750.02	43.95	5.99	-9.42	40.52	MaxQP	Horizontal	118	66	46.0	-5.5	Pass
#12	874.99	42.22	6.27	-8.09	40.40	Peak (Scan)	Horizontal	100	1	--	--	
#13	874.99	40.69	6.27	-8.09	38.87	MaxQP	Horizontal	100	37	46.0	-7.1	Pass

Test Notes: Ethernet to Coax video stream

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 36 of 58

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions

<b>Antenna:</b>	Integral	<b>Variant:</b>	802.11g/a
<b>Antenna Gain (dBi):</b>	Not Applicable	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	2437/5200	<b>Data Rate:</b>	6 MBit/s
<b>Power Setting:</b>	Nom	<b>Tested By:</b>	SB

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	2220.44	52.08	2.62	-12.39	42.31	Peak (Scan)	Vertical	200	1	--	--	
#2	2220.44	36.68	2.62	-12.39	26.91	Max Avg	Vertical	176	61	54.0	-27.1	Pass
#3	2220.44	55.46	2.62	-12.39	45.69	Max Peak	Vertical	176	61	74.0	-28.3	Pass
#4	2220.44	36.73	2.62	-12.39	26.96	Max Avg	Horizontal	100	20	54.0	-27.0	Pass
#5	2220.44	56.84	2.62	-12.39	47.07	Max Peak	Horizontal	100	20	74.0	-26.9	Pass
#6	3849.78	53.07	3.22	-10.81	45.48	Peak (Scan)	Vertical	100	26	--	--	
#7	3849.78	53.07	3.22	-10.81	45.48	Peak (NRB)	Vertical	100	26	--	--	Pass
#8	3849.78	56.87	3.22	-10.81	49.28	Max Avg	Vertical	117	80	54.0	-4.7	Pass
#9	3849.78	59.37	3.22	-10.81	51.78	Max Peak	Vertical	117	80	74.0	-22.2	Pass
#10	3849.78	53.28	3.22	-10.81	45.69	Max Avg	Horizontal	132	148	54.0	-8.3	Pass
#11	3849.78	56.86	3.22	-10.81	49.27	Max Peak	Horizontal	132	148	74.0	-24.7	Pass

Test Notes: Ethernet to Coax video stream

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 37 of 58

---

## **A. APPENDIX - GRAPHICAL IMAGES**

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## A.1. Radiated


### A.1.1. Restricted Band Emissions

#### A.1.1.1. Galtronics Custom PCB SMT



#### RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5180.00 MHz, Antenna: Galtronics Custom PCB SMT, Power Setting: 23, Duty Cycle (%): 98

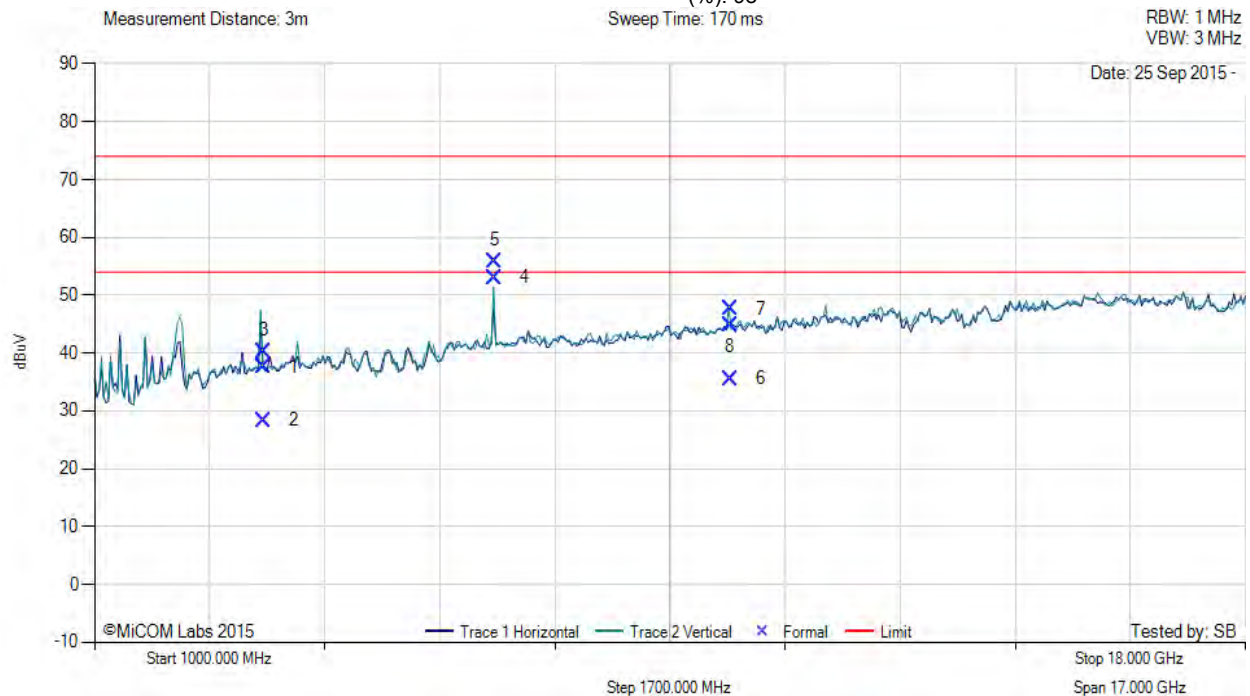

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	3503.46	45.68	3.11	-11.26	37.53	Peak (Scan)	Vertical	148	0	--	--	
2	3503.46	36.50	3.11	-11.26	28.35	Max Avg	Vertical	129	42	54.0	25.7	Pass
3	3503.46	48.50	3.11	-11.26	40.35	Max Peak	Vertical	129	42	74.0	-33.7	Pass
4	6906.74	56.48	4.11	-7.54	53.05	Max Avg	Vertical	158	267	54.0	1.0	Pass
5	6906.74	59.38	4.11	-7.54	55.95	Max Peak	Vertical	158	267	74.0	-18.1	Pass
6	10386.42	35.25	5.44	-5.12	35.57	Max Avg	Vertical	100	163	54.0	18.4	Pass
7	10386.42	47.28	5.44	-5.12	47.60	Max Peak	Vertical	100	163	74.0	-26.4	Pass
8	10386.42	44.41	5.44	-5.12	44.73	Peak (Scan)	Vertical	148	0	--	--	

**Test Notes:** ethernet cable connect to laptop (outside)


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

# RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5200.00 MHz, Antenna: Galtronics Custom PCB SMT, Power Setting: 23, Duty Cycle (%): 98

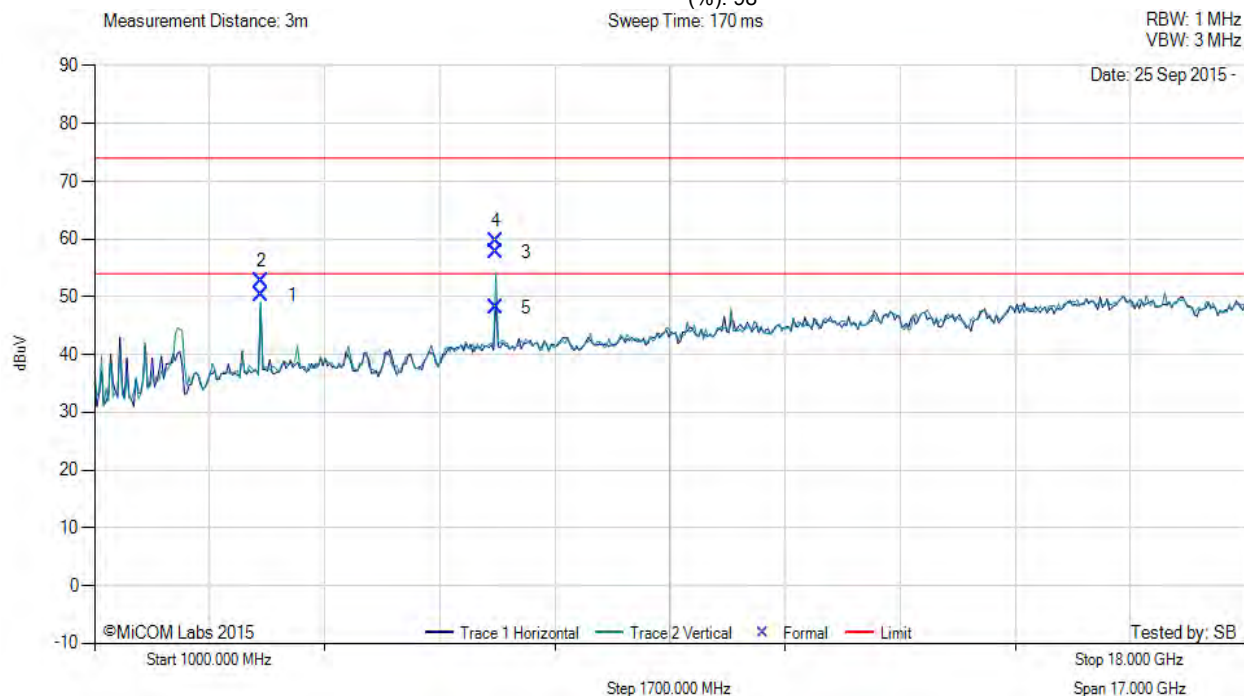

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	3466.66	58.41	3.11	-11.25	50.27	Max Avg	Vertical	102	266	54.0	3.7	Pass
2	3466.66	60.88	3.11	-11.25	52.74	Max Peak	Vertical	102	266	74.0	-21.3	Pass
3	6933.19	61.14	4.11	-7.49	57.76	Max Avg	Vertical	147	271	54.0	-3.8	Pass
4	6933.19	62.98	4.11	-7.49	59.60	Max Peak	Vertical	147	271	74.0	-14.4	Pass
5	6933.19	51.44	4.11	-7.49	48.06	Peak (Scan)	Vertical	151	1	--	--	


**Test Notes:** ethernet cable connect to laptop (outside)

[back to matrix](#)

# RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5240.00 MHz, Antenna: Galtronics Custom PCB SMT, Power Setting: 23, Duty Cycle (%): 98

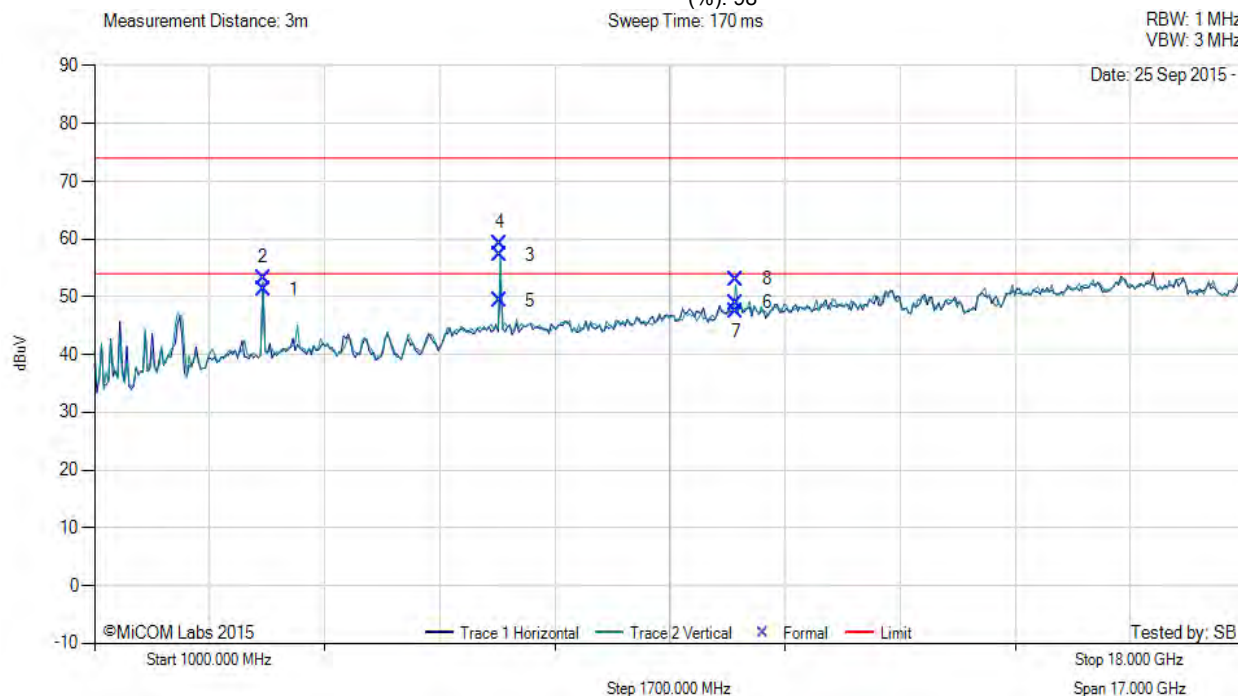

Num	Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1	3493.42	59.42	3.11	-11.26	51.27	Max Avg	Horizontal	109	247	54.0	2.7	Pass
2	3493.42	61.44	3.11	-11.26	53.29	Max Peak	Horizontal	109	247	74.0	-20.7	Pass
3	6986.65	60.51	4.13	-7.45	57.19	Max Avg	Vertical	146	263	54.0	-3.2	Pass
4	6986.65	62.57	4.13	-7.45	59.25	Max Peak	Vertical	146	263	74.0	-14.8	Pass
5	6986.65	52.68	4.13	-7.45	49.36	Peak (Scan)	Vertical	198	0	--	--	
6	10479.80	48.05	5.42	-4.46	49.01	Peak (Scan)	Vertical	198	160	--	--	
7	10479.80	46.55	5.42	-4.46	47.51	Max Avg	Vertical	180	254	54.0	6.5	Pass
8	10479.80	52.08	5.42	-4.46	53.04	Max Peak	Vertical	180	254	74.0	-21.0	Pass

**Test Notes:** ethernet cable connect to laptop (outside)


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

# RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5745.00 MHz, Antenna: Galtronics Custom PCB SMT, Power Setting: 23, Duty Cycle (%): 98

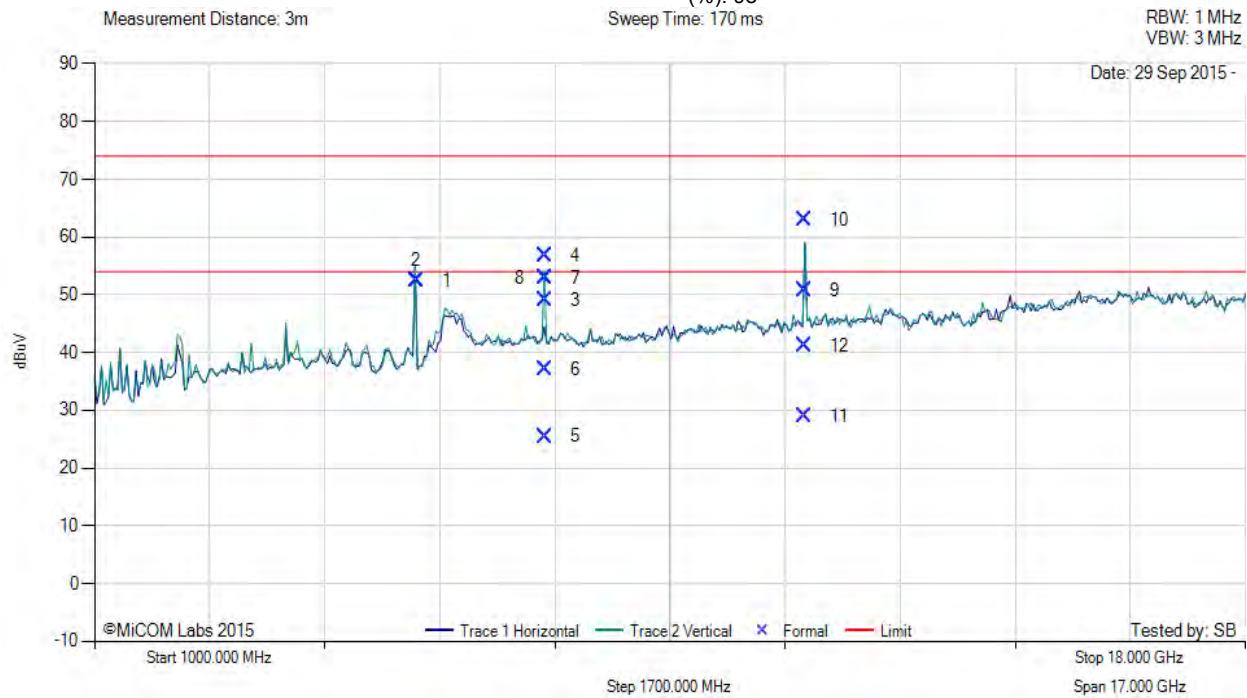

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	5752.02	59.25	3.84	-10.62	52.47	Peak (Scan)	Horizontal	148	52	--	--	
2	5752.02	59.25	3.84	-10.62	52.47	Fundamental	Horizontal	148	52	--	--	
3	7660.12	51.68	4.37	-6.95	49.10	Max Avg	Vertical	194	60	54.0	4.9	Pass
4	7660.12	59.39	4.37	-6.95	56.81	Max Peak	Vertical	194	60	74.0	-17.2	Pass
5	7660.12	28.10	4.37	-6.95	25.52	Max Avg	Horizontal	134	25	54.0	28.5	Pass
6	7660.12	39.70	4.37	-6.95	37.12	Max Peak	Horizontal	134	25	74.0	-36.9	Pass
7	7660.12	55.56	4.37	-6.95	52.98	Peak (Scan)	Vertical	198	52	--	--	
8	7660.12	55.56	4.37	-6.95	52.98	Peak (NRB)	Vertical	198	52	--	--	Pass
9	11486.18	50.23	5.46	-4.86	50.83	Max Avg	Vertical	195	73	54.0	3.2	Pass
10	11486.18	62.33	5.46	-4.86	62.93	Max Peak	Vertical	195	73	74.0	-11.1	Pass
11	11486.18	28.35	5.46	-4.86	28.95	Max Avg	Horizontal	172	169	54.0	25.1	Pass
12	11486.18	40.64	5.46	-4.86	41.24	Max Peak	Horizontal	172	169	74.0	-32.8	Pass

**Test Notes:** ethernet cable connected to laptop (outside)


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

# RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5785.00 MHz, Antenna: Galtronics Custom PCB SMT, Power Setting: 23, Duty Cycle (%): 98

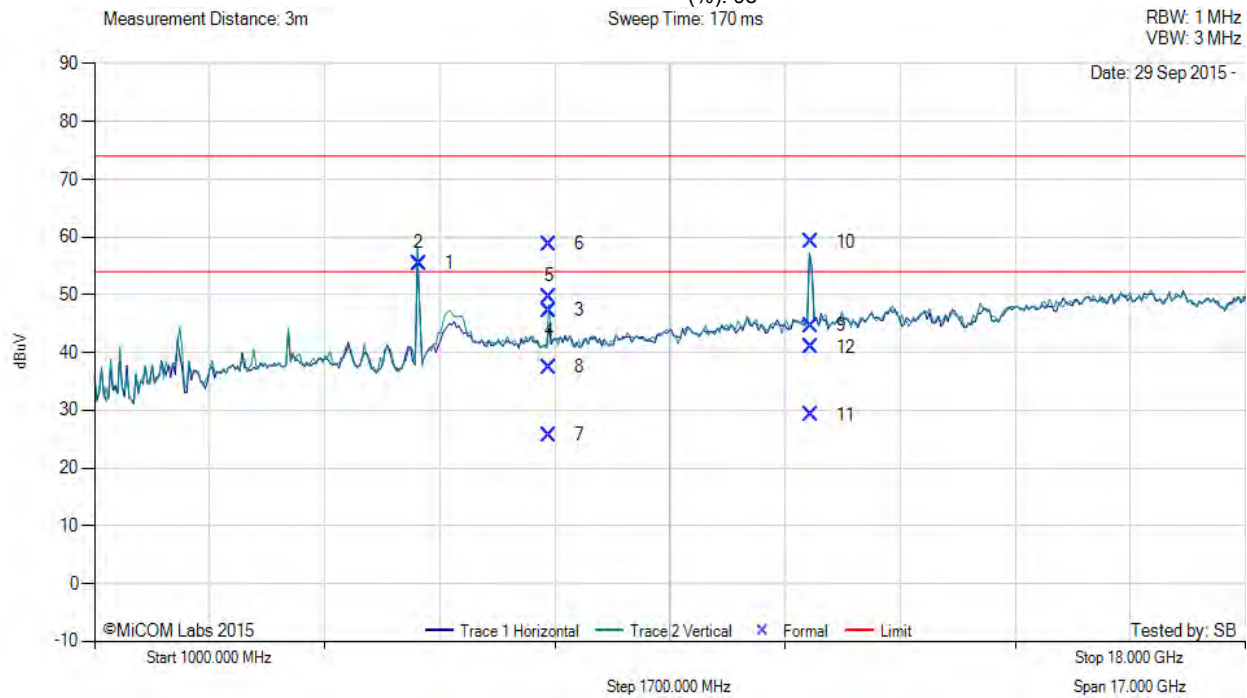

Num	Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1	5789.54	62.07	3.79	-10.42	55.44	Peak (Scan)	Vertical	148	48	--	--	
2	5789.54	62.07	3.79	-10.42	55.44	Fundamental	Vertical	148	48	--	--	
3	7713.47	49.70	4.41	-6.85	47.26	Peak (Scan)	Vertical	198	48	--	--	
4	7713.47	49.70	4.41	-6.85	47.26	Peak (NRB)	Vertical	198	48	--	--	Pass
5	7713.47	52.10	4.41	-6.85	49.66	Max Avg	Vertical	197	67	54.0	4.3	Pass
6	7713.47	61.19	4.41	-6.85	58.75	Max Peak	Vertical	197	67	74.0	-15.3	Pass
7	7713.47	28.18	4.41	-6.85	25.74	Max Avg	Horizontal	164	297	54.0	28.3	Pass
8	7713.47	39.95	4.41	-6.85	37.51	Max Peak	Horizontal	164	297	74.0	-36.5	Pass
9	11580.44	43.88	5.41	-4.60	44.69	Max Avg	Vertical	193	88	54.0	9.3	Pass
10	11580.44	58.33	5.41	-4.60	59.14	Max Peak	Vertical	193	88	74.0	-14.9	Pass
11	11580.44	28.42	5.41	-4.60	29.23	Max Avg	Horizontal	197	326	54.0	24.8	Pass
12	11580.44	40.07	5.41	-4.60	40.88	Max Peak	Horizontal	197	326	74.0	-33.1	Pass

**Test Notes:** ethernet cable connected to laptop (outside)

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



# RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5825.00 MHz, Antenna: Galtronics Custom PCB SMT, Power Setting: 23, Duty Cycle (%): 98

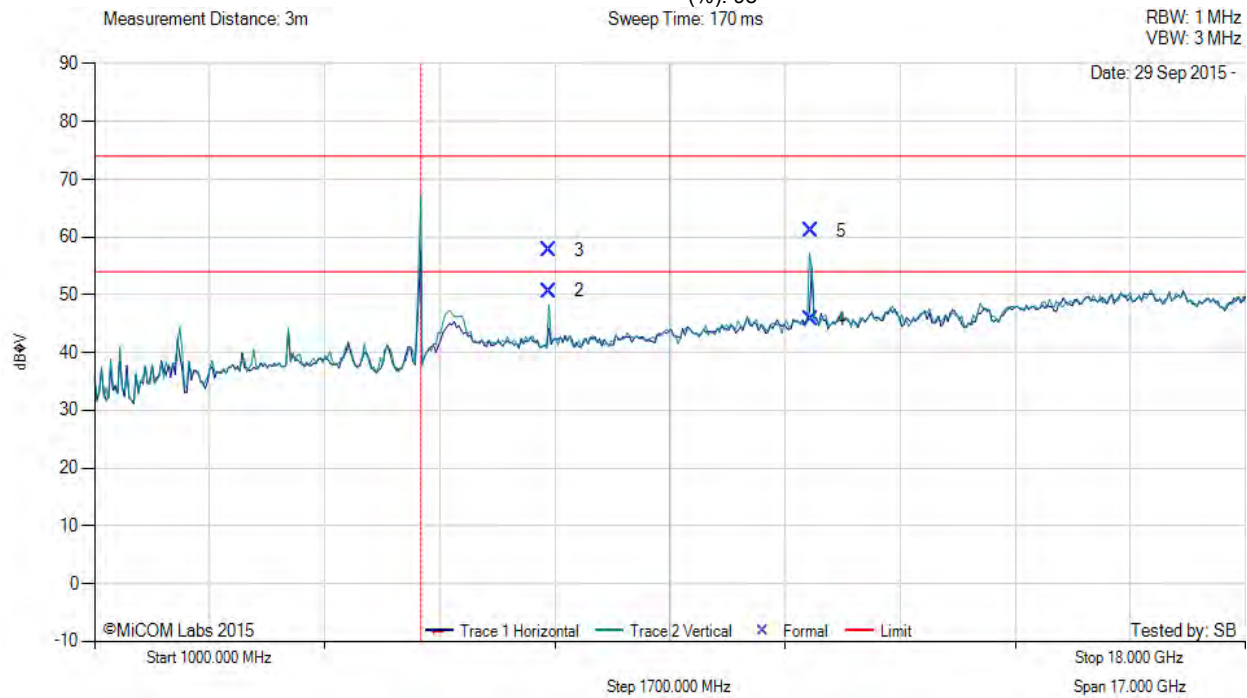

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	5819.54	62.07	0.00	0.00	--	Fundamental	Vertical	148	48	--	--	
2	7713.47	53.10	4.41	-6.85	50.66	Max Avg	Vertical	197	67	54.0	3.3	Pass
3	7713.47	60.19	4.41	-6.85	57.75	Max Peak	Vertical	197	67	74.0	-16.3	Pass
4	11580.44	44.88	5.41	-2.60	45.69	Max Avg	Vertical	193	88	54.0	8.3	Pass
5	11580.44	56.33	5.41	-4.60	61.14	Max Peak	Vertical	193	88	74.0	-12.9	Pass

**Test Notes:** ethernet cable connected to laptop (outside)

[back to matrix](#)


## A.1.2. Restricted Band-Edge Emissions

### A.1.2.2. Galtronics Custom PCB SMT

#### RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11a, Test Freq: 5180.00 MHz, Antenna: Galtronics Custom PCB SMT, Power Setting: 23, Duty Cycle (%): 98

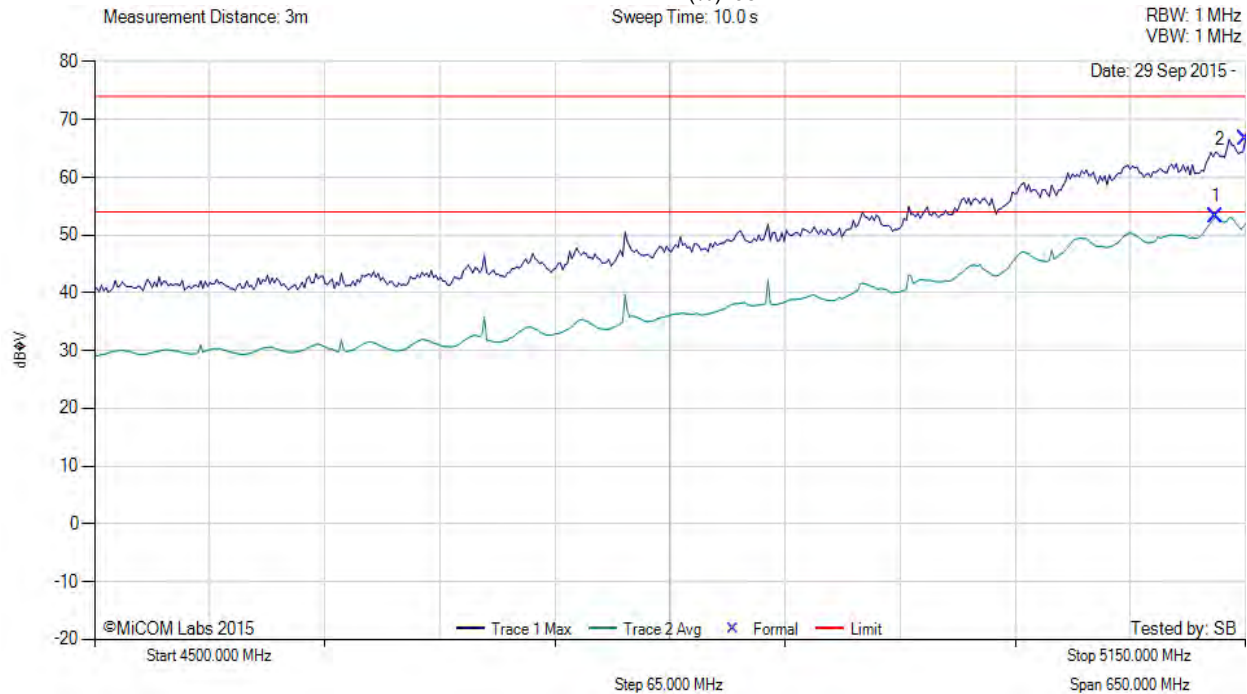

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	5133.07	61.10	3.69	-11.60	53.19	Max Avg	Vertical	150	75	54.0	-0.8	Pass
2	5150.00	74.56	3.67	-11.59	66.64	Max Peak	Vertical	150	75	74.0	-7.4	Pass

**Test Notes:** ethernet cable connected to laptop (outside)

[back to matrix](#)



# RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11ac-80, Test Freq: 5210.00 MHz, Antenna: Galtronics Custom PCB SMT, Power Setting: 13, Duty Cycle (%): 98



Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	5148.70	76.35	3.67	-11.59	68.43	Max Peak	Vertical	150	75	74.0	-5.6	Pass
2	5150.00	60.39	3.67	-11.59	52.47	Max Avg	Vertical	150	75	54.0	-1.5	Pass

**Test Notes:** ethernet cable connected to laptop (outside)

[back to matrix](#)




**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 46 of 58

#### RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5180.00 MHz, Antenna: Galtronics Custom PCB SMT, Power Setting: 23, Duty Cycle (%): 98

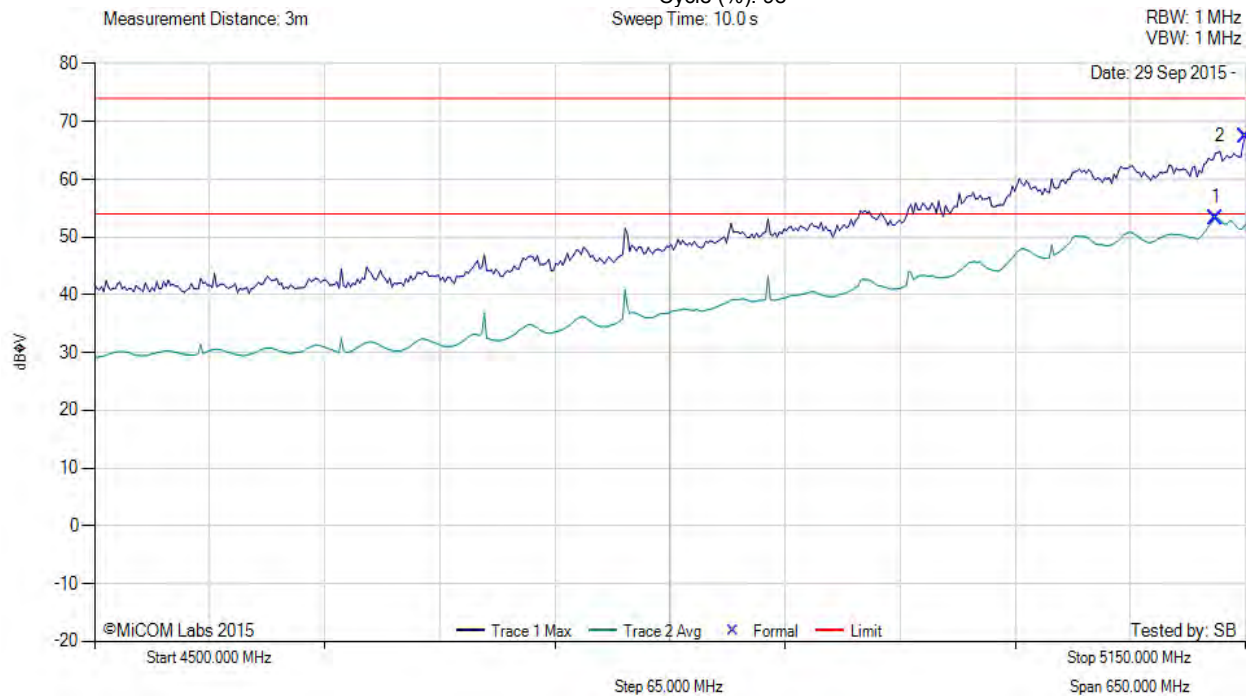

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	5133.07	61.29	3.69	-11.60	53.38	Max Avg	Vertical	150	75	54.0	-0.6	Pass
2	5150.00	75.37	3.67	-11.59	67.45	Max Peak	Vertical	150	75	74.0	-6.6	Pass

**Test Notes:** ethernet cable connected to laptop (outside)

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 47 of 58

#### RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11n HT-40, Test Freq: 5190.00 MHz, Antenna: Galtronics Custom PCB SMT, Power Setting: 20, Duty Cycle (%): 98



Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	5148.70	75.81	3.67	-11.59	67.89	Max Peak	Vertical	150	75	74.0	-6.1	Pass
2	5150.00	61.23	3.67	-11.59	53.31	Max Avg	Vertical	150	75	54.0	-0.7	Pass

**Test Notes:** ethernet cable connected to laptop (outside)

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 48 of 58




# RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11a, Test Freq: 5745 MHz, Antenna: Galtronics Custom PCB SMT



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	0 dB
20 dBm	-35.39 dBm	VBW	1 MHz		
	5.72500000 GHz	SWT	10 s	Unit	dBm

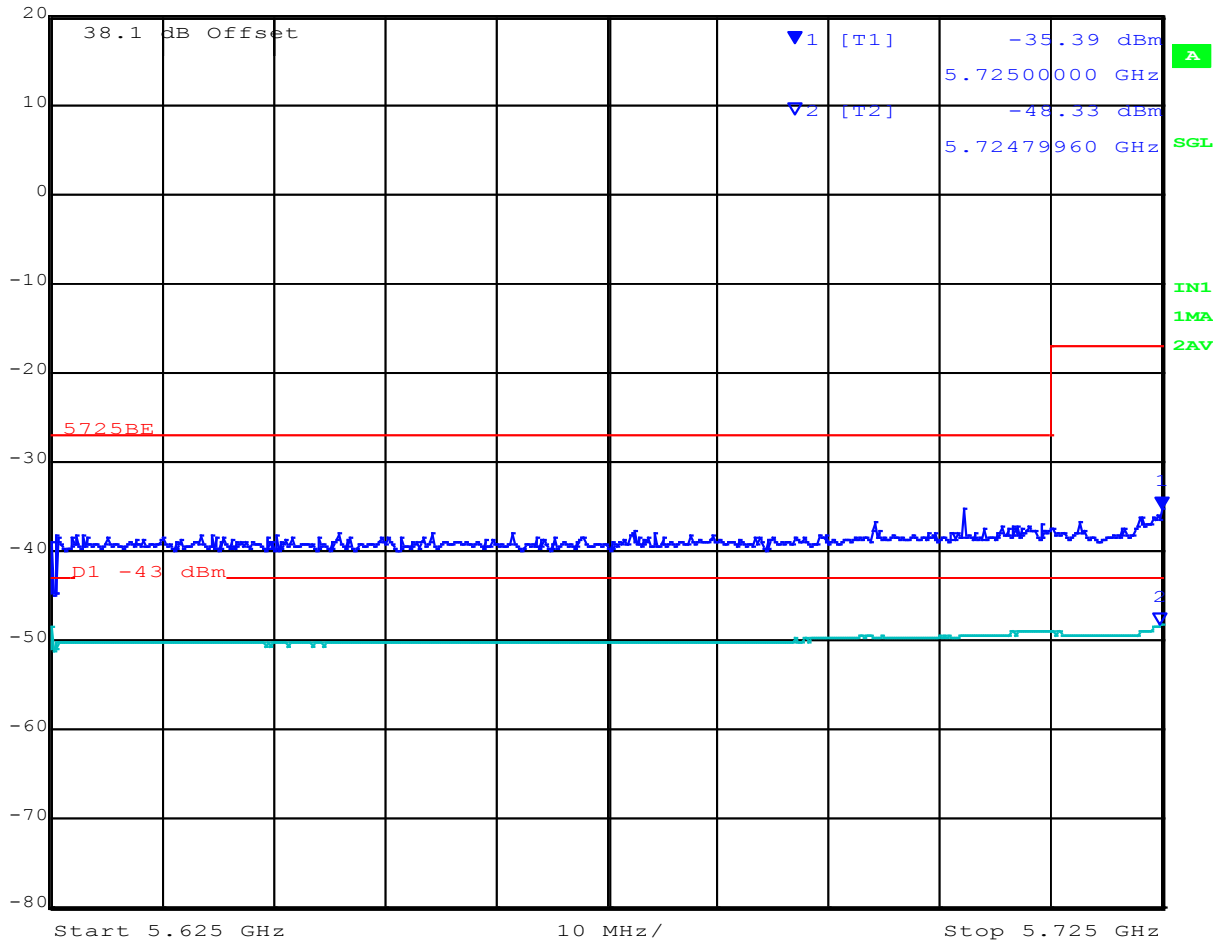

Date: 30.SEP.2015 09:47:49

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 49 of 58




#### RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11a, Test Freq: 5825 MHz, Antenna: Galtronics Custom PCB SMT



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	0 dB
20.3 dBm	-36.08 dBm	VBW	1 MHz		
	5.85060120 GHz	SWT	10 s	Unit	dBm

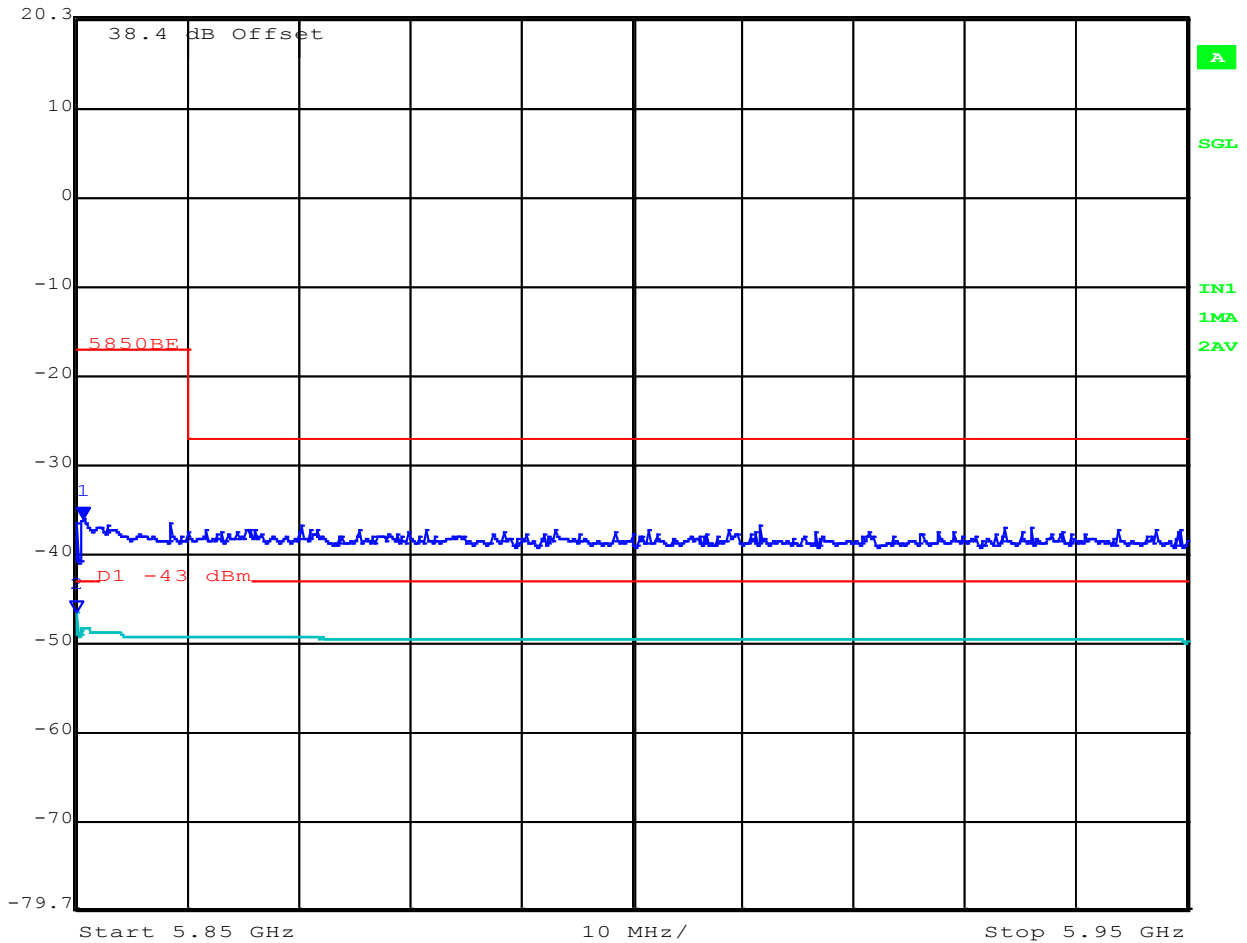

Date: 30.SEP.2015 08:57:41

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


## RESTRICTED BAND-EDGE EMISSIONS



Variant: 802.11n HT20, Test Freq: 5745 MHz, Antenna: Galtronics Custom PCB SMT




	Marker 1 [T1]	RBW	1 MHz	RF Att	0 dB
Ref Lvl	-29.00 dBm	VBW	1 MHz		
20 dBm	5.72479960 GHz	SWT	10 s	Unit	dBm

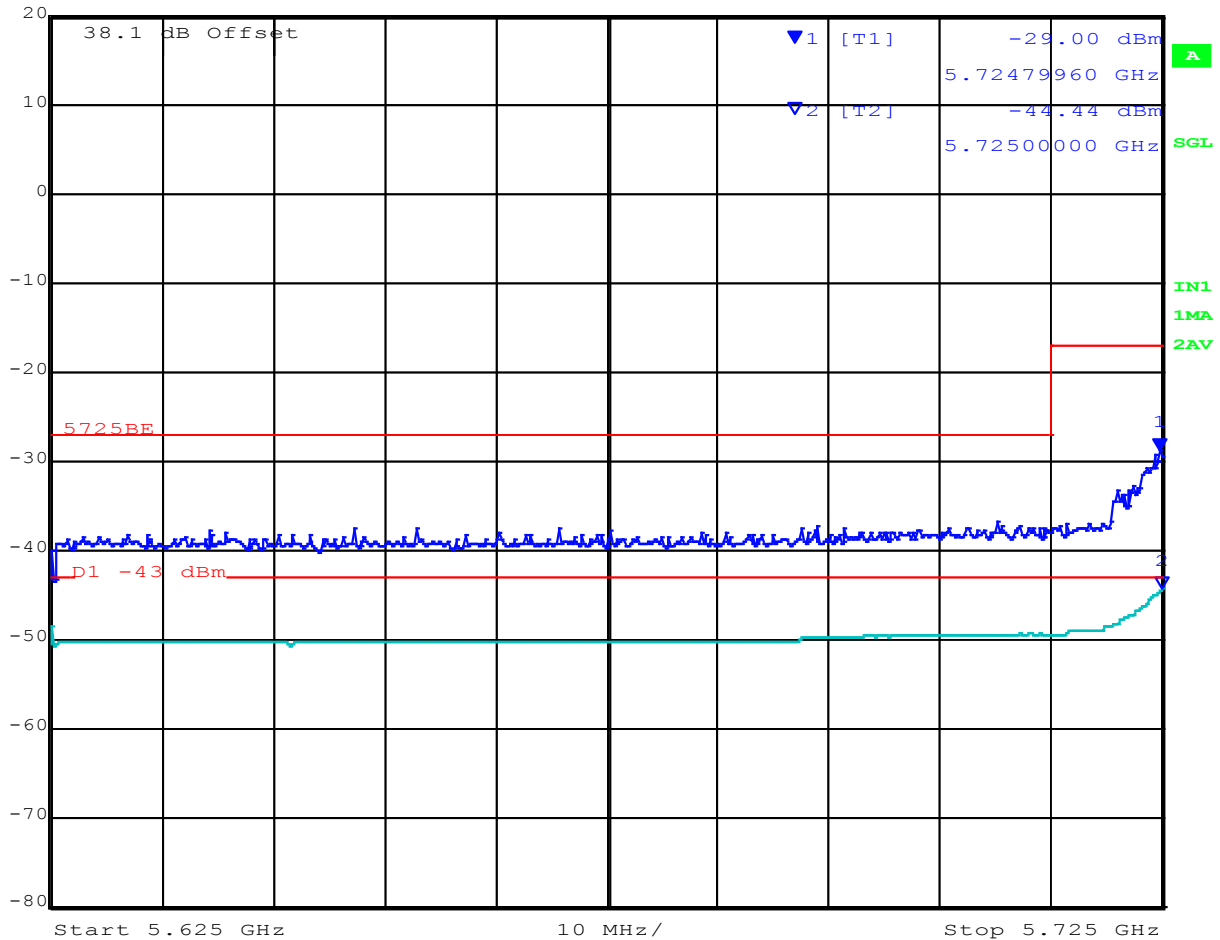

Date: 30.SEP.2015 09:46:36

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

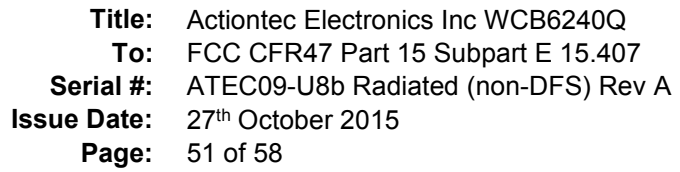

dBm



MiCOM Labs, 575 Boulder Court, Pleasanton, California 94566 USA, Phone: +1 (925) 462 0304, Fax: +1 (925) 462 0306, [www.micomlabs.com](http://www.micomlabs.com)



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 52 of 58




#### RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11n HT40, Test Freq: 5755 MHz, Antenna: Galtronics Custom PCB SMT



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	0 dB
20 dBm	-29.81 dBm	VBW	1 MHz		
	5.72299599 GHz	SWT	10 s	Unit	dBm

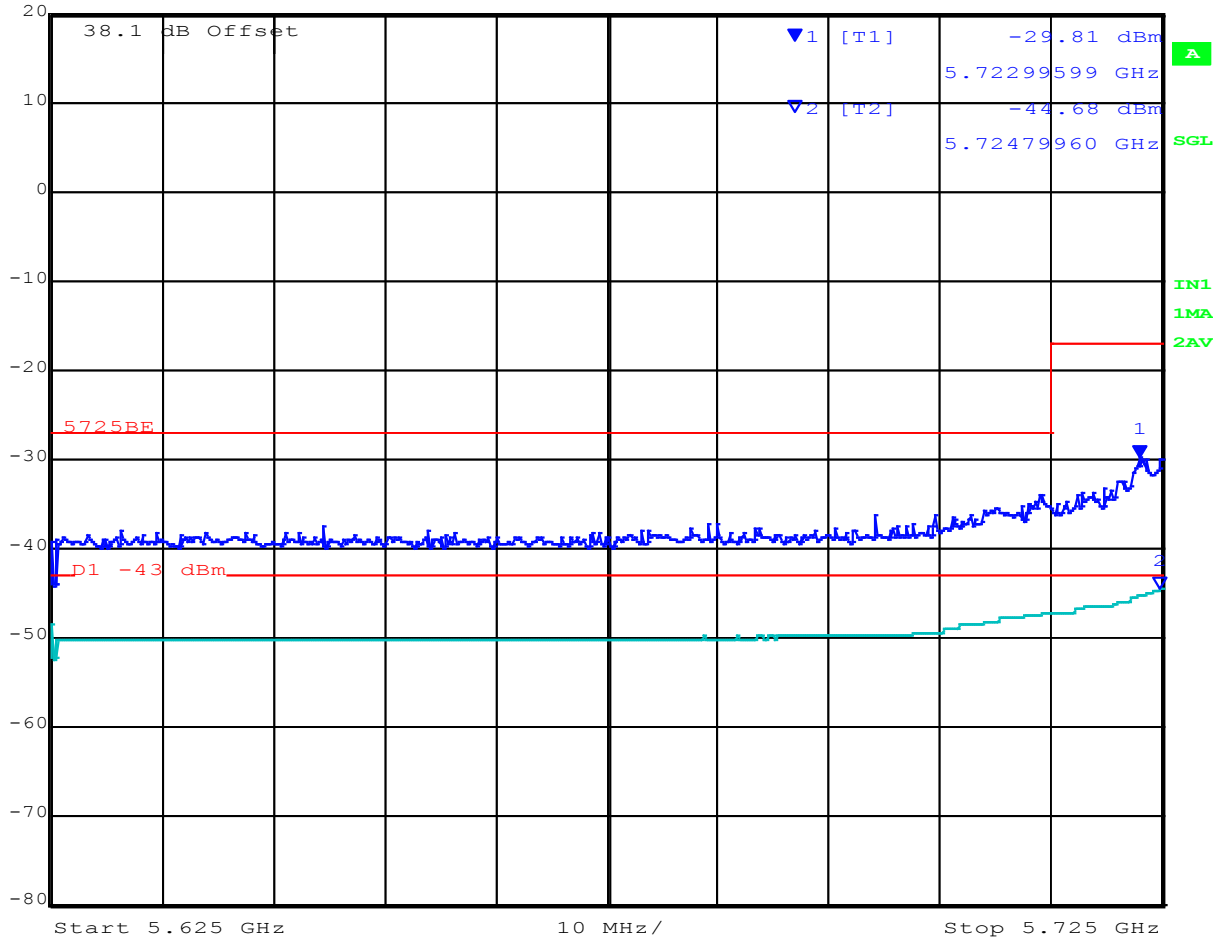

Date: 30.SEP.2015 09:44:08

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 53 of 58




# RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11n HT40, Test Freq: 5815 MHz, Antenna: Galtronics Custom PCB SMT



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	0 dB
20.3 dBm	-24.76 dBm	VBW	1 MHz		
	5.85260521 GHz	SWT	10 s	Unit	dBm

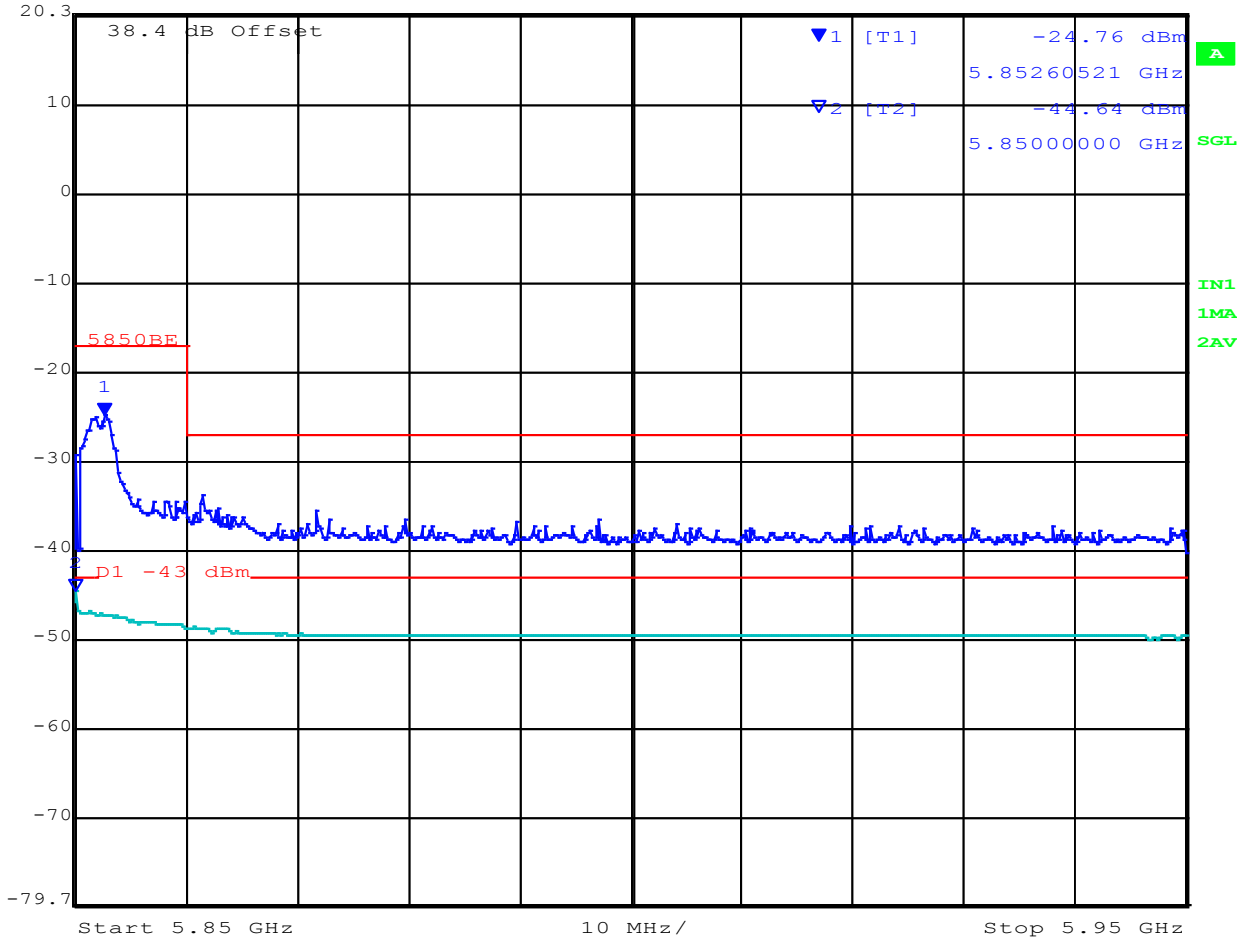

Date: 30.SEP.2015 09:13:40

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 54 of 58




#### RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11ac 80, Test Freq: 5775 MHz, Antenna: Galtronics Custom PCB SMT



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	0 dB
20 dBm	-27.93 dBm	VBW	1 MHz		
	5.72500000 GHz	SWT	10 s	Unit	dBm

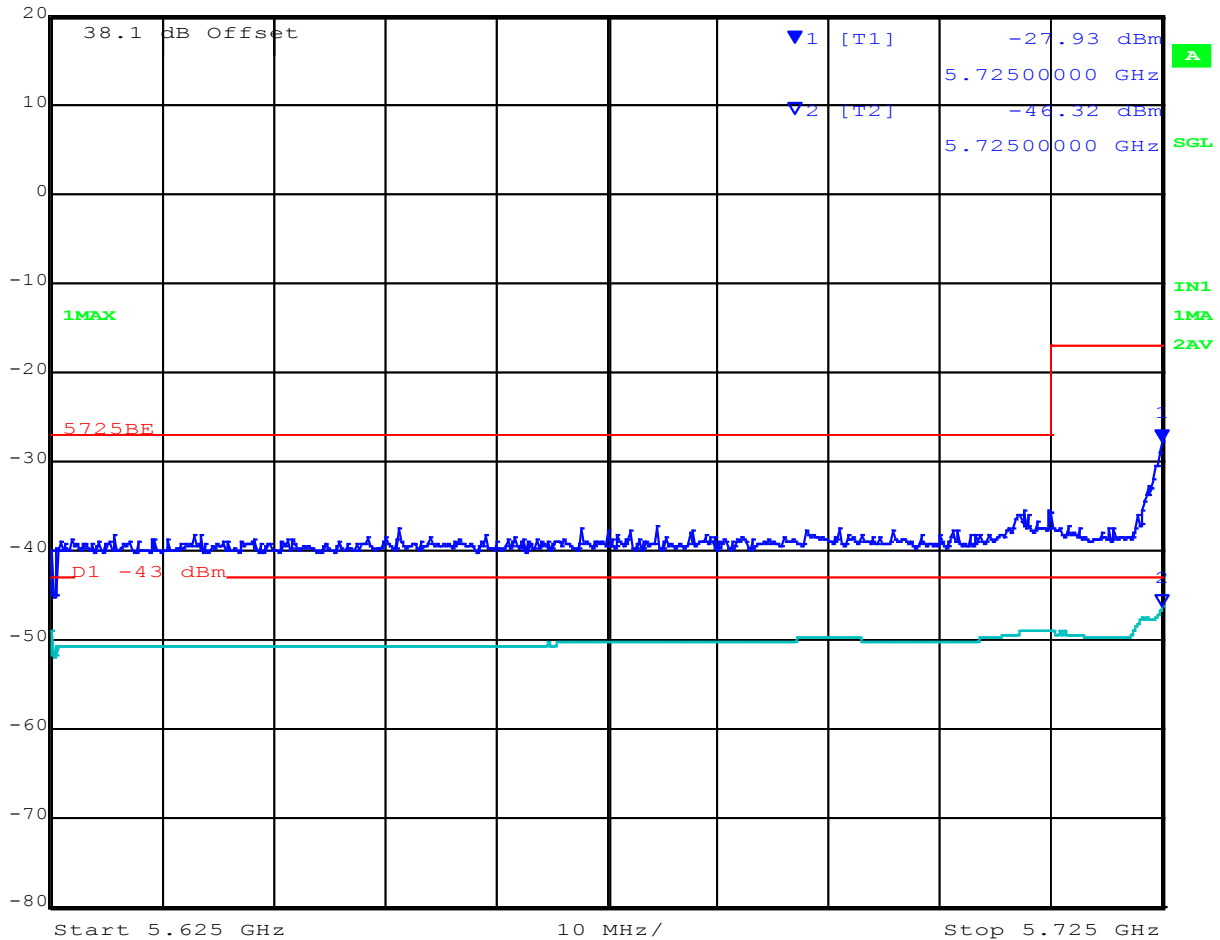

Date: 30.SEP.2015 09:39:51

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


## RESTRICTED BAND-EDGE EMISSIONS



Variant: 802.11ac 80, Test Freq: 5775 MHz, Antenna: Galtronics Custom PCB SMT



	Marker 1 [T1]	RBW	1 MHz	RF Att	0 dB
Ref Lvl	-27.81 dBm	VBW	1 MHz		
20.3 dBm	5.88186373 GHz	SWT	10 s	Unit	dBm

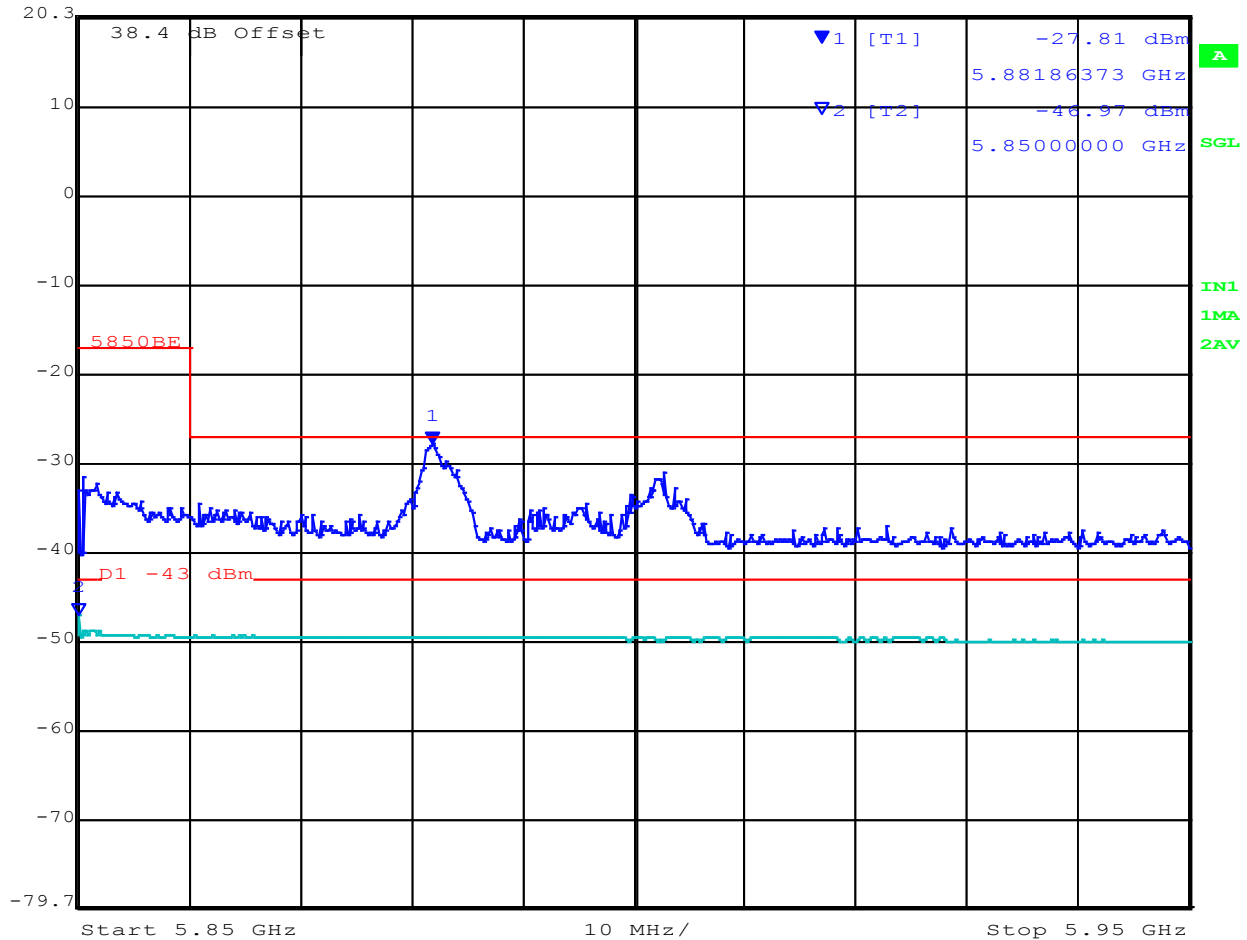

Date: 30.SEP.2015 09:17:51

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 56 of 58

### A.1.3. Digital Emissions



Variant: 802.11g/a, Test Freq: 2437/5200 MHz, Antenna: Integral, Power Setting: Nom

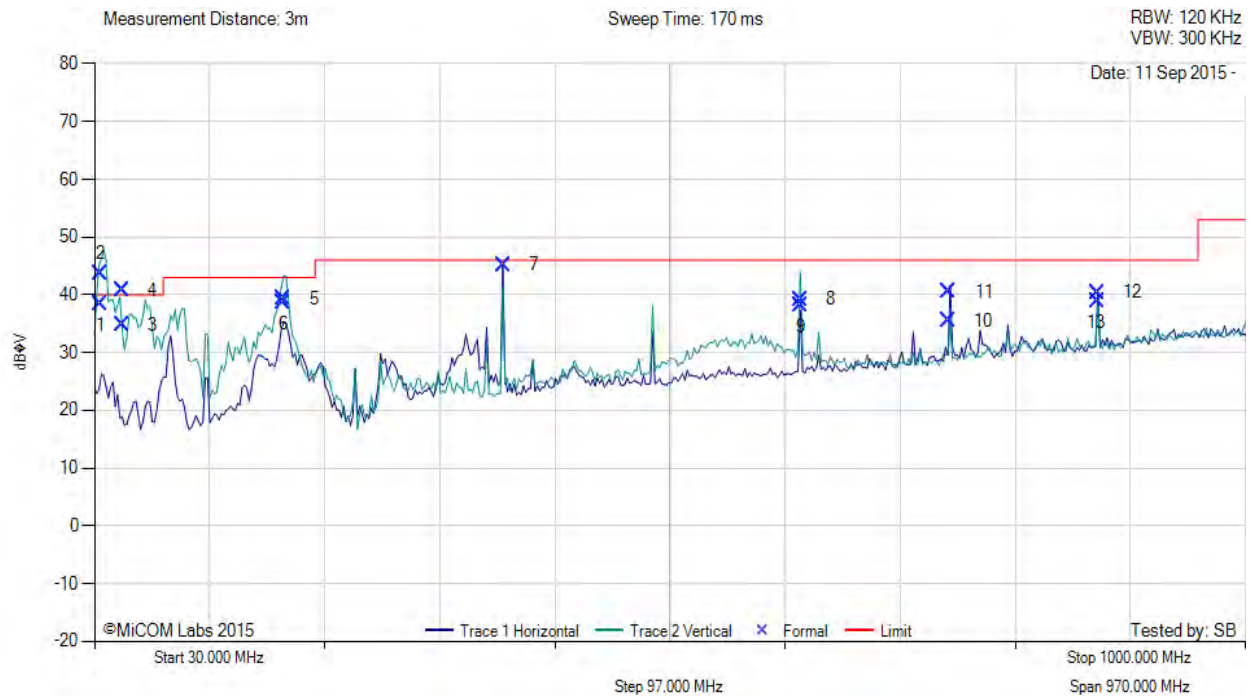

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	35.01	48.49	3.46	-13.58	38.37	MaxQP	Vertical	100	281	40.0	-1.6	Pass
2	35.01	53.83	3.46	-13.58	43.71	Peak (Scan)	Vertical	100	1	--	--	
3	52.97	55.14	3.59	-23.92	34.81	MaxQP	Vertical	122	0	40.0	-5.2	Pass
4	52.97	61.15	3.59	-23.92	40.82	Peak (Scan)	Vertical	100	1	--	--	
5	189.44	54.76	4.30	-19.71	39.35	MaxQP	Vertical	100	126	43.0	-3.7	Pass
6	189.44	54.01	4.30	-19.71	38.60	Peak (Scan)	Vertical	100	1	--	--	
7	374.99	55.66	4.94	-15.36	45.24	MaxQP	Horizontal	100	267	46.0	-0.8	Pass
8	624.95	44.52	5.67	-10.99	39.20	MaxQP	Vertical	100	116	46.0	-6.8	Pass
9	624.95	43.45	5.67	-10.99	38.13	Peak (Scan)	Vertical	100	1	--	--	
10	750.02	38.89	5.99	-9.42	35.46	Peak (Scan)	Horizontal	100	1	--	--	
11	750.02	43.95	5.99	-9.42	40.52	MaxQP	Horizontal	118	66	46.0	-5.5	Pass
12	874.99	42.22	6.27	-8.09	40.40	Peak (Scan)	Horizontal	100	1	--	--	
13	874.99	40.69	6.27	-8.09	38.87	MaxQP	Horizontal	100	37	46.0	-7.1	Pass

**Test Notes:** Ethernet to Coax video stream

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc WCB6240Q  
**To:** FCC CFR47 Part 15 Subpart E 15.407  
**Serial #:** ATEC09-U8b Radiated (non-DFS) Rev A  
**Issue Date:** 27<sup>th</sup> October 2015  
**Page:** 57 of 58



Variant: 802.11ga, Test Freq: 0.00 MHz, Antenna: Integral, Power Setting: Nom

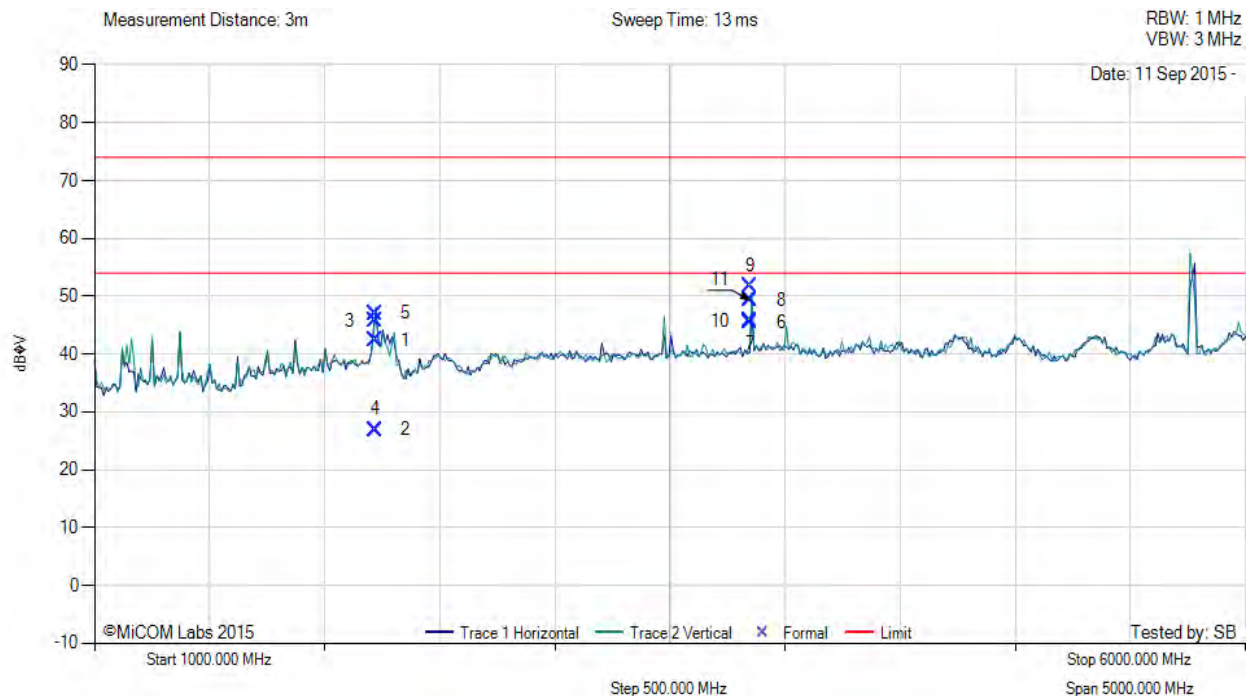

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2220.44	52.08	2.62	-12.39	42.31	Peak (Scan)	Vertical	200	1	--	--	
2	2220.44	36.68	2.62	-12.39	26.91	Max Avg	Vertical	176	61	54.0	27.1	Pass
3	2220.44	55.46	2.62	-12.39	45.69	Max Peak	Vertical	176	61	74.0	-28.3	Pass
4	2220.44	36.73	2.62	-12.39	26.96	Max Avg	Horizontal	100	20	54.0	27.0	Pass
5	2220.44	56.84	2.62	-12.39	47.07	Max Peak	Horizontal	100	20	74.0	-26.9	Pass
6	3849.78	53.07	3.22	-10.81	45.48	Peak (Scan)	Vertical	100	26	--	--	
7	3849.78	53.07	3.22	-10.81	45.48	Peak (NRB)	Vertical	100	26	--	--	Pass
8	3849.78	56.87	3.22	-10.81	49.28	Max Avg	Vertical	117	80	54.0	4.7	Pass
9	3849.78	59.37	3.22	-10.81	51.78	Max Peak	Vertical	117	80	74.0	-22.2	Pass
10	3849.78	53.28	3.22	-10.81	45.69	Max Avg	Horizontal	132	148	54.0	8.3	Pass
11	3849.78	56.86	3.22	-10.81	49.27	Max Peak	Horizontal	132	148	74.0	-24.7	Pass

**Test Notes:** Ethernet to Coax video stream

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



575 Boulder Court  
Pleasanton, California 94566, USA  
Tel: +1 (925) 462 0304  
Fax: +1 (925) 462 0306  
[www.micomlabs.com](http://www.micomlabs.com)