

Recognized by the
Federal Communications Commission
Anechoic chamber registration no.: 90462 (FCC)
Anechoic chamber registration no.: 3463 (IC)
TCB ID: DE 0001



Accredited by the
German Accreditation Council
DAR-Registration Number
TTI-P-G 081/94-D0



Independent ETSI
compliance test house



Accredited Bluetooth[®] Test Facility (BQTF)

Test report no.: 5-4907-01-12/04
FCC Part 15.247 / CANADA RSS-210
FCC ID:LYHIWPBV1
IC:267AB-IWPBV1

I/WLAN/PB LINK PN IO

CETECOM – ICT Services GmbH
Untertürkheimerstr. 6-10
D-66117 Saarbrücken, Germany

Telephone: + 49 (0) 681 / 598-0
Fax: + 49 (0) 681 / 598-9075

BLUETOOTH is a trademark owned by Bluetooth SIG, Inc. and licensed to Cetecom

Table of contents

1. ADMINISTRATIVE DATA	3
1.1. ADMINISTRATIVE DATA OF THE TEST FACILITY	3
1.1.1 Identification of the testing laboratory	3
1.1.2 Organizational items.....	3
1.1.3 Applicant's details	4
1.2 ADMINISTRATIVE DATA OF MANUFACTURER / MEMBER	4
1.3 DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	5
1.3.1 EUT: Type, S/N etc.	5
1.3.2 If RF component testing only, description of additional used HW/SW.....	5
1.3.3 ADDITIONAL EUT INFORMATION	5
1.3.4 EUT operating modes	6
1.3.5 Extreme conditions testing values.....	6
2 TEST STANDARD & SUMMARY LIST OF ALL PERFORMED TEST CASES	7
3 RF MEASUREMENT TESTING	8
3.1 DESCRIPTION OF TEST SET-UP.....	8
3.1.1 Radiated measurements	8
3.1.2 Conducted measurements	8
3.1.3 AC-conducted measurements.....	8
3.2 REFERENCED DOCUMENTS	9
3.3 ADDITIONAL COMMENTS.....	9
3.5 PEAK POWER SPECTRAL DENSITY (DSSS) §15.247(D).....	10
3.5 PEAK POWER SPECTRAL DENSITY (OFDM) §15.247(D).....	13
3.6 SPECTRUM BANDWIDTH OF A DSSS SYSTEM / 6 dB BANDWITH §15.247(A2).....	16
3.6 SPECTRUM BANDWIDTH OF A OFDM SYSTEM / 6 dB BANDWITH §15.247(A2).....	19
3.7 MAXIMUM OUTPUT POWER (CONDUCTED) (DSSS) §15.247 (B) (1)	22
3.7 MAXIMUM OUTPUT POWER (CONDUCTED) (OFDM) §15.247 (B) (1)	26
3.8 MAX. PEAK OUTPUT POWER (RADIATED) §15.247 (B) (1).....	32
3.9 BAND-EDGE COMPLIANCE OF CONDUCTED EMISSIONS §15.247 (C).....	34
3.10 BAND-EDGE COMPLIANCE OF RADIATED EMISSIONS (DSSS) §15.205	36
3.11 BAND-EDGE COMPLIANCE OF RADIATED EMISSIONS (OFDM) §15.205	42
3.12 SPURIOUS EMISSIONS - CONDUCTED (TRANSMITTER) §15.247 (C).....	48
3.13 SPURIOUS EMISSIONS - RADIATED (TRANSMITTER) DSSS §15.209	52
3.14 SPURIOUS EMISSIONS - RADIATED (TRANSMITTER) OFDM §15.209	81
3.15 SPURIOUS EMISSIONS - RADIATED RECEIVER §15.109 / 209	110
3.16 SPURIOUS EMISSIONS - RADIATED <30 MHz (VALID FOR ALL ANTENNA TYPES) §15.109	114
3.15 CONDUCTED EMISSIONS <30 MHz §15.107/207.....	115
4 PHOTOGRAPHS	120
7 ANNEX 1:.....	142

ANNEX 1: TECHNICAL PRODUCT DESCRIPTION

1. Administrative data

1.1. Administrative data of the test facility

1.1.1 Identification of the testing laboratory

Company name:	Cetecom ICT Services GmbH
Address:	Untertürkheimerstr. 6-10 D-66117 Saarbruecken Germany
Laboratory accreditation:	DAR-Registration No. TTI-P-G 081/94-D0 Bluetooth Qualification Test Facility (BQTF)
Responsible for testing laboratory:	Harro Ames, Michael Berg Phone: +49 681 598 0 Fax: +49 681 598 9075 email: info@ict.cetecom.de

..... /
Responsible for testing laboratory
(Harro Ames, Michael Berg)

1.1.2 Organizational items

Reference No.:	5-4907-01-12/04
Order No.:	
Responsible for test report and project leader:	Harro Ames, Michael Berg
Receipt of EUT:	2004-11-28
Date(s) of test:	2004-11-28 to 2005-01-11
Date of report:	2005-01-11
Number of report pages:	14906
Number of diagram pages (annex):	

Version of template:	1.6

..... /
Responsible for test report
(Harro Ames, Michael Berg)

Note:

The test results of this test report relate exclusively to the item tested as specified in this report. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

During the test no hardware and software changes are allowed to be performed at the EUT.

1.1.3 Applicant's details

Applicant's name:	Siemens AG A&D_PT2
Address:	Gleiwitzerstr.555 D-90475 Nürnberg Germany
Contact person:	Mr. Dietmar Herian Phone: +49 (0)721 595 4406 Fax: +49 (0)721 595 4406

1.2 Administrative data of manufacturer / member

Manufacturer's name:	- applicant -
Address:	

1.3 Description of the Equipment under test (EUT)

1.3.1 EUT: Type, S/N etc.

Product name	Product ID	Description	S/N serial number	HW hardware status	SW software status
IWLAN/PB LINK PN IO		WLAN Client		1 (Serie)	
Frequency Band [MHz]	Type of Modulation	Number of channels	Antenna	Power Supply	Temperature Range
ISM 2.400 - 2.483,5	DSSS / OFDM	11	2 external	24 V DC	-20°C - +55°C

1.3.2 If RF component testing only, description of additional used HW/SW

	Product name	Product ID	Description	S/N serial number	HW hardware status	SW software status
1						
2						

1.3.3 Additional EUT information

The tested product runs as a wireless client in combination with a SPS-control unit.

The build-in WLAN card is able to use A, B and G-mode in 2.4 and 5 GHZ range.

The client can be used with 4 different antennas in this frequency range.

- the standard dual-band omnidirectional antenna ANT795-4MR, called "Antenna 1" in the report
- the high-gain dual-band omnidirectional antenna ANT795-6MR, called "Antenna 2" in the report
- the high-gain patch antenna ANT792-8DR, called "Antenna 3" in the report
- the RCOAX antenna ANT792-4DN, called "Antenna 4" in the report

Depending on the antenna gain it is necessary to use the loss of the coax cable to fulfil the requirements of the standard. In the annex of this report the antenna diagrams, the antenna gain and the necessary cable loss is described for each antenna.

1.3.4 EUT operating modes

EUT operating mode no.*)	Description of operating modes	Additional information
Op. 0	Normal mode	Normal temperature and power source conditions
Op. 1		low temperature, low power source conditions
Op. 3		low temperature, high power source conditions
Op. 4		high temperature, low power source conditions
Op. 5		high temperature, high power source conditions

*) EUT operating mode no. is used to simplify the test report.

1.3.5 Extreme conditions testing values

Description	Shortcut	Unit	Value
Nominal Temperature / humidity	T _{nom}	°C / %	22°C / 33%
Low Temperature	T _{low}	°C	-20°C
High Temperature	T _{high}	°C	55°C
Nominal Power Source	V _{nom}	V	24
Low Power Source	V _{low}	V	20
High Power Source	V _{high}	V	28

Type of powersource: External DC power supply from our house

2 Test standard & summary list of all performed test cases

TC identifier	Description	verdict	date	Remark
RF-Testing	FCC Part 15 §15.247 - CANADA RSS-210			

Test Specification Clause	Test Case	Pass	Fail	Not applicable	Not performed
None	Antenna Gain	Yes			
§15.247 (d)	Peak power spectral density	Yes			
§15.247(a2)	Spectrum Bandwidth of a DSSS /OFDMSystem 6dB BW	Yes			
§ 15.247 (b) (3)	Maximum output power (conducted)	Yes			
§ 15.247 (b) (3)	Max. peak output power (radiated)	Yes			
§15.247 (c)	Band-edge compliance of conducted emissions	Yes			
§15.205	Band-edge compliance of radiated emissions	Yes			
§15.247 (c)	Spurious Emission - conducted (Transmitter)	Yes			
§ 15.209	Spurious Emission -radiated (Transmitter)	Yes			
§ 15.247 (c)	Spurious Emissions-radiated (Receiver)	Yes			
§ 15.109	Spurious Emissions-radiated <30 MHz	Yes			
§ 15.107/207	Conducted Emissions <30 MHz	Yes			

3 RF measurement testing

3.1 Description of test set-up

3.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-2003 clause 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.


30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

>1GHz: Average, RBW 1MHz, VBW 10 MHz, waveguide horn with lownoise preamp

3.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is connected to the spectrum analyzer. The specific losses for signal paths is first checked within a calibration. The measurement readings on the spectrum analyzer is corrected by the specific test set-up loss. The attenuator, power divider, signaling unit and the spectrum analyzer are impedance matched on 50 Ohm.

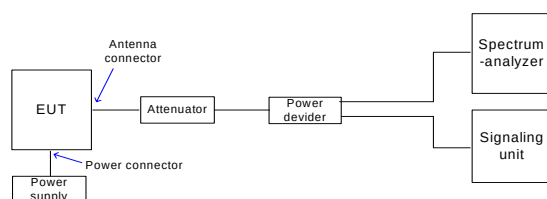

3.1.3 AC-conducted measurements

As the product is sold without any power supply, we used a power supply from our company to show compliance with AC-conducted requirements.

3.2 Referenced Documents

none

3.3 Additional comments

none

Antenna gain:

Antenna 1:

-Max gain at 2,4 GHz = +0,6 dBi

Antenna 2:

-Max gain at 2,4 GHz = +2,3 dBi

Antenna 3:

-Max gain at 2,4 GHz = +14,1 dBi - (additional cable loss 3.5dB) => 10.6 dBi

minimum cable length : 5m (only for point to point operation)

Antenna 4:


-Max gain at 2.4 Ghz = +4,2 dBi - (additional cable loss 2,1 dB) => 2,1 dBi

minimum cable length : 3m

3.5 Peak Power Spectral density (DSSS)

§15.247(d)

Plot 1: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

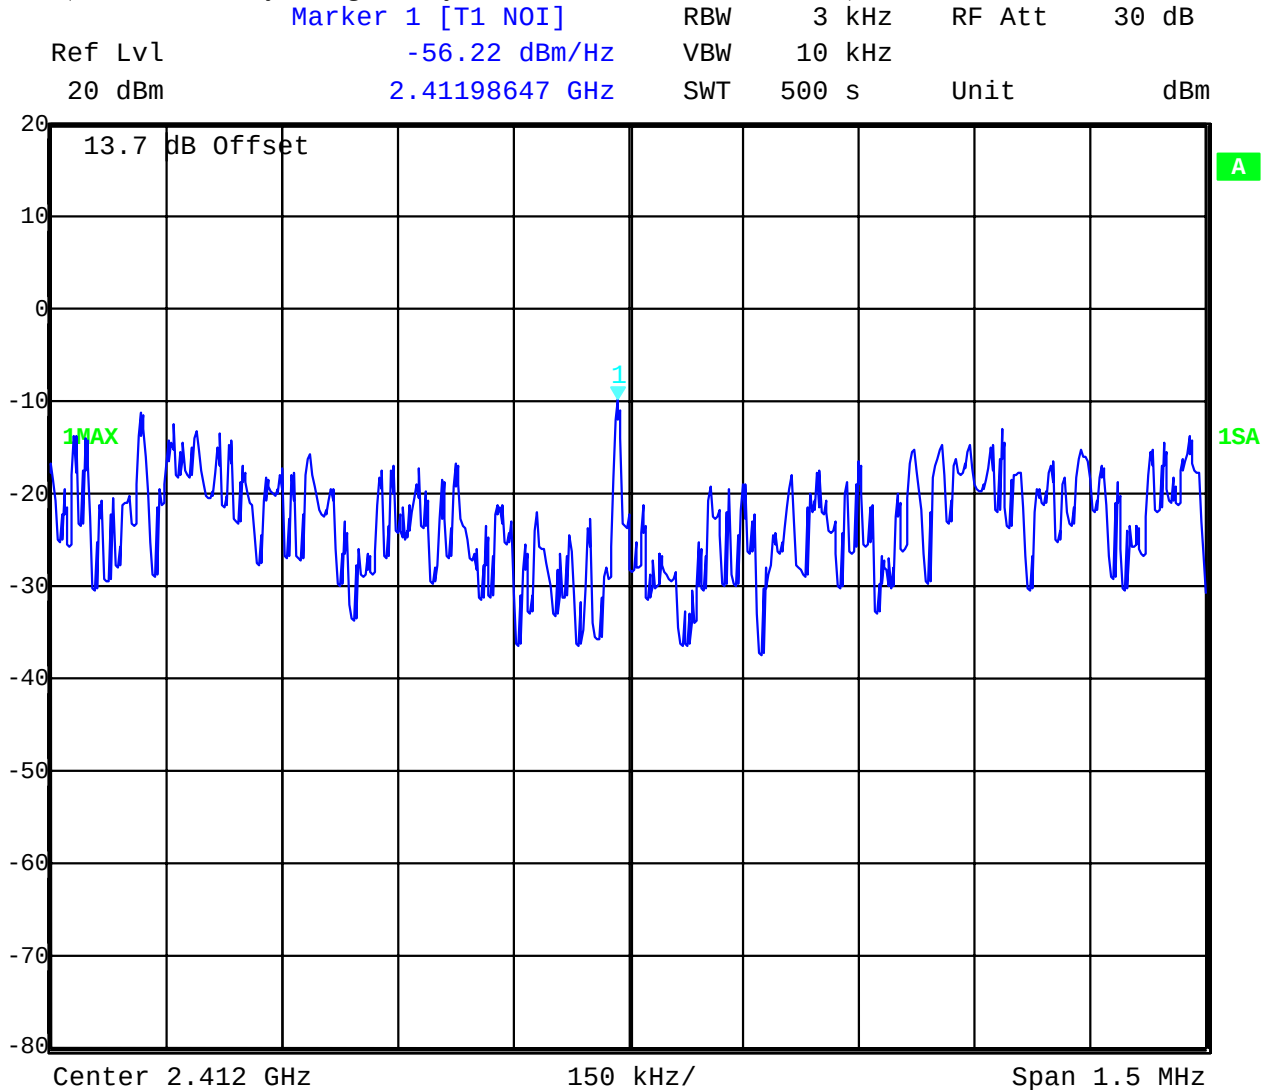

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04


Date:2005-01-19

Page 11 of 149

Plot 2: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

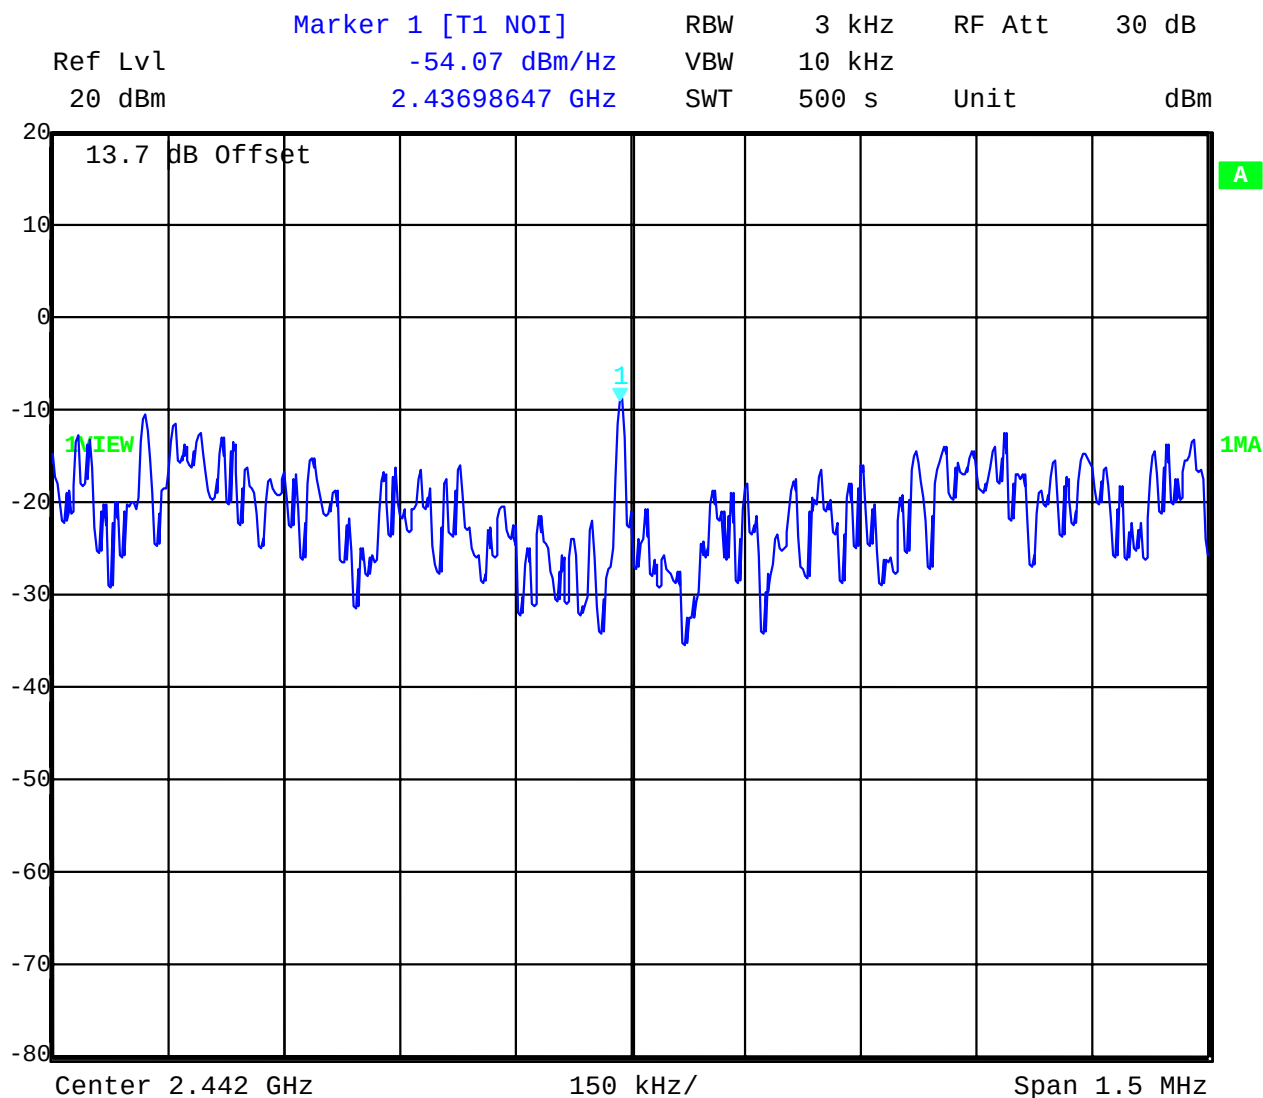

Plot 3: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

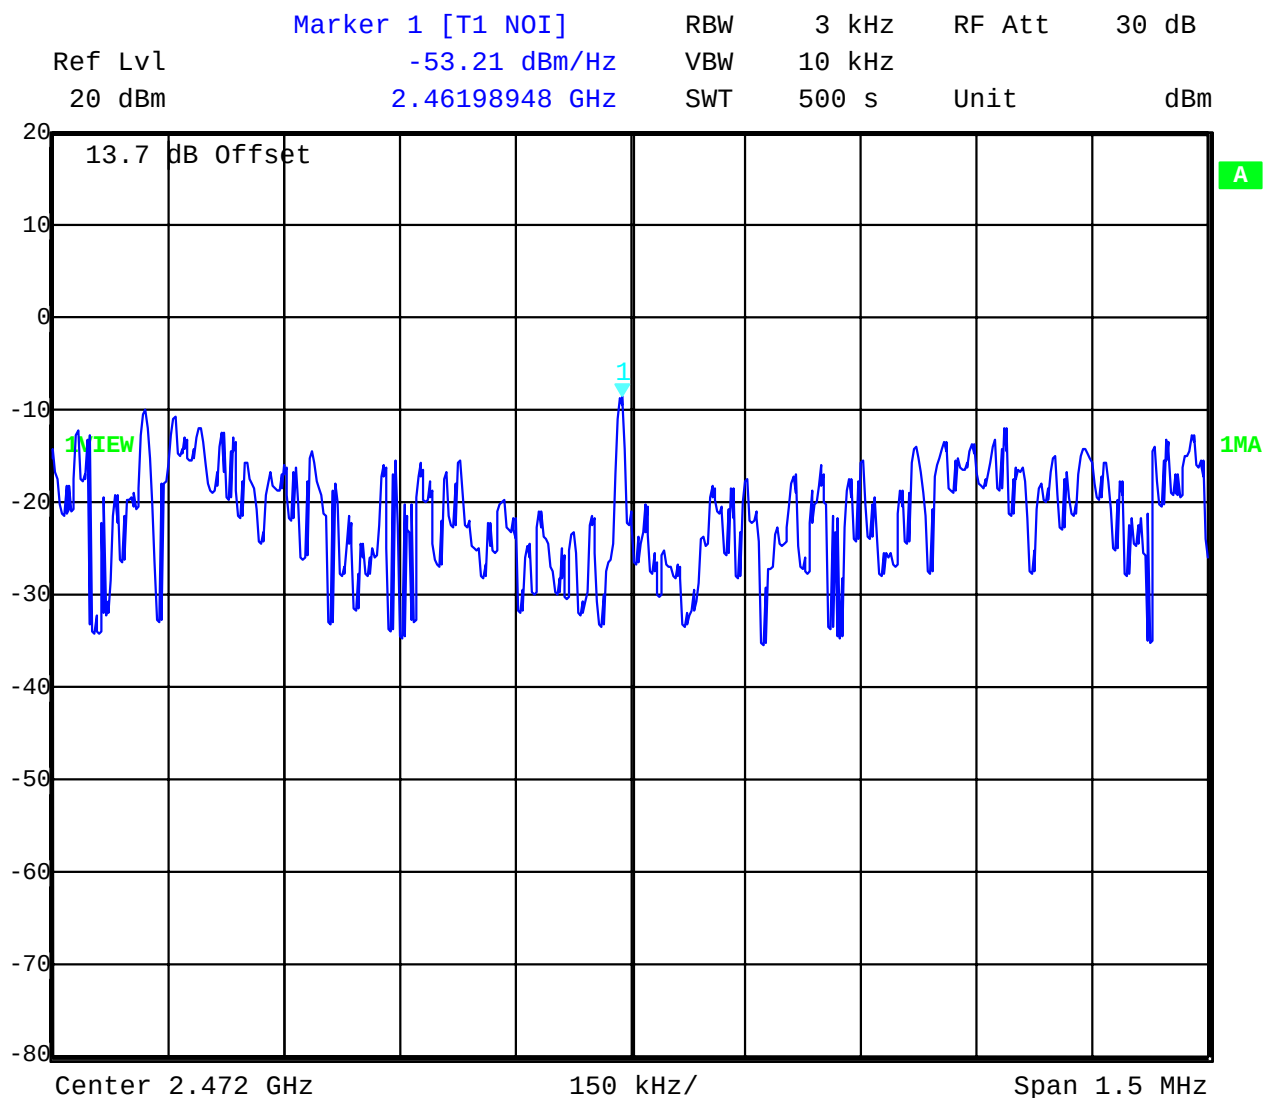

Results: Plot 1: Power density : - 56.22 dBm/Hz = - 21.42 dBm / 3 KHz
 Plot 2: Power density : - 54.07 dBm/Hz = - 19.27 dBm / 3 KHz
 Plot 3: Power density : - 53.21 dBm/Hz = - 18.41 dBm / 3 KHz

Correction factor from dBm/Hz to dBm/3KHz is +34,8 dB


Limits :

Under normal test conditions only	For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmission
-----------------------------------	---

3.5 Peak Power Spectral density (OFDM)

§15.247(d)

Plot 1: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

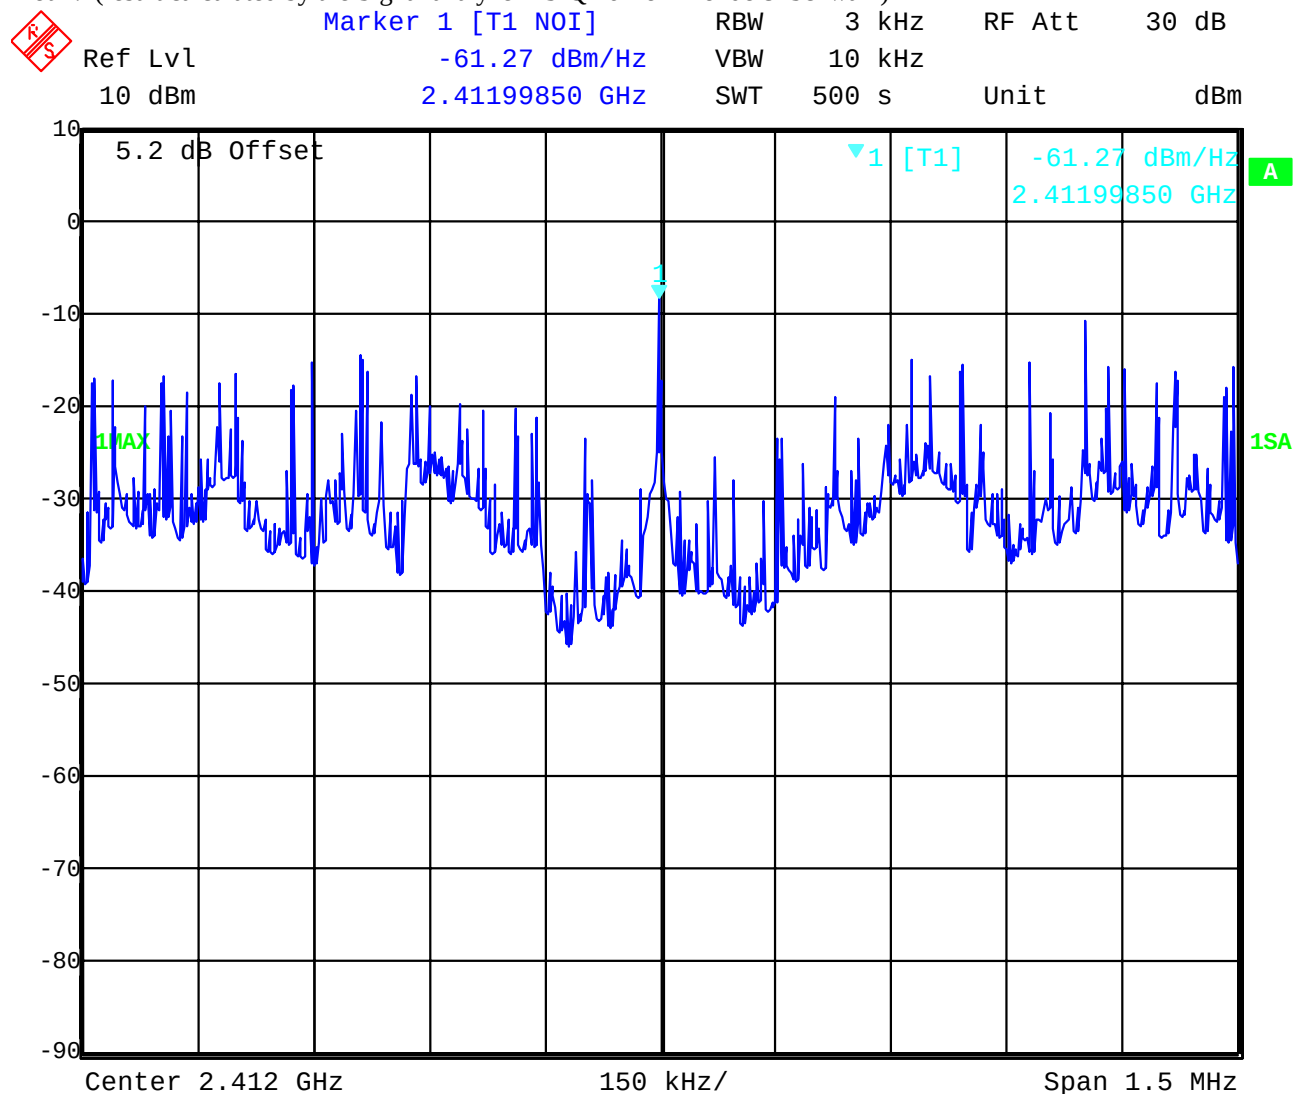

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04


Date:2005-01-19

Page 14 of 149

Plot 2: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

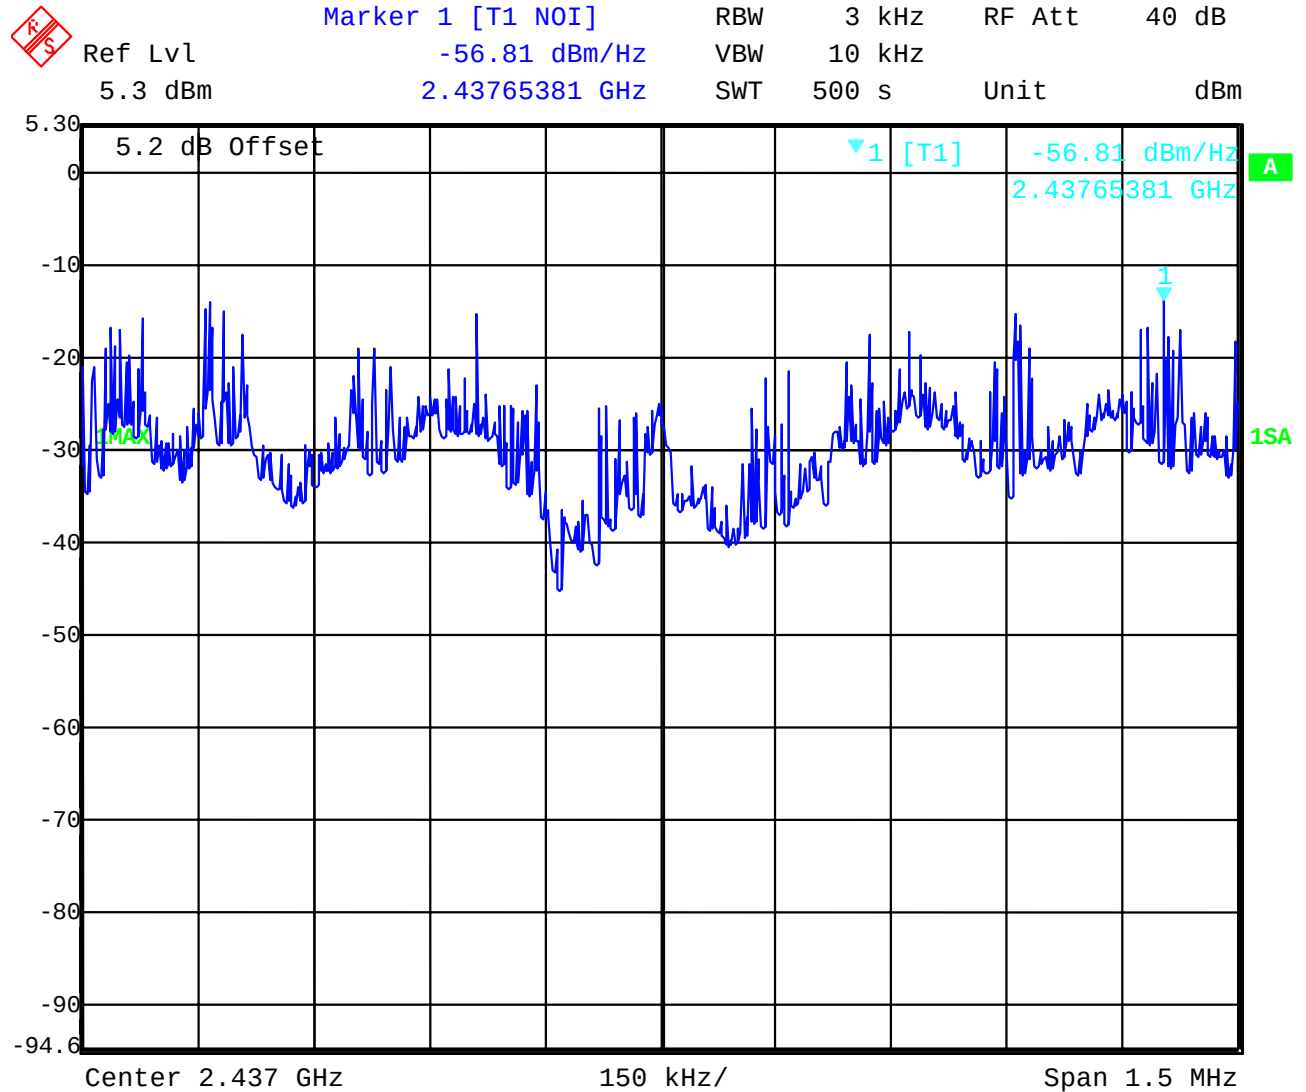

Plot 3: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

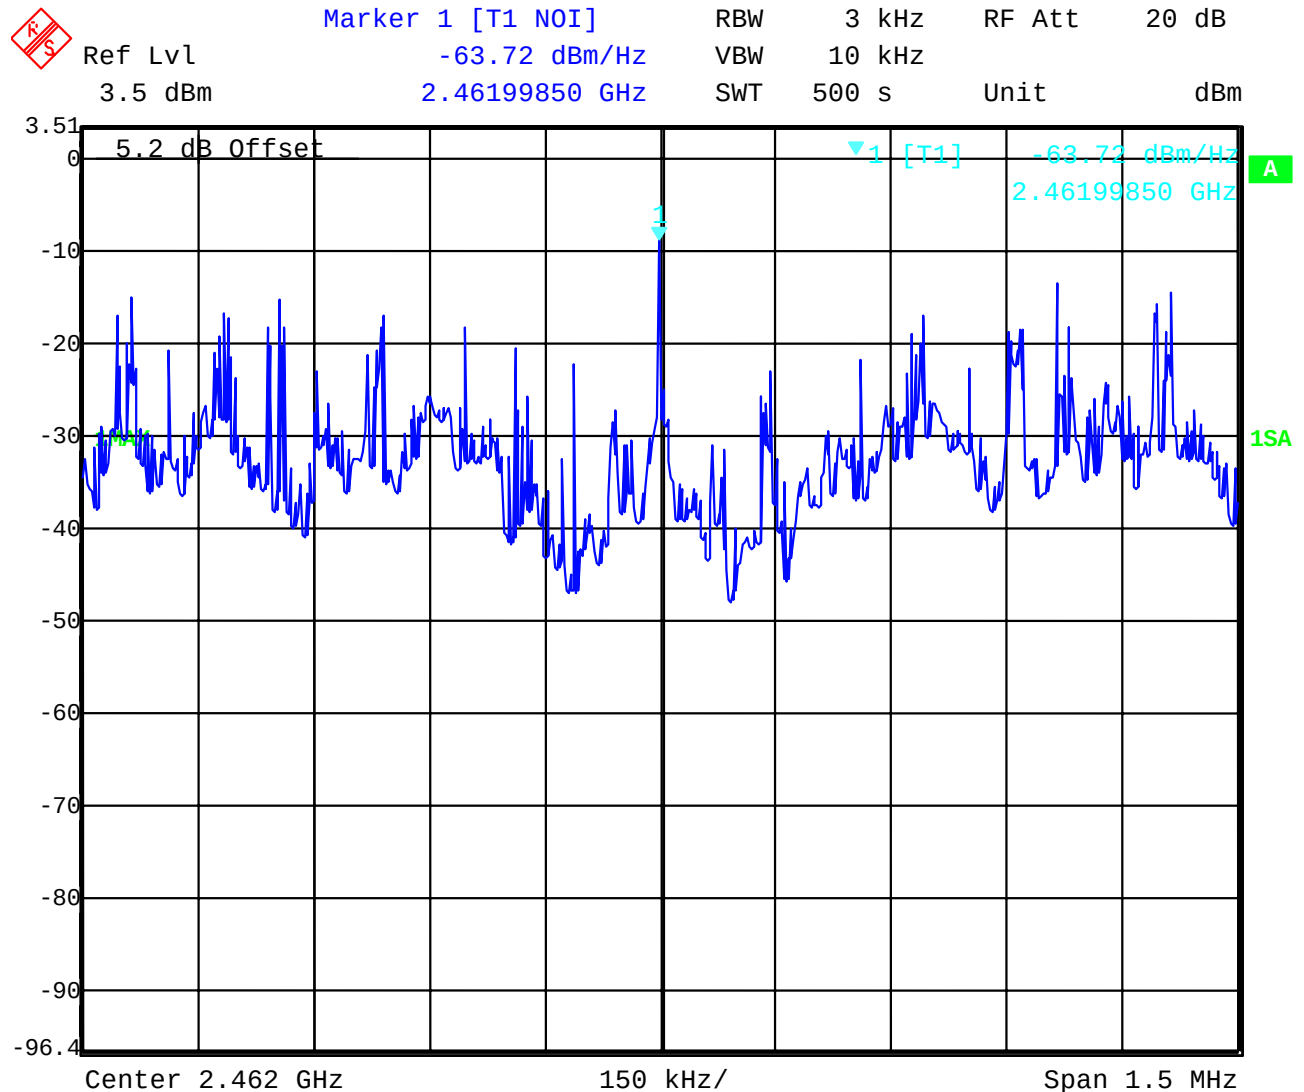

Results: Plot 1: Power density : - 61.27 dBm/Hz = - 26.47dBm / 3 KHz
 Plot 2: Power density : - 56.81 dBm/Hz = - 22.01 dBm / 3 KHz
 Plot 3: Power density : - 63.72 dBm/Hz = - 28.92 dBm / 3 KHz


Correction factor from dBm/Hz to dBm/3KHz is +34,8 dB

Limits :

Under normal test conditions only	For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmission
-----------------------------------	---

3.6 Spectrum Bandwidth of a DSSS System / 6 dB Bandwidth §15.247(a2)

Plot 1 :

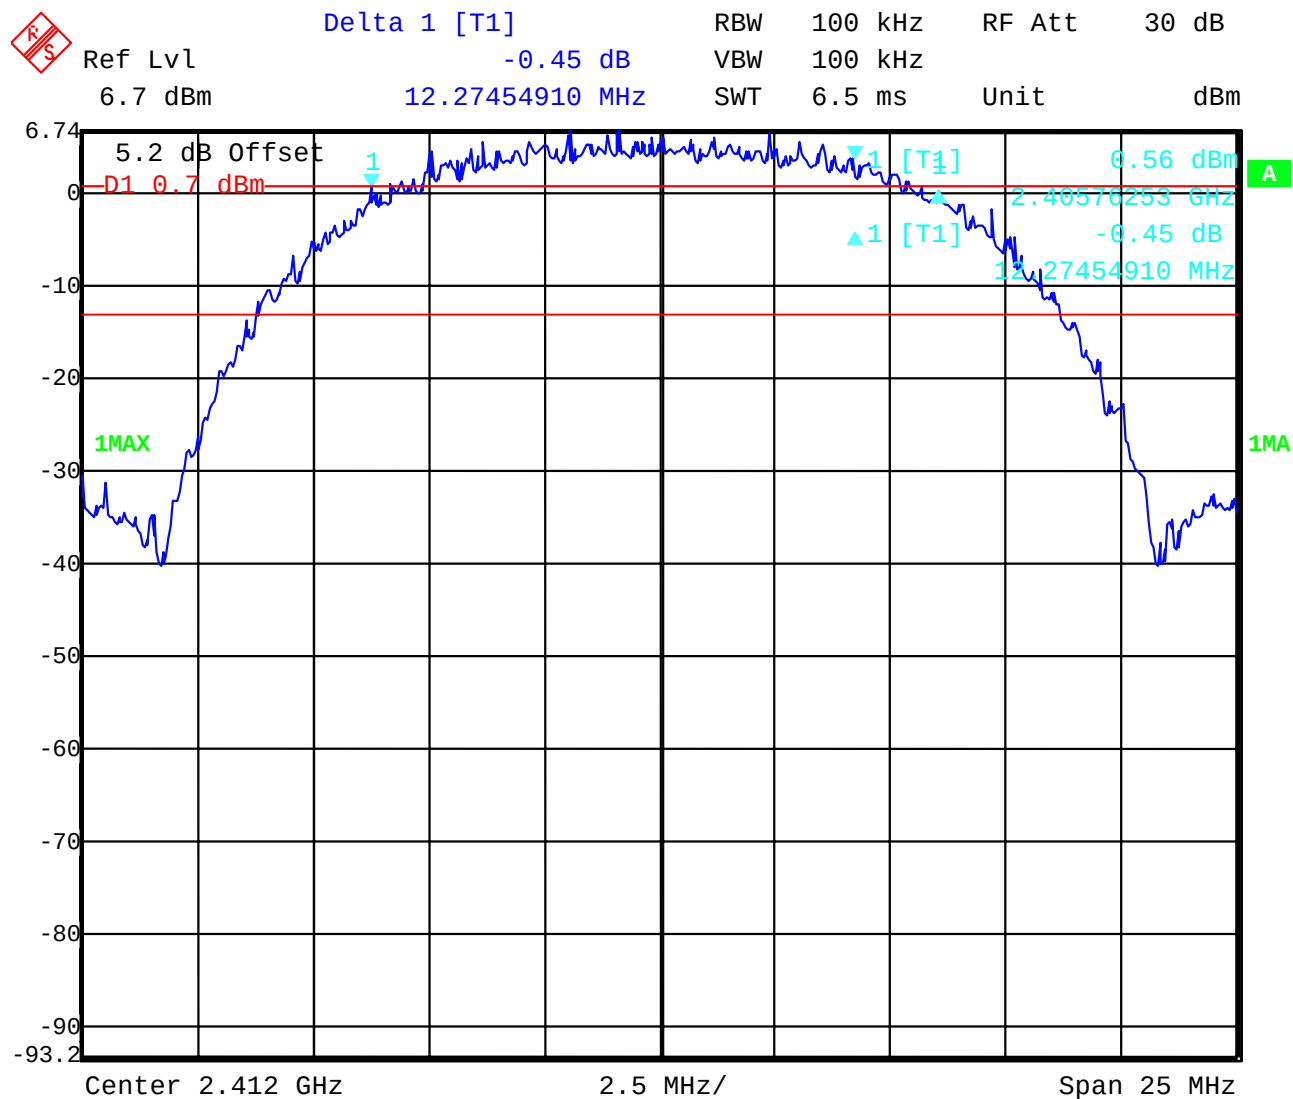

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04


Date:2005-01-19

Page 17 of 149

Plot 2:

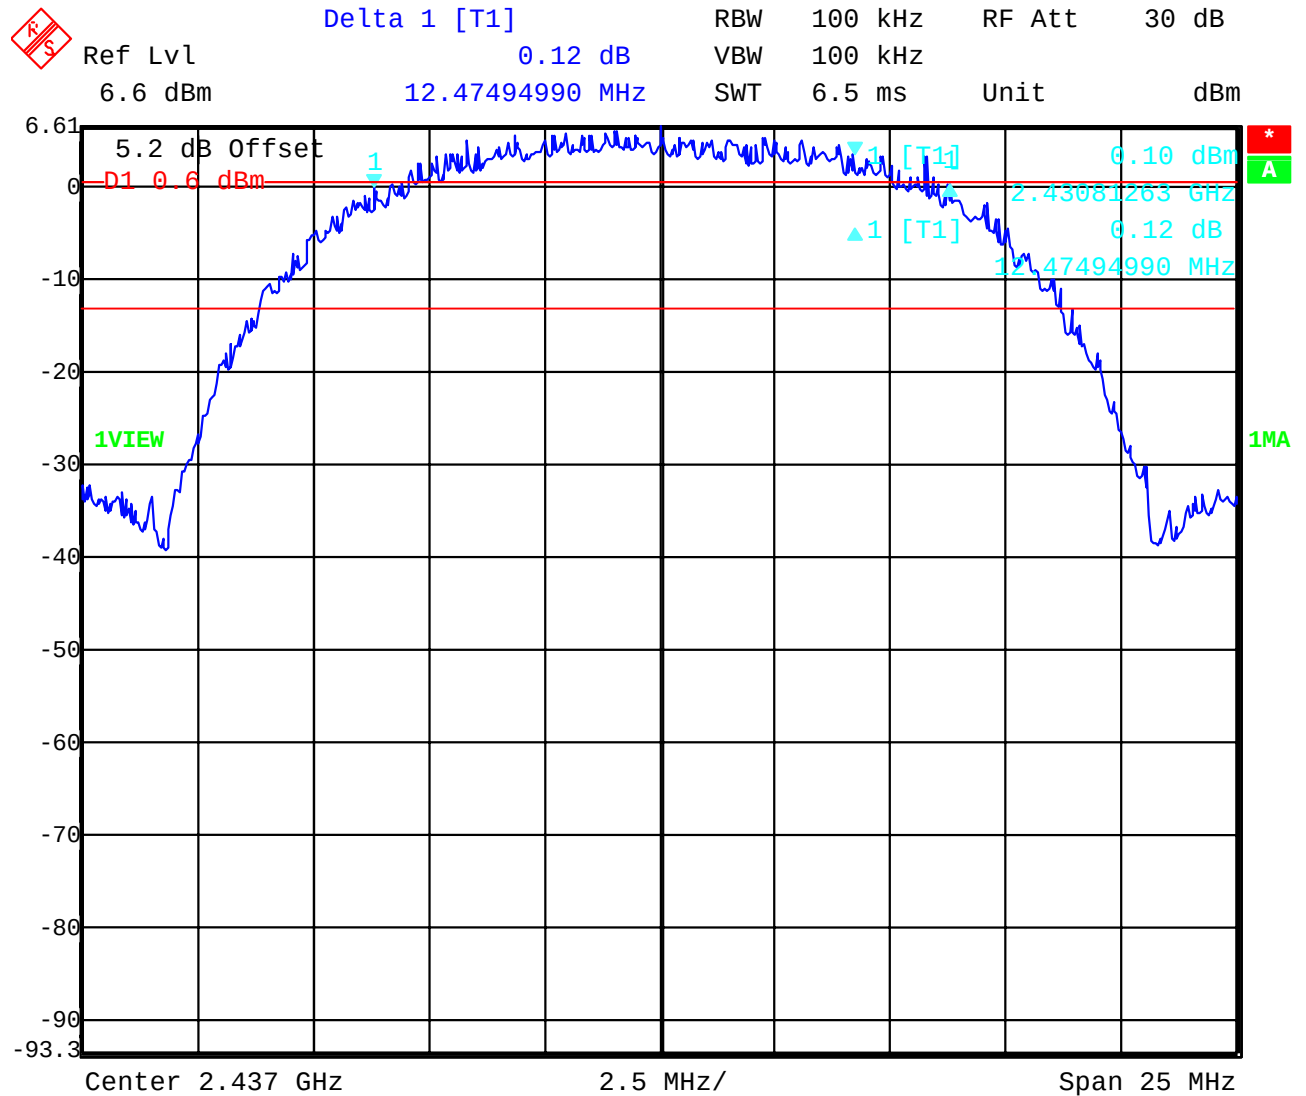

Plot 3:

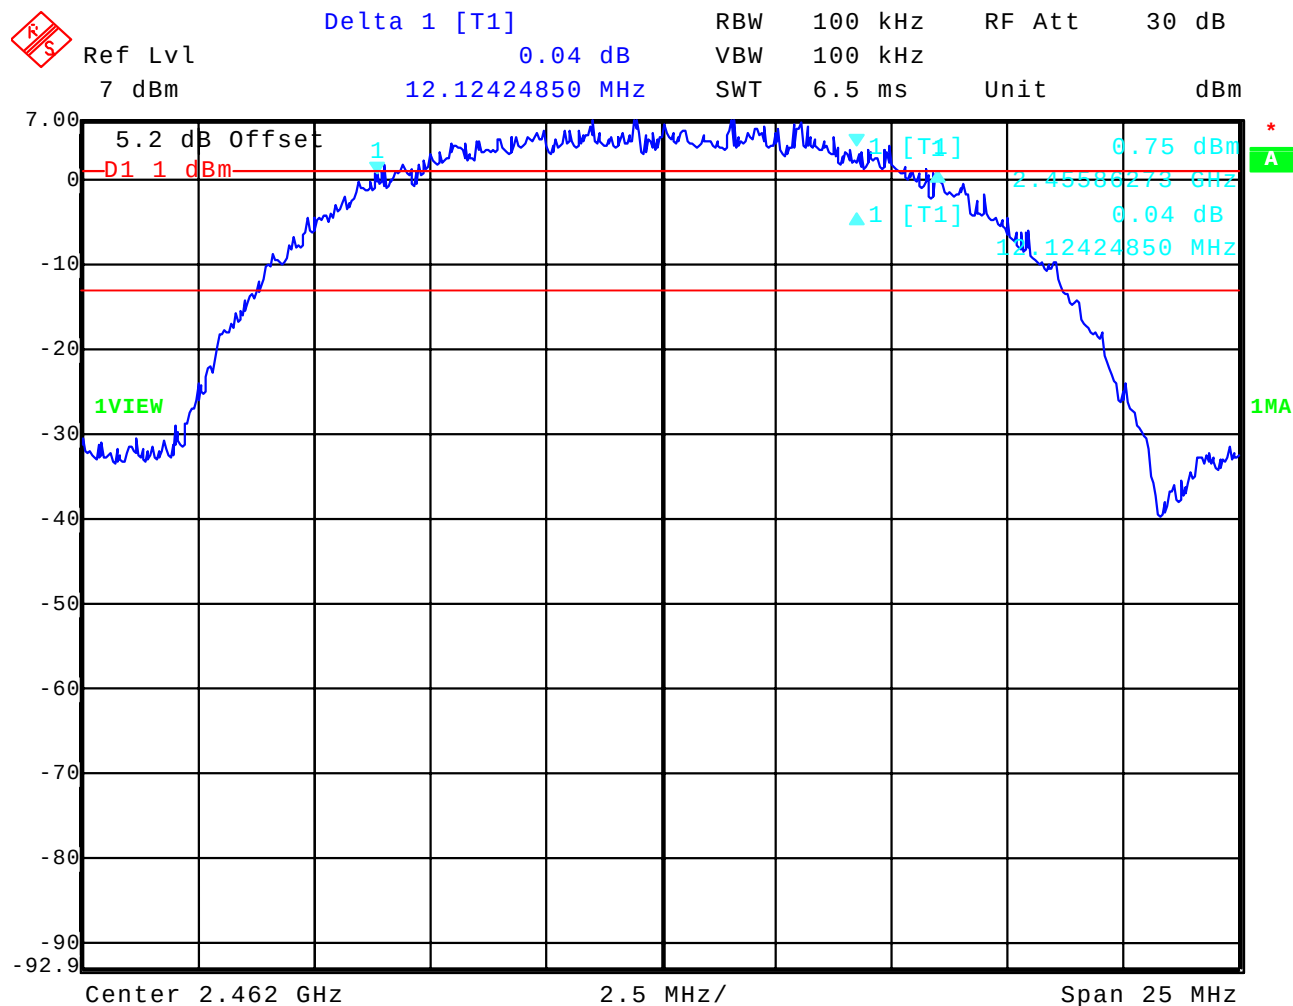

Results:

Test conditions		BANDWIDTH [MHz]		
Frequency [MHz]		2412	2437	2462
	6 dB	12.275	12.475	12.124
	20 dB	17.614	17.645	17.544
Measurement uncertainty		±1kHz		


RBW: 100 kHz / VBW 100 kHz

Limits :

Under normal test conditions only	> 500 KHz
-----------------------------------	-----------

3.6 Spectrum Bandwidth of a OFDM System / 6 dB Bandwith §15.247(a2)

Plot 1 :

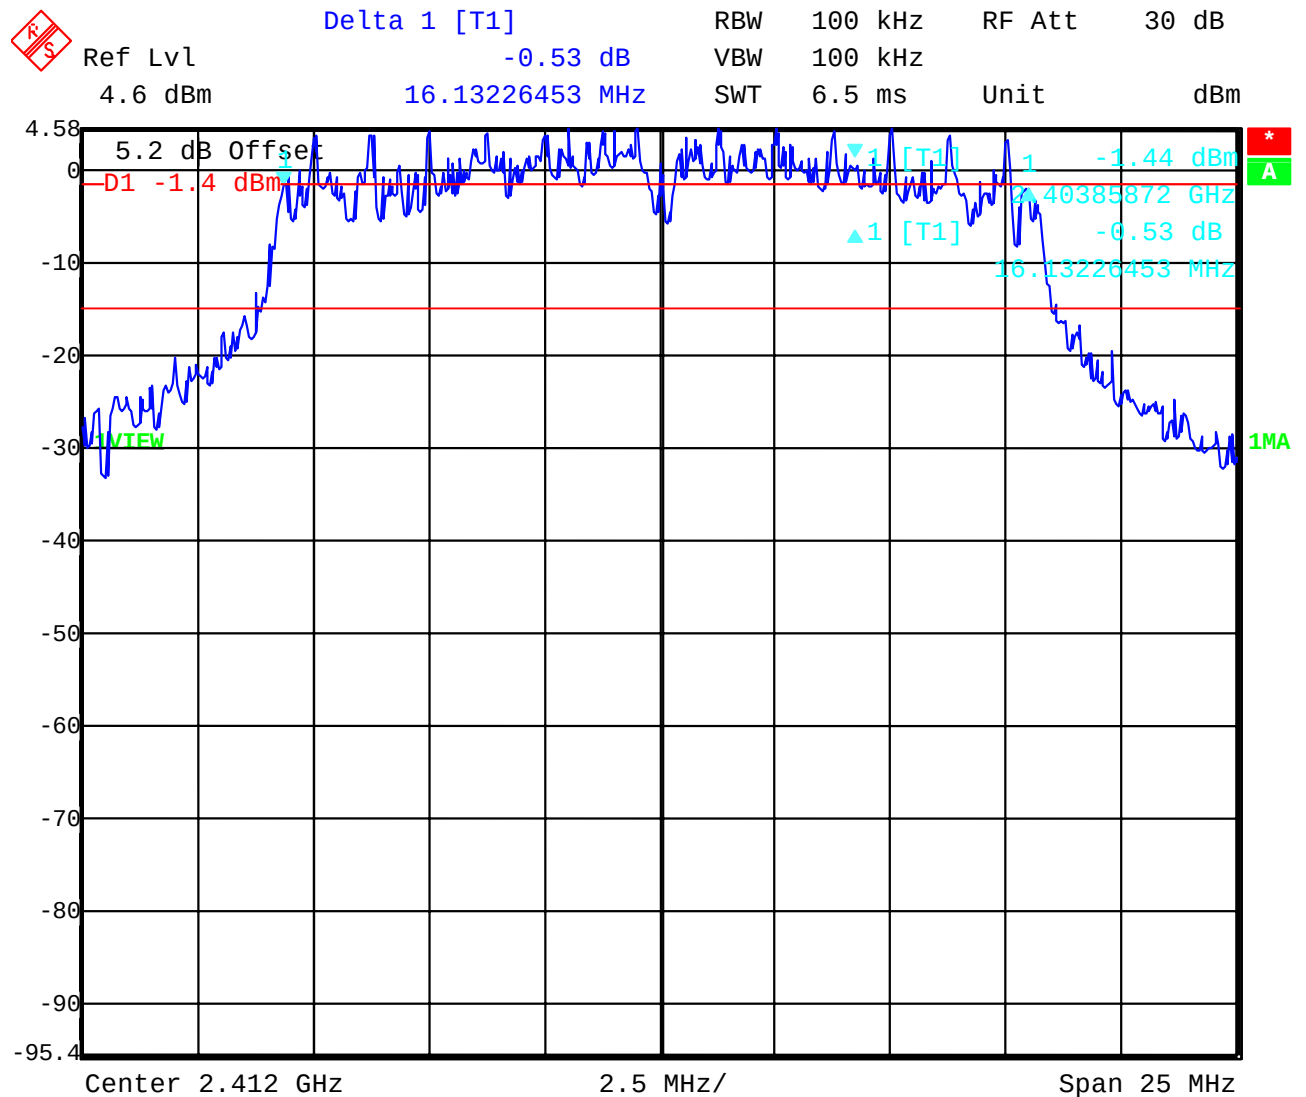


Test report No.:5-4907-01-12/04


Date:2005-01-19

Page 20 of 149

Plot 2:

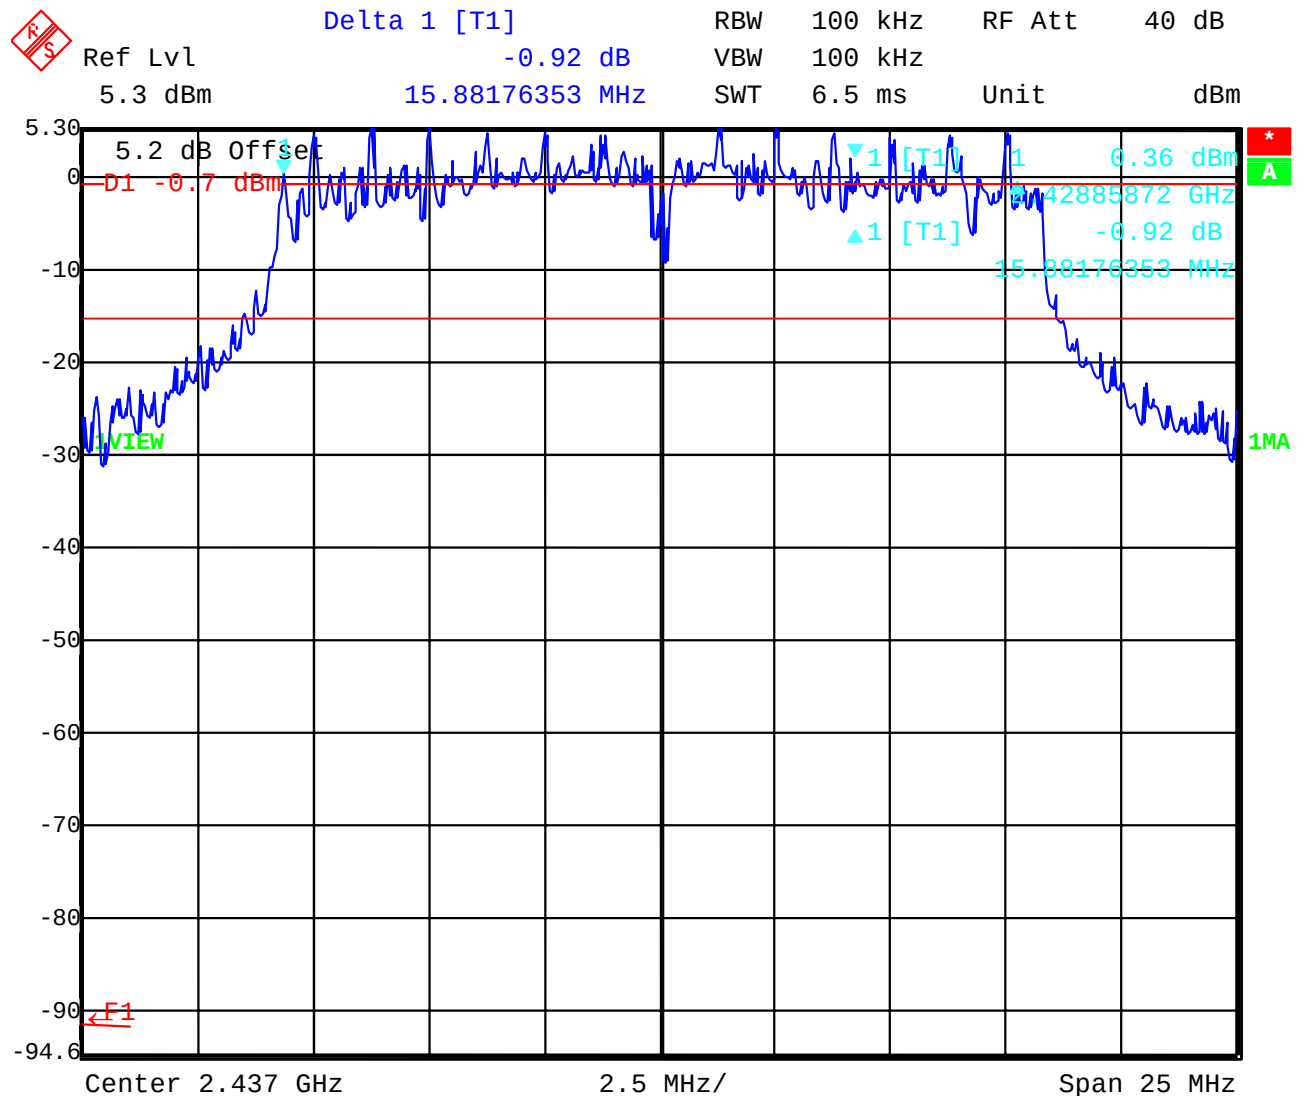

Plot 3:

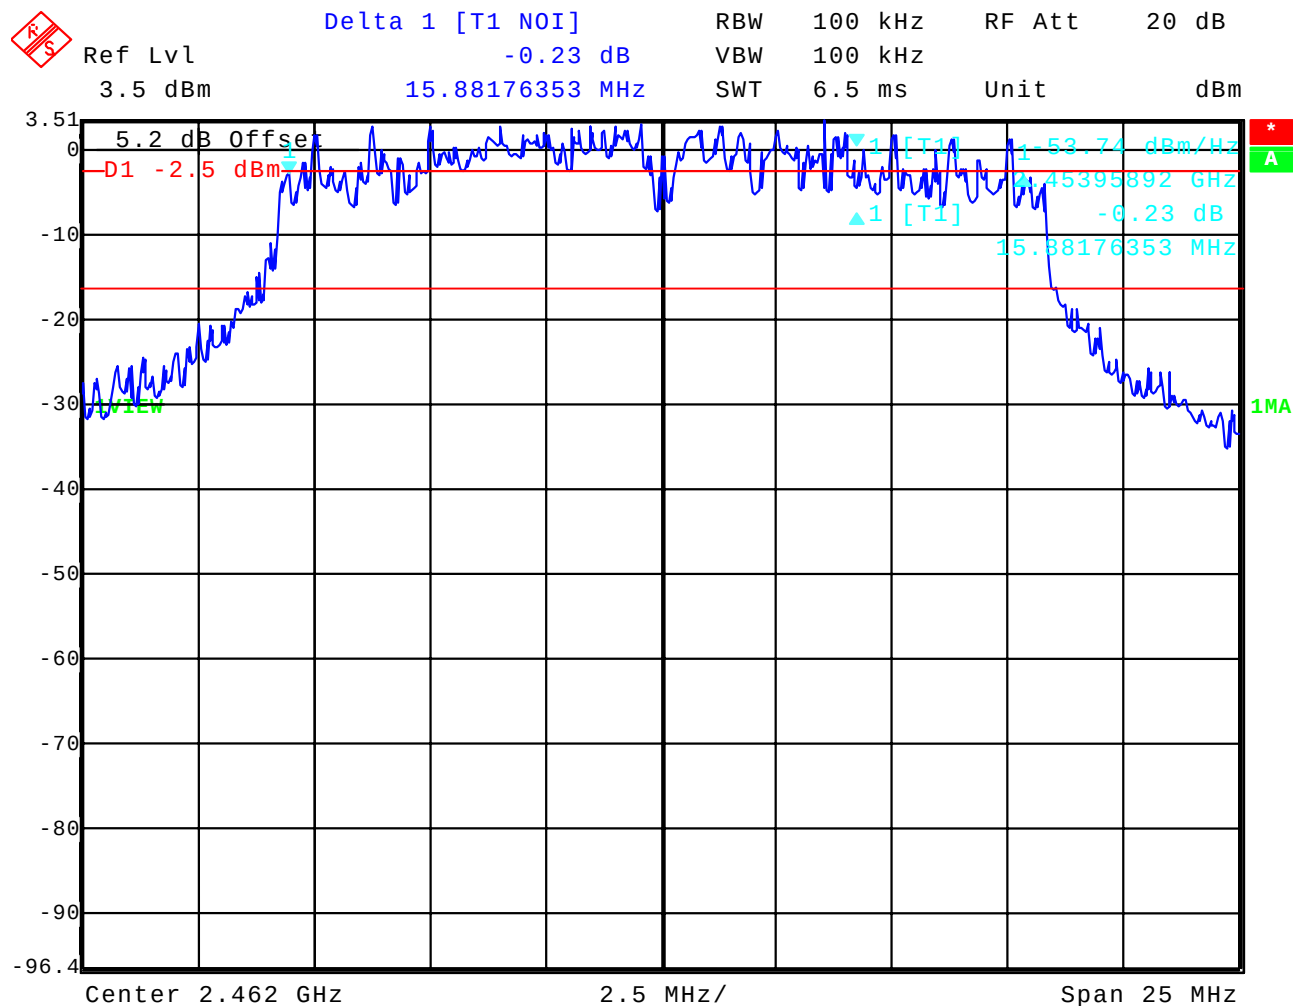

Results:

Test conditions		6 dB BANDWIDTH [MHz]		
Frequency [MHz]		2412	2437	2462
	6 dB	16.132	15.881	15.881
	20 dB	17.443	17.725	17.388
Measurement uncertainty		±1kHz		

RBW: 100 kHz / VBW 100 kHz


Limits :

Under normal test conditions only	> 500 KHz
-----------------------------------	-----------

3.7 Maximum output power (conducted) (DSSS)

§15.247 (b) (1)

Plot 1:

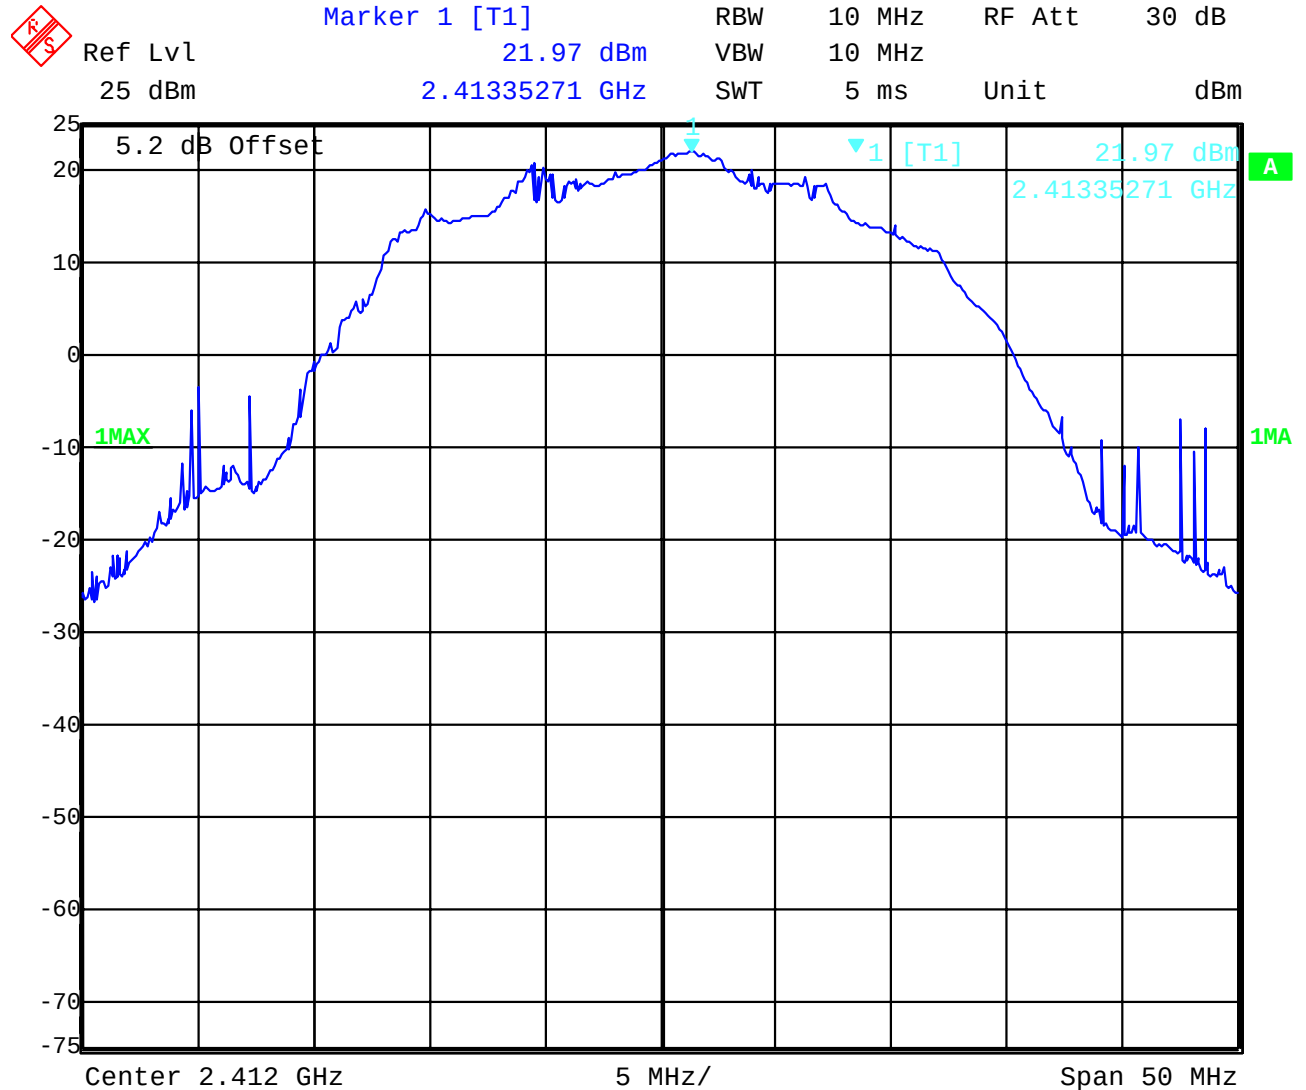

RBW / VBW : 10 MHz

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04

Date:2005-01-19


Page 23 of 149

Plot 2:

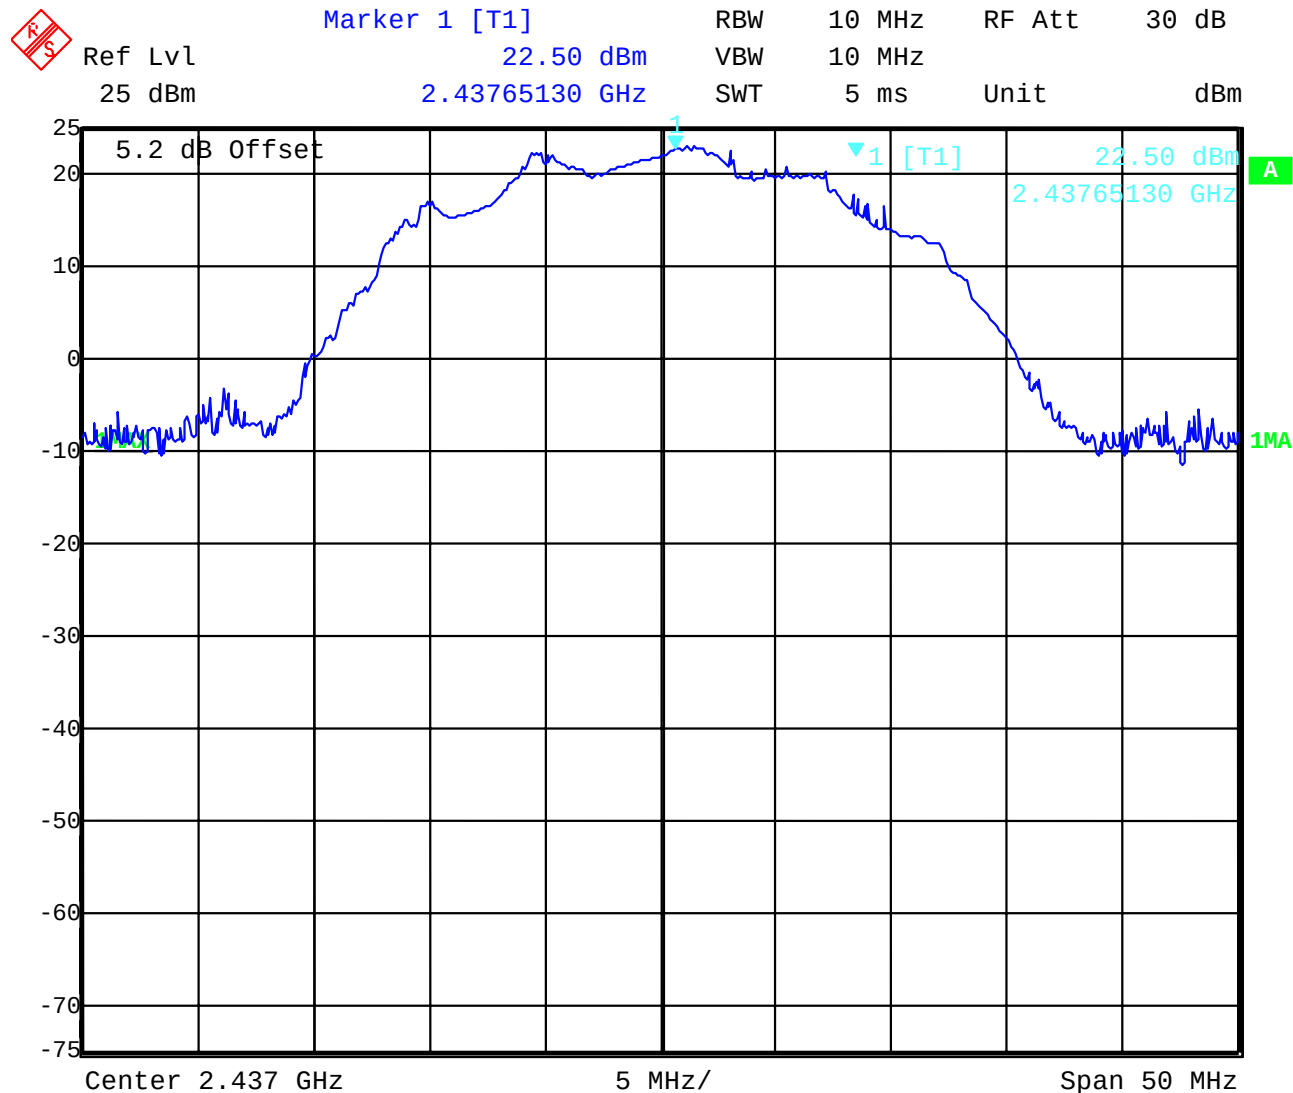

RBW / VBW : 10 MHz

Plot 3:

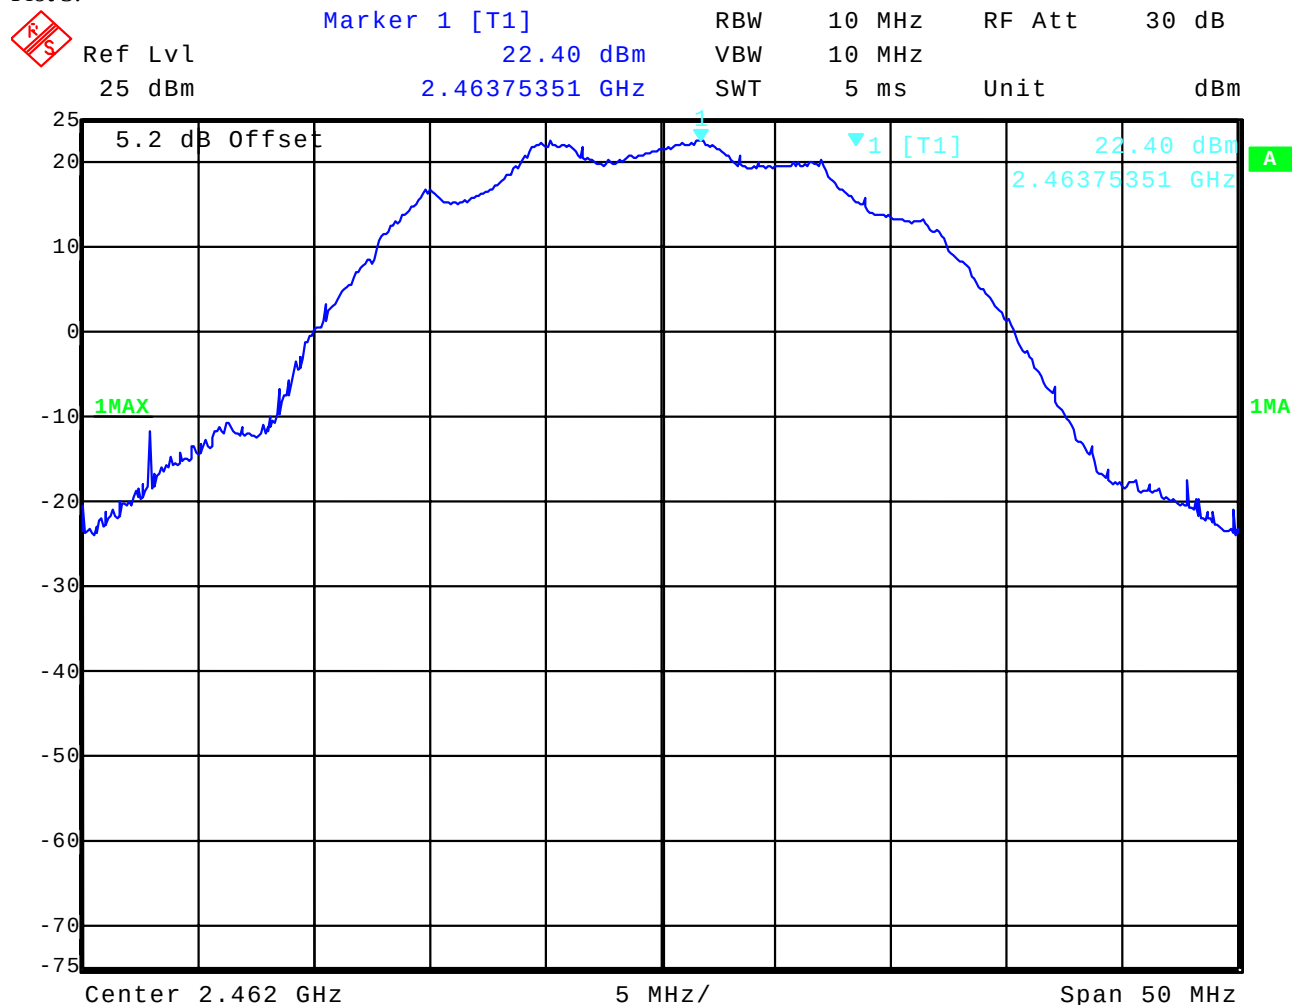

RBW / VBW : 10 MHz

Results: with correction factor $10 \cdot \log(6\text{dB BW} / \text{used BW})$, here **0.9 dB**

Test conditions		Max. peak output power [dBm]			
Frequency [MHz]		2412		2437	2462
T _{nom}	V _{nom}	PK	21.97	22.50	22.40
		PK corrected	22.87	23.40	23.30
Average		16.11		16.86	16.85
Measurement uncertainty		±3dB			

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.:5-4907-01-12/04

Date:2005-01-19

Page 25 of 149

Remark:

The correction factor is calculated by $10 \times \log (\text{measured BW} / \text{used BW})$ [dB]


Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt / 30 dBm
---	------------------------

3.7 Maximum output power (conducted) (OFDM)

§15.247 (b) (1)

Plot 1:

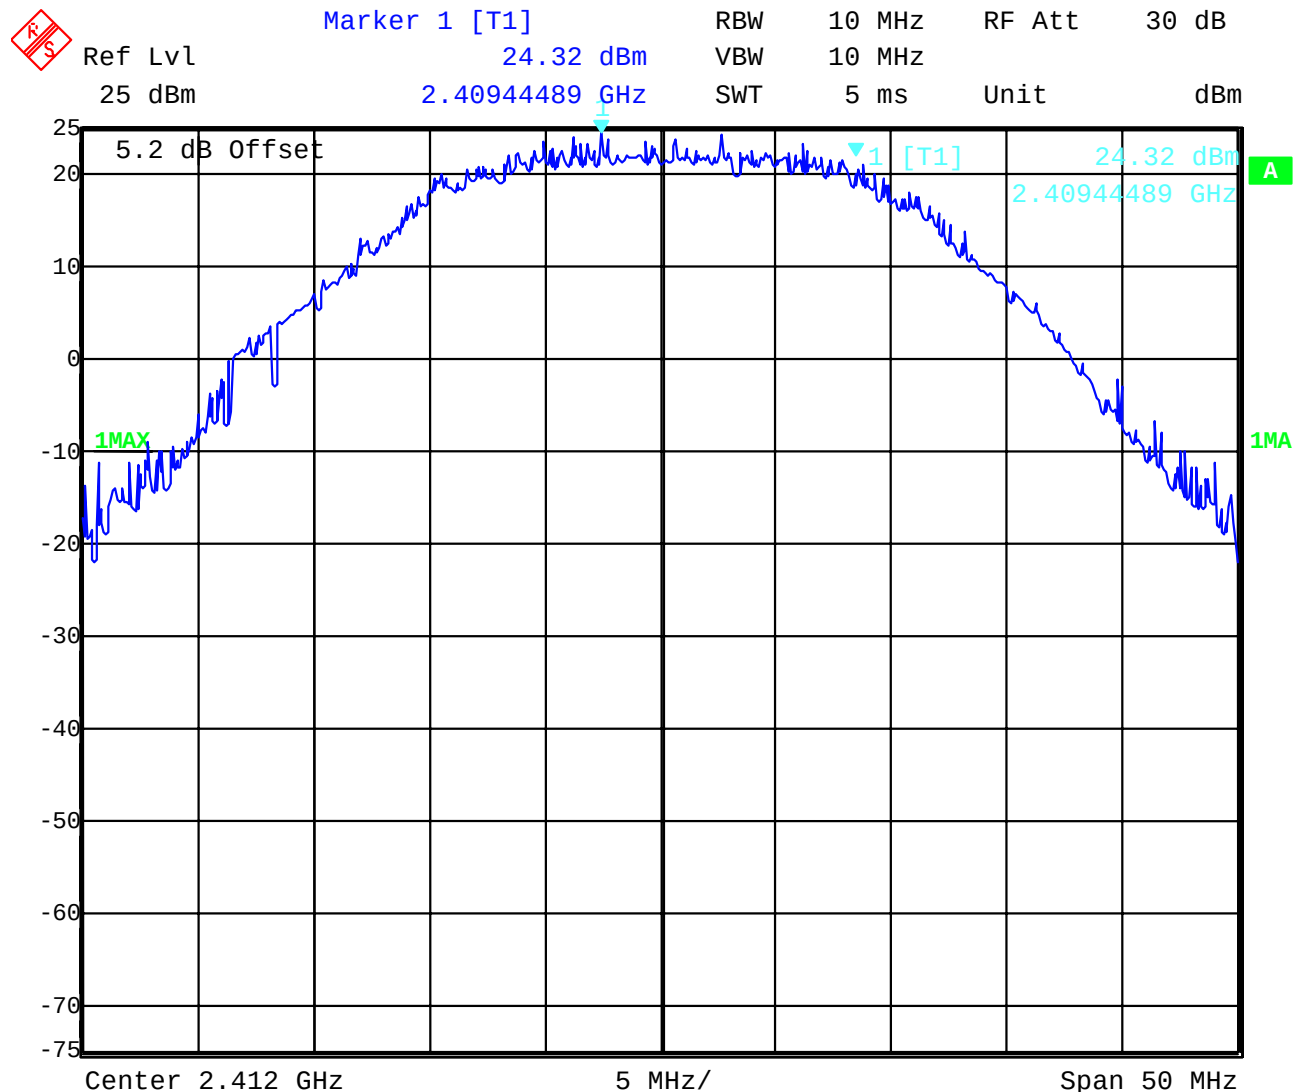

RBW / VBW : 10 MHz

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04

Date:2005-01-19


Page 27 of 149

Plot 2:

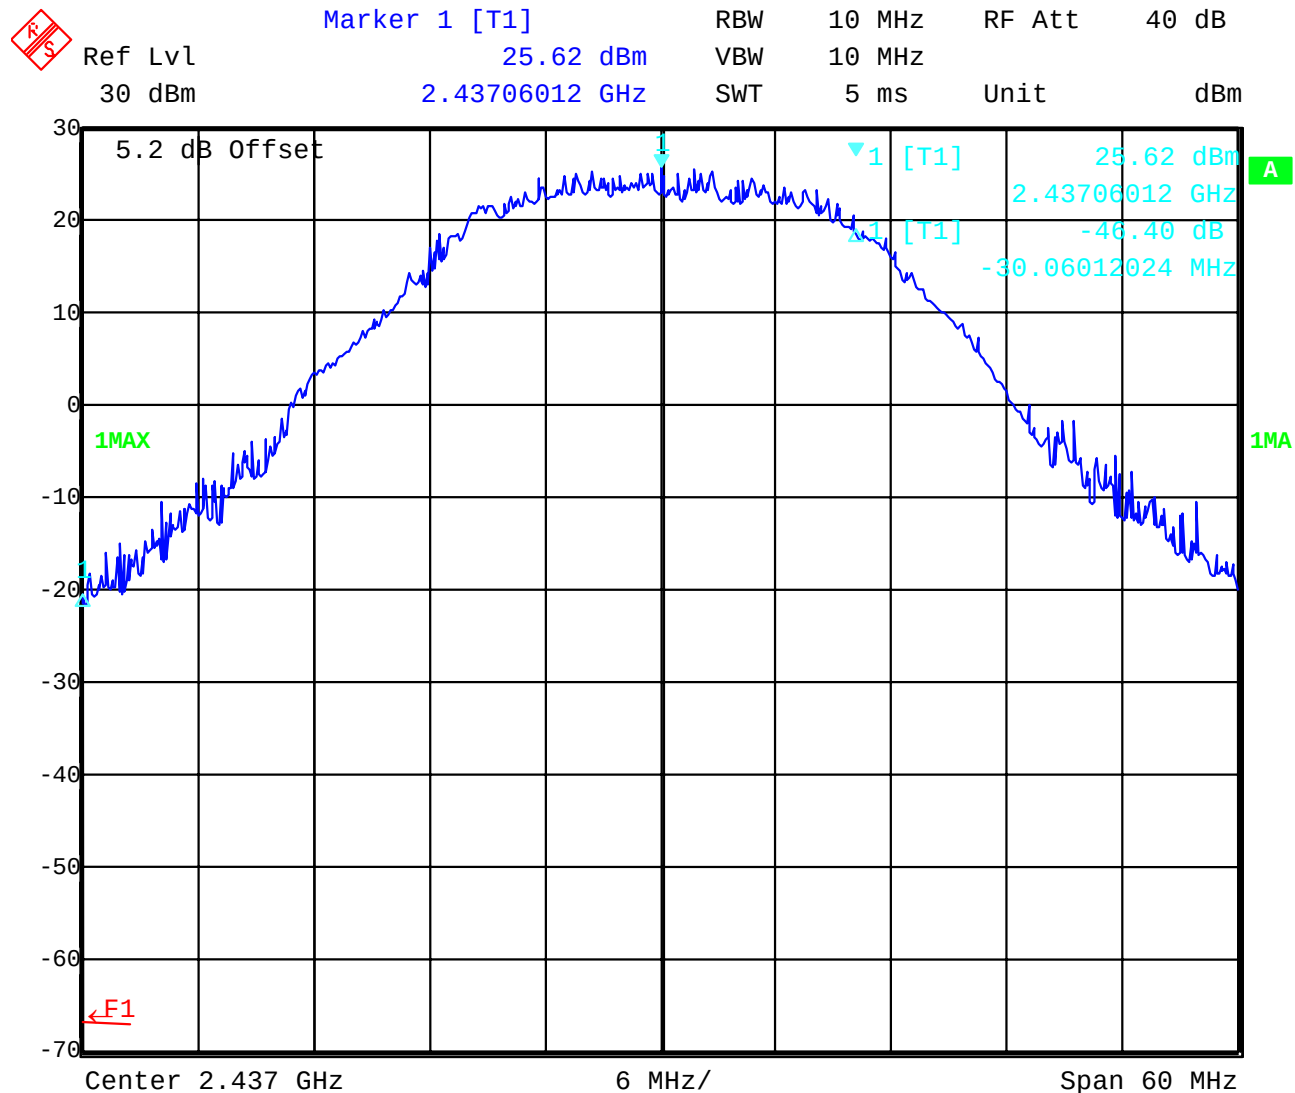

RBW / VBW : 10 MHz

Plot 3:

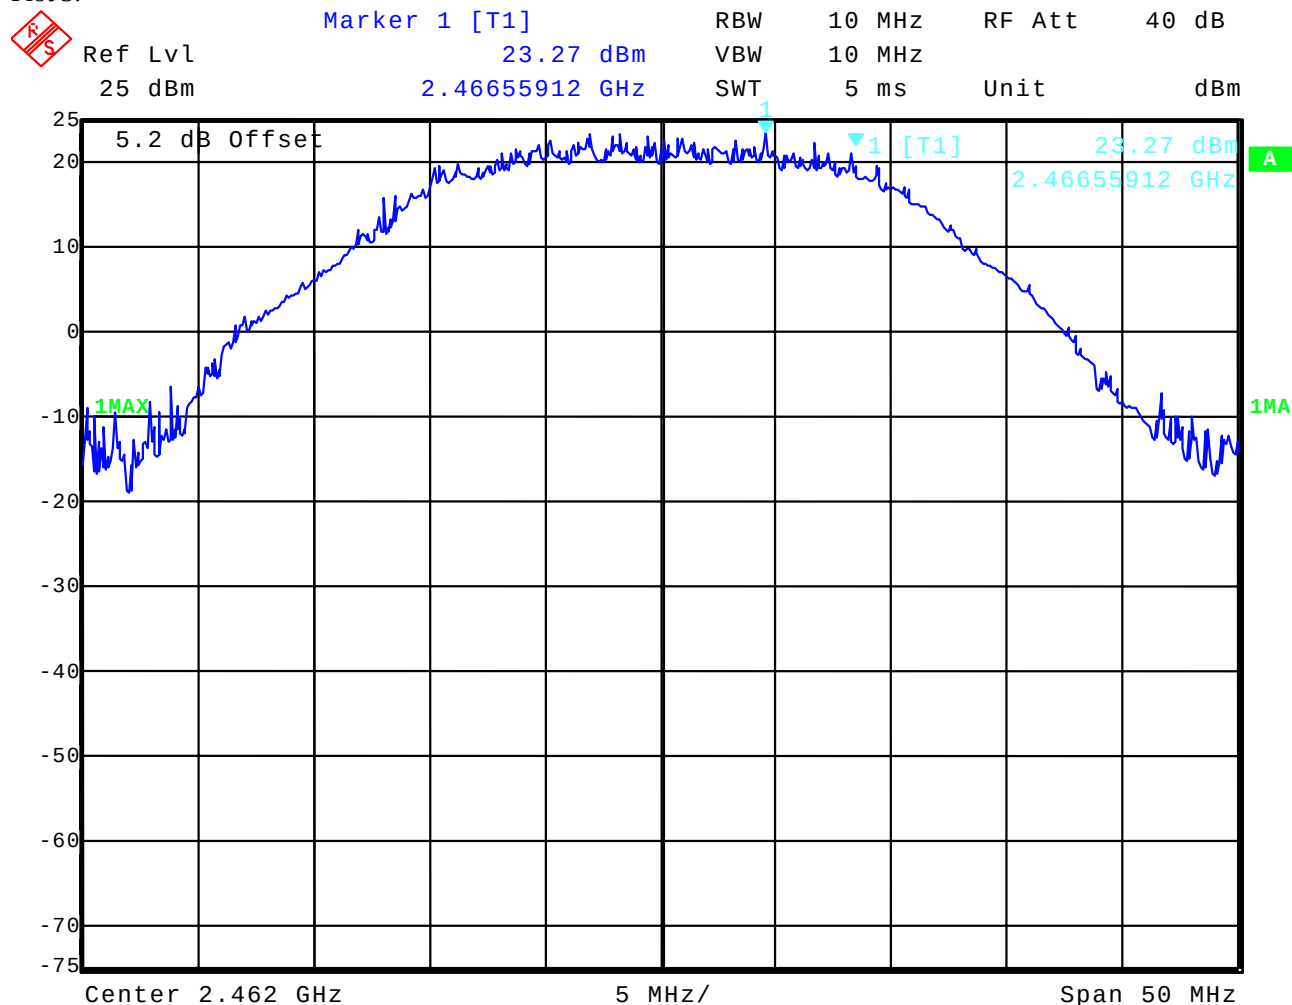

RBW / VBW : 10 MHz

Results: with correction factor $10 * \log(6\text{dB BW} / \text{used BW})$, here **2.0 dB**

Test conditions		Max. peak output power [dBm]			
Frequency [MHz]		2412		2437	2462
T _{nom}	V _{nom}	PK	24.32	25.62	23.27
		PK corrected	26.32	27.62	25.27
Average		16.31		16.88	15.47
Measurement uncertainty		±3dB			

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.:5-4907-01-12/04

Date:2005-01-19

Page 29 of 149

Remark:

The correction factor is calculated by $10 \times \log (\text{measured BW} / \text{used BW})$ [dB]

Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt / 30 dBm
---	------------------------

MPE calculation

These equations are generally accurate in the far field of an antenna but will over predict power density in the near field, where they could be used for making a “worst case” prediction.

$$S = PG/4\pi R^2$$

where S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units e.g. mW)

G = power gain of the antenna in the direction of interest relative to the isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units e.g. cm)

Or

$$S = EIRP/4\pi R^2$$

where EIRP = equivalent isotropically radiated power

Calculation:

(Calculated for max. EIRP)

EIRP: 29.92 dBm = 981 mW

calculated at distance of 20 cm:

power density = $981 / 4\pi 20^2 = 0.195 \text{ mW/ cm}^2$

Limit:

1mW/ cm² is the reference level for general public exposure according to the OET Bulletin 65,
Edition 97-01 Table 1.

RF EXPOSURE INFO for high gain antenna (EIRP>5Watt)

Environmental evaluation measurements of Maximum Permissible Exposure (MPE) to radio frequency (RF) radiation from transmitting devices for compliance with the technical rules and regulations of the U.S. Federal Communications Commission and Industry Canada.

Description of EUT

Siemens AG Model: wireless Client with antenna type ANT792-8DR including 5m coax cable.

- 1) The probe was positioned on a table at a separation distance of 20 cm from the radiating antenna and at a starting height of 5 cm to the center of the probe.
- 2) The table was positioned so that the initial start angle was 0 degrees.
- 3) The EUT was powered on and allowed sufficient time to stabilize. The EUT was operated at full power on a desired frequency.
- 4) The analyzer and the field probe was set for maximum hold, and set on the appropriate power range.
- 5) The table was rotated 360 degrees and the maximum reading was obtained for that elevation.
- 6) The antennas were lifted and lowered at maximum value in the horizontal plane to find the maximum in vertical position.

Result:



The max measured MPE value on a distance of 20 cm is:

0.33 mW/cm² by measurement with the analyzer

0.29 mW/cm² by measurement with the field probe

MPE System Specification:

- Electromagnetic Radiation Field probe, PMM Model 8053
Frequency Range: 1 MHz to 40 GHz
Calibration date: 05/2005
- Signal analyzer FSIQ26 from R&S
Frequency range: 10 Hz to 26.5 GHz
Calibration date: 09/2006

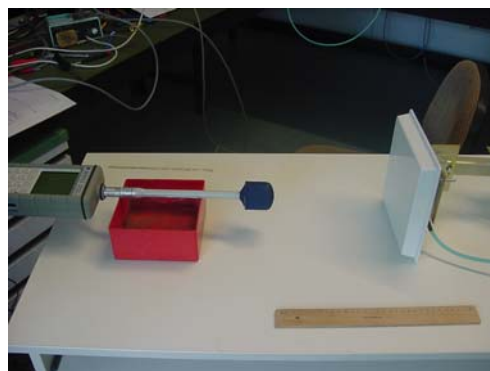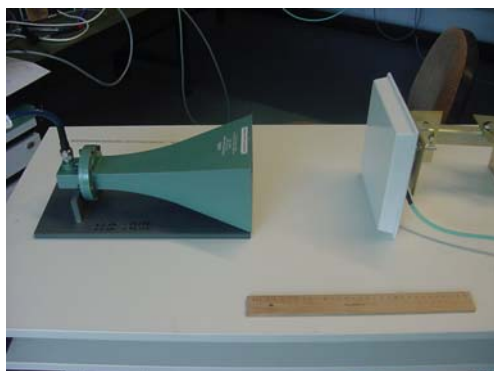

Limit:

1mW/ cm ² is the reference level for general public exposure according to the OET Bulletin 65, Edition 97-01 Table 1.
--

3.8 Max. peak output power (radiated) §15.247 (b) (1)

Results:

Test conditions		Max. peak output power EIRP [dBm]		
Antenna 1 (gain 0.6 dBi) Frequency [MHz]		2412	2437	2462
T_{nom}	V_{nom}	22.87 cond	23.40 cond	23.30 cond
DSSS		23.47 rad	24.00 rad	23.90 rad
T_{nom}	V_{nom}	26.32 cond	27.62 cond	25.27 cond
OFDM		26.92 rad	28.32 rad	25.87 rad
Measurement uncertainty		±3dB		

RBW / VBW : 10 MHz

Test conditions		Max. peak output power EIRP [dBm]		
Antenna 2 (gain 2.3 dBi) Frequency [MHz]		2412	2437	2462
T_{nom}	V_{nom}	22.87 cond	23.40 cond	23.30 cond
DSSS		25.17 rad	25.70 rad	25.60 rad
T_{nom}	V_{nom}	26.32 cond	27.62 cond	25.27 cond
OFDM		28.62 rad	29.92 rad	27.57 rad
Measurement uncertainty		±3dB		

Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt / 30 dBm
--	------------------------

Results:

Test conditions		Max. peak output power EIRP [dBm]		
Antenna 3 (gain 10.6 dBi, incl. cable loss)		2412	2437	2462
Frequency [MHz]				
T_{nom}	V_{nom}	22.87 cond	23.40 cond	23.30 cond
DSSS		33.47 rad	34.00 rad	33.90 rad
T_{nom}	V_{nom}	26.32 cond	27.62 cond	25.27 cond
OFDM		36.92 rad	38.22 rad	35.87 rad
Measurement uncertainty		$\pm 3dB$		

RBW / VBW : 10 MHz


Test conditions		Max. peak output power EIRP [dBm]		
Antenna 4 (gain 2.1 dBi, incl. cable loss)		2412	2437	2462
Frequency [MHz]				
T_{nom}	V_{nom}	22.87 cond	23.40 cond	23.30 cond
DSSS		24.97 rad	25.50 rad	25.40 rad
T_{nom}	V_{nom}	26.32 cond	27.62 cond	25.27 cond
OFDM		28.42 rad	29.52 rad	29.67 rad
Measurement uncertainty		$\pm 3dB$		

Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt / 30 dBm
--	------------------------


3.9 Band-edge compliance of conducted emissions §15.247 (c)

Plot 1, lowest channel

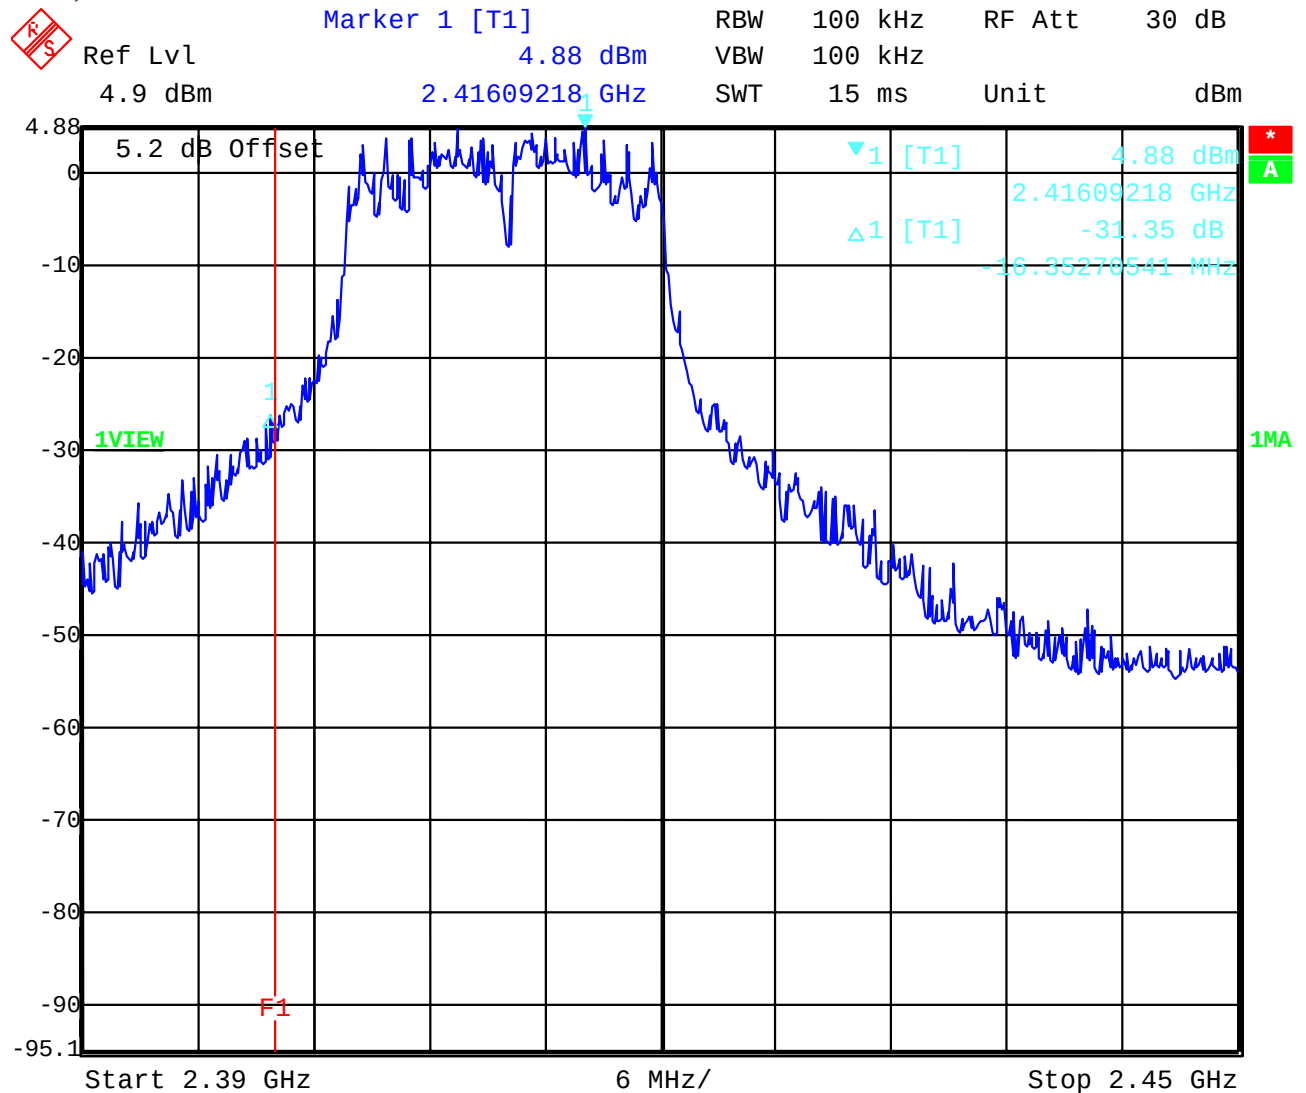

We used OFDM modulation as this is the worst case regarding used BW.

Plot 2, highest channel

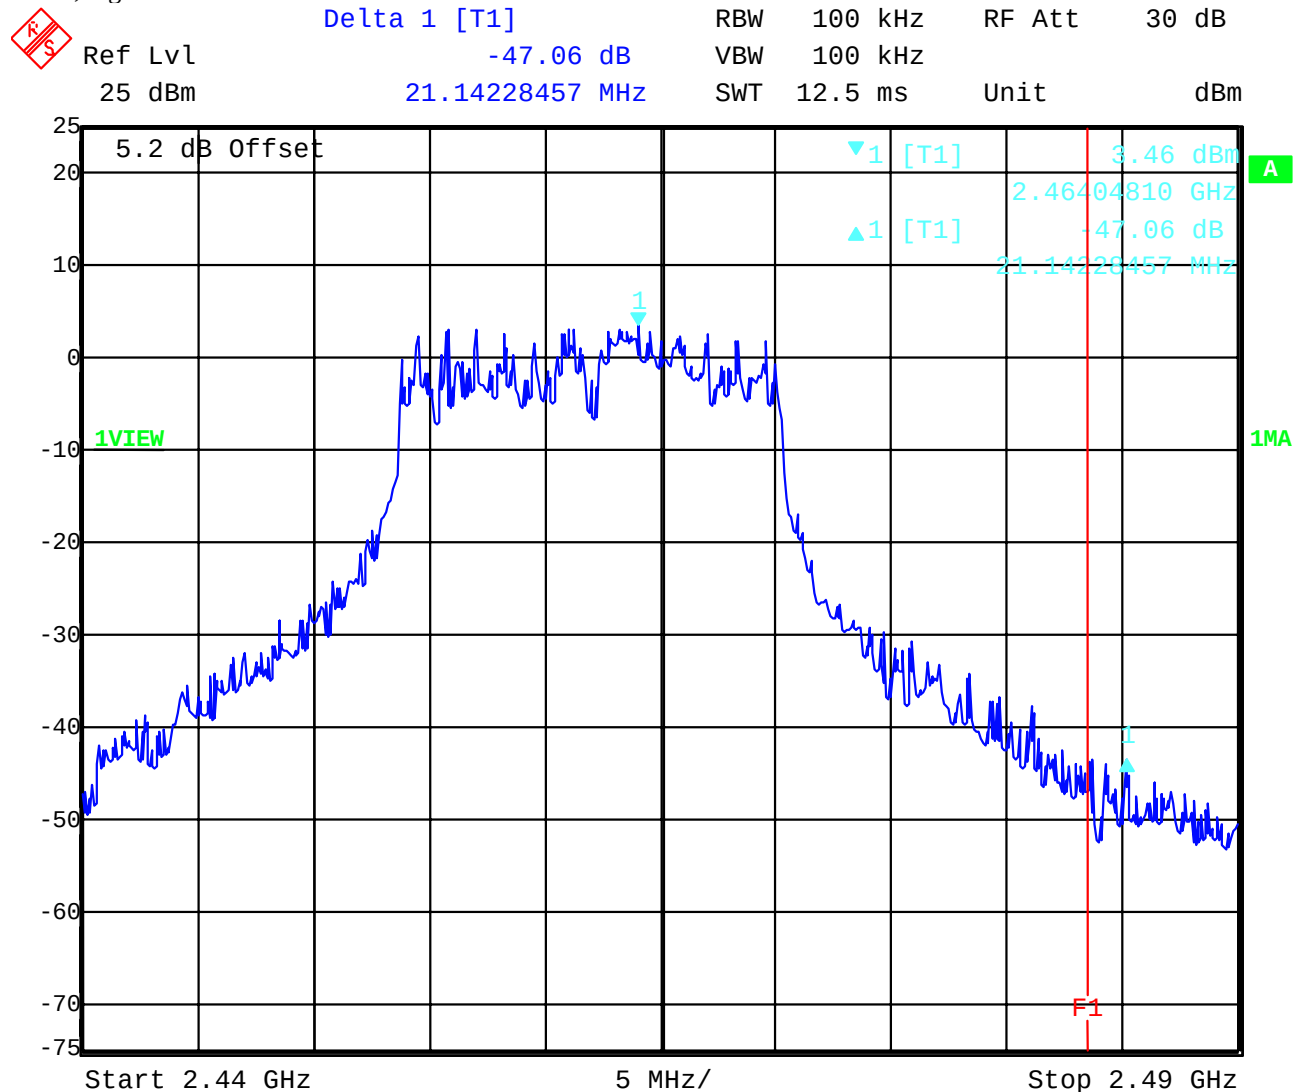

We used OFDM modulation as this is the worst case regarding used BW.


Limits:

Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).
-----------------------------------	--

3.10 Band-edge compliance of radiated emissions (DSSS)


§15.205

Plot 1: Low channel 2412 MHz, measured with Antenna 2

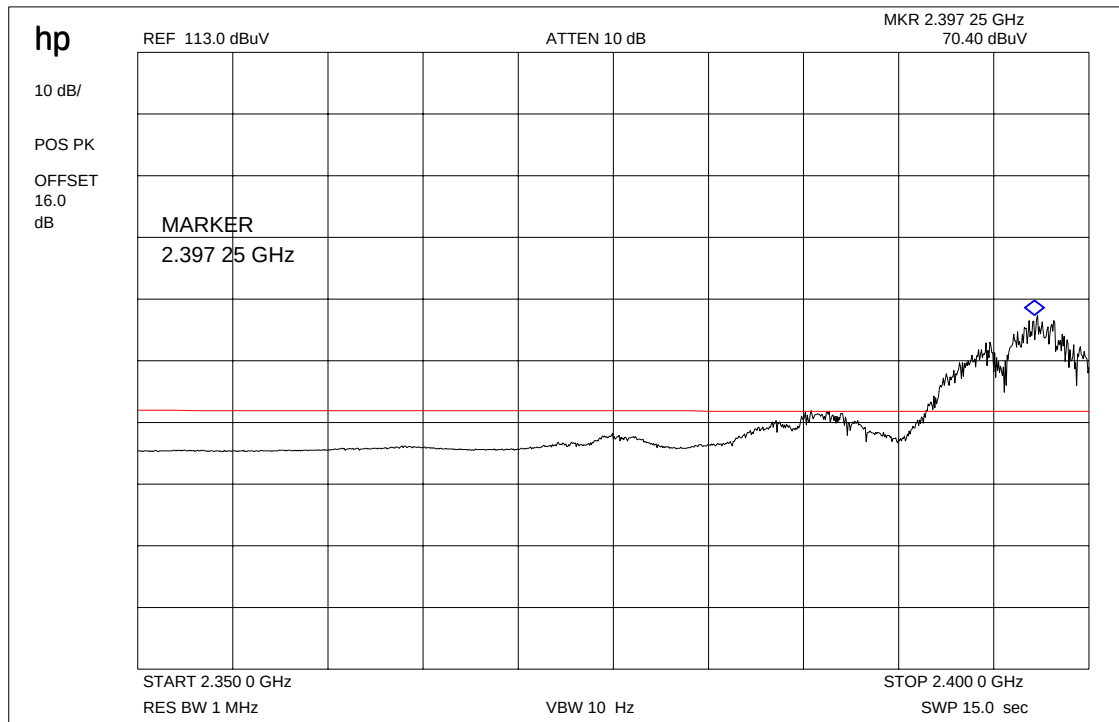

Max value > 20 dBc.


Plot 2 : Max field strength in 3m distance (single frequency) peak, measured with antenna 2

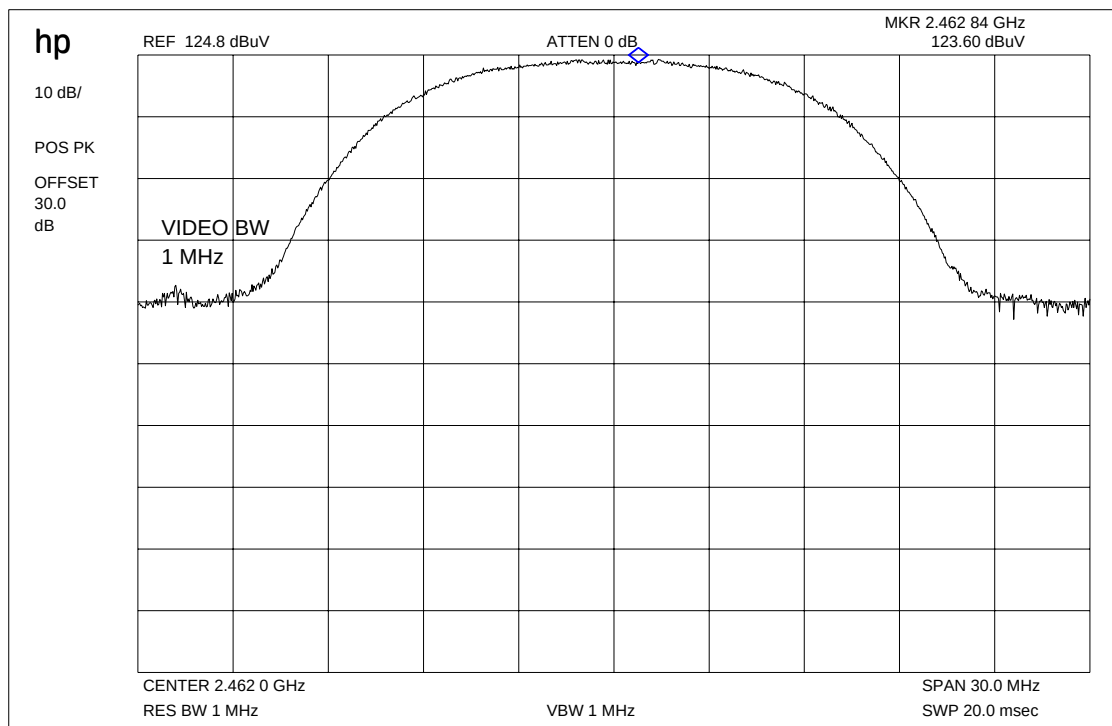

Result:

Frequency		Cable loss	Antenna factor	Results
2462 MHz		22.8 dB	-6.8	123.6 dB μ V/m at 3m


Plot 3 : Max field strength in 3m distance (single frequency) average, measured with antenna 2

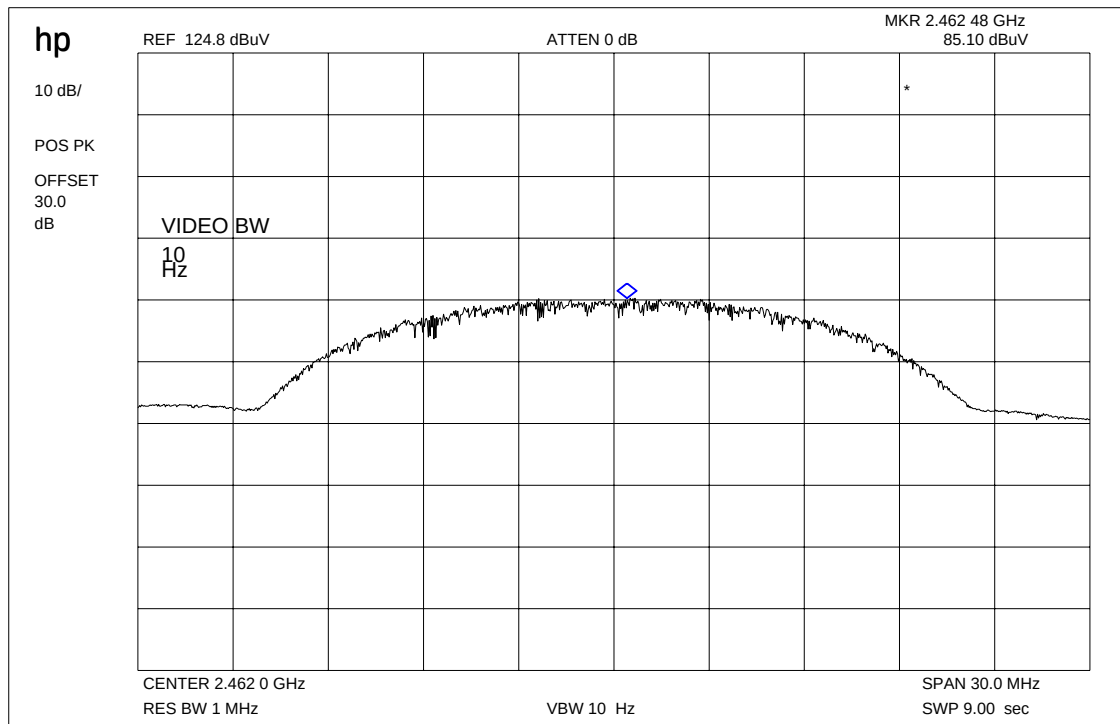

Result:

Frequency	Meter reading	Cable loss	Antenna factor	Results
2462 MHz		22.8 dB	-6.8	85.1 dB μ V/m at 3m

Plot 4: Marker-Delta Method RBW/VBW = 1% of span, measured with antenna 2

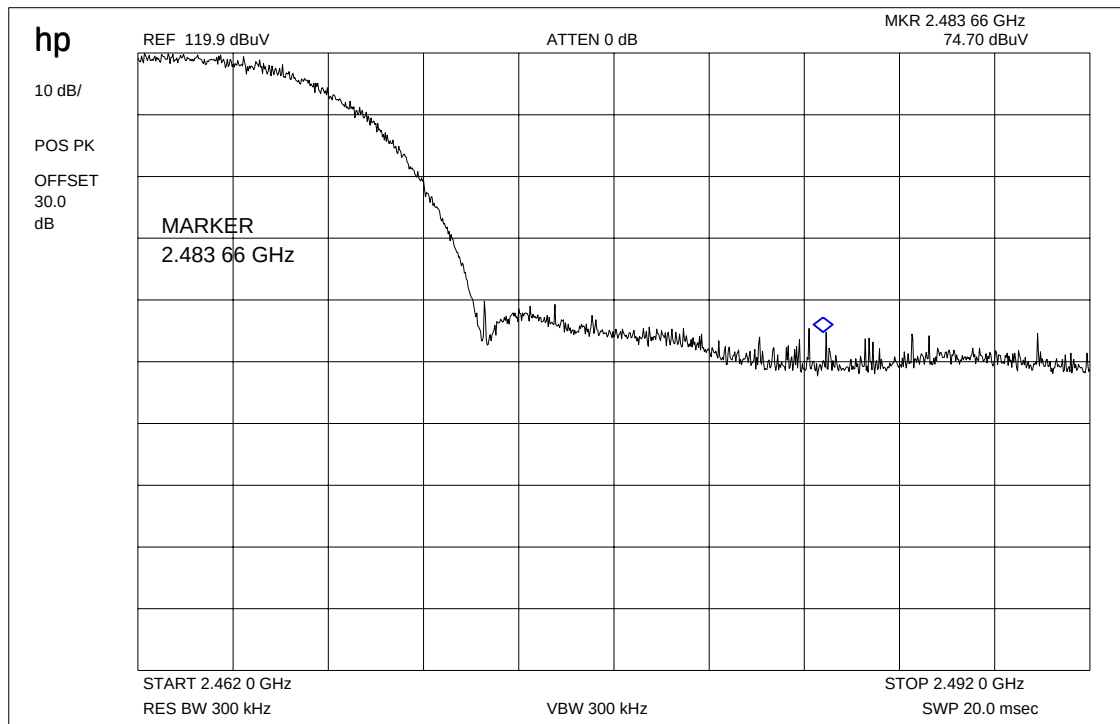


Result:

Marker-Delta-Value : 45.2 dB

This measurement was made to show that the behavior of the system is conform to FCC 15.205 (restricted bands)

Here the complete restricted band 2483,5 to 2500 MHz

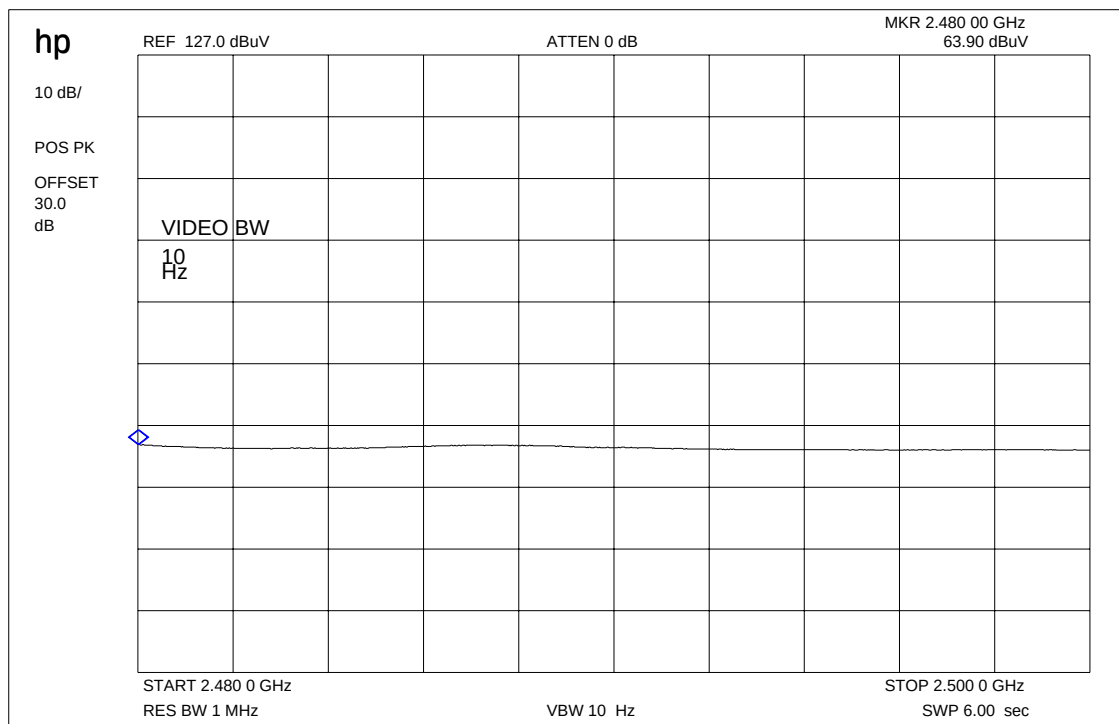

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.:5-4907-01-12/04

Date:2005-01-19

Page 41 of 149

Results & Limits:

Radiated field strength


The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.

high channel	setup	measured value (3m)	correction factor (3m)	calculated value (3m)
Max. peak value	1 MHz RBW 1 MHz VBW	107.6 dB μ V/m	+16 dB	123.6 dB μ V/m
Max. average value	1 MHz RBW 10 Hz VBW	69.1 dB μ V/m	+16 dB	85.1 dB μ V/m
Delta value	Peak 300 kHz RBW/VBW	45.2 dB μ V/m		
Value at band edge	limit 54 dB μ V/m			39.9 dB μ V/m
Statement:				Complies

3.11 Band-edge compliance of radiated emissions (OFDM)


§15.205

Plot 1: Low channel 2412 MHz, measured with antenna 2

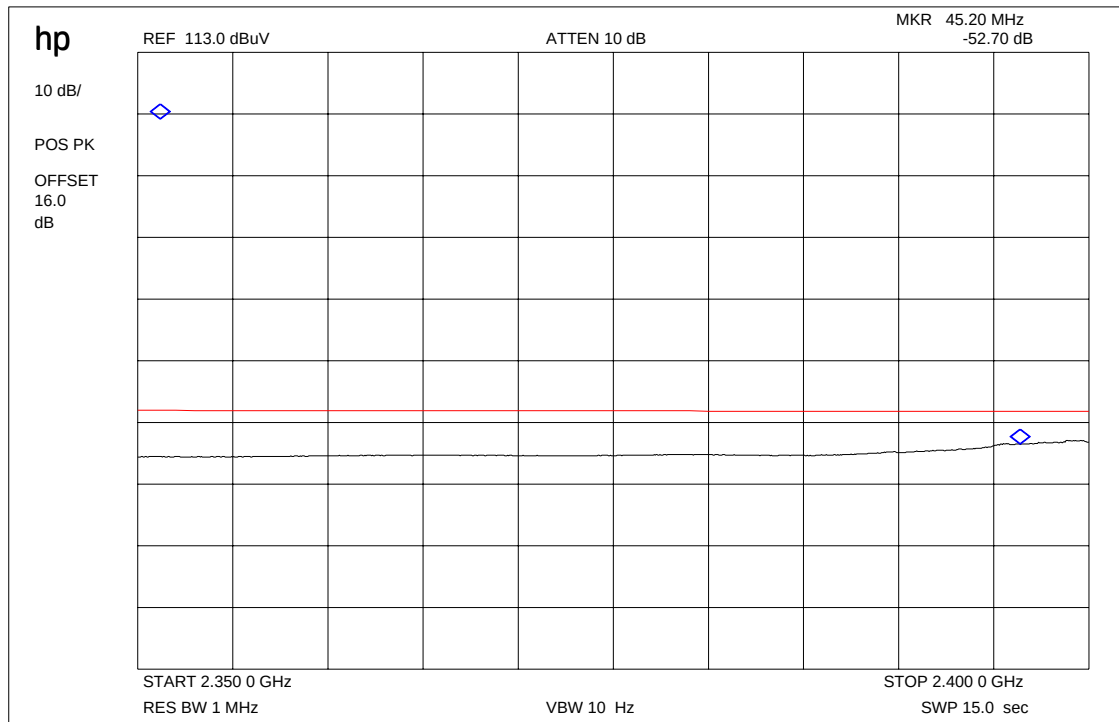

Max value > 20 dBc.


Plot 2 : Max field strength in 3m distance (single frequency) peak, measured with antenna 2

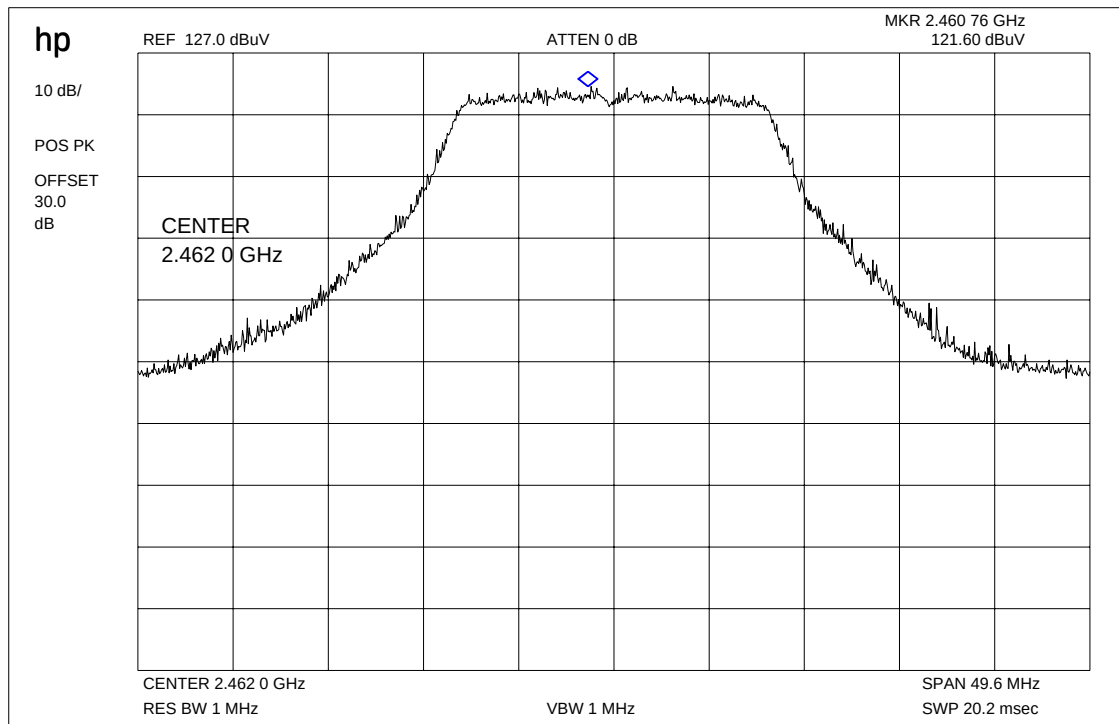

Result:

Frequency		Cable loss	Antenna factor	Results
2462 MHz		22.8 dB	-6.8	121.5 dB μ V/m at 3m


Plot 3 : Max field strength in 3m distance (single frequency) average, measured with antenna 2

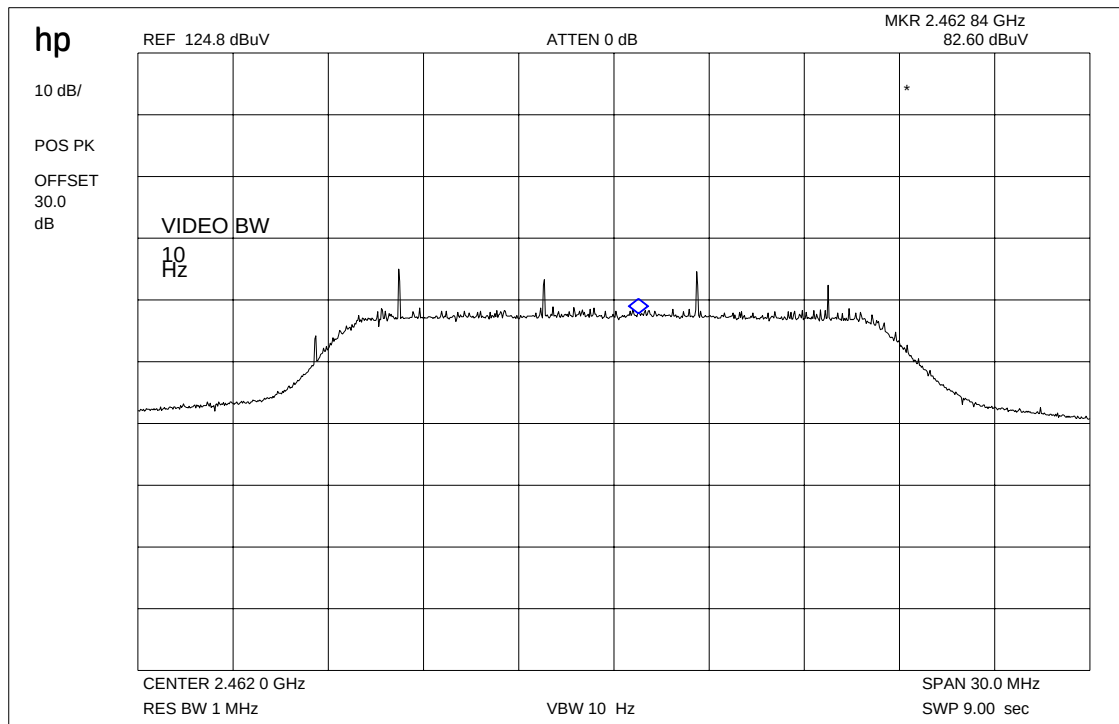

Result:

Frequency	Meter reading	Cable loss	Antenna factor	Results
2462 MHz		22.8 dB	-6.8	82.6 dB μ V/m at 3m

Plot 4: Marker-Delta Method RBW/VBW = 1% of span, measured with antenna 2

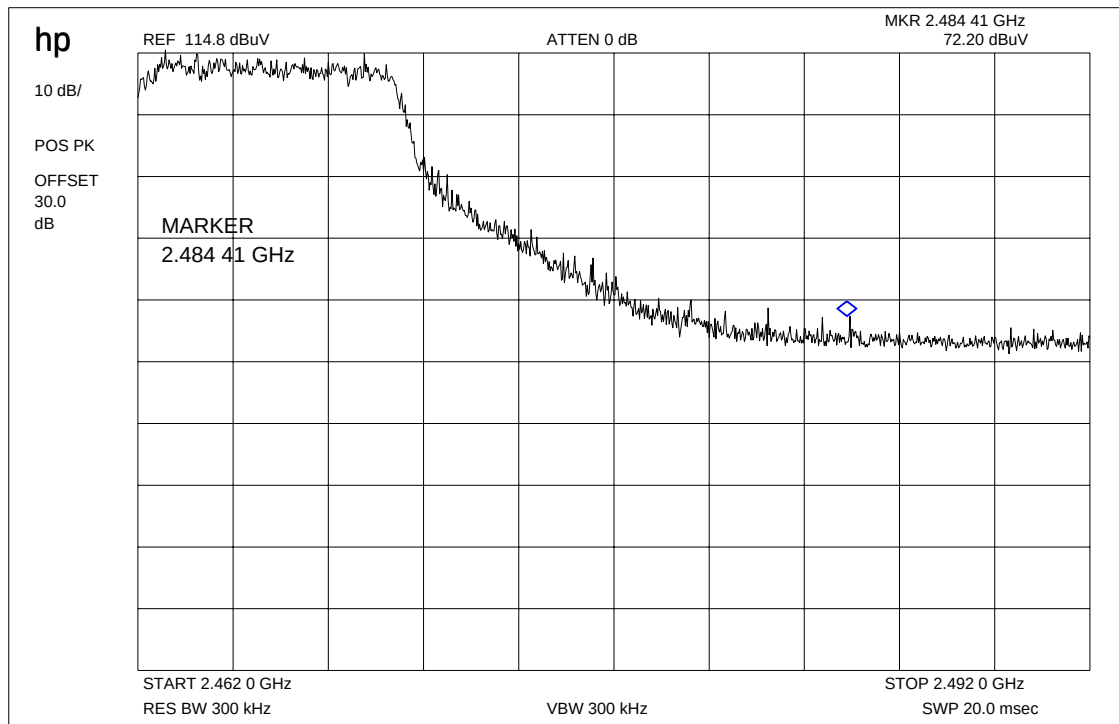

Result:

Marker-Delta-Value : 42.6 dB

This measurement was made to show that the behavior of the system is conform to FCC 15.205 (restricted bands)

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04

Date:2005-01-19

Page 46 of 149

Here the complete restricted band 2483.5 to 2500 MHz

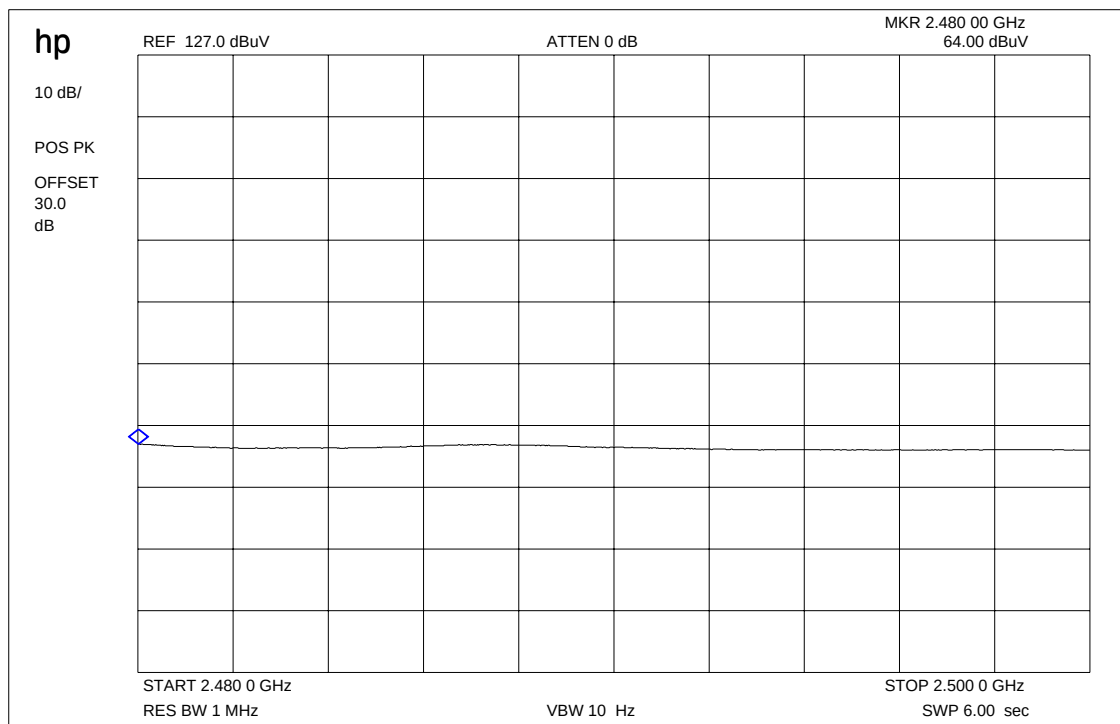

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.:5-4907-01-12/04

Date:2005-01-19

Page 47 of 149

Results & Limits:

Radiated field strength

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.

high channel	setup	measured value (3m)	correction factor (3m)	calculated value (3m)
Max. peak value	1 MHz RBW 1 MHz VBW	105.6 dB μ V/m	+16 dB	121.6 dB μ V/m
Max. average value	1 MHz RBW 10 Hz VBW	66.6 dB μ V/m	+16 dB	82.6 dB μ V/m
Delta value	Peak 300 kHz RBW/VBW	42.6 dB		
Value at band edge	limit 54 dB μ V/m			40.0 dB μ V/m
Statement:				Complies

3.12 Spurious Emissions - conducted (Transmitter)

§15.247 (c)

Result & Limits for OFDM (worst case)

Emission Limitations					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emmision power	actual attenuation below frequency of operation [dB]	results
2412		24.32	30 dBm	-	Operating frequency
250.5		-52.1	-20 dBc	76.4	pass
2104.2		-43.5		67.8	pass
2655.3		-33.0		57.3	pass
4809.6		-47.9		72.7	pass
2437		25.72	30 dBm		Operating frequency
2163.4		-36.8	-20 dBc	62.5	pass
2655.3		-38.8		64.5	pass
4859.7		-45.2		70.9	pass
2462		23.72	30 dBm		Operating frequency
2213.5		-44.8	-20 dBc	68.5	pass
2655.3		-43.4		67.1	pass
4909.8		-42.8		66.5	pass
Measurement uncertainty		± 3dB			

RBW : 100 kHz VBW: 100 kHz

Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
-----------------------------------	--

Note: For emissions that fall into restricted bands you find the radiated emissions later in the report.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany





Test report No.:5-4907-01-12/04

Date:2005-01-19

Page 49 of 149

2412 MHz OFDM (worst case)

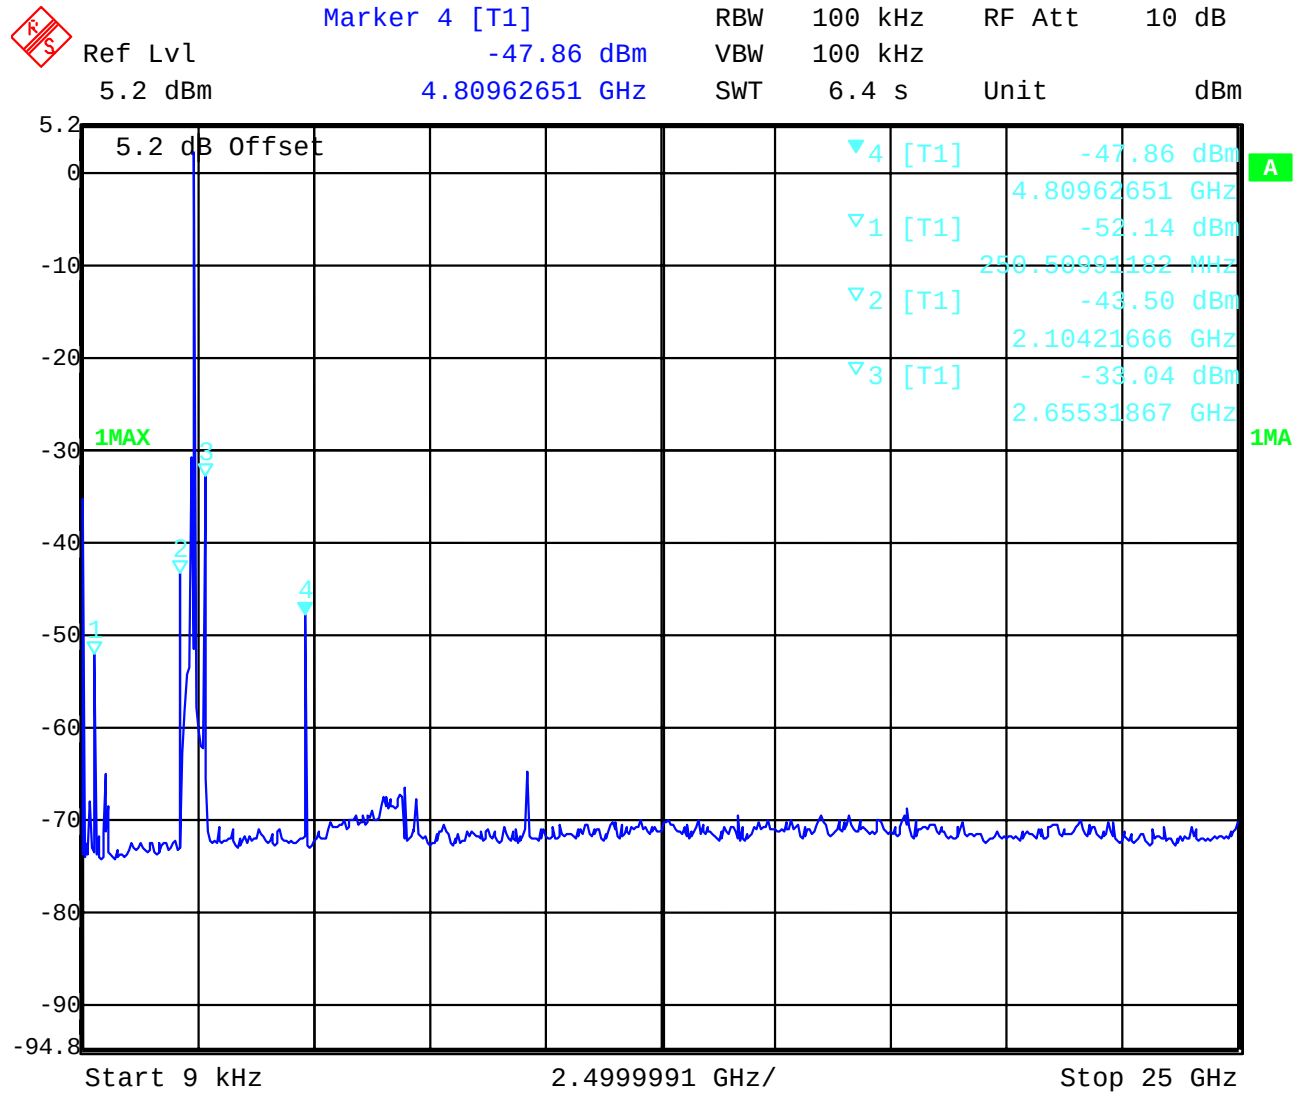

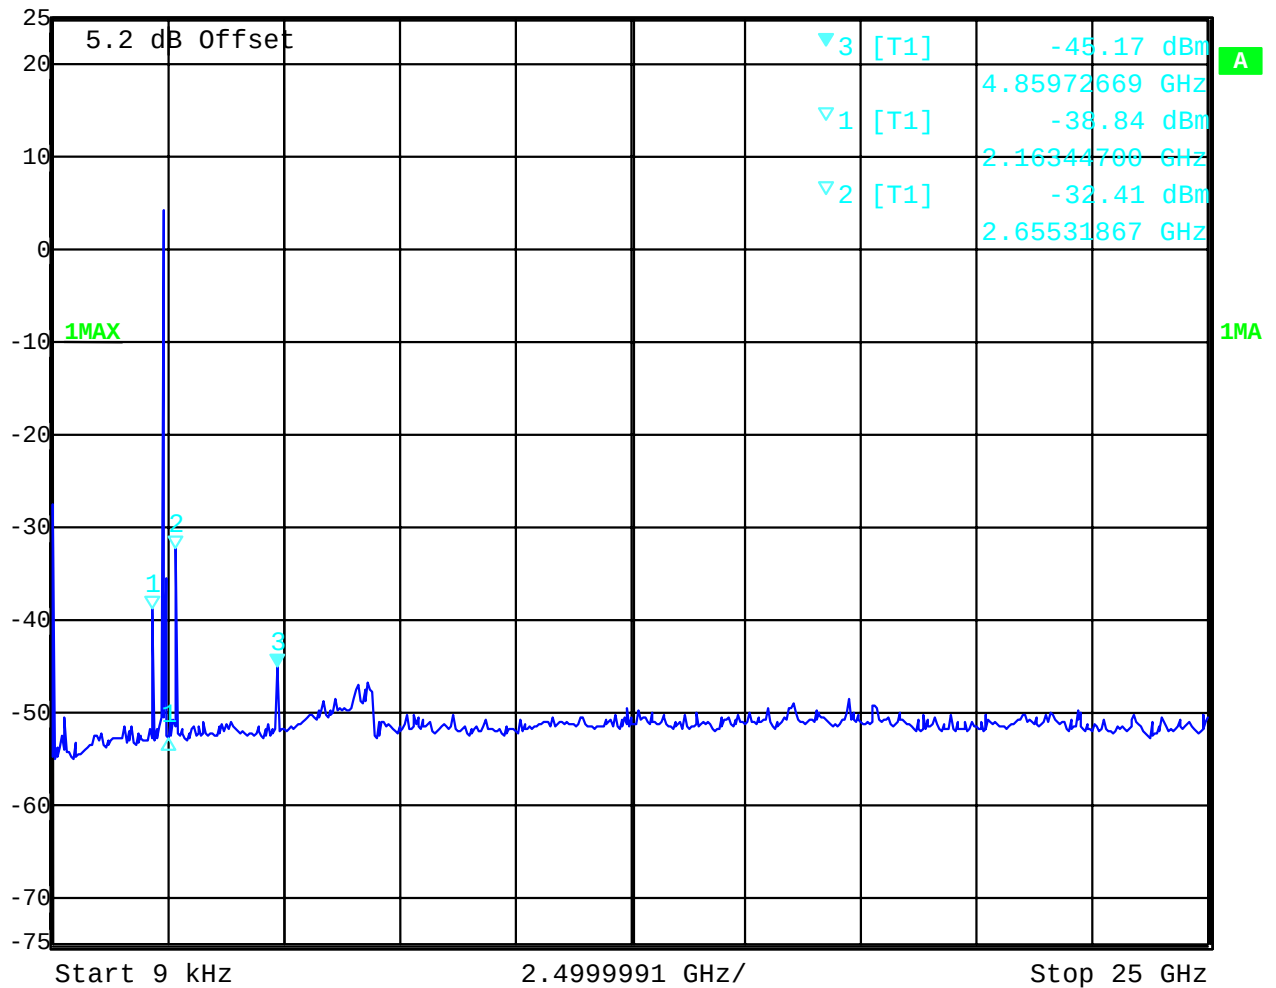

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04

Date:2005-01-19

Page 51 of 149


2462 MHz OFDM (worst case)

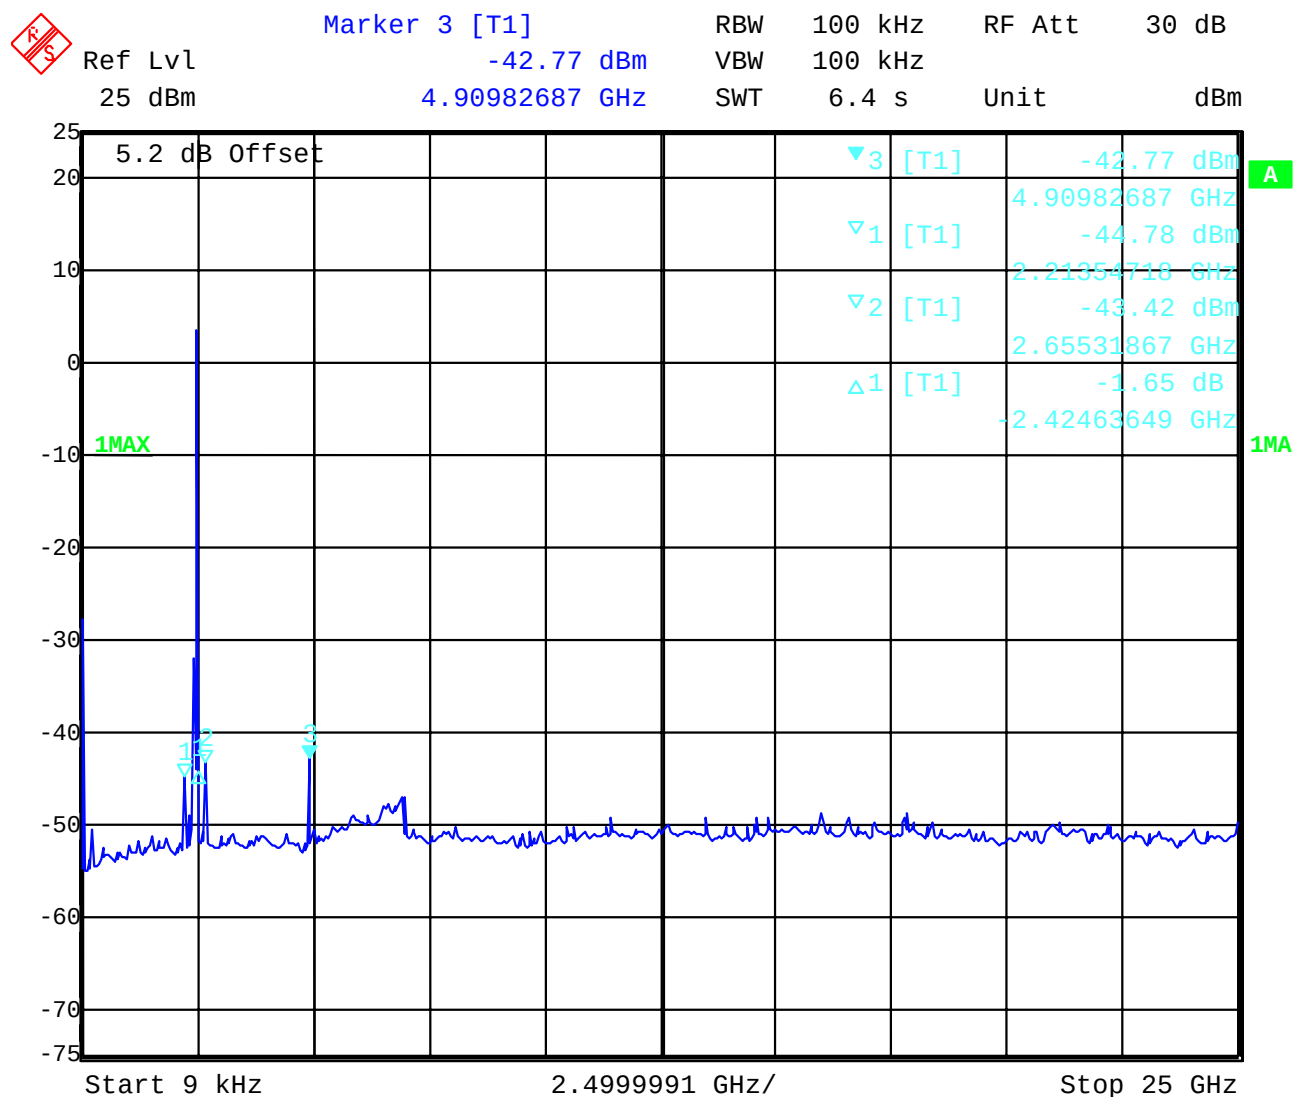

3.13 Spurious Emissions - radiated (Transmitter) DSSS §15.209


Antenna 1

Plot 1: 0.03 - 4 GHz vertical / horizontal (lowest channel)

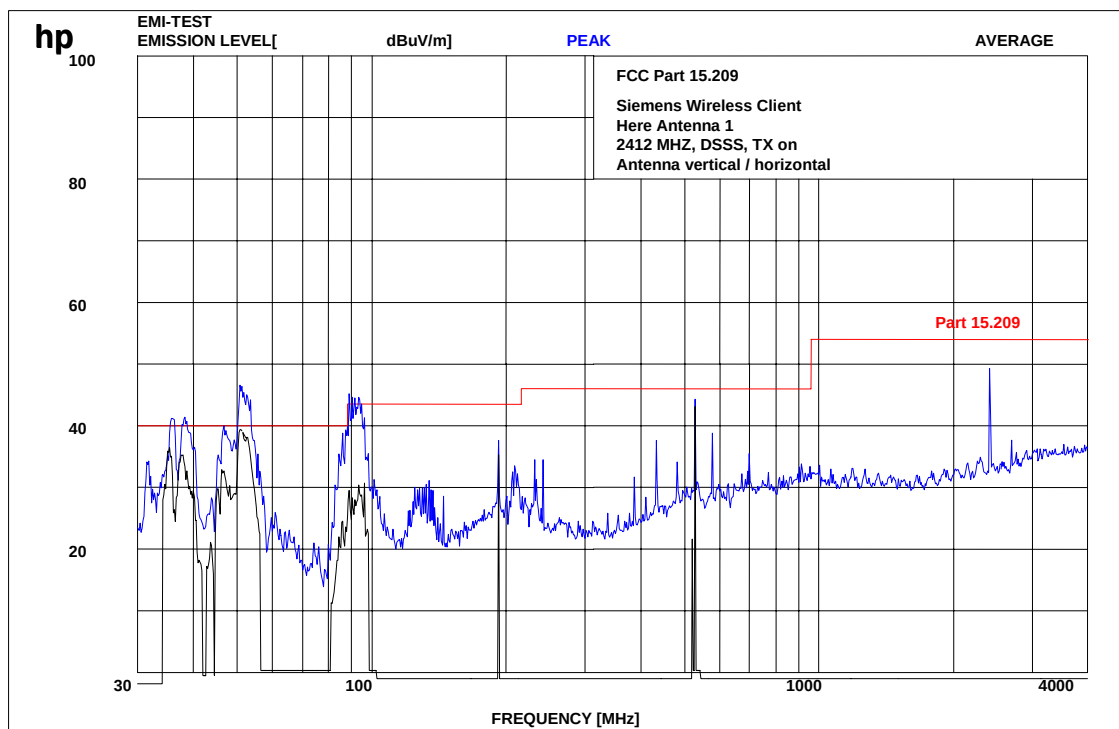


Carrier suppressed with a tunable filter to avoid overload of the preamp.

Plot 2: 4- 12 GHz (lowest channel)

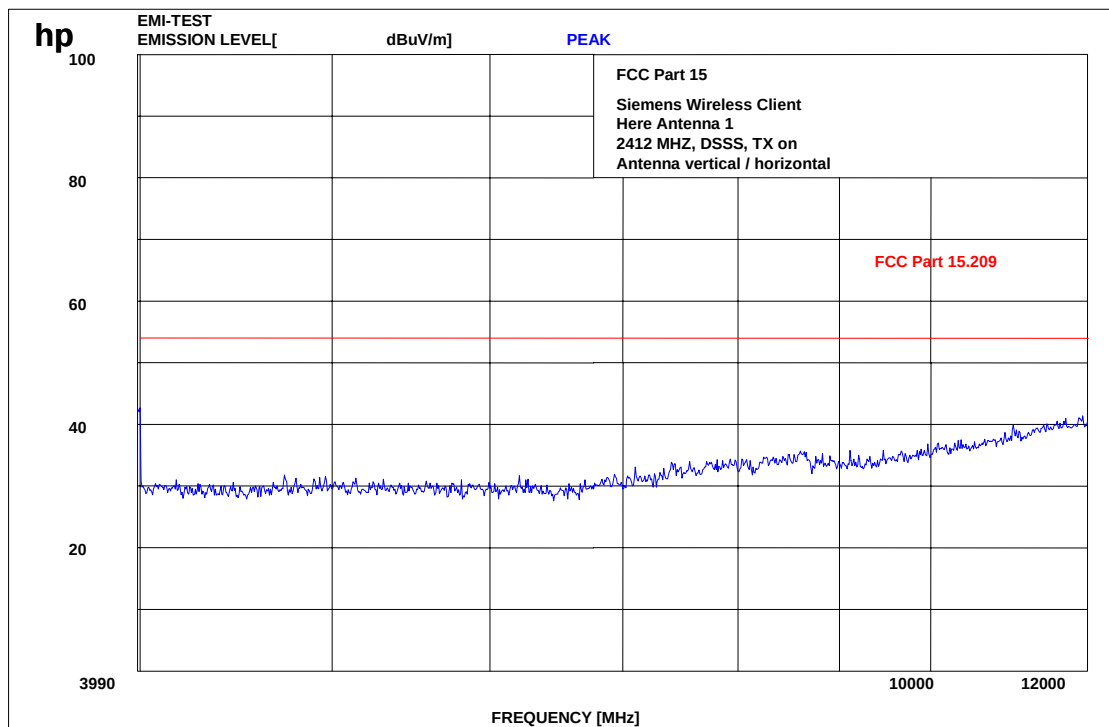


Plot 3: 12 – 25 GHz horizontal / vertical (valid for all three channels and all antennas)

There were no peaks found.

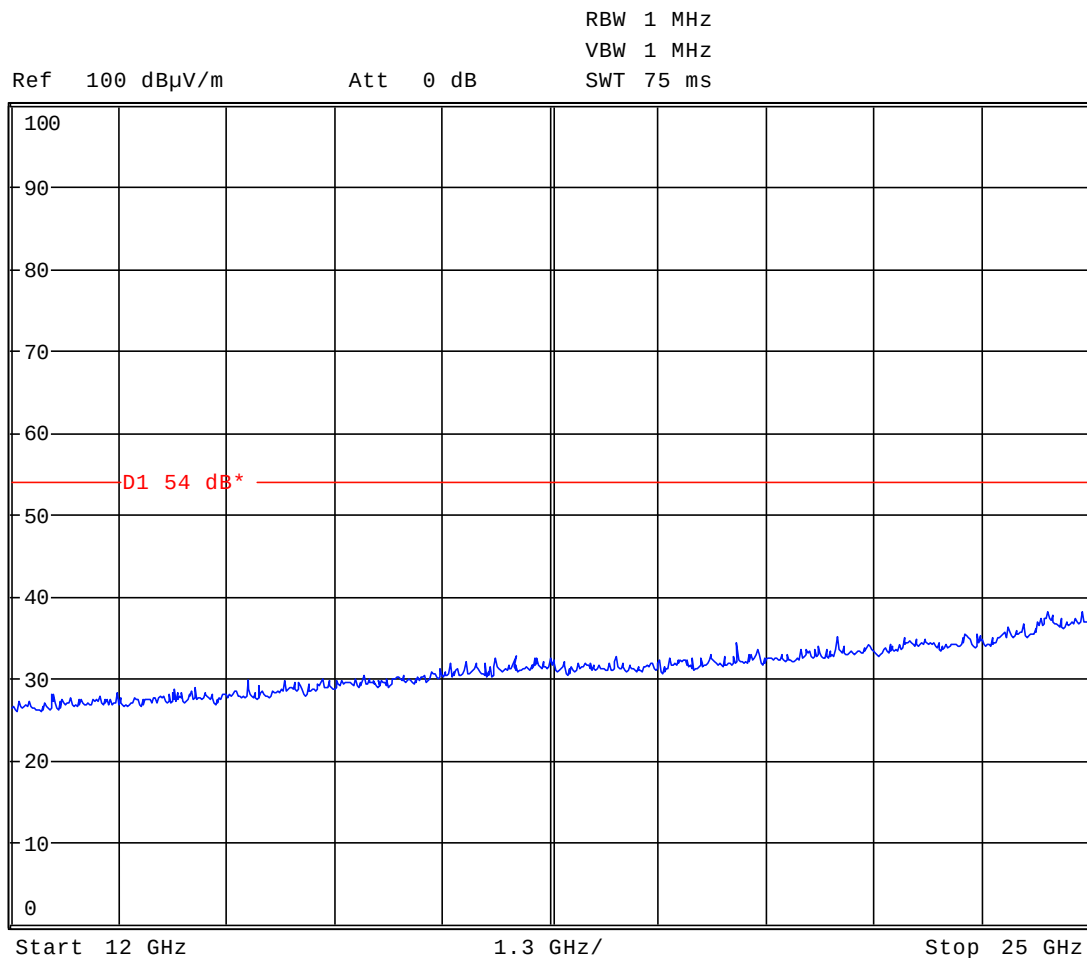


Plot 4: 0.03 - 4 GHz vertical / horizontal (middle channel)

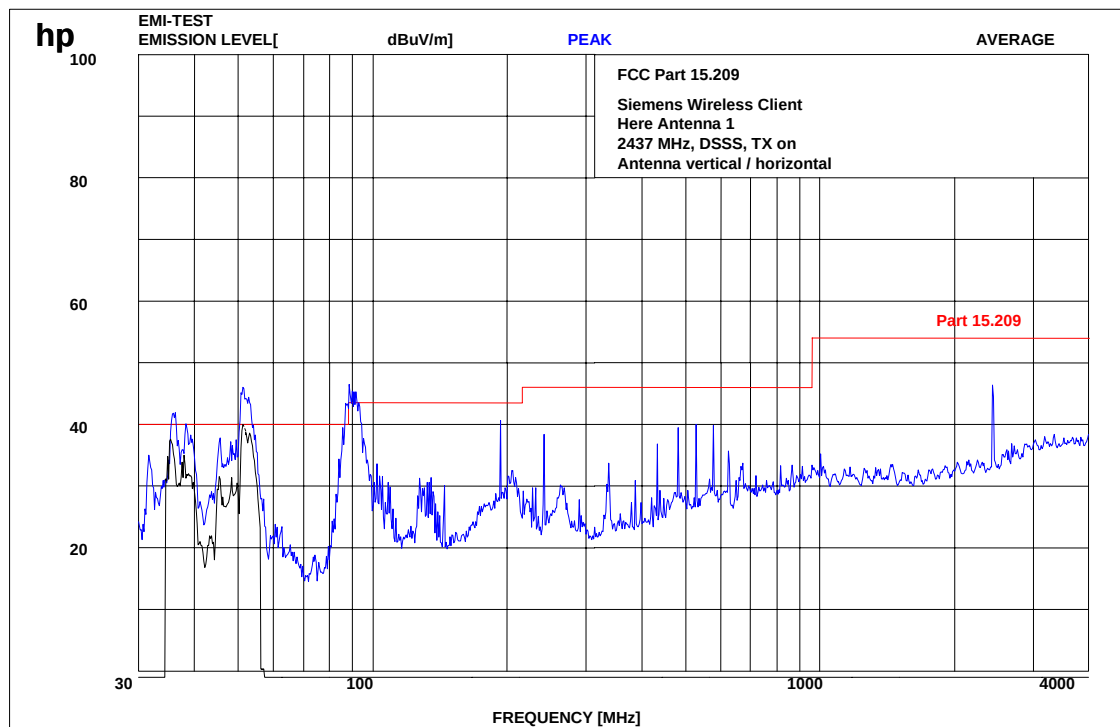


Carrier suppressed with a tunable filter to avoid overload of the preamp.

Plot 5: 4- 12 GHz (middle channel)

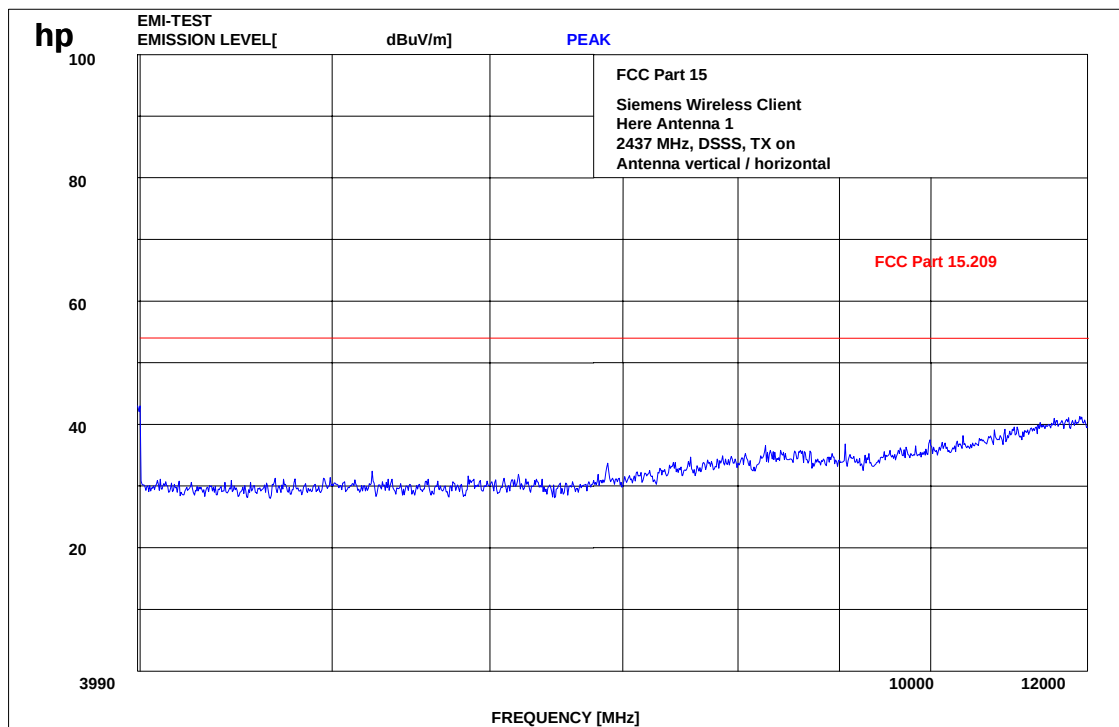

Plot 6: 0.03 - 4 GHz vertical / horizontal (highest channel)

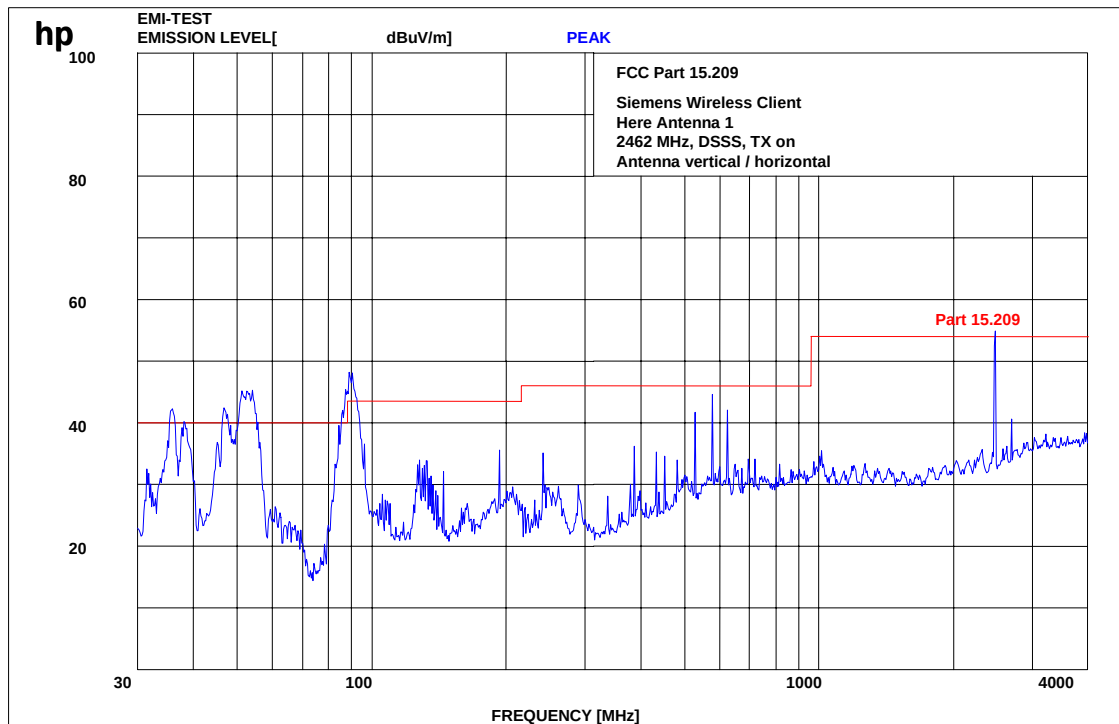

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04

Date:2005-01-19


Page 58 of 149

Plot 7: 4- 12 GHz (highest channel)

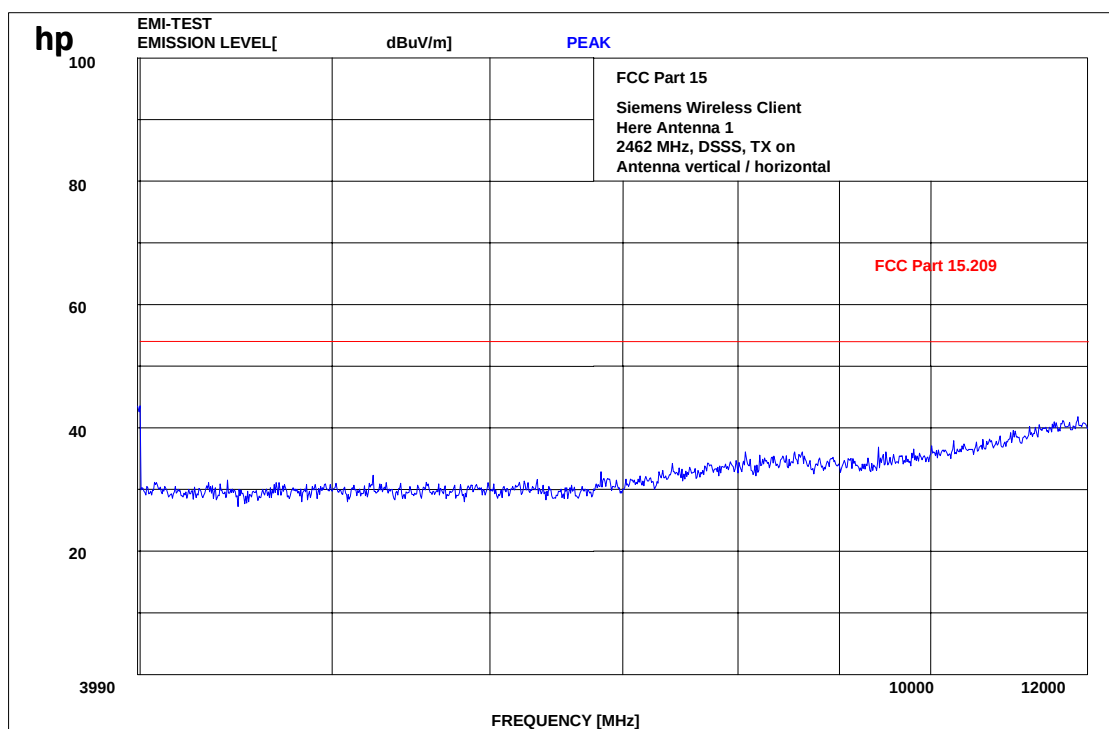

Antenna 2

Plot 1: 0.03 - 4 GHz vertical / horizontal (lowest channel)

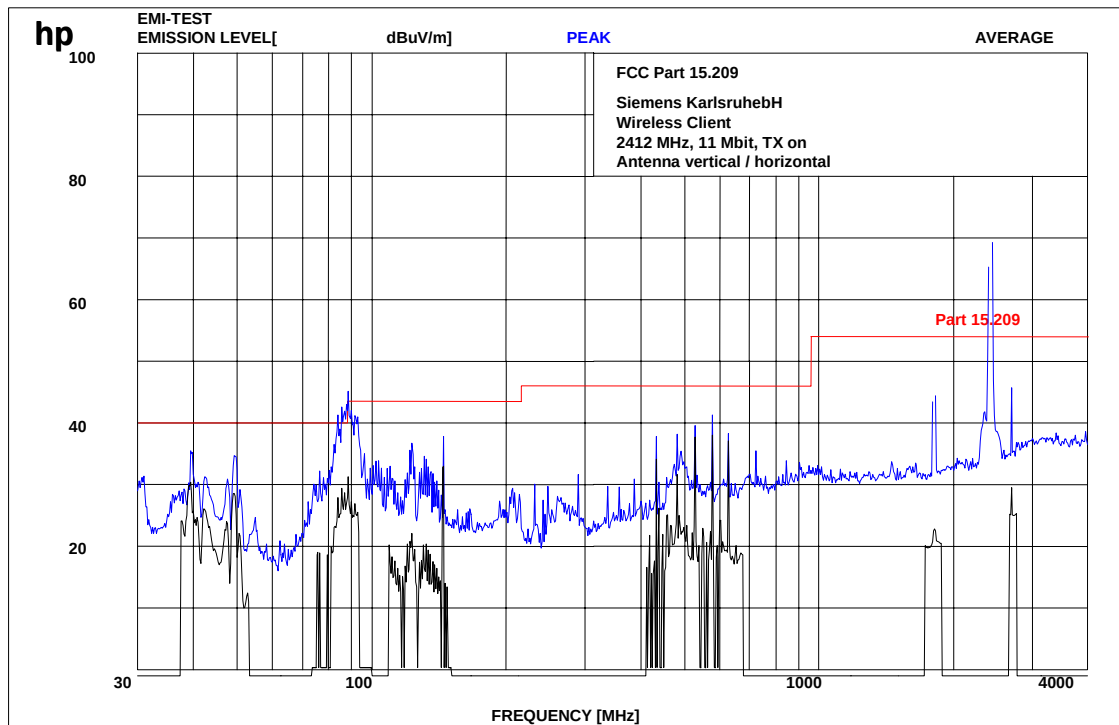

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04


Date:2005-01-19

Page 60 of 149


Plot 2: 4- 12 GHz (lowest channel)

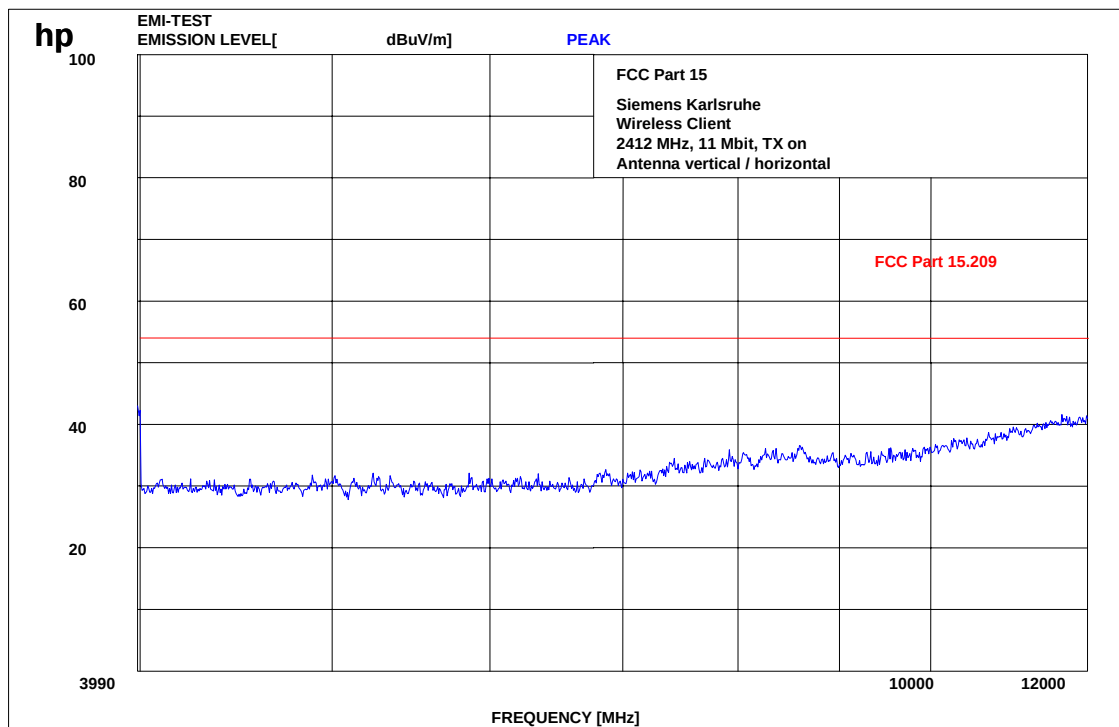

Plot 3: 12 – 25 GHz horizontal / vertical (valid for all three channels)

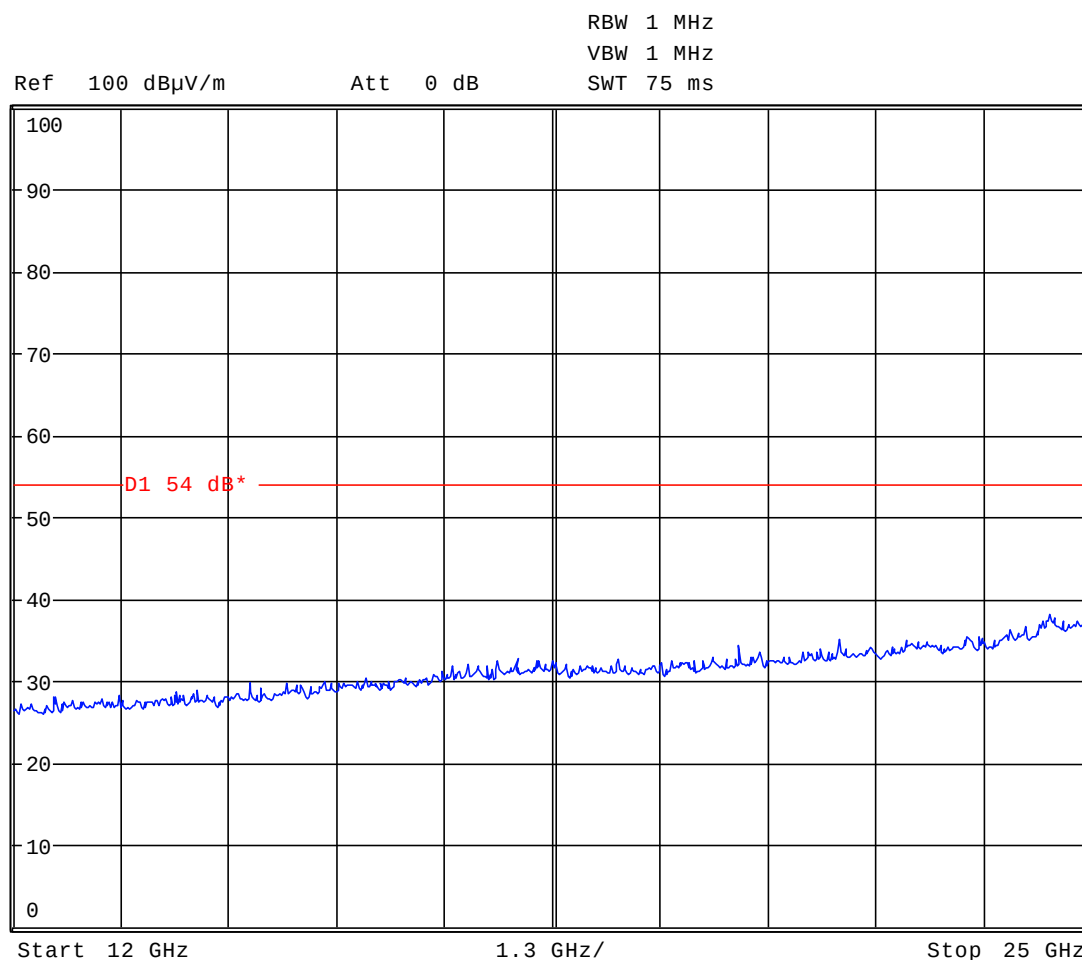

Plot 4: 0.03 - 4 GHz vertical / horizontal (middle channel)

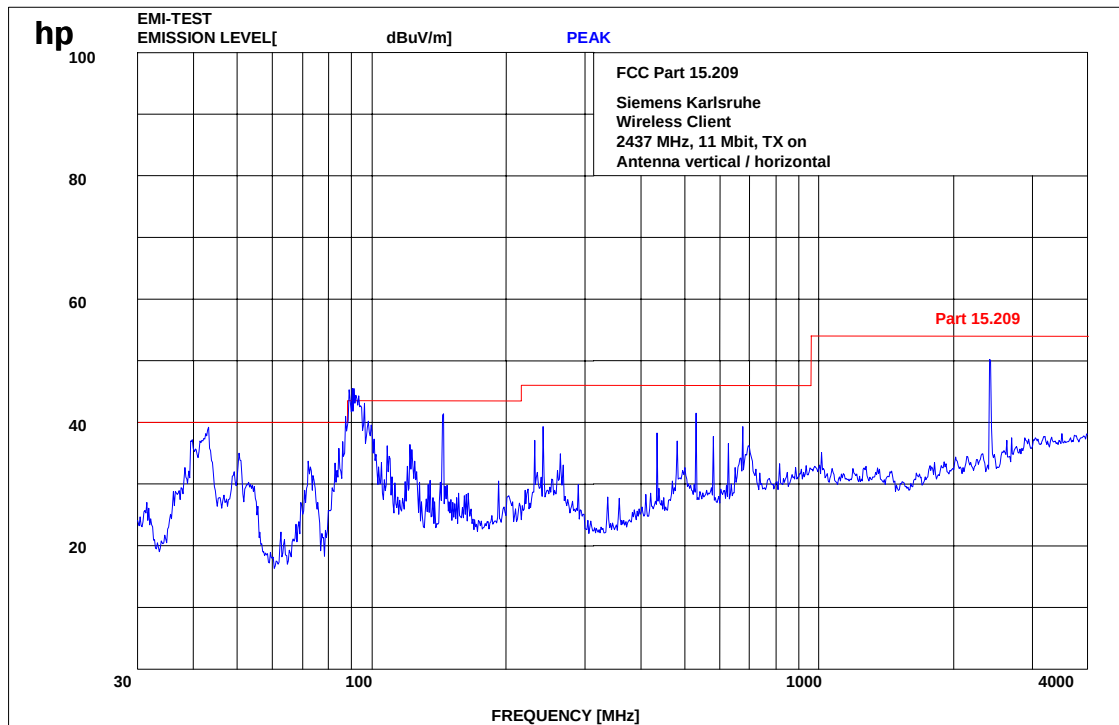

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04


Date:2005-01-19

Page 63 of 149

Plot 5: 4- 12 GHz (middle channel)

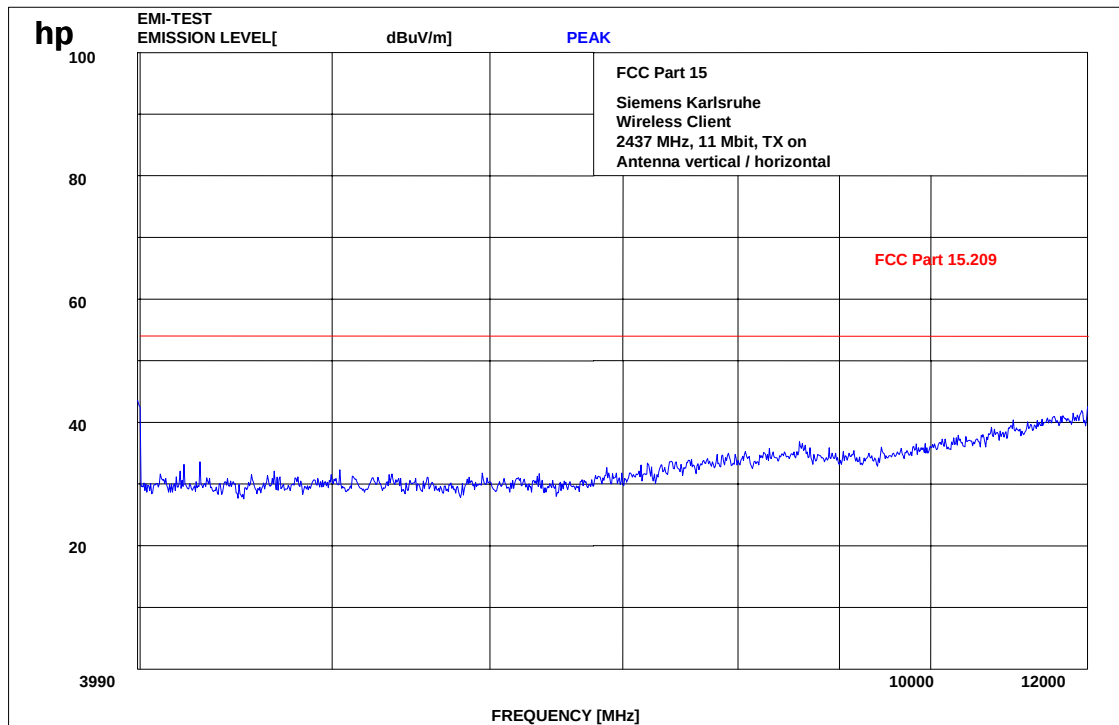

Plot 6: 0.03 - 4 GHz vertical / horizontal (highest channel)

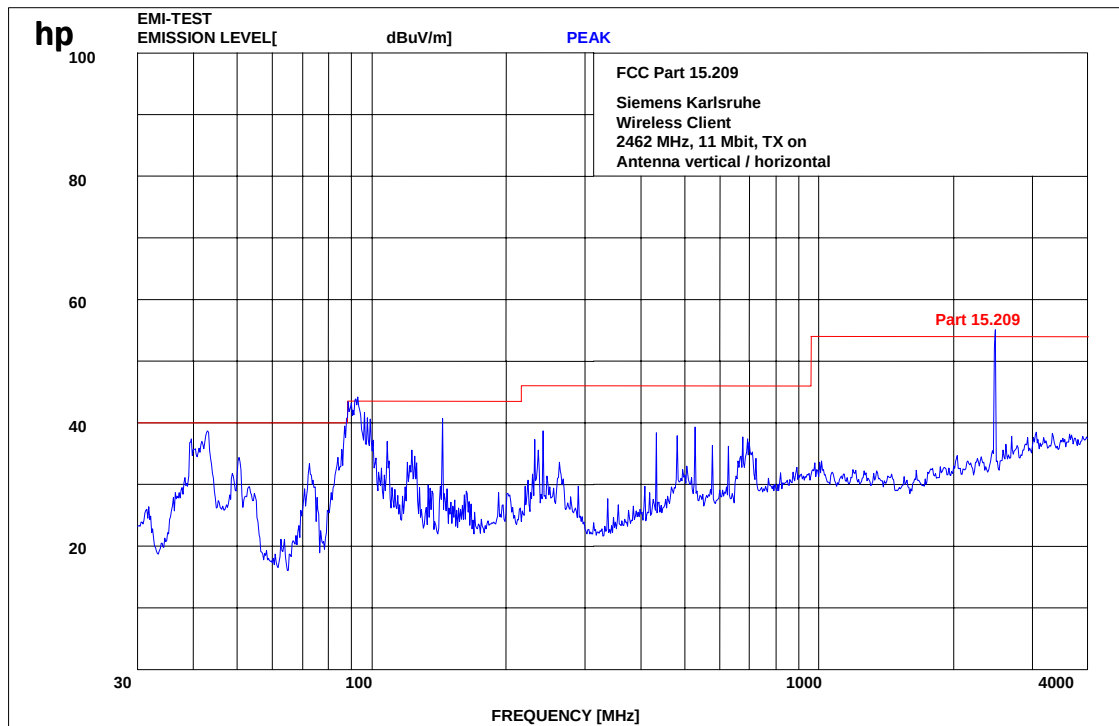

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04

Date:2005-01-19


Page 65 of 149

Plot 7: 4- 12 GHz (highest channel)

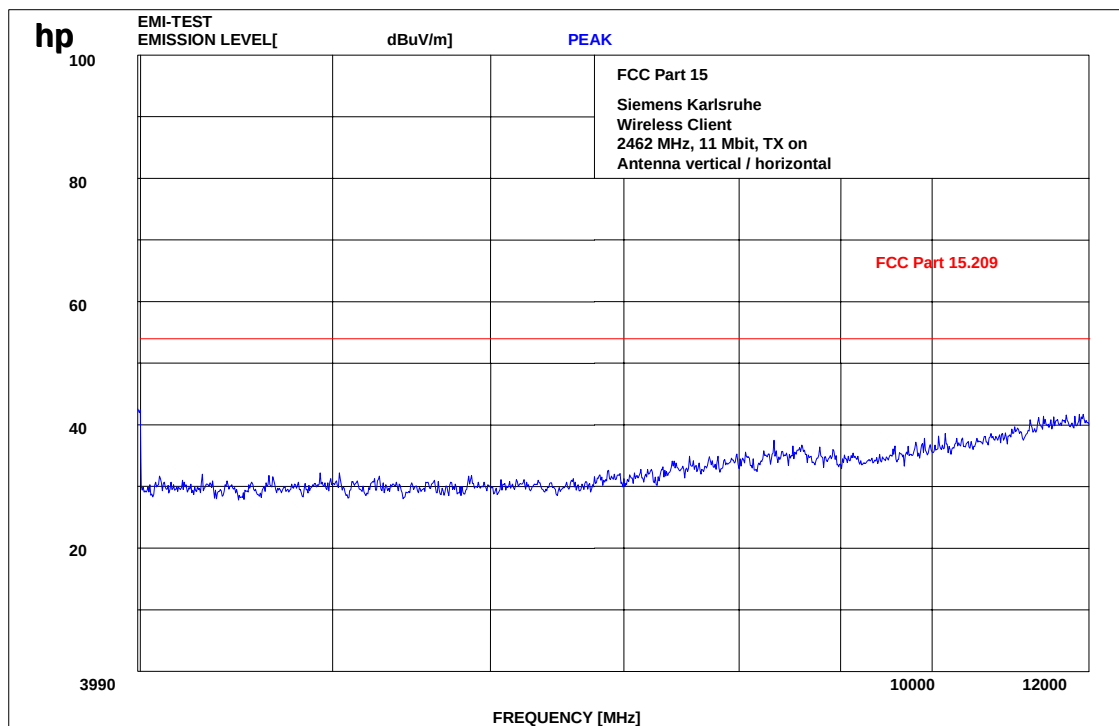

Antenna 3

Plot 1: 0.03 - 4 GHz vertical / horizontal (lowest channel)

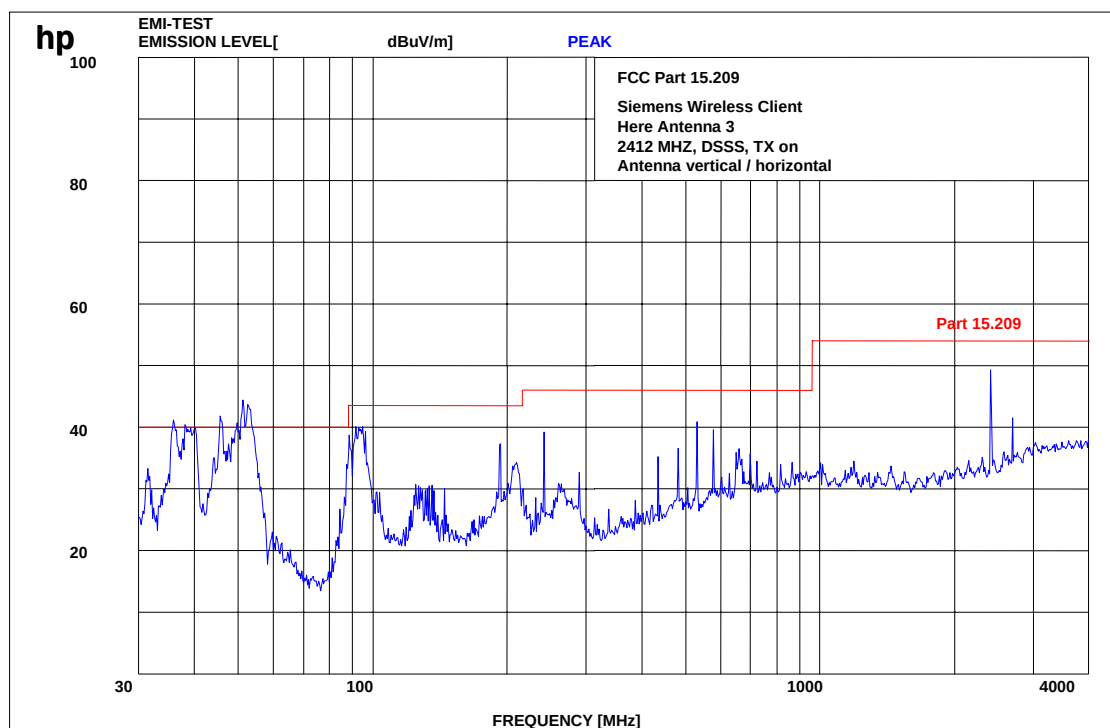

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04

Date:2005-01-19


Page 67 of 149

Plot 2: 4- 12 GHz (lowest channel)

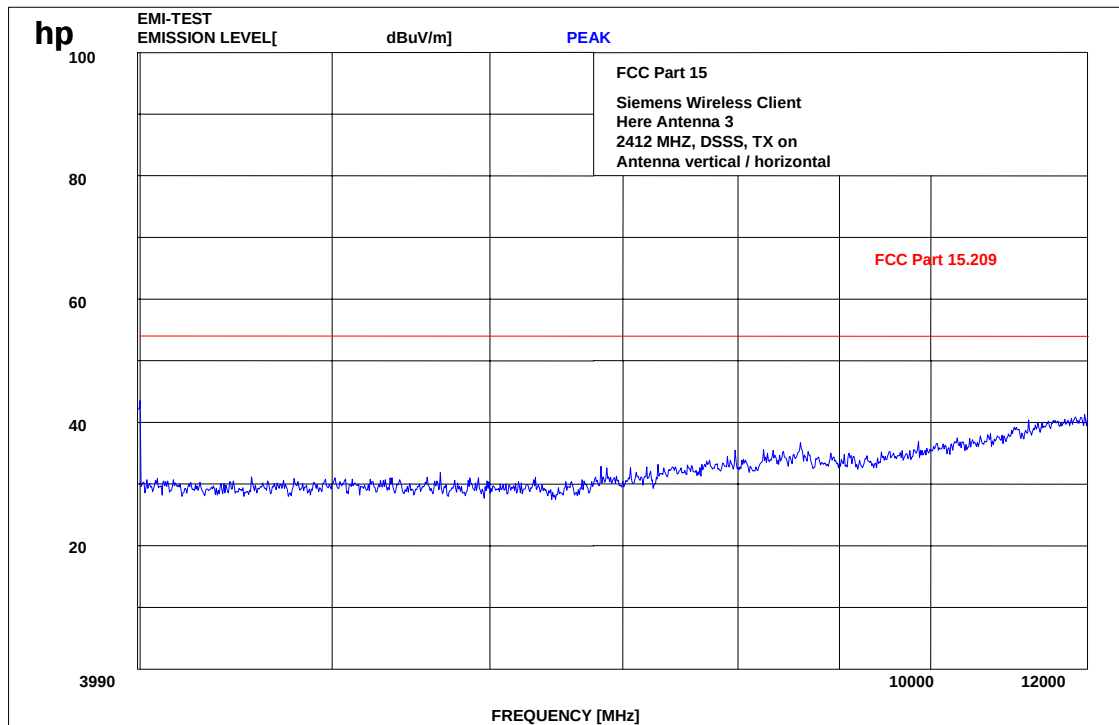


Plot 3: 12 – 25 GHz horizontal / vertical (valid for all three channels and all antennas)

There were no peaks found.

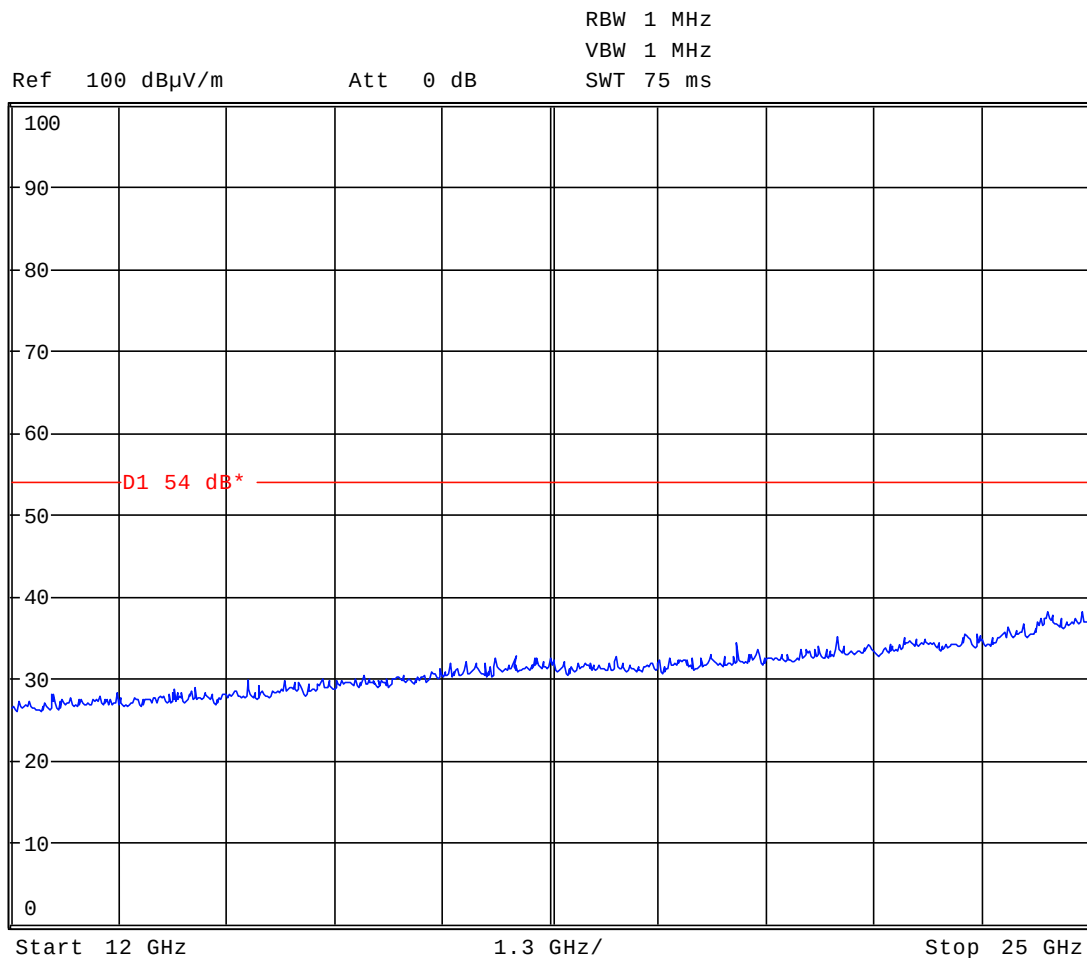

Plot 4: 0.03 - 4 GHz vertical / horizontal (middle channel)

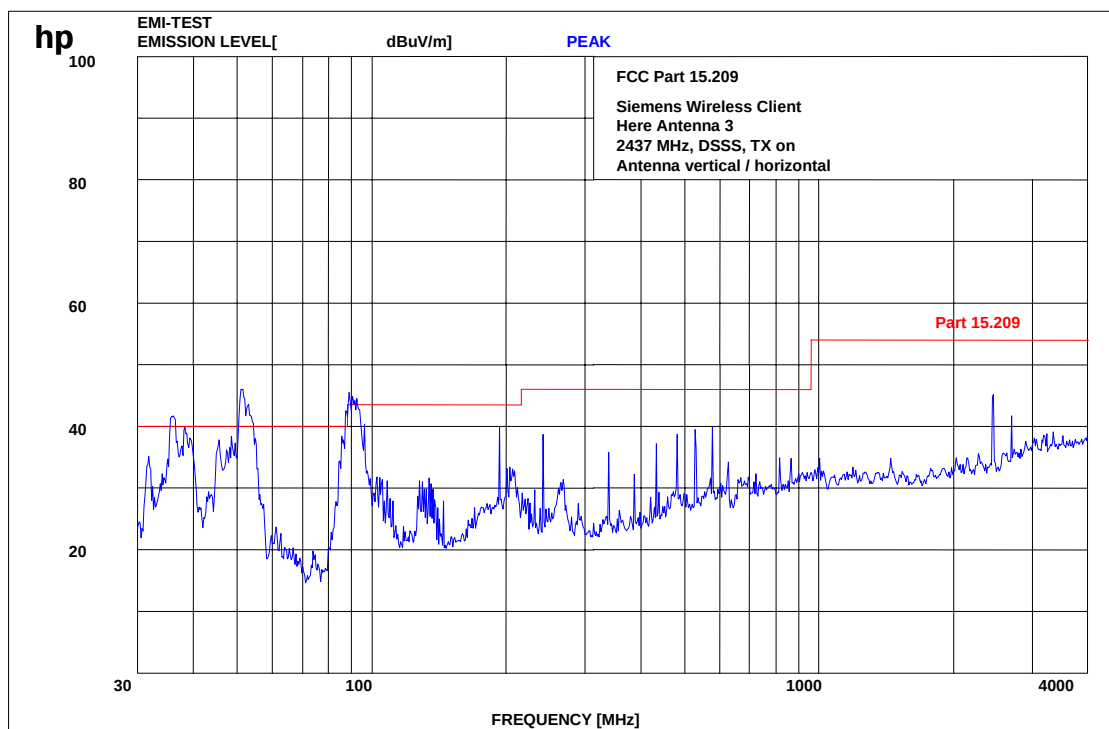

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04


Date:2005-01-19

Page 70 of 149

Plot 5: 4- 12 GHz (middle channel)

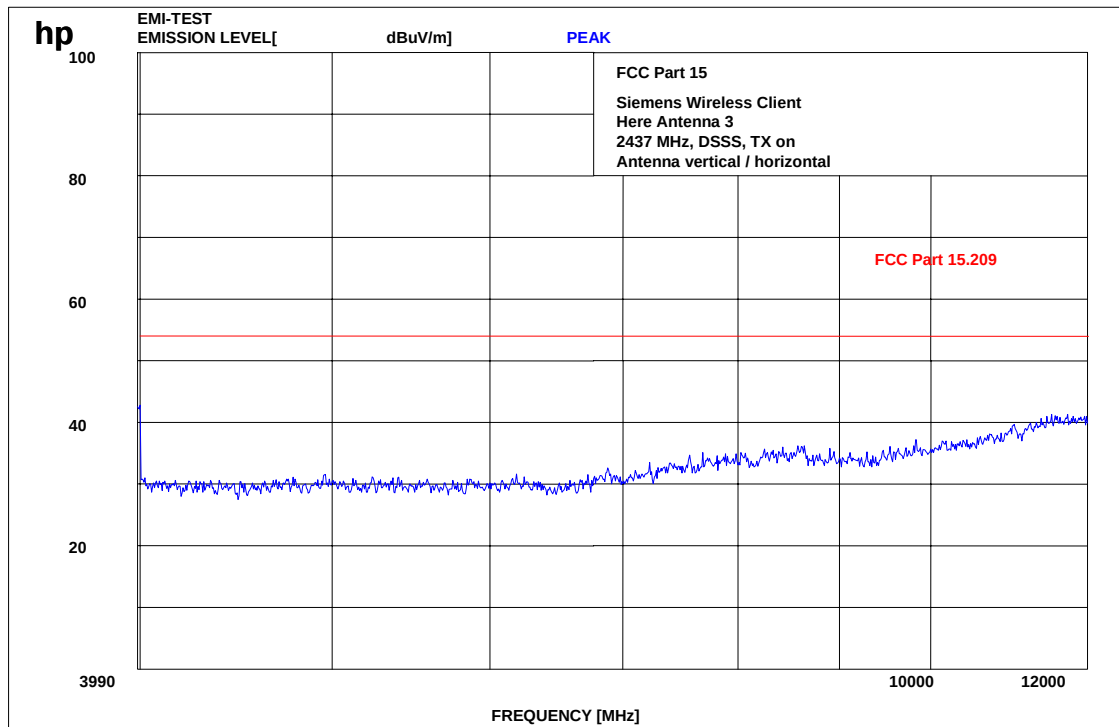

Plot 6: 0.03 - 4 GHz vertical / horizontal (highest channel)

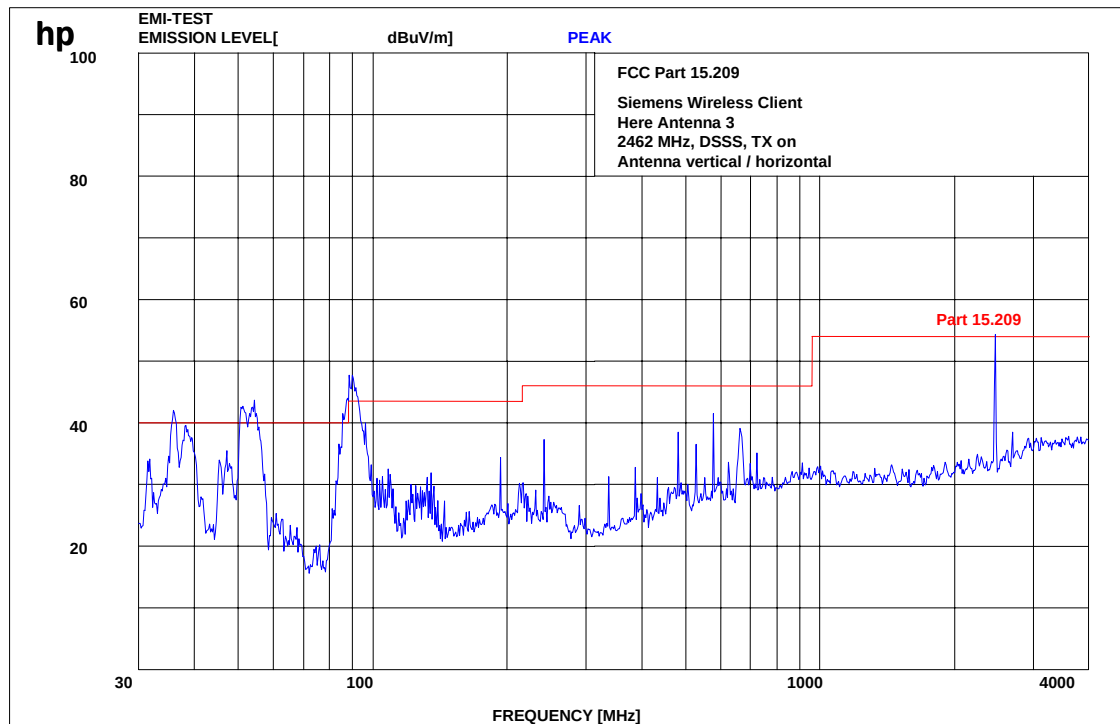

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04

Date:2005-01-19


Page 72 of 149

Plot 7: 4- 12 GHz (highest channel)

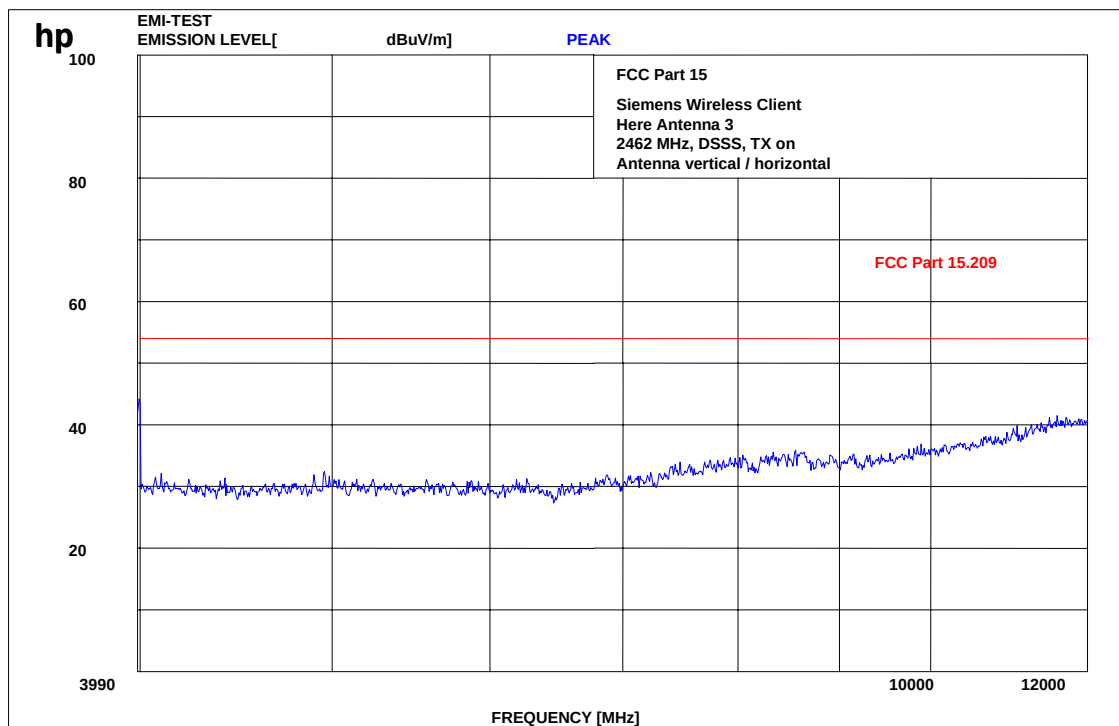

Antenna 4

Plot 1: 0.03 - 4 GHz vertical / horizontal (lowest channel)

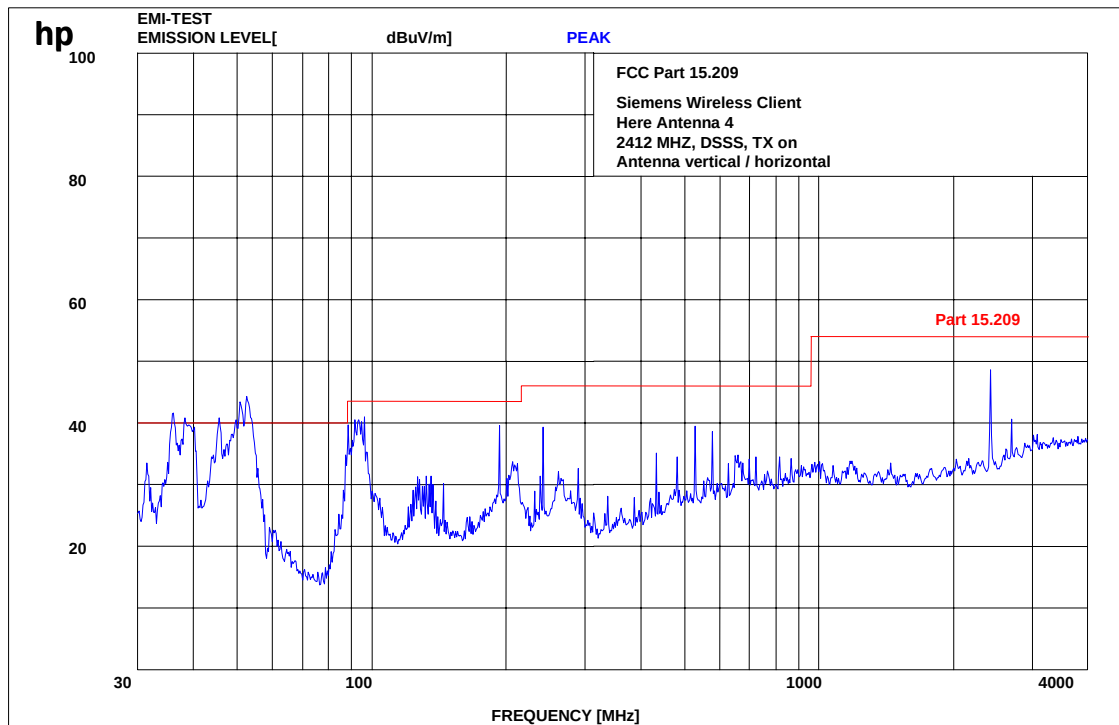

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04


Date:2005-01-19

Page 74 of 149


Plot 2: 4- 12 GHz (lowest channel)

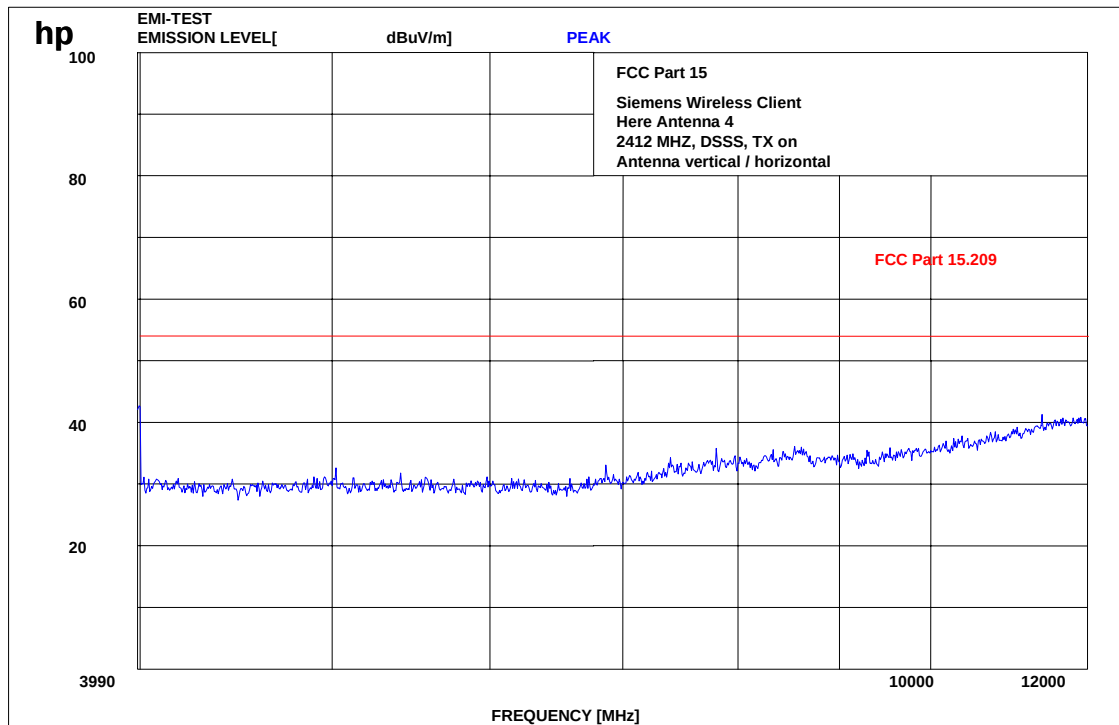

Plot 3: 12 – 25 GHz horizontal / vertical (valid for all three channels)

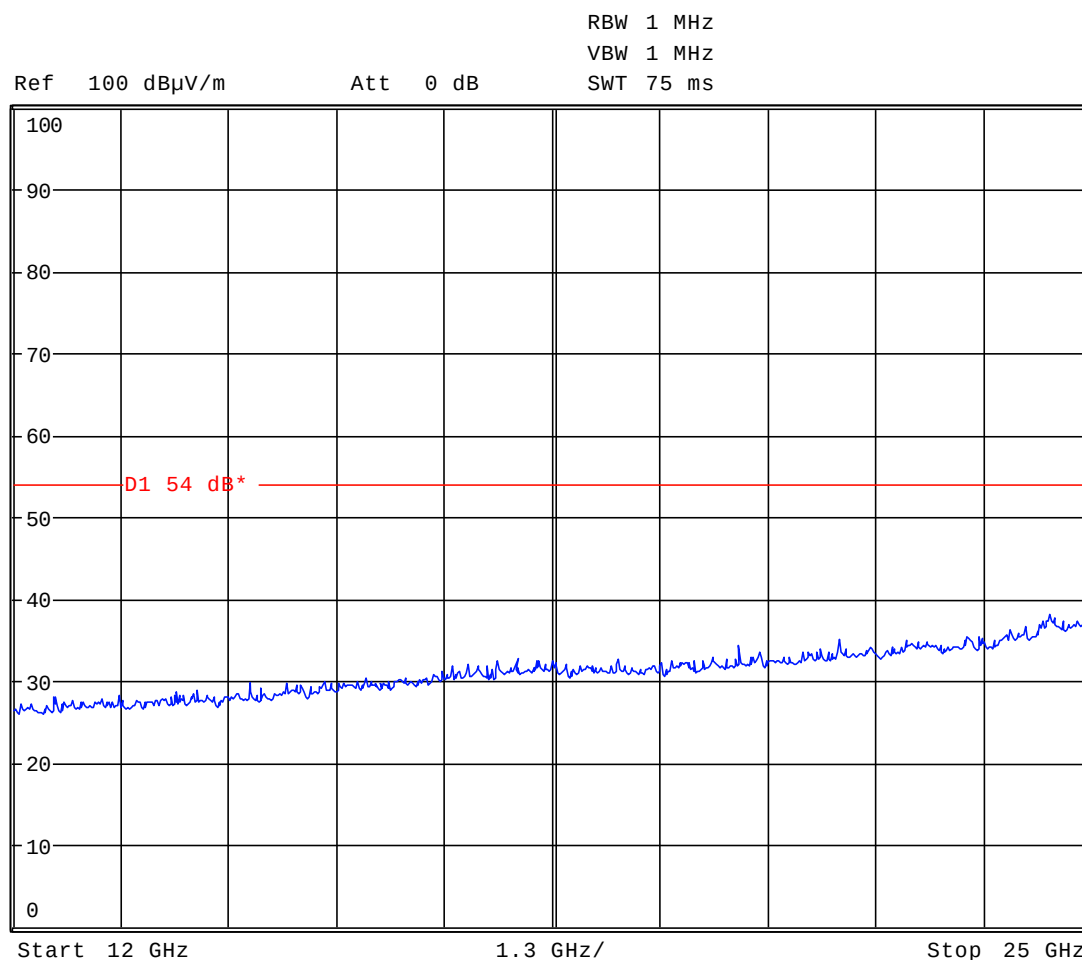

Plot 4: 0.03 - 4 GHz vertical / horizontal (middle channel)

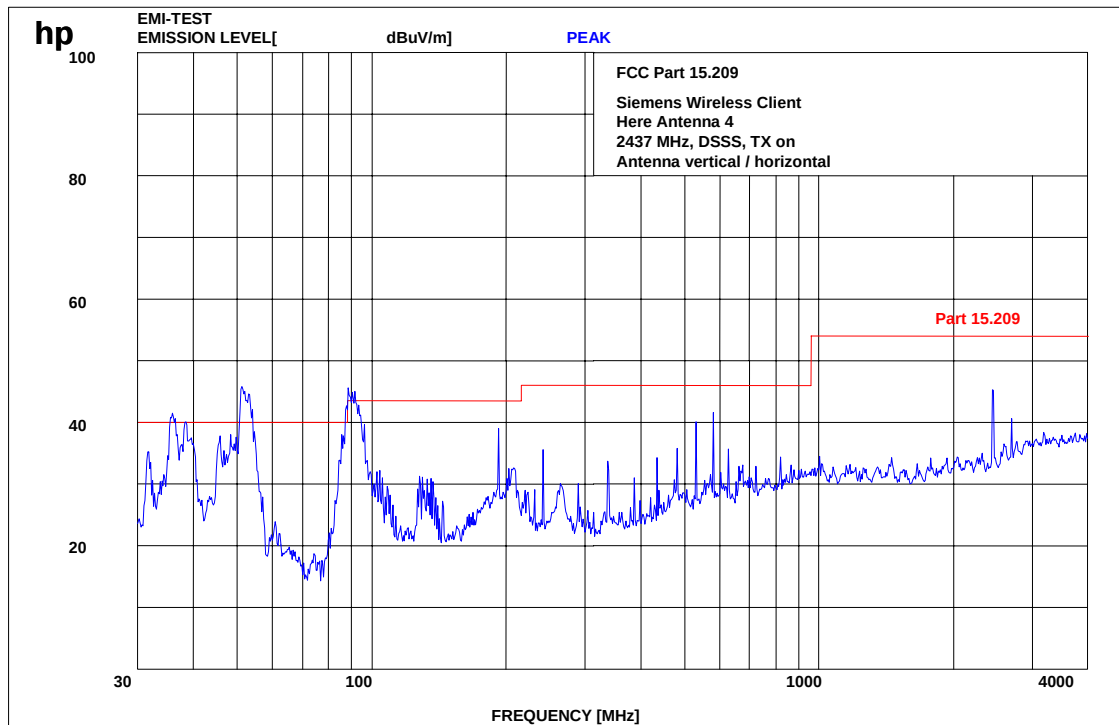

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04


Date:2005-01-19

Page 77 of 149

Plot 5: 4- 12 GHz (middle channel)

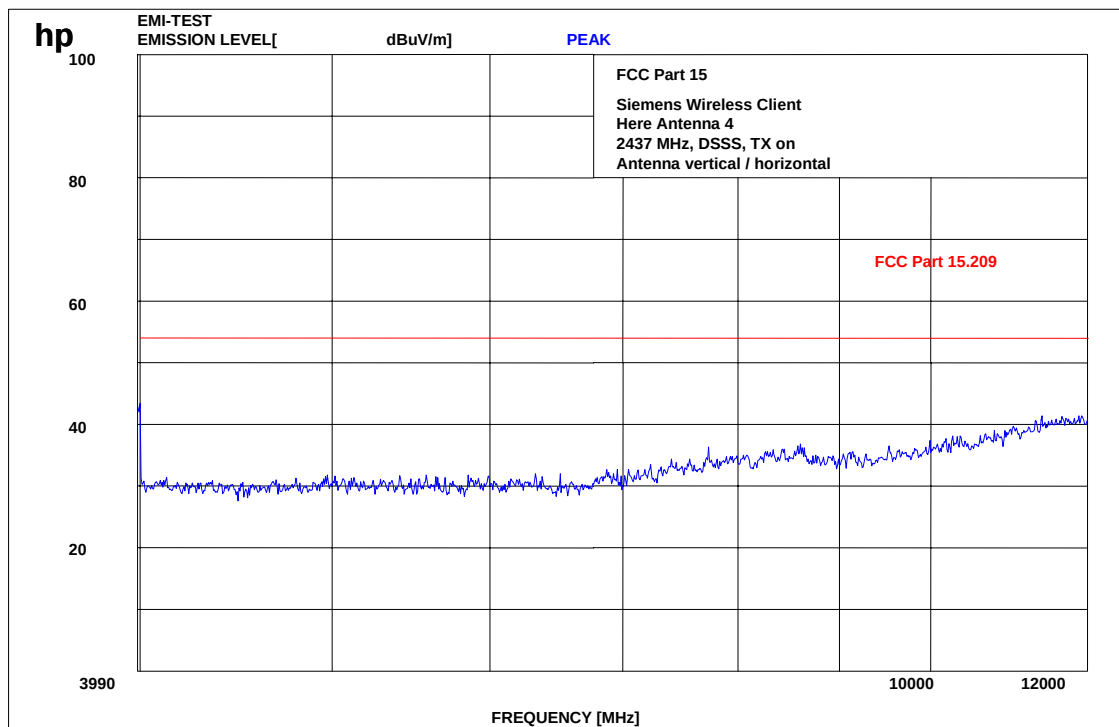

Plot 6: 0.03 - 4 GHz vertical / horizontal (highest channel)

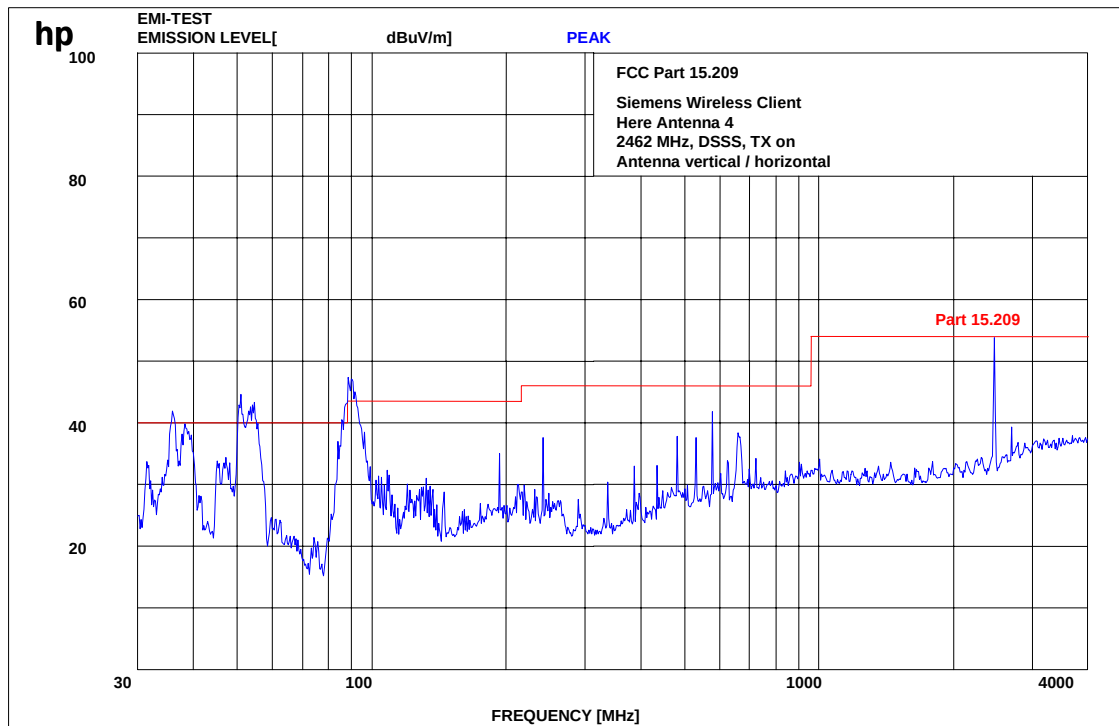

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04

Date:2005-01-19

Page 79 of 149

Plot 7: 4- 12 GHz (highest channel)

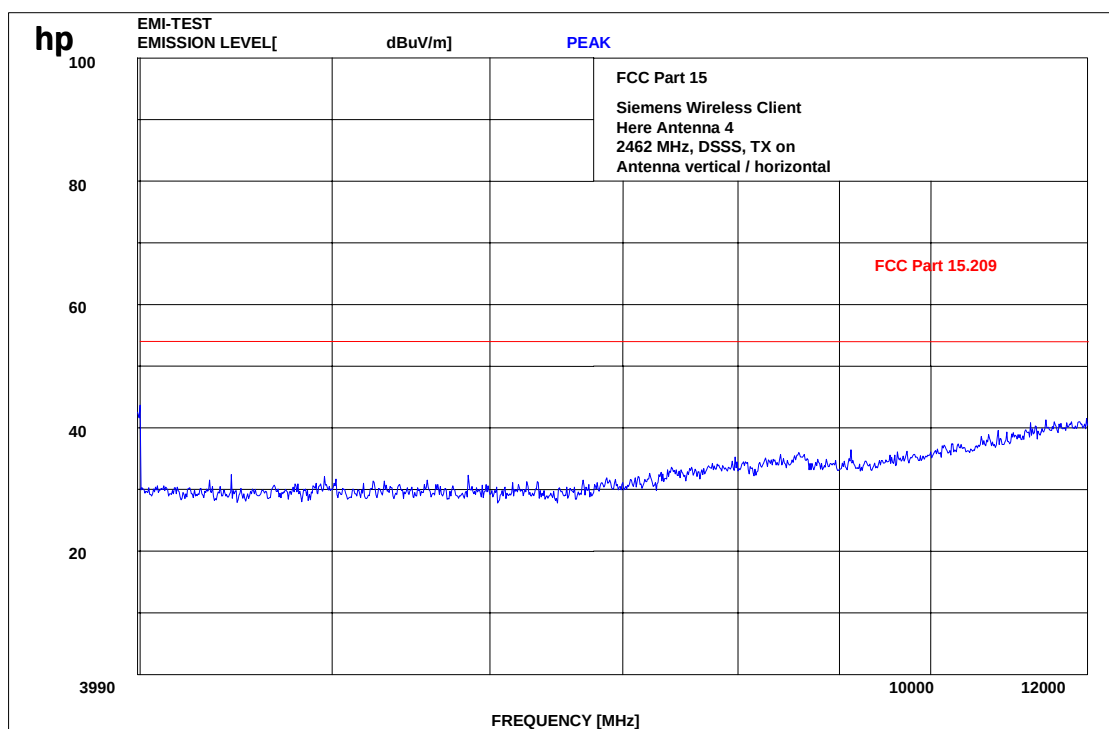

Results: (black line on the plots)

SPURIOUS EMISSIONS LEVEL §15.209								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
38.7	QP	35.3	38.7	QP	35.3	38.7	QP	35.3
42.0	QP	40.4	42.0	QP	40.4	42.0	QP	40.4
90.1	QP	33.7	90.1	QP	33.7	90.1	QP	33.7
142.3	QP	34.1	142.3	QP	34.1	142.3	QP	34.1
528.7	QP	41.8	528.7	QP	41.8	528.7	QP	41.8
624.3	QP	38.4	624.3	QP	38.4	624.3	QP	38.4
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

Limits: § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Limits: § 15.209


Frequency [MHz]	Field strength [µV/m]	Measurement distance (m)
30 - 88	100 (40 dBµV/m)	3
88 - 216	150 (43.5 dBµV/m)	3
216 - 960	200 (46 dBµV/m)	3
above 960	500 (54 dBµV/m)	3

3.14 Spurious Emissions - radiated (Transmitter) OFDM

§15.209

Antenna 1

Plot 1: 0.03 - 4 GHz vertical / horizontal (lowest channel)

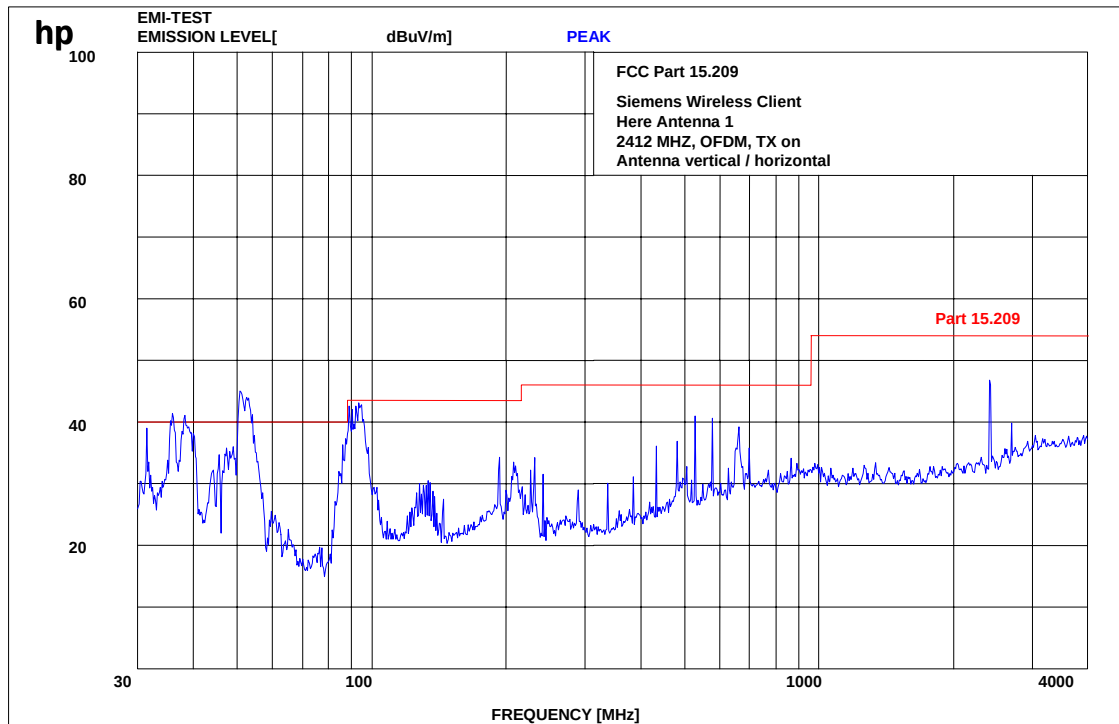

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04


Date:2005-01-19

Page 82 of 149


Plot 2: 4- 12 GHz (lowest channel)

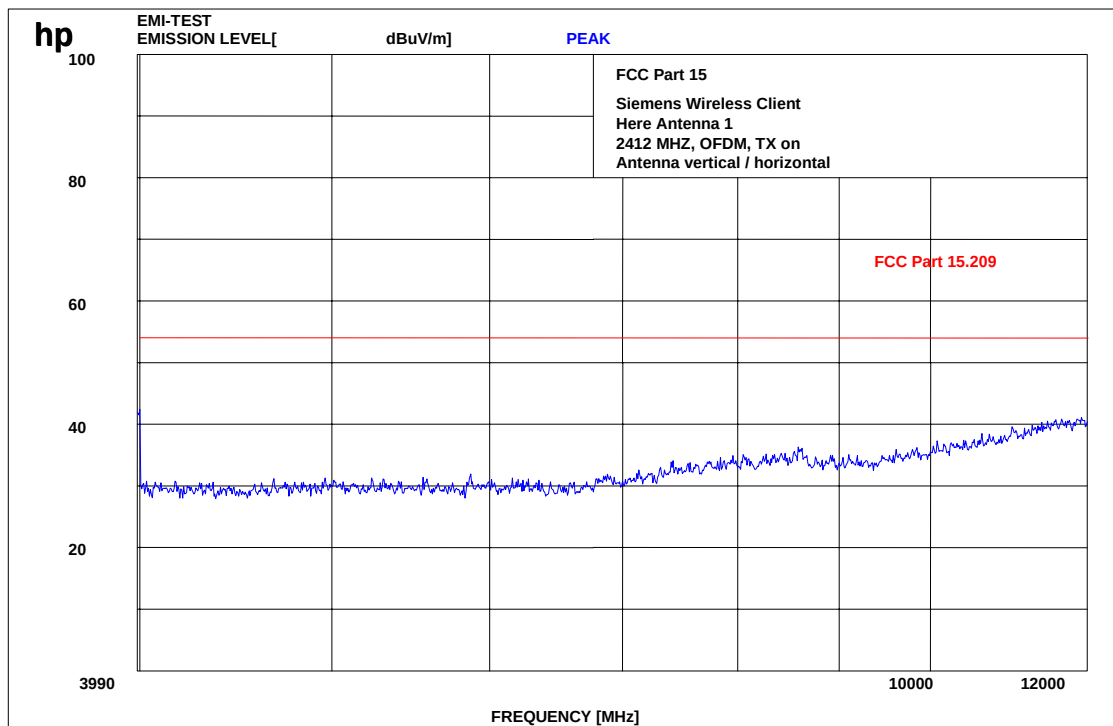

Plot 3: 12 – 25 GHz horizontal / vertical (valid for all three channels)

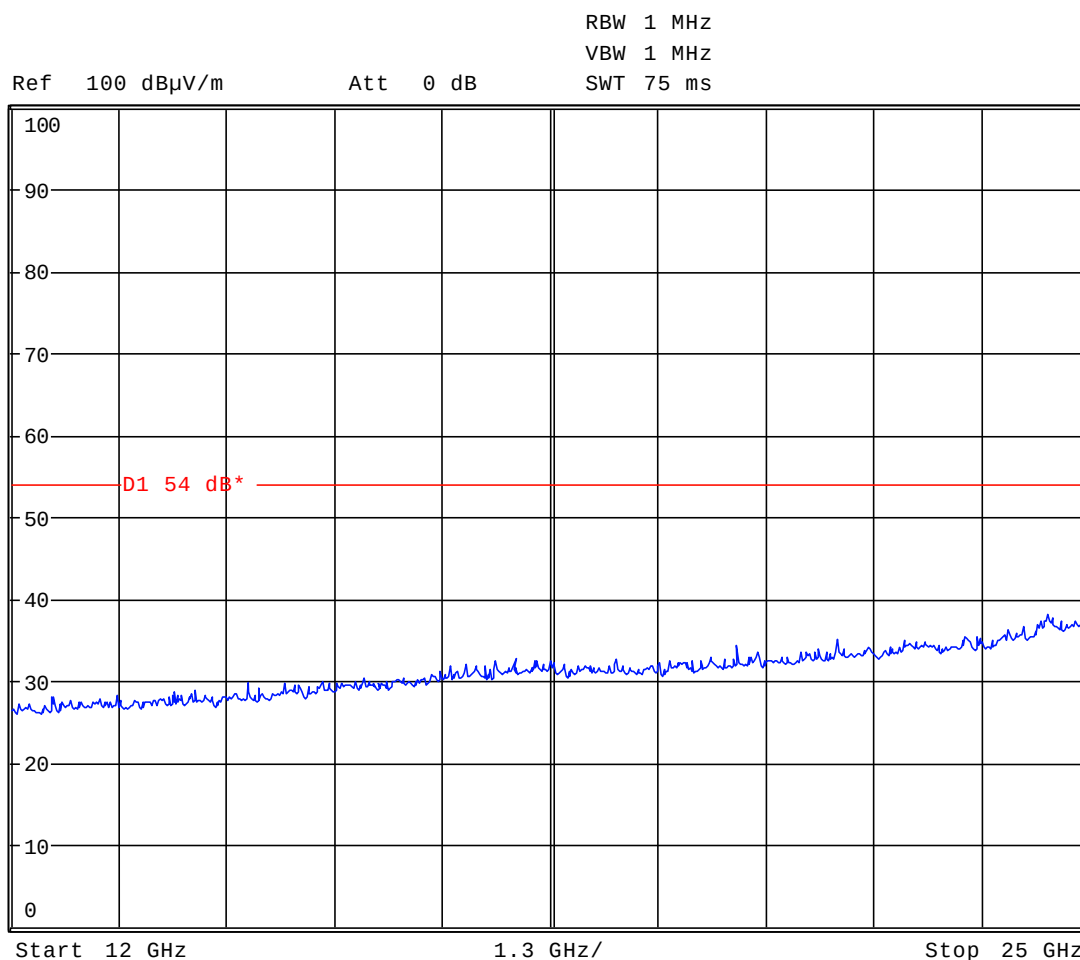


Plot 4: 0.03 - 4 GHz vertical / horizontal (middle channel)

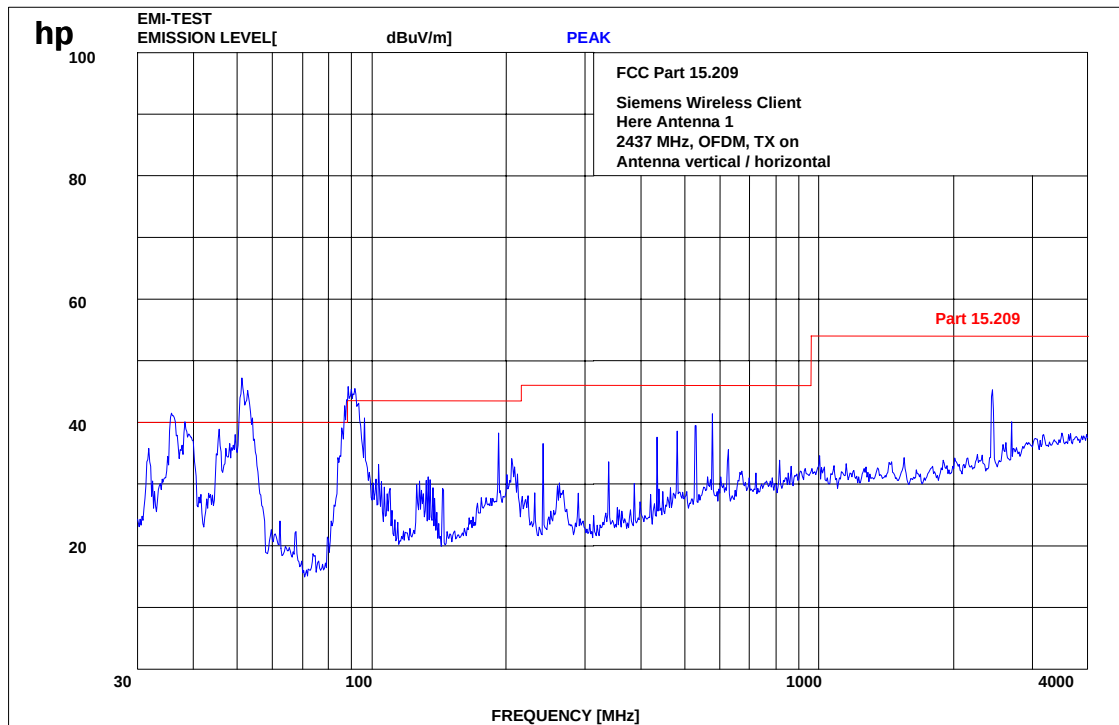


Carrier suppressed with a tunable filter to avoid overload of the preamp.

Plot 5: 4- 12 GHz (middle channel)

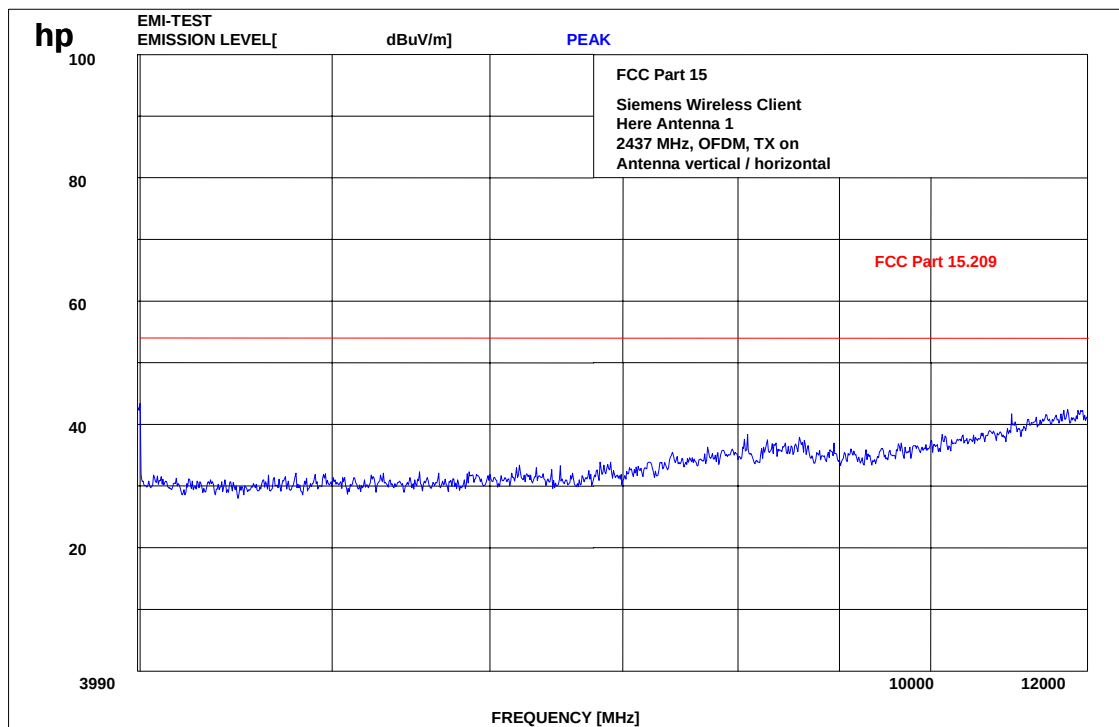

Plot 6: 0.03 - 4 GHz vertical / horizontal (highest channel)

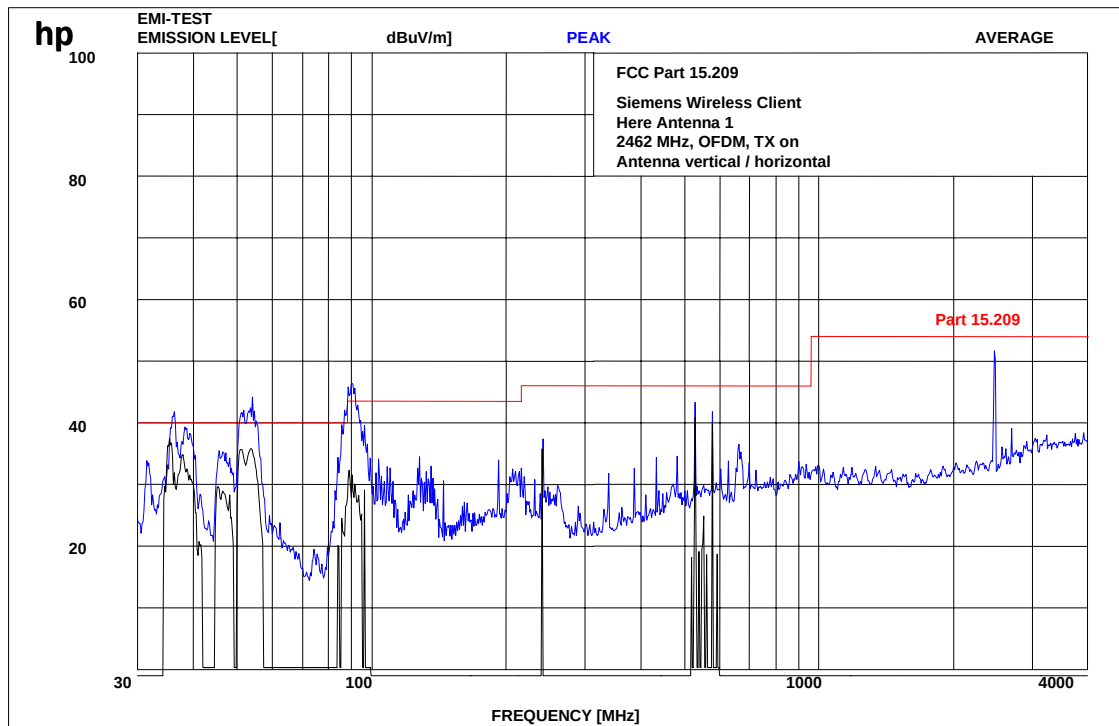

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04

Date:2005-01-19


Page 87 of 149

Plot 7: 4- 12 GHz (highest channel)

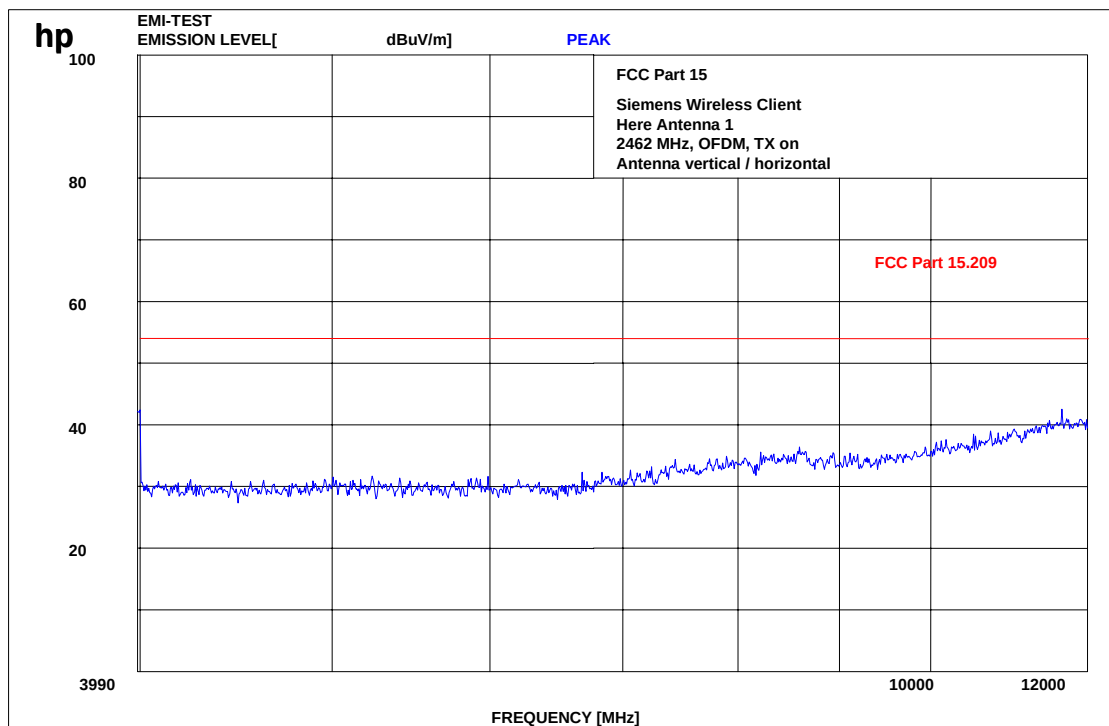

Antenna 2

Plot 1: 0.03 - 4 GHz vertical / horizontal (lowest channel)

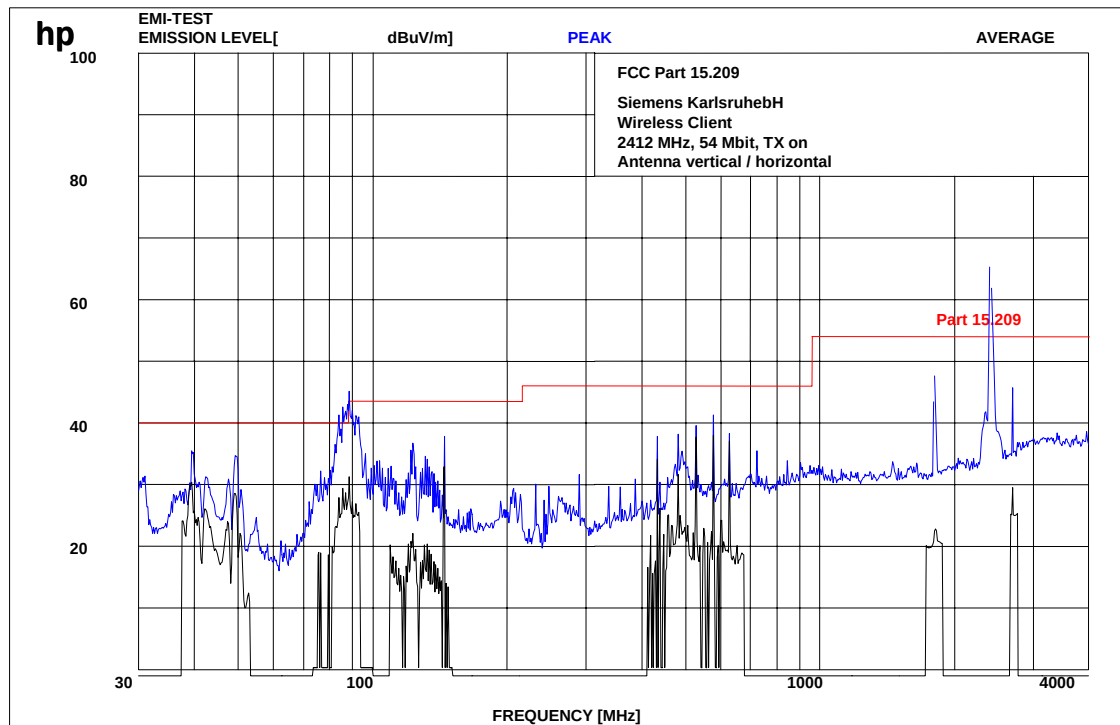

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04


Date:2005-01-19

Page 89 of 149


Plot 2: 4- 12 GHz (lowest channel)

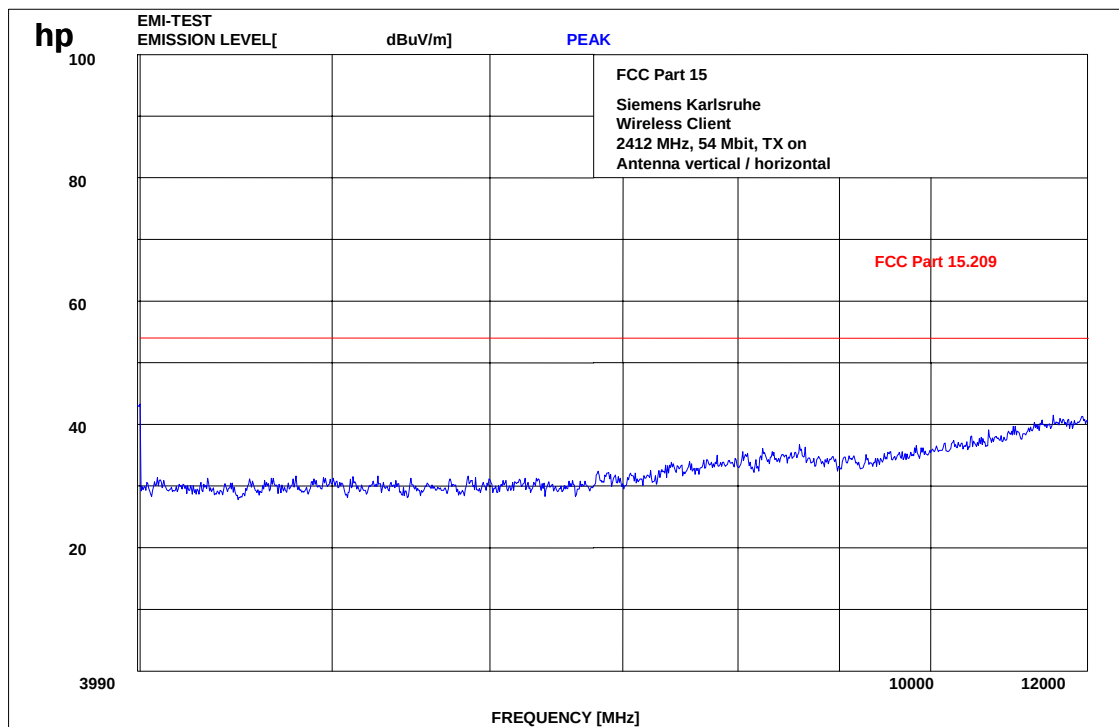

Plot 3: 12 – 25 GHz horizontal / vertical (valid for all three channels)

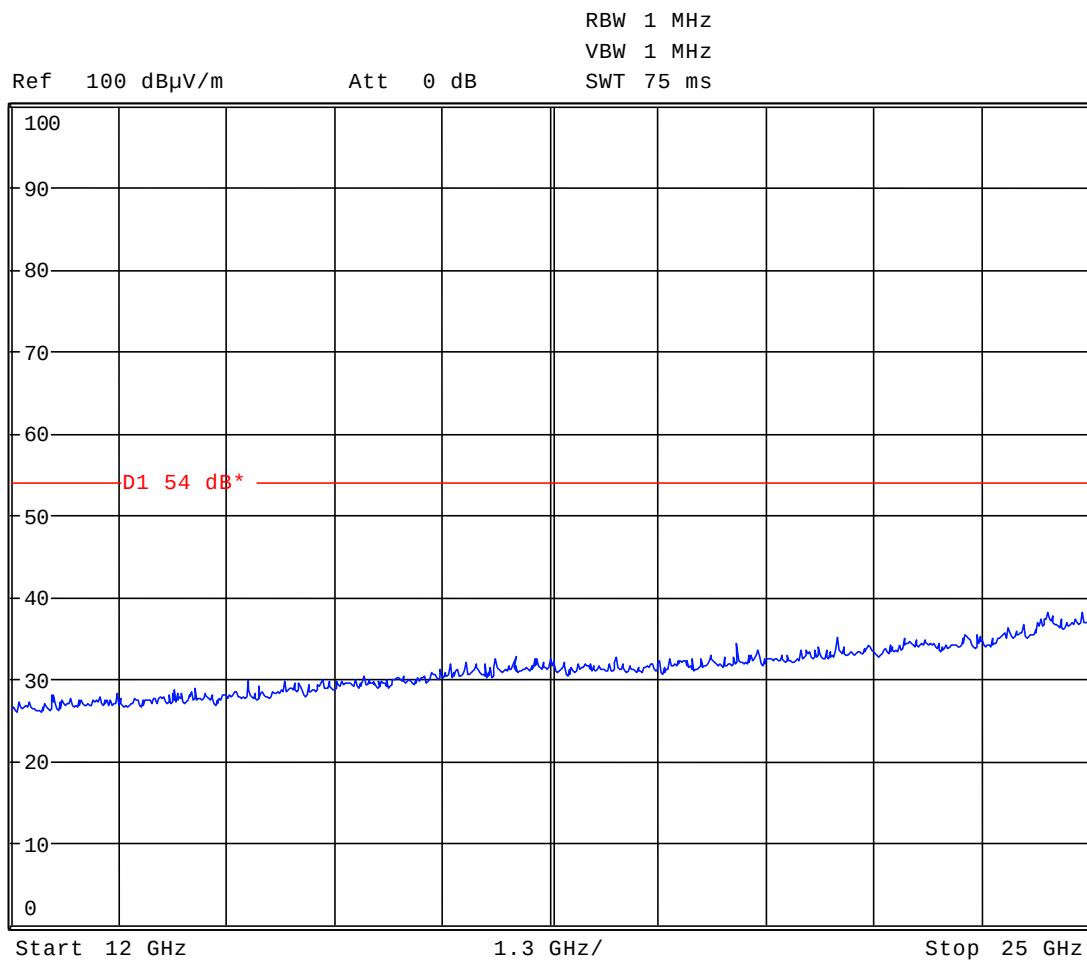

Plot 4: 0.03 - 4 GHz vertical / horizontal (middle channel)

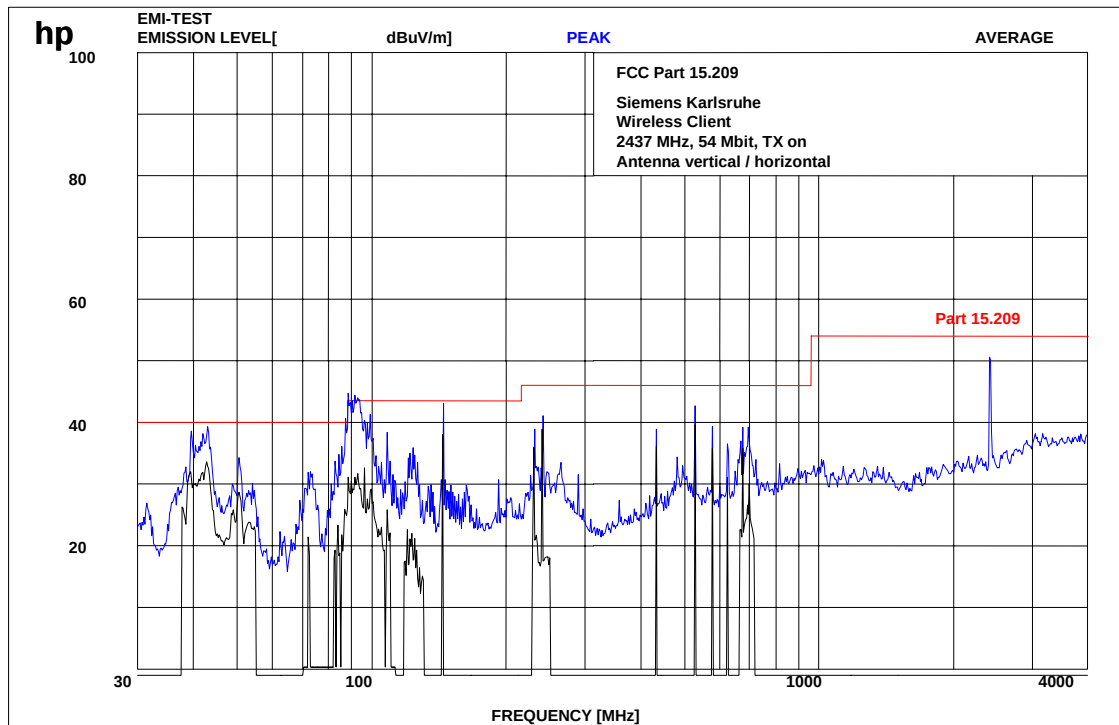

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04


Date:2005-01-19

Page 92 of 149

Plot 5: 4- 12 GHz (middle channel)

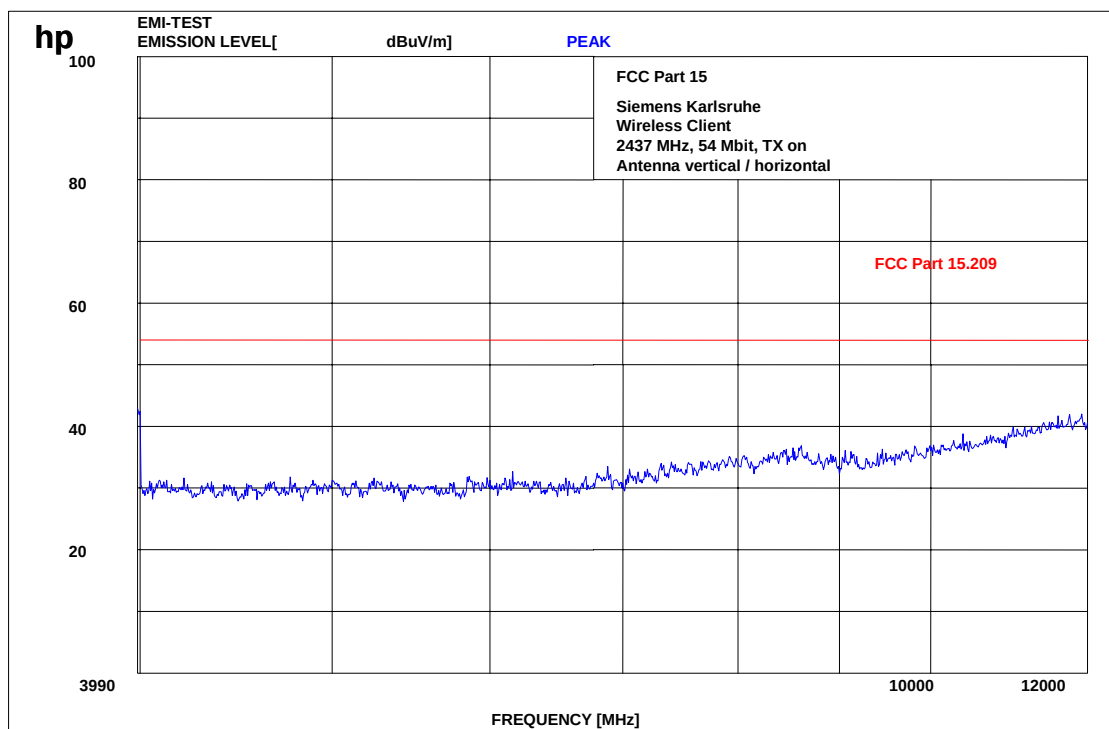


Plot 6: 0.03 - 4 GHz vertical / horizontal (highest channel)

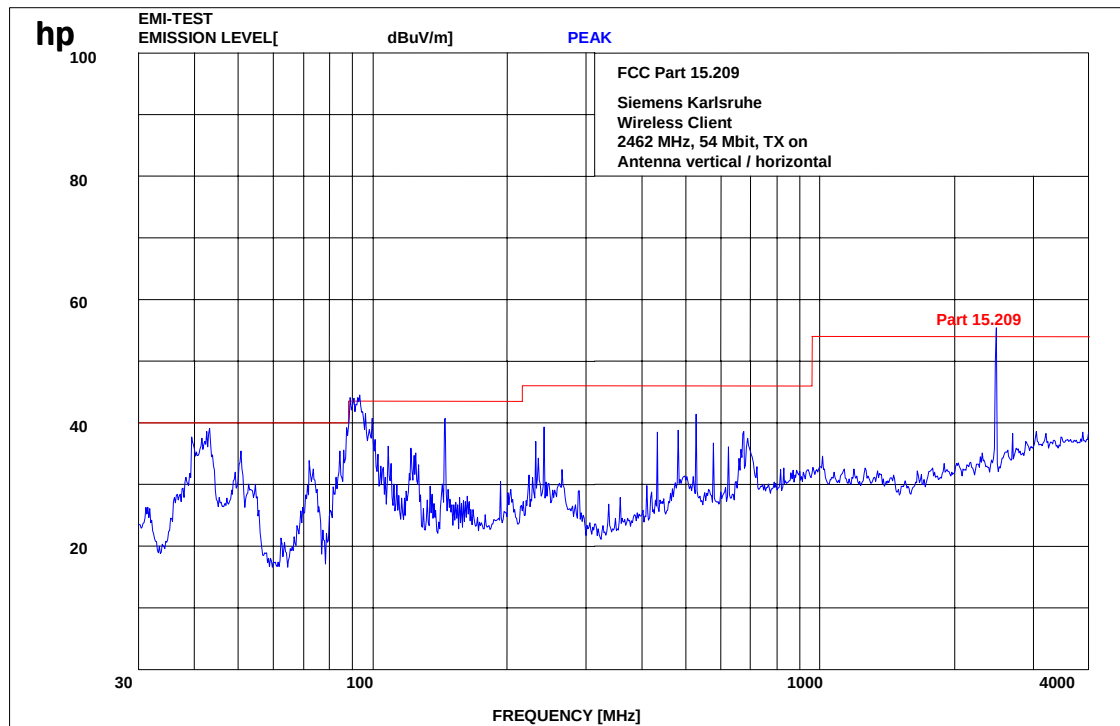


Carrier suppressed with a tunable filter to avoid overload of the preamp.

Plot 7: 4- 12 GHz (highest channel)

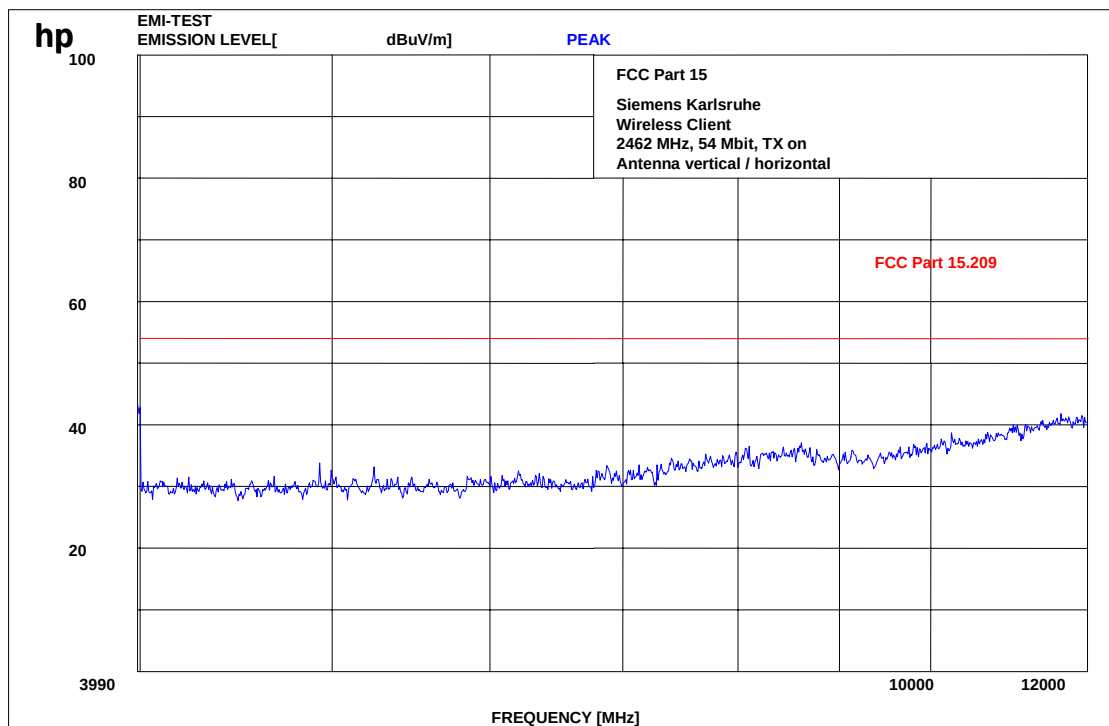

Antenna 3

Plot 1: 0.03 - 4 GHz vertical / horizontal (lowest channel)

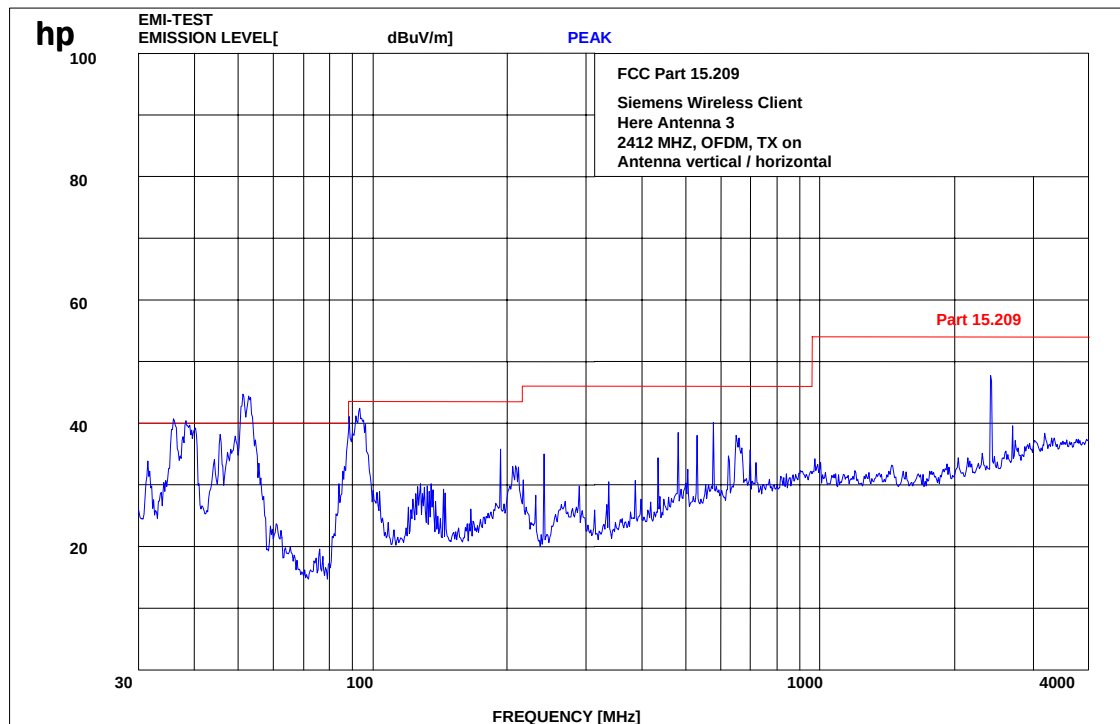

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04


Date:2005-01-19

Page 96 of 149


Plot 2: 4- 12 GHz (lowest channel)

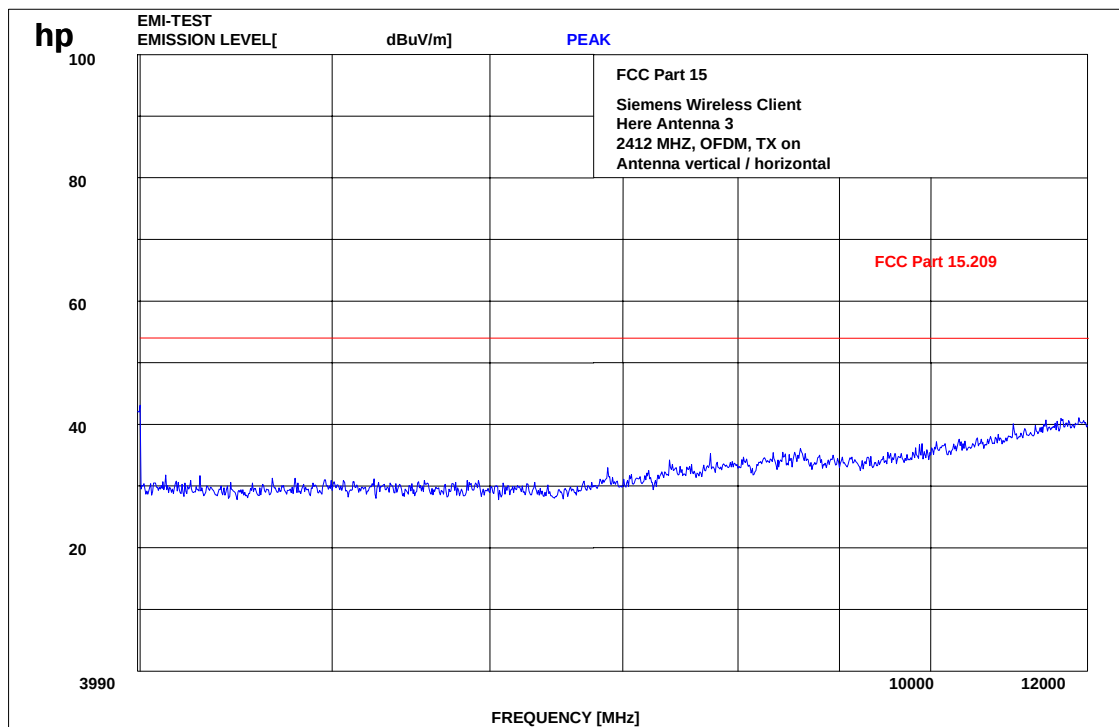

Plot 3: 12 – 25 GHz horizontal / vertical (valid for all three channels)

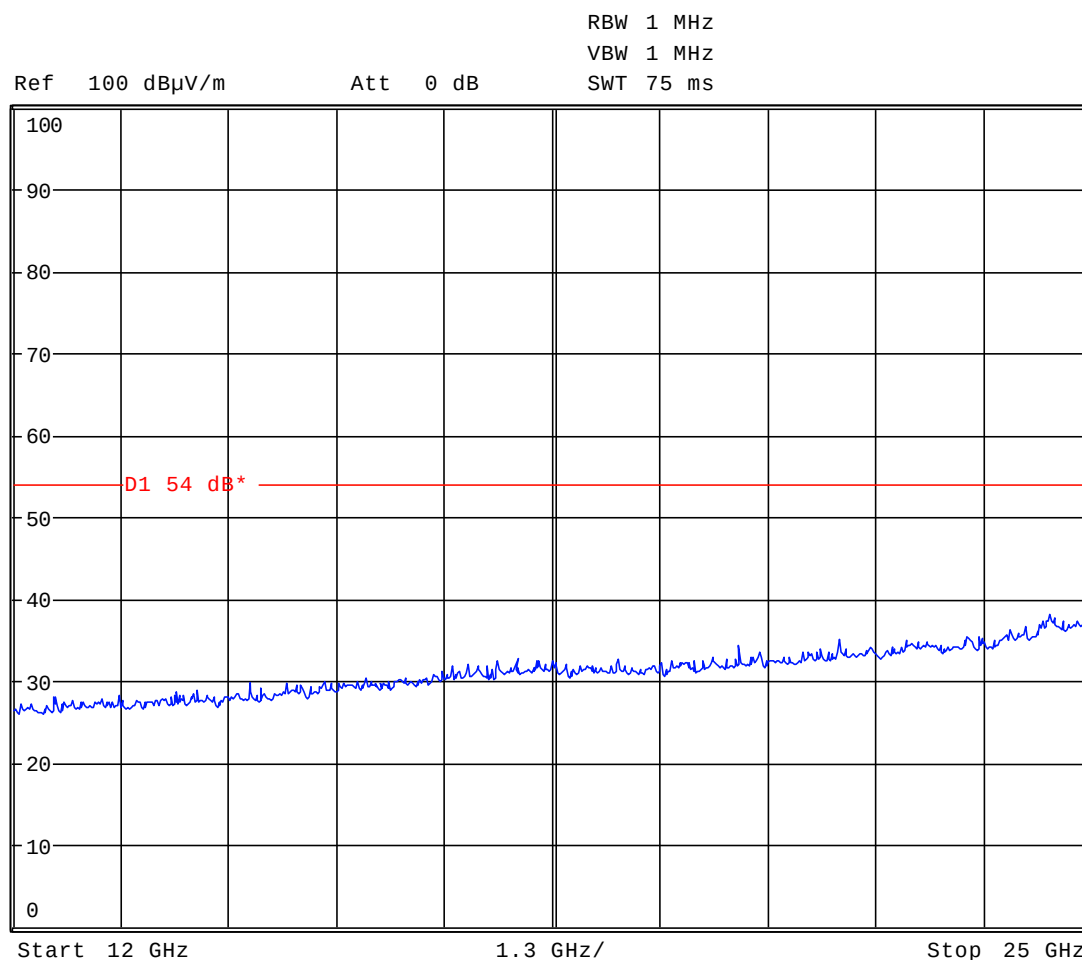

Plot 4: 0.03 - 4 GHz vertical / horizontal (middle channel)

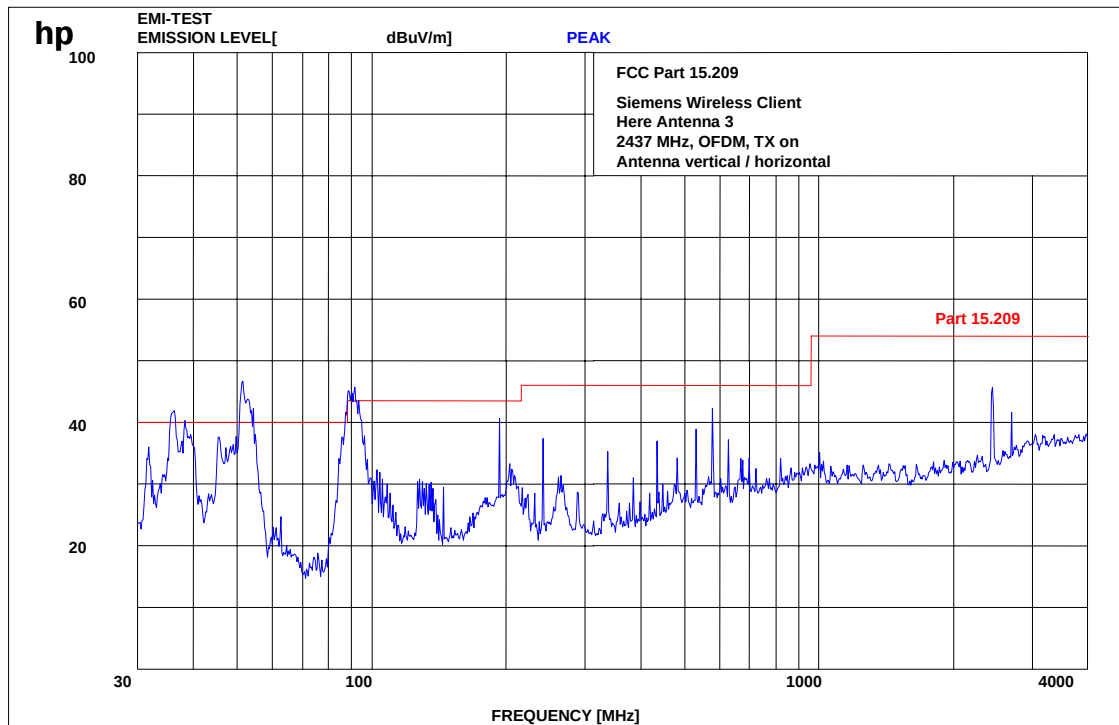

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04


Date:2005-01-19

Page 99 of 149

Plot 5: 4- 12 GHz (middle channel)

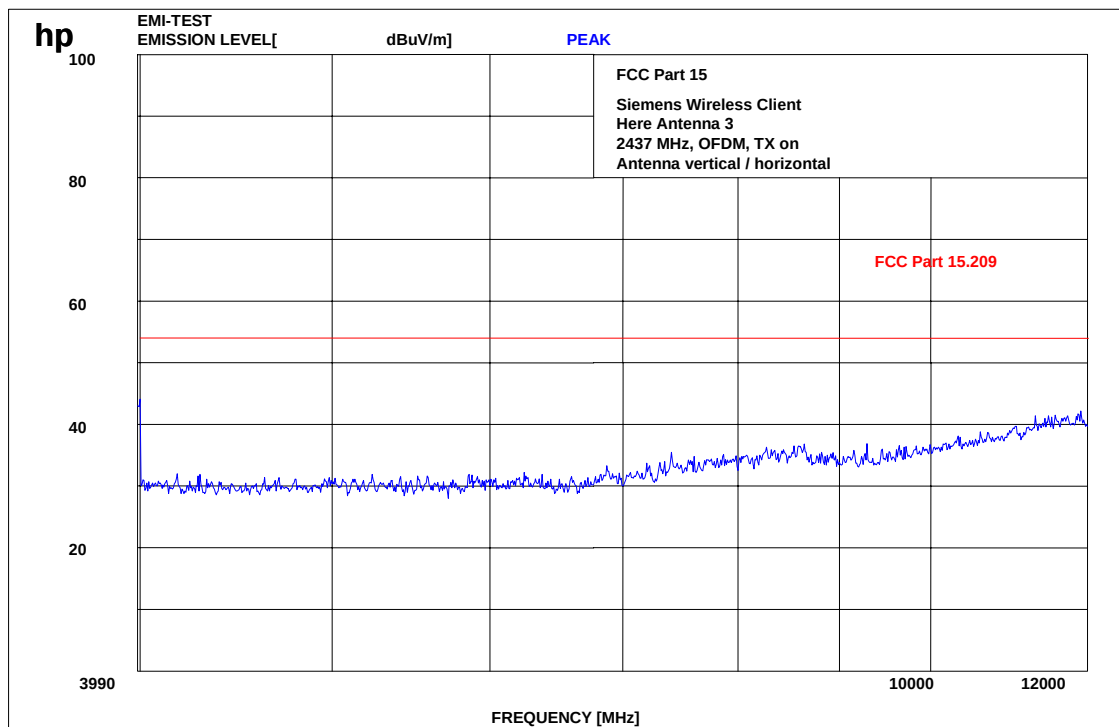

Plot 6: 0.03 - 4 GHz vertical / horizontal (highest channel)

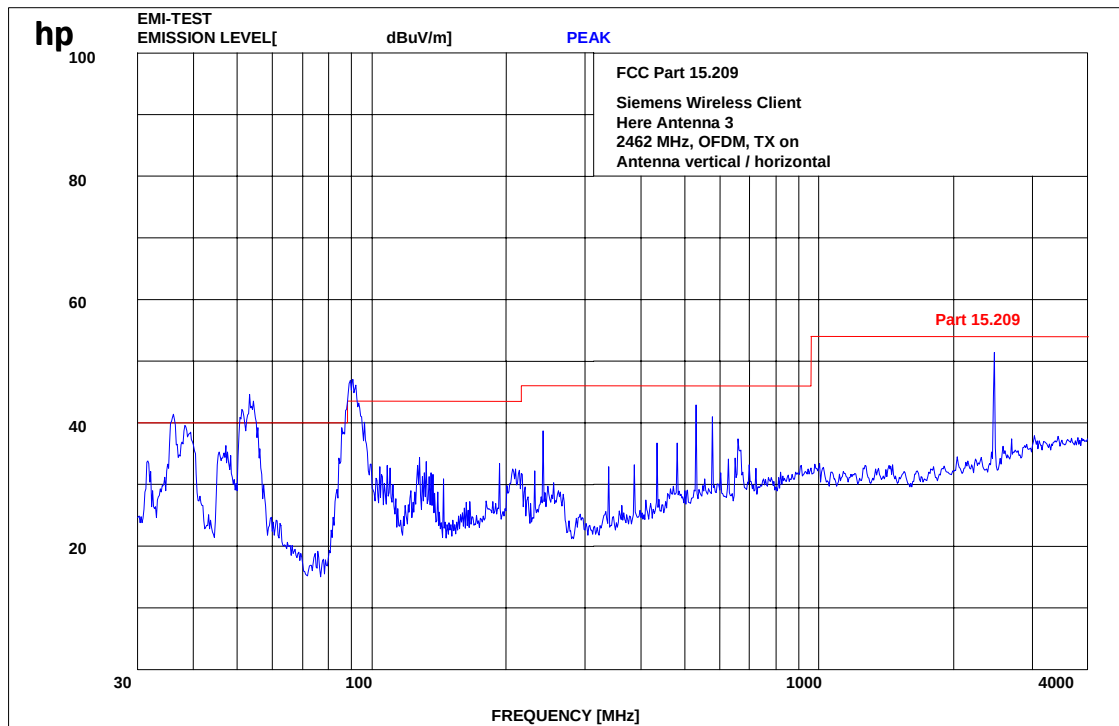

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04

Date:2005-01-19


Page 101 of 149

Plot 7: 4- 12 GHz (highest channel)

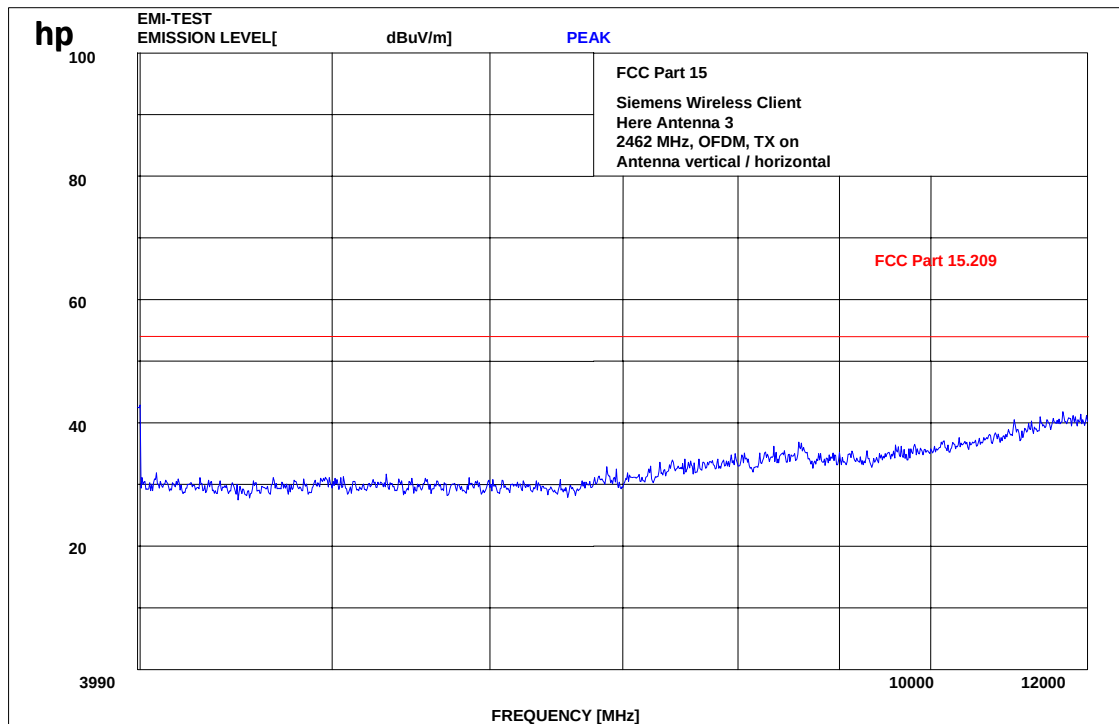

Antenna 4

Plot 1: 0.03 - 4 GHz vertical / horizontal (lowest channel)

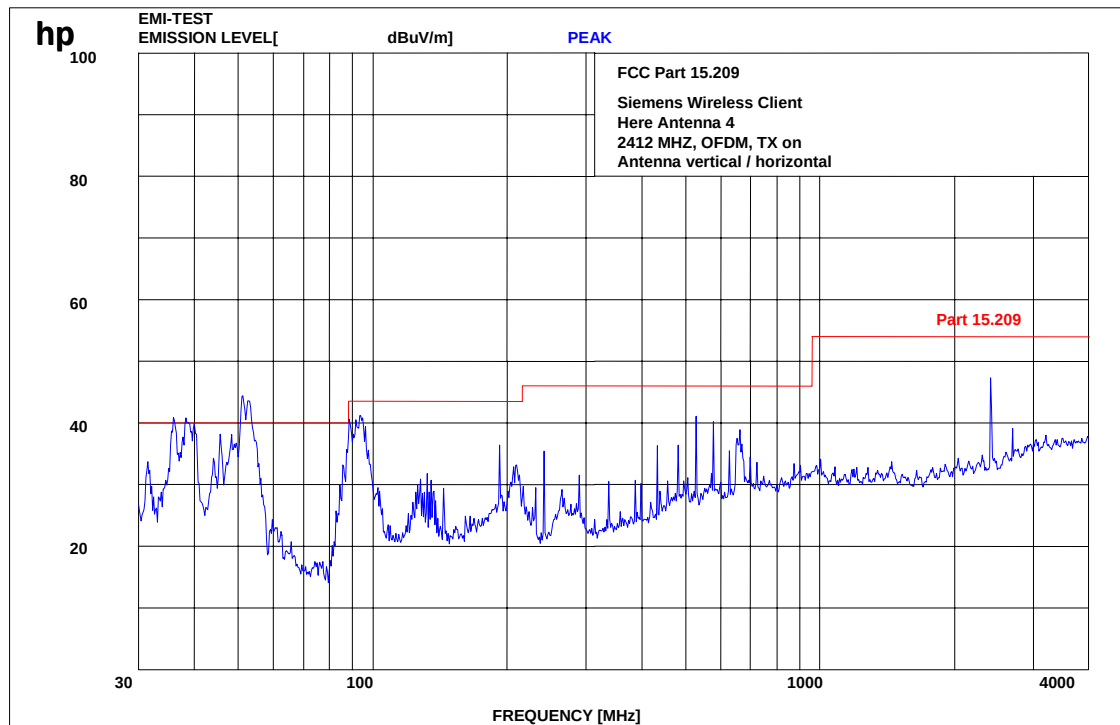

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04


Date:2005-01-19

Page 103 of 149


Plot 2: 4- 12 GHz (lowest channel)

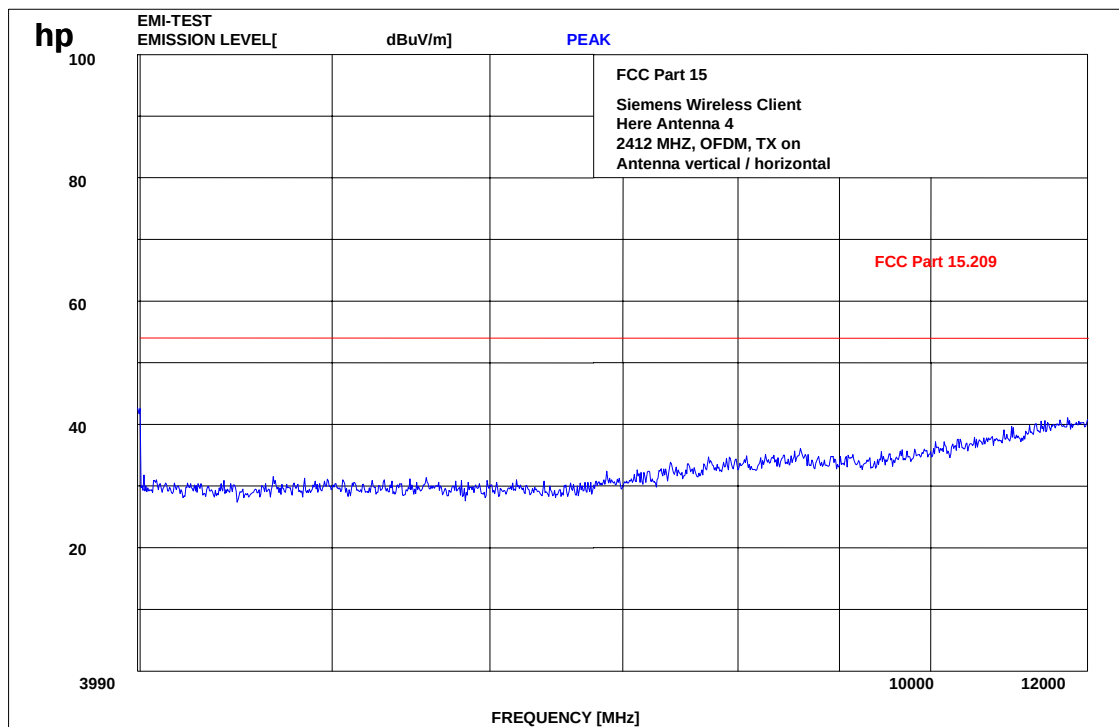

Plot 3: 12 – 25 GHz horizontal / vertical (valid for all three channels)

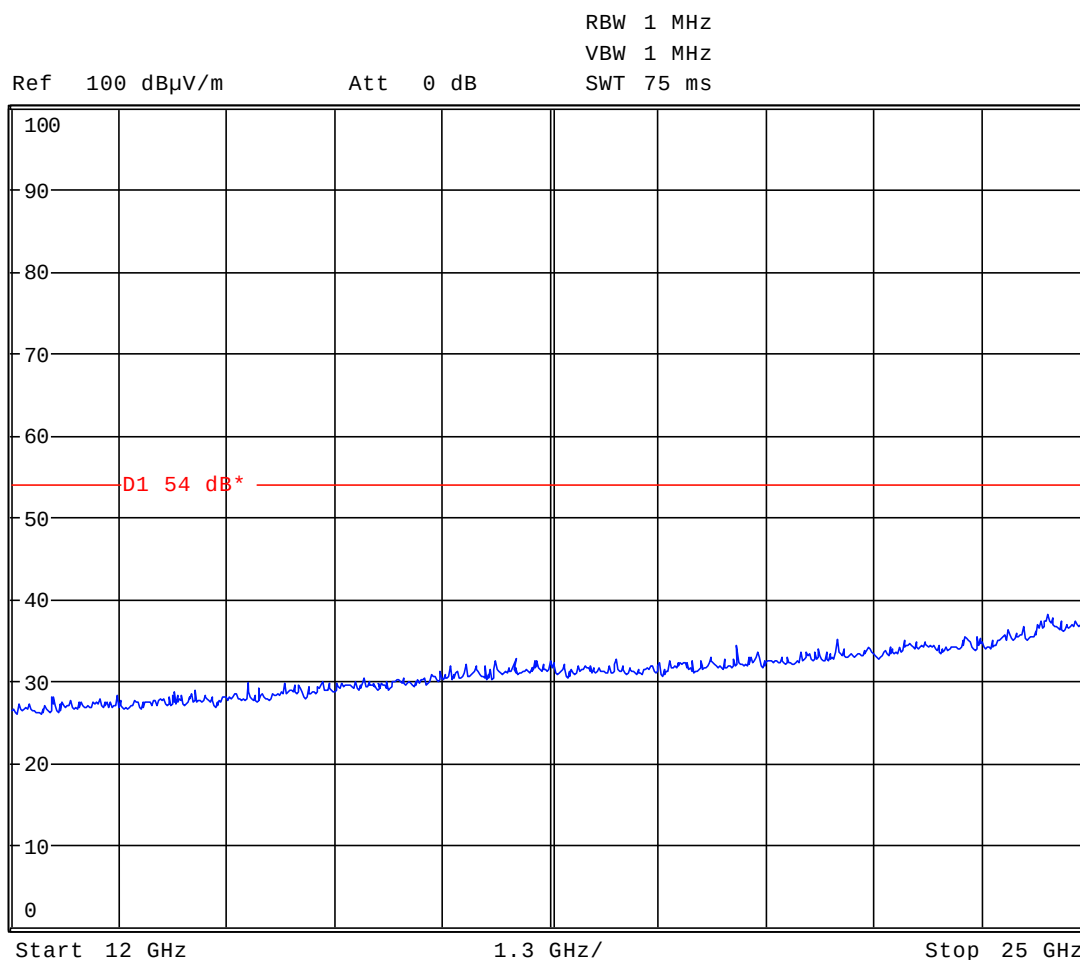

Plot 4: 0.03 - 4 GHz vertical / horizontal (middle channel)

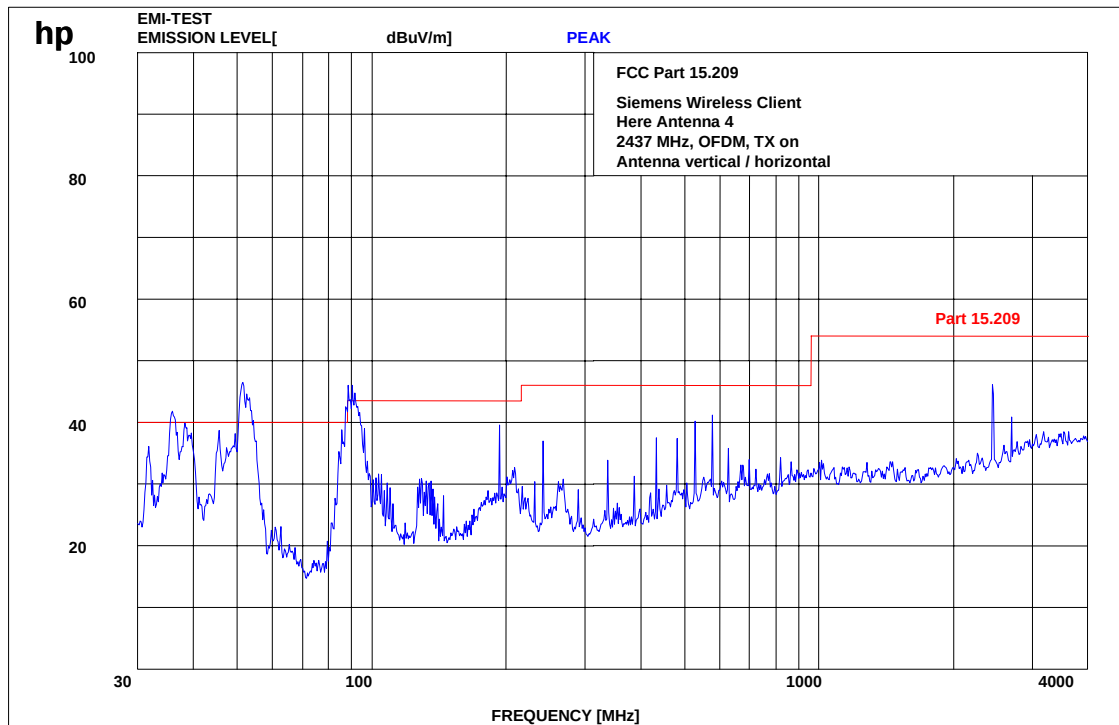

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04


Date:2005-01-19

Page 106 of 149

Plot 5: 4- 12 GHz (middle channel)

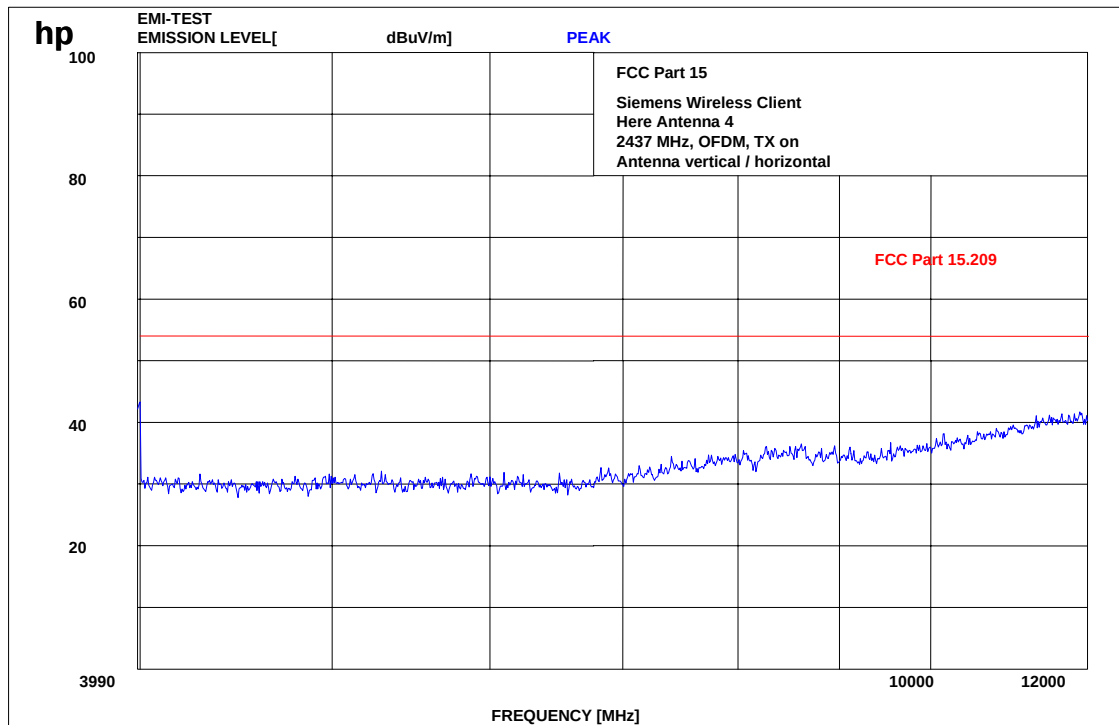

Plot 6: 0.03 - 4 GHz vertical / horizontal (highest channel)

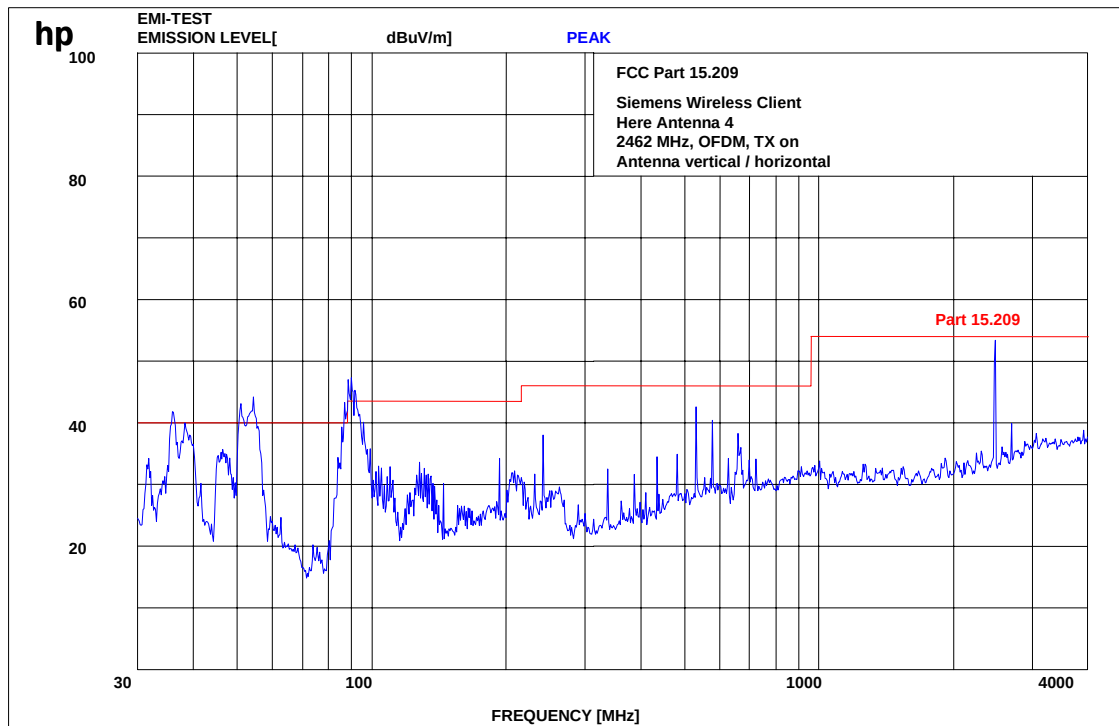

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04

Date:2005-01-19

Page 108 of 149

Plot 7: 4- 12 GHz (highest channel)

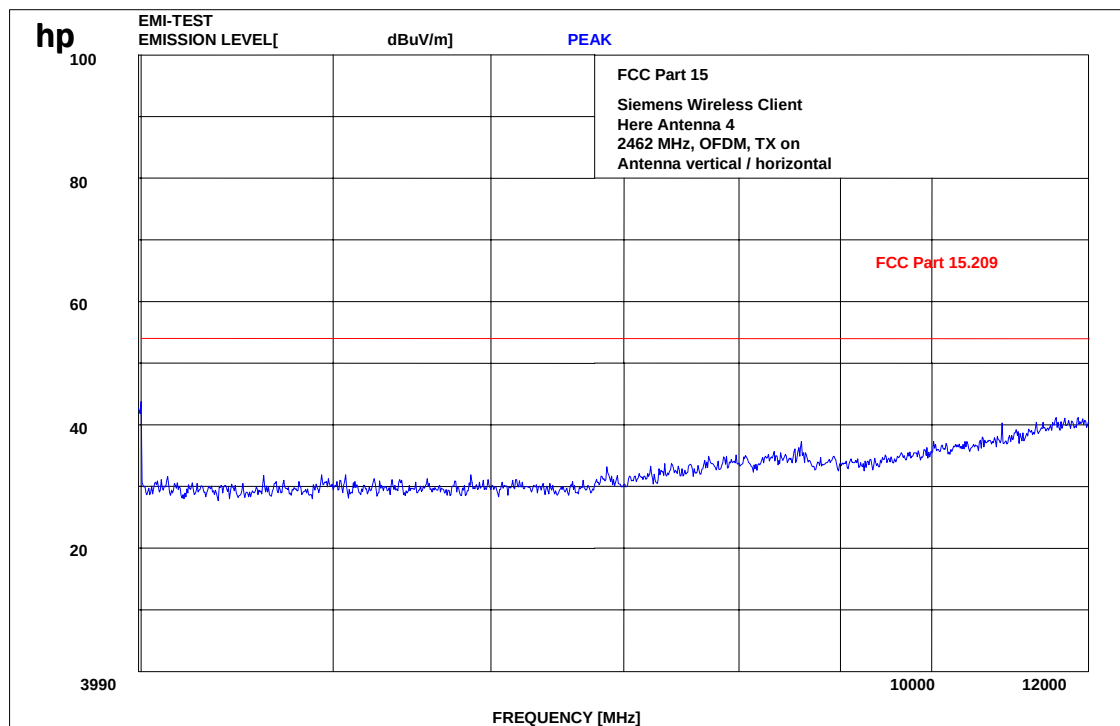

Results: (black line on the plots)

SPURIOUS EMISSIONS LEVEL §15.209								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
42.0	QP	32.6	42.0	QP	32.6	42.0	QP	32.6
90.1	QP	32.6	90.1	QP	32.6	90.1	QP	32.6
144.0	QP	38.0	144.0	QP	38.0	144.0	QP	38.0
230.3	QP	38.9	230.3	QP	38.9	230.3	QP	38.9
432.7	QP	36.1	432.7	QP	36.1	432.7	QP	36.1
528.7	QP	39.6	528.7	QP	39.6	528.7	QP	39.6
624.3	QP	31.1	624.3	QP	31.1	624.3	QP	31.1
675.0	QP	35.8	675.0	QP	35.8	675.0	QP	35.8
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

Limits: § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Limits: § 15.209

Frequency [MHz]	Field strength [µV/m]	Measurement distance (m)
30 - 88	100 (40 dBµV/m)	3
88 - 216	150 (43.5 dBµV/m)	3
216 - 960	200 (46 dBµV/m)	3
above 960	500 (54 dBµV/m)	3


3.15 Spurious Emissions - radiated Receiver

§15.109 / 209

DSSS and OFDM mode, no difference in result

Measurements were made with antenna 2 (worst case because of highest gain)

Plot 1: 0.03 - 4 GHz vertical / horizontal (receiver)

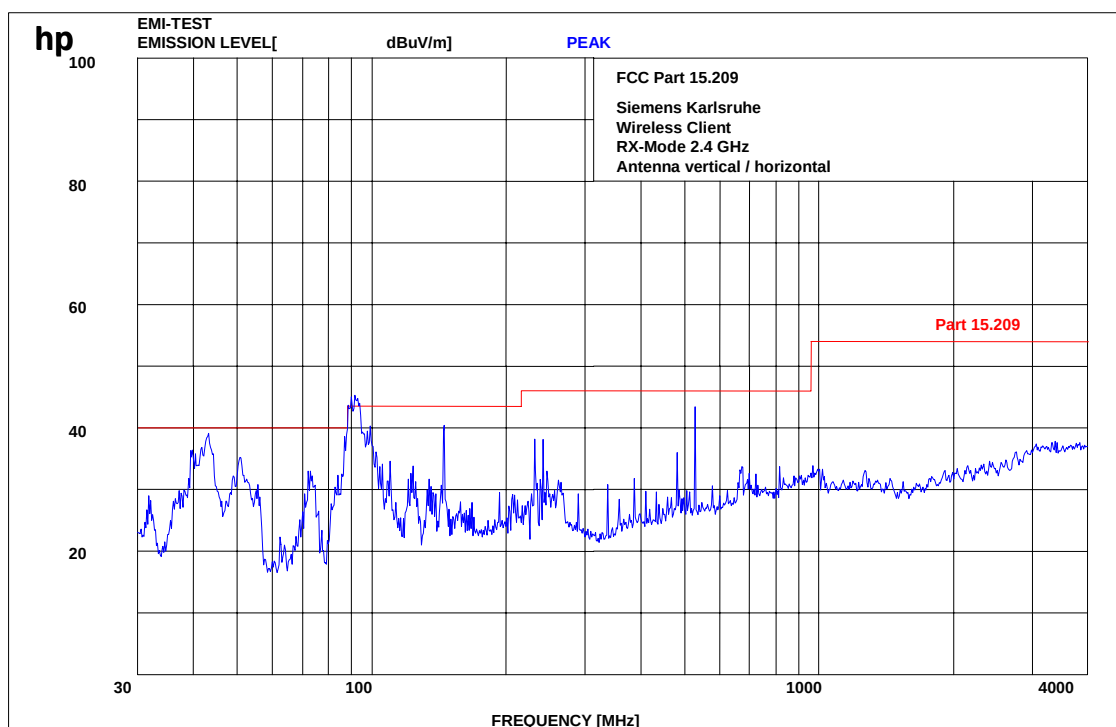

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04

Date:2005-01-19

Page 111 of 149

Plot 2: 4- 12 GHz (receiver)

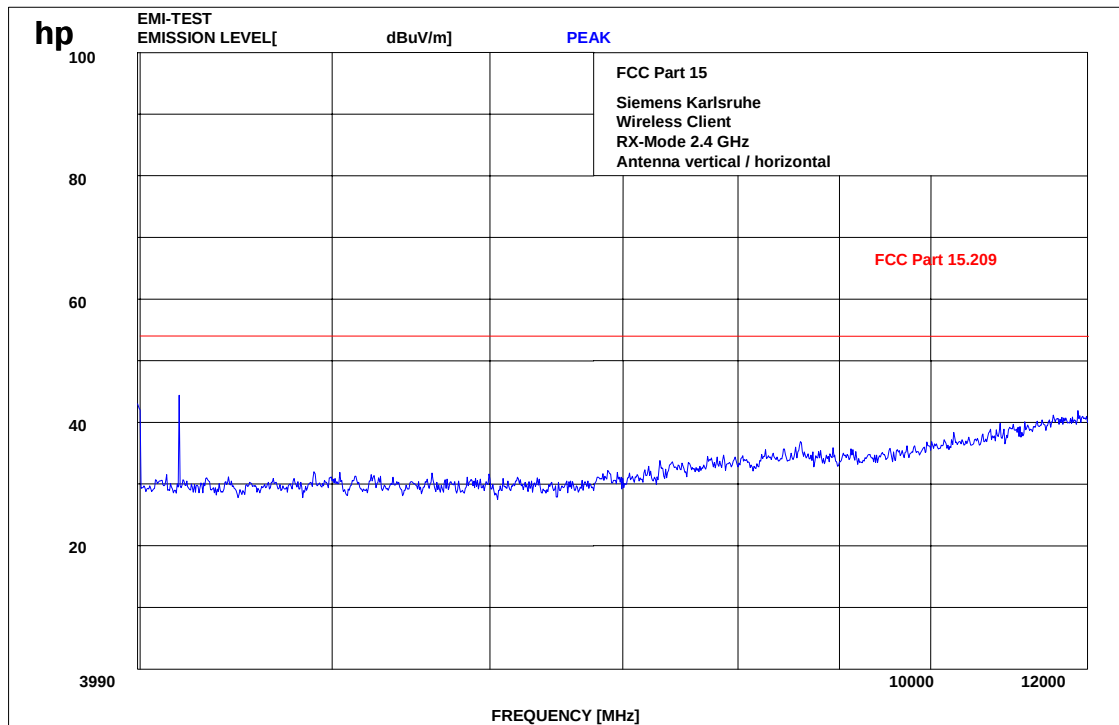

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04

Date:2005-01-19

Page 112 of 149

Plot 3: 12- 25 GHz (receiver)

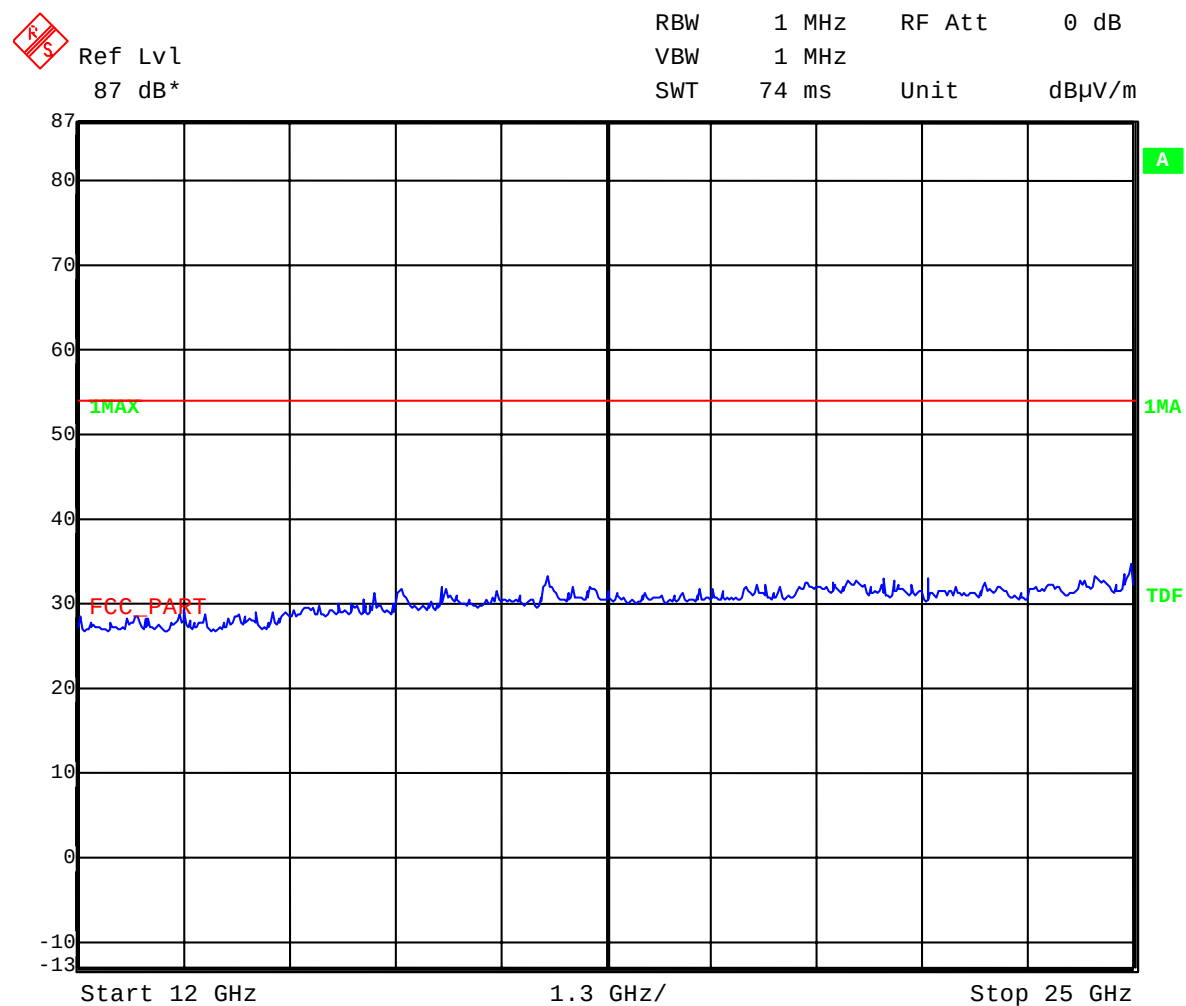

Results:

Spurious Emissions level [$\mu\text{V/m}$]								
CH 1 / 2 / 3								
f[MHz]	Detector	Level [$\mu\text{V/m}$]	f[MHz]	Detector	Level [$\mu\text{V/m}$]	f[MHz]	Detector	Level [$\mu\text{V/m}$]
38.7	QP	35.3						
42.0	QP	40.4						
90.1	QP	33.7						
142.3	QP	34.1						
528.7	QP	41.8						
624.3	QP	38.4						
4189	AV	46.4						
Measurement uncertainty			$\pm 3 \text{ dB}$					

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz

see above plots

Measurement distance see table

Limits : § 15.109 / 209

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
30 - 88	100 (40 dB $\mu\text{V/m}$)	3
88 - 216	150 (43.5 dB $\mu\text{V/m}$)	3
216 - 960	200 (46 dB $\mu\text{V/m}$)	3
above 960	500 (54 dB $\mu\text{V/m}$)	3


3.16 Spurious Emissions - radiated <30 MHz (valid for all antenna types) §15.109 (measured with a 110V AC power supply from our house as the product is delivered without any power supply.)

Valid for OFDM and DSSS mode, no difference

Measured at 3 m distance.

Values recalculated with 40 dB/decade according to FCC rules.

Plot 1:

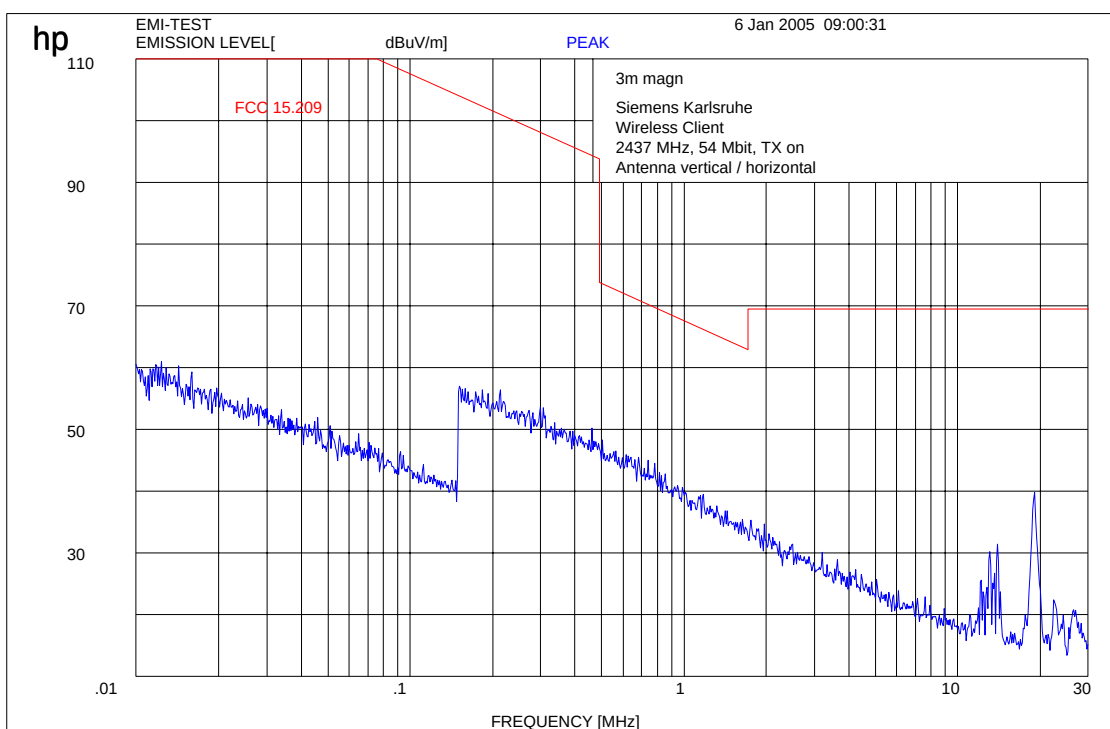

Limits:


Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBμV/m	30
30 - 88	100 / 40 dBμV/m	3
88 - 216	150 / 43.5 dBμV/m	3
216 - 960	200 / 46 dBμV/m	3
above 960	54 dBμV/m	3

3.17 Conducted Emissions <30 MHz

§15.107/207

(measured with a 110V AC power supply from our house as the product is delivered without any power supply.)

Plot 1: CISPR 22

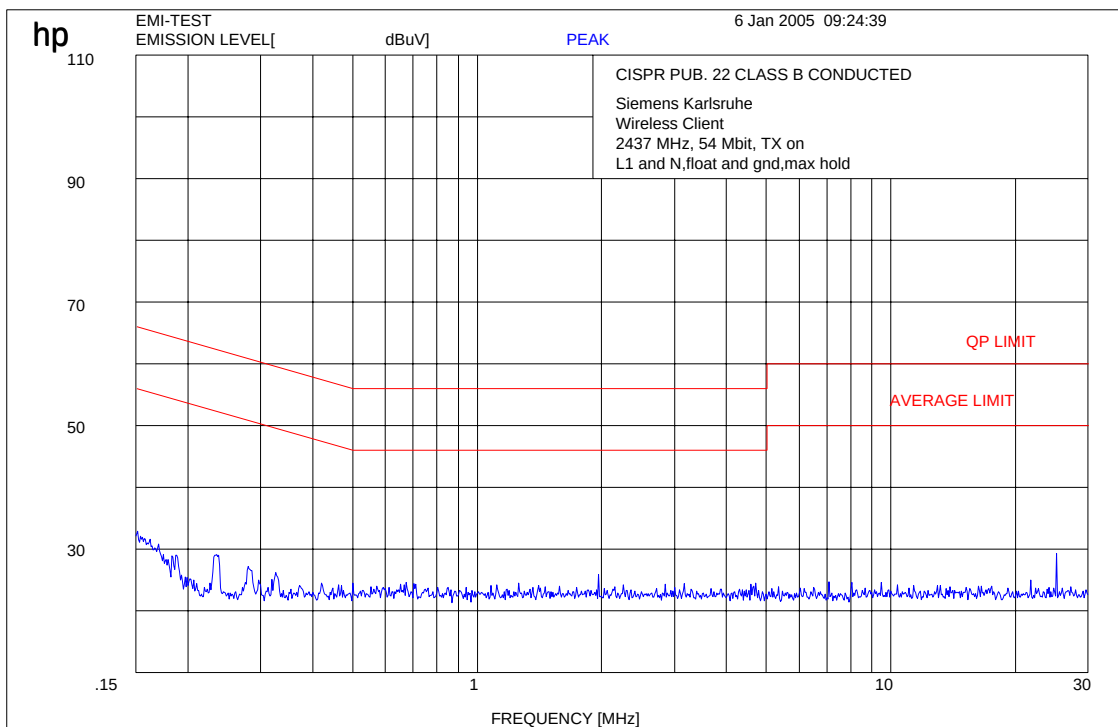

We measured in TX and RX mode, L1 and N floating and grounded, max value was hold.

Limits :

Under normal test conditions only	See plots
-----------------------------------	-----------

3.16 Used Testequipment

Anachoic chamber C:

Device	Manufacturer	Type	S/N Number	Inv. No. Cetecom
Spektrum Analyser	HP	8566B	2747A05306	300001000
Spektrum Analyser Display	HP	85662A	2816A16541	300002297
Quasi-Peak-Adapter	HP	85650A	2811A01131	300000999
Power Dupply	HP	6032A	2818A03450	300001040
Power Attenuator	Byrd	8325	1530	300001595
Bikonical Antenna	EMCO	3104	3758	300001602
Log. Period. Antenna	EMCO	3146	2130	300001603
Double Ridged Antenna	EMCO	HP 3115P	3088	300001032
Active Loop Antenna	EMCO	6502	2210	300001015
Antenna VDE/FCC		HP11965B		300002298
SRM-Drive	HP	9144A	2823e46556	300001044
Software	HP	EMI		300000983
Busisolator	Kontron			300001056
Absorberhalle	MWB		87400/02	300000996
Salzsäule	Kontron			300001055
Antenna	R&S	HMO20	832211/003	300002243
Indukt. Tast Antenna	R&S	HFH 2 Z4	881468/026	300001464
System-Rack	HP I.V.	85900	*	300000222
Spectrum Analyzer	HP	8566B	2747A05275	300000219
Quasi-Peak-Adapter	HP	85650A	2811A01135	300000216
RF-Preselector	HP	85685A	2837A00779	300000218
Rahmen Antenne	R&S	HFH2-Z2	891847-35	300001169
Leitungsteiler	HP	11850C		300000997
Breitband-Hornantenne EMI	HP	35155P		300002300
PC	HP	Vectra VL		300001688
VHF Meßantenne	Schwarzbeck	VHA 9103		300001778
Spectrum Analyzer Display	HP	85662A	2816A16497	300001690
VHF Meßantenna	Schwarzbeck	VHA 9103		300001780
Biconical Antenna	EMCO	3104 C	9909-4868	300002590

SRD Laboratory:

Device	300001207	Type	S/N Number	Inv. No. Cetecom
Spectrum Analyzer	300001208	494AP	B010241	300000863
Spectrum Analyzer	HP	71210A (70000)	2731A02347	300000321
Spectrum Analyzer Display	HP	70206A	2840A01553	300002017
Reference Frequency	HP	70310A	2736A00707	300002018
Local Oscillator	HP	70900A	2842A02221	300002019
ZF-Modul 10Hz-300 kHz	HP	70902A	2840A02145	300002020
ZF-Modul 100 kHz-3 MHz	HP	70903A	2835A01069	300002021
HF-Teil für 71210A 100Hz- 22GHz	HP	70908A		300002022
Spectrum Analyzer 2	HP	85660B	3138A07614	
Spectrum Analyzer Display 2	HP	85662A	3144A20627	

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.:5-4907-01-12/04

Date:2005-01-19

Page 117 of 149

Signal Generator DC-600 KHz	HP	8904A	2822A01213	300001157
Signal Generator DC-600 KHz	HP	8904A	2822A01214	300001158
Powersupply	HP	6038A	3122A11097	300001204
Netznachbildung	R&S	ESH3-Z5	828576/020	300001210
Amplituden Controller	R&S	SMDU-Z2	871829/051	300002309
Trenntrafo	Erft	913501		300001205
Trenntrafo	Grundig	RT5A	9242	300001627
Relais Matrix	HP	3488A	2719A15013	300001156
Multimeter	Siemens	Multizet		300001102
Peak Power Calibrator	HP	8900B		300001084
Schallgeber	Schomandl	SG 1	10159	300001209
Schallgeber	Schomandl	SG 2	10176	300002473
Filter	FSY Microwave			300001206
Attenuatorer	Pro Nova			300002476
Klimaschrank	Heraeus Voetsch	VUK04/500		300001012
Spectrum Analyzer 3	HP	8566A	1925A00257	300001098
Spectrum Analyzer Display 3	HP	85662	1925A00860	300002306
Oszilloscope	Tektronix	2432	110261	300001165
Radiocom. Analyzer	R&S	CMTA 54	894043/010	300001175
Powersupply	HP	6038A	2848A07027	300001174
Signal Generator 0.01-1280 MHz	HP	8662A	2224A01012	300001110
Signal Generator (Funktionen)	R&S	AFGU	862490/032	300001201
Trenntrafo	Erft	MPL	91350	300001155
Relais Matrix	R&S	PSU	893285/020	300001173
Power Meter	HP	436A	2101A12378	300001136
Powersensor	HP	8484A	2237A10156	300001140
Powersensor	HP	8482A	2237A06016	300001139
Relais Matrix	R&S	PSU	282628/004	300001214
Powersupply	Zentro		2007	300001109
Oszilloscope	Tektronix	7633		300001111
Klimaschrank	Heraeus Voetsch	VUK04/500	32926	300001500
Quasi-Peak Adapter	HP	85650A	2811A01204	300002308
Radiocom. Analyzer	R&S	CMTA 84	894199/012	300001176
Oszilloscope	HP	54510A	3022A02062	300001202
Funkmeßplatz	Schomandl	FD1000	34982	300001115
Signal Generator	R&S	SMPC	882416/019	300001162
Frequency counter	HP	5340A	2116A08138	300001104
Power Meter	HP	436A	2031U01461	300001105
Powersensor	HP	8482A		300001106
Powersensor	HP	8484A		300001107
Powersensor	HP	8485A		300001108
Powersupply	HP	6038A	2752A04866	300001161
Reflectionsmeter	R&S	NAP	879191	300001132
Signal Generator NF	R&S	SPN	880139/068	300001142
Trenntrafo	Erft	MPL	91350	300001151
Attenuator	JFW	30 db	1350h/104	300001703
Attenuator	JFW	10 db	1350h/103	300001704
Attenuator	JFW	20 db	1350h/106	300001705
Attenuator	JFW	20 db	1350h/105	300001766
Filter	Spinner	153755		300001791

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.:5-4907-01-12/04

Date:2005-01-19

Page 118 of 149

Powersensor	HP	8484A	2237A10494	300001666
Powersupply	HP	6038A	3122A11097	300001204
Netznachbildung	R&S	ESH3-Z5	828576/020	300001210
Amplituden Controller	R&S	SMDU-Z2	871829/051	300002309
Trenntrafo	Erfi	913501		300001205
Trenntrafo	Grundig	RT5A	9242	300001627
Relais Matrix	HP	3488A	2719A15013	300001156
Multimeter	Siemens	Multizet		300001102
Peak Power Calibrator	HP	8900B		300001084
Schallgeber	Schomandl	SG 1	10159	300001209
Schallgeber	Schomandl	SG 2	10176	300002473
Filter	FSY Microwave			300001206
Attenuatorer	Pro Nova			300002476
Klimaschrank	Heraeus Voetsch	VUK04/500		300001012
Spectrum Analyzer 3	HP	8566A	1925A00257	300001098
Spectrum Analyzer Display 3	HP	85662	1925A00860	300002306
Oszilloscope	Tektronix	2432	110261	300001165
Radiocom. Analyzer	R&S	CMTA 54	894043/010	300001175
Powersupply	HP	6038A	2848A07027	300001174
Signal Generator 0.01-1280 MHz	HP	8662A	2224A01012	300001110
Signal Generator (Funktionen)	R&S	AFGU	862490/032	300001201
Trenntrafo	Erfi	MPL	91350	300001155
Relais Matrix	R&S	PSU	893285/020	300001173
Power Meter	HP	436A	2101A12378	300001136
Powersensor	HP	8484A	2237A10156	300001140
Powersensor	HP	8482A	2237A06016	300001139
Relais Matrix	R&S	PSU	282628/004	300001214
Powersupply	Zentro		2007	300001109
Oszilloscope	Tektronix	7633		300001111
Klimaschrank	Heraeus Voetsch	VUK04/500	32926	300001500
Quasi-Peak Adapter	HP	85650A	2811A01204	300002308
Radiocom. Analyzer	R&S	CMTA 84	894199/012	300001176
Oszilloscope	HP	54510A	3022A02062	300001202
Funkmeßplatz	Schomandl	FD1000	34982	300001115
Signal Generator	R&S	SMPC	882416/019	300001162
Frequency counter	HP	5340A	2116A08138	300001104
Power Meter	HP	436A	2031U01461	300001105
Powersensor	HP	8482A		300001106
Powersensor	HP	8484A		300001107
Powersensor	HP	8485A		300001108
Powersupply	HP	6038A	2752A04866	300001161
Reflectionsmeter	R&S	NAP	879191	300001132
Signal Generator NF	R&S	SPN	880139/068	300001142
Trenntrafo	Erfi	MPL	91350	300001151
Attenuator	JFW	30 db	1350h/104	300001703
Attenuator	JFW	10 db	1350h/103	300001704
Attenuator	JFW	20 db	1350h/106	300001705
Attenuator	JFW	20 db	1350h/105	300001766
Filter	Spinner	153755		300001791
Powersensor	HP	8484A	2237A10494	300001666

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.:5-4907-01-12/04


Date:2005-01-19

Page 119 of 149


Powersensor	HP	8485A	2238A00849	300001668
Bandfilter	Telonic	TTF7255EE	20293-11	300001300
Bandfilter	Telonic	TTF12555EE	20292-6	300001302
Bandfilter	Telonic	TTF25055EE	20291-8	300001304
Bandfilter	Telonic	TTF50055EE	20290-7	300001305
Bandfilter	Telonic	TTF100055EE	20289-7	300001307
Bandfilter	Telonic	TTA300055EESN	20370-2	300001312
Bandstop	Telonic	TTR3753EE1	30013-1	300001314
Bandstop	Telonic	TTR723EE	20417-2	300001316
Bandstop	Telonic	TTR95-3EE	20372-4	300001318
Bandstop	Telonic	TTR1903EE	30036-4	300001320
Bandstop	Telonic	TTR3753EE	20369-5	300001321
Bandstop	Telonic	TTR750-3EE1	90177-1	300002387
Highpass	Pro Nova	HDP120-6GG	ohne	300001348
Highpass	Pro Nova	HMC500-6AA	HJ67-01?	300001350
Highpass	Narda	NHP 9000	0004	300001362
Highpass	Narda	HDP16-6GH	JV70-01	300001364
Highpass	RSD	HDP50-6GH, HDP200-6GG		300001371
Highpass	RSD	2099-02-01		300000370
Signal Generator 0.1-2060 MHz	HP	8657A	2838U00736	300001009
Radio Code Analyzer	Schlumberger	SL4922		300001038
Signal Analyzer	B&K	2033		300001047
Frequency counter	HP	5386A	2704A01243	300000998
Laufzeitelement	WR-Elektronik			300001036
Powersupply Stromversorgung	Syston	M5P 40/15A	828233	300001291
Powersupply	Heiden	1108-32	1701	300001392
Powersupply	Heiden	1108-32	1802	300001383
Powersupply	Heiden	1108-32	003202	300001187
Powersupply	Zentro	LA 2x30/5GB1	2011	300001276
Powersupply	Zentro	LA 2x30/5GB2	2012	300001275
Powersupply	Zentro	LA 30/5GA	2041,2042	300001287
Trenntrafo	Grundig	RT5A	8781	300001277
Trenntrafo	Grundig	RT5A	9242	300001263
Multimeter	Goerz Elektro	Unigor 6e P	911 355	300001625
Multimeter	Goerz Elektro	Unigor 6e P	911 391	300001281
Climatic Box	Heraeus Voetsch	VUK04/500	32679	300000299
Powersensor + Att.	HP	8482B	2703A02586	300001492
Attenuator 30 dB	HP	8498A	1801A02445	300001475
Signal Generator NF	HP		2822A01203	300001004
Attenuator	Spinner	BN 534171 D	51881	300001516
Attenuator coaxial	Bird	8325	2429	300001513
Impulsbegrenzer	R&S	ESH 3 Z2		300001460
4Port Box	R&S	4Port Box	860457/005	300001472
Signal Generator 0.1-4200 MHz	HP	8665A	2833A0011	300002299
NF-Spektrumanalyzer	B&K	2033A		300002301
Swissphone Freifeld-Messbox	Swissphone Schweiz			300002302
Trenntrafo regelbar	Grundig	RT5H	9242	300001628
Signal Generator	HP	8111A	2215G00867	300001117

4 Photographs


Test site: Antenna 1

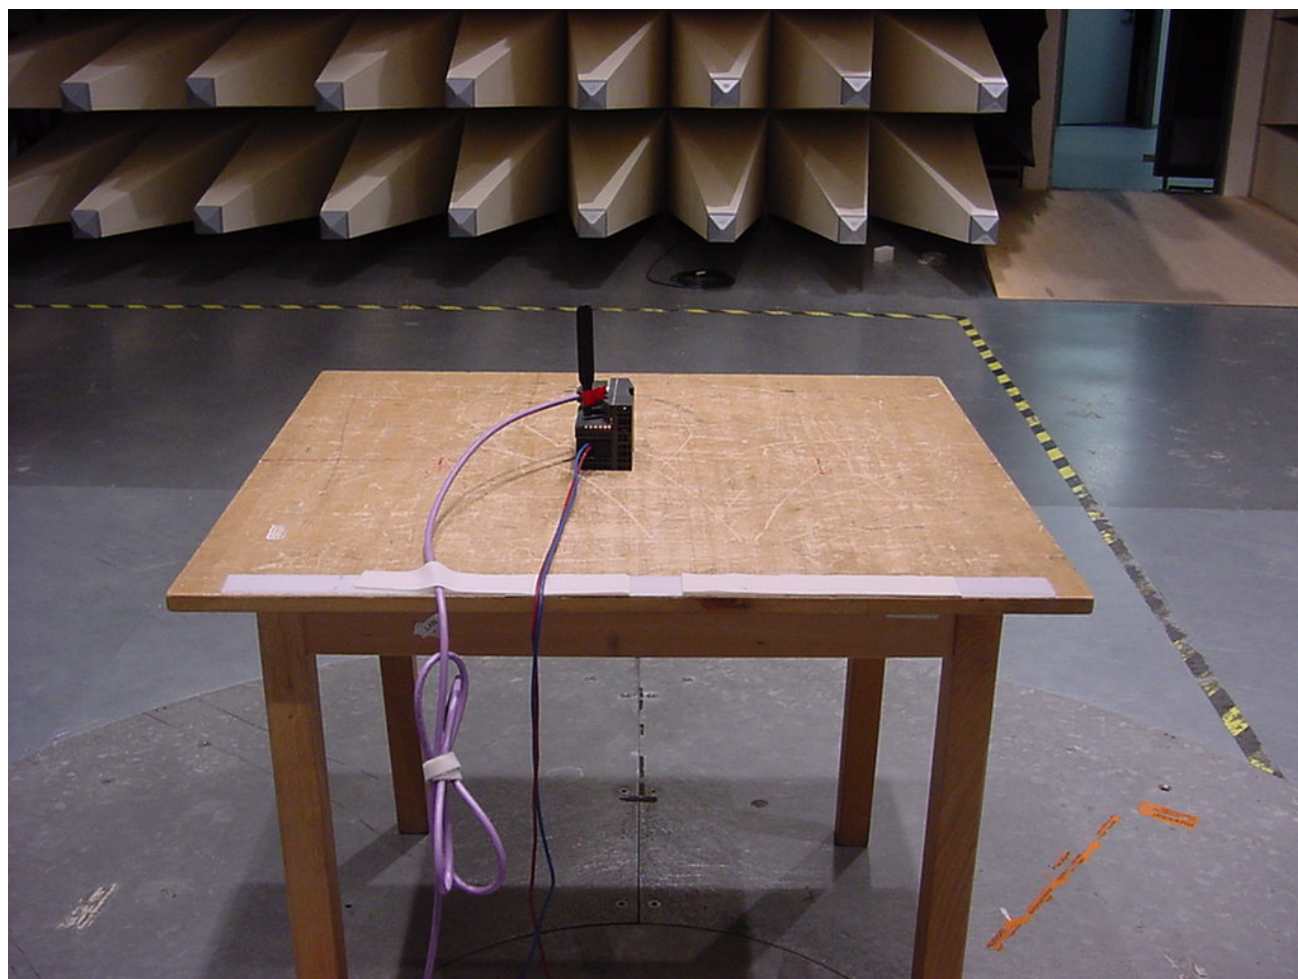


Test site: Antenna 1

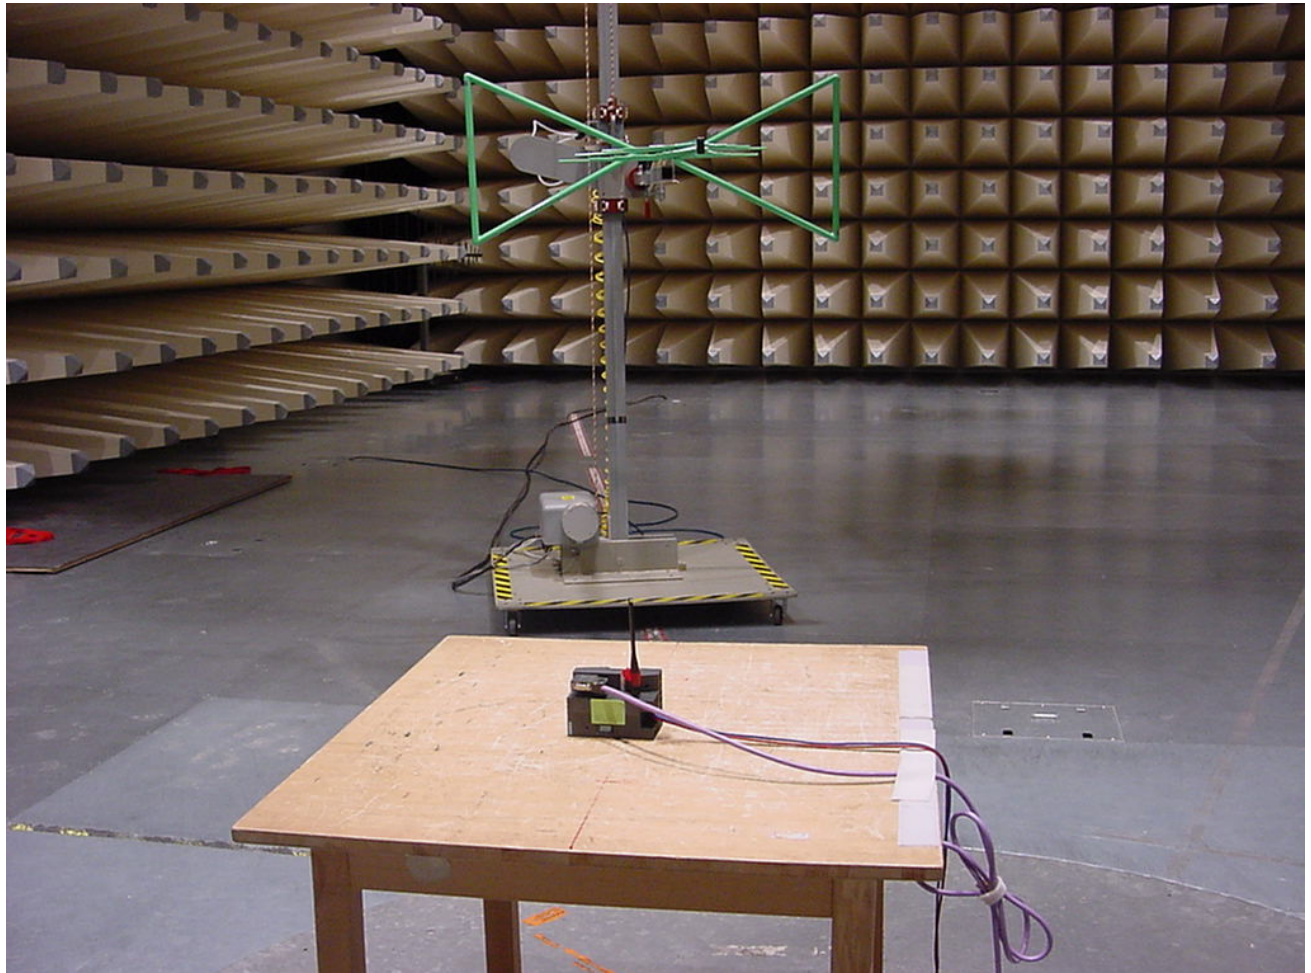


Test site: Antenna 2

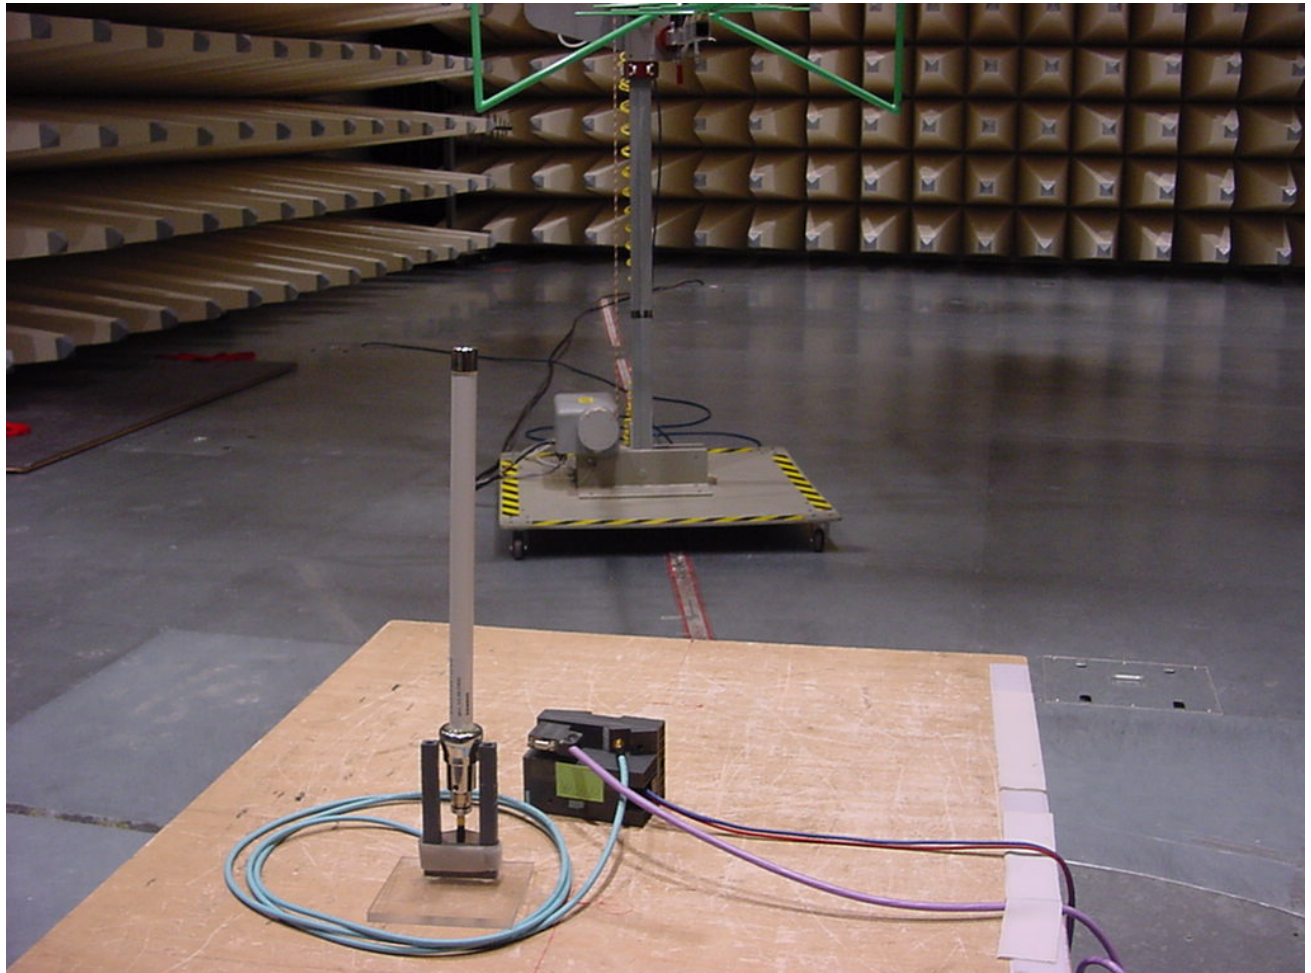

Test site: Antenna 3

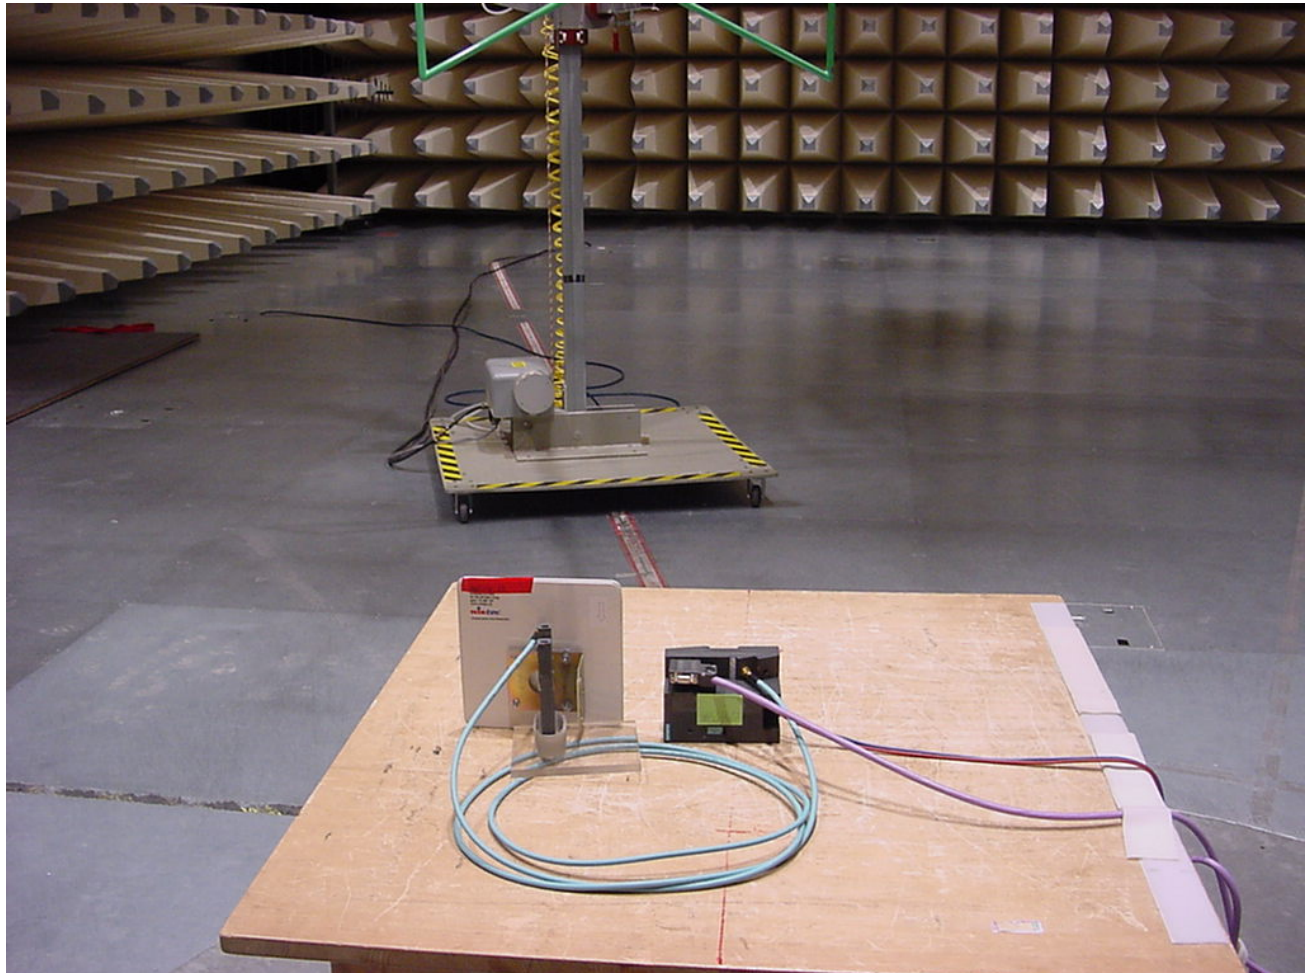

Test site: Antenna 4

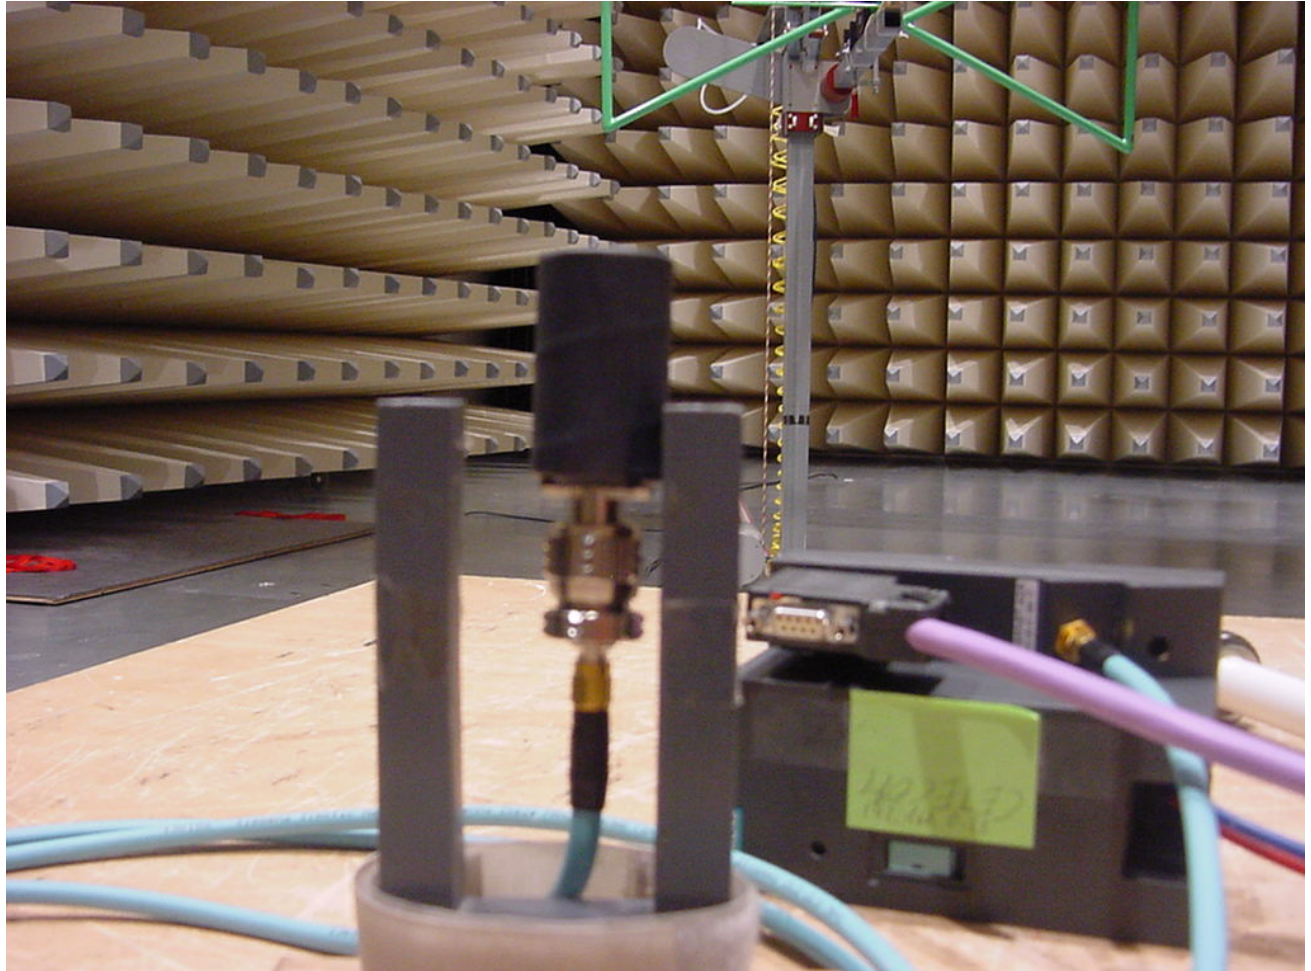

AC-conducted:



SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.:5-4907-01-12/04

Date:2005-01-19

Page 126 of 149

Test sample:

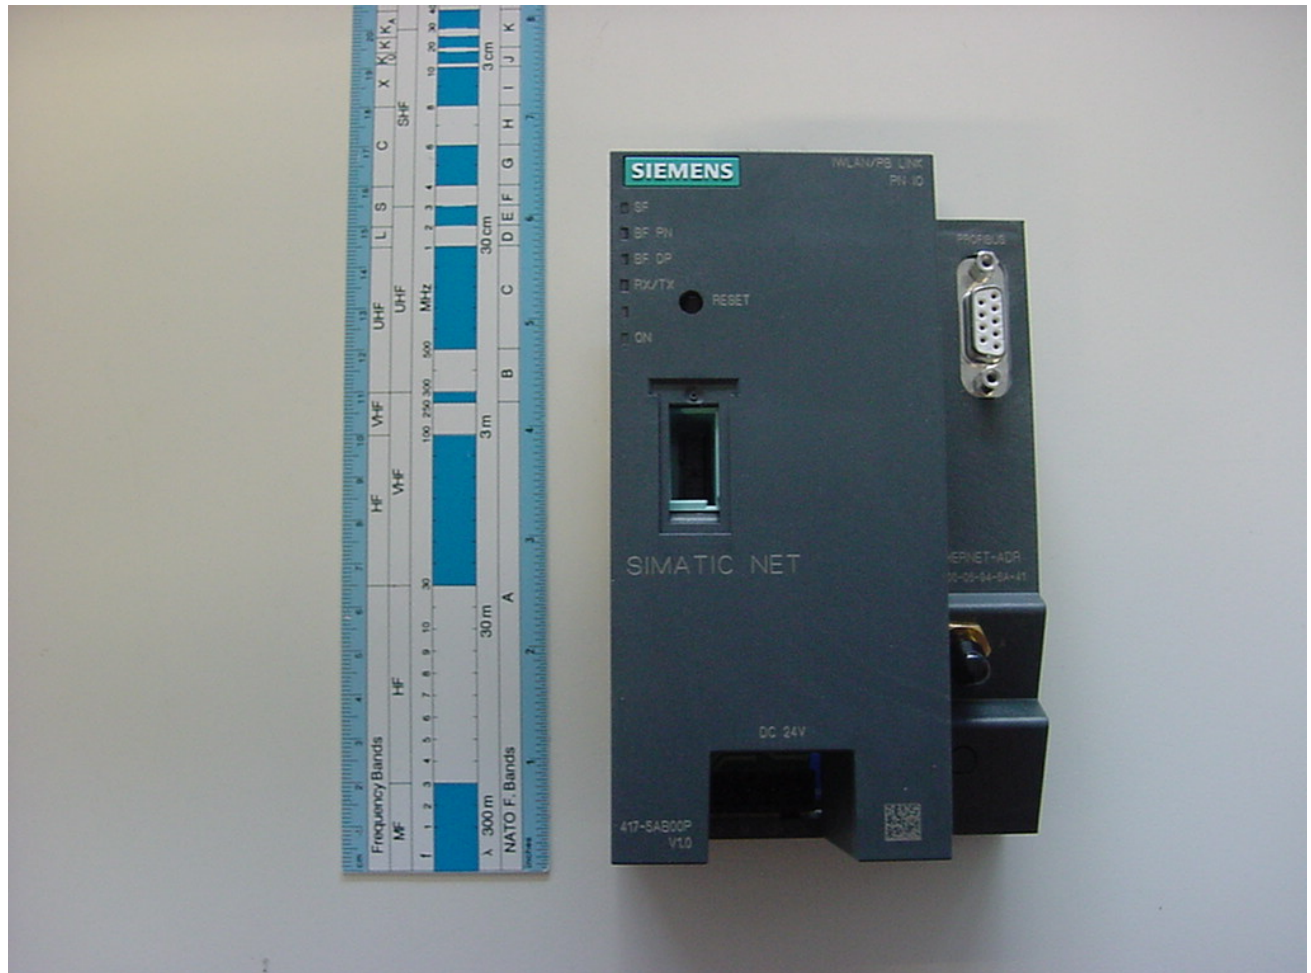

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.:5-4907-01-12/04

Date:2005-01-19

Page 127 of 149

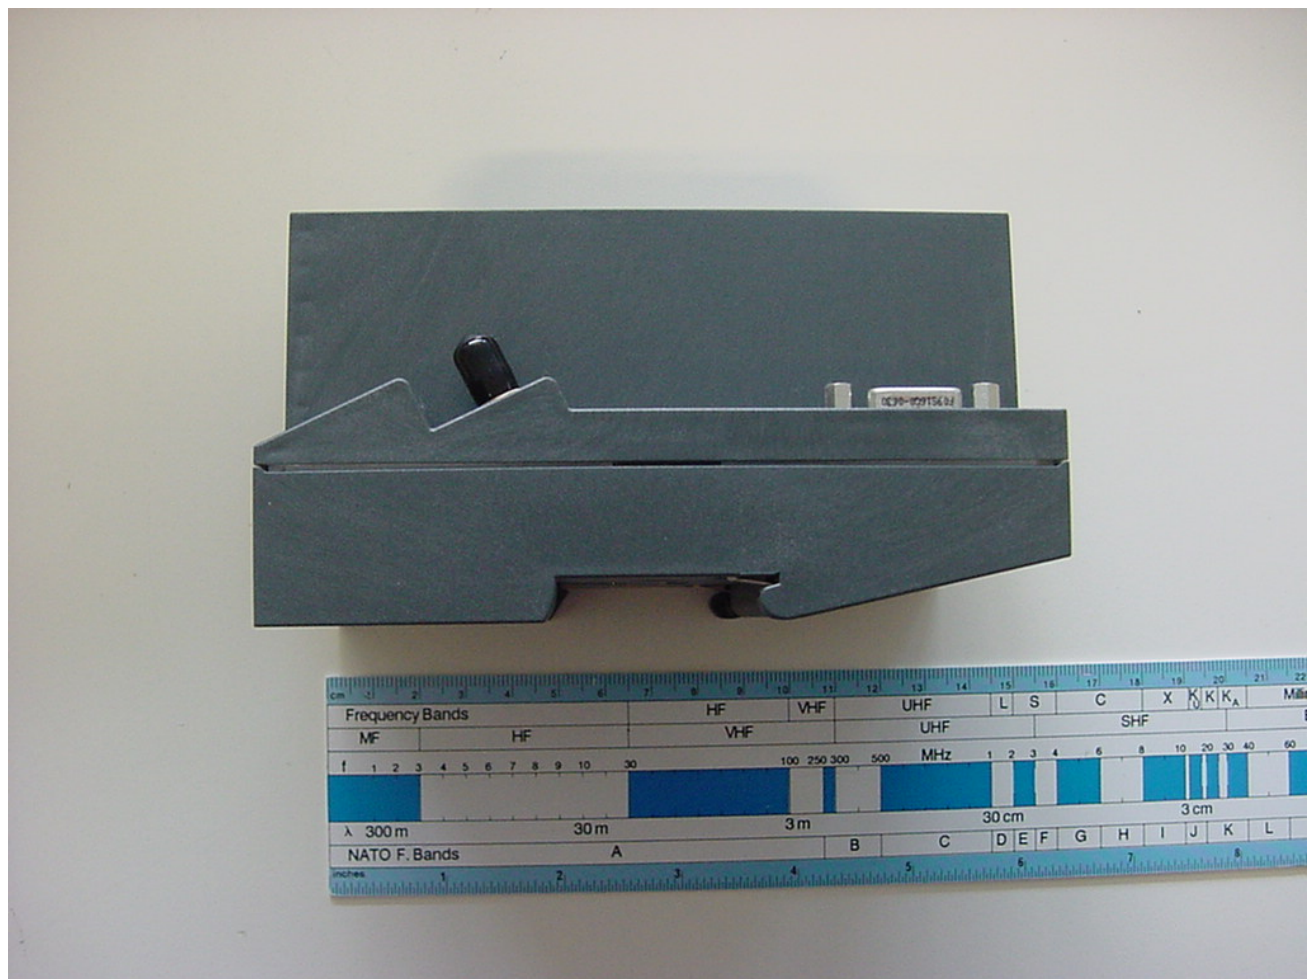

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.:5-4907-01-12/04

Date:2005-01-19

Page 128 of 149

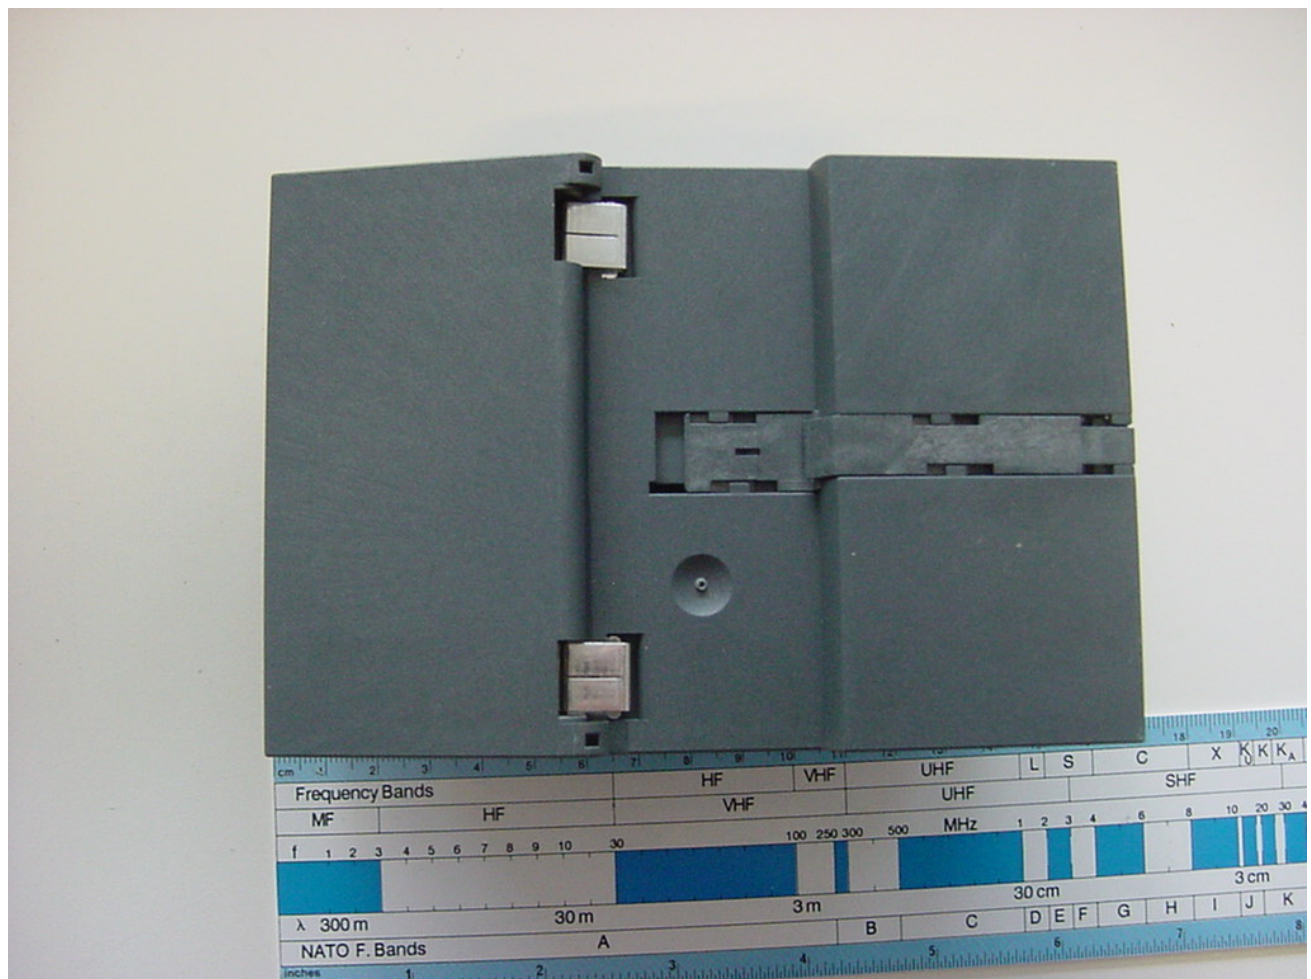

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.:5-4907-01-12/04

Date:2005-01-19

Page 129 of 149

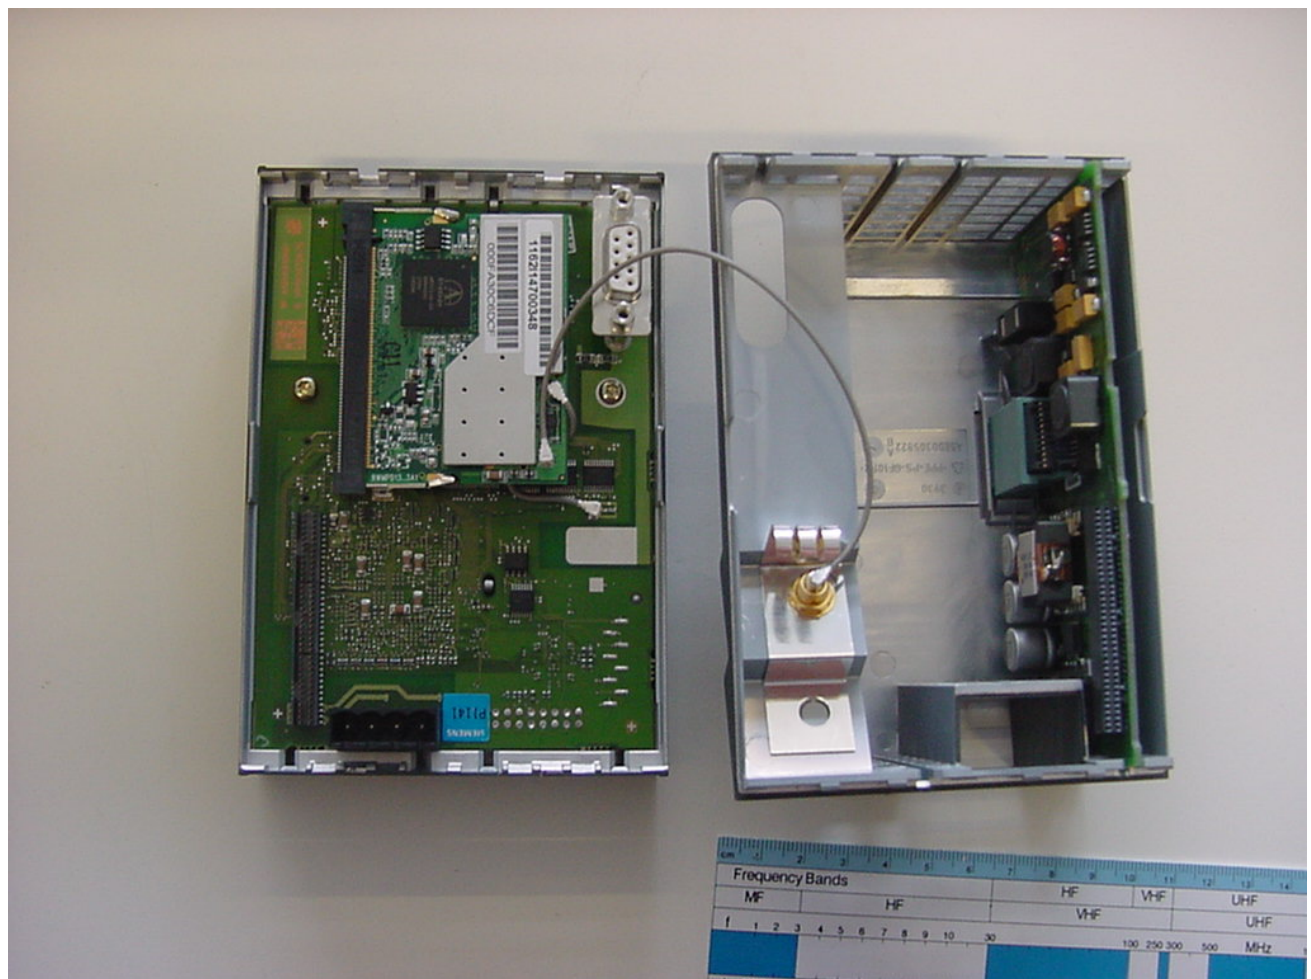

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.:5-4907-01-12/04

Date:2005-01-19

Page 130 of 149

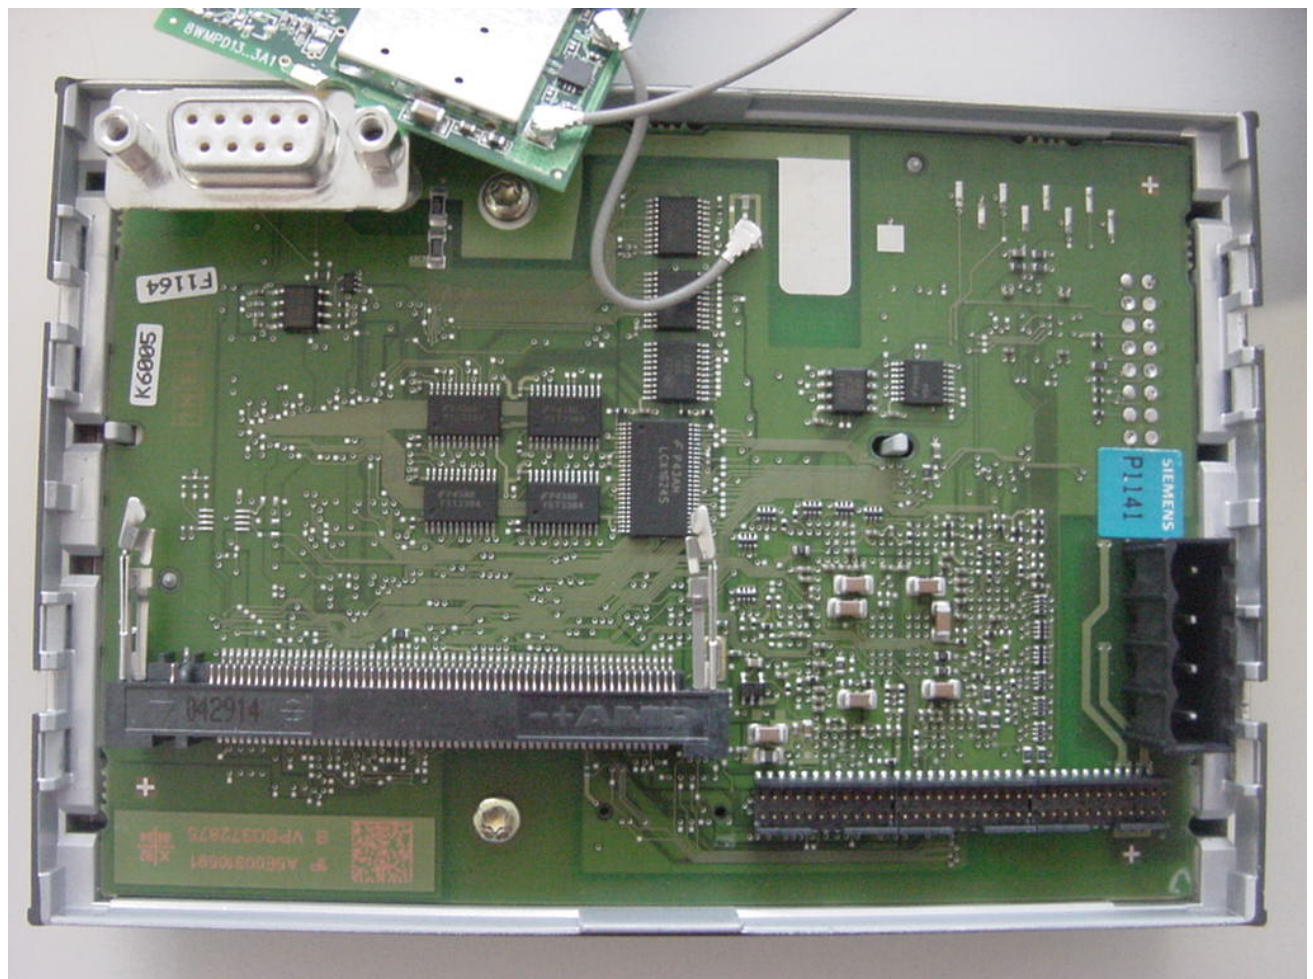

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.:5-4907-01-12/04

Date:2005-01-19

Page 131 of 149

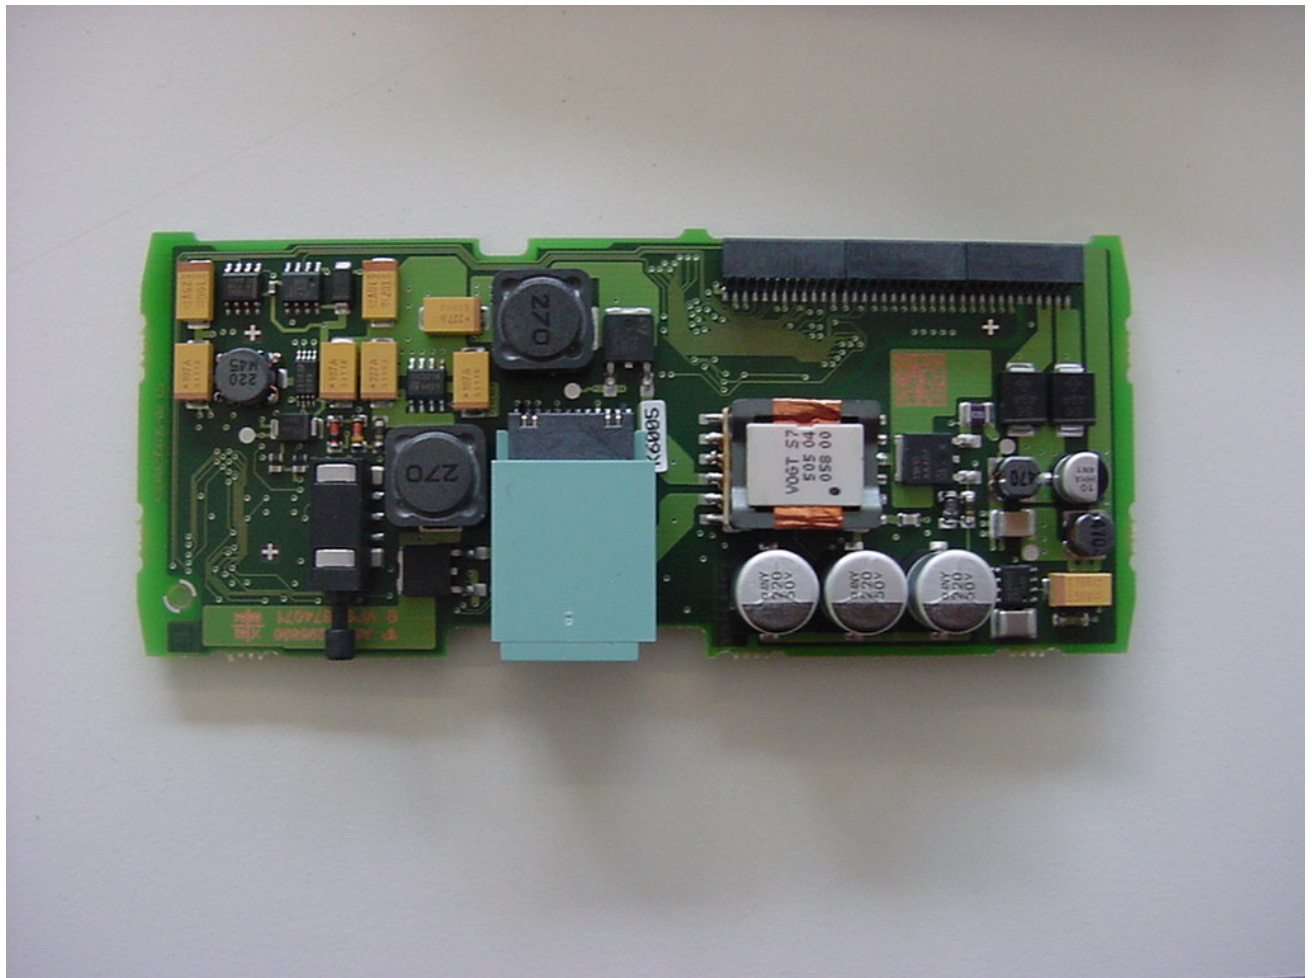

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.:5-4907-01-12/04

Date:2005-01-19

Page 132 of 149

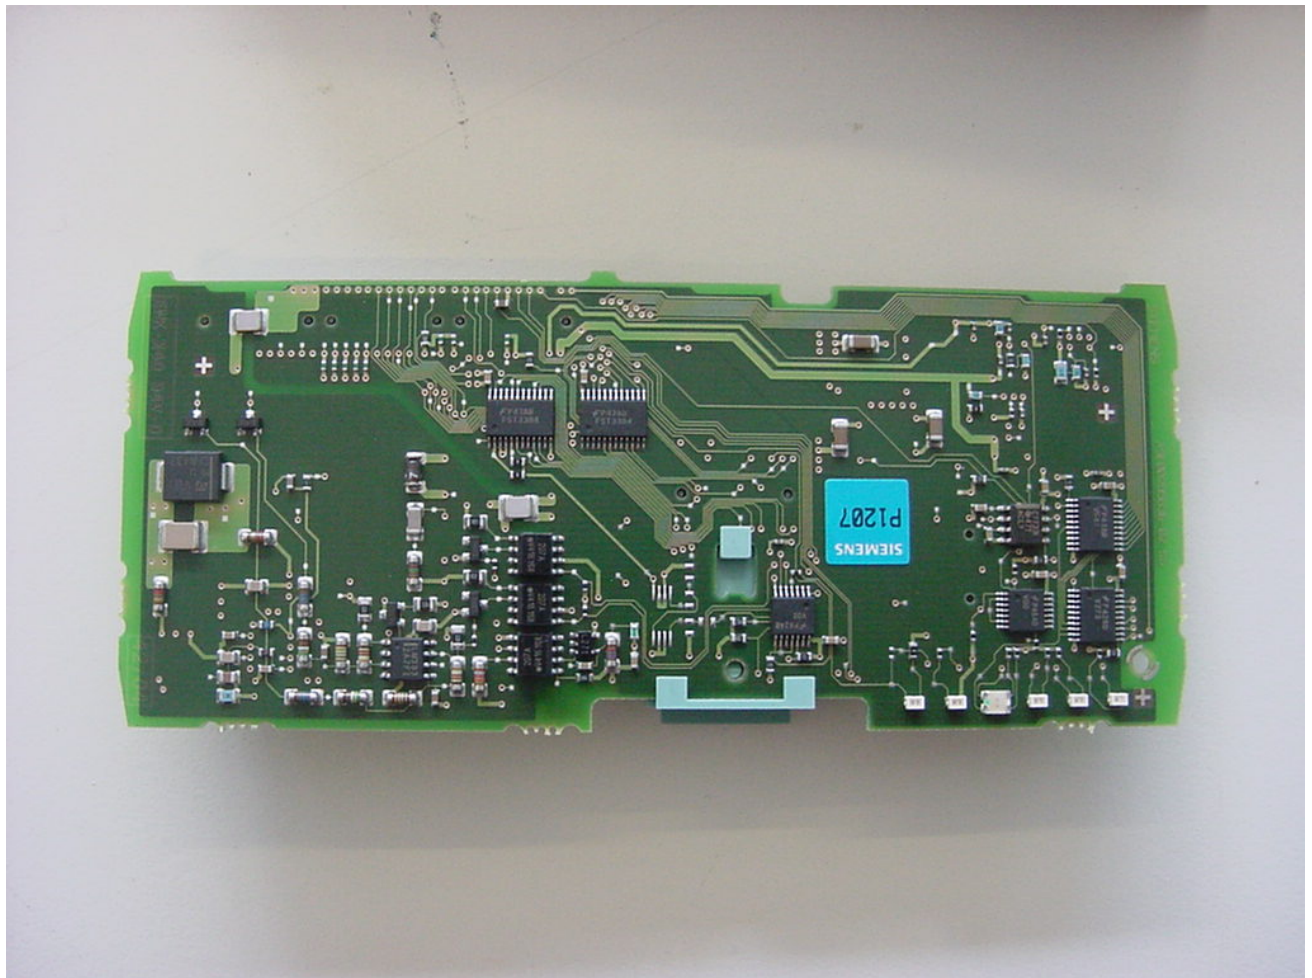

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.:5-4907-01-12/04

Date:2005-01-19

Page 133 of 149

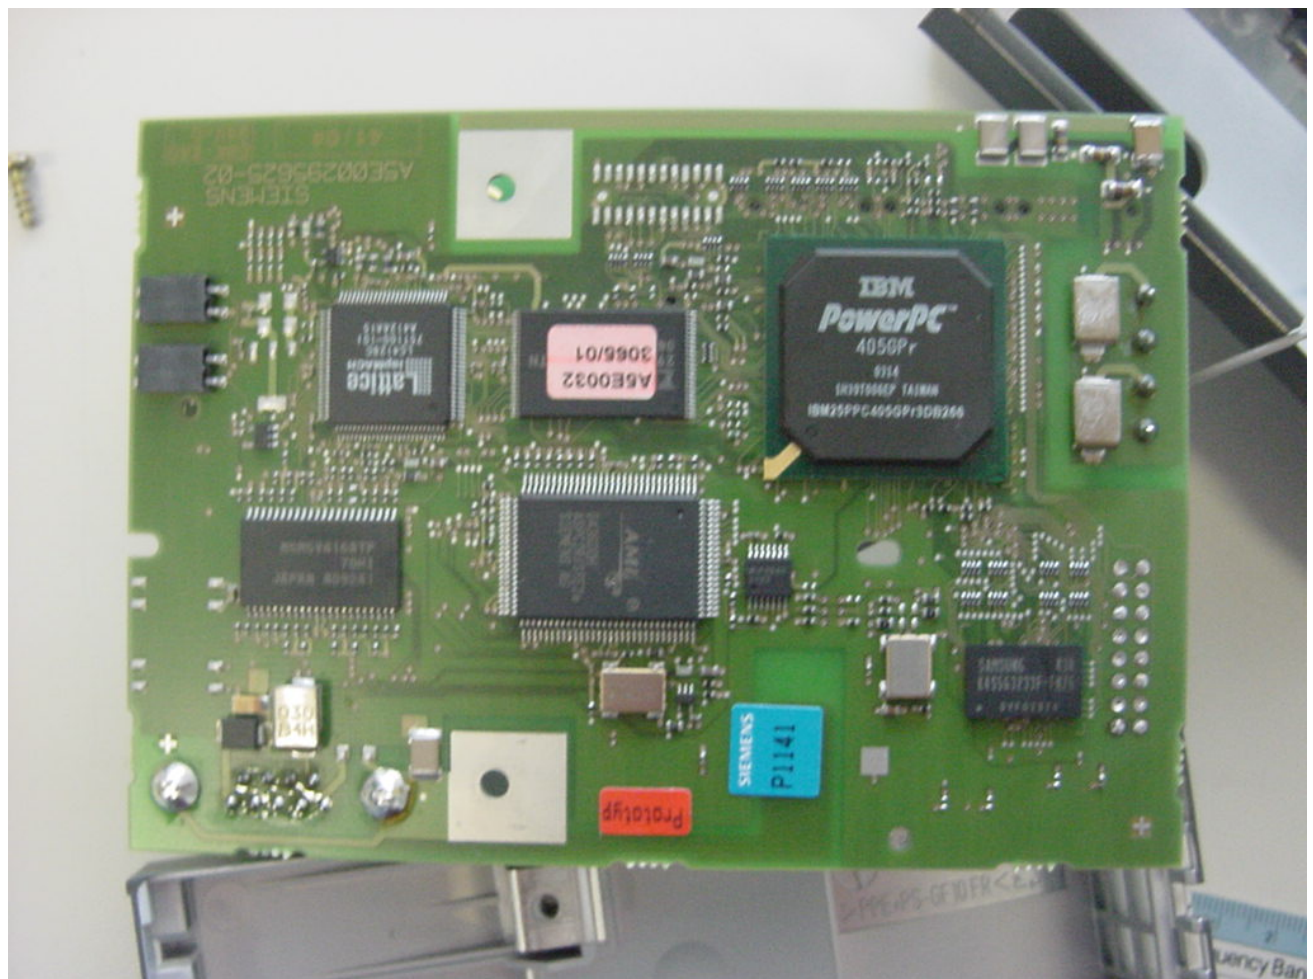

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.:5-4907-01-12/04

Date:2005-01-19

Page 134 of 149



SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.:5-4907-01-12/04

Date:2005-01-19


Page 135 of 149

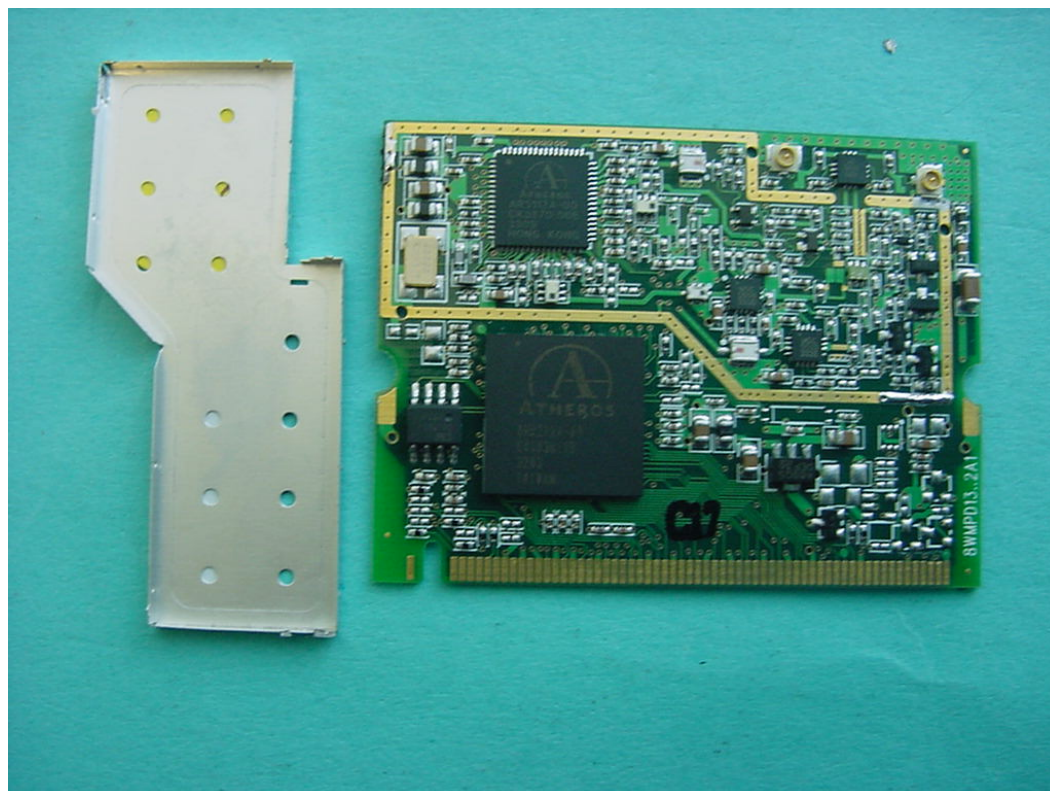

Antenna 1



Antenna 2

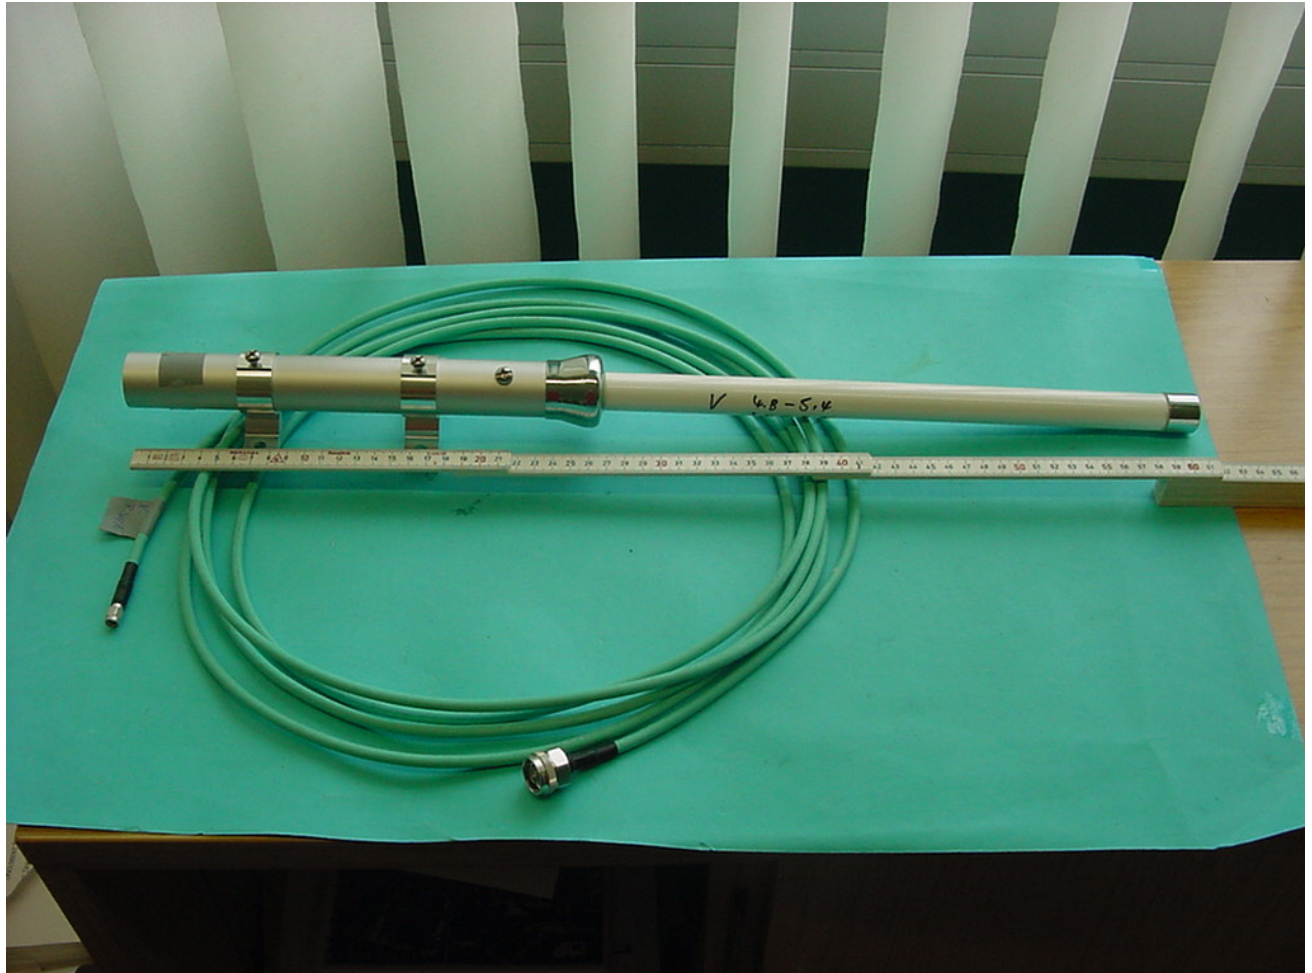

Antenna 3





Antenna 4:



SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.:5-4907-01-12/04


Date:2005-01-19

Page 141 of 149




7 Annex 1:

Antenna gain antenna 1: azimuth max gain 0.6 dBi

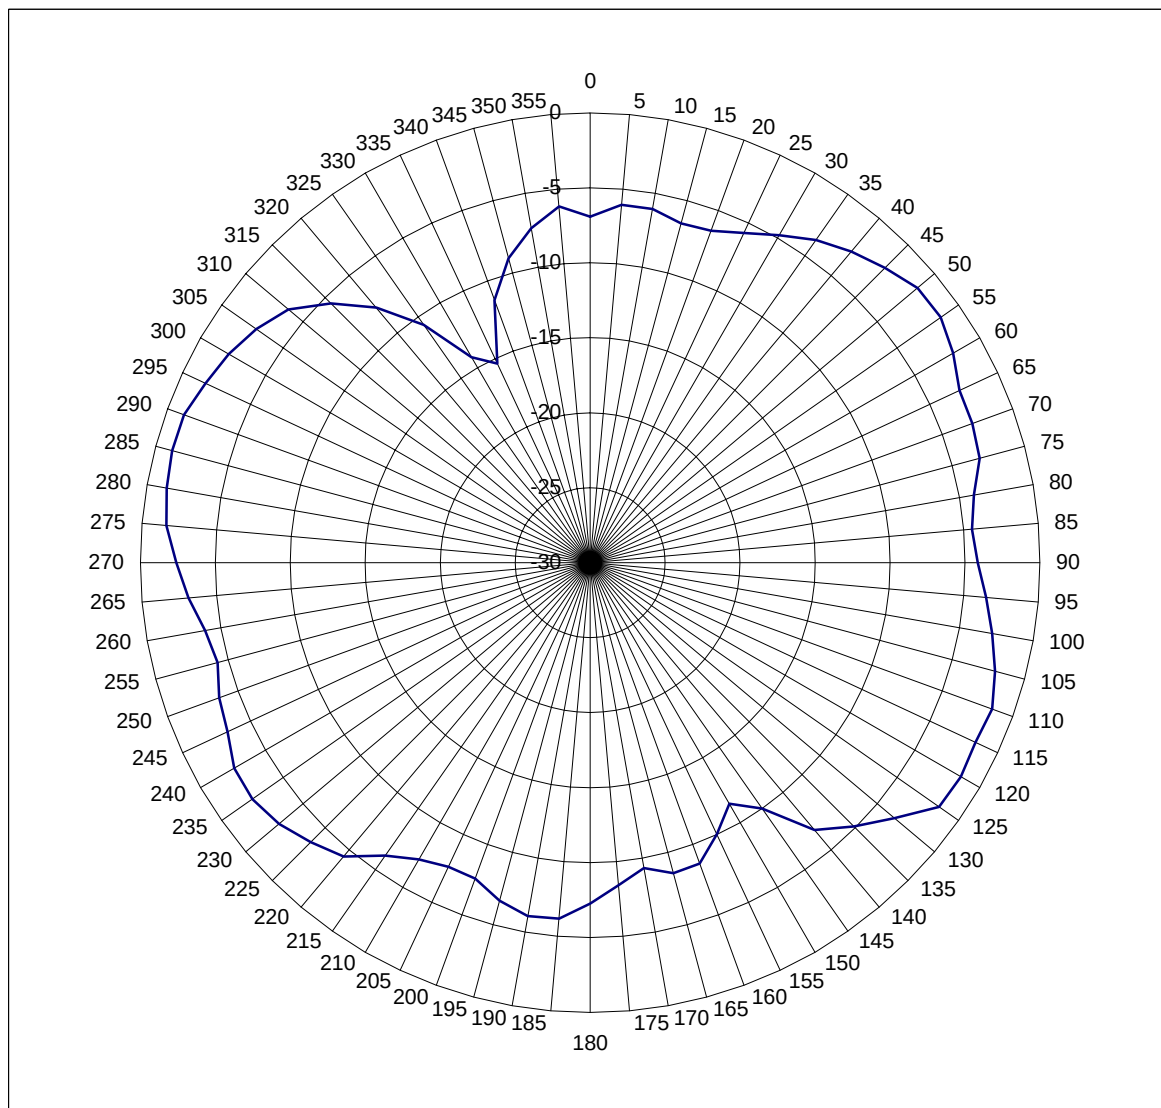


vertical

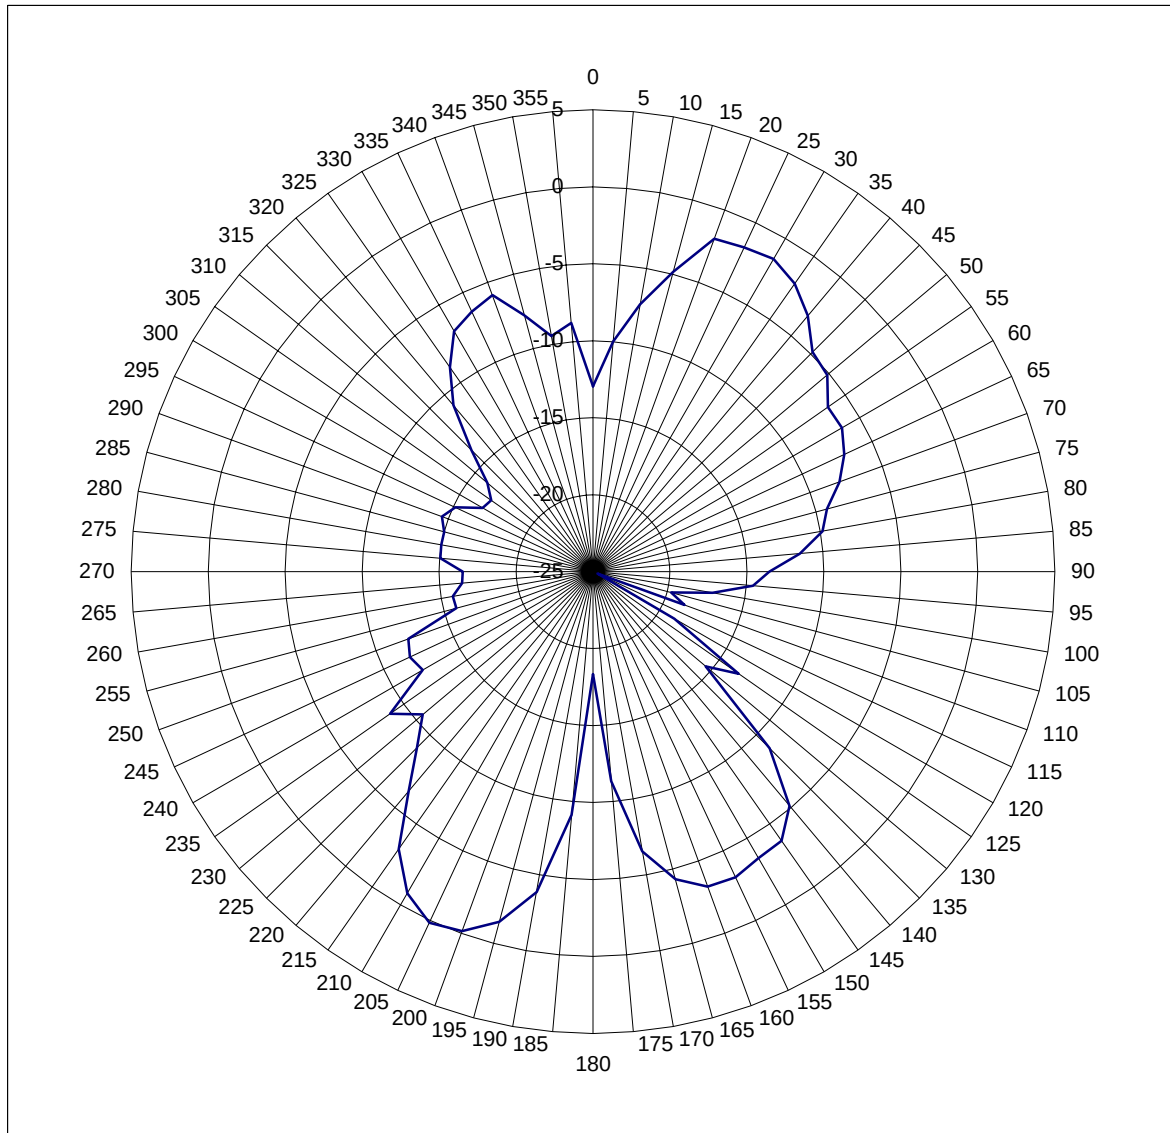


Antenna gain antenna 2:

azimuth max gain 2.3 dBi

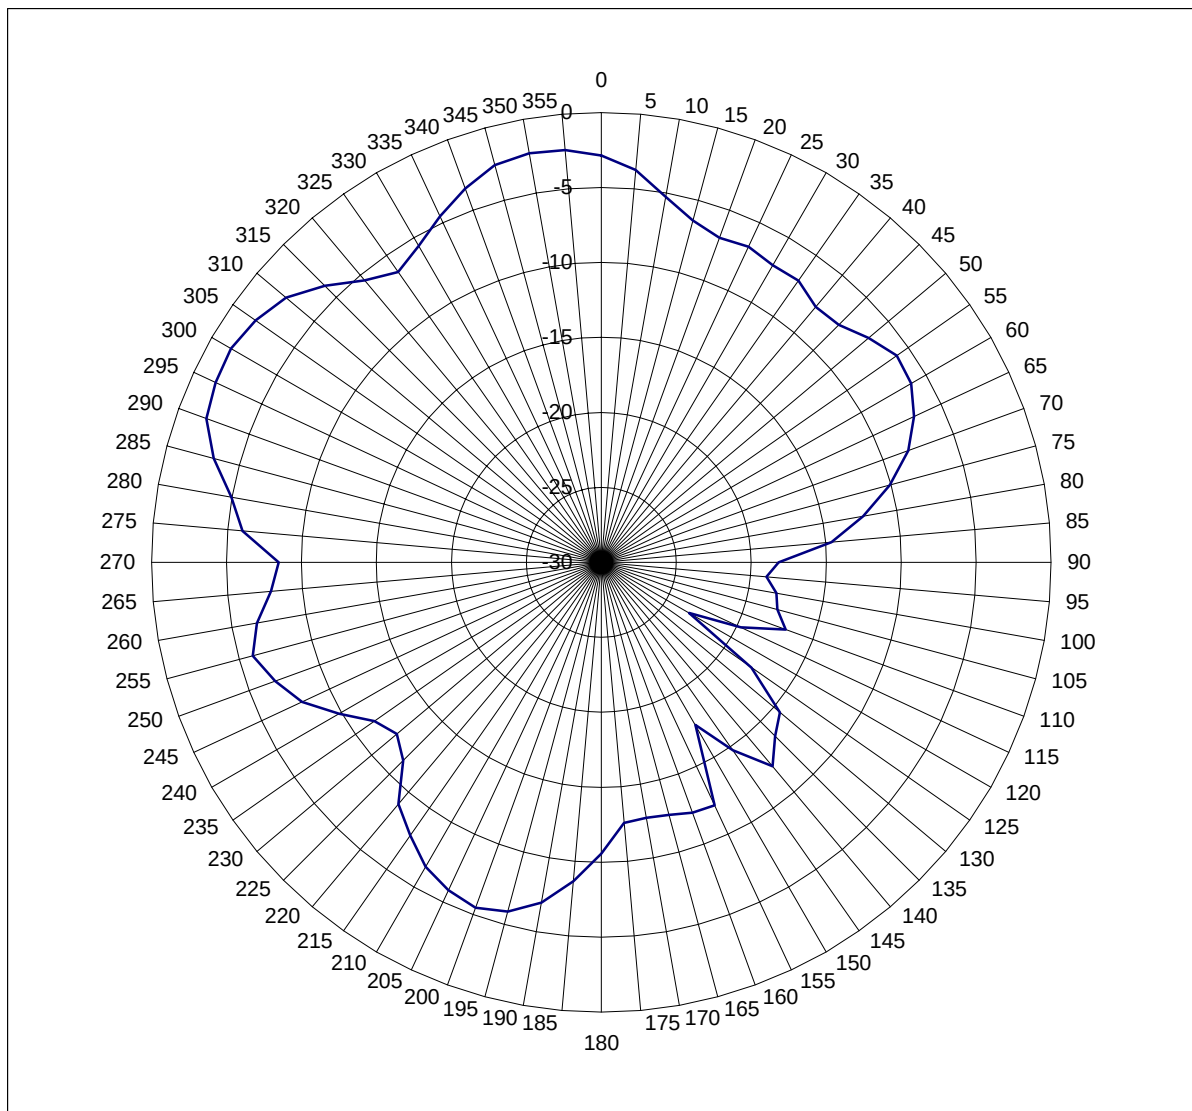


Vertical

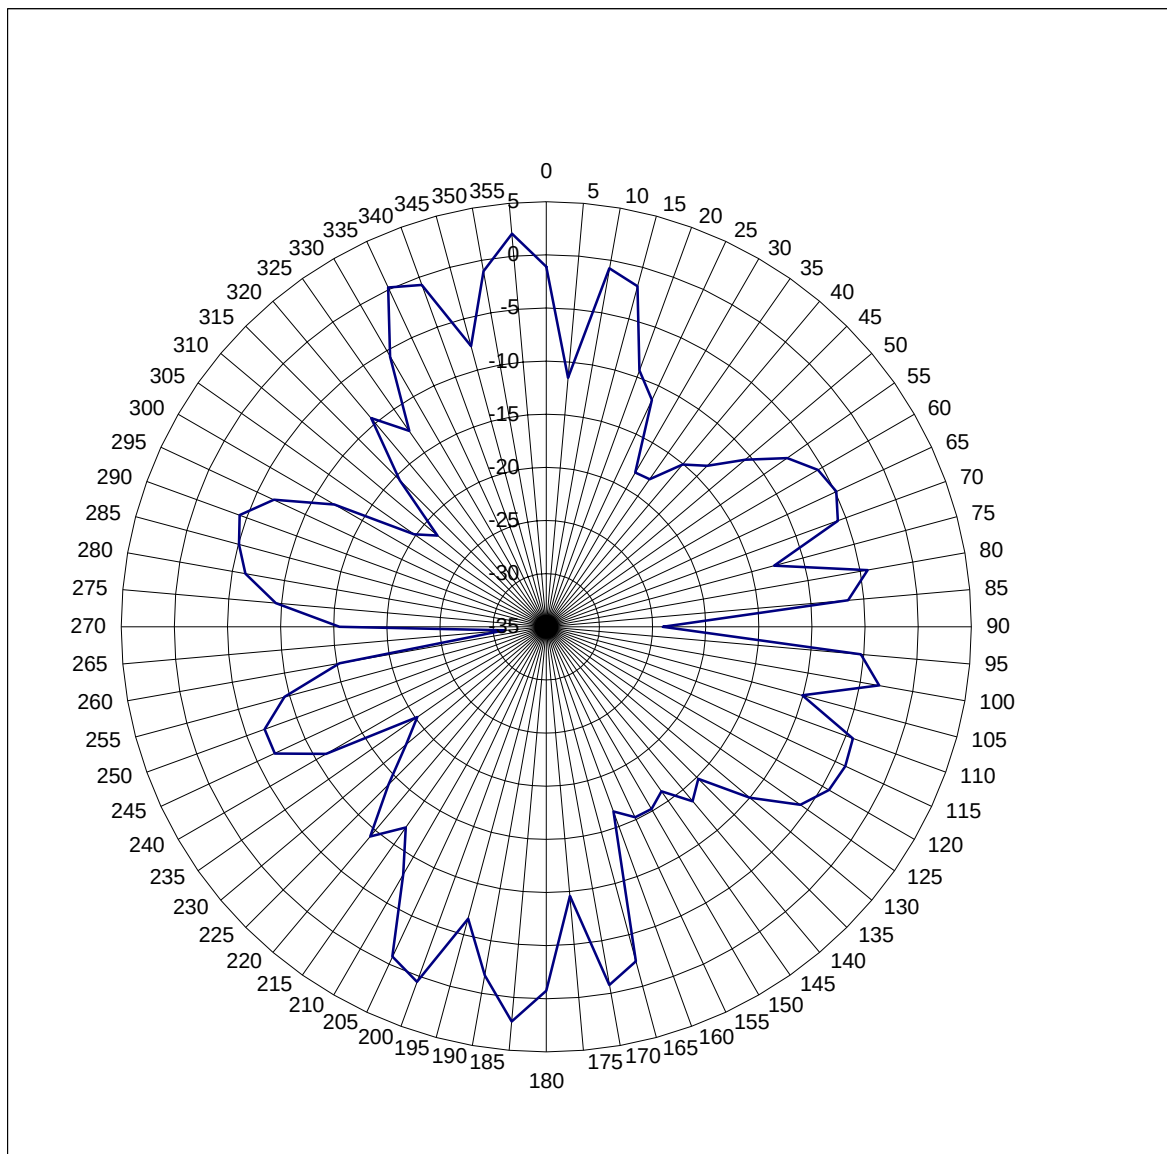


Antenna gain antenna 3:

azimuth max gain 14.1 dBi

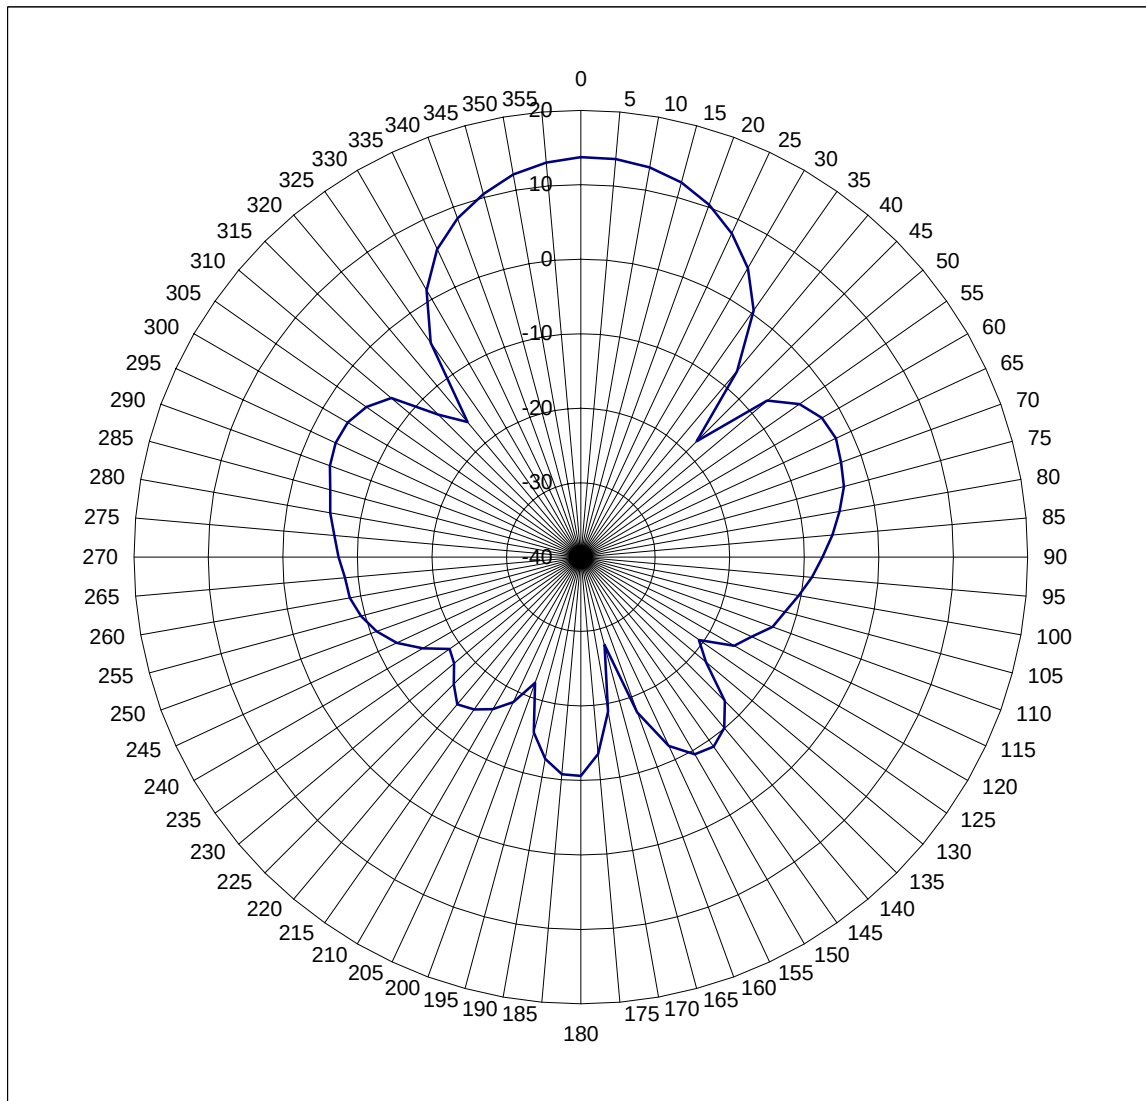


vertical

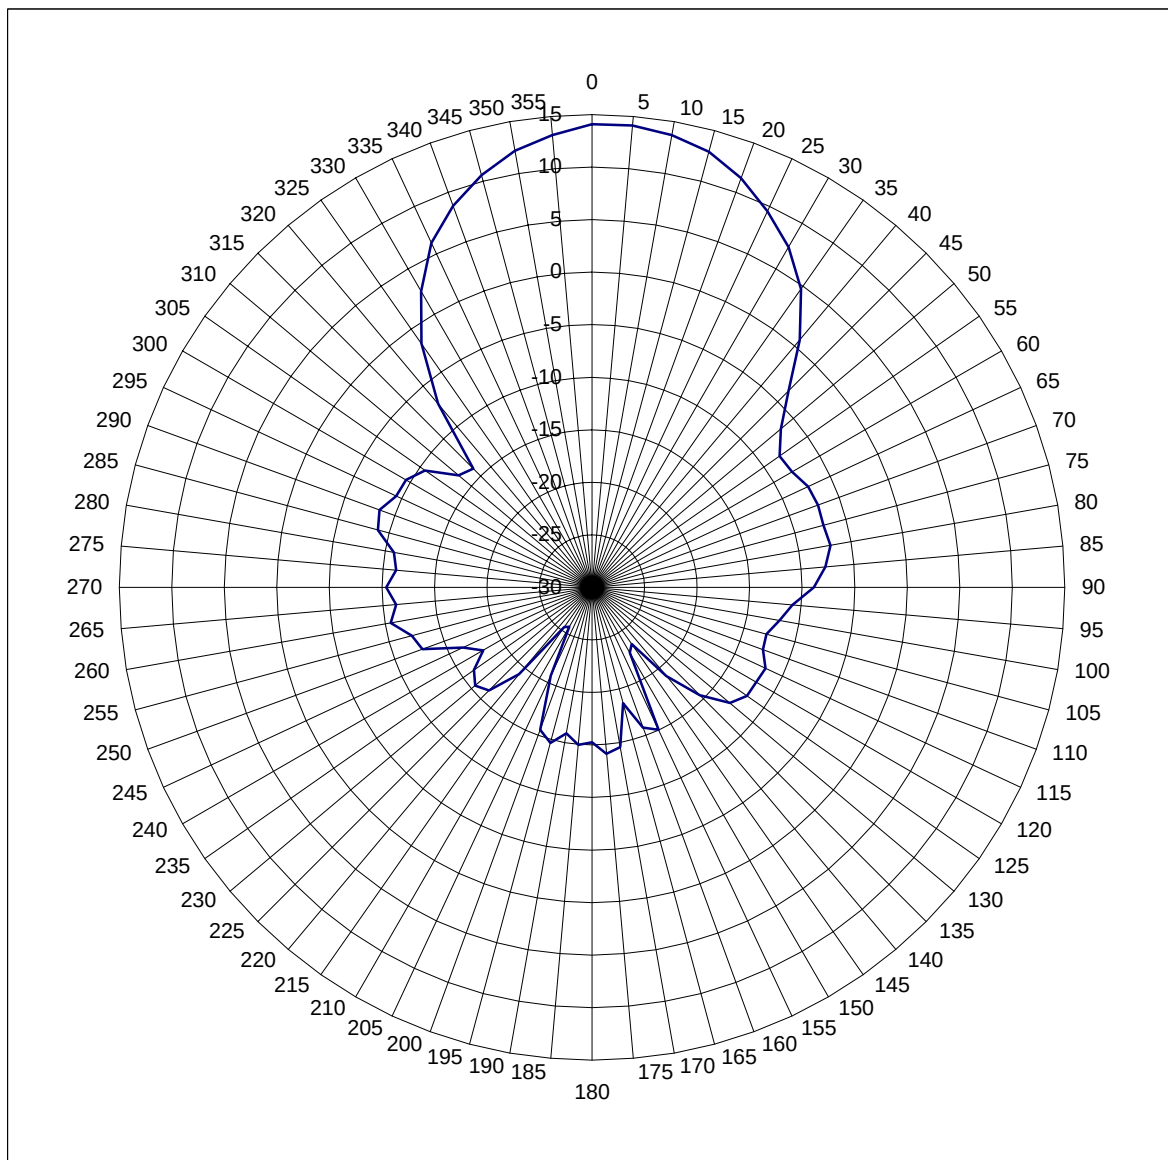

Antenna gain antenna 4:

azimuth max gain 4.2 dBi

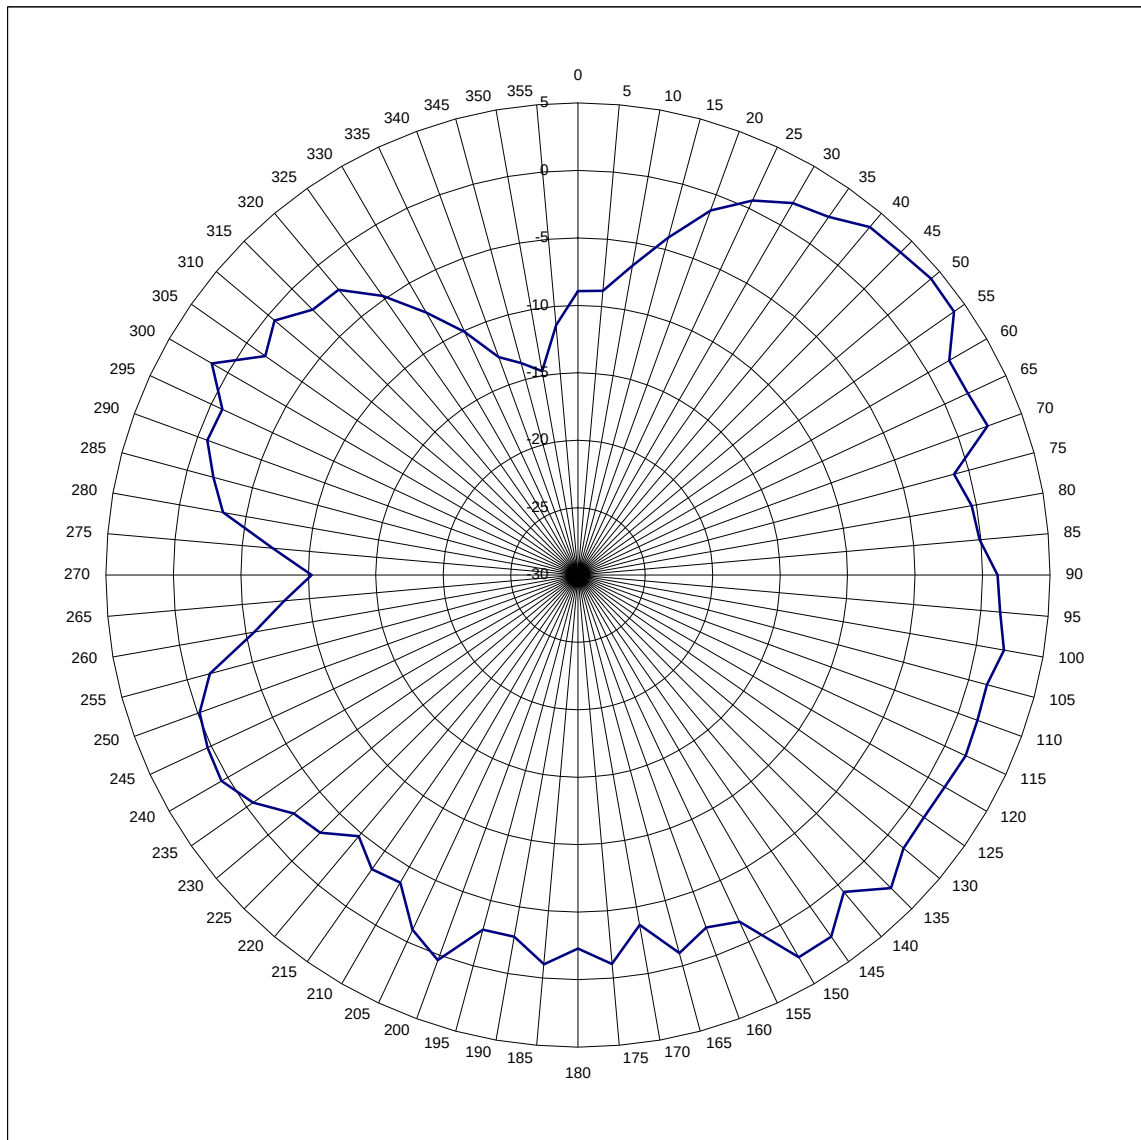

vertical

