

RF Maximum Permissible Exposure Measurement Report

of

E.U.T. : Wireless LAN Card

MODEL : XI-300

FCC ID. : M4Y-XI-300

for

APPLICANT : Z-COM, INC.

ADDRESS : 7F-2, NO. 9, PROSPERITY 1ST RD., SCIENCE-BASED
INDUSTRIAL PARK, HSINCHU, TAIWAN, R.O.C.

Test Performed by

ELECTRONICS TESTING CENTER, TAIWAN

NO. 8 LANE 29, WENMING ROAD,
LOSHAN TSUN, KWEISHAN HSIANG,
TAOYUAN, TAIWAN, R.O.C.

Tel:(03)3280026-32

Fax:(03)3280034

Report Number : ET88R-12-020

TEST REPORT CERTIFICATION

Applicant : Z-COM, INC.
7F-2, NO. 9, PROSPERITY 1ST RD., SCIENCE-BASED INDUSTRIAL
PARK, HSINCHU, TAIWAN, R.O.C.

Manufacturer : Z-COM, INC.
7F-2, NO. 9, PROSPERITY 1ST RD., SCIENCE-BASED INDUSTRIAL
PARK, HSINCHU, TAIWAN, R.O.C.

Description of EUT :

- a) Type of EUT : Wireless LAN Card
- b) Model No. : XI-300
- c) FCC ID. : M4Y-XI-300
- d) Power Supply : DC 5V & 3V from Note Book

Regulation Applied : IEEE C95.1-1991, FCC 47 CFR Part 1 and Part 2

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in IEEE C95.1, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relates only to the item tested.
2. The testing report shall not be reproduced expect in full, without the written approval of ETC.

Issued Date : Apr. 02, 2000

Test Engineer : 
(K. C. Chen)

Approve & Authorized Signer : 
Will Yauo, Supervisor
EMI Test Site of ELECTRONICS
TESTING CENTER, TAIWAN

Table of Contents	Page
1 GENERAL INFORMATION	1
1.1 Product Description	1
1.2 Characteristics of Device	1
1.3 Test Methodology	1
1.4 Test Facility	1
2 PROVISIONS APPLICABLE	2
2.1 Definition	2
2.2 Relative Requirement for Compliance	2
3. SYSTEM TEST CONFIGURATION	3
3.1 Justification	3
3.2 Devices for Tested System	3
4 MAXIMUM PERMISSIBLE EXPOSURE MEASUREMENT	4
4.1 Applicable Standard	4
4.2 Measurement Procedure	4
4.3 Measurement Instrument	5
4.4 Power Density Data	5
APPENDIX A SPECIFICATION OF DEVICE UNDER TEST	6

1 GENERAL INFORMATION

1.1 Product Description

- a) Type of EUT : Wireless LAN Card
- b) Trade Name : Z-Com
- c) Model No. : XI-300
- d) Power Supply : DC 5V & 3V from Note Book

1.2 Characteristics of Device

The Wireless Lan Card (PCMCIA) designed with a transmitting method of direct sequence spread spectrum is for local area network operation, which operates at 2.4 GHz ISM band and data rate up to 11Mbps. For operation of this device, it is asked for maintaining a minimum space of 20 cm from the operator or any bystanding in the user's manual. Its nominal rated output power is 12 dBm.

1.3 Test Methodology

The Maximum Permissible Exposure (MPE) was performed according to the procedures illustrated in IEEE C95.1-1991.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the roof top of Building at No.34, 5 Lin, Din Fu Tsun, Lin Kou, Taipei, Taiwan, R.O.C.

This site has been fully described in a report submitted to the FCC, and accepted in a letter dated Feb. 10, 1997.

2 PROVISIONS APPLICABLE

2.1 Definition

MPE in Occupational / Controlled Environments:

Persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Also apply to a individual is transient through a location where occupational / controlled limits apply provided he or she is made aware of the potatial for exposure.

MPE in General Population / Uncontrolled Environments:

General population / Uncontrlled exposure apply in situation in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potatial for exposure or cannot execise control over their exposure.

2.2 Relative Requirement for Compliance

(1) MPE for Controlled Enviroments

According to section 1.1310 of FCC 47 CFR Part 1, MPE Limits for controlled enviroment are as following:

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-3.0	614	1.63	*100	6
3-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1500	-----	-----	f/300	6
1500-100,000	-----	-----	5.0	6

(2) MPE for Uncontrolled Enviroments

According to section 1.1310 of FCC 47 CFR Part 1, MPE Limits for uncontrolled enviroment are as following:

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-3.0	614	1.63	*100	30
3-30	1842/f	4.89/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1500	-----	-----	f/1500	30
1500-100,000	-----	-----	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power desity

3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a typical fashion, as a customer would normally use it. The MPE measurement was performed under the setting of maximum RF transmitting power and maximum transmission data rate of 11 Mbps. And measured on lowest, middle, and highest frequencies to demonstrate the whole used band is complied with the requirement. Further, measurement was made on every possible azimuth around the transmitting structure. Therefore, we can make sure that the MPE testing was performed under the worst case.

3.2 Devices for Tested System

Device	Manufacture	Model	Cable Description
Wireless LAN Card *	Z-COM, INC.	XI-300	No external cables

Remark “*” means device under test.

4 Maximum Permissible Exposure Measurement


4.1 Applicable Standard

For this intentional radiator is used with any possible people, therefore the **Uncontrolled Environment Condition** is applied. And the MPE requirement is as descibed in section 2.2 of this test report.

4.2 Measurement Procedure

- (1) Set up the device under test (DUT) as its normal using configuration. Please see figure 1.
- (2) Calibrate the probe system so that the meter displays zero, and then power on the DUT.
- (3) Scan the antenna of DUT with a proper spacer of 5 cm in vertical axis and keep vertical scanning around the antenna, and pick up the maximum data with Max. Hold function.
- (4) Repeat step (3) by changing the spacer to 10 cm and then 20 cm till the field from DUT is too weak to be measured.
- (5) Record the maximum value appeared.

Figure 1 : Measurement configuration

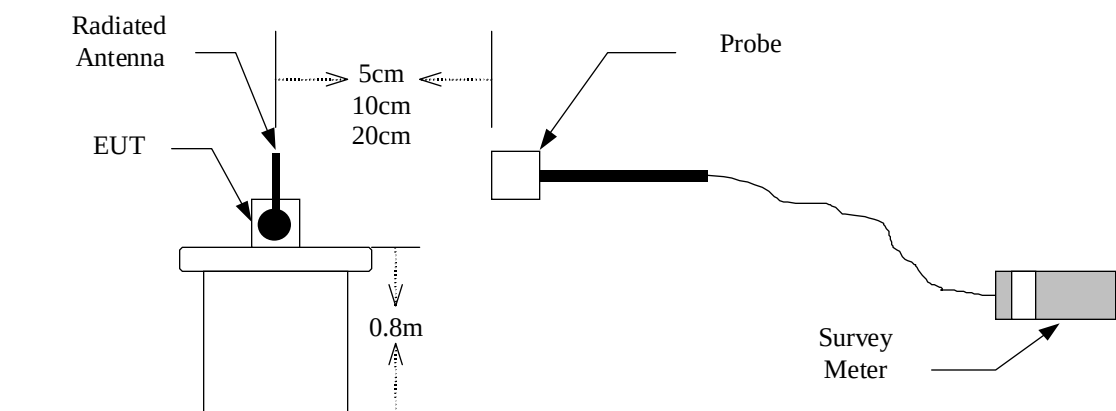

4.3 Measurement Instrument

The following instrument are used for radiated emissions measurement :

Equipment	Manufacturer	Model No.	Next Cal. Due
Survey Meter	Narda	8712	Jan. 30, 2001
Probe	Narda	8721D	Jan. 30, 2001

4.4 Power Desity Data

Operation Mode : Maximum Data Transmitting Rate
 Transmitting Frequency : 2400 to 2483.5 MHz
 Rated Maximum Output Power : 12 dBm
 Measured Output Peak Power : 11 dBm
 Test Date : Mar. 27, 2000 Temperature : 24 • Humidity : 70%

Measured Frequency MHz	Measured @ 5cm mW/cm ²	Measured @ 10cm mW/cm ²	Measured @ 20cm mW/cm ²	Measured @ 30cm mW/cm ²	Probe Factor	Maximum Result @5cm mW/ cm ²	MPE Limt mW/cm ²
2412.00	0.56	0.10	---	---	0.82	0.46	1.0
2437.00	0.52	0.09	---	---	0.82	0.43	1.0
2462.00	0.51	0.08	---	---	0.82	0.42	1.0

Note :

1. Remark “---” means that the emission level is too low to be measured (the precise accuracy of the measurement system is 0.01 mW/ cm²).
2. Value 0.82 is a corrected factor of measurement system.
3. Result = Value Measured X Corrected Factor.
4. The measurement was performed under the condition of fixed the emission frequency to get the most extreme MPE.

Appendix A Specification of Device Under Test



Z-Com, Inc.

A Wireless Networking Company

7F-2, No.9, Prosperity 1st Rd.,
Science-Based Industrial Park,
Hsinchu, Taiwan
Tel : 886-3-5777364
Fax : 886-3-5773359



LANescape XI-300

Wireless PC Card Specification

Description: 2.4 GHz Direct Sequence Spread Spectrum (DSSS) Wireless PCMCIA NIC Card, Type II, Plug and Play PC Card 2.0 Compliant.

Antenna: Detachable Diversity antenna

Data Rate: 11, 5.5, 2 and 1 Mbps per channel

Simultaneous Channels Support: 11 N. America,

Power Consumption: ~ 150mA

Output Power: 12 dBm

Voltage: 3 V & 5V DC

Network Architecture Types: Supports ad-hoc, peer-to-peer and infrastructure communications to wired networks via Access Points.

Operating Channels: 11 N. America

Sensitivity: -80 dBm (at 1E-5 BER)

Operating Frequency: 2.412-2.462 GHz(N. America)
2.412-2.4835 GHz(Japan TELEC)
2.412-2.472 GHz(Europe ETSI)
2.457-2.462 GHz(Spain)
2.457-2.472 GHz(France)

Modulation: CCK (11Mbps, 5.5M), DQPSK (2M), DBPSK (1M)

Size and Weight: PCMCIA type II
Compact Size Weight < 50g