



FCC RADIO TEST REPORT

Applicant's company	Z-Com, Inc.
Applicant Address	7F-2, No. 9. Prosperity RD.I Science-Based Industrial, Park Hsinchu, 300 Taiwan
FCC ID	M4Y-XN990V02
Manufacturer's company	Z-Com, Inc.
Manufacturer Address	7F-2, No. 9. Prosperity RD.I Science-Based Industrial, Park Hsinchu, 300 Taiwan

Product Name	IEEE 802.11n Wireless LAN PCI Card
Brand Name	ZCOM
Model Name	XN-990
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Sep. 19, 2007
Final Test Date	Sep. 29, 2007
Submission Type	Original Equipment



Statement

Test result included is only for the Draft n part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes.....	6
3.6. Table for Testing Locations.....	6
3.7. Table for Supporting Units	7
3.8. Table for Parameters of Test Software Setting	7
3.9. Test Configurations	8
4. TEST RESULT	10
4.1. AC Power Line Conducted Emissions Measurement.....	10
4.2. Maximum Peak Output Power Measurement	14
4.3. Power Spectral Density Measurement	17
4.4. 6dB Spectrum Bandwidth Measurement	22
4.5. Radiated Emissions Measurement	27
4.6. Band Edge Emissions Measurement	45
4.7. Antenna Requirements	50
5. LIST OF MEASURING EQUIPMENTS	51
6. TEST LOCATION.....	53
7. TAF CERTIFICATE OF ACCREDITATION	54
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A10
APPENDIX B. TEST PHOTOS.....	B1 ~ B7
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE	C1 ~C4



History of This Test Report

Original Issue Date: Oct. 08, 2007

Report No.: FR791909AA

■ No additional attachment.

Additional attachment were issued as following record:




Report No.: FR791909AA

Certificate No.: CB9610015

1. CERTIFICATE OF COMPLIANCE

Product Name : IEEE 802.11n Wireless LAN PCI Card
Brand Name : ZCOM
Model Name : XN-990
Applicant : Z-Com, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Sep. 19, 2007 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.


Wayne Hsu

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	7.22 dB
4.2	15.247(b)(3)	Maximum Peak Conducted Output Power	Complies	6.94 dB
4.3	15.247(e)	Power Spectral Density	Complies	17.97 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	5.75 dB
4.6	15.247(d)	Band Edge Emissions	Complies	1.32 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (2TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation&	see the below table for draft n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for Draft n
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	MCS8 (20MHz) : 17.64 MHz MCS8 (40MHz) : 36.16 MHz
Conducted Output Power	MCS8 (20MHz) : 23.06 dBm MCS8 (40MHz) : 22.56 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna & Band width

Antenna	Single (TX)		Two (TX)	
Band width Mode	20 MHz	40 MHz	20 MHz	40 MHz
802.11b	V	X	X	X
802.11g	V	X	X	X
Draft n	X	X	V	V

Draft n spec

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Data rate(Mbps)	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	$\frac{1}{2}$	1	52	108	26	54	6.5	13.5
1	1	QPSK	$\frac{1}{2}$	2	104	216	52	108	13.0	27.0
2	1	QPSK	$\frac{3}{4}$	2	104	216	78	162	19.5	40.5
3	1	16-QAM	$\frac{1}{2}$	4	208	432	104	216	26.0	54.0
4	1	16-QAM	$\frac{3}{4}$	4	208	432	156	324	39.0	81.0
5	1	64-QAM	$\frac{2}{3}$	6	312	648	208	432	52.0	108.0
6	1	64-QAM	$\frac{3}{4}$	6	312	648	234	486	58.5	121.5
7	1	64-QAM	$\frac{5}{6}$	6	312	648	260	540	65.0	135.0
8	2	BPSK	$\frac{1}{2}$	1	104	216	52	108	13.0	27.0
9	2	QPSK	$\frac{1}{2}$	2	208	432	104	216	26.0	54.0
10	2	QPSK	$\frac{3}{4}$	2	208	432	156	324	39.0	81.0
11	2	16-QAM	$\frac{1}{2}$	4	416	864	208	432	52.0	108.0
12	2	16-QAM	$\frac{3}{4}$	4	416	864	312	648	78.0	162.0
13	2	64-QAM	$\frac{2}{3}$	6	624	1296	416	864	104.0	216.0
14	2	64-QAM	$\frac{3}{4}$	6	624	1296	468	972	117.0	243.0
15	2	64-QAM	$\frac{5}{6}$	6	624	1296	520	1080	130.0	270.0


Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPS	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

3.2. Accessories

N/A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Cable Length	Cable Lose (dB)	Gain (dBi)	Total Gain (dBi)
1	Wha Yu	C037-510810-A (SSR-71307)	Dipole	Reversed-SMA	100 cm	2.1	3	0.9
2	WANSHIH	FMH-0517-28-3857	Dipole	Reversed-SMA	90 cm	2.5	2	-0.5
3	WANSHIH	SAW-0008A	Dipole	Reversed-SMA	-	-	2	2

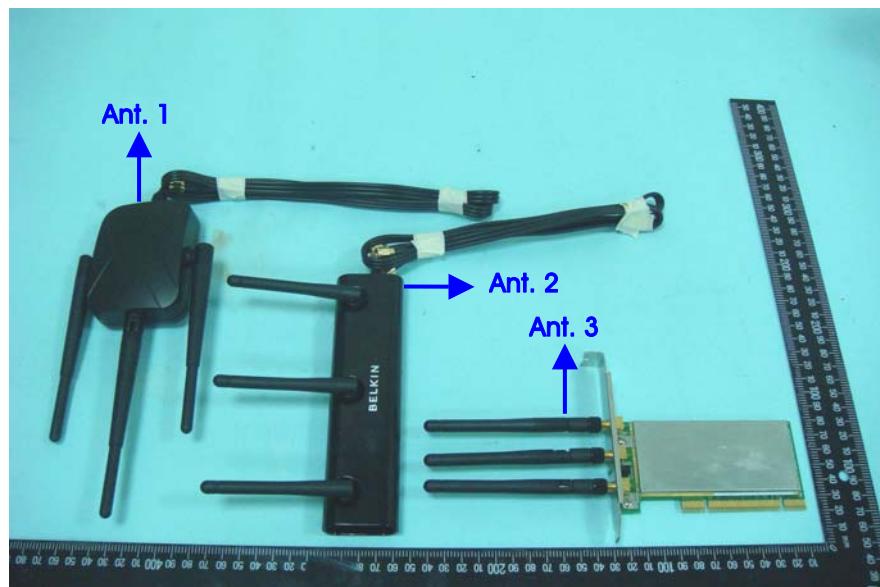

Note: The EUT has three sets of dipole antenna.

Due to Antenna 3 generated the worst test result, so it was recorded in this report.

For Antenna 3

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
A	WANSHIH	SAW-0008A	Dipole	Reversed-SMA	2	TX/RX Ant.
B	WANSHIH	SAW-0008A	Dipole	Reversed-SMA	2	TX/RX Ant.
C	WANSHIH	SAW-0008A	Dipole	Reversed-SMA	2	RX Ant.



Note: The EUT has three antennas.

Both antenna A and B can be used as transmitting antenna.

Antenna A, B, C is used as the receiving antenna.

3.4. Table for Carrier Frequencies

There are two bandwidth systems for draft n.

For both 20MHz bandwidth systems, use Channel 1~Channel 11.

For both 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz		

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	6	A+B+C
Maximum Peak Conducted Output Power	MCS8/20MHz	1/6/11	A / B / A+B
	MCS8/40MHz	3/6/9	A / B / A+B
Power Spectral Density 6dB Spectrum Bandwidth	MCS8/20MHz	1/6/11	A+B
	MCS8/40MHz	3/6/9	A+B
Radiated Emissions 9kHz~1GHz	Normal Link	6	A+B+C
Radiated Emissions 1GHz~10 th Harmonic	MCS8/20MHz	1/6/11	A+B
	MCS8/40MHz	3/6/9	A+B
Band Edge Emissions	MCS8/20MHz	1/11	A+B
	MCS8/40MHz	3/9	A+B

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
PC	hp compaq	d330uT	DoC
LCD Monitor	DELL	1704FPt	DoC
Mouse	HP	M-UV96	DoC
Keyboard	BTC	9110	E5XKB9110
Printer	EPSON	LQ-300+	N/A
Modem	ACEEX	DM1414	IFAXDM1414
Wireless AP	Planex	GW-AP54SGX	N/A

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of Draft n MCS8 20MHz

Test Software Version	QA		
Frequency	2412 MHz	2437 MHz	2462 MHz
Draft n Ant. A	0C	0C	0E
Draft n Ant. B	0C	0C	0C

Power Parameters of Draft n MCS8 40MHz

Test Software Version	QA		
Frequency	2422 MHz	2437 MHz	2452 MHz
Draft n Ant. A	0C	0C	0D
Draft n Ant. B	0B	0B	0B

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows:

- Turn on the power of all equipment.
- The PC sends " H " messages to the panel, and the panel displays " H " patterns on the screen.
- The PC sends " H " messages to the printer, then the printer prints them on the paper.
- The PC sends " H " messages to the modem.
- Repeat the steps from b to d.

At the same time, the following programs were executed:


Executed " ATE " to control the EUT continuously transmit RF signal.

Executed " ping.exe " to link with the remote workstation to receive and transmit signal by WLAN.

3.9. Test Configurations


3.9.1. Radiation Emissions Test Configuration

Test Configuration: 9KHz~1GHz

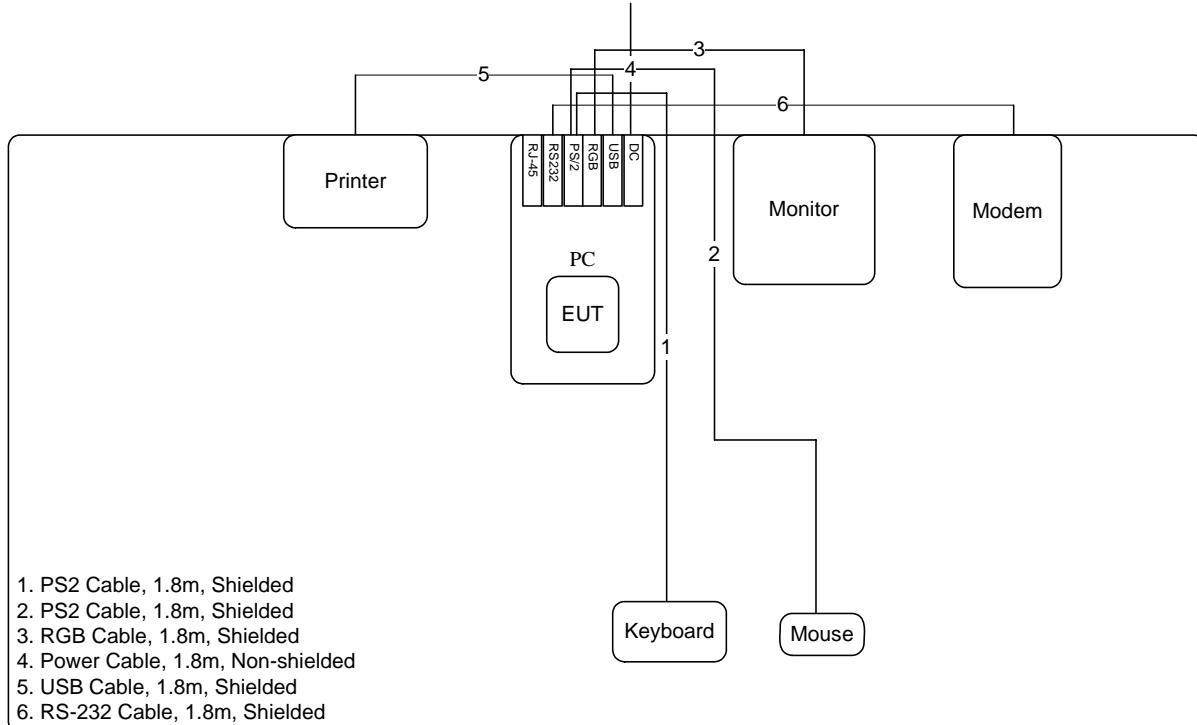


AP

Test Configuration: above 1GHz

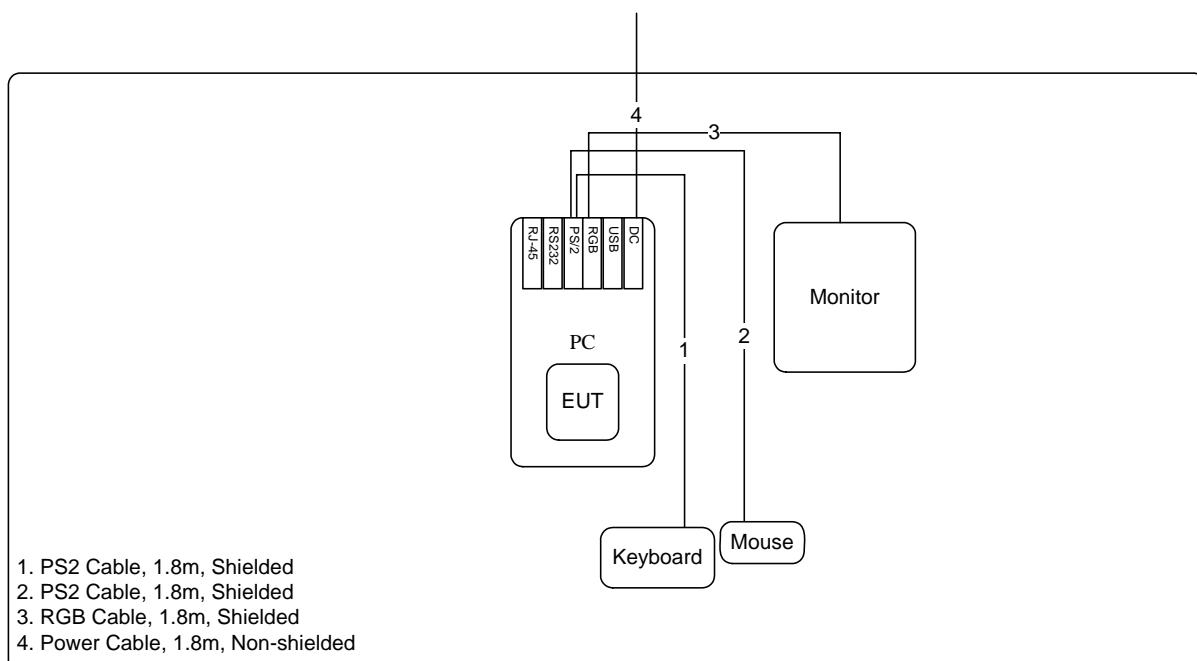

3.9.2. AC Power Line Conduction Emissions Test Configuration

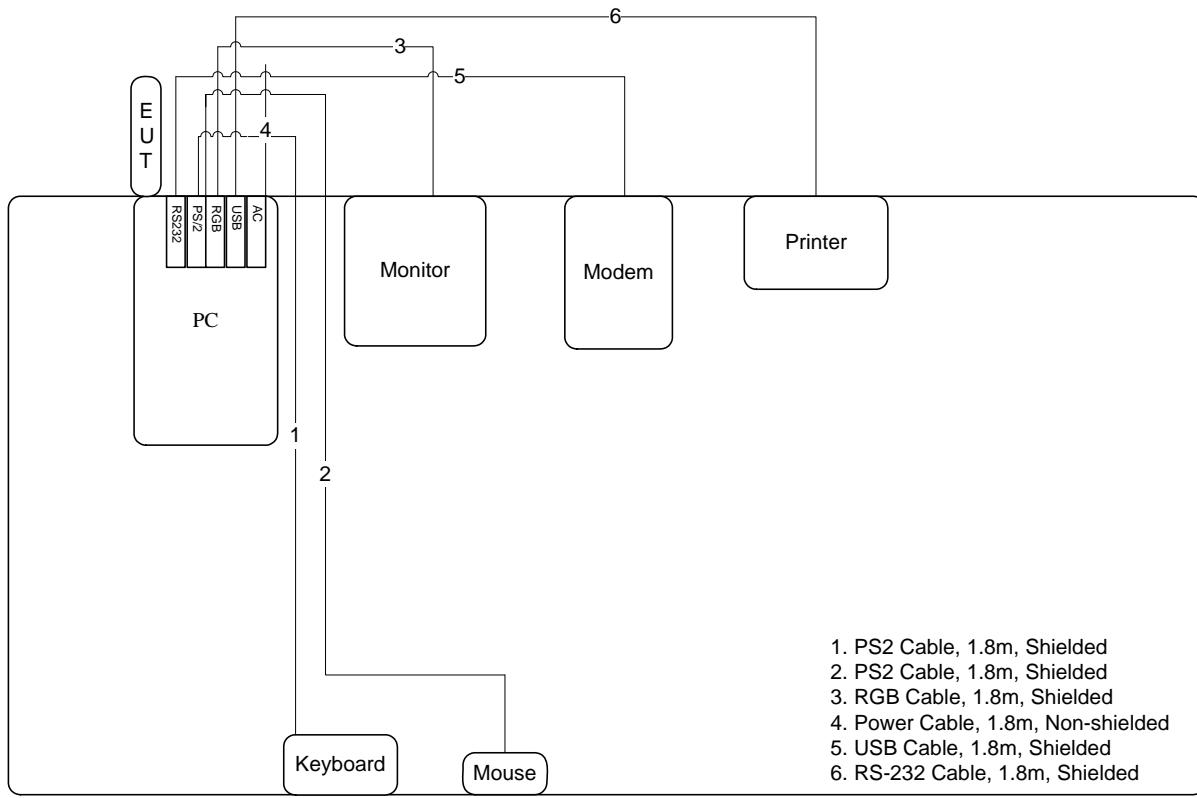

AP

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

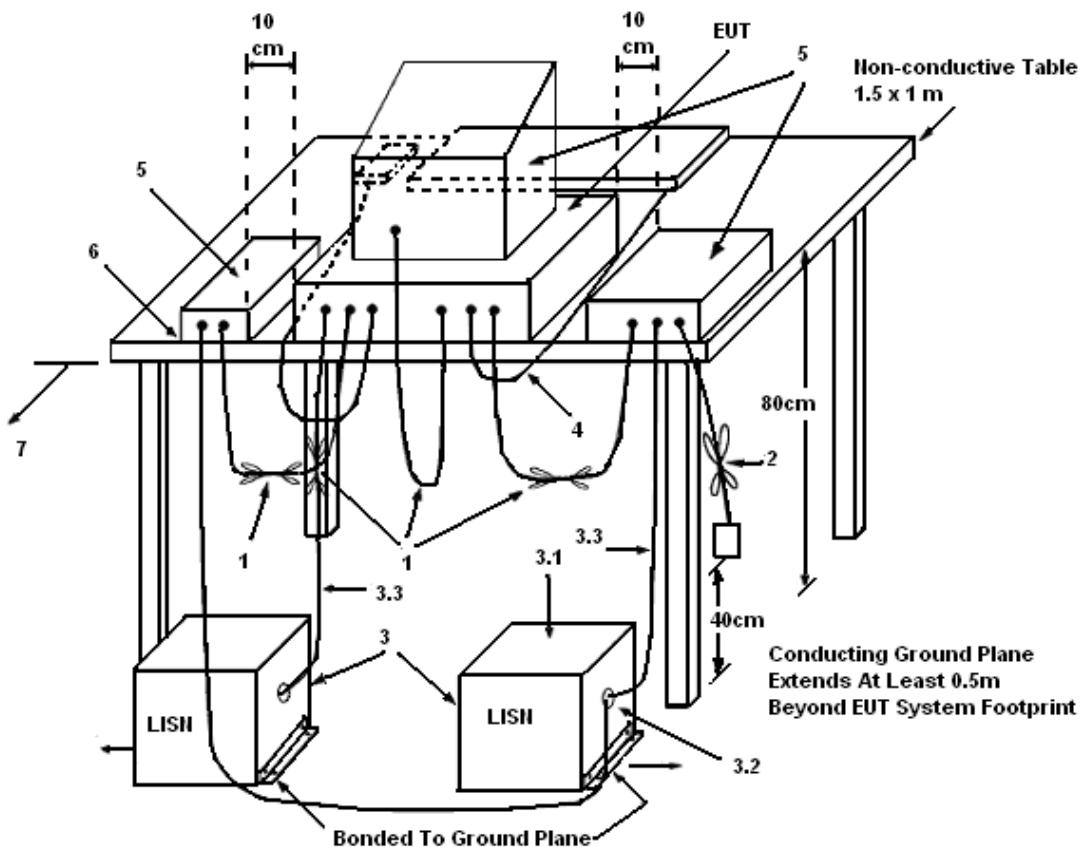

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	26°C	Humidity	62%
Test Engineer	Andy Tsai	Phase	Line
Configuration	Normal Link		

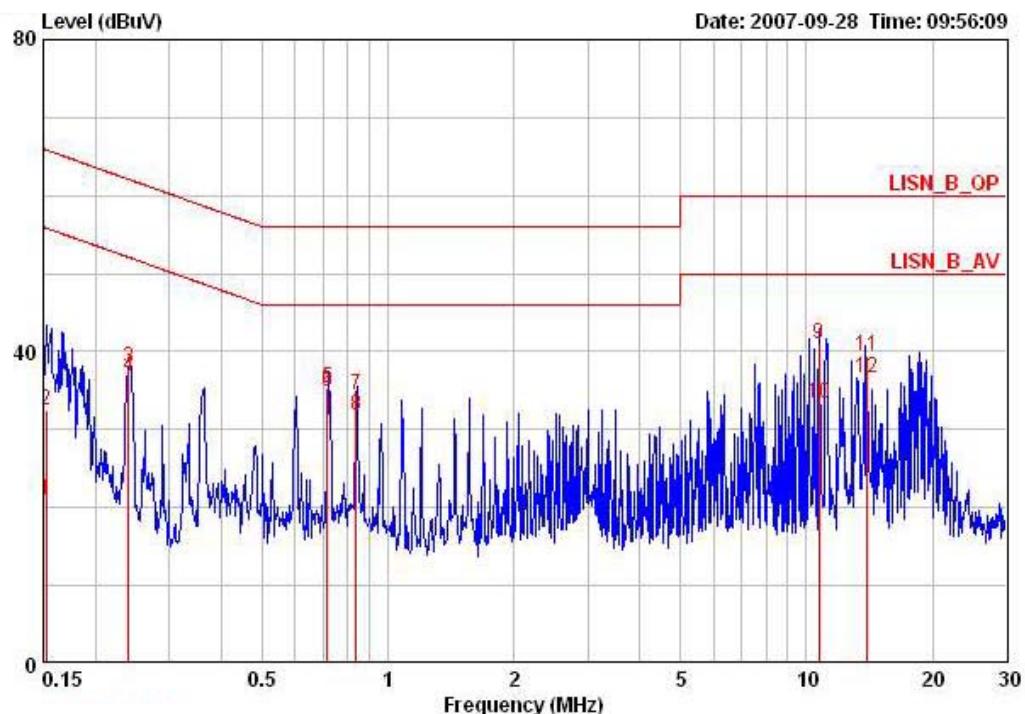

Freq	Level	Limit	Over	Limit	Read	LISN	Cable	Remark	Pol/Phase
			Line	Level	Factor	Loss	Remark		
MHz	dBuV	dB	dBuV	dBuV	dB	dB	dB		
0.15240	21.01	-34.86	55.87	20.61	0.20	0.20	AVERAGE		LINE
0.15240	32.57	-33.30	65.87	32.17	0.20	0.20	QP		LINE
0.23965	37.84	-24.27	62.11	37.54	0.10	0.20	QP		LINE
0.23965	36.90	-15.21	52.11	36.60	0.10	0.20	AVERAGE		LINE
0.71660	35.35	-20.66	56.00	35.10	0.05	0.20	QP		LINE
0.71660	34.88	-11.13	46.00	34.63	0.05	0.20	AVERAGE		LINE
0.83778	34.45	-21.56	56.00	34.22	0.03	0.20	QP		LINE
0.83778	31.90	-14.11	46.00	31.67	0.03	0.20	AVERAGE		LINE
10.700	40.89	-19.11	60.00	40.39	0.10	0.40	QP		LINE
10.700	33.30	-16.70	50.00	32.80	0.10	0.40	AVERAGE		LINE
13.884	39.41	-20.59	60.00	38.91	0.10	0.40	QP		LINE
13.884	36.63	-13.37	50.00	36.13	0.10	0.40	AVERAGE		LINE

Temperature	26°C	Humidity	62%
Test Engineer	Andy Tsai	Phase	Neutral
Configuration	Normal Link		

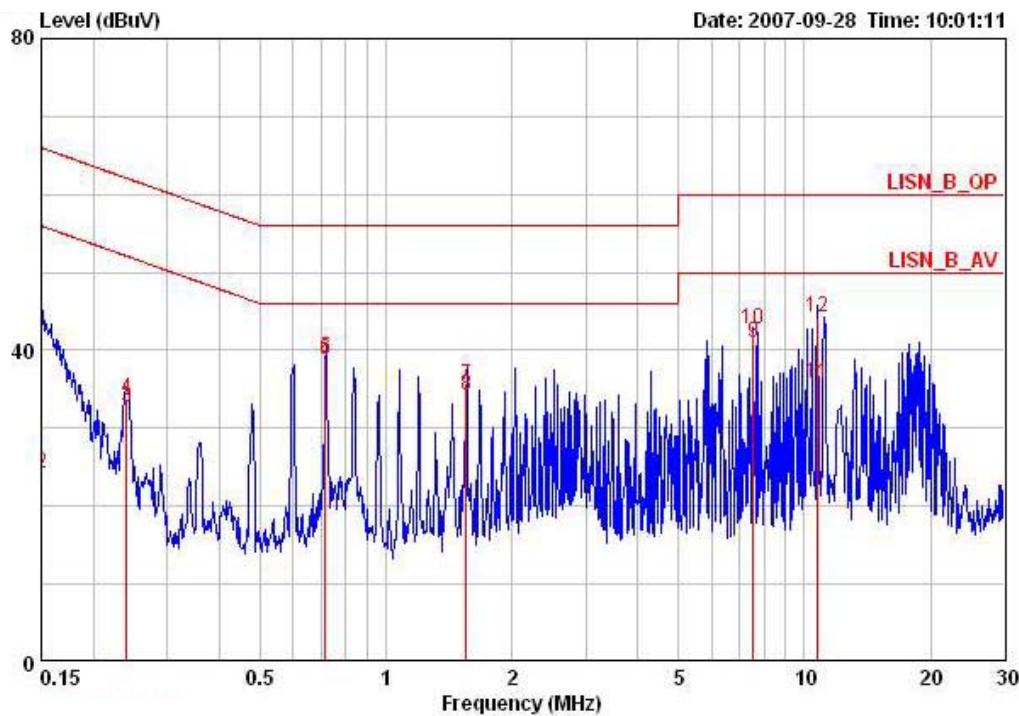

Freq	Level	Over Limit	Read Line	LISN		Cable Loss	Remark	Pol/Phase	
				MHz	dBuV	dB	dBuV	dB	
1	0.15000	36.76	-29.24	66.00	36.26	0.30	0.20	QP	NEUTRAL
2	0.15000	24.27	-31.73	56.00	23.77	0.30	0.20	AVERAGE	NEUTRAL
3	0.23937	32.60	-19.51	52.12	32.22	0.18	0.20	AVERAGE	NEUTRAL
4	0.23937	33.75	-28.36	62.12	33.37	0.18	0.20	QP	NEUTRAL
5	0.71677	39.10	-16.90	56.00	38.80	0.10	0.20	QP	NEUTRAL
6 @	0.71677	38.78	-7.22	46.00	38.48	0.10	0.20	AVERAGE	NEUTRAL
7	1.552	35.63	-20.37	56.00	35.42	0.10	0.11	QP	NEUTRAL
8 @	1.552	34.14	-11.86	46.00	33.93	0.10	0.11	AVERAGE	NEUTRAL
9 @	7.553	41.05	-8.95	50.00	40.55	0.10	0.40	AVERAGE	NEUTRAL
10	7.553	42.62	-17.38	60.00	42.12	0.10	0.40	QP	NEUTRAL
11	10.750	35.72	-14.28	50.00	35.22	0.10	0.40	AVERAGE	NEUTRAL
12	10.750	44.15	-15.85	60.00	43.65	0.10	0.40	QP	NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Peak Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	NRV-Z32 (model 04)

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.

4.2.4. Test Setup Layout

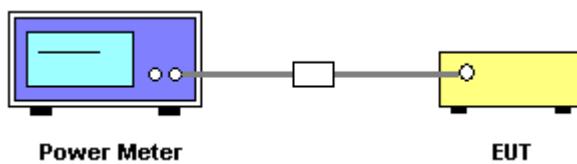

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Peak Output Power

Temperature	24.3°C	Humidity	56%
Test Engineer	Aric Lee	Configurations	Draft n

Configuration Draft n MCS0 20MHz Ant. A

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	20.20	30.00	Complies
6	2437 MHz	19.50	30.00	Complies
11	2462 MHz	20.20	30.00	Complies

Configuration Draft n MCS0 20MHz Ant. B

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	19.90	30.00	Complies
6	2437 MHz	19.90	30.00	Complies
11	2462 MHz	18.90	30.00	Complies

Configuration Draft n MCS8 20MHz Ant. A + Ant. B

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	23.06	30.00	Complies
6	2437 MHz	22.71	30.00	Complies
11	2462 MHz	22.61	30.00	Complies

Configuration Draft n MCS0 40MHz Ant. A

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	19.50	30.00	Complies
6	2437 MHz	19.40	30.00	Complies
9	2452 MHz	19.60	30.00	Complies

Configuration Draft n MCS0 40MHz Ant. B

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	19.60	30.00	Complies
6	2437 MHz	19.60	30.00	Complies
9	2452 MHz	19.40	30.00	Complies

Configuration Draft n MCS8 40MHz Ant. A + Ant. B

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	22.56	30.00	Complies
6	2437 MHz	22.51	30.00	Complies
9	2452 MHz	22.51	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	500s

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.

4.3.4. Test Setup Layout

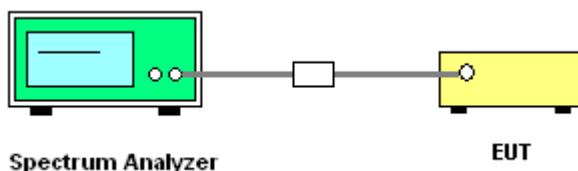

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	24.3°C	Humidity	56%
Test Engineer	Aric Lee	Configurations	Draft n


Configuration Draft n MCS8 20MHz Ant. A + Ant. B

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-9.97	8.00	Complies
6	2437 MHz	-10.44	8.00	Complies
11	2462 MHz	-10.26	8.00	Complies

Configuration Draft n MCS8 40MHz Ant. A + Ant. B


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	-12.73	8.00	Complies
6	2437 MHz	-13.41	8.00	Complies
9	2452 MHz	-13.21	8.00	Complies

Power Density Plot on Configuration Draft n MCS8 20MHz Ant. A + Ant. B / 2412 MHz

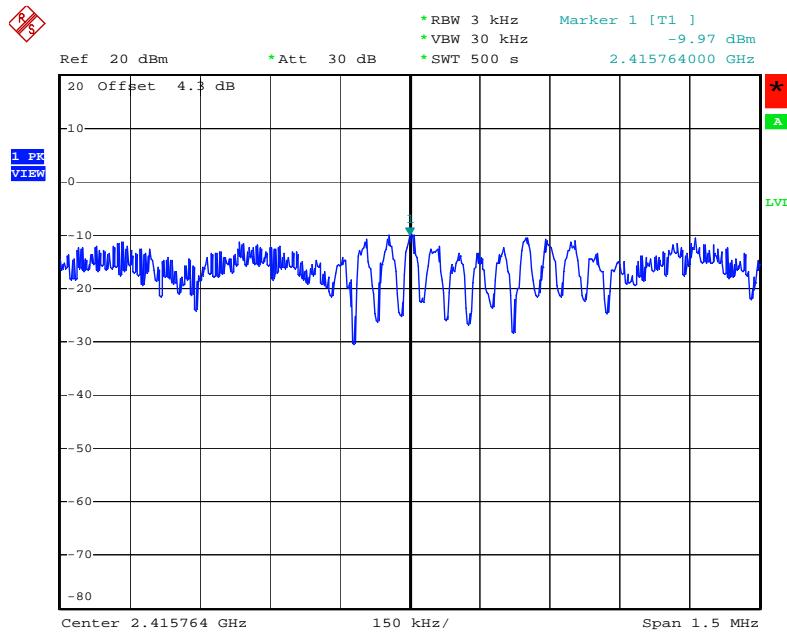


Date: 20.SEP.2007 16:05:18


Power Density Plot on Configuration Draft n MCS8 20MHz Ant. A + Ant. B / 2437 MHz

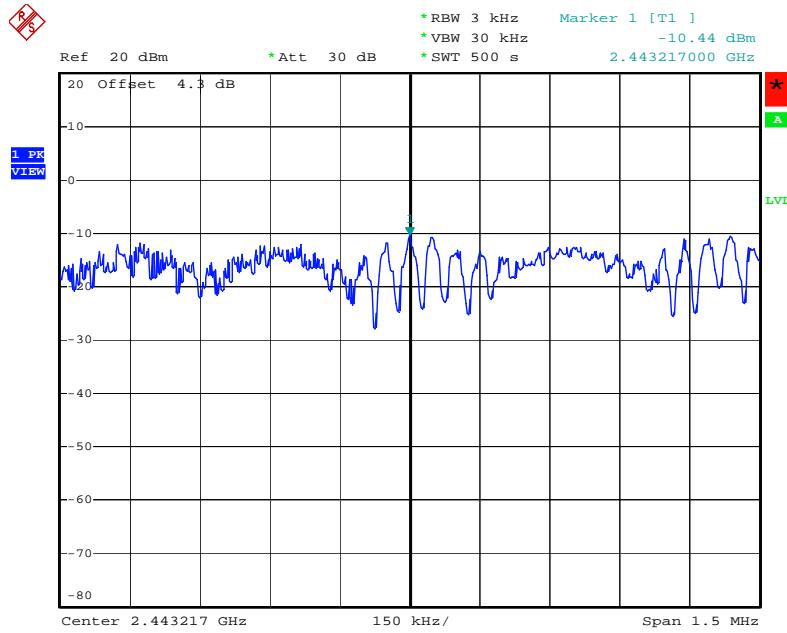

Date: 20.SEP.2007 16:06:42

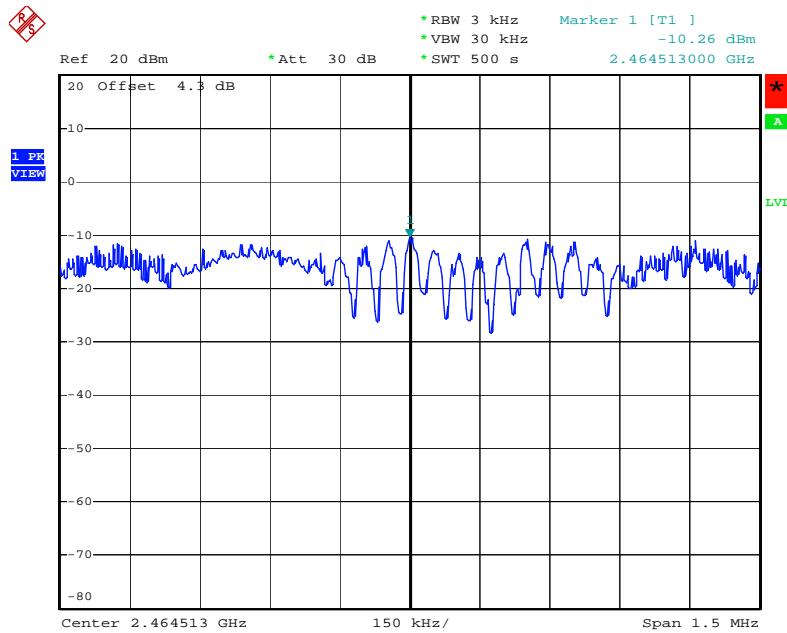
Power Density Plot on Configuration Draft n MCS8 20MHz Ant. A + Ant. B / 2462 MHz


Date: 20.SEP.2007 16:07:51

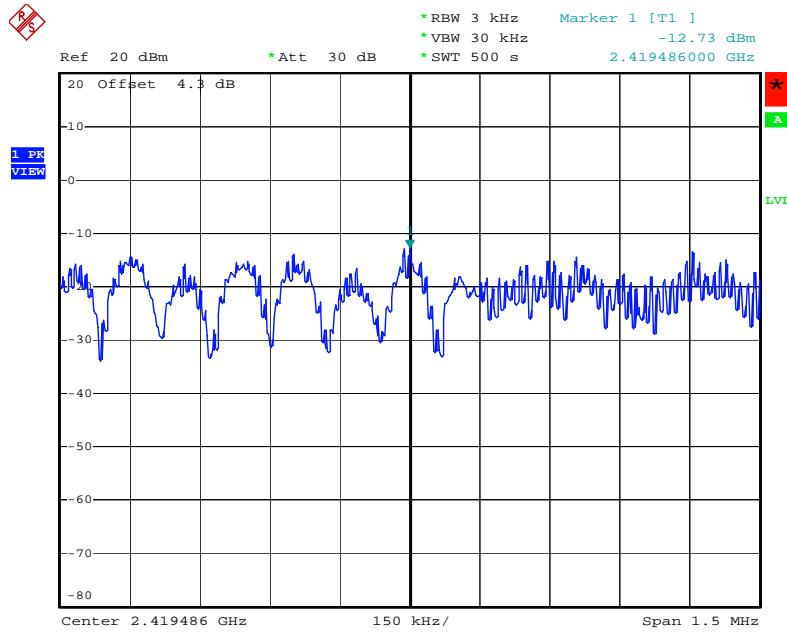Power Density Plot on Configuration Draft n MCS8 40MHz Ant. A + Ant. B / 2422 MHz


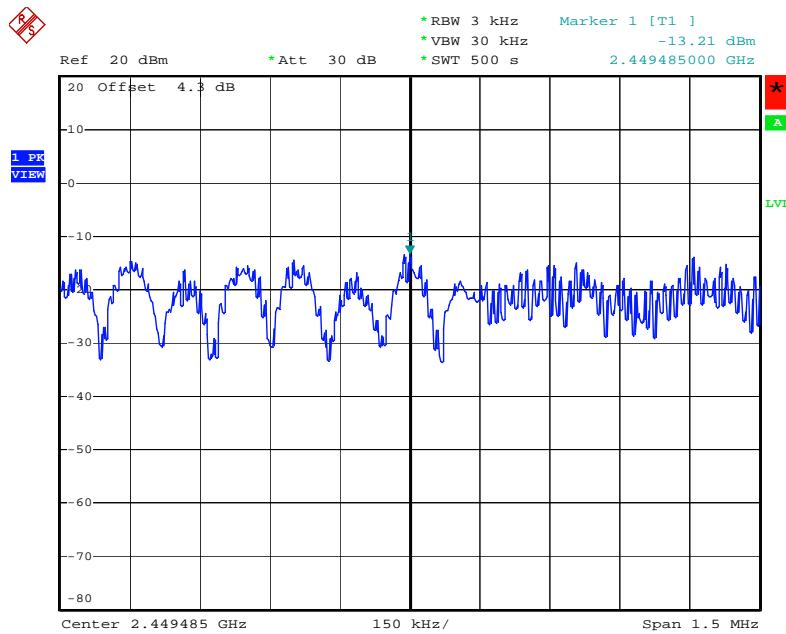
Date: 20.SEP.2007 16:13:24

Power Density Plot on Configuration Draft n MCS8 40MHz Ant. A + Ant. B / 2437 MHz

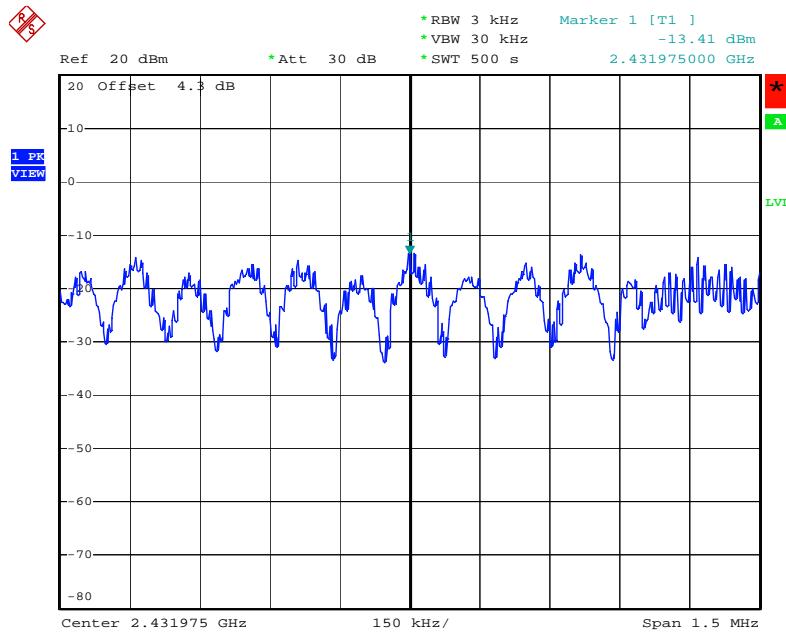

Date: 20.SEP.2007 16:14:41

Power Density Plot on Configuration Draft n MCS8 40MHz Ant. A + Ant. B / 2452 MHz



Date: 20.SEP.2007 16:15:47

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

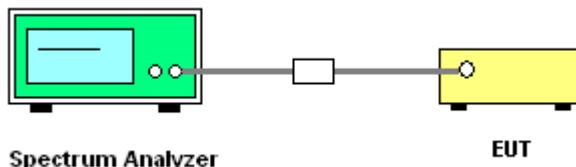

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	24.3°C	Humidity	56%
Test Engineer	Aric Lee	Configurations	Draft n


Configuration Draft n MCS8 20MHz Ant. A + Ant. B

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.64	17.64	500	Complies
6	2437 MHz	17.64	17.60	500	Complies
11	2462 MHz	17.68	17.64	500	Complies

Configuration Draft n MCS8 40MHz Ant. A + Ant. B


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.40	36.16	500	Complies
6	2437 MHz	36.40	36.00	500	Complies
9	2452 MHz	36.40	36.00	500	Complies

6 dB Bandwidth Plot on Configuration Draft n MCS8 20MHz Ant. A + Ant. B / 2412 MHz

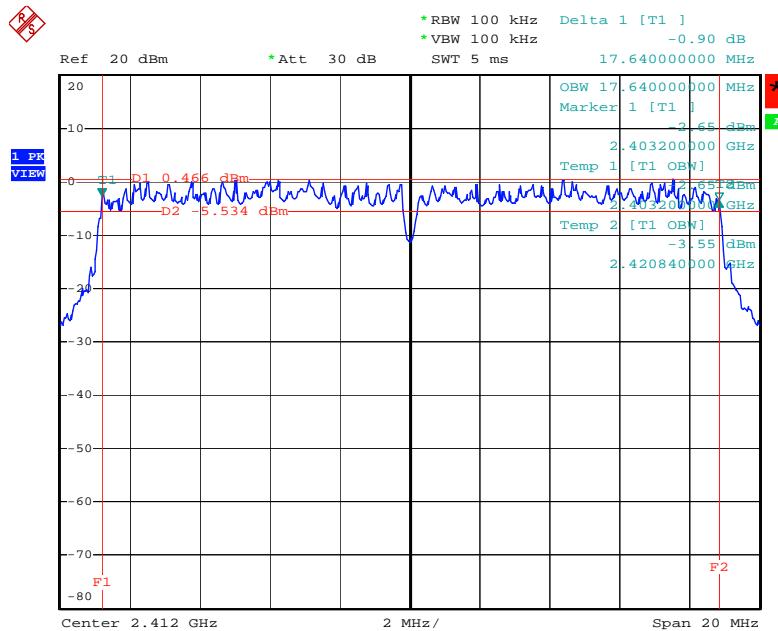


Date: 20.SEP.2007 16:04:53

6 dB Bandwidth Plot on Configuration Draft n MCS8 20MHz Ant. A + Ant. B / 2437 MHz

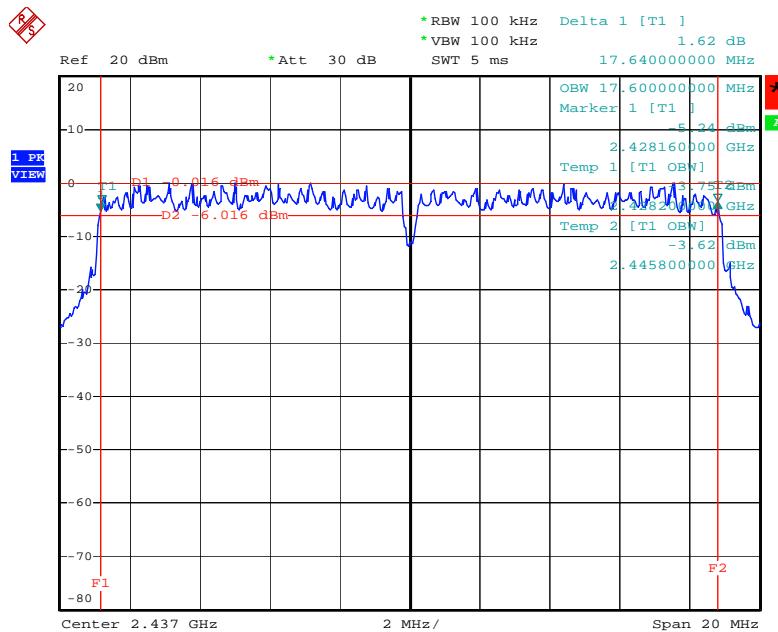


Date: 20.SEP.2007 16:06:26

6 dB Bandwidth Plot on Configuration Draft n MCS8 20MHz Ant. A + Ant. B / 2462 MHz

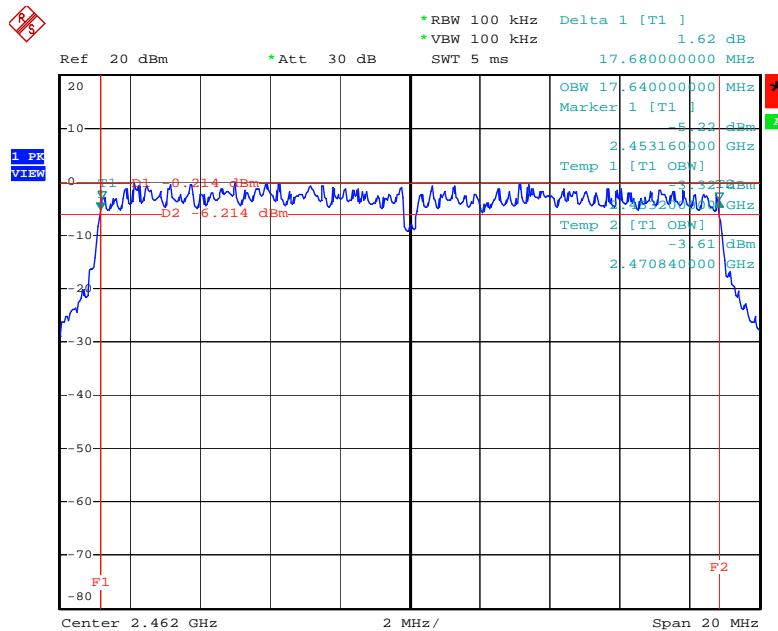


Date: 20.SEP.2007 16:07:36

6 dB Bandwidth Plot on Configuration Draft n MCS8 40MHz Ant. A + Ant. B / 2422 MHz

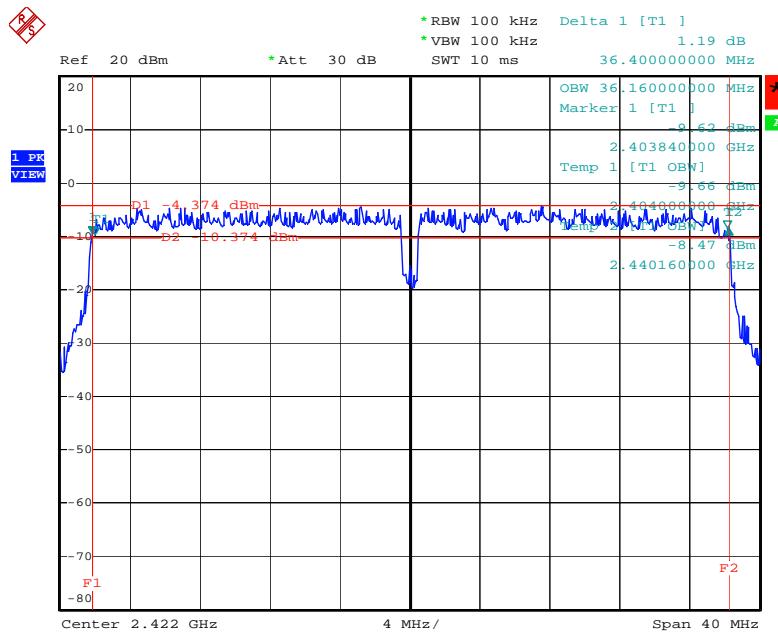


Date: 20.SEP.2007 16:12:59

6 dB Bandwidth Plot on Configuration Draft n MCS8 40MHz Ant. A + Ant. B / 2437 MHz

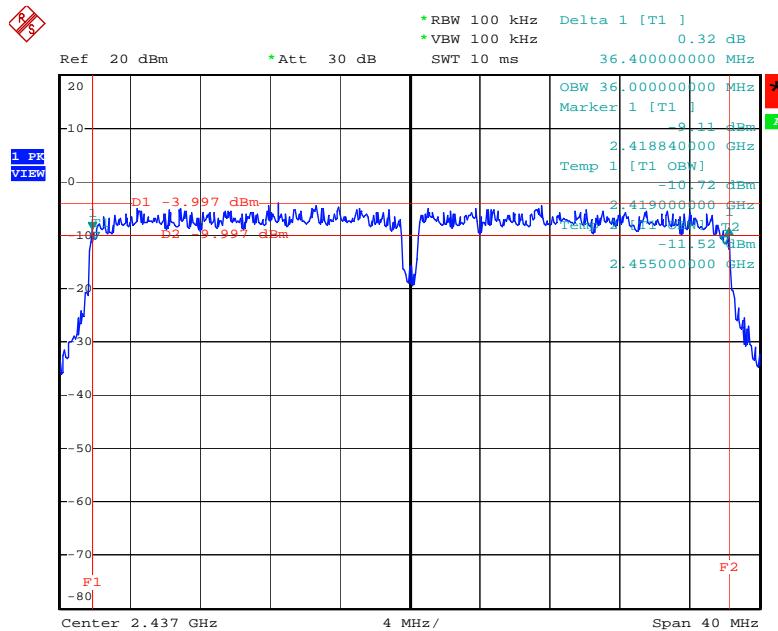

Date: 20.SEP.2007 16:14:16

6 dB Bandwidth Plot on Configuration Draft n MCS8 40MHz Ant. A + Ant. B / 2452 MHz

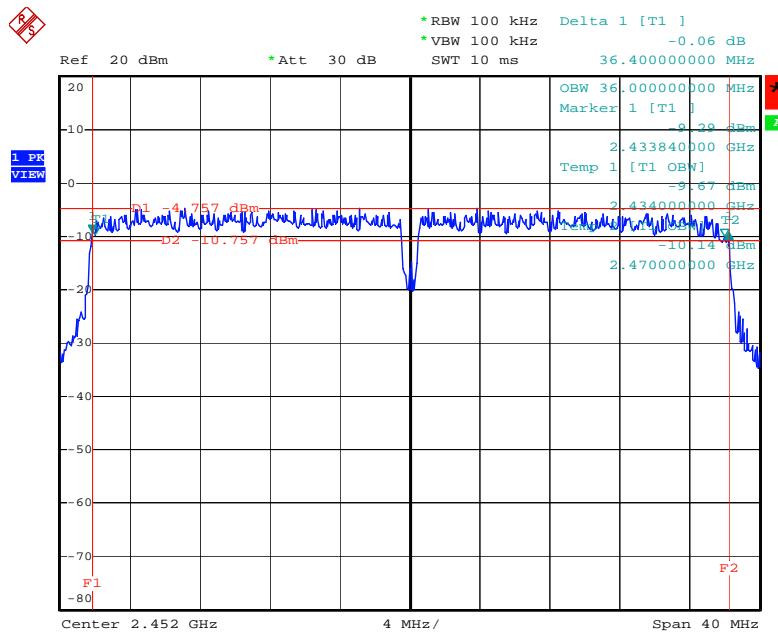

Date: 20.SEP.2007 16:15:22

4.5. Radiated Emissions Measurement

4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout

For radiated emissions below 30MHz

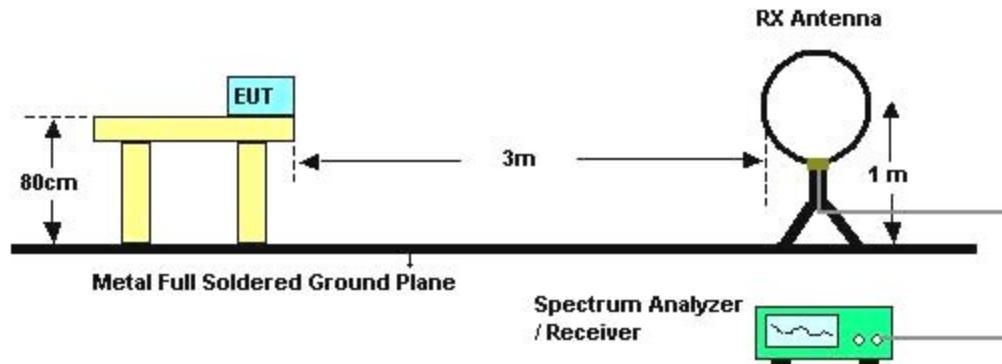

For radiated emissions above 30MHz

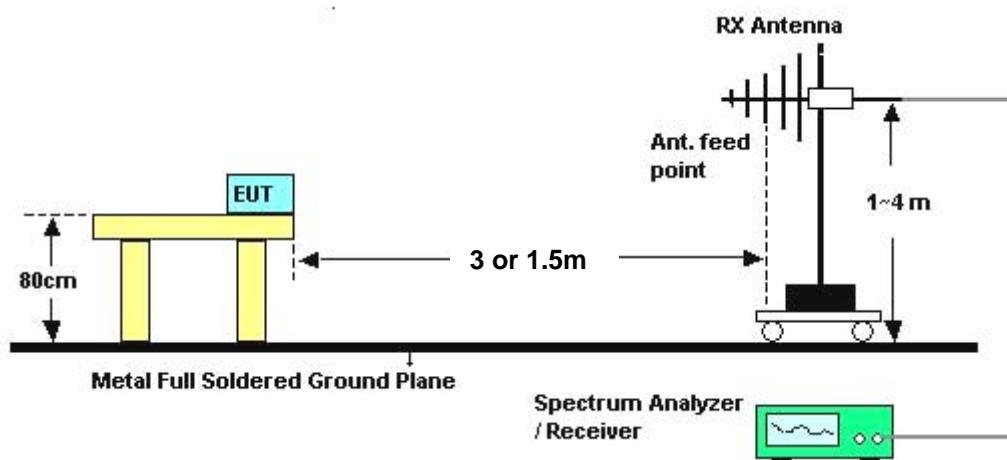

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	Normal Link

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


4.5.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	Normal Link

Horizontal

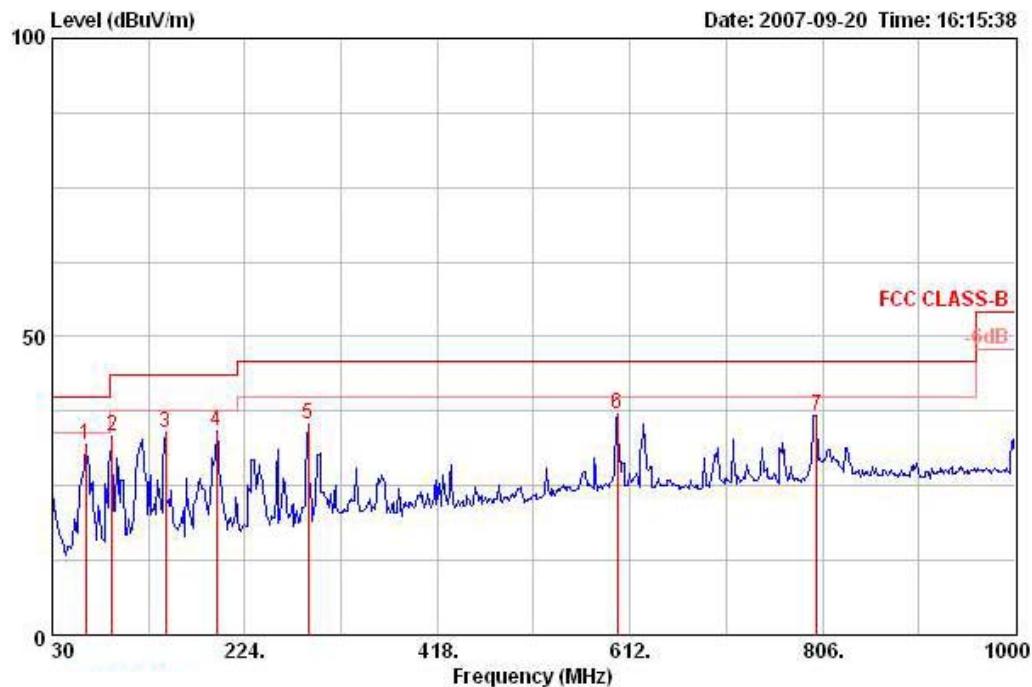

Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Table	Ant	
		Limit	Line	Level	Factor	Factor	Loss			Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	cm		Pol/Phase
1	63.950	31.91	-8.09	40.00	53.96	4.75	27.69	0.89	Peak	0 100 HORIZONTAL
2	90.140	33.35	-10.15	43.50	51.19	8.60	27.51	1.07	Peak	0 100 HORIZONTAL
3	144.460	33.93	-9.57	43.50	49.78	10.04	27.16	1.27	Peak	0 100 HORIZONTAL
4	195.870	34.30	-9.20	43.50	50.71	8.90	26.74	1.43	Peak	0 100 HORIZONTAL
5	288.020	35.22	-10.78	46.00	47.32	12.58	26.23	1.55	Peak	0 100 HORIZONTAL
6	599.390	36.90	-9.10	46.00	43.82	18.33	27.11	1.86	Peak	0 100 HORIZONTAL
7	800.180	36.78	-9.22	46.00	41.03	19.90	27.16	3.01	Peak	0 100 HORIZONTAL

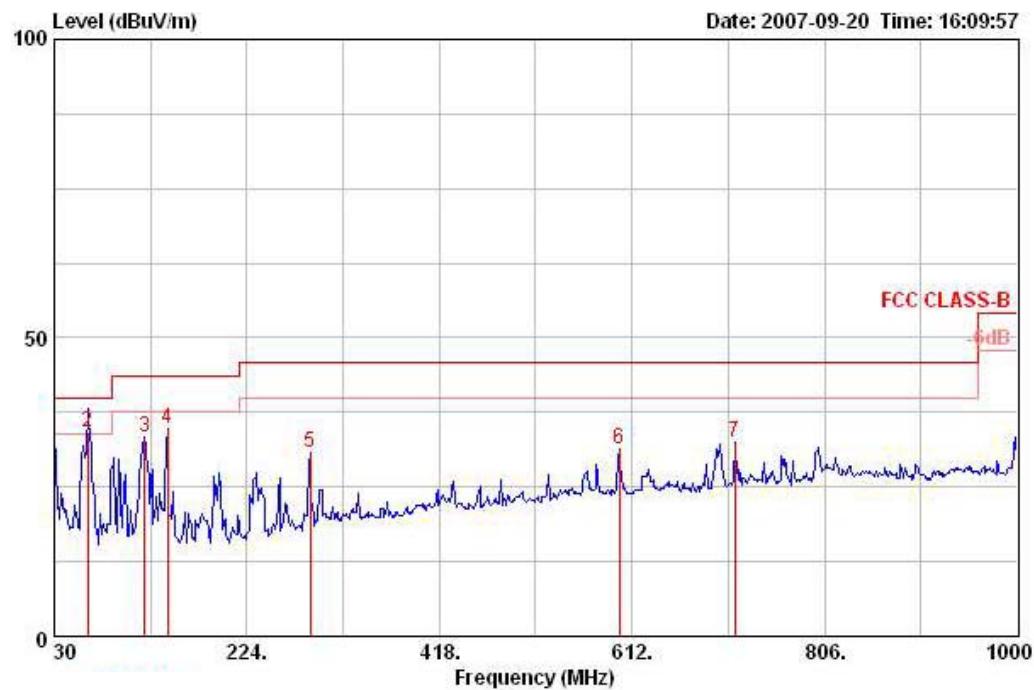Vertical


Freq	Level	Over Limit	Limit	Read		Antenna Factor	Preamp Factor	Cable Loss	Remark	Table Pos	Ant Pos	Pol/Phase
				MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	cm
1	30.000	33.17	-6.83	40.00	42.40	18.00	27.90	0.67	Peak	0	400	VERTICAL
2 @	63.950	34.25	-5.75	40.00	56.30	4.75	27.69	0.89	QP	360	161	VERTICAL
3	121.180	33.41	-10.09	43.50	47.95	11.63	27.34	1.16	Peak	0	400	VERTICAL
4	144.460	34.77	-8.73	43.50	50.62	10.04	27.16	1.27	Peak	0	400	VERTICAL
5	288.020	30.83	-15.17	46.00	42.93	12.58	26.23	1.55	Peak	0	400	VERTICAL
6	599.390	31.20	-14.80	46.00	38.12	18.33	27.11	1.86	Peak	0	400	VERTICAL
7	715.790	32.54	-13.46	46.00	37.63	19.65	26.97	2.23	Peak	0	400	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	Draft n MCS8 20MHz Ch 1 Ant. A + Ant. B

Horizontal

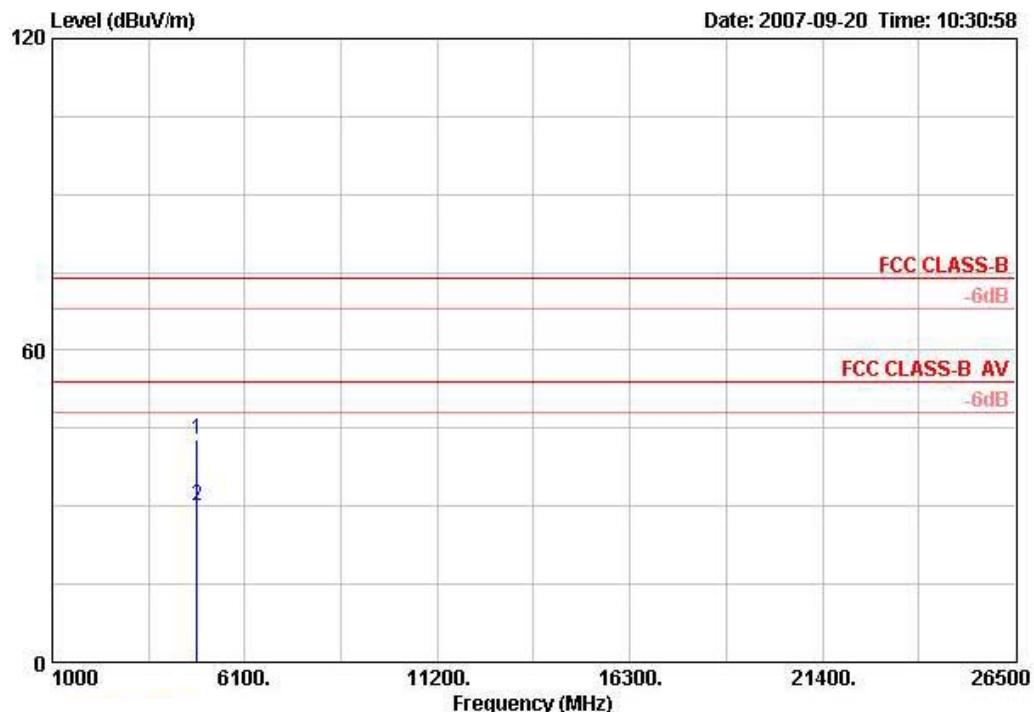


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	
		Line	Limit	Level	Factor	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	
1	4824.850	42.97	-31.03	74.00	39.23	33.06	5.86	35.16	PEAK
2	4826.440	30.01	-23.99	54.00	26.27	33.06	5.86	35.16	AVERAGE
									100 HORIZONTAL
									100 HORIZONTAL

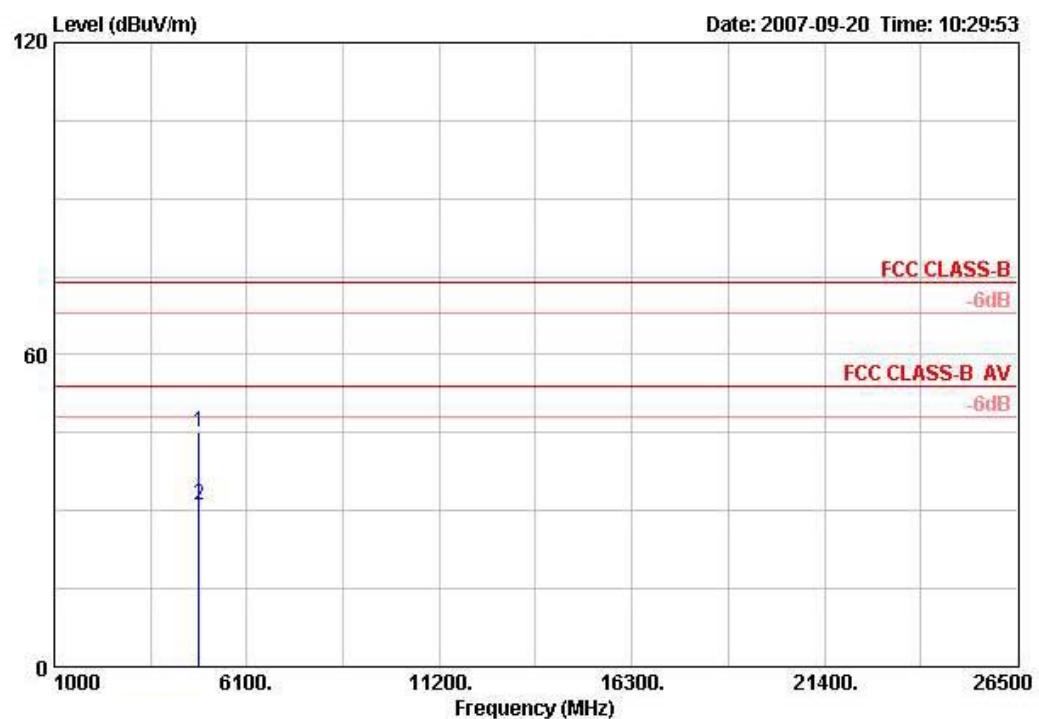
Vertical


Freq	Level	Over Limit	Read Line	Antenna		Cable Loss	Preamp Factor	Remark	Ant Pos	Pol/Phase
				MHz	dBuV/m	dB	dBuV/m	dB	dB	cm
1	4825.280	45.23	-28.77	74.00	41.49	33.06	5.86	35.16	PEAK	135 VERTICAL
2	4826.400	31.21	-22.79	54.00	27.46	33.06	5.86	35.16	AVERAGE	135 VERTICAL

Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	Draft n MCS8 20MHz Ch 6 Ant. A + Ant. B

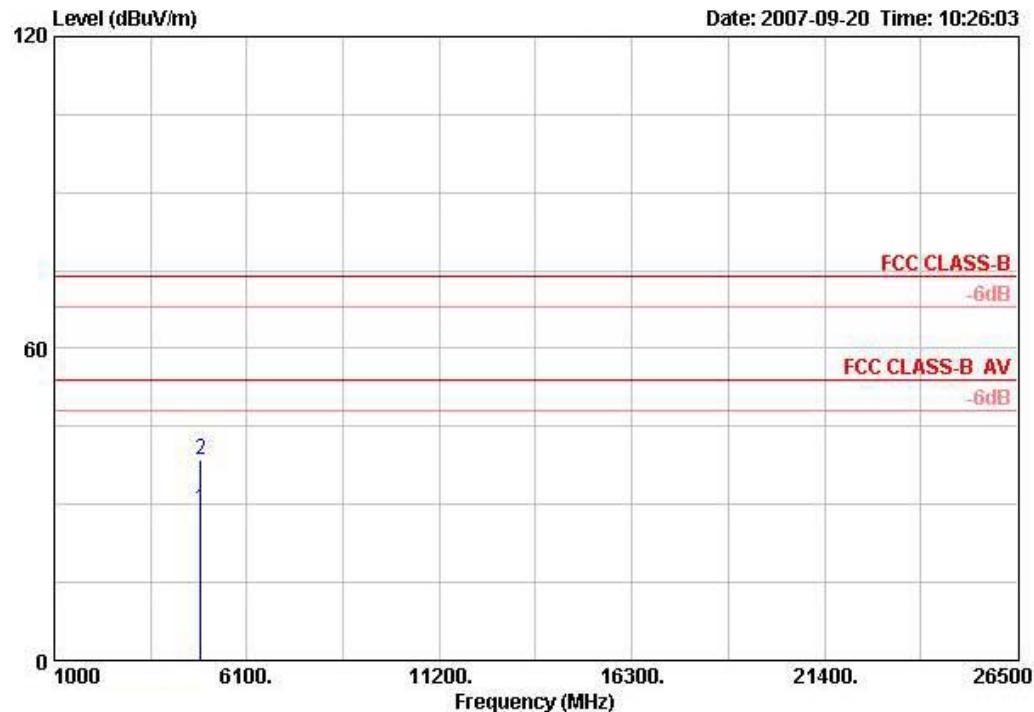
Horizontal


Freq	Level	Over Limit	Limit Line	ReadAntenna		Cable Preamp		Ant Pos	Pol/Phase
				Level	Factor	dBuV	dB/m		
1	4871.910	28.99	-25.01	54.00	24.96	33.16	6.02	35.15	AVERAGE
2	4872.120	38.48	-35.52	74.00	34.45	33.16	6.02	35.15	PEAK

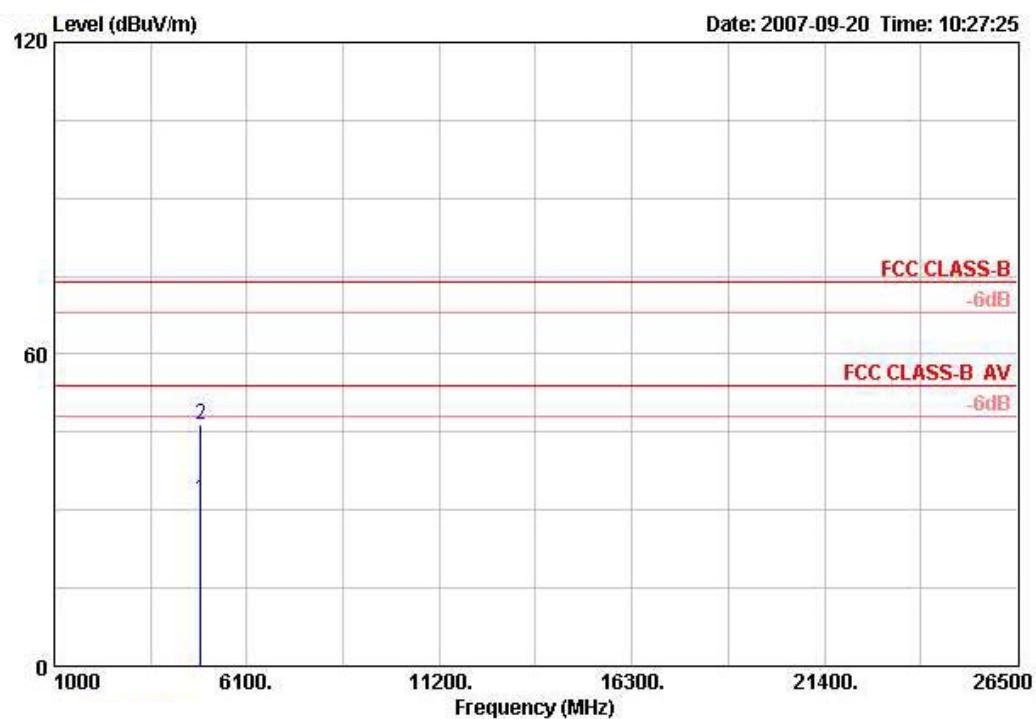
Vertical


Freq	Level	Over Limit	Limit	Read	Antenna	Cable Preamp			Ant
						Line	Level Factor	Loss Factor	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	
1	4873.130	32.16	-21.84	54.00	28.14	33.16	6.02	35.15	AVERAGE
	4874.390	46.57	-27.43	74.00	42.54	33.16	6.02	35.15	PEAK
									143 VERTICAL
									143 VERTICAL

Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	Draft n MCS8 20MHz Ch11 Ant. A + Ant. B

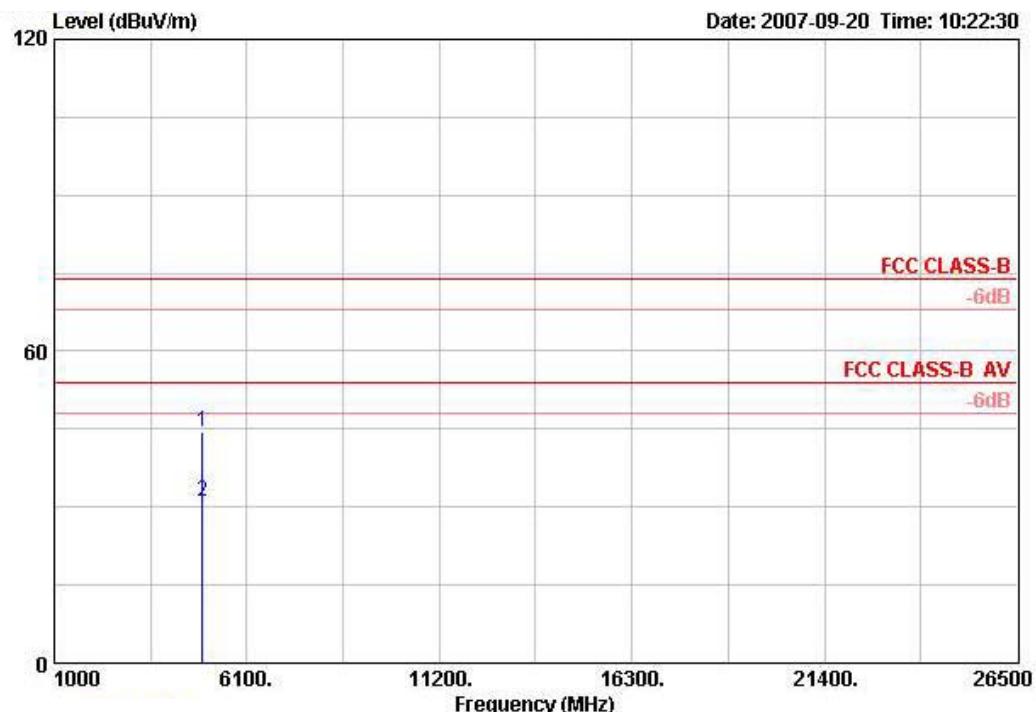
Horizontal


Freq	Level	Over Limit	Limit	Read	Antenna	Cable	Preamp	Ant	
								Pos	Pol/Phase
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	
1	4922.900	44.36	-29.64	74.00	40.17	33.26	6.07	35.14	PEAK
2	4925.560	31.03	-22.97	54.00	26.84	33.26	6.07	35.14	AVERAGE
									100 HORIZONTAL
									100 HORIZONTAL

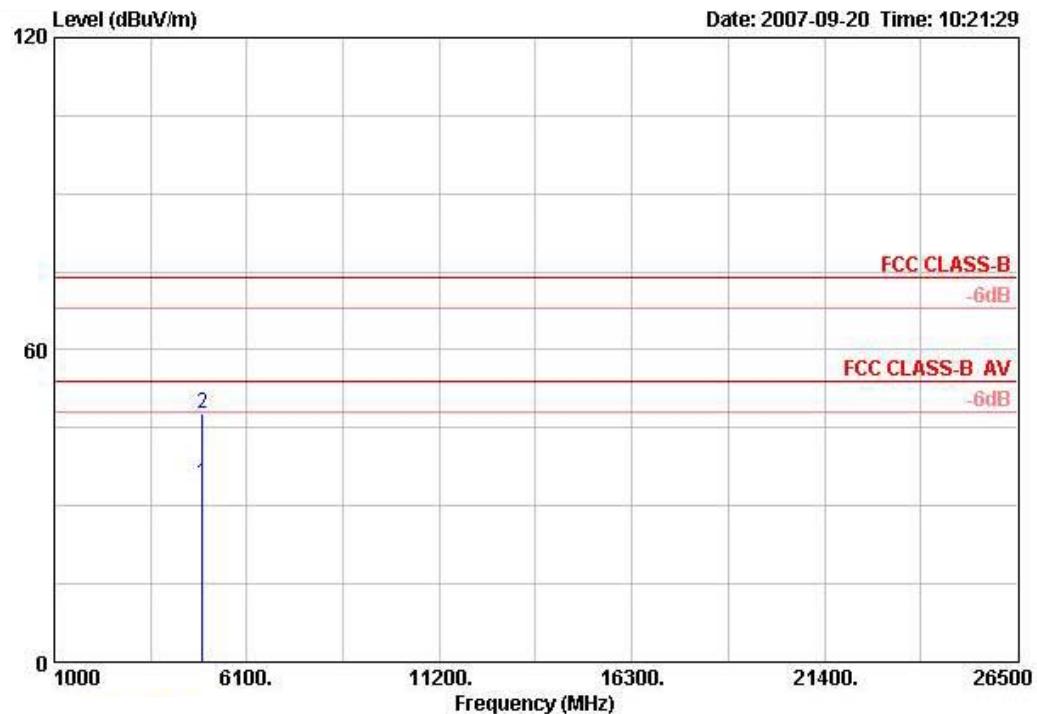
Vertical


Freq	Level	Over Limit	Line	ReadAntenna		Cable Loss	Preamp Factor	Remark	Ant Pos	Pol/Phase
				MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB
1	4924.170	34.20	-19.80	54.00	30.00	33.26	6.07	35.14	AVERAGE	100 VERTICAL
2	4925.910	47.65	-26.35	74.00	43.46	33.26	6.07	35.14	PEAK	100 VERTICAL

Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	Draft n MCS8 40MHz Ch 3 Ant. A + Ant. B

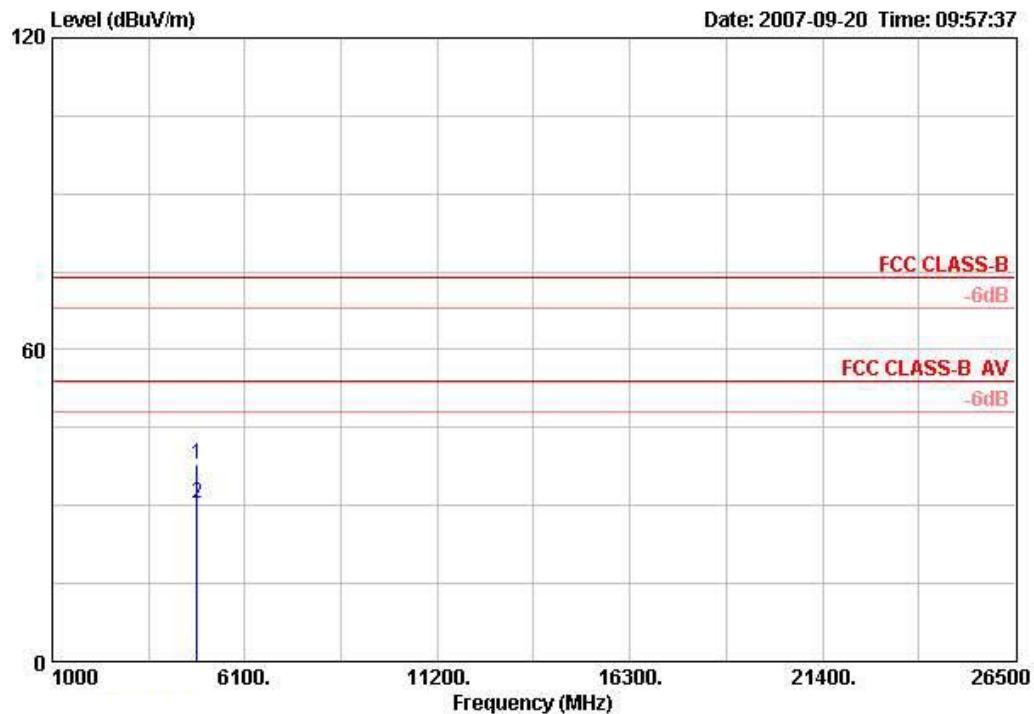
Horizontal


Freq	Level	Over Limit	Limit	Read	Antenna	Cable	Preamp	Ant				
								Line	Factor	Loss	Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB					cm
1	4841.890	37.85	-36.15	74.00	33.98	33.09	5.94	35.16	PEAK			100 HORIZONTAL
2	4842.850	30.40	-23.60	54.00	26.54	33.09	5.94	35.16	AVERAGE			100 HORIZONTAL

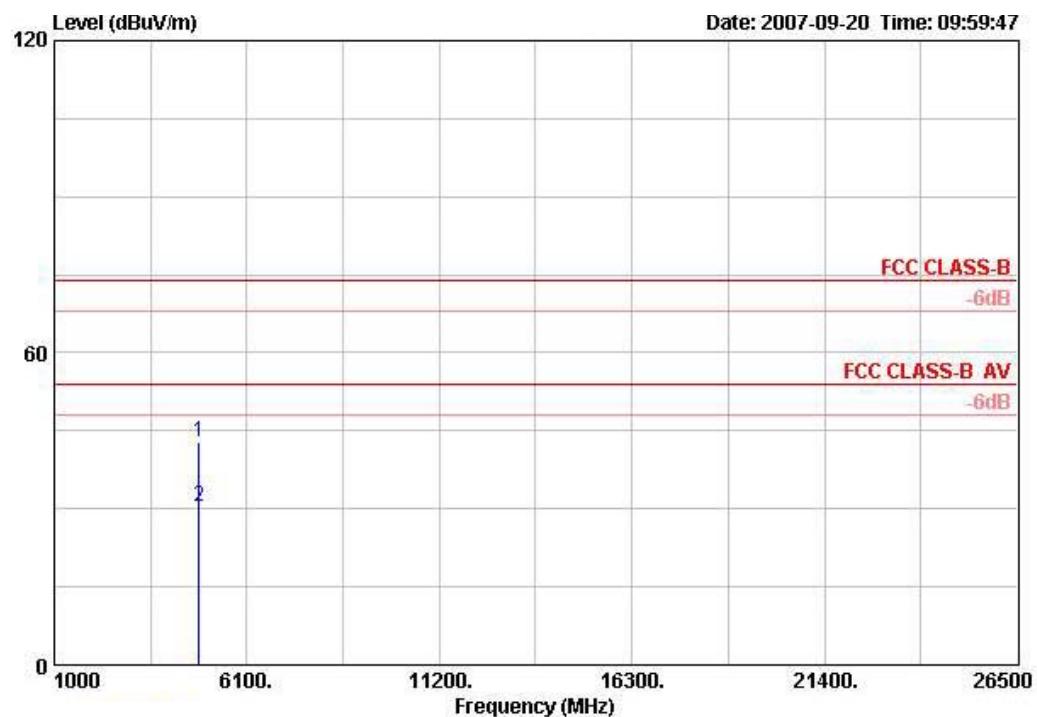Vertical


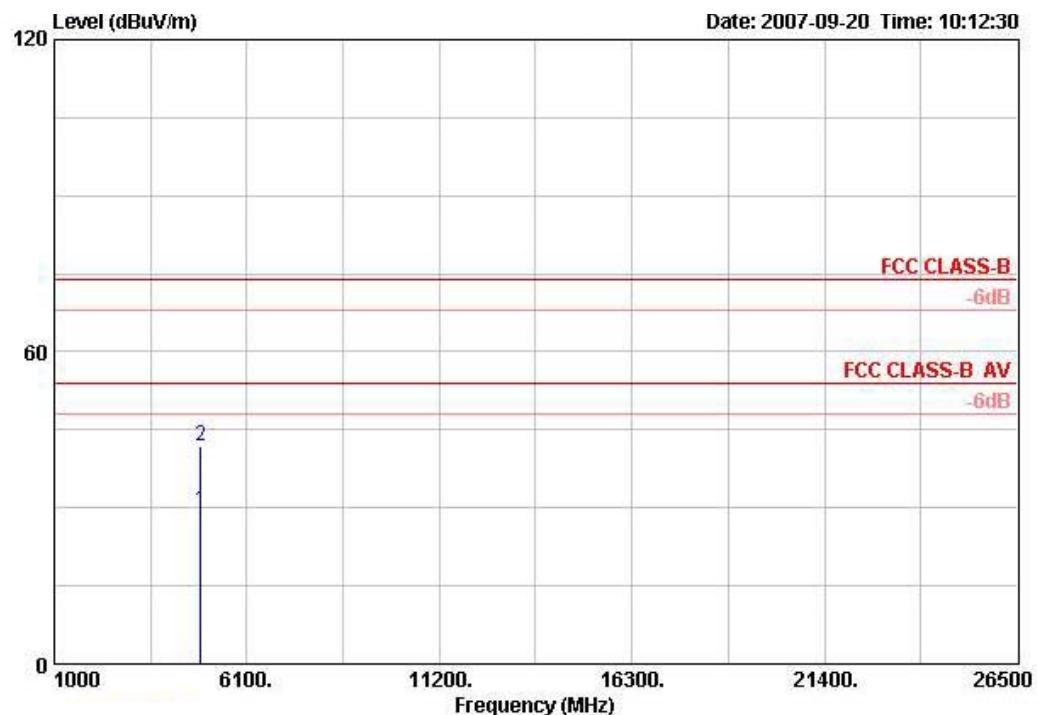
Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant		
		Limit	Line	Level	Factor	Loss	Factor		Pos	Pol/Phase
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			
1	4841.750	42.89	-31.11	74.00	39.03	33.09	5.94	35.16	PEAK	100 VERTICAL
2	4842.830	30.52	-23.48	54.00	26.65	33.09	5.94	35.16	AVERAGE	100 VERTICAL

Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	Draft n MCS8 40MHz Ch 6 Ant. A + Ant. B

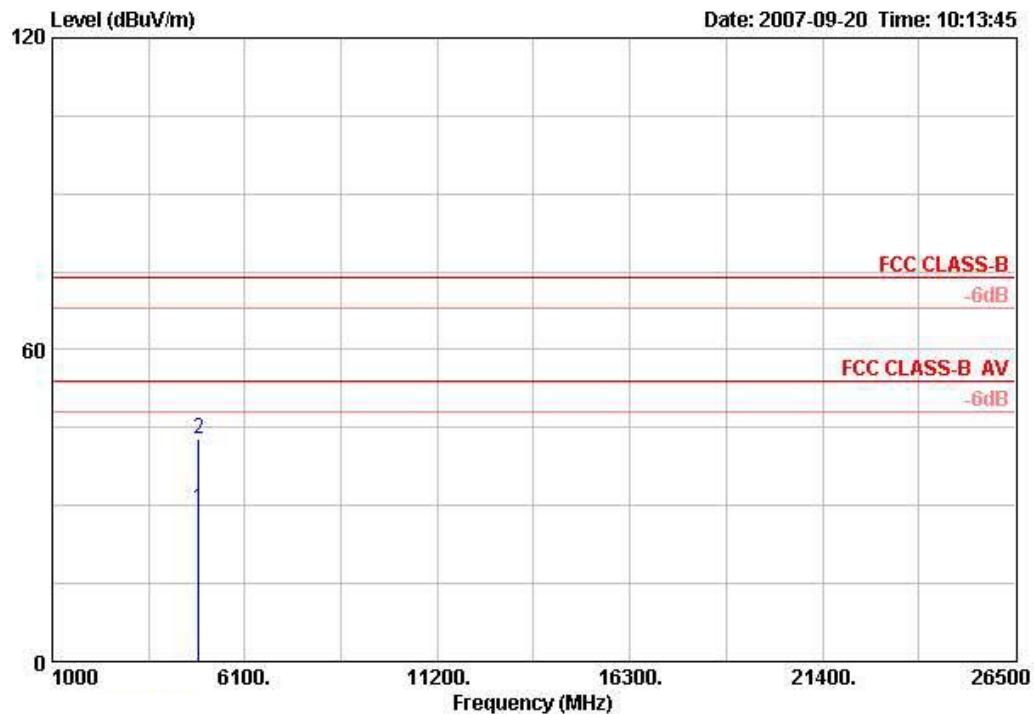Horizontal


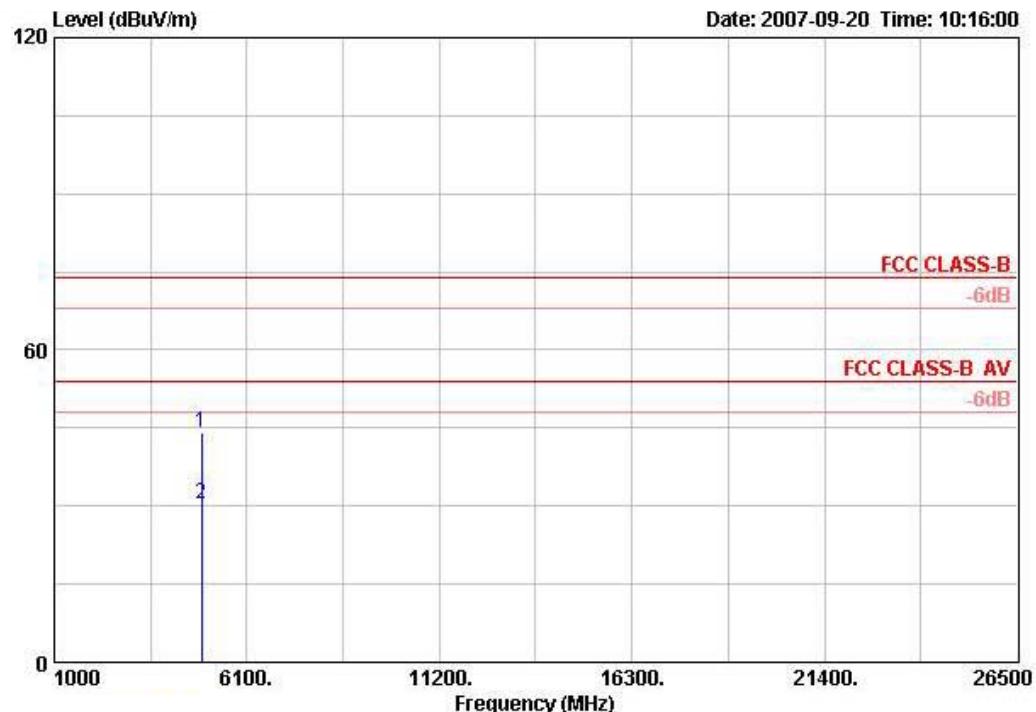
Freq	Level	Over Limit	Limit	Read		Ant	Pos	Preamp	Cable	Preamp	Ant
				Antenna	Line						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	cm	cm	cm
1	4871.700	29.31	-24.69	54.00	25.29	33.16	6.02	35.15	AVERAGE	100	HORIZONTAL
2	4876.290	42.67	-31.33	74.00	38.65	33.16	6.02	35.15	PEAK	100	HORIZONTAL

Vertical




Freq	Level	Over Limit	Limit	Read		Ant	Pos	Preamp		
				Antenna	Line	Factor	Loss	Factor	Remark	Pol/Phase
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm		
1	4871.540	29.51	-24.49	54.00	25.48	33.16	6.02	35.15	AVERAGE	100 VERTICAL
2	4875.930	41.91	-32.09	74.00	37.88	33.16	6.02	35.15	PEAK	100 VERTICAL

Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	Draft n MCS8 40MHz Ch 9 Ant. A + Ant. B

Horizontal


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant		
		Limit	Line	Level	Factor	Loss	Factor		Pos	Pol/Phase
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm		
1	4905.740	44.19	-29.81	74.00	40.07	33.23	6.05	35.15	PEAK	100 HORIZONTAL
2	4906.420	30.35	-23.65	54.00	26.23	33.23	6.05	35.15	AVERAGE	100 HORIZONTAL

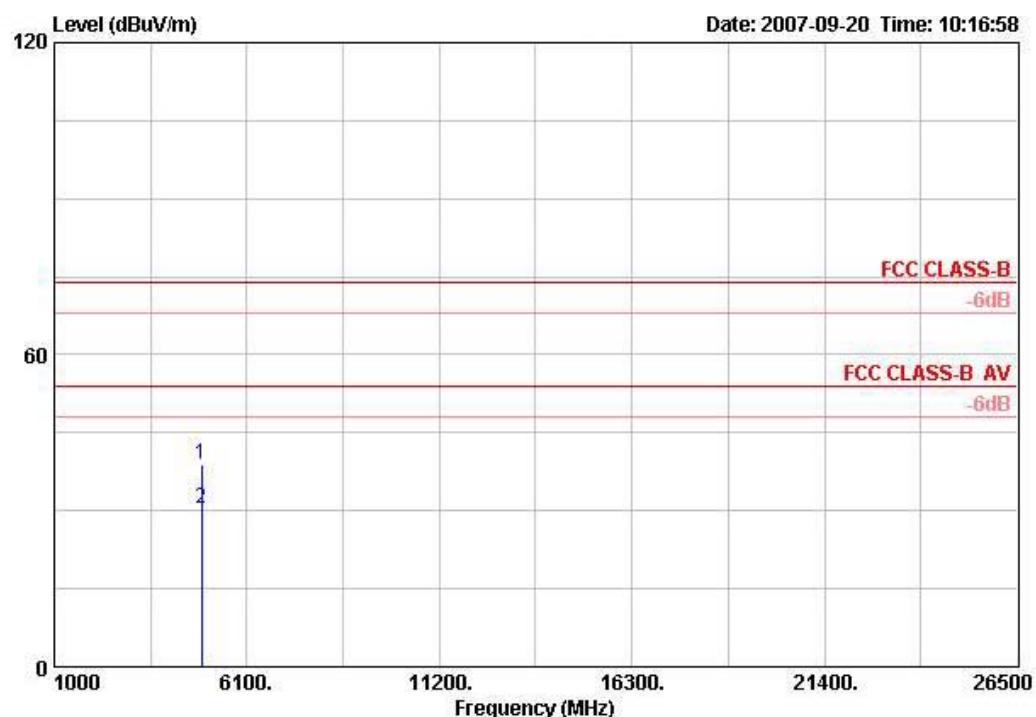Vertical


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant
		Limit	Line	Antenna Factor	Level	Loss Factor	Remark	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm
1	4902.100	39.02	-34.98	74.00	34.89	33.23	6.05	35.15 PEAK
2	4906.500	30.49	-23.51	54.00	26.37	33.23	6.05	35.15 AVERAGE

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	Draft n MCS8 20MHz Ch 1, 6, 11 Ant. A + Ant. B

Channel 1

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Pos	Pol/Phase
			Line	Limit	Level	Factor	Loss	Factor			
			MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm
1	2388.600	58.10	-15.90	74.00	26.69	28.17	3.24	0.00	PEAK	187	VERTICAL
2	2390.000	45.08	-8.92	54.00	13.67	28.17	3.24	0.00	AVERAGE	187	VERTICAL
3	2409.200	102.53			71.08	28.21	3.24	0.00	PEAK	187	VERTICAL
4 @	2411.200	92.05			60.60	28.21	3.24	0.00	AVERAGE	187	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz

Channel 6

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Pos	Pol/Phase
			Line	Limit	Level	Factor	Cable	Preamp			
			MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm
1 @	2433.800	92.38			60.89	28.25	3.25	0.00	AVERAGE	100	VERTICAL
2	2435.400	102.36			70.87	28.25	3.25	0.00	PEAK	100	VERTICAL

Item 1, 2 are the fundamental frequency at 2437MHz.

Channel 11

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Pos	Pol/Phase
			Line	Limit	Level	Factor	Cable	Preamp			
			MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm
1	2468.400	101.35			69.76	28.32	3.27	0.00	PEAK	106	VERTICAL
2 @	2469.600	91.16			59.57	28.32	3.27	0.00	AVERAGE	106	VERTICAL
3 !	2483.500	52.68	-1.32	54.00	21.05	28.36	3.27	0.00	AVERAGE	106	VERTICAL
4	2483.500	67.72	-6.28	74.00	36.09	28.36	3.27	0.00	PEAK	106	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	24.3°C	Humidity	56%
Test Engineer	Beck Wu	Configurations	Draft n MCS8 40MHz Ch 3, 6, 9 Ant. A + Ant. B

Channel 3

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Pos	Pol/Phase
			Limit	Line	Level	Factor	Loss	Factor			
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	
1	2379.200	57.26	-16.74	74.00	25.90	28.13	3.23	0.00	PEAK	107	VERTICAL
2	2386.400	45.55	-8.45	54.00	14.15	28.17	3.23	0.00	AVERAGE	107	VERTICAL
3	2434.800	89.68			58.18	28.25	3.25	0.00	AVERAGE	107	VERTICAL
4	2436.000	100.27			68.77	28.25	3.25	0.00	PEAK	107	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Pos	Pol/Phase
			Limit	Line	Level	Factor	Loss	Factor			
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	
1	2435.000	89.17			57.68	28.25	3.25	0.00	AVERAGE	100	VERTICAL
2	2435.000	99.44			67.94	28.25	3.25	0.00	PEAK	100	VERTICAL

Item 1, 2 are the fundamental frequency at 2437MHz.

Channel 9


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Pos	Pol/Phase
			Limit	Line	Level	Factor	Loss	Factor			
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	
1	2456.400	96.14			64.56	28.32	3.26	0.00	PEAK	104	VERTICAL
2	2468.800	85.02			53.43	28.32	3.27	0.00	AVERAGE	104	VERTICAL
3 !	2483.500	51.03	-2.97	54.00	19.40	28.36	3.27	0.00	AVERAGE	104	VERTICAL
4	2485.900	64.98	-9.02	74.00	33.35	28.36	3.27	0.00	PEAK	104	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

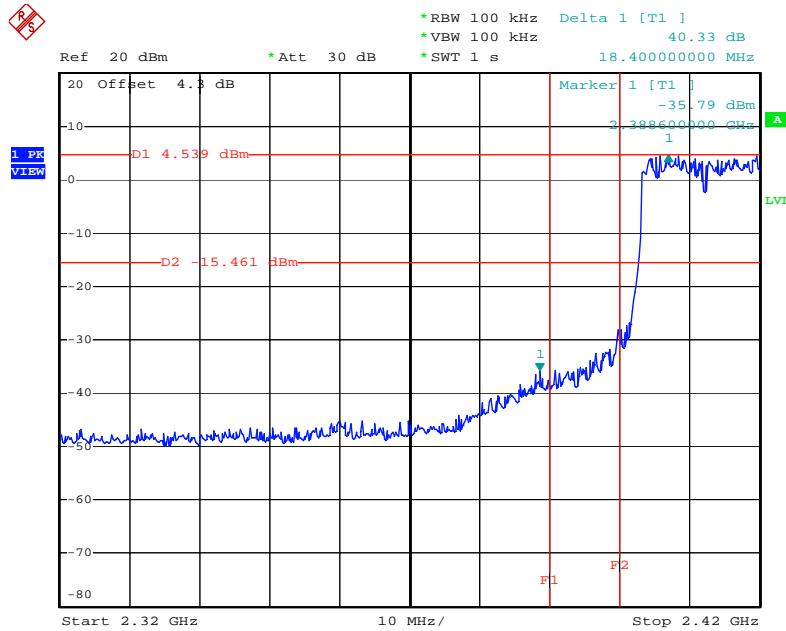For Emission not in Restricted Band
Low Band Edge Plot on Configuration Draft n MCS8 20MHz Ant. A + Ant. B / 2412 MHz


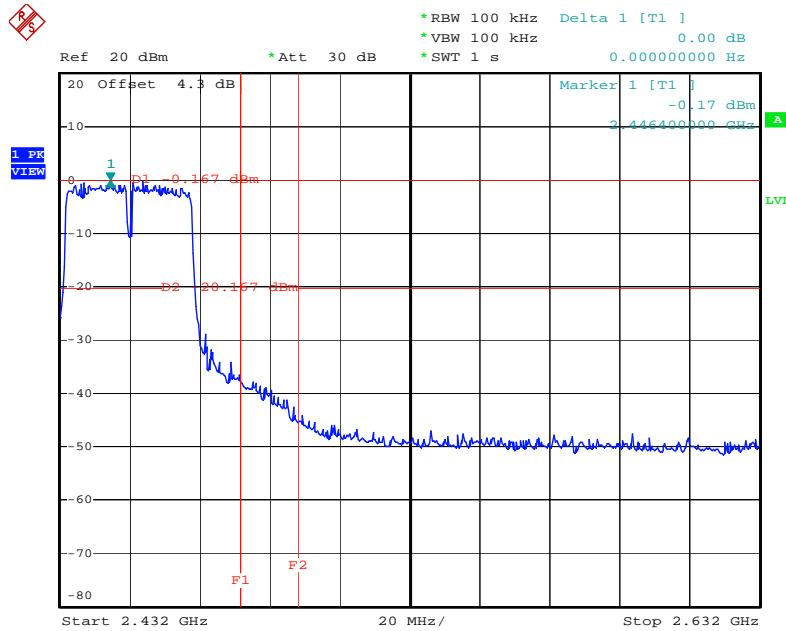
Date: 20.SEP.2007 16:05:26

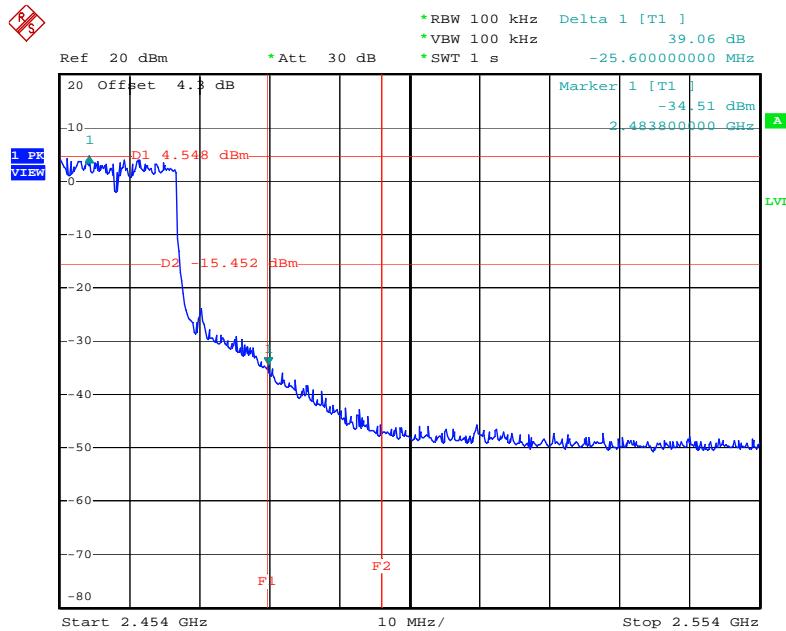High Band Edge Plot on Configuration Draft n MCS8 20MHz Ant. A + Ant. B / 2462 MHz


Date: 20.SEP.2007 16:08:00

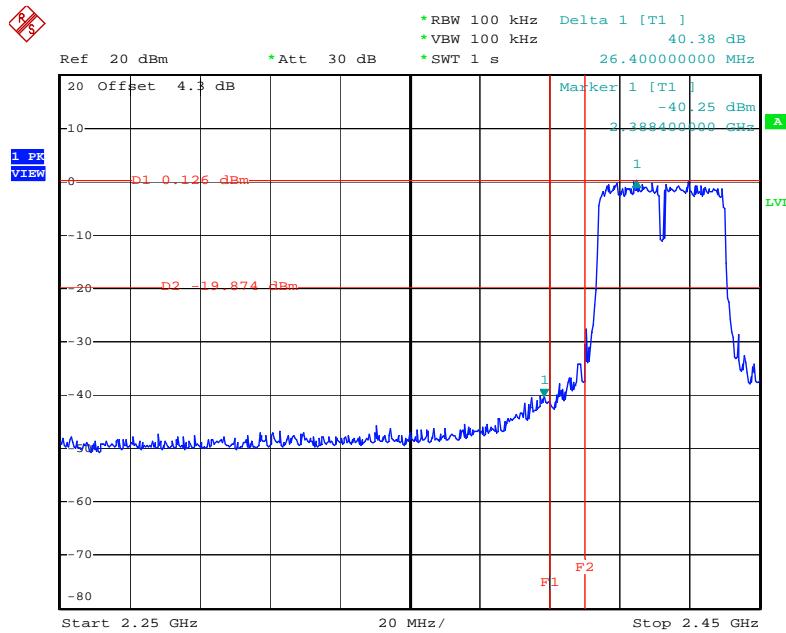Low Band Edge Plot on Configuration Draft n MCS8 40MHz Ant. A + Ant. B / 2422 MHz


Date: 20.SEP.2007 16:13:32

High Band Edge Plot on Configuration Draft n MCS8 40MHz Ant. A + Ant. B / 2452 MHz


Date: 20.SEP.2007 16:15:55

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 14, 2007	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	CPA9231A	1886	9 kHz - 2 GHz	Jan. 22, 2007	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jun. 07, 2007	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	923364	26.5 GHz - 40 GHz	Jan. 22, 2007*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004/040	9 kHz - 40 GHz	Aug. 31, 2007	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2006*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz - 1 GHz	Jul. 21, 2007	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May 04, 2007	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	NCR	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec. 02, 2006	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec. 02, 2006	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 - 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
EMC Receiver	R&S	ESCS 30	100359	9kHz - 2.75GHz	Mar. 01, 2007	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz - 30MHz	Mar. 31, 2007	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz - 30MHz	Mar. 22, 2007	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz - 30MHz	Apr. 20, 2007	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz -30MHz	May 09, 2007	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
Isolation Transformer	Erika Fiedler OHG	D-65396 Walluf	58	45MHz-2.15GHz	N/A	Conduction (CO04-HY)
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Dec. 17, 2006	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jun. 27, 2007	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100458	DC ~ 30GHz	Jun. 27, 2007	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun. 27, 2007	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	May 04, 2007*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 03, 2007	Conducted (TH01-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 02, 2006	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2006	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2006	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Nov. 14, 2006	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 07, 2007	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

* Calibration Interval of instruments listed above is two year.

NCR means Non-Calibration required.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-070110

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sportun International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria : ISO/IEC 17025:2005
Accreditation Number : 1190
Originally Accredited : December 15, 2003
Effective Period : January 10, 2007 to January 09, 2010
Accredited Scope : Testing Field, see described in the Appendix
Specific Accreditation Program : Accreditation Program for Designated Testing Laboratory
for Commodities Inspection
Accreditation Program for Telecommunication Equipment Testing Laboratory



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 10, 2007

PI, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.