

FCC Test Report (NFC)

Report No.: RF200518E05-4

FCC ID: MQT-AT150R3

Test Model: xCL_AT-150-R3-18U

Received Date: May 26, 2020

Test Date: June 06 to 18, 2020

Issued Date: Sep. 18, 2020

Applicant: XAC AUTOMATION CORP.

Address: 4F, No. 30, INDUSTRY E. RD. IX, SCIENCE-BASED INDUSTRIAL
PARK, HSINCHU, TAIWAN

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Modification Record	5
3 General Information	6
3.1 General Description of EUT (NFC)	6
3.2 Description of Test Modes	8
3.2.1 Test Mode Applicability and Tested Channel Detail	9
3.3 Description of Support Units	11
3.3.1 Configuration of System under Test	12
3.4 General Description of Applied Standards	13
4 Test Types and Results	14
4.1 Radiated Emission Measurement	14
4.1.1 Limits of Radiated Emission Measurement	14
4.1.2 Test Instruments	15
4.1.3 Test Procedures	17
4.1.4 Deviation from Test Standard	17
4.1.5 Test Setup	18
4.1.6 EUT Operating Conditions	18
4.1.7 Test Results	19
4.2 Conducted Emission Measurement	33
4.2.1 Limits of Conducted Emission Measurement	33
4.2.2 Test Instruments	33
4.2.3 Test Procedures	34
4.2.4 Deviation from Test Standard	34
4.2.5 Test Setup	35
4.2.6 EUT Operating Conditions	35
4.2.7 Test Results	36
4.3 Frequency Stability	38
4.3.1 Limits of Frequency Stability Measurement	38
4.3.2 Test Setup	38
4.3.3 Test Instruments	38
4.3.4 Test Procedure	38
4.3.5 Deviation from Test Standard	38
4.3.6 EUT Operating Conditions	39
4.3.7 Test Result	39
4.4 20dB Bandwidth	40
4.4.1 Limits of 20dB bandwidth Measurement	40
4.4.2 Test Setup	40
4.4.3 Test Instruments	40
4.4.4 Test Procedures	40
4.4.5 Deviation from Test Standard	40
4.4.6 EUT Operating Conditions	40
4.4.7 Test Results	41
5 Pictures of Test Arrangements	42
Appendix – Information of the Testing Laboratories	43

Release Control Record

Issue No.	Description	Date Issued
RF200518E05-4	Original release.	Sep. 18, 2020

1 Certificate of Conformity

Product: Terminal

Brand: XAC

Test Model: xCL_AT-150-R3-18U

Sample Status: ENGINEERING SAMPLE

Applicant: XAC AUTOMATION CORP.

Test Date: June 06 to 18, 2020

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.225)
47 CFR FCC Part 15, Subpart C (Section 15.215)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :



Date: Sep. 18, 2020

Joyce Kuo / Specialist

Approved by :



Date: Sep. 18, 2020

Clark Lin / Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.225, 15.215)			
FCC Clause	Test Item	Result	Remarks
15.207	Conducted emission test	PASS	Meet the requirement of limit. Minimum passing margin is -14.28dB at 0.50156MHz.
15.225 (a)	The field strength of any emissions within the band 13.553-13.567 MHz	PASS	Meet the requirement of limit. Minimum passing margin is -5.9dB at 48.99MHz.
15.225 (b)	The field strength of any emissions within the bands 13.410-13.553 MHz and 13.567-13.710 MHz	PASS	Meet the requirement of limit.
15.225 (c)	The field strength of any emissions within the bands 13.110-13.410 MHz and 13.710-14.010 MHz	PASS	Meet the requirement of limit.
15.225 (d)	The field strength of any emissions appearing outside of the 13.110-14.010 MHz band	PASS	Meet the requirement of limit. Minimum passing margin is -24.40dB at 13.772MHz.
15.225 (e)	The frequency tolerance	PASS	Meet the requirement of limit.
15.215 (c)	20dB Bandwidth	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF) not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Conducted emissions	-	2.5 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.4 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (NFC)

Product	Terminal
Brand	XAC
Test Model	xCL_AT-150-R3-18U
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	Refer to note 1
Modulation Type	ASK
Transfer Rate	Refer to Note
Operating Frequency	13.56MHz
Number of Channel	1
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Battery x1 (Option)
Data Cable Supplied	NA

Note:

1. The EUT has three radios as following table:

Radio 1	Radio 2	Radio 3
WLAN(2.4GHz + 5GHz) + Bluetooth	WWAN(LTE + WCDMA)	NFC

2. Simultaneously transmission condition.

Condition	Technology	
1	WWAN	NFC
2	WWAN	Bluetooth
3	WLAN 2.4GHz	NFC
4	WLAN 5GHz	NFC
5	Bluetooth	NFC

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT must be supplied power adapter and battery as following table:

Adapter (Only test not for sale)		
Brand	Model	Specification
MASS POWER	NBS10B050200VUU	AC Input: 100-240Vac, 0.3A, 50-60Hz DC Output: 5Vdc, 2A
Battery (Option)		
Brand	Model	Specification
Shenzhen Rishengzhi Electronics Technology Co., Ltd.	J625	3.7V, 3000mAh, 11.1Wh

4. The antennas provided to the EUT, please refer to the following table:

Antenna No.	RF Chain NO.	Brand	Model	Antenna Net Gain(dBi)	Frequency range	Antenna Type	Connector Type
NFC	Main	XAC	RTOS	13	13.56MHz	wire	None
Wi-Fi BT	Main	AWAN	AYF6P-100002	-2.7	2.4~2.4835GHz	PIFA	i-pex(MHF)
				2.19	5.15~5.85GHz		
				-2.7	2.4~2.4835GHz		
LTE	Main(B2) TX	AWAN	AXF6P-100004	1.55	1850 MHz to 1910 MHz	PIFA	i-pex(MHF)
	Main(B4) TX			1.48	1710 MHz to 1755 MHz		
	Main(B12) TX			2.87	699 MHz to 716 MHz		
	Aux(B2) RX	AWAN	AXF6P-100005	2.36	1930 MHz to 1990 MHz	PIFA	i-pex(MHF)
	Aux(B4) RX			2.91	2110 MHz to 2155 MHz		
	Aux(B12) RX			2.8	729 MHz to 746 MHz		
WCDMA	Main(B2) TX	AWAN	AXF6P-100004	1.55	1850 MHz to 1910 MHz	PIFA	i-pex(MHF)
	Main(B5) TX			1.23	824 MHz to 849 MHz		
	Aux(B2) RX	AWAN	AXF6P-100005	2.36	1930 MHz to 1990 MHz	PIFA	i-pex(MHF)
	Aux(B5) RX			2.84	869 MHz to 894 MHz		

5. The EUT was pre-tested for radiated test under following test modes:

Pre-test Mode	Power
Mode A	Power from Adapter
Mode B	Power from Laptop
From the above modes, the worst radiated test was found in Mode A .	

6. The EUT was pre-tested for conducted test under following test modes:

Pre-test Mode	Power
Mode A	Power from Adapter
Mode B	Power from Battery
From the above modes, the worst radiated test was found in Mode A .	

7. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

One channel was provided to this EUT:

Channel	Frequency (MHz)
1	13.56

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE	PLC	FS	EB	
-	√	√	√	√	-

Where

RE≥1G: Radiated Emission

PLC: Power Line Conducted Emission

FS: Frequency Stability

EB: 20dB Bandwidth measurement

Radiated Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
1	1	ASK

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
1	1	ASK

Frequency Stability:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
1	1	ASK

20dB Bandwidth:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
1	1	ASK

Test Condition:

Applicable to	Environmental Conditions	Input Power (System)	Tested By
RE	28deg. C, 71%RH	120Vac, 60Hz	Kevin Ko
	29deg. C, 71%RH	120Vac, 60Hz	Kevin Ko
PLC	21deg. C, 60%RH	120Vac, 60Hz	Sampson Chen
FS	25deg. C, 60%RH	120Vac, 60Hz	Anderson Chen
EB	25deg. C, 60%RH	120Vac, 60Hz	Anderson Chen


3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	USB Adapter	MASS POWER	NBS10B050200VUU	NA	NA	Supplied by client
B.	SIM Card	Keysight	NA	NA	NA	Provided by Lab
C.	SAM Card *2	XAC	NA	NA	NA	Supplied by client
D.	IC Card	XAC	NA	NA	NA	Supplied by client
E.	Magnetic Card	XAC	NA	NA	NA	Supplied by client
F.	NFC Card	XAC	NA	NA	NA	Supplied by client
G.	Earphone	Infinix	NA	NA	NA	Provided by Lab

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB Type C to USB Cable	1	1.2	Yes	0	Supplied by client
2.	Earphone Cable	1	1.1	Yes	0	Provided by Lab

3.3.1 Configuration of System under Test

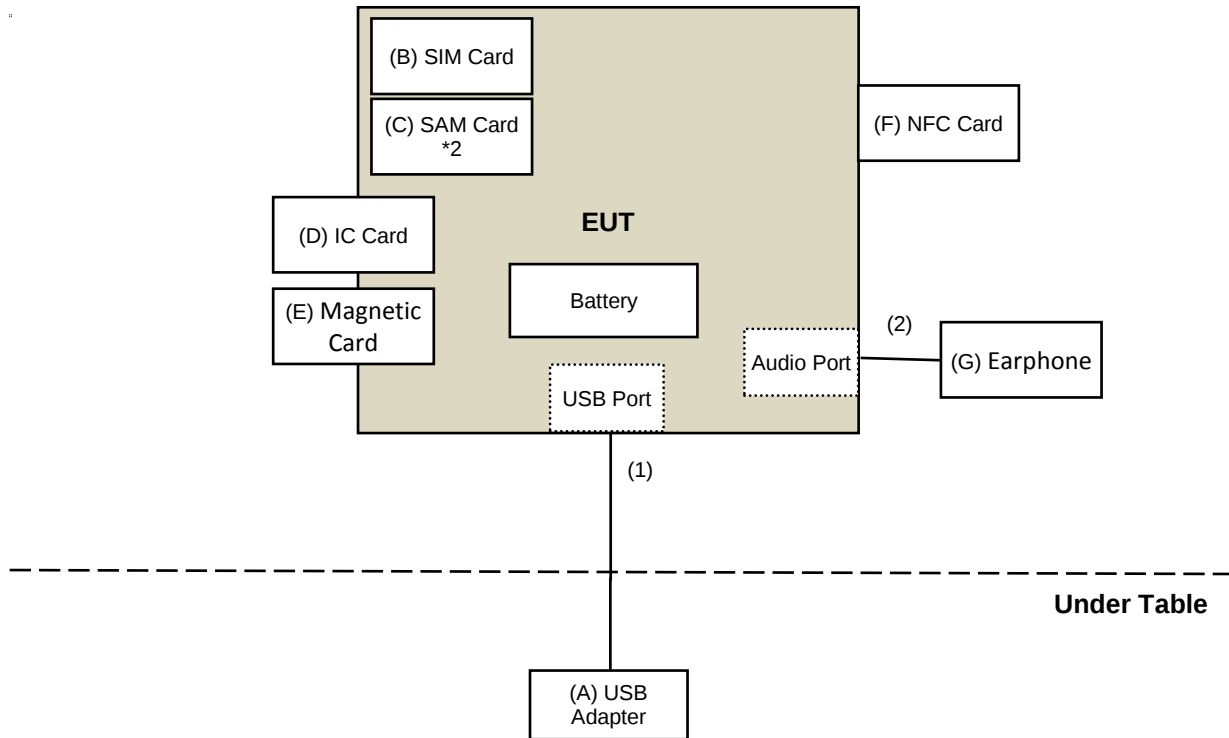

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.225)

FCC Part 15, Subpart C (15.215)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission Measurement

4.1.1 Limits of Radiated Emission Measurement

(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209 as below table:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
4. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

For emissions:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 03, 2019	July 02, 2020
Pre-Amplifier EMCI	EMC001340	980142	May 25, 2020	May 24, 2021
Loop Antenna Electro-Metrics	EM-6879	264	Feb. 18, 2020	Feb. 17, 2021
RF Cable	NA	LOOPCAB-001	Jan. 08, 2020	Jan. 07, 2021
RF Cable	NA	LOOPCAB-002	Jan. 08, 2020	Jan. 07, 2021
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-05	Apr. 28, 2020	Apr. 27, 2021
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Nov. 11, 2019	Nov. 10, 2020
RF Cable	8D	966-3-1	Mar. 17, 2020	Mar. 16, 2021
RF Cable	8D	966-3-2	Mar. 17, 2020	Mar. 16, 2021
RF Cable	8D	966-3-3	Mar. 17, 2020	Mar. 16, 2021
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	Sep. 26, 2019	Sep. 25, 2020
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. The CANADA Site Registration No. is 20331-1
4. Loop antenna was used for all emissions below 30 MHz.
5. Tested Date: June 06 to 09, 2020

For other test items:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	May 29, 2020	May 28, 2021
Spectrum Analyzer Keysight	N9030A	MY54490679	July 17, 2019	July 16, 2020
Power sensor Anritsu	MA2411B	1339443	July 26, 2019	July 25, 2020
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
Mech Switch Absorptive Mini-Circuits	MSP4TA-18+	0140	Feb. 10, 2020	Feb. 09, 2021
FXD ATTEN Mini-Circuits	BW-S3W2+	MN71981	Feb. 10, 2020	Feb. 09, 2021
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

- NOTE:**
1. The test was performed in Oven room 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: June 18, 2020

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak or Average Detects Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup

For Radiated emission below 30MHz

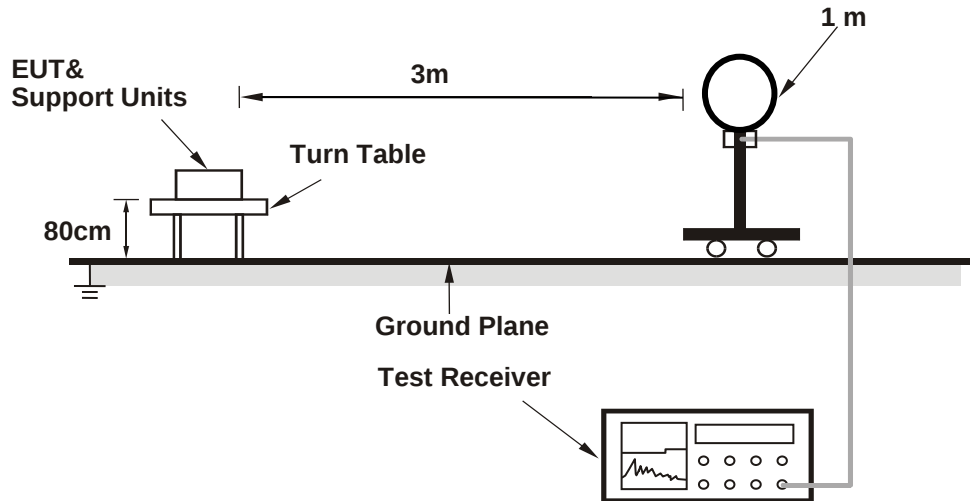

For Radiated emission 30MHz to 1GHz

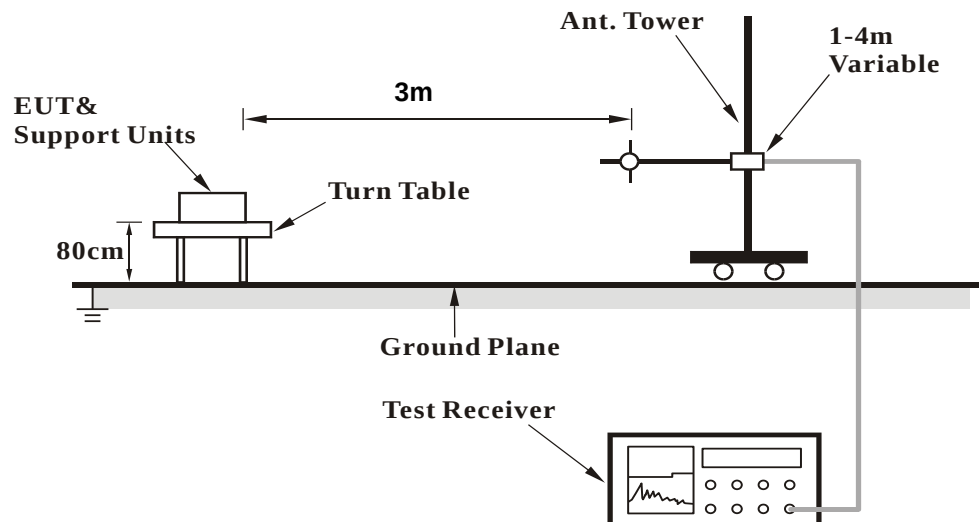

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Set the EUT under transmission condition continuously at specific channel frequency.


4.1.7 Test Results

Frequency Range	13.11 ~ 14.01MHz	Detector Function	Quasi-Peak
-----------------	------------------	-------------------	------------

Antenna Polarity : Parallel								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13.349	10.11 QP	40.51	-30.40	1.00	189	53.61	-43.50
2	13.462	15.23 QP	50.47	-35.24	1.00	189	58.75	-43.52
3	*13.560	32.02 QP	84.00	-51.98	1.00	189	75.56	-43.54
4	13.660	15.92 QP	50.47	-34.55	1.00	189	59.47	-43.55
5	13.772	13.97 QP	40.51	-26.54	1.00	189	57.54	-43.57

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. For the test distance below 0.49 ~ 30MHz is 3m, extrapolate the measured field strength to a distance of 30 meters.
Distance factor@3m = $40 \cdot \log(3/30) = -40\text{dB}$

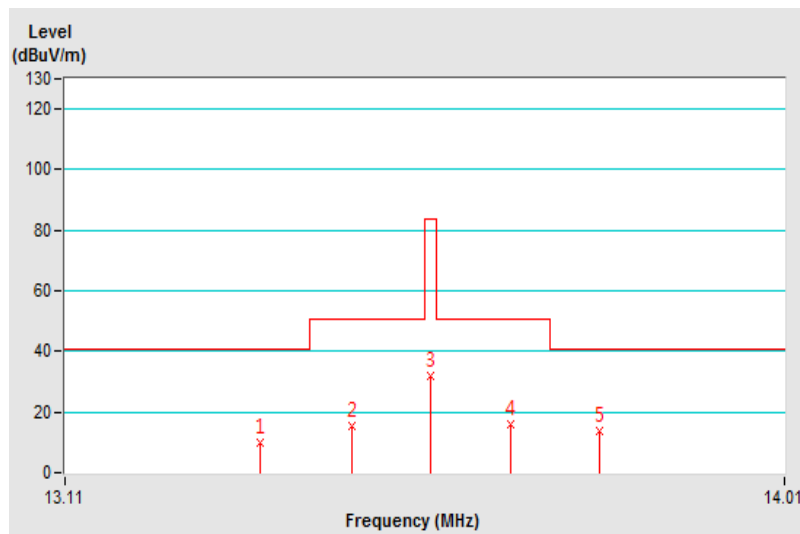


Frequency Range	13.11 ~ 14.01MHz	Detector Function	Quasi-Peak
-----------------	------------------	-------------------	------------

Antenna Polarity : Perpendicular								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13.350	6.51 QP	40.51	-34.00	1.00	284	50.01	-43.50
2	13.462	10.16 QP	50.47	-40.31	1.00	284	53.68	-43.52
3	*13.560	27.96 QP	84.00	-56.04	1.00	284	71.50	-43.54
4	13.659	12.08 QP	50.47	-38.39	1.00	284	55.63	-43.55
5	13.773	9.45 QP	40.51	-31.06	1.00	284	53.02	-43.57

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. For the test distance below 0.49 ~ 30MHz is 3m, extrapolate the measured field strength to a distance of 30 meters.
Distance factor@3m = $40 \cdot \log(3/30) = -40\text{dB}$

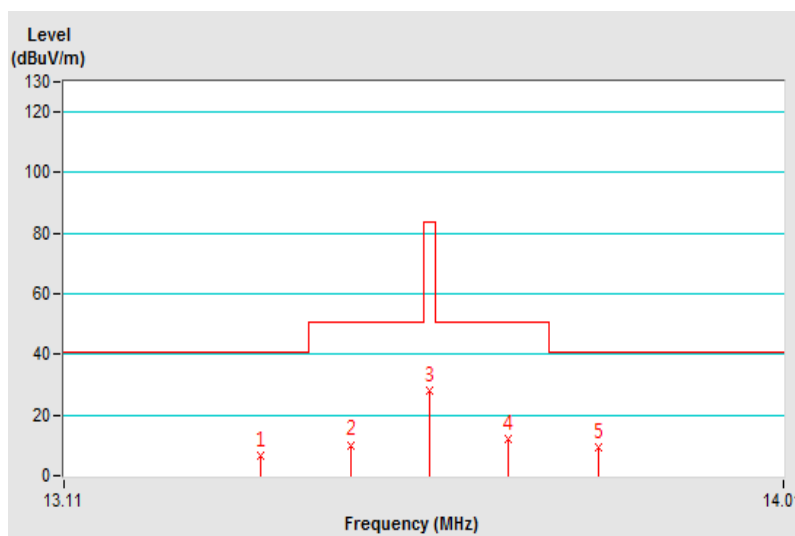


Frequency Range	13.11 ~ 14.01MHz	Detector Function	Quasi-Peak
-----------------	------------------	-------------------	------------

Antenna Polarity : Ground-parallel								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13.350	12.71 QP	40.51	-27.80	1.00	191	56.21	-43.50
2	13.462	16.42 QP	50.47	-34.05	1.00	191	59.94	-43.52
3	*13.560	33.76 QP	84.00	-50.24	1.00	191	77.30	-43.54
4	13.659	17.68 QP	50.47	-32.79	1.00	191	61.23	-43.55
5	13.772	16.11 QP	40.51	-24.40	1.00	191	59.68	-43.57

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. For the test distance below 0.49 ~ 30MHz is 3m, extrapolate the measured field strength to a distance of 30 meters.
Distance factor@3m = $40 \cdot \log(3/30) = -40\text{dB}$

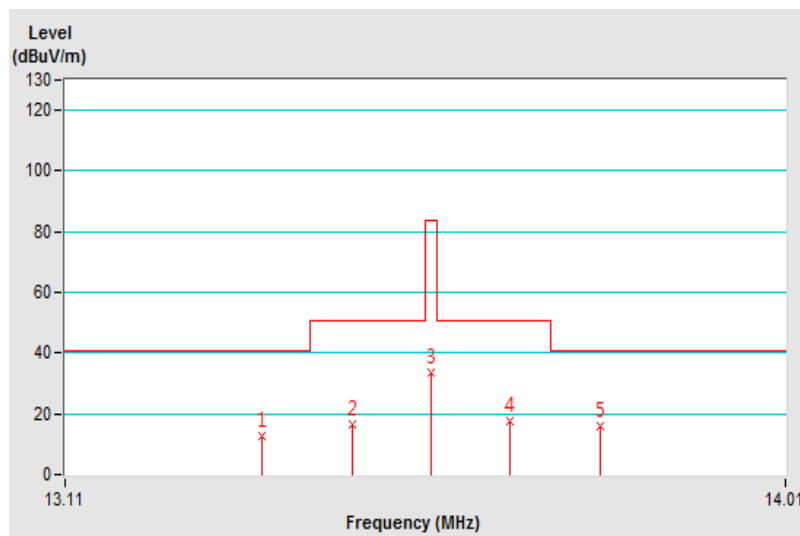


Frequency Range	9kHz ~ 150kHz	Detector Function	Peak/Average
-----------------	---------------	-------------------	--------------

Antenna Polarity : Parallel								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	0.010	-16.03 PK	67.60	-83.63	1.00	3	27.54	-43.57
2	0.010	-20.65 AV	47.60	-68.25	1.00	3	22.92	-43.57
3	0.011	-17.94 PK	66.78	-84.72	1.00	78	26.10	-44.04
4	0.011	-21.56 AV	46.78	-68.34	1.00	78	22.48	-44.04
5	0.014	-27.59 PK	64.68	-92.27	1.00	297	17.86	-45.45
6	0.014	-31.66 AV	44.68	-76.34	1.00	297	13.79	-45.45
7	0.020	-32.95 PK	61.58	-94.53	1.00	269	15.31	-48.26
8	0.020	-36.77 AV	41.58	-78.35	1.00	269	11.49	-48.26
9	0.025	-36.65 PK	59.64	-96.29	1.00	292	13.74	-50.39
10	0.025	-40.17 AV	39.64	-79.81	1.00	292	10.22	-50.39
11	0.035	-41.37 PK	56.72	-98.09	1.00	334	12.26	-53.63
12	0.035	-44.57 AV	36.72	-81.29	1.00	334	9.06	-53.63

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. For the test distance below 0.49MHz is 3m, extrapolate the measured field strength to a distance of 300 meters.
Distance factor@3m = $40 \cdot \log(3/300) = -80\text{dB}$

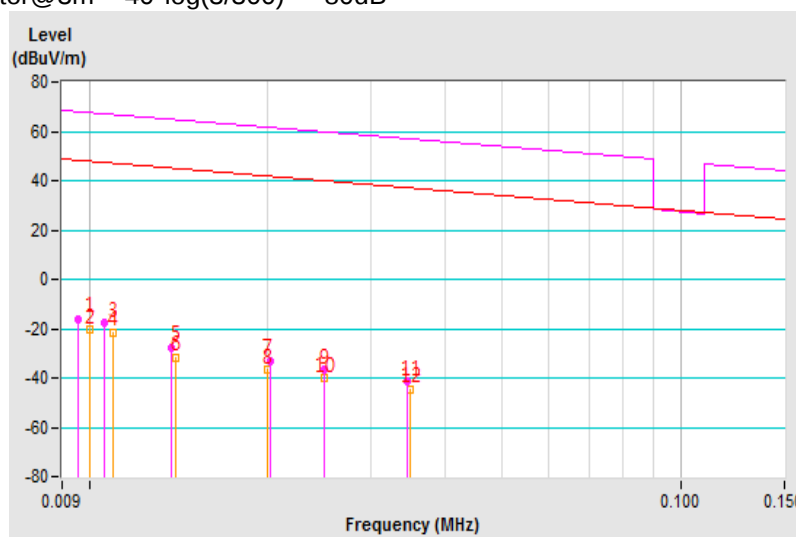


Frequency Range	150kHz ~ 490kHz	Detector Function	Peak/Average
-----------------	-----------------	-------------------	--------------

Antenna Polarity : Parallel								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	0.156	-31.46 PK	43.74	-75.20	1.00	256	34.67	-66.13
2	0.156	-35.92 AV	23.74	-59.66	1.00	256	30.21	-66.13
3	0.167	-33.46 PK	43.15	-76.61	1.00	264	33.13	-66.59
4	0.167	-37.41 AV	23.15	-60.56	1.00	264	29.18	-66.59
5	0.178	-34.68 PK	42.59	-77.27	1.00	264	32.35	-67.03
6	0.178	-38.55 AV	22.59	-61.14	1.00	264	28.48	-67.03
7	0.206	-36.76 PK	41.33	-78.09	1.00	251	31.45	-68.21
8	0.206	-40.54 AV	21.33	-61.87	1.00	251	27.67	-68.21
9	0.224	-37.17 PK	40.60	-77.77	1.00	0	31.78	-68.95
10	0.224	-41.55 AV	20.60	-62.15	1.00	0	27.40	-68.95
11	0.243	-38.27 PK	39.89	-78.16	1.00	262	31.47	-69.74
12	0.243	-42.51 AV	19.89	-62.40	1.00	262	27.23	-69.74

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. For the test distance below 0.49MHz is 3m, extrapolate the measured field strength to a distance of 300 meters.
Distance factor@3m = $40 \cdot \log(3/300) = -80\text{dB}$

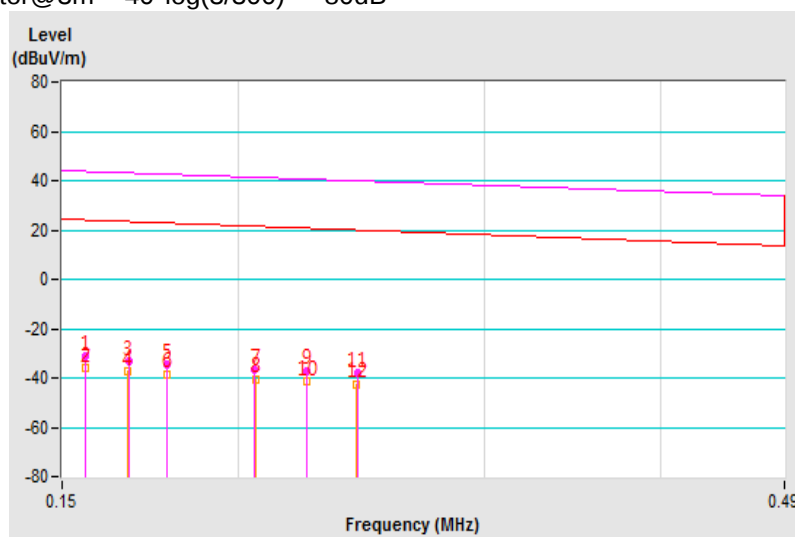


Frequency Range	490kHz ~ 30MHz	Detector Function	Peak/Average
-----------------	----------------	-------------------	--------------

Antenna Polarity : Parallel								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	0.745	-8.11 QP	30.16	-38.27	1.00	247	29.32	-37.43
2	1.404	-13.44 QP	24.65	-38.09	1.00	305	26.86	-40.30
3	1.862	-13.54 QP	29.54	-43.08	1.00	28	27.75	-41.29
4	3.403	-11.22 QP	29.54	-40.76	1.00	347	32.57	-43.79
5	8.233	-12.09 QP	29.54	-41.63	1.00	360	31.17	-43.26
6	27.122	-0.37 QP	29.54	-29.91	1.00	332	42.93	-43.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. For the test distance below 0.49 ~ 30MHz is 3m, extrapolate the measured field strength to a distance of 30 meters.
Distance factor@3m = $40 \cdot \log(3/30) = -40\text{dB}$

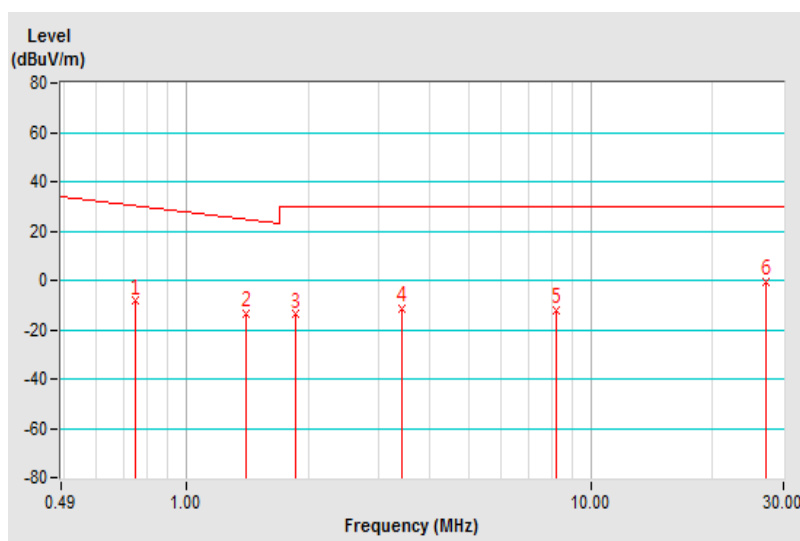


Frequency Range	9kHz ~ 150kHz	Detector Function	Peak/Average
-----------------	---------------	-------------------	--------------

Antenna Polarity : Perpendicular								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	0.009	-16.39 PK	68.52	-84.91	1.00	298	26.27	-42.66
2	0.009	-20.95 AV	48.52	-69.47	1.00	298	21.71	-42.66
3	0.014	-25.06 PK	64.68	-89.74	1.00	34	20.39	-45.45
4	0.014	-29.54 AV	44.68	-74.22	1.00	34	15.91	-45.45
5	0.022	-34.62 PK	60.75	-95.37	1.00	10	14.49	-49.11
6	0.022	-37.21 AV	40.76	-77.97	1.00	10	11.90	-49.11
7	0.034	-34.44 PK	56.97	-91.41	1.00	211	18.97	-53.41
8	0.034	-37.51 AV	36.97	-74.48	1.00	211	15.90	-53.41
9	0.060	-42.54 PK	52.03	-94.57	1.00	13	15.79	-58.33
10	0.060	-45.17 AV	32.04	-77.21	1.00	13	13.16	-58.33
11	0.069	-43.46 PK	50.82	-94.28	1.00	211	16.09	-59.55
12	0.069	-47.21 AV	30.83	-78.04	1.00	211	12.34	-59.55

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. For the test distance below 0.49MHz is 3m, extrapolate the measured field strength to a distance of 300 meters.

Distance factor@3m = $40 \cdot \log(3/300) = -80\text{dB}$

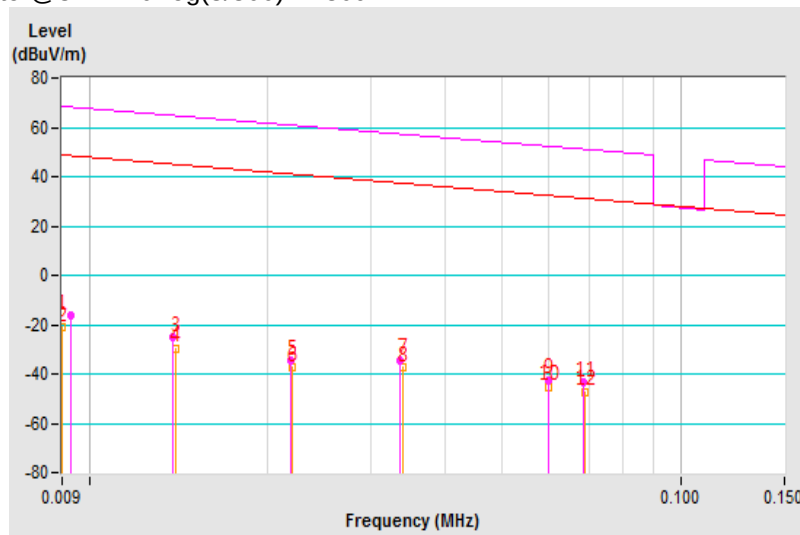


Frequency Range	150kHz ~ 490kHz	Detector Function	Peak/Average
-----------------	-----------------	-------------------	--------------

Antenna Polarity : Perpendicular								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	0.167	-33.35 PK	43.15	-76.50	1.00	185	33.24	-66.59
2	0.167	-37.55 AV	23.15	-60.70	1.00	185	29.04	-66.59
3	0.182	-35.52 PK	42.40	-77.92	1.00	41	31.68	-67.20
4	0.182	-38.45 AV	22.40	-60.85	1.00	41	28.75	-67.20
5	0.220	-36.86 PK	40.75	-77.61	1.00	318	31.92	-68.78
6	0.220	-40.57 AV	20.75	-61.32	1.00	318	28.21	-68.78
7	0.253	-38.94 PK	39.54	-78.48	1.00	360	31.21	-70.15
8	0.253	-41.77 AV	19.54	-61.31	1.00	360	28.38	-70.15
9	0.280	-38.92 PK	38.66	-77.58	1.00	344	32.35	-71.27
10	0.280	-41.57 AV	18.66	-60.23	1.00	344	29.70	-71.27
11	0.324	-41.02 PK	37.39	-78.41	1.00	144	31.49	-72.51
12	0.324	-44.17 AV	17.39	-61.56	1.00	144	28.34	-72.51

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. For the test distance below 0.49MHz is 3m, extrapolate the measured field strength to a distance of 300 meters.

Distance factor@3m = $40 \cdot \log(3/300) = -80\text{dB}$

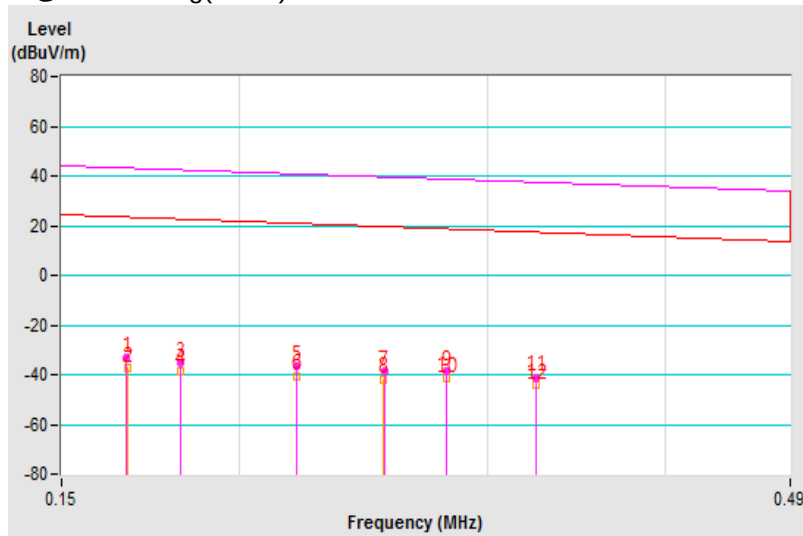


Frequency Range	490kHz ~ 30MHz	Detector Function	Quasi-Peak
-----------------	----------------	-------------------	------------

Antenna Polarity : Perpendicular								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	0.742	-8.07 QP	30.19	-38.26	1.00	138	29.34	-37.41
2	1.190	-11.23 QP	26.09	-37.32	1.00	120	28.62	-39.85
3	2.063	-13.44 QP	29.54	-42.98	1.00	239	28.30	-41.74
4	3.395	-2.95 QP	29.54	-32.49	1.00	272	40.84	-43.79
5	8.106	-5.60 QP	29.54	-35.14	1.00	219	37.68	-43.28
6	23.130	7.45 QP	29.54	-22.09	1.00	102	51.41	-43.96

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. For the test distance below 0.49 ~ 30MHz is 3m, extrapolate the measured field strength to a distance of 30 meters.
Distance factor@3m = $40 \cdot \log(3/30) = -40\text{dB}$

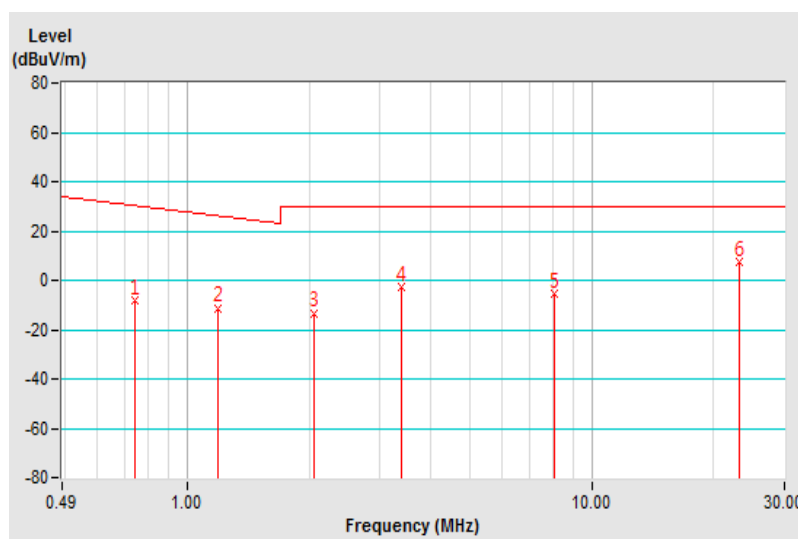


Frequency Range	9kHz ~ 150kHz	Detector Function	Peak/Average
-----------------	---------------	-------------------	--------------

Antenna Polarity : Ground-parallel								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	0.009	-16.61 PK	68.52	-85.13	1.00	206	26.05	-42.66
2	0.009	-20.17 AV	48.52	-68.69	1.00	206	22.49	-42.66
3	0.010	-17.19 PK	67.60	-84.79	1.00	335	26.38	-43.57
4	0.010	-20.11 AV	47.60	-67.71	1.00	335	23.46	-43.57
5	0.014	-23.17 PK	64.68	-87.85	1.00	342	22.28	-45.45
6	0.014	-27.95 AV	44.68	-72.63	1.00	342	17.50	-45.45
7	0.016	-31.01 PK	63.52	-94.53	1.00	114	15.37	-46.38
8	0.016	-35.21 AV	43.52	-78.73	1.00	114	11.17	-46.38
9	0.019	-33.17 PK	62.03	-95.20	1.00	346	14.62	-47.79
10	0.019	-36.87 AV	42.03	-78.90	1.00	346	10.92	-47.79
11	0.026	-35.66 PK	59.30	-94.96	1.00	203	15.16	-50.82
12	0.026	-38.77 AV	39.30	-78.07	1.00	203	12.05	-50.82

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. For the test distance below 0.49MHz is 3m, extrapolate the measured field strength to a distance of 300 meters.
Distance factor@3m = $40 \cdot \log(3/300) = -80\text{dB}$

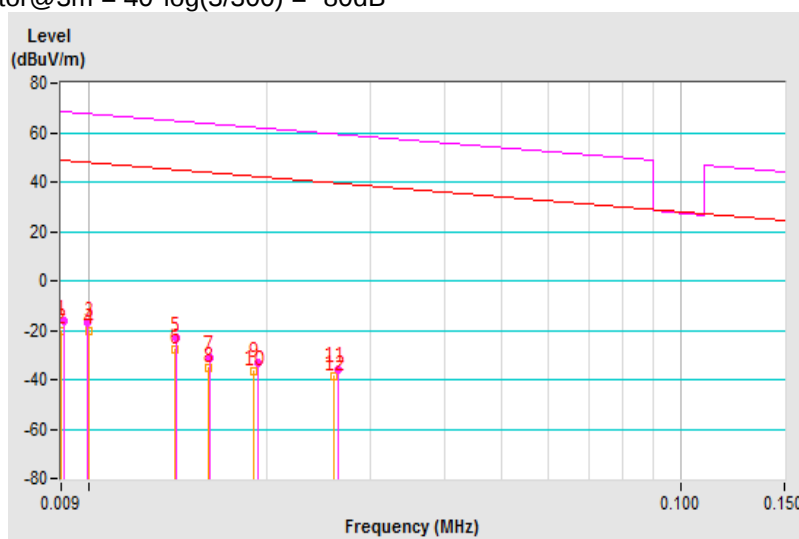


Frequency Range	150kHz ~ 490kHz	Detector Function	Peak/Average
-----------------	-----------------	-------------------	--------------

Antenna Polarity : Ground-parallel								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	0.151	-33.35 PK	44.02	-77.37	1.00	218	32.57	-65.92
2	0.151	-35.45 AV	24.02	-59.47	1.00	218	30.47	-65.92
3	0.173	-33.66 PK	42.84	-76.50	1.00	127	33.17	-66.83
4	0.173	-35.14 AV	22.84	-57.98	1.00	127	31.69	-66.83
5	0.188	-33.64 PK	42.12	-75.76	1.00	137	33.81	-67.45
6	0.188	-37.15 AV	22.12	-59.27	1.00	137	30.30	-67.45
7	0.199	-35.72 PK	41.63	-77.35	1.00	22	32.19	-67.91
8	0.199	-38.17 AV	21.63	-59.80	1.00	22	29.74	-67.91
9	0.224	-37.38 PK	40.60	-77.98	1.00	171	31.57	-68.95
10	0.224	-41.11 AV	20.60	-61.71	1.00	171	27.84	-68.95
11	0.255	-38.17 PK	39.47	-77.64	1.00	243	32.07	-70.24
12	0.255	-42.17 AV	19.47	-61.64	1.00	243	28.07	-70.24

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. For the test distance below 0.49MHz is 3m, extrapolate the measured field strength to a distance of 300 meters.

Distance factor@3m = $40 \cdot \log(3/300) = -80\text{dB}$

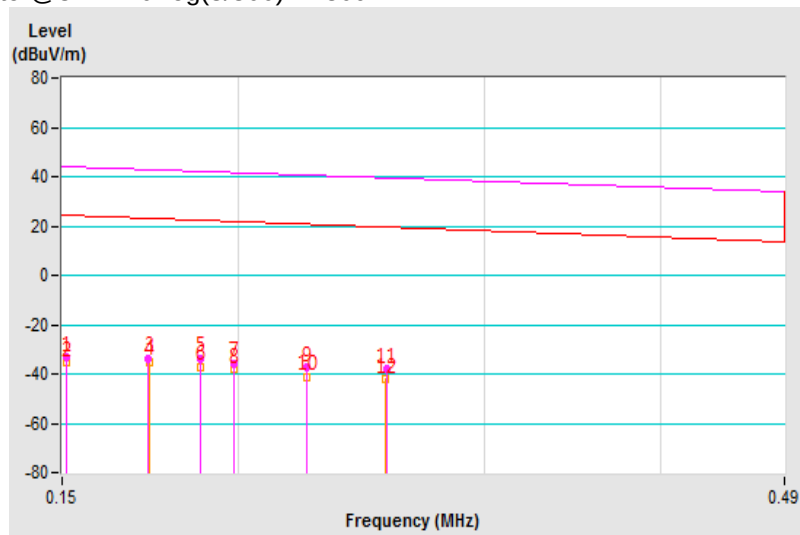


Frequency Range	490kHz ~ 30MHz	Detector Function	Quasi-Peak
-----------------	----------------	-------------------	------------

Antenna Polarity : Ground-parallel								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	0.854	-9.76 QP	28.97	-38.73	1.00	310	28.53	-38.29
2	1.110	-10.45 QP	26.69	-37.14	1.00	223	29.22	-39.67
3	3.452	1.27 QP	29.54	-28.27	1.00	349	45.07	-43.80
4	6.391	-7.66 QP	29.54	-37.20	1.00	45	35.95	-43.61
5	8.653	-0.76 QP	29.54	-30.30	1.00	165	42.42	-43.18
6	23.129	7.38 QP	29.54	-22.16	1.00	59	51.34	-43.96

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. For the test distance below 0.49 ~ 30MHz is 3m, extrapolate the measured field strength to a distance of 30 meters.
Distance factor@3m = $40 \cdot \log(3/30) = -40\text{dB}$

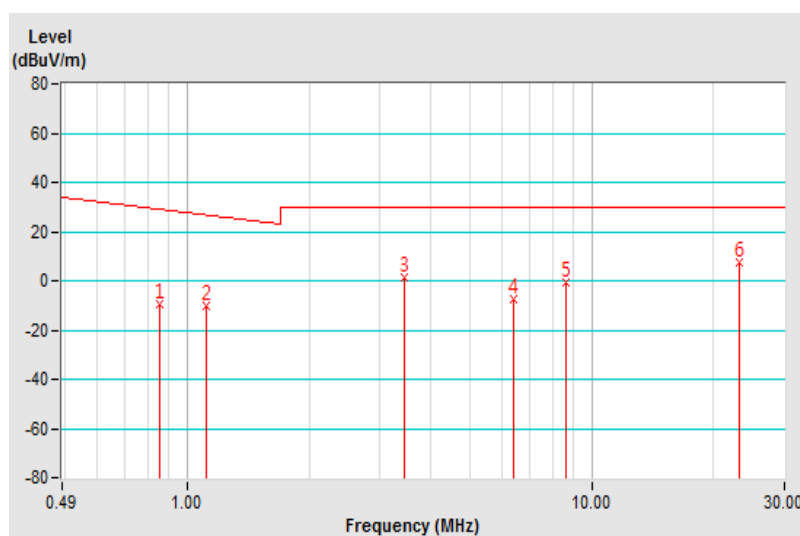


Frequency Range	30MHz ~ 1000MHz	Detector Function	Quasi-Peak
-----------------	-----------------	-------------------	------------

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.22	33.6 QP	40.0	-6.4	2.00 H	0	42.3	-8.7
2	131.85	35.4 QP	43.5	-8.1	2.00 H	301	43.5	-8.1
3	189.95	36.6 QP	43.5	-6.9	1.50 H	241	46.1	-9.5
4	241.75	34.0 QP	46.0	-12.0	2.00 H	30	42.1	-8.1
5	323.98	33.8 QP	46.0	-12.2	1.00 H	144	38.8	-5.0
6	444.02	33.9 QP	46.0	-12.1	2.00 H	258	35.5	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

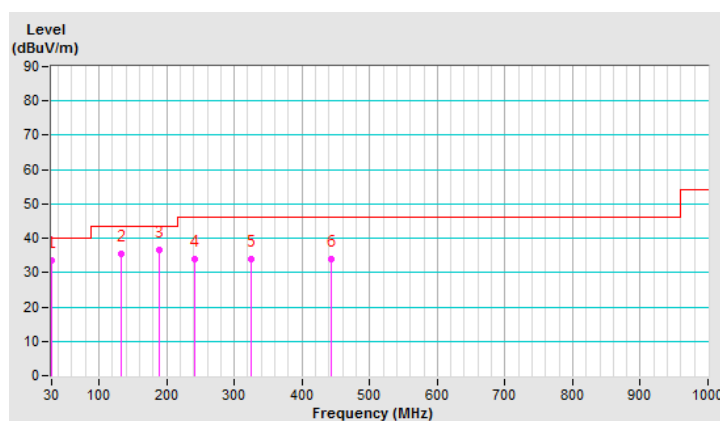


Frequency Range	30MHz ~ 1000MHz	Detector Function	Quasi-Peak
-----------------	-----------------	-------------------	------------

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	48.99	34.1 QP	40.0	-5.9	1.00 V	324	41.7	-7.6
2	107.96	30.4 QP	43.5	-13.1	1.50 V	277	40.7	-10.3
3	201.47	28.3 QP	43.5	-15.2	1.00 V	284	38.4	-10.1
4	294.66	30.7 QP	46.0	-15.3	1.00 V	324	36.9	-6.2
5	324.03	31.3 QP	46.0	-14.7	1.00 V	320	36.3	-5.0
6	506.39	31.6 QP	46.0	-14.4	2.00 V	65	31.8	-0.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

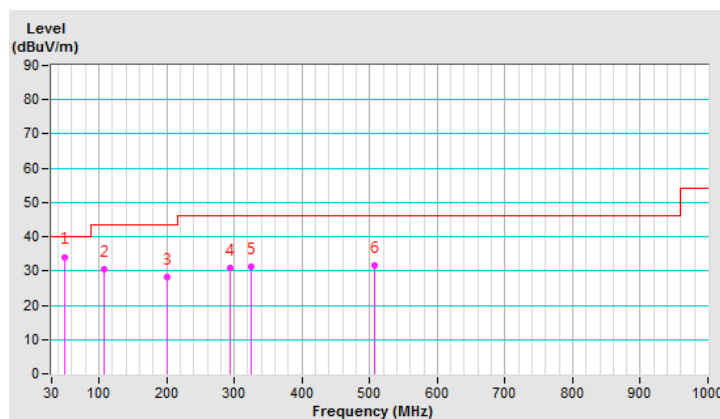

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 19, 2020	Mar. 18, 2021
50 ohms Terminator	50	3	Oct. 23, 2019	Oct. 22, 2020
RF Cable	5D-FB	COCCAB-001	Sep. 27, 2019	Sep. 26, 2020
Fixed attenuator EMCI	STI02-2200-10	005	Aug. 30, 2019	Aug. 29, 2020
Software BVADT	BVADT_Conc_V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: June 09, 2020

4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

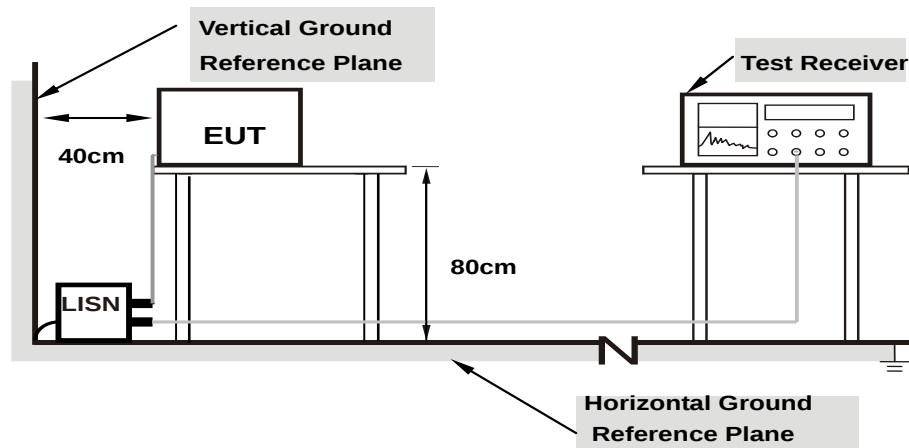

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17344	9.97	37.78	14.02	47.75	23.99	64.79	54.79	-17.04	-30.80
2	0.19297	9.97	38.66	18.74	48.63	28.71	63.91	53.91	-15.28	-25.20
3	0.50156	9.99	32.73	17.90	42.72	27.89	56.00	46.00	-13.28	-18.11
4	0.62656	10.00	31.94	19.43	41.94	29.43	56.00	46.00	-14.06	-16.57
5	0.94297	10.02	29.90	14.66	39.92	24.68	56.00	46.00	-16.08	-21.32
6	0.94297	10.02	29.86	14.54	39.88	24.56	56.00	46.00	-16.12	-21.44

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

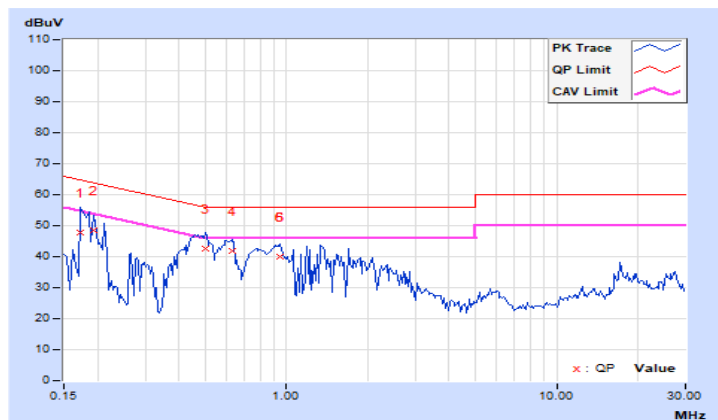


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17734	9.97	38.70	15.91	48.67	25.88	64.61	54.61	-15.94	-28.73
2	0.18906	9.97	37.54	17.28	47.51	27.25	64.08	54.08	-16.57	-26.83
3	0.44297	9.98	32.34	16.48	42.32	26.46	57.01	47.01	-14.69	-20.55
4	0.63047	10.00	32.17	20.29	42.17	30.29	56.00	46.00	-13.83	-15.71
5	0.94688	10.02	29.84	15.72	39.86	25.74	56.00	46.00	-16.14	-20.26
6	1.25391	10.03	28.29	15.51	38.32	25.54	56.00	46.00	-17.68	-20.46

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

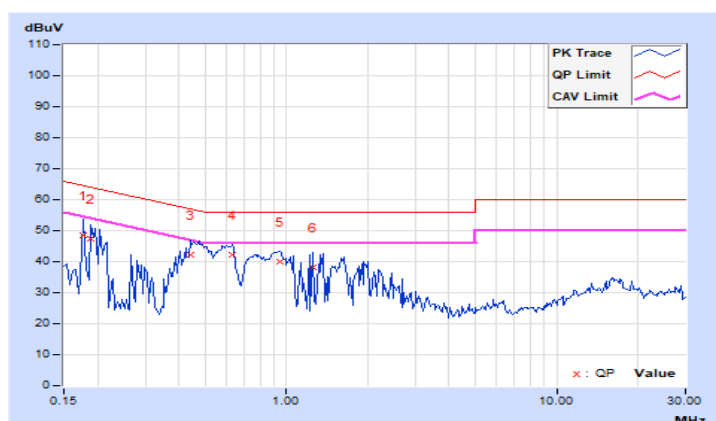


4.3 Frequency Stability

4.3.1 Limits of Frequency Stability Measurement

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

4.3.2 Test Setup

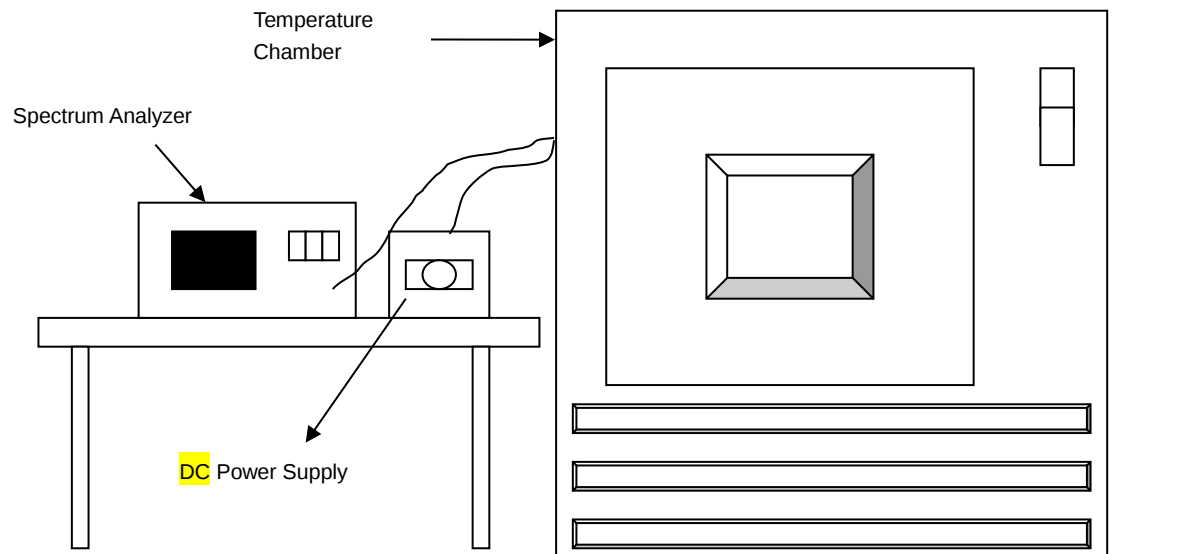

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- Turned the EUT on and coupled its output to a spectrum analyzer.
- Turned the EUT off and set the chamber to the highest temperature specified.
- Allowed sufficient time (approximately 30 min) for the temperature of the chamber to stabilize then turned the EUT on and measured the operating frequency after 2, 5, and 10 minutes.
- Repeated step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at $+20$ degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

Same as Item 4.1.6.

4.3.7 Test Result

Frequency Stability Versus Temp.									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
40	120	13.56001	0.00007	13.56001	0.00007	13.56001	0.00007	13.56002	0.00015
30	120	13.55999	-0.00007	13.56	0.00000	13.56	0.00000	13.55999	-0.00007
20	120	13.56001	0.00007	13.55999	-0.00007	13.56	0.00000	13.56	0.00000
10	120	13.56001	0.00007	13.56002	0.00015	13.56002	0.00015	13.56001	0.00007
0	120	13.56003	0.00022	13.56003	0.00022	13.56003	0.00022	13.56001	0.00007


Frequency Stability Versus Voltage									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
20	138	13.56001	0.00007	13.55999	-0.00007	13.56	0.00000	13.56	0.00000
	120	13.56001	0.00007	13.55999	-0.00007	13.56	0.00000	13.56	0.00000
	102	13.56001	0.00007	13.55999	-0.00007	13.56	0.00000	13.56	0.00000

4.4 20dB Bandwidth

4.4.1 Limits of 20dB BANDWIDTH Measurement

The 20dB bandwidth shall be specified in operating frequency band.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 10kHz RBW and 30kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.4.5 Deviation from Test Standard


No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.1.6.

4.4.7 Test Results

20dBc Point (Low) (MHz)	20dBc Point (High) (MHz)	Operating Frequency Band (MHz)	Pass/Fail
13.560555	13.560773	13.11 – 14.01	Pass

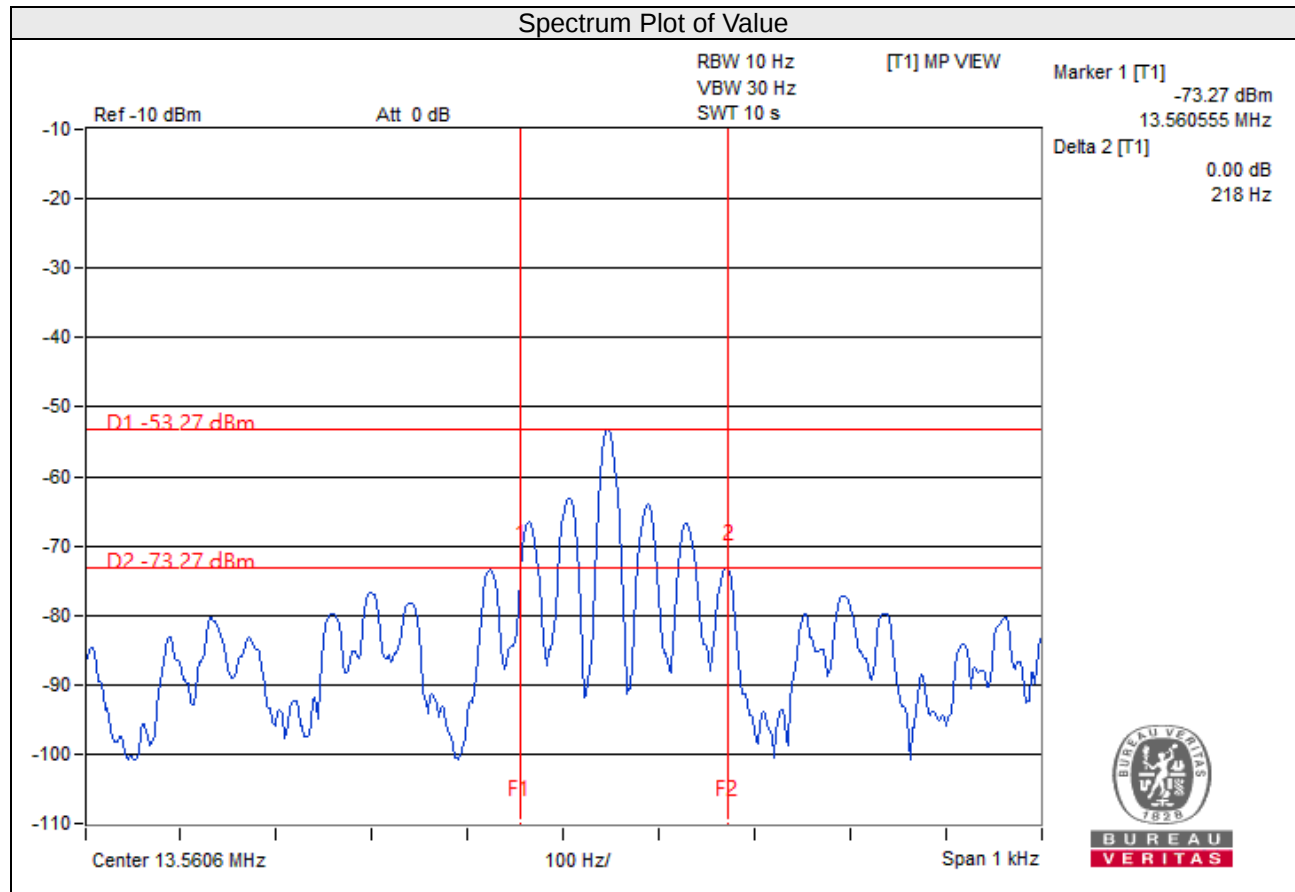

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---