



ELECTROMAGNETIC EMISSION COMPLIANCE REPORT

Test report file number : E009R-046

Applicant : PROCHIPS TECHNOLOGY INC.

Address : 118-2, Oryu-Dong, Guro-Gu, Seoul, Korea

Manufacturer : PROCHIPS TECHNOLOGY INC.

Address : 118-2, Oryu-Dong, Guro-Gu, Seoul, Korea

Type of Equipment : USB PC CAMERA

FCC ID : MY8PCA-3100

Model / Type No. : PCA-3100

Serial number : N/A

Total page of Report : 13 pages (including this page)

Date of Incoming : August 26, 2000

Date of issuing : September 29, 2000

SUMMARY

The equipment complies with the regulation; FCC PART 15 SUBPART B § 15.101

This test report contains only the result of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production

Reviewed by:

Y. K. Kwon / Chief Engineer
EMC Dept.
ONETECH Corp.

Approved by:

S. S. Hong / Managing Director
EMC Dept.
ONETECH Corp.

This report shall not be reproduced except in full without our written approval.

EMC-004 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-860 Korea. (TEL: 82-31-765-8289 FAX: 82-

3 1 - 7 6 6 - 2 9 0 4)



CONTENTS

Page

1. VERIFICATION OF COMPLIANCE.....	3
2. GENERAL INFORMATION.....	4
2.1 PRODUCT DESCRIPTION.....	4
2.2 RELATED SUBMITTAL(S) / GRANT(S).....	4
2.3 TEST SYSTEM DETAILS	5
2.4 TEST METHODOLOGY	5
2.5 TEST FACILITY	5
3. SYSTEM TEST CONFIGURATION.....	6
3.1 JUSTIFICATION	6
3.2 EUT EXERCISE SOFTWARE.....	6
3.3 CABLE DESCRIPTION.....	6
3.4 NOISE SUPPRESSION PARTS ON CABLE.....	7
3.5 EQUIPMENT MODIFICATIONS.....	7
3.6 CONFIGURATION OF TEST SYSTEM	7
4. PRELIMINARY TEST.....	8
4.1 AC POWER LINE CONDUCTED EMISSION TEST	8
4.2 RADIATED EMISSION TEST	8
5. FINAL RESULT OF MEASUREMENT.....	9
5.1 CONDUCTED EMISSION TEST	9
5.2 RADIATED EMISSION TEST	11
6. FIELD STRENGTH CALCULATION	12
7. LIST OF TEST EQUIPMENT.....	13



1. VERIFICATION OF COMPLIANCE

APPLICANT : PROCHIPS TECHNOLOGY INC.
ADDRESS : 118-2, Oryu-Dong, Guro-Gu, Seoul, Korea
CONTACT PERSON : Taeryong Hwang / Manager
TELEPHONE NO : 82-2-2610-8956
FCC ID : MY8PCA-3100
MODEL NO/NAME : PCA-3100
SERIAL NUMBER : N/A
DATE : September 29, 2000

DEVICE TYPE	Peripheral Device for Class B Computing Device - Unintentional Radiator
E.U.T. DESCRIPTION	USB PC CAMERA
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4/1992
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC CFR 47 PART 15 § 15.101
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



2. GENERAL INFORMATION

2.1 Product Description

The PROCHIPS TECHNOLOGY INC., Model PCA-3100 (referred to as the EUT in this report) is an USB PC CAMERA which can support video communications and other applications. Product specification described herein was obtained from product data sheet or user' s manual.

CHASSIS TYPE	Plastic
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	27MHz, 48MHz
NUMBER OF LAYERS	4 Layers
IMAGING DEVICE	1/4" CMOS
PIXEL	100,000pixel
ELECTRICAL RATING	DC 5V
DIMENSIONS	75mm X 90mm X 57mm
EXTERNAL TERMINALS	USB port

Model Differences:

-. The difference(s) compared to the EUT is as follows: none

2.2 Related Submittal(s) / Grant(s)

Original submittal only



2.3 Test System Details

The model numbers for all the equipments which were used in the tested system is:

Model	Manufacturer	FCC ID	Description	Connected to
PCA-3100	PROCHIPS TECHNOLOGY INC.	O7SRX-9106	USB PC CAMERA (EUT)	PC
GA-6BXE	GIGABITE	DOC	PC	EUT
AV-5T	KDS	EVOKD-1510T	MONITOR	PC
5530	BTC	DOC	KEYBOARD	PC
SMB-601	SEJIN Elec.	GJJB509A0	MOUSE	PC
2225C	HP	DSI6XU2225	PRINTER	PC
020-0470	CARDINAL	GDE0196	MODEM	PC

2.4 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4/1992. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.5 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Commission on January 12, 1999. (Registration Number: 92819)



3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
MAIN BOARD	PROCHIPS TECHNOLOGY INC.	PCA-3100/3202	N/A
CAMERA BOARD	PROCHIPS TECHNOLOGY INC.	PCA-3202/3100	N/A

3.2 EUT exercise Software

The image of camera was continuously displayed on the monitor.

3.3 Cable Description

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
USB PC CAMERA (EUT)	N/A	Y	1.5(D)
PC	N	Y	1.5(P), 1.2(D)
MONITOR	N	Y	1.5(P), 1.8(D)
KEYBOARD	N/A	Y	1.8 (D)
MOUSE	N/A	Y	1.8(D)
MODEM	N	Y	1.5(D)
PRINTER	N	Y	1.5(P), 1.2 (D)

* The marked “(P)” means the Power Cable and “(D)” means Signal Cable.



3.4 Noise Suppression Parts on Cable

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
USB PC CAMERA (EUT)	Y	PC END	Y	PC END
PC	-	-	-	-
MONITOR	Y	PC END	Y	PC END
KEYBOARD	N	N/A	Y	PC END
MOUSE	N	N/A	Y	PC END
MODEM	N	N/A	Y	BOTH END
PRINTER	N	N/A	Y	BOTH END

3.5 Equipment Modifications

To achieve compliance to CLASS B levels, the following change(s) was made by ONETECH Corp. during compliance testing:

“There was no Modified items during EMI test”

3.6 Configuration of Test System

Line Conducted Test: The EUT was connected to PC and the power line of PC was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4/1992 7.2.3 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emission test was conducted using the procedure in ANSI C63.4/1992 8.3.1.1 to determine the worse operating conditions. Final radiated emission test was conducted at 3 meters open area test site.



4. PRELIMINARY TEST

4.1 AC Power line Conducted Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
The image of camera was continuously displayed on the monitor.	X

4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
The image of camera was continuously displayed on the monitor.	X

**5. FINAL RESULT OF MEASUREMENT**

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level


5.1 Conducted Emission Test

Humidity Level : 51% Temperature : 21
 Limits apply to : FCC CFR 47, PART 15, SUBPART B
 Type of Test : CLASS B
 Result : PASSED BY 46.92 dB at 0.45 MHz

EUT : USB PC CAMERA Date: September 21, 2000
 Operating Condition : The image of camera was continuously displayed on the monitor.
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

Power Line Conducted Emission			FCC CLASS B	
Frequency (MHz)	Amplitude (dBuV)	Conductor	Limit (dBuV)	Margin (dB)
0.45	31.08	HOT	48.00	-16.92
0.70	23.82	HOT	48.00	-24.18
1.23	17.64	NEUTRAL	48.00	-30.36
1.70	23.69	NEUTRAL	48.00	-24.31
12.00	20.09	NEUTRAL	48.00	-27.91
24.01	29.58	NEUTRAL	48.00	-18.42

Line Conducted Emission Tabulated Data


 Measuring by: Young Min, Choi / Test Engineer


This report shall not be reproduced except in full without our written approval.

EMC-004 (Rev.0)


HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
 (TEL: 82-31-746-8500 FAX: 82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-860 Korea. (TEL: 82-31-765-8289 FAX: 82-

3 1 - 7 6 6 - 2 9 0 4)

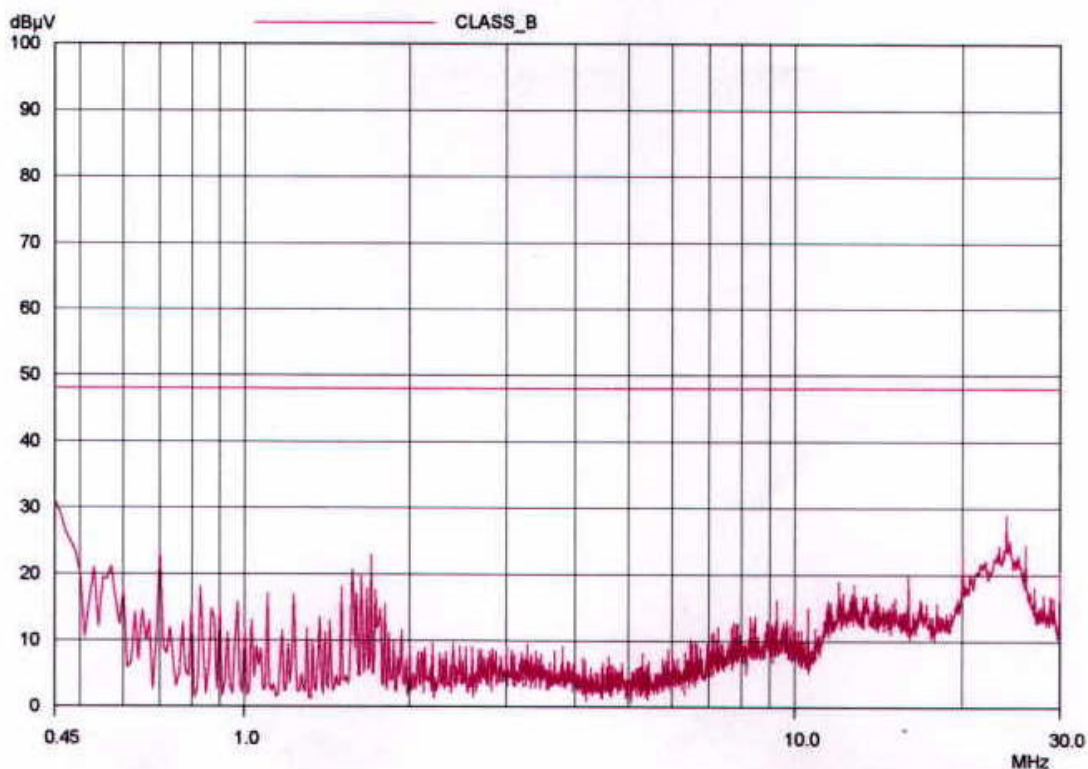

HOT LINE

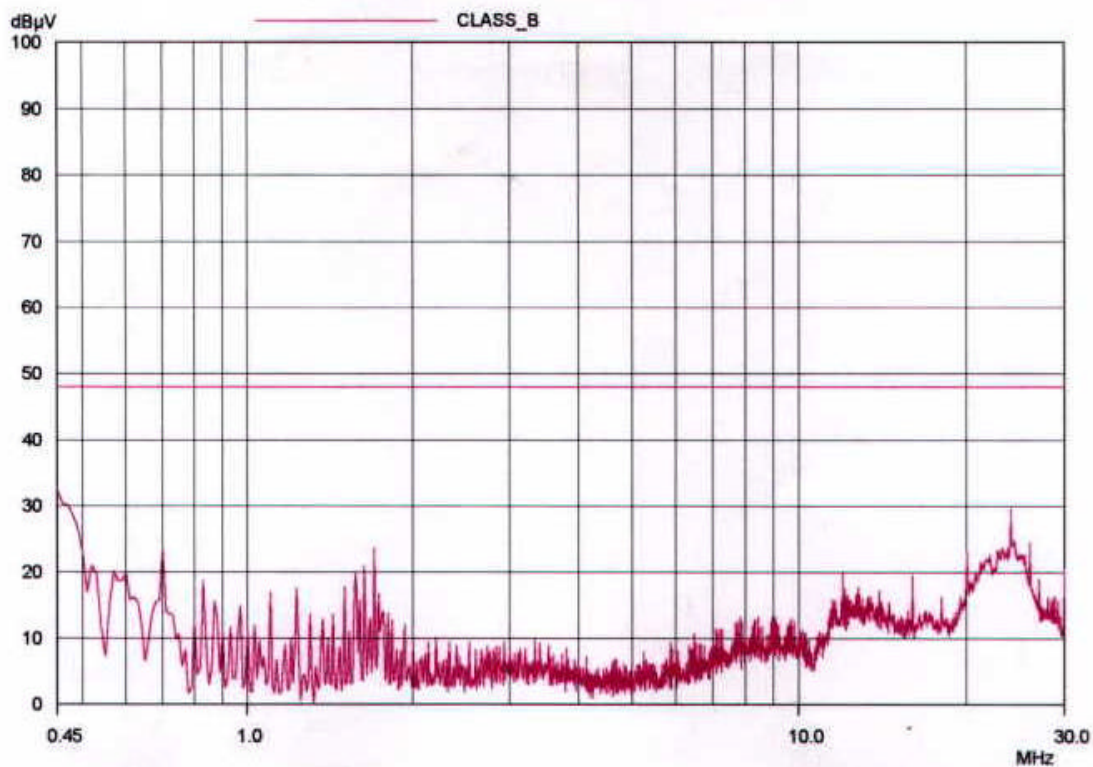

This report shall not be reproduced except in full without our written approval.

EMC-004 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-860 Korea. (TEL: 82-31-765-8289 FAX: 82-

3 1 - 7 6 6 - 2 9 0 4)



ONETECH

Testing & Evaluation Lab.

Page 11 of 13

FCC ID. : MY8PCA-3100

File No. : E009R-046

NEUTRAL LINE

This report shall not be reproduced except in full without our written approval.

EMC-004 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-860 Korea. (TEL: 82-31-765-8289 FAX: 82-

3 1 - 7 6 6 - 2 9 0 4)



5.2 Radiated Emission Test

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 48 % Temperature : 25
 Limits apply to : FCC CFR 47, PART 15, SUBPART B
 Type of Test : CLASS B
 Result : PASSED BY -5.71 dB at 72.04 MHz

EUT : USB PC CAMERA Date: September 21, 2000
 Operating Condition : The image of camera was continuously displayed on the monitor.
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)
 Distance : 3 Meter

Radiated Emission		Ant	Correction Factors		Total	FCC CLASS B	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
48.00	20.70	V	11.25	0.91	32.86	40.00	-7.14
72.04	26.40	H	6.89	1.00	34.29	40.00	-5.71
120.00	20.60	H	13.34	1.23	35.17	43.50	-8.33
138.90	17.5.	V	12.70	1.31	31.51	43.50	-11.99
143.20	17.70	V	12.90	1.32	31.92	43.50	-11.58
165.00	18.80	H	14.63	1.41	34.84	43.50	-8.66
205.60	20.70	V	11.62	1.60	33.92	43.50	-9.58
350.40	18.90	H	15.20	2.28	36.38	46.00	-9.62
507.00	15.60	V	18.33	2.69	36.62	46.00	-9.38
666.00	12.60	H	20.44	3.14	36.18	46.00	-9.82
800.00	13.70	V	21.33	3.71	38.74	46.00	-7.26

Radiated Emission Tabulated Data

Measuring by: Young Min, Choi / Test Engineer

This report shall not be reproduced except in full without our written approval.

EMC-004 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
 (TEL: 82-31-746-8500 FAX: 82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-860 Korea. (TEL: 82-31-765-8289 FAX: 82-

3 1 - 7 6 6 - 2 9 0 4)



6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)

**7. LIST OF TEST EQUIPMENT**

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS 10	827864/005	SEP/99	12MONTH	■
2.	Test receiver	R/S	ESHS10	834467/007	APRIL/00	12MONTH	■
3.	Spectrum analyzer	HP	8568B	3026A0226	SEP/99	12MONTH	■
4.	RF preselector	HP	85685A	3107A01264	SEP/99	12MONTH	■
5.	Quasi-Peak Adapter	HP	85650A	3107A01542	SEP/99	12MONTH	■
6.	Dipole Antenna	EMCO	3121C	9107-745	JUN/00	12MONTH	
7.	Biconical antenna	EMCO	3104C	9109-4441 9109-4443 9109-4444	MAR/00	12MONTH	■
8.	Log Periodic antenna	EMCO	3146	9109-3213 9109-3214 9109-3217	MAR/00	12MONTH	■
9.	LISN	EMCO	3825/2	9109-1867 9109-1869	FEB/00	12MONTH	■
10.	RF Amplifier	HP	8447F	3113A04554	JUN/00	N/A	
11.	Spectrum Analyzer	HP	8591A	3131A02312	APR/00	12MONTH	
12.	Computer System	HP	98581C	98543A	N/A	N/A	■
	Hard disk drive		9153C	CMC762Z9153	N/A	N/A	■
13.	Plotter	HP	7475A	30052 22986	N/A	N/A	■
14.	Position Controller	EMCO	1090	9107-1038	N/A	N/A	■
15.	Turn Table	EMCO	1080-1.21	9109-1576	N/A	N/A	■
16.	Antenna Master	EMCO	1070-1	9109-1624	N/A	N/A	■

This report shall not be reproduced except in full without our written approval.

EMC-004 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-860 Korea. (TEL: 82-31-765-8289 FAX: 82-

3 1 - 7 6 6 - 2 9 0 4)