



FCC TEST REPORT

REPORT NO.: RF970903H01

MODEL NO.: MW600-B-LO

RECEIVED: Sep. 03, 2008

TESTED: Sep. 17 to 22, 2008

ISSUED: Sep. 26, 2008

APPLICANT: CyberTAN Technology, Inc.

ADDRESS: No.99, Park Avenue III, Science-based Industrial Park, Hsinchu, Taiwan 308,R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien, Taiwan, R.O.C.

This test report consists of 65 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	8
3.4	GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.5	DESCRIPTION OF SUPPORT UNITS	11
3.6	CONFIGURATION OF SYSTEM UNDER TEST	12
4	TEST TYPES AND RESULTS	13
4.1	CONDUCTED EMISSION MEASUREMENT	13
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	13
4.1.2	TEST INSTRUMENTS	13
4.1.3	TEST PROCEDURES	14
4.1.4	TEST SETUP	14
4.1.5	EUT OPERATING CONDITIONS	15
4.1.6	TEST RESULTS	16
4.2	RADIATED EMISSION MEASUREMENT	18
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	18
4.2.2	TEST INSTRUMENTS	19
4.2.3	TEST PROCEDURES	20
4.2.4	TEST SETUP	21
4.2.5	EUT OPERATING CONDITIONS	21
4.2.6	TEST RESULTS	22
4.3	6dB BANDWIDTH MEASUREMENT	37
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	37
4.3.2	TEST INSTRUMENTS	37
4.3.3	TEST PROCEDURE	38
4.3.4	TEST SETUP	38
4.3.5	EUT OPERATING CONDITIONS	38
4.3.6	TEST RESULTS	39
4.4	MAXIMUM PEAK OUTPUT POWER	45
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	45



4.4.2	TEST INSTRUMENTS.....	45
4.4.3	TEST PROCEDURES	46
4.4.4	TEST SETUP	46
4.4.5	EUT OPERATING CONDITIONS	46
4.4.6	TEST RESULTS	47
4.5	POWER SPECTRAL DENSITY MEASUREMENT	49
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	49
4.5.2	TEST INSTRUMENTS.....	49
4.5.3	TEST PROCEDURE.....	50
4.5.4	TEST SETUP	50
4.5.5	EUT OPERATING CONDITIONS	50
4.5.6	TEST RESULTS	51
4.6	Conducted OUT-BAND EMISSION MEASUREMENT	57
4.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT	57
4.6.2	TEST INSTRUMENTS.....	57
4.6.3	TEST PROCEDURE.....	57
4.6.4	EUT OPERATING CONDITION.....	57
4.6.5	TEST RESULTS	58
4.7	ANTENNA REQUIREMENT	63
4.7.1	STANDARD APPLICABLE	63
4.7.2	ANTENNA CONNECTED CONSTRUCTION	63
5	INFORMATION ON THE TESTING LABORATORIES	64
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	65



1 CERTIFICATION

PRODUCT : Wireless 802. 11b/g wireless PCI-E Adapter Card

BRAND NAME : CyberTAN

MODEL NO. : MW600-B-LO

TESTED : Sep. 17 to 22, 2008

APPLICANT : CyberTAN Technology, Inc.

TEST SAMPLE : ENGINEERING SAMPLE

STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247)

ANSI C63.4-2003

The above equipment (Model: MW600-B-LO) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Midoli Peng , **DATE:** Sep. 26, 2008
(Midoli Peng, Specialist)

**TECHNICAL
ACCEPTANCE**
Responsible for RF : Hank Chung , **DATE:** Sep. 26, 2008
(Hank Chung, Deputy Manager)

APPROVED BY : May Chen , **DATE:** Sep. 26, 2008
(May Chen, Deputy Manager)



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -21.90 dB at 18.429 MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -0.64 dB at 2483.50 MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(d)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions	2.44 dB
Radiated emissions (30MHz-1GHz)	3.94 dB
Radiated emissions (1GHz -18GHz)	2.33 dB
Radiated emissions (18GHz -40GHz)	2.55 dB



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless 802.11b/g wireless PCI-E Adapter Card
MODEL NO.	MW600-B-LO
FCC ID	N89-MW600BLO
POWER SUPPLY	DC 3.3V from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
CHANNEL SPACING	5MHz
OUTPUT POWER	802.11b: 110.154mW 802.11g: 217.771mW
ANTENNA TYPE	Dipole antenna with SMA Male Reverse connector (Antenna Gain : 2dBi)
DATA CABLE	NA
I/O PORT	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
2. The EUT complies with IEEE 802.11g standards, and backwards compatible with IEEE 802.11b products.
3. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

For 802.11b/g normal mode: Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
-	√	√	√	√	NA

Where PLC: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	11	DSSS	DBPSK	1

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	11	DSSS	DBPSK	1

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

**Bandedge Measurement:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 11	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6



3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Wireless 802. 11b/g wireless PCI-E Adapter Card. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 2003

All tests have been performed and recorded as per the above standards.



3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PERSONAL COMPUTER	Lenovo	ideacentre K series	NA	DoC
2	MONITOR	BENQ	Q5C3	99L9172APT34301764	NA
3	MODEM	ACEEX	1414	0206026776	IFAXDM1414
4	KEYBOARD	HP	KB-0316	BC3520DVBVK37S	NA
5	MOUSE	BTC	M851	G00347024426	DoC
6	TEST TOOL	CyberTAN	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.8 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core.
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
4	1.5m foil shielded wire, PS/2 Connector, w/o core.
5	1.5m foil shielded wire, PS/2 Connector, w/o core.
6	NA


NOTE: All power cords of the above support units are non-shielded (1.8m).

3.6 CONFIGURATION OF SYSTEM UNDER TEST

For conducted test:

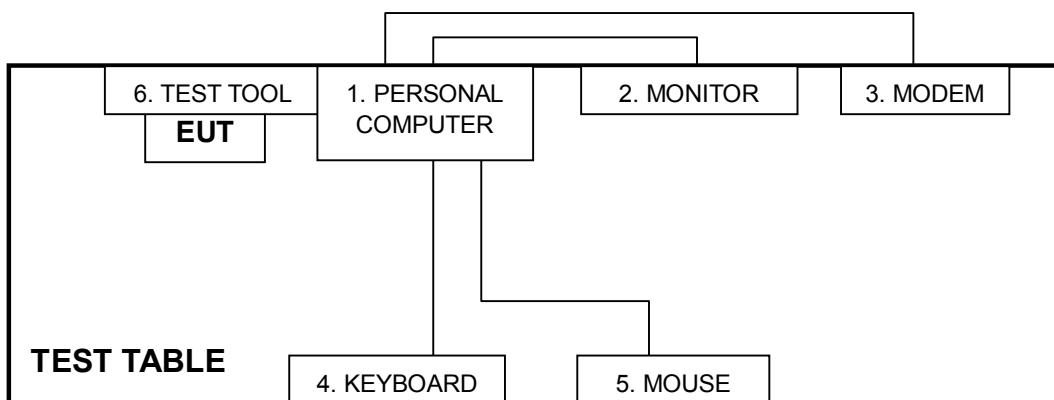

For radiated test:

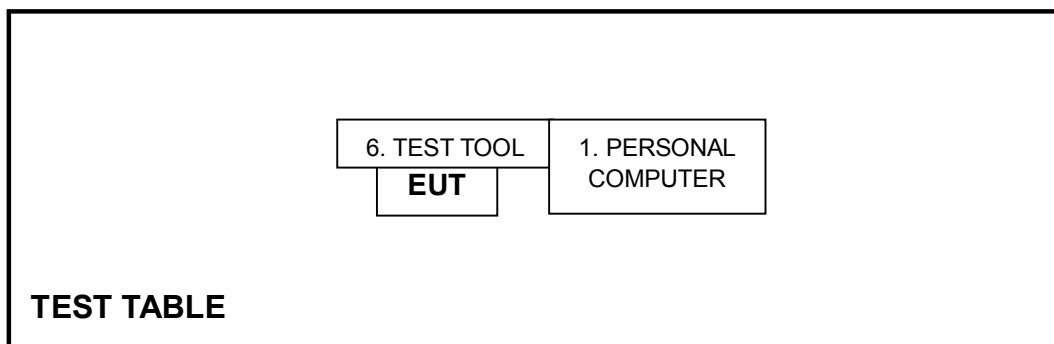



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
0.15-0.5 0.5-5 5-30	Quasi-peak	Average
	66 to 56	56 to 46
	56	46
	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	847124/029	Feb. 29, 2008	Feb. 28, 2009
Line-Impedance Stabilization Network(for EUT)	ENV-216	100071	Nov. 27, 2007	Nov. 26, 2008
Line-Impedance Stabilization Network(for Peripheral)	ESH3-Z5	848773/004	Nov. 09, 2007	Nov. 08, 2008
RF Cable (JYEBAO)	5DFB	COBCAB-001	July 24, 2008	July 23, 2009
50 ohms Terminator	50	3	Nov. 16, 2007	Nov. 15, 2008
Software	ADT_Cond_V7.3.2	NA	NA	NA


Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. B.
3. The VCCI Con B Registration No. is C-2193.

4.1.3 TEST PROCEDURES

- a. The EUT/HOST was placed 0.4 meters from the conducting wall of the shielded room with EUT/HOST being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT/HOST were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 TEST SETUP

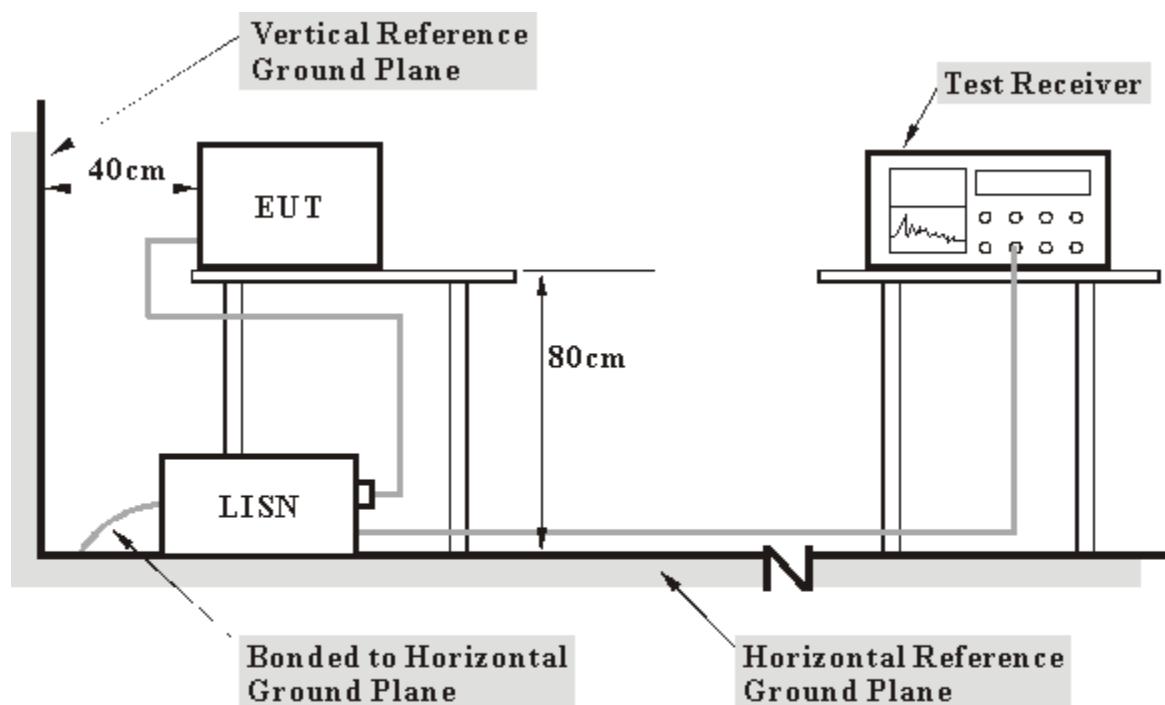

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.5 EUT OPERATING CONDITIONS

- a. Plug the EUT into test board and placed on the testing table.
- b. The support unit 1 (Personal Computer) ran a test program "MFGTEST.exe" to enable EUT under transmission condition continuously at specific channel frequency.


4.1.6 TEST RESULTS

INPUT POWER (SYSTEM)	120Vac, 60 Hz	6dB BANDWIDTH	9 kHz
PHASE	Line (L)	TRANSFER RATE	1Mbps
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 959hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	9.70	28.61	-	38.31	-	63.91	53.91	-25.60	-
2	0.287	9.81	20.81	-	30.62	-	60.62	50.62	-30.00	-
3	0.478	9.91	21.67	-	31.58	-	56.37	46.37	-24.79	-
4	1.918	9.72	22.13	-	31.85	-	56.00	46.00	-24.15	-
5	18.429	9.94	28.16	-	38.10	-	60.00	50.00	-21.90	-
6	28.211	9.98	23.92	-	33.90	-	60.00	50.00	-26.10	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

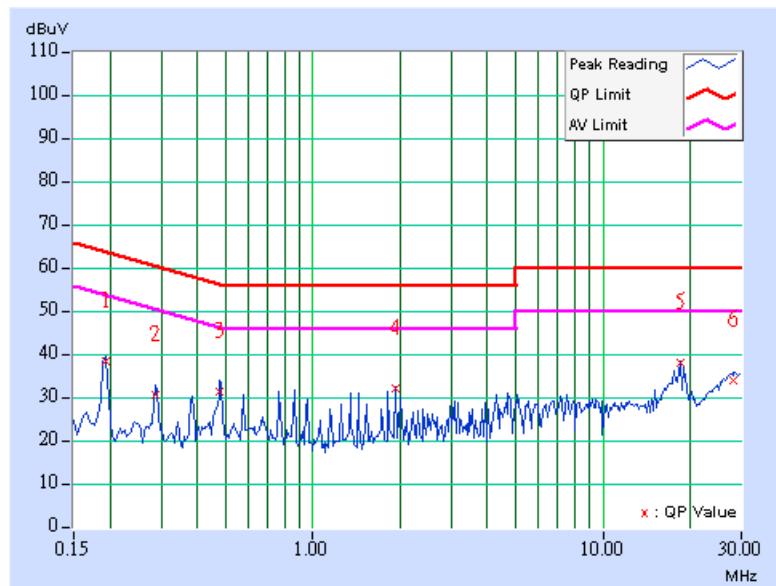


INPUT POWER (SYSTEM)	120Vac, 60 Hz	6dB BANDWIDTH	9 kHz
PHASE	Neutral (N)	TRANSFER RATE	1Mbps
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 959hPa	TESTED BY	Max Tseng

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	9.70	30.76	-	40.46	-	63.91	53.91	-23.45	-
2	0.478	9.90	23.29	-	33.19	-	56.37	46.37	-23.18	-
3	0.963	9.69	21.11	-	30.80	-	56.00	46.00	-25.20	-
4	1.920	9.72	19.55	-	29.27	-	56.00	46.00	-26.73	-
5	10.367	9.89	14.76	-	24.65	-	60.00	50.00	-35.35	-
6	18.711	10.06	26.65	-	36.71	-	60.00	50.00	-23.29	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

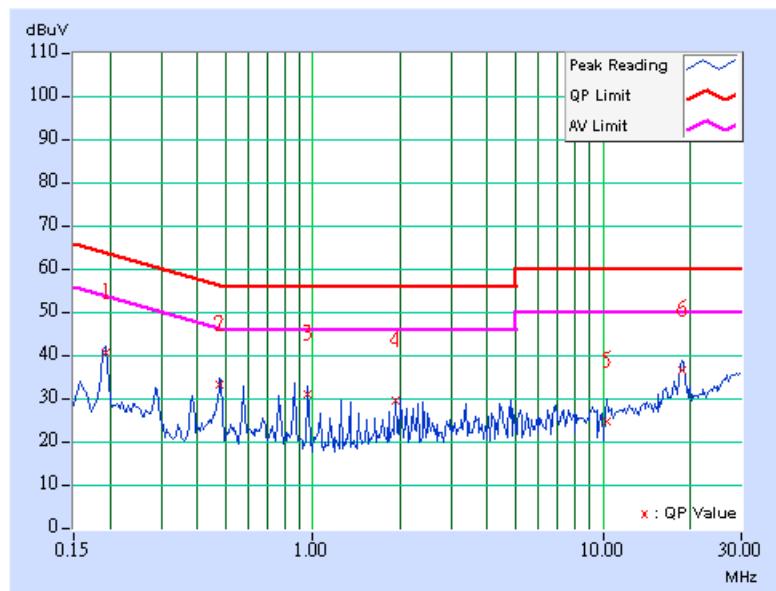



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 16, 2008	July 15, 2009
HP Pre_Amplifier	8449B	3008A01922	Oct. 05, 2007	Oct. 04, 2008
ROHDE & SCHWARZ Test Receiver	ESCS30	100375	April 01, 2008	Mar. 31, 2009
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	April 30, 2008	April 29, 2009
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 17, 2007	Dec. 16, 2008
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA917015 3	Jan. 28, 2008	Jan. 27, 2009
RF Switches (ARNITSU)	CS-201	1565157	Aug. 14, 2008	Aug. 13, 2009
RF CABLE (Chaintek)	SF102	22054-2	Dec. 07, 2007	Dec. 06, 2008
RF Cable	8DFB	STCCAB-30 M-1GHz	Oct. 10, 2007	Oct. 09, 2008
Software	ADT_Radiate d_V7.6.15.8	NA	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA	NA
CHANCE MOST Turn Table	TT-100	0203	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: R3271A) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 3789C-3.




4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

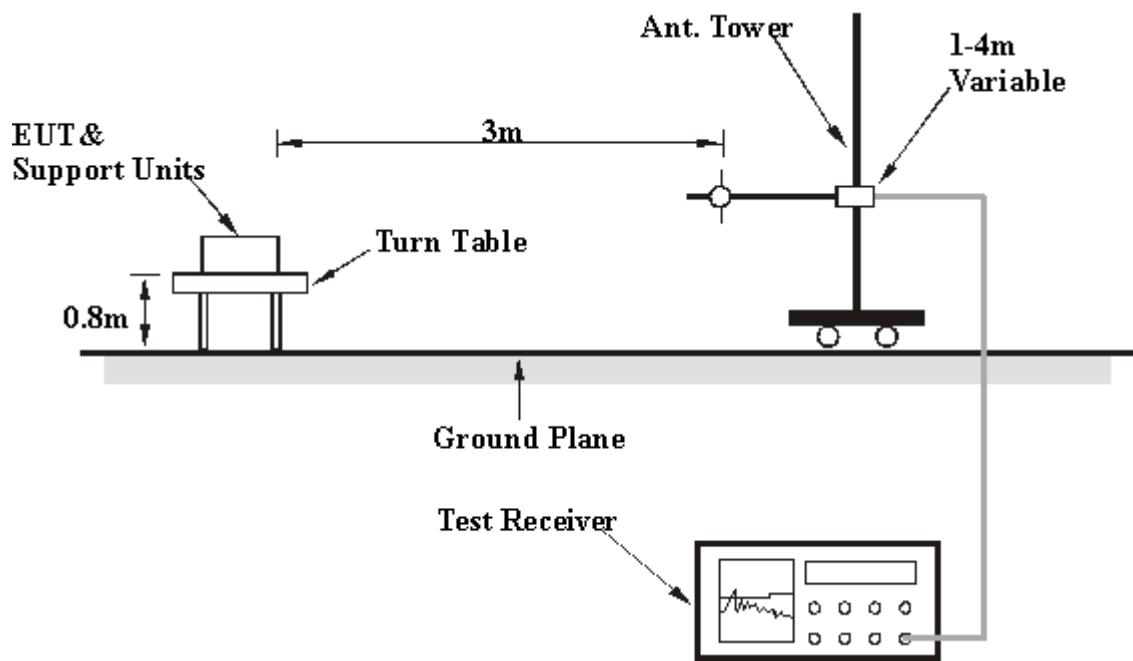

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5



4.2.6 TEST RESULTS

BELOW 1GHz WORST-CASE DATA : 802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 11		FREQUENCY RANGE Below 1000MHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Quasi-Peak
ENVIRONMENTAL CONDITIONS		28deg. C, 64%RH 972hPa		TESTED BY Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	171.62	31.51 QP	43.50	-11.99	1.61 H	6	17.33	14.18
2	187.70	28.49 QP	43.50	-15.01	1.61 H	8	15.32	13.17
3	200.00	27.67 QP	43.50	-15.83	1.61 H	1	15.50	12.17
4	300.00	29.71 QP	46.00	-16.29	1.61 H	105	13.53	16.18
5	353.18	30.00 QP	46.00	-16.00	1.63 H	141	11.69	18.31
6	600.00	29.27 QP	46.00	-16.73	1.00 H	115	5.97	23.30
7	651.25	31.93 QP	46.00	-14.07	1.61 H	16	7.37	24.56
8	900.00	31.19 QP	46.00	-14.81	1.63 H	161	1.63	29.56

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.94	28.47 QP	40.00	-11.53	1.00 V	279	14.82	13.65
2	74.23	32.34 QP	40.00	-7.66	1.00 V	325	20.51	11.83
3	113.76	26.74 QP	43.50	-16.76	1.00 V	8	14.62	12.12
4	200.00	28.91 QP	43.50	-14.59	1.41 V	1	16.74	12.17
5	250.00	27.29 QP	46.00	-18.71	1.00 V	317	12.79	14.50
6	362.32	30.32 QP	46.00	-15.68	1.00 V	137	11.66	18.66
7	639.23	31.72 QP	46.00	-14.28	1.41 V	157	7.45	24.27
8	651.25	34.38 QP	46.00	-11.62	1.51 V	277	9.82	24.56

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		FREQUENCY RANGE		1 ~ 25GHz
INPUT POWER (SYSTEM)		DETECTOR FUNCTION		Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		TESTED BY		Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.32 PK	74.00	-17.68	1.82 H	224	26.26	30.06
2	2390.00	45.05 AV	54.00	-8.95	1.82 H	224	14.99	30.06
3	*2412.00	104.52 PK			1.82 H	225	74.37	30.15
4	*2412.00	99.60 AV			1.82 H	225	69.45	30.15
5	2493.64	59.92 PK	74.00	-14.08	1.55 H	63	29.45	30.47
6	2493.64	45.95 AV	54.00	-8.05	1.55 H	63	15.48	30.47
7	4824.00	48.73 PK	74.00	-25.27	1.28 H	269	13.27	35.46
8	4824.00	38.28 AV	54.00	-15.72	1.28 H	269	2.82	35.46
9	7236.00	54.28 PK	84.52	-30.24	1.28 H	269	12.43	41.85
10	7236.00	44.76 AV	79.60	-34.84	1.28 H	269	2.91	41.85
11	14472.00	61.10 PK	74.00	-12.90	1.35 H	226	11.97	49.13
12	14472.00	49.87 AV	54.00	-4.13	1.35 H	226	0.74	49.13

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.71 PK	74.00	-14.29	1.43 V	258	29.65	30.06
2	2390.00	49.29 AV	54.00	-4.71	1.43 V	258	19.23	30.06
3	*2412.00	111.24 PK			1.42 V	258	81.09	30.15
4	*2412.00	106.45 AV			1.42 V	258	76.30	30.15
5	2494.55	60.21 PK	74.00	-13.79	1.36 V	269	29.74	30.47
6	2494.55	48.80 AV	54.00	-5.20	1.36 V	269	18.33	30.47
7	4824.00	50.90 PK	74.00	-23.10	1.17 V	230	15.44	35.46
8	4824.00	45.94 AV	54.00	-8.06	1.17 V	230	10.48	35.46
9	7236.00	54.54 PK	91.24	-36.70	1.21 V	211	12.69	41.85
10	7236.00	44.70 AV	86.45	-41.75	1.21 V	211	2.85	41.85
11	14472.00	62.90 PK	74.00	-11.10	1.47 V	210	13.77	49.13
12	14472.00	51.80 AV	54.00	-2.20	1.47 V	210	2.67	49.13

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 6		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		27deg. C, 76%RH 972hPa		TESTED BY Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.60 PK			1.84 H	226	73.36	30.24
2	*2437.00	99.71 AV			1.84 H	226	69.47	30.24
3	4874.00	47.20 PK	74.00	-26.80	1.36 H	20	11.65	35.55
4	4874.00	35.60 AV	54.00	-18.40	1.36 H	20	0.05	35.55
5	7311.00	53.13 PK	74.00	-20.87	1.29 H	266	11.09	42.04
6	7311.00	43.00 AV	54.00	-11.00	1.29 H	266	0.96	42.04

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.36 PK			1.38 V	258	81.12	30.24
2	*2437.00	106.62 AV			1.38 V	258	76.38	30.24
3	4874.00	50.00 PK	74.00	-24.00	1.03 V	227	14.45	35.55
4	4874.00	43.29 AV	54.00	-10.71	1.03 V	227	7.74	35.55
5	7311.00	53.54 PK	74.00	-20.46	1.21 V	312	11.50	42.04
6	7311.00	43.24 AV	54.00	-10.76	1.21 V	312	1.20	42.04

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.





EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 11		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		27deg. C, 76%RH 972hPa		TESTED BY Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.72 PK			1.72 H	221	74.38	30.34
2	*2462.00	99.73 AV			1.72 H	221	69.39	30.34
3	2483.50	59.00 PK	74.00	-15.00	1.70 H	220	28.57	30.43
4	2483.50	45.94 AV	54.00	-8.06	1.70 H	220	15.51	30.43
5	4924.00	46.10 PK	74.00	-27.90	1.34 H	30	10.47	35.63
6	4924.00	34.60 AV	54.00	-19.40	1.34 H	30	-1.03	35.63
7	7386.00	53.60 PK	74.00	-20.40	1.27 H	268	11.37	42.23
8	7386.00	43.86 AV	54.00	-10.14	1.27 H	268	1.63	42.23
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.11 PK			1.64 V	255	80.77	30.34
2	*2462.00	106.52 AV			1.64 V	255	76.18	30.34
3	2483.50	62.77 PK	74.00	-11.23	1.59 V	247	32.34	30.43
4	2483.50	52.67 AV	54.00	-1.33	1.59 V	247	22.24	30.43
5	4924.00	49.27 PK	74.00	-24.73	1.18 V	238	13.64	35.63
6	4924.00	41.95 AV	54.00	-12.05	1.18 V	238	6.32	35.63
7	7386.00	53.61 PK	74.00	-20.39	1.28 V	40	11.38	42.23
8	7386.00	43.20 AV	54.00	-10.80	1.28 V	40	0.97	42.23



REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.



RESTRICTED BANDEDGE (802.11b MODE, CH1, HORIZONTAL)

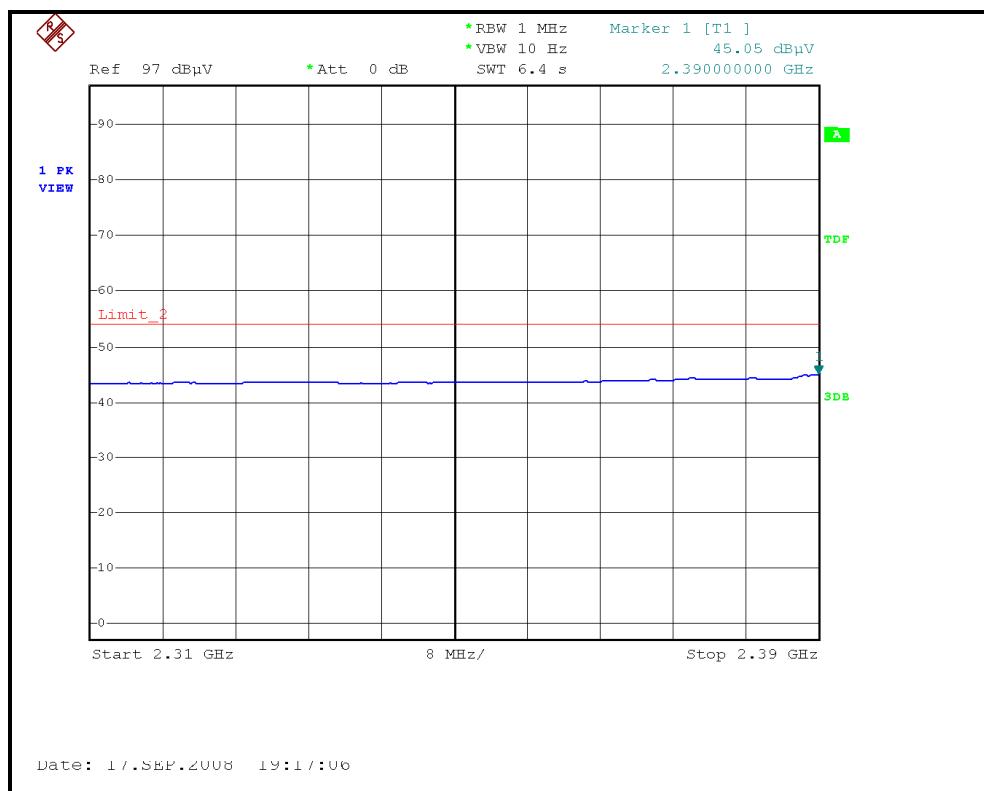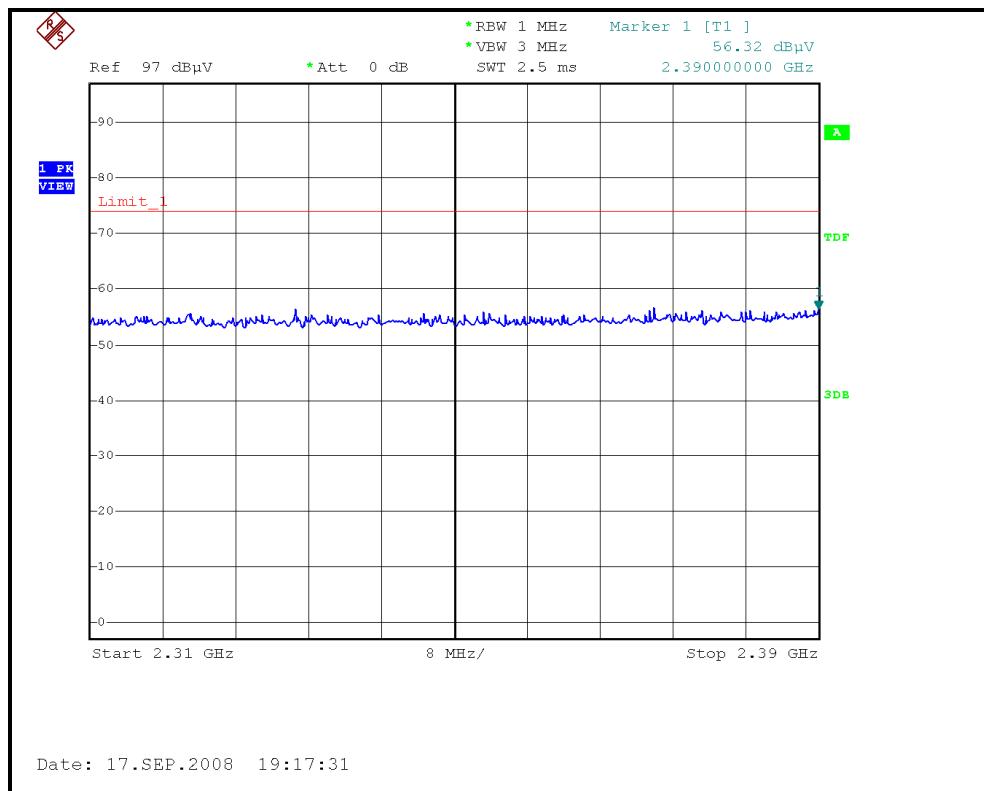



RESTRICTED BANDEDGE (802.11b MODE, CH1, VERTICAL)

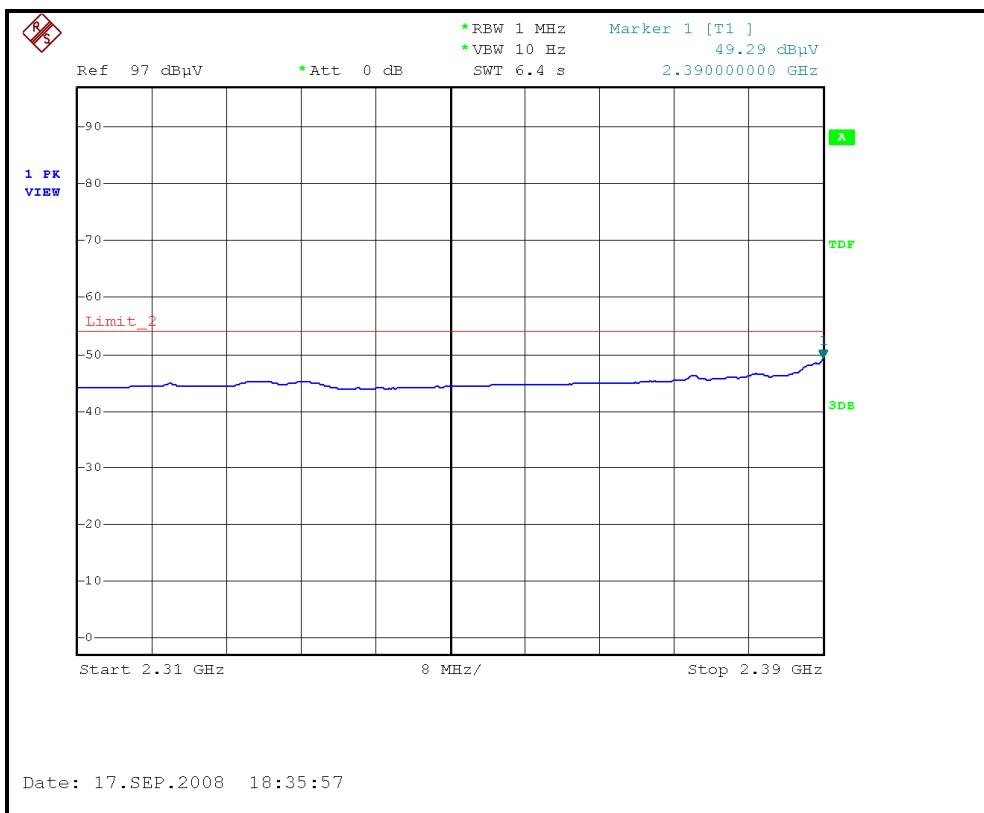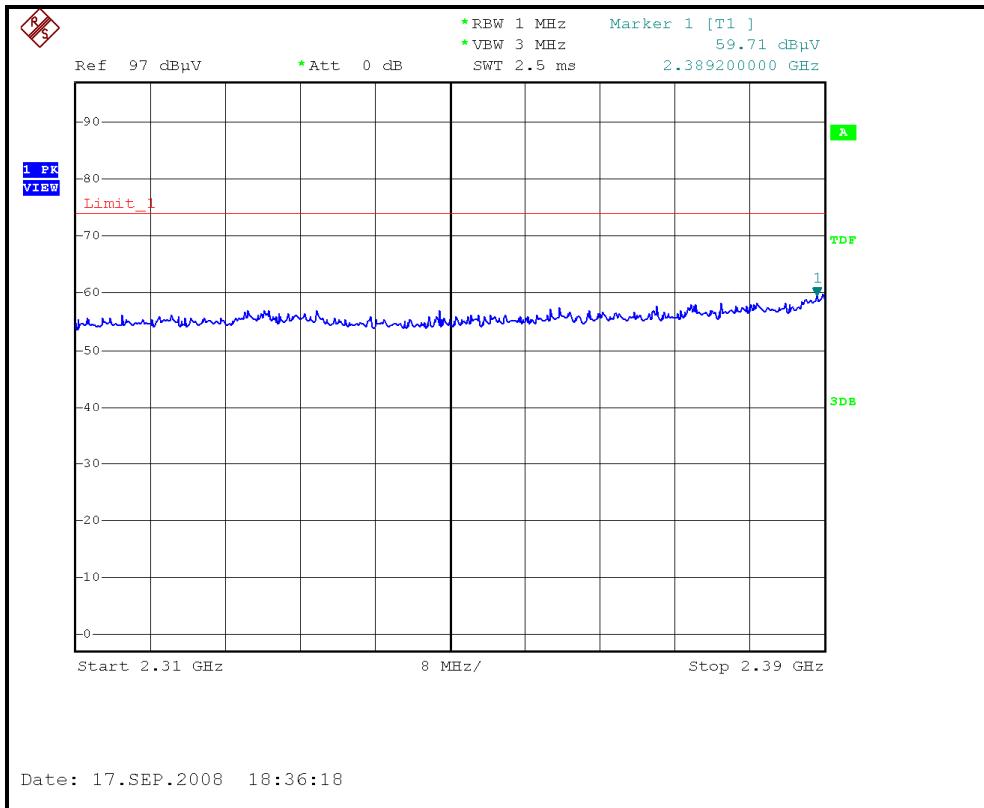

RESTRICTED BANDEDGE (802.11b MODE, CH11, HORIZONTAL)

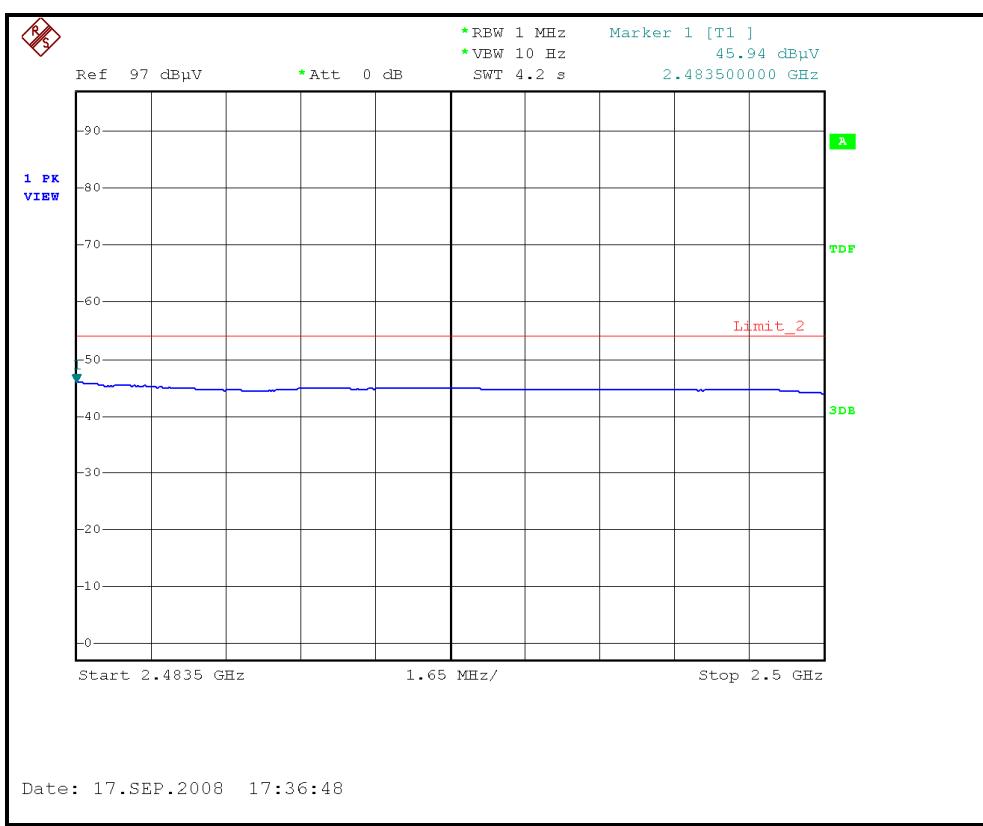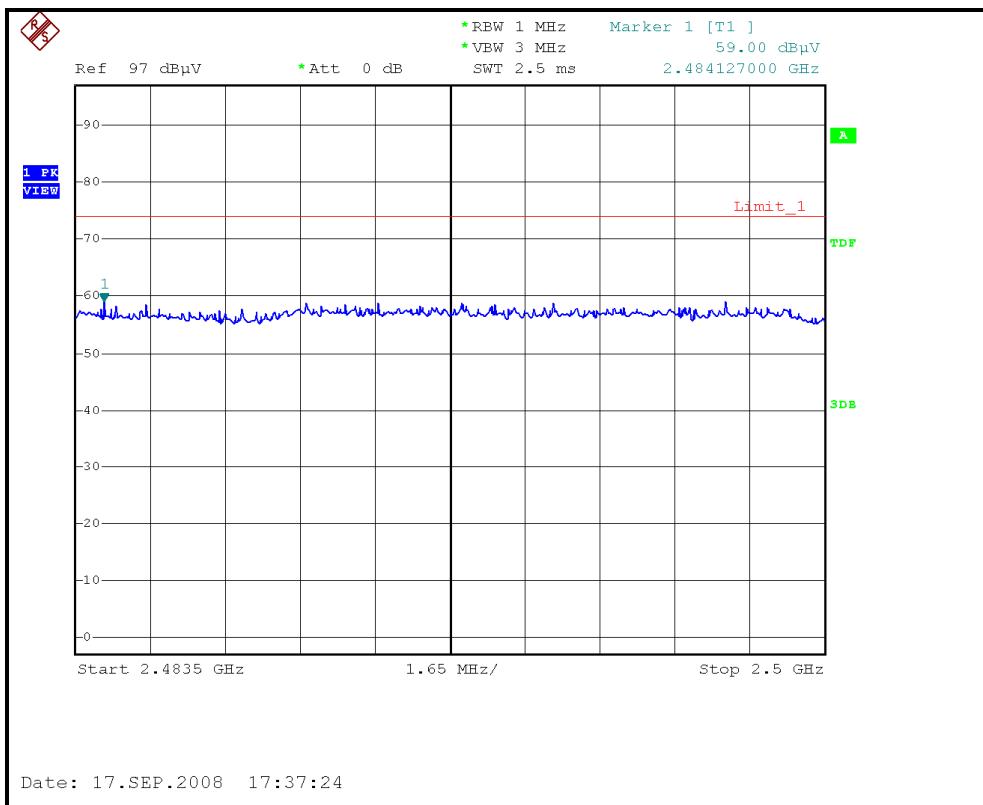

RESTRICTED BANDEDGE (802.11b MODE, CH11, VERTICAL)

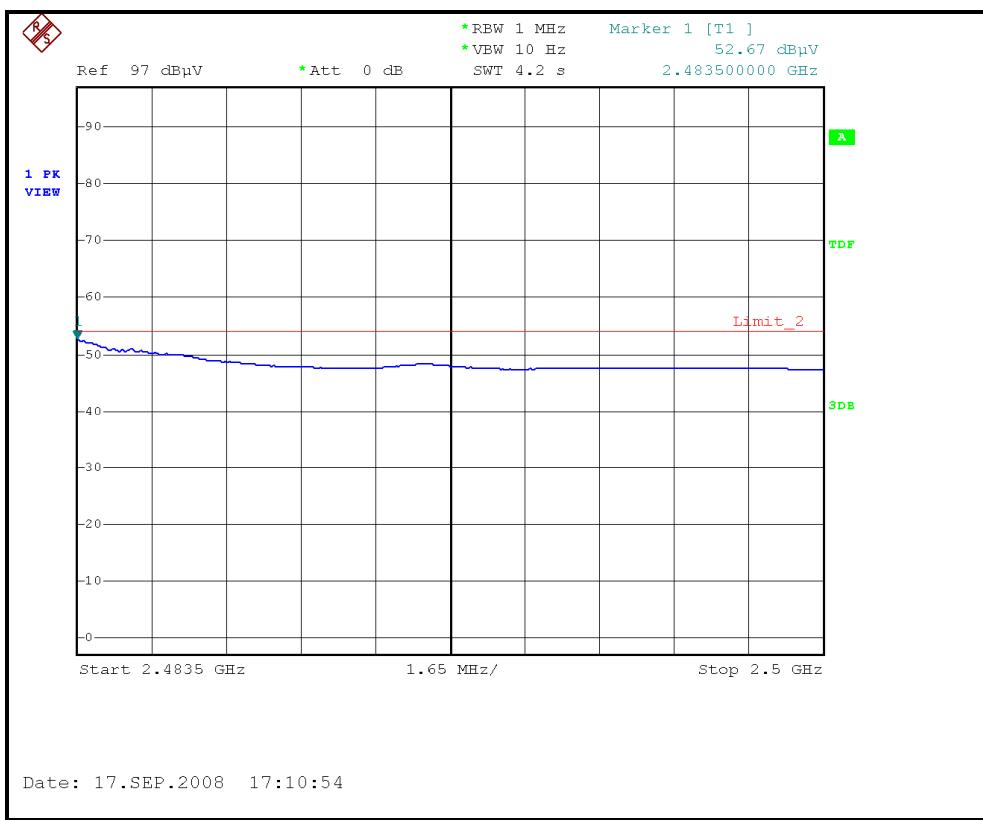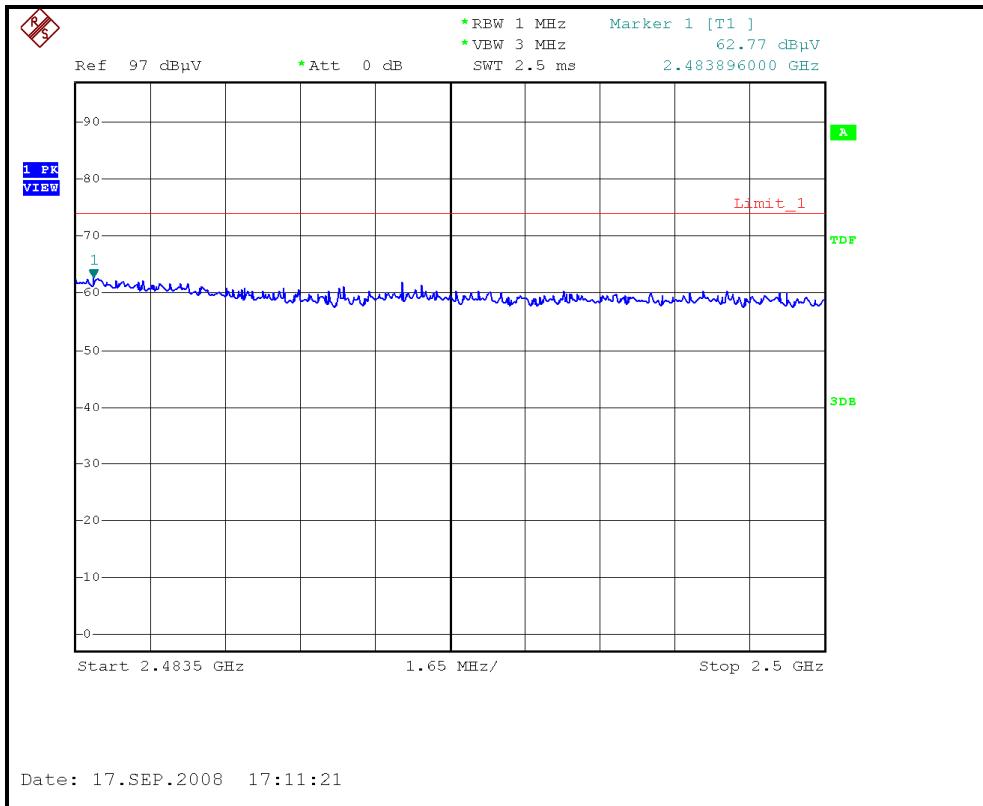



802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 1		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		27deg. C, 76%RH 972hPa		TESTED BY Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.93 PK	74.00	-13.07	1.54 H	247	30.87	30.06
2	2390.00	44.38 AV	54.00	-9.62	1.54 H	247	14.32	30.06
3	*2412.00	104.49 PK			1.54 H	247	74.34	30.15
4	*2412.00	91.35 AV			1.54 H	247	61.20	30.15
5	2490.99	60.03 PK	74.00	-13.97	1.58 H	66	29.58	30.45
6	2490.99	45.41 AV	54.00	-8.59	1.58 H	66	14.96	30.45
7	4824.00	47.53 PK	74.00	-26.47	1.63 H	102	12.07	35.46
8	4824.00	34.12 AV	54.00	-19.88	1.63 H	102	-1.34	35.46
9	7236.00	54.13 PK	84.49	-30.36	1.57 H	131	12.28	41.85
10	7236.00	39.26 AV	71.35	-32.09	1.57 H	131	-2.59	41.85
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.54 PK	74.00	-4.46	1.44 V	256	39.48	30.06
2	2390.00	48.19 AV	54.00	-5.81	1.44 V	256	18.13	30.06
3	*2412.00	111.94 PK			1.39 V	258	81.79	30.15
4	*2412.00	98.32 AV			1.39 V	258	68.17	30.15
5	2496.04	60.43 PK	74.00	-13.57	1.39 V	245	29.96	30.47
6	2496.04	47.80 AV	54.00	-6.20	1.39 V	245	17.33	30.47
7	4824.00	48.00 PK	74.00	-26.00	1.16 V	230	12.54	35.46
8	4824.00	34.34 AV	54.00	-19.66	1.16 V	230	-1.12	35.46
9	7236.00	55.29 PK	91.94	-36.65	1.68 V	206	13.44	41.85
10	7236.00	40.10 AV	78.32	-38.22	1.68 V	206	-1.75	41.85

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 6		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		27deg. C, 76%RH 972hPa		TESTED BY Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.00 PK			1.68 H	225	73.76	30.24
2	*2437.00	91.60 AV			1.68 H	225	61.36	30.24
3	4874.00	47.32 PK	74.00	-26.68	1.69 H	63	11.77	35.55
4	4874.00	33.87 AV	54.00	-20.13	1.69 H	63	-1.68	35.55
5	7311.00	53.02 PK	74.00	-20.98	1.59 H	103	10.98	42.04
6	7311.00	37.20 AV	54.00	-16.80	1.59 H	103	-4.84	42.04

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.38 PK			1.59 V	253	81.14	30.24
2	*2437.00	98.00 AV			1.59 V	253	67.76	30.24
3	4874.00	47.65 PK	74.00	-26.35	1.08 V	220	12.10	35.55
4	4874.00	34.07 AV	54.00	-19.93	1.08 V	220	-1.48	35.55
5	7311.00	56.18 PK	74.00	-17.82	1.83 V	224	14.14	42.04
6	7311.00	38.40 AV	54.00	-15.60	1.83 V	224	-3.64	42.04

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.





EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 11		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		27deg. C, 76%RH 972hPa		TESTED BY Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.06 PK			1.84 H	44	73.72	30.34
2	*2462.00	91.72 AV			1.84 H	44	61.38	30.34
3	2483.50	67.19 PK	74.00	-6.81	1.85 H	43	36.76	30.43
4	2483.50	45.51 AV	54.00	-8.49	1.85 H	43	15.08	30.43
5	4924.00	46.87 PK	74.00	-27.13	1.71 H	57	11.24	35.63
6	4924.00	32.06 AV	54.00	-21.94	1.71 H	57	-3.57	35.63
7	7386.00	52.90 PK	74.00	-21.10	1.61 H	112	10.67	42.23
8	7386.00	38.45 AV	54.00	-15.55	1.61 H	112	-3.78	42.23
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.92 PK			1.64 V	253	82.58	30.34
2	*2462.00	98.50 AV			1.64 V	253	68.16	30.34
3	2483.50	73.36 PK	74.00	-0.64	1.58 V	254	42.93	30.43
4	2483.50	48.87 AV	54.00	-5.13	1.58 V	254	18.44	30.43
5	4924.00	46.93 PK	74.00	-27.07	1.50 V	293	11.30	35.63
6	4924.00	32.20 AV	54.00	-21.80	1.50 V	293	-3.43	35.63
7	7386.00	59.12 PK	74.00	-14.88	1.60 V	329	16.89	42.23
8	7386.00	40.00 AV	54.00	-14.00	1.60 V	329	-2.23	42.23



REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.



RESTRICTED BANDEDGE (802.11g MODE, CH1, HORIZONTAL)

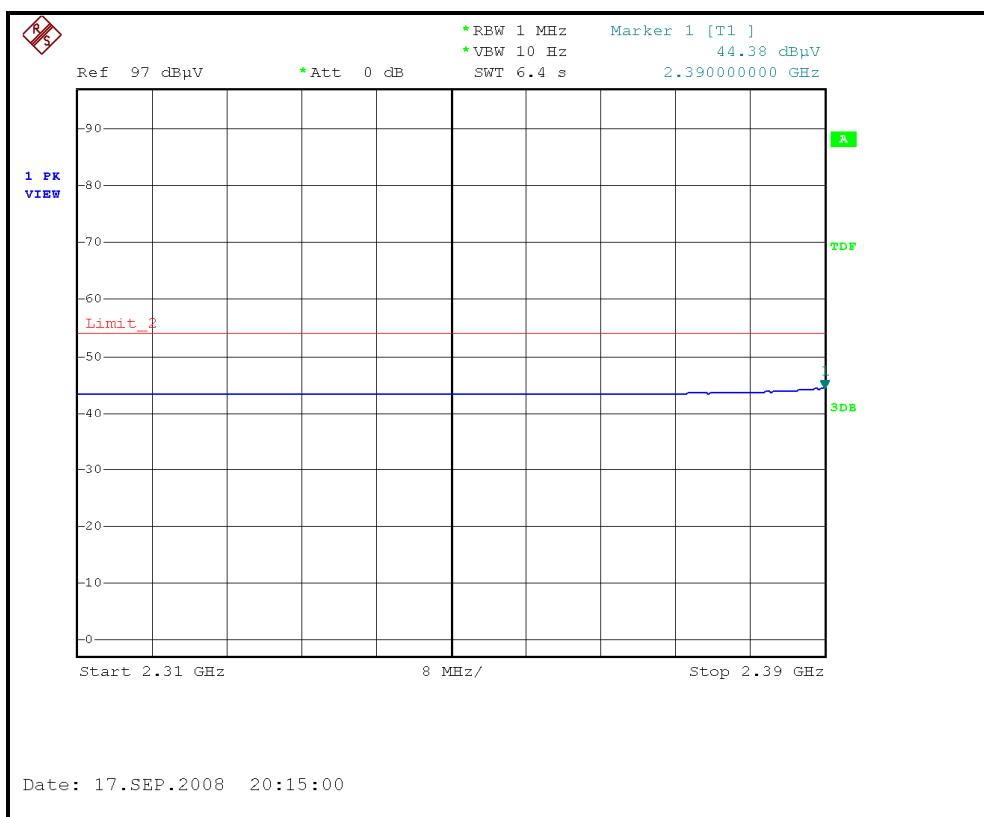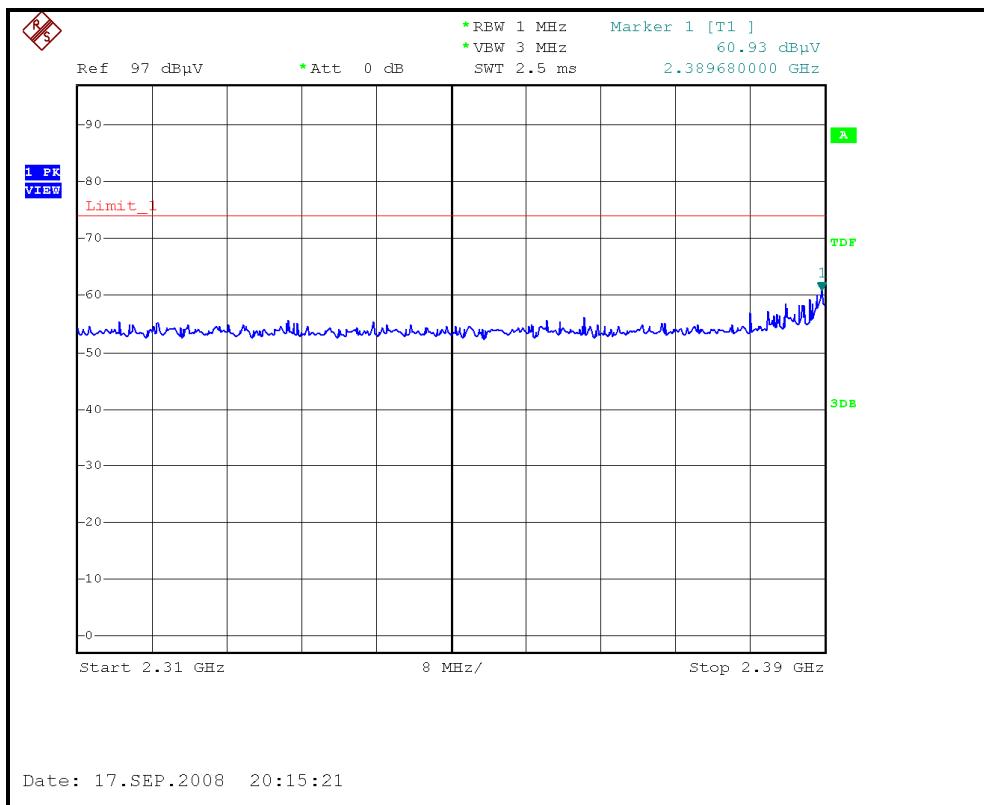



RESTRICTED BANDEDGE (802.11g MODE, CH1, VERTICAL)

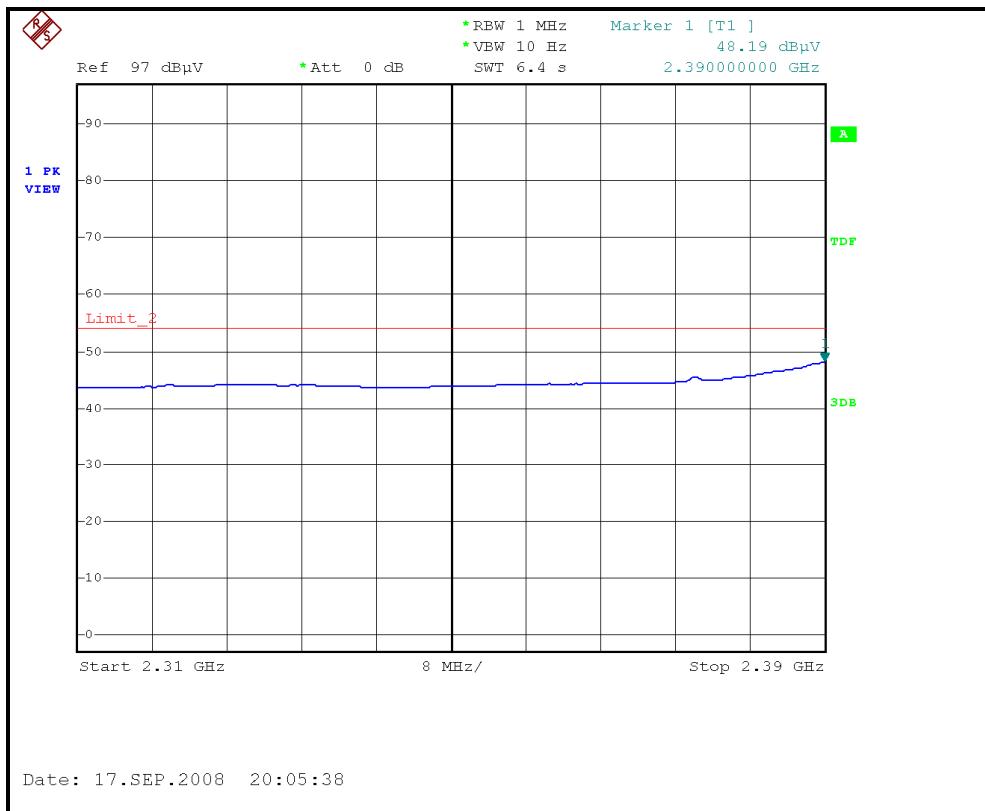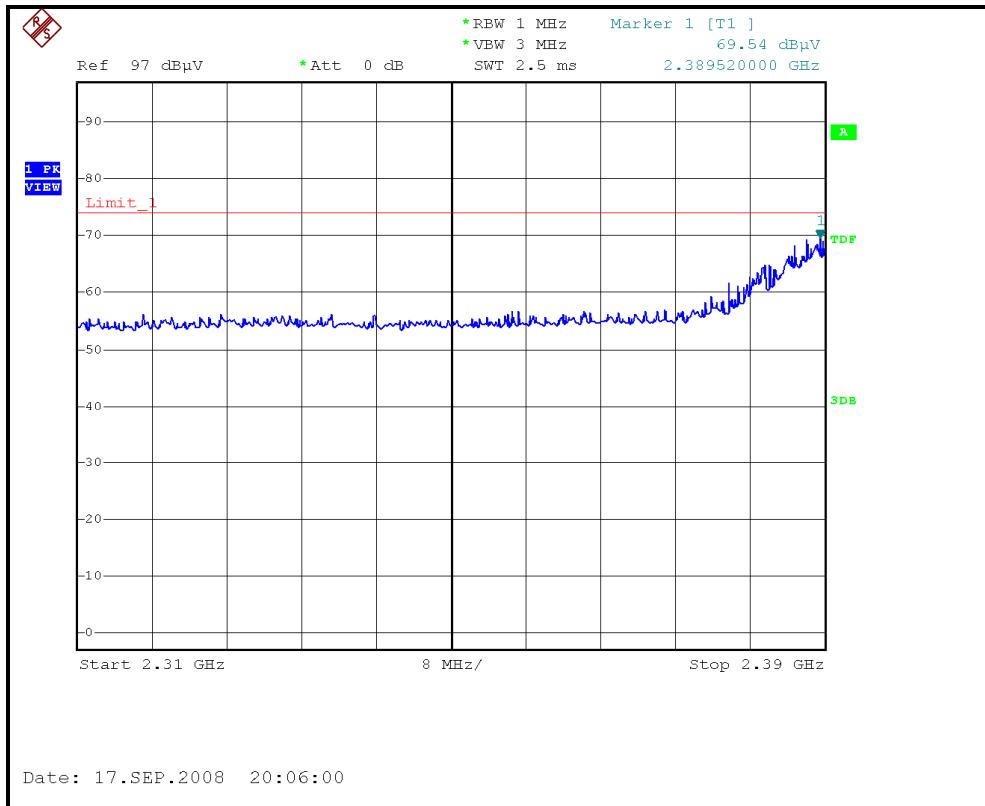

RESTRICTED BANDEDGE (802.11g MODE, CH11, HORIZONTAL)

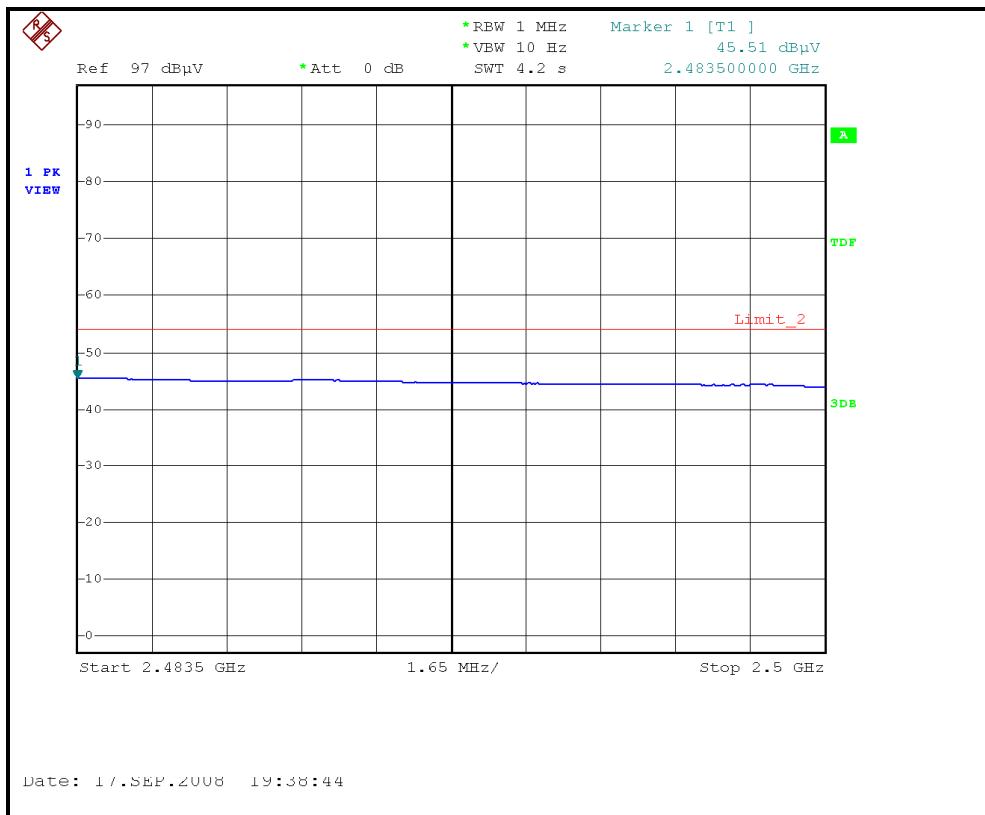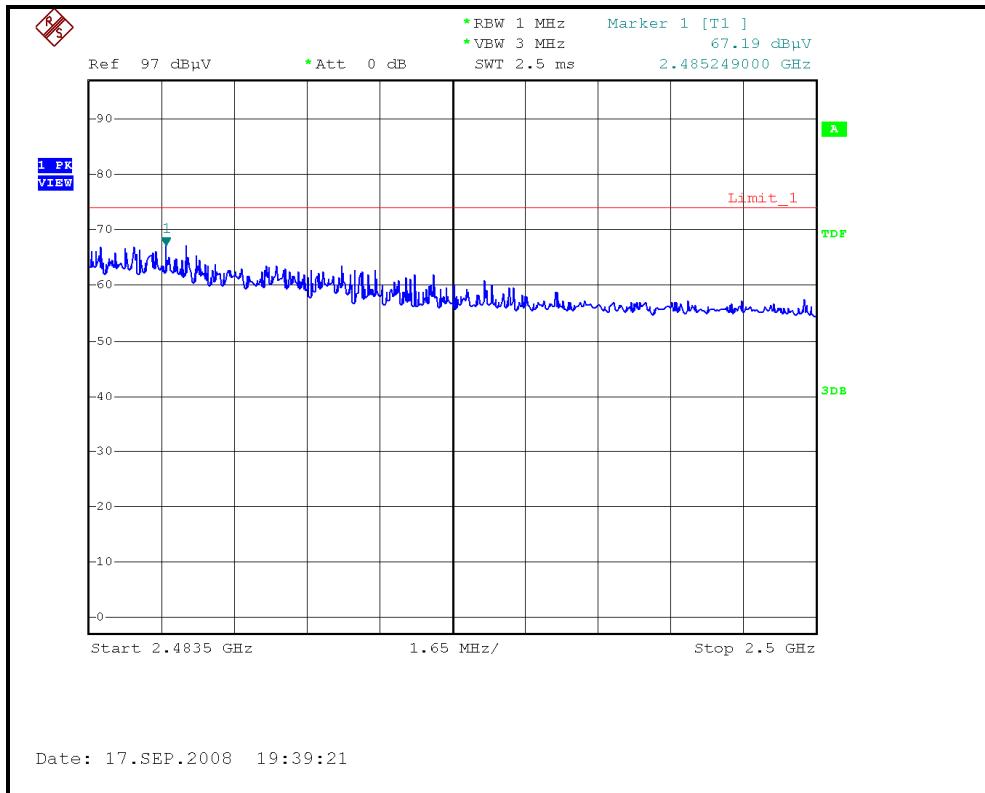

RESTRICTED BANDEDGE (802.11g MODE, CH11, VERTICAL)

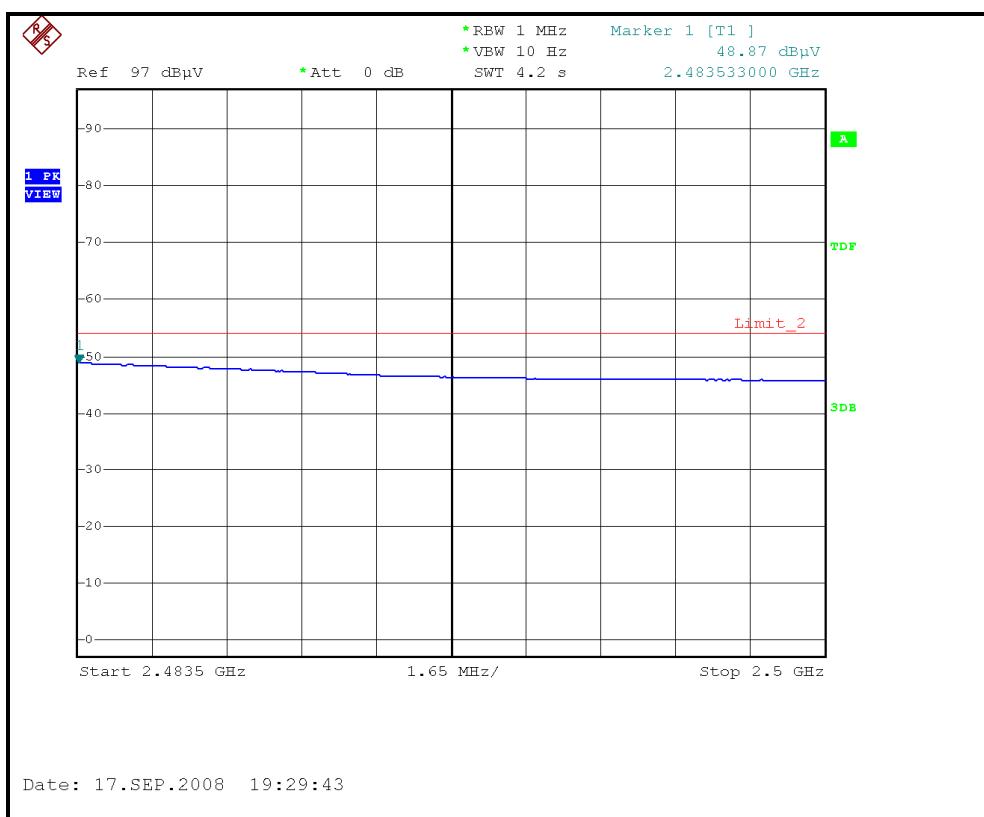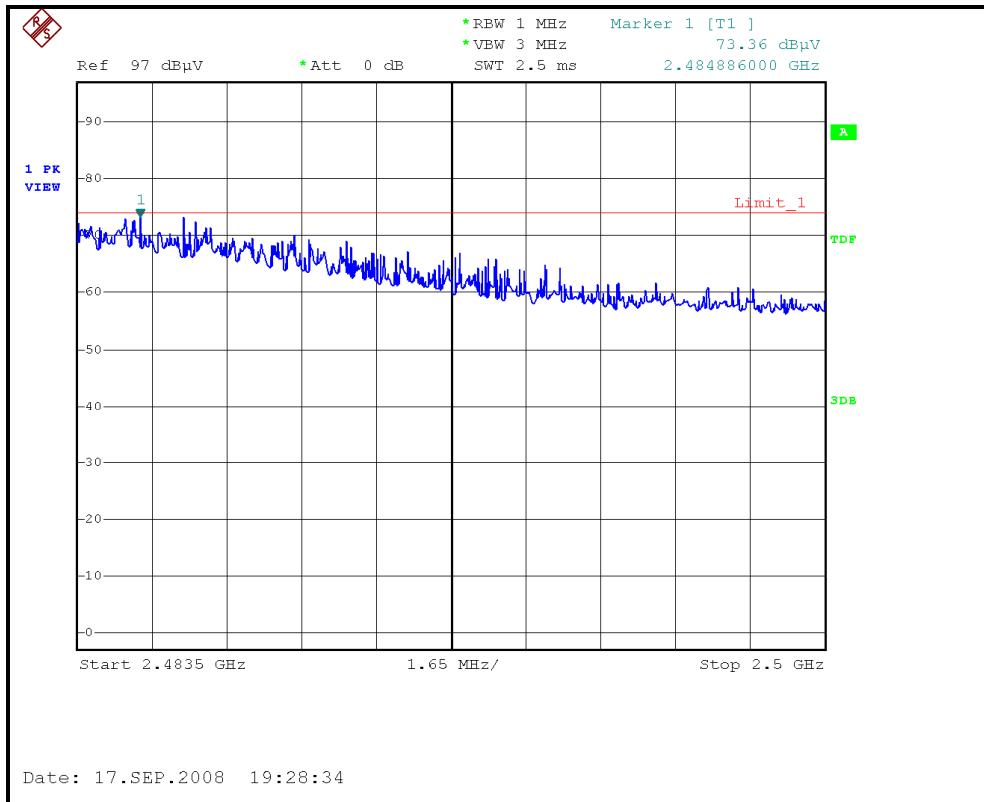



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated DATE	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 16, 2007	Dec. 17, 2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.6 TEST RESULTS


802.11b DSSS modulation

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 959hPa
TESTED BY	Rex Huang		


CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	9.59	0.5	PASS
6	2437	9.24	0.5	PASS
11	2462	9.47	0.5	PASS



CH1

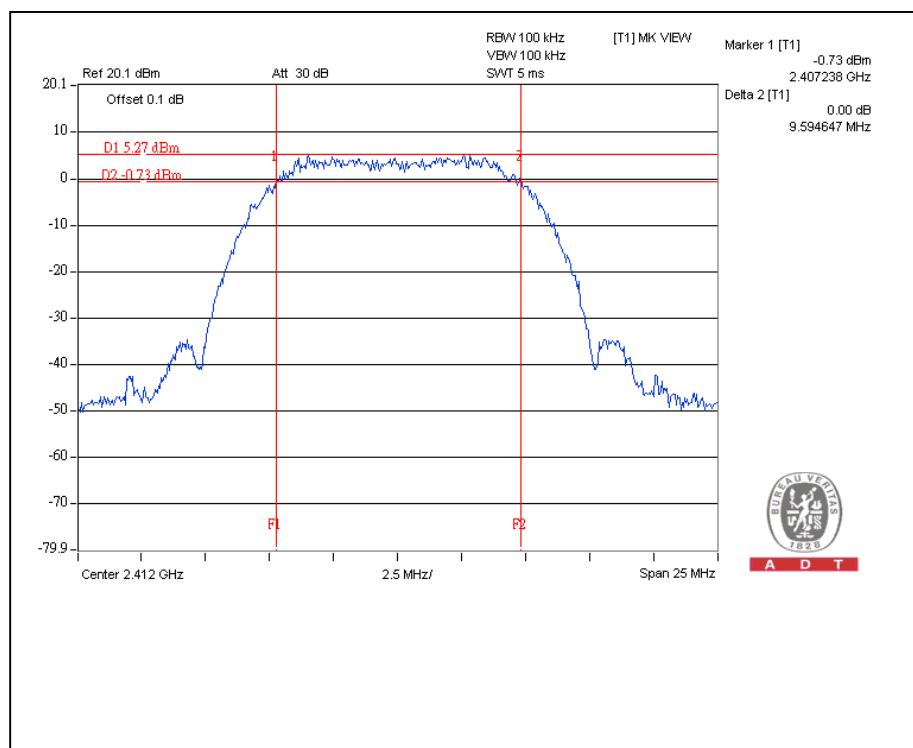


CH6

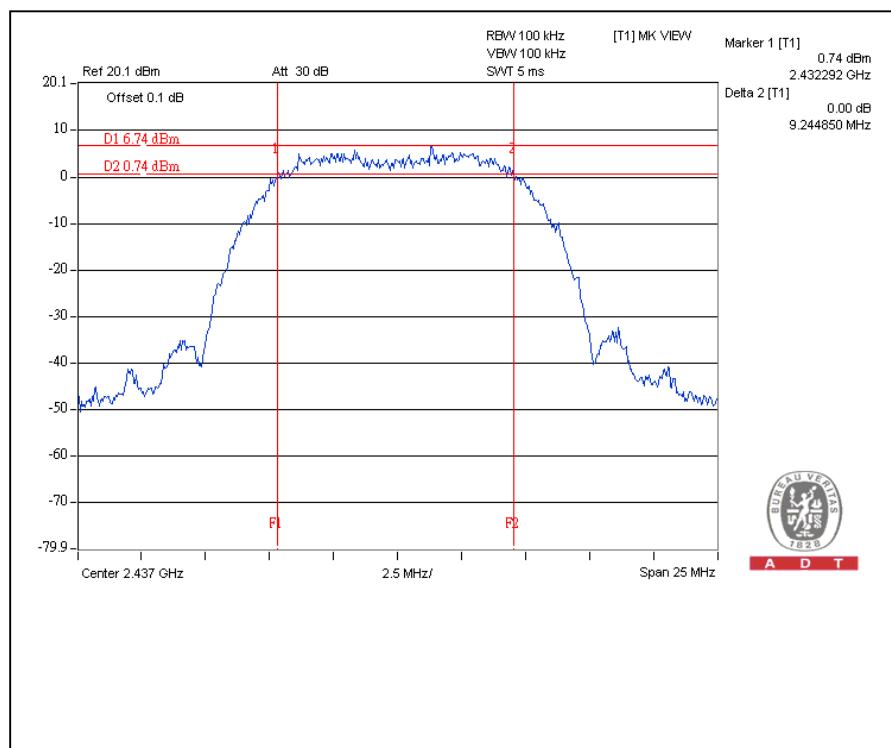



CH11

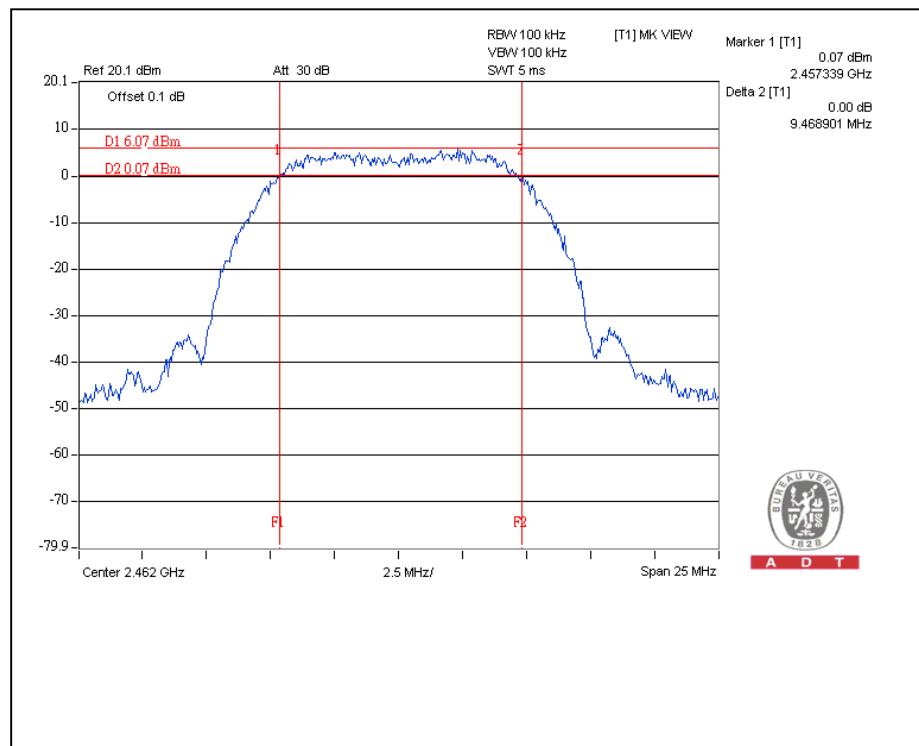


**802.11g OFDM modulation**


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 959hPa
TESTED BY	Rex Huang		


CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	15.79	0.5	PASS
6	2437	15.76	0.5	PASS
11	2462	15.84	0.5	PASS

CH1

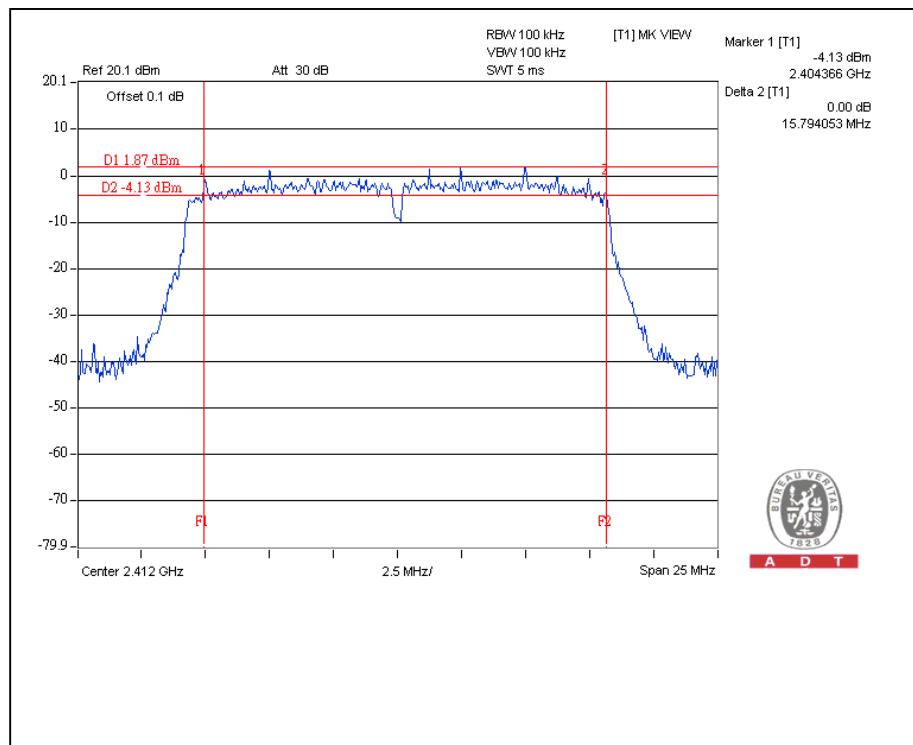

CH6

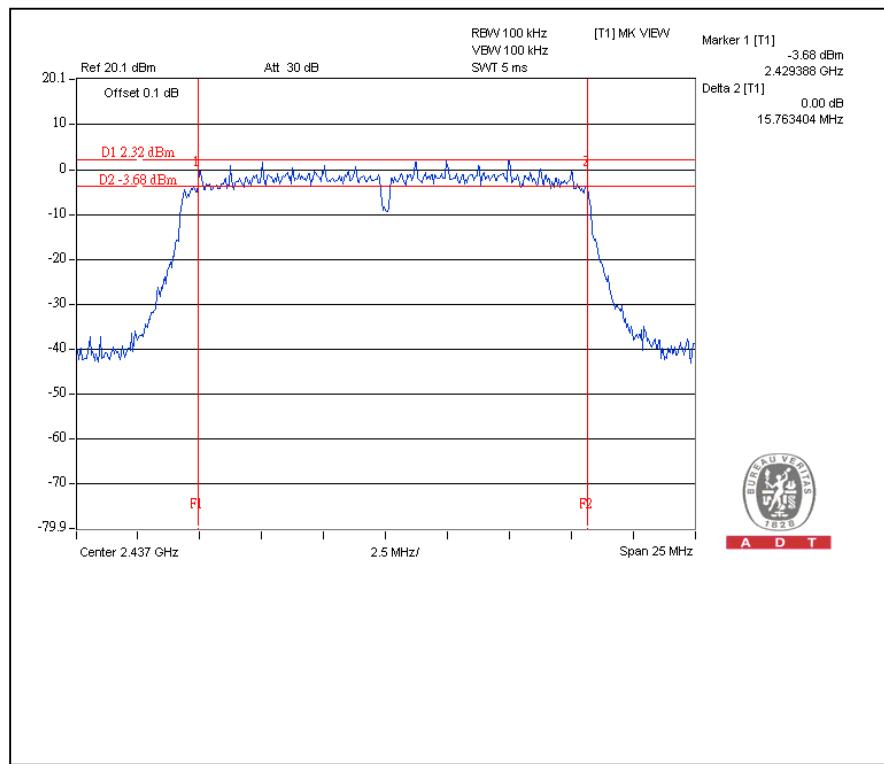

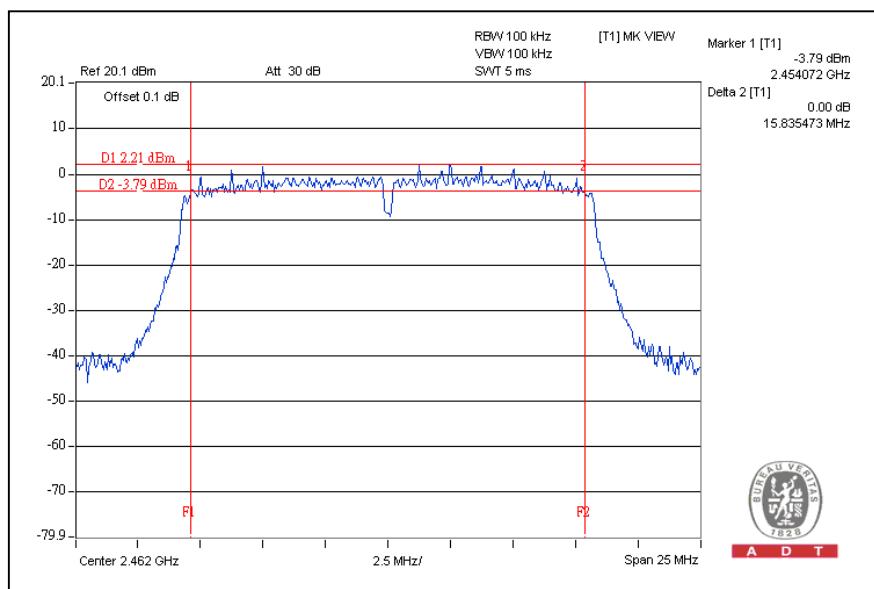CH11




4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model no.	Serial No.	Calibrated date	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 13, 2008	Aug. 12, 2009
Agilent SIGNAL GENERATOR	E8257C	MY43320668	Dec. 26, 2007	Dec. 25, 2008
Anritsu Power Meter	ML2495A	0824006	NA	NA
Pulse Power Sensor	MA2411B	0738172	NA	NA


NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. The transmitter output was connected to the power meter through an attenuator; the bandwidth of the fundamental frequency was measured with the power meter.
2. Record the power level.

4.4.4 TEST SETUP

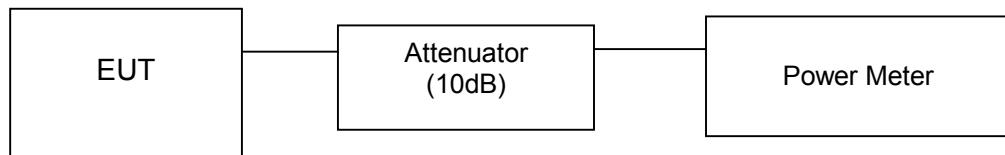

4.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5



4.4.6 TEST RESULTS

802.11b DSSS modulation

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 959hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	110.154	20.42	30	PASS
6	2437	109.648	20.40	30	PASS
11	2462	109.901	20.41	30	PASS

**802.11g OFDM modulation**

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 959hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	199.526	23.00	30	PASS
6	2437	217.771	23.38	30	PASS
11	2462	208.449	23.19	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated DATE	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 16, 2007	Dec. 17, 2008

NOTE:


- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 TEST SETUP



4.5.5 EUT OPERATING CONDITIONS

Same as 4.3.5



4.5.6 TEST RESULTS


802.11b DSSS modulation

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 959hPa
TESTED BY	Rex Huang		


CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-7.49	8	PASS
6	2437	-7.91	8	PASS
11	2462	-8.77	8	PASS




CH1

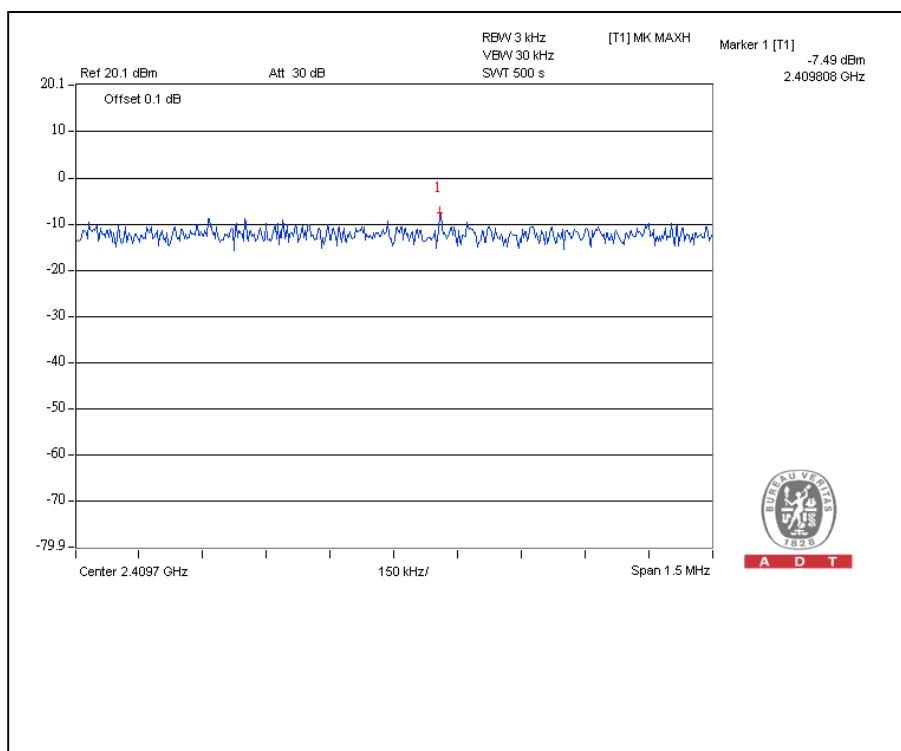

CH6

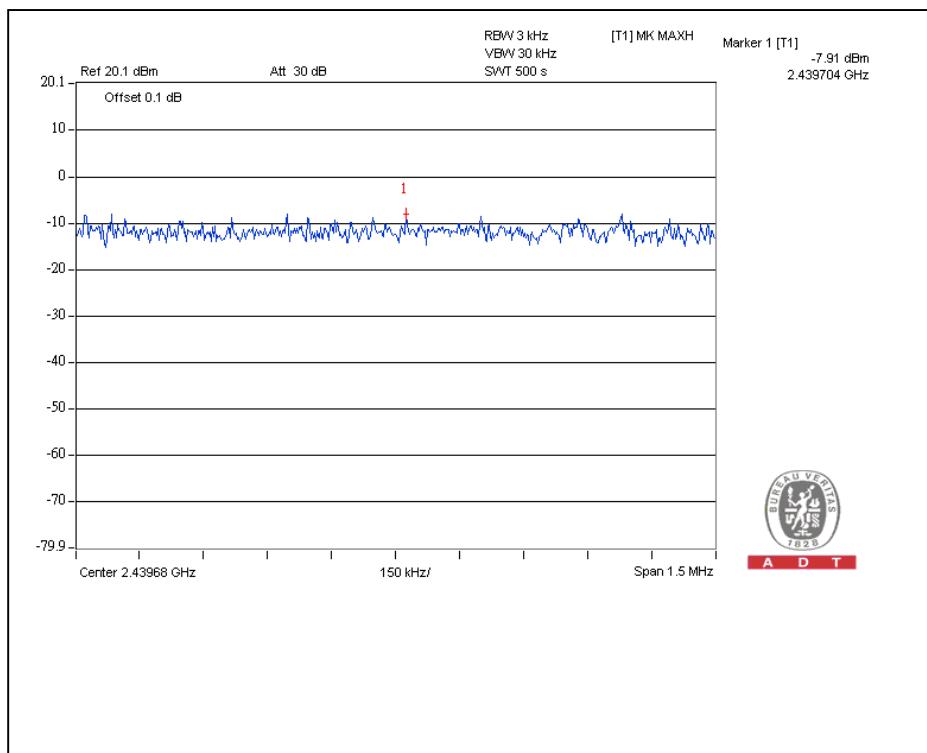



CH11

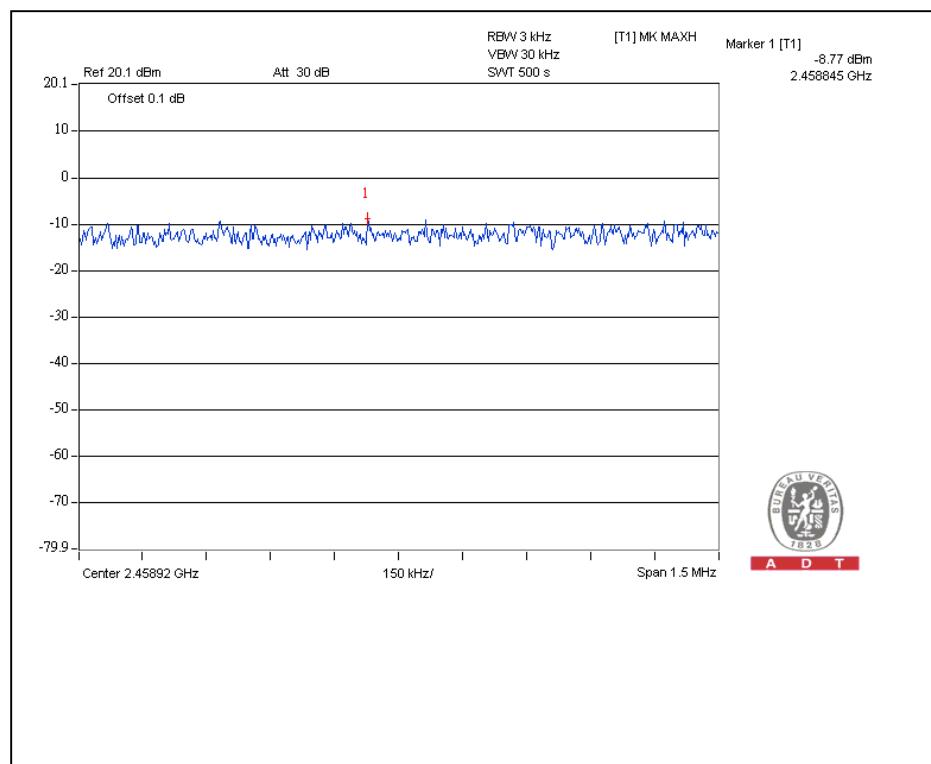


**802.11g OFDM modulation**

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 959hPa
TESTED BY	Rex Huang		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-12.75	8	PASS
6	2437	-11.15	8	PASS
11	2462	-8.93	8	PASS

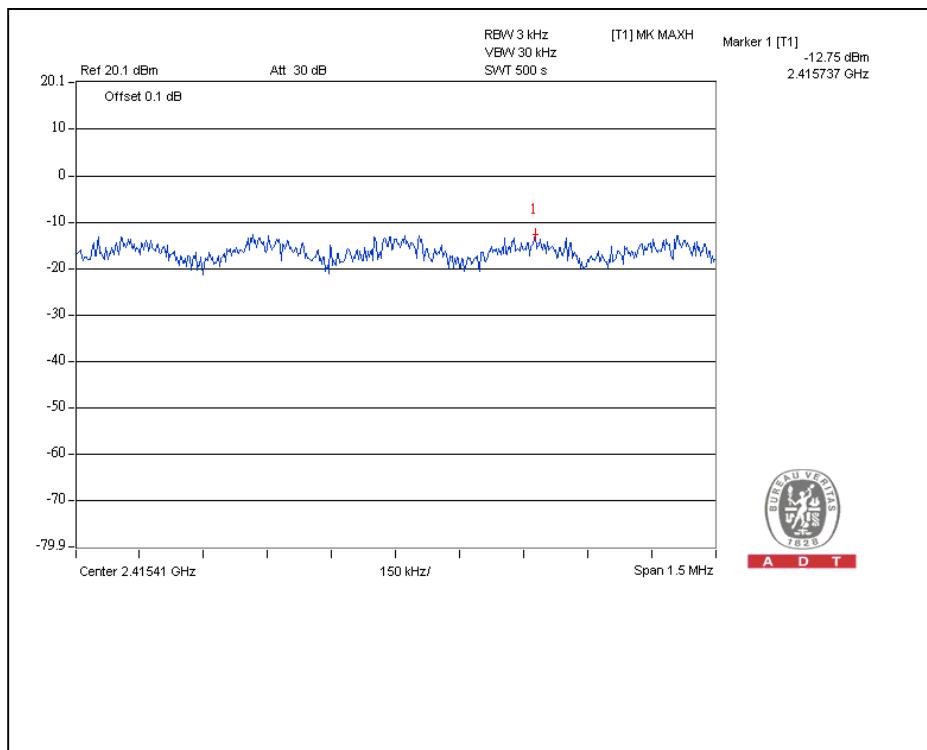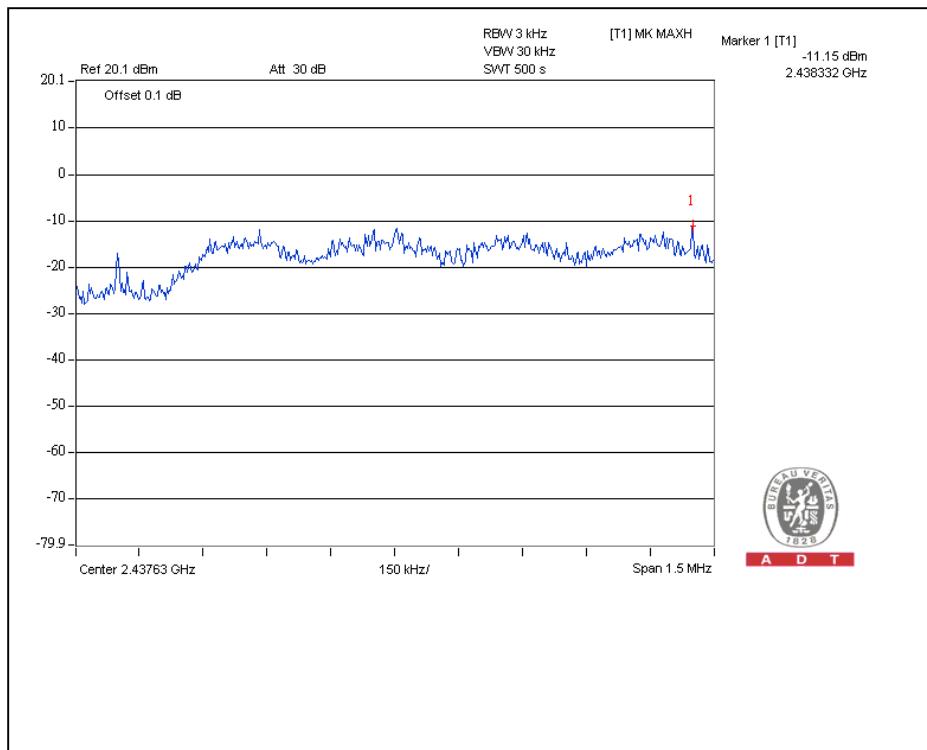CH1

CH6

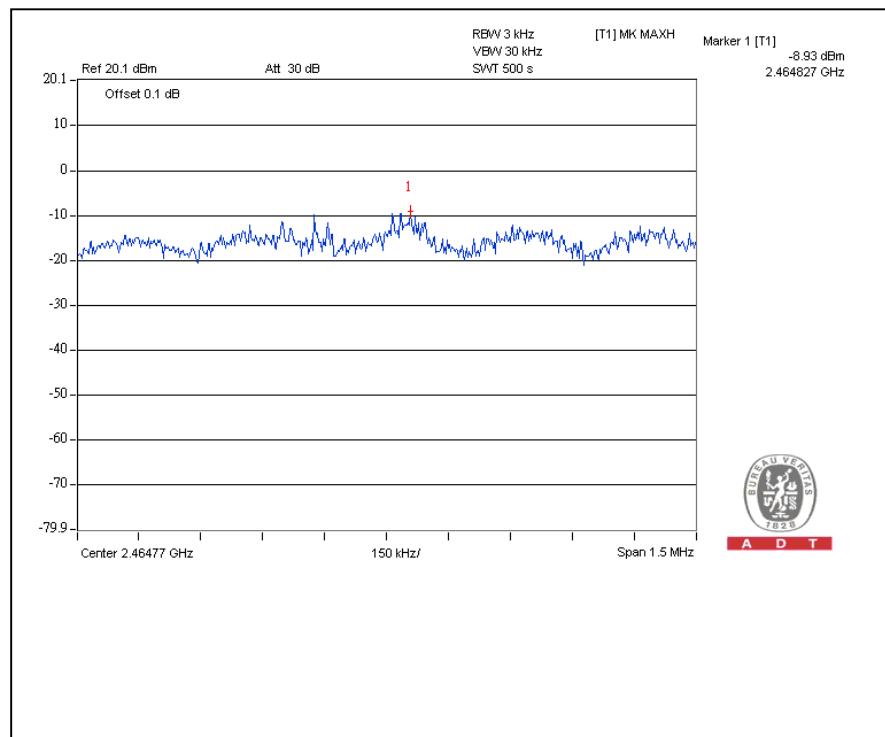
CH11





4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated DATE	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 16, 2007	Dec. 17, 2008

NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW of spectrum analyzer to 100kHz and VBW of spectrum analyzer to 300kHz with suitable frequency span including 100 MHz bandwidth from band edge. The conducted out-band emission was measured and recorded.

The spectrum plots (RBW =100kHz ; VBW = 300kHz) are attached on the following pages.

4.6.4 EUT OPERATING CONDITION

Same as Item 4.3.5




4.6.5 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).



802.11b DSSS MODULATION:

CH1

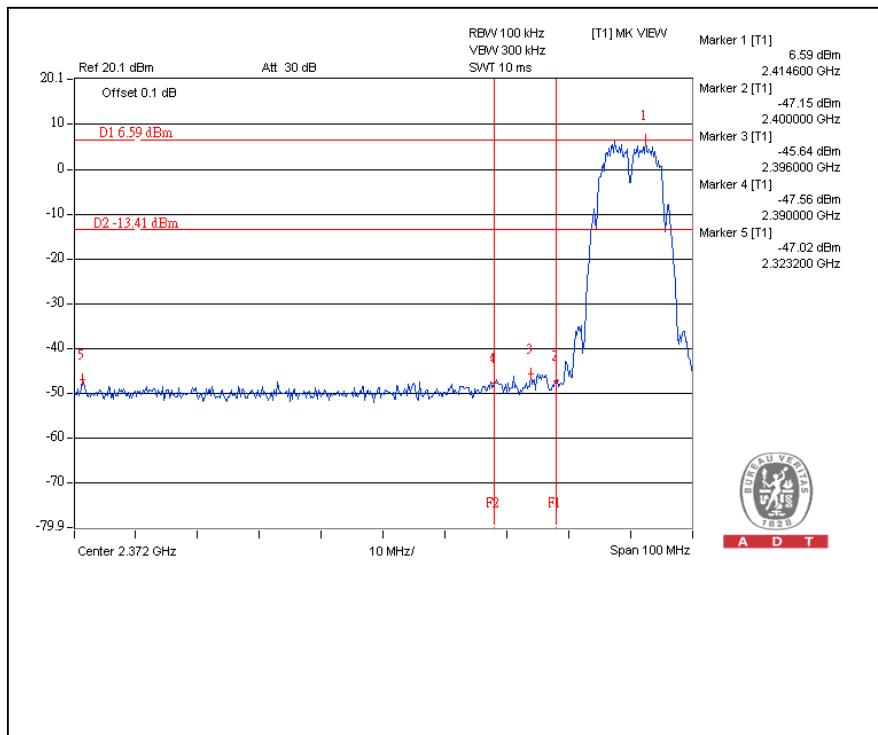


CH11

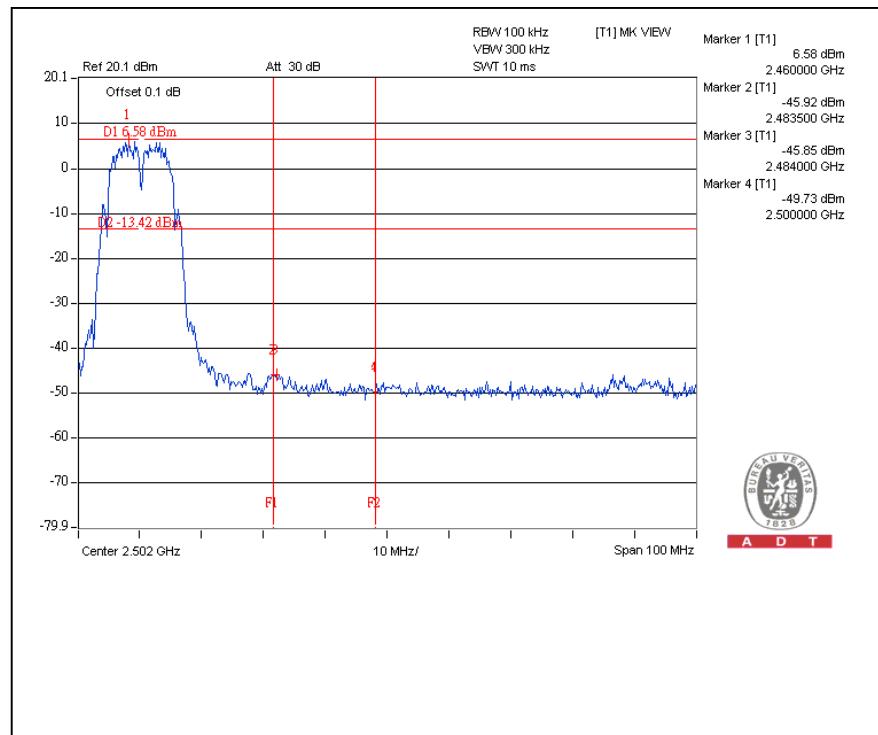


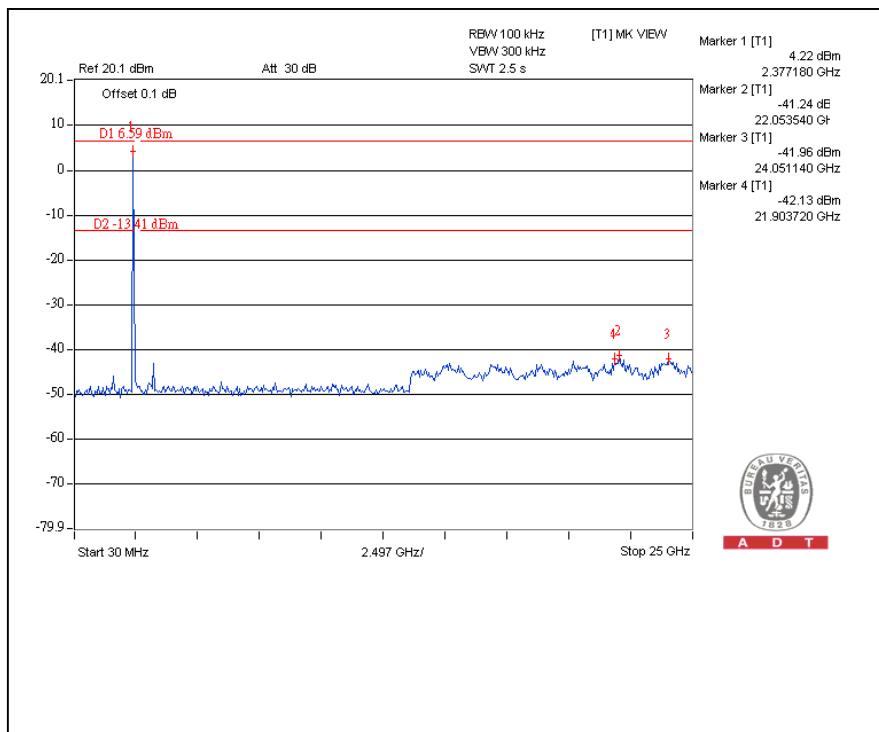
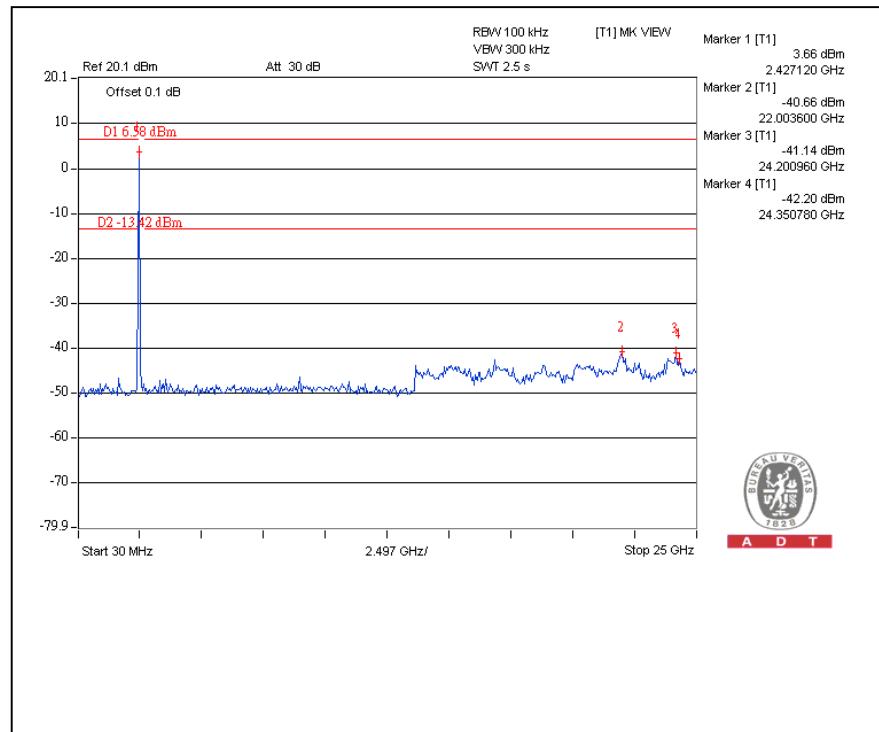
CH1

CH11

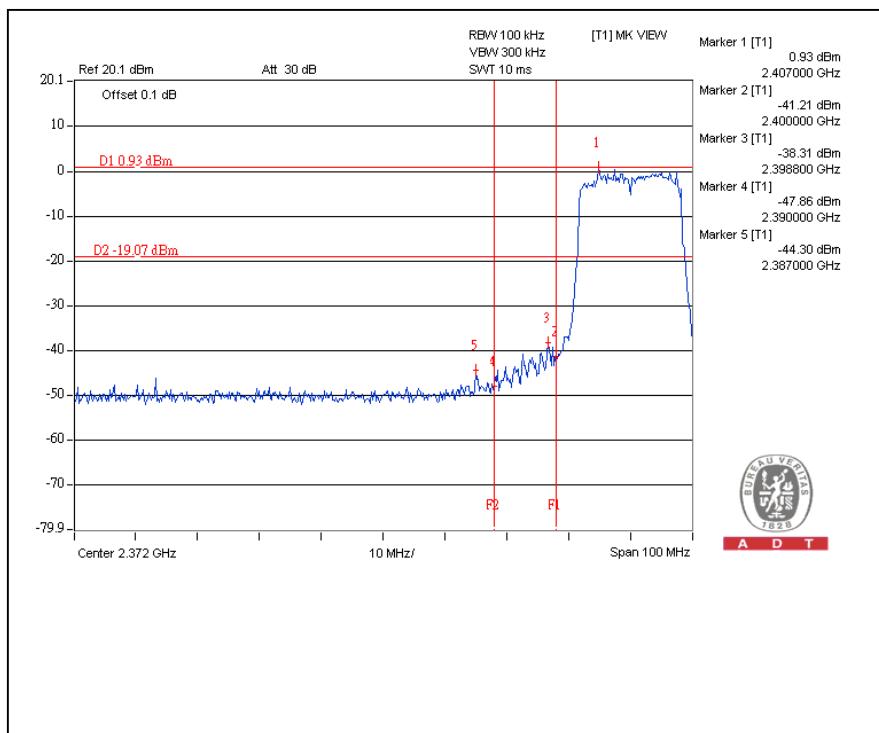
802.11g OFDM MODULATION: CH1

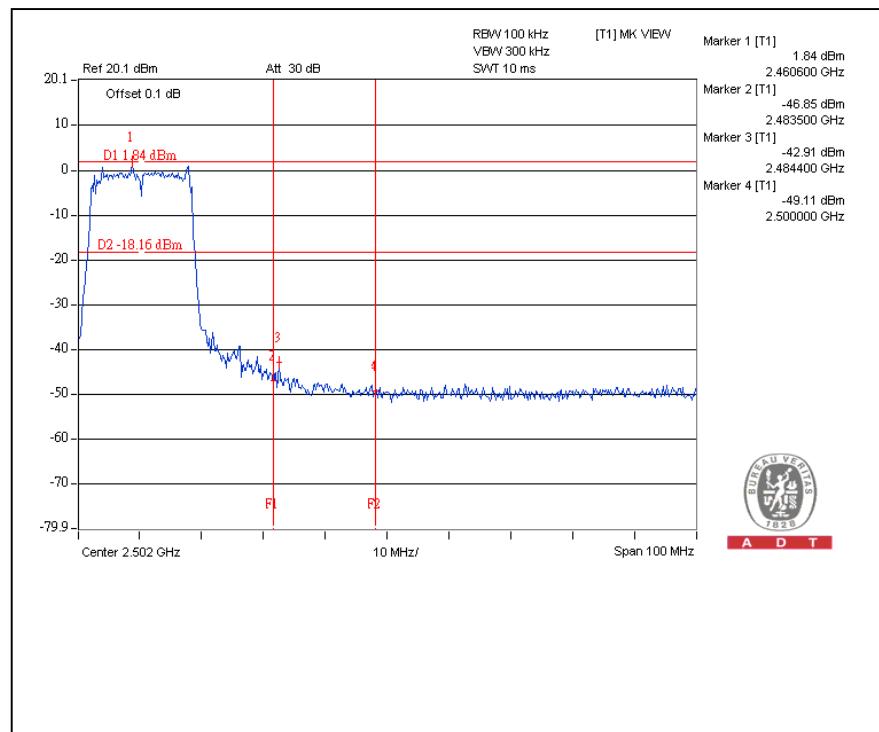

CH11

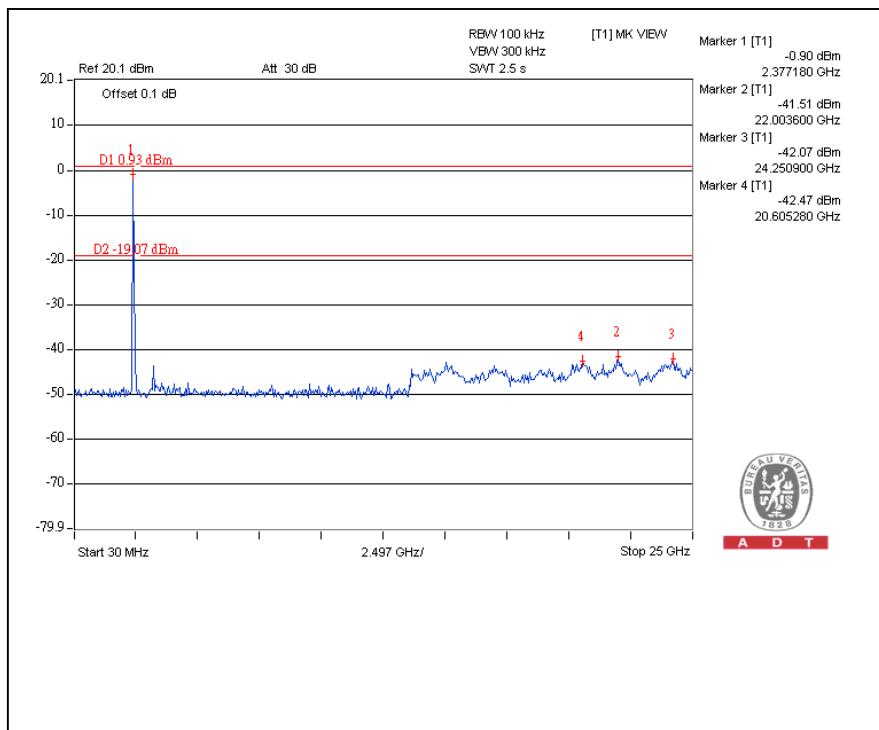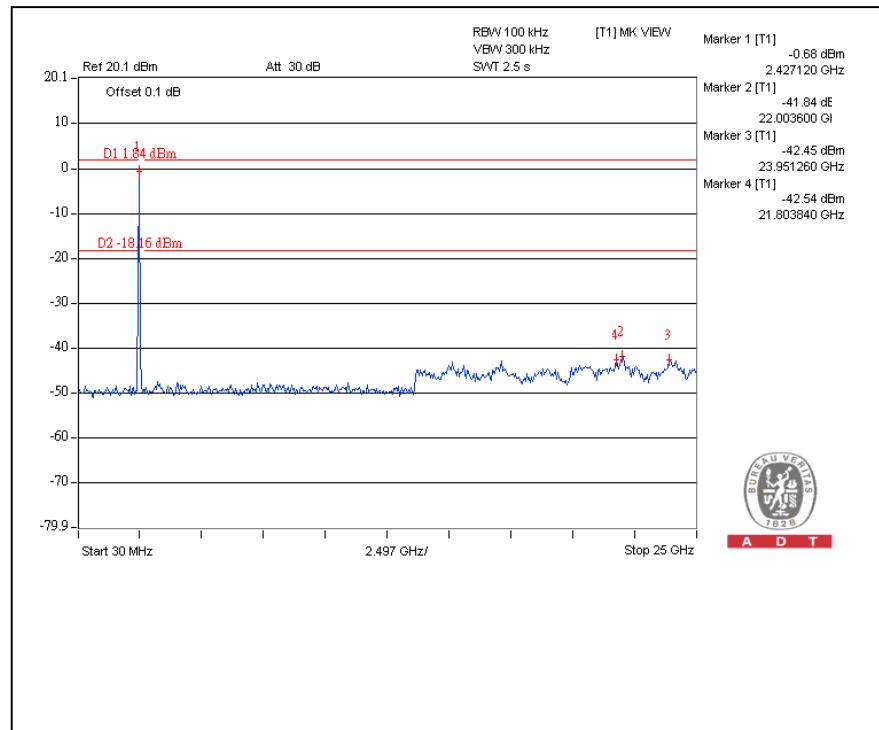

CH1

CH11




4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole antenna with SMA Male Reverse connector. The maximum Gain of the antenna is 2dBi.



5 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

USA	FCC, UL
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA (MOU)
Russia	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232
Fax: 886-3-3185050

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- EMD ---