


Test Report No.10039948 001

Appendix 2: Test Result of Radiated Emissions and
Radiated Band Edge

(File: 10039948Appendix2)


Radiated Bandedge (802.11B) AVG

Low Channel (H)

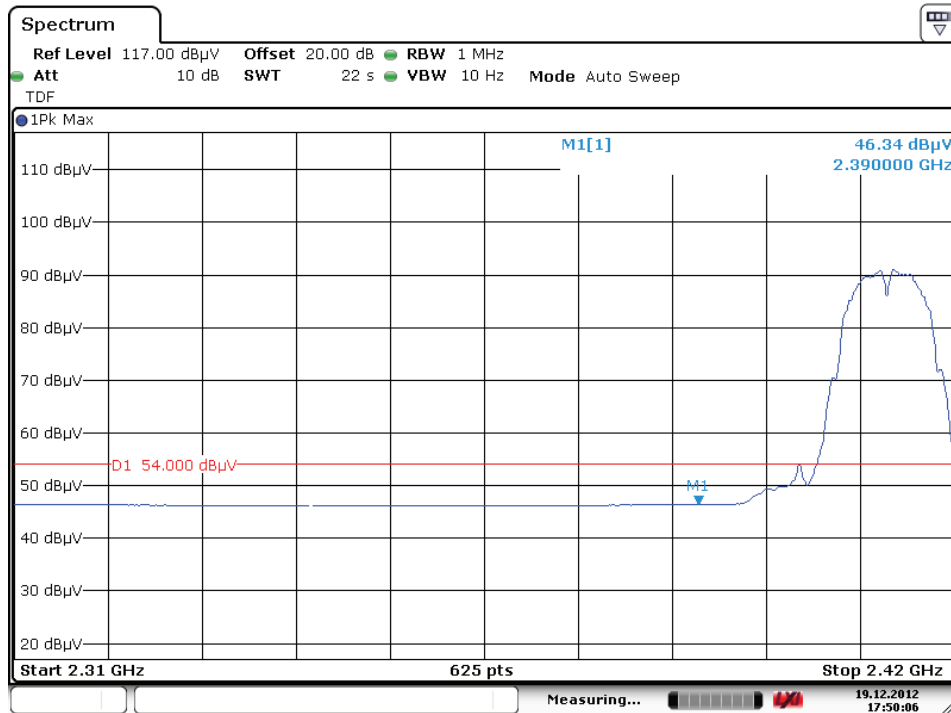


Date: 19.DEC.2012 17:50:06

High Channel (H)

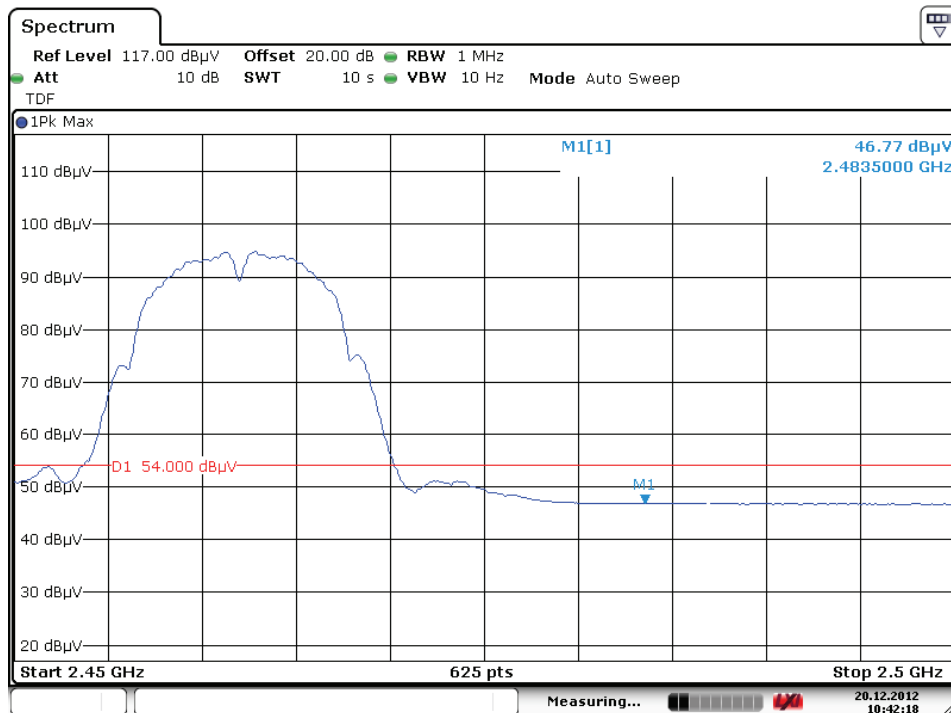


Date: 20.DEC.2012 10:42:18

Low Channel (V)

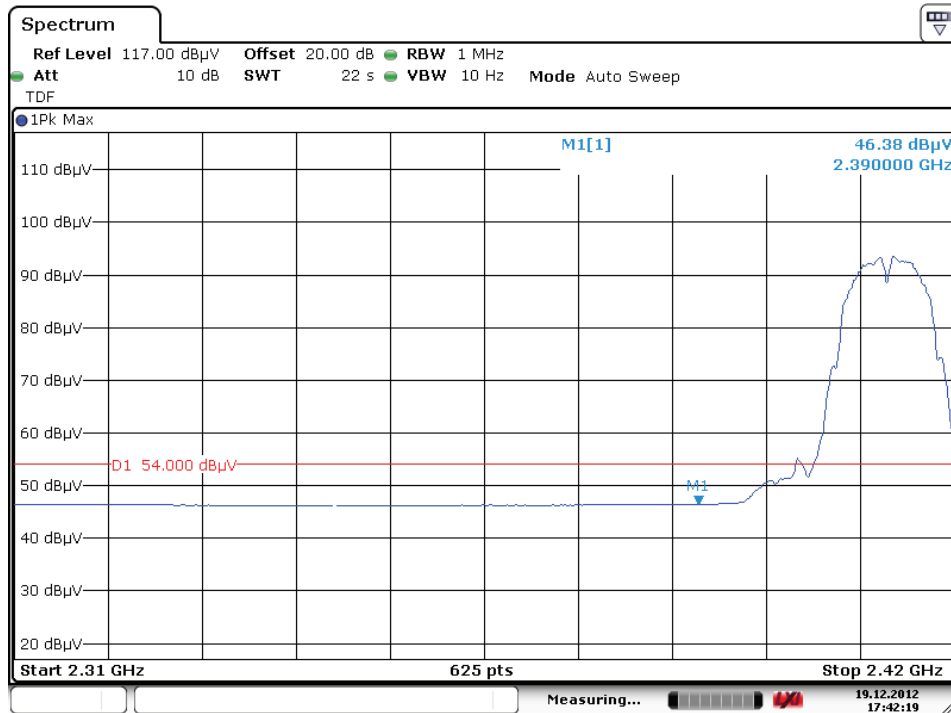

Date: 19.DEC.2012 17:42:19


High Channel (V)

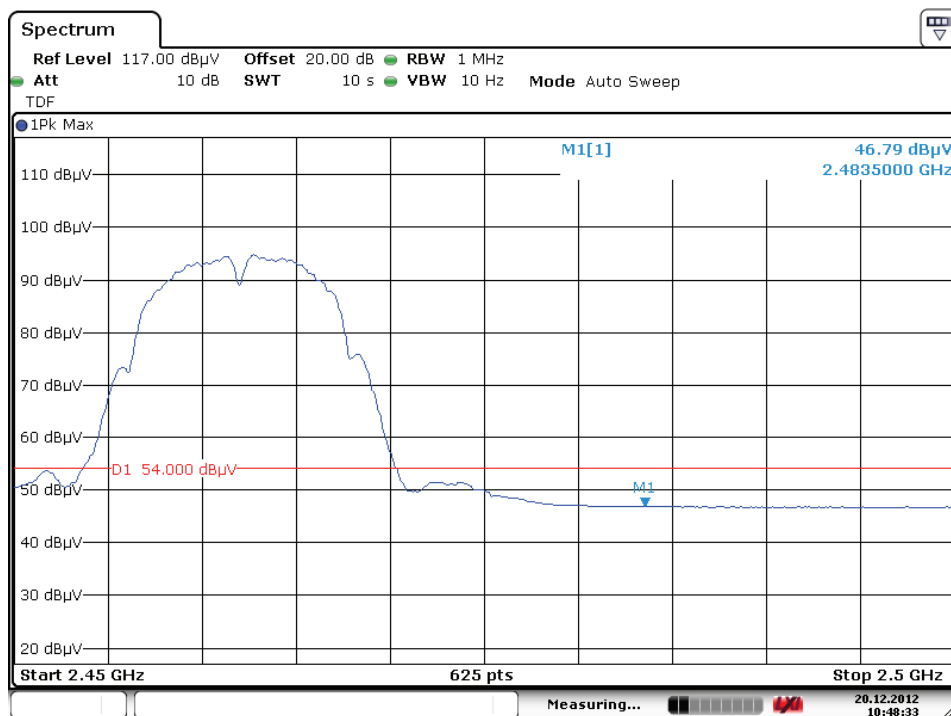


Date: 20.DEC.2012 10:48:33

Radiated Bandedge (802.11G) AVG


Low Channel (H)

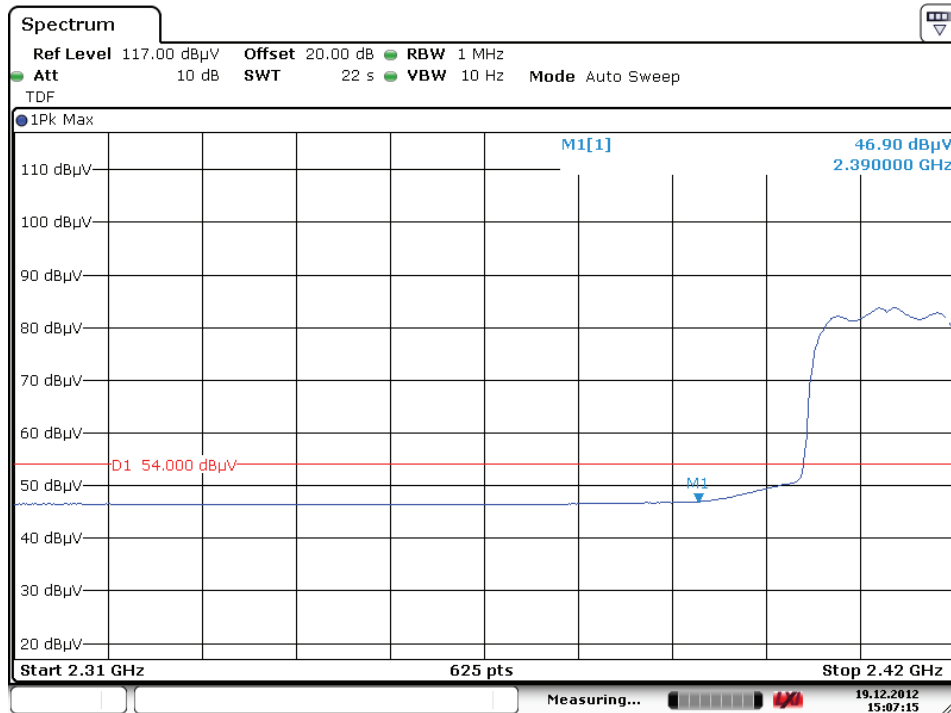


High Channel (H)

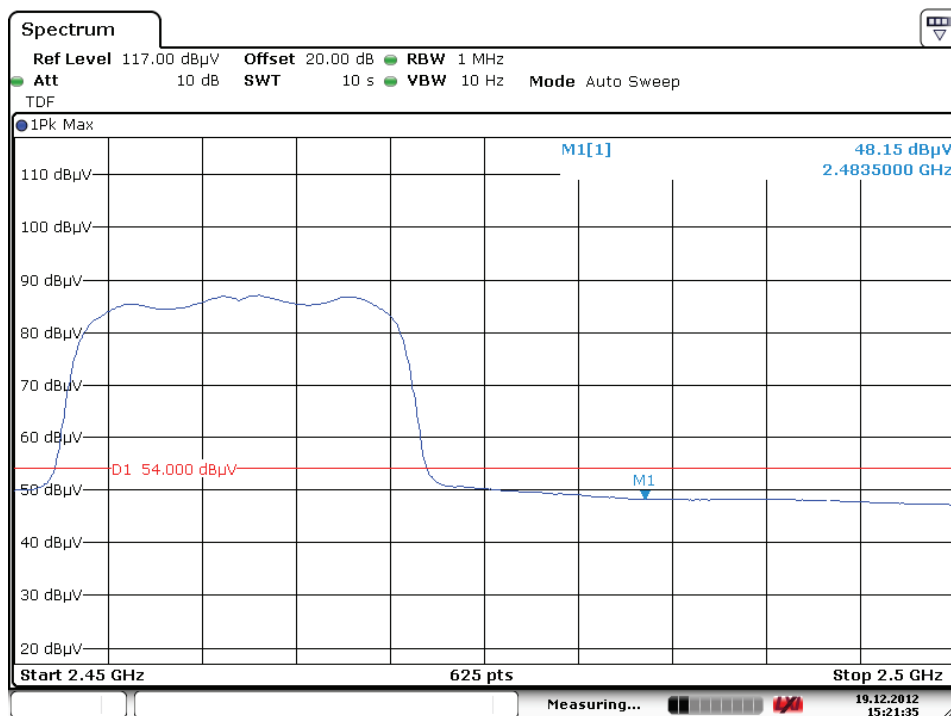

Low Channel (V)

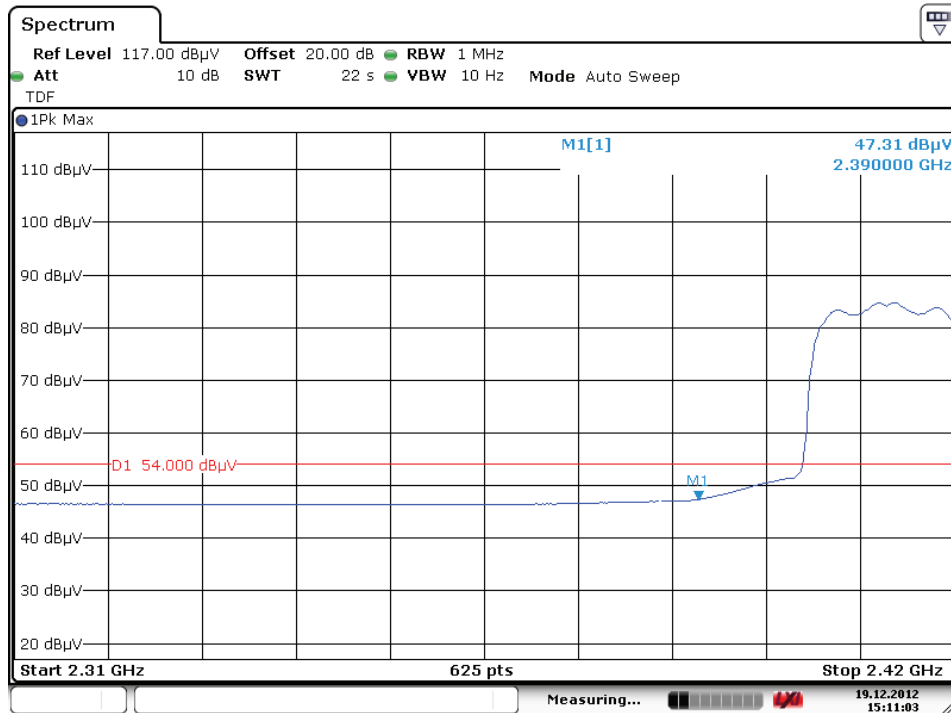


High Channel (V)

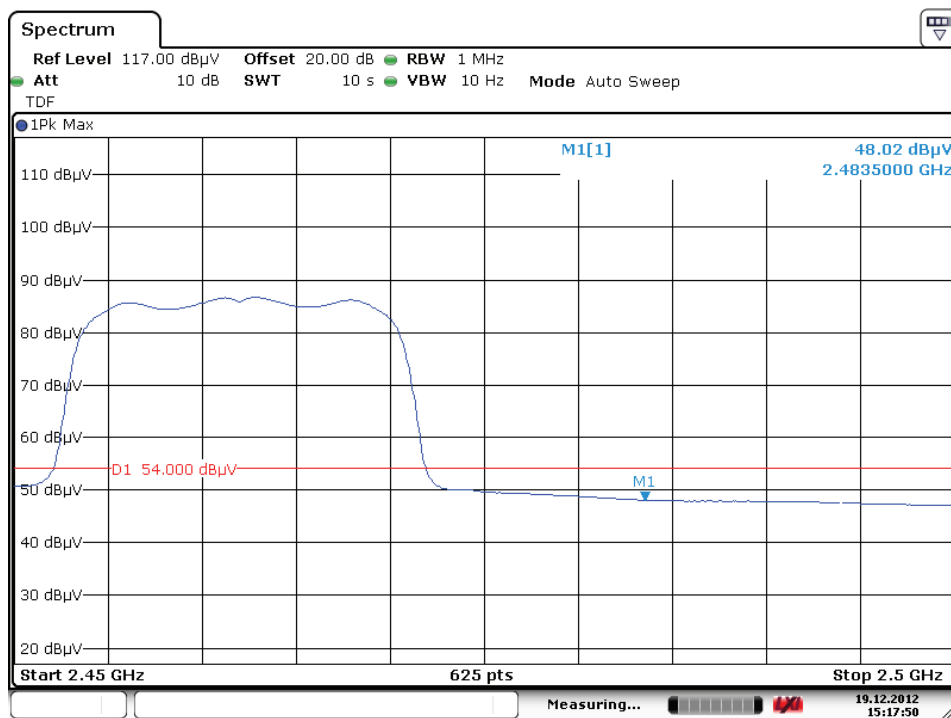


Radiated Bandedge (802.11N, HT20) AVG


Low Channel (H)

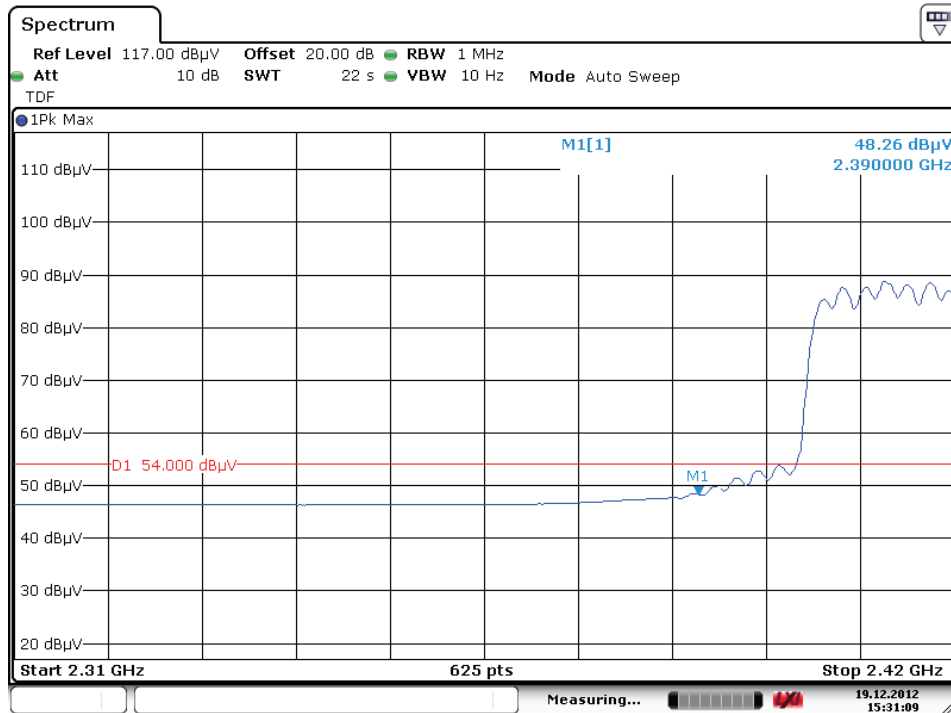


High Channel (H)

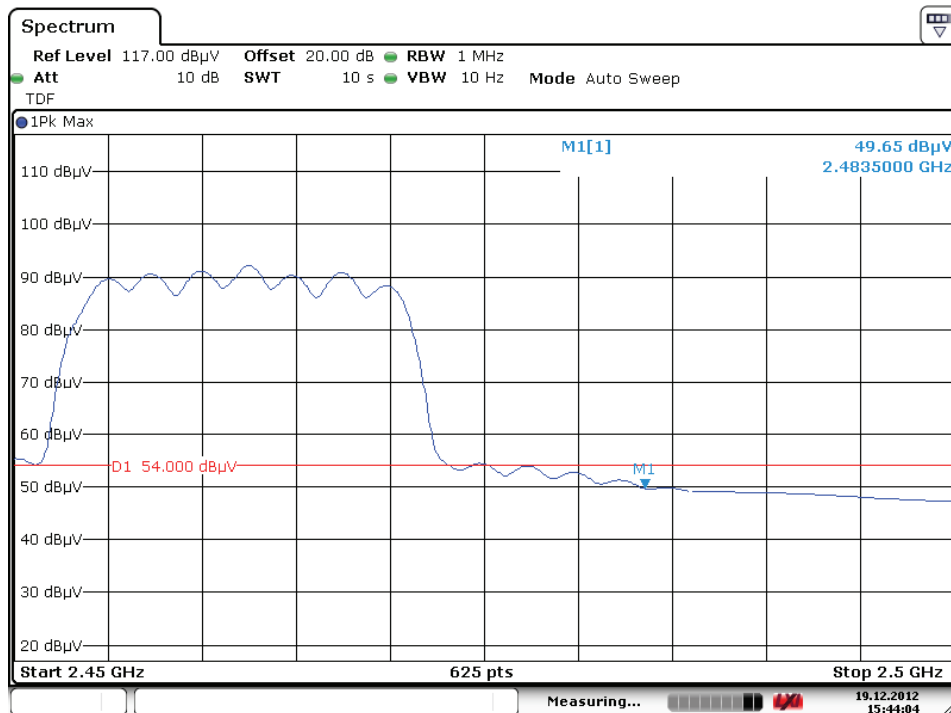

Low Channel (V)

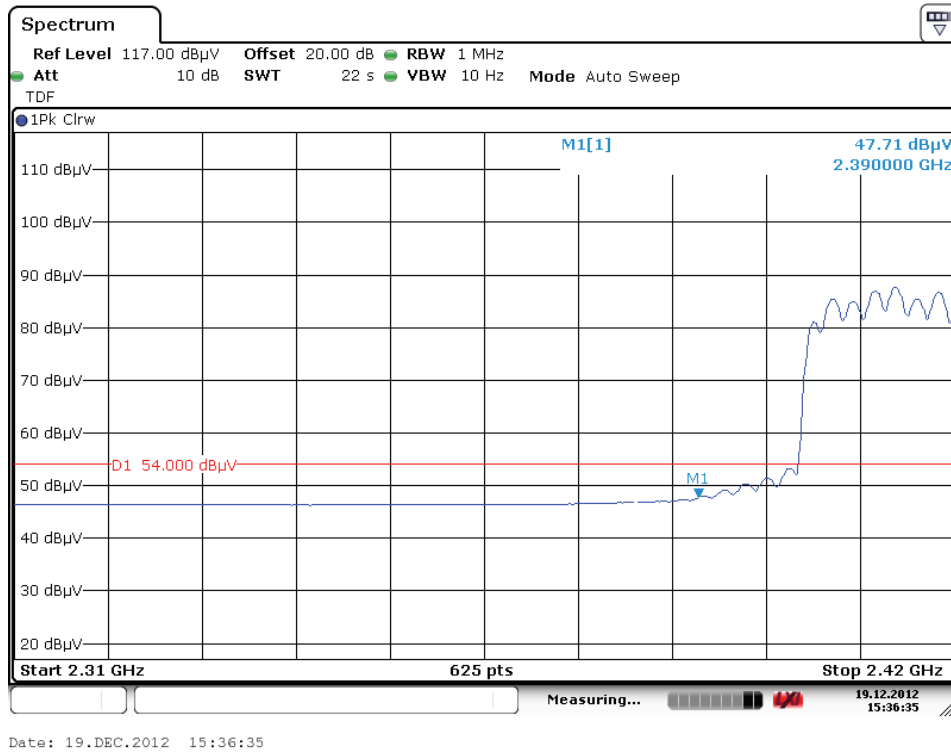


High Channel (V)

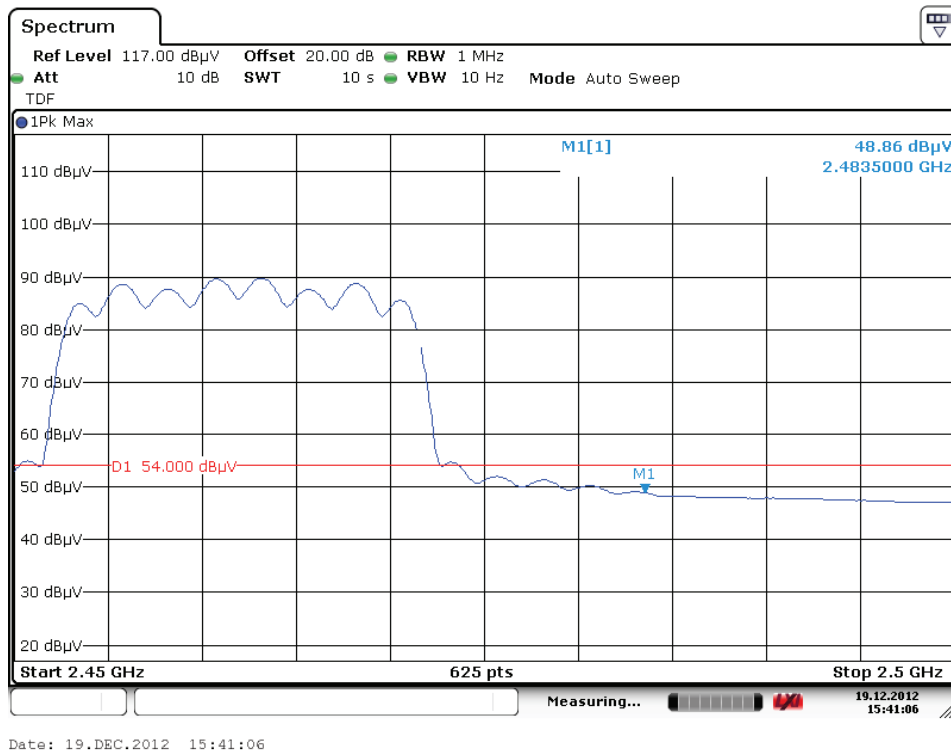


Radiated Bandedge (802.11N, HT40) AVG


Low Channel (H)

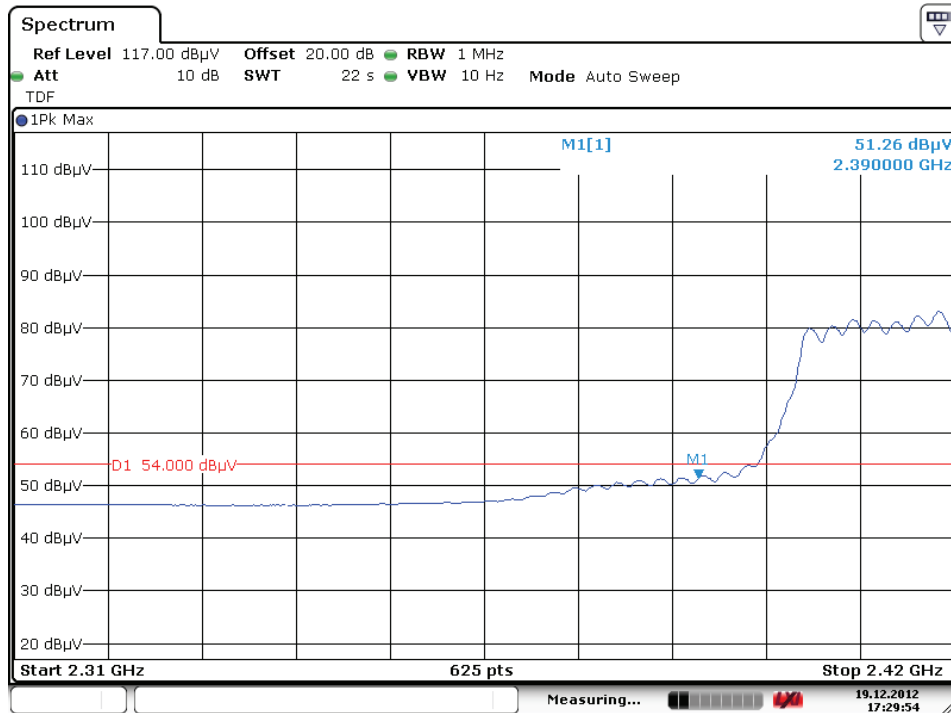


High Channel (H)

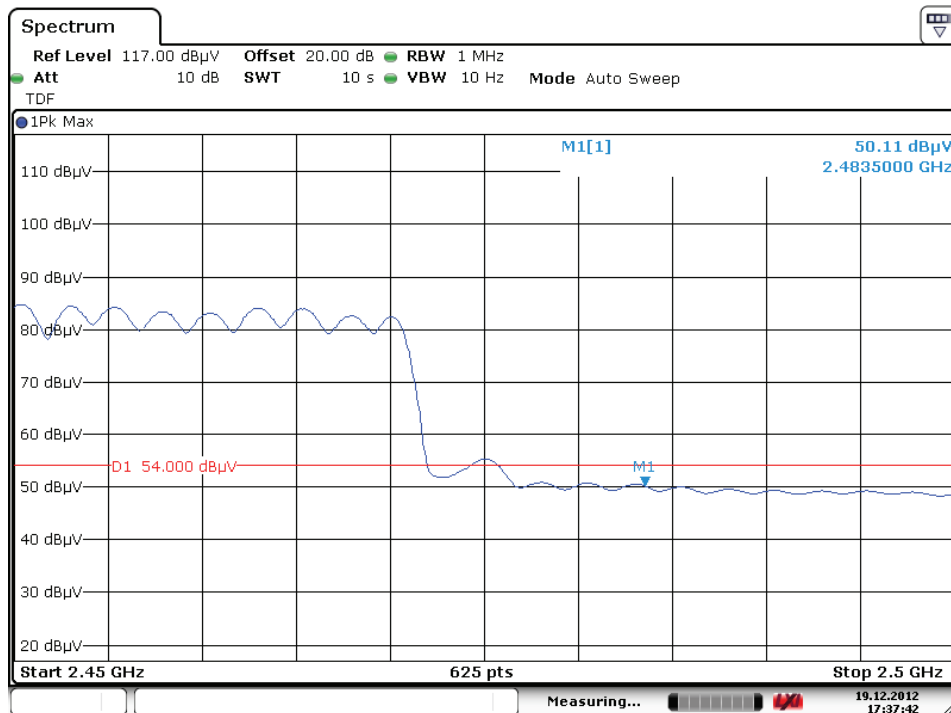

Low Channel (V)

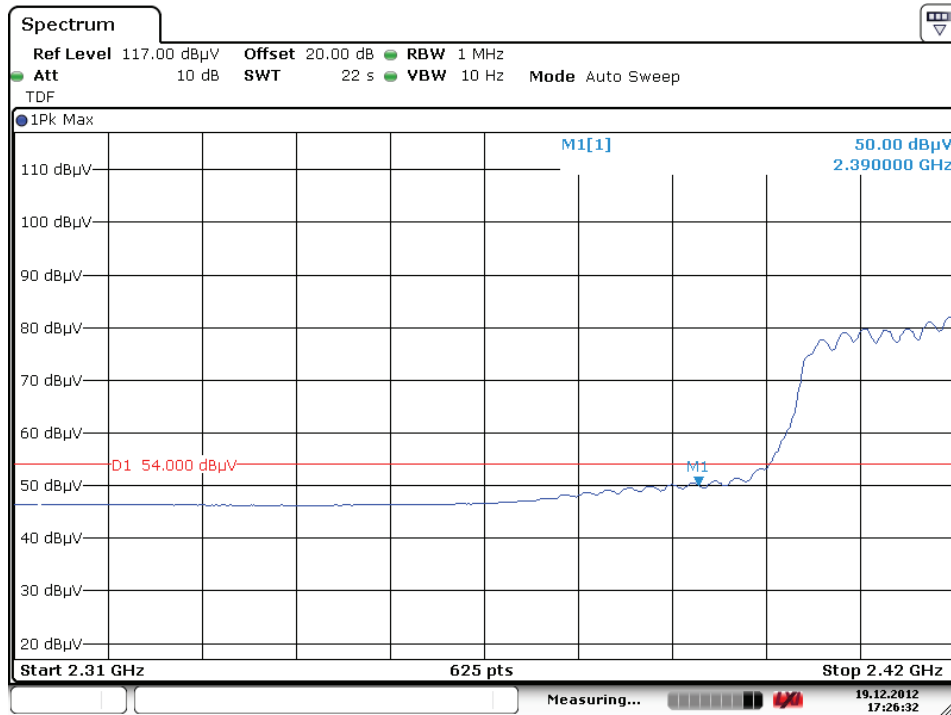


High Channel (V)

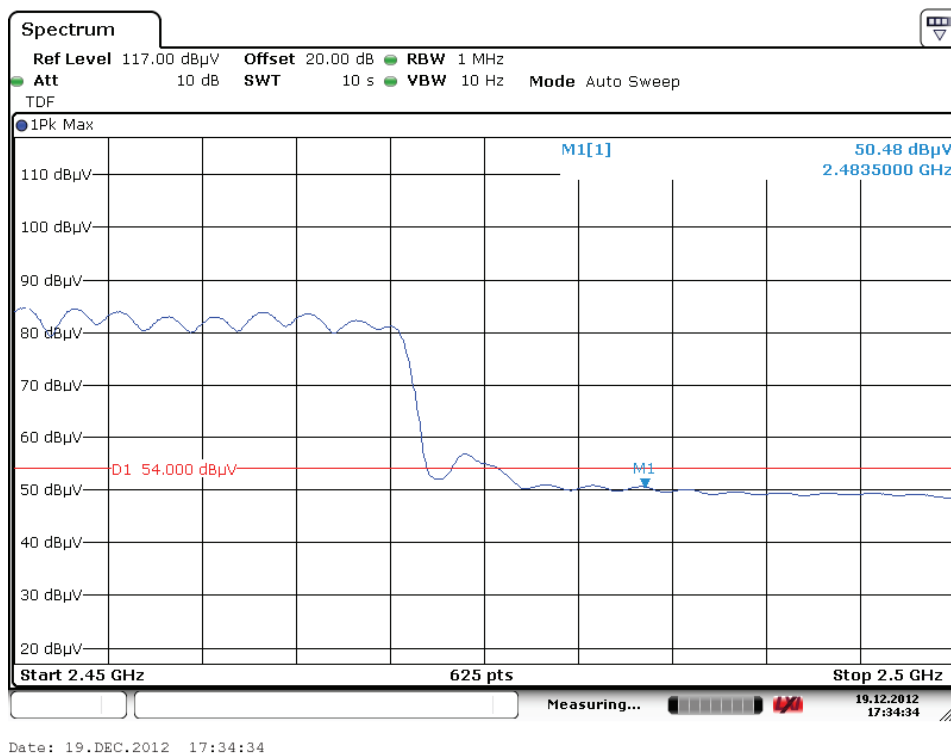


Radiated Bandedge (802.11B) PK


Low Channel (H)

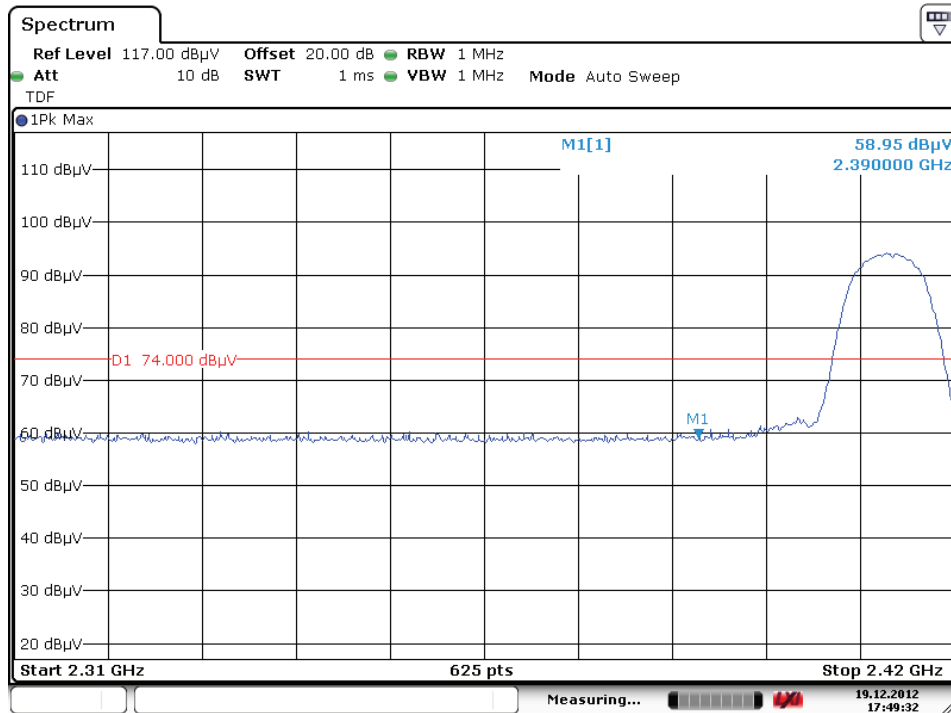


High Channel (H)

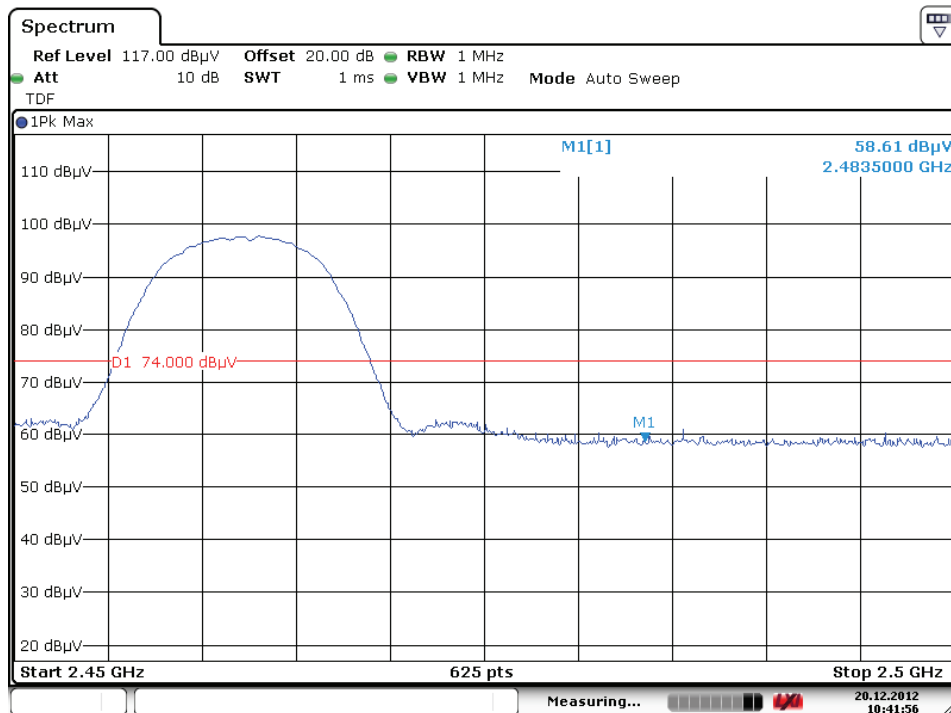

Low Channel (V)

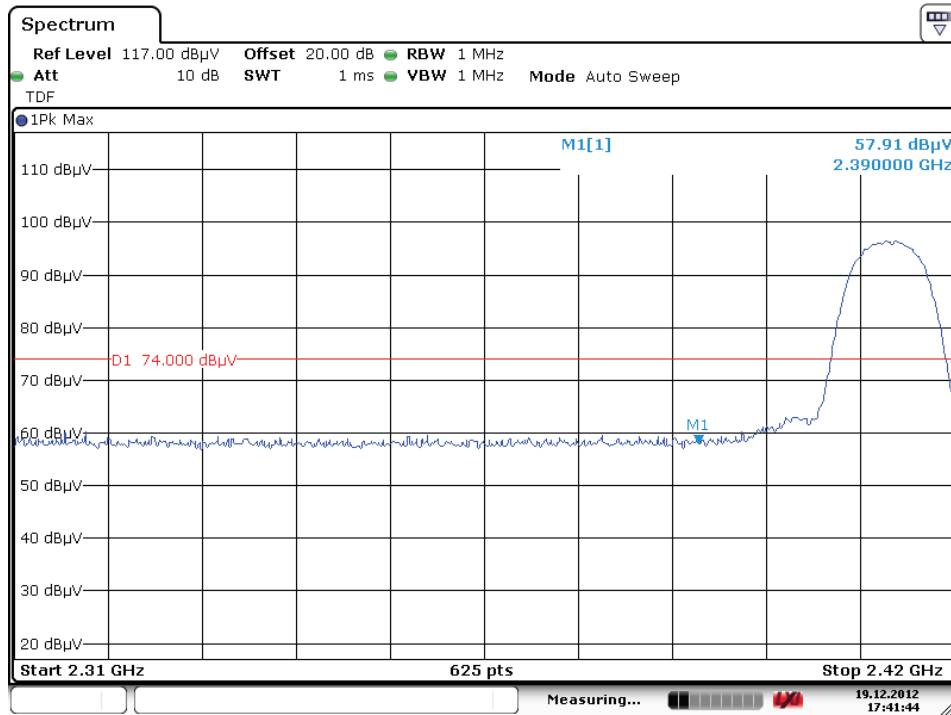


High Channel (V)

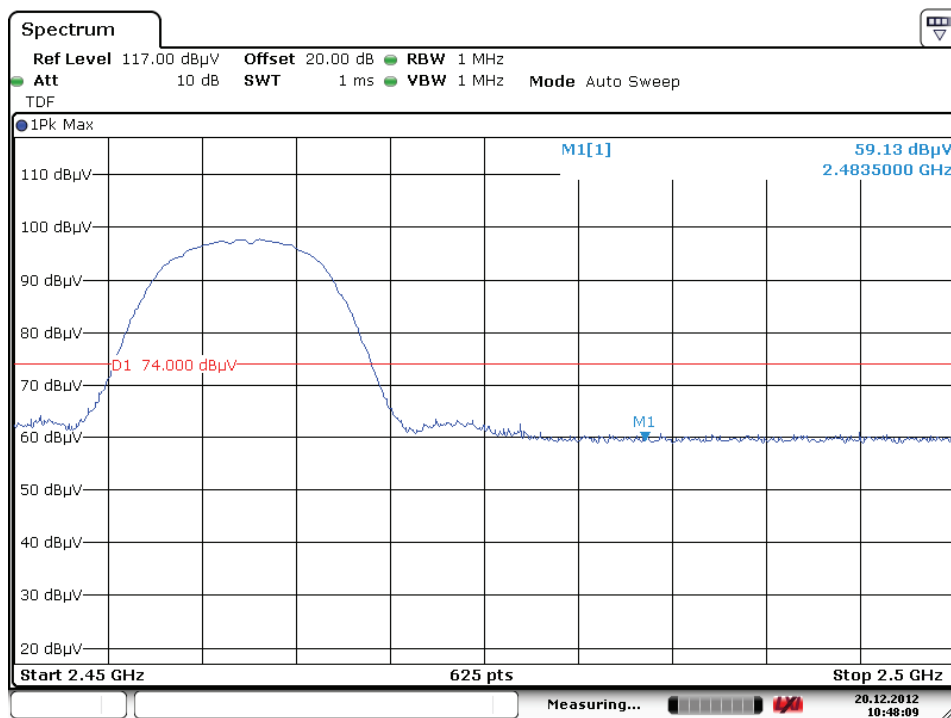


Radiated Bandedge (802.11G) PK


Low Channel (H)

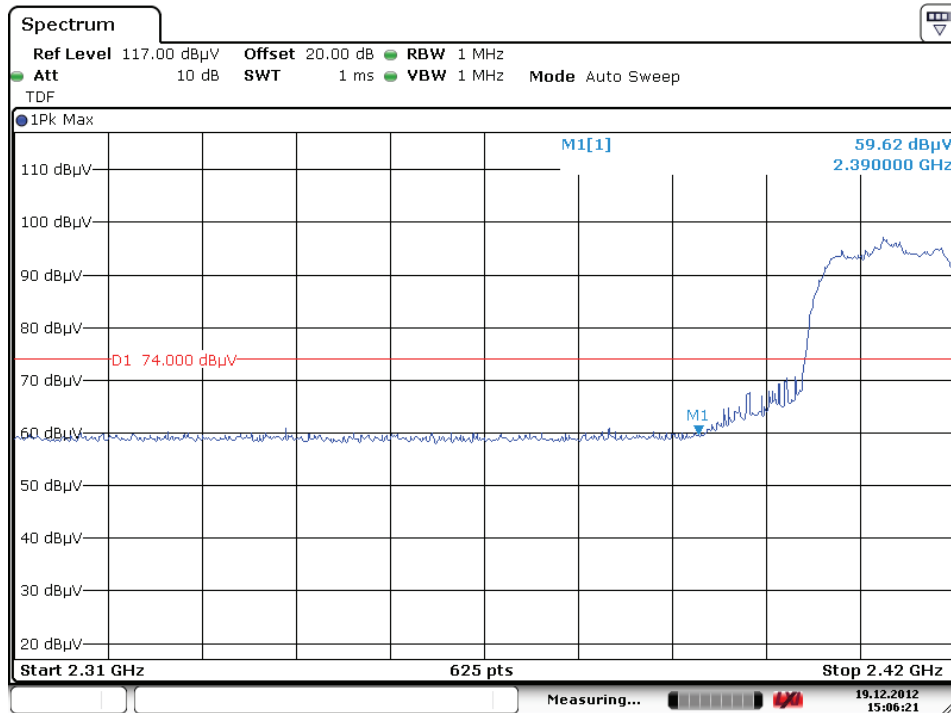


High Channel (H)

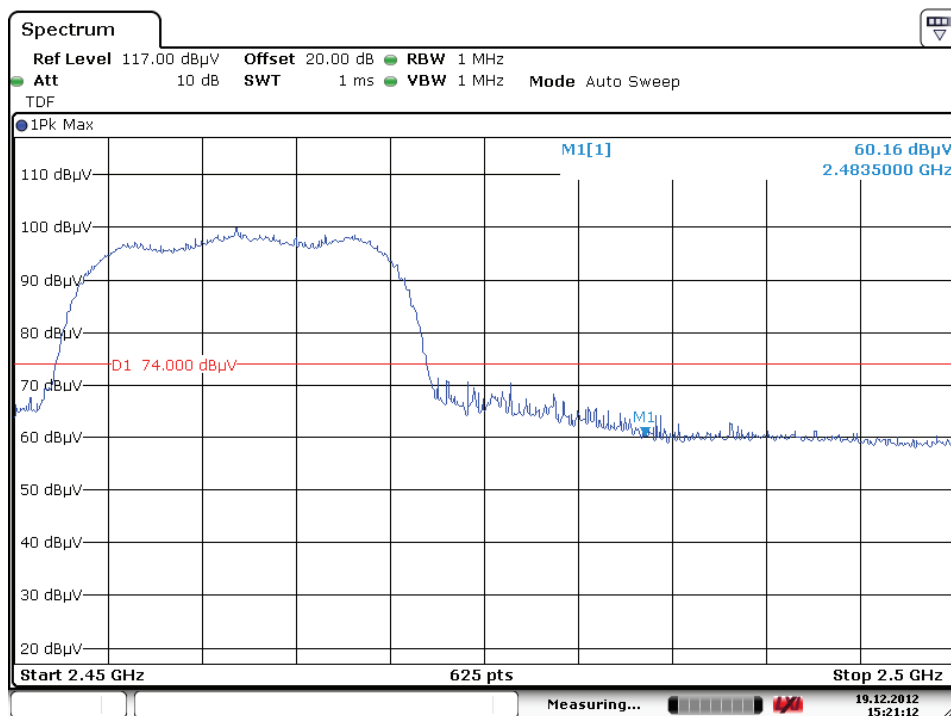

Low Channel (V)

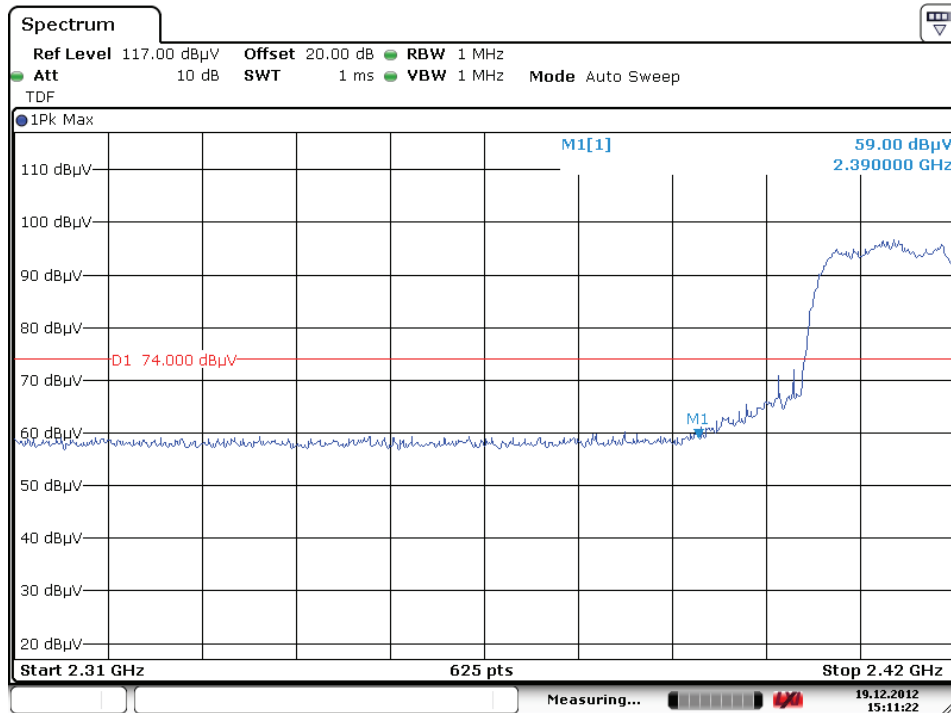


High Channel (V)

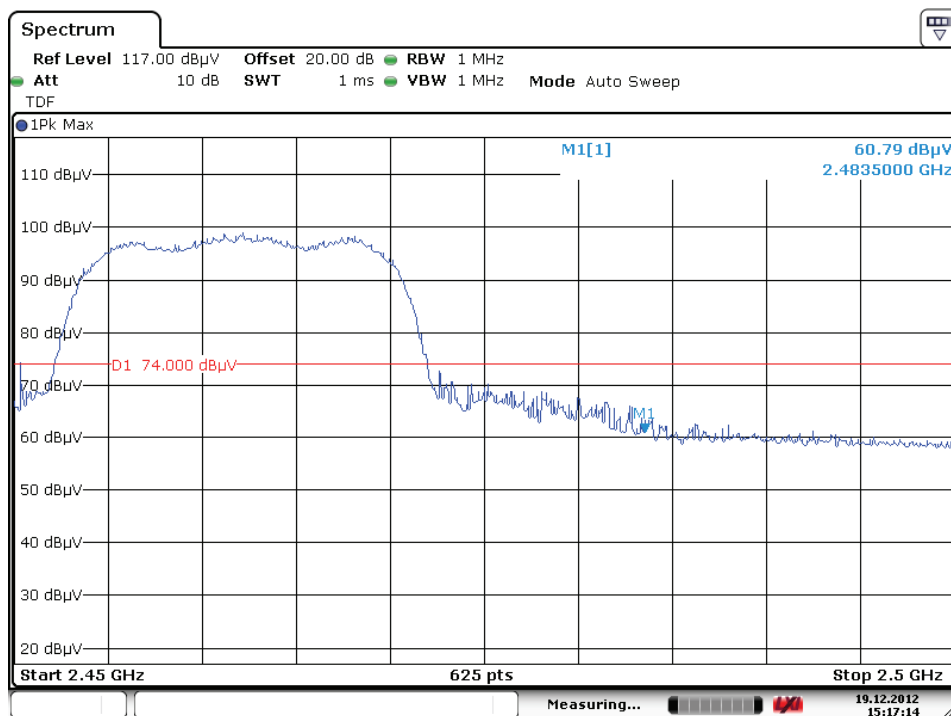

Radiated Bandedge (802.11N, HT20) PK


Low Channel (H)

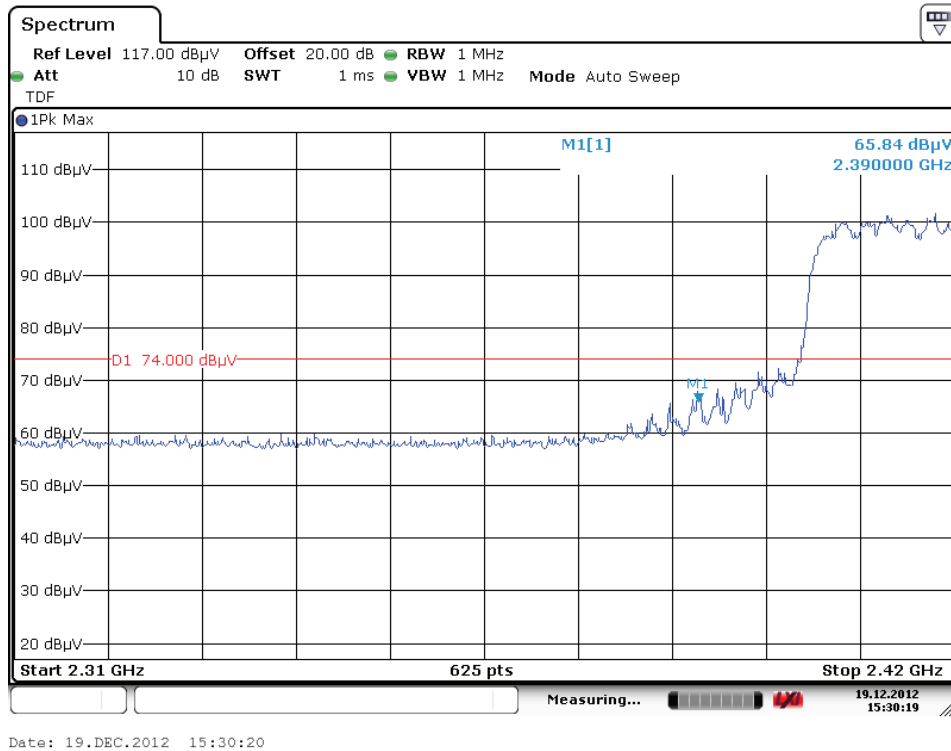

High Channel (H)



Low Channel (V)

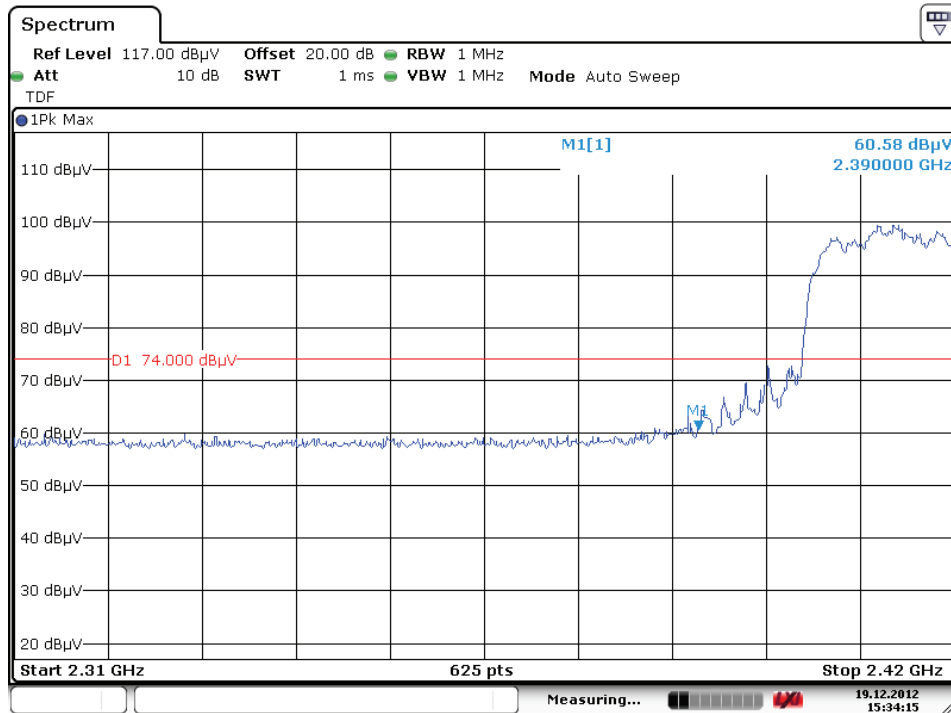

Date: 19.DEC.2012 15:34:16


High Channel (V)




Date: 19.DEC.2012 15:40:36

Radiated Bandedge (802.11N, HT40) PK


Low Channel (H)

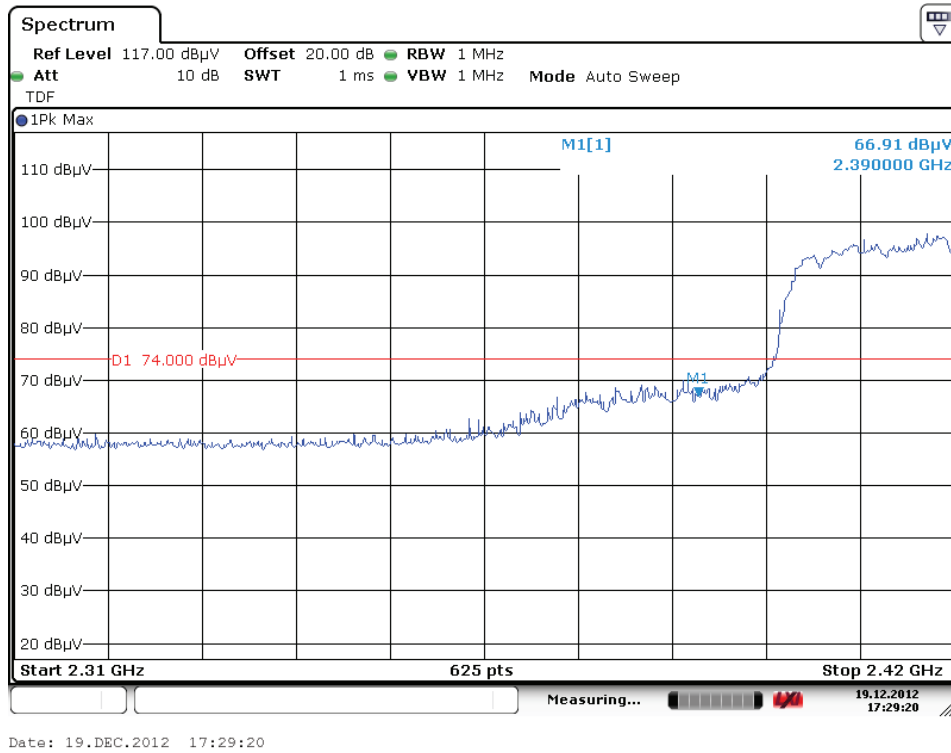

High Channel (H)

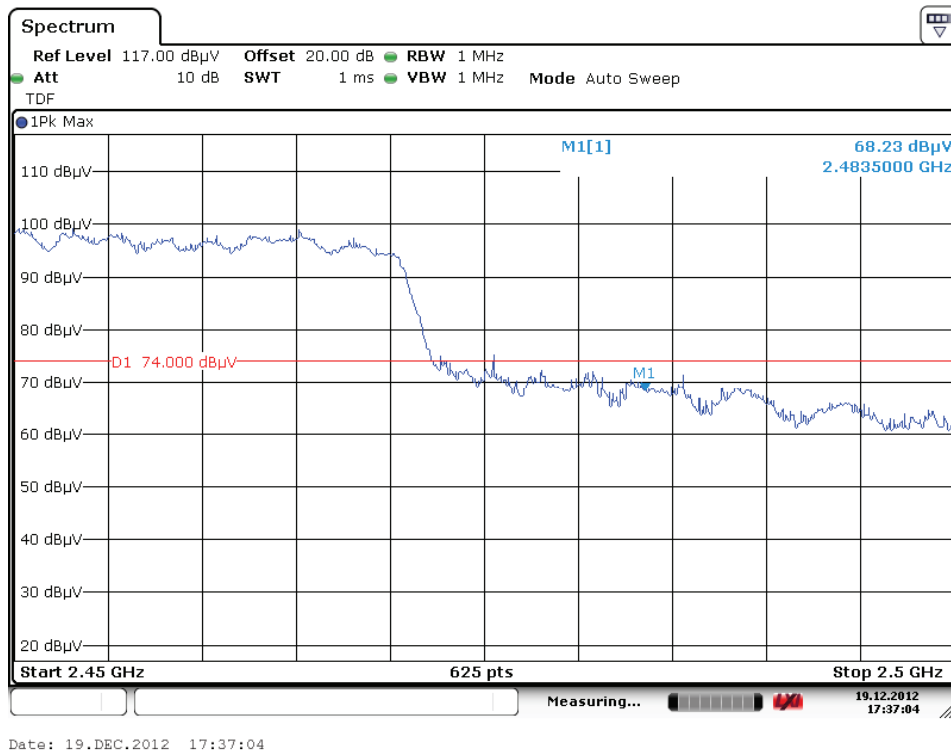


Low Channel (V)

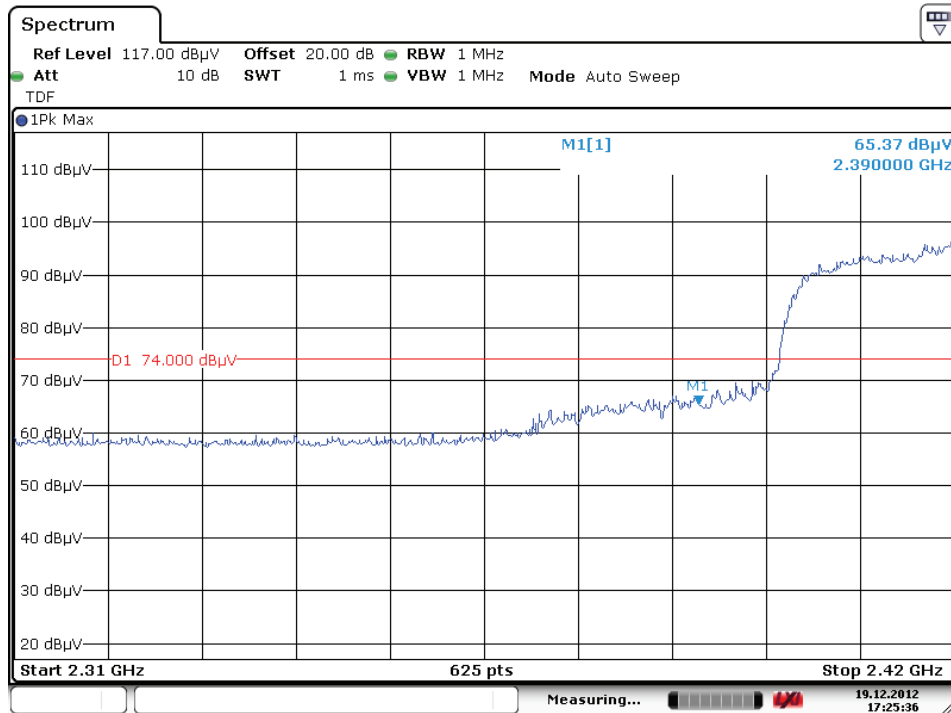


Date: 19.DEC.2012 17:25:36

High Channel (V)

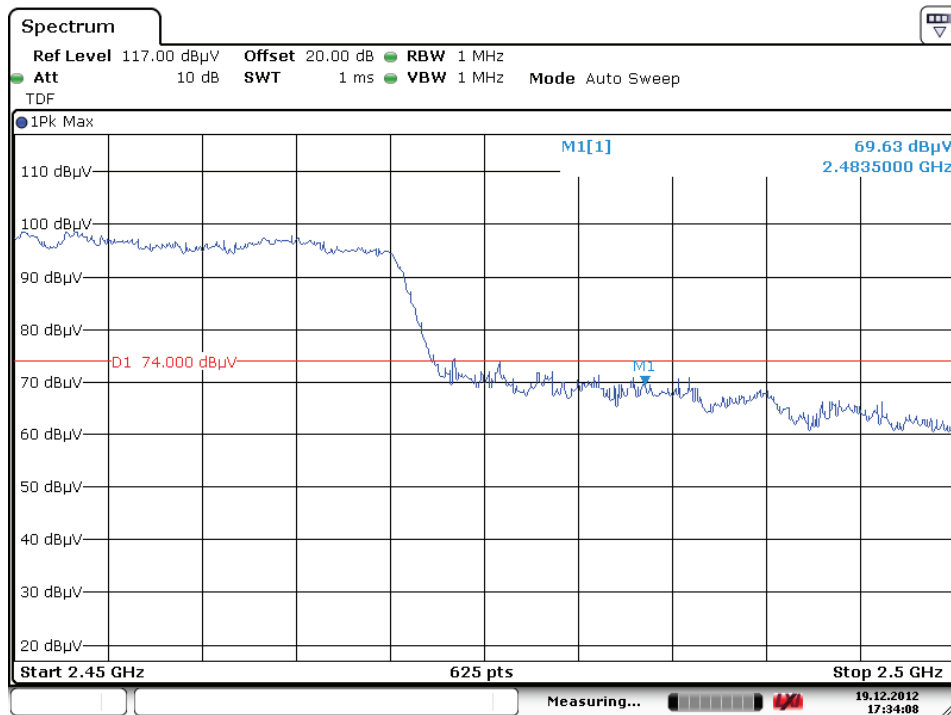


Date: 19.DEC.2012 17:34:09

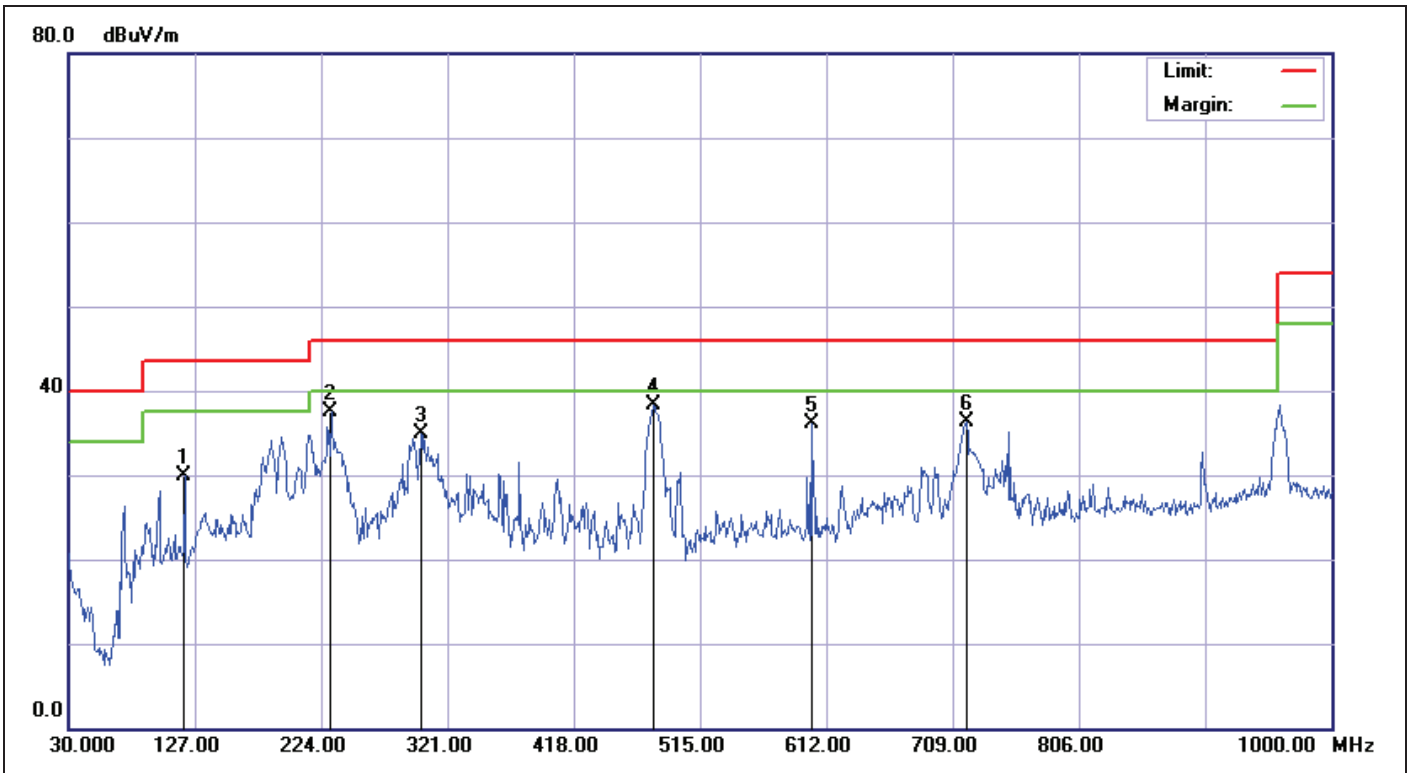


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/21 AM 09:54:22
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:			
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	119.2399	-14.14	44.05	29.91	43.50	-13.59	QP	300	360	
2	231.7599	-14.75	52.20	37.45	46.00	-8.55	QP	100	223	
3	300.6298	-11.27	46.08	34.81	46.00	-11.19	QP	100	333	
4	479.1100	-8.06	46.27	38.21	46.00	-7.79	QP	200	108	
5	600.3600	-5.87	41.94	36.07	46.00	-9.93	QP	200	0	
6	719.6699	-4.30	40.64	36.34	46.00	-9.66	QP	100	249	

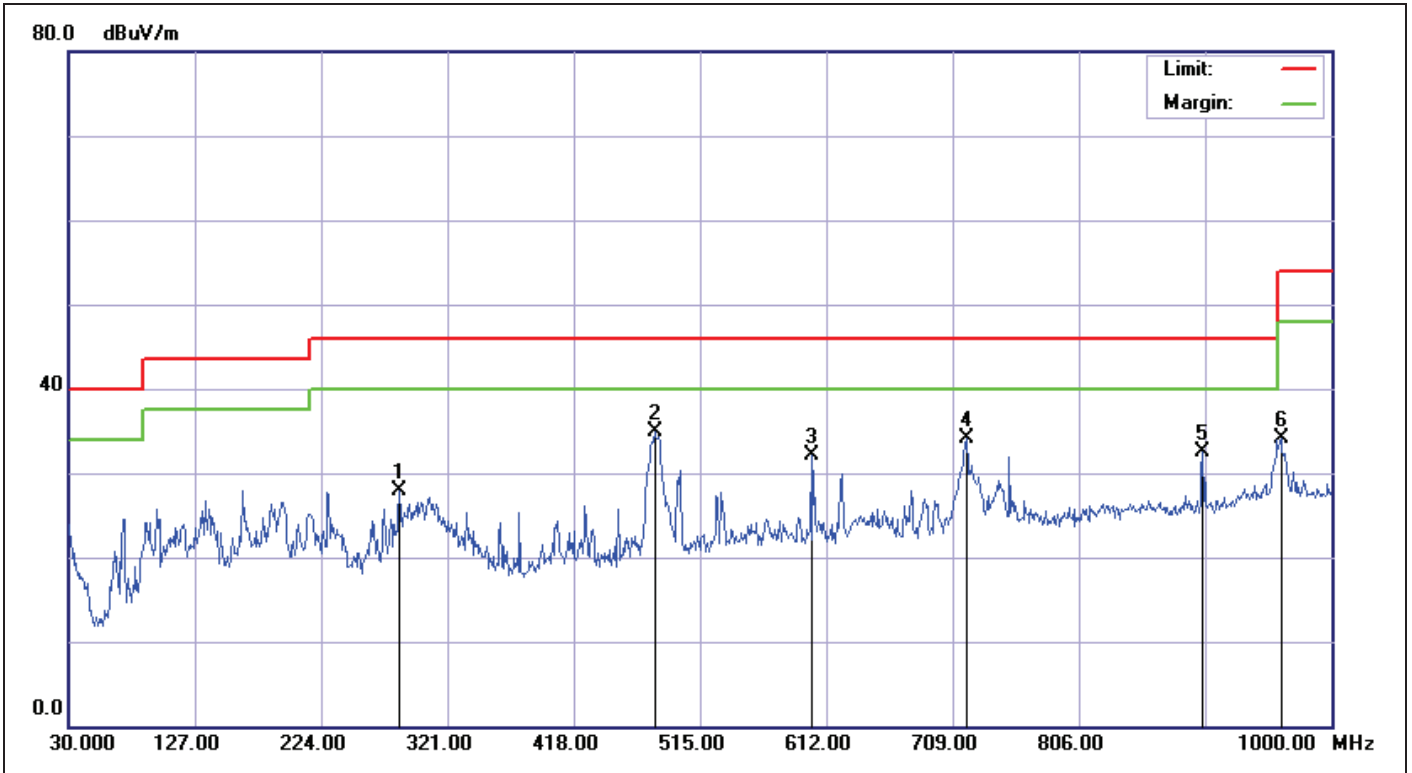


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/21 AM 09:59:21
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:			
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	284.1400	-11.84	39.76	27.92	46.00	-18.08	QP	200	186	
2	480.0800	-8.03	42.85	34.82	46.00	-11.18	QP	200	159	
3	600.3600	-5.87	37.94	32.07	46.00	-13.93	QP	100	324	
4	719.6700	-4.30	38.43	34.13	46.00	-11.87	QP	100	0	
5	901.0600	-1.89	34.31	32.42	46.00	-13.58	QP	100	294	
6	961.2000	0.05	34.07	34.12	54.00	-19.88	QP	100	317	

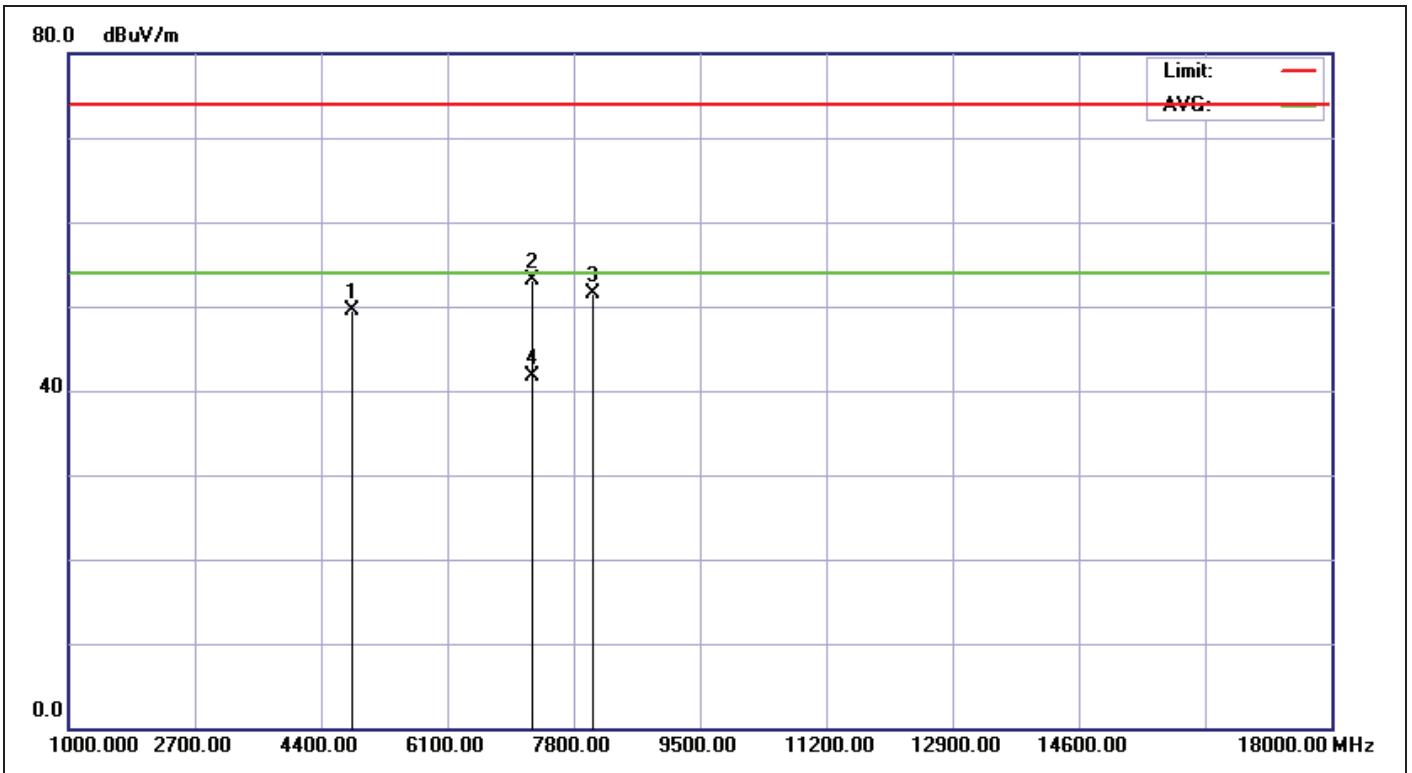


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/19 PM 02:31:46
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	B CH2412		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4822.000	-4.05	53.58	49.53	74.00	-24.47	peak	100	0	
2	7242.000	6.51	46.59	53.10	74.00	-20.90	peak	100	0	
3	8058.000	7.51	44.09	51.60	74.00	-22.40	peak	100	0	
4	7242.000	6.51	35.10	41.61	54.00	-12.39	AVG			

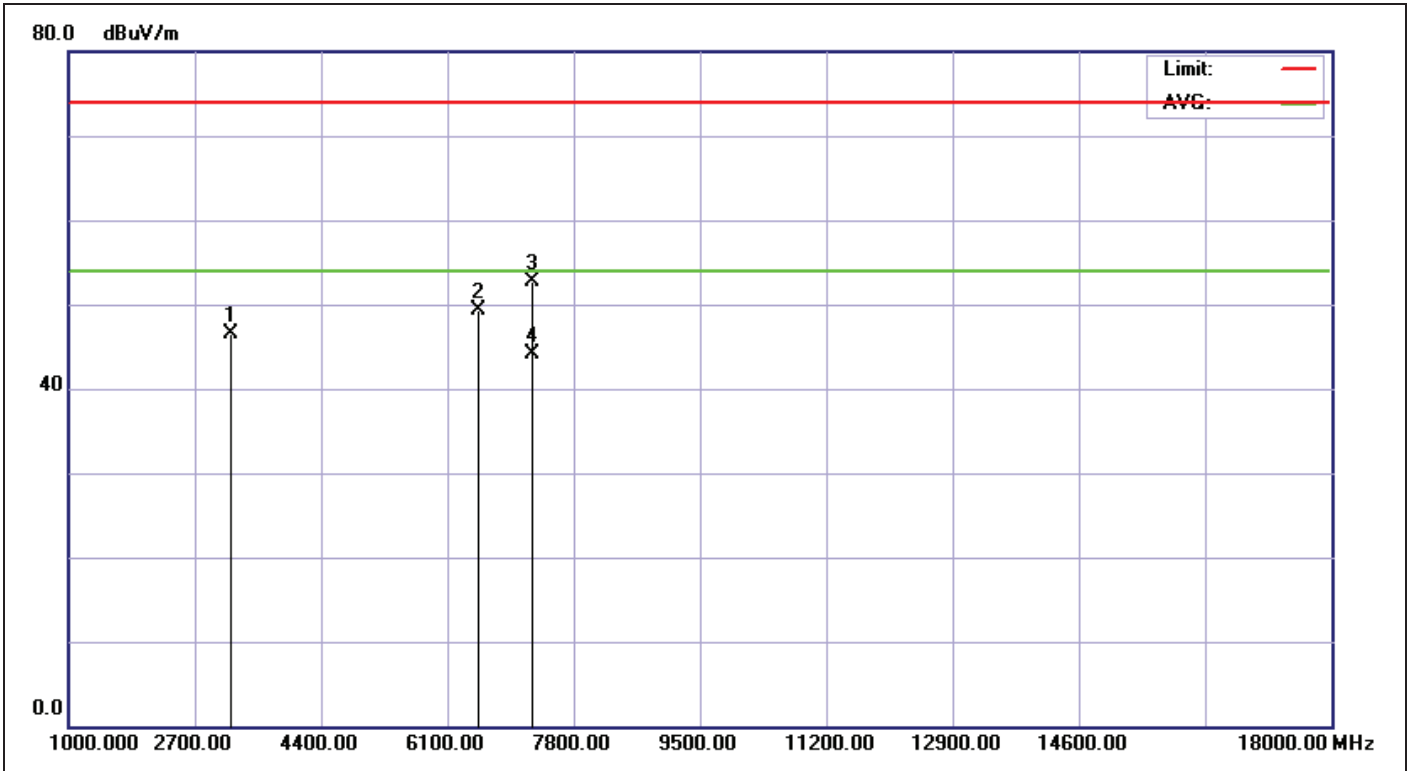


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/19 PM 02:36:28
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	B CH2412		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3182.000	-9.19	55.62	46.43	74.00	-27.57	peak	100	0	
2	6528.000	4.97	44.41	49.38	74.00	-24.62	peak	100	0	
3	7235.000	6.49	46.15	52.64	74.00	-21.36	peak	100	0	
4	7235.000	6.49	37.63	44.12	54.00	-9.88	AVG			

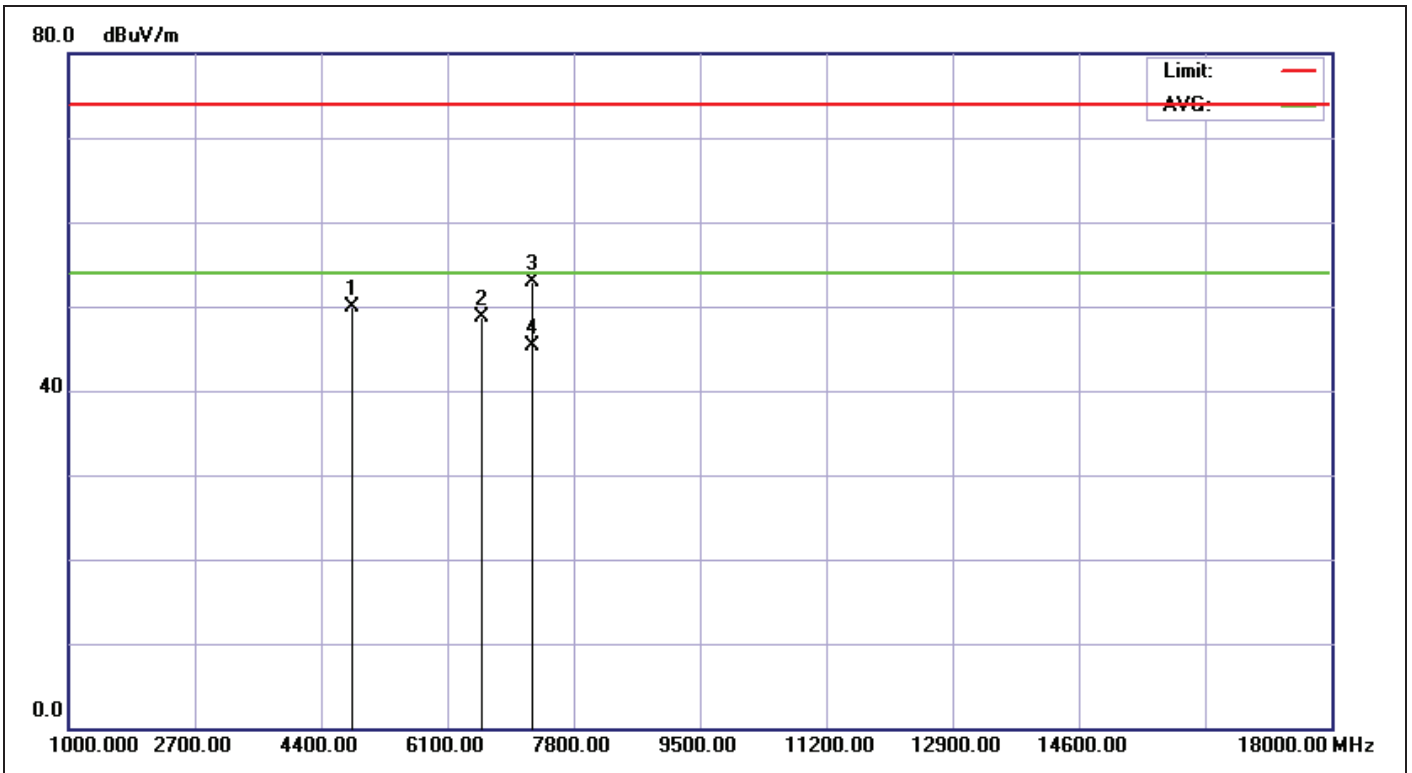


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/19 PM 02:40:05
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	B CH2437		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4816.000	-4.07	53.88	49.81	74.00	-24.19	peak	100	0	
2	6557.000	5.01	43.73	48.74	74.00	-25.26	peak	100	0	
3	7237.000	6.49	46.35	52.84	74.00	-21.16	peak	100	0	
4	7237.000	6.49	38.83	45.32	54.00	-8.68	AVG			

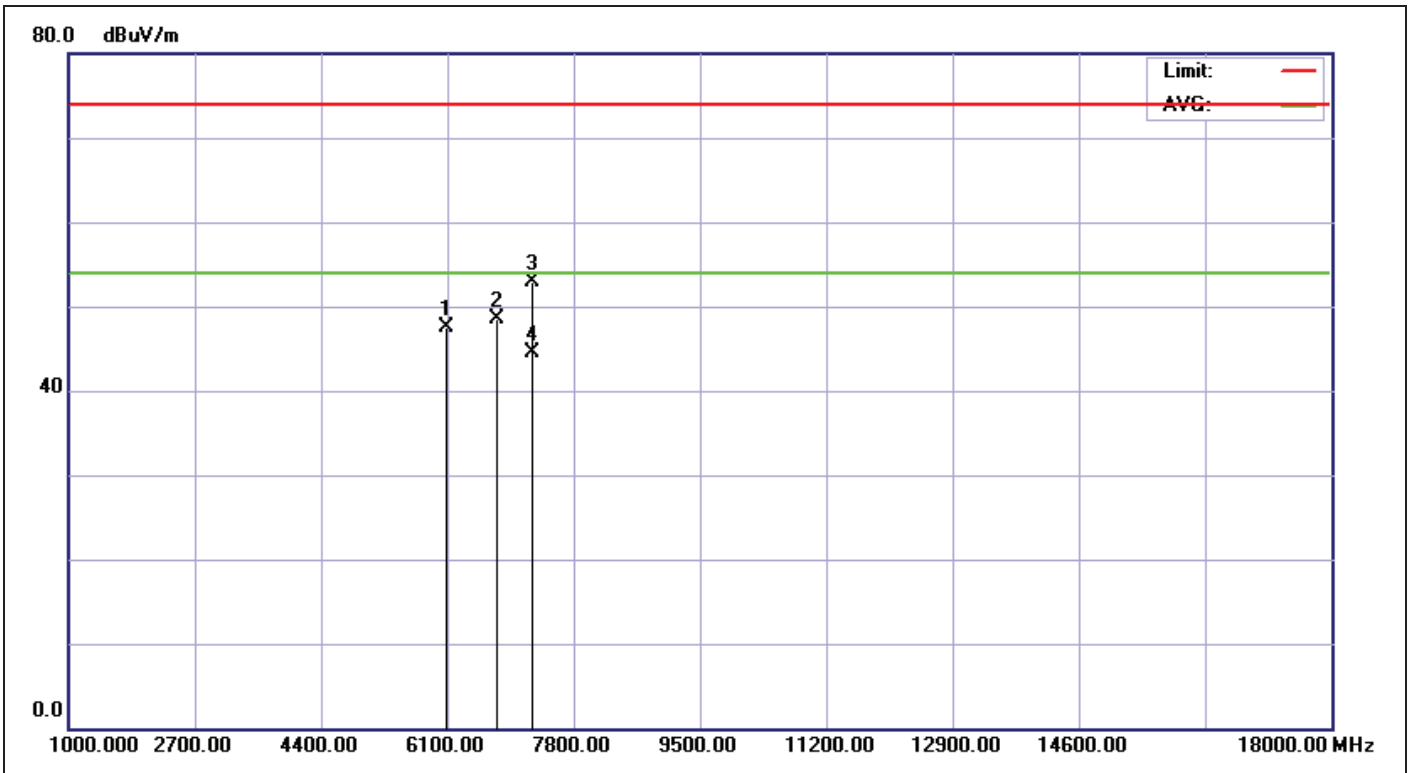


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/19 PM 02:42:41
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	B CH2437		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	6095.000	3.19	44.34	47.53	74.00	-26.47	peak	100	360	
2	6775.000	5.27	43.29	48.56	74.00	-25.44	peak	100	360	
3	7237.000	6.49	46.43	52.92	74.00	-21.08	peak	100	360	
4	7237.000	6.49	38.04	44.53	54.00	-9.47	AVG			

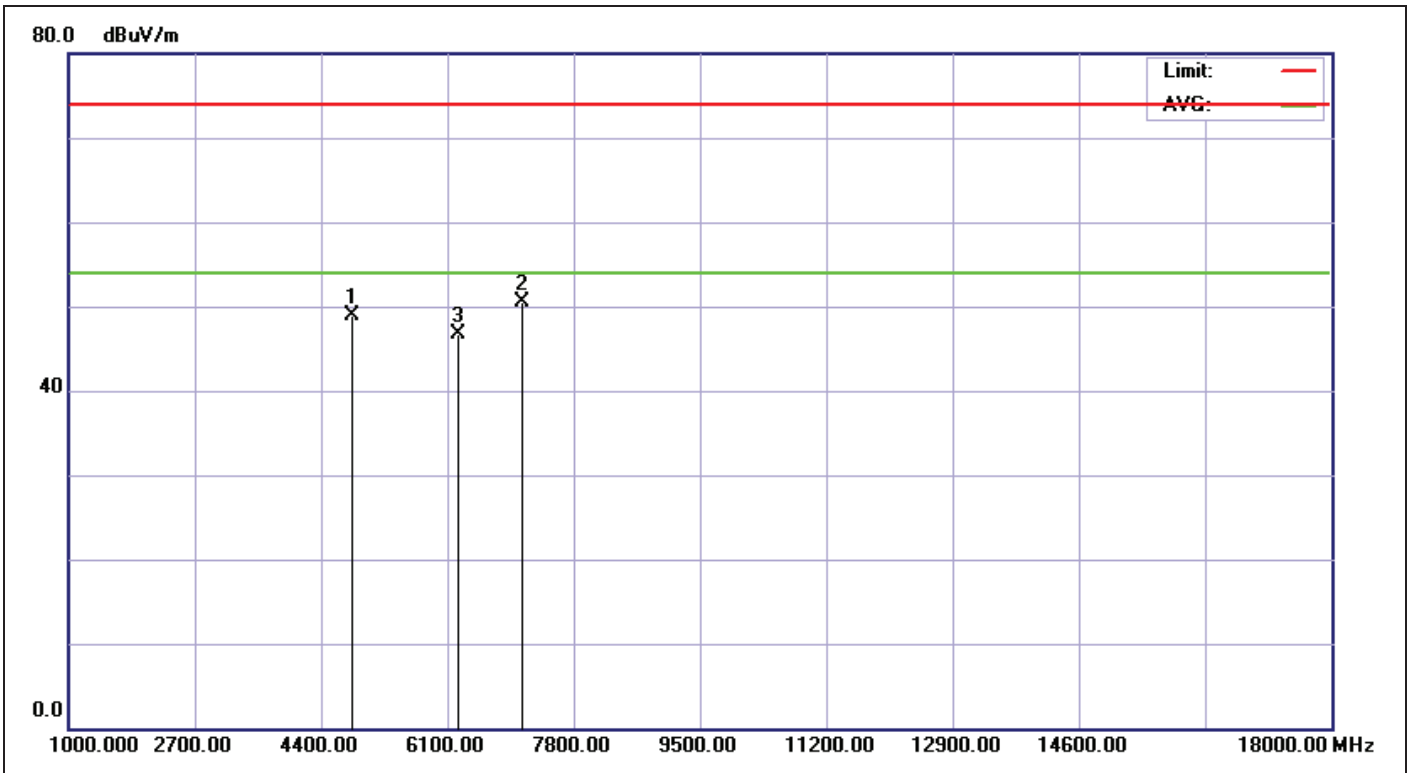


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/19 PM 02:46:26
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	B CH2462		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4816.000	-4.07	52.95	48.88	74.00	-25.12	peak	100	360	
2	7101.000	5.94	44.50	50.44	74.00	-23.56	peak	100	360	
3	6258.000	3.89	42.87	46.76	74.00	-27.24	peak	100	360	

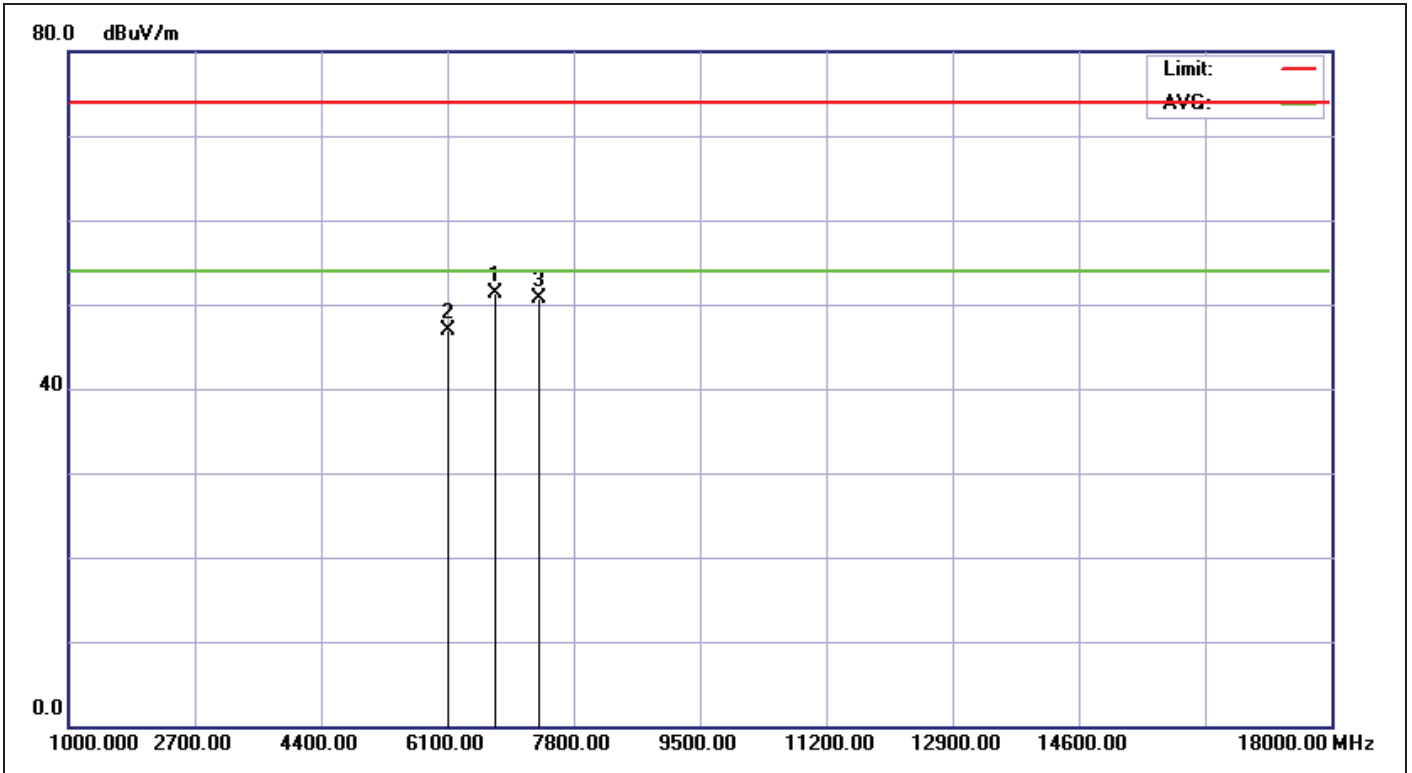


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/19 PM 02:48:40
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	B CH2462		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	6747.000	5.23	46.01	51.24	74.00	-22.76	peak	100	0	
2	6122.000	3.31	43.59	46.90	74.00	-27.10	peak	100	0	
3	7346.000	6.94	43.74	50.68	74.00	-23.32	peak	100	0	

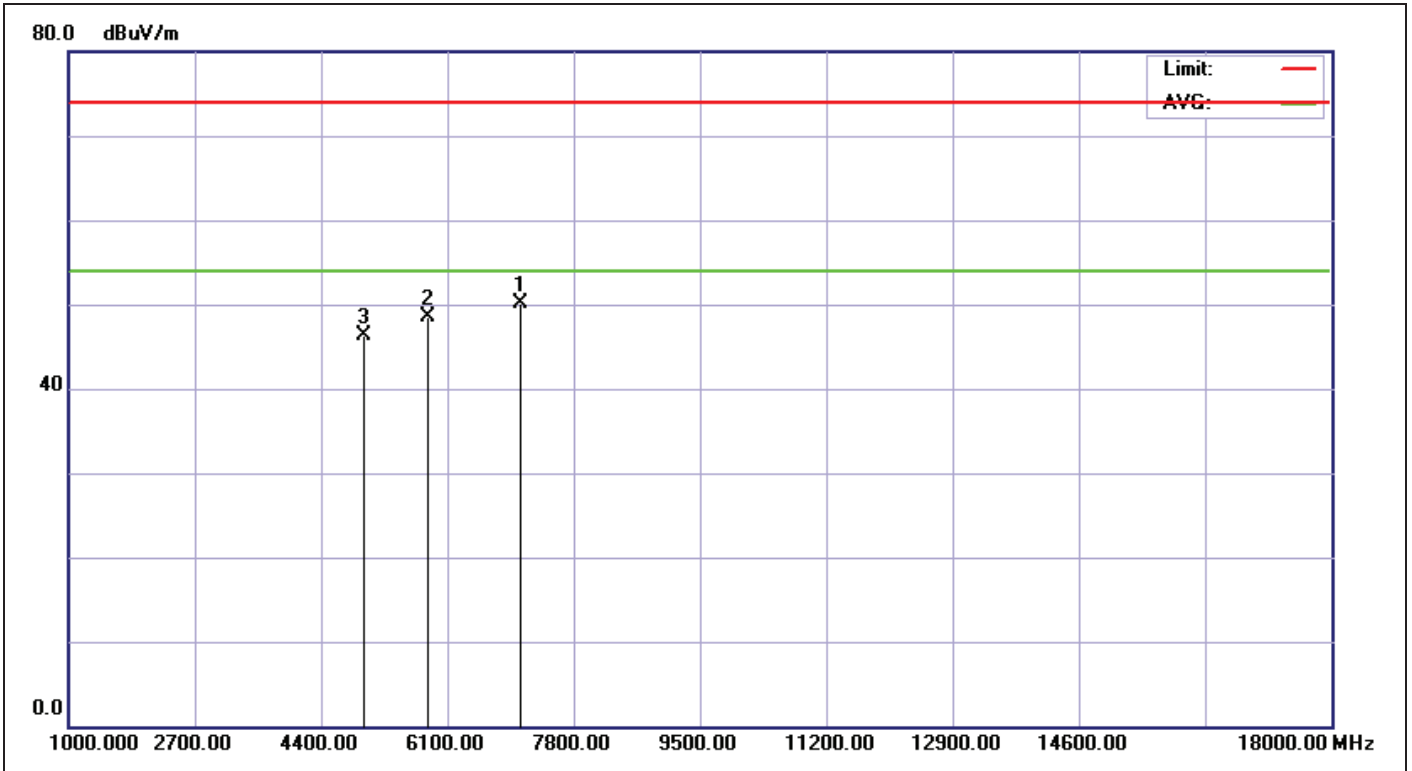


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012-12-20 AM 10:52:16
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	G CH2412		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7079.000	5.85	44.20	50.05	74.00	-23.95	peak	100	360	
2	5828.000	1.63	46.85	48.48	74.00	-25.52	peak	100	360	
3	4985.000	-3.31	49.59	46.28	74.00	-27.72	peak	100	360	

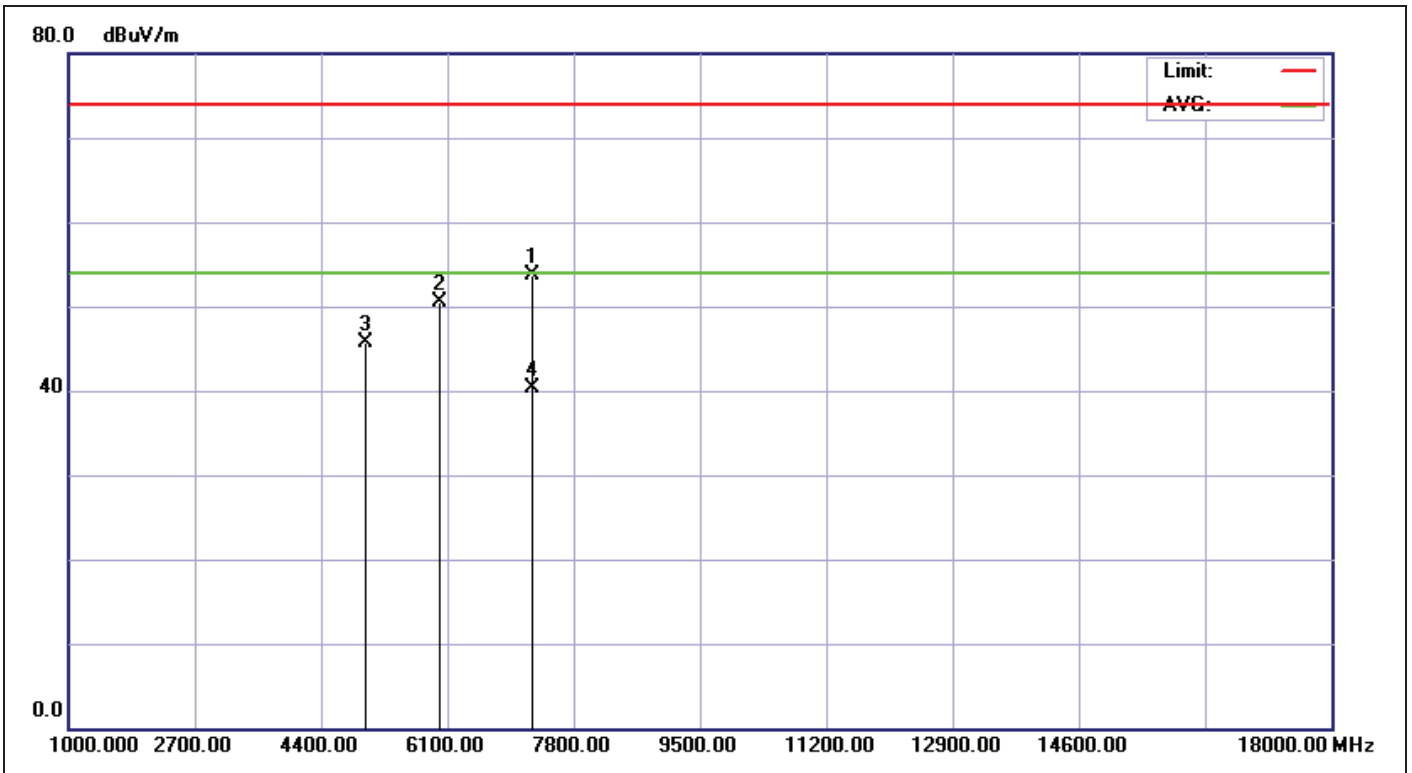


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012-12-20 AM 10:55:10
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	G CH2412		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7242.000	6.51	47.12	53.63	74.00	-20.37	peak	100	0	
2	5991.000	2.72	47.73	50.45	74.00	-23.55	peak	100	0	
3	5012.000	-3.17	48.94	45.77	74.00	-28.23	peak	100	0	
4	7242.000	6.51	33.71	40.22	54.00	-13.78	AVG			

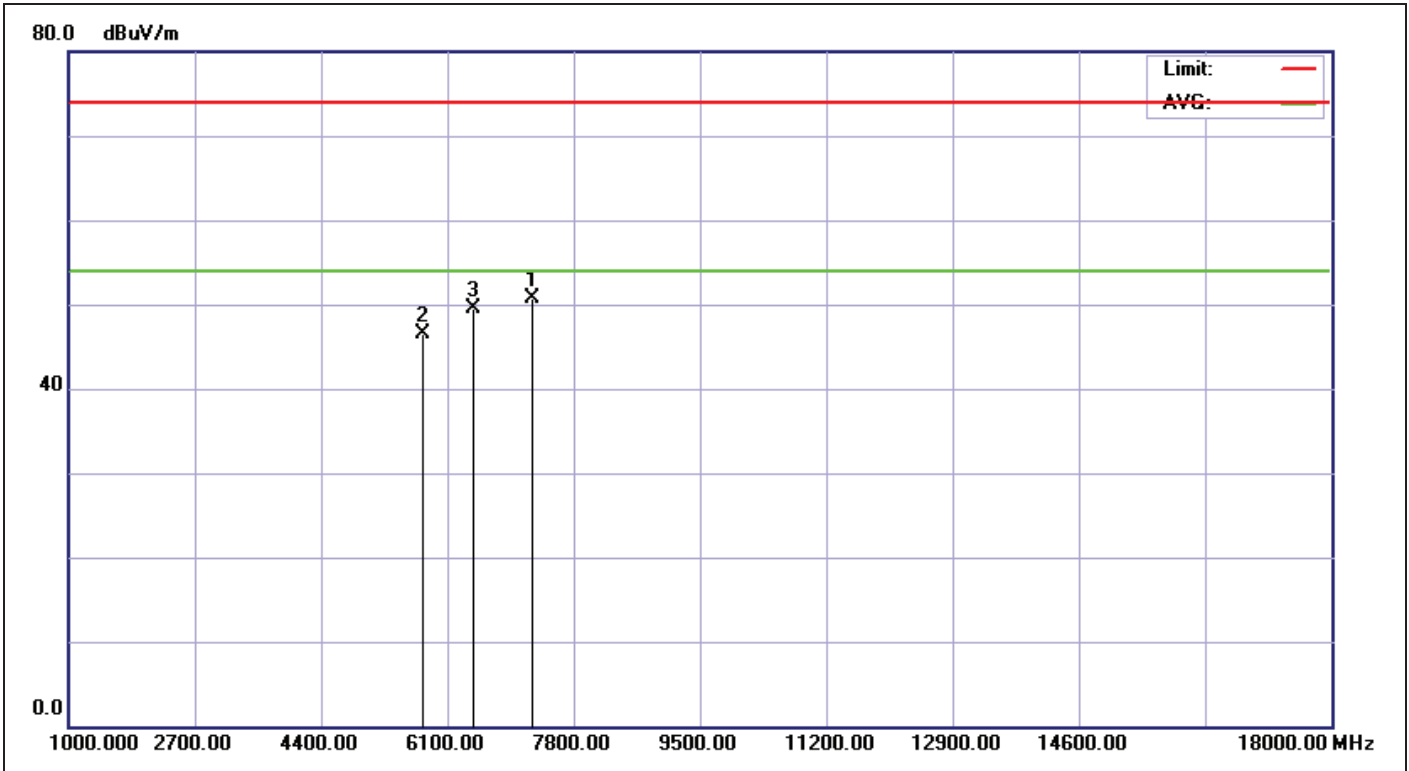


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012-12-20 AM 11:00:08
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	G CH2437		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7241.000	6.51	44.21	50.72	74.00	-23.28	peak	100	360	
2	5772.000	1.26	45.20	46.46	74.00	-27.54	peak	100	360	
3	6452.000	4.73	44.78	49.51	74.00	-24.49	peak	100	360	

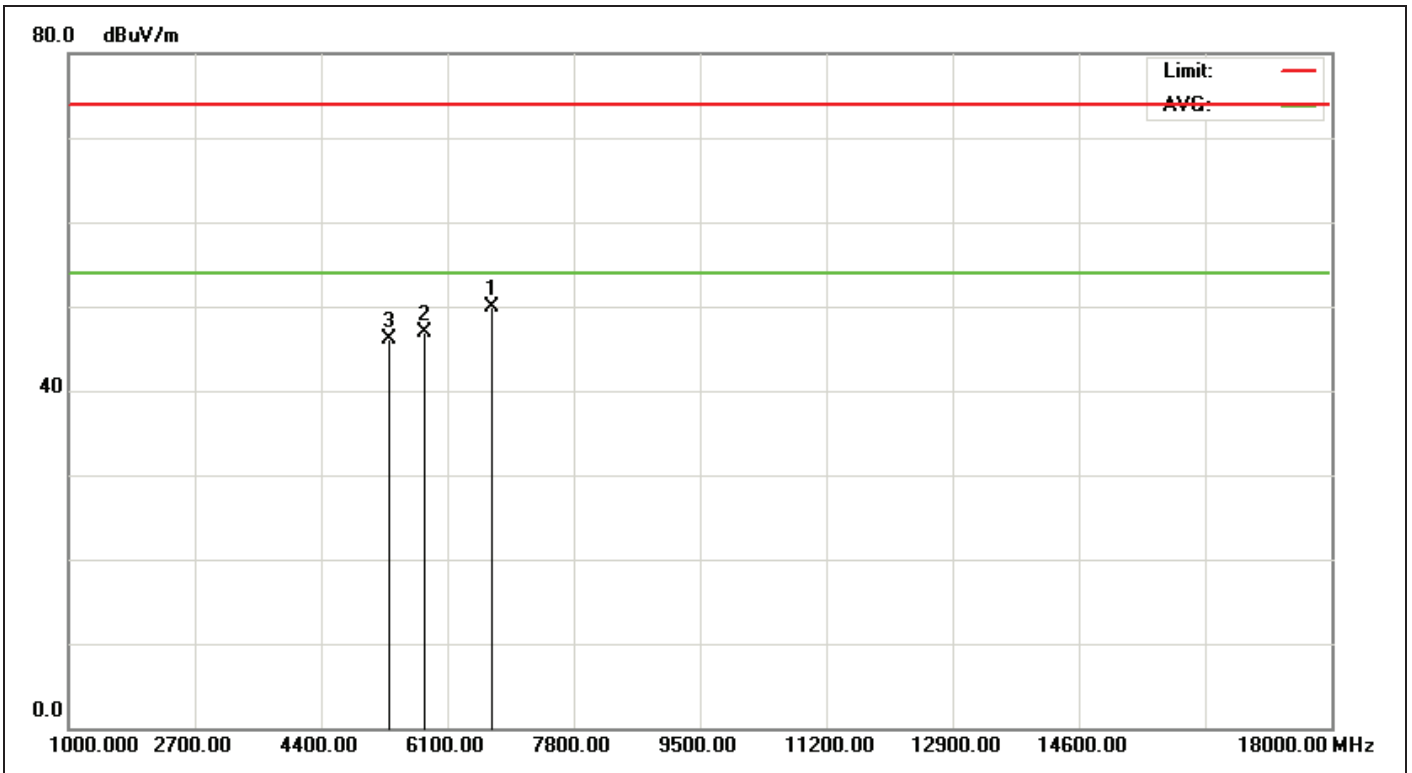


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 AM 11:02:58
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	G CH2437		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	6697.000	5.18	44.74	49.92	74.00	-24.08	peak	100	0	
2	5799.000	1.43	45.41	46.84	74.00	-27.16	peak	100	0	
3	5309.000	-1.58	47.76	46.18	74.00	-27.82	peak	100	0	

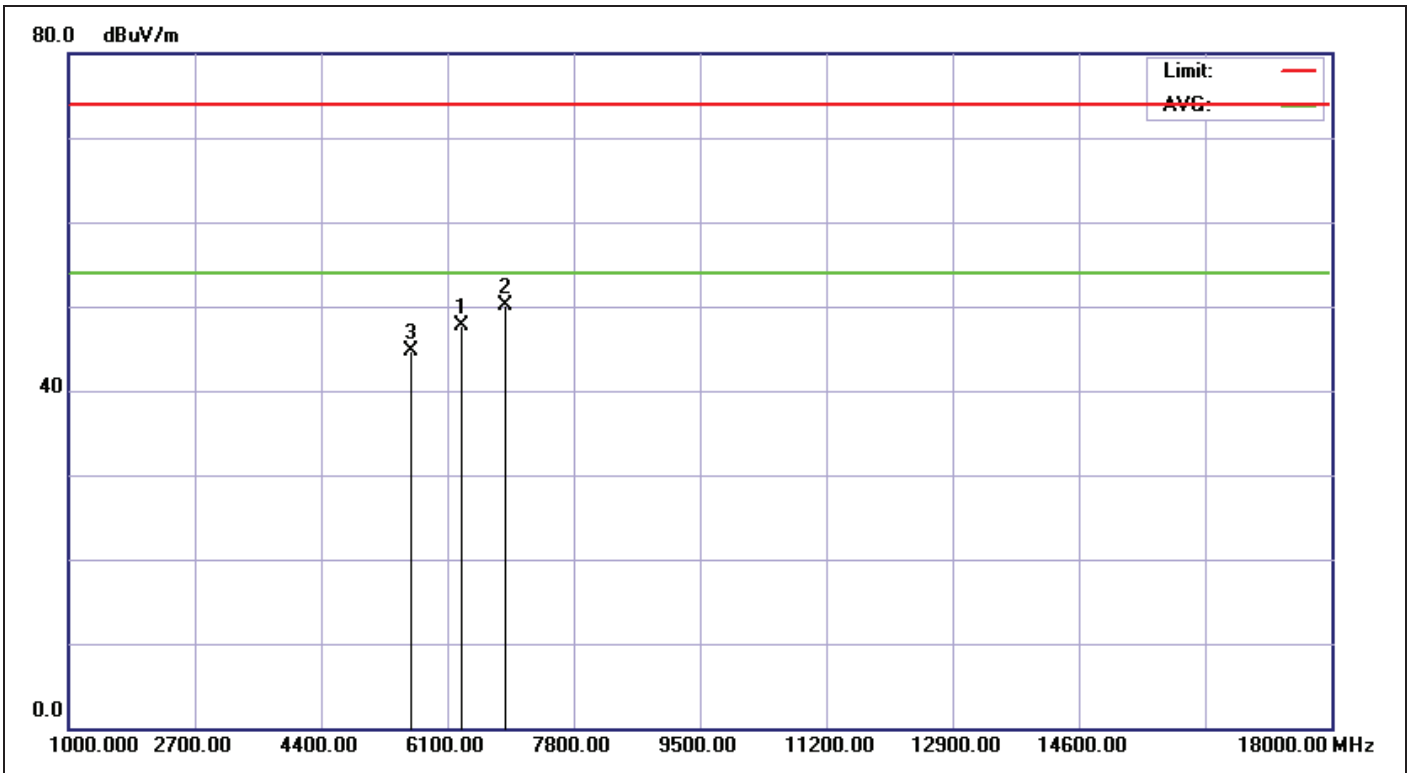


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 AM 11:05:50
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	G CH2462		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	6289.000	4.03	43.60	47.63	74.00	-26.37	peak	100	360	
2	6887.000	5.40	44.74	50.14	74.00	-23.86	peak	100	360	
3	5610.000	0.16	44.58	44.74	74.00	-29.26	peak	100	360	

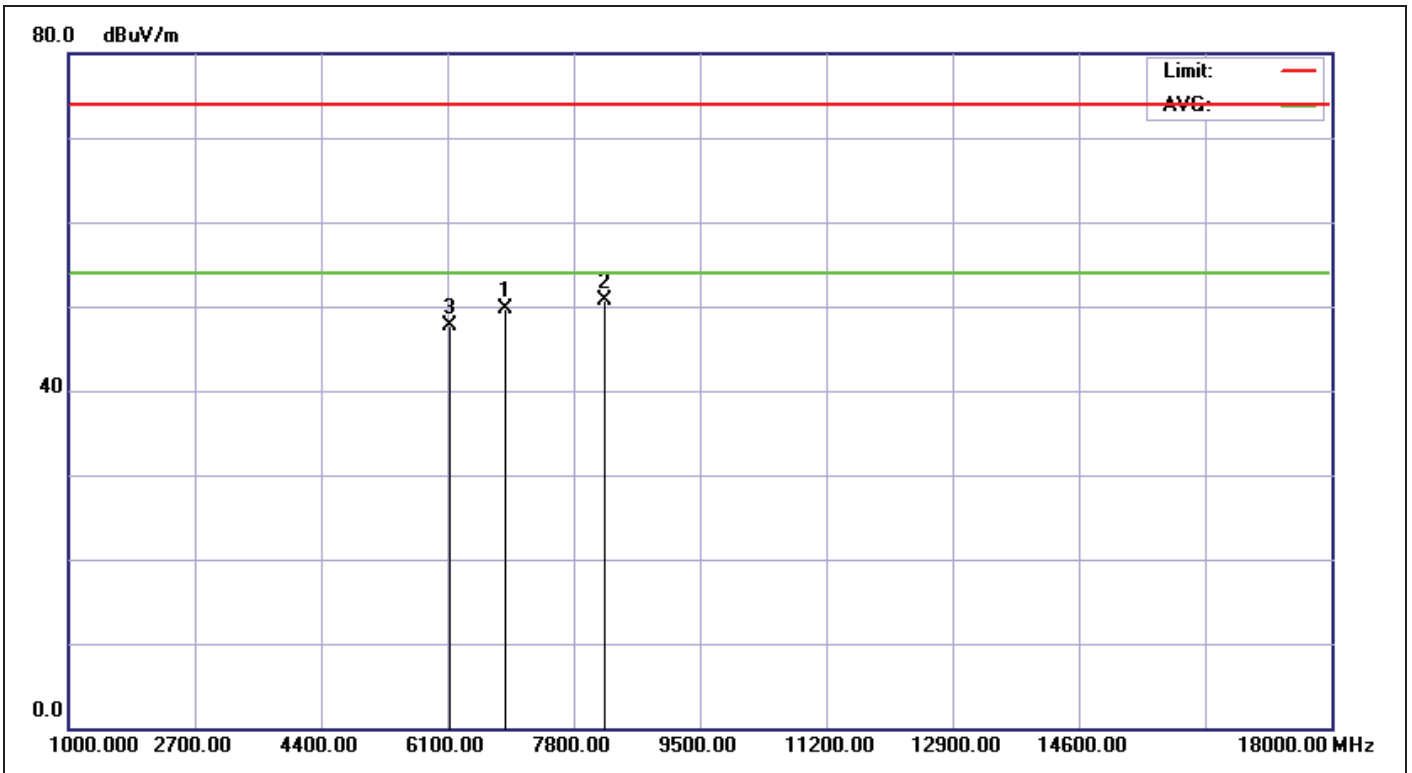


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 AM 11:07:29
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	G CH2462		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	6889.000	5.41	44.37	49.78	74.00	-24.22	peak	100	0	
2	8222.000	7.56	43.21	50.77	74.00	-23.23	peak	100	0	
3	6127.000	3.33	44.45	47.78	74.00	-26.22	peak	100	0	

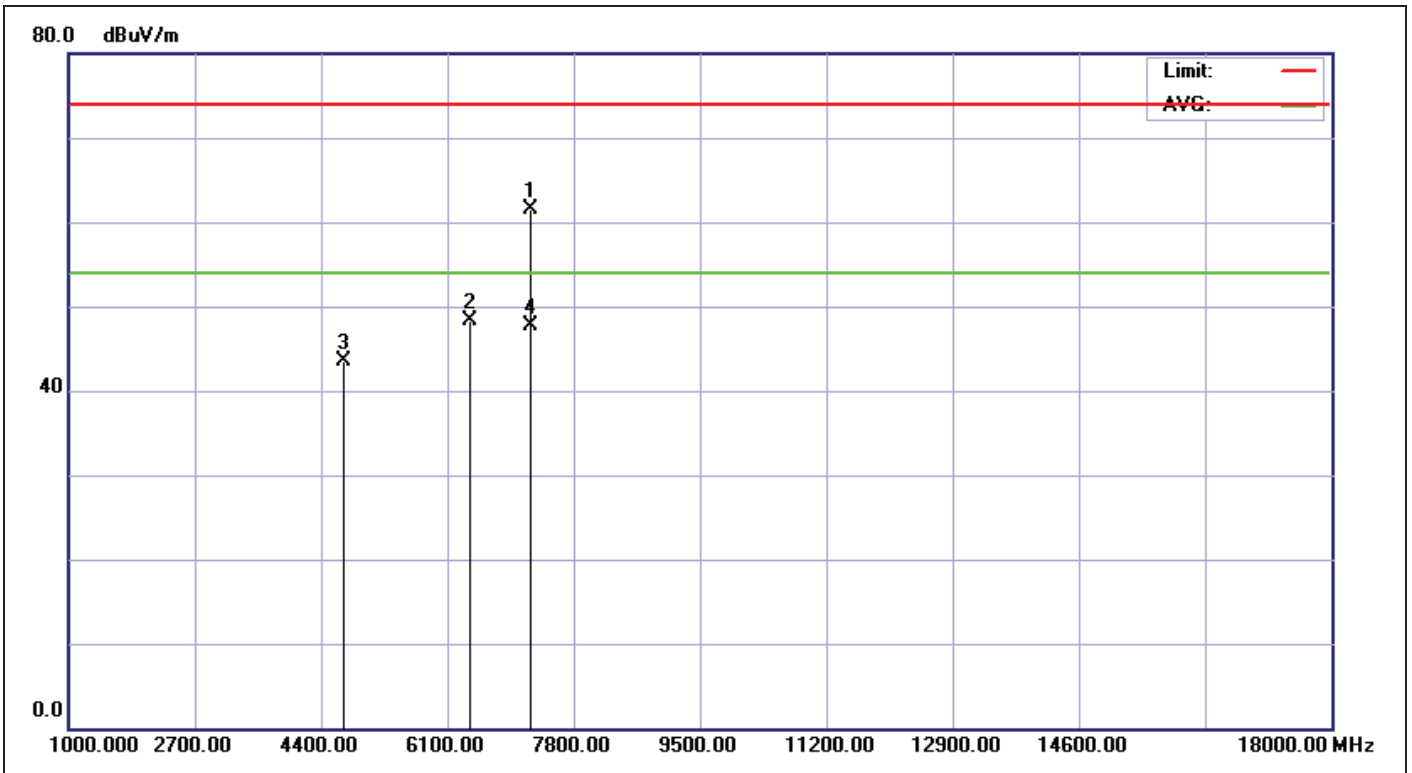


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 AM 11:09:09
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N CH2412		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7215.000	6.40	55.09	61.49	74.00	-12.51	peak	100	360	
2	6399.000	4.51	43.89	48.40	74.00	-25.60	peak	100	360	
3	4713.000	-4.55	47.99	43.44	74.00	-30.56	peak	100	360	
4	7215.000	6.40	41.37	47.77	54.00	-6.23	AVG			

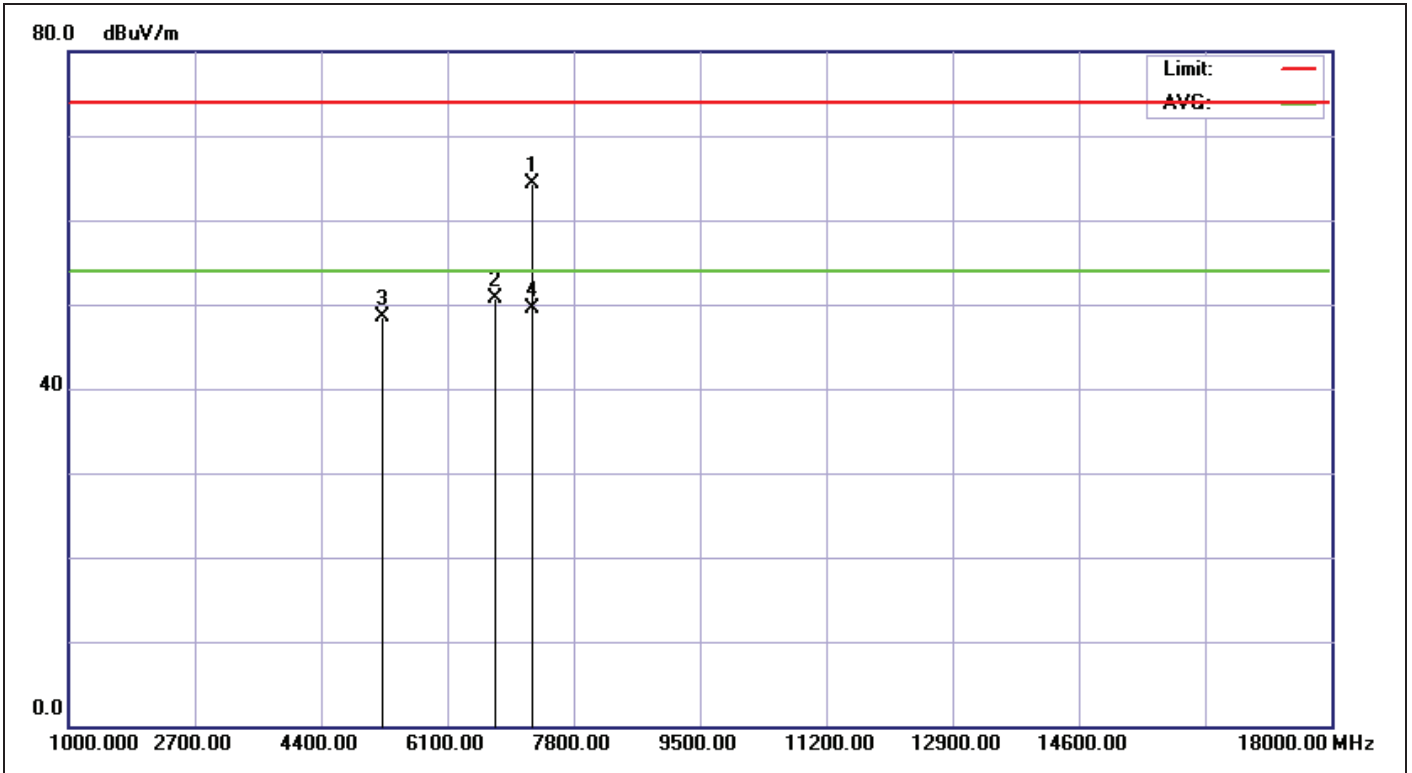


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 AM 11:17:24
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N CH2412		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7238.000	6.49	57.91	64.40	74.00	-9.60	peak	100	0	
2	6748.000	5.23	45.42	50.65	74.00	-23.35	peak	100	0	
3	5225.000	-2.04	50.59	48.55	74.00	-25.45	peak	100	0	
4	7238.000	6.49	43.00	49.49	54.00	-4.51	AVG			

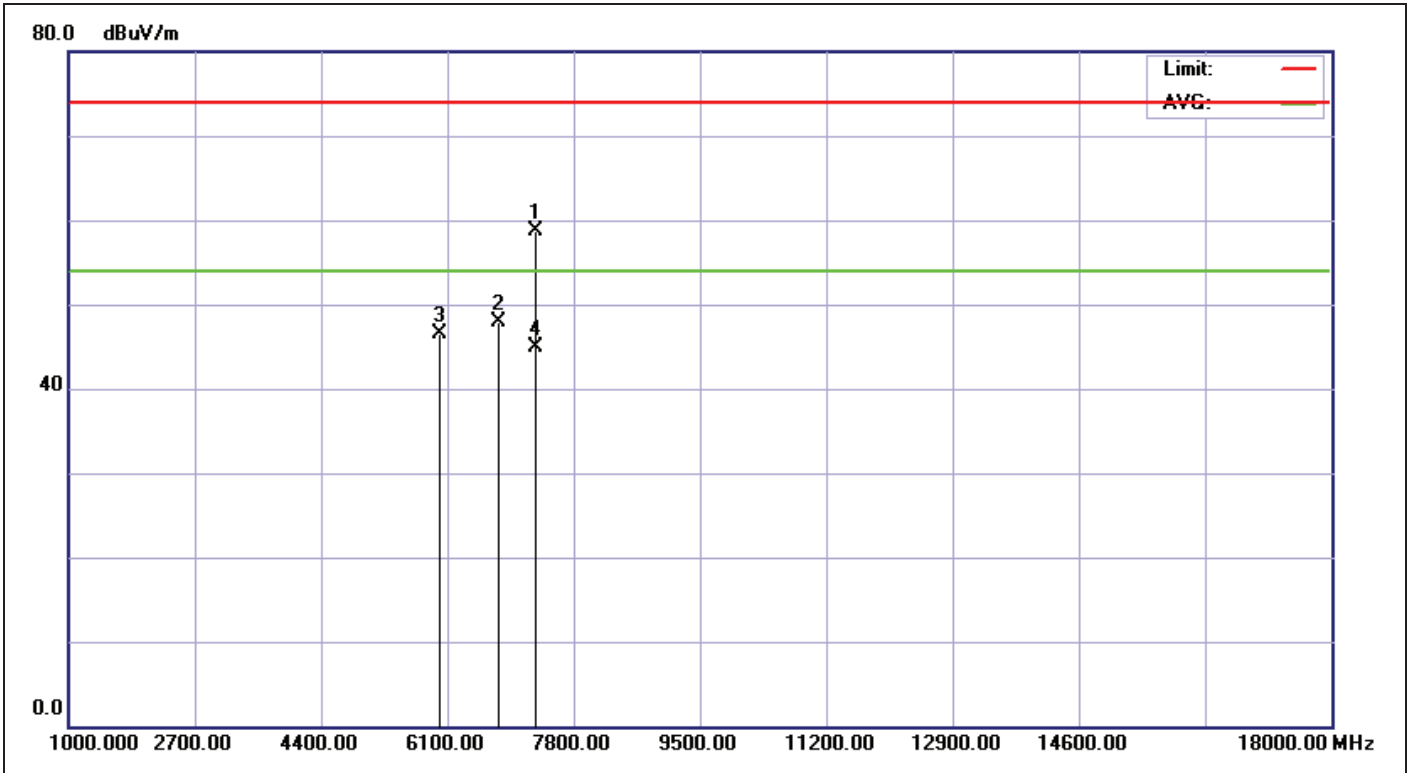


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 AM 11:28:32
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N CH2437		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7286.000	6.69	51.94	58.63	74.00	-15.37	peak	100	148	
2	6796.000	5.30	42.69	47.99	74.00	-26.01	peak	100	148	
3	6007.000	2.81	43.68	46.49	74.00	-27.51	peak	100	148	
4	7286.000	6.69	38.20	44.89	54.00	-9.11	AVG			

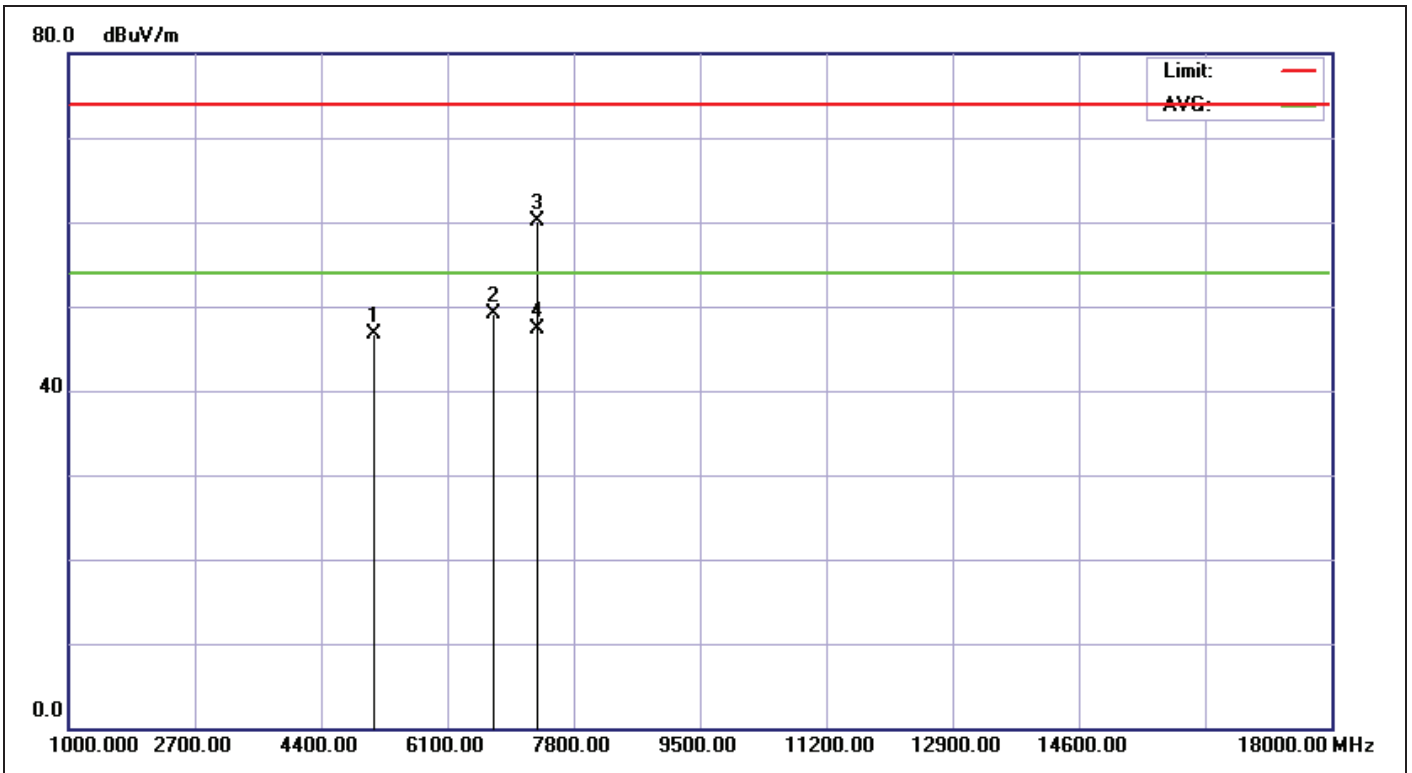


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 AM 11:29:43
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N CH2437		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	5110.000	-2.65	49.33	46.68	74.00	-27.32	peak	100	360	
2	6715.000	5.20	43.84	49.04	74.00	-24.96	peak	100	360	
3	7313.000	6.79	53.34	60.13	74.00	-13.87	peak	100	360	
4	7313.000	6.79	40.46	47.25	54.00	-6.75	AVG			

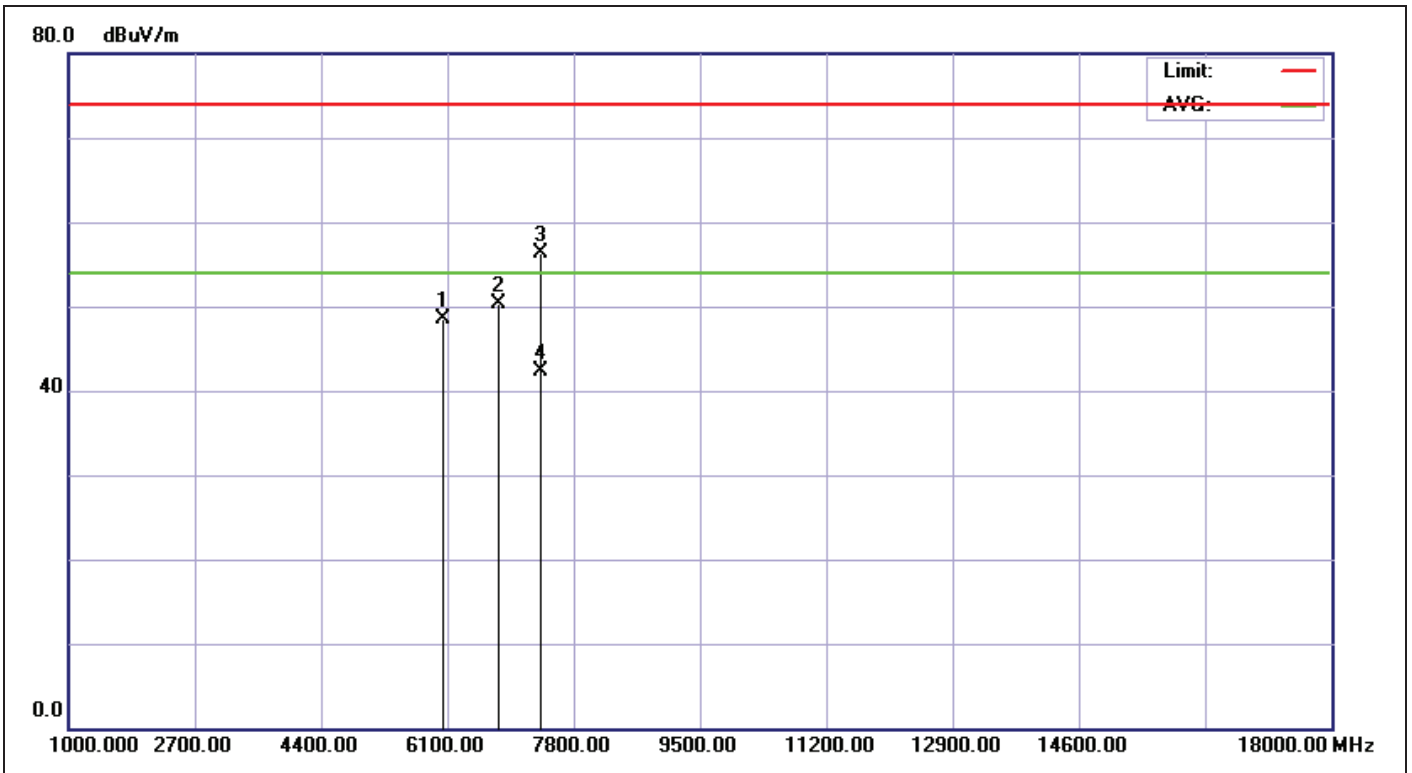


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 AM 11:39:07
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N CH2462		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	6033.000	2.92	45.63	48.55	74.00	-25.45	peak	100	360	
2	6794.000	5.29	45.11	50.40	74.00	-23.60	peak	100	360	
3	7365.000	7.00	49.38	56.38	74.00	-17.62	peak	100	360	
4	7365.000	7.00	35.38	42.38	54.00	-11.62	AVG			

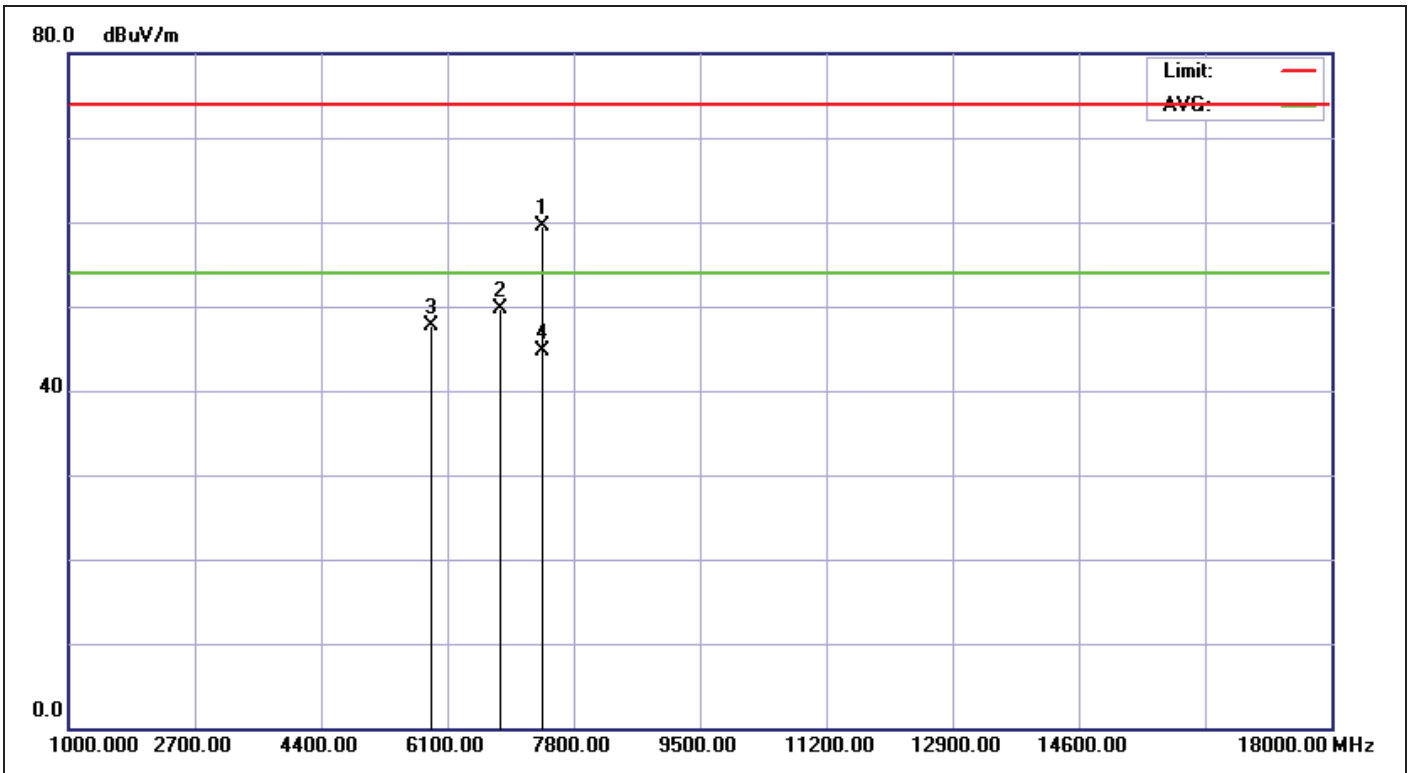


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 AM 11:43:45
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N CH2462		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7380.000	7.07	52.48	59.55	74.00	-14.45	peak	100	360	
2	6809.000	5.32	44.33	49.65	74.00	-24.35	peak	100	360	
3	5884.000	2.00	45.79	47.79	74.00	-26.21	peak	100	360	
4	7380.000	7.07	37.61	44.68	54.00	-9.32	AVG			

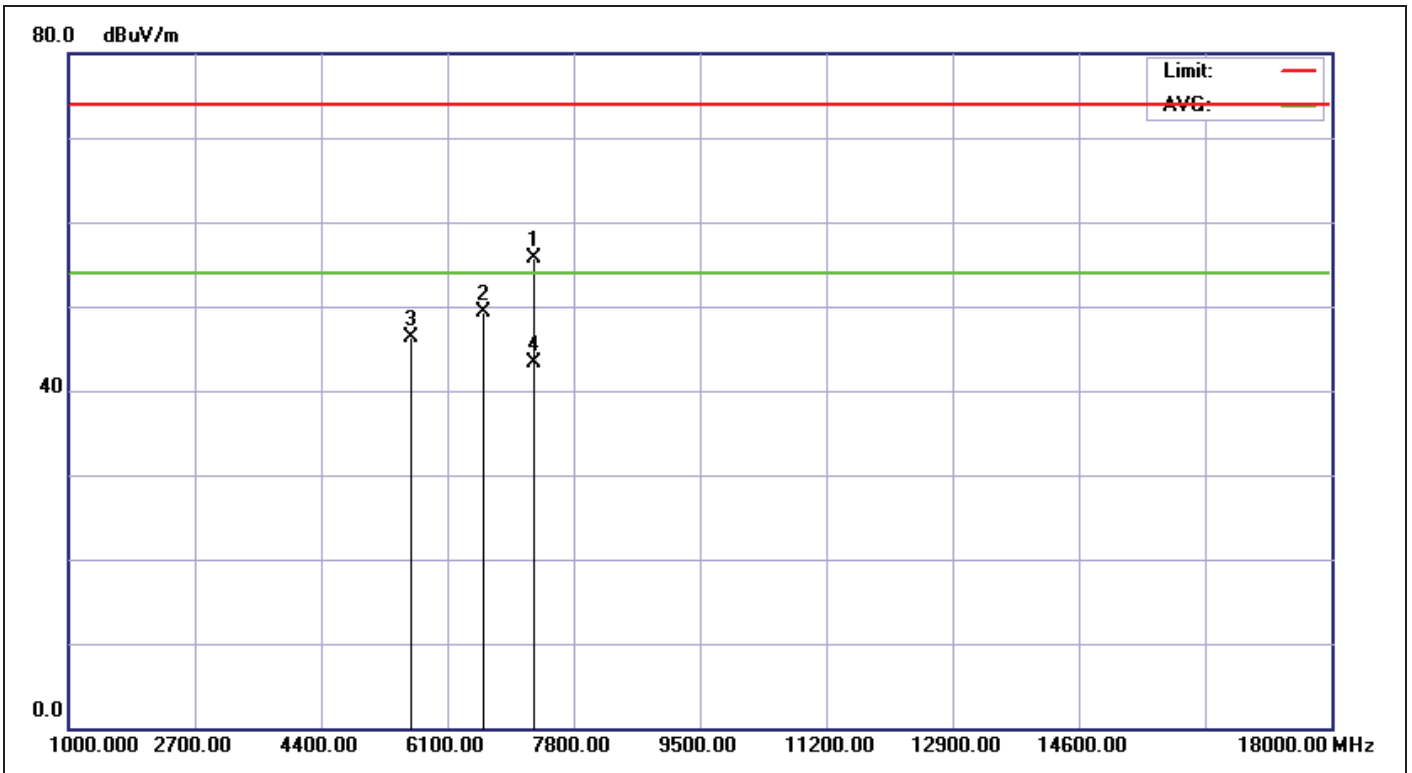


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 AM 11:48:55
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N40 CH2422		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7271.000	6.63	49.05	55.68	74.00	-18.32	peak	100	360	
2	6591.000	5.05	44.30	49.35	74.00	-24.65	peak	100	360	
3	5612.000	0.18	46.13	46.31	74.00	-27.69	peak	100	360	
4	7271.000	6.63	36.71	43.34	54.00	-10.66	AVG			

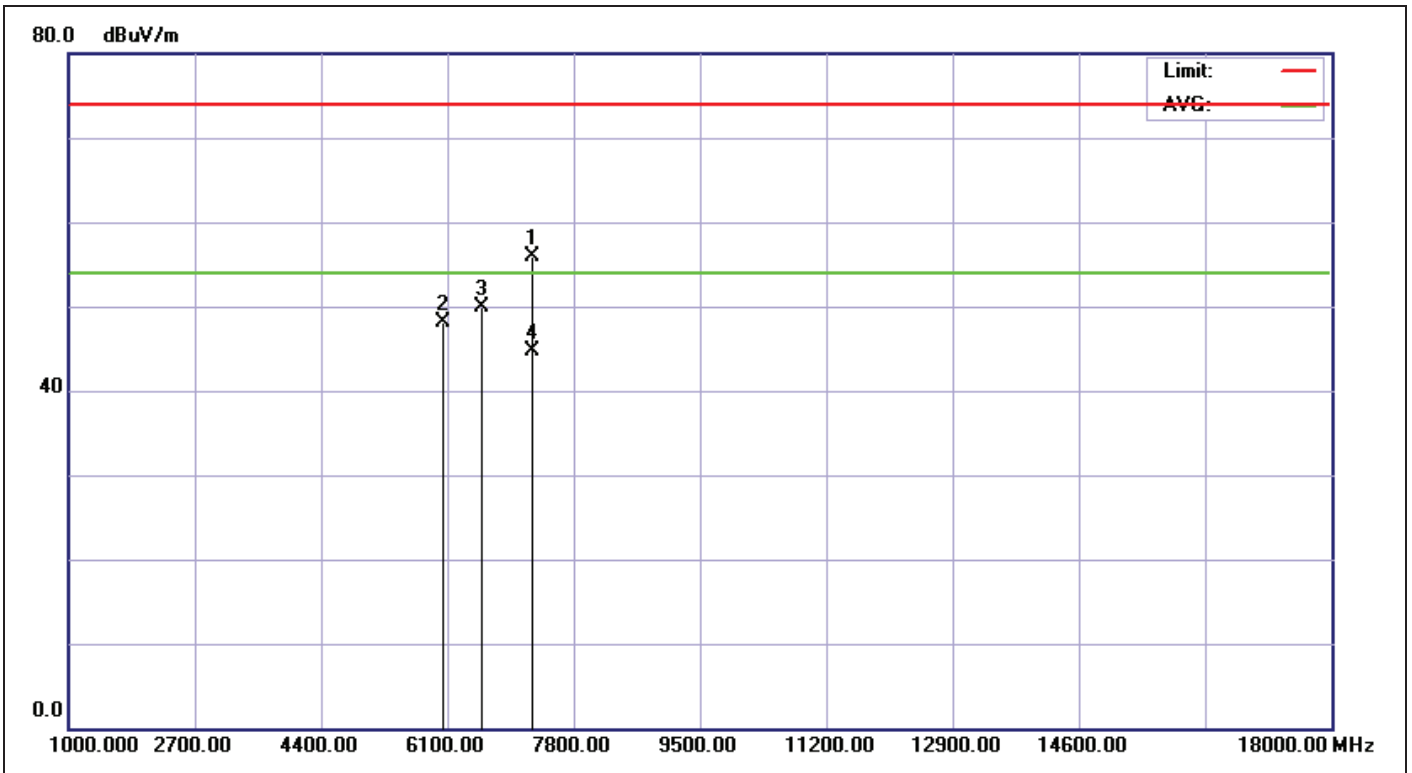


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 01:06:08
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N40 CH2422		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7237.000	6.49	49.41	55.90	74.00	-18.10	peak	100	360	
2	6040.000	2.95	45.11	48.06	74.00	-25.94	peak	100	360	
3	6557.000	5.01	44.85	49.86	74.00	-24.14	peak	100	360	
4	7237.000	6.49	38.14	44.63	54.00	-9.37	AVG			

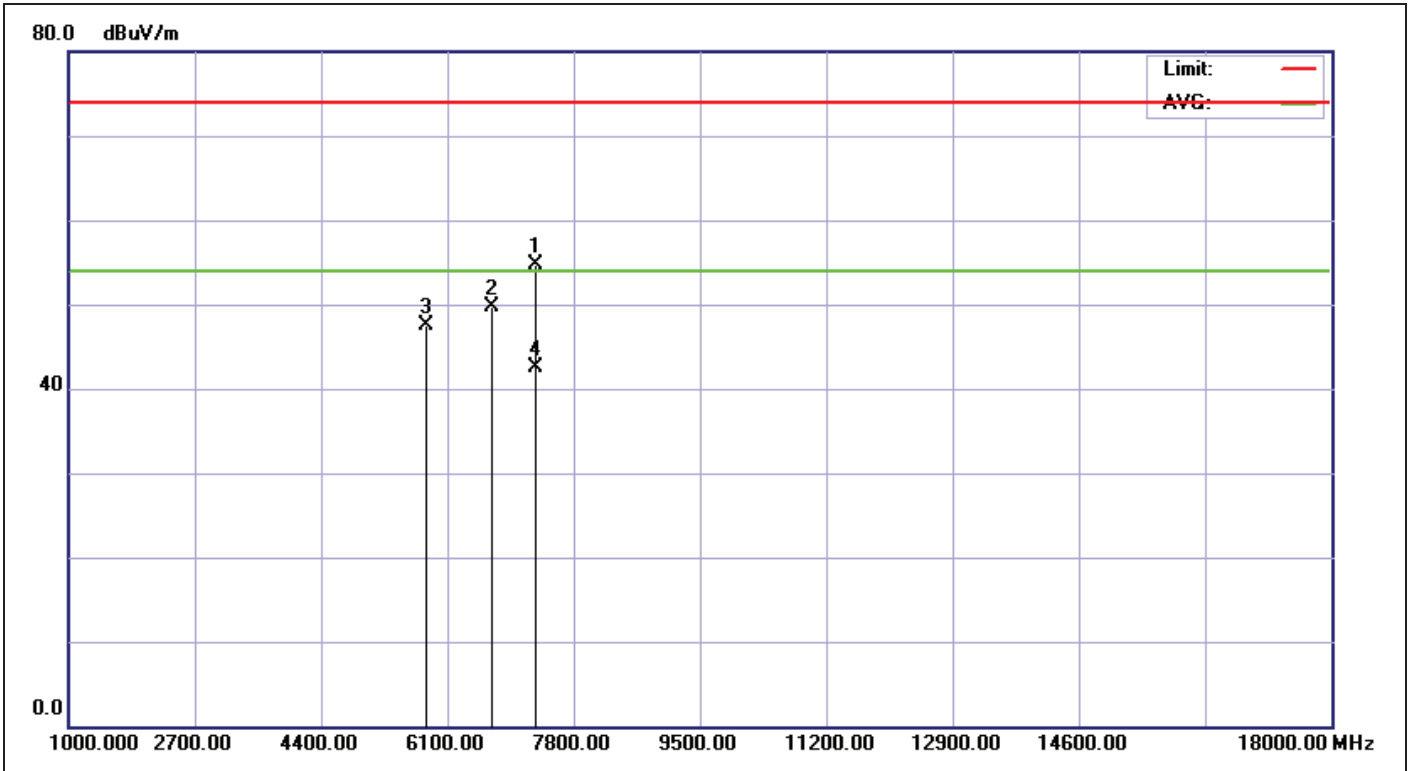


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 01:09:30
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N40 CH2437		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7290.000	6.70	47.95	54.65	74.00	-19.35	peak	100	360	
2	6691.000	5.16	44.48	49.64	74.00	-24.36	peak	100	360	
3	5821.000	1.58	45.92	47.50	74.00	-26.50	peak	100	360	
4	7290.000	6.70	35.84	42.54	54.00	-11.46	AVG			

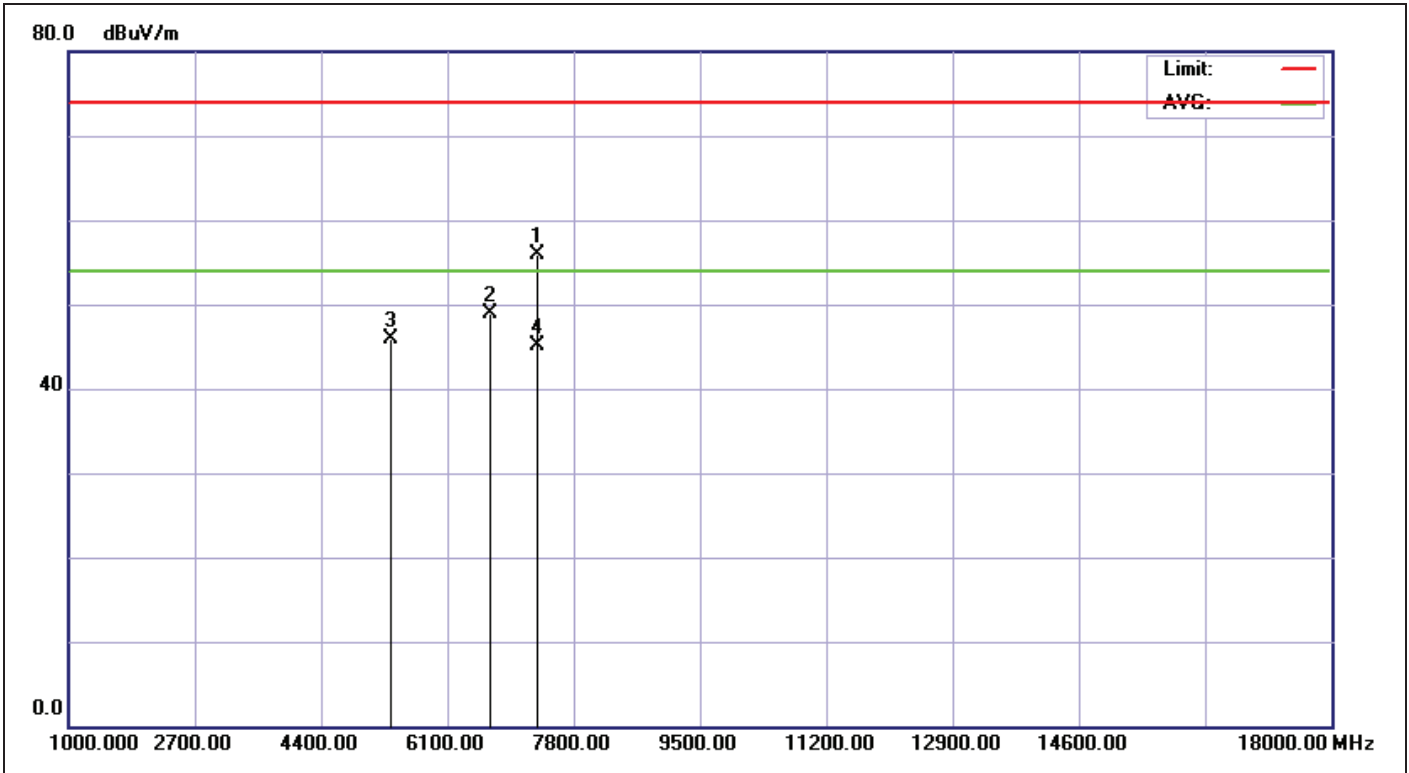


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 01:15:46
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N40 CH2437		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7307.000	6.78	49.21	55.99	74.00	-18.01	peak	100	360	
2	6682.000	5.16	43.80	48.96	74.00	-25.04	peak	100	360	
3	5349.000	-1.37	47.31	45.94	74.00	-28.06	peak	100	360	
4	7307.000	6.78	38.27	45.05	54.00	-8.95	AVG			

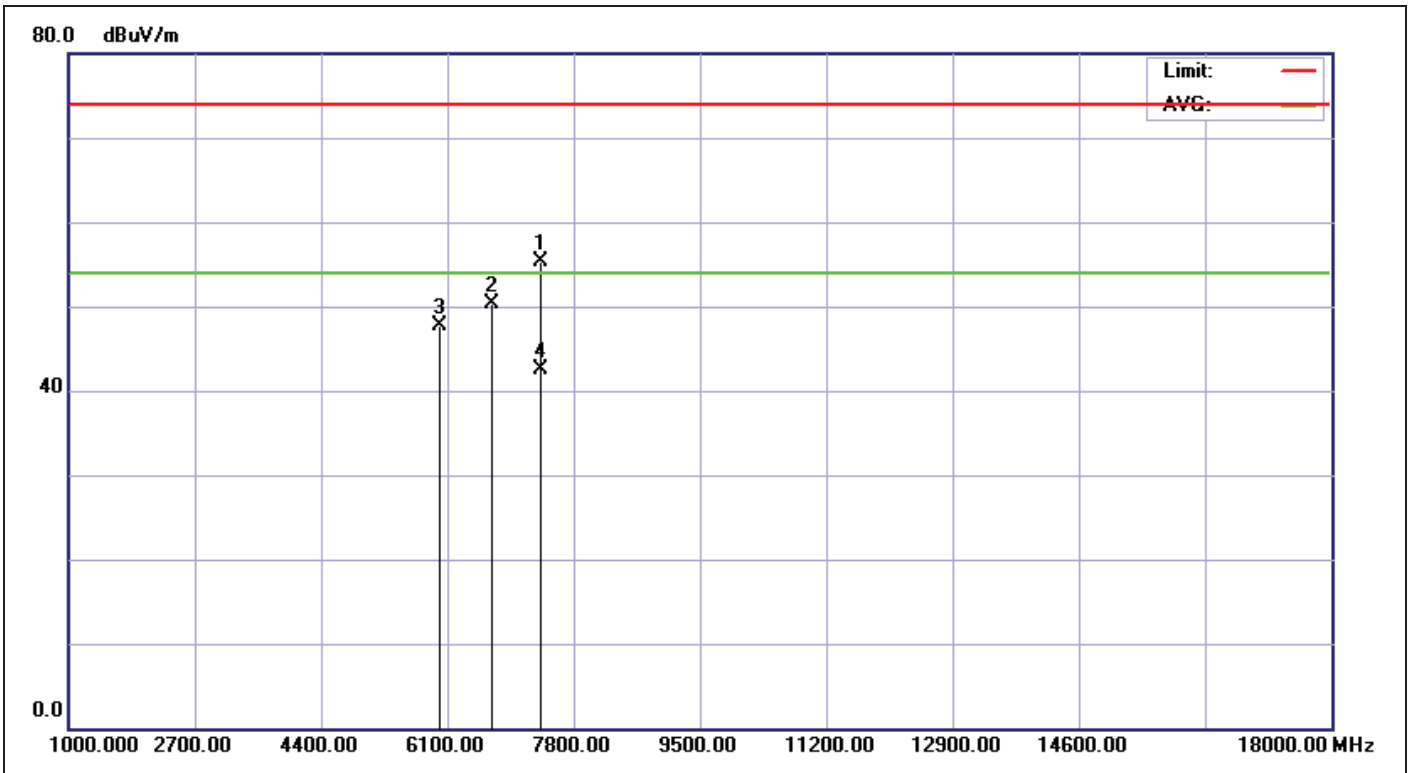


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 01:20:43
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N40 CH2452		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7360.000	6.99	48.28	55.27	74.00	-18.73	peak	100	360	
2	6707.000	5.19	45.09	50.28	74.00	-23.72	peak	100	360	
3	6000.000	2.78	44.84	47.62	74.00	-26.38	peak	100	360	
4	7360.000	6.99	35.59	42.58	54.00	-11.42	AVG			

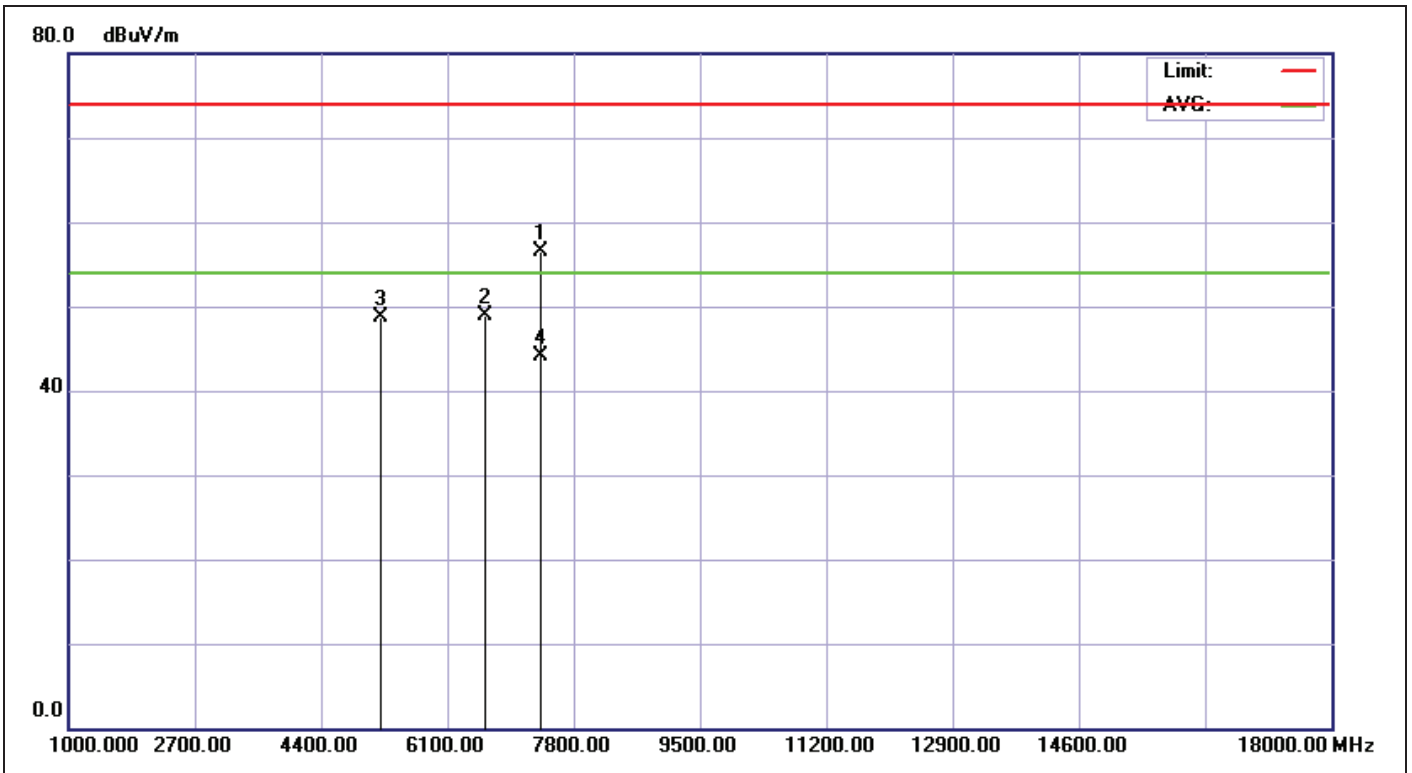


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 01:26:54
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N40 CH2452		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7355.000	6.96	49.57	56.53	74.00	-17.47	peak	100	360	
2	6620.000	5.08	43.79	48.87	74.00	-25.13	peak	100	360	
3	5206.000	-2.14	50.86	48.72	74.00	-25.28	peak	100	360	
4	7355.000	6.96	37.10	44.06	54.00	-9.94	AVG			

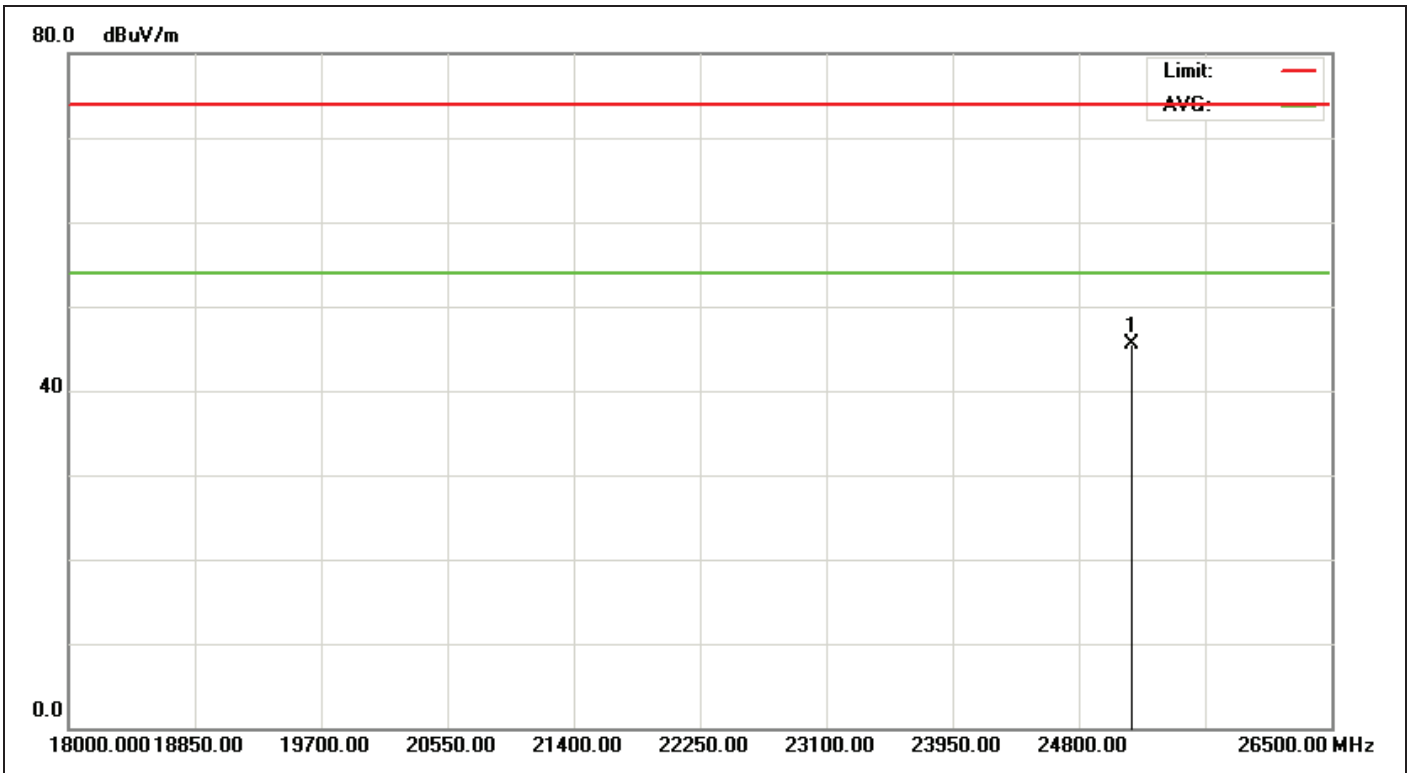


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 07:59:34
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	B CH2412		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	25160.000	26.17	19.36	45.53	74.00	-28.47	peak	100	360	

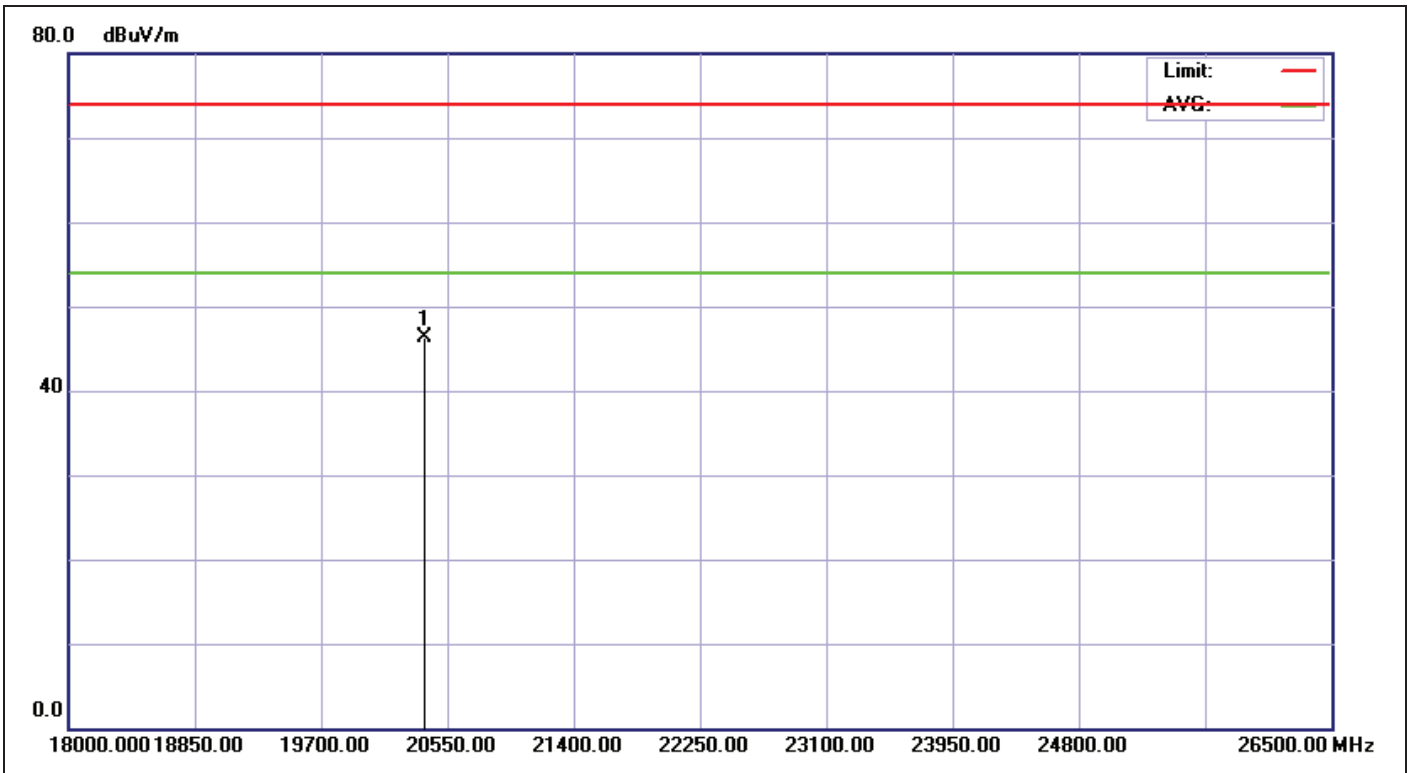


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 08:00:10
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	B CH2412		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20400.000	26.58	19.67	46.25	74.00	-27.75	peak	100	360	

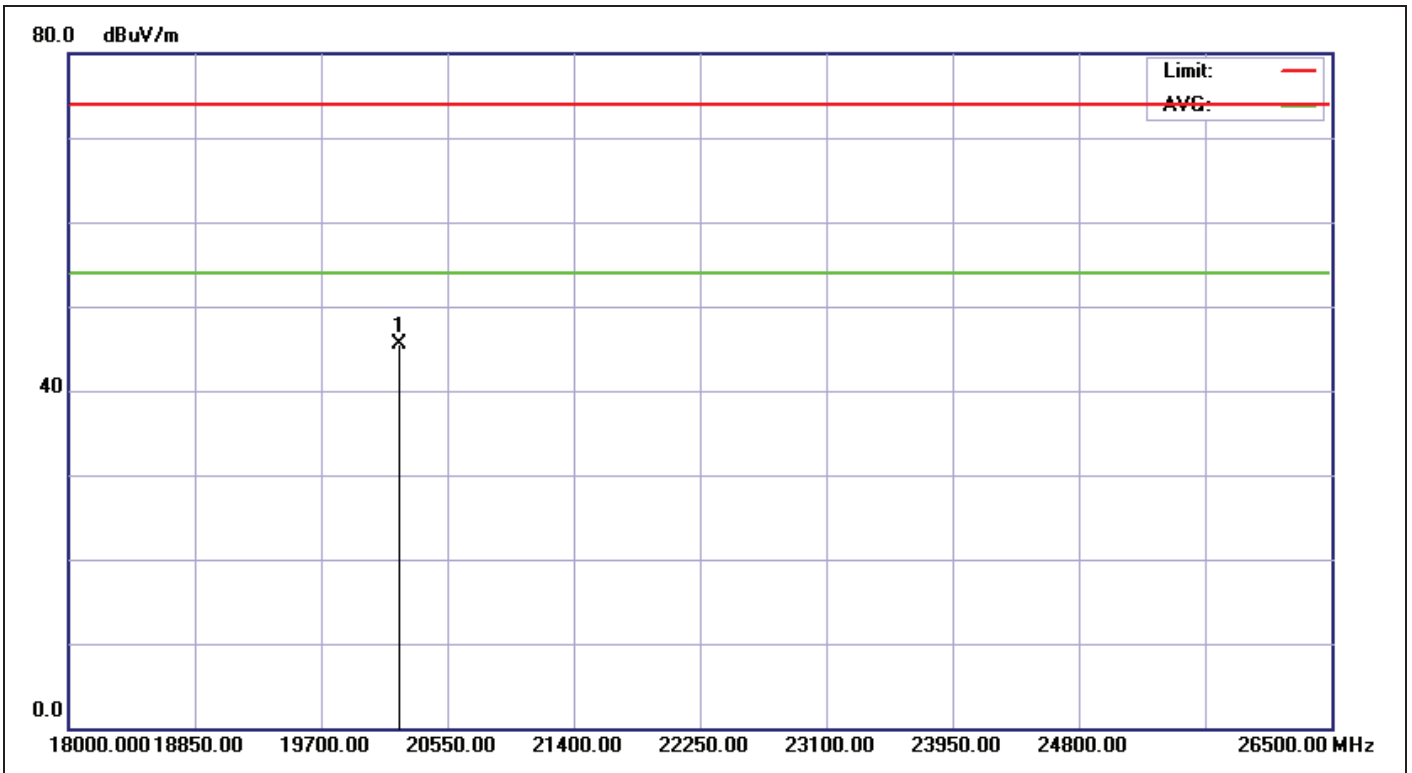

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 08:00:37
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	B CH2437		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20224.000	26.45	19.11	45.56	74.00	-28.44	peak	100	360	

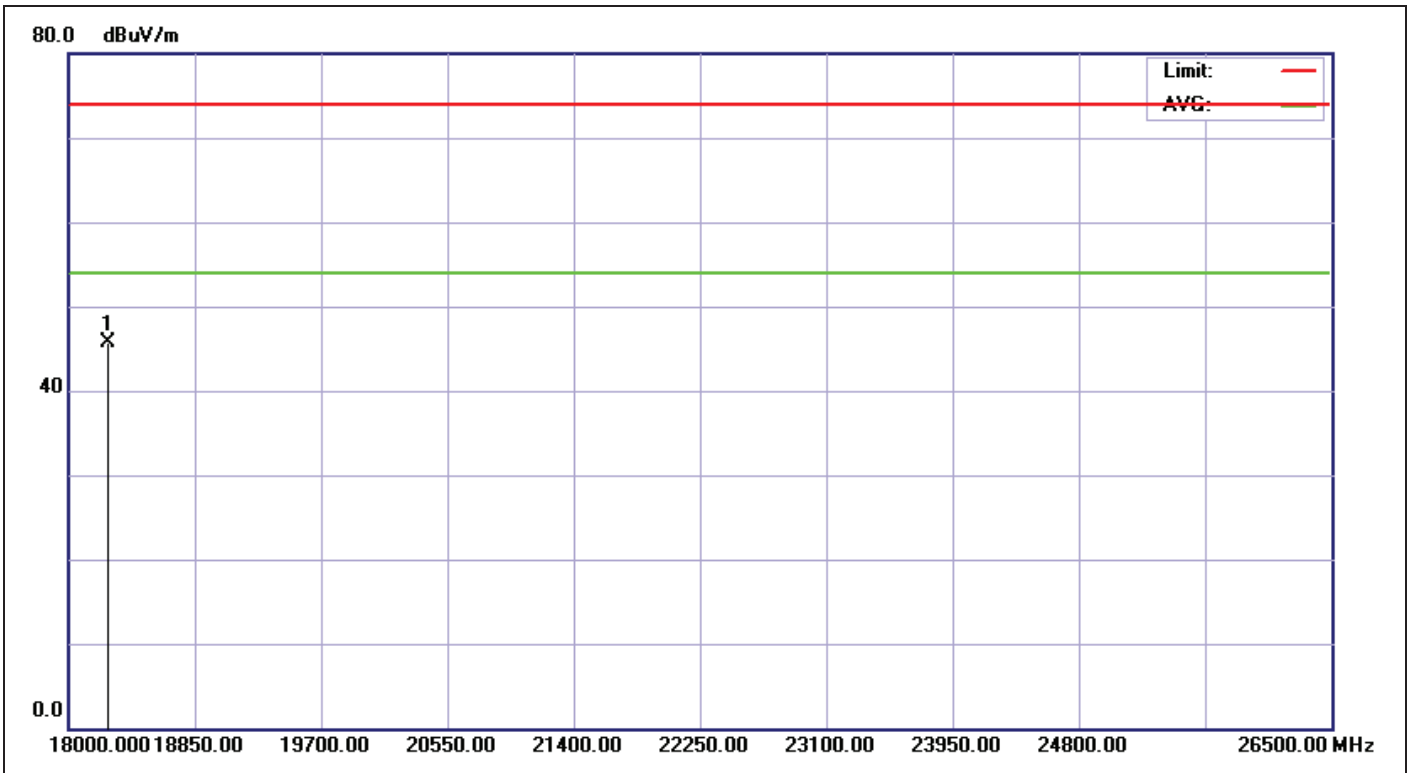

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 08:01:14
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	B CH2437		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	18265.000	25.03	20.58	45.61	74.00	-28.39	peak	100	360	



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

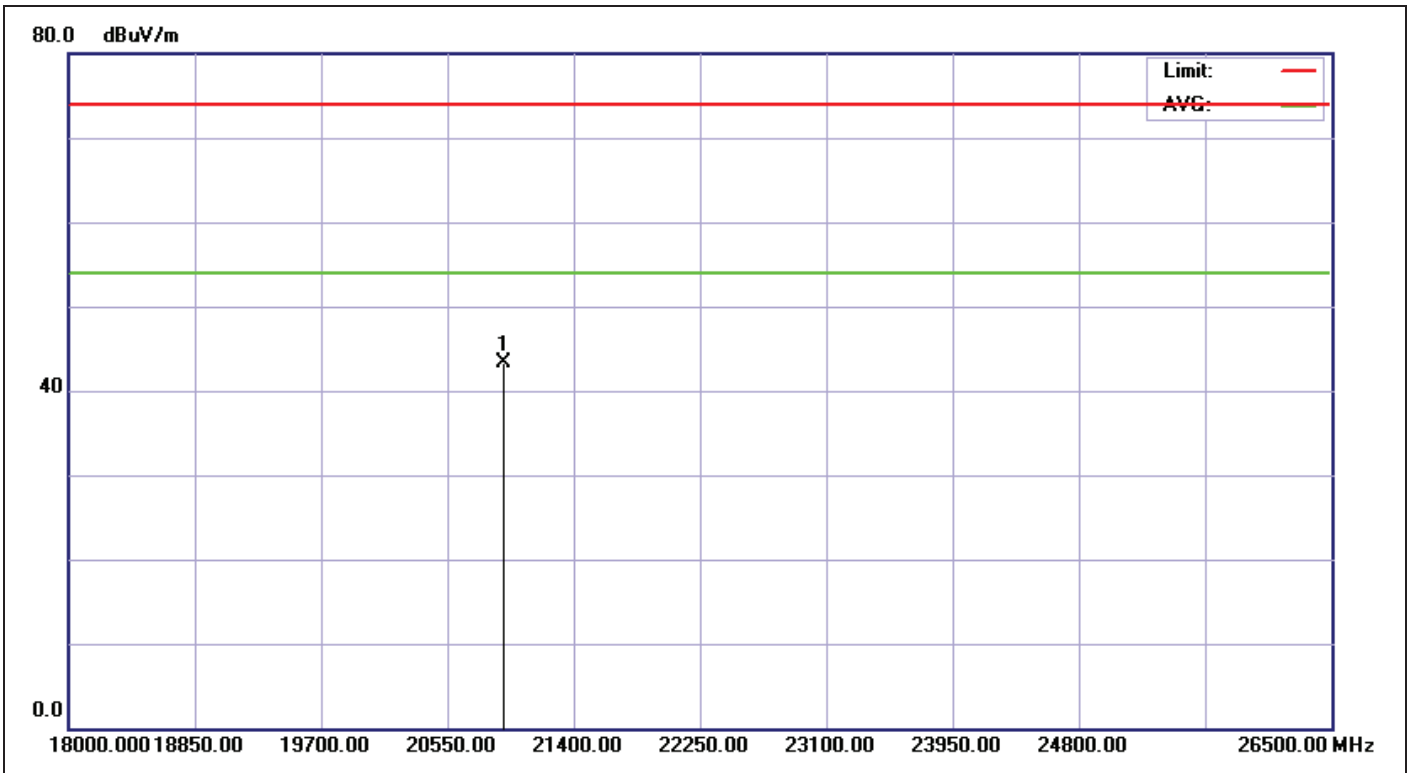

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 08:02:31
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	B CH2462		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20931.000	25.35	18.05	43.40	74.00	-30.60	peak	100	360	



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

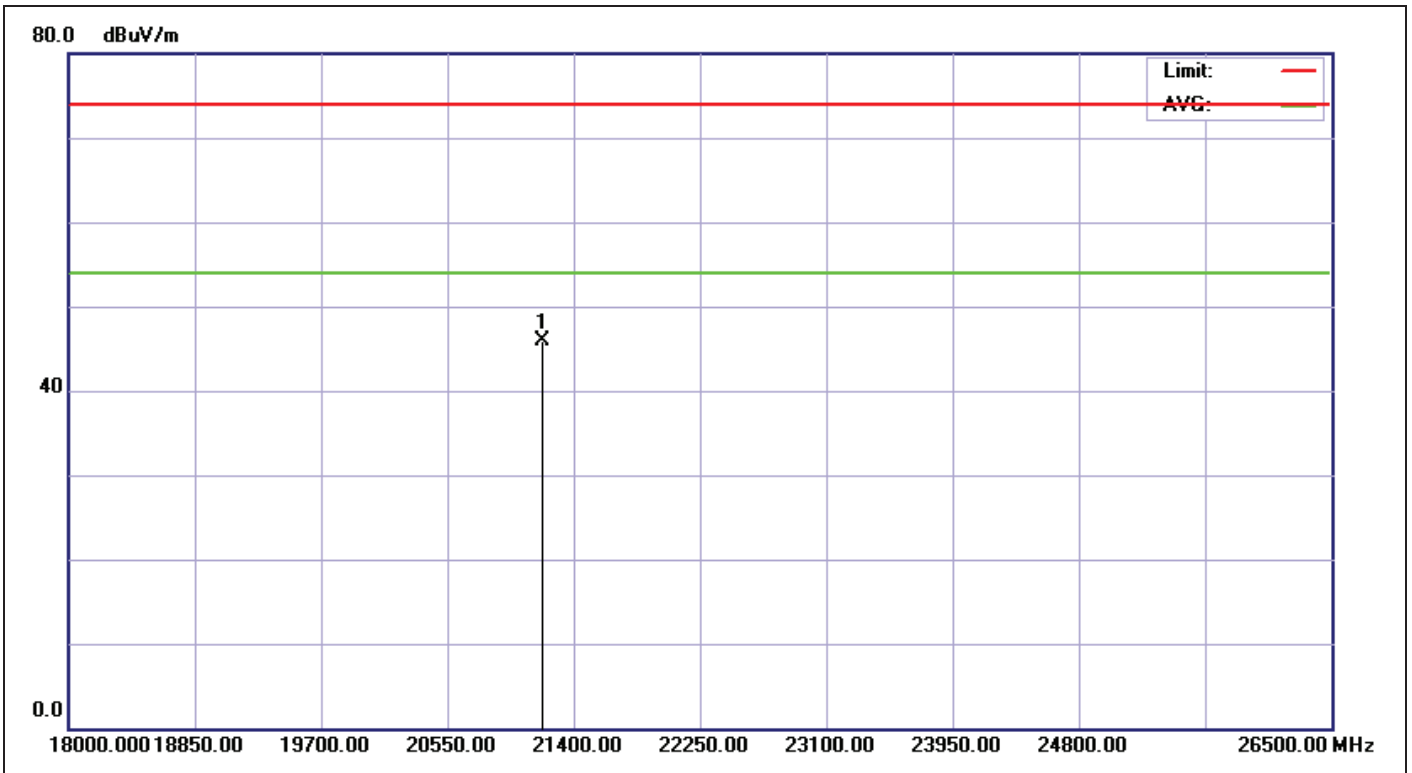

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 08:03:04
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	B CH2462		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21189.000	25.30	20.63	45.93	74.00	-28.07	peak	100	360	



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

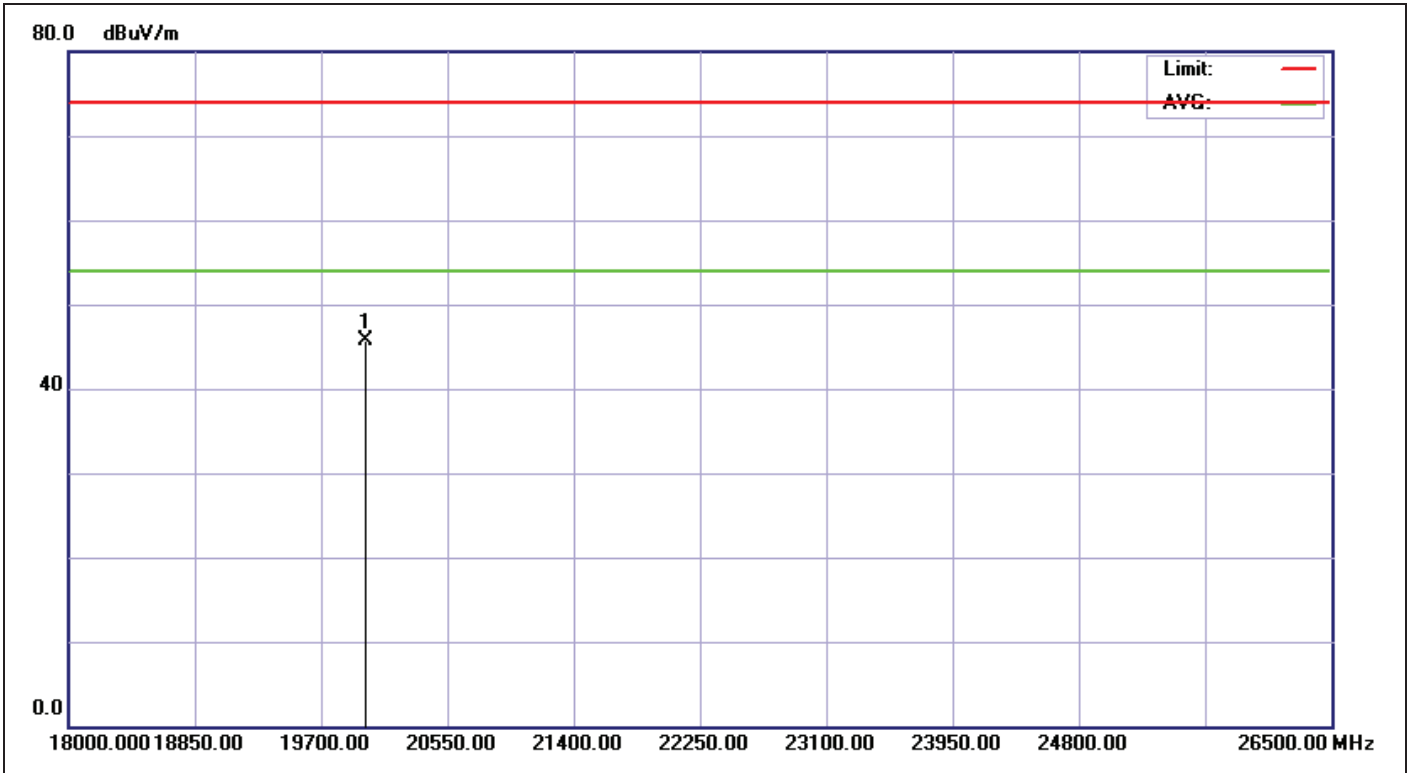

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 08:03:30
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	G CH2412		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20006.000	26.29	19.37	45.66	74.00	-28.34	peak	100	360	



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

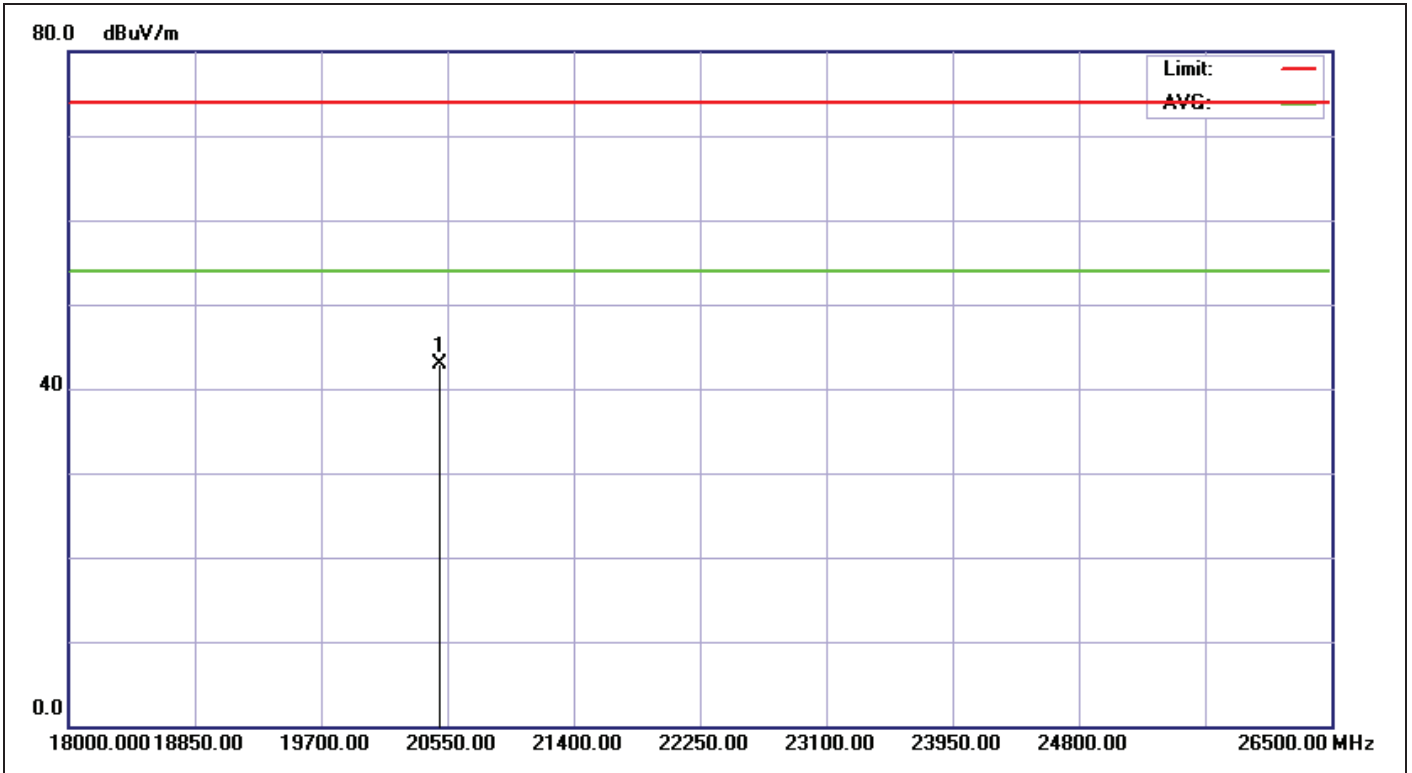

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 08:04:23
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	G CH2412		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20496.000	26.66	16.18	42.84	74.00	-31.16	peak	100	360	



TUV Taiwan


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

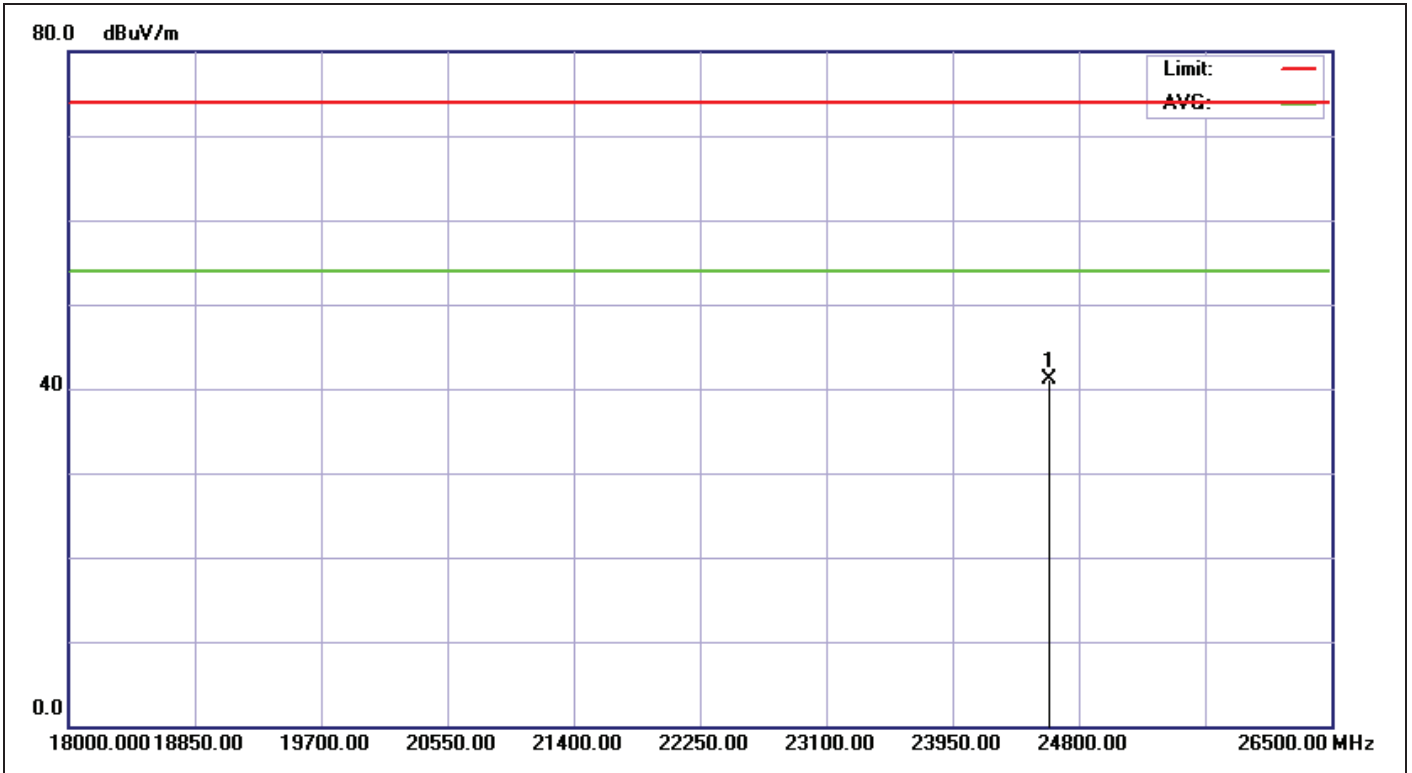

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 08:04:50
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	G CH2437		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	24603.000	25.79	15.40	41.19	74.00	-32.81	peak	100	360	

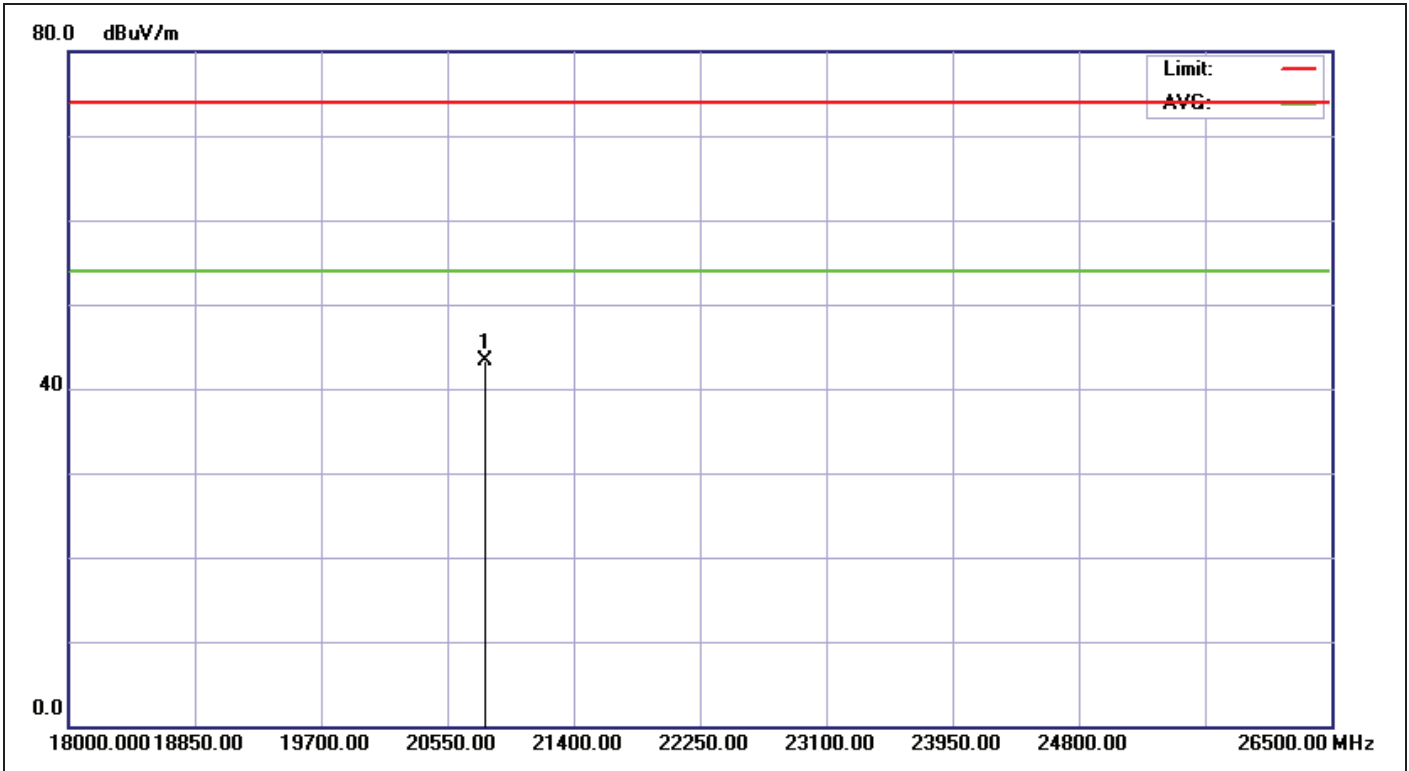

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 08:05:18
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	G CH2437		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20808.000	25.73	17.58	43.31	74.00	-30.69	peak	100	360	



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

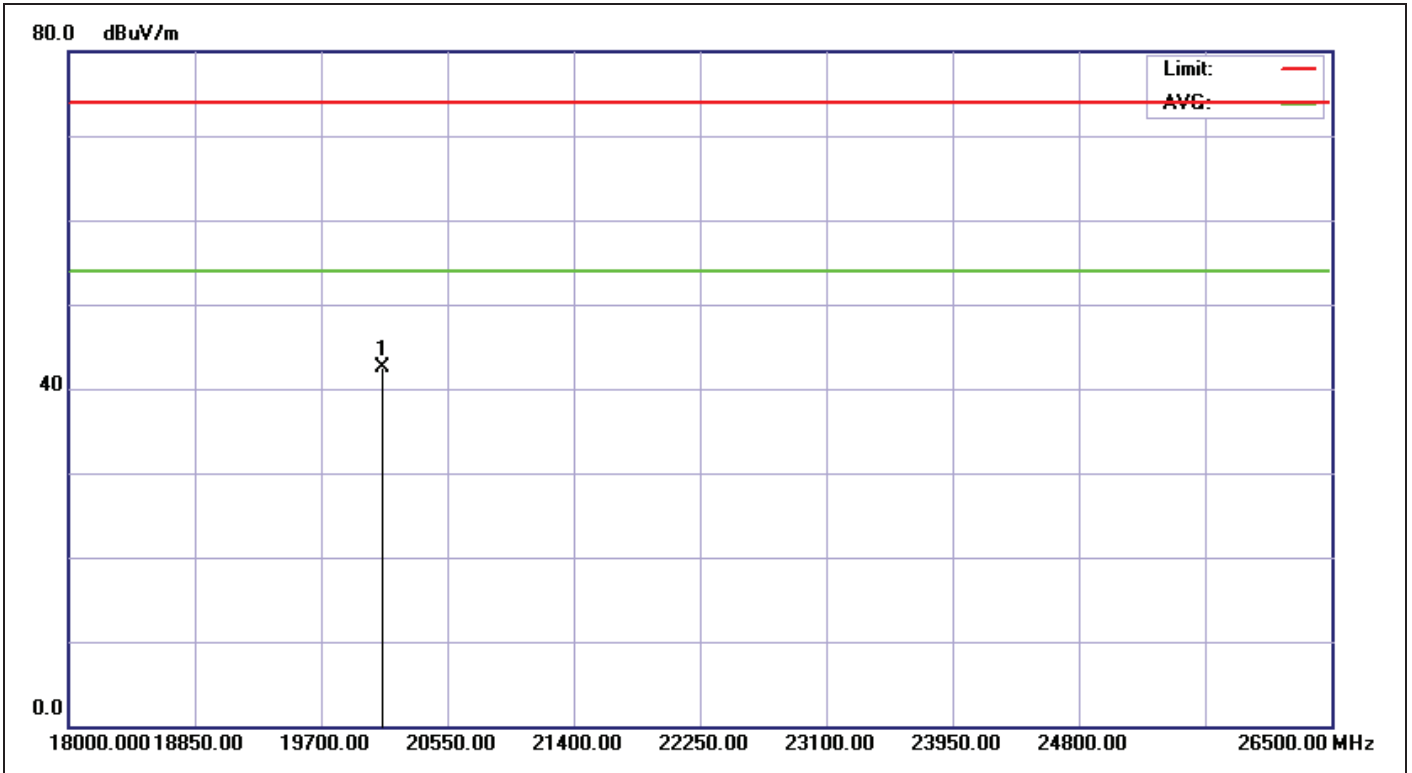

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 08:05:40
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	G CH2462		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20115.000	26.37	16.09	42.46	74.00	-31.54	peak	100	360	



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

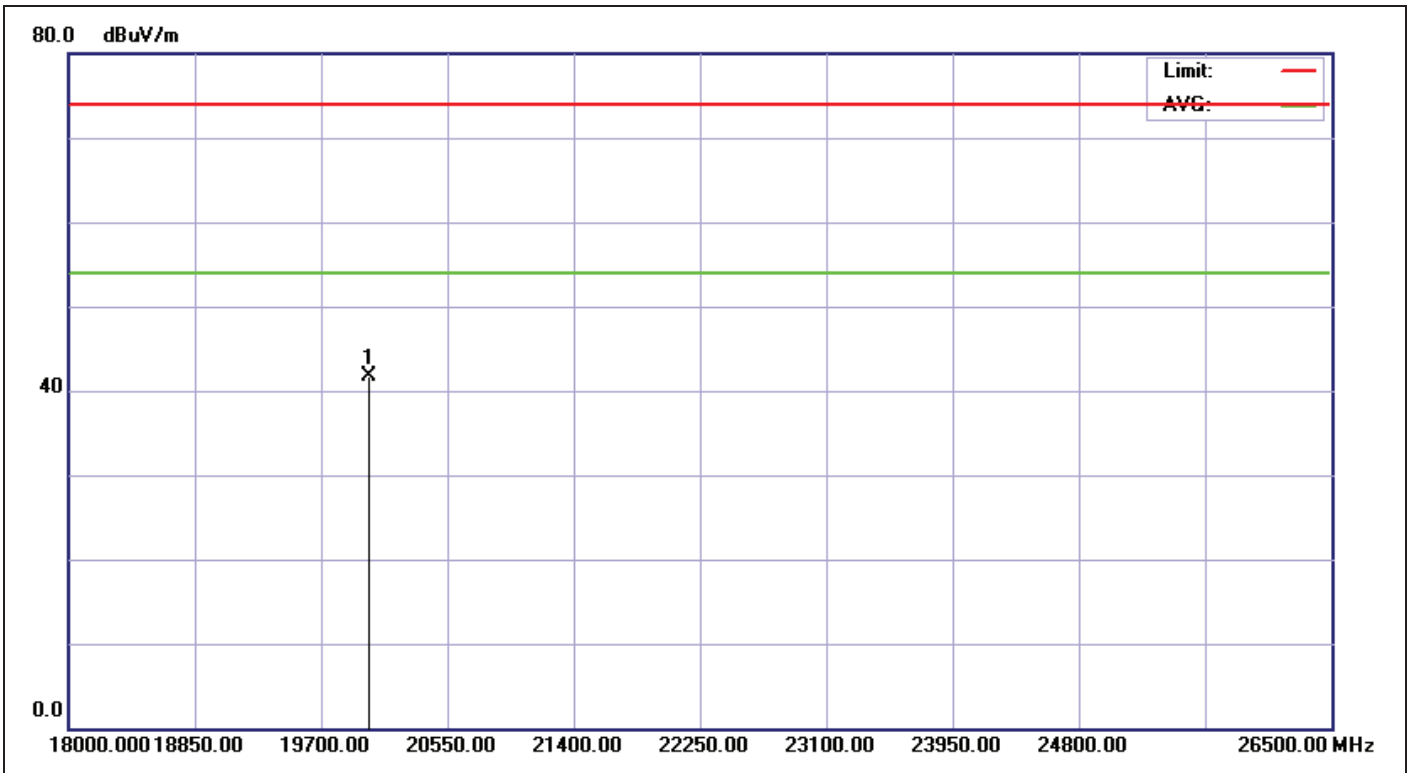

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 08:06:05
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	G CH2462		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20020.000	26.29	15.38	41.67	74.00	-32.33	peak	100	360	



TUV Taiwan


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

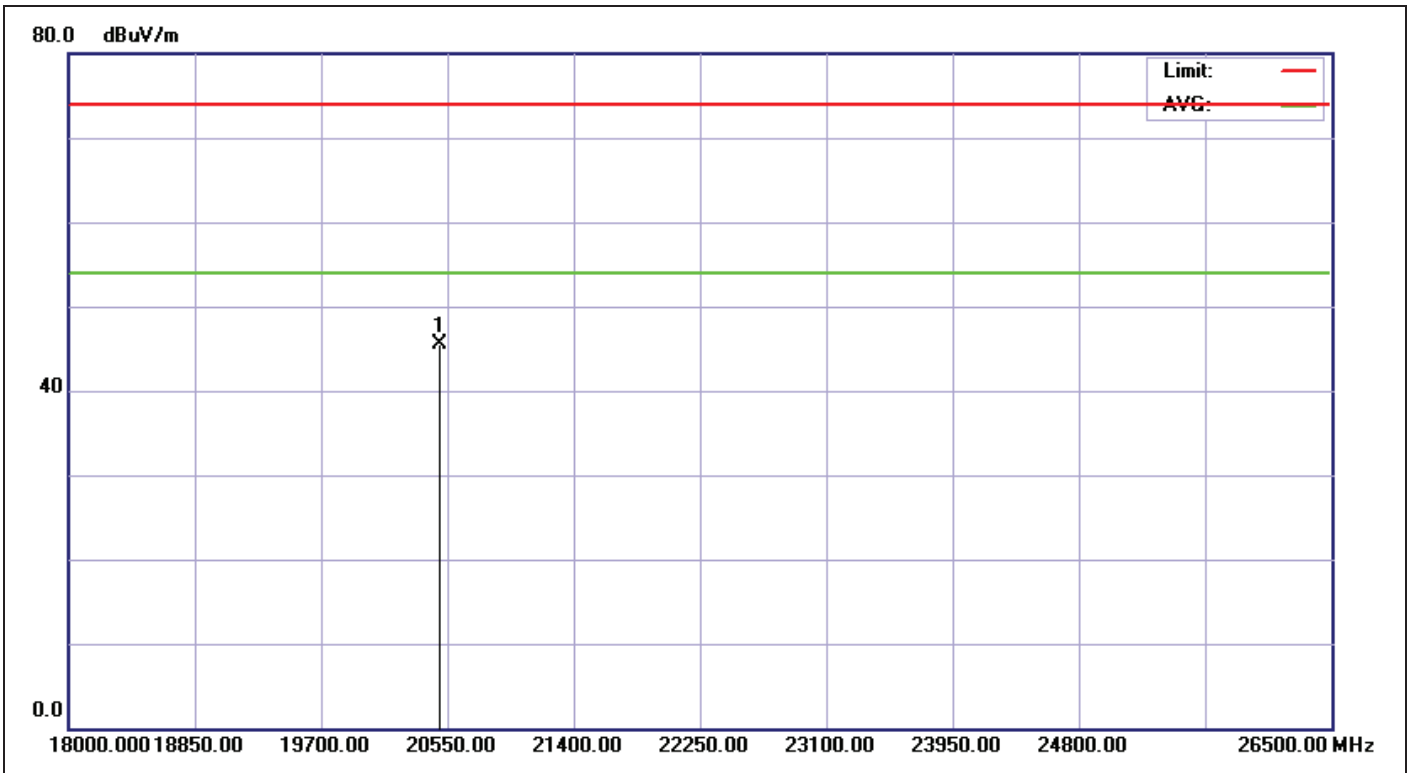


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 08:06:33
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N CH2412		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20496.000	26.66	18.82	45.48	74.00	-28.52	peak	100	360	

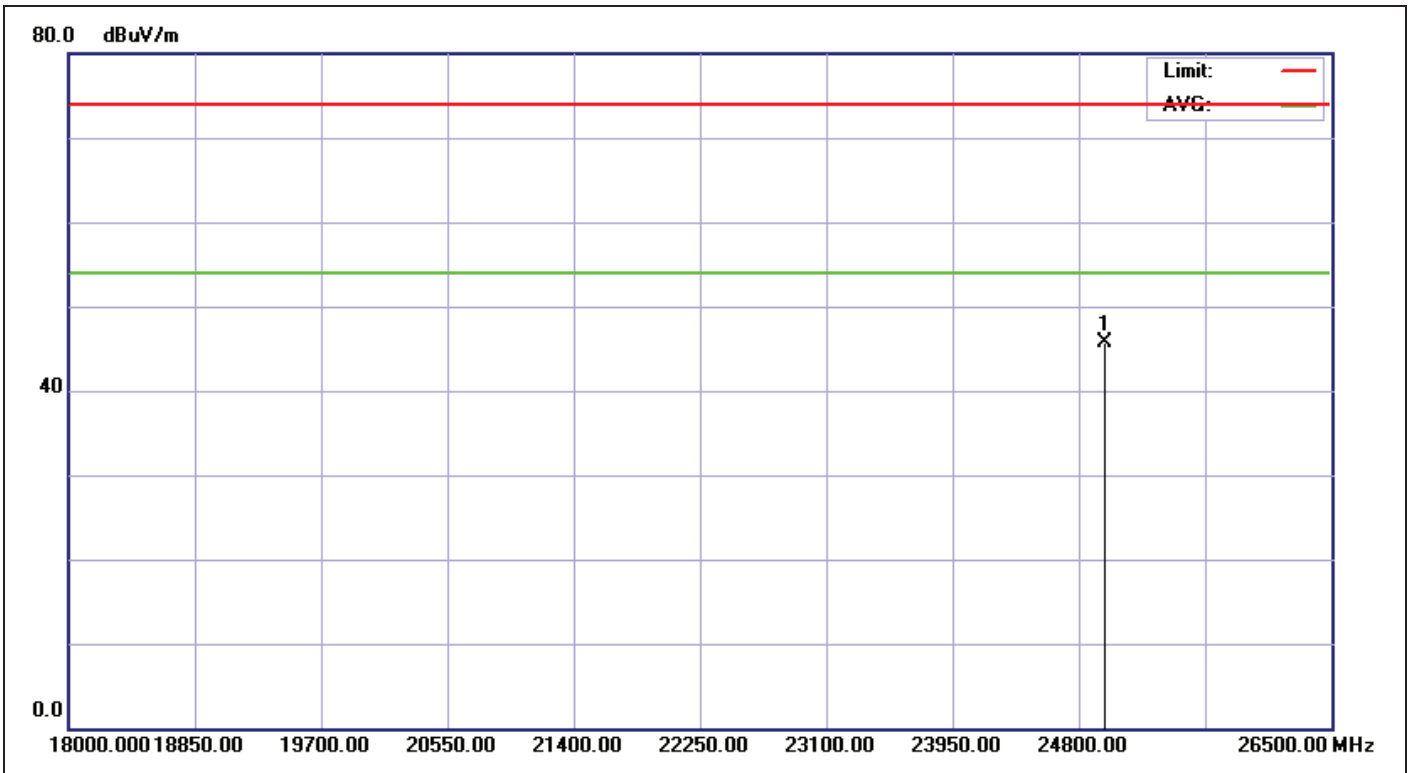

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 08:07:07
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N CH2412		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	24970.000	26.23	19.51	45.74	74.00	-28.26	peak	100	360	

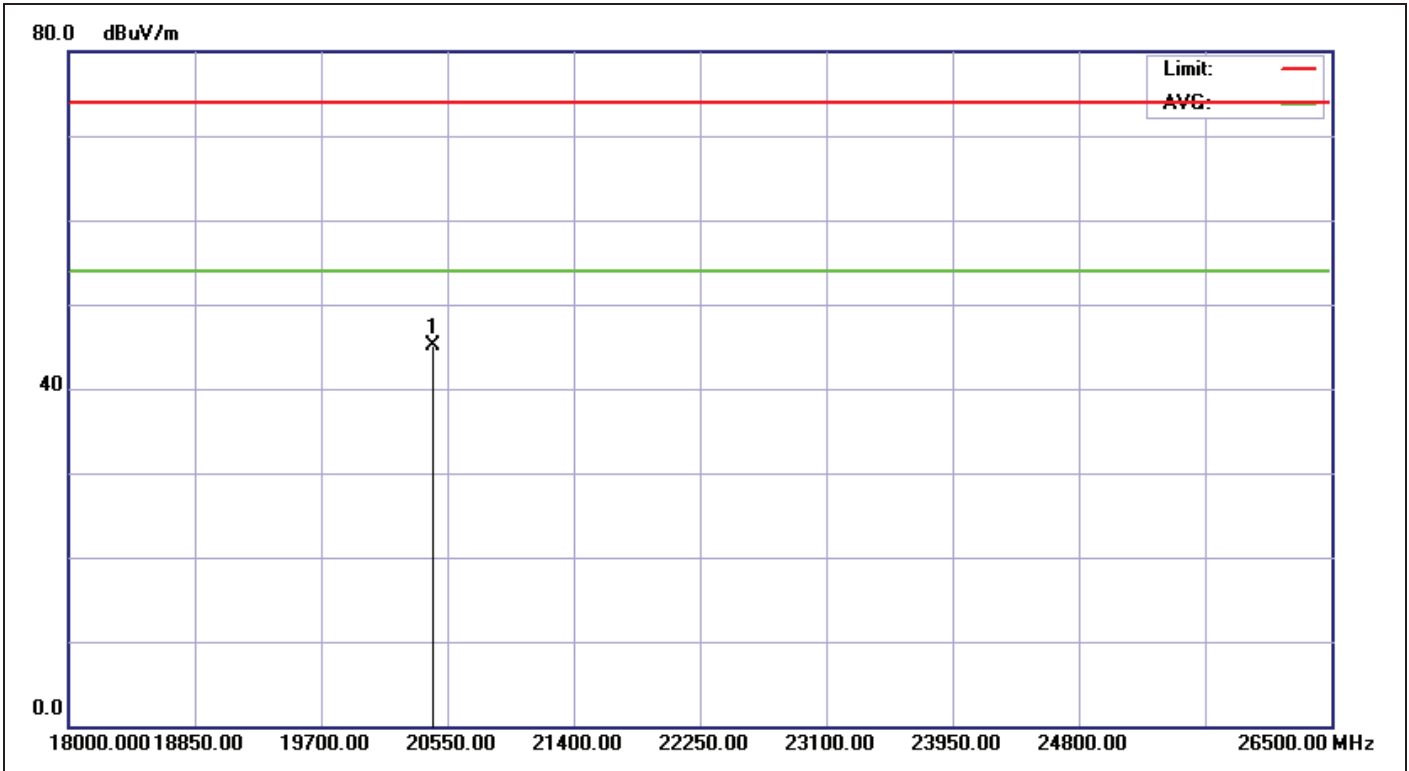

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 08:07:29
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N CH2437		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20455.000	26.62	18.55	45.17	74.00	-28.83	peak	100	360	



TUV Taiwan


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

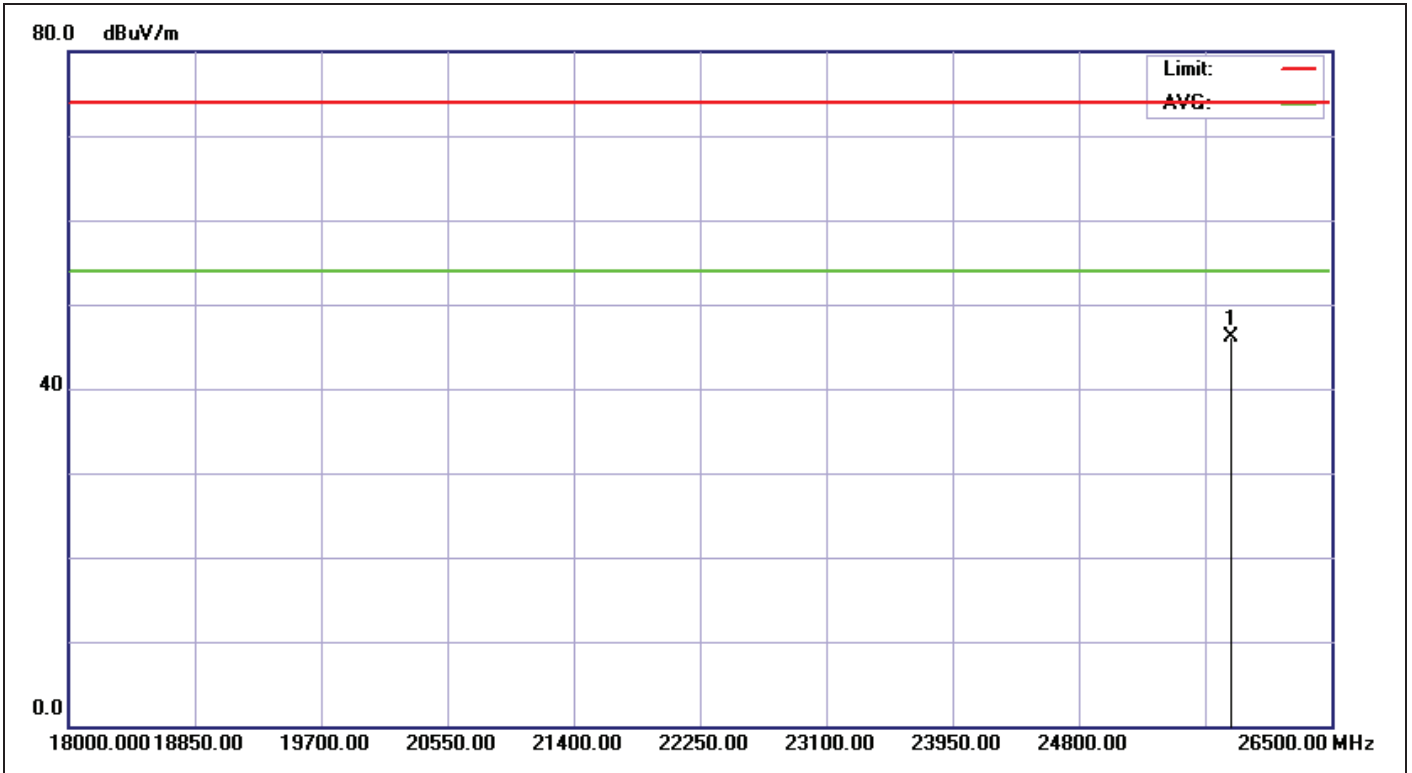


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 08:08:01
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N CH2437		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	25827.000	26.60	19.59	46.19	74.00	-27.81	peak	100	360	

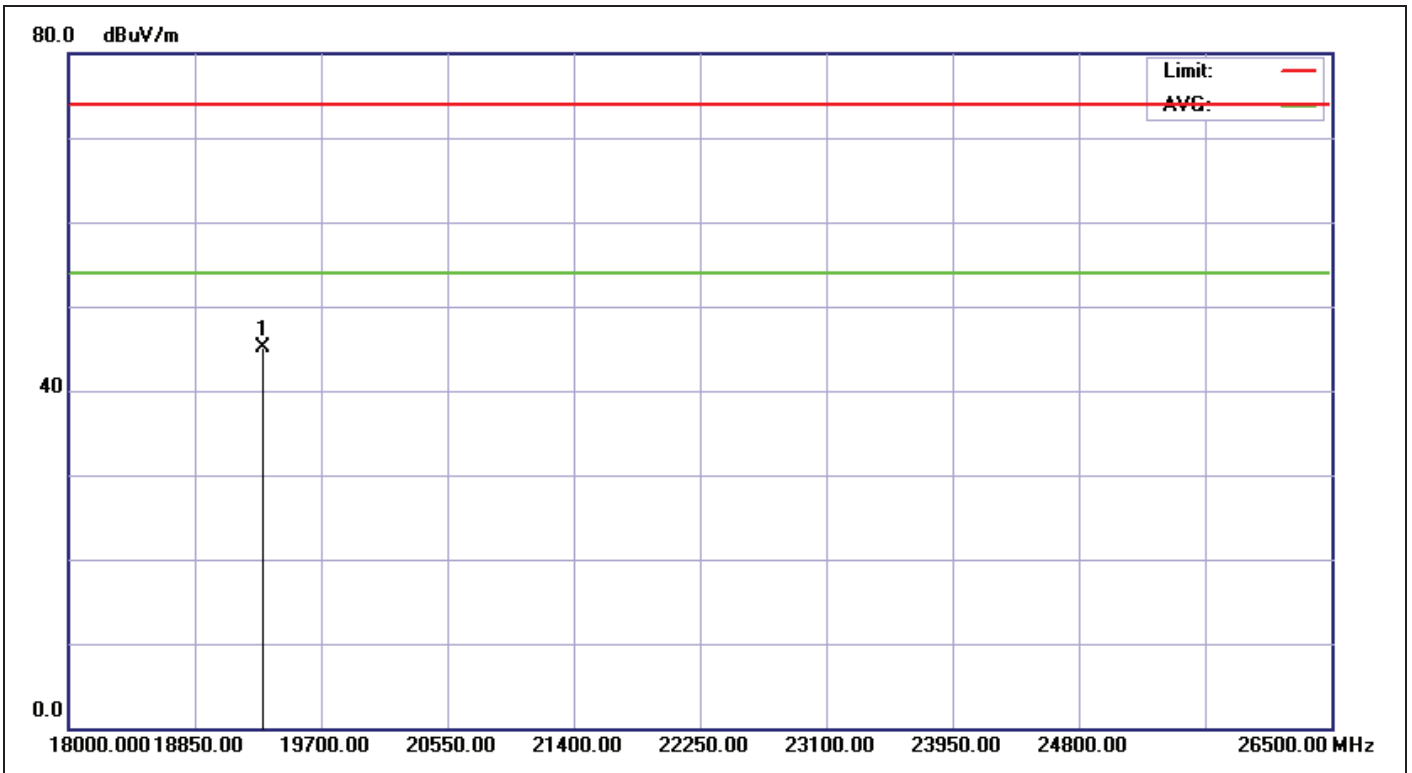

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 08:08:26
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N CH2462		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19312.000	25.51	19.66	45.17	74.00	-28.83	peak	100	360	

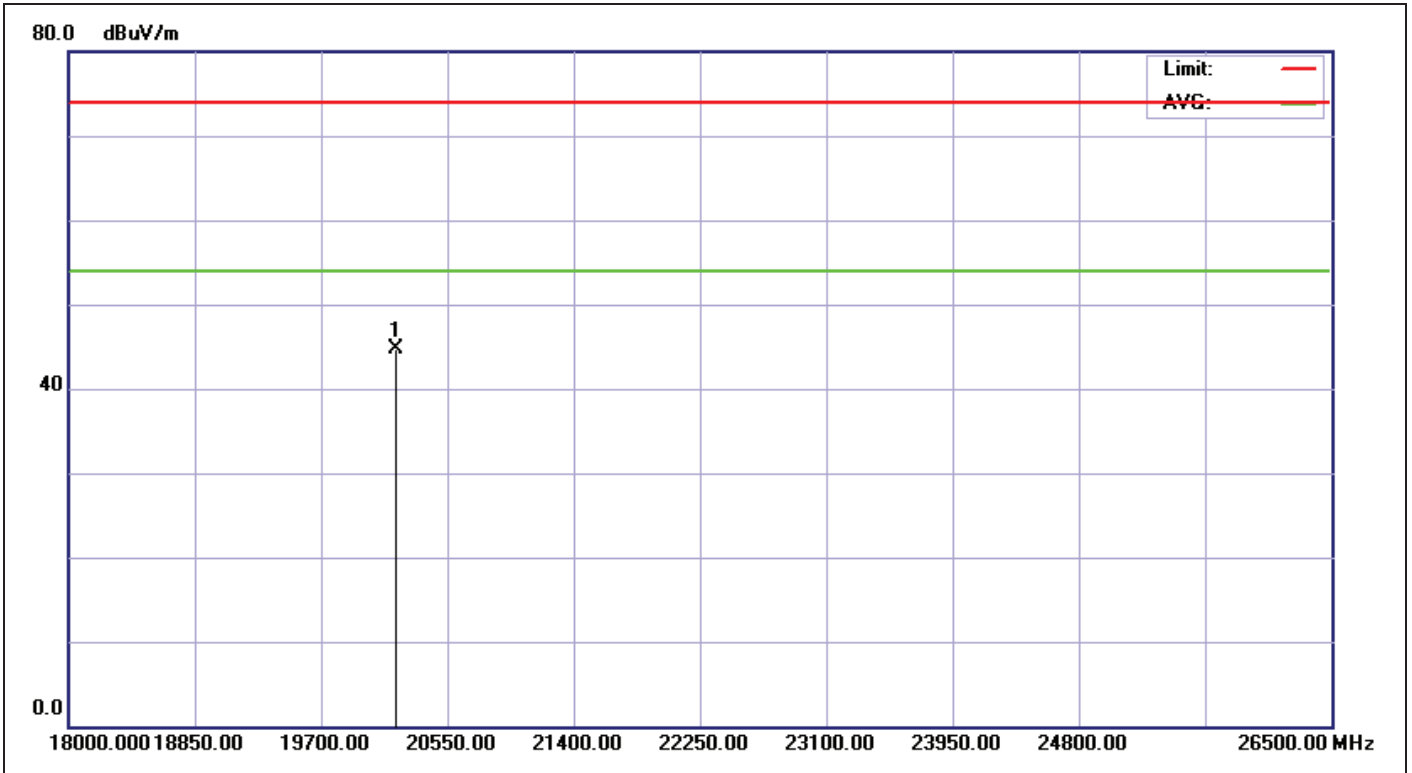

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 08:08:54
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N CH2462		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20210.000	26.44	18.31	44.75	74.00	-29.25	peak	100	360	



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

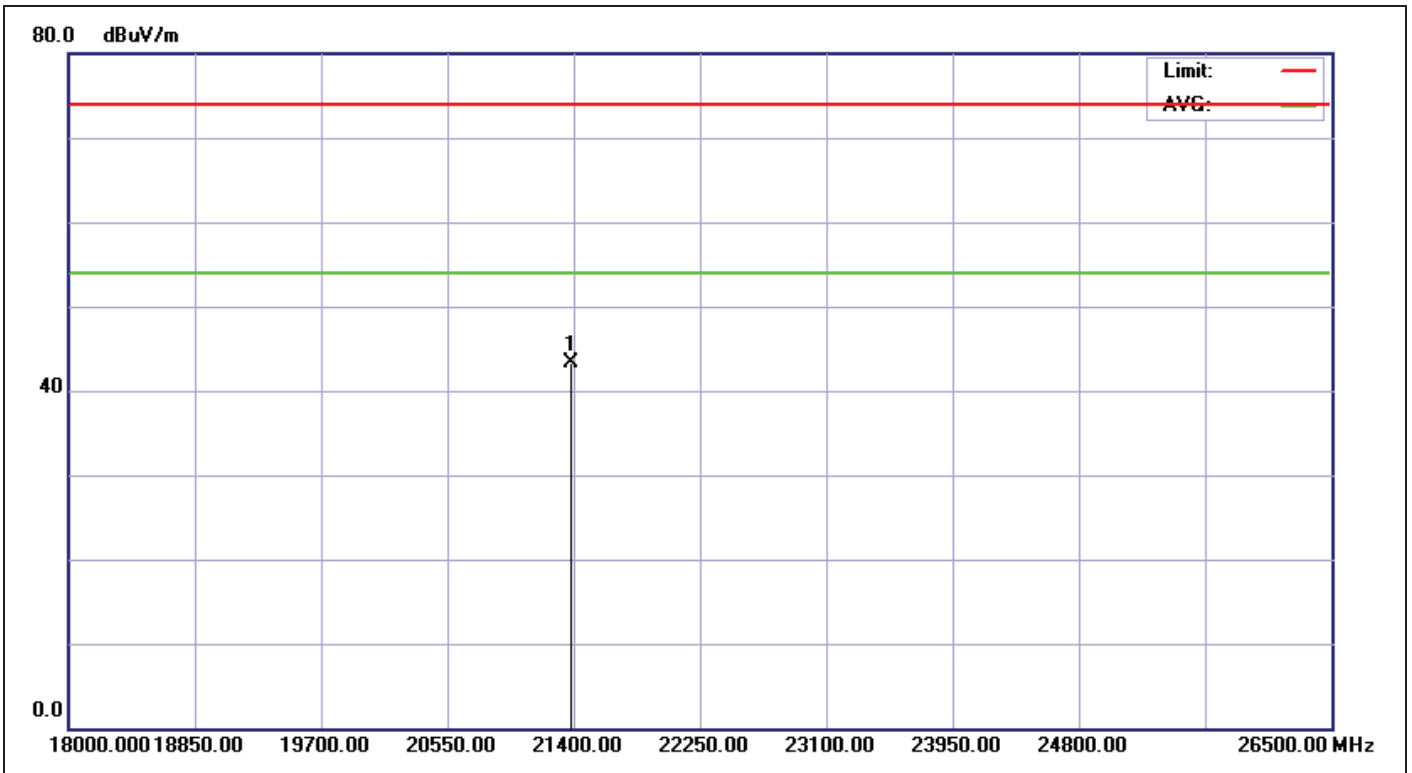

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 08:09:17
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N40 CH2422		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21380.000	25.46	17.79	43.25	74.00	-30.75	peak	100	360	



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

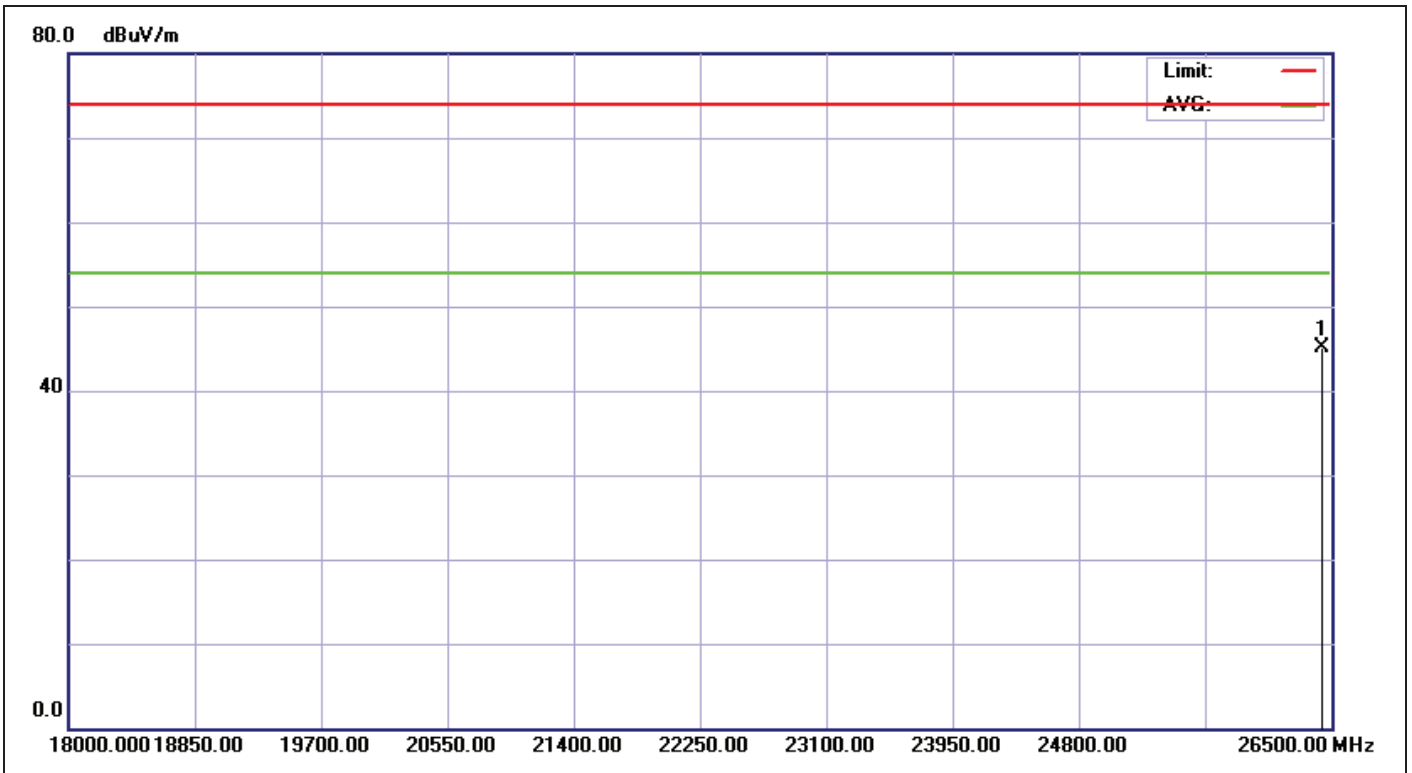

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 08:09:52
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N40 CH2422		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	26439.000	26.11	19.08	45.19	74.00	-28.81	peak	100	360	



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

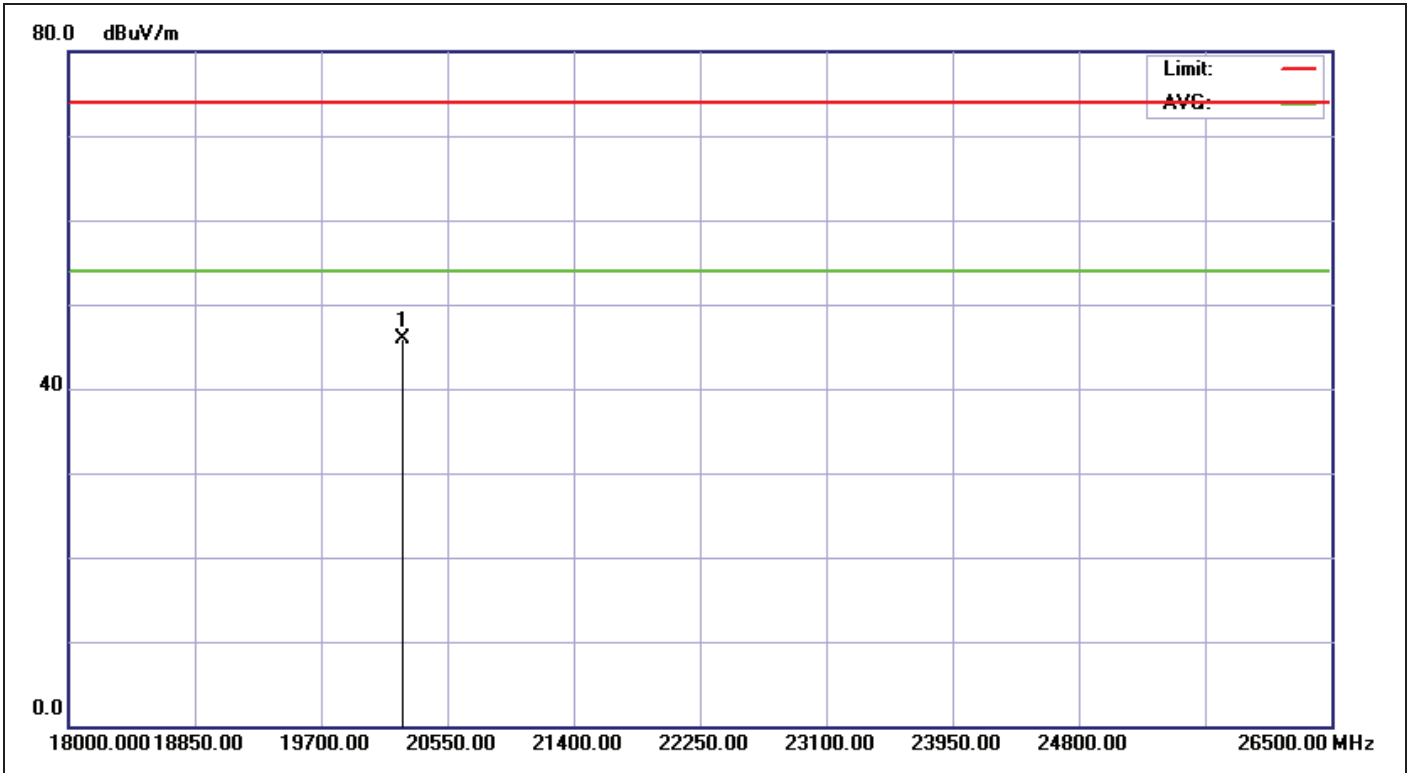

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 08:10:14
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N40 CH2437		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20251.000	26.47	19.37	45.84	74.00	-28.16	peak	100	360	



TUV Taiwan


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

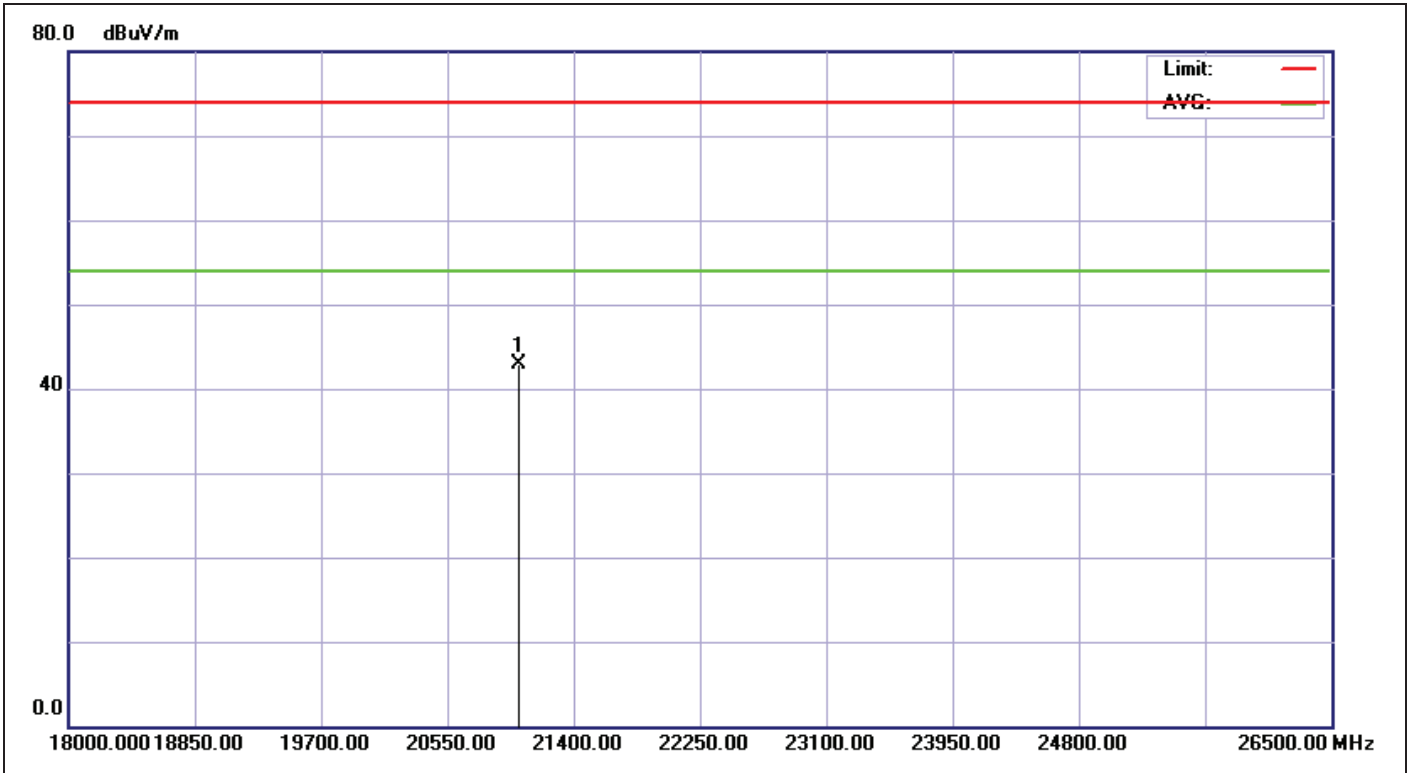


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 08:10:45
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N40 CH2437		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21026.000	25.17	17.72	42.89	74.00	-31.11	peak	100	360	

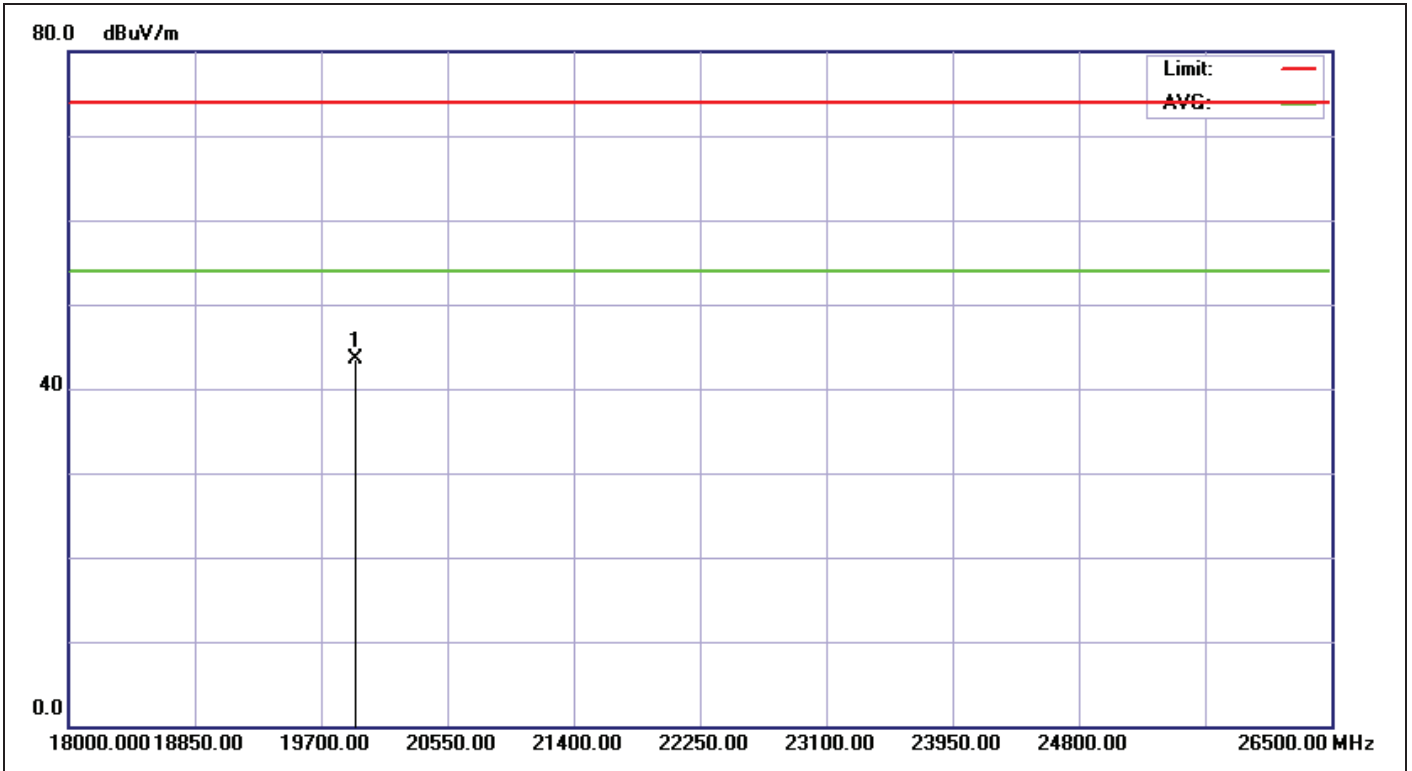


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 08:11:15
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N40 CH2452		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19938.000	26.20	17.26	43.46	74.00	-30.54	peak	100	360	

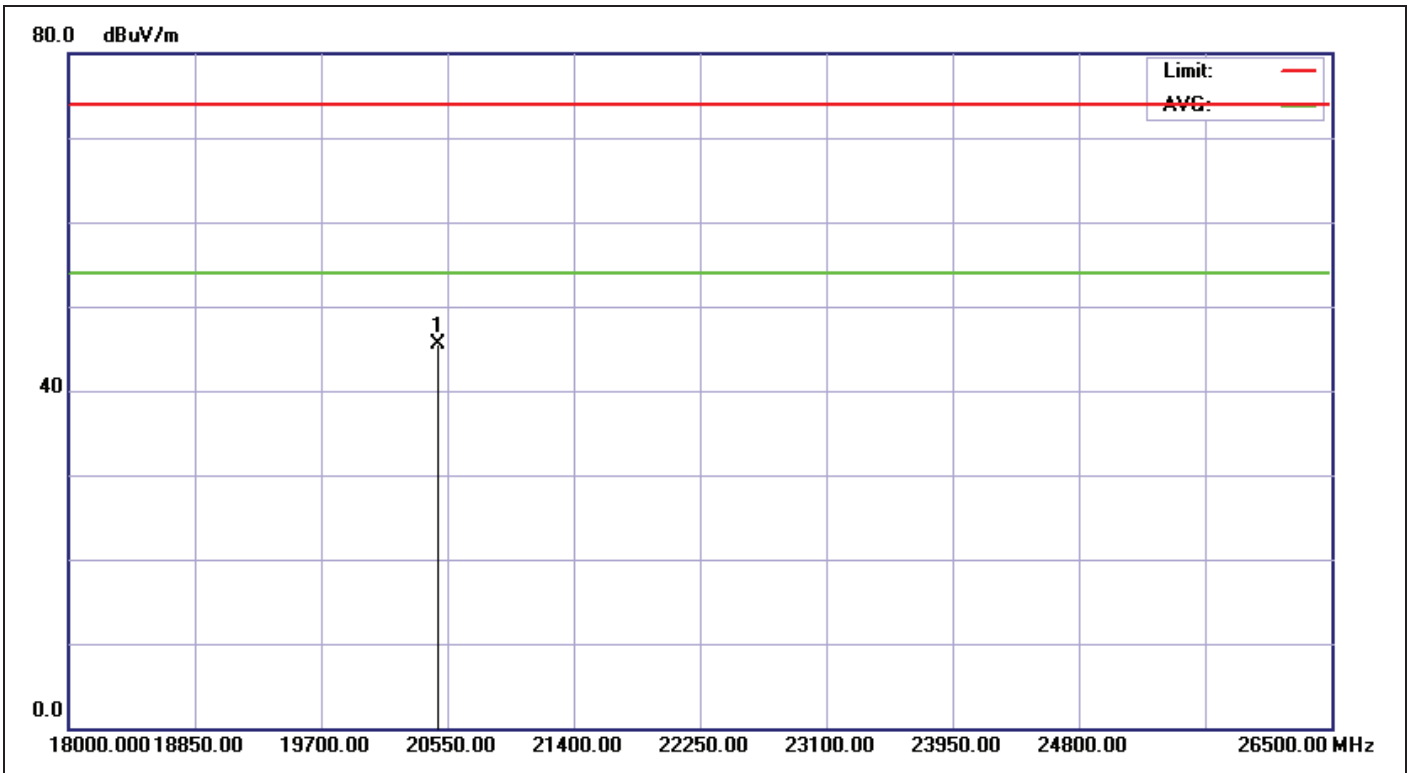


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 08:11:46
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	N40 CH2452		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20482.000	26.65	18.95	45.60	74.00	-28.40	peak	100	360	

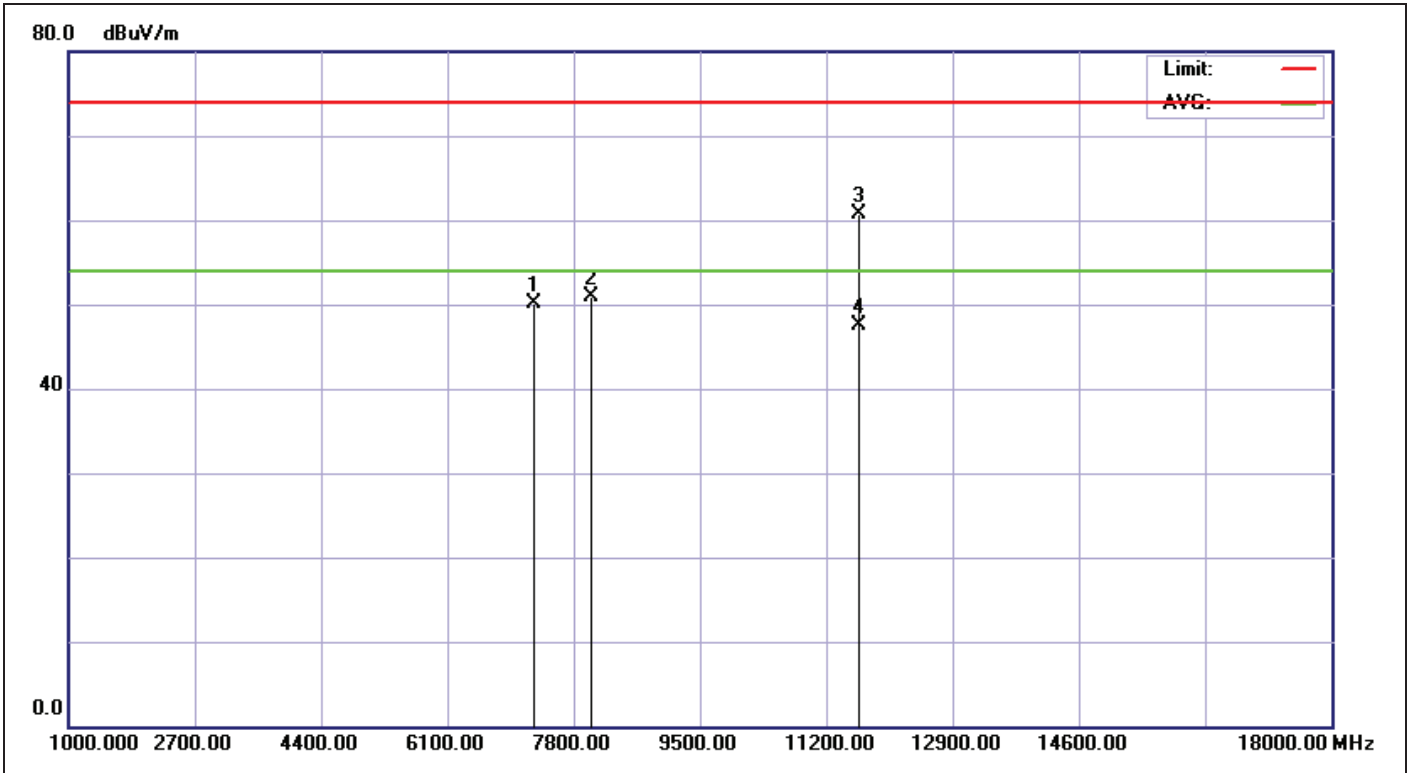

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 05:59:20
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5825		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7271.000	5.59	44.45	50.04	74.00	-23.96	peak	100	0	
2	8033.000	6.45	44.40	50.85	74.00	-23.15	peak	100	0	
3	11651.000	5.89	54.87	60.76	74.00	-13.24	peak	100	0	
4	11651.000	5.89	41.56	47.45	54.00	-6.55	AVG			

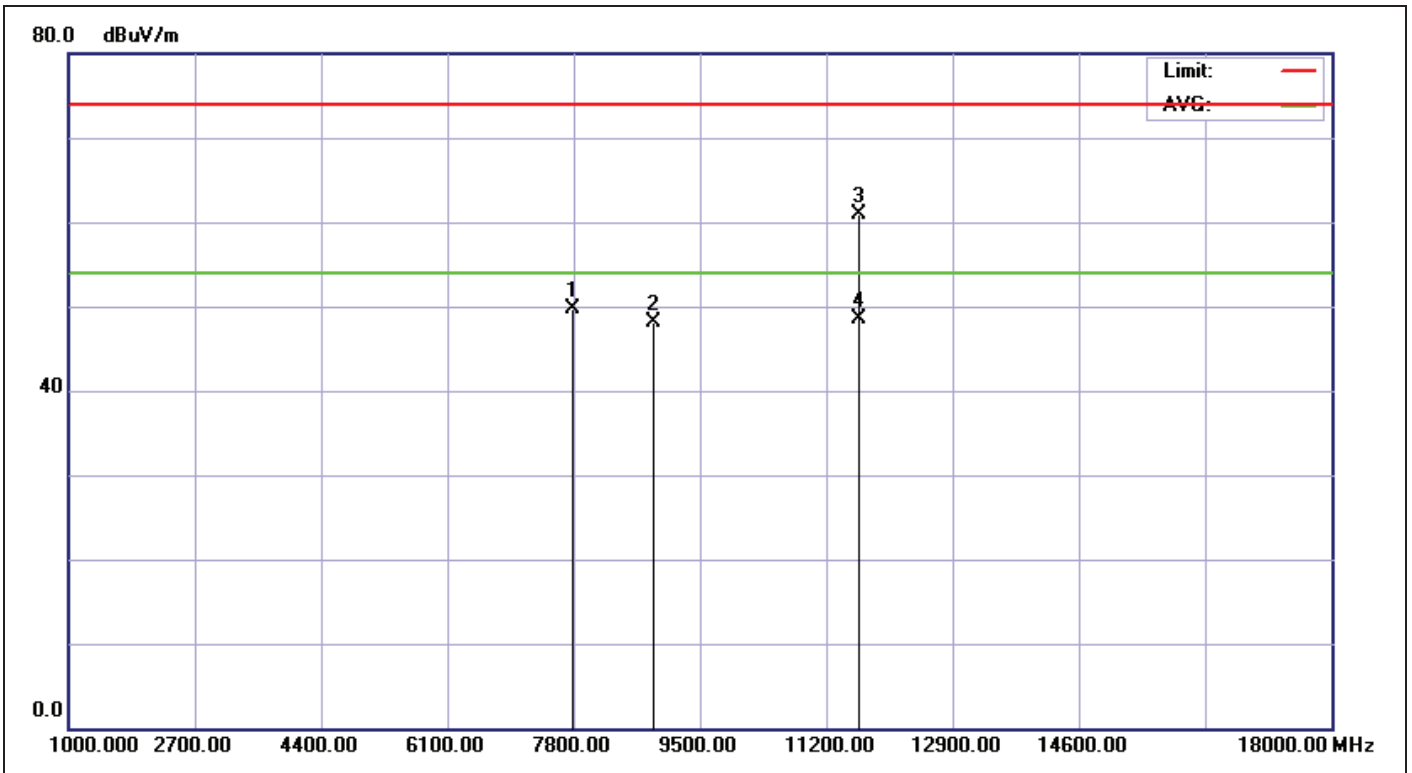

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 05:56:02
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5825		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7788.000	6.48	43.31	49.79	74.00	-24.21	peak	100	0	
2	8876.000	7.18	41.02	48.20	74.00	-25.80	peak	100	0	
3	11650.000	5.89	55.08	60.97	74.00	-13.03	peak	100	0	
4	11650.000	5.89	42.64	48.53	54.00	-5.47	AVG			



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

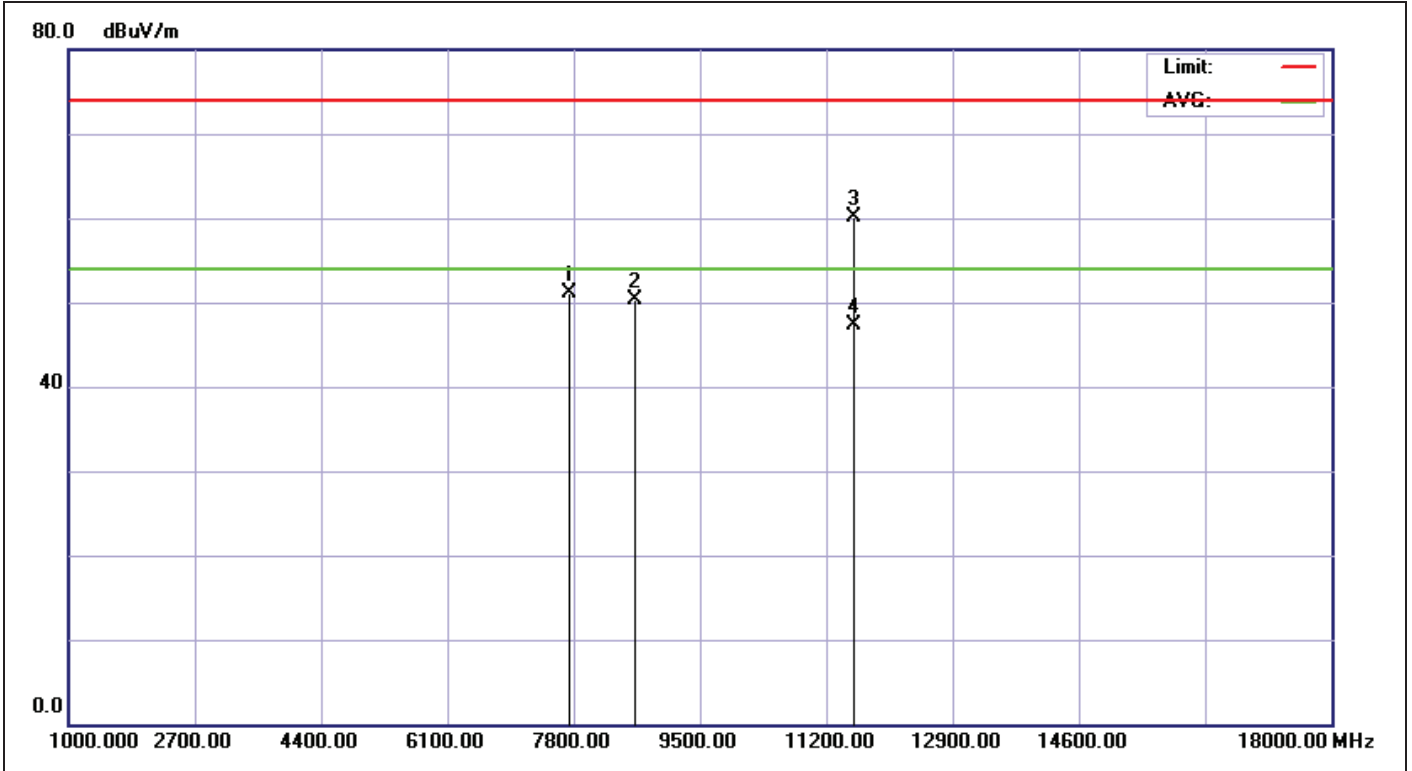

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 05:42:57
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5785		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7734.000	6.47	44.69	51.16	74.00	-22.84	peak	100	0	
2	8632.000	6.81	43.55	50.36	74.00	-23.64	peak	100	0	
3	11570.000	5.70	54.34	60.04	74.00	-13.96	peak	100	0	
4	11570.000	5.70	41.67	47.37	54.00	-6.63	AVG			



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

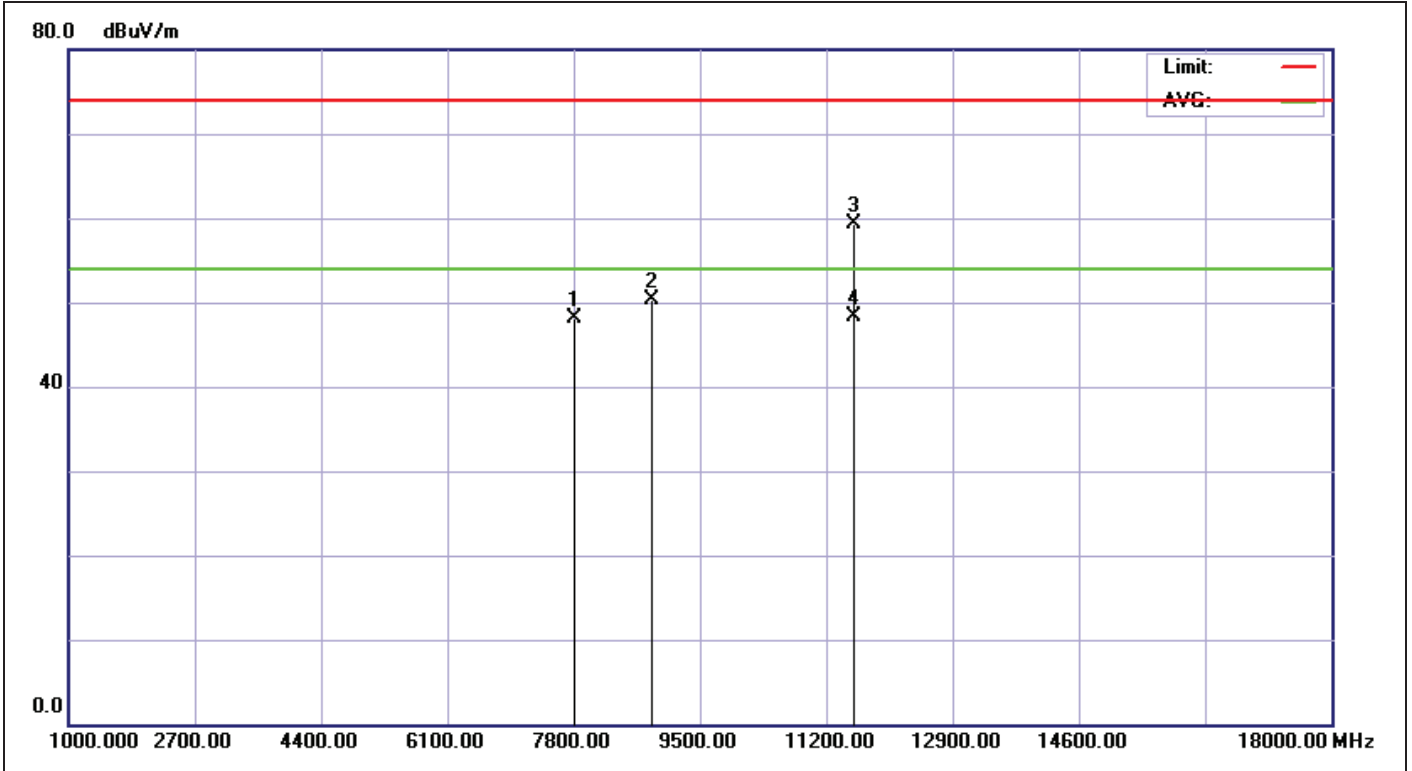

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 05:38:17
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5785		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7818.000	6.47	41.63	48.10	74.00	-25.90	peak	100	0	
2	8852.000	7.14	43.17	50.31	74.00	-23.69	peak	100	0	
3	11572.000	5.70	53.65	59.35	74.00	-14.65	peak	100	0	
4	11572.000	5.70	42.62	48.32	54.00	-5.68	AVG			



TUV Taiwan


11F., No.758, Sec.4 Bade Road, Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

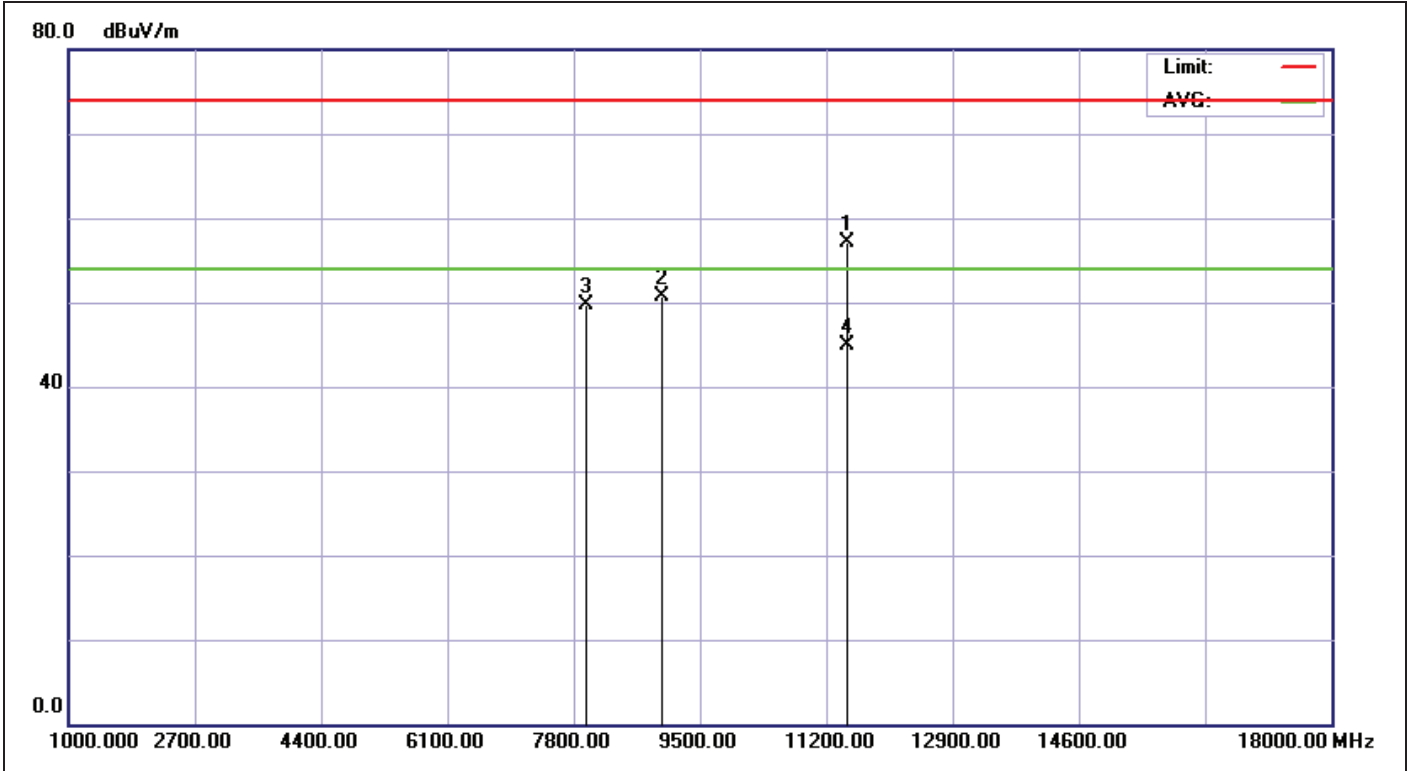

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 05:32:18
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5745		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	11490.000	5.53	51.67	57.20	74.00	-16.80	peak	100	0	
2	8988.000	7.35	43.31	50.66	74.00	-23.34	peak	100	0	
3	7981.000	6.44	43.35	49.79	74.00	-24.21	peak	100	0	
4	11490.000	5.53	39.46	44.99	54.00	-9.01	AVG			

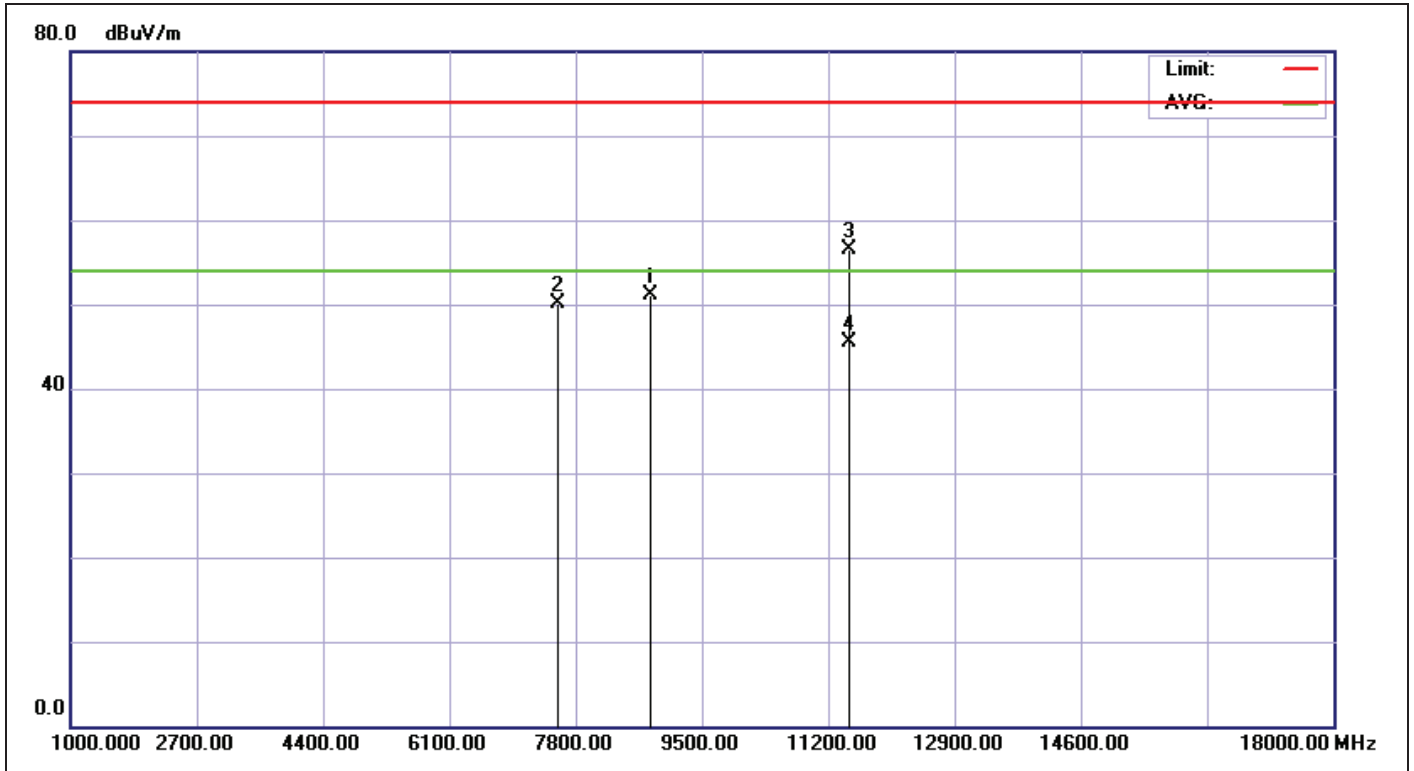


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 05:27:40
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5745		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8820.000	7.09	44.02	51.11	74.00	-22.89	peak	100	0	
2	7569.000	6.51	43.55	50.06	74.00	-23.94	peak	100	0	
3	11490.000	5.53	51.03	56.56	74.00	-17.44	peak	100	0	
4	11490.000	5.53	39.91	45.44	54.00	-8.56	AVG			



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

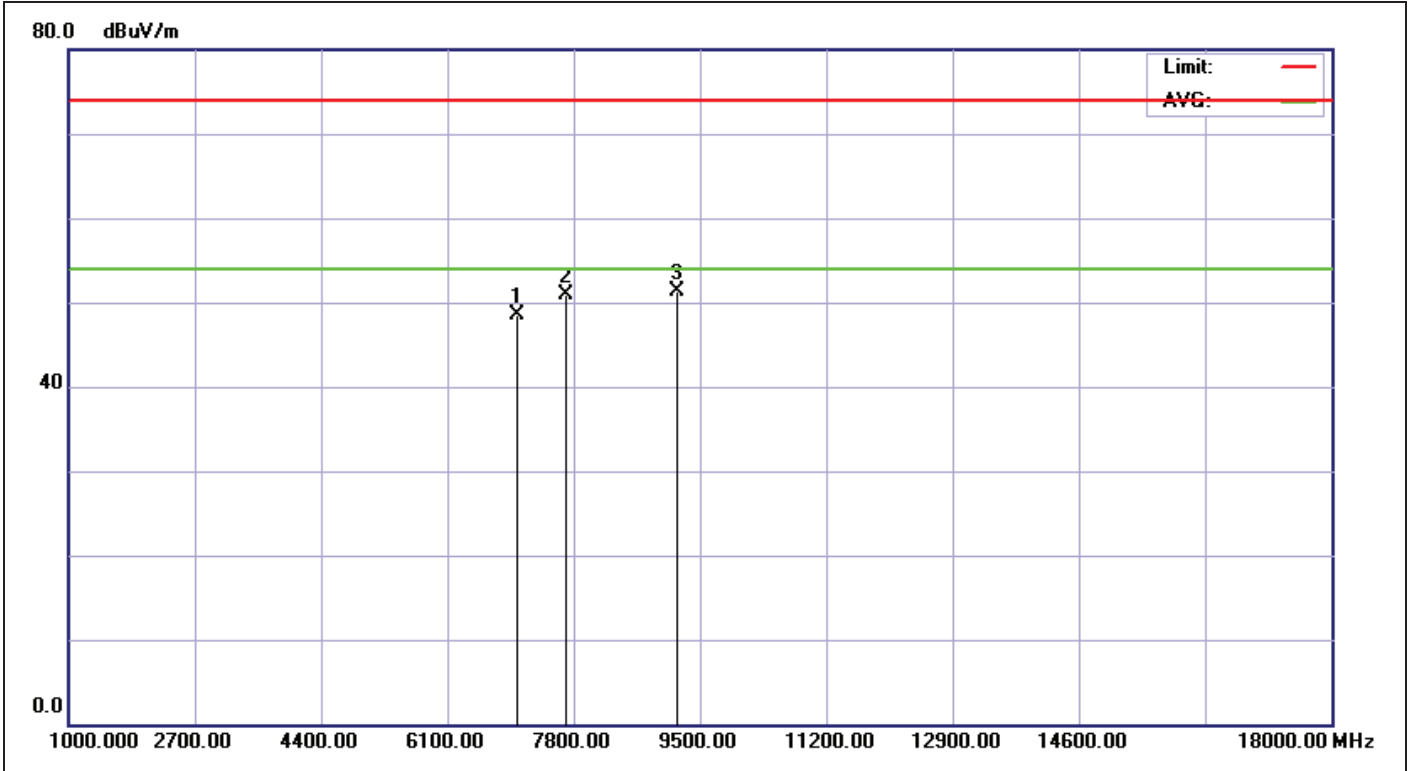

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 07:20:06
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5795		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7048.000	4.70	43.76	48.46	74.00	-25.54	peak	100	360	
2	7700.000	6.48	44.51	50.99	74.00	-23.01	peak	100	360	
3	9196.000	7.56	43.78	51.34	74.00	-22.66	peak	100	360	



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

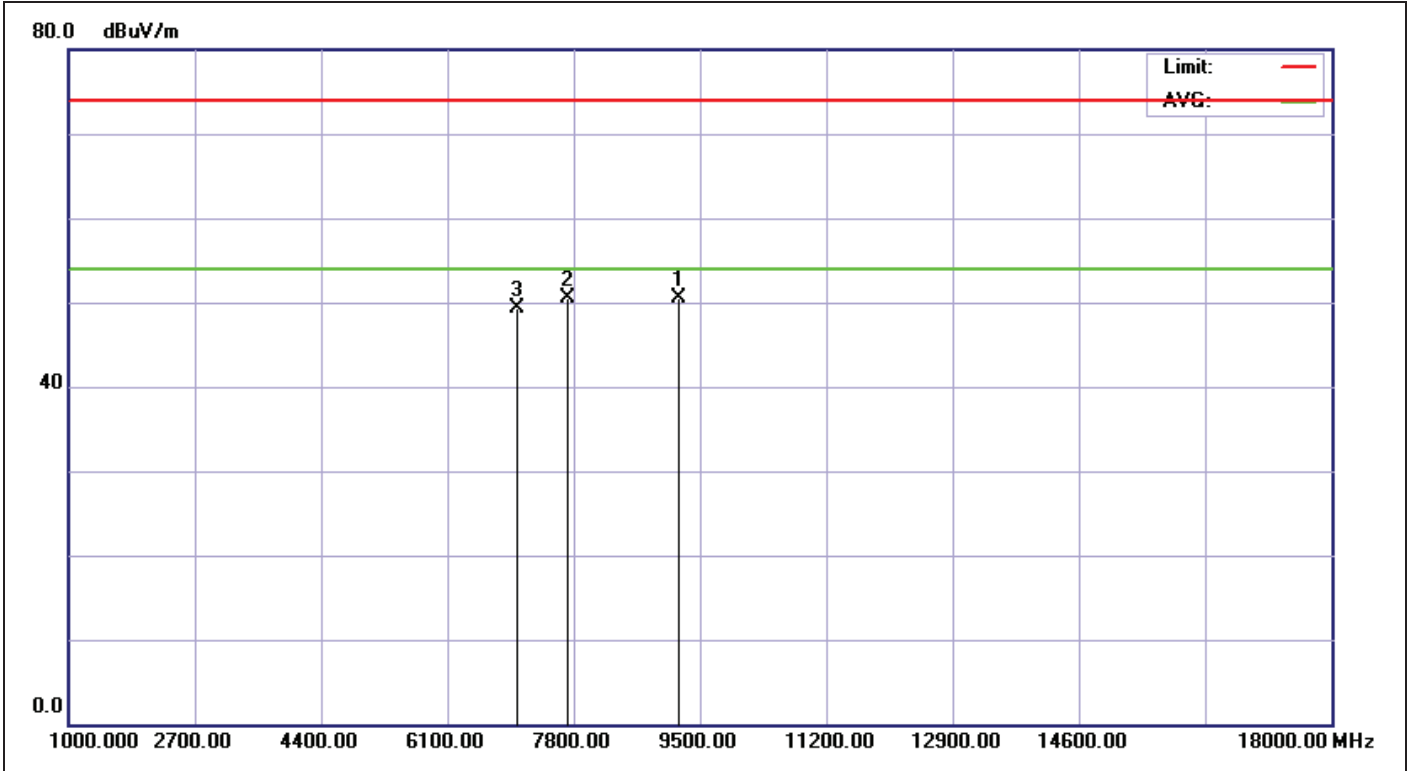

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 07:17:02
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5795		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	9224.000	7.58	43.00	50.58	74.00	-23.42	peak	100	0	
2	7728.000	6.48	43.94	50.42	74.00	-23.58	peak	100	0	
3	7048.000	4.70	44.69	49.39	74.00	-24.61	peak	100	0	



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

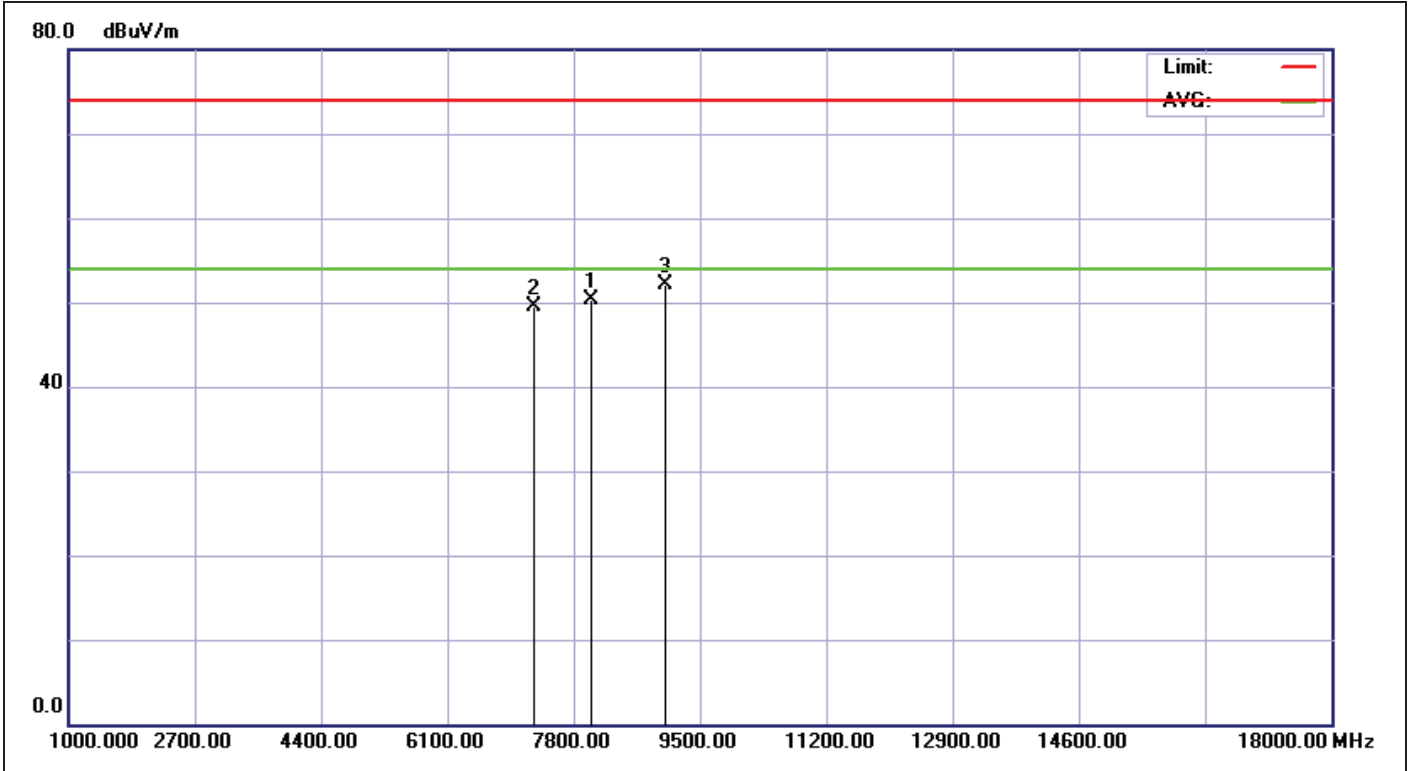

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 07:15:28
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5755		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8028.000	6.45	43.81	50.26	74.00	-23.74	peak	100	360	
2	7267.000	5.57	43.84	49.41	74.00	-24.59	peak	100	360	
3	9035.000	7.40	44.59	51.99	74.00	-22.01	peak	100	360	



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

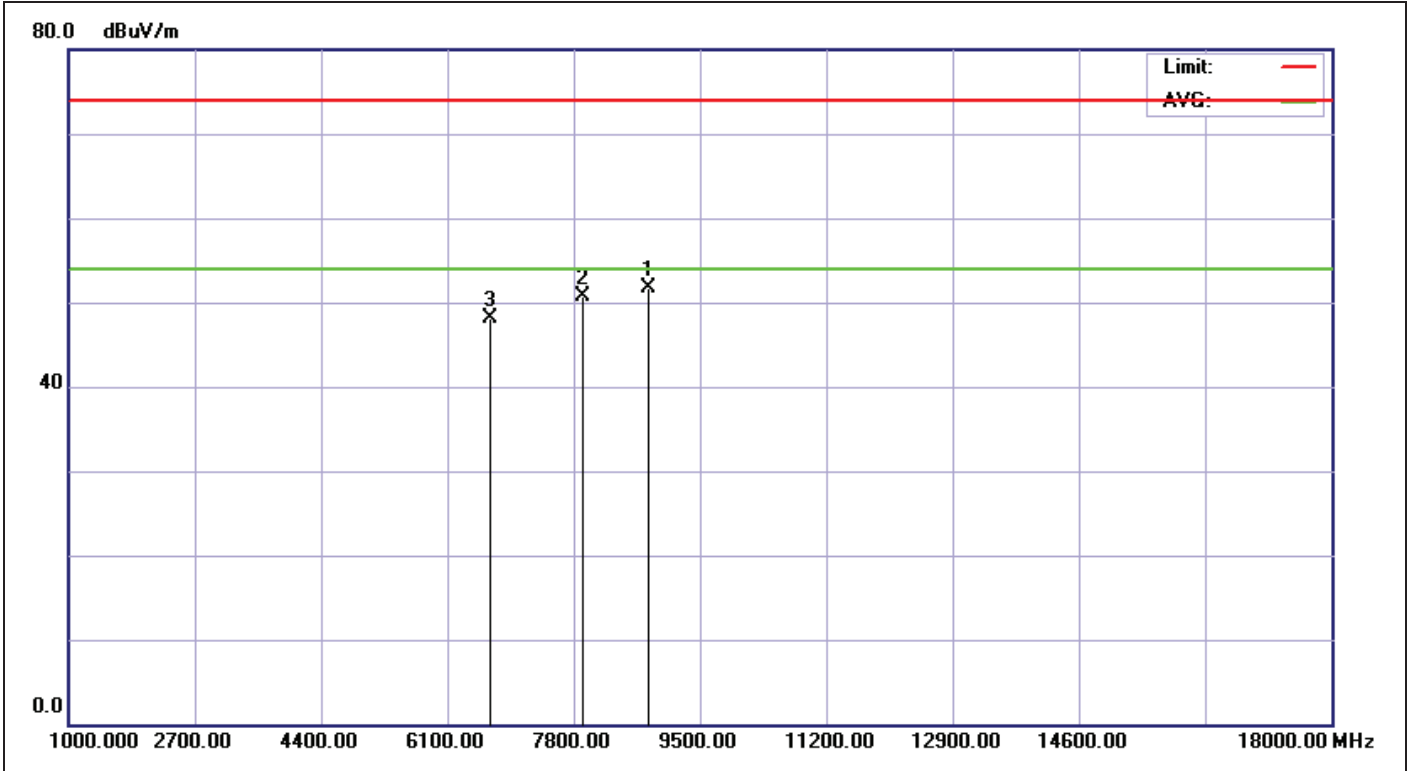

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 07:12:10
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5755		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8817.000	7.09	44.71	51.80	74.00	-22.20	peak	100	0	
2	7920.000	6.45	44.24	50.69	74.00	-23.31	peak	100	0	
3	6668.000	4.10	44.02	48.12	74.00	-25.88	peak	100	0	



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

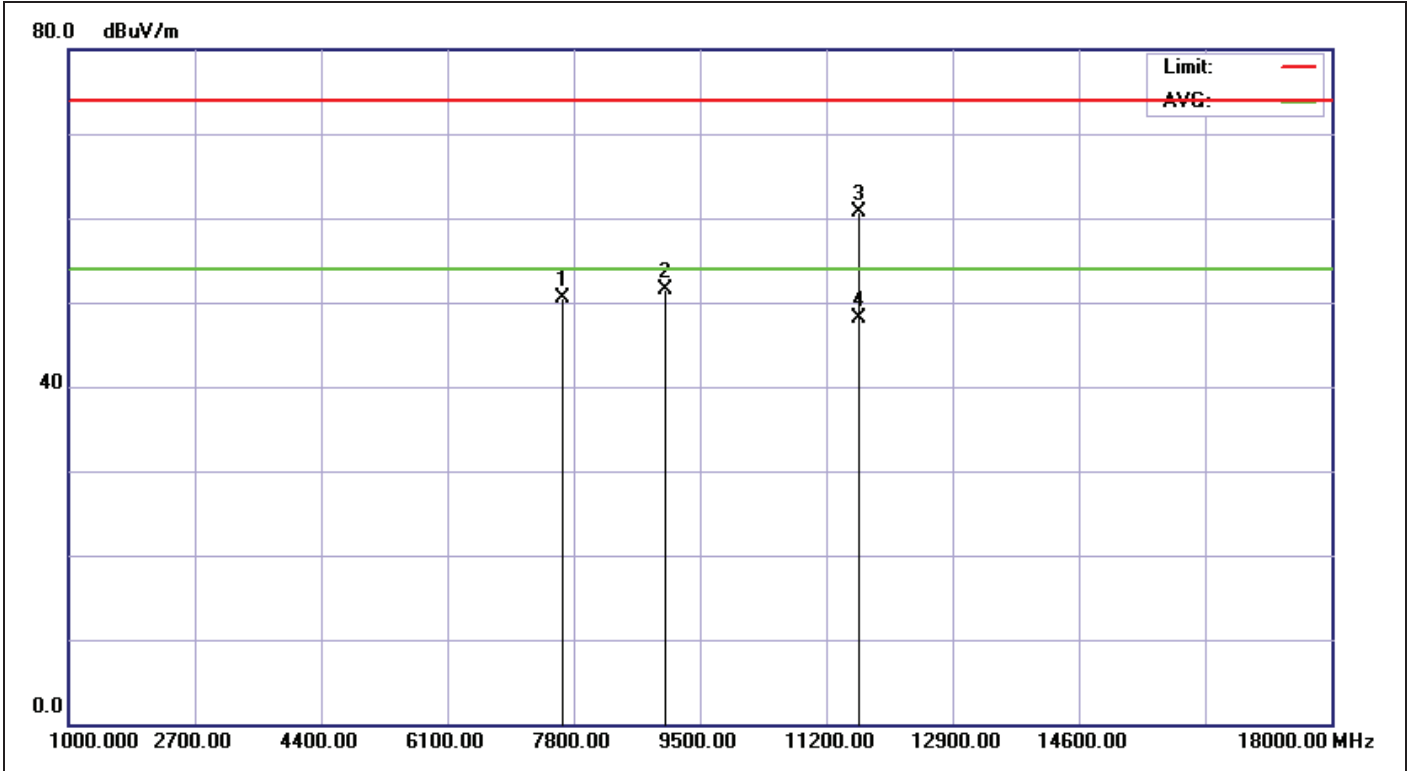

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 07:07:04
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5825		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7652.000	6.48	44.02	50.50	74.00	-23.50	peak	100	0	
2	9039.000	7.41	44.03	51.44	74.00	-22.56	peak	100	0	
3	11650.000	5.89	54.72	60.61	74.00	-13.39	peak	100	0	
4	11650.000	5.89	42.31	48.20	54.00	-5.80	AVG			



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

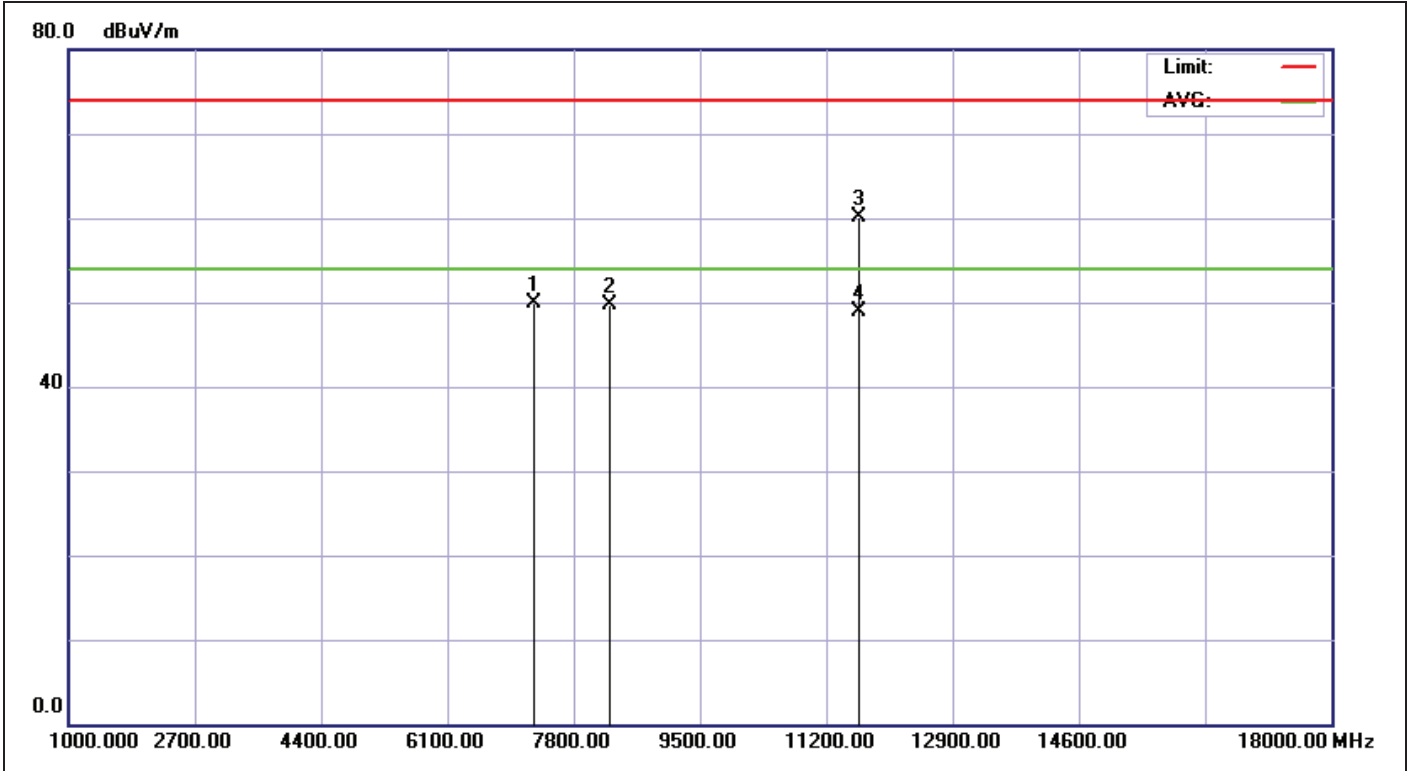

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 06:17:51
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5825		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7272.000	5.60	44.37	49.97	74.00	-24.03	peak	100	0	
2	8278.000	6.54	43.08	49.62	74.00	-24.38	peak	100	0	
3	11651.000	5.89	54.23	60.12	74.00	-13.88	peak	100	0	
4	11651.000	5.89	42.98	48.87	54.00	-5.13	AVG			



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

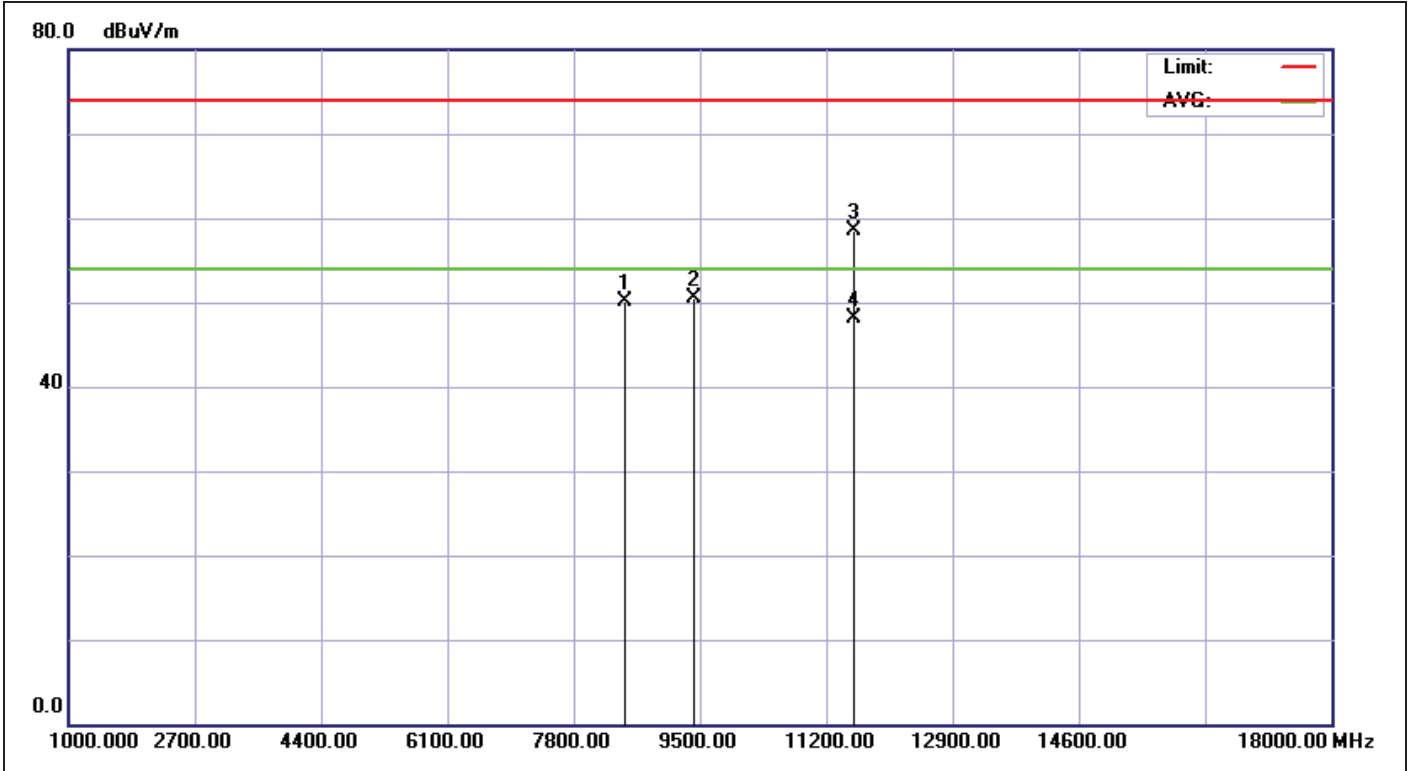

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 06:14:20
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5785		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8496.000	6.61	43.43	50.04	74.00	-23.96	peak	100	0	
2	9421.000	7.80	42.71	50.51	74.00	-23.49	peak	100	0	
3	11570.000	5.70	52.86	58.56	74.00	-15.44	peak	100	0	
4	11570.000	5.70	42.50	48.20	54.00	-5.80	AVG			



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

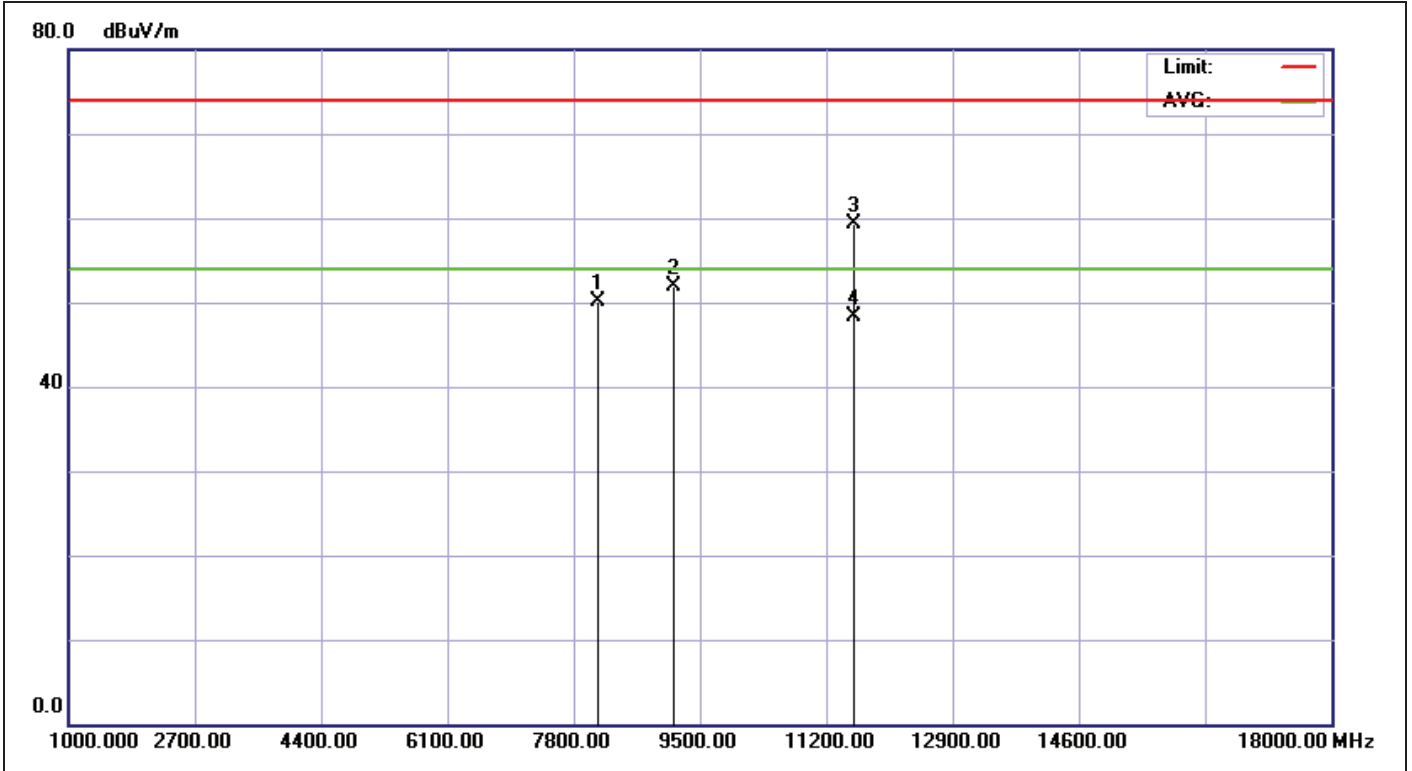

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 06:11:20
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5785		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8124.000	6.49	43.71	50.20	74.00	-23.80	peak	100	0	
2	9158.000	7.53	44.29	51.82	74.00	-22.18	peak	100	0	
3	11578.000	5.72	53.51	59.23	74.00	-14.77	peak	100	0	
4	11578.000	5.72	42.60	48.32	54.00	-5.68	AVG			



TUV Taiwan

11F., No.758, Sec.4 Bade Road, Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

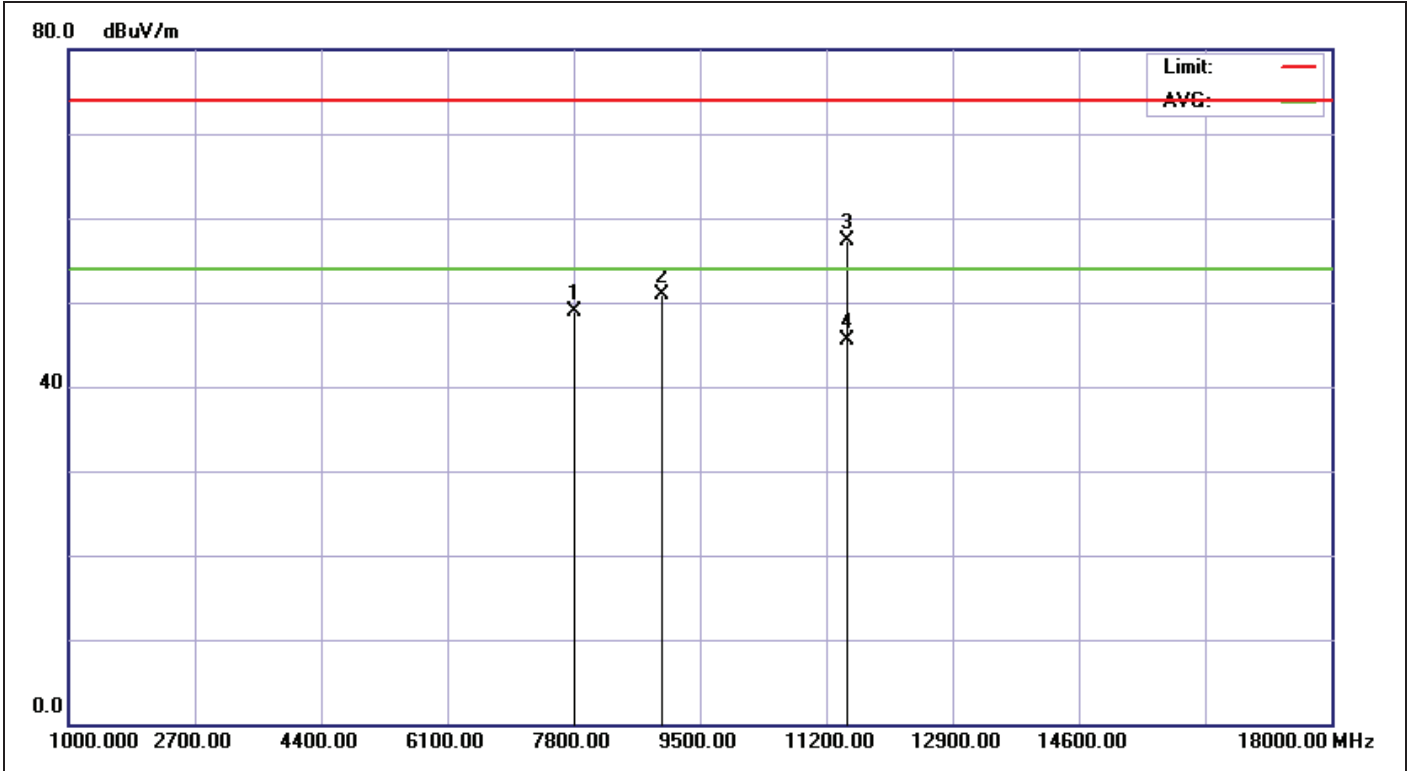

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 06:07:11
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5745		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7820.000	6.46	42.45	48.91	74.00	-25.09	peak	100	0	
2	8990.000	7.34	43.54	50.88	74.00	-23.12	peak	100	0	
3	11492.000	5.53	51.78	57.31	74.00	-16.69	peak	100	0	
4	11492.000	5.53	40.04	45.57	54.00	-8.43	AVG			



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

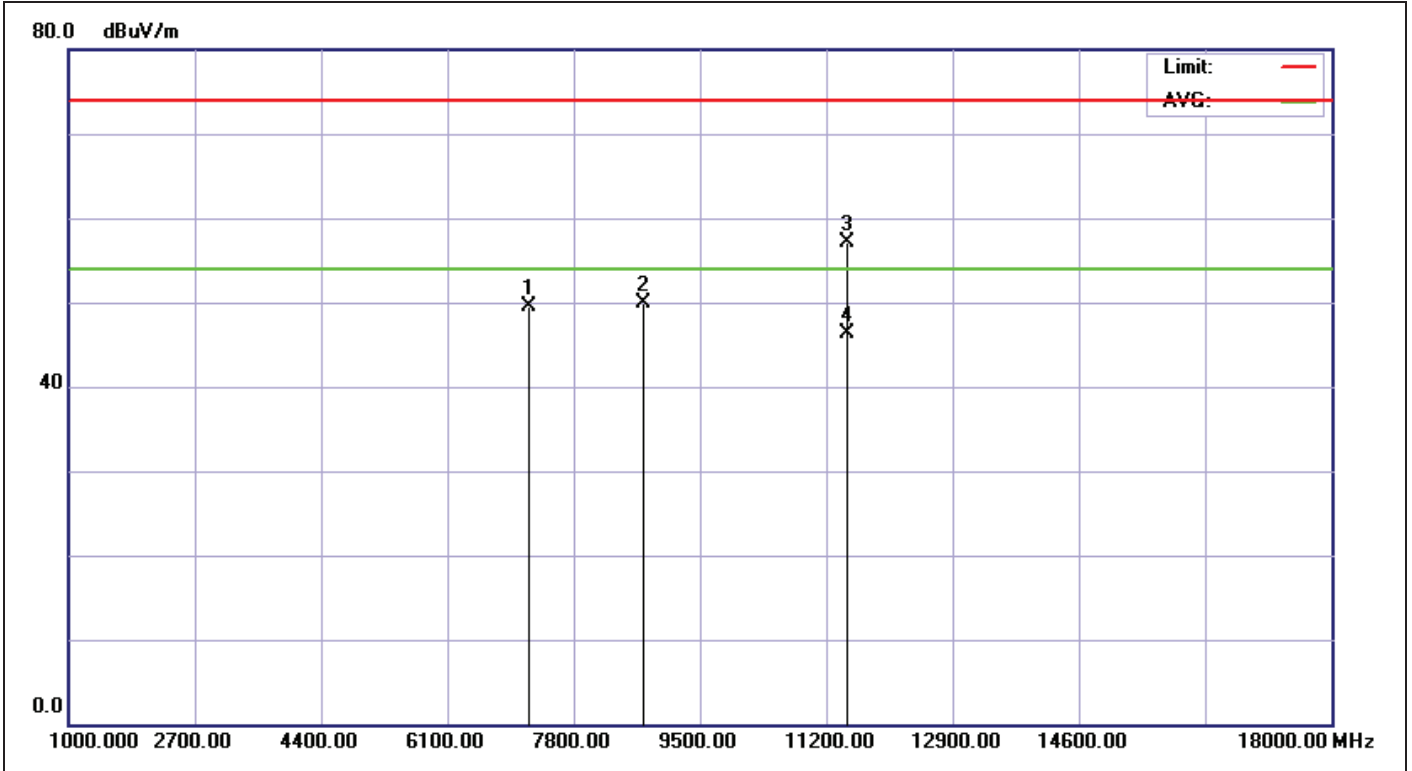

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 06:04:21
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5745		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7189.000	5.26	44.20	49.46	74.00	-24.54	peak	100	0	
2	8740.000	6.97	42.85	49.82	74.00	-24.18	peak	100	0	
3	11487.000	5.53	51.67	57.20	74.00	-16.80	peak	100	0	
4	11487.000	5.53	40.69	46.22	54.00	-7.78	AVG			



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

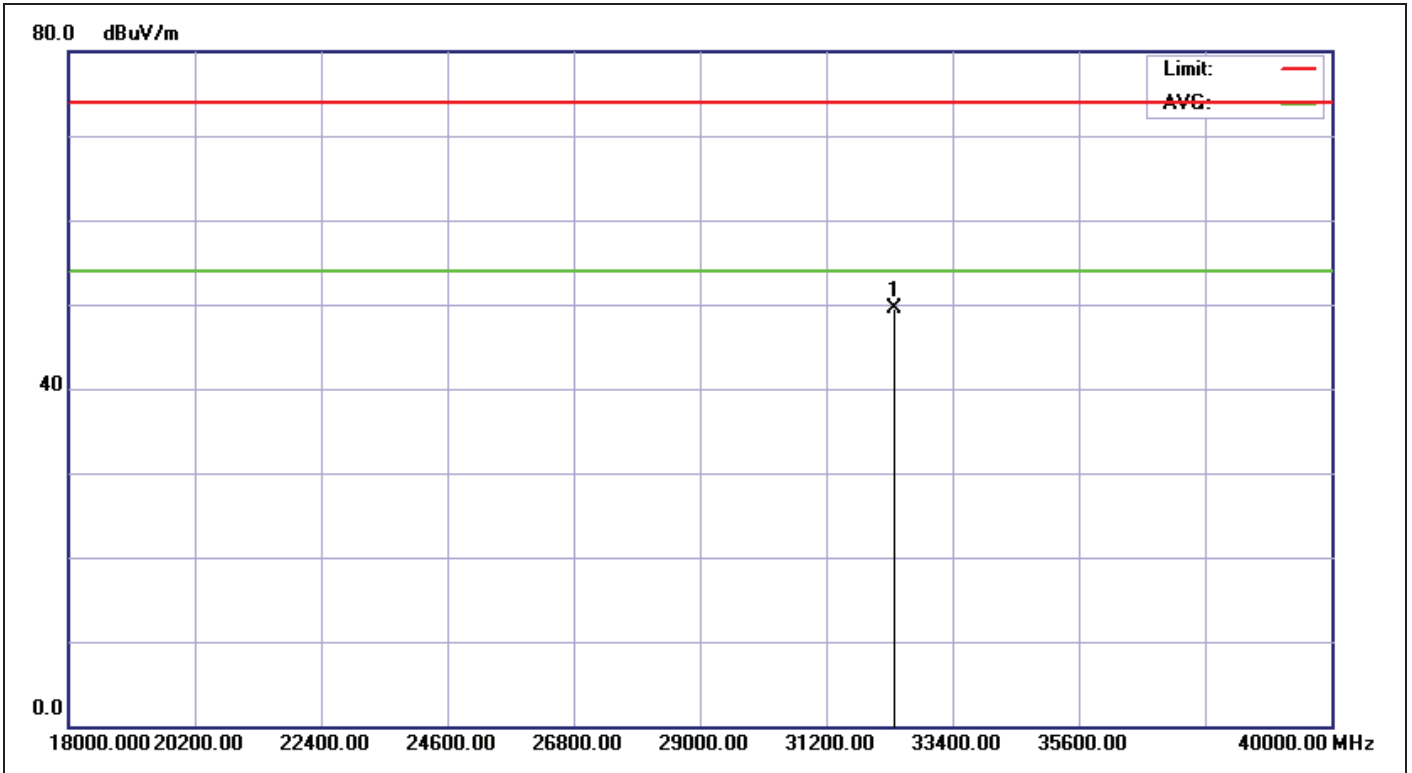

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:52:48
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5825		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	32379.000	33.96	15.45	49.41	74.00	-24.59	peak	100	360	



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

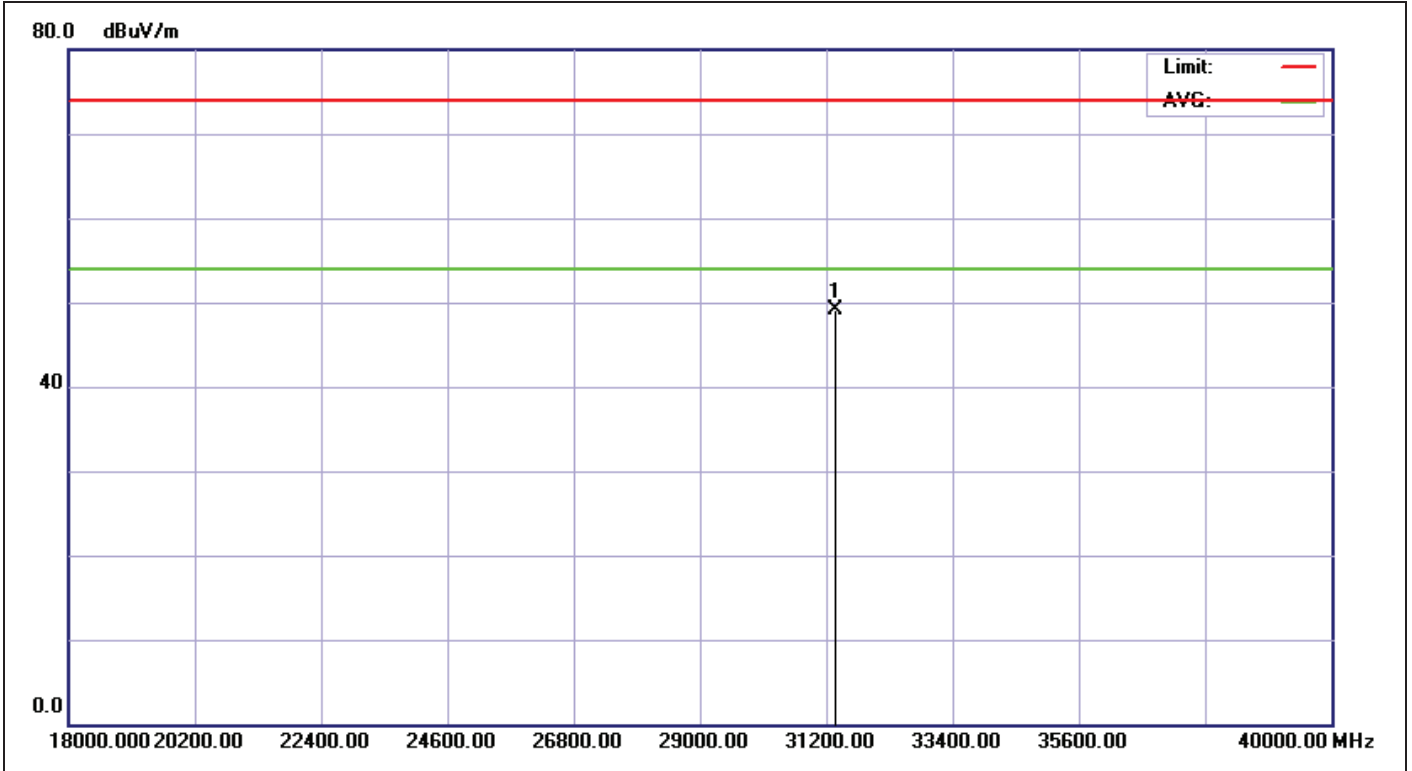


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:52:21
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5825		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	31358.000	32.12	16.94	49.06	74.00	-24.94	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

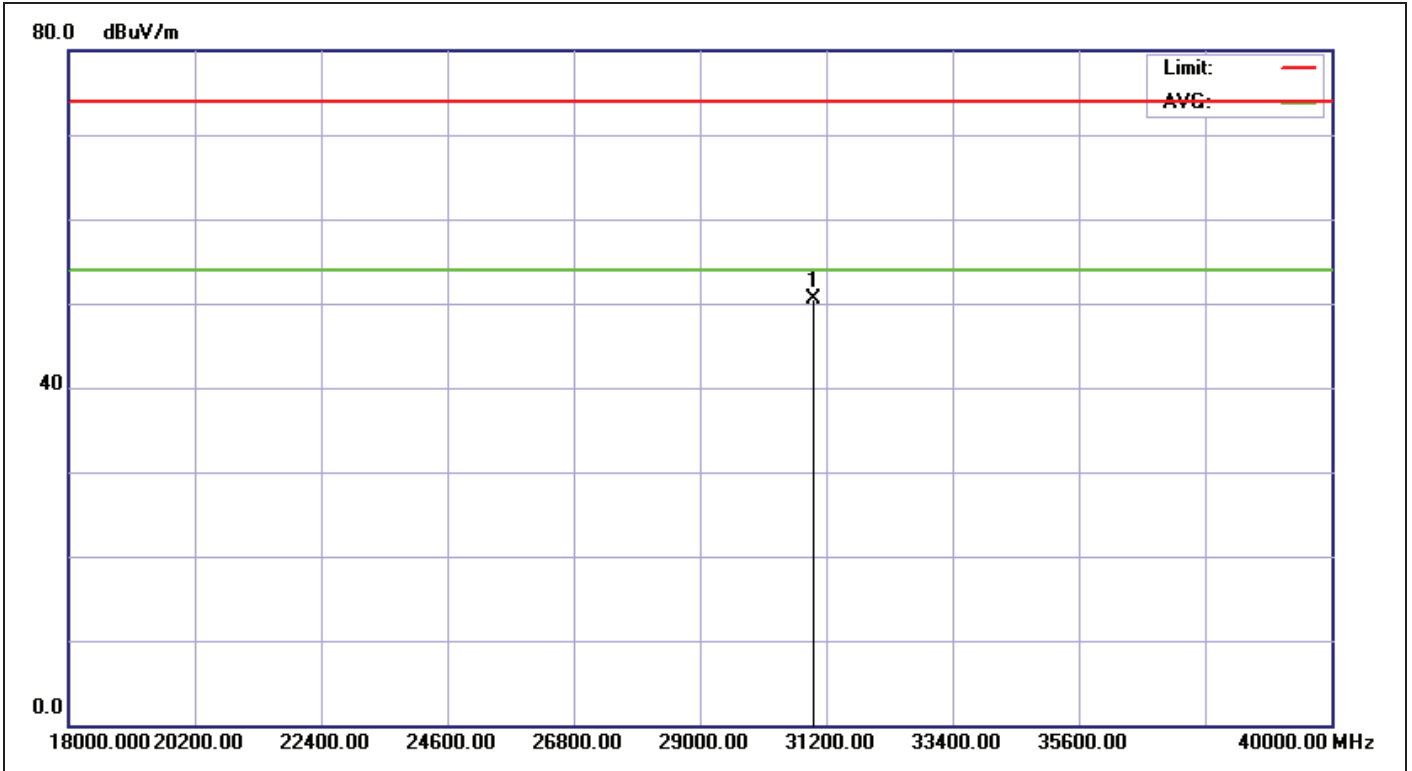


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:51:54
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5785		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30971.000	32.67	17.79	50.46	74.00	-23.54	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

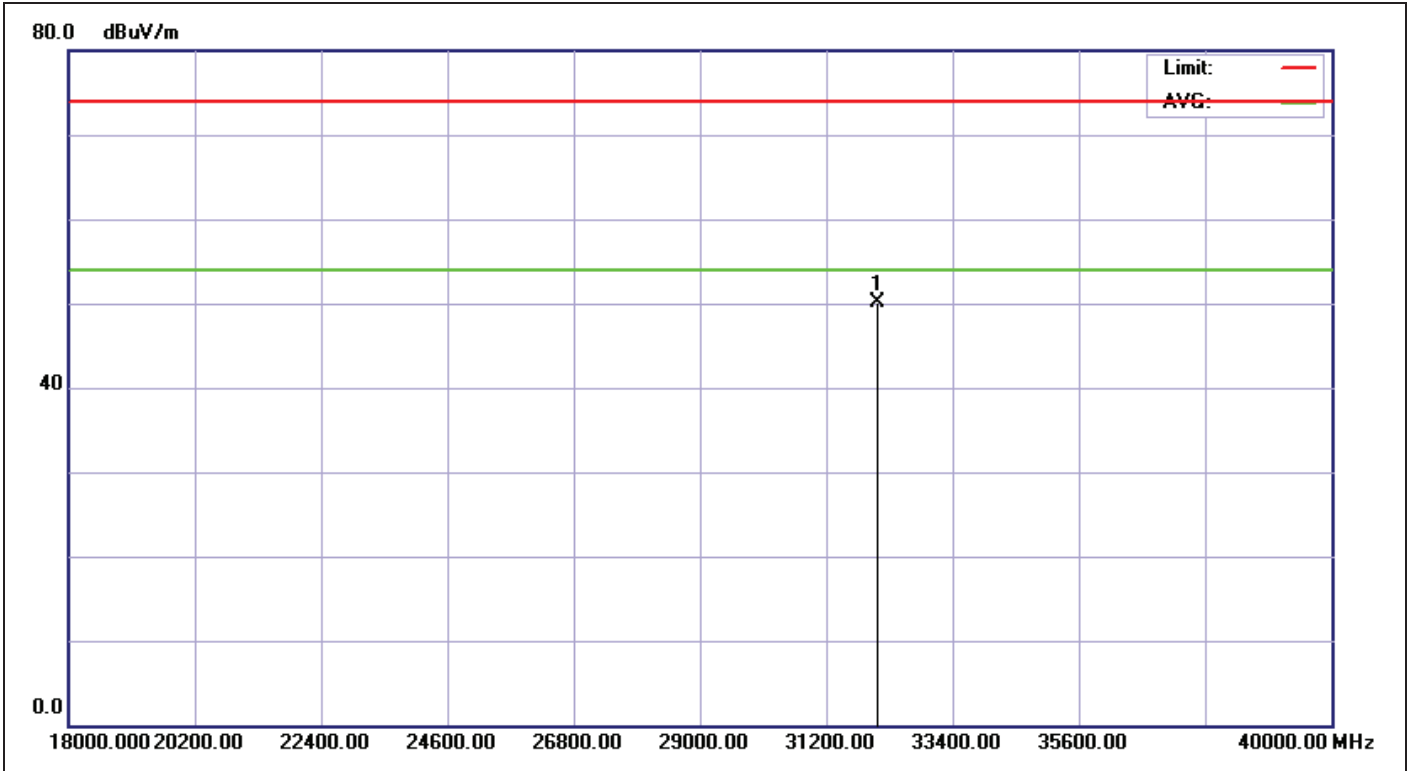


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:51:25
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5785		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	32098.000	33.46	16.59	50.05	74.00	-23.95	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

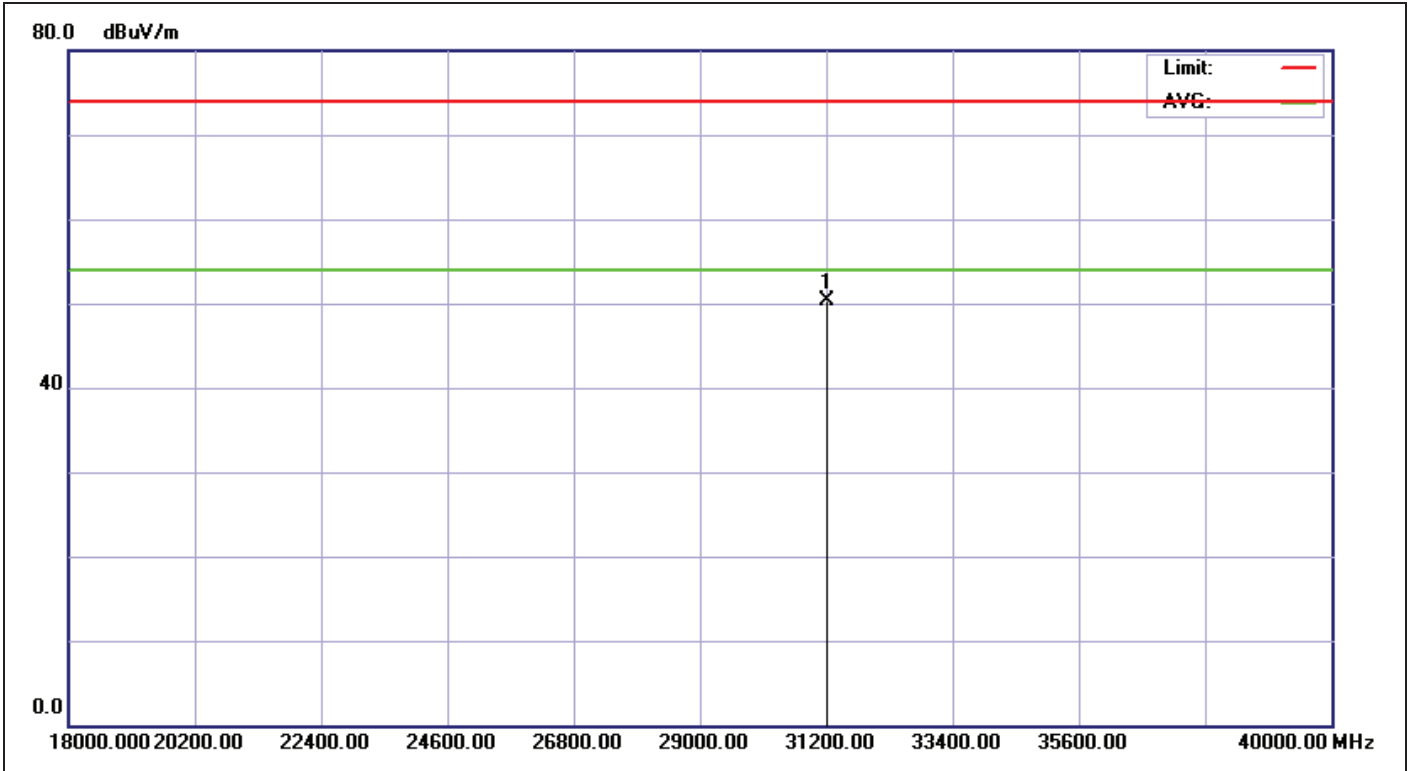


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:51:02
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5745		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	31218.000	32.37	17.96	50.33	74.00	-23.67	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

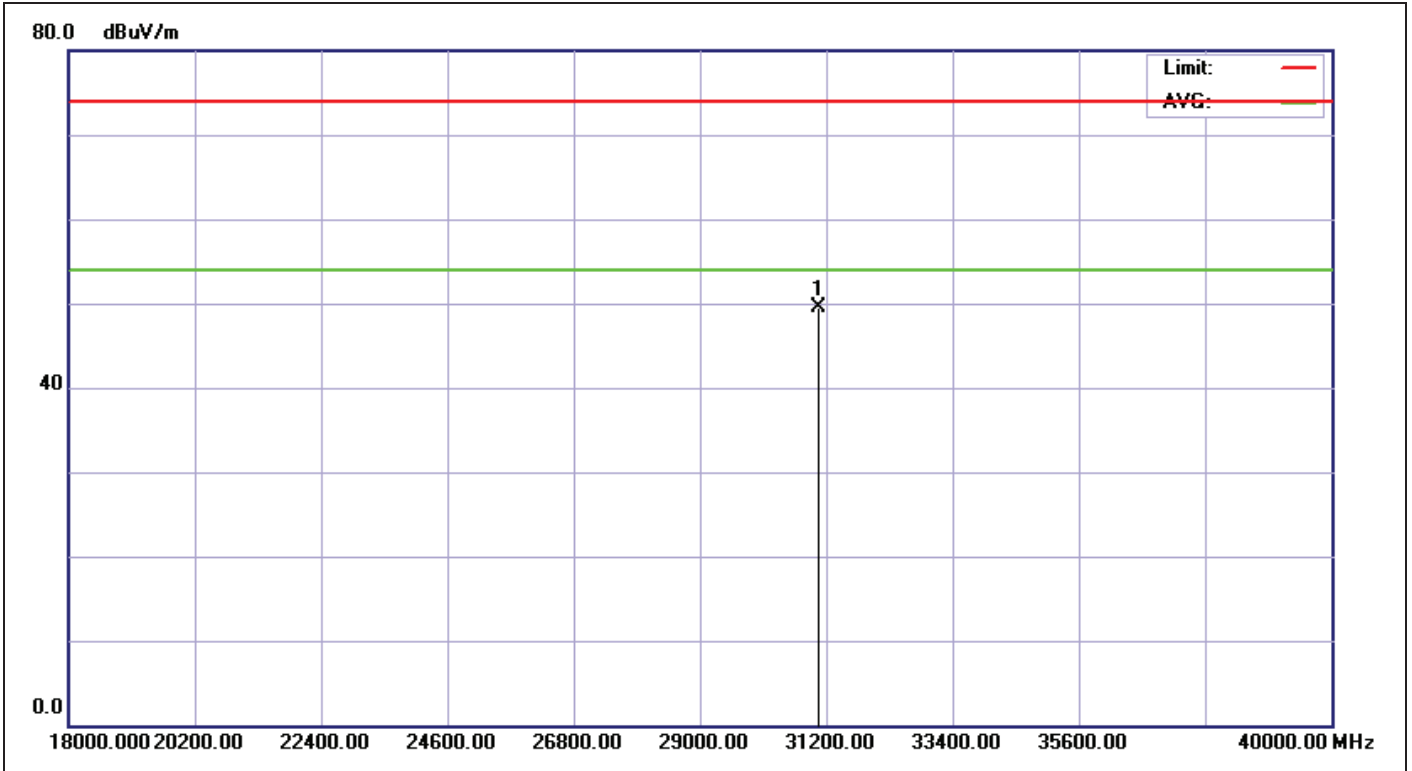


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:50:29
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5745		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	31077.000	32.62	16.90	49.52	74.00	-24.48	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

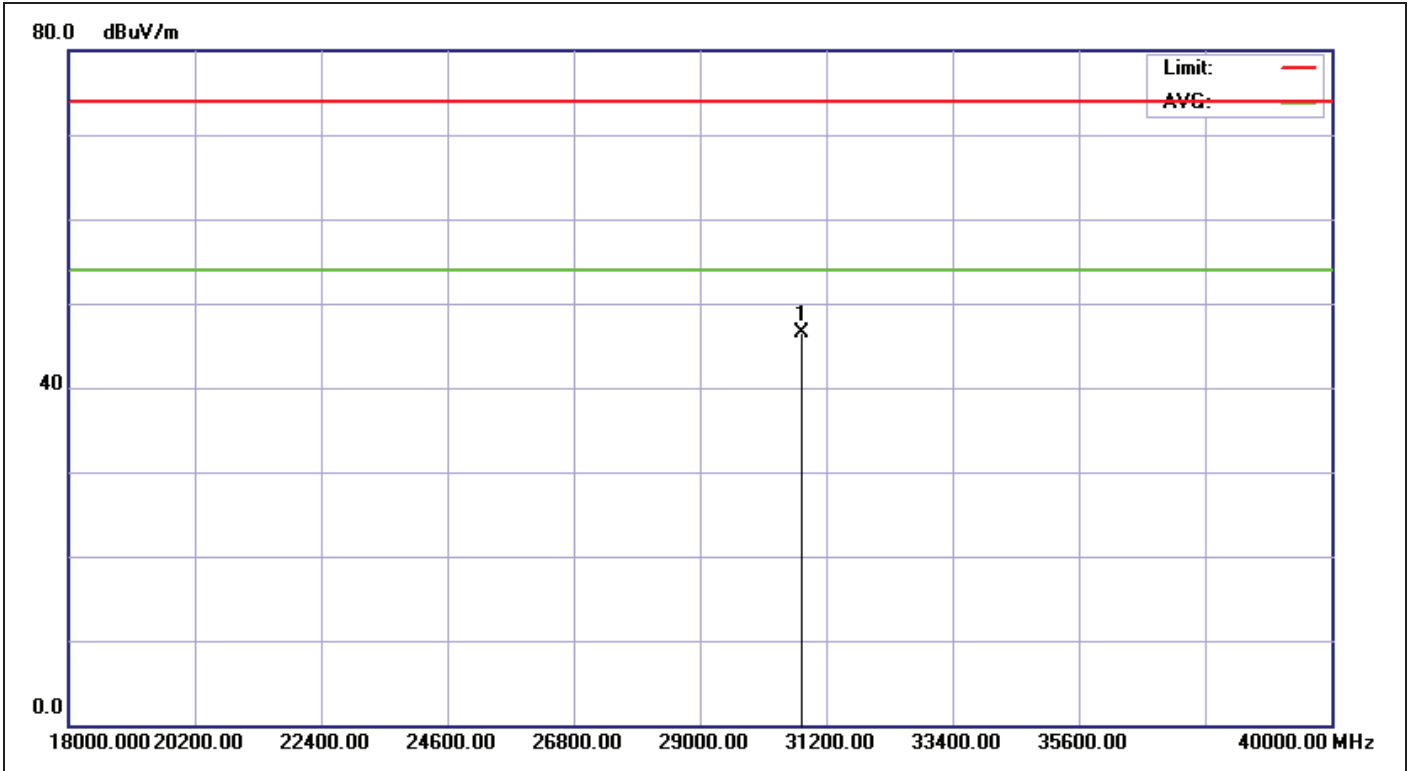


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 09:00:14
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5795		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30760.000	31.98	14.58	46.56	74.00	-27.44	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

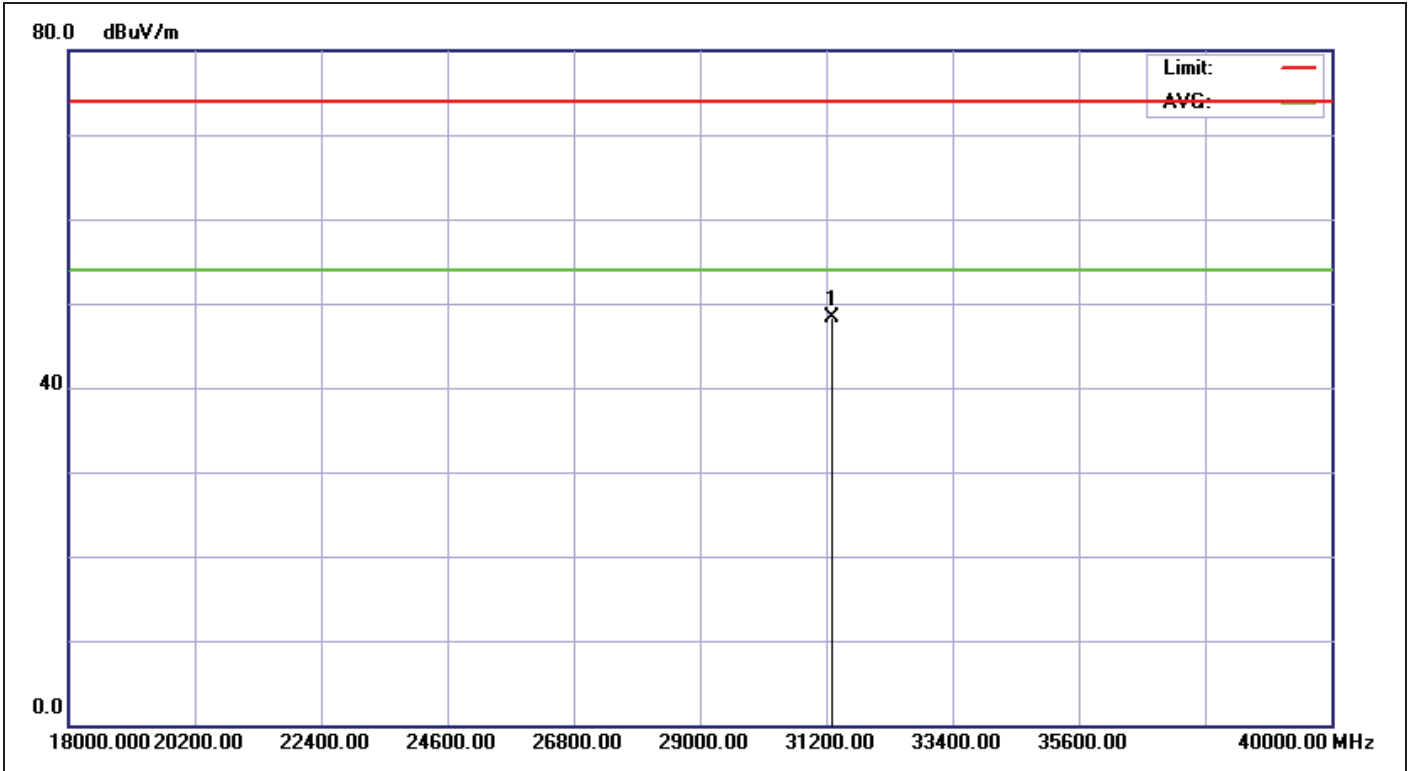


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:59:07
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5795		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	31288.000	32.25	16.02	48.27	74.00	-25.73	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

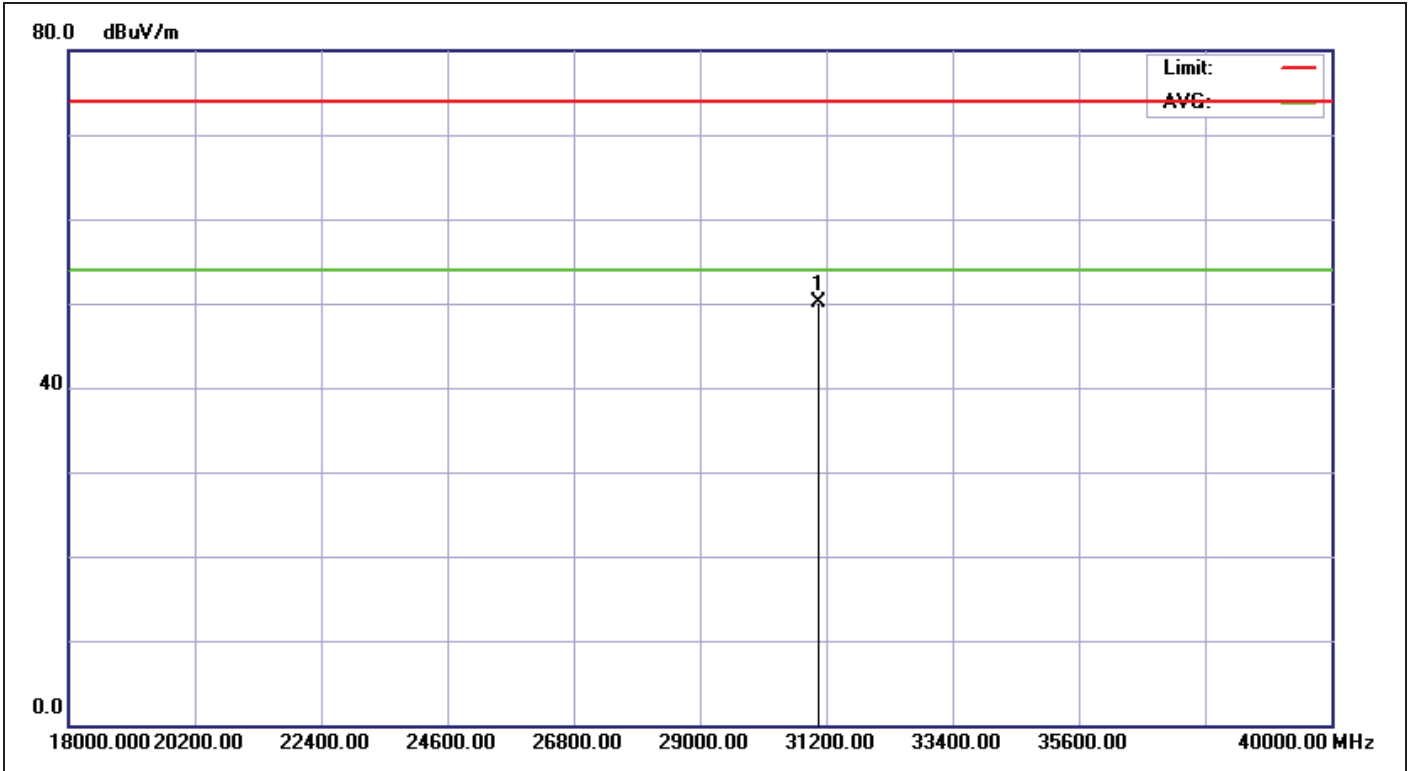


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:58:37
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5755		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	31077.000	32.62	17.40	50.02	74.00	-23.98	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

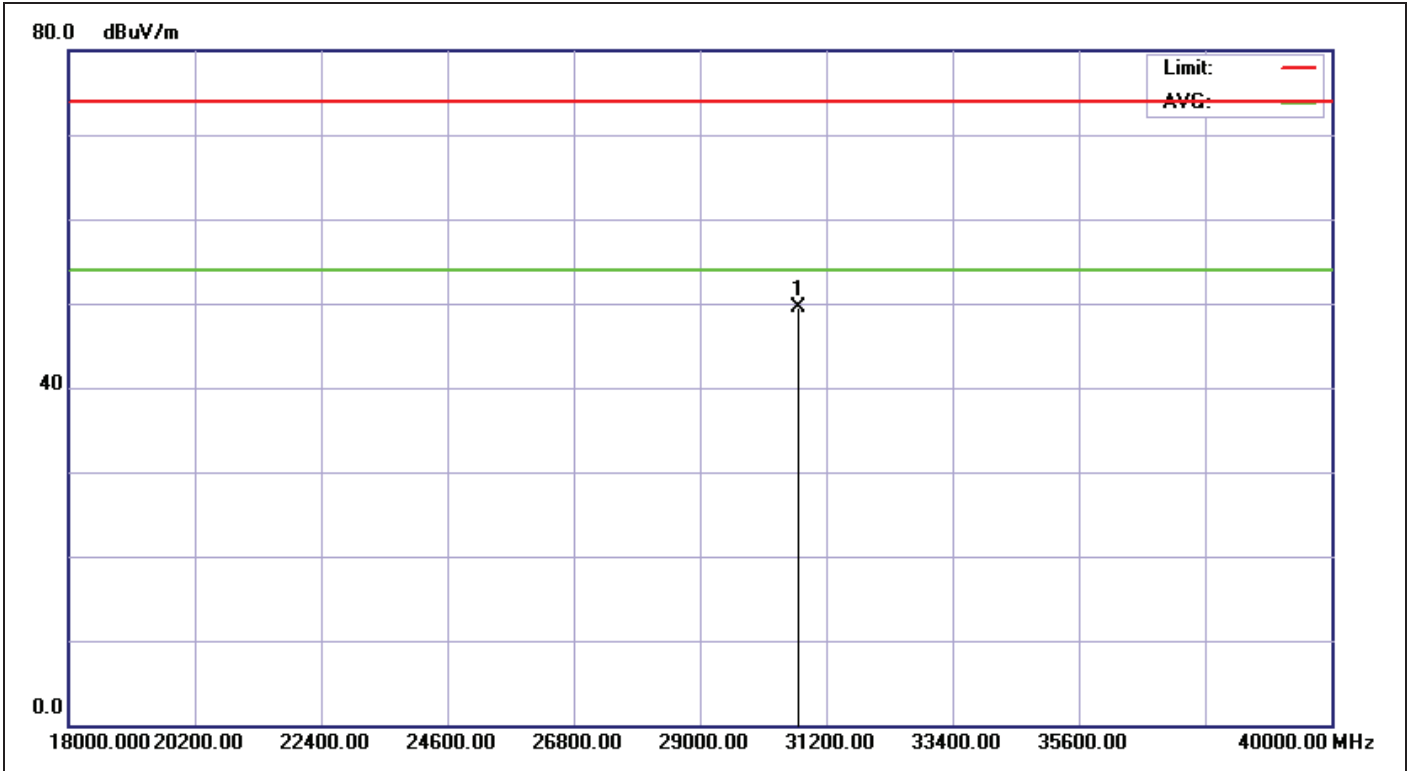


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:57:56
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5755		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30725.000	31.87	17.56	49.43	74.00	-24.57	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

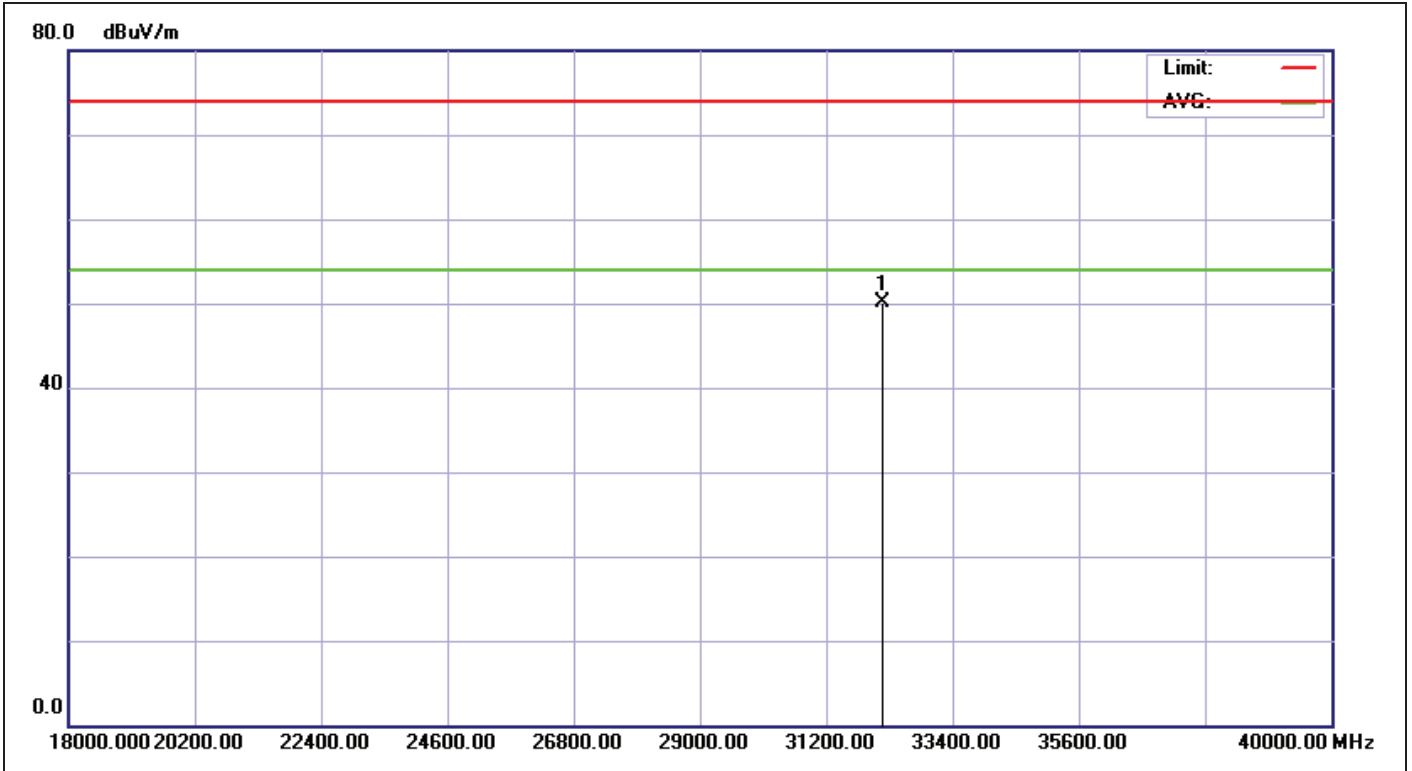


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:57:29
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5825		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	32168.000	33.59	16.44	50.03	74.00	-23.97	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

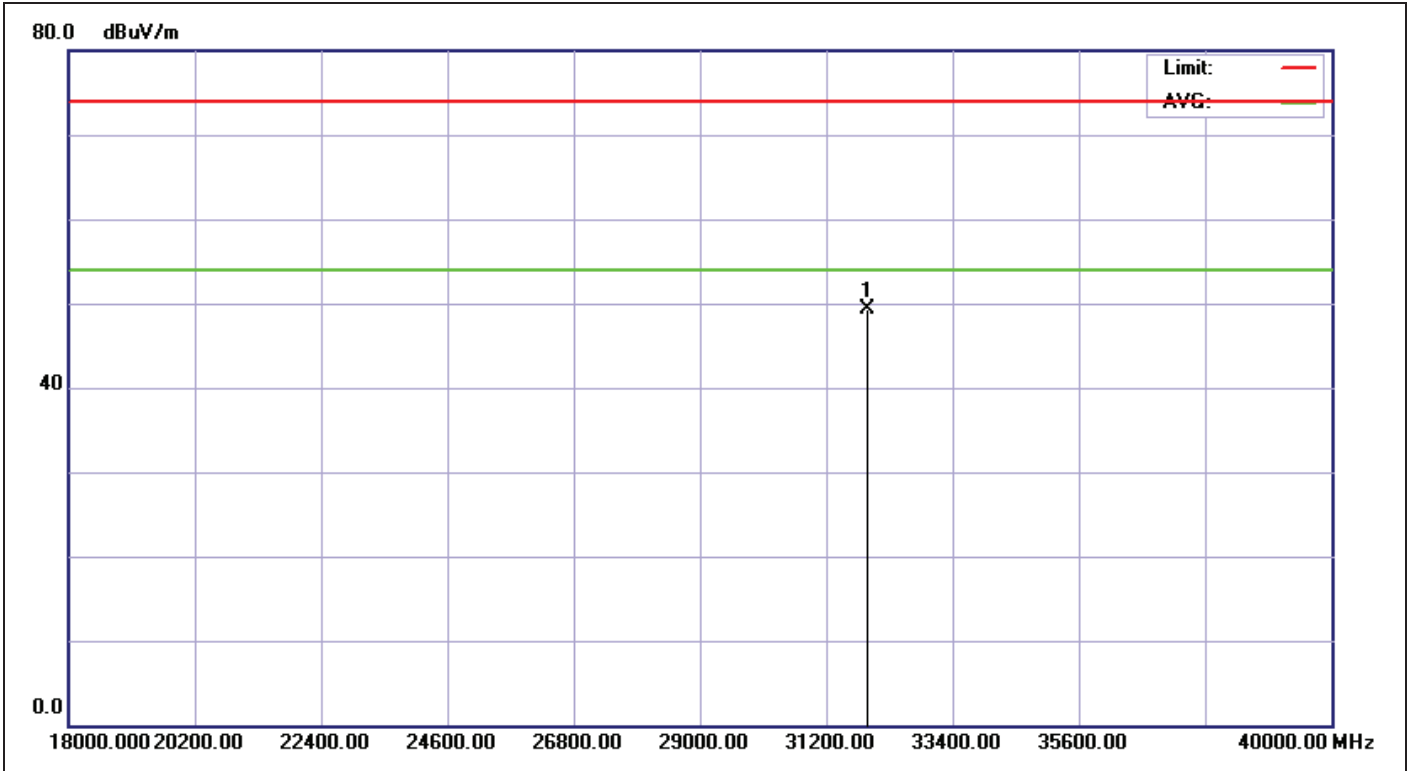


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:56:23
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5825		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	31922.000	33.07	16.33	49.40	74.00	-24.60	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

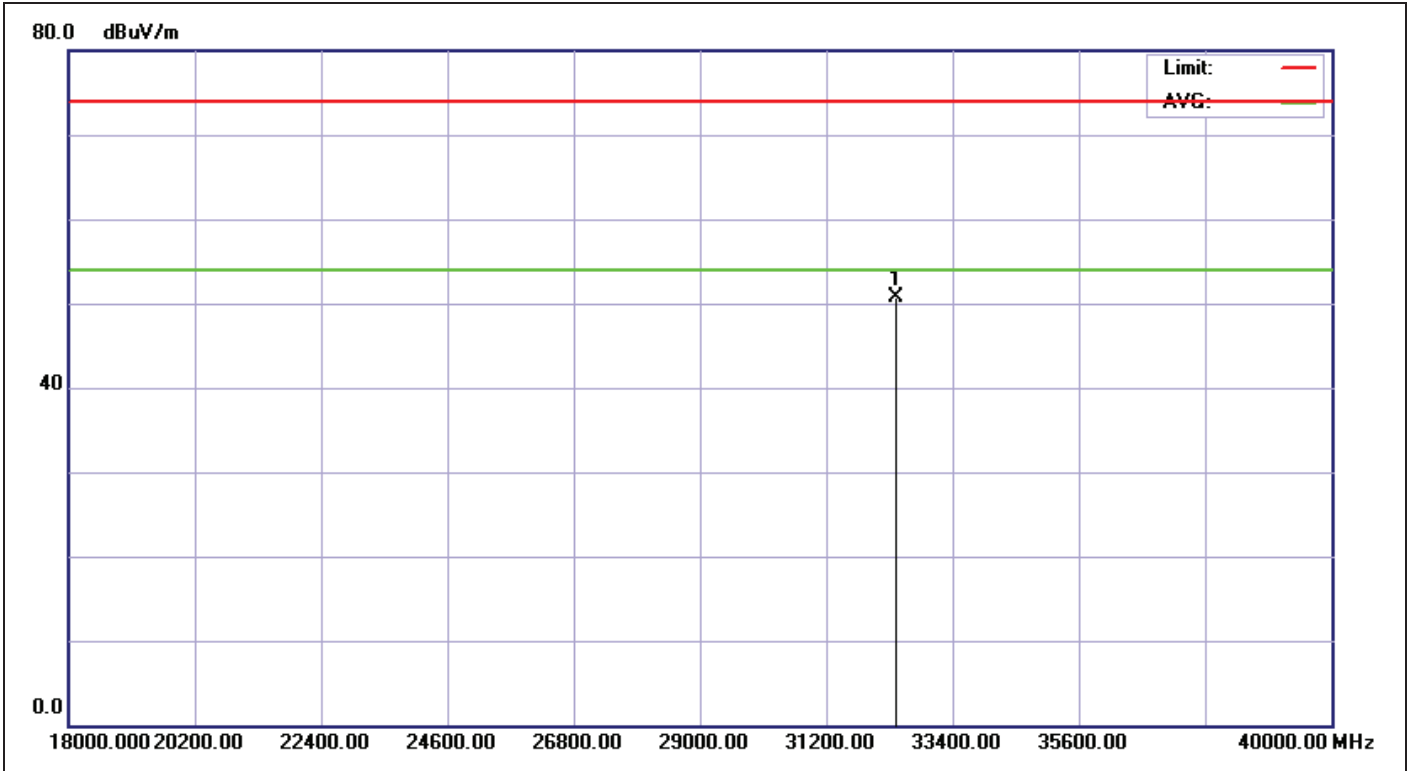


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:55:53
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5785		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	32414.000	34.03	16.66	50.69	74.00	-23.31	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

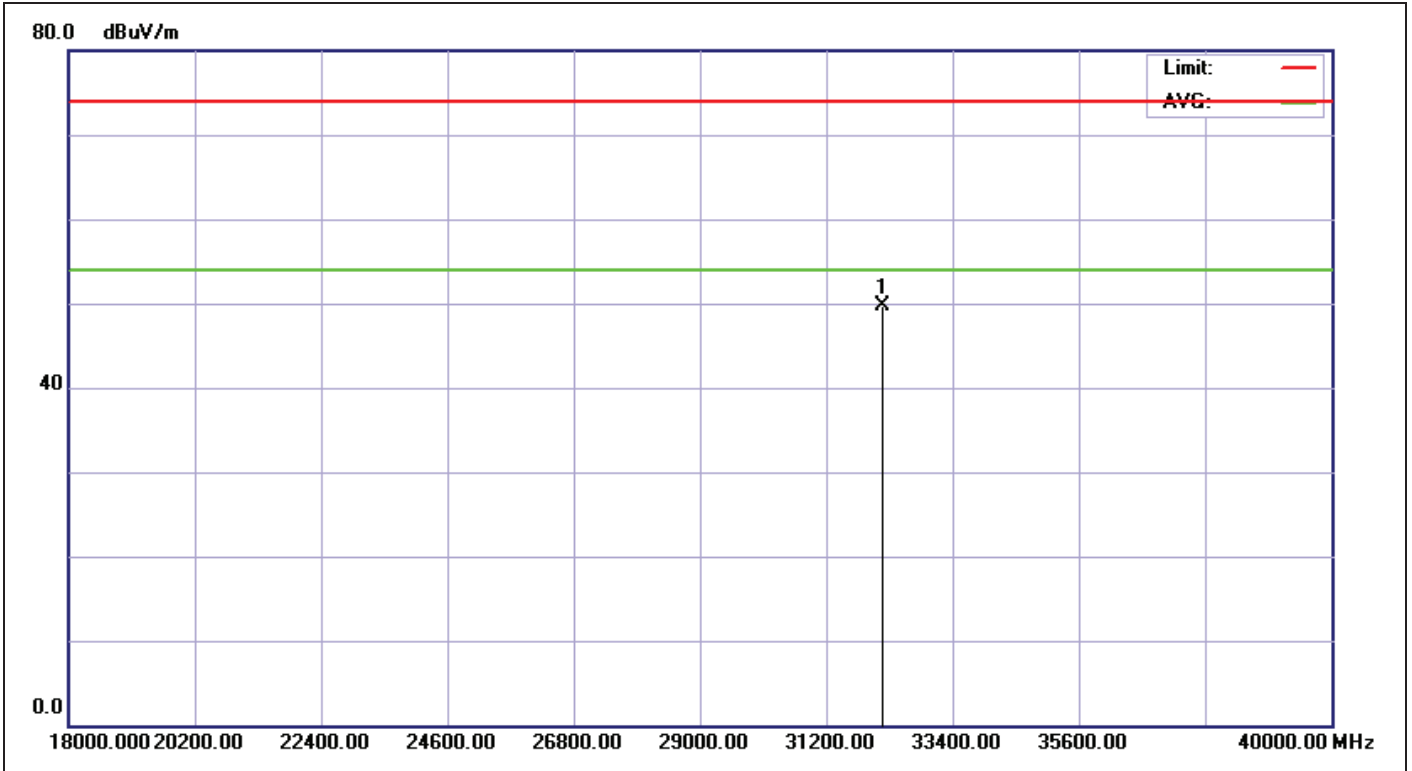


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:54:54
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5785		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	32168.000	33.59	16.10	49.69	74.00	-24.31	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

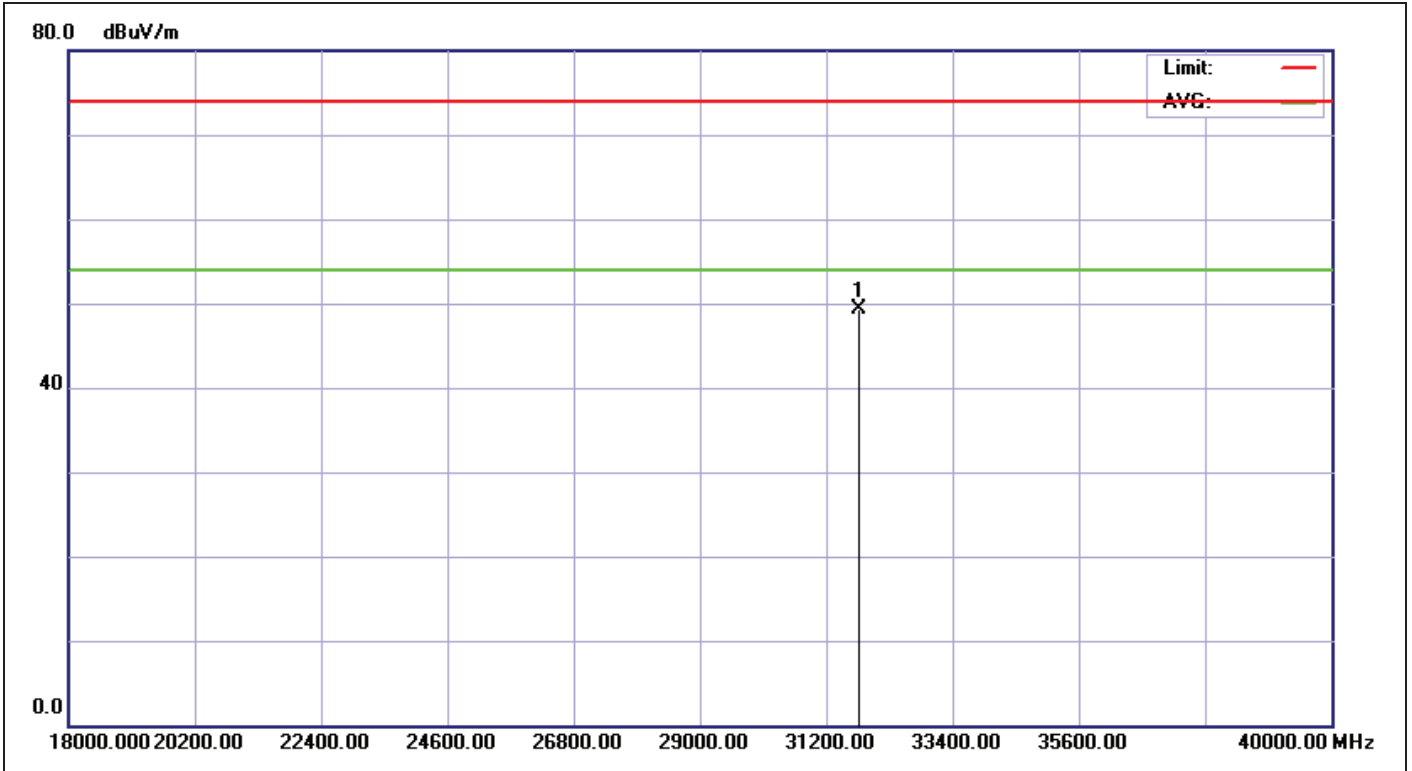


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:54:17
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5745		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	31781.000	32.66	16.58	49.24	74.00	-24.76	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

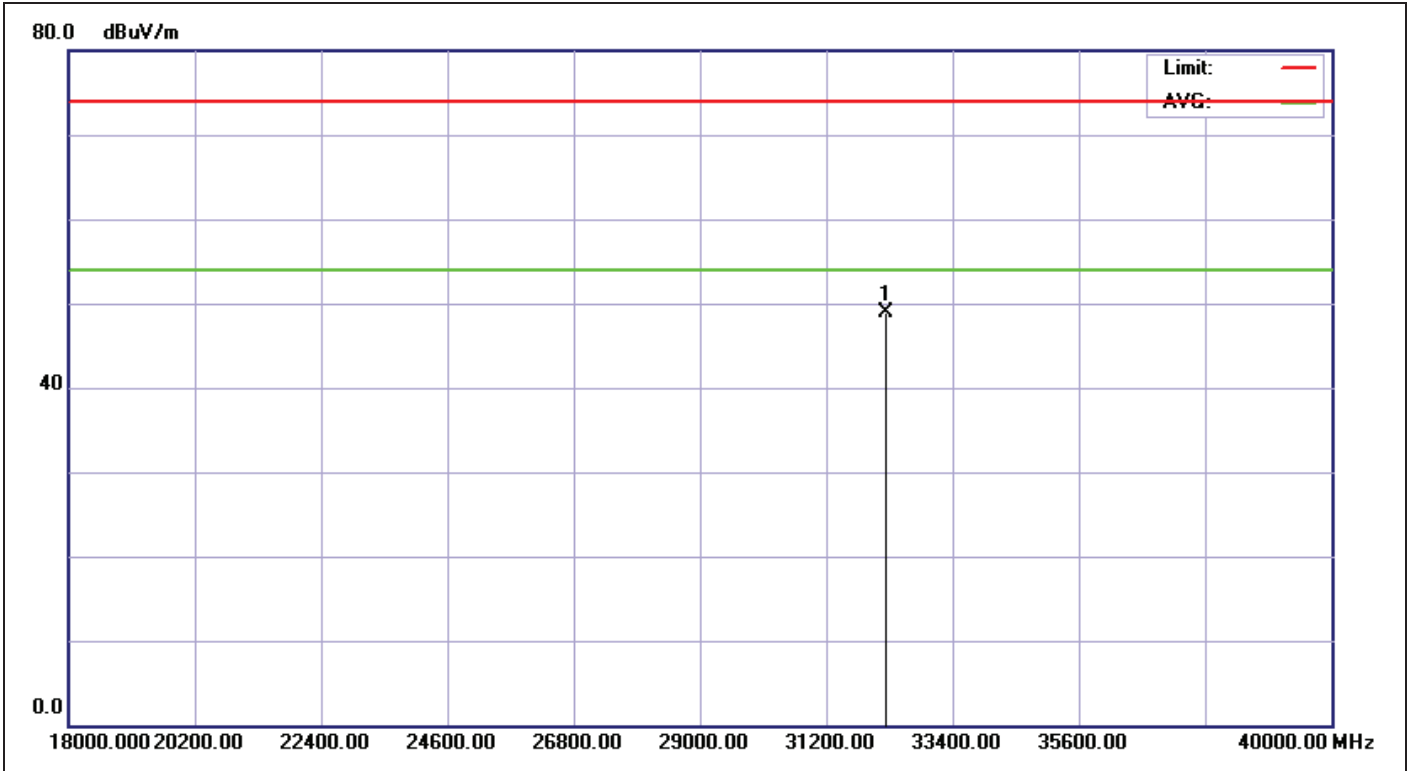

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:53:41
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5745		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	32238.000	33.71	15.28	48.99	74.00	-25.01	peak	100	360	