


Test Report No.10039910 001

Appendix 2: Test Result of Radiated Emissions and
Radiated Band Edge


(File: 10039910Appendix2)

Radiated Bandedge (802.11A) AVG


Low Channel (H)

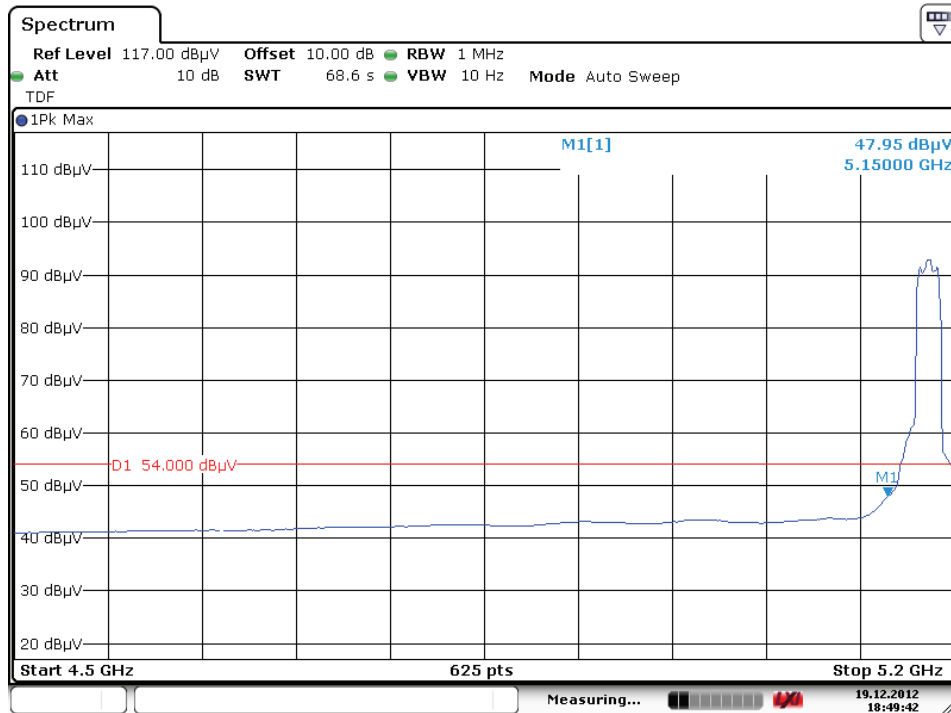


High Channel (H)

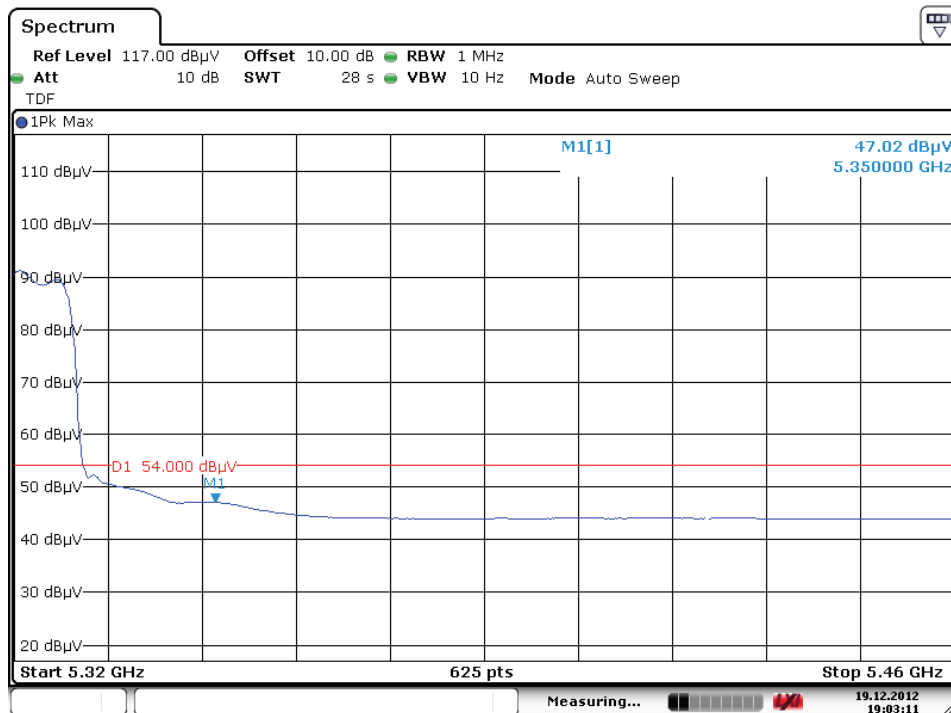

Low Channel (V)

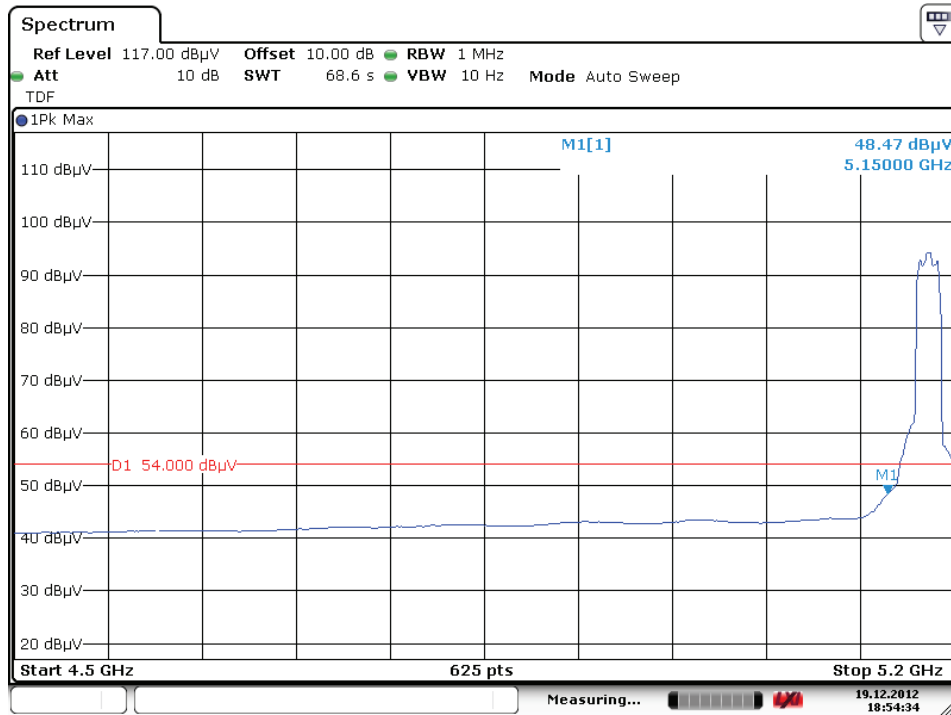


High Channel (V)

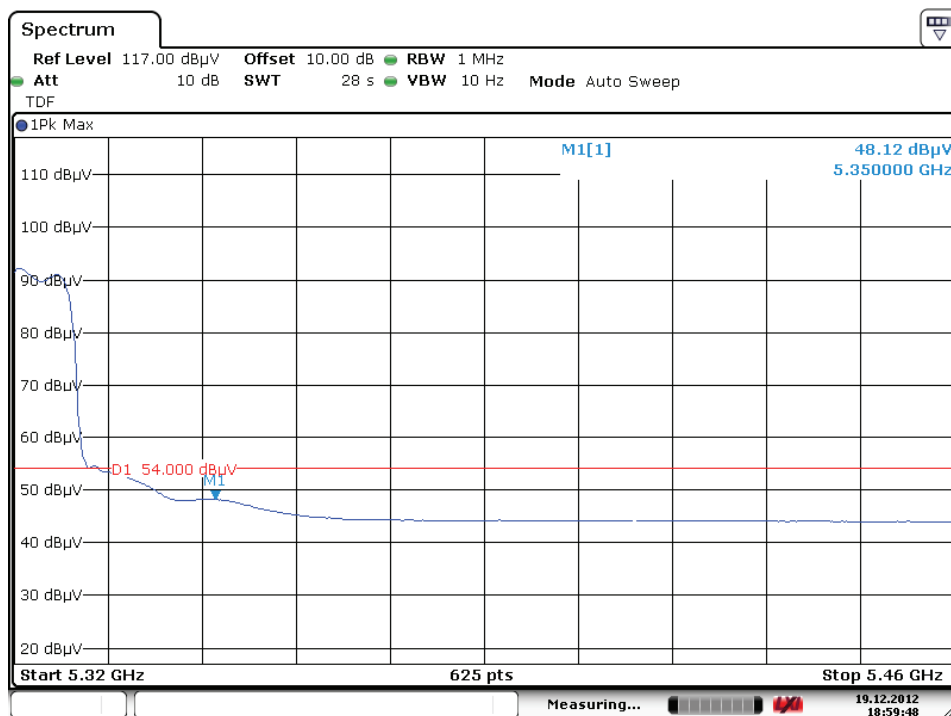


Radiated Bandedge (802.11N, HT20) AVG

Low Channel (H)

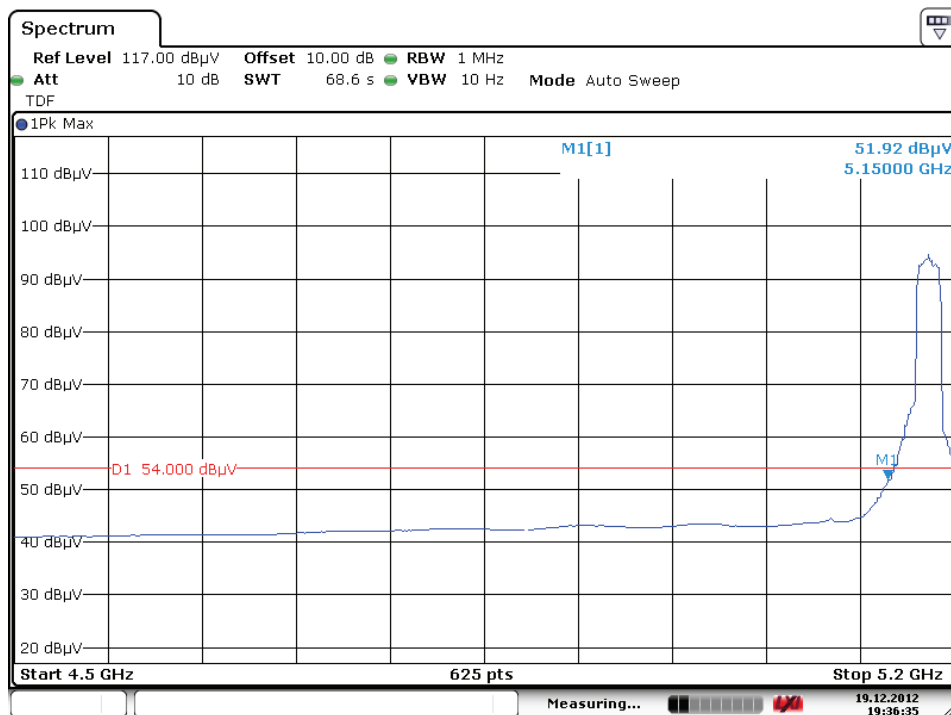


Date: 19.DEC.2012 19:36:35

High Channel (H)

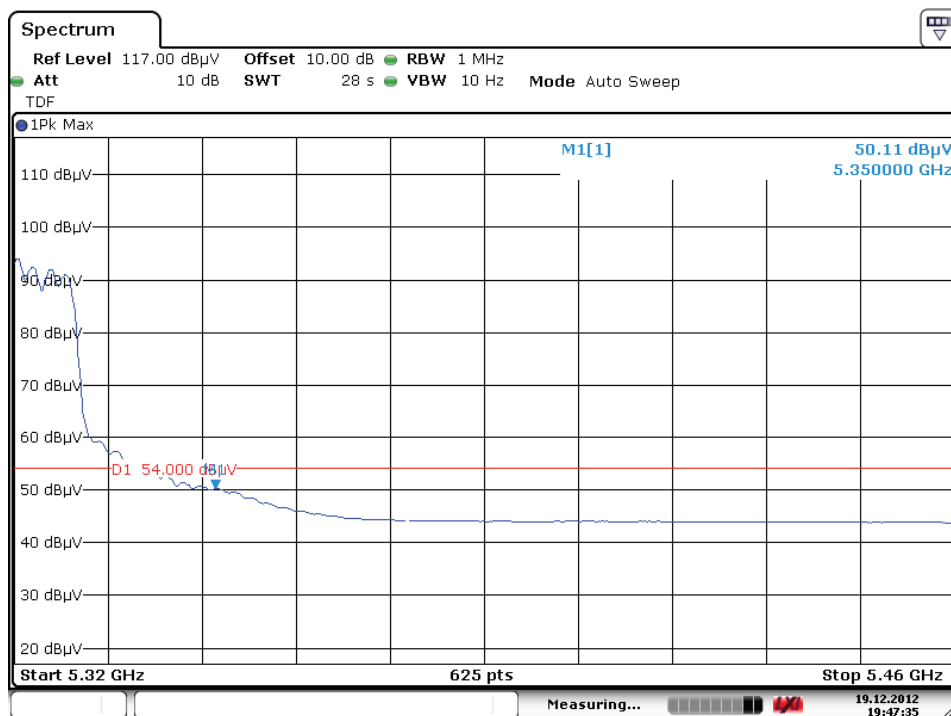


Date: 19.DEC.2012 19:47:35

Low Channel (V)

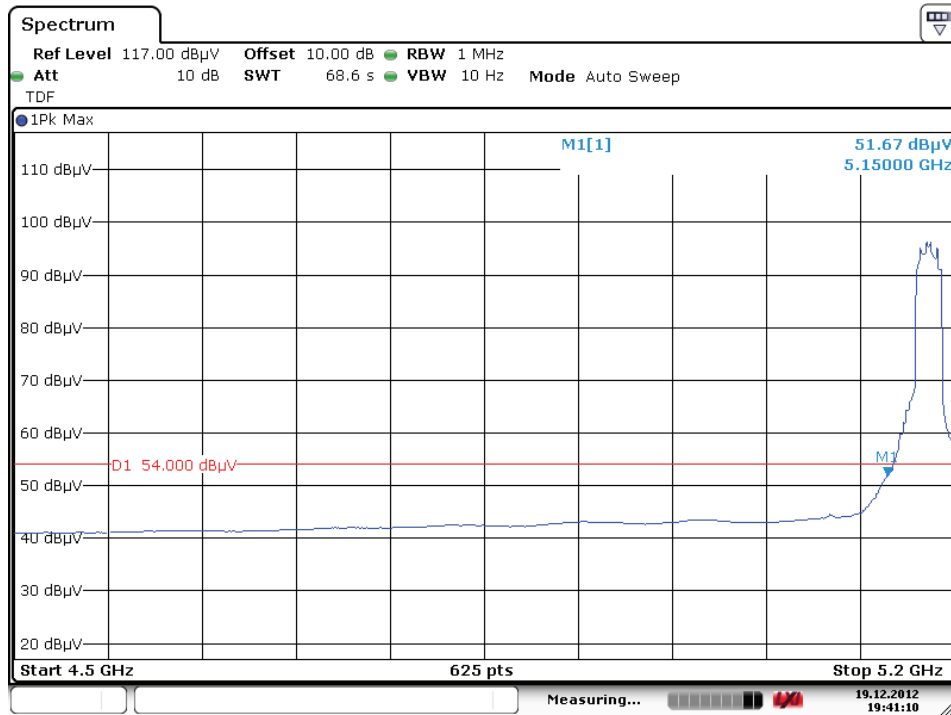


High Channel (V)

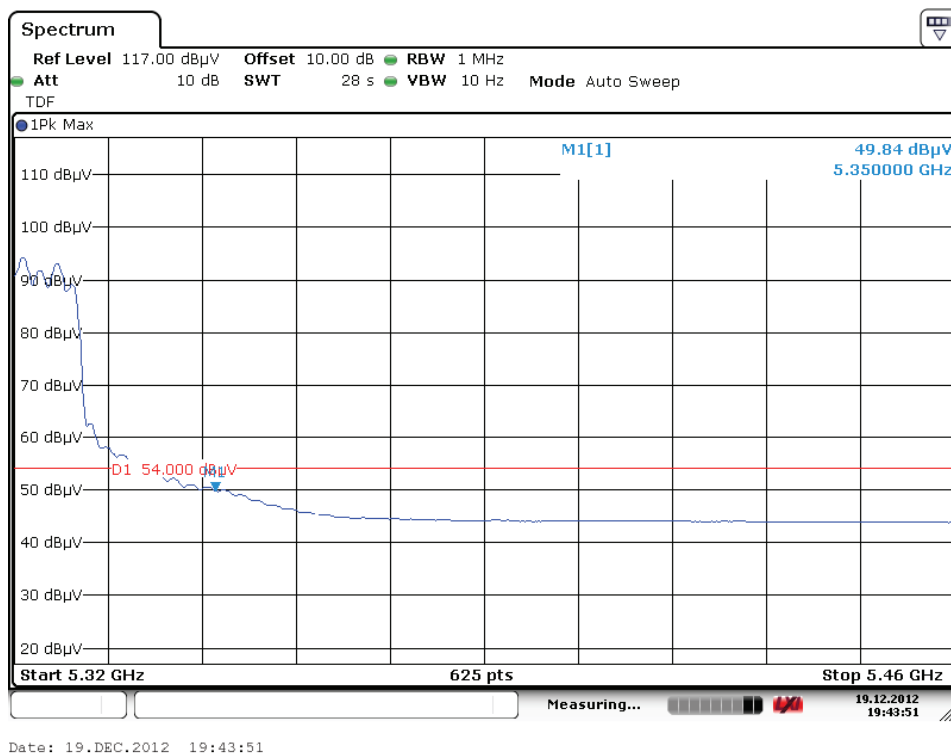


Radiated Bandedge (802.11N, HT40) AVG


Low Channel (H)

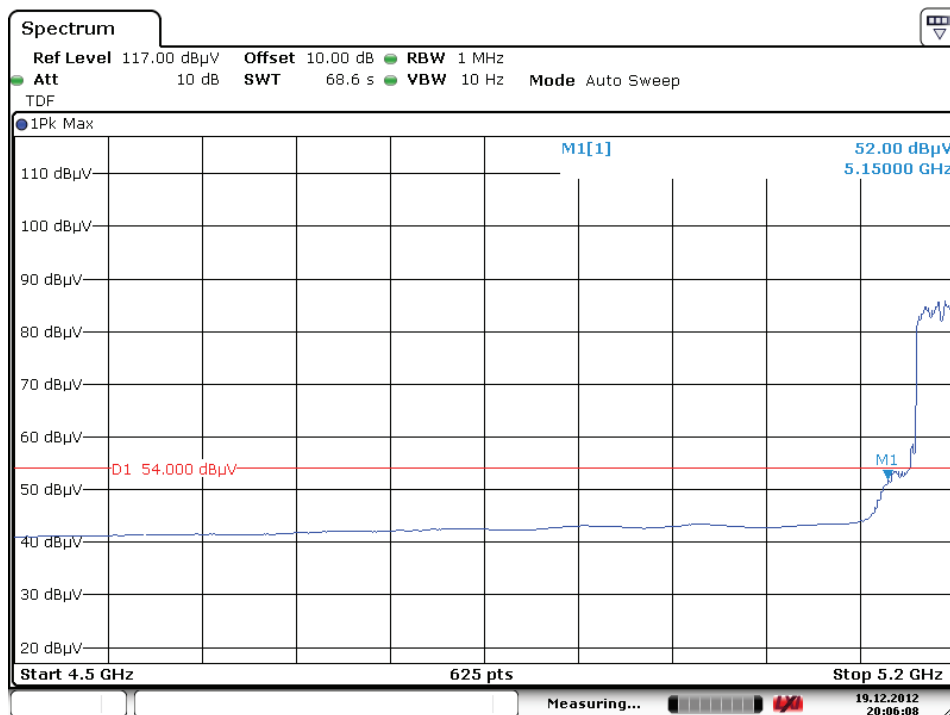


High Channel (H)

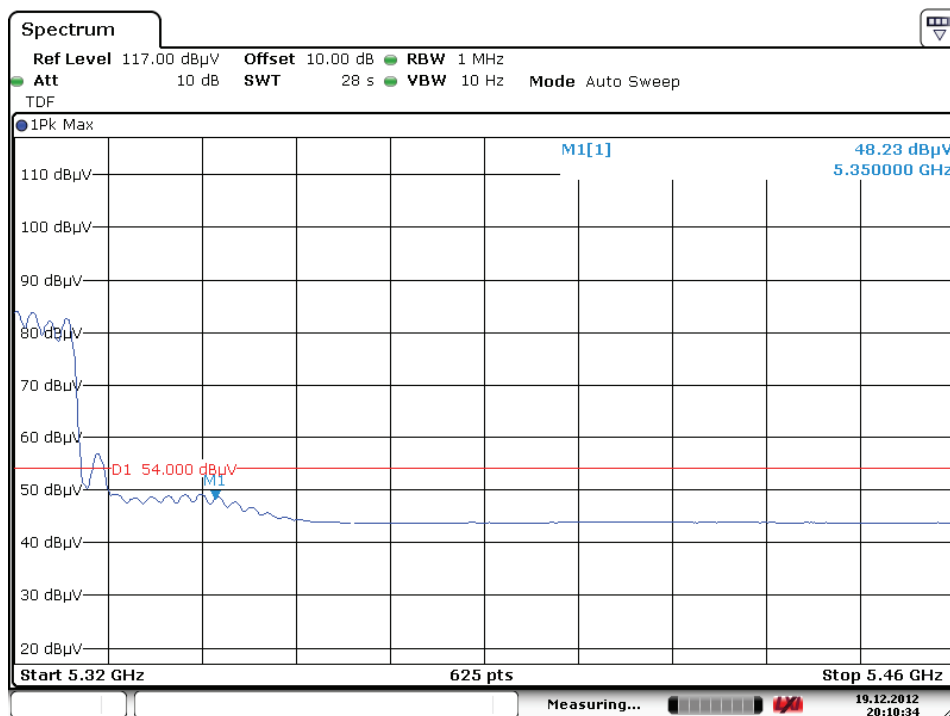

Low Channel (V)

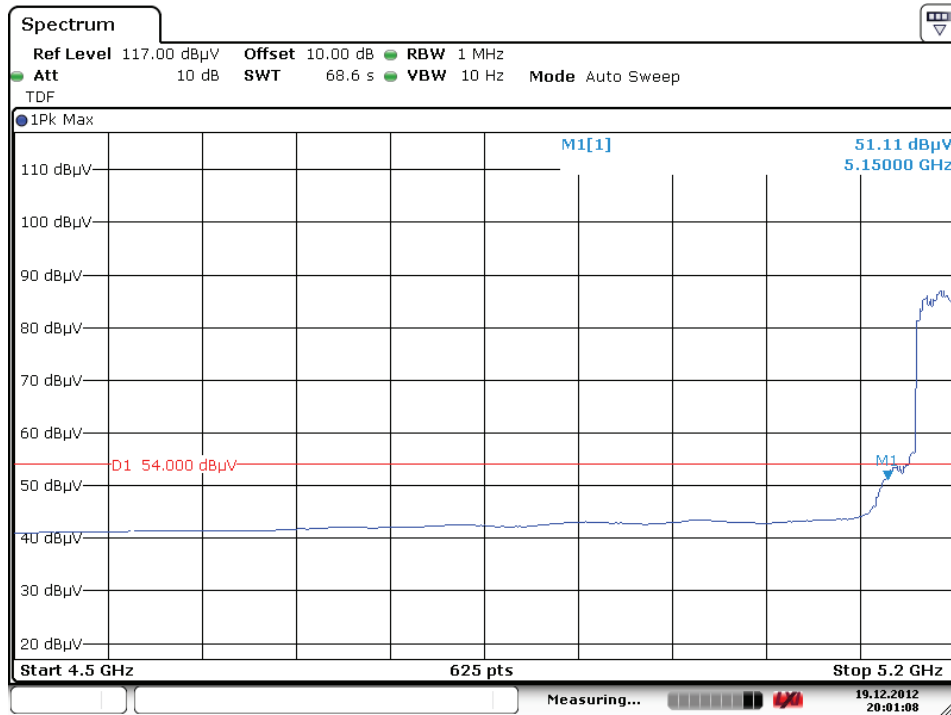


High Channel (V)

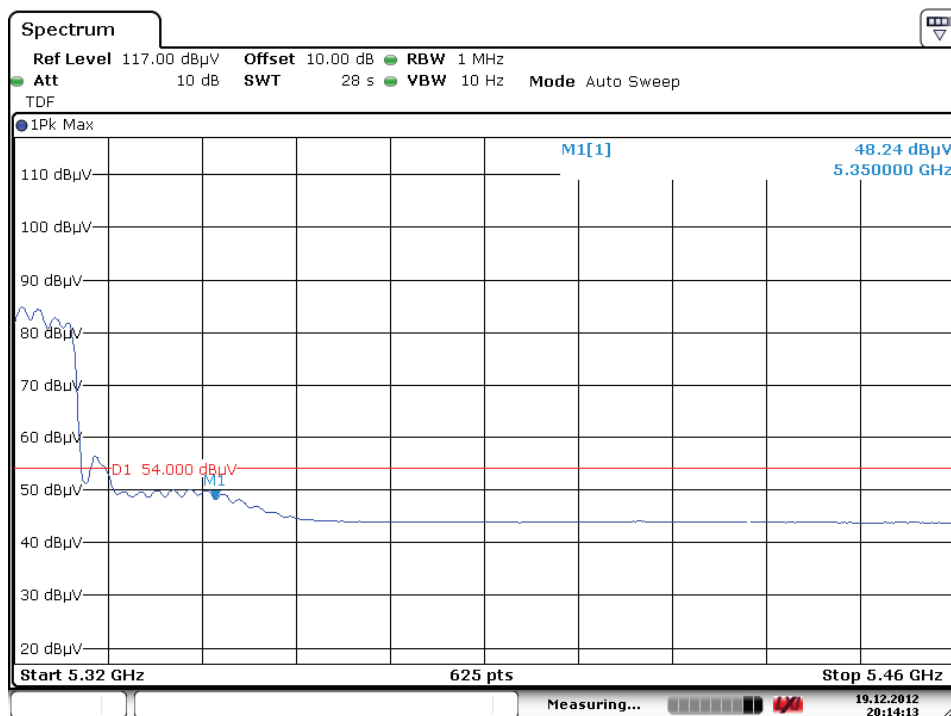


Radiated Bandedge (802.11A) PK


Low Channel (H)

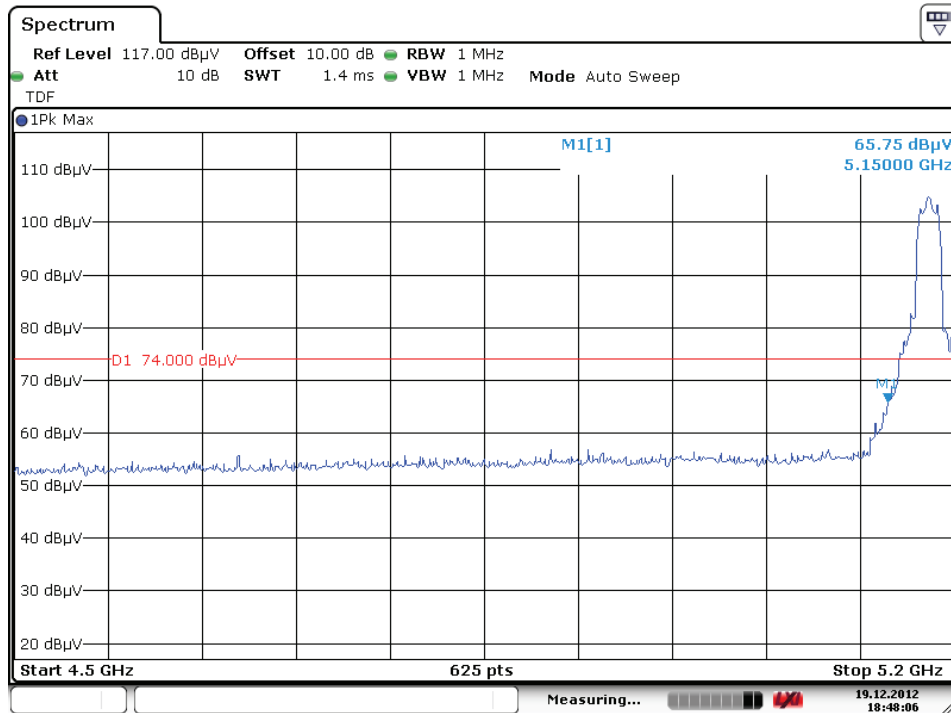


High Channel (H)

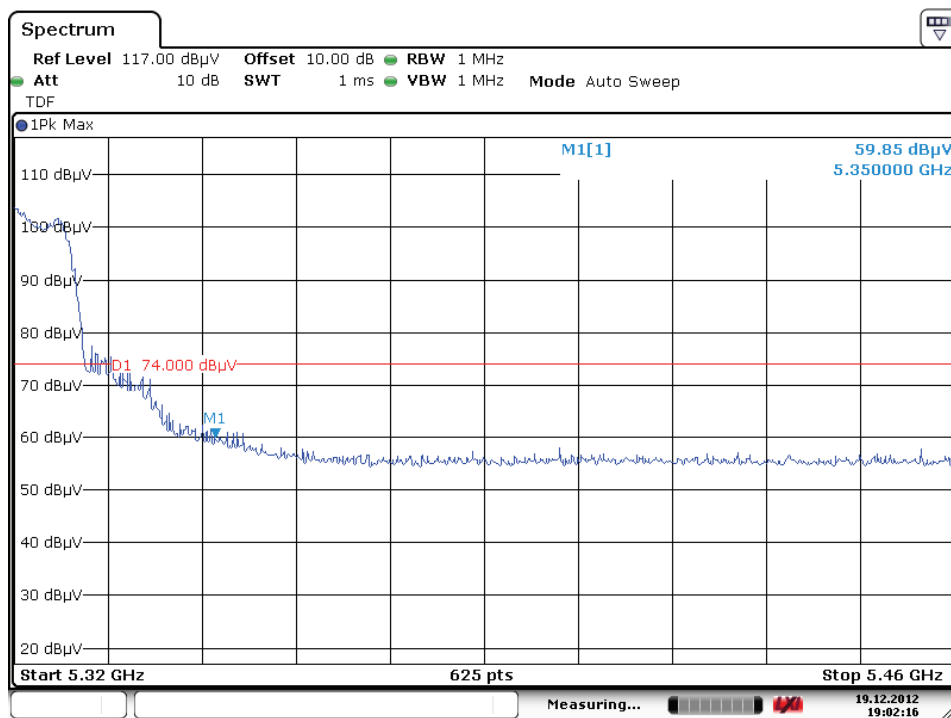

Low Channel (V)

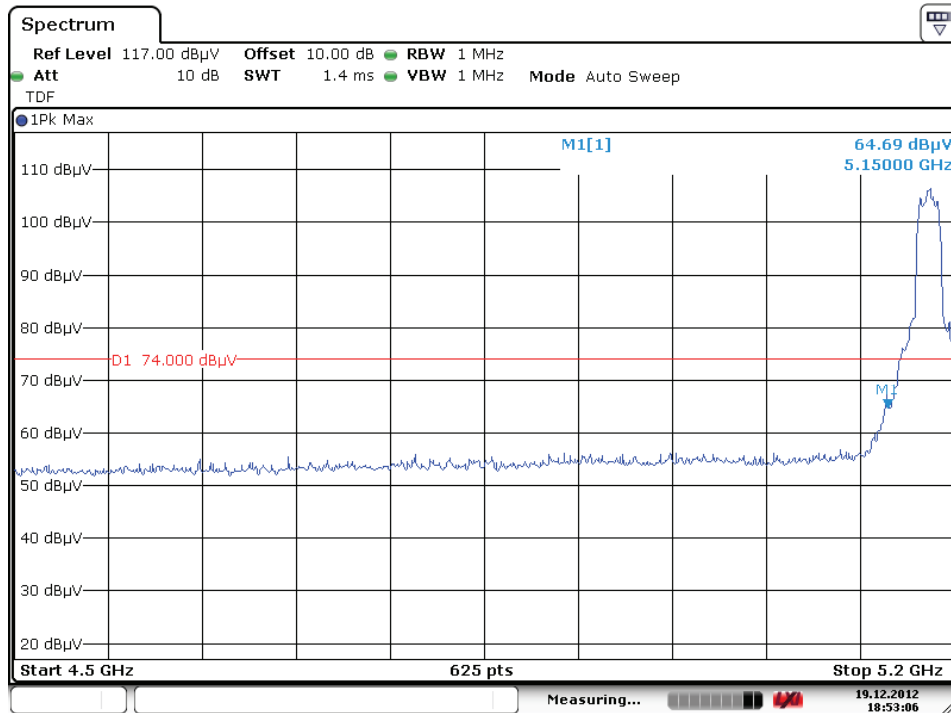


High Channel (V)

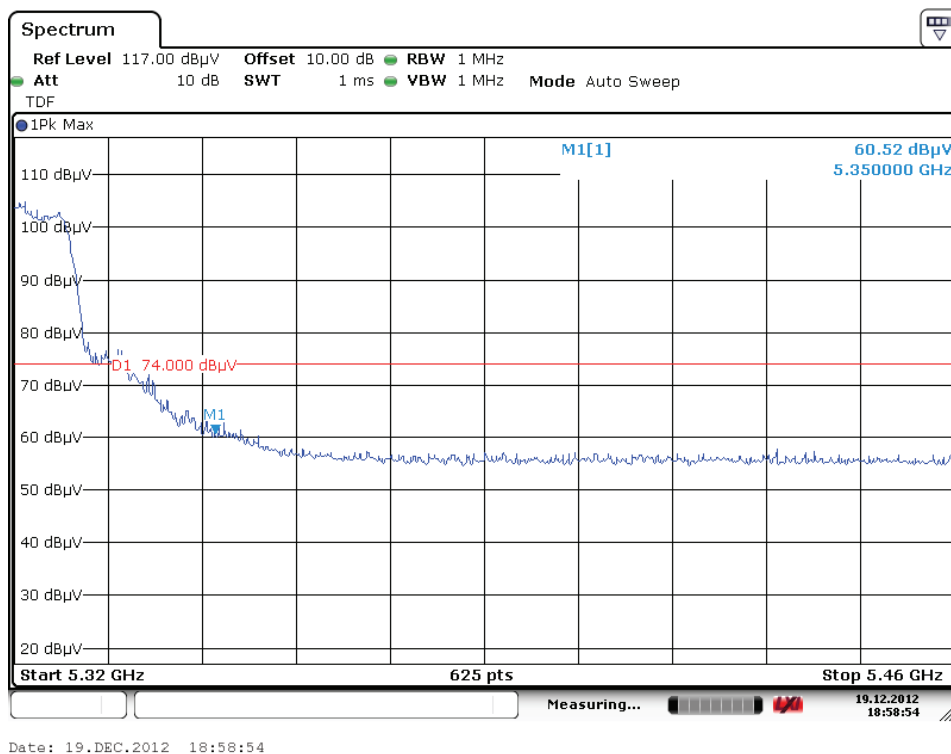


Radiated Bandedge (802.11N, HT20) PK

Low Channel (H)

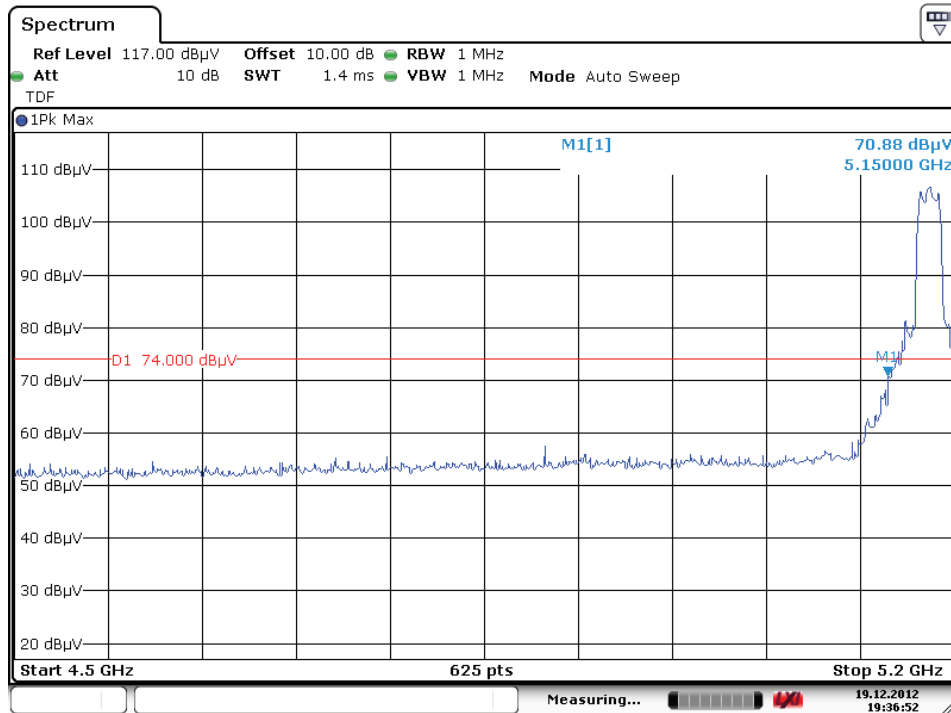


Date: 19.DEC.2012 19:36:52

High Channel (H)

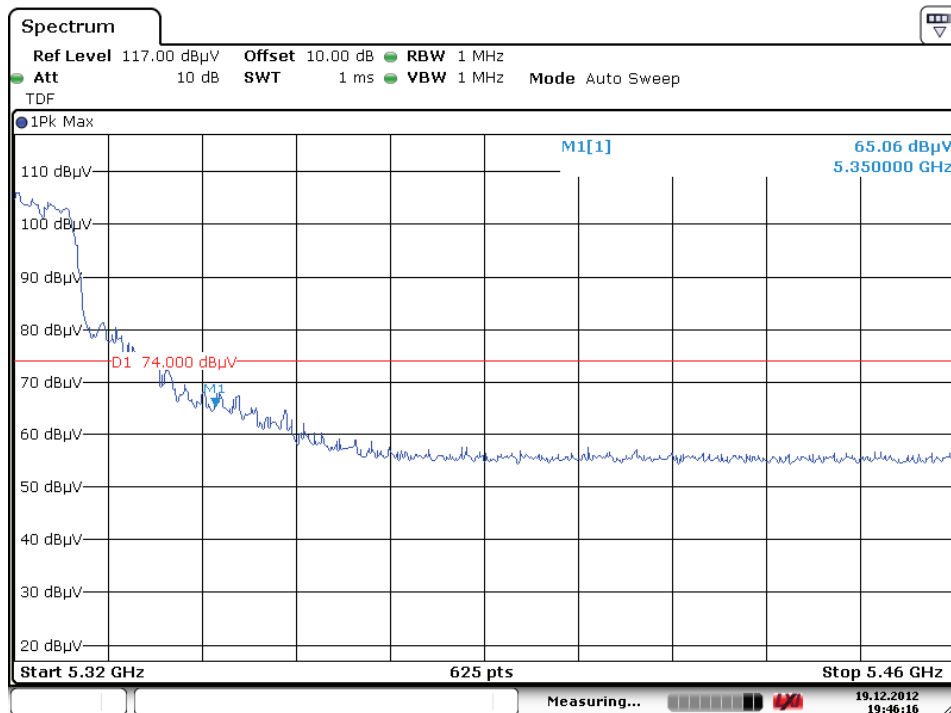


Date: 19.DEC.2012 19:46:16

Low Channel (V)

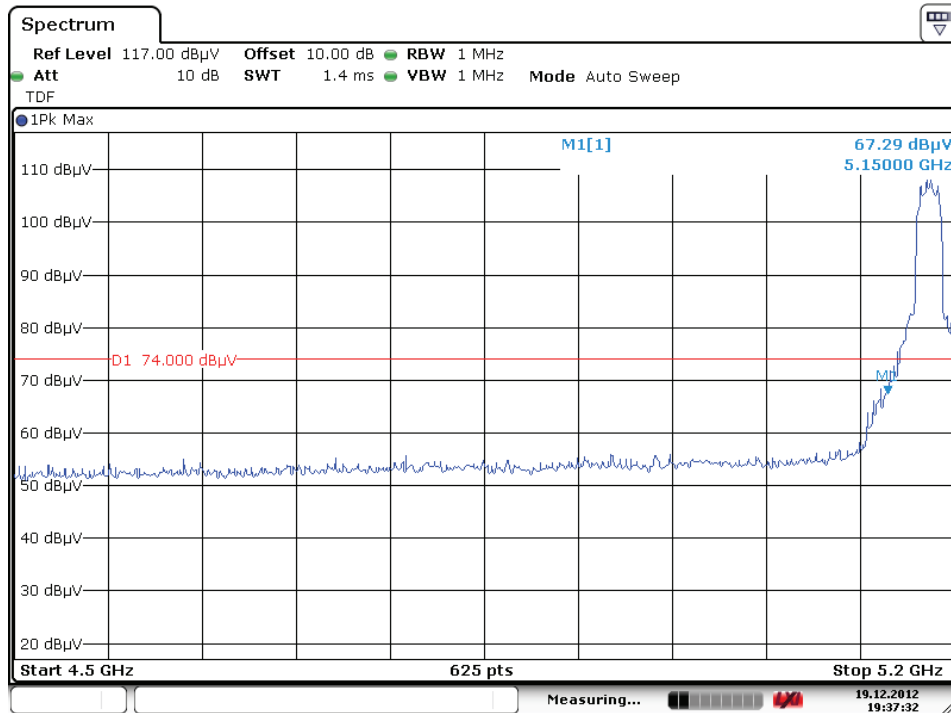


High Channel (V)

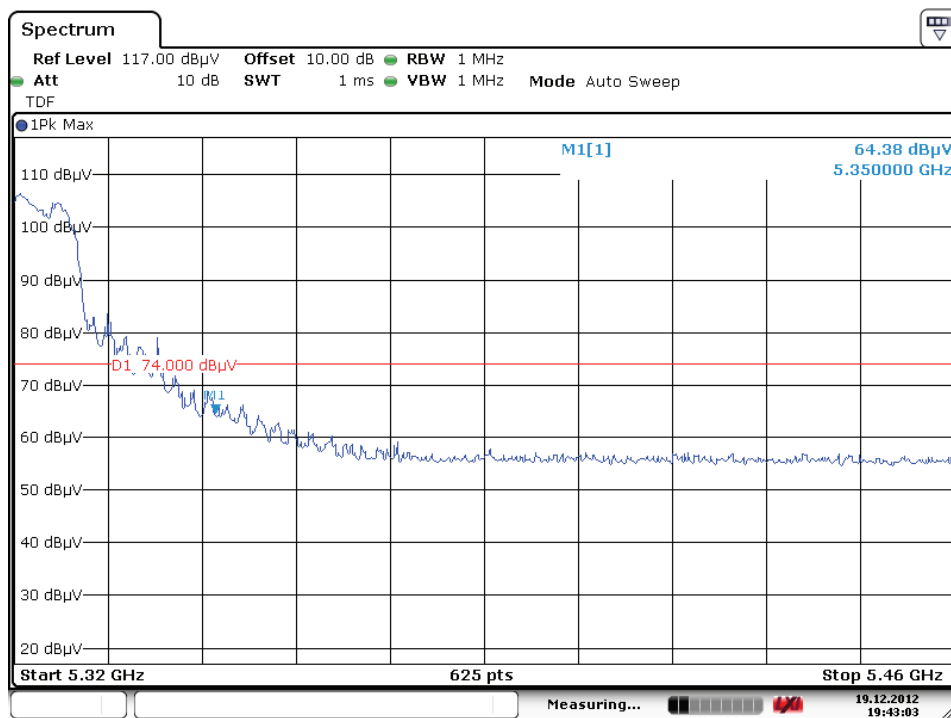


Radiated Bandedge (802.11N, HT40) PK


Low Channel (H)

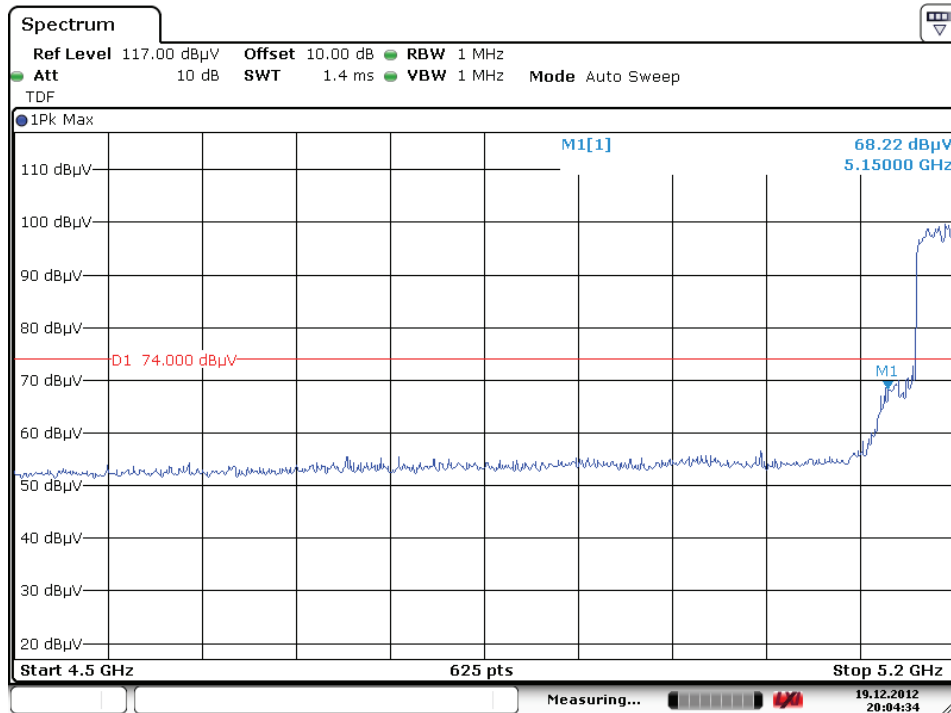


High Channel (H)

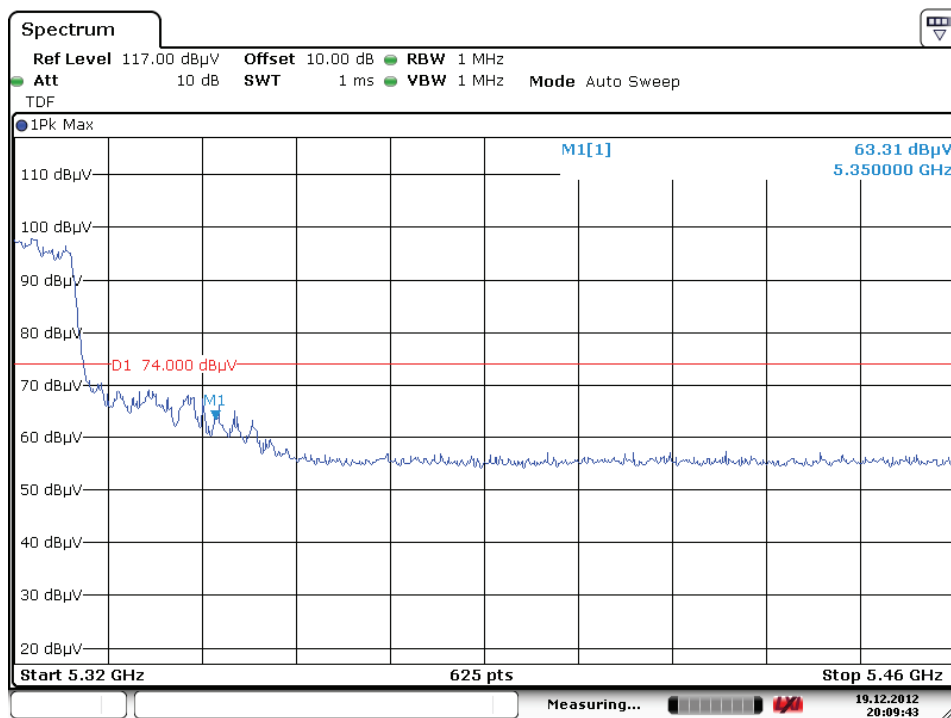


Low Channel (V)

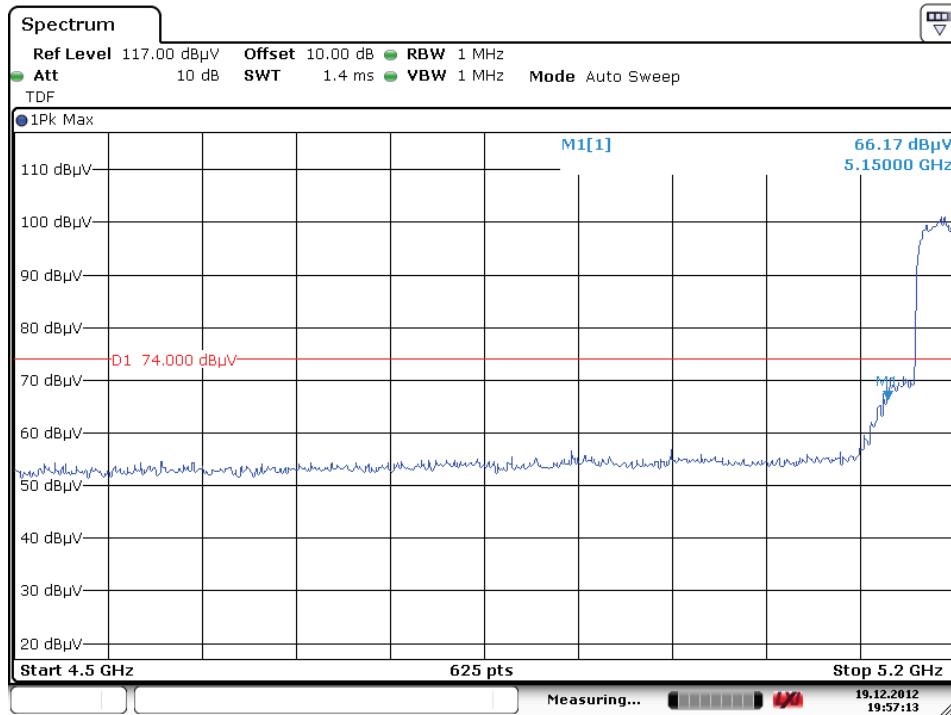


High Channel (V)

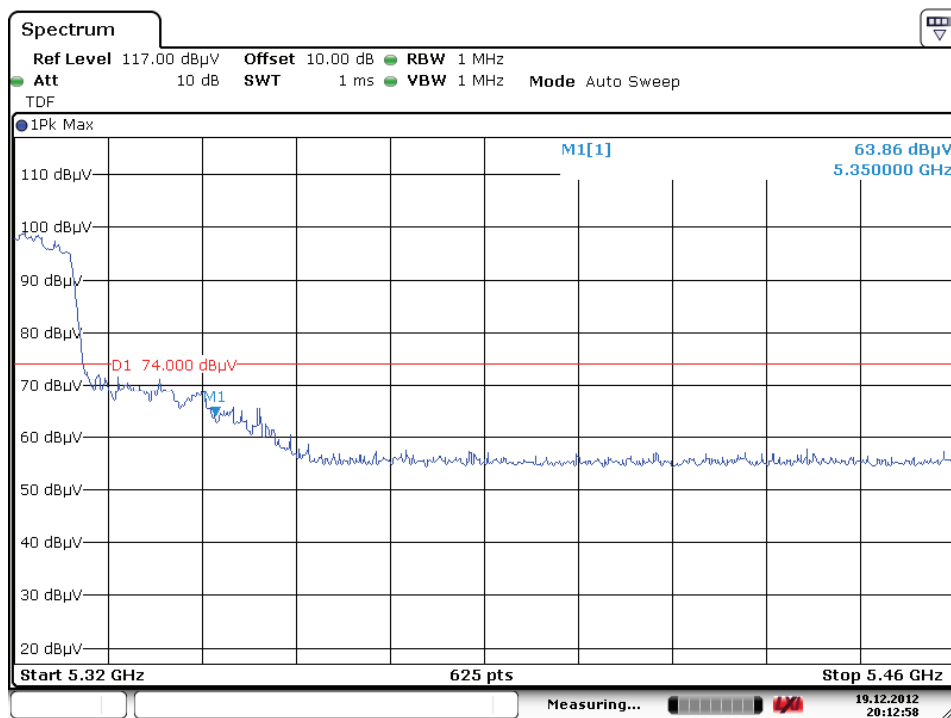

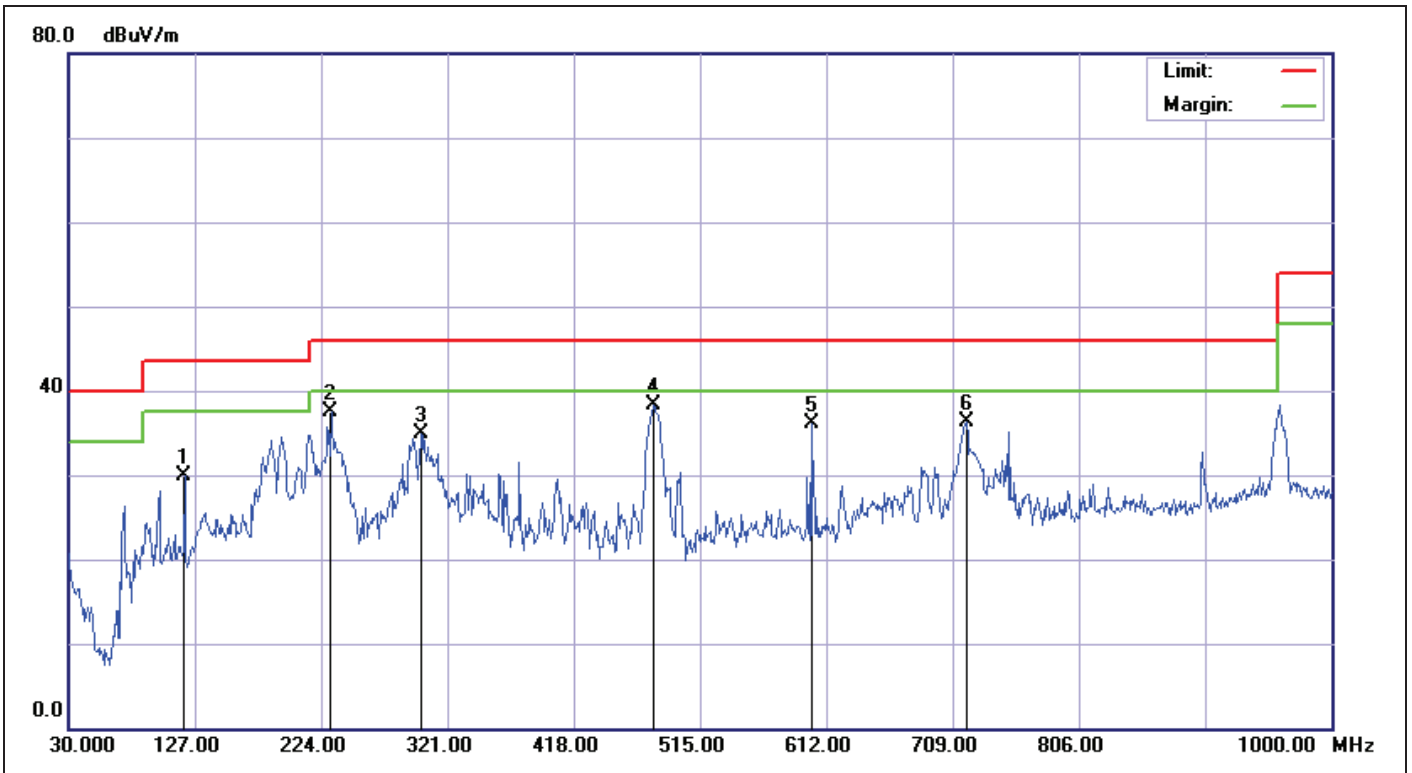


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/21 AM 09:54:22
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:			
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	119.2399	-14.14	44.05	29.91	43.50	-13.59	QP	300	360	
2	231.7599	-14.75	52.20	37.45	46.00	-8.55	QP	100	223	
3	300.6298	-11.27	46.08	34.81	46.00	-11.19	QP	100	333	
4	479.1100	-8.06	46.27	38.21	46.00	-7.79	QP	200	108	
5	600.3600	-5.87	41.94	36.07	46.00	-9.93	QP	200	0	
6	719.6699	-4.30	40.64	36.34	46.00	-9.66	QP	100	249	

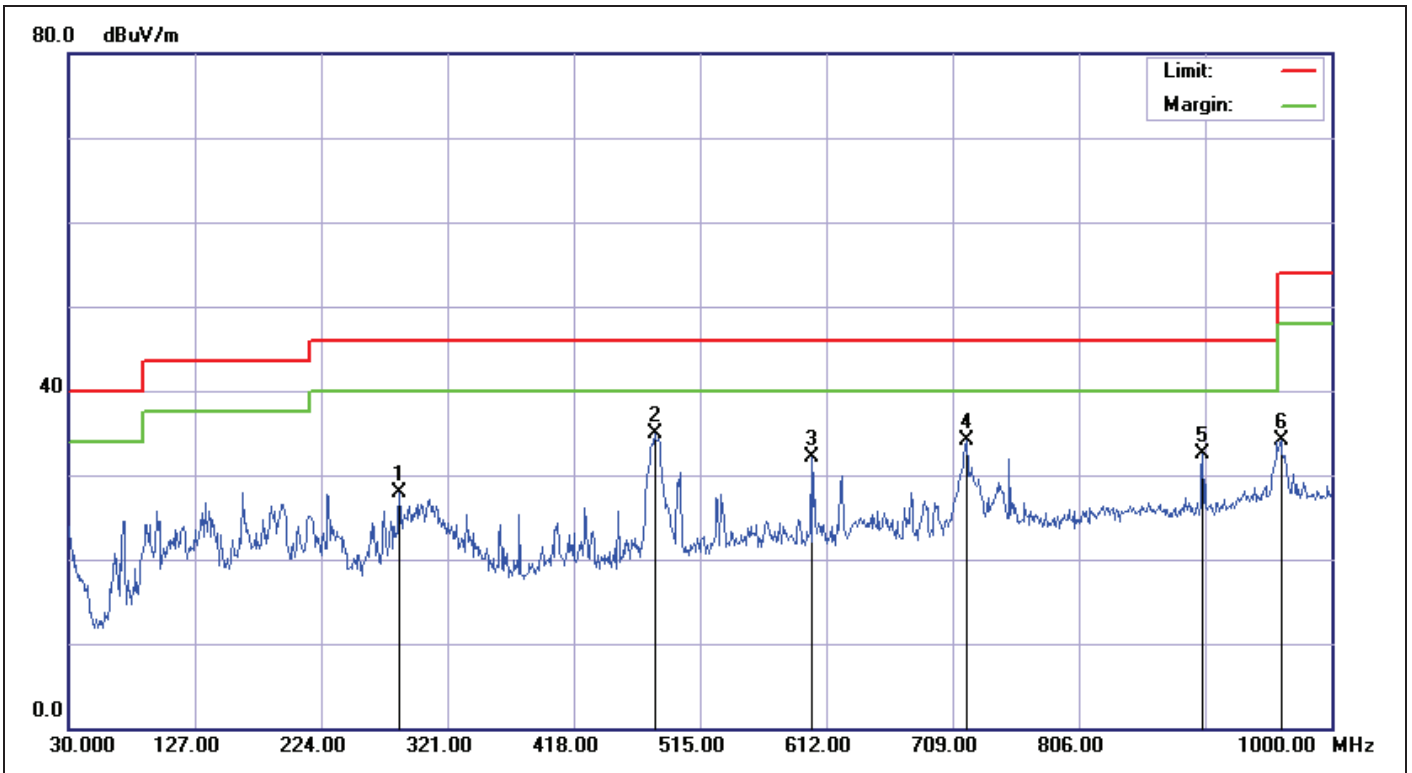


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/21 AM 09:59:21
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:			
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	284.1400	-11.84	39.76	27.92	46.00	-18.08	QP	200	186	
2	480.0800	-8.03	42.85	34.82	46.00	-11.18	QP	200	159	
3	600.3600	-5.87	37.94	32.07	46.00	-13.93	QP	100	324	
4	719.6700	-4.30	38.43	34.13	46.00	-11.87	QP	100	0	
5	901.0600	-1.89	34.31	32.42	46.00	-13.58	QP	100	294	
6	961.2000	0.05	34.07	34.12	54.00	-19.88	QP	100	317	

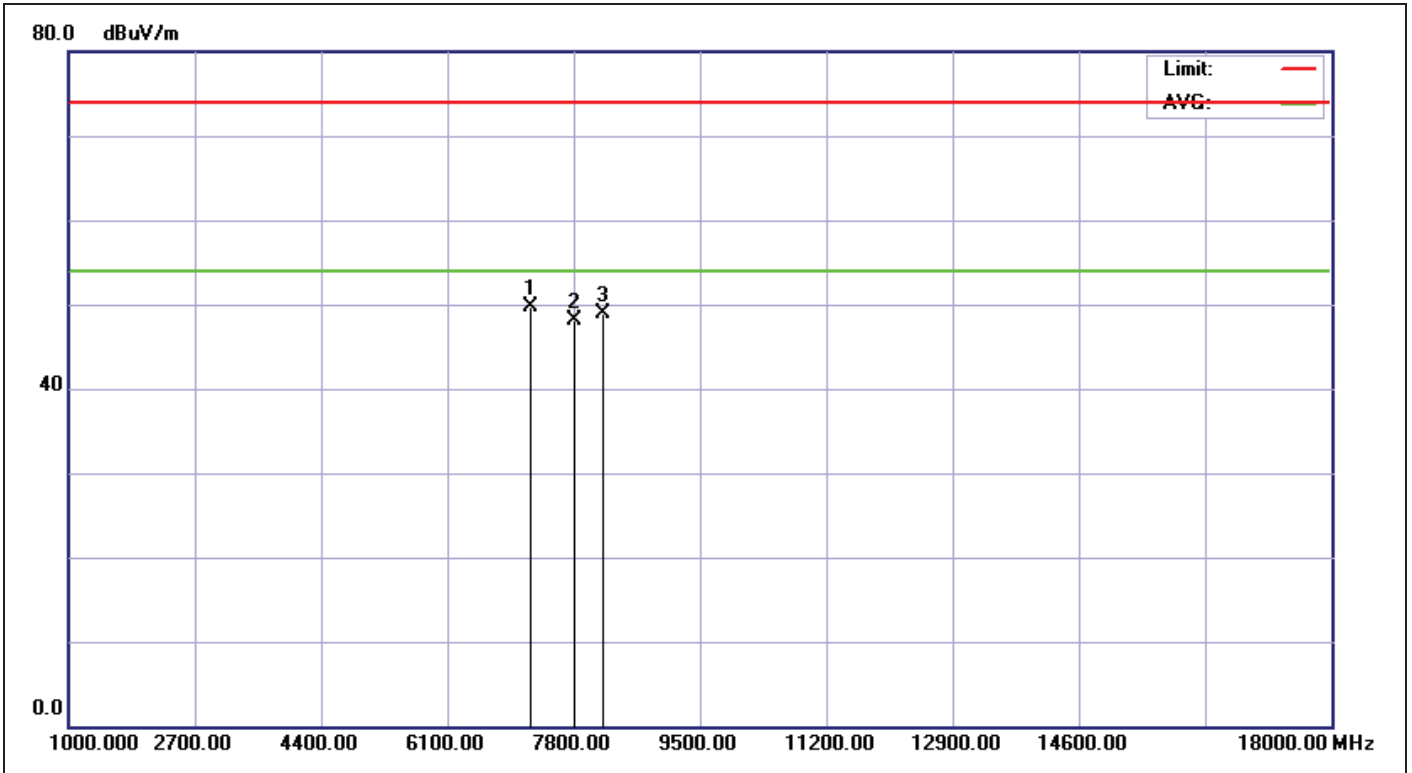

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 02:19:10
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5240		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7211.000	5.35	44.31	49.66	74.00	-24.34	peak	100	0	
2	7810.000	6.46	41.64	48.10	74.00	-25.90	peak	100	0	
3	8190.000	6.50	42.47	48.97	74.00	-25.03	peak	100	0	

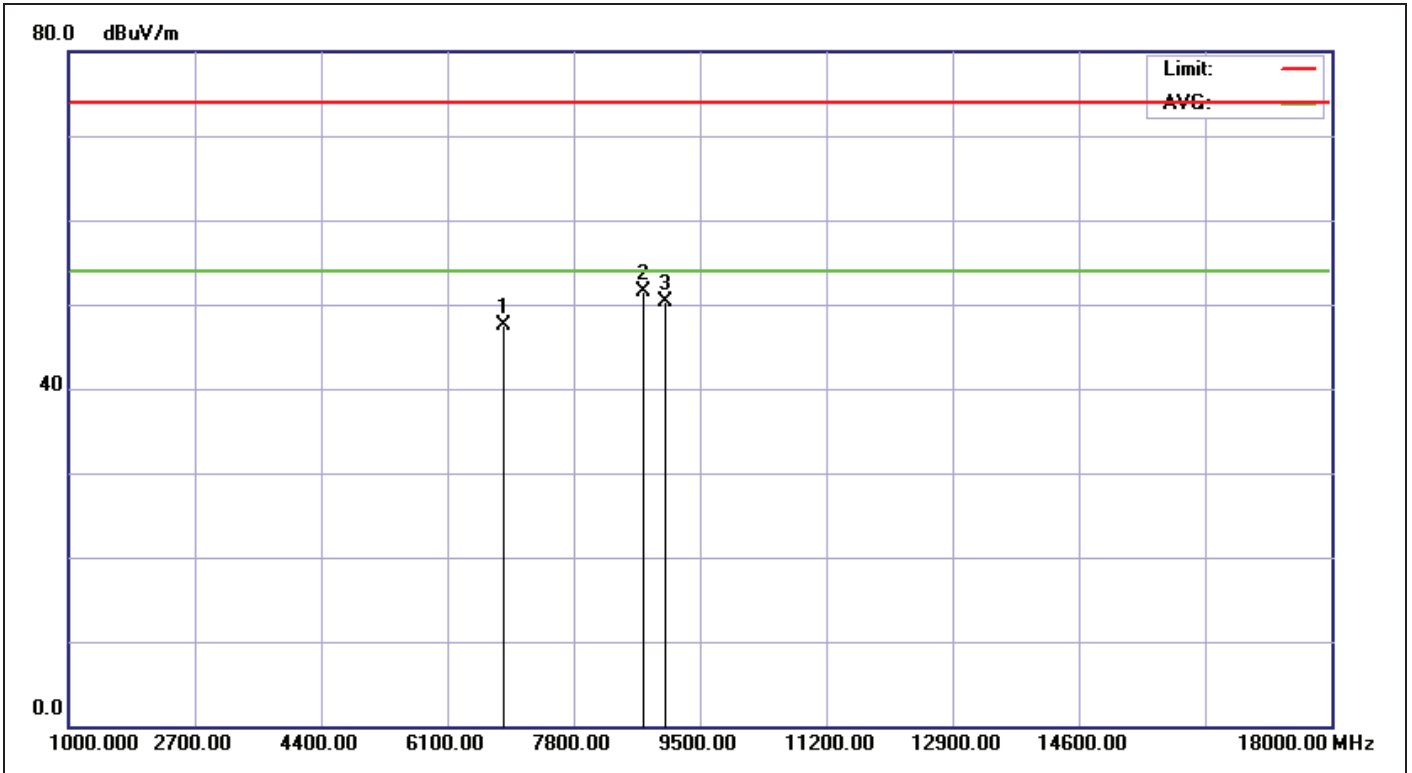

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 02:12:05
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5220		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	6854.000	4.32	43.18	47.50	74.00	-26.50	peak	100	360	
2	8734.000	6.96	44.62	51.58	74.00	-22.42	peak	100	360	
3	9034.000	7.39	42.85	50.24	74.00	-23.76	peak	100	360	



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

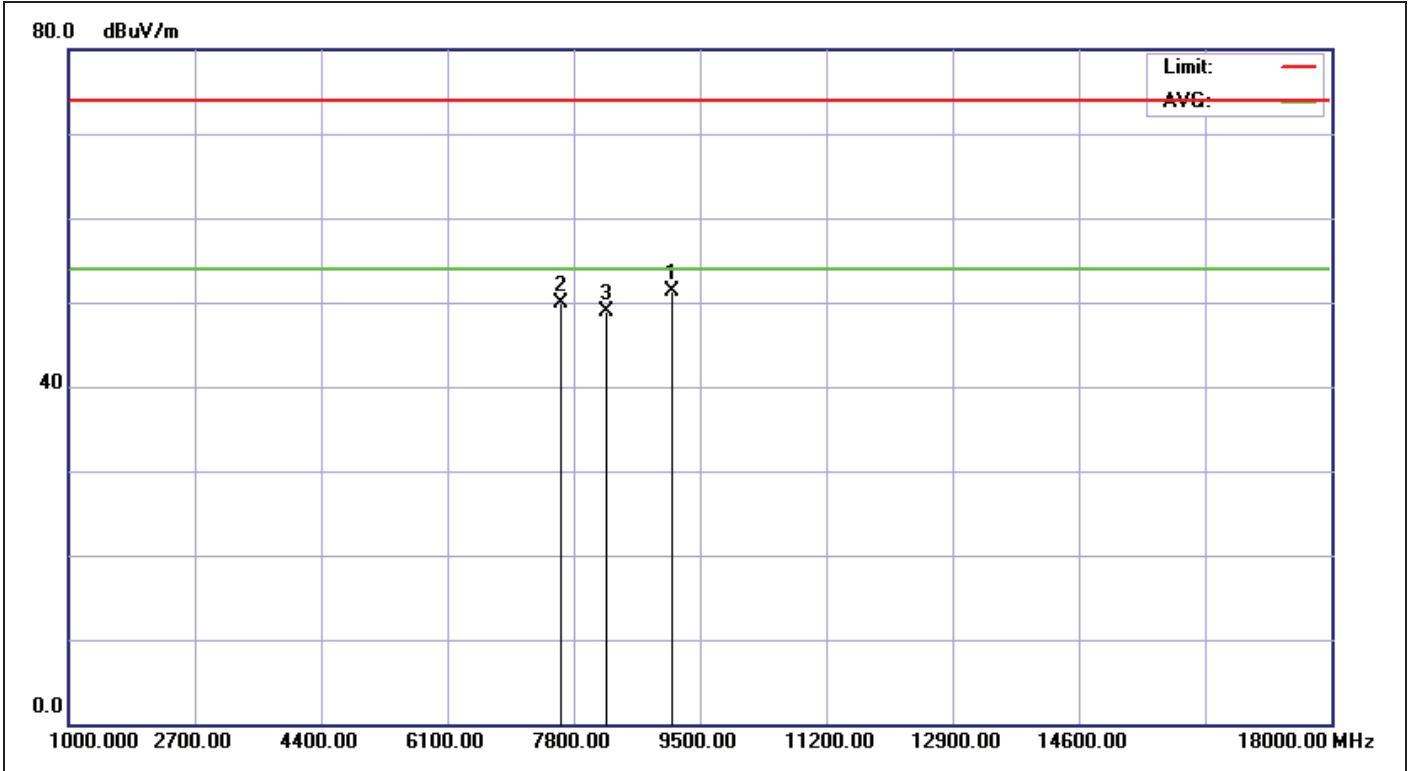


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 02:14:55
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5220		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	9115.000	7.47	43.77	51.24	74.00	-22.76	peak	100	0	
2	7619.000	6.50	43.46	49.96	74.00	-24.04	peak	100	0	
3	8245.000	6.53	42.30	48.83	74.00	-25.17	peak	100	0	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

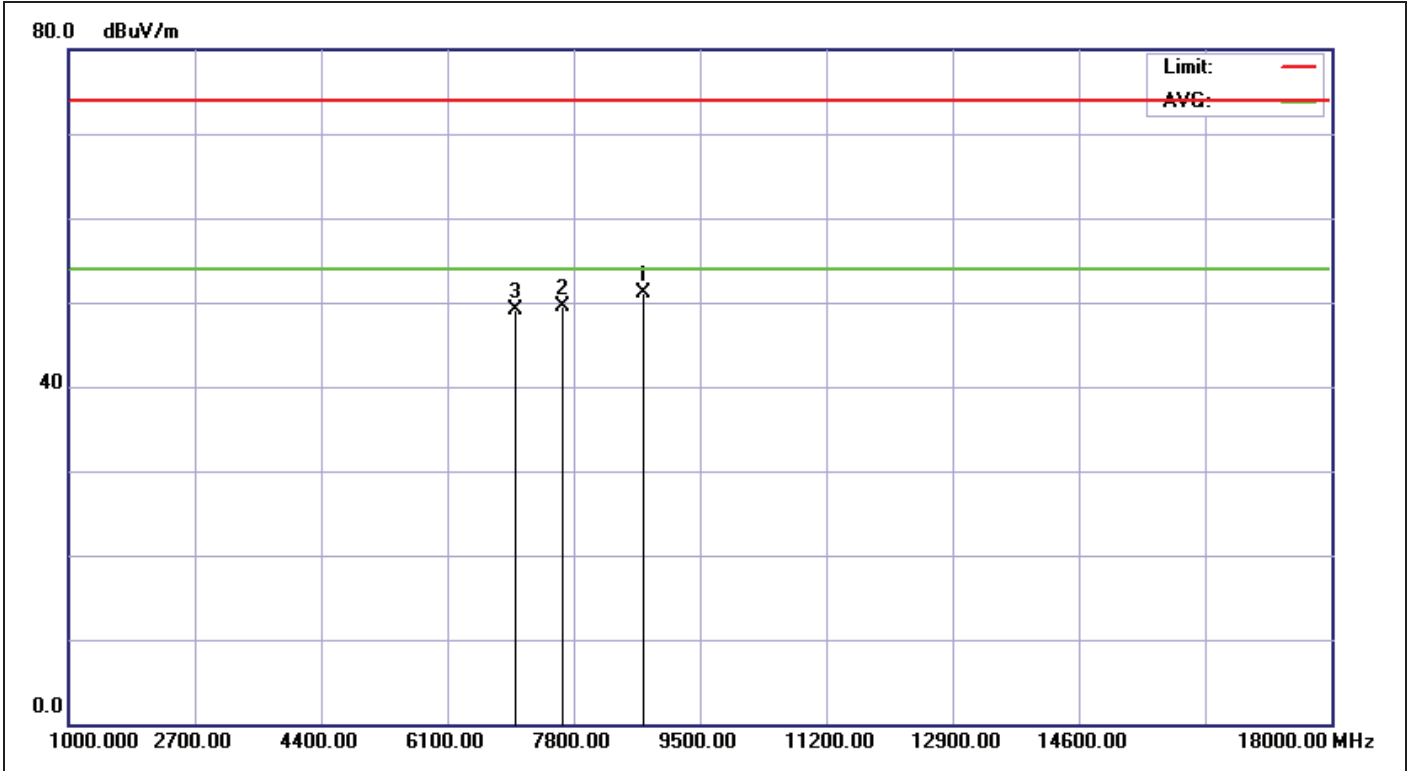

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 02:17:30
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5240		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8734.000	6.96	44.06	51.02	74.00	-22.98	peak	100	360	
2	7646.000	6.49	43.02	49.51	74.00	-24.49	peak	100	360	
3	7021.000	4.59	44.61	49.20	74.00	-24.80	peak	100	360	



TUV Taiwan


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

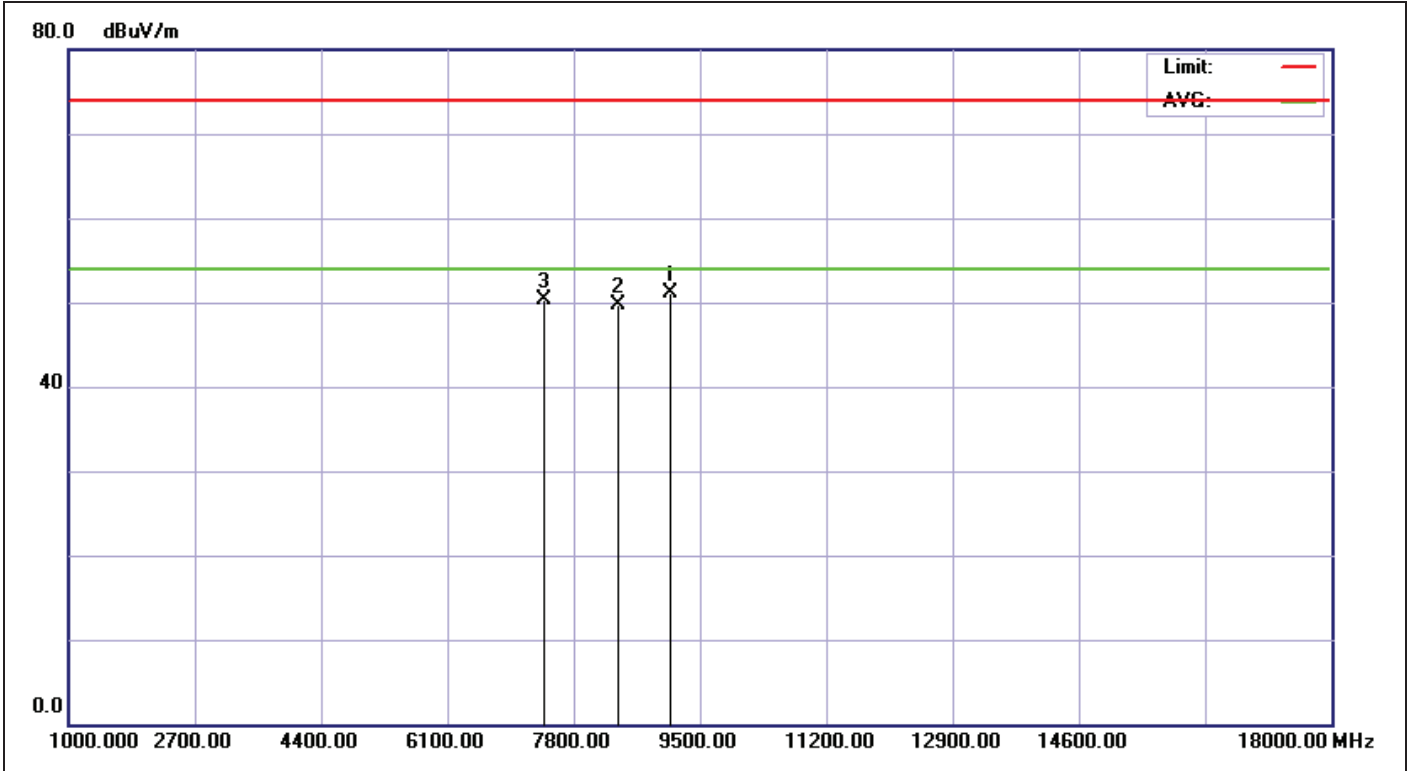

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 02:20:46
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5180		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	9109.000	7.47	43.57	51.04	74.00	-22.96	peak	100	360	
2	8402.000	6.59	43.18	49.77	74.00	-24.23	peak	100	360	
3	7395.000	6.09	44.30	50.39	74.00	-23.61	peak	100	360	

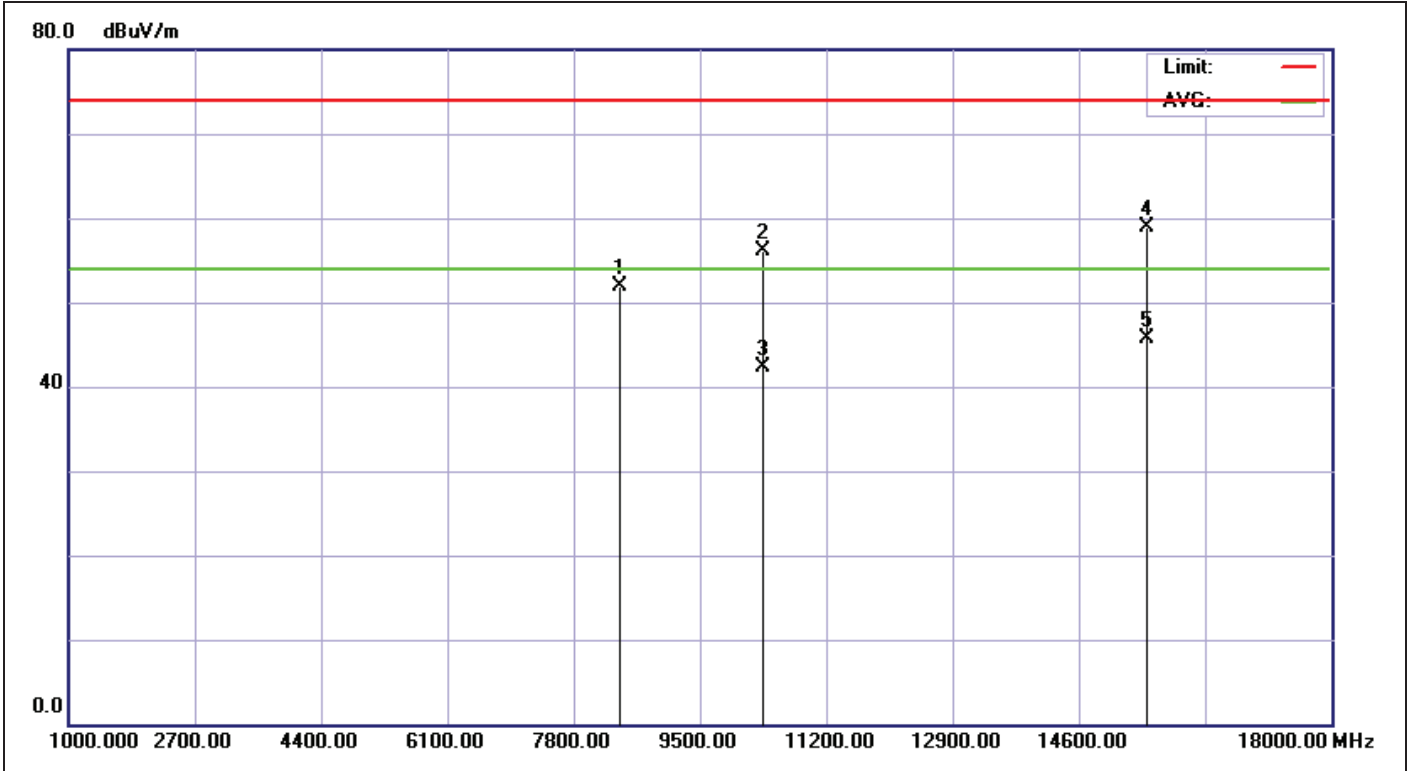

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 02:24:00
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5180		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8429.000	6.59	45.32	51.91	74.00	-22.09	peak	100	0	
2	10360.000	6.13	50.04	56.17	74.00	-17.83	peak	100	0	
3	10360.000	6.13	36.25	42.38	54.00	-11.62	AVG			
4	15528.000	9.39	49.50	58.89	74.00	-15.11	peak	100	0	
5	15528.000	9.39	36.38	45.77	54.00	-8.23	AVG			



TUV Taiwan


11F., No.758, Sec.4 Bade Road, Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

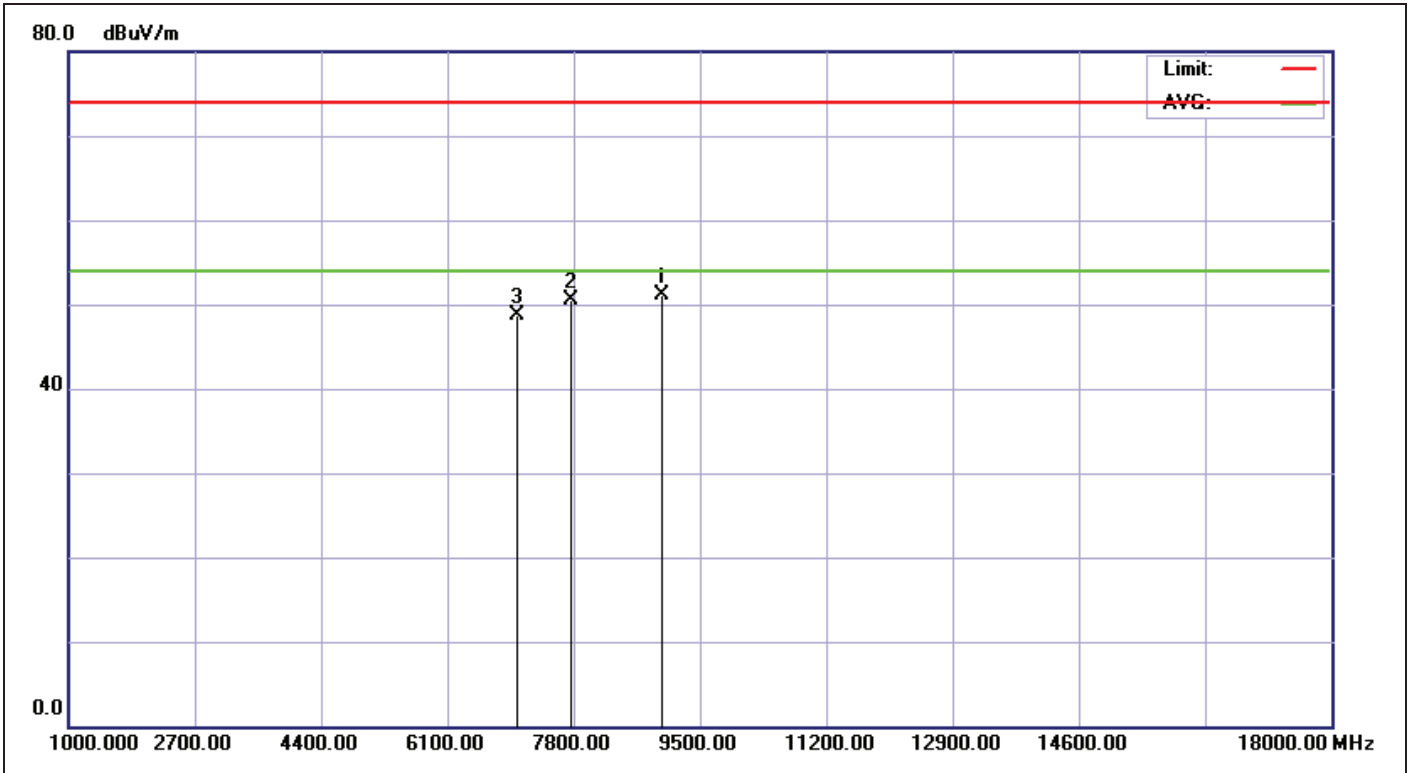


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 02:30:17
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5220		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	9000.000	7.36	43.82	51.18	74.00	-22.82	peak	100	0	
2	7776.000	6.47	43.99	50.46	74.00	-23.54	peak	100	0	
3	7042.000	4.67	44.07	48.74	74.00	-25.26	peak	100	0	

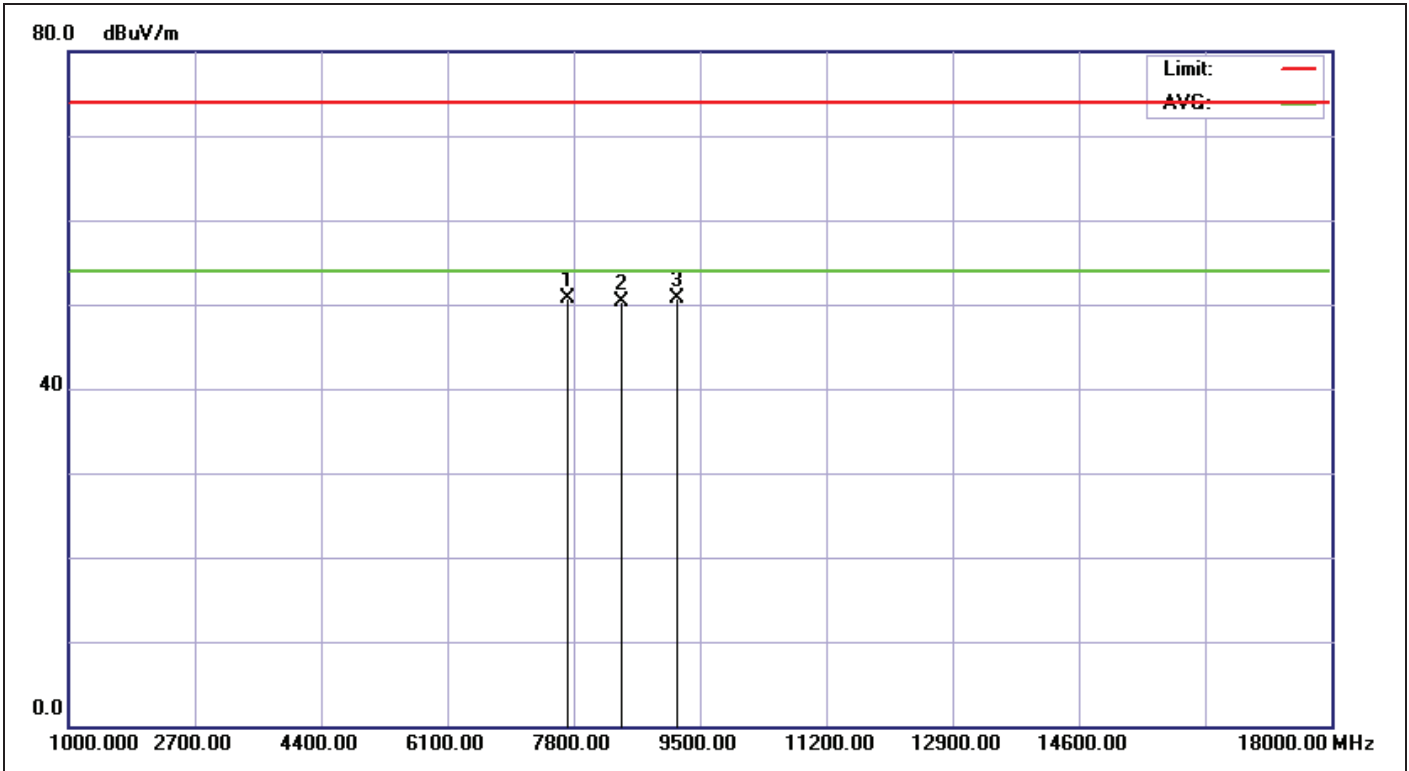


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 02:32:23
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5220		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7722.000	6.48	44.21	50.69	74.00	-23.31	peak	100	360	
2	8456.000	6.61	43.77	50.38	74.00	-23.62	peak	100	360	
3	9201.000	7.56	43.11	50.67	74.00	-23.33	peak	100	360	

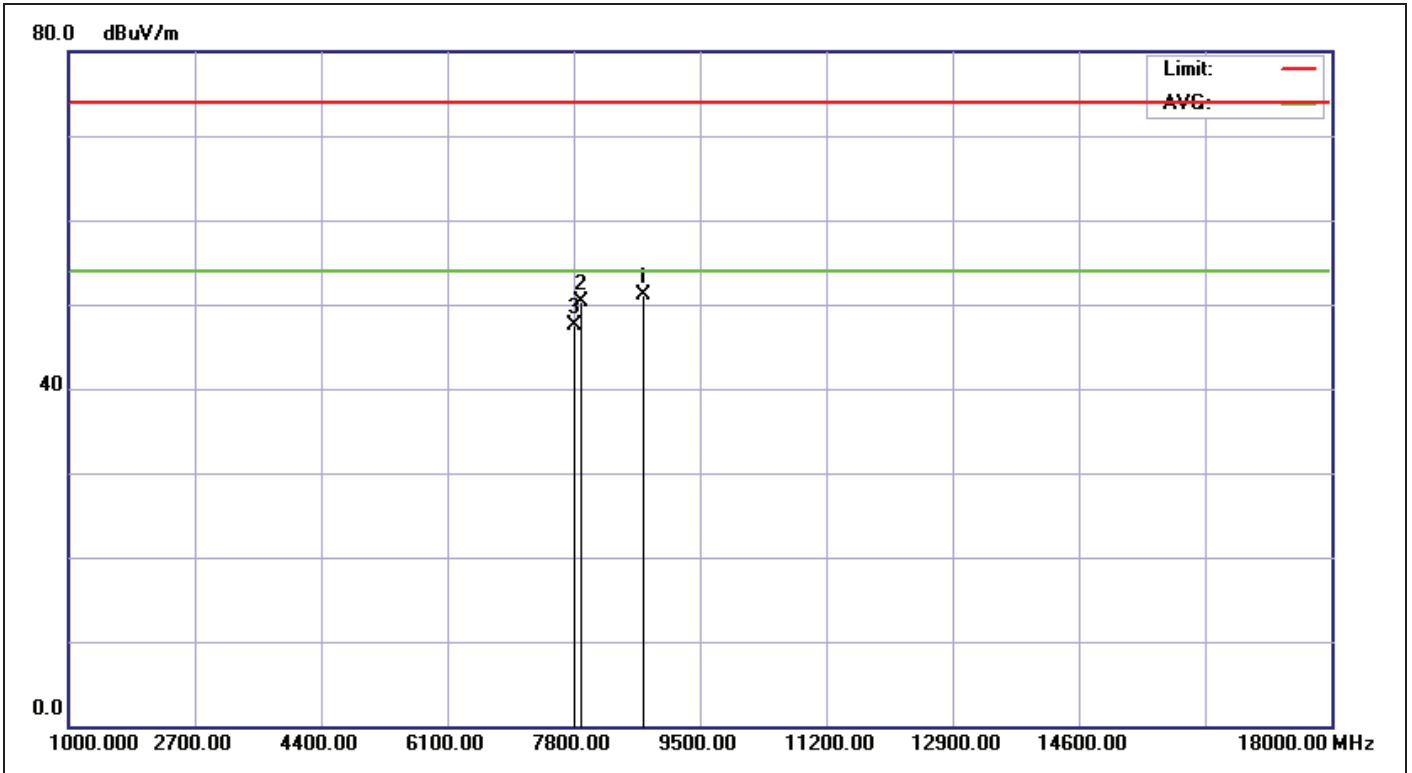


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 02:35:11
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5240		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8738.000	6.98	44.11	51.09	74.00	-22.91	peak	100	0	
2	7895.000	6.45	43.85	50.30	74.00	-23.70	peak	100	0	
3	7814.000	6.47	41.13	47.60	74.00	-26.40	peak	100	0	

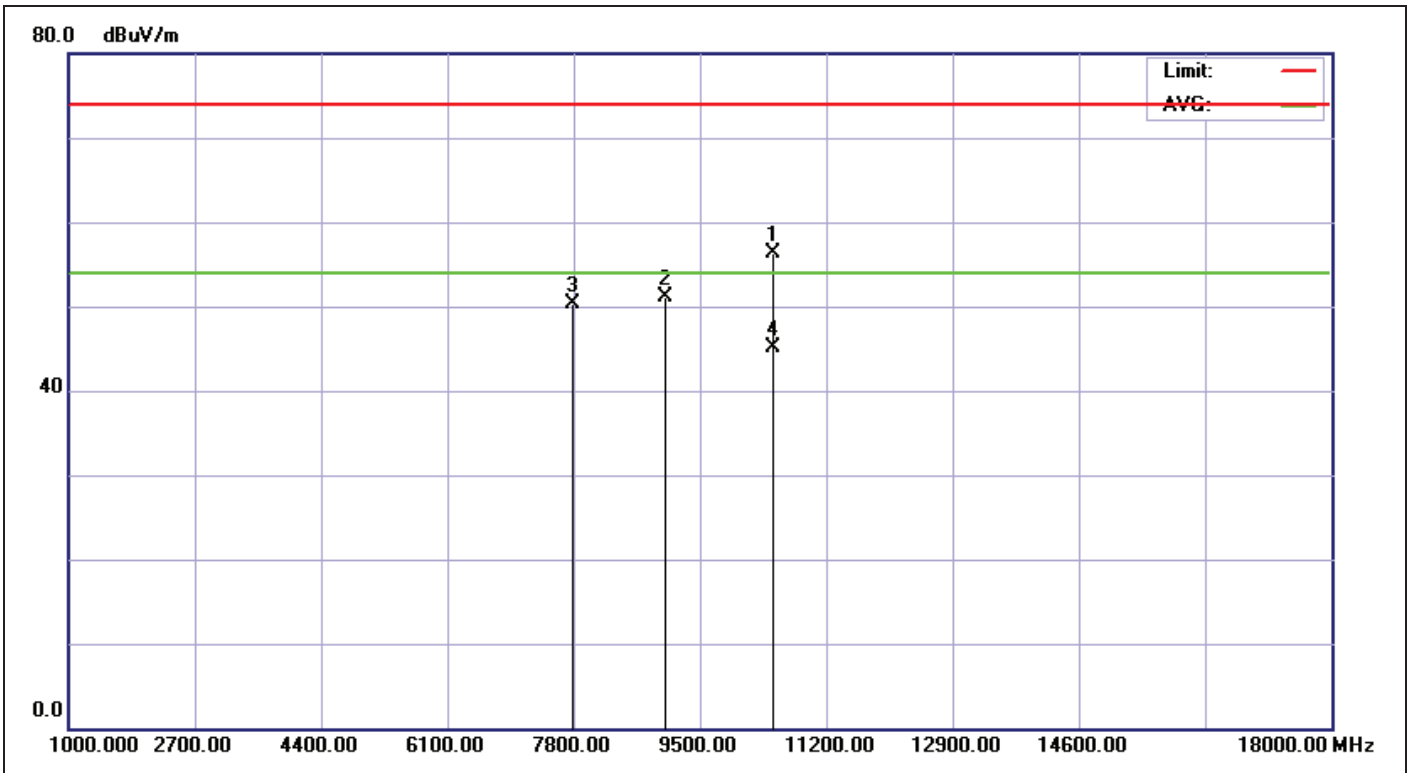


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 02:36:51
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5240		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	10479.000	5.96	50.36	56.32	74.00	-17.68	peak	100	360	
2	9038.000	7.40	43.77	51.17	74.00	-22.83	peak	100	360	
3	7786.000	6.46	43.85	50.31	74.00	-23.69	peak	100	360	
4	10479.000	5.96	39.17	45.13	54.00	-8.87	AVG			

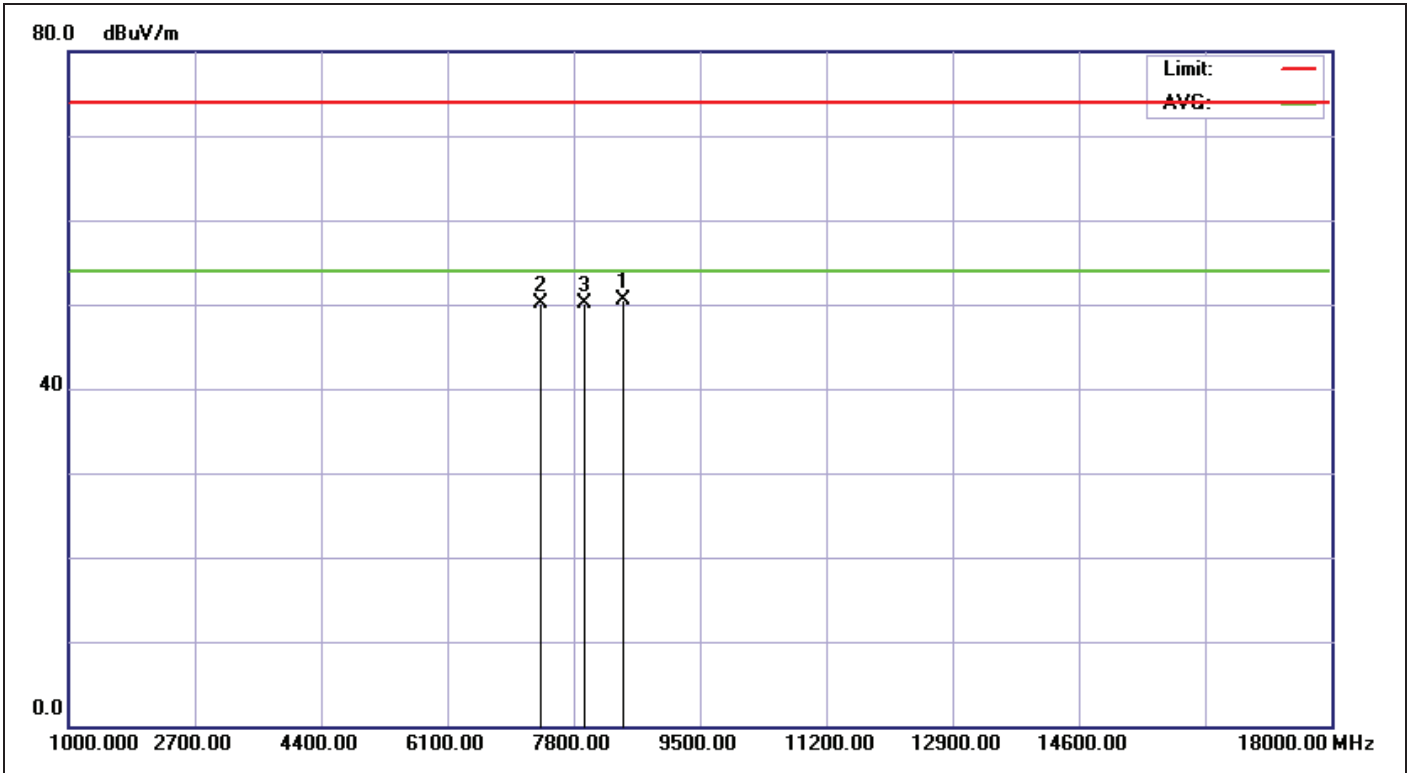


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 02:41:53
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5190		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8466.000	6.60	43.96	50.56	74.00	-23.44	peak	100	0	
2	7351.000	5.91	44.20	50.11	74.00	-23.89	peak	100	0	
3	7949.000	6.45	43.67	50.12	74.00	-23.88	peak	100	0	

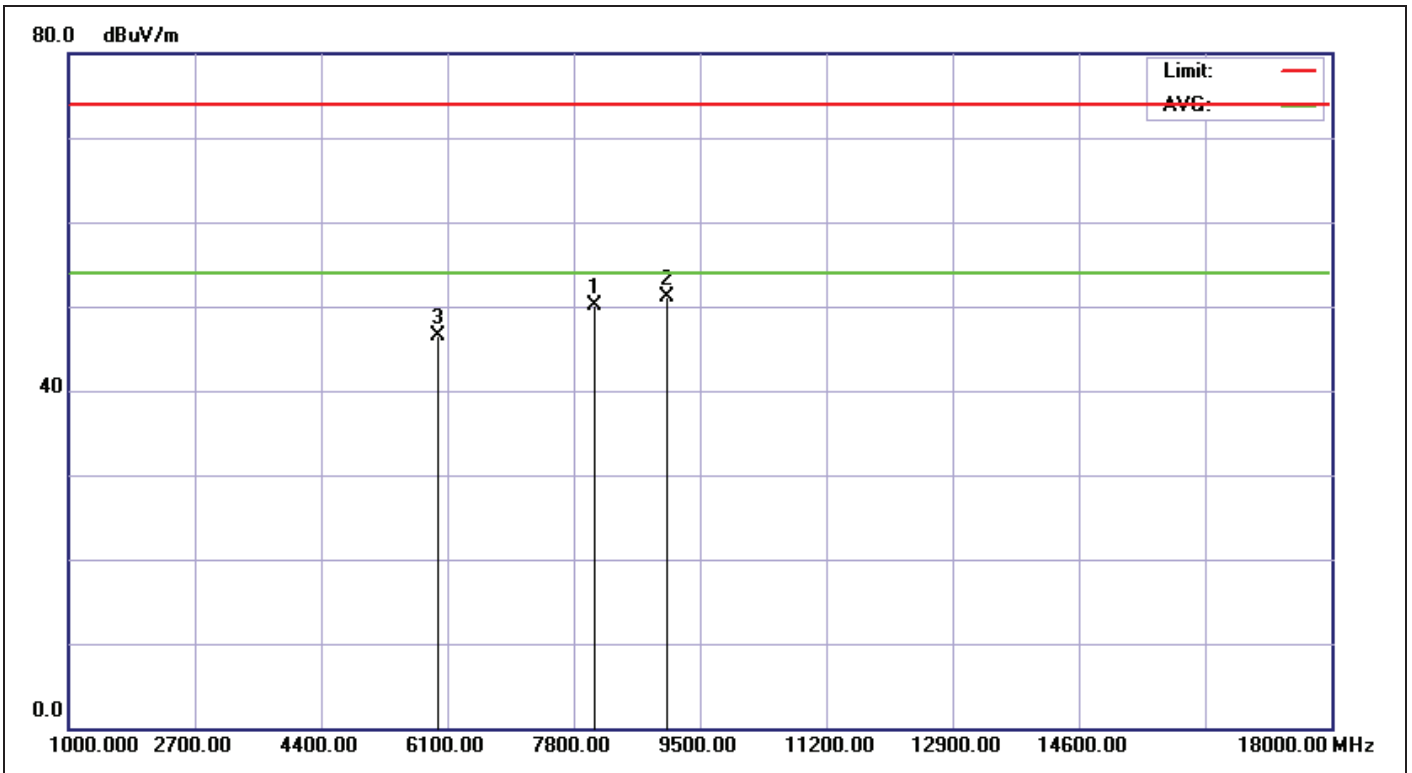


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 02:44:09
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5190		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8085.000	6.47	43.71	50.18	74.00	-23.82	peak	100	360	
2	9065.000	7.43	43.66	51.09	74.00	-22.91	peak	100	360	
3	5964.000	1.51	44.93	46.44	74.00	-27.56	peak	100	360	

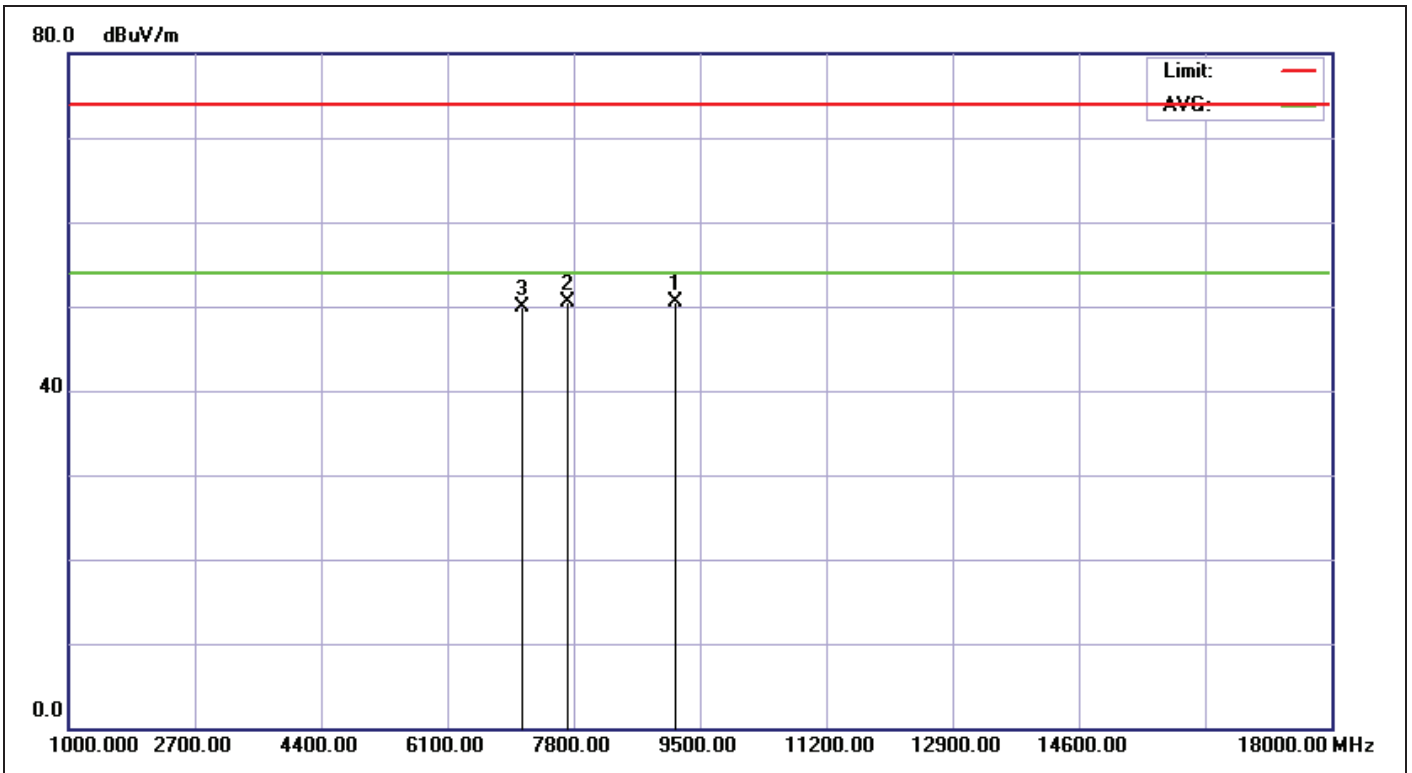

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 02:47:03
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5210		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	9173.000	7.53	43.06	50.59	74.00	-23.41	peak	100	0	
2	7732.000	6.47	44.13	50.60	74.00	-23.40	peak	100	0	
3	7106.000	4.92	45.05	49.97	74.00	-24.03	peak	100	0	

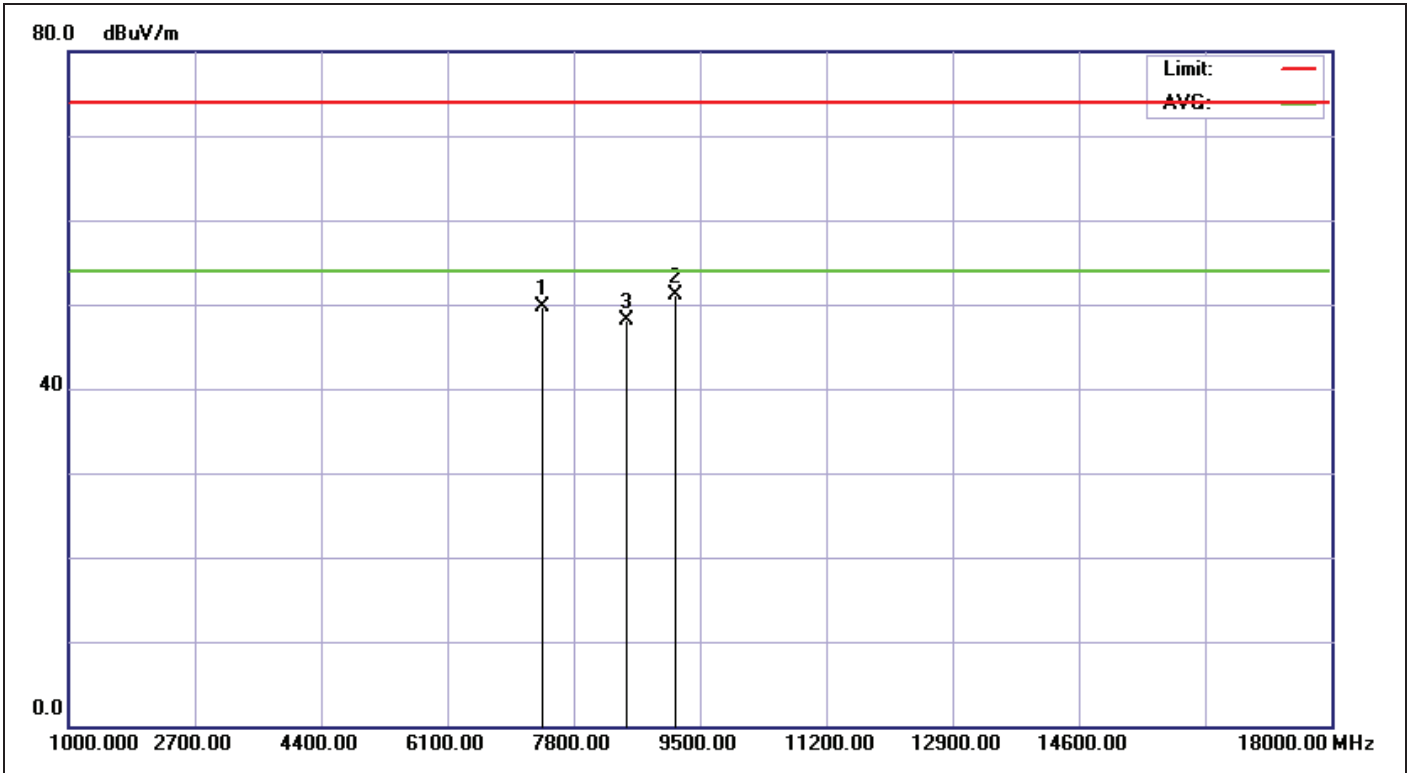

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 02:48:42
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5210		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7378.000	6.02	43.76	49.78	74.00	-24.22	peak	100	360	
2	9173.000	7.53	43.58	51.11	74.00	-22.89	peak	100	360	
3	8521.000	6.64	41.54	48.18	74.00	-25.82	peak	100	360	



TUV Taiwan


11F., No.758, Sec.4 Bade Road, Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

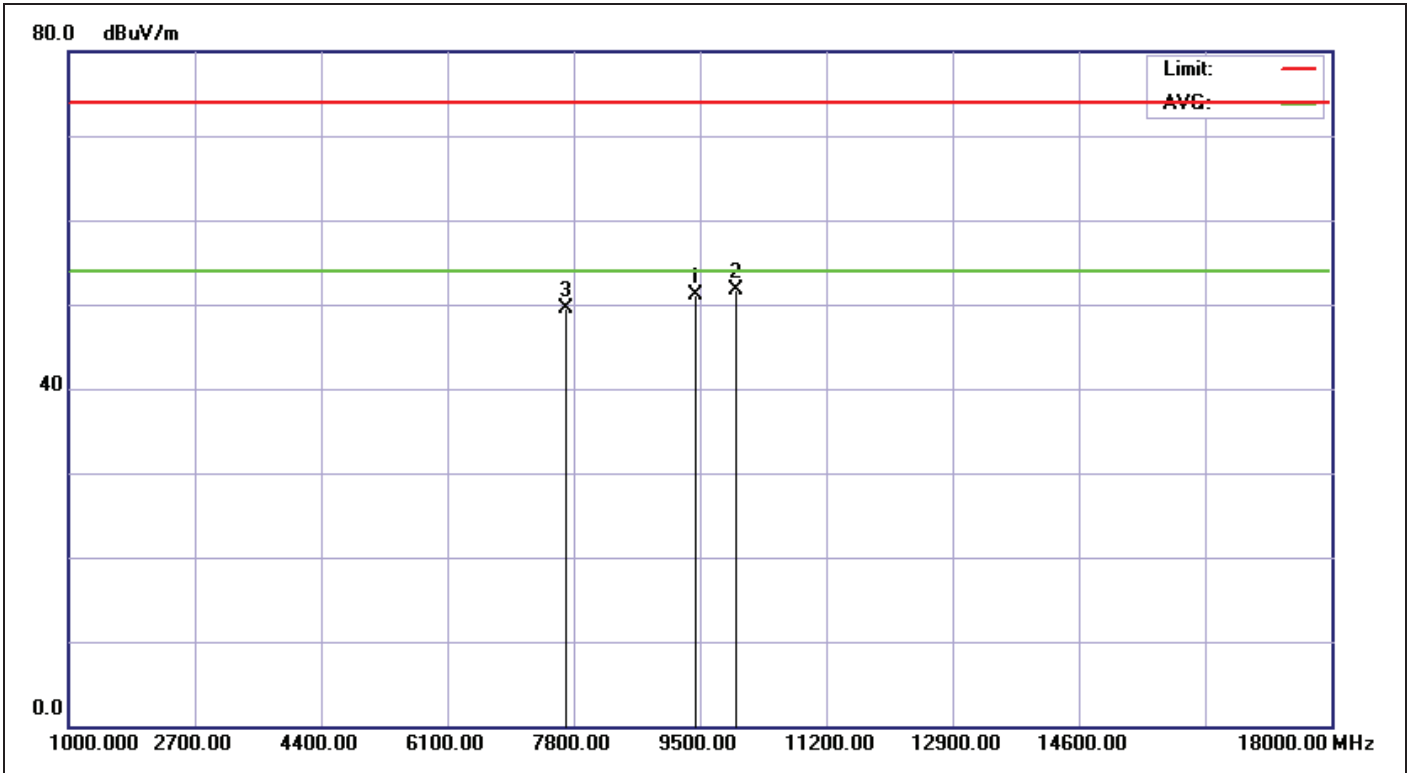


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 02:52:24
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5230		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	9445.000	7.82	43.20	51.02	74.00	-22.98	peak	100	0	
2	9989.000	6.65	44.96	51.61	74.00	-22.39	peak	100	0	
3	7705.000	6.48	43.12	49.60	74.00	-24.40	peak	100	0	

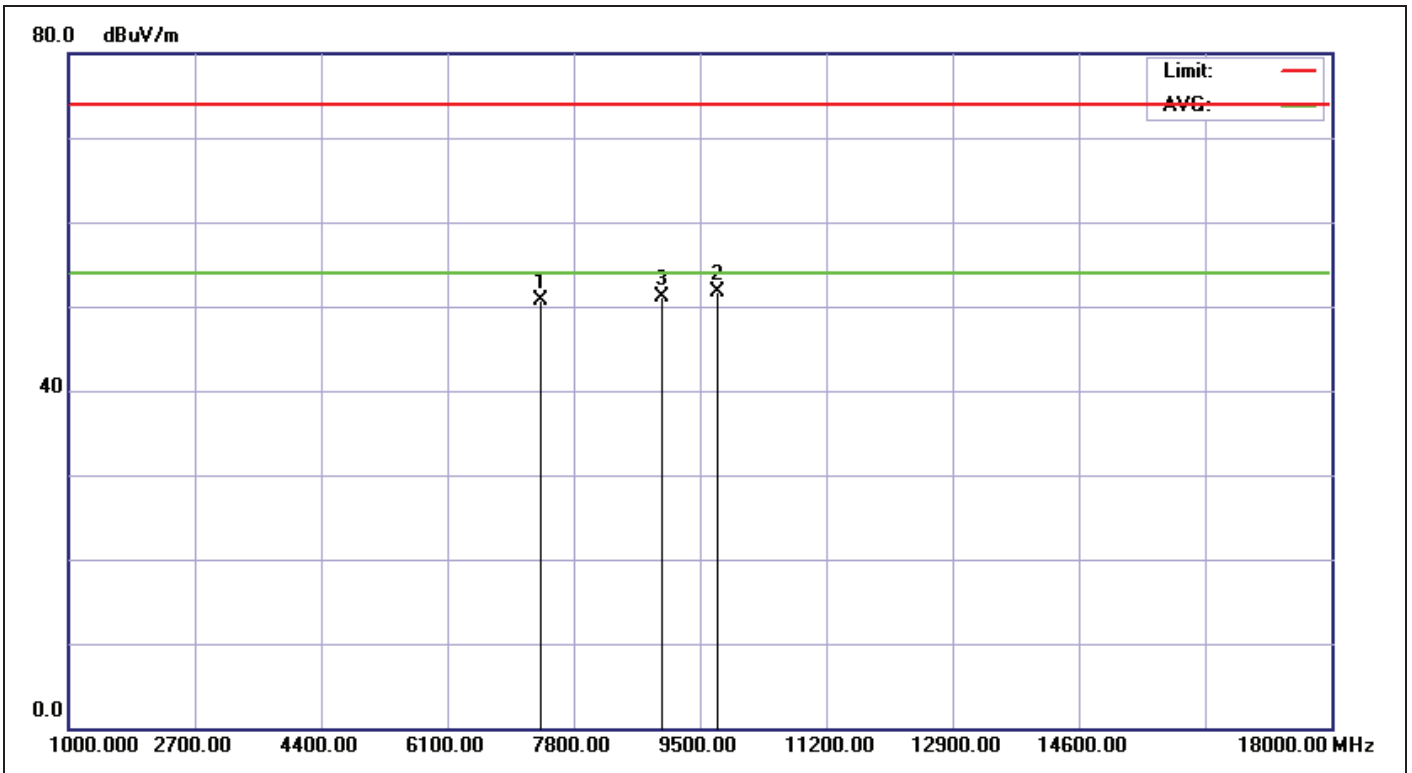


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 02:53:33
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5230		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7351.000	5.91	44.70	50.61	74.00	-23.39	peak	100	360	
2	9745.000	7.25	44.48	51.73	74.00	-22.27	peak	100	360	
3	8983.000	7.33	43.73	51.06	74.00	-22.94	peak	100	360	

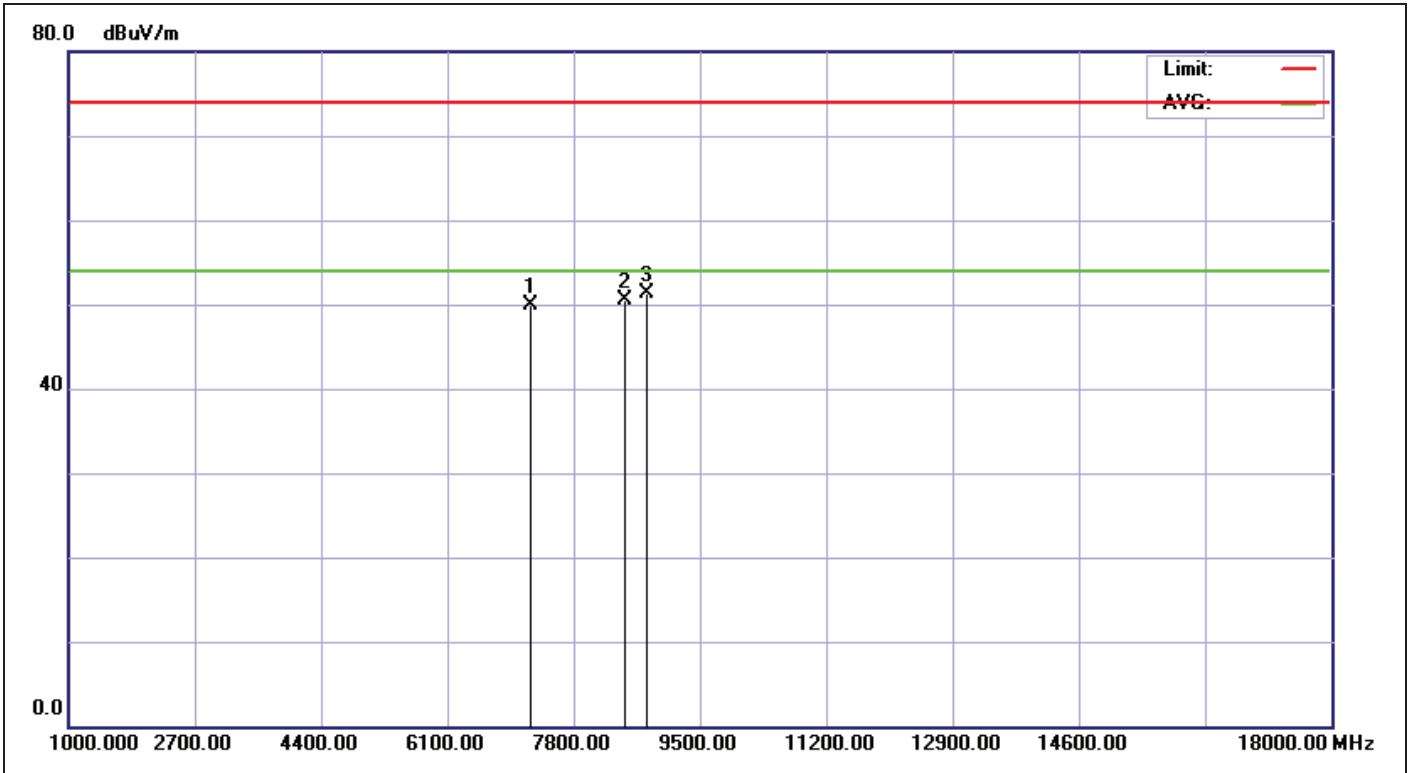


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 02:06:01
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5180		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7232.000	5.44	44.52	49.96	74.00	-24.04	peak	100	0	
2	8483.000	6.62	43.86	50.48	74.00	-23.52	peak	100	0	
3	8782.000	7.04	44.24	51.28	74.00	-22.72	peak	100	0	

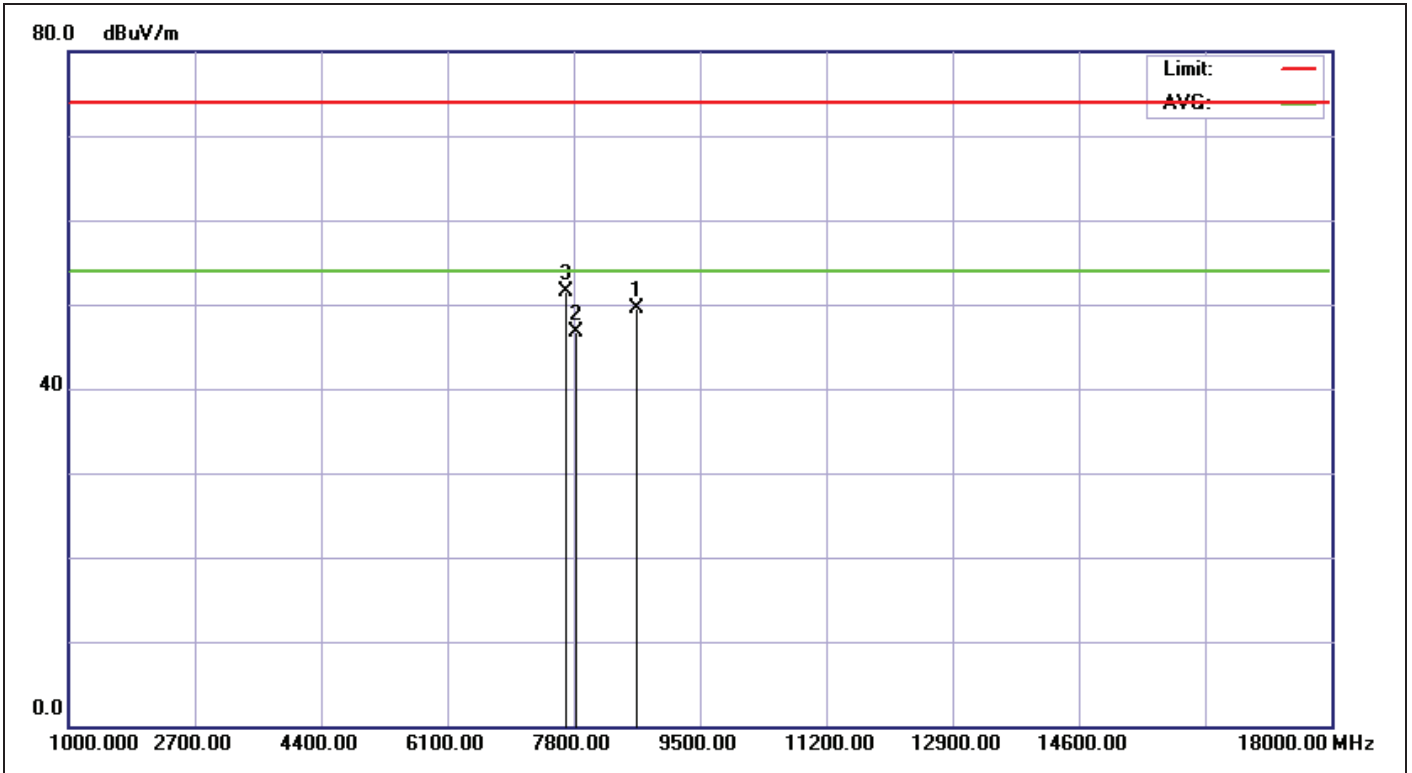

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/20 PM 02:08:45
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5180		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8646.000	6.83	42.64	49.47	74.00	-24.53	peak	100	360	
2	7830.000	6.46	40.29	46.75	74.00	-27.25	peak	100	360	
3	7694.000	6.49	44.98	51.47	74.00	-22.53	peak	100	360	

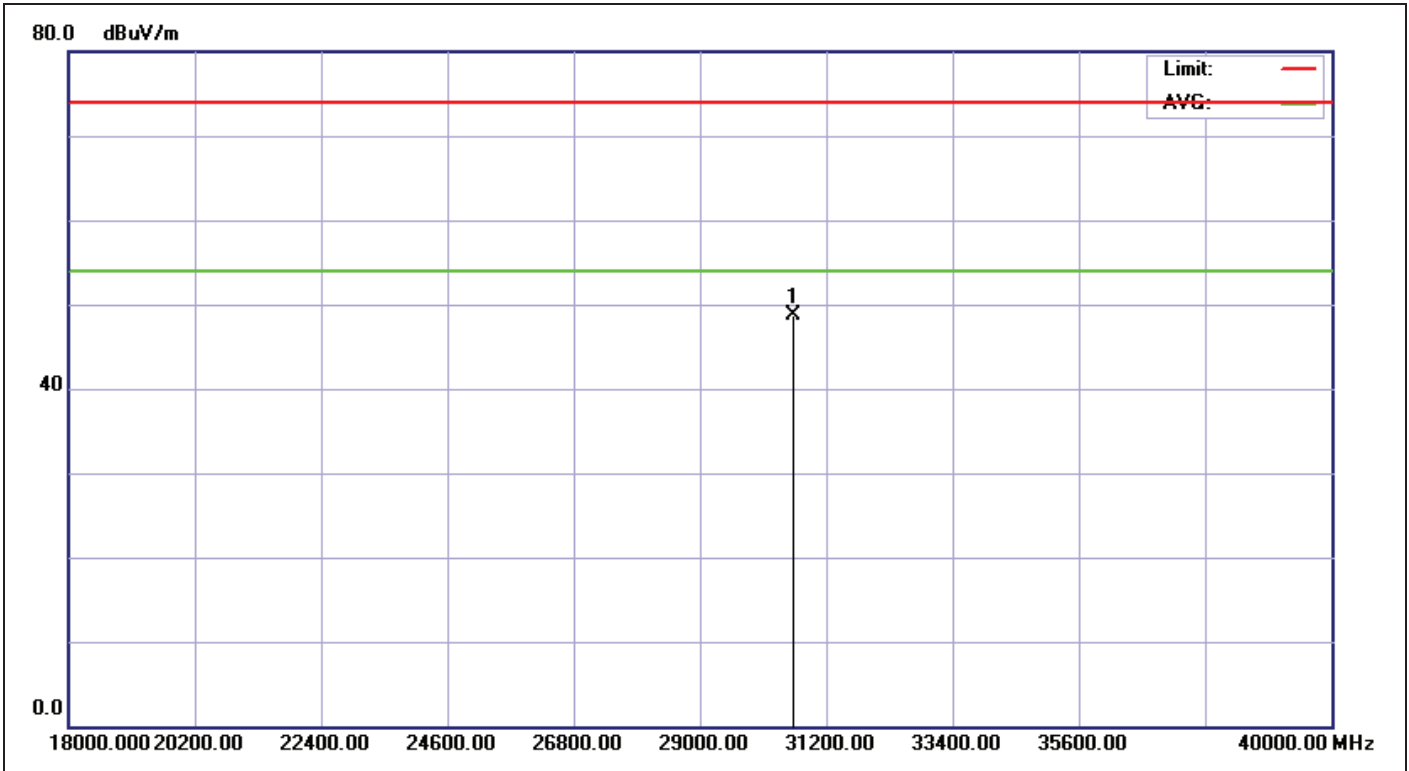

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:24:40
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5240		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30620.000	31.52	17.13	48.65	74.00	-25.35	peak	100	360	



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

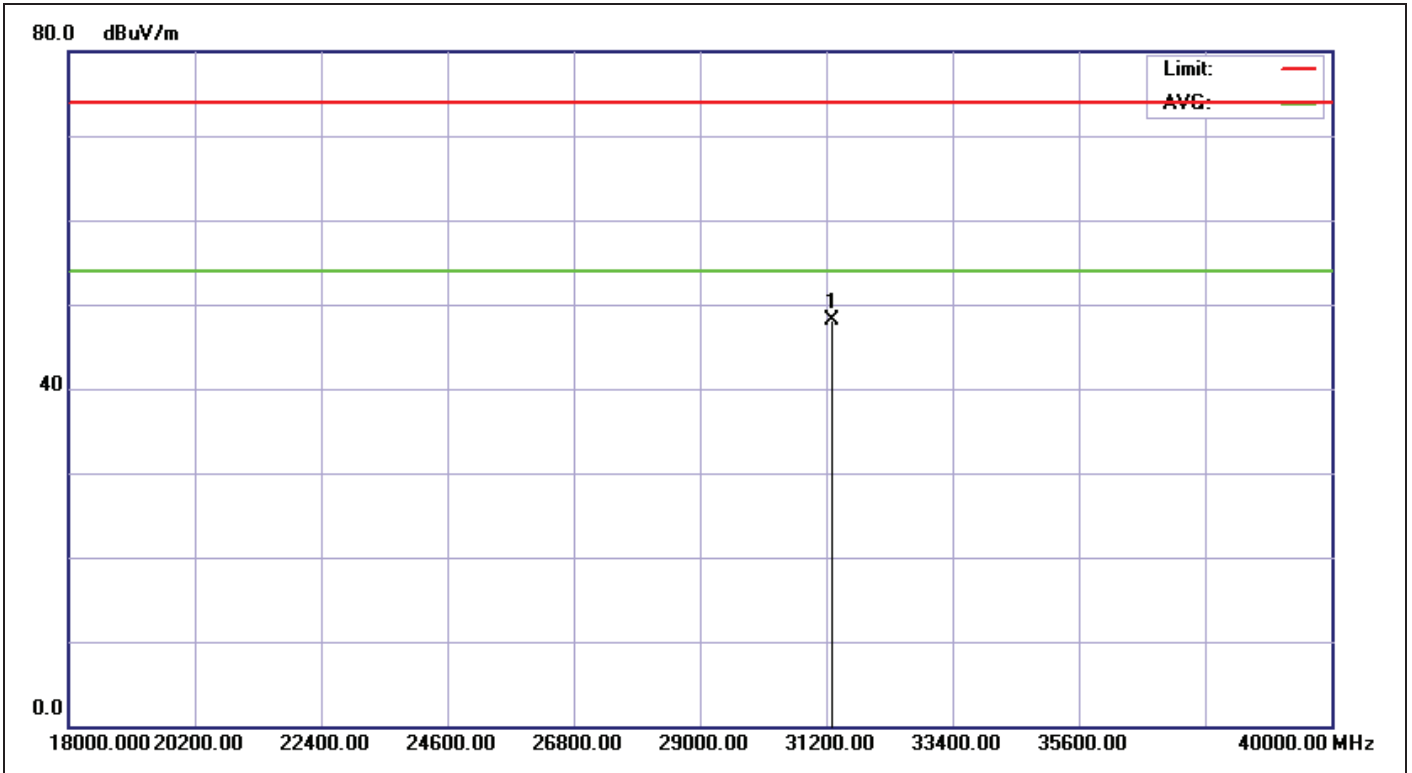


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:24:13
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5240		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	31288.000	32.25	15.95	48.20	74.00	-25.80	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

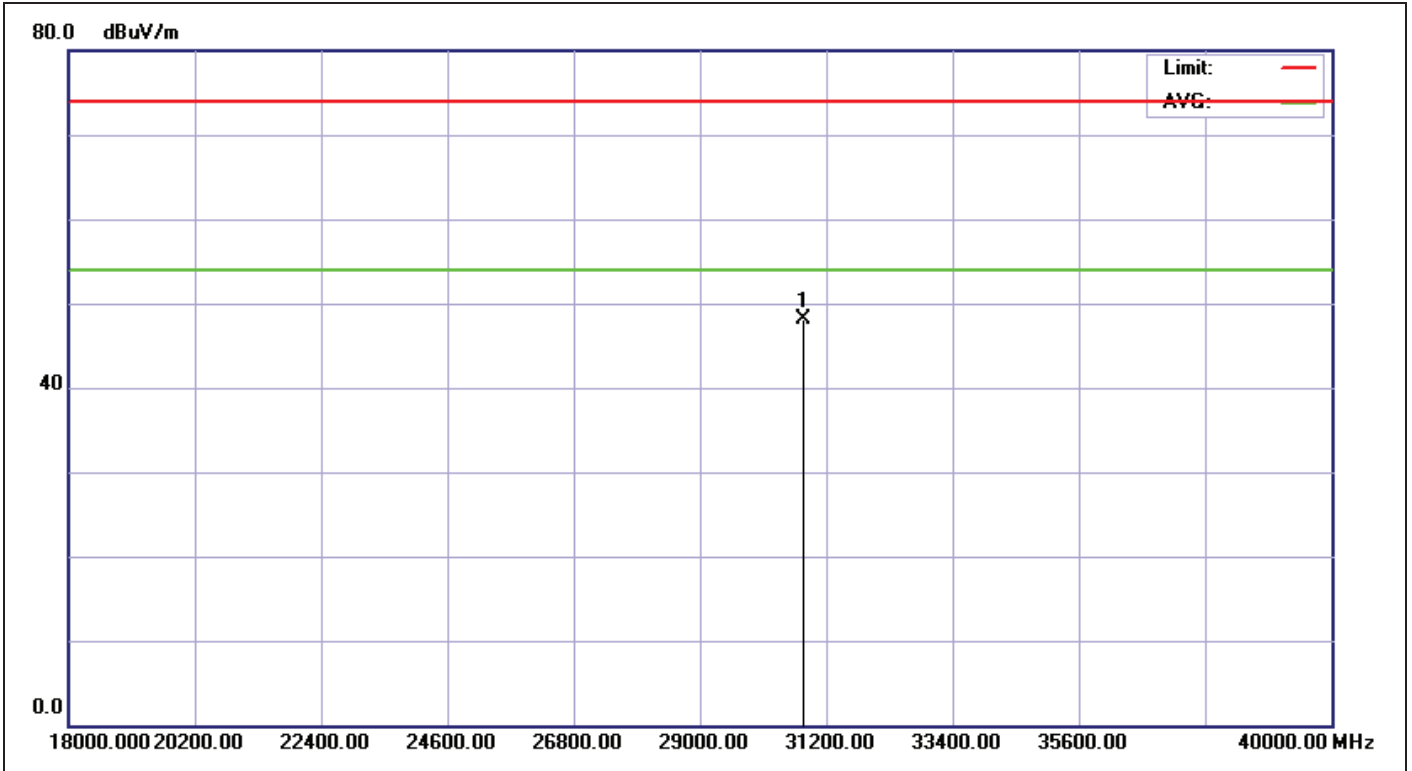


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:23:51
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5220		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30796.000	32.10	16.06	48.16	74.00	-25.84	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

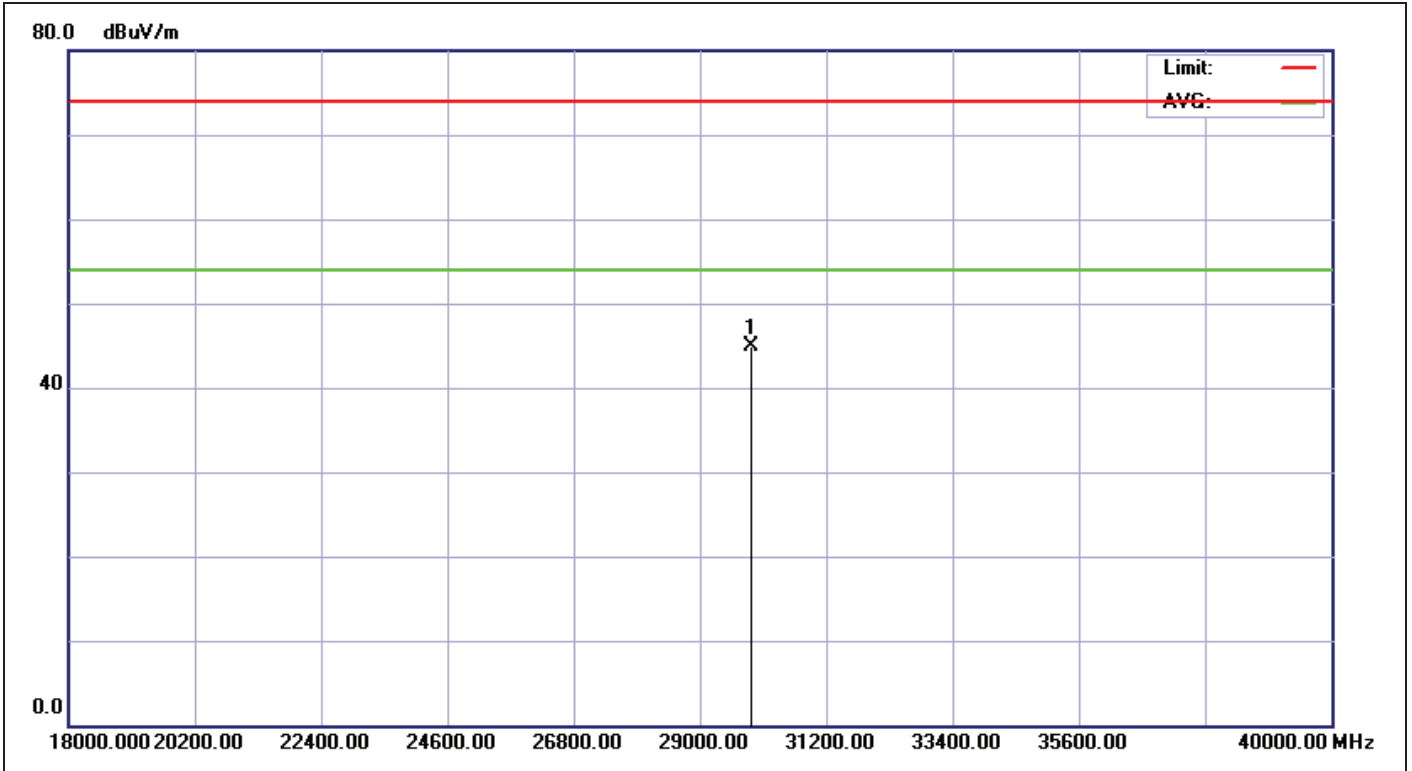


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:23:19
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5220		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	29880.000	30.35	14.59	44.94	74.00	-29.06	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

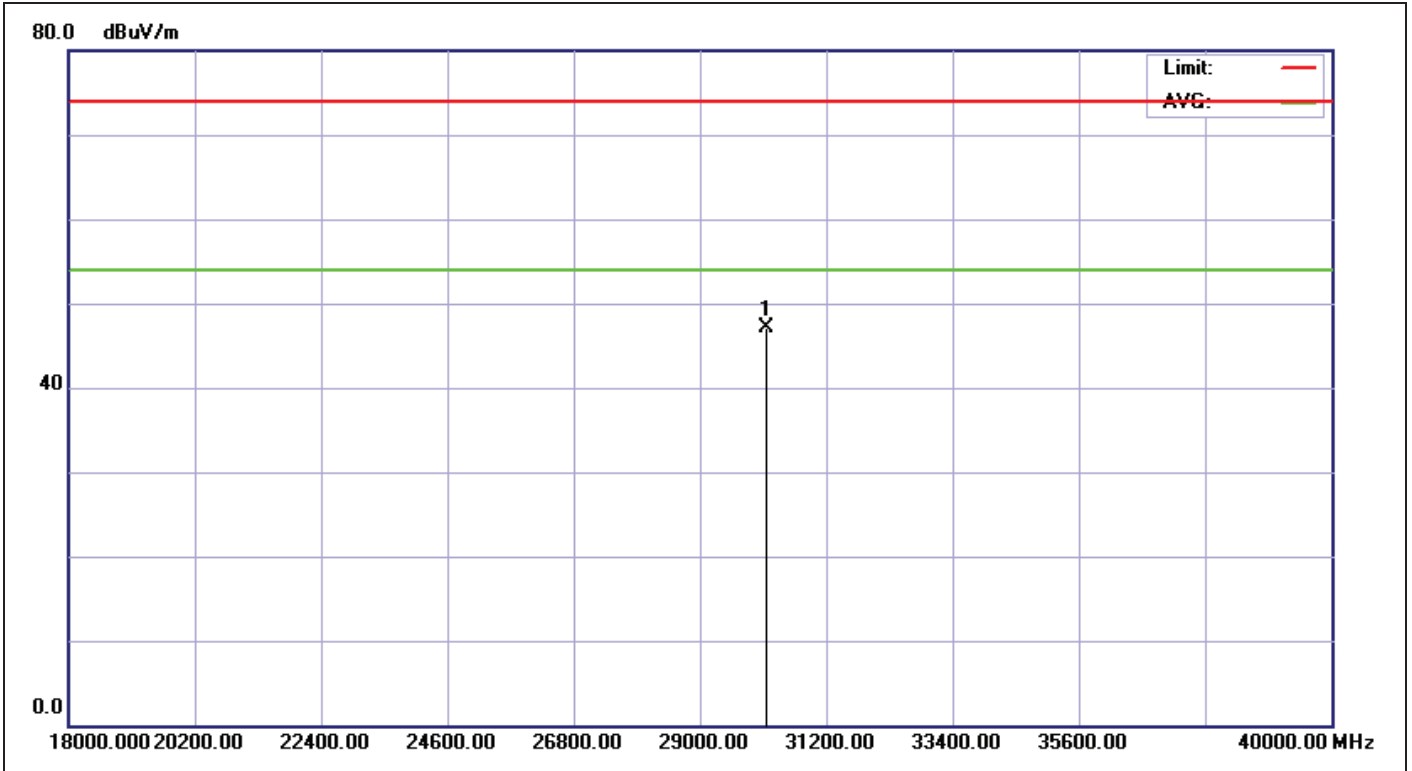


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:22:56
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5180		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30162.000	30.63	16.45	47.08	74.00	-26.92	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

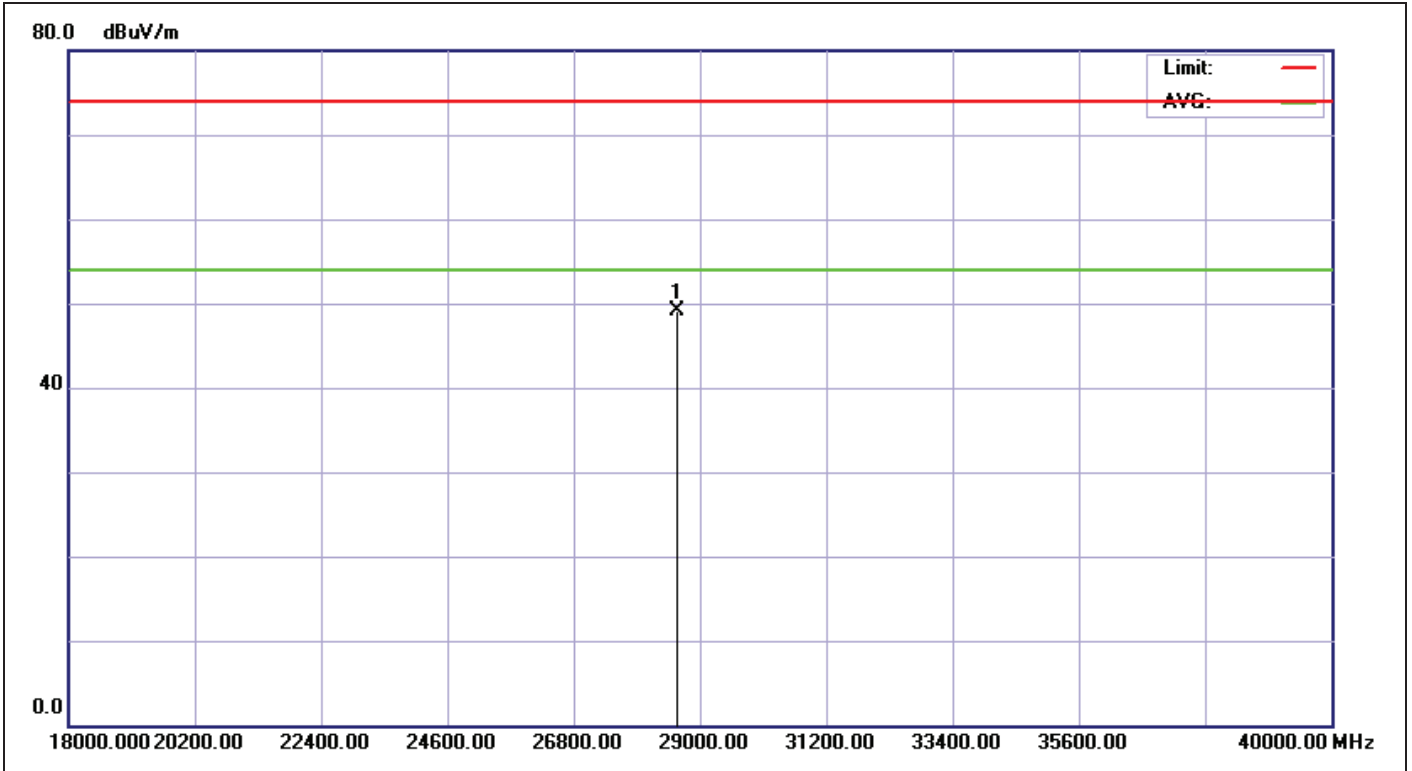


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:21:39
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A CH5180		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	28613.000	31.37	17.68	49.05	74.00	-24.95	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

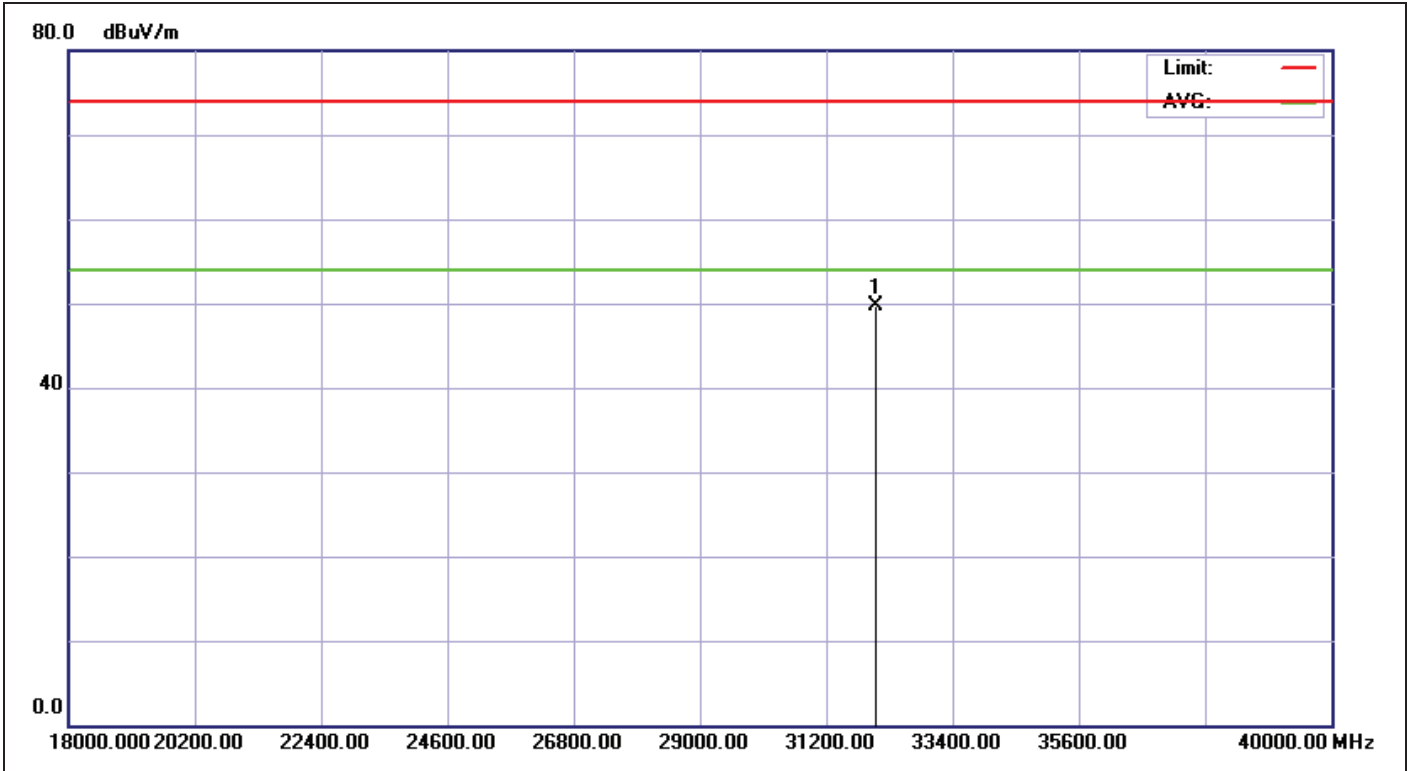


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:31:46
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5230		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	32063.000	33.39	16.35	49.74	74.00	-24.26	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

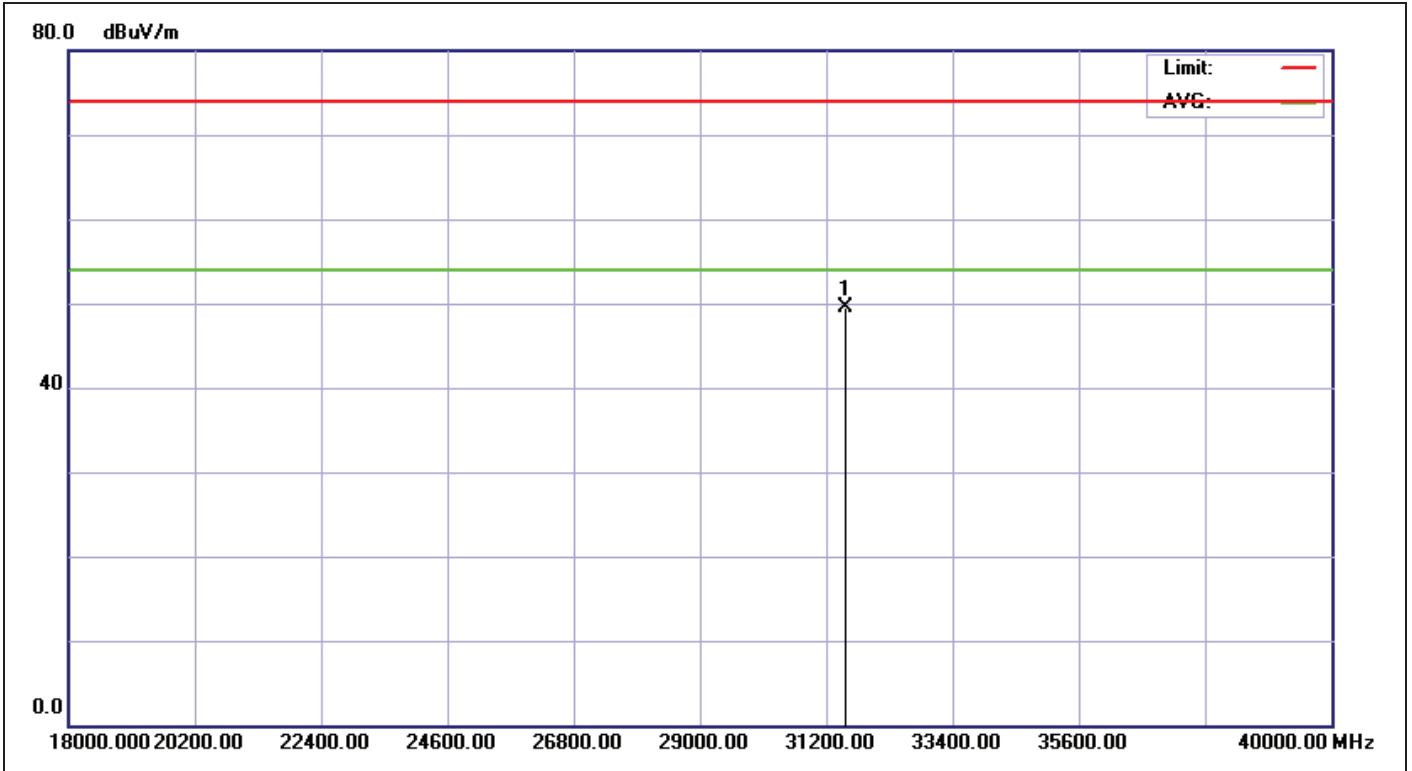


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:30:50
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5230		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	31535.000	31.97	17.46	49.43	74.00	-24.57	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

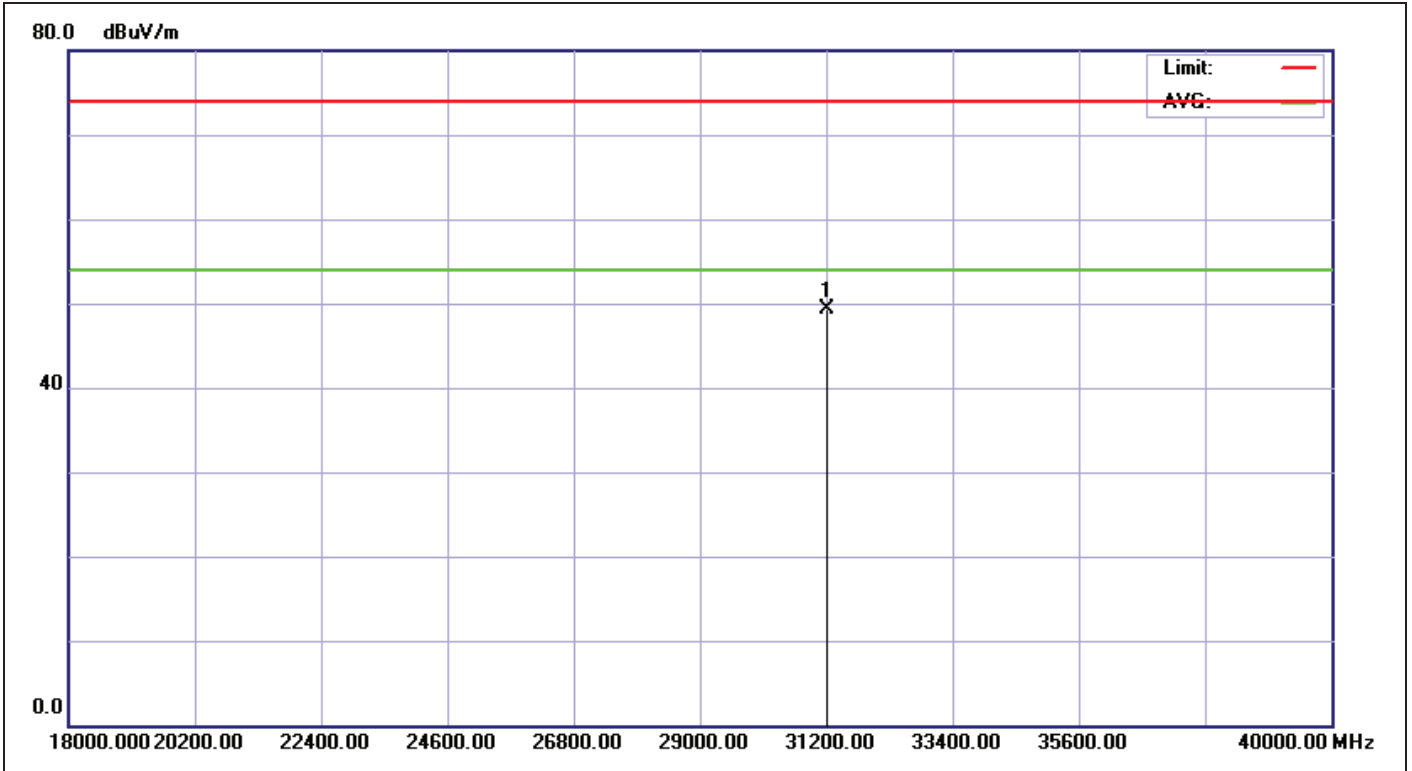


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:30:24
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5210		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	31218.000	32.37	16.94	49.31	74.00	-24.69	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

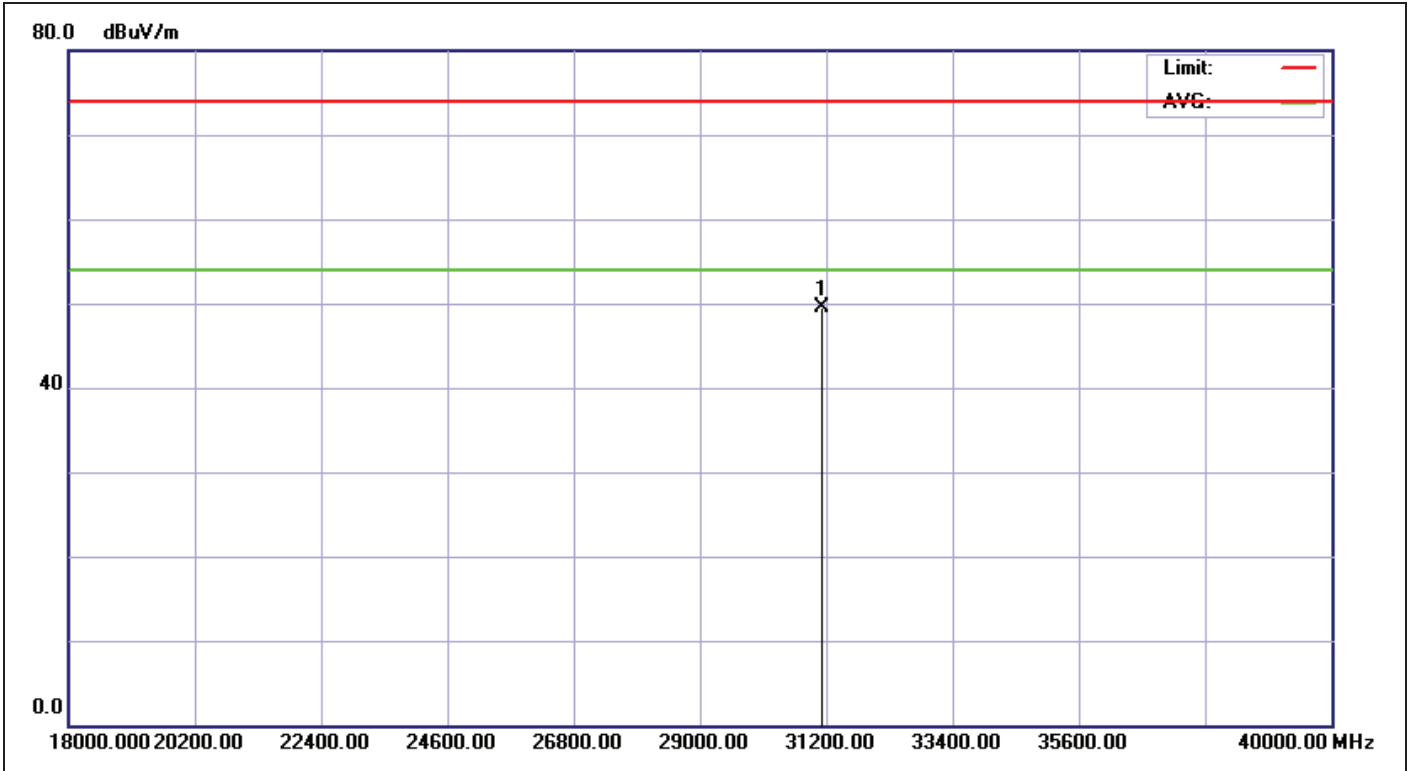


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:29:52
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5210		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	31112.000	32.56	17.03	49.59	74.00	-24.41	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

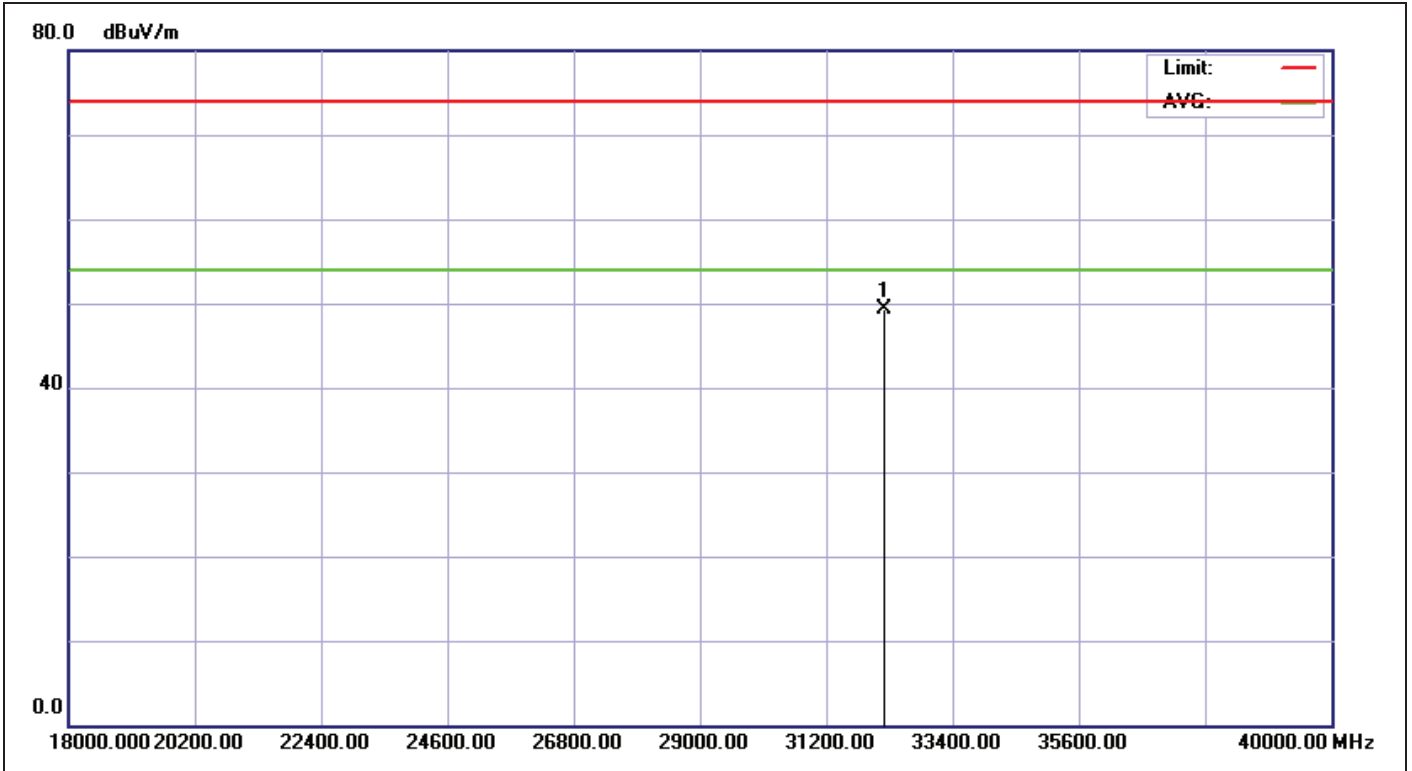


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:29:26
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5190		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	32204.000	33.65	15.68	49.33	74.00	-24.67	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

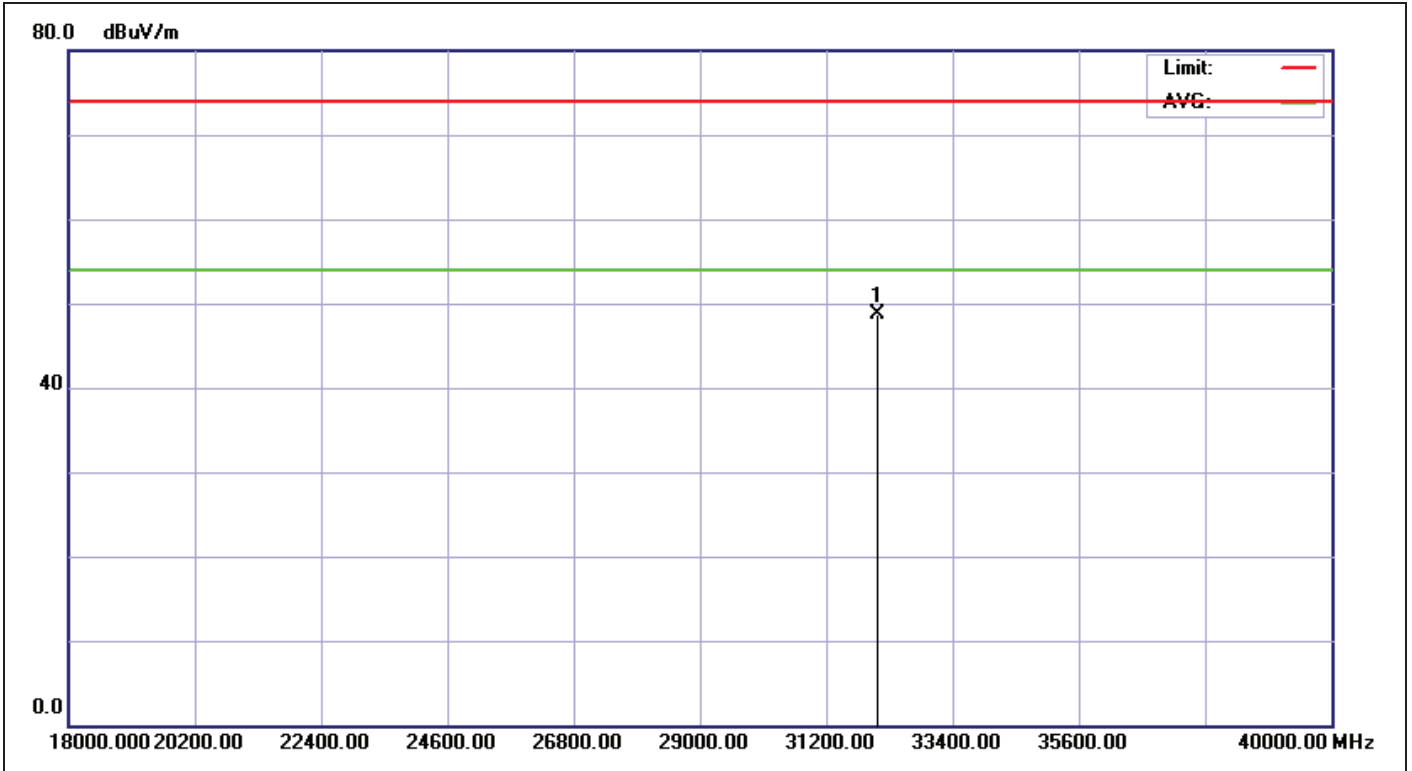


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:28:54
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5190		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	32098.000	33.46	15.18	48.64	74.00	-25.36	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

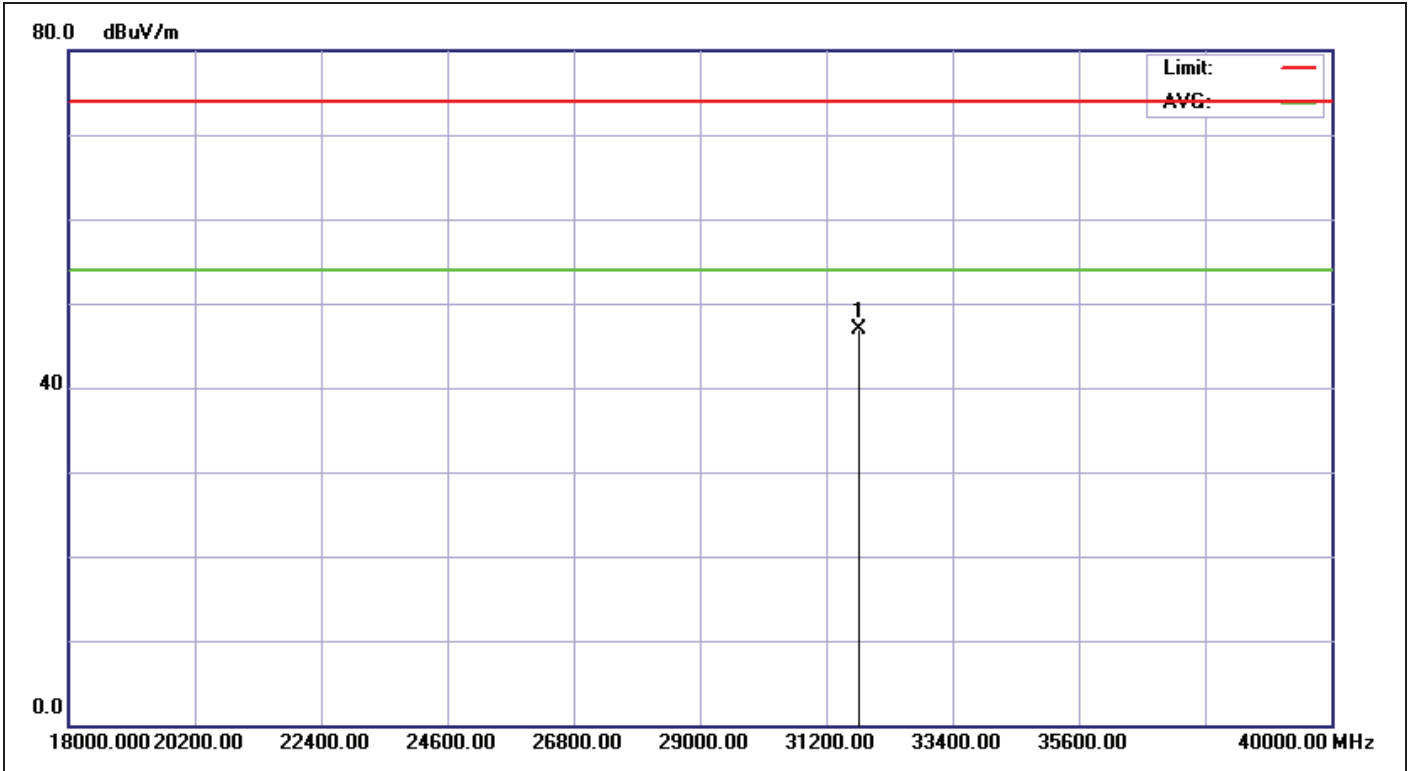


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:28:30
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5240		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	31781.000	32.66	14.15	46.81	74.00	-27.19	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

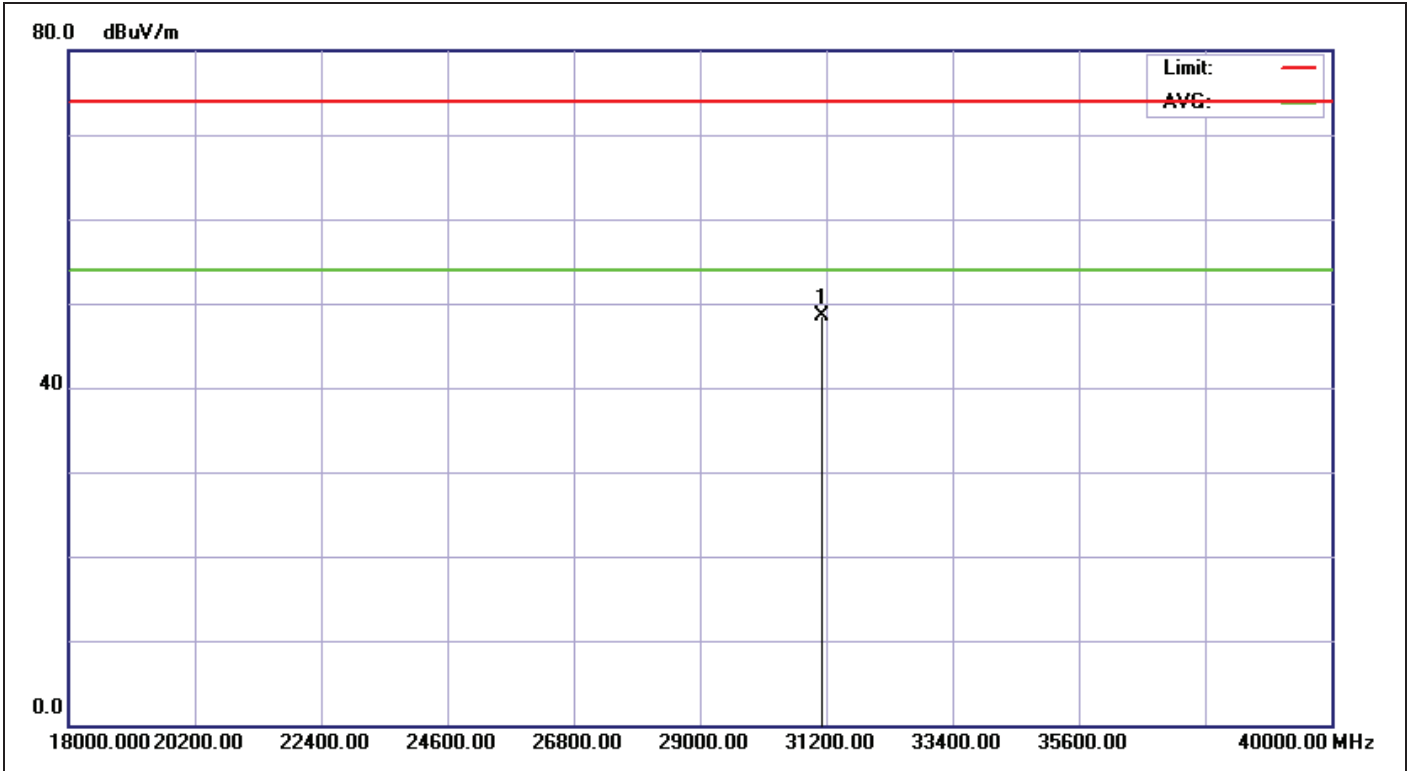


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:28:00
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5240		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	31112.000	32.56	15.85	48.41	74.00	-25.59	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

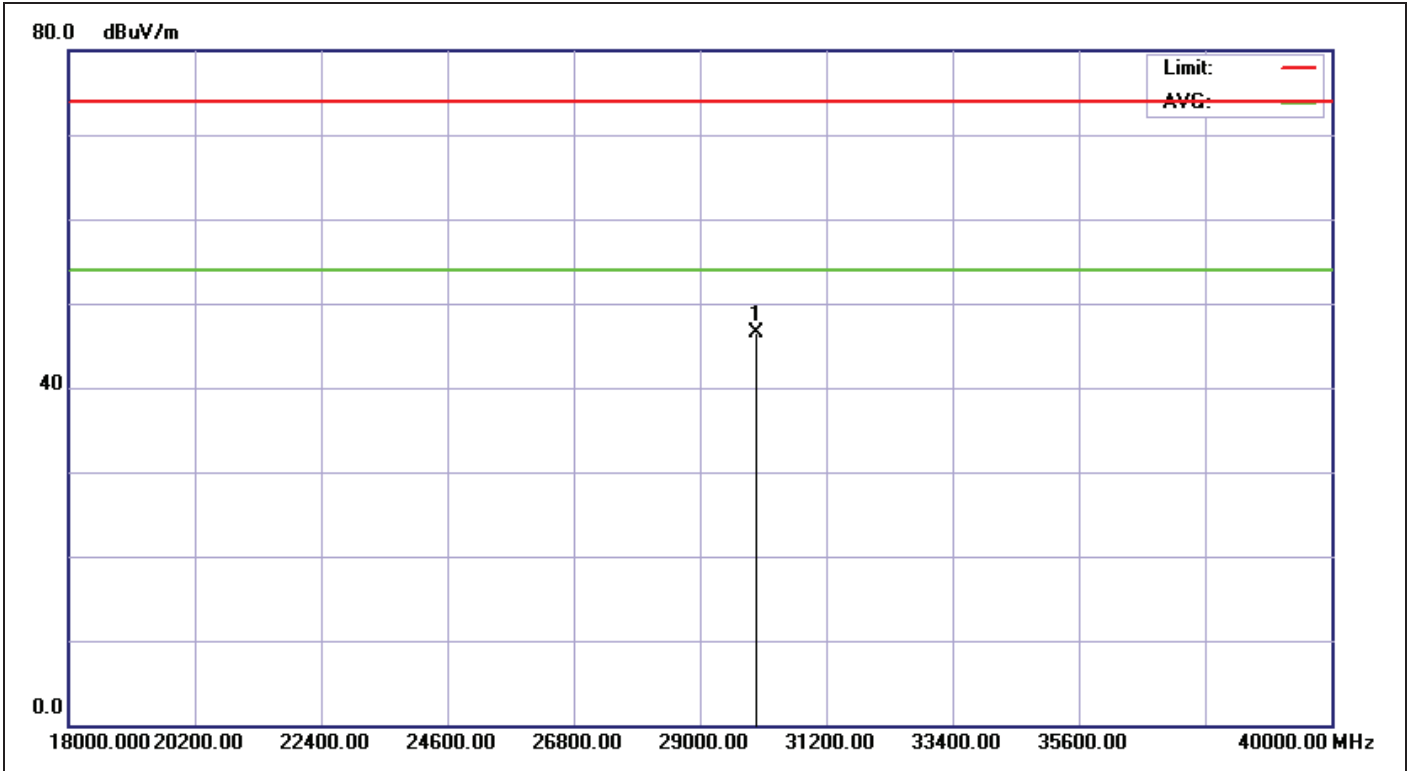


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:27:20
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5220		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	29986.000	30.36	16.23	46.59	74.00	-27.41	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

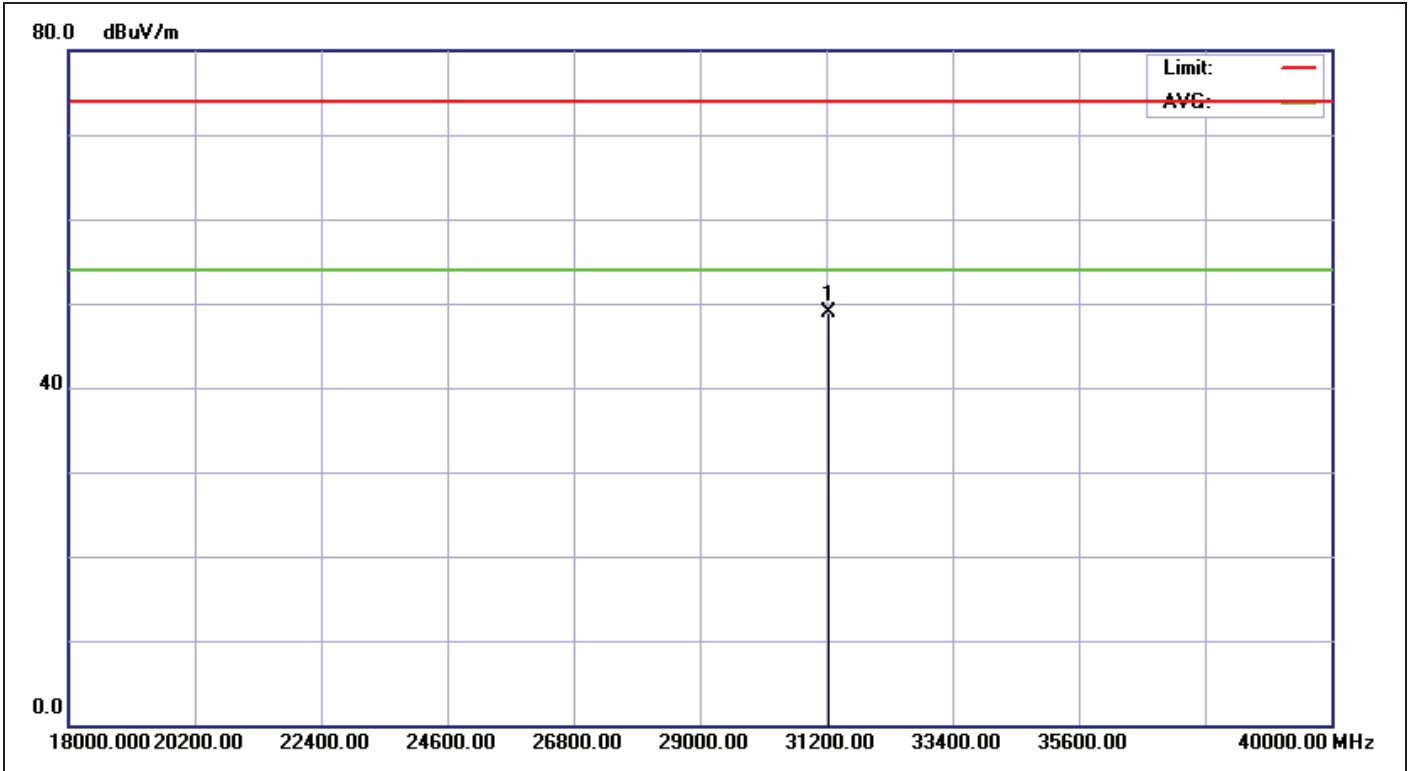


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:26:53
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5220		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	31253.000	32.31	16.52	48.83	74.00	-25.17	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

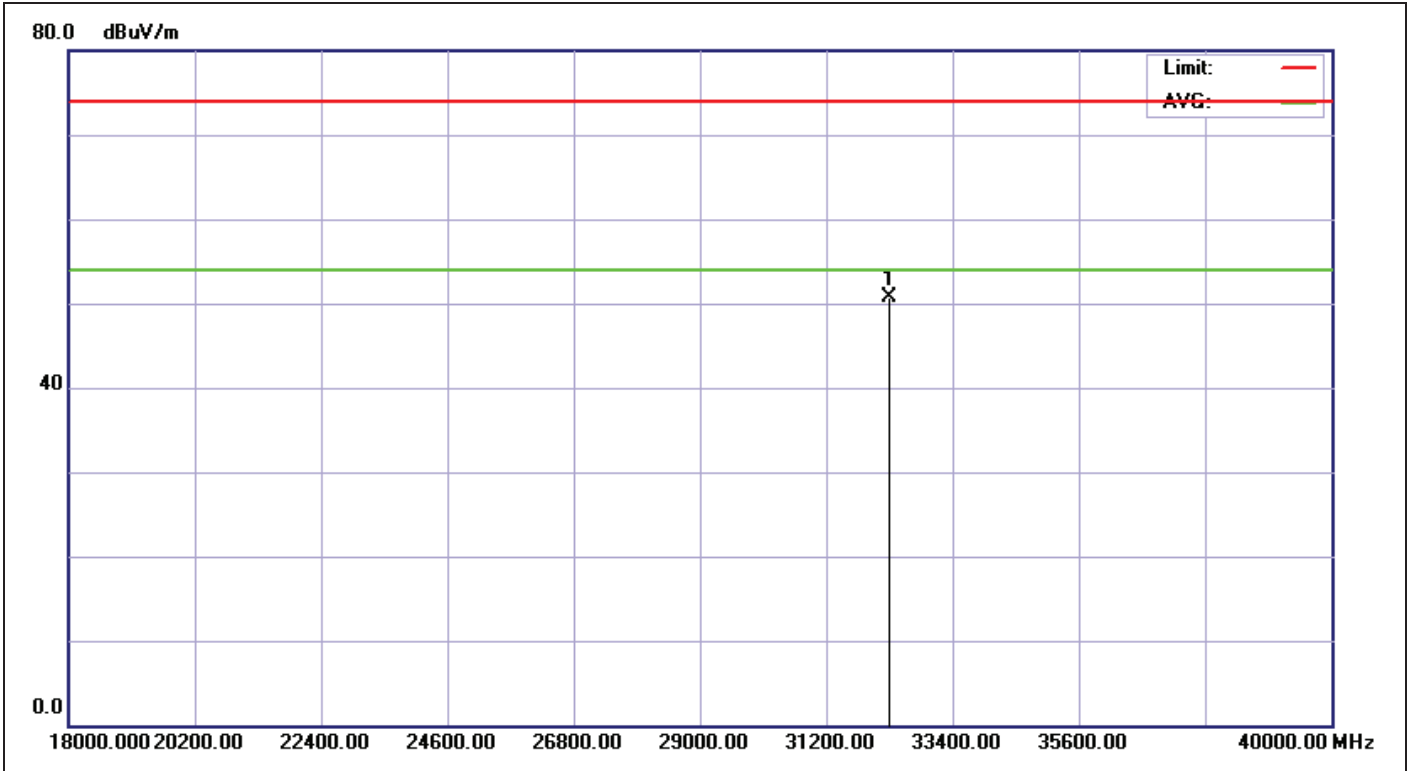


Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:26:32
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5180		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	32309.000	33.84	16.91	50.75	74.00	-23.25	peak	100	360	



TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

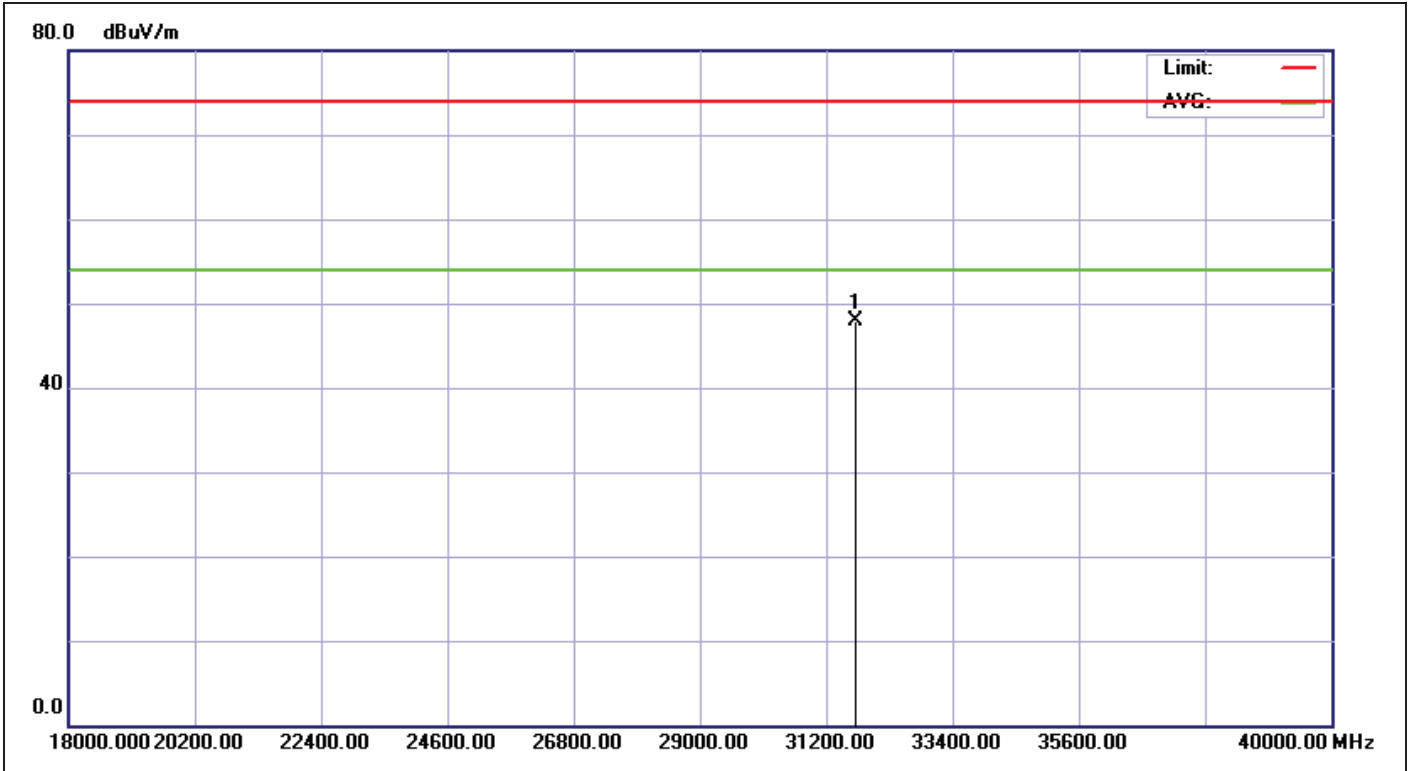

Service No.:	113161703-RF	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012-12-20 PM 08:25:43
Applicant:	CyberTAN	Test Rating:	DC 5V
Product:	Wifi Display HDMI Receive Dongle	Temp.(°C)/Hum.(%):	21(°C)/56%
Model No.:	MA400-C	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5180		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	31711.000	32.47	15.53	48.00	74.00	-26.00	peak	100	360	