

FCC TEST REPORT

REPORT NO.: RF930503L01A

MODEL NO.: WM610-T

RECEIVED: Sep. 14, 2004

TESTED: Sep. 22 ~ Sep. 23, 2004

APPLICANT: CYBERTAN TECHNOLOGY INC.

ADDRESS: No.99, Park Avenue III, Science-based
Industrial Park, Hsinchu, Taiwan,R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Kueishan, Taoyuan,
Taiwan, R.O.C.

This test report consists of 68 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



NO. 2177-01



0528
ILAC MRA

Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS	8
3.5	CONFIGURATION OF SYSTEM UNDER TEST	8
4	TEST TYPES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
4.1.2	TEST INSTRUMENTS	9
4.1.3	TEST PROCEDURES	10
4.1.4	DEVIATION FROM TEST STANDARD	10
4.1.5	TEST SETUP	11
4.1.6	EUT OPERATING CONDITIONS	11
4.1.7	TEST RESULTS	12
4.2	RADIATED EMISSION MEASUREMENT	18
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	18
4.2.2	TEST INSTRUMENTS	19
4.2.3	TEST PROCEDURES	20
4.2.4	DEVIATION FROM TEST STANDARD	20
4.2.5	TEST SETUP	21
4.2.6	EUT OPERATING CONDITIONS	21
4.2.7	TEST RESULTS	22
4.2.8	TEST RESULTS (A)	23
4.2.9	TEST RESULTS (B)	26
4.3	6dB BANDWIDTH MEASUREMENT	29
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	29
4.3.2	TEST INSTRUMENTS	29
4.3.3	TEST PROCEDURE	30
4.3.4	DEVIATION FROM TEST STANDARD	30
4.3.5	TEST SETUP	30
4.3.6	EUT OPERATING CONDITIONS	30
4.3.7	TEST RESULTS (A)	31
4.3.8	TEST RESULTS (B)	35
4.4	MAXIMUM PEAK OUTPUT POWER	39
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	39
4.4.2	TEST INSTRUMENTS	39
4.4.3	TEST PROCEDURES	40
4.4.4	DEVIATION FROM TEST STANDARD	40



4.4.5	TEST SETUP	40
4.4.6	EUT OPERATING CONDITIONS	40
4.4.7	TEST RESULTS (A)	41
4.4.8	TEST RESULTS (B)	42
4.5	POWER SPECTRAL DENSITY MEASUREMENT	43
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	43
4.5.2	TEST INSTRUMENTS.....	43
4.5.3	TEST PROCEDURE.....	44
4.5.4	DEVIATION FROM TEST STANDARD	44
4.5.5	TEST SETUP.....	44
4.5.6	EUT OPERATING CONDITIONS	44
4.5.7	TEST RESULTS (A)	45
4.5.8	TEST RESULTS (B)	49
4.6	BAND EDGES MEASUREMENT	53
4.6.1	LIMITS OF BAND EDGES MEASUREMENT.....	53
4.6.2	TEST INSTRUMENTS.....	53
4.6.3	TEST PROCEDURE.....	53
4.6.4	DEVIATION FROM TEST STANDARD	53
4.6.5	EUT OPERATING CONDITION	54
4.6.6	TEST RESULTS (A)	54
4.6.7	TEST RESULTS (B)	59
4.7	ANTENNA REQUIREMENT	64
4.7.1	STANDARD APPLICABLE	64
4.7.2	ANTENNA CONNECTED CONSTRUCTION	64
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	65
6	INFORMATION ON THE TESTING LABORATORIES	68



1 CERTIFICATION

PRODUCT : WLAN 802.11g MiniPCI Card
MODEL NO. : WM610-T
BRAND : CyberTAN
APPLICANT : CYBERTAN TECHNOLOGY INC
TESTED : Sep. 22 ~ Sep. 24, 2004
TEST SAMPLE : ENGINEERING SAMPLE
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2001

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Andrea Hsia , **DATE:** Sep. 29, 2004
(Andrea Hsia)

TECHNICAL
ACCEPTANCE : Gary Chang , **DATE:** Sep. 29, 2004
Responsible for RF (Gary Chang)

APPROVED BY : Cody Chang , **DATE:** Sep. 29, 2004
(Cody Chang / Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -17.36dB at 0.154MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -2.59dB at 2611.00MHz.
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Conducted emissions	9k~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.63 dB
	200MHz ~1000MHz	3.65 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	WLAN 802.11g MiniPCI Card
MODEL NO.	WM610-T
POWER SUPPLY	5.0Vdc from host equipment
MODULATION	BPSK, QPSK, CCK, 16QAM, 64QAM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
CHANNEL SPACING	5MHz
NUMBER OF CHANNEL	11
MAXIMUM OUTPUT POWER	40.55 mW
ANTENNA TYPE	Dipole antenna with 2dBi gain
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. This is a supplementary report with ADT report no. RF930503L01.
2. This report is prepared for FCC class II permissive change. The difference compared with the original design is adding antenna type to this EUT for the test.
3. The EUT, operates in the 2.4GHz frequency range, lets you connect IEEE 802.11g or IEEE 802.11b devices to the network. With its high-speed data transmissions of up to 54Mbps
4. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
2. From our experience and technical viewpoint, we have chosen data rates 11Mbps for CCK technique and 6Mbps for OFDM technique, as the worst cases for the test among other data rates.
3. There are two test results presented in the following sections: The test result A is for CCK technique and the test result B is for OFDM technique.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a WLAN 802.11g MiniPCI Card. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)
ANSI C63.4-2001

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	9954115984	E2K24CLNS
2	PRINTER	EPSON	LQ-300+	DCGY054147	FCC DoC Approved
3	MODEM	ACEEX	1414V/3	0401008269	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2 shielded cable without core
3	1.2 shielded cable without core

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

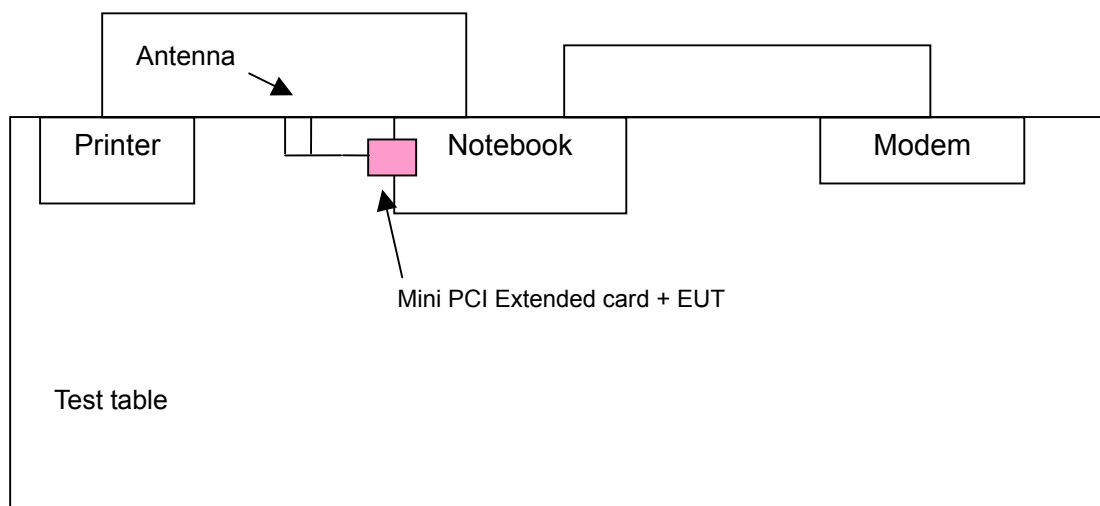

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Dec. 12, 2004
RF signal cable Woken	5D-FB	Cable-HYC01-01	Mar. 02, 2005
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Mar. 03, 2005
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Mar. 02, 2005
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under Limit - 20dB was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

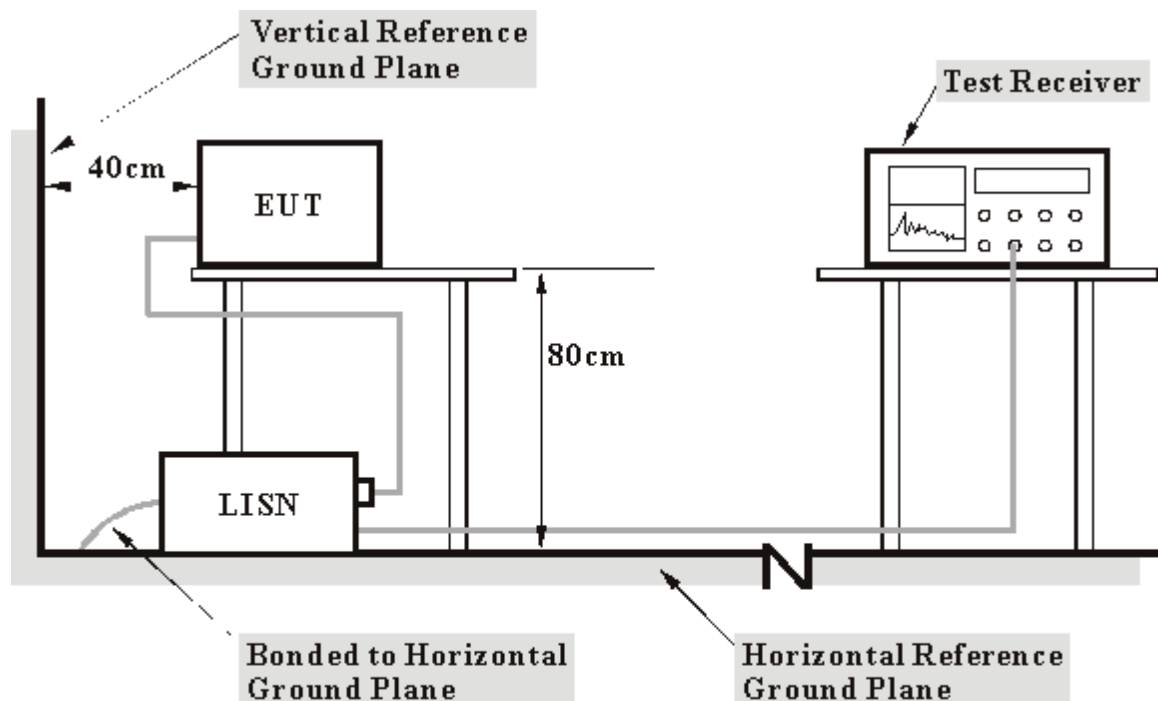

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


- a. Connected the EUT and extended card into a notebook system placed on a testing table.
- b. The notebook system ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The computer system sent "H" messages to its screen.
- d. The computer system sent "H" messages to modem.
- e. The computer system sent "H" messages to printer, and the printer prints them on paper.
- f. Item c ~ e were repeated.

4.1.7 TEST RESULTS

EUT	WLAN 802.11g MiniPCI Card	MODEL	WM610-T
CHANNEL	1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991 hPa	TESTED BY	Gary Chang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	0.12	40.12	-	40.24	-	63.91	53.91	-23.67	-
2	0.310	0.12	35.67	-	35.79	-	59.97	49.97	-24.17	-
3	1.852	0.16	31.08	-	31.24	-	56.00	46.00	-24.76	-
4	10.098	0.31	33.20	-	33.51	-	60.00	50.00	-26.49	-
5	16.227	0.84	32.23	-	33.07	-	60.00	50.00	-26.93	-
6	19.055	0.97	24.03	-	25.00	-	60.00	50.00	-35.00	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

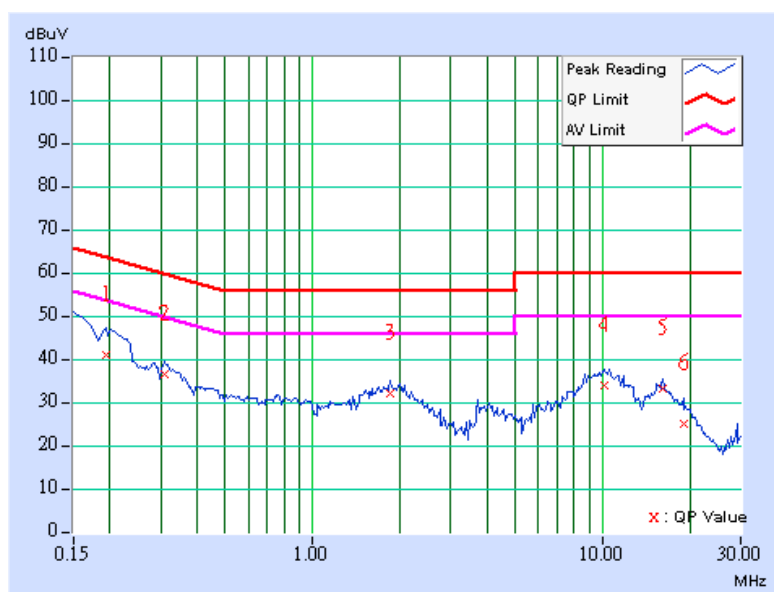

EUT	WLAN 802.11g MiniPCI Card	MODEL	WM610-T
CHANNEL	1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991 hPa	TESTED BY	Gary Chang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.10	48.33	-	48.43	-	65.79	55.79	-17.36	-
2	0.197	0.11	38.96	-	39.07	-	63.74	53.74	-24.67	-
3	0.361	0.12	32.57	-	32.69	-	58.71	48.71	-26.02	-
4	1.984	0.16	32.04	-	32.20	-	56.00	46.00	-23.80	-
5	10.707	0.33	32.29	-	32.62	-	60.00	50.00	-27.38	-
6	15.348	0.64	27.47	-	28.11	-	60.00	50.00	-31.89	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

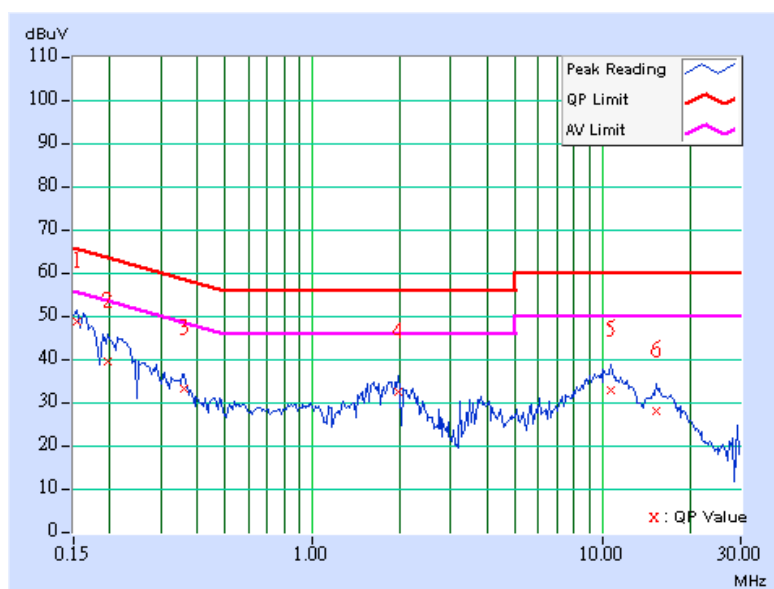

EUT	WLAN 802.11g MiniPCI Card	MODEL	WM610-T
CHANNEL	6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991 hPa	TESTED BY	Gary Chang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.11	46.04	-	46.15	-	65.58	55.58	-19.43	-
2	0.197	0.12	39.12	-	39.24	-	63.74	53.74	-24.50	-
3	0.310	0.12	34.61	-	34.73	-	59.97	49.97	-25.23	-
4	1.699	0.16	30.75	-	30.91	-	56.00	46.00	-25.09	-
5	7.621	0.30	27.78	-	28.08	-	60.00	50.00	-31.92	-
6	10.289	0.33	33.04	-	33.37	-	60.00	50.00	-26.63	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

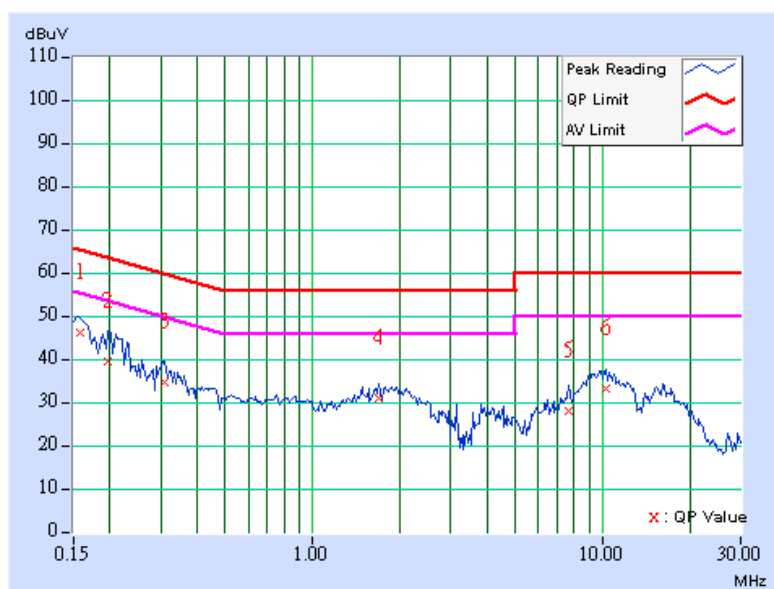

EUT	WLAN 802.11g MiniPCI Card	MODEL	WM610-T
CHANNEL	6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991 hPa	TESTED BY	Gary Chang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	46.86	-	46.96	-	66.00	56.00	-19.04	-
2	0.209	0.11	40.38	-	40.49	-	63.26	53.26	-22.77	-
3	0.310	0.11	34.07	-	34.18	-	59.97	49.97	-25.78	-
4	1.688	0.16	32.33	-	32.49	-	56.00	46.00	-23.51	-
5	3.863	0.20	26.17	-	26.37	-	56.00	46.00	-29.63	-
6	10.395	0.31	33.10	-	33.41	-	60.00	50.00	-26.59	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

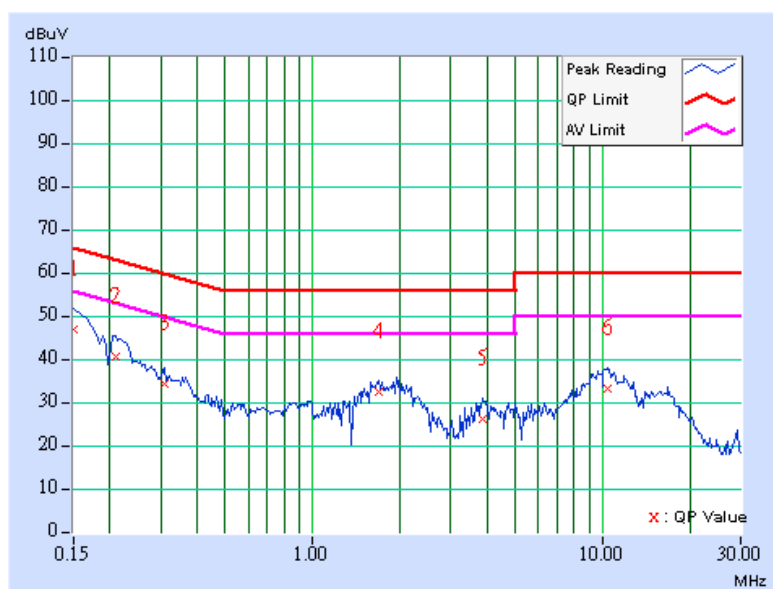

EUT	WLAN 802.11g MiniPCI Card	MODEL	WM610-T
CHANNEL	11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991 hPa	TESTED BY	Gary Chang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.11	47.46	-	47.57	-	65.79	55.79	-18.22	-
2	0.205	0.12	41.11	-	41.23	-	63.42	53.42	-22.19	-
3	0.314	0.12	33.75	-	33.87	-	59.86	49.86	-25.99	-
4	1.832	0.16	28.49	-	28.65	-	56.00	46.00	-27.35	-
5	10.234	0.32	33.26	-	33.58	-	60.00	50.00	-26.42	-
6	16.324	0.84	27.39	-	28.23	-	60.00	50.00	-31.77	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

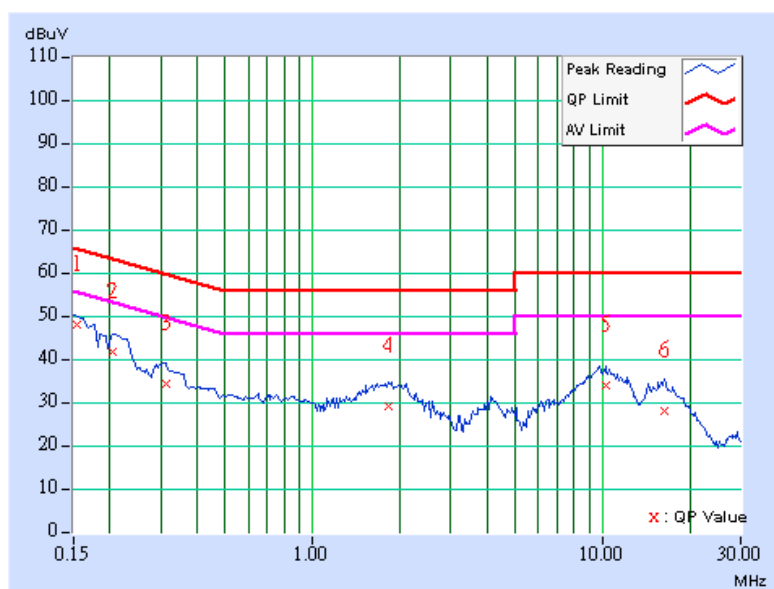

EUT	WLAN 802.11g MiniPCI Card	MODEL	WM610-T
CHANNEL	11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991 hPa	TESTED BY	Gary Chang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.10	48.03	-	48.13	-	65.79	55.79	-17.66	-
2	0.201	0.11	40.10	-	40.21	-	63.58	53.58	-23.37	-
3	1.664	0.16	32.50	-	32.66	-	56.00	46.00	-23.34	-
4	3.582	0.19	26.44	-	26.63	-	56.00	46.00	-29.37	-
5	10.219	0.30	33.52	-	33.82	-	60.00	50.00	-26.18	-
6	15.156	0.64	27.60	-	28.24	-	60.00	50.00	-31.76	-

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

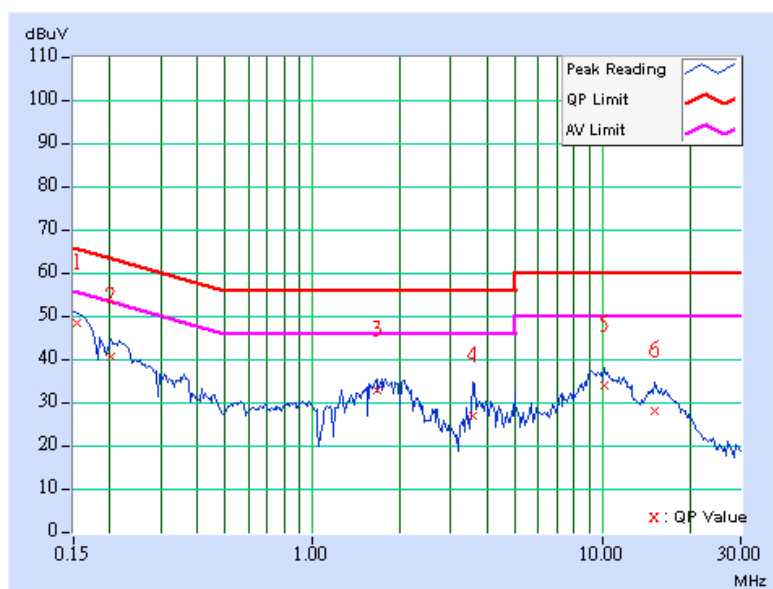



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Feb. 09, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Dec. 15, 2004
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170242	Feb. 23, 2005
Preamplifier Agilent	8447D	2944A10631	Jan. 15, 2005
Preamplifier Agilent	8449B	3008A01960	Jan. 22, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219272/4	Mar. 04, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219275/4	Mar. 04, 2005
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA
Turn Table ADT.	TT100.	TT93021704	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-4.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10kHz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

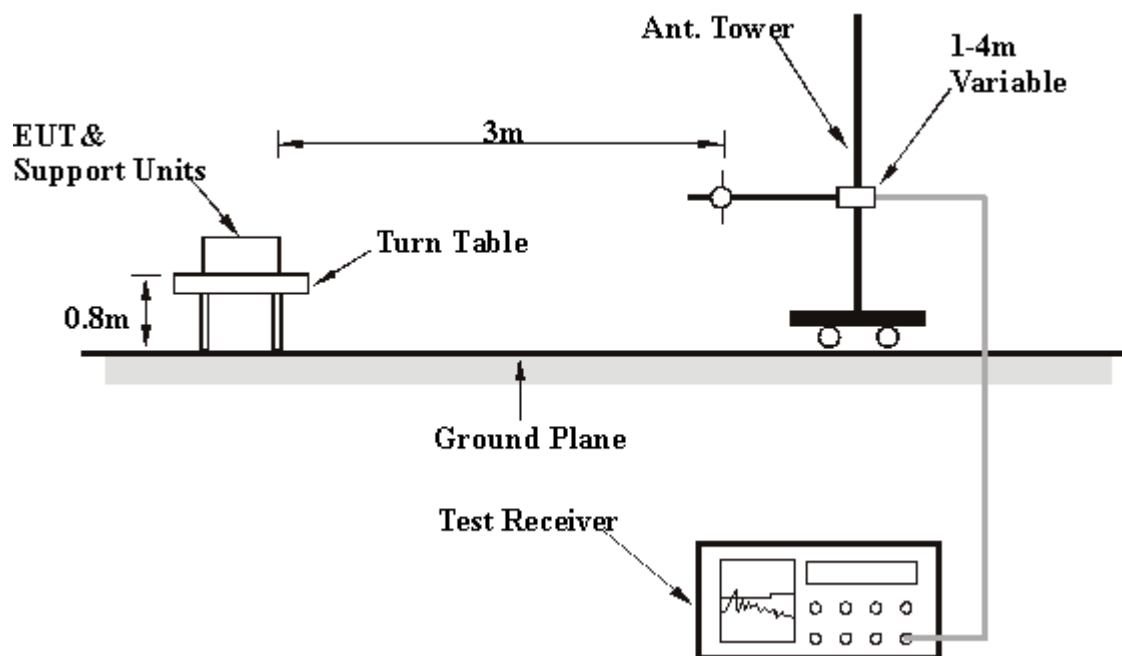

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

EUT	WLAN 802.11g MiniPCI Card	MODEL	WM610-T
CHANNEL	11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 65 % RH, 991 hPa	TESTED BY	Leo Hung

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.03	33.45 QP	43.50	-10.05	2.00 H	172	19.56	13.89
2	166.07	38.33 QP	43.50	-5.17	1.00 H	172	24.00	14.32
3	199.12	34.36 QP	43.50	-9.14	1.25 H	7	23.02	11.34
4	265.21	36.45 QP	46.00	-9.55	1.00 H	37	22.98	13.47
5	333.25	34.23 QP	46.00	-11.77	1.00 H	340	19.08	15.15
6	376.01	33.39 QP	46.00	-12.61	1.00 H	241	17.24	16.15
7	467.37	34.31 QP	46.00	-11.69	2.00 H	340	16.11	18.20
8	531.52	28.89 QP	46.00	-17.11	1.50 H	88	9.76	19.13
9	599.56	36.54 QP	46.00	-9.46	1.25 H	103	15.73	20.82
10	665.65	37.87 QP	46.00	-8.13	1.25 H	334	16.23	21.64
11	681.20	37.17 QP	46.00	-8.83	1.00 H	34	15.37	21.81
12	720.08	37.37 QP	46.00	-8.63	1.00 H	34	14.87	22.50
13	799.78	31.16 QP	46.00	-14.84	1.00 H	40	7.70	23.46
14	840.60	30.81 QP	46.00	-15.19	1.75 H	307	6.98	23.83

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	166.07	33.96 QP	43.50	-9.54	2.00 V	88	19.64	14.32
2	199.12	32.66 QP	43.50	-10.84	1.25 V	22	21.31	11.34
3	265.21	36.76 QP	46.00	-9.24	1.75 V	349	23.29	13.47
4	333.25	36.72 QP	46.00	-9.28	1.50 V	52	21.57	15.15
5	457.66	34.29 QP	46.00	-11.71	2.00 V	139	16.20	18.09
6	533.47	30.75 QP	46.00	-15.25	1.00 V	16	11.58	19.17
7	599.56	30.28 QP	46.00	-15.72	1.25 V	91	9.46	20.82
8	640.38	31.82 QP	46.00	-14.18	1.00 V	76	10.47	21.35
9	681.20	33.90 QP	46.00	-12.10	1.00 V	82	12.10	21.81
10	720.08	32.47 QP	46.00	-13.53	1.00 V	55	9.97	22.50
11	799.78	28.04 QP	46.00	-17.96	1.75 V	55	4.58	23.46
12	906.69	29.35 QP	46.00	-16.65	1.00 V	274	4.47	24.88

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2.8 TEST RESULTS (A)

EUT	WLAN 802.11g MiniPCI Card	MODEL	WM610-T
CHANNEL	1	FREQUENCY RANGE	1 ~ 25 GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65 % RH, 991 hPa	TESTED BY	Leo Hung

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2208.00	45.31 PK	74.00	-28.69	1.16 H	318	12.41	32.90
1	2208.00	34.34 AV	54.00	-19.66	1.16 H	318	1.44	32.90
2	2244.00	45.47 PK	74.00	-28.53	1.22 H	136	12.38	33.09
2	2244.00	38.70 AV	54.00	-15.30	1.22 H	136	5.61	33.09
3	2390.00	45.45 PK	74.00	-28.55	1.26 H	31	11.62	33.83
3	2390.00	35.07 AV	54.00	-18.93	1.26 H	31	1.24	33.83
4	*2412.00	101.10 PK			1.26 H	31	67.17	33.93
4	*2412.00	90.72 AV			1.26 H	31	56.79	33.93
5	2611.00	49.50 PK	74.00	-24.50	1.21 H	96	14.85	34.65
5	2611.00	38.15 AV	54.00	-15.85	1.21 H	96	3.50	34.65
6	4824.00	52.30 PK	74.00	-21.70	1.10 H	110	11.64	40.66
6	4824.00	39.83 AV	54.00	-14.17	1.10 H	110	-0.83	40.66

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2208.00	51.20 PK	74.00	-22.80	1.24 V	66	18.30	32.90
1	2208.00	41.51 AV	54.00	-12.49	1.24 V	66	8.61	32.90
2	2244.00	48.93 PK	74.00	-25.07	1.26 V	62	15.84	33.09
2	2244.00	45.15 AV	54.00	-8.85	1.26 V	62	12.06	33.09
3	2390.00	57.37 PK	74.00	-16.63	1.16 V	10	23.54	33.83
3	2390.00	46.83 AV	54.00	-7.17	1.16 V	10	13.00	33.83
4	*2412.00	113.02 PK			1.16 V	10	79.09	33.93
4	*2412.00	102.48 AV			1.16 V	10	68.55	33.93
5	2611.00	60.02 PK	74.00	-13.98	1.06 V	37	25.37	34.65
5	2611.00	49.96 AV	54.00	-4.04	1.06 V	37	15.31	34.65
6	4824.00	52.16 PK	74.00	-21.84	1.00 V	255	11.50	40.66
6	4824.00	39.84 AV	54.00	-14.16	1.00 V	255	-0.82	40.66

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 - 5.“ * ” : Fundamental frequency.

EUT	WLAN 802.11g MiniPCI Card	MODEL	WM610-T
CHANNEL	6	FREQUENCY RANGE	1 ~ 25 GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65 % RH, 991 hPa	TESTED BY	Leo Hung

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2244.00	46.09 PK	74.00	-27.91	1.18 H	136	13.00	33.09
1	2244.00	38.41 AV	54.00	-15.59	1.18 H	136	5.32	33.09
2	2254.00	47.45 PK	74.00	-26.55	1.02 H	56	14.31	33.14
2	2254.00	36.86 AV	54.00	-17.14	1.02 H	56	3.72	33.14
3	*2437.00	100.49 PK			1.09 H	145	66.44	34.05
3	*2437.00	90.16 AV			1.09 H	145	56.11	34.05
4	2611.00	47.14 PK	74.00	-26.86	1.00 H	80	12.49	34.65
4	2611.00	36.43 AV	54.00	-17.57	1.00 H	80	1.78	34.65
5	4874.00	51.99 PK	74.00	-22.01	1.10 H	144	11.30	40.69
5	4874.00	38.51 AV	54.00	-15.49	1.10 H	144	-2.18	40.69

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2244.00	49.60 PK	74.00	-24.40	1.23 V	63	16.51	33.09
1	2244.00	45.89 AV	54.00	-8.11	1.23 V	63	12.80	33.09
2	2254.00	55.27 PK	74.00	-18.73	1.30 V	61	22.13	33.14
2	2254.00	45.09 AV	54.00	-8.91	1.30 V	61	11.95	33.14
3	*2437.00	112.54 PK			1.15 V	12	78.49	34.05
3	*2437.00	101.87 AV			1.15 V	12	67.82	34.05
4	2611.00	61.11 PK	74.00	-12.89	1.06 V	63	26.46	34.65
4	2611.00	51.41 AV	54.00	-2.59	1.06 V	63	16.76	34.65
5	4874.00	52.56 PK	74.00	-21.44	1.00 V	115	11.87	40.69
5	4874.00	39.91 AV	54.00	-14.09	1.00 V	115	-0.78	40.69

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + CorrectionFactor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT	WLAN 802.11g MiniPCI Card	MODEL	WM610-T
CHANNEL	11	FREQUENCY RANGE	1 ~ 25 GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65 % RH, 991 hPa	TESTED BY	Leo Hung

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2244.00	44.72 PK	74.00	-29.28	1.10 H	140	11.63	33.09
1	2244.00	36.14 AV	54.00	-17.89	1.10 H	140	3.05	33.09
2	2310.00	50.24 PK	74.00	-23.76	1.13 H	136	16.81	33.43
2	2310.00	41.25 AV	54.00	-12.75	1.13 H	136	7.82	33.43
3	*2462.00	102.37 PK			1.04 H	157	68.21	34.16
3	*2462.00	91.99 AV			1.04 H	157	57.83	34.16
4	2483.50	43.92 PK	74.00	-30.08	1.04 H	157	9.66	34.26
4	2483.50	33.54 AV	54.00	-20.46	1.04 H	157	-0.72	34.26
5	2611.00	52.45 PK	74.00	-21.55	1.23 H	97	17.80	34.65
5	2611.00	42.57 AV	54.00	-11.43	1.23 H	97	7.92	34.65
6	4924.00	51.63 PK	74.00	-22.37	1.02 H	241	10.77	40.86
6	4924.00	38.78 AV	54.00	-15.22	1.02 H	241	-2.08	40.86

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2244.00	49.88 PK	74.00	-24.12	1.00 V	58	16.79	33.09
1	2244.00	45.35 AV	54.00	-8.65	1.00 V	58	12.26	33.09
2	2310.00	61.12 PK	74.00	-12.88	1.21 V	135	27.69	33.43
2	2310.00	50.41 AV	54.00	-3.59	1.21 V	135	16.98	33.43
3	*2462.00	114.02 PK			1.17 V	63	79.86	34.16
3	*2462.00	103.30 AV			1.17 V	63	69.14	34.16
4	2483.50	55.57 PK	74.00	-18.43	1.17 V	63	21.31	34.26
4	2483.50	44.85 AV	54.00	-9.15	1.17 V	63	10.59	34.26
5	2611.00	64.39 PK	94.22	-29.83	1.09 V	337	29.74	34.65
5	2611.00	54.55 AV	83.30	-28.75	1.09 V	337	19.90	34.65
6	4924.00	52.75 PK	74.00	-21.25	1.00 V	112	11.89	40.86
6	4924.00	40.07 AV	54.00	-13.93	1.00 V	112	-0.79	40.86

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

4.2.9 TEST RESULTS (B)

EUT	WLAN 802.11g MiniPCI Card	MODEL	WM610-T
CHANNEL	1	FREQUENCY RANGE	1 ~ 25 GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65 % RH, 991 hPa	TESTED BY	Leo Hung

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	45.15 PK	74.00	-28.85	1.07 H	112	13.08	32.07
1	2038.00	38.39 AV	54.00	-15.61	1.07 H	112	6.32	32.07
2	2244.00	44.07 PK	74.00	-29.93	1.08 H	1	10.98	33.09
2	2244.00	35.42 AV	54.00	-18.58	1.08 H	1	2.33	33.09
3	2390.00	48.28 PK	74.00	-25.72	1.24 H	29	14.45	33.83
3	2390.00	38.30 AV	54.00	-15.70	1.24 H	29	4.47	33.83
4	*2412.00	98.93 PK			1.24 H	29	65.00	33.93
4	*2412.00	88.95 AV			1.24 H	29	55.02	33.93
5	4824.00	51.35 PK	74.00	-22.65	1.04 H	341	10.69	40.66
5	4824.00	38.35 AV	54.00	-15.65	1.04 H	341	-2.31	40.66

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	46.59 PK	74.00	-27.41	1.36 V	62	14.52	32.07
1	2038.00	42.99 AV	54.00	-11.01	1.36 V	62	10.92	32.07
2	2244.00	48.96 PK	74.00	-25.04	1.25 V	61	15.87	33.09
2	2244.00	44.86 AV	54.00	-9.14	1.25 V	61	11.77	33.09
3	2390.00	59.14 PK	74.00	-14.86	1.16 V	12	25.31	33.83
3	2390.00	47.99 AV	54.00	-6.01	1.16 V	12	14.16	33.83
4	*2412.00	109.79 PK			1.16 V	12	75.86	33.93
4	*2412.00	98.64 AV			1.16 V	12	64.71	33.93
5	4824.00	51.94 PK	74.00	-22.06	1.07 V	324	11.28	40.66
5	4824.00	40.18 AV	54.00	-13.82	1.07 V	324	-0.48	40.66

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT	WLAN 802.11g MiniPCI Card	MODEL	WM610-T
CHANNEL	6	FREQUENCY RANGE	1 ~ 25 GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65 % RH, 991 hPa	TESTED BY	Leo Hung

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2244.00	43.87 PK	74.00	-30.13	1.10 H	1	10.78	33.09
1	2244.00	34.77 AV	54.00	-19.23	1.10 H	1	1.68	33.09
2	2262.00	46.19 PK	74.00	-27.81	1.17 H	141	13.00	33.19
2	2262.00	34.98 AV	54.00	-19.02	1.17 H	141	1.79	33.19
3	*2437.00	97.41 PK			1.10 H	352	63.36	34.05
3	*2437.00	87.36 AV			1.10 H	352	53.31	34.05
4	2611.00	47.73 PK	74.00	-26.27	1.17 H	97	13.08	34.65
4	2611.00	36.61 AV	54.00	-17.39	1.17 H	97	1.96	34.65
5	4874.00	50.90 PK	74.00	-23.10	1.22 H	224	10.21	40.69
5	4874.00	38.56 AV	54.00	-15.44	1.22 H	224	-2.13	40.69

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2244.00	49.46 PK	74.00	-24.54	1.28 V	63	16.37	33.09
1	2244.00	45.81 AV	54.00	-8.19	1.28 V	63	12.72	33.09
2	2262.00	50.85 PK	74.00	-23.15	1.28 V	60	17.66	33.19
2	2262.00	40.18 AV	54.00	-13.82	1.28 V	60	6.99	33.19
3	*2437.00	109.15 PK			1.15 V	360	75.10	34.05
3	*2437.00	97.76 AV			1.15 V	360	63.71	34.05
4	2611.00	57.18 PK	74.00	-16.82	1.06 V	38	22.53	34.65
4	2611.00	47.66 AV	54.00	-6.34	1.06 V	38	13.01	34.65
5	4874.00	52.59 PK	74.00	-21.41	1.10 V	114	11.90	40.69
5	4874.00	40.08 AV	54.00	-13.92	1.10 V	114	-0.61	40.69

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + CorrectionFactor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.

EUT	WLAN 802.11g MiniPCI Card	MODEL	WM610-T
DETECTOR FUNCTION	Peak(PK) Average (AV)	FREQUENCY RANGE	1 ~ 25 GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	MODE	Channel 11
ENVIRONMENTAL CONDITIONS	25 deg. C, 65 % RH, 991 hPa	TESTED BY	Leo Hung

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	44.18 PK	74.00	-29.82	1.00 H	148	11.88	32.30
1	2088.00	36.43 AV	54.00	-28.31	1.00 H	148	4.13	32.30
2	2244.00	45.69 PK	74.00	-28.31	1.21 H	138	12.60	33.09
2	2244.00	39.50 AV	54.00	-14.50	1.21 H	138	6.41	33.09
3	2313.00	46.07 PK	74.00	-27.93	1.00 H	57	12.62	33.45
3	2313.00	34.88 AV	54.00	-19.12	1.00 H	57	1.43	33.45
4	*2462.00	97.31 PK			1.27 H	21	63.15	34.16
4	*2462.00	86.57 AV			1.27 H	21	52.41	34.16
5	2483.50	46.50 PK	74.00	-27.50	1.27 H	21	12.24	34.26
5	2483.50	35.76 AV	54.00	-18.24	1.27 H	21	1.50	34.26
6	2611.00	49.64 PK	74.00	-24.36	1.19 H	100	14.99	34.65
6	2611.00	38.82 AV	54.00	-15.18	1.19 H	100	4.17	34.65
7	4924.00	50.90 PK	74.00	-23.10	1.04 H	244	10.04	40.86
7	4924.00	39.08 AV	54.00	-14.92	1.04 H	244	-1.78	40.86

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	46.05 PK	74.00	-27.95	1.33 V	60	13.75	32.30
1	2088.00	40.35 AV	54.00	-13.65	1.33 V	60	8.05	32.30
2	2244.00	47.78 PK	74.00	-26.22	1.00 V	54	14.68	33.09
2	2244.00	44.02 AV	54.00	-9.98	1.00 V	54	10.92	33.09
3	2313.00	55.32 PK	74.00	-18.68	1.28 V	58	21.87	33.45
3	2313.00	46.00 AV	54.00	-8.00	1.28 V	58	12.55	33.45
4	*2462.00	108.50 PK			1.18 V	62	74.57	33.93
4	*2462.00	97.56 AV			1.18 V	62	63.63	33.93
5	2483.50	57.69 PK	74.00	-16.31	1.18 V	62	23.43	34.26
5	2483.50	46.75 AV	54.00	-7.25	1.18 V	62	12.49	34.26
6	2611.00	59.15 PK	74.00	-14.85	1.09 V	60	24.50	34.65
6	2611.00	49.83 AV	54.00	-4.17	1.09 V	60	15.18	34.65
7	4924.00	49.94 PK	74.00	-24.06	1.00 V	274	9.08	40.86
7	4924.00	39.38 AV	54.00	-14.62	1.00 V	274	-1.48	40.86

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS (A)


EUT	WLAN 802.11g MiniPCI Card	MODEL	WM610-T
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991 hPa
TESTED BY	Leo Hung		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.72	0.5	PASS
6	2437	11.84	0.5	PASS
11	2462	11.96	0.5	PASS


CH1

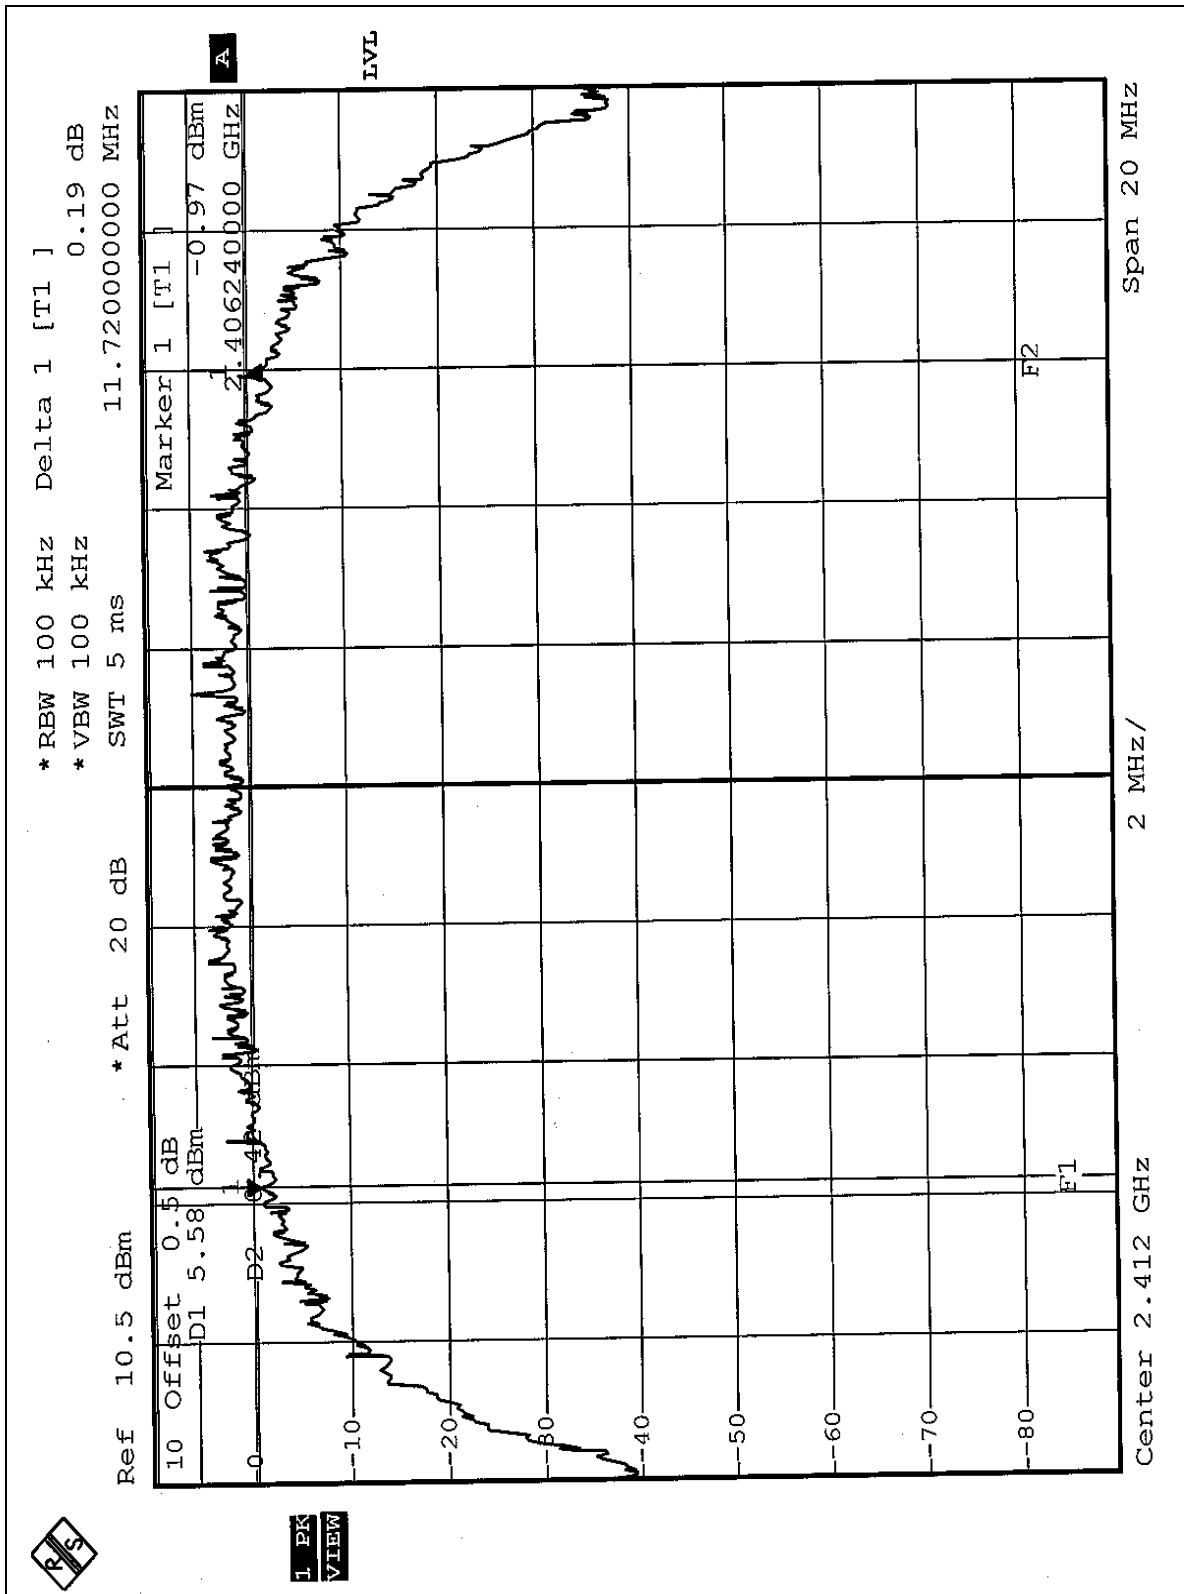

CH6

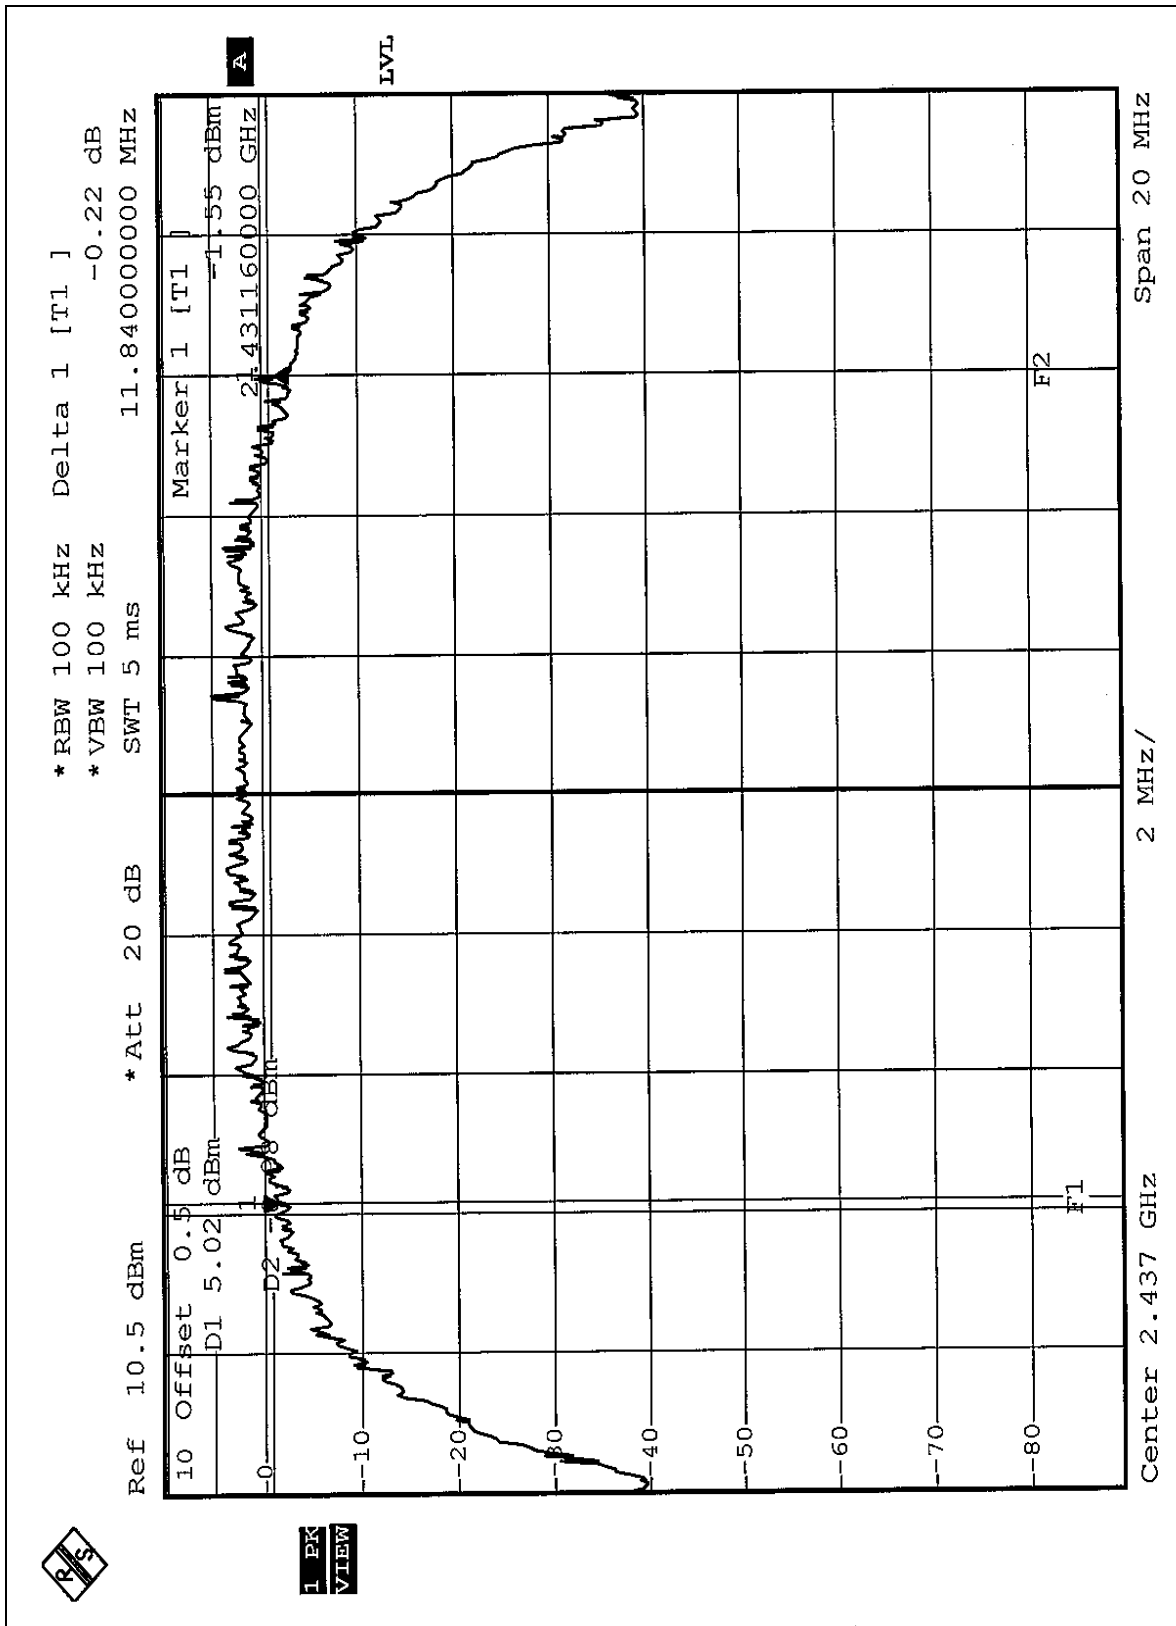

CH11

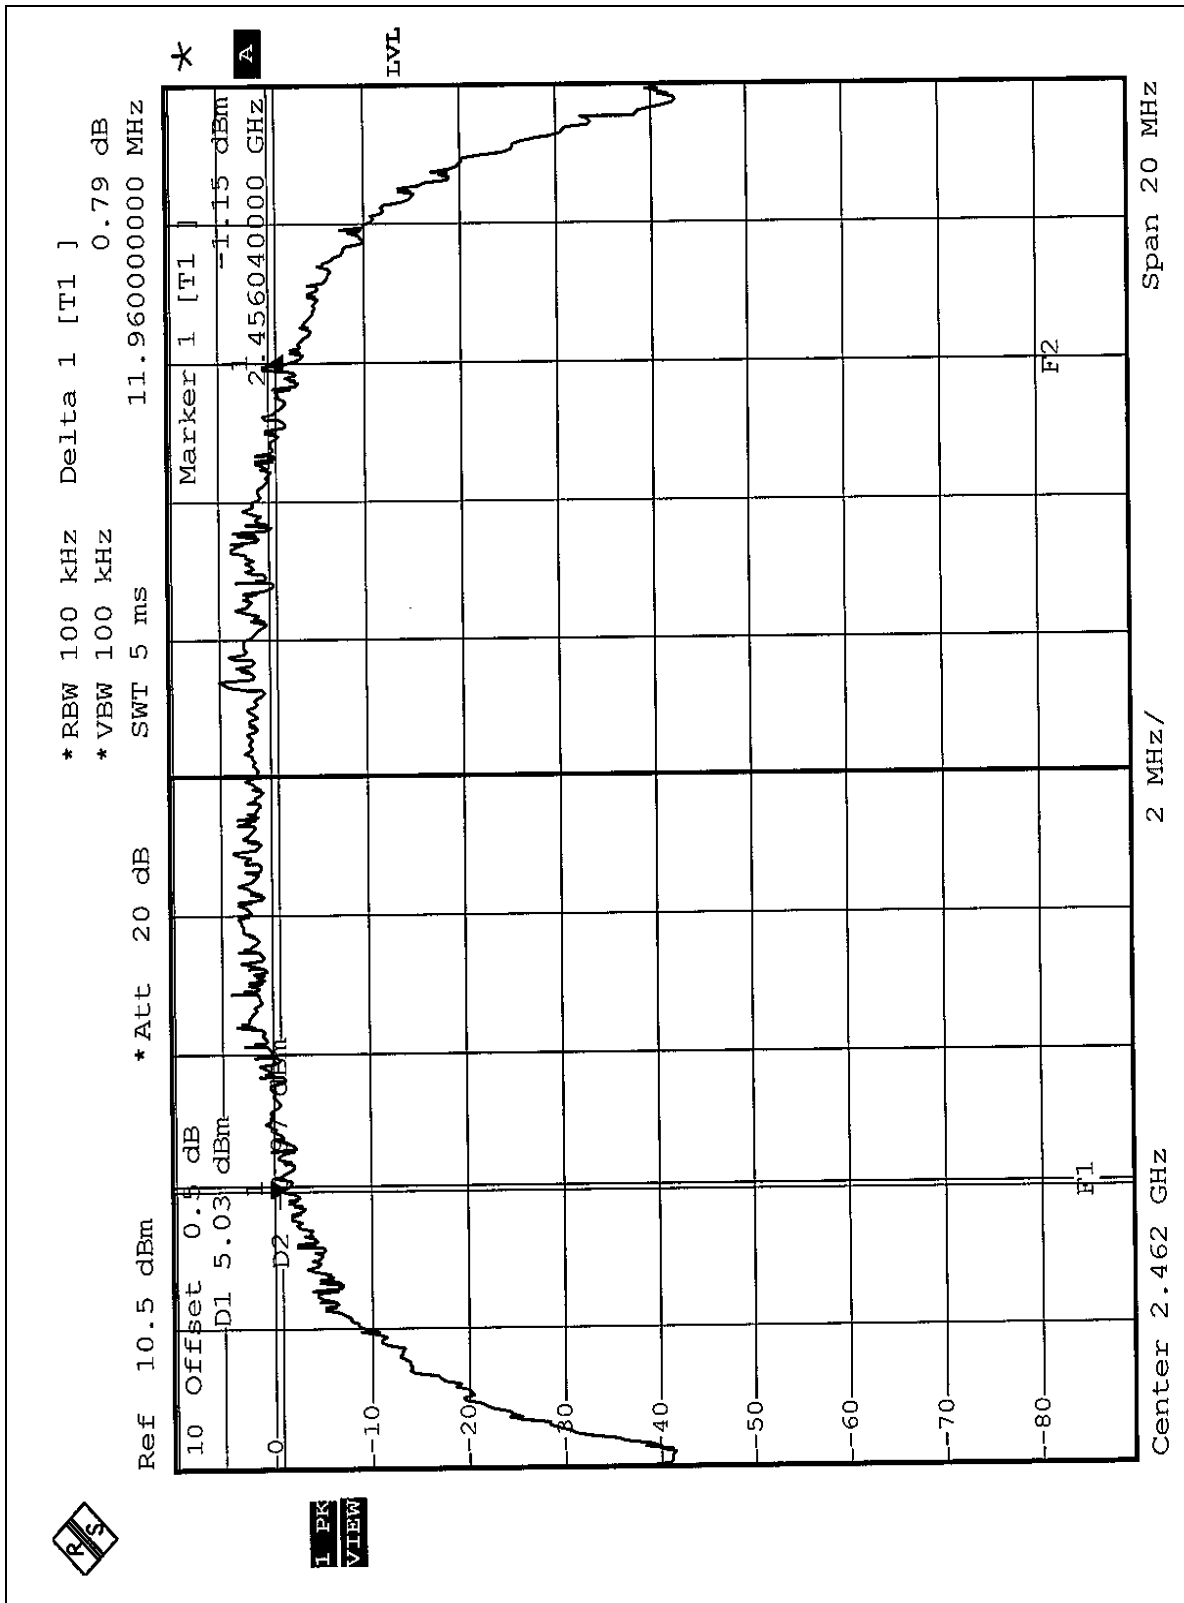


4.3.8 TEST RESULTS (B)


EUT	WLAN 802.11g MiniPCI Card	MODEL	WM610-T
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991 hPa
TESTED BY	Leo Hung		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.44	0.5	PASS
6	2437	16.40	0.5	PASS
11	2462	16.48	0.5	PASS


CH1

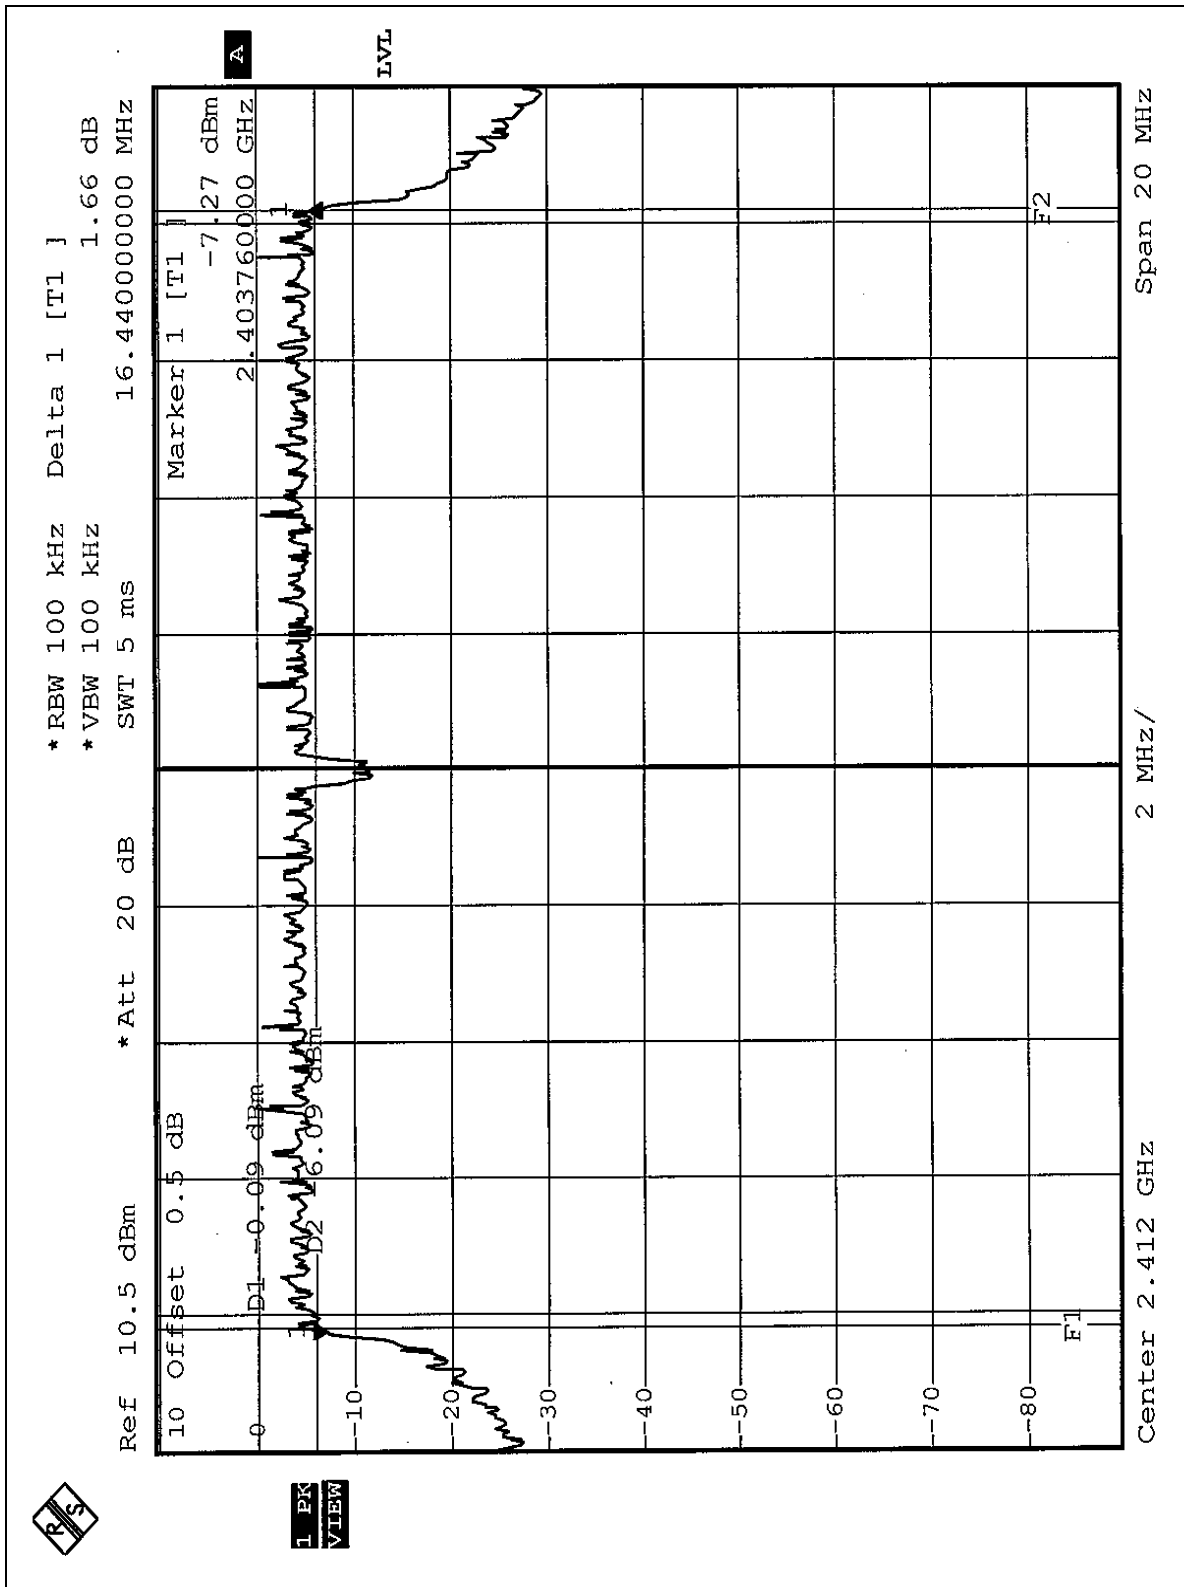

CH6

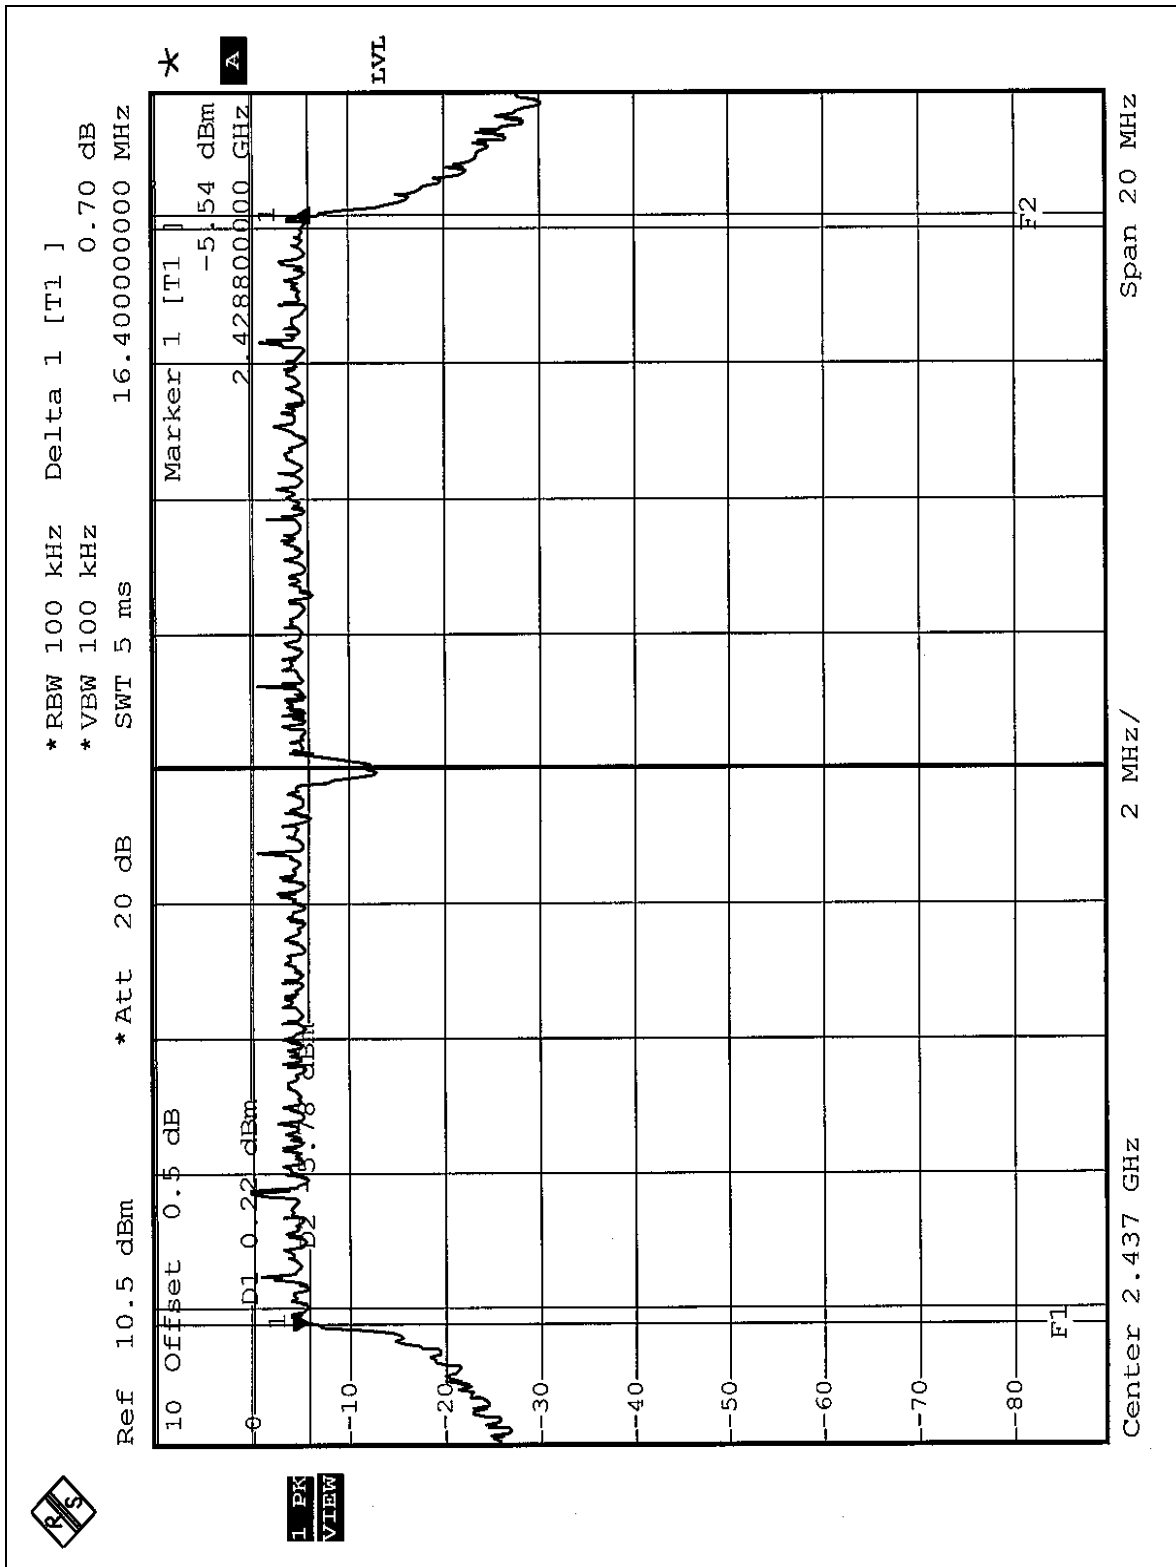

CH11

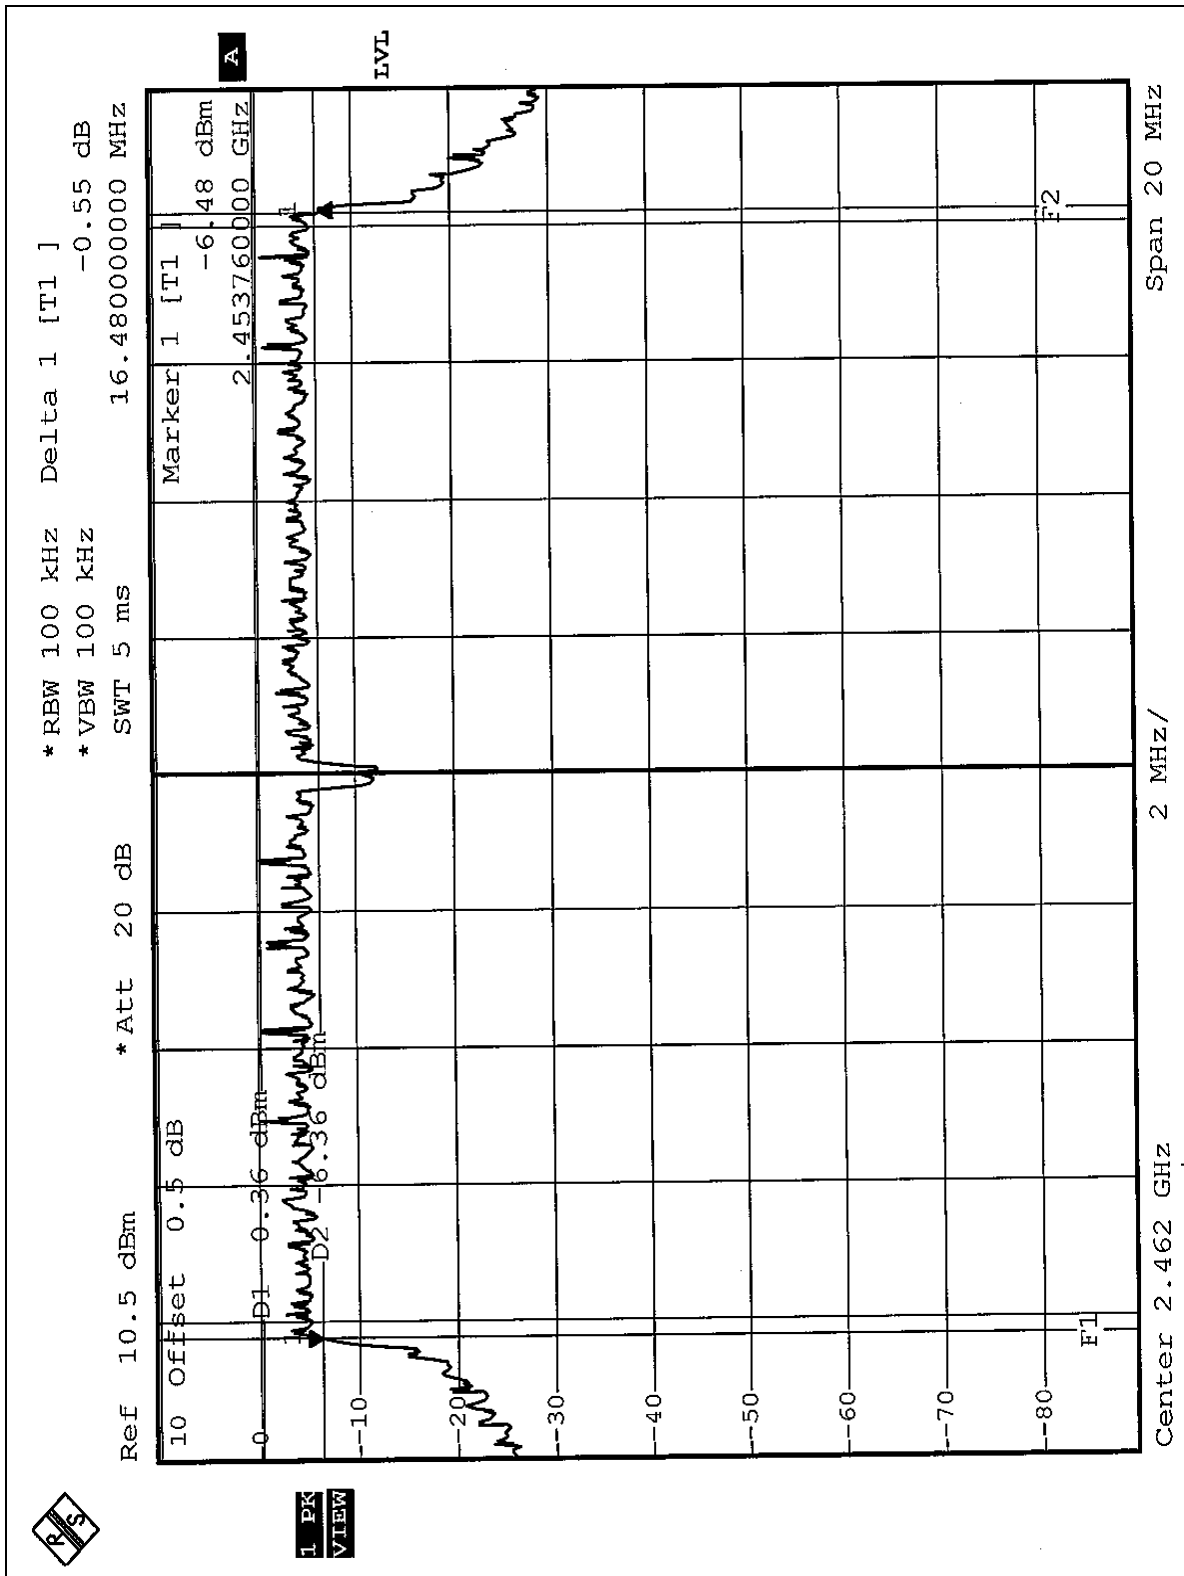

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 31, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	C019167	Feb. 01, 2005
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

The transmitter output was connected to the peak power meter.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS (A)

EUT	WLAN 802.11g MiniPCI Card	MODEL	WM610-T
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991 hPa
TESTED BY	Leo Hung		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	40.18	16.04	30	PASS
6	2437	40.55	16.08	30	PASS
11	2462	39.81	16.00	30	PASS

4.4.8 TEST RESULTS (B)

EUT	WLAN 802.11g MiniPCI Card	MODEL	WM610-T
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991 hPa
TESTED BY	Leo Hung		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	32.21	15.08	30	PASS
6	2437	31.62	15.00	30	PASS
11	2462	32.21	15.08	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS


Same as 4.3.6

4.5.7 TEST RESULTS (A)


EUT	WLAN 802.11g MiniPCI Card	MODEL	WM610-T
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991 hPa
TESTED BY	Leo Hung		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-10.31	8	PASS
6	2437	-10.15	8	PASS
11	2462	-10.66	8	PASS


CH1

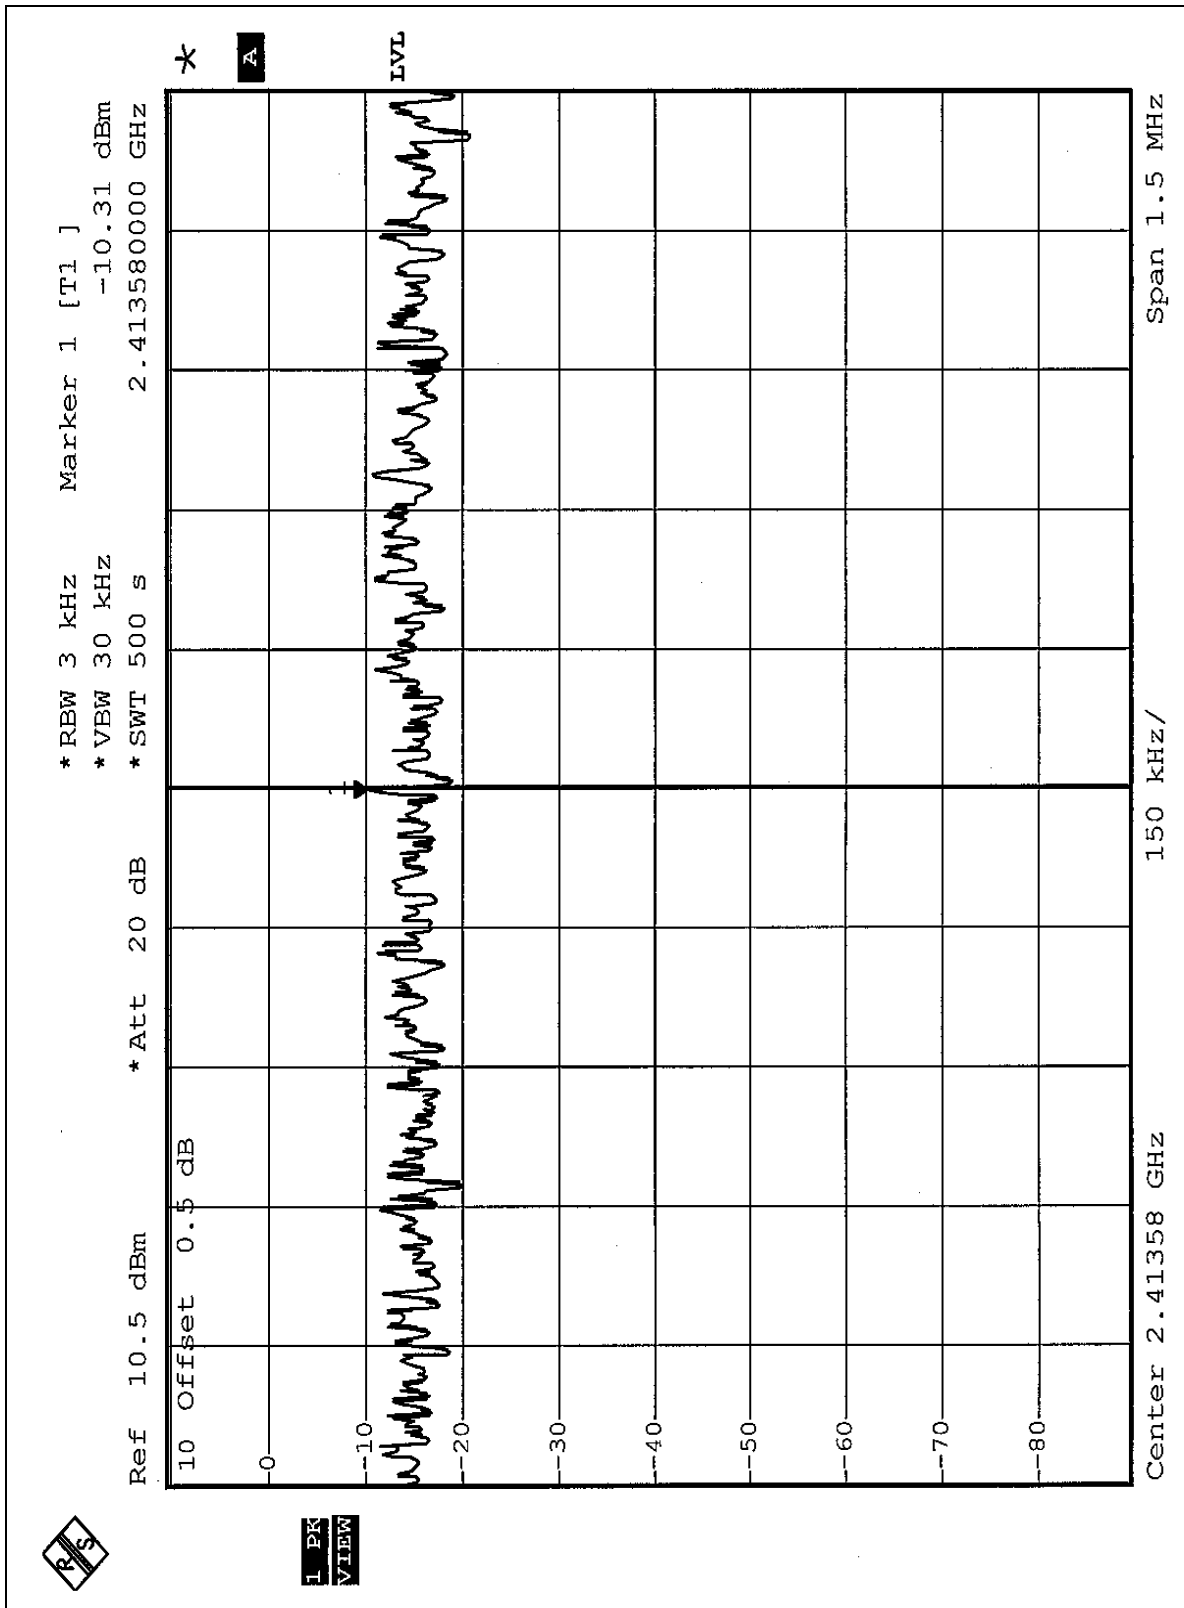

CH6

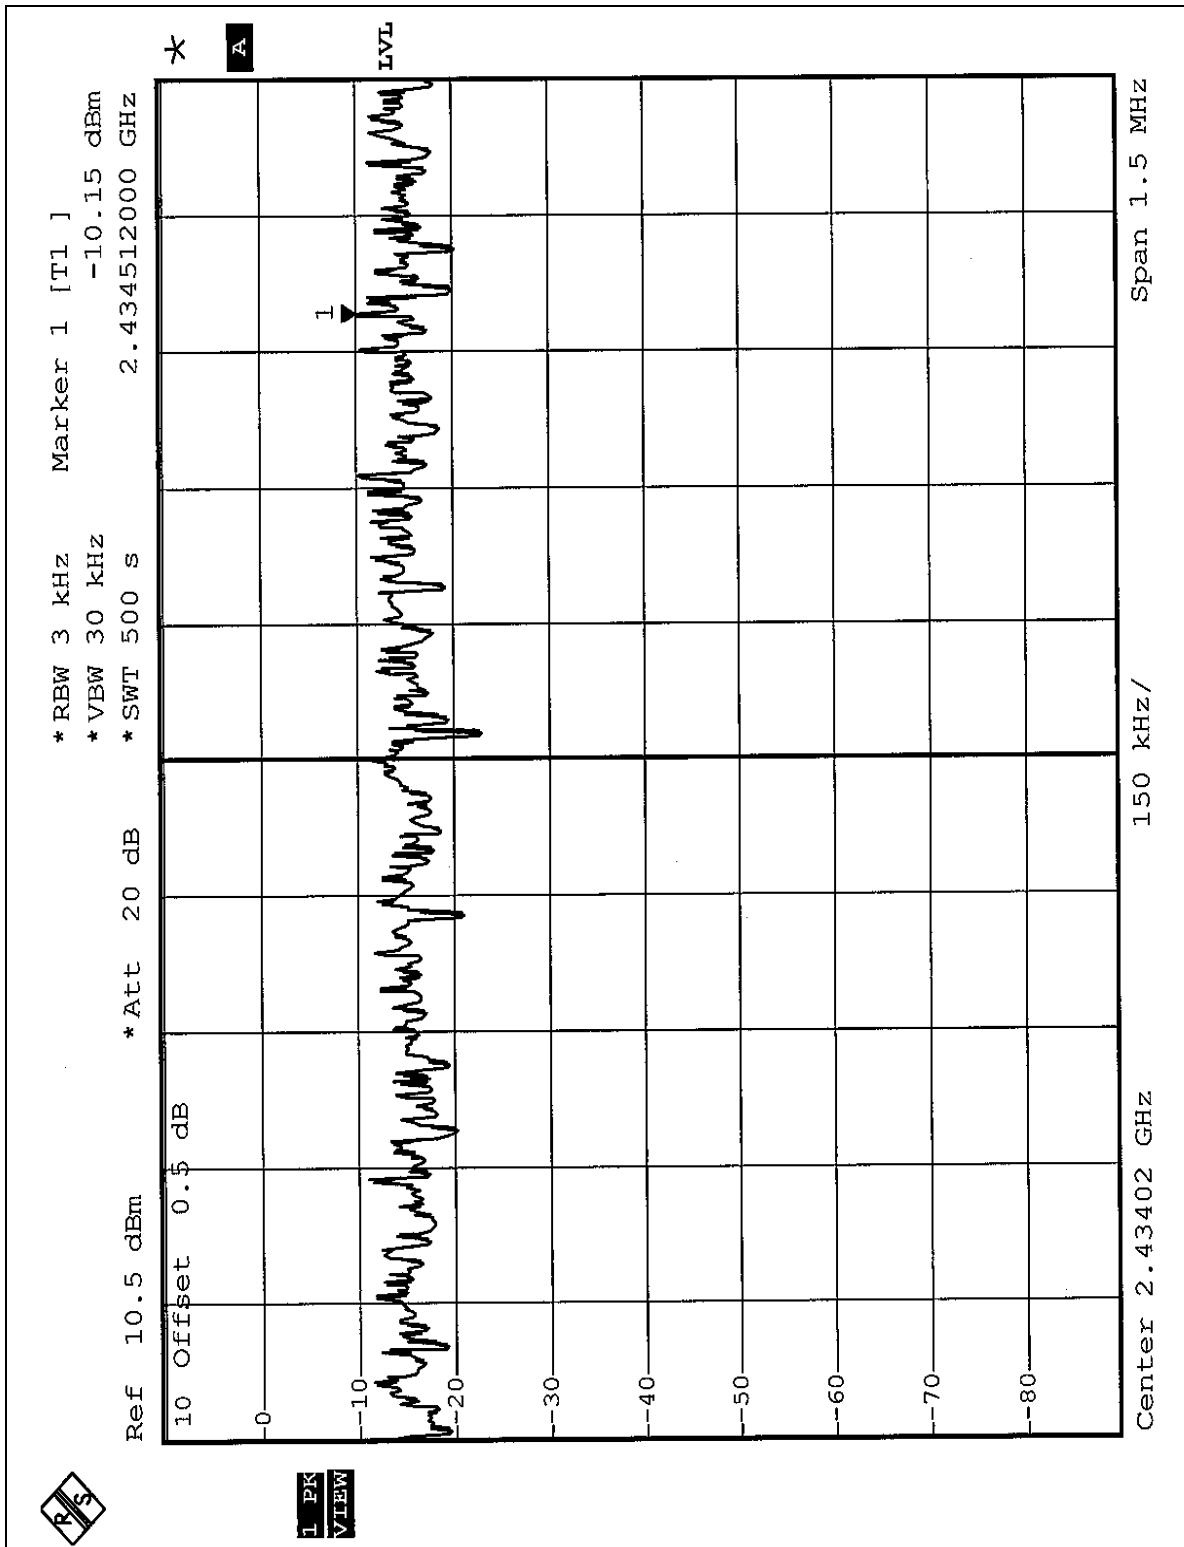

CH11

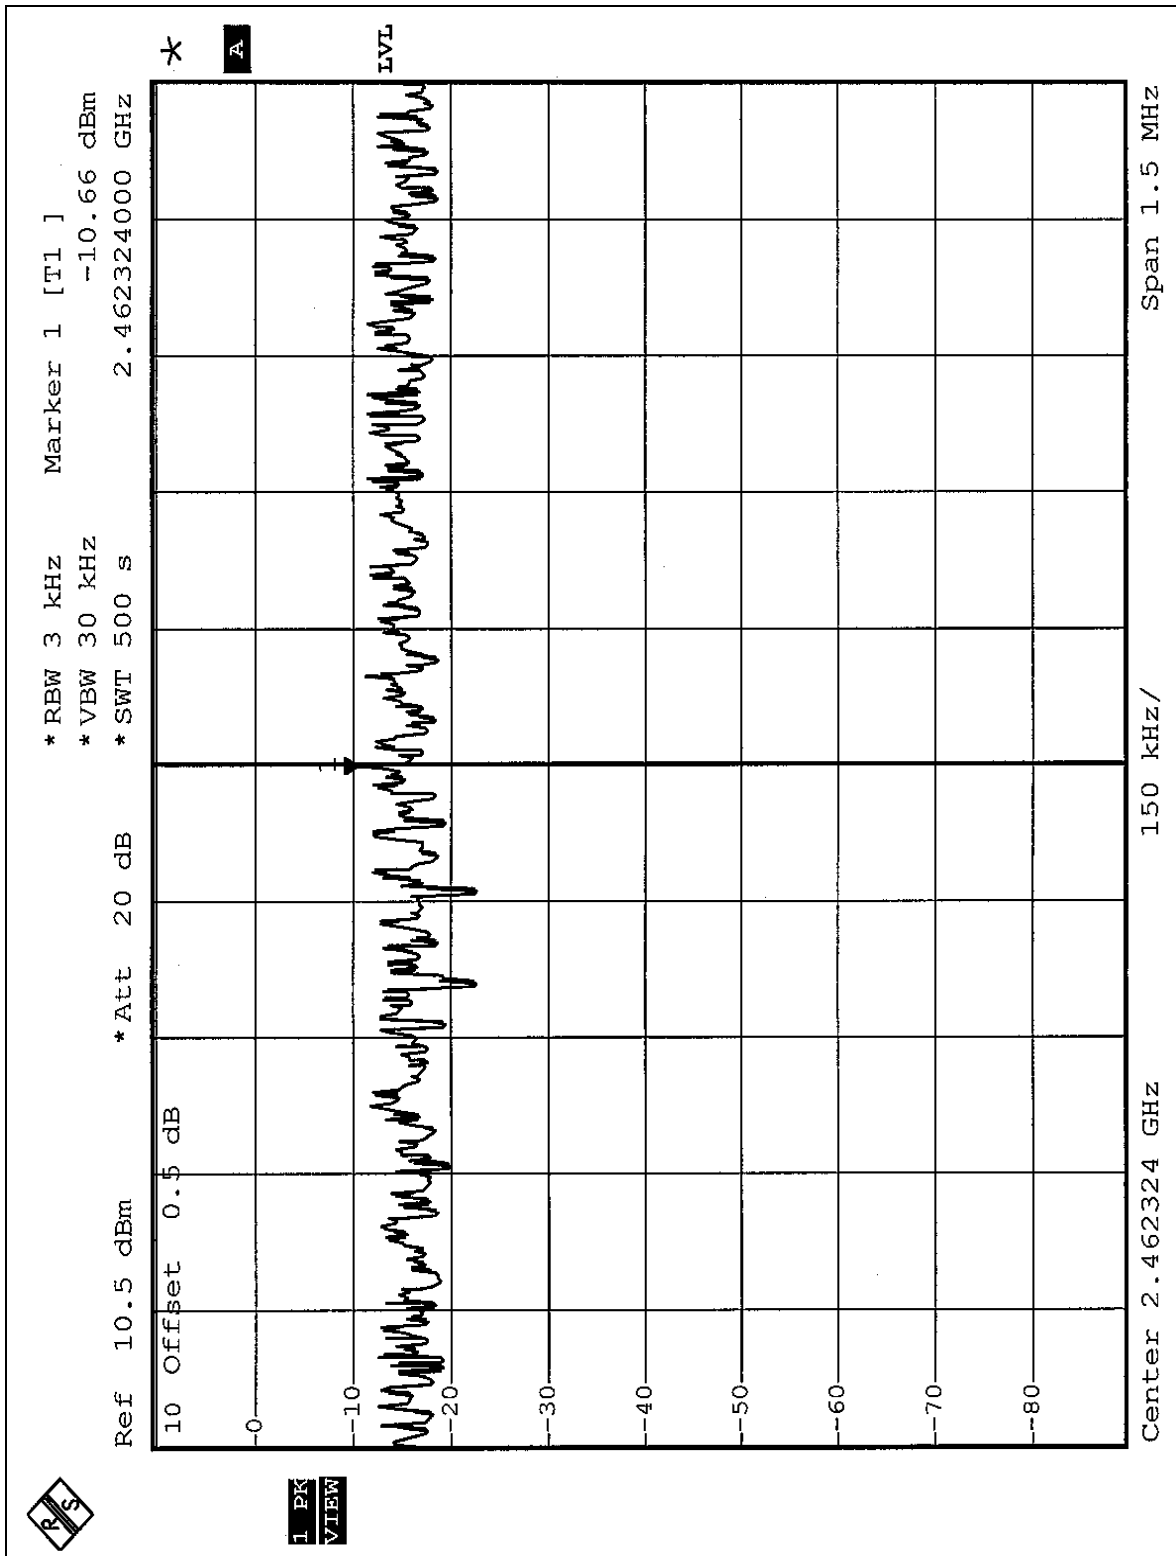


4.5.8 TEST RESULTS (B)


EUT	WLAN 802.11g MiniPCI Card	MODEL	WM610-T
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991 hPa
TESTED BY	Leo Hung		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-13.41	8	PASS
6	2437	-13.21	8	PASS
11	2462	-13.05	8	PASS


CH1

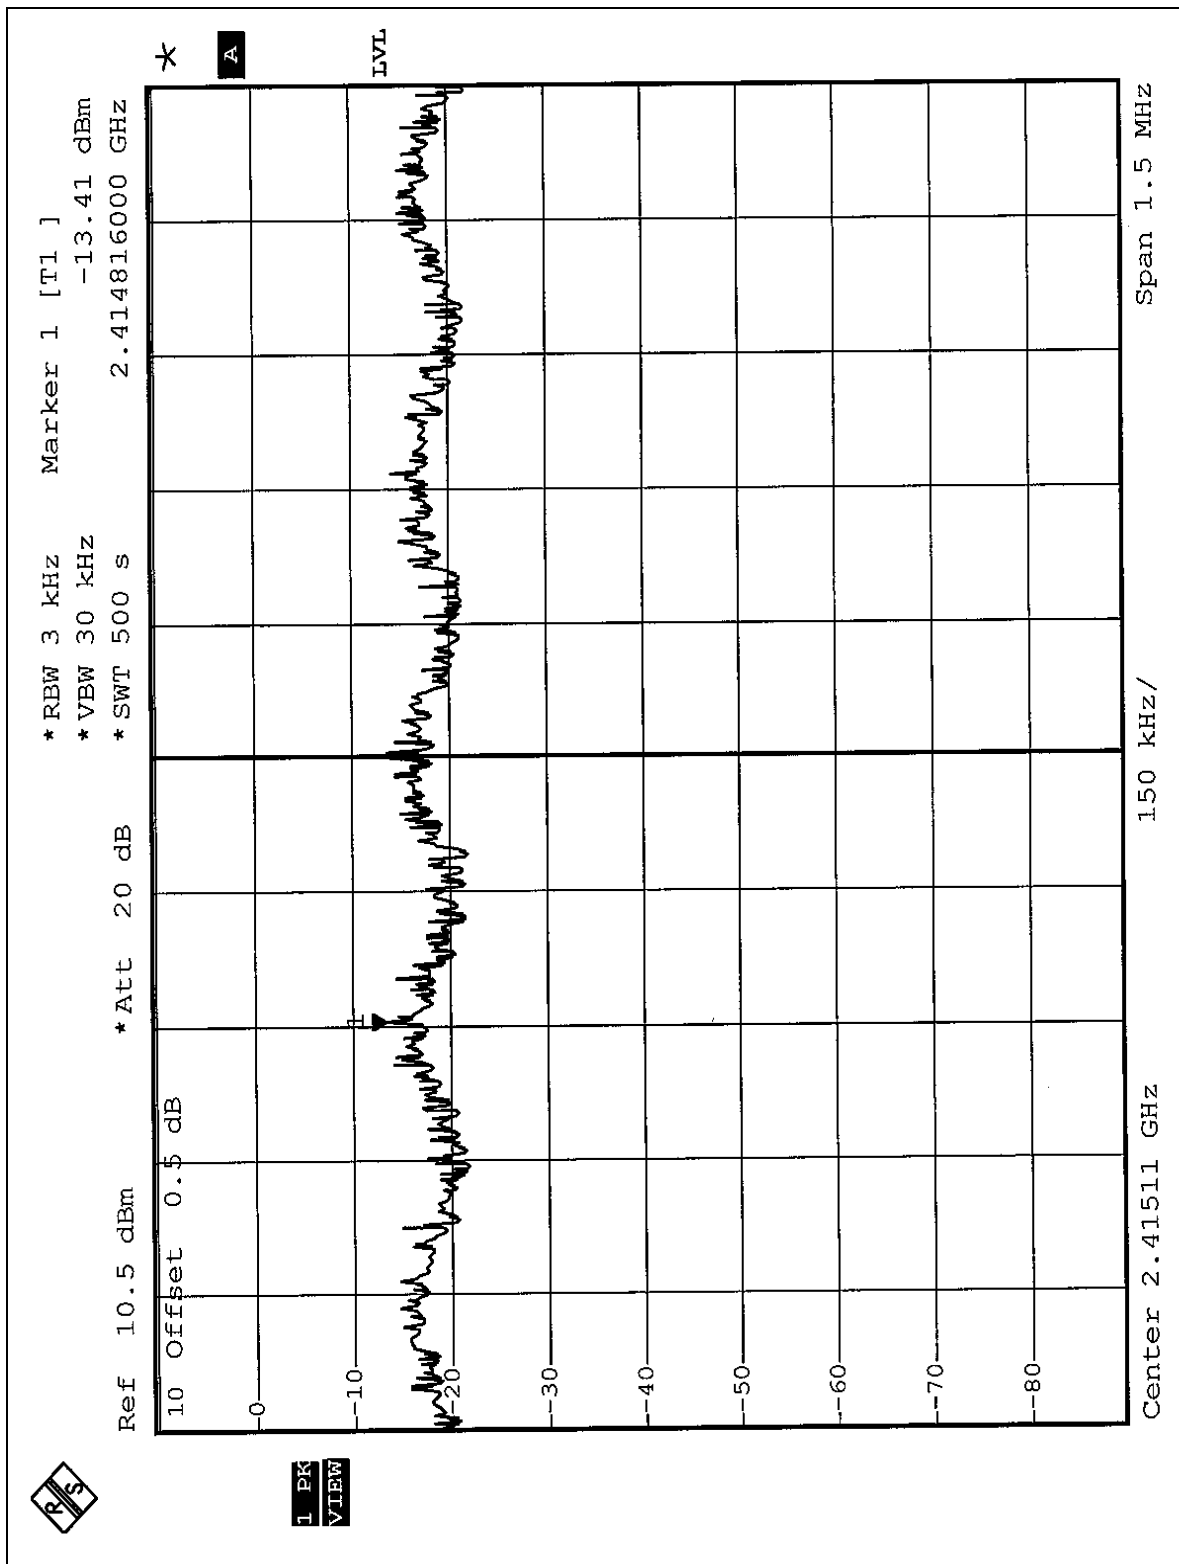

CH6

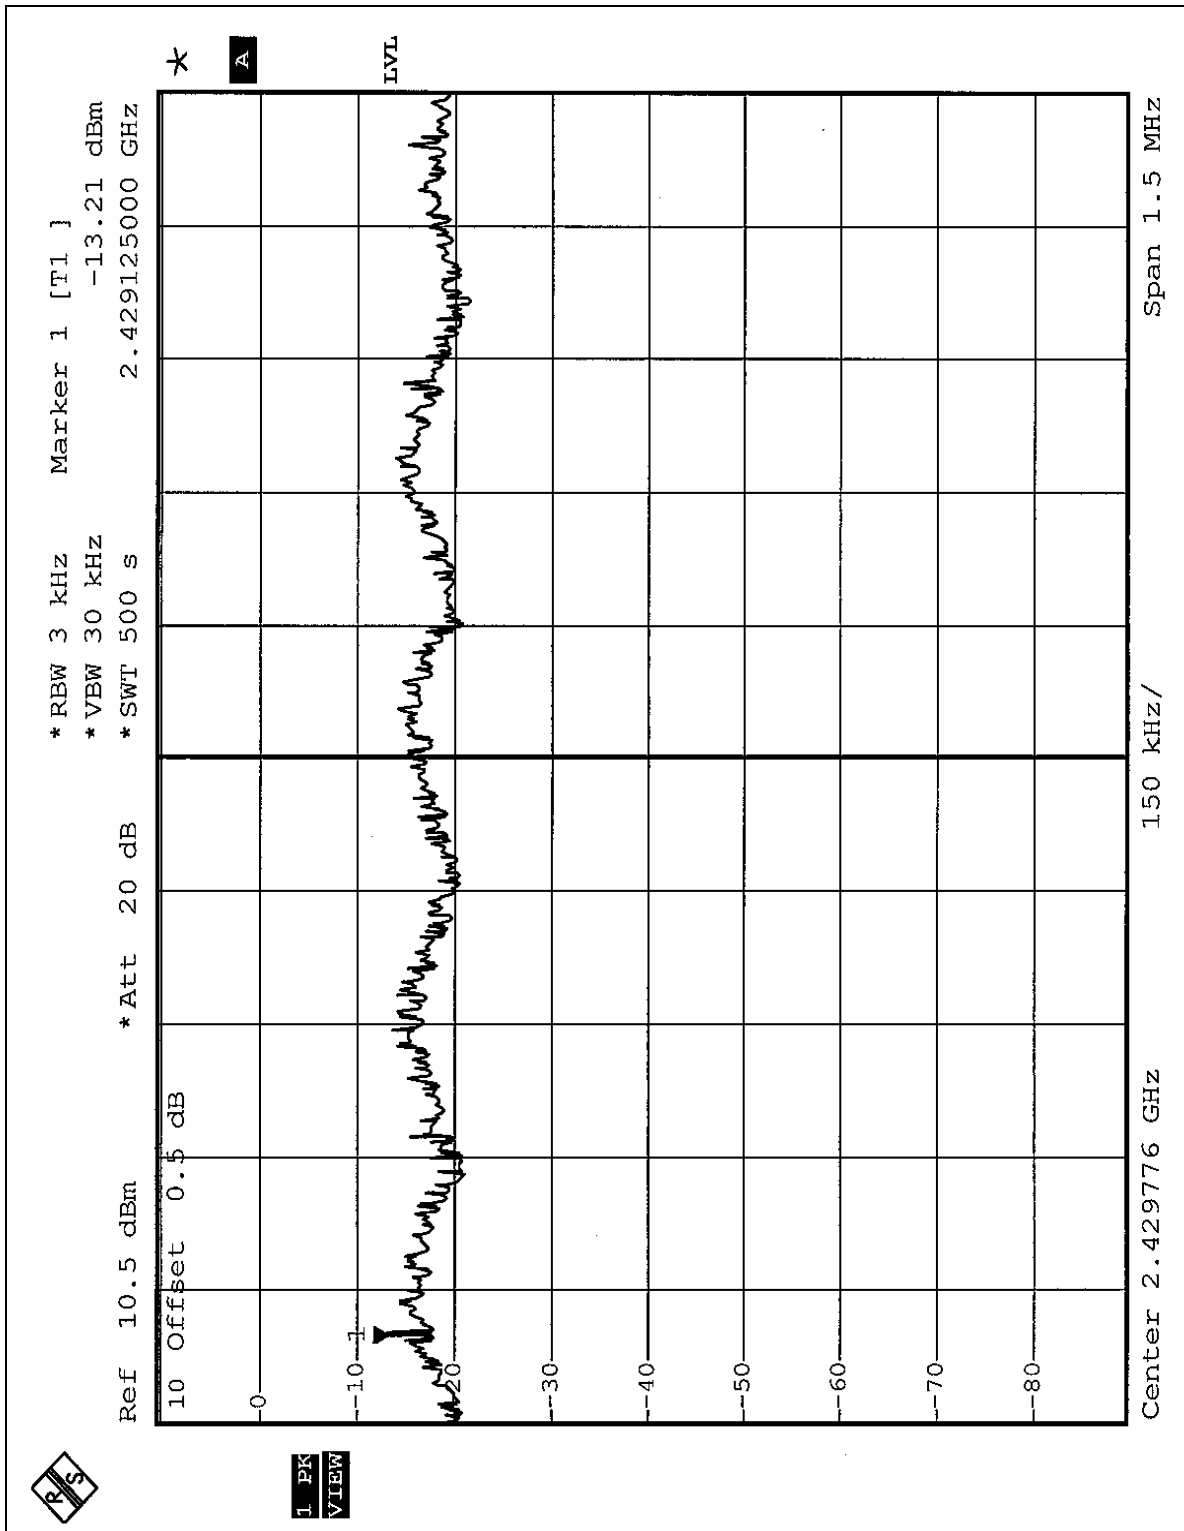

CH11

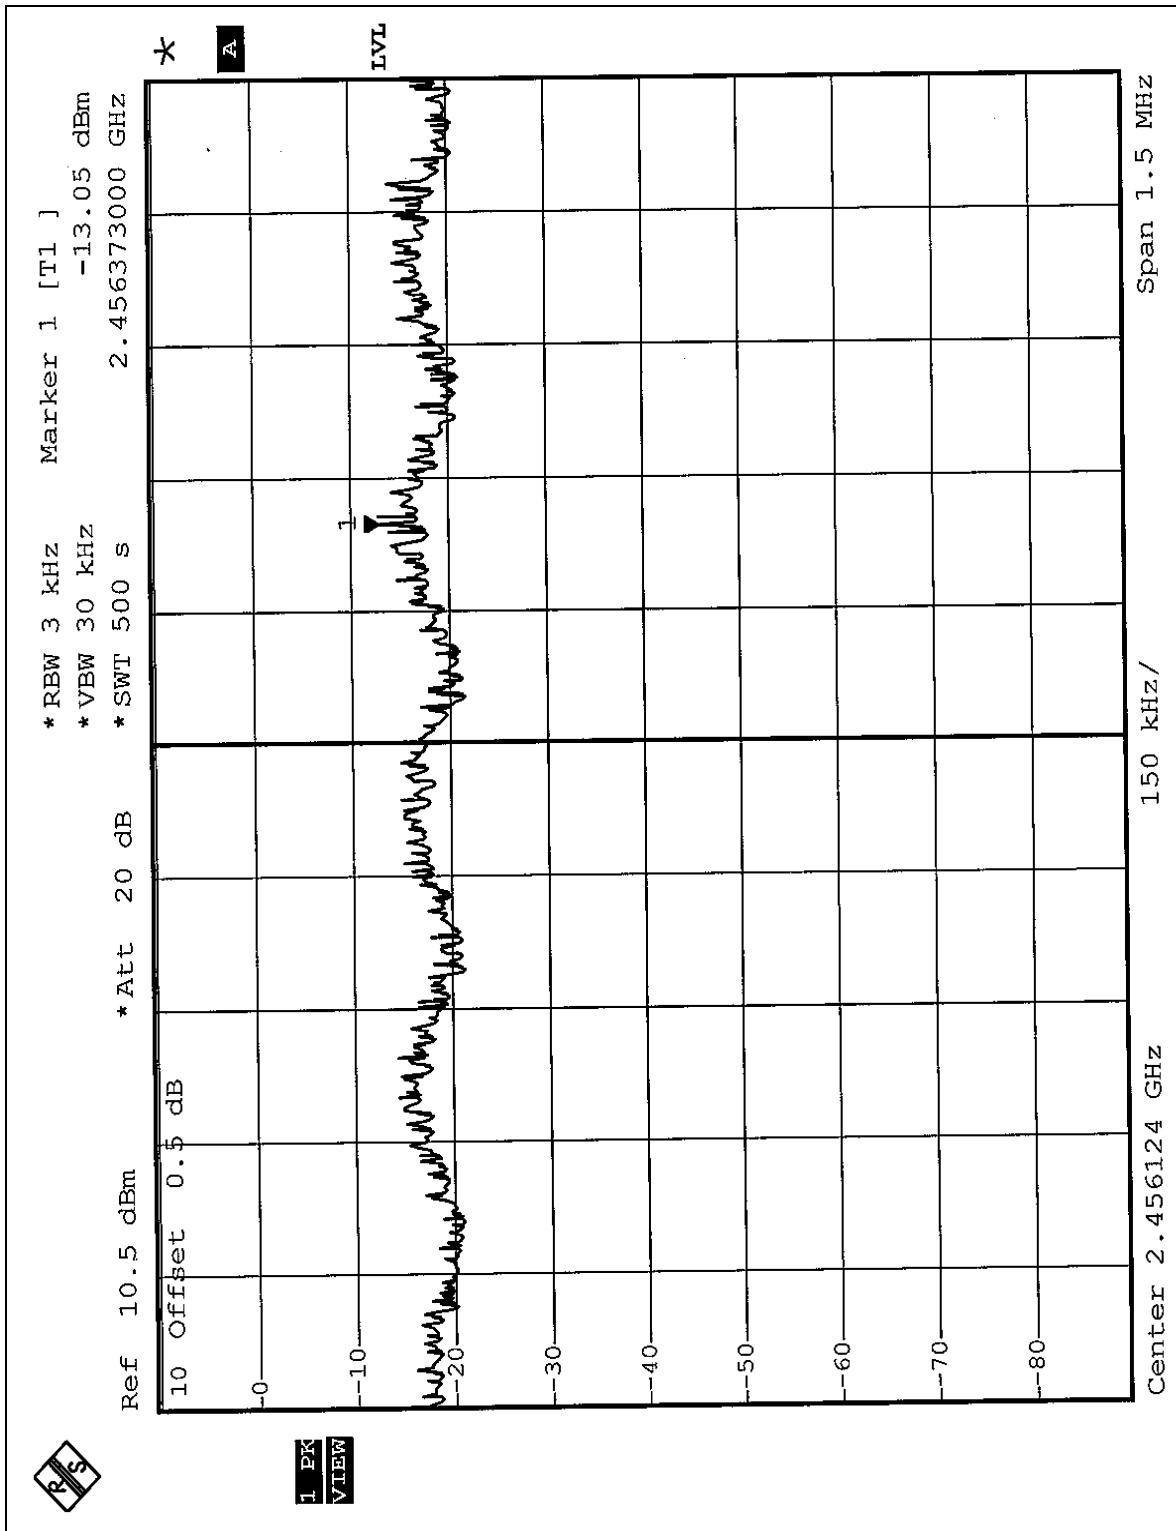



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6


4.6.6 TEST RESULTS (A)


The spectrum plots are attached on the following 4 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).


NOTE:


The band edge emission plot on the following 1~2 pages show 54.23dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.8 is 102.48dBuV/m, so the maximum field strength in restrict band is $102.48 - 54.23 = 48.25$ dBuV/m which is under 54dBuV/m limit.

The band edge emission plot on the following 3~4 pages show 59.68dB delta between carrier maximum power and local maximum emission in restrict band (2.4836GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.8 is 103.30dBuV/m, so the maximum field strength in restrict band is $103.30 - 59.68 = 43.62$ dBuV/m which is under 54dBuV/m limit.

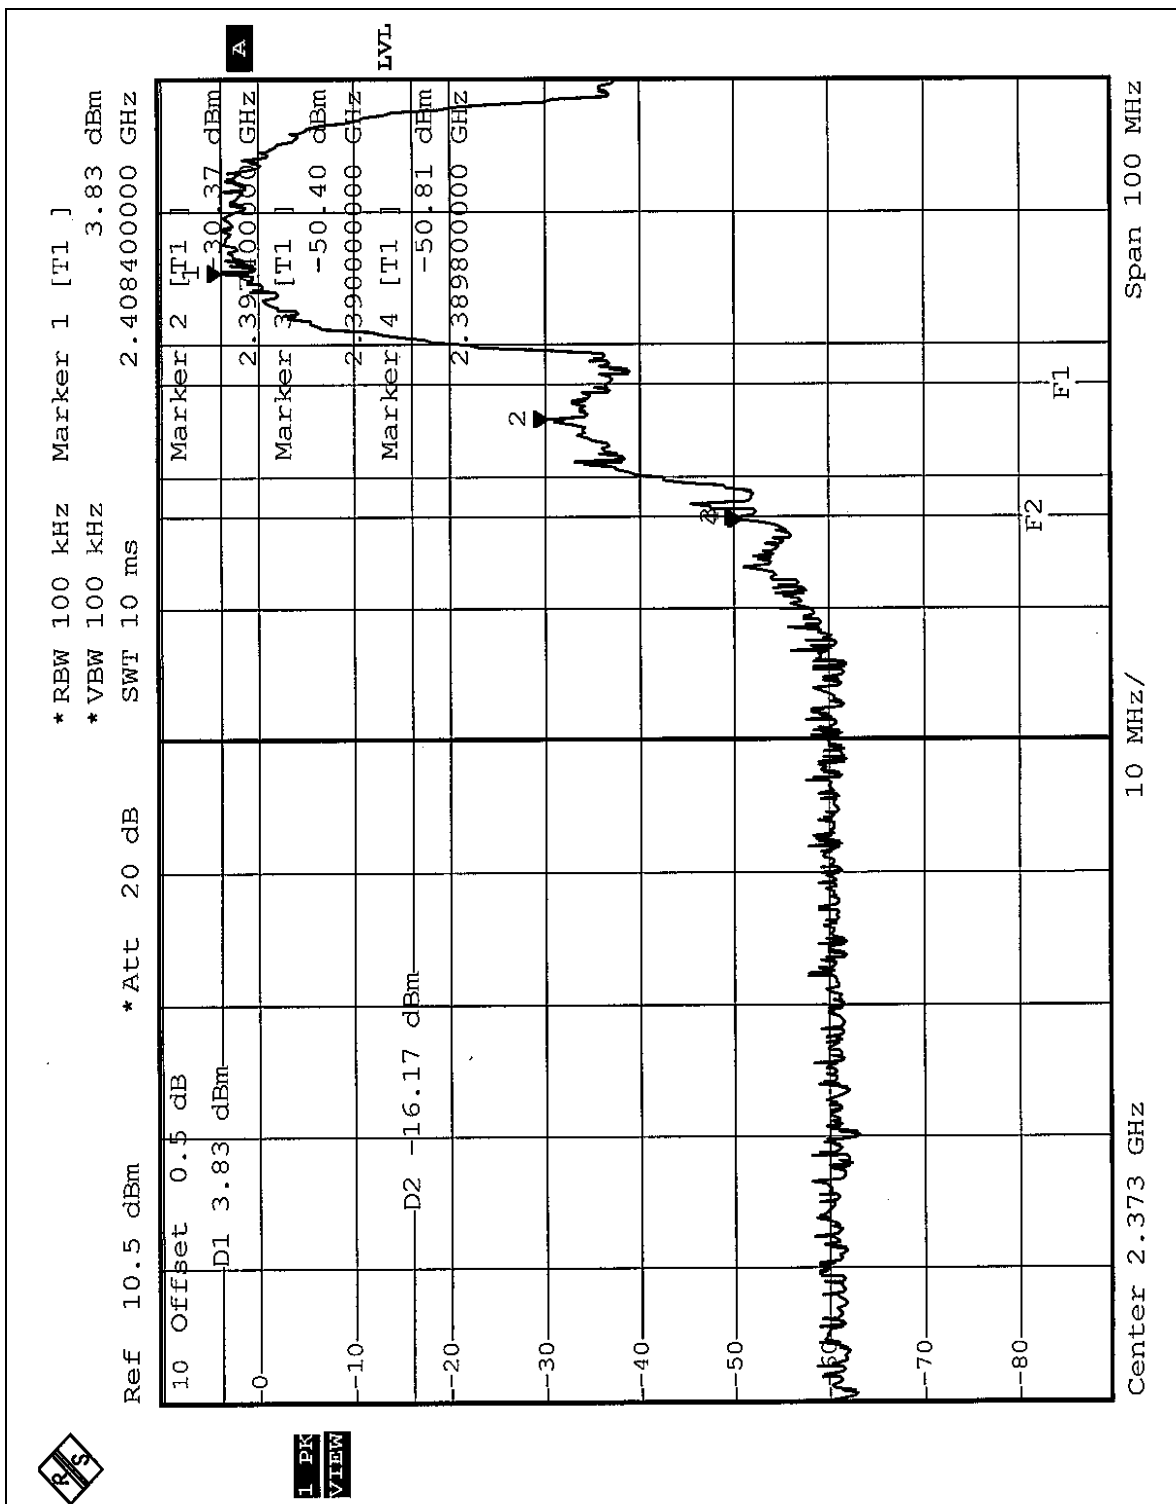



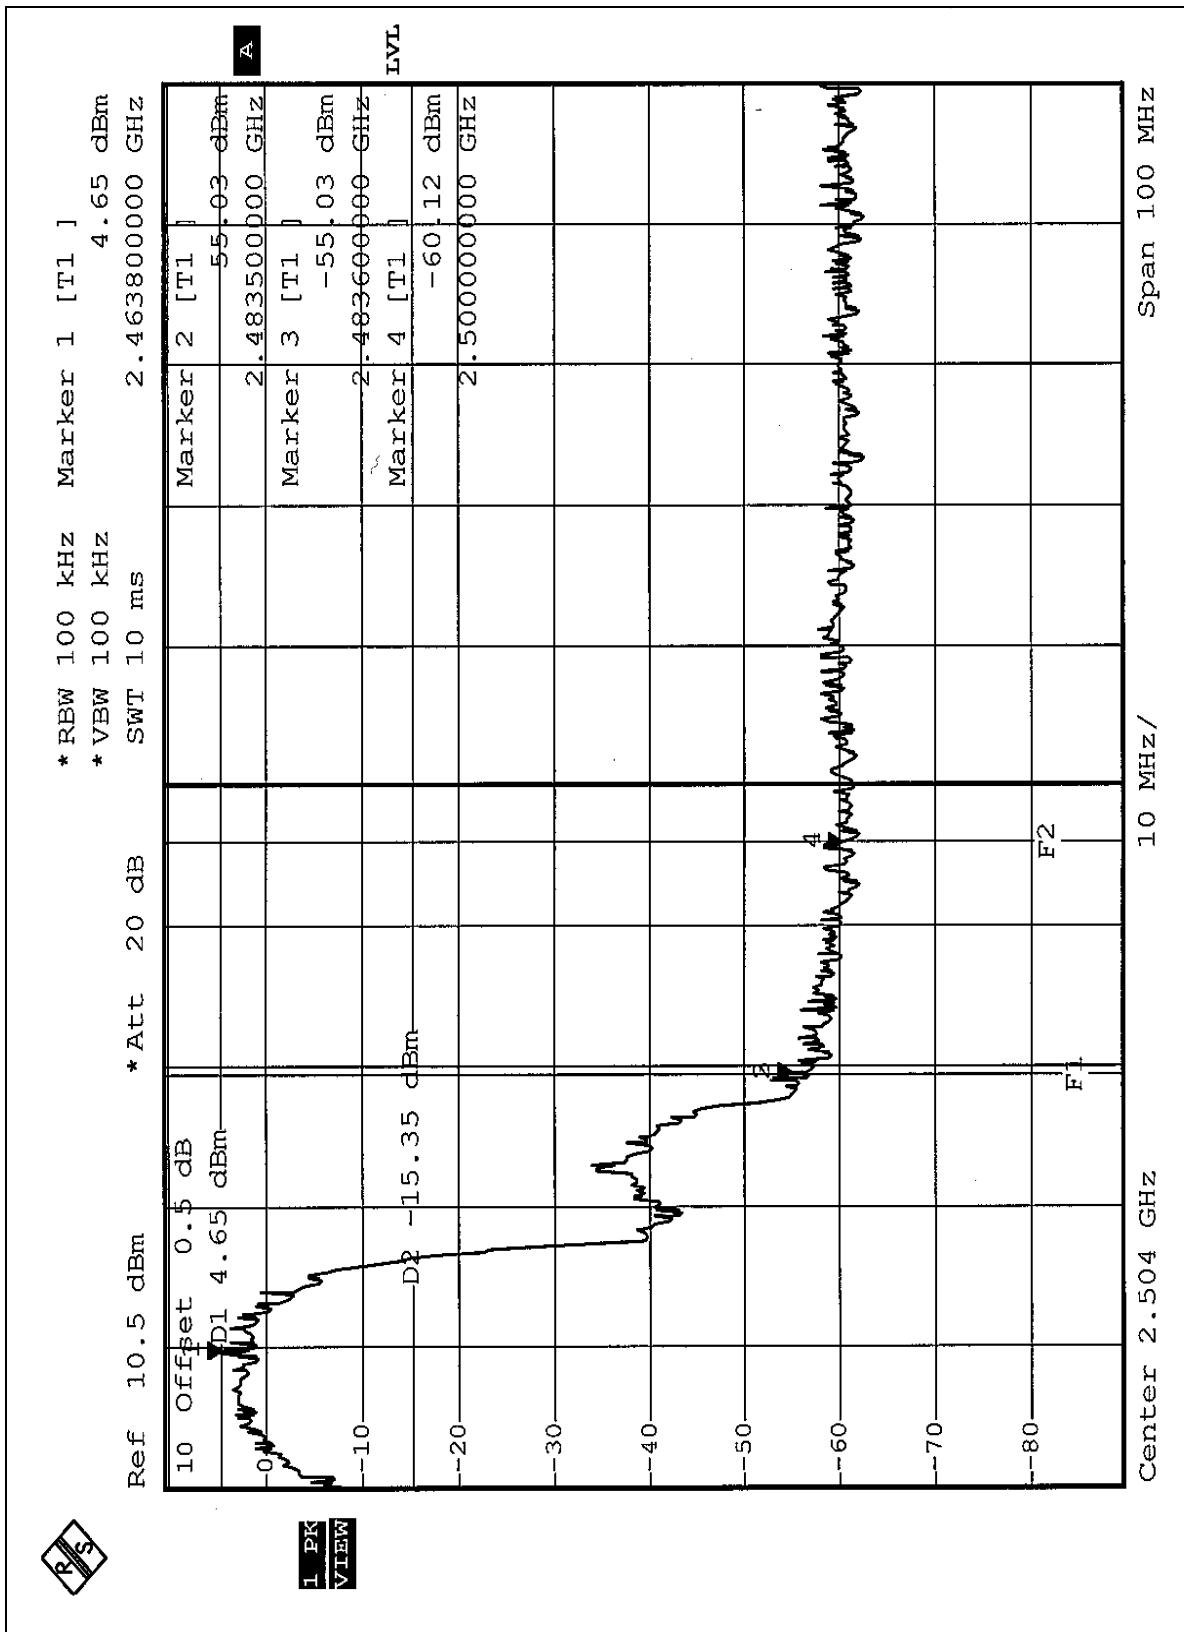





4.6.7 TEST RESULTS (B)


The spectrum plots are attached on the following 4 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).


NOTE :


The band edge emission plot on the following 1~2 pages show 52.22dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.9 is 98.64dBuV/m, so the maximum field strength in restrict band is $98.64 - 52.22 = 46.42$ dBuV/m which is under 54dBuV/m limit.


NOTE :

The band edge emission plot on the following 3~4 pages show 49.10dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.9 is 97.56dBuV/m, so the maximum field strength in restrict band is $97.56 - 49.10 = 48.46$ dBuV/m which is under 54dBuV/m limit.

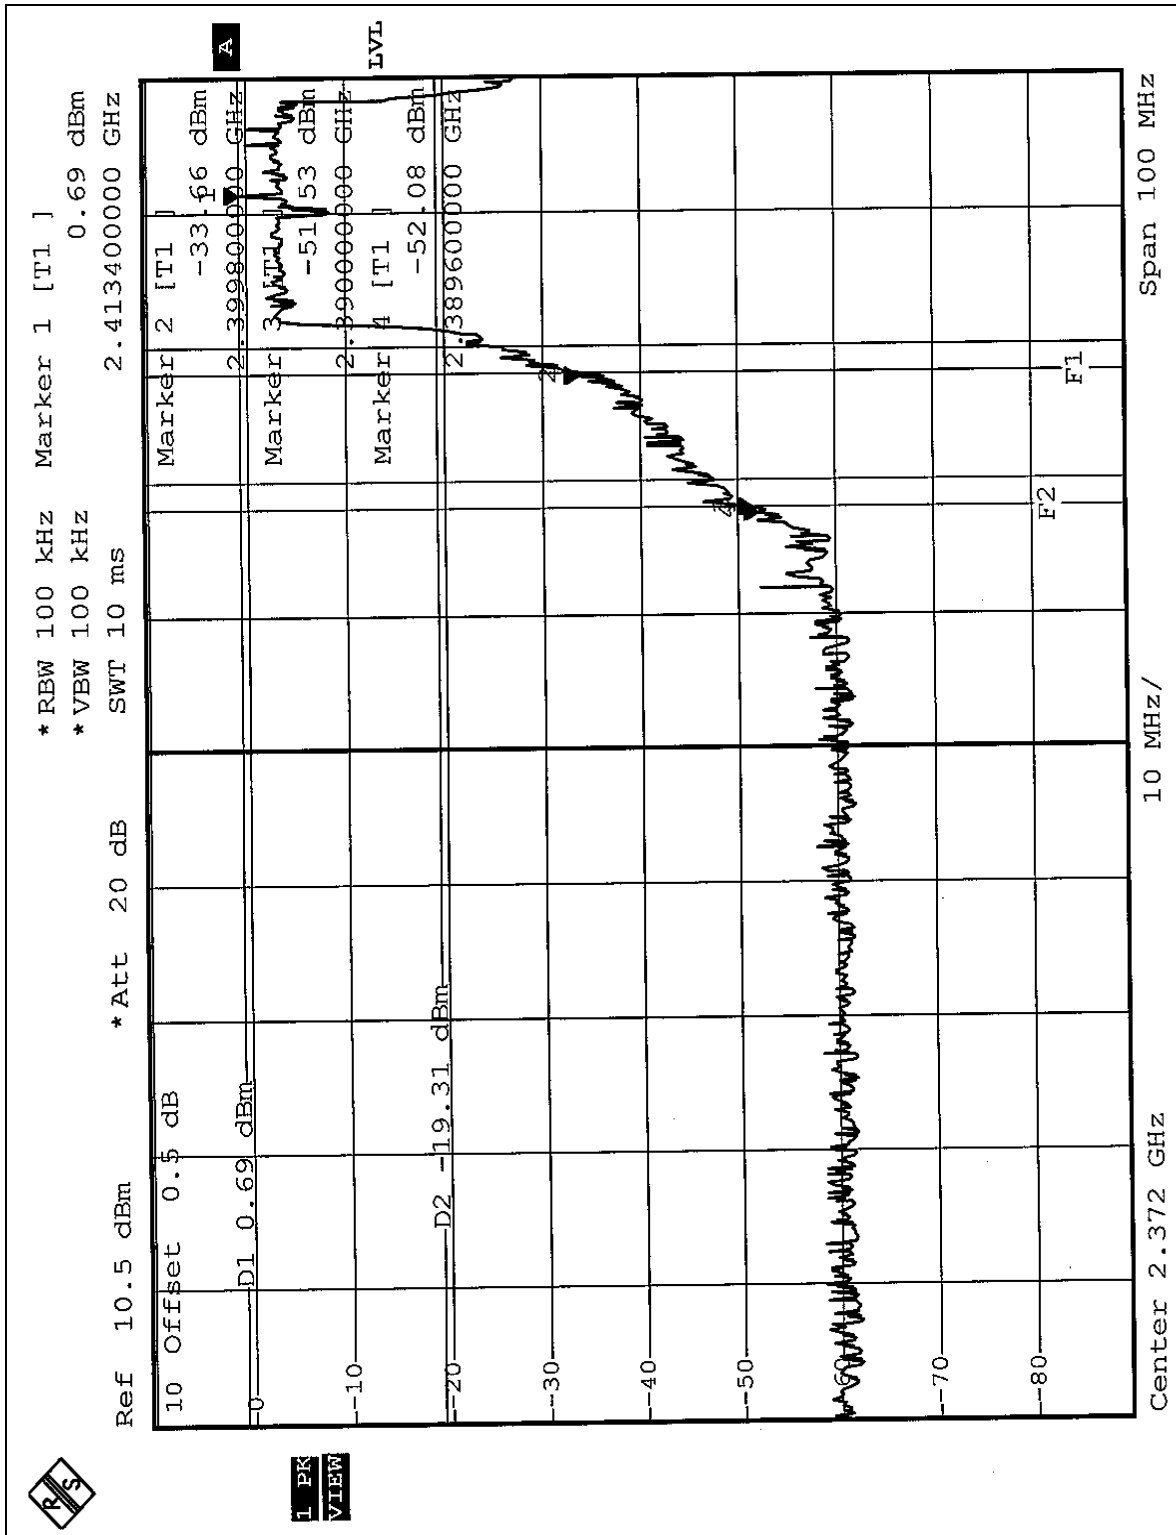

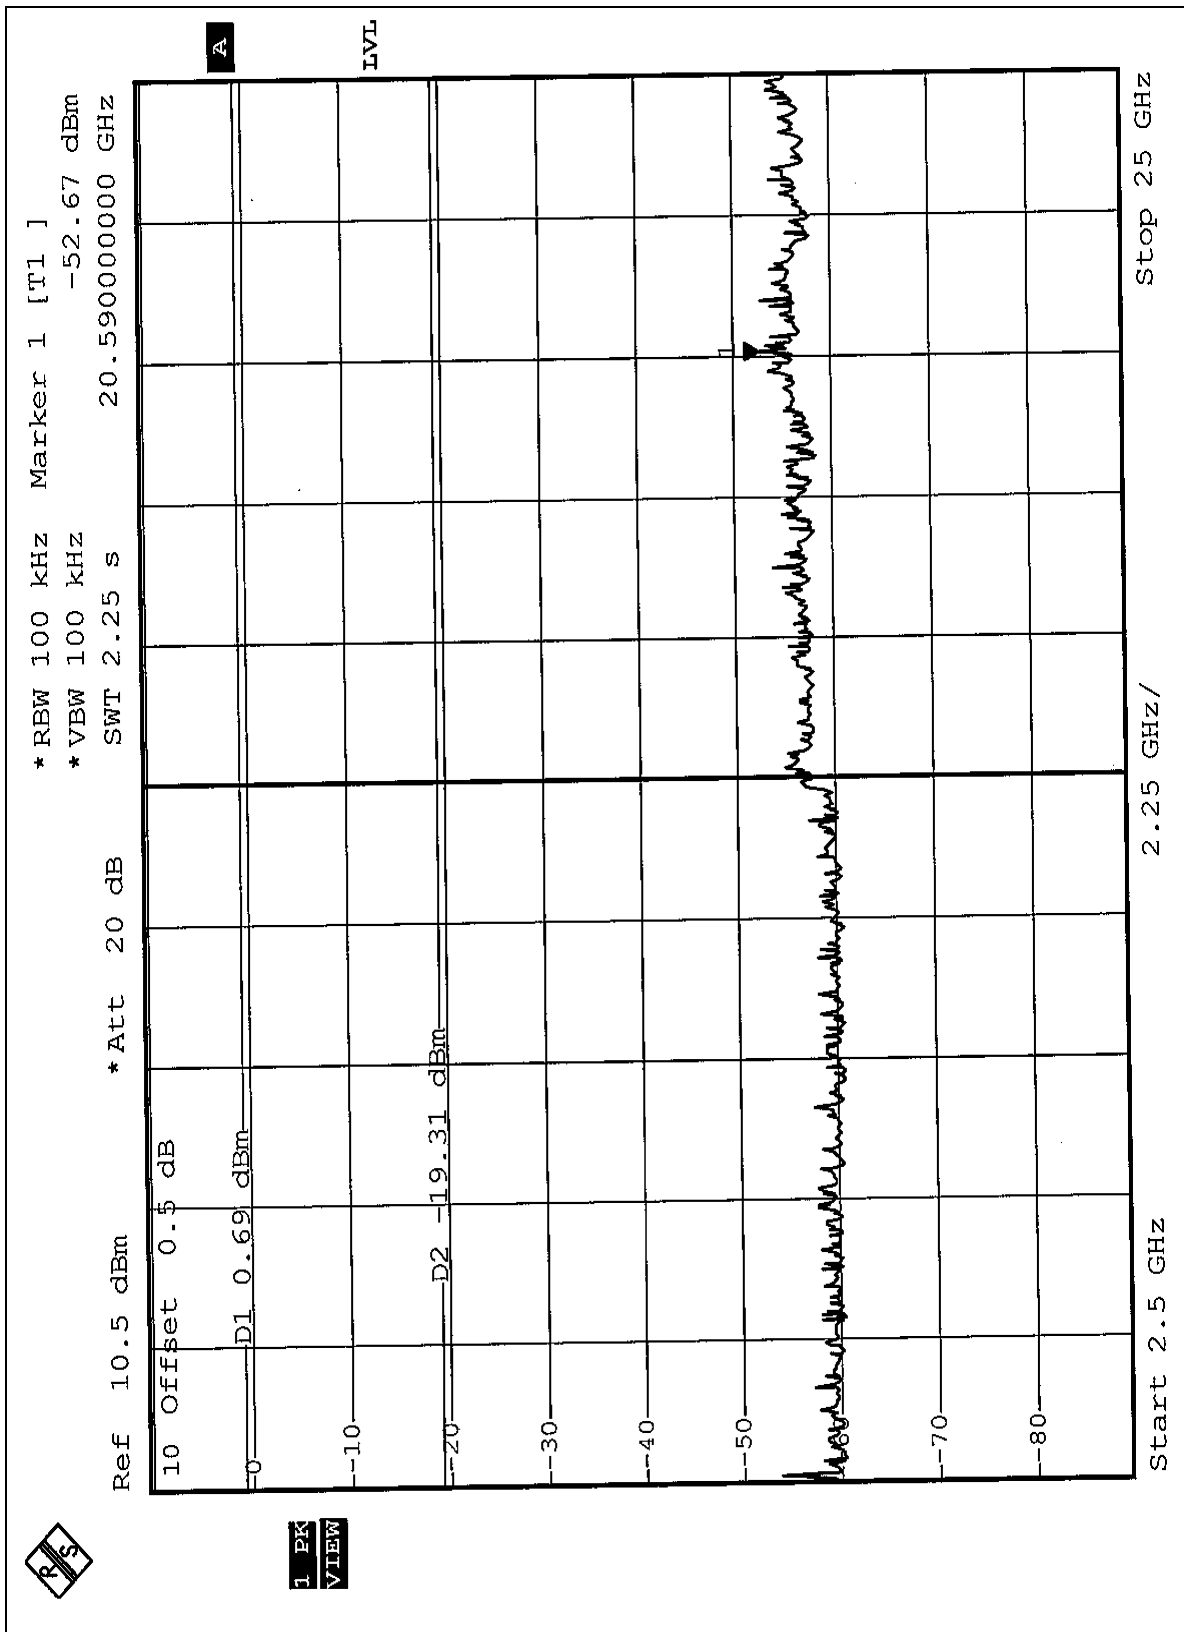

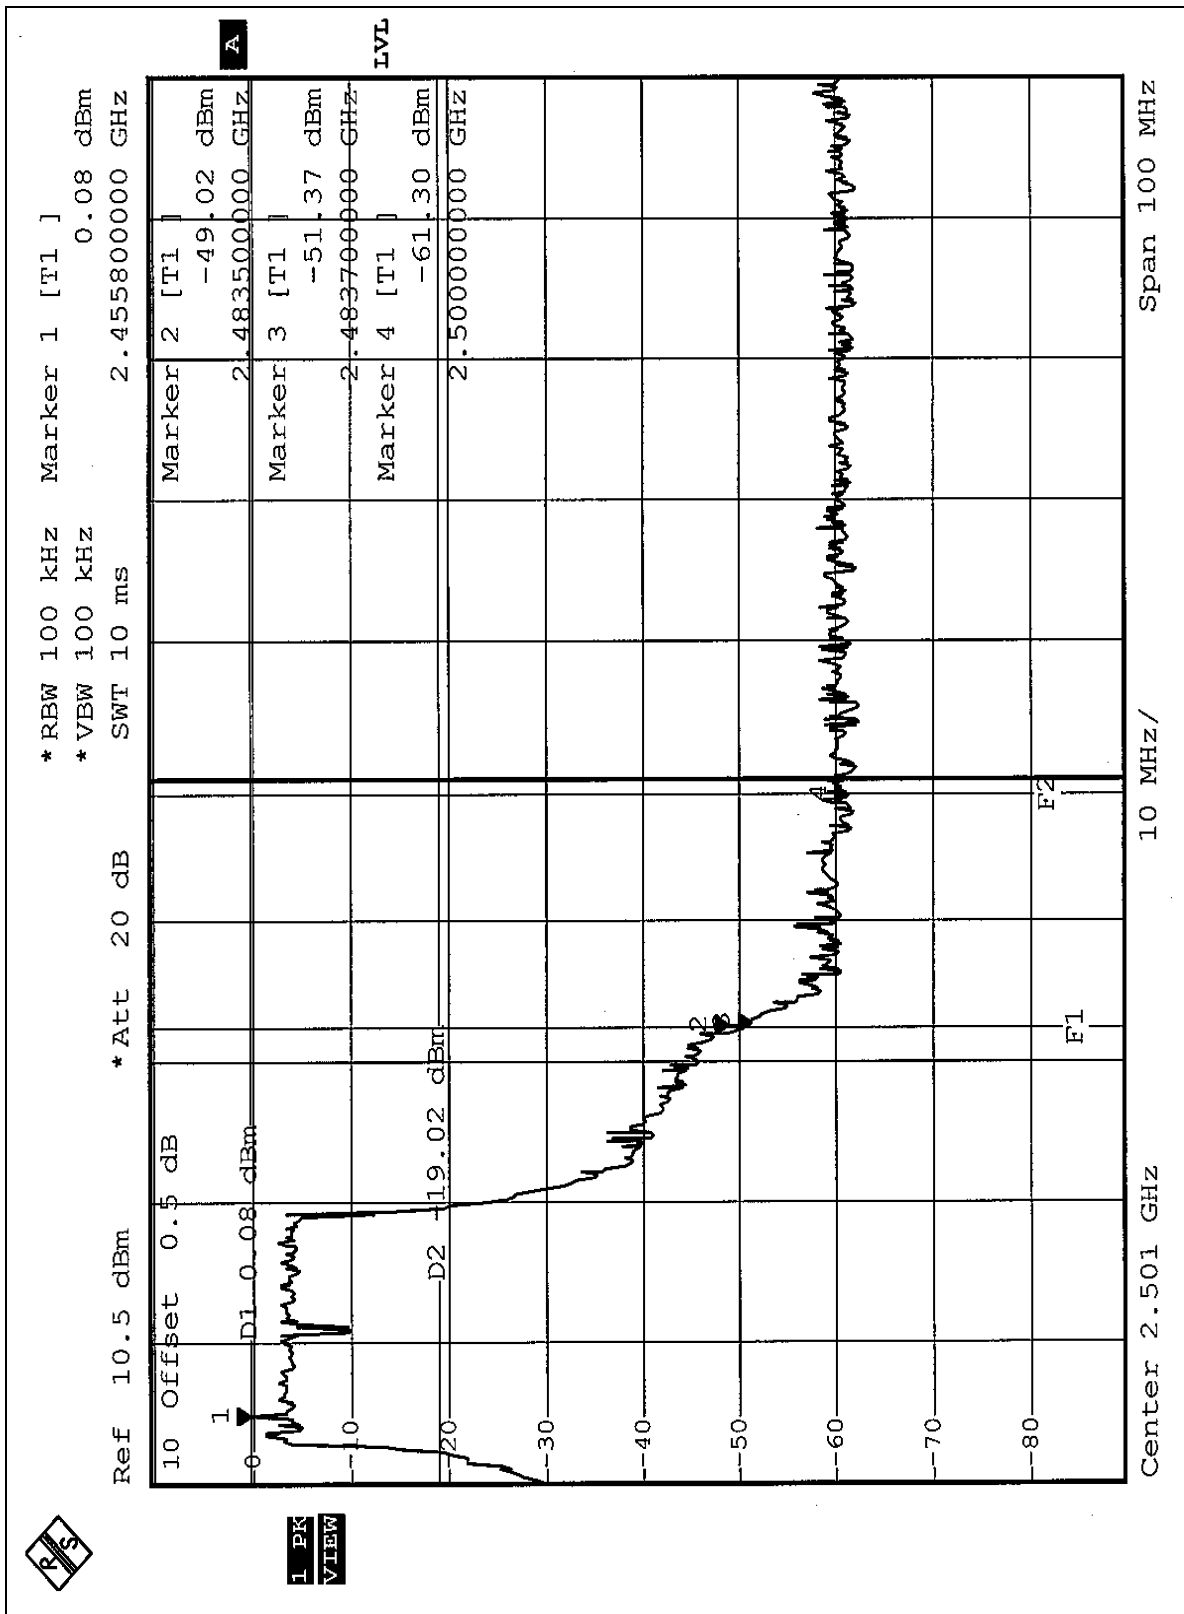

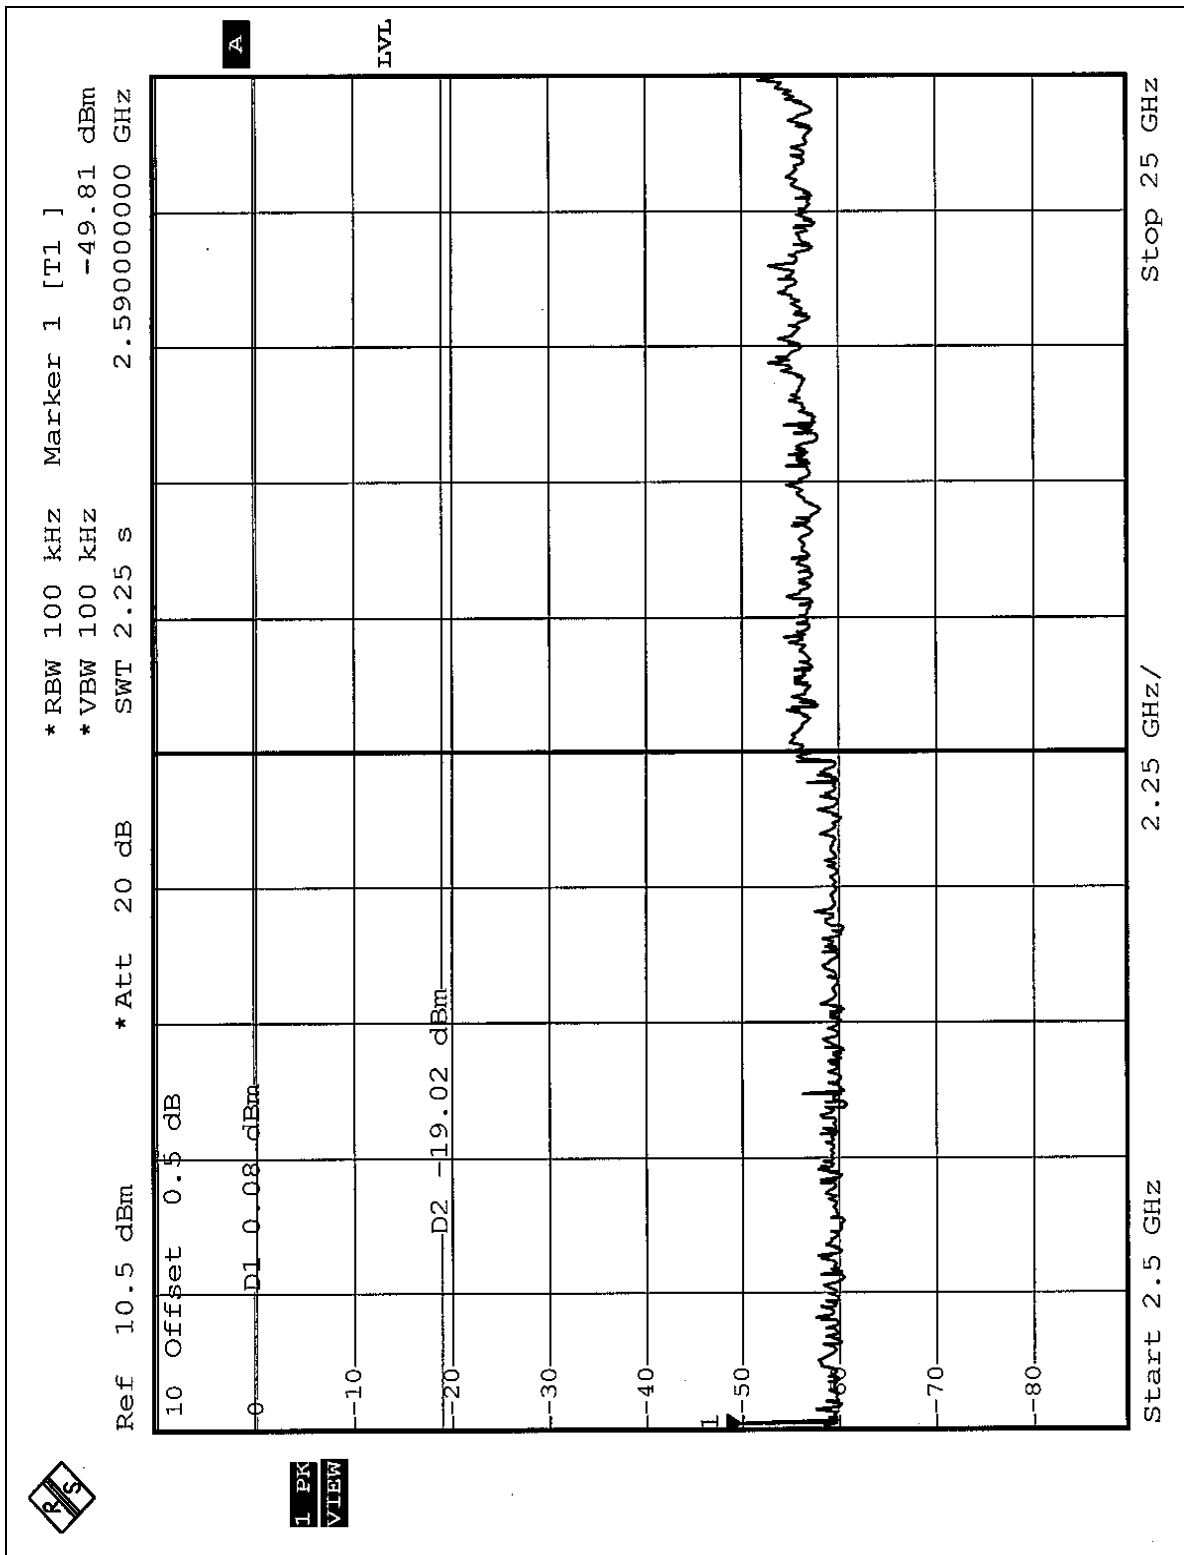



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole antenna with 1.13 coaxial cable. The antenna connector is UFL. The maximum Gain of this antenna is only 2dBi.


5 PHOTOGRAPHS OF THE TEST CONFIGURATION


CONDUCTED EMISSION TEST





RADIATED EMISSION TEST

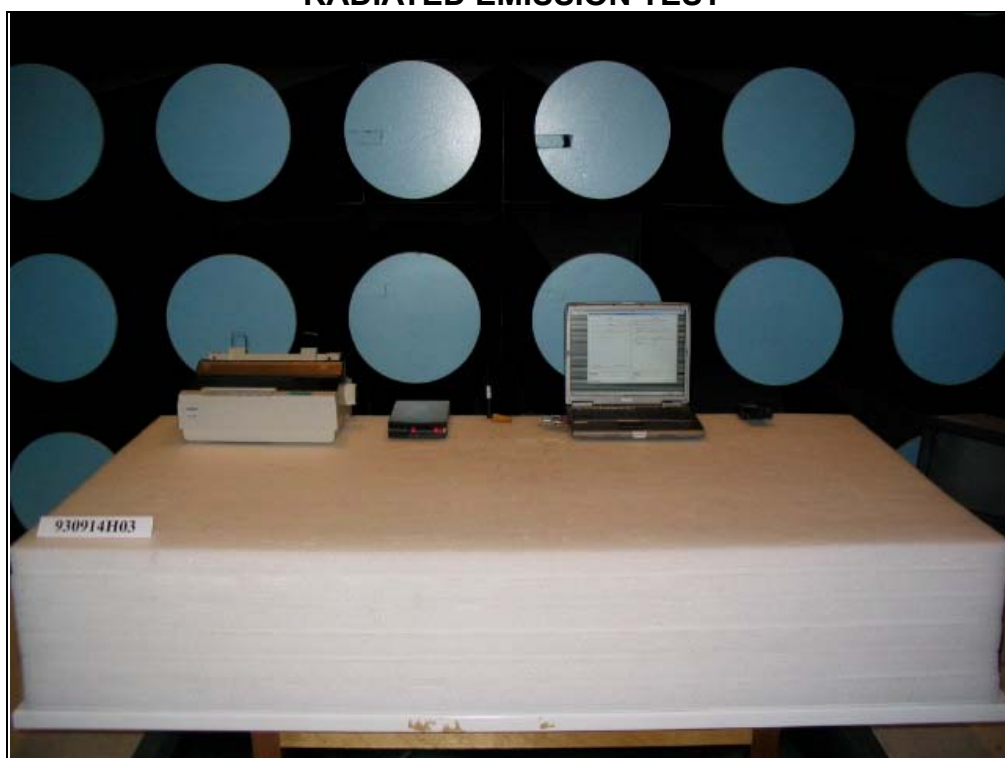

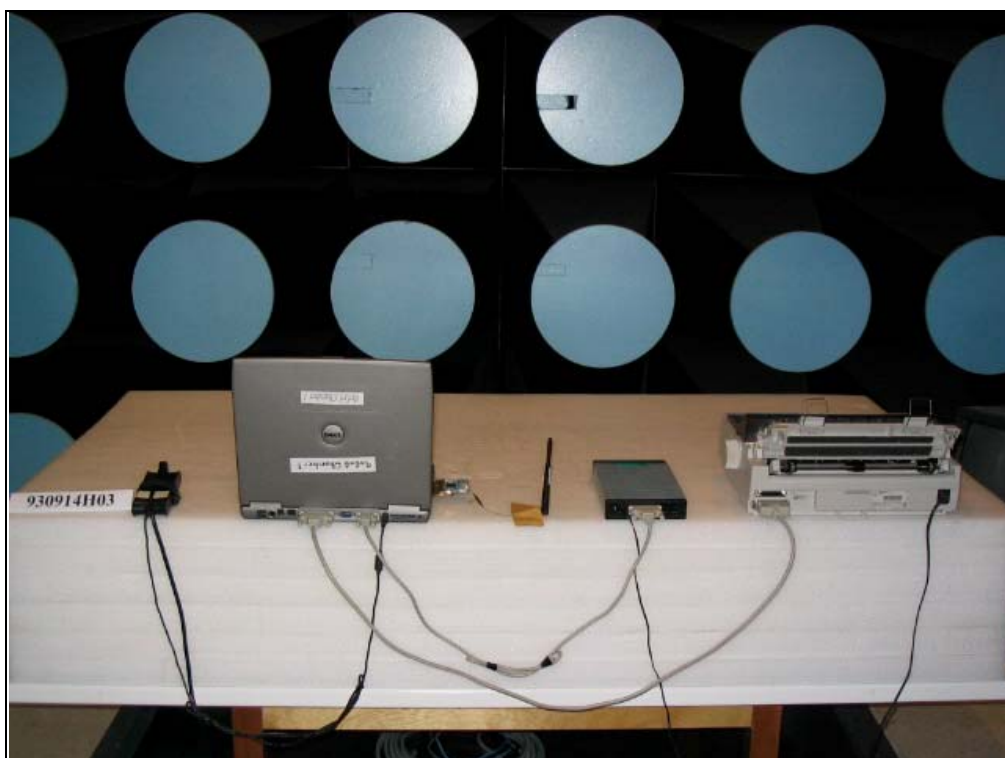



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

Report Format Version 1.5