


REVISIONS			
REV.	DESCRIPTION	DRN.	DATE
1	MODIFY SURFACE	SRZ	1/26/07
2	ADD CHANGE CORE	SRZ	1/29/07
3	MODIFY SURFACE	SRZ	2/15/07




RUBBER COLOR:GRAY 9C
ICON COLOR:WHITE

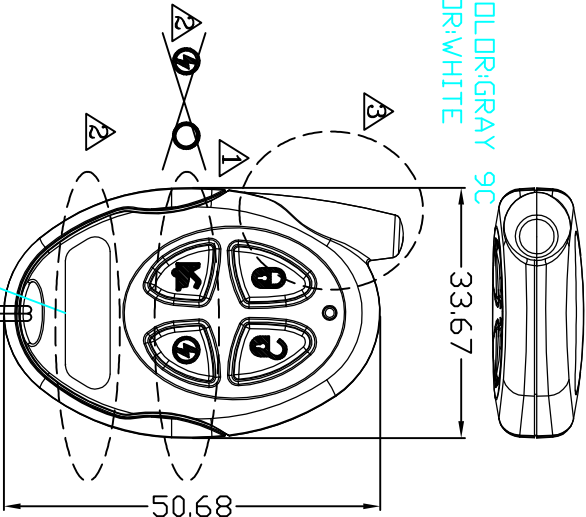

CASE COLOR:8401C

ENGRAVING??????????

CHANGE CORE(CAVE=0,MT-11010)

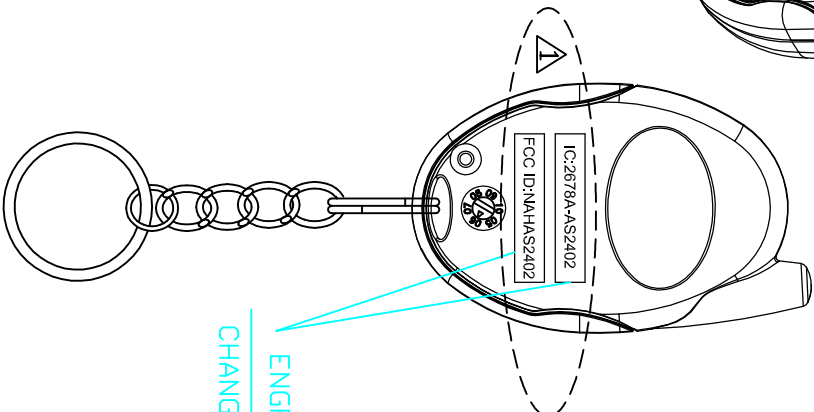

ENGRAVING(CAVE=0.2,FLASH)

CHANGE CORE(CAVE=0.3,FLASH)

*Tolerance please refer specification of tolerance limits 'C' of INJECT TOLERANCE SPEC.

DIMENSION	GRADE	A	B	C
UNDER 6		± 0.08	± 0.16	± 0.30
6~30		± 0.10	± 0.20	± 0.40
30~120		± 0.20	± 0.40	± 0.80
120~300		± 0.40	± 0.80	± 2.00

BODY MATERIAL : ABS+PC MT-11010
1. Texture is same as
2. Radious will be 0.2 if not specified.
3. Key chain : MA17H000
4. Screw : MTF02008

TX P/N:IASG0G01
RUBBER P/N:NKSG08A0

SCALE: 1:1	UNIT: M/M	DRN BY SRZ	DATE 1/18/07	TITLE NUTEK CORPORATION		
MATERIAL		CHK BY VICTOR		ASRA2402		
FINISH		APPD BY YGF		SIZE A4	DEPT	DRAWING NO 9510630
CODE		SHEET OF				REV 3