



**FCC 47 CFR PART 15 SUBPART C  
ISED RSS 210**

**CERTIFICATION TEST REPORT**

**FOR**

**433.92 MHZ TRANSCEIVER**

**MODEL NUMBERS: K123716, K138357, K138362, K138367**

**FCC ID: NATRXK123716  
ISED ID: 3323A-K123716**

**REPORT NUMBER: 12016445-E1V5**

**ISSUE DATE: 3/15/2018**

*Prepared for*  
**BENDIX COMMERCIAL VEHICLE SYSTEMS LLC**  
**#2110 – 6900 GRAYBAR ROAD**  
**RICHMOND, B. C. V6W 0A5 CANADA**

*Prepared by*  
**UL VERIFICATION SERVICES INC.**  
**47173 BENICIA STREET**  
**FREMONT, CA 94538, U.S.A.**  
**TEL: (510) 771-1000**  
**FAX: (510) 661-0888**

**NVLAP**<sup>®</sup>  
TESTING  
NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	1/11/2018	Initial Issue	--
V2	2/7/2018	Sec. 5.3: Updated Antenna Gain.	Bobby Bayani
V3	2/20/2018	Report revised based on reviewer's feedback: 1. Sec. 7.3: Added 15.231(e). 2. Sec. 8: Added legend definition.	Bobby Bayani
V4	2/23/2018	Report revised based on reviewer's feedback: 1. Sec. 5.3: Updated.	Bobby Bayani
V5	3/15/2018	1. Cover Page & Sec. 1: Updated Model numbers and ISED Number	Bobby Bayani

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>7</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	7
4.2. <i>SAMPLE CALCULATION</i> .....	7
4.3. <i>MEASUREMENT UNCERTAINTY</i> .....	7
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>8</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	8
5.2. <i>MAXIMUM OUTPUT POWER</i> .....	8
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	8
5.4. <i>SOFTWARE AND FIRMWARE</i> .....	8
5.5. <i>WORST-CASE CONFIGURATION AND MODE</i> .....	8
5.6. <i>DESCRIPTION OF TEST SETUP</i> .....	9
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>11</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>12</b>
7.1. <i>20 dB AND 99% BW</i> .....	12
7.2. <i>DUTY CYCLE</i> .....	14
7.3. <i>TRANSMISSIONS PLOT</i> .....	17
<b>8. RADIATED EMISSION TEST RESULTS.....</b>	<b>20</b>
<b>9. SETUP PHOTOS.....</b>	<b>29</b>

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** BENDIX COMMERCIAL VEHICLE SYSTEMS LLC  
#2110 – 6900 GRAYBAR ROAD  
RICHMOND, B. C. V6W 0A5 CANADA

**EUT DESCRIPTION:** 433.92 MHZ TRANSCEIVER

**MODELS:** K123716, K138357, K138362, K138367

**SERIAL NUMBER:** 0000207, 0000260

**DATE TESTED:** NOVEMBER 16 to DECEMBER 09, 2017

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	Complies
ISED RSS-210 Issue 9, Annex A	Complies
ISED RSS-GEN Issue 4	Complies

UL Verification Services Inc tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Reviewed By:



---

Bobby Bayani  
Lead Project Engineer  
UL Verification Service Inc.

Prepared By:



---

Jason Qian  
Test Engineer  
UL Verification Services Inc.

Approved & Released For  
UL Verification Services Inc By:



---

Thu Chan  
Operations Leader  
UL Verification Service Inc.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 4, and RSS-210 Issue 9.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input checked="" type="checkbox"/> Chamber A(ISED: 2324B-1)	<input type="checkbox"/> Chamber D(ISED: 22541-1)
<input type="checkbox"/> Chamber B(ISED: 2324B-2)	<input type="checkbox"/> Chamber E(ISED: 22541-2)
<input type="checkbox"/> Chamber C(ISED: 2324B-3)	<input type="checkbox"/> Chamber F(ISED: 22541-3)
	<input type="checkbox"/> Chamber G(ISED: 22541-4)
	<input type="checkbox"/> Chamber H(ISED: 22541-5)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through C are covered under ISED company address code 2324B with site numbers 2324B -1 through 2324B-3, respectively. Chambers D through H are covered under Industry Canada company address code 22541 with site numbers 22541 -1 through 22541-5, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Worst Case Radiated Disturbance, 9kHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a 433.92MHz transceiver used for Tire Pressure Monitoring Systems.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has the maximum peak and average radiated field strengths as follows:

Frequency Range (MHz)	Mode	Field Strength Peak (dBuV/m)	Field Strength Average (dBuV/m)
433.9789	Normal	87.50	71.66

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an internal antenna with a gain of -5dBi approximately (0.4 dB Cable Loss).

### 5.4. SOFTWARE AND FIRMWARE

The software used in the EUT during testing was CANRXTOOL Test Ver. 9.6.0.2.  
The firmware installed in the EUT during testing was version 1.63 (Application) and 1.23 (Bootloader).

### 5.5. WORST-CASE CONFIGURATION AND MODE

The EUT was investigated in each of its three orthogonal axes. All radiated testing was performed in the worse-case axis, which was found to be the "X-axis". See photos for details.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST			
Description	Manufacturer	Model	Serial Number
Laptop PC	LENOVO	T410	2921940145
AC Adapter	LENOVO	ADLX66NCT2A	11S36200293ZZ100392366
DC Power Supply	SORENSEN	XT 15-4	1319A02780
USB-Link	NEXIQ	-	73726


### I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC	1	DC	Unshielded	1.0m	N/A
2	SERIAL	1	SERIAL	Unshielded	1.5m	N/A
3	USB	1	USB	Unshielded	1.0m	N/A
4	SERIAL	1	SERIAL	Shielded	0.3m	N/A
5	DC	1	DC	Unshielded	1.2m	N/A
6	AC	1	AC	Unshielded	1.2m	N/A
7	AC	1	AC	Unshielded	1.2m	N/A

### TEST SETUP

The EUT was connected to a host Laptop via USB cable. Test software exercised the EUT.

**SETUP DIAGRAM FOR TESTS**

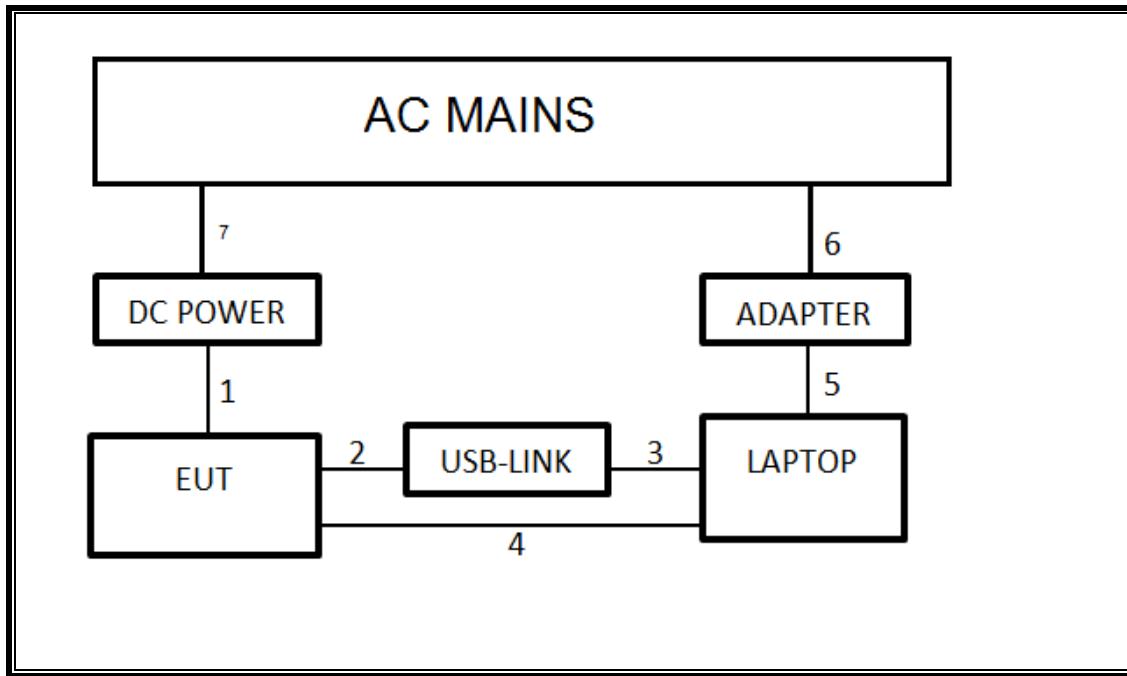

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	T No.	Cal Date	Cal Due
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A	1450	01/10/17	01/10/18
Spectrum Analyzer, PSA, 3Hz to 44GHz	Agilent	E4446A	905	01/11/17	01/11/18
Power Meter, P-series single channel	Agilent (Keysight) Technologies	N1911A	T1264	07/08/17	07/08/18
Power Sensor, P – series, 50MHz to 18GHz, Wideband	Agilent (Keysight) Technologies	N1921A	T413	07/08/17	07/08/18
Amplifier, 1 - 26.5GHz	Miteq	AFS42	1165	08/01/17	08/01/18
Antenna, Broadband Hybrid 30MHz - 2GHz	Sunol Sciences	JB1	130	09/01/17	09/01/18
Antenna, Horn 1-18GHz	ETS Lindgren	3117	712	01/30/17	01/30/18
Amplifier, 10kHz to 1GHz, 32dB	Keysight	8447D	15	08/26/17	08/26/18

Test Software List			
Description	Manufacturer	Model	Version
Antenna Port Software	UL	UL RF	Ver 6.2, March 10, 2017
Radiated Software	UL	UL EMC	Ver 9.5 Apr 26, 2016

## 7. ANTENNA PORT TEST RESULTS

### 7.1. 20 dB AND 99% BW

#### LIMITS

FCC §15.231 (c)

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

RSS-210 A.1.3

The 99% bandwidth of monetarily operated devices shall be less or equal to 0.25% of the center frequency for devices operating between 70MHz and 900MHz. For devices operating above 900MHz, the 99% bandwidth shall be less or equal to 0.5% of the center frequency.

#### TEST PROCEDURE

ANSI C63.10

The transmitter output is connected to the spectrum analyzer.

20dB Bandwidth: The RBW is set to 1% to 5% of OBW. The VBW is set to 3 times the RBW. The sweep time is coupled. Bandwidth is determined at the points 20 dB down from the modulated carrier.

99% Bandwidth: The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.


## **RESULTS**

## 20dB Bandwidth

Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)
433.92	252.1	1084.8	-832.7

## 99% Bandwidth

Frequency (MHz)	99% Bandwidth (kHz)	Limit (kHz)	Margin (kHz)
433.92	341.54	1084.8	-743.26

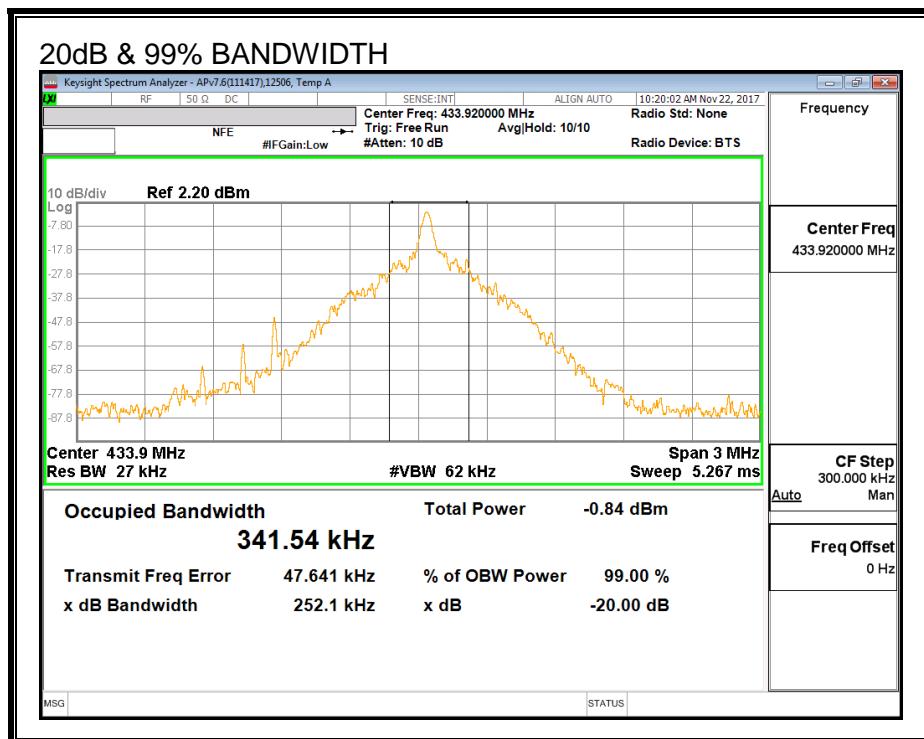

## 7.2. DUTY CYCLE

### LIMITS

#### FCC §15.35 (c)

The measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 1MHz and the VBW is set to 1MHz. The sweep time is coupled and the span is set to 0 Hz. The number of pulses is measured and calculated in a 100 ms scan.

### CALCULATION


Average Reading = Peak Reading (dB<sub>UV</sub>/m) + 20log (Duty Cycle), Where Duty Cycle is (# of long pulses \* long pulse width) + (# of short pulses \* short pulse width) / 100 or T

### RESULTS


No non-compliance noted:

One Period (ms)	Long Pulse Width (ms)	# of Long Pulses	Medium Pulse Width (ms)	# of Medium Pulses	Short Pulse Width (ms)	# of Short Pulses	Duty Cycle	20*Log Duty Cycle (dB)
100	0.447	1	0.333	9	0.165	77	0.161	-15.84


## ONE PERIOD

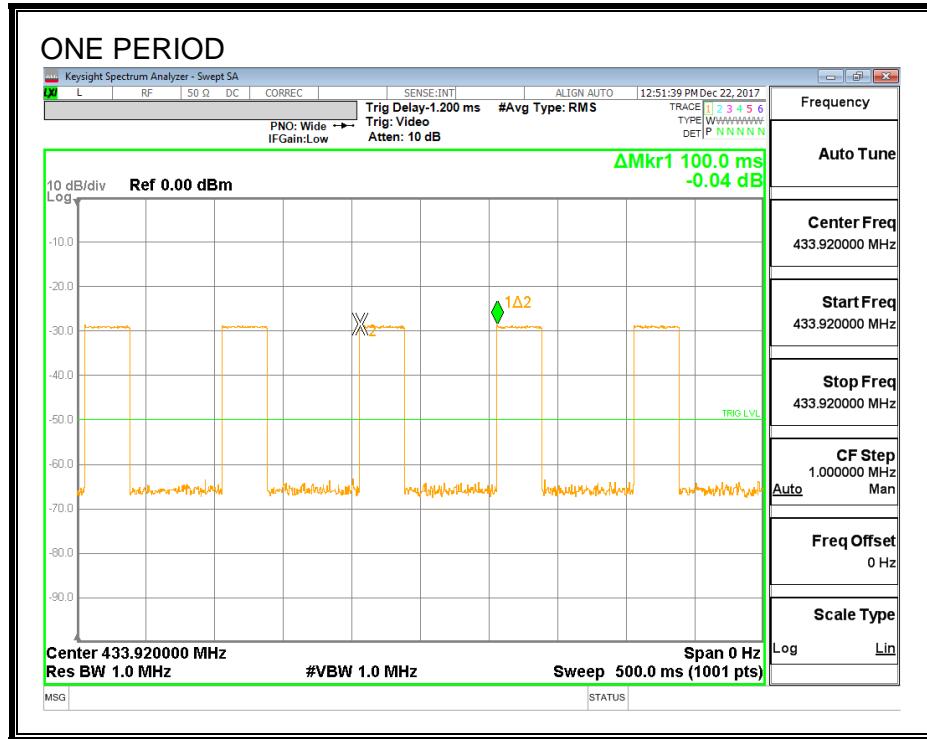

## PULSE WIDTHS

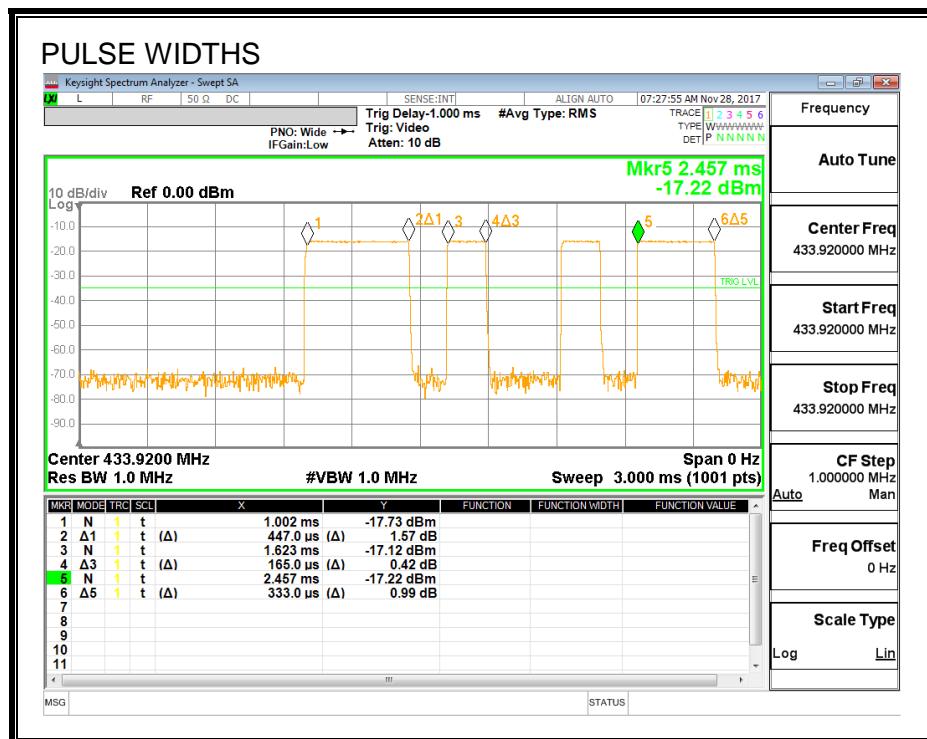

**NUMBER OF PULSES**

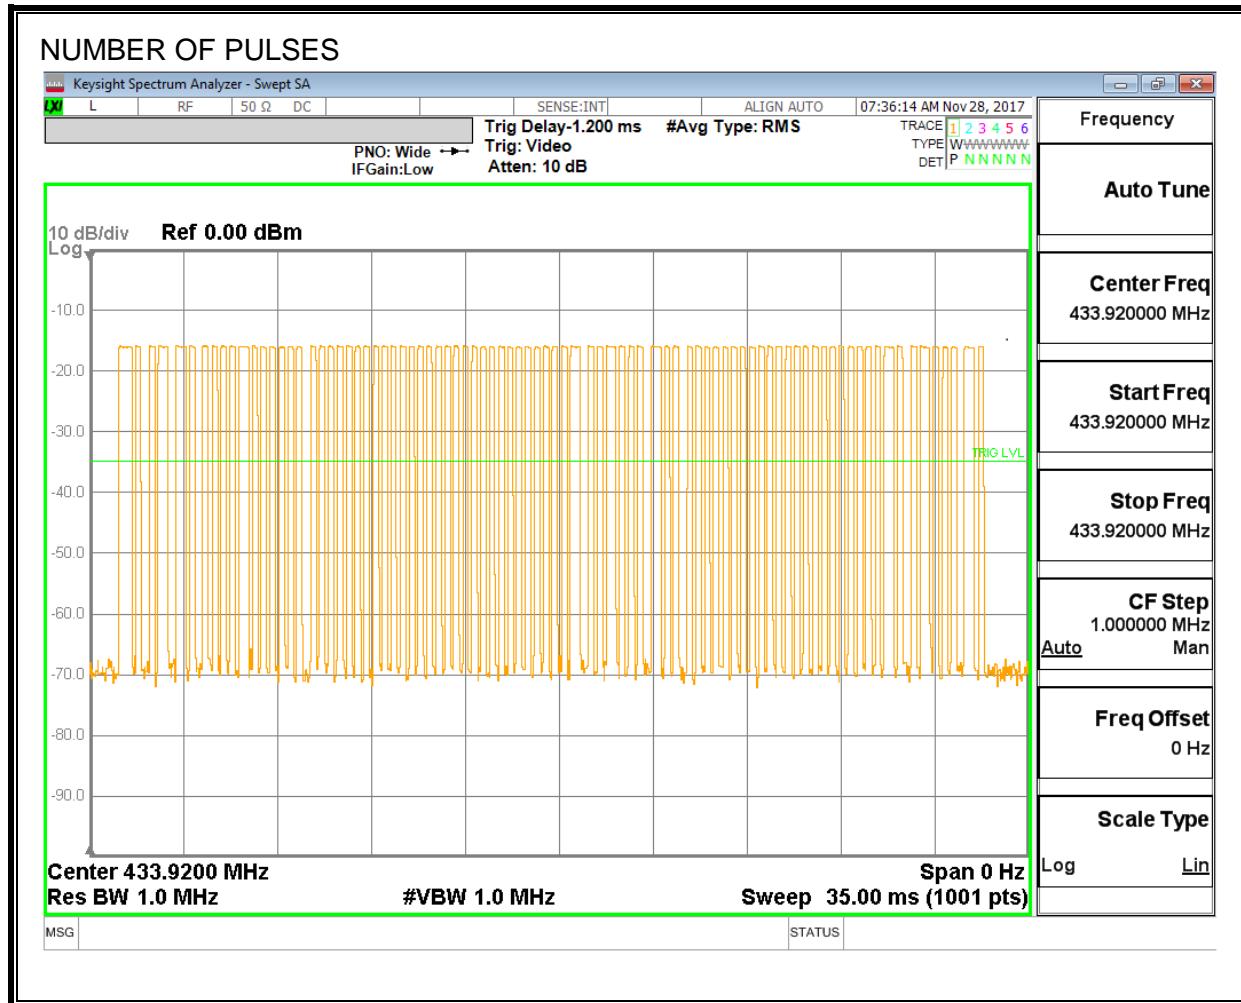

### 7.3. TRANSMISSIONS PLOT

#### LIMITS

FCC §15.231 (e) In addition, devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.


RSS210 A1.1.5 In addition, devices operated under the provisions of this section (A1.1.5) shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than 1 second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds. However, devices that are designed for limited use for the purpose of initial programming, reprogramming or installation, and not for regular operations, may operate up to 5 seconds, provided that such devices are to be used only occasionally in connection with each unit being programmed or installed.


#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 100 KHz and the VBW is set to 100 KHz. The sweep time is set to 10 & 30 seconds and the span is set to 0 Hz.

#### RESULTS

Transmission begins approximately 0.8 second after activation and transmission ceases approximately 1.28 seconds after activation. The Transmitting Interval every 3 - 5 minutes.

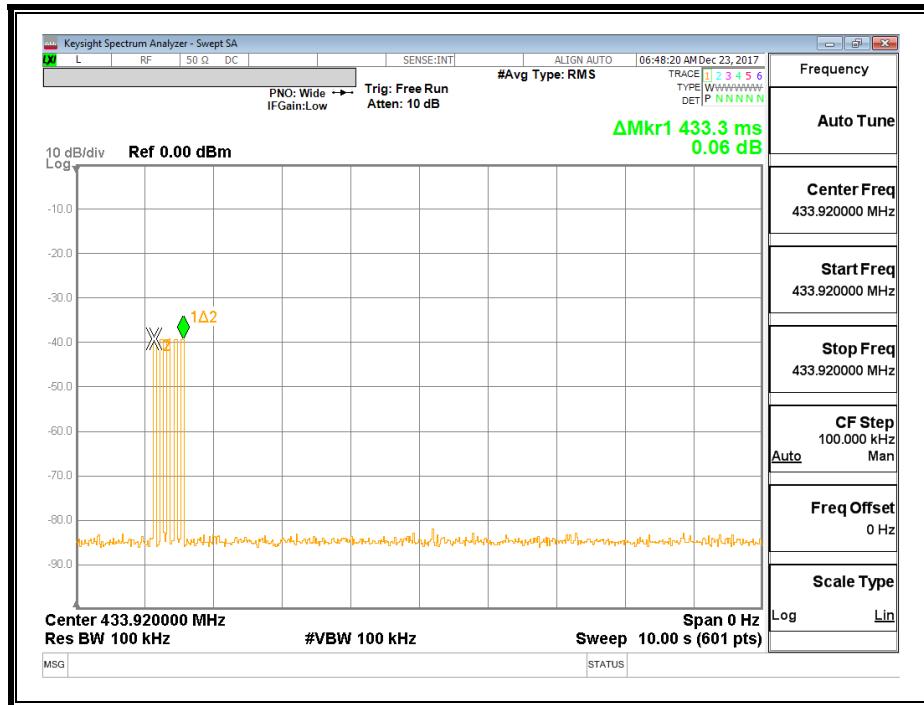

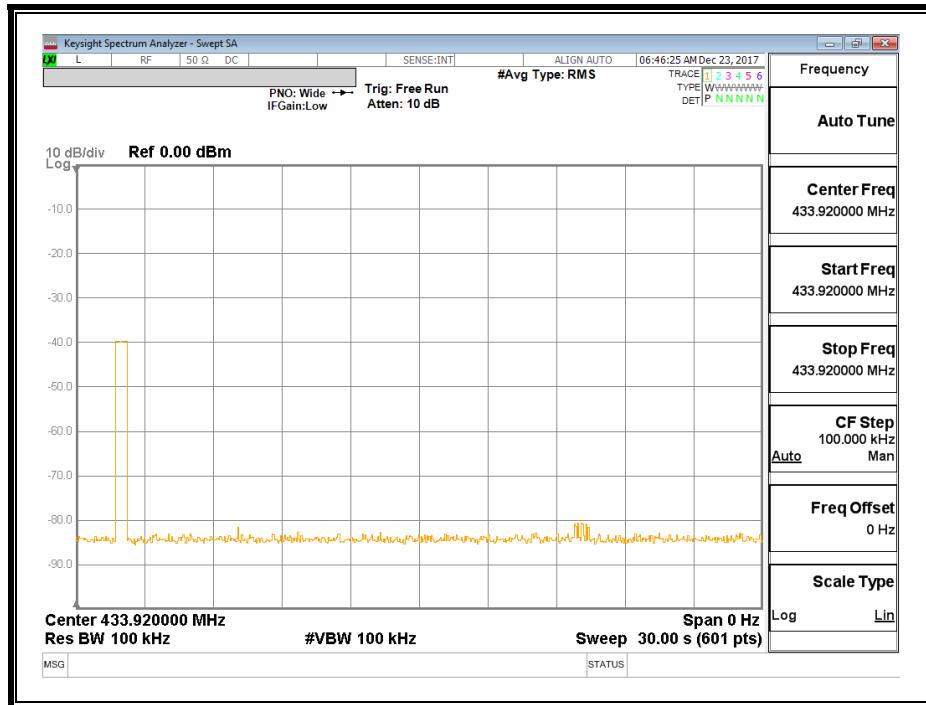

## 8. RADIATED EMISSION TEST RESULTS

### LIMITS

FCC §15.231 (e)  
RSS-210 A.1.2

In addition to the provisions of § 15.205, the field strength of emissions from Intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	1,000	100
70-130	500	50
130-174	500 to 1,500 <sup>1</sup>	50 to 150
174-260	1,500	150
260-470	1,500 to 5,000 <sup>1</sup>	150 to 500 <sup>1</sup>
Above 470	5,000	500

<sup>1</sup>Linear interpolation

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

2 Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted.


For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements. Please refer to test report section 7.2 for duty cycle factor information. Note: The pre-scan measurements above 1GHz the VBW is set to 30 kHz.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## **RESULTS**

No non-compliance noted:

**FUNDAMENTAL, HARMONICS AND TX SPURIOUS EMISSION (30 – 1000 MHz)**

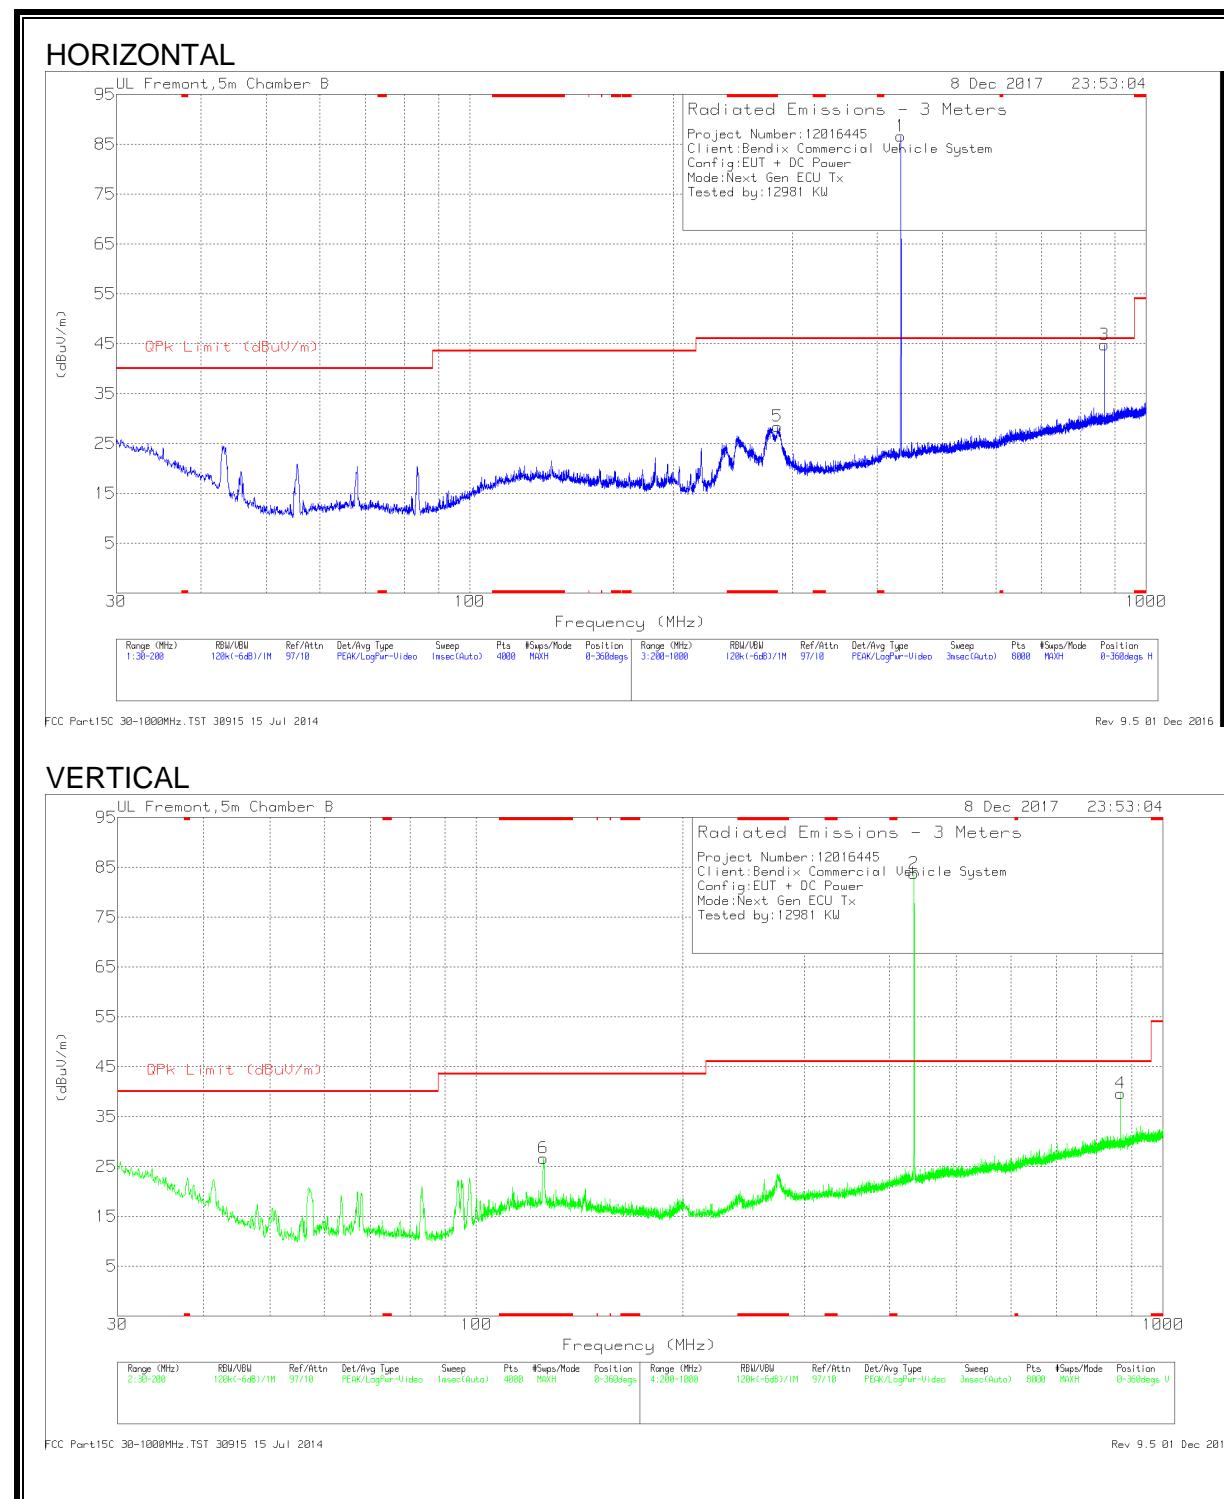

## BELOW 1GHZ RADIATED EMISSIONS

## FUNDAMENTAL FIELD STRENGTH AND HARMONICS SPURIOUS EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T899 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	*** 125.468	29.09	Pk	17.7	-27.6	19.19	43.52	-24.33	231	145	V
5	286.198	35.05	Pk	17.3	-26	26.35	46.02	-19.67	258	141	H
2	433.9659	87.93	Pk	20.6	-26	82.53	92.87	-10.34	333	123	V
			Av			66.69	72.87	-6.18	333	123	V
1	433.9789	92.9	Pk	20.6	-26	87.5	92.87	-5.37	349	100	H
			Av			71.66	72.87	-1.21	349	100	H
4	867.9113	40.39	Pk	25.7	-23.7	42.39	72.87	-30.48	172	102	V
			Av			26.55	52.87	-26.32	172	102	V
3	867.919	43.22	Pk	25.7	-23.7	45.22	72.87	-27.65	51	101	H
			Av			29.38	52.87	-23.49	51	101	H

Pk - Peak detector

Av – Average detector

\* Average Reading = Peak Reading (dBuV/m) + 20log (Duty Cycle), Where Duty Cycle is -15.84dB

(# of long pulses \* long pulse width) + (# of medium pulses \* medium pulse width) + (# of short pulses \* short pulse width) / 100 or T

Refer to section 7.2 for duty cycle factor calculation (-15.84dB)


Note: Radiated peak result is based on 100% duty cycle sample; average reading = peak reading + DCCF

\*\* Harmonics of fundamental 319.5MHz


\*\*\* Indicates frequency in CFR15.205/RSS-Gen 8.10 -Restricted Band

## **HARMONICS AND TX SPURIOUS EMISSIONS ABOVE 1GHz**

### **HORIZONTAL**

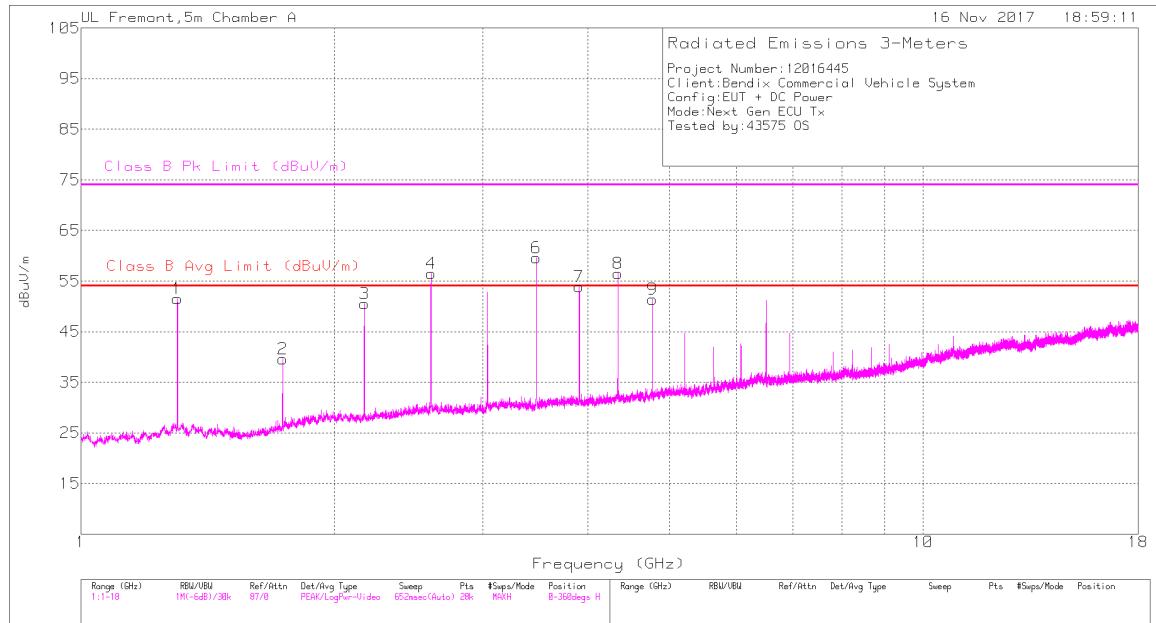

### **VERTICAL**

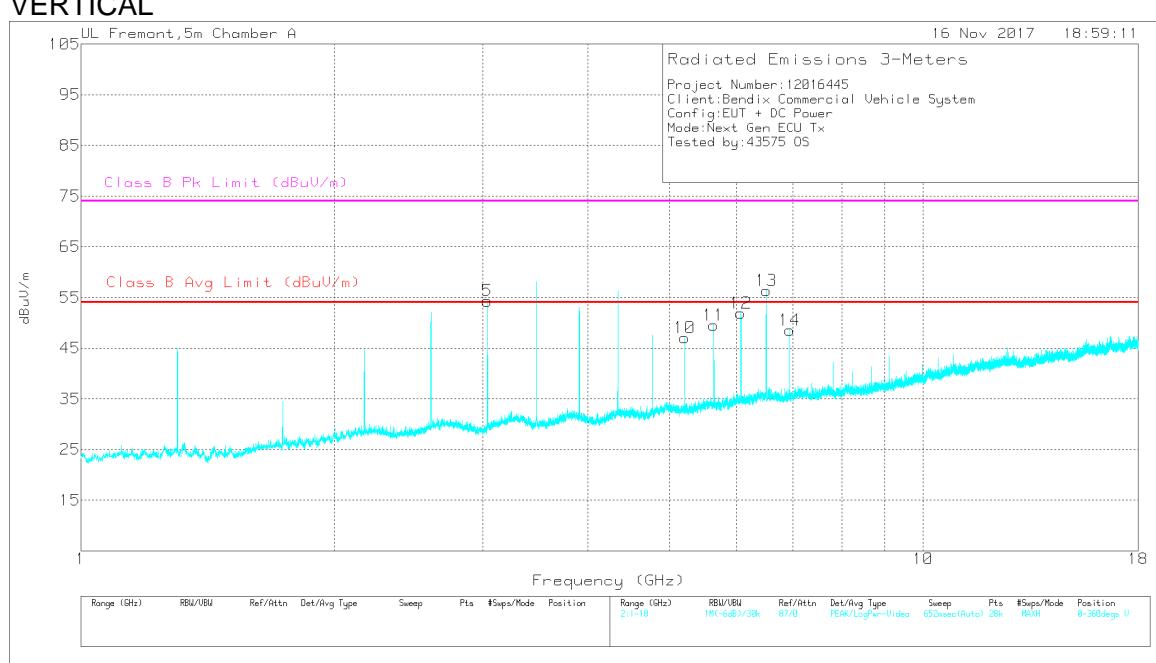

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Av Limit (dBuV/m)	Peak Margin (dB)	Av Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	***1.302	57.32	Pk	29.4	-33.3	53.42	74	-	-20.58	-	132	130	H
			Av			37.58	-	54	-	-16.42	132	130	H
2	1.736	45.24	Pk	29.5	-32.8	41.94	72.87	-	-30.93	-	335	244	H
			Av			26.1	-	52.87	-	-26.77	335	244	H
3	2.17	53.28	Pk	31.1	-32	52.38	72.87	-	-20.49	-	138	247	H
			Av			36.54	-	52.87	-	-16.33	138	247	H
4	2.604	57.69	Pk	32.4	-31.4	58.69	72.87	-	-14.18	-	223	394	H
			Av			42.85	-	52.87	-	-10.02	223	394	H
5	3.038	57.04	Pk	32.6	-31	58.64	72.87	-	-14.23	-	149	220	V
			Av			42.8	-	52.87	-	-10.07	149	220	V
6	3.472	58.95	Pk	32.8	-30.5	61.25	72.87	-	-11.62	-	350	147	H
			Av			45.41	-	52.87	-	-7.46	350	147	H
7	***3.906	52.91	Pk	33.1	-29.7	56.31	74	-	-17.69	-	14	142	H
			Av			40.47	-	54	-	-13.53	14	142	H
8	***4.34	53.57	Pk	33.6	-28.9	58.27	74	-	-15.73	-	145	116	H
			Av			42.43	-	54	-	-11.57	145	116	H
9	***4.773	48.48	Pk	34.1	-28.3	54.28	74	-	-19.72	-	136	106	H
			Av			38.44	-	54	-	-15.56	136	106	H
10	5.207	45.08	Pk	34.5	-28	51.58	72.87	-	-21.29	-	323	229	V
			Av			35.74	-	52.87	-	-17.13	323	229	V

Pk - Peak detector

Av – Average detector

\* Average Reading = Peak Reading (dBuV/m) + 20log (Duty Cycle), Where Duty Cycle is -15.84dB

(# of long pulses \* long pulse width) + (# of medium pulses \* medium pulse width) + (# of short pulses \* short pulse width) / 100 or T


Refer to section 7.2 for duty cycle factor calculation (-15.84dB)

Note: Radiated peak result is based on 100% duty cycle sample; average reading = peak reading + DCCF

\*\* Harmonics of fundamental 433.92 MHz

\*\*\* Indicates frequency in CFR15.205/RSS-Gen 8.10 -Restricted Band

## BELOW 30MHz

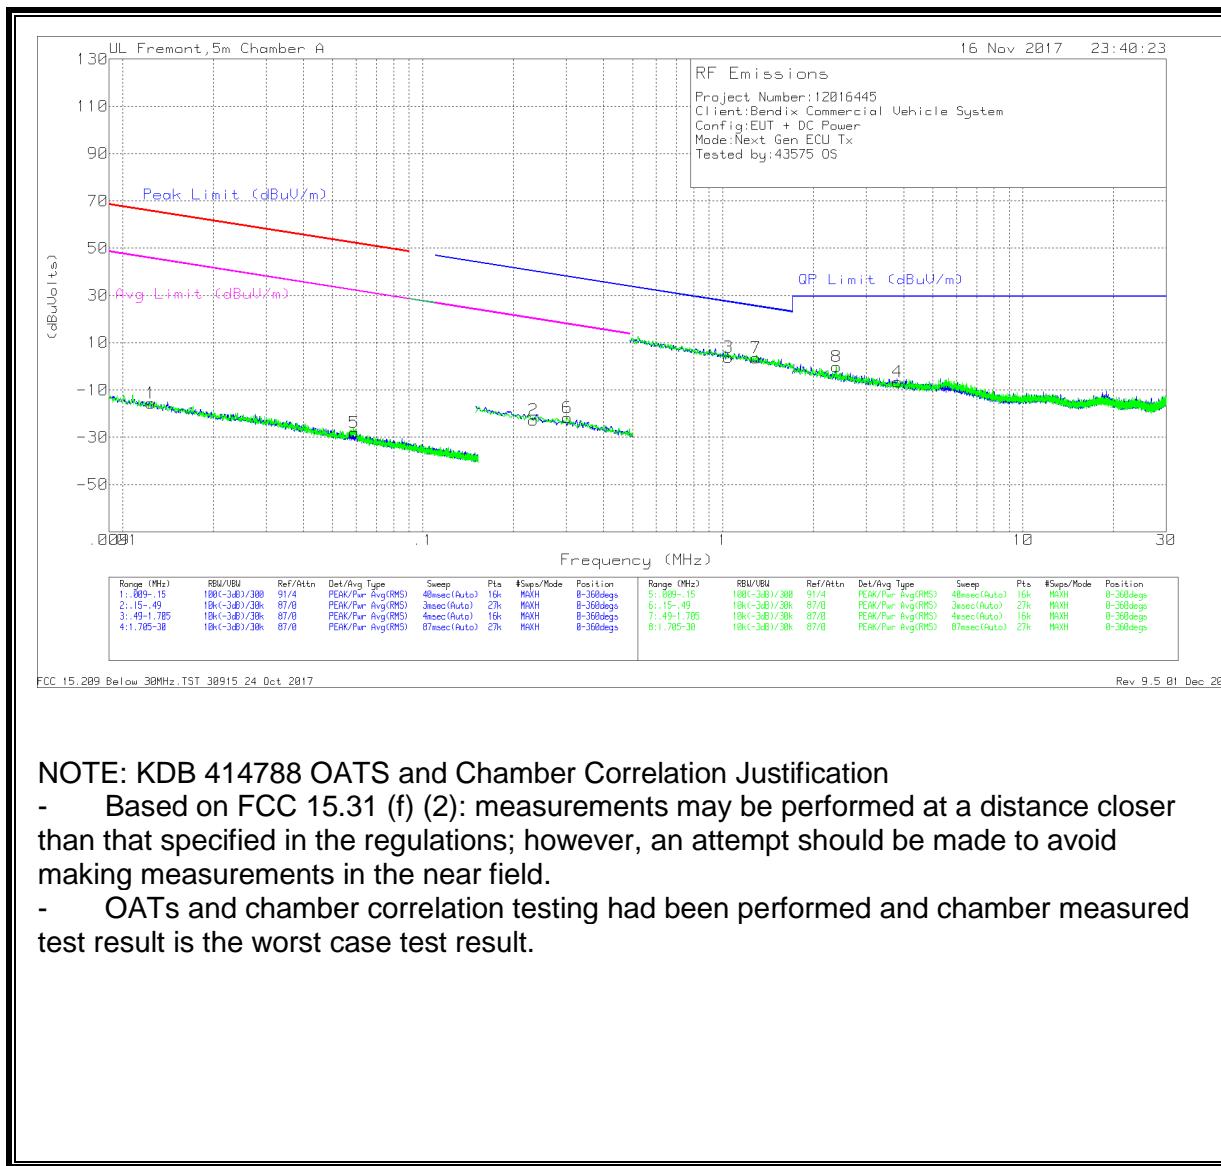

### NOTE: KDB 414788 OATS and Chamber Correlation Justification

- Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.
- OATs and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

## BELOW 30MHz RADIATED EMISSIONS

### Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cbl (dB)	Dist Corr 300m	Corrected Reading (dBuVolts)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	.01245	48.75	Pk	.15.5	.1	-80	-15.65	65.68	-81.33	45.68	-61.33	-	-	-	-	0-360
5	.05907	37.46	Pk	14.5	.1	-80	-27.94	52.16	-80.1	32.16	-60.1	-	-	-	-	0-360
2	.23374	43.34	Pk	13.9	.1	-80	-22.66	-	-	-	-	40.24	-62.9	20.24	-42.9	0-360
6	.30317	44.34	Pk	13.8	.1	-80	-21.76	-	-	-	-	37.98	-59.74	17.98	-39.74	0-360

### Pk - Peak detector

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cbl (dB)	Dist Corr 30m	Corrected Reading (dBuVolts)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
3	1.04328	29.26	Pk	14.3	.2	-40	3.76	27.25	-23.49	0-360
7	1.28998	29.03	Pk	14.3	.2	-40	3.53	25.42	-21.89	0-360
8	2.3862	25.27	Pk	14.4	.2	-40	-13	29.5	-29.63	0-360
4	3.81305	18.56	Pk	14.5	.3	-40	-6.64	29.5	-36.14	0-360

### Pk - Peak detector