

FCC ID: NDX-LABMAXIII

# EMI - TEST REPORT

- FCC Part 15.209 -



<b>Test Report No. :</b> T36133-00-02HU	01. August 2012 Date of issue
---	----------------------------------

**Type / Model Name** : LAB MAX III

**Product Description** : RFID stationary reader for animal identification

**Applicant** : Datamars S.A.

Address : Via ai Prati

CH – 6930 BEDANO

**Manufacturer** : Datamars S.A.

Address : Via ai Prati

CH – 6930 BEDANO

**Licence holder** : Datamars S.A.

Address : Via ai Prati

CH – 6930 BEDANO

<b>Test Result</b> according to the standards listed in clause 1 test standards:	<b>POSITIVE</b>
--	-----------------



The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: NDX-LABMAXIII

## Contents

<b>1</b>	<b><u>TEST STANDARDS</u></b>	<b>3</b>
<b>2</b>	<b><u>SUMMARY</u></b>	<b>4</b>
<b>3</b>	<b><u>EQUIPMENT UNDER TEST</u></b>	<b>5</b>
3.1	Photo documentation of the EUT – Detailed photos see Attachment A	5
3.2	Power supply system utilised	6
3.3	Short description of the Equipment under Test (EUT)	6
<b>4</b>	<b><u>TEST ENVIRONMENT</u></b>	<b>7</b>
4.1	Address of the test laboratory	7
4.2	Environmental conditions	7
4.3	Statement of the measurement uncertainty	7
4.4	Measurement Protocol for FCC, VCCI and AUSTEL	8
<b>5</b>	<b><u>TEST CONDITIONS AND RESULTS</u></b>	<b>9</b>
5.1	Conducted emissions	9
5.2	Field strength of the fundamental wave	15
5.3	Spurious emissions (magnetic field) 9 kHz – 30 MHz	17
5.4	Emission Bandwidth	20
<b>6</b>	<b><u>USED TEST EQUIPMENT AND ACCESSORIES</u></b>	<b>22</b>

## FCC ID: NDX-LABMAXIII

# 1 TEST STANDARDS

The tests were performed according to following standards:

**FCC Rules and Regulations Part 15, Subpart A - General (October, 2011)**

Part 15, Subpart A, Section 15.31	Measurement standards
Part 15, Subpart A, Section 15.33	Frequency range of radiated measurements
Part 15, Subpart A, Section 15.35	Measurement detector functions and bandwidths

**FCC Rules and Regulations Part 15, Subpart C - Intentional Radiators (October, 2011)**

Part 15, Subpart C, Section 15.203	Antenna requirement
Part 15, Subpart C, Section 15.204	External radio frequency power amplifiers and antenna modifications
Part 15, Subpart C, Section 15.205	Restricted bands of operation
Part 15, Subpart C, Section 15.209	Radiated emission limits, general requirements

ANSI C63.4: 2003	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
------------------	---

ANSI C95.1:1992	IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
-----------------	--

CISPR 16-4-2: 2003	Uncertainty in EMC measurement
--------------------	--------------------------------

FCC ID: NDX-LABMAXIII

## 2 SUMMARY

### GENERAL REMARKS:

The carrier frequency is 134.2 kHz

### FINAL ASSESSMENT:

The equipment under test **fulfills** the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 13. June 2012

Testing concluded on : 25. July 2012

Checked by:

Tested by:

\_\_\_\_\_  
Klaus Gegenfurtner  
Dipl.-Ing.(FH)  
Manager: Radio Group

\_\_\_\_\_  
Huber Markus

FCC ID: NDX-LABMAXIII

### **3 EQUIPMENT UNDER TEST**

**3.1 Photo documentation of the EUT – Detailed photos see Attachment A**

mikes



FCC ID: NDX-LABMAXIII

## 4 TEST ENVIRONMENT

### 4.1 Address of the test laboratory

mikes-testingpartners gmbh  
Ohmstrasse 2-4  
94342 STRASSKIRCHEN  
GERMANY

### 4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

### 4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader may notice that tolerances within the calibration of the equipment and facilities may cause additional uncertainty. The measurement uncertainty is calculated for all measurements listed in this test report acc. to CISPR 16-4-2 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurement“ and documented in the mikes-testingpartners gmbh quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, mikes-testingpartners gmbh, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component diversity and modifications in production process of devices may result in additional deviation. If necessary, refer to the test lab for the actual measurement uncertainty for the specific test. The manufacturer has the sole responsibility of continued compliance of the EUT.

## FCC ID: NDX-LABMAXIII

### 4.4 Measurement Protocol for FCC, VCCI and AUSTEL

#### 4.4.1 GENERAL INFORMATION

##### 4.4.1.1 Test Methodology

Conducted and radiated disturbance testing is performed according to the procedures set out by the International Special Committee on Radio Interference (CISPR) Publication 22, European Standard EN 55022 as shown under section 1 of this report.

The test methods used comply with CISPR Publication 22, EN 55022 - "Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement" and with ANSI C63.4 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

In compliance with 47 CFR Part 15 Subpart A, Section 15.38 testing for FCC compliance may be achieved by following the procedures set out in ANSI C63.4 and applying the CISPR 22 limits.

##### 4.4.1.2 Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral using the appropriate impedance characteristic or left unterminated. Where appropriate, cables are manually manipulated with respect to each other thus obtaining maximum disturbances from the unit.

mikes

FCC ID: NDX-LABMAXIII

## 5 TEST CONDITIONS AND RESULTS


### 5.1 Conducted emissions

For test instruments and accessories used see section 6 Part A 4.

#### 5.1.1 Description of the test location

Test location:                   Shielded Room S3

#### 5.1.2 Photo documentation of the test set-up

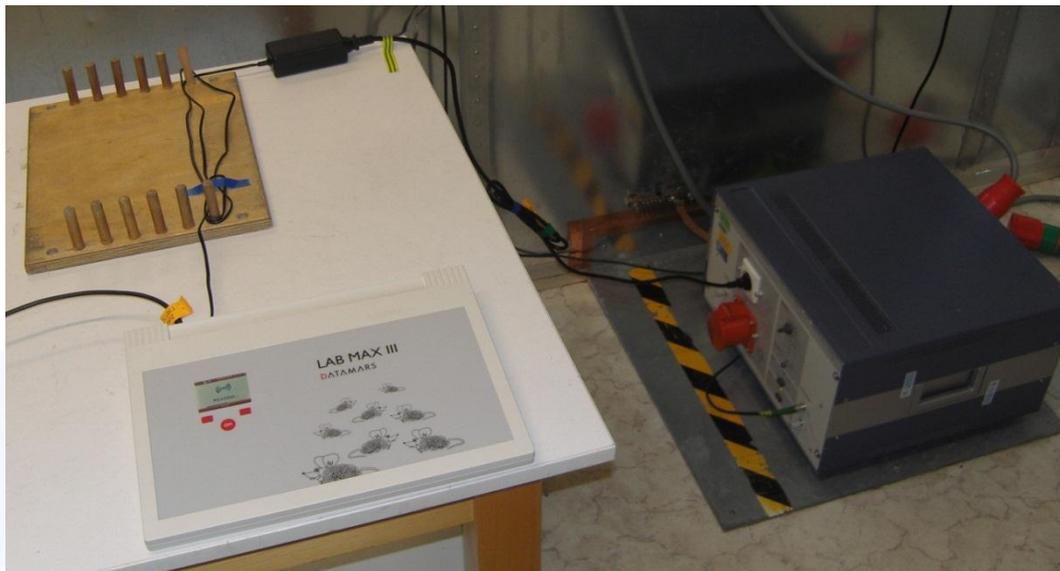

#### 5.1.3 Applicable standard

According to FCC Part 15, Section 15.207(a):

Except as shown in paragraphs (b) and (c) of this Section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency

**FCC ID: NDX-LABMAXIII****5.1.4 Test result**

Frequency range: 0.15 MHz - 30 MHz  
Min. limit margin: 3.0 dB at 4.83 MHz  
(Power Line L1, Tag reading mode)

The requirements are **FULFILLED**.

**Remarks:** For detailed results, please see the following page(s).  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

mikes








### FCC ID: NDX-LABMAXIII

Test point: Power Line N  
 Operation mode: Battery charging during tag reading mode  
 Remarks: PHIHONG PSU, PSAA18U-150, Serial No.:094100891A1  
 Date: 19.07.2012  
 Tested by: Huber Markus

Result: passed

Freq kHz	QP- L dB[μV]	D -Limit QP [dB]	Freq kHz	AV-L dB[μV]	D -Limit AV [dB]
175	54,3	10,4	180	38,8	15,7
190	53,1	10,9	190	34,7	19,3
230	47,7	14,7	240	33,5	18,6
295	44,7	15,7	300	30,1	20,1
425	41,5	15,8	425	29,1	18,2
435	42,1	15,1	435	29,6	17,6
535	38,3	17,7	535	25,7	20,3
700	35,7	20,3	670	23,7	22,3
875	28,3	27,7	940	20,1	25,9
1145	34,7	21,3	1210	25	21,0
1475	33,8	22,2	1475	25,1	20,9
1580	33,8	22,2	1560	23,1	22,9
2010	32,2	23,8	2280	26,4	19,6
2550	32,3	23,7	2550	27,9	18,1
3355	36,6	19,4	3355	30,8	15,2

Freq kHz	QP- L dB[μV]	D -Limit QP [dB]	Freq kHz	AV-L dB[μV]	D -Limit AV [dB]
4295	44	12,0	4025	35,5	10,5
4830	47,6	8,4	4830	42,4	3,6
5905	50,6	9,4	5905	45,5	4,5
6980	47,2	12,8	7245	41,7	8,3
9125	50,6	9,4	9125	45,2	4,8
10870	48,3	11,7	11675	39,3	10,7
13285	41,8	18,2	13555	36,1	13,9
17715	44,6	15,4	17715	39,2	10,8
19725	25,7	34,3	19725	20,4	29,6
26840	23,8	36,2	24425	17,3	32,7

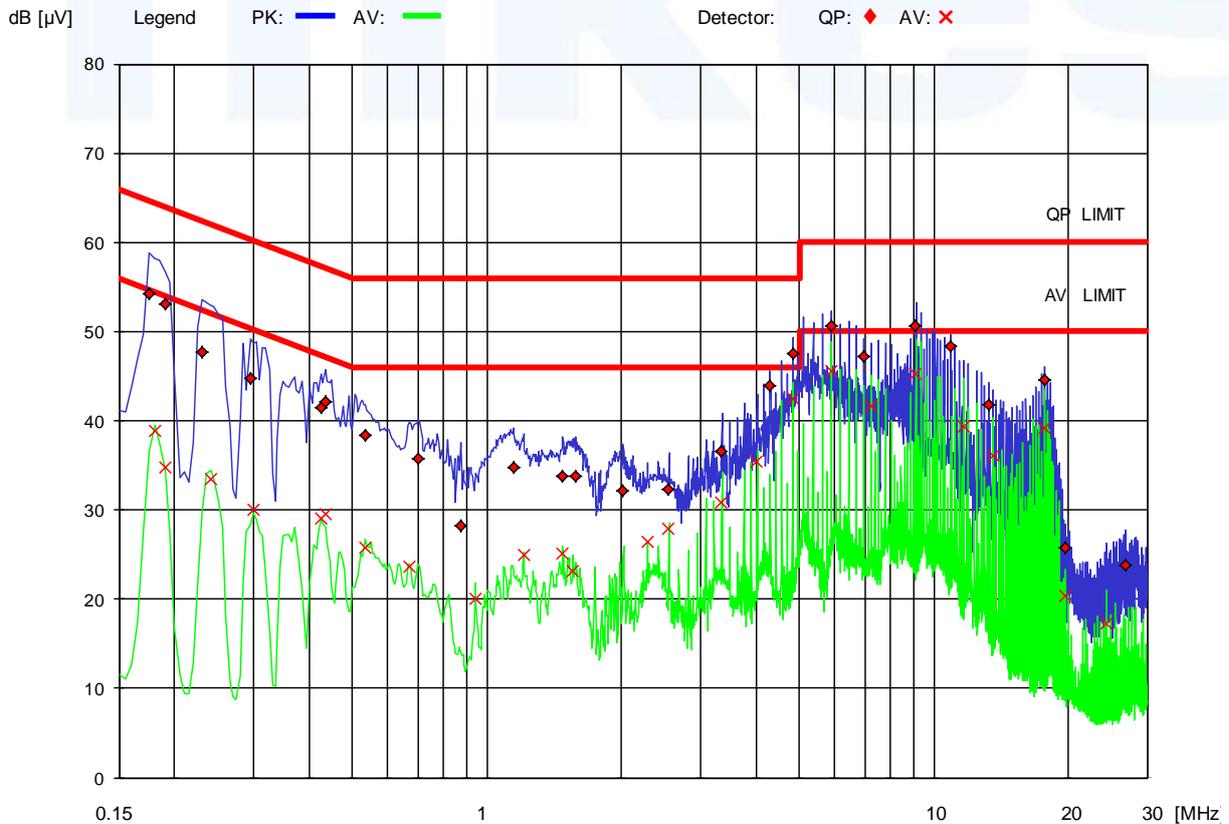

**FCC ID: NDX-LABMAXIII****5.2 Field strength of the fundamental wave**

For test instruments and accessories used see section 6 Part **CPR 1**.

**5.2.1 Description of the test location**

Test location: OATS1

Test distance: 3 metres

**5.2.2 Photo documentation of the test set-up**

**FCC ID: NDX-LABMAXIII**

**5.2.1 Applicable standard**

According to FCC Part 15C, Section 15.209:

The emissions from intentional radiators shall not exceed the effective field strength limits.

**5.2.2 Description of Measurement**

The spurious emissions of the EUT have to be measured at an open area test site in the frequency range from 9 kHz to 1000 MHz using a tuned EMI receiver. The set up of the equipment under test will be in accordance with ANSI C63.4. The measurement has been performed at 3 m. The results have been compared to the limits defined at 30 m or 300 m distances according to FCC Part 15C, Section 15.31(f)(2) using an inverse linear distance extrapolation factor of 40 dB/decade. The final measurement has been performed with the EMI receiver using Quasi peak detector except for the frequency bands 9 kHz to 90 kHz and 110 to 490 kHz where an average detector will be used, according to Section 15.209(d).

The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: RBW: 200 Hz  
 150 kHz – 30 MHz: RBW: 9 kHz

Example:

Frequency (MHz)	Level (dBμV)	+	Factor (dB)	=	Level dB(μV/m)	-	Limit dB(μV/m)	=	Delta (dB)
1.705	5	+	20	=	25	-	30	=	-5

**5.2.3 Test result**

Measurement distance: 3 m

Frequency (kHz)	Level PK (dBμV)	Level AV (dBμV)	Level QP (dBμV)	Band- width (kHz)	Correct. factor (dB)	Corrected Level PK dB(μV/m)	Corrected Level AV dB(μV/m)	Corrected Level QP dB(μV/m)	Limit AV dB(μV/m)	Delta (dB)
134.2	88.7	84.8	87.7	0.2	20	108.7	104.8	107.7	105.0	-0.2

Calculated value at distance: 300 m

Frequency (kHz)	Level PK (dBμV)	Level AV (dBμV)	Level QP (dBμV)	Band- width (kHz)	Correct. factor (dB)	Corrected Level PK dB(μV/m)	Corrected Level AV dB(μV/m)	Corrected Level QP dB(μV/m)	Limit AV dB(μV/m)	Delta (dB)
134.2	8.7	4.8	7.7	0.2	20	28.7	24.8	27.7	25.05	-0.2

Limit according to FCC Part 15C, Section 15.209(a):

Frequency (MHz)	Field strength of fundamental wave		Measurement distance (metres)
	(μV/m)	dB(μV/m)	
<b>0.009-0.490</b>	<b>2400/F(kHz)</b>	--	<b>300</b>
0.490-1.705	24000/F (kHz)	--	30
1.705-30.0	30	29.5	30

The requirements are **FULFILLED**.

Remarks:

---



---



---



---

FCC ID: NDX-LABMAXIII

### 5.3 Spurious emissions (magnetic field) 9 kHz – 30 MHz


For test instruments and accessories used see section 6 Part SER 1.

#### 5.3.1 Description of the test location

Test location: OATS1

Test distance: 3 metres

#### 5.3.2 Photo documentation of the test set-up

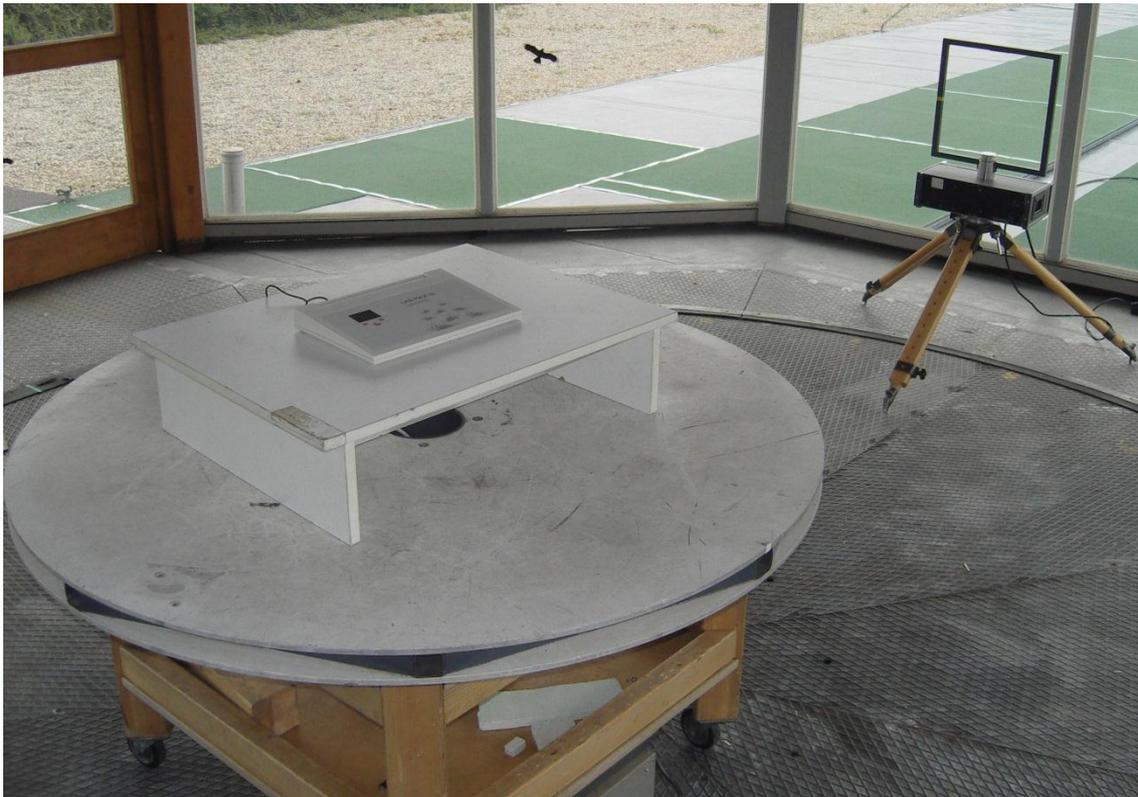

## FCC ID: NDX-LABMAXIII

### 5.3.3 Applicable standard

According to FCC Part 15C, Section 15.209:

The emissions from intentional radiators shall not exceed the effective field strength limits.

### 5.3.4 Description of Measurement

The spurious emissions of the EUT have to be measured at an open area test site in the frequency range from 9 kHz to 1000 MHz using a tuned EMI receiver. The set up of the equipment under test will be in accordance with ANSI C63.4. The measurement has been performed at 3 m. The results have been compared to the limits defined at 30 m or 300 m distances according to FCC Part 15C, Section 15.31(f)(2) using an inverse linear distance extrapolation factor of 40 dB/decade. The final measurement has been performed with the EMI receiver using Quasi peak detector except for the frequency bands 9 kHz to 90 kHz and 110 to 490 kHz where an average detector will be used, according to Section 15.209(d).

The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz:                      RBW:    200 Hz  
 150 kHz – 30 MHz:                    RBW:    9 kHz

Example:

Frequency (MHz)	Level (dB $\mu$ V)	+	Factor (dB)	=	Level dB( $\mu$ V/m)	-	Limit dB( $\mu$ V/m)	=	Delta (dB)
1.705	5	+	20	=	25	-	30	=	-5

### 5.3.5 Test result

Measurement distance: 3 m

Frequency (MHz)	Level PK (dB $\mu$ V)	Level AV (dB $\mu$ V)	Level QP (dB $\mu$ V)	Band- width (kHz)	Correct. factor (dB)	Corrected Level PK dB( $\mu$ V/m)	Corrected Level AV dB( $\mu$ V/m)	Corrected Level QP dB( $\mu$ V/m)	Limit AV dB( $\mu$ V/m)	Delta (dB)
0.268	59.5	40.6	45.7	9	20	79.5	60.6	65.7	95.5	-34.9

Calculated value at distance: 300m

Frequency (MHz)	Level PK (dB $\mu$ V)	Level AV (dB $\mu$ V)	Level QP (dB $\mu$ V)	Band- width (kHz)	Correct. factor (dB)	Corrected Level PK dB( $\mu$ V/m)	Corrected Level AV dB( $\mu$ V/m)	Corrected Level QP dB( $\mu$ V/m)	Limit AV dB( $\mu$ V/m)	Delta (dB)
0.268	-20.5	-39.4	-34.3	9	20	-0.5	-19.4	-14.3	15.5	-34.9

Values at distance: 30m

Frequency (MHz)	Level PK (dB $\mu$ V)	Level AV (dB $\mu$ V)	Level QP (dB $\mu$ V)	Band- width (kHz)	Correct. factor (dB)	Corrected Level PK dB( $\mu$ V/m)	Corrected Level AV dB( $\mu$ V/m)	Corrected Level QP dB( $\mu$ V/m)	Limit dB( $\mu$ V/m)	Delta (dB)
0.49 – 30.0				9	20				29.5	> 40

**FCC ID: NDX-LABMAXIII**

Limit according to FCC Part 15 Subpart 15.209(a):

Frequency (MHz)	Field strength of spurious emissions		Measurement distance (metres)
	( $\mu\text{V/m}$ )	$\text{dB}(\mu\text{V/m})$	
<b>0.009-0.490</b>	<b>2400/F(kHz)</b>	--	<b>300</b>
0.490-1.705	24000/F (kHz)	--	30
1.705-30.0	30	29.5	30

The requirements are **FULFILLED**.

**Remarks:** All other unwanted emissions in the frequency range from 9 kHz to 30 MHz were  
below  $< -10.5 \text{ dB}\mu\text{V/m}$ .  
 \_\_\_\_\_  
 \_\_\_\_\_



**FCC ID: NDX-LABMAXIII**


**5.4 Emission Bandwidth**

For test instruments and accessories used see section 6 Part MB.

**5.4.1 Description of the test location**

Test location: AREA4

**5.4.2 Photo documentation of the test set-up**

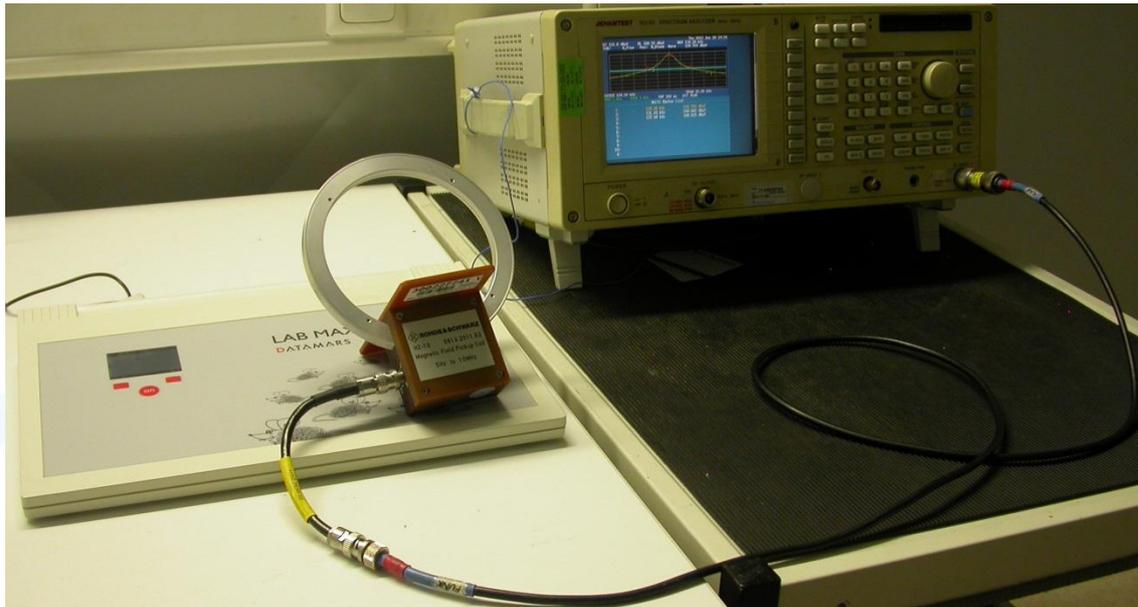

Fundamental [kHz] See Plot 1	20dB Bandwidth F1	20dB Bandwidth F2	Measured Bandwidth [kHz]
134.20	131.85	136.75	4.9

Remarks:

---



---



---



---

FCC ID: NDX-LABMAXIII

5.4.3 Test protocol


Emission Bandwidth plots



Ref 123 dB $\mu$ V Att 50 dB SWT 50 ms

\*RBW 1 kHz Marker 1 [T1 ] 99.78 dB $\mu$ V  
 \*VBW 1 kHz 131.850000000 kHz

1 PK  
MAXH

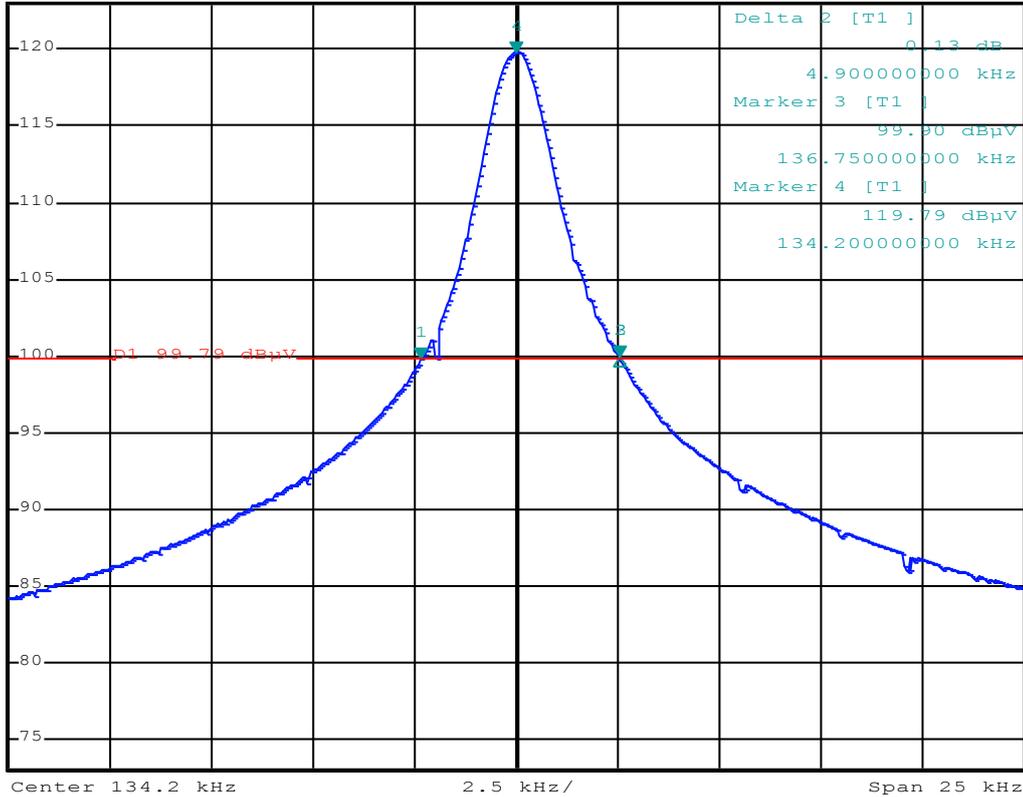

FCC ID: NDX-LABMAXIII

**6 USED TEST EQUIPMENT AND ACCESSORIES**

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
A 4	ESHS 30	02-02/03-05-002	11/07/2013	11/07/2012		
	ESH 2 - Z 5	02-02/20-05-004	12/05/2013	12/05/2012	09/08/2012	09/02/2012
	N-4000-BNC	02-02/50-05-138				
	N-1500-N	02-02/50-05-140				
	ESH 3 - Z 2	02-02/50-05-155			05/10/2012	05/04/2012
	SP 103 /3.5-60	02-02/50-05-182				
CPR 1	FMZB 1516	01-02/24-01-018			16/02/2013	16/02/2012
	ESCI	02-02/03-05-005	21/11/2012	21/11/2011		
	S10162-B	02-02/50-05-031				
	KK-EF393-21N-16	02-02/50-05-033				
	NW-2000-NB	02-02/50-05-113				
MB	FSP 40	02-02/11-11-001	02/09/2012	02/09/2011		
	HZ-10	02-02/24-05-012				
SER 1	FMZB 1516	01-02/24-01-018			16/02/2013	16/02/2012
	ESCI	02-02/03-05-005	21/11/2012	21/11/2011		
	S10162-B	02-02/50-05-031				
	KK-EF393-21N-16	02-02/50-05-033				
	NW-2000-NB	02-02/50-05-113				