



# FCC TEST REPORT

**REPORT NO.:** RF920719R04

**MODEL NO.:** SL-3054PCI Aries

**OEM MODEL NO.:** NL-3054PCI Aries

**RECEIVED:** July 19, 2003

**TESTED:** July 21 ~ August 13, 2003

**APPLICANT:** SENOAO INTERNATIONAL CO., LTD.

**ADDRESS:** 2F, No.531, Chung Cheng Rd., Hsin-Tien, Taipei, Taiwan, R.O.C.

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** 47 14th Lin, Chiapau Tsun, Linko, Taipei, Taiwan, R.O.C.

This test report consists of 63 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



**NVLAP**<sup>®</sup>  
Lab Code: 200102-0

## Table of Contents

1	CERTIFICATION .....	4
2	SUMMARY OF TEST RESULTS .....	5
3	GENERAL INFORMATION .....	6
3.1	GENERAL DESCRIPTION OF EUT .....	6
3.2	DESCRIPTION OF TEST MODES .....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	7
3.4	DESCRIPTION OF SUPPORT UNITS .....	8
4	TEST TYPES AND RESULTS .....	9
4.1	CONDUCTED EMISSION MEASUREMENT .....	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	9
4.1.2	TEST INSTRUMENTS .....	9
4.1.3	TEST PROCEDURES .....	10
4.1.4	DEVIATION FROM TEST STANDARD .....	10
4.1.5	TEST SETUP .....	11
4.1.6	EUT OPERATING CONDITIONS .....	12
4.1.7	TEST RESULTS .....	13
4.2	RADIATED EMISSION MEASUREMENT .....	19
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	19
4.2.2	TEST INSTRUMENTS .....	20
4.2.3	TEST PROCEDURES .....	21
4.2.4	DEVIATION FROM TEST STANDARD .....	21
4.2.5	TEST SETUP .....	22
4.2.6	EUT OPERATING CONDITIONS .....	22
4.2.7	TEST RESULTS .....	23
4.3	6dB BANDWIDTH MEASUREMENT .....	31
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	31
4.3.2	TEST INSTRUMENTS .....	31
4.3.3	TEST PROCEDURE .....	32
4.3.4	DEVIATION FROM TEST STANDARD .....	32
4.3.5	TEST SETUP .....	32
4.3.6	EUT OPERATING CONDITIONS .....	32
4.3.7	TEST RESULTS .....	33
4.4	MAXIMUM PEAK OUTPUT POWER .....	41
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....	41
4.4.2	TEST INSTRUMENTS .....	41

4.4.3	TEST PROCEDURES.....	42
4.4.4	DEVIATION FROM TEST STANDARD .....	42
4.4.5	TEST SETUP .....	42
4.4.6	EUT OPERATING CONDITIONS.....	42
4.4.7	TEST RESULTS.....	43
4.5	POWER SPECTRAL DENSITY MEASUREMENT .....	44
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	44
4.5.2	TEST INSTRUMENTS .....	44
4.5.3	TEST PROCEDURE .....	45
4.5.4	DEVIATION FROM TEST STANDARD .....	45
4.5.5	TEST SETUP .....	45
4.5.6	EUT OPERATING CONDITIONS.....	45
4.5.7	TEST RESULTS.....	46
4.6	BAND EDGES MEASUREMENT .....	54
4.6.1	LIMITS OF BAND EDGES MEASUREMENT .....	54
4.6.2	TEST INSTRUMENTS .....	54
4.6.3	TEST PROCEDURE .....	54
4.6.4	DEVIATION FROM TEST STANDARD .....	54
4.6.5	EUT OPERATING CONDITION .....	55
4.6.6	TEST RESULTS.....	55
4.7	ANTENNA REQUIREMENT.....	60
4.7.1	STANDARD APPLICABLE .....	60
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	60
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	61
6	INFORMATION ON THE TESTING LABORATORIES .....	63



## 1 CERTIFICATION

**PRODUCT :** 802.11g Wireless PCI Adapter

**MODEL NO. :** SL-3054PCI Aries ( for Brand: SENAO)

**OEM MODEL NO. :** NL-3054PCI Aries ( for Brand: EnGenius)

**TEST ITEM :** Engineering Sample

**APPLICANT :** SENOAO INTERNATIONAL CO., LTD.

**STANDARDS :** 47 CFR Part 15, Subpart C (Section 15.247),  
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from July 21 ~ August 13, 2003, The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

**PREPARED BY:** Rennie Wang, **DATE:** August 15, 2003  
Rennie Wang

**APPROVED BY:** Dr. Alan Lane, JVP, **DATE:** August 15, 2003  
Dr. Alan Lane, JVP

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is $-15.55\text{dBuV}$ at 0.638MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is $-2.10\text{dBuV/m}$ at 2389.00 MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

**NOTE:** The information of measurement uncertainty is available upon the customer's request.

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	802.11g Wireless PCI Adapter
<b>MODEL NO.</b>	SL-3054PCI Aries ( for Brand: SENO)
<b>OEM MODEL NO.</b>	NL-3054PCI Aries ( for Brand: EnGenius)
<b>POWER SUPPLY</b>	5VDC from host equipment
<b>MODULATION TYPE</b>	BPSK, QPSK, CCK,16QAM, 64QAM
<b>RADIO TECHNOLOGY</b>	DSSS, OFDM
<b>TRANSFER RATE</b>	1/2/5.5/6/9/11/12/18/24/36/48/54Mbps
<b>FREQUENCY RANGE</b>	2412MHz ~ 2462MHz
<b>BANDWIDTH OF EACH CHANNEL</b>	22MHz
<b>NUMBER OF CHANNEL</b>	11
<b>OUTPUT POWER</b>	22.37dBm
<b>ANTENNA TYPE</b>	Dipole Antenna with 2dBi antenna gain
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	NA
<b>ASSOCIATED DEVICES</b>	NA

**NOTE:**

1. Two models were provided to this EUT. They are identical to each other except for their model name and brand name due to marketing requirement.
2. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
3. The EUT complies with IEEE 802.11g draft standards, and backwards compatible with IEEE 802.11b products.
4. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

**NOTE:**

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
3. Data rate, 11Mbps with CCK technique and 6Mbps with OFDM technique, the worst case, were chosen for final test.

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a 802.11g Wireless PCI Adapter. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 15, Subpart C. (15.247)**  
**ANSI C63.4 : 1992**

All tests have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Personal Computer	HP	Brio BA410	SG12902766	FCC DoC Approved
2	COLOR MONITOR	ADI	CM100	026058T102006 11 A	FCC DoC Approved
3	MODEM	ACEEX	1414	980020503	IFAXDM1414
4	PRINTER	EPSON	LQ-300+	DCGY017096	FCC DoC Approved
5	PS/2 KEYBOARD	FORWARD	FDA-104GA	FDKB8110111	F4ZDA-104G
6	USB MOUSE	Logitech	M-BB48	LZA00354277	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.8 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
4	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
5	1.5 m foil shielded wire, terminated with PS/2 connector via metallic frame, w/o core.
6	NA

**NOTE:** All power cords of the above support units are non shielded (1.8m).

## 4 TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS30	834115/016	Mar. 04, 2004
ROHDE & SCHWARZ Artificial Mains Network (For EUT)	ESH2-Z5	892107/003	Jul. 8, 2004
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Nov. 29, 2003
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/018	Nov. 29, 2003
EMCO L.I.S.N. (For peripherals)	3825/2	9504-2359	Jun. 17, 2004
Software	Cond-V2M3	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C03.01	May. 23, 2004
Terminator (For EMCO LISN)	NA	E1-01-300	Feb. 23, 2004
Terminator (For EMCO LISN)	NA	E1-01-301	Feb. 23, 2004

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. “\*”: These equipment are used for conducted telecom port test only (if tested).
3. The test was performed in ADT Shielded Room No. 3.
4. The VCCI Site Registration No. is C-274.


#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

## 4.1.5 TEST SETUP

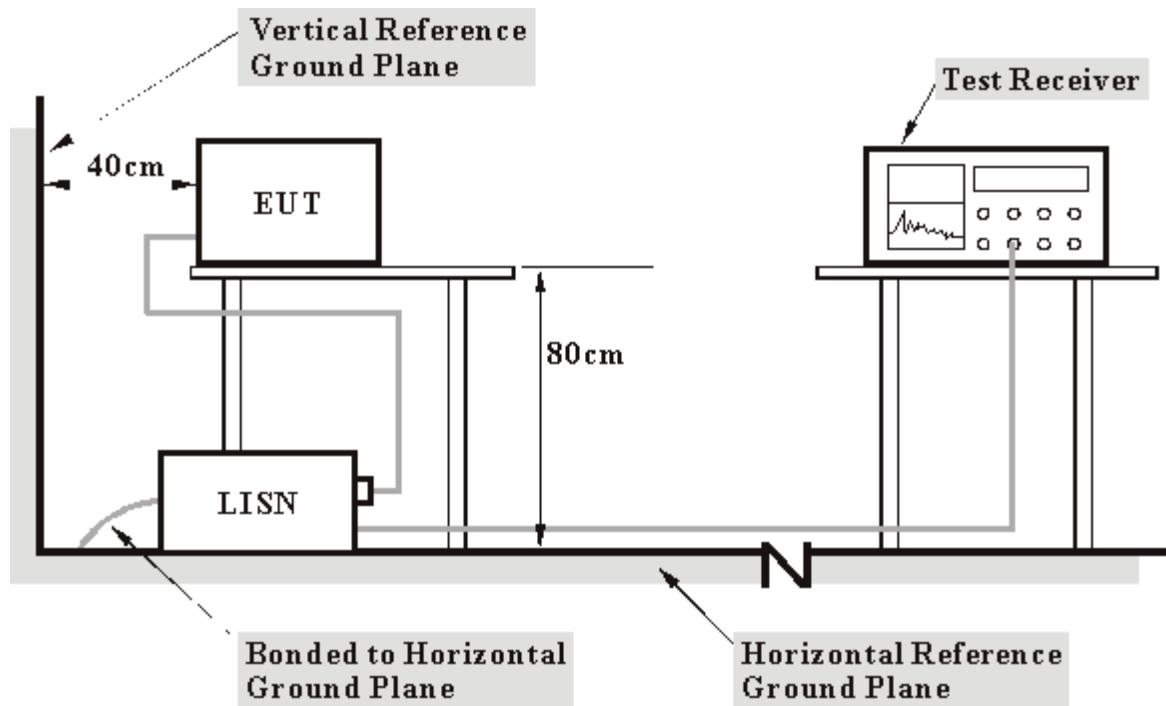

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Connected the EUT to a computer system placed on a testing table.
- b. The computer system ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The computer system sent "H" messages to its screen.
- d. The computer system sent "H" messages to modem.
- e. The computer system sent "H" messages to printer, and the printer prints them on paper.

## 4.1.7 TEST RESULTS

<b>EUT</b>	802.11g Wireless PCI Adapter	<b>MODEL</b>	SL-3054PCI Aries
<b>MODE</b>	Channel 1	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	30 deg. C, 60%RH, 991 hPa		<b>TESTED BY:</b> Steven Lu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.228	0.11	42.78	-	42.89	-	62.52	52.52	-19.62	-
2	0.345	0.17	35.15	-	35.32	-	59.08	49.08	-23.75	-
3	0.532	0.22	37.11	-	37.33	-	56.00	46.00	-18.67	-
4	0.685	0.25	27.55	-	27.80	-	56.00	46.00	-28.20	-
5	1.063	0.31	38.54	-	38.85	-	56.00	46.00	-17.15	-
6	1.484	0.35	37.86	-	38.21	-	56.00	46.00	-17.79	-

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

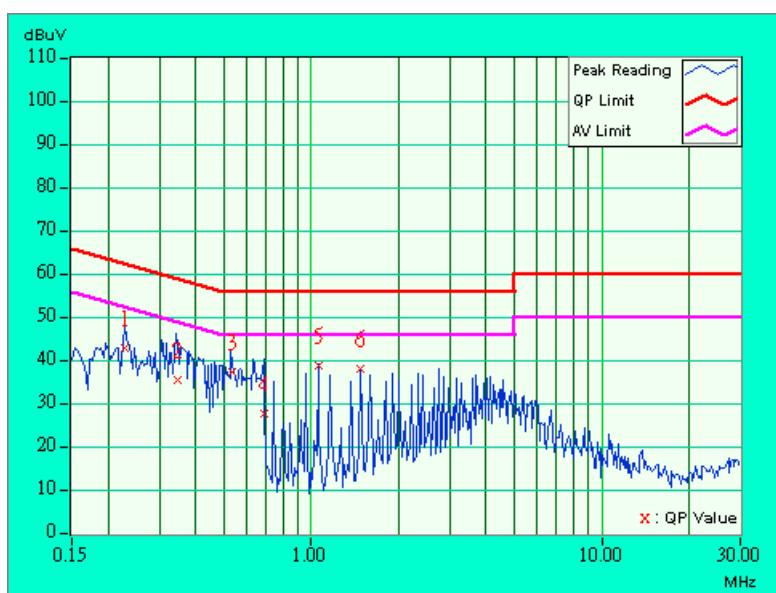


<b>EUT</b>	802.11g Wireless PCI Adapter	<b>MODEL</b>	SL-3054PCI Aries
<b>MODE</b>	Channel 1	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	30 deg. C, 60%RH, 991 hPa		<b>TESTED BY:</b> Steven Lu

No	Freq. Factor	Corr. [MHz]	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.230	0.11	46.57	-	46.68	-	62.47	52.47	-15.78	-
2	0.533	0.22	37.67	-	37.89	-	56.00	46.00	-18.11	-
3	0.638	0.24	38.85	-	39.09	-	56.00	46.00	-16.91	-
4	1.488	0.35	39.34	-	39.69	-	56.00	46.00	-16.31	-
5	2.764	0.40	38.84	-	39.24	-	56.00	46.00	-16.76	-
6	4.039	0.40	37.45	-	37.85	-	56.00	46.00	-18.15	-

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

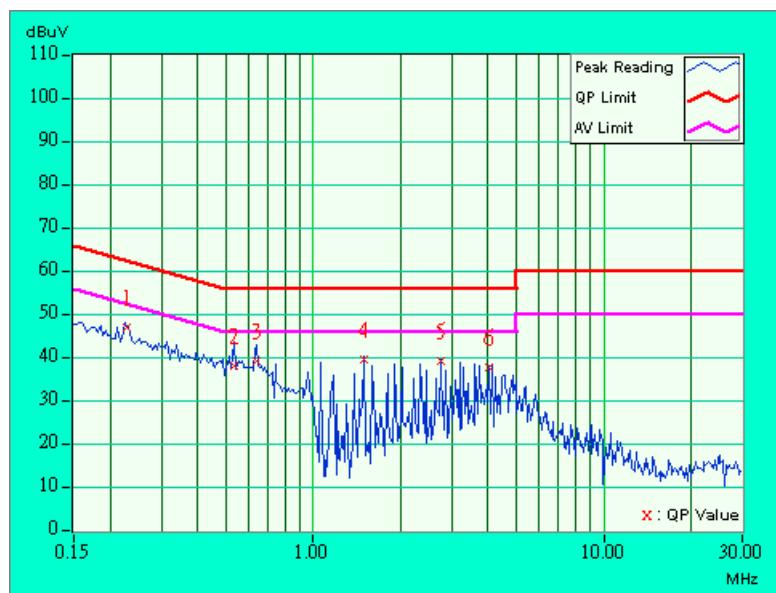


<b>EUT</b>	802.11g Wireless PCI Adapter	<b>MODEL</b>	SL-3054PCI Aries
<b>MODE</b>	Channel 6	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	30 deg. C, 60%RH, 991 hPa		<b>TESTED BY:</b> Steven Lu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.319	0.16	40.14	-	40.30	-	59.73	49.73	-19.43	-
2	0.533	0.22	37.81	-	38.03	-	56.00	46.00	-17.97	-
3	0.638	0.24	39.01	-	39.25	-	56.00	46.00	-16.75	-
4	1.488	0.35	39.36	-	39.71	-	56.00	46.00	-16.29	-
5	1.914	0.39	38.92	-	39.31	-	56.00	46.00	-16.69	-
6	2.766	0.44	38.65	-	39.09	-	56.00	46.00	-16.91	-

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

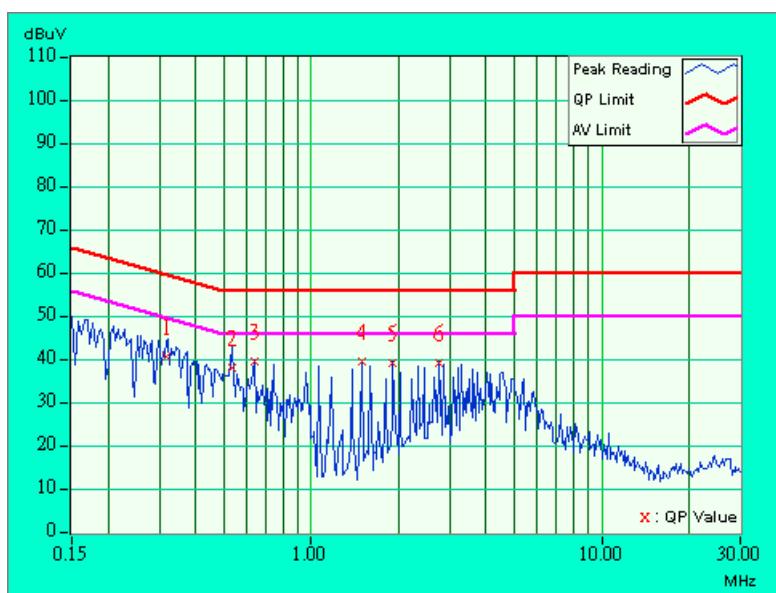


<b>EUT</b>	802.11g Wireless PCI Adapter	<b>MODEL</b>	SL-3054PCI Aries
<b>MODE</b>	Channel 6	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	30 deg. C, 60%RH, 991 hPa		<b>TESTED BY:</b> Steven Lu

No	Freq. Factor	Corr. [MHz]	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.228	0.11	43.16	-	43.27	-	62.52	52.52	-19.24	-
2	0.638	0.24	40.21	-	40.45	-	56.00	46.00	-15.55	-
3	1.172	0.32	37.20	-	37.52	-	56.00	46.00	-18.48	-
4	1.491	0.35	38.44	-	38.79	-	56.00	46.00	-17.21	-
5	2.768	0.40	38.46	-	38.86	-	56.00	46.00	-17.14	-
6	4.043	0.40	35.91	-	36.31	-	56.00	46.00	-19.69	-

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

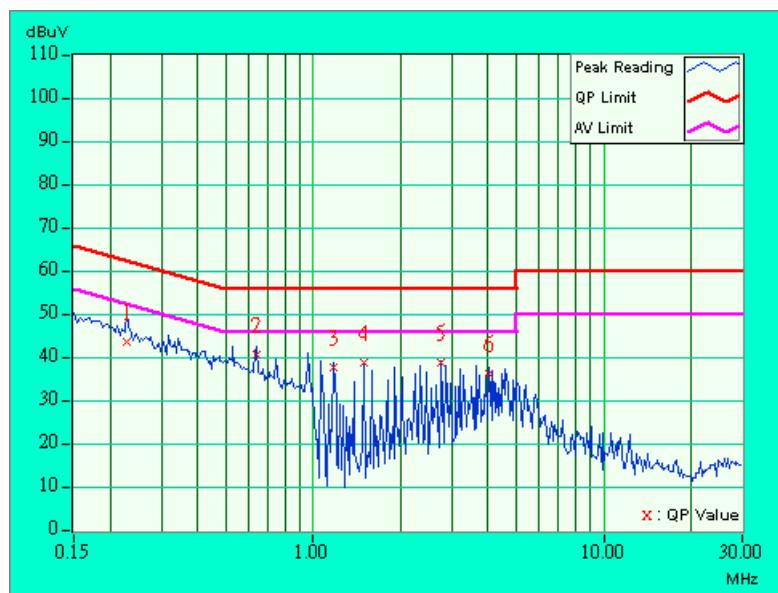


<b>EUT</b>	802.11g Wireless PCI Adapter	<b>MODEL</b>	SL-3054PCI Aries
<b>MODE</b>	Channel 11	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	30 deg. C, 60%RH, 991 hPa		<b>TESTED BY:</b> Steven Lu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.224	0.11	46.88	-	46.99	-	62.66	52.66	-15.67	-
2	0.320	0.16	35.41	-	35.57	-	59.71	49.71	-24.14	-
3	0.533	0.22	37.69	-	37.91	-	56.00	46.00	-18.09	-
4	0.640	0.24	39.17	-	39.41	-	56.00	46.00	-16.59	-
5	1.492	0.35	39.44	-	39.79	-	56.00	46.00	-16.21	-
6	1.918	0.39	39.35	-	39.74	-	56.00	46.00	-16.26	-

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

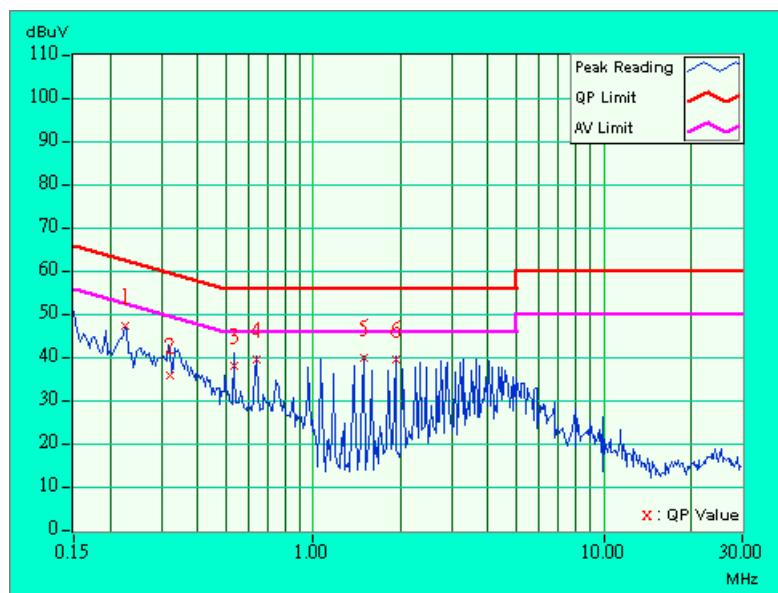


<b>EUT</b>	802.11g Wireless PCI Adapter	<b>MODEL</b>	SL-3054PCI Aries
<b>MODE</b>	Channel 11	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	30 deg. C, 60%RH, 991 hPa		<b>TESTED BY:</b> Steven Lu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.228	0.11	43.70	-	43.81	-	62.52	52.52	-18.70	-
2	0.340	0.17	35.45	-	35.62	-	59.20	49.20	-23.58	-
3	0.533	0.22	38.22	-	38.44	-	56.00	46.00	-17.56	-
4	0.641	0.24	39.68	-	39.92	-	56.00	46.00	-16.08	-
5	0.746	0.26	35.65	-	35.91	-	56.00	46.00	-20.09	-
6	2.344	0.40	38.08	-	38.48	-	56.00	46.00	-17.52	-

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

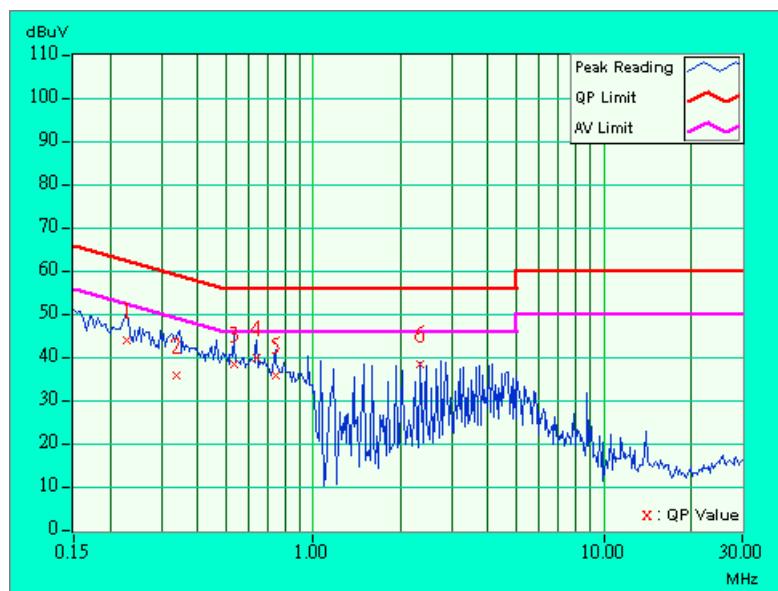

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB<sub>u</sub>V/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	Jun. 10, 2004
* HP Preamplifier	8447D	2944A08485	May. 01, 2004
* HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
* HP Preamplifier	8449B	3008A01292	Aug. 13, 2004
ROHDE & SCHWARZ TEST RECEIVER	ESI7	838496/016	Feb. 23, 2004
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Feb. 13, 2004
SCHAFFNER Tunable Dipole Antenna SCHWARZBECK Tunable Dipole Antenna	VHBA 9123 UHA 9105	459 977	Nov. 22, 2003
* CHASE BILOG Antenna	CBL6112A	2221	July 26, 2004
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	Jun 30, 2004
* EMCO Horn Antenna	3115	9312-4192	Mar. 23 2004
* EMCO Turn Table	1060	1115	NA
* CHANCE Tower	CM-AT40	CM-A010	NA
* Software	ADT_Radiate_d_V5.14	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Jan. 05. 2004
* TIMES RF cable	LMR-600	CABLE-ST5-01	Jan. 05. 2004

**NOTE:**

1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. “\*” = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. 5.
5. The VCCI Site Registration No. is R-1039.

#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.5 TEST SETUP

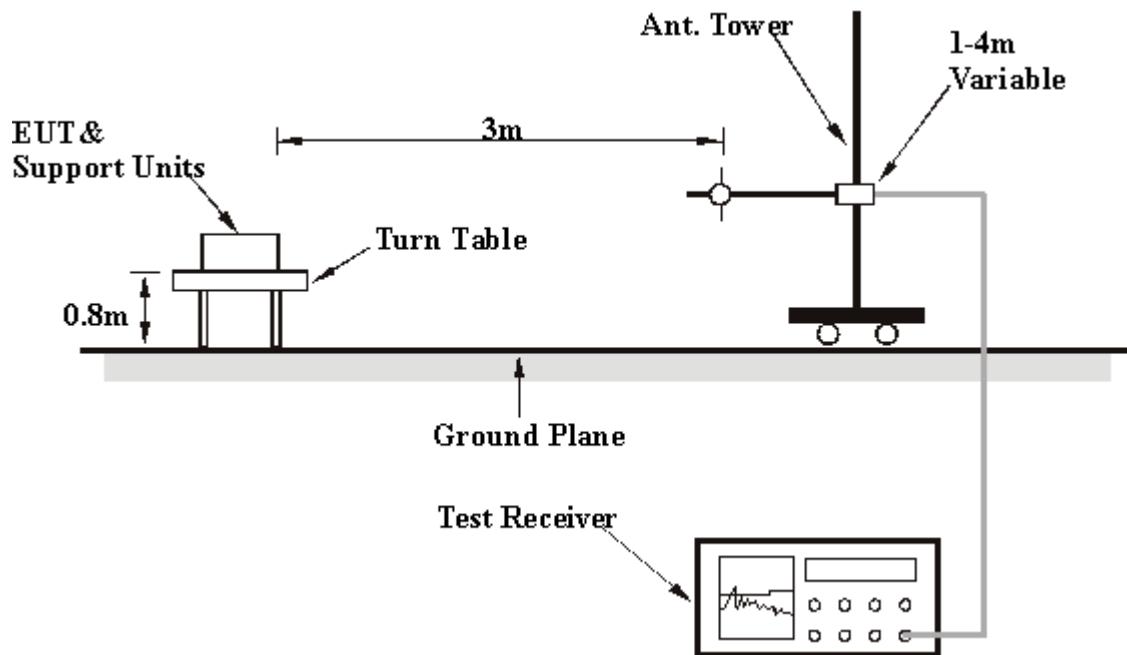

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

## 4.2.7 TEST RESULTS

<b>EUT</b>	802.11g Wireless PCI Adapter	<b>MODEL</b>	SL-3054PCI Aries
<b>CHANNEL</b>	Channel 11	<b>FREQUENCY RANGE</b>	Below 1000 MHz
<b>MODE</b>	CCK & OFDM	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>ENVIRONMENTAL CONDITIONS</b>	30 deg. C, 60 % RH, 991 hPa	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>TESTED BY</b>	Hardaway Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	139.98	18.4 QP	43.50	-25.10	1.16 H	1	6.40	12.00
2	149.99	22.9 QP	43.50	-20.60	1.29 H	169	11.50	11.40
3	275.91	40.6 QP	46.00	-5.40	1.16 H	185	25.30	15.30
4	299.89	34.4 QP	46.00	-11.60	1.57 H	228	18.80	15.70
5	375.00	34.6 QP	46.00	-11.40	1.86 H	229	17.30	17.30
6	400.00	28.7 QP	46.00	-17.30	1.00 H	102	10.50	18.20
7	498.29	39.8 QP	46.00	-6.20	1.78 H	39	19.70	20.10
8	996.60	44.9 QP	54.00	-9.10	1.55 H	338	19.70	25.10

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.

<b>EUT</b>	802.11g Wireless PCI Adapter	<b>MODEL</b>	SL-3054PCI Aries
<b>CHANNEL</b>	Channel 11	<b>FREQUENCY RANGE</b>	Below 1000 MHz
<b>MODE</b>	CCK & OFDM	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>ENVIRONMENTAL CONDITIONS</b>	30 deg. C, 60 % RH, 991 hPa	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>TESTED BY</b>	Hardaway Lee		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	122.88	28.9 QP	43.50	-14.60	1.37 V	331	16.00	12.90
2	139.80	27.7 QP	43.50	-15.80	1.41 V	0	15.70	12.10
3	150.00	24.9 QP	43.50	-18.60	1.59 V	1	13.60	11.40
4	174.98	31.8 QP	43.50	-11.70	1.64 V	72	21.30	10.50
5	203.77	30.5 QP	43.50	-13.00	1.00 V	1	19.50	11.00
6	224.98	28.5 QP	46.00	-17.50	1.22 V	106	16.30	12.20
7	269.92	34.3 QP	46.00	-11.70	1.37 V	142	19.20	15.20
8	275.91	37.3 QP	46.00	-8.70	1.00 V	127	22.00	15.30
9	300.00	30.6 QP	46.00	-15.40	1.39 V	0	14.90	15.70
10	375.02	35.8 QP	46.00	-10.20	1.36 V	297	18.50	17.30
11	399.94	32.4 QP	46.00	-13.60	1.23 V	313	14.10	18.20
12	498.32	40.6 QP	46.00	-5.40	1.20 V	206	20.50	20.10
13	592.47	41.1 QP	46.00	-4.90	1.00 V	0	19.10	22.10
14	996.60	41.5 QP	54.00	-12.50	1.27 V	311	16.40	25.10

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.

<b>EUT</b>	802.11g Wireless PCI Adapter	<b>MODEL</b>	SL-3054PCI Aries
<b>CHANNEL</b>	Channel 1	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>MODE</b>	CCK	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>ENVIRONMENTAL CONDITIONS</b>	25 deg. C, 60 % RH, 991 hPa	<b>DETECTOR FUNCTION</b>	Peak / Average
<b>TESTED BY</b>	Gary Chang		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2412.00	108.8 PK			1.41 H	241	79.10	29.70
1	*2412.00	101.8 AV			1.41 H	241	72.10	29.70
2	4874.00	51.4 PK	74.00	-22.60	1.50 H	54	15.90	35.50
2	4874.00	40.6 AV	54.00	-13.40	1.50 H	54	5.10	35.50
3	6336.00	49.5 PK	74.00	-24.50	1.37 H	221	11.20	38.30
4	7236.00	49.9 PK	74.00	-24.10	1.28 H	227	8.80	41.10

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.00	60.1 PK	74.00	-13.90	1.00 V	210	30.50	29.60
1	2389.00	51.9 AV	54.00	-2.10	1.00 V	210	22.30	29.60
2	*2412.00	109.8 PK			1.00 V	210	80.10	29.70
2	*2412.00	102.0 AV			1.00 V	210	72.30	29.70
3	4824.00	61.3 PK	74.00	-12.70	1.04 V	196	26.00	35.30
3	4824.00	45.2 AV	54.00	-8.80	1.04 V	196	10.00	35.30
4	6336.00	48.9 PK	74.00	-25.10	1.10 V	187	10.60	38.30
5	7236.00	50.9 PK	74.00	-23.10	1.25 V	164	9.80	41.10

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level – Limit value.
4. “\*”: Fundamental frequency.
5. The other emission levels were very low against the limit.

<b>EUT</b>	802.11g Wireless PCI Adapter	<b>MODEL</b>	SL-3054PCI Aries
<b>CHANNEL</b>	Channel 6	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>MODE</b>	CCK	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>ENVIRONMENTAL CONDITIONS</b>	25 deg. C, 60 % RH, 991 hPa	<b>DETECTOR FUNCTION</b>	Peak / Average
<b>TESTED BY</b>	Gary Chang		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	110.0 PK			1.31 H	234	80.30	29.70
1	*2437.00	103.7 AV			1.31 H	234	74.00	29.70
2	4874.00	50.7 PK	74.00	-23.30	1.61 H	233	15.20	35.50
3	6336.00	49.5 PK	74.00	-24.50	1.39 H	114	11.20	38.30
4	7310.00	51.5 PK	74.00	-22.50	1.50 H	5	10.20	41.30
4	7310.00	41.1 AV	54.00	-12.90	1.50 H	5	-0.10	41.30

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	110.4 PK			1.25 V	206	80.70	29.70
1	*2437.00	102.2 AV			1.25 V	206	72.50	29.70
2	4874.00	65.2 PK	74.00	-8.80	1.02 V	197	29.70	35.50
2	4874.00	51.3 AV	54.00	-2.70	1.02 V	197	15.80	35.50
3	6336.00	49.1 PK	74.00	-24.90	1.46 V	271	10.80	38.30
4	7311.00	51.3 PK	74.00	-22.70	1.37 V	354	10.00	41.30
4	7311.00	41.1 AV	54.00	-12.90	1.37 V	354	-0.20	41.30

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level – Limit value.
4. “\*”: Fundamental frequency.
5. The other emission levels were very low against the limit.

<b>EUT</b>	802.11g Wireless PCI Adapter	<b>MODEL</b>	SL-3054PCI Aries
<b>CHANNEL</b>	Channel 11	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>MODE</b>	CCK	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>ENVIRONMENTAL CONDITIONS</b>	25 deg. C, 60 % RH, 991 hPa	<b>DETECTOR FUNCTION</b>	Peak / Average
<b>TESTED BY</b>	Gary Chang		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.5 PK			1.23 H	227	73.60	29.80
1	*2462.00	96.3 AV			1.23 H	227	66.50	29.80
2	4924.00	49.1 PK	74.00	-24.90	1.28 H	54	13.40	35.70
3	6336.00	50.0 PK	74.00	-24.00	1.37 H	154	11.70	38.30
4	7385.00	50.9 PK	74.00	-23.10	1.27 H	61	9.50	41.50

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	105.8 PK			1.11 V	34	76.00	29.80
1	*2462.00	99.0 AV			1.11 V	34	69.20	29.80
2	2483.60	54.7 PK	74.00	-19.30	1.11 V	34	24.80	29.90
2	2483.60	47.9 AV	54.00	-6.10	1.11 V	34	18.00	29.90
3	4924.00	53.6 PK	74.00	-20.40	1.22 V	149	18.00	35.70
3	4924.00	39.1 AV	54.00	-14.90	1.22 V	149	3.40	35.70
4	6336.00	50.4 PK	74.00	-23.60	1.08 V	117	12.10	38.30
5	7385.00	51.1 PK	74.00	-22.90	1.26 V	170	9.60	41.50
5	7385.00	40.8 AV	54.00	-13.20	1.26 V	170	-0.70	41.50

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level – Limit value.
4. “\*”: Fundamental frequency.
5. The other emission levels were very low against the limit.

<b>EUT</b>	802.11g Wireless PCI Adapter	<b>MODEL</b>	SL-3054PCI Aries
<b>CHANNEL</b>	Channel 1	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>MODE</b>	OFDM	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>ENVIRONMENTAL CONDITIONS</b>	25 deg. C, 60 % RH, 991 hPa	<b>DETECTOR FUNCTION</b>	Peak / Average
<b>TESTED BY</b>	Gary Chang		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.00	60.4 PK	74.00	-13.60	1.33 H	230	30.80	29.60
1	2389.00	51.8 AV	54.00	-2.20	1.33 H	230	22.20	29.60
2	*2412.00	107.6 PK			1.33 H	230	77.90	29.70
2	*2412.00	98.3 AV			1.33 H	230	68.60	29.70
3	4824.00	49.7 PK	74.00	-24.30	1.17 H	84	14.40	35.30
4	6336.00	48.0 PK	74.00	-26.00	1.14 H	85	9.60	38.30
5	7236.00	51.6 PK	74.00	-22.40	1.24 H	308	10.50	41.10
5	7236.00	40.8 AV	54.00	-13.20	1.24 H	308	-0.30	41.10

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.00	56.2 PK	74.00	-17.80	1.52 V	36	26.60	29.60
1	2389.00	48.4 AV	54.00	-5.60	1.52 V	36	18.80	29.60
2	*2412.00	104.0 PK			1.52 V	36	74.30	29.70
2	*2412.00	96.2 AV			1.52 V	36	66.50	29.70
3	4824.00	60.1 PK	74.00	-13.90	1.01 V	45	24.80	35.30
3	4824.00	46.0 AV	54.00	-8.00	1.01 V	45	10.70	35.30
4	6336.00	48.0 PK	74.00	-26.00	1.25 V	5	9.70	38.30
5	7236.00	50.9 PK	74.00	-23.10	1.22 V	171	9.80	41.10

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level – Limit value.
4. “\*”: Fundamental frequency.
5. The other emission levels were very low against the limit.

<b>EUT</b>	802.11g Wireless PCI Adapter	<b>MODEL</b>	SL-3054PCI Aries
<b>CHANNEL</b>	Channel 6	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>MODE</b>	OFDM	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>ENVIRONMENTAL CONDITIONS</b>	22 deg. C, 60 % RH, 991 hPa	<b>DETECTOR FUNCTION</b>	Peak / Average
<b>TESTED BY</b>	Gary Chang		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	109.0 PK			1.30 H	233	79.30	29.70
1	*2437.00	100.9 AV			1.30 H	233	71.20	29.70
2	4874.00	54.6 PK	74.00	-19.40	1.12 H	4	19.10	35.50
2	4874.00	40.5 AV	54.00	-13.50	1.12 H	4	5.00	35.50
3	6336.00	48.9 PK	74.00	-25.10	1.12 H	35	10.60	38.30
4	7310.00	51.2 PK	74.00	-22.80	1.36 H	85	9.90	41.30
4	7310.00	41.0 AV	54.00	-13.00	1.36 H	85	-0.30	41.30

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	107.0 PK			1.41 V	66	77.30	29.70
1	*2437.00	97.7 AV			1.41 V	66	68.00	29.70
2	4874.00	62.6 PK	74.00	-11.40	1.37 V	357	27.10	35.50
2	4874.00	49.4 AV	54.00	-4.60	1.37 V	357	13.90	35.50
3	6336.00	48.6 PK	74.00	-25.40	1.18 V	1	10.20	38.30
4	7311.00	52.8 PK	74.00	-21.20	1.13 V	221	11.50	41.30
4	7311.00	40.6 AV	54.00	-13.40	1.13 V	221	-0.60	41.30

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level – Limit value.
4. “\*”: Fundamental frequency.
5. The other emission levels were very low against the limit.

<b>EUT</b>	802.11g Wireless PCI Adapter	<b>MODEL</b>	SL-3054PCI Aries
<b>CHANNEL</b>	Channel 11	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>MODE</b>	OFDM	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>ENVIRONMENTAL CONDITIONS</b>	22 deg. C, 60 % RH, 991 hPa	<b>DETECTOR FUNCTION</b>	Peak / Average
<b>TESTED BY</b>	Gary Chang		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	99.3 PK			1.12 H	249	69.50	29.80
1	*2462.00	90.9 AV			1.12 H	249	61.10	29.80
2	4924.00	45.8 PK	74.00	-28.20	1.13 H	358	10.10	35.70
3	6336.00	49.0 PK	74.00	-25.00	1.29 H	31	10.70	38.30
4	7386.00	52.1 PK	74.00	-21.90	1.16 H	291	10.60	41.50
4	7386.00	40.6 AV	54.00	-13.40	1.16 H	291	-0.90	41.50

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.0 PK			1.13 V	65	71.20	29.80
1	*2462.00	93.0 AV			1.13 V	65	63.20	29.80
2	2483.60	58.0 PK	74.00	-16.00	1.13 V	65	28.10	29.90
2	2483.60	50.0 AV	54.00	-4.00	1.13 V	65	20.10	29.90
3	4924.00	51.9 PK	74.00	-22.10	1.46 V	126	16.30	35.70
3	4924.00	38.6 AV	54.00	-15.40	1.46 V	126	2.90	35.70
4	6336.00	48.1 PK	74.00	-25.90	1.06 V	37	9.80	38.30
5	7388.00	51.3 PK	74.00	-22.70	1.25 V	34	9.80	41.50
5	7388.00	40.3 AV	54.00	-13.70	1.25 V	34	-1.20	41.50

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level – Limit value.
4. “\*”: Fundamental frequency.
5. The other emission levels were very low against the limit.

### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

**NOTE:**

- 1.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.3.5 TEST SETUP



#### 4.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 4.3.7 TEST RESULTS

<b>EUT</b>	802.11g Wireless PCI Adapter	<b>MODEL</b>	SL-3054PCI Aries
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 61%RH, 991 hPa
<b>MODE</b>	CCK	<b>TESTED BY</b>	Ansen Lei

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	12.44	0.5	PASS
6	2437	11.92	0.5	PASS
11	2462	12.28	0.5	PASS


CH1

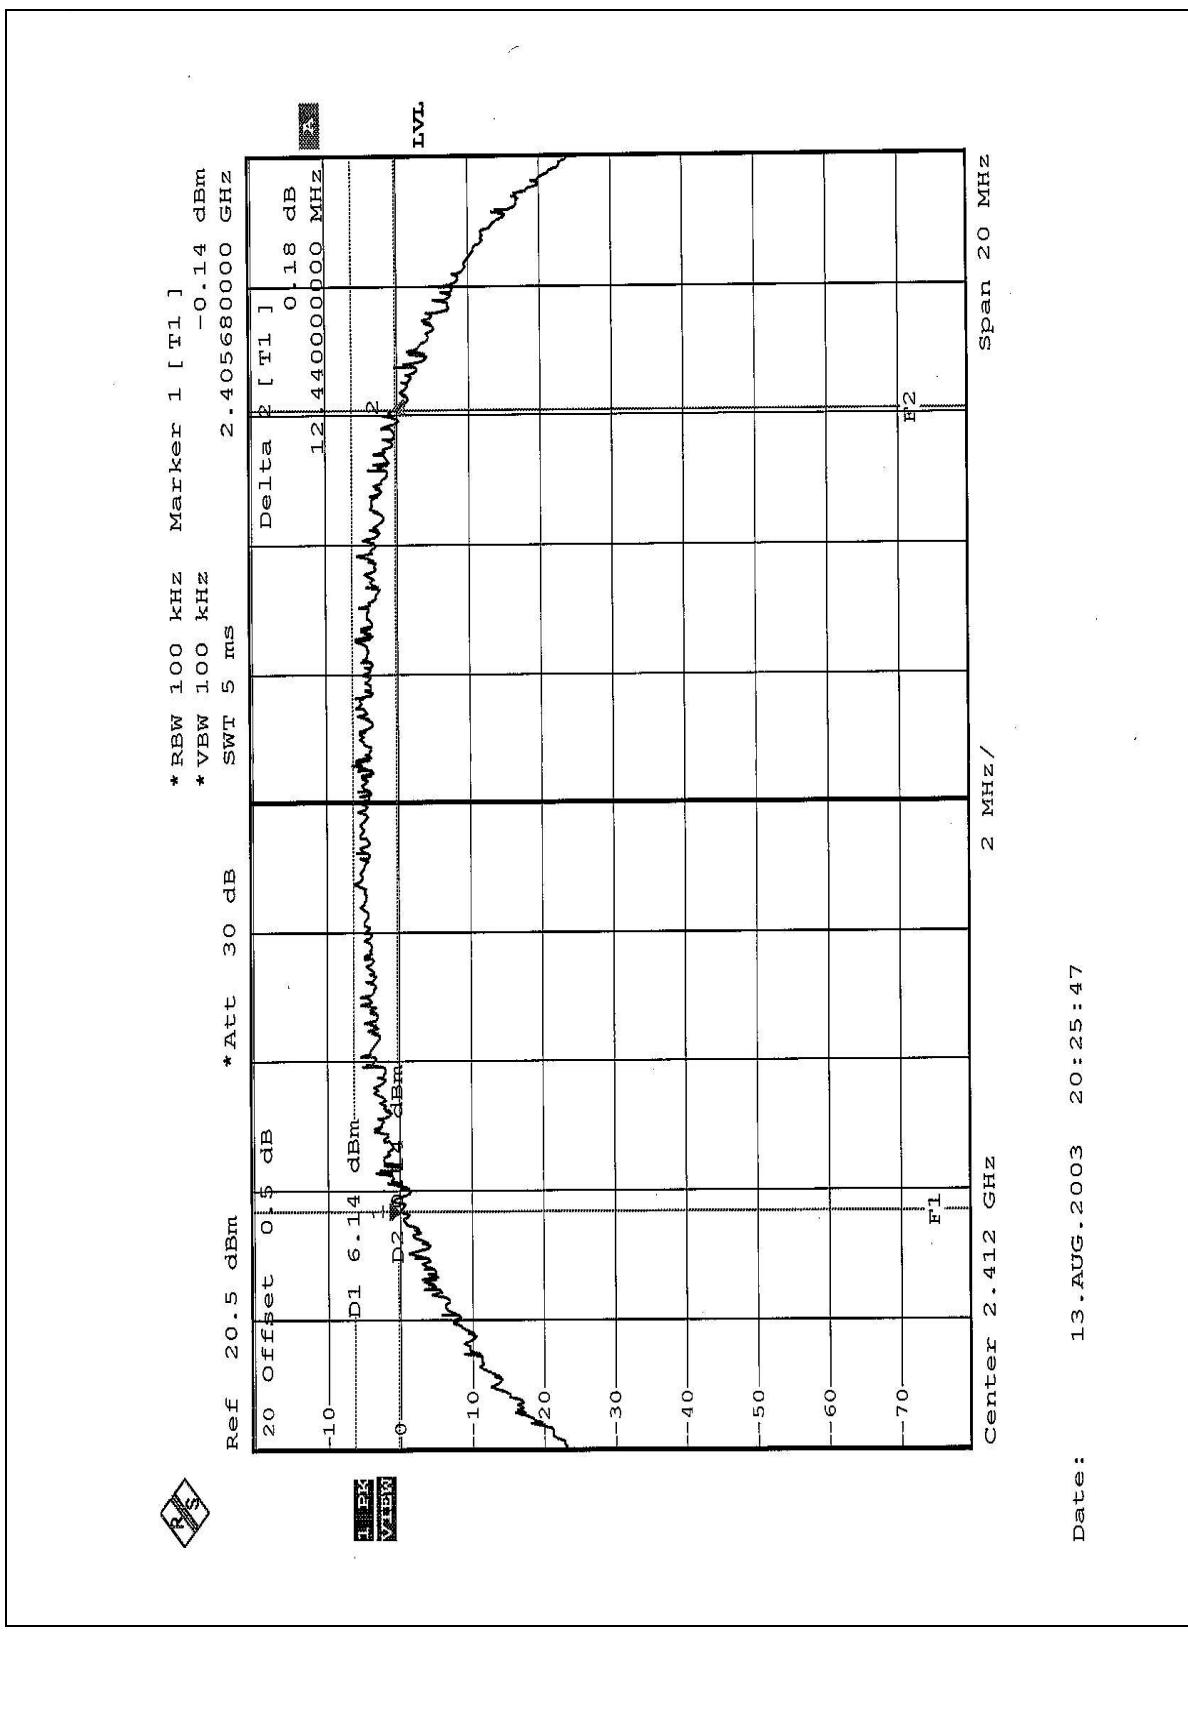

Date :

13.AUG.2003 20:25:47


CH6

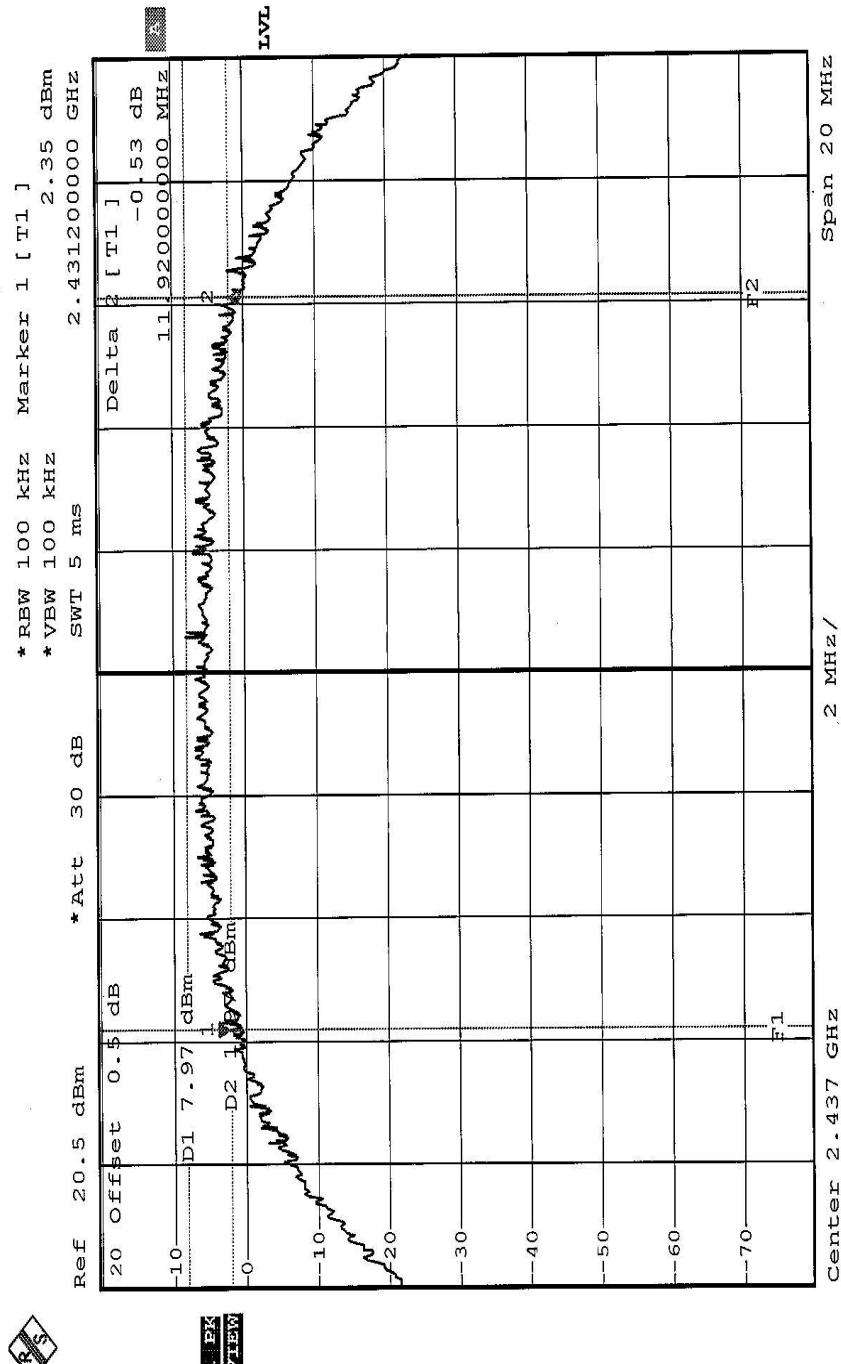

REF

Date: 13-AUG-2003 20:32:03

CH11

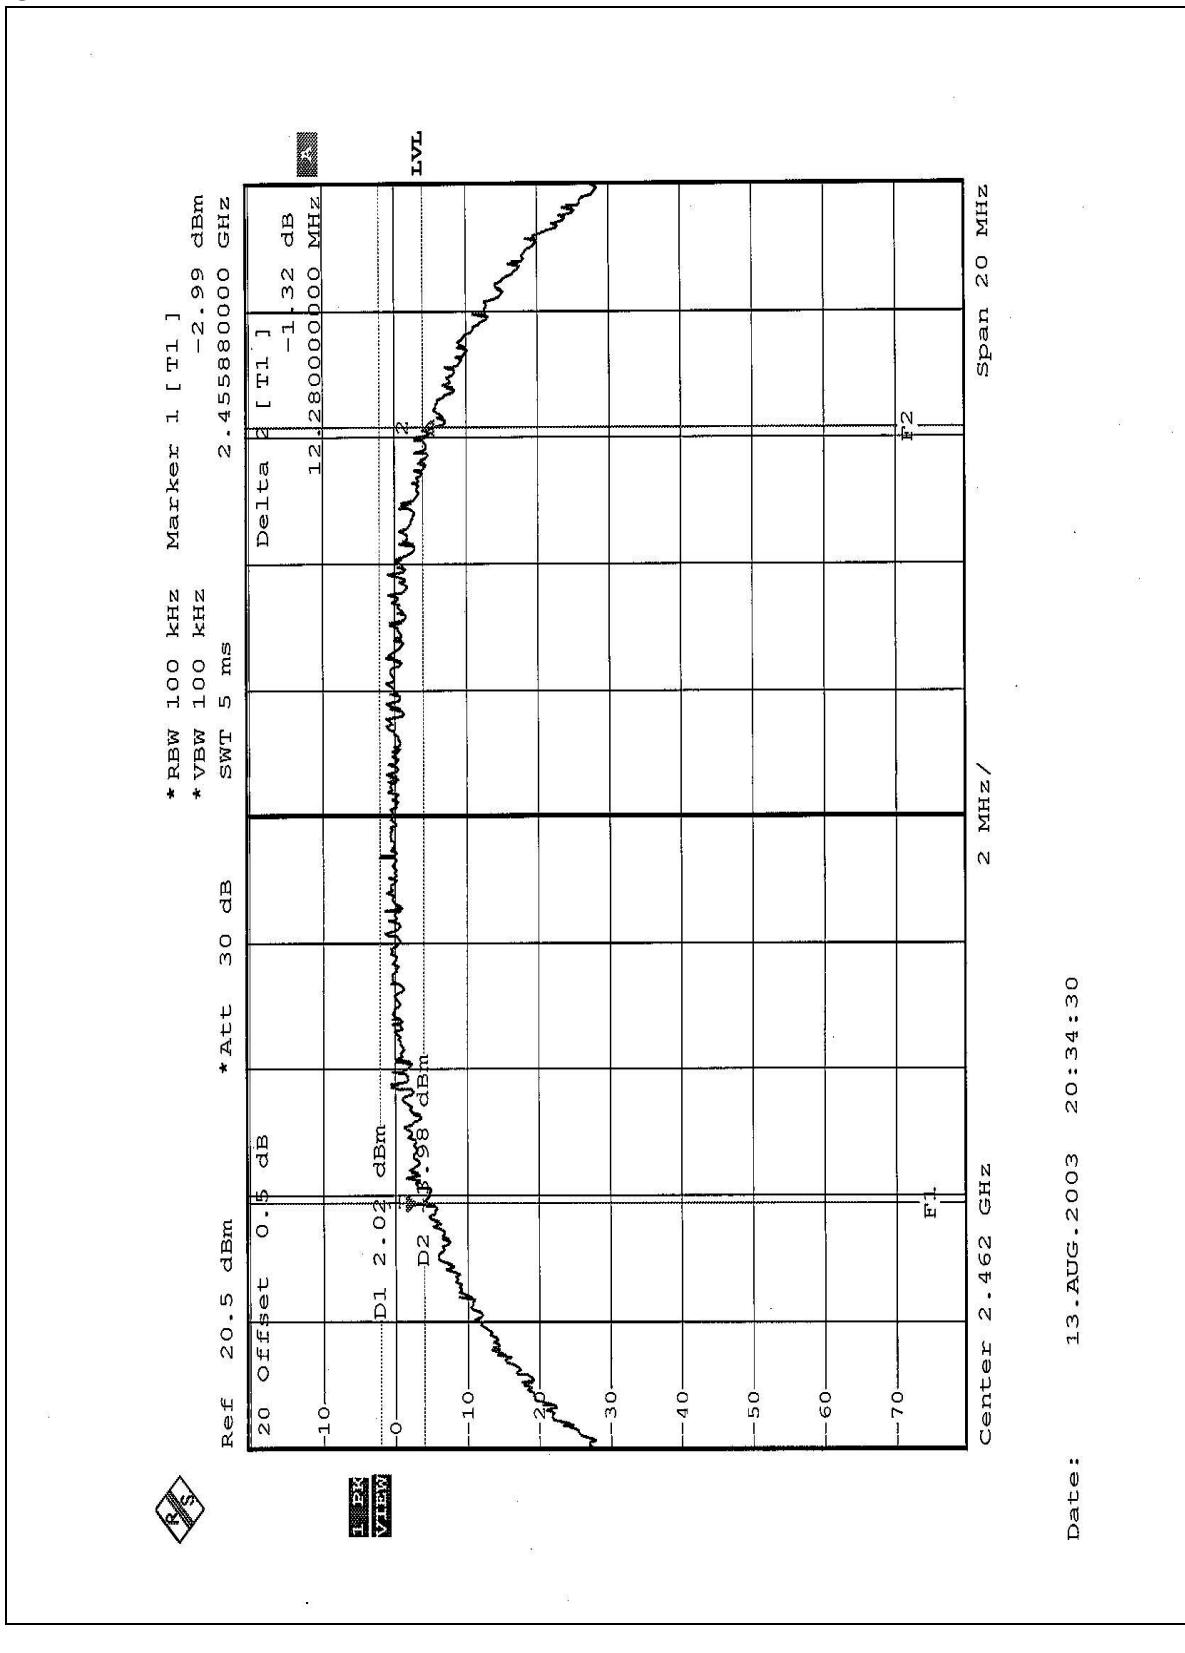

Date: 13-AUG-2003 20:34:30


<b>EUT</b>	802.11g Wireless PCI Adapter	<b>MODEL</b>	SL-3054PCI Aries
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 61%RH, 991 hPa
<b>MODE</b>	OFDM	<b>TESTED BY</b>	Ansen Lei

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.56	0.5	PASS
6	2437	16.56	0.5	PASS
11	2462	16.52	0.5	PASS

FCC ID: NI3-AT30V17




CH1

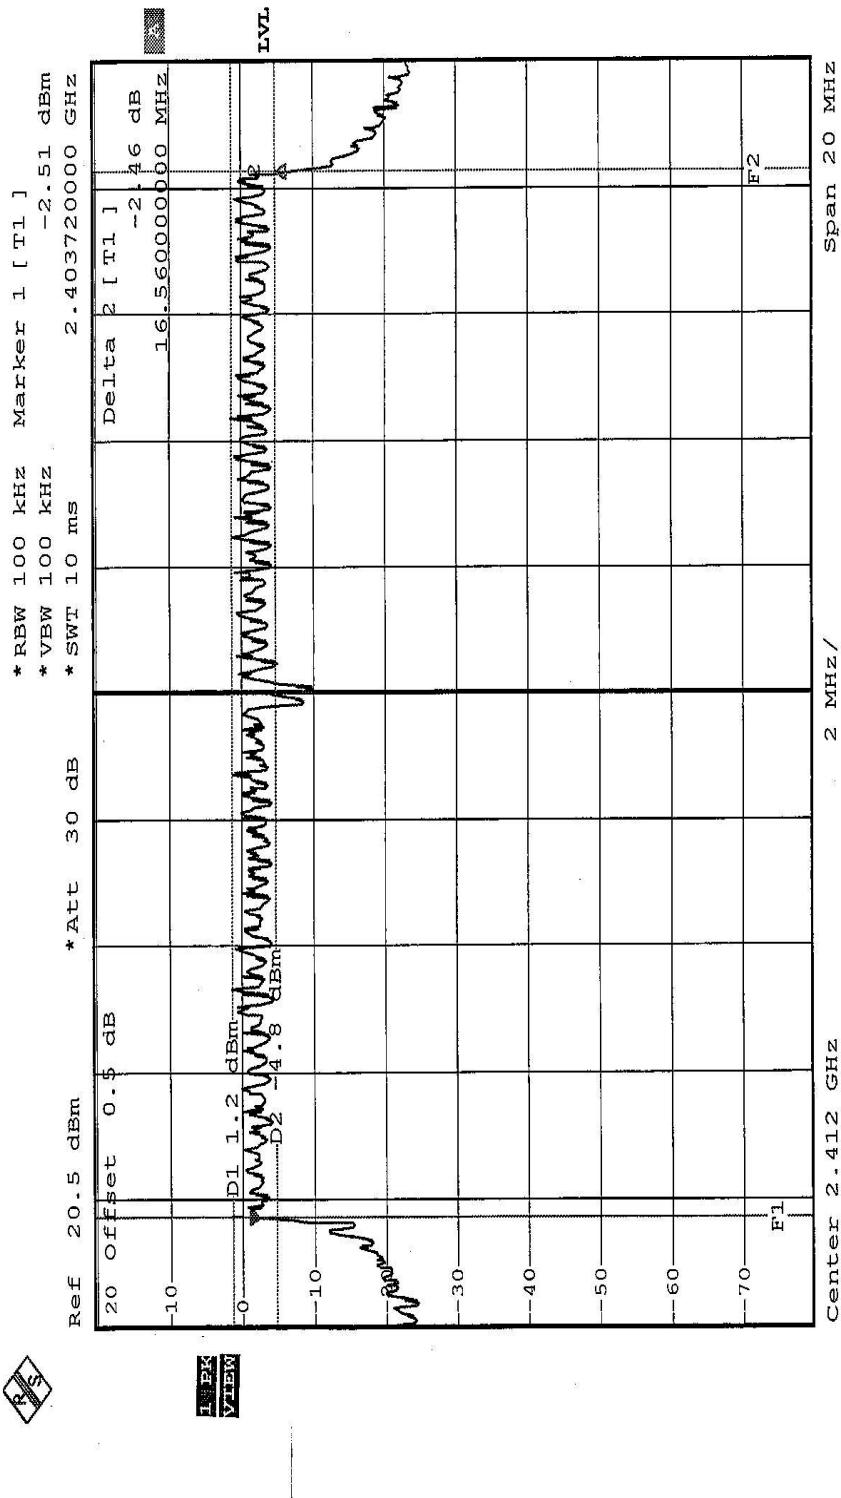


Date: 13.AUG.2003 21:42:25

CH6

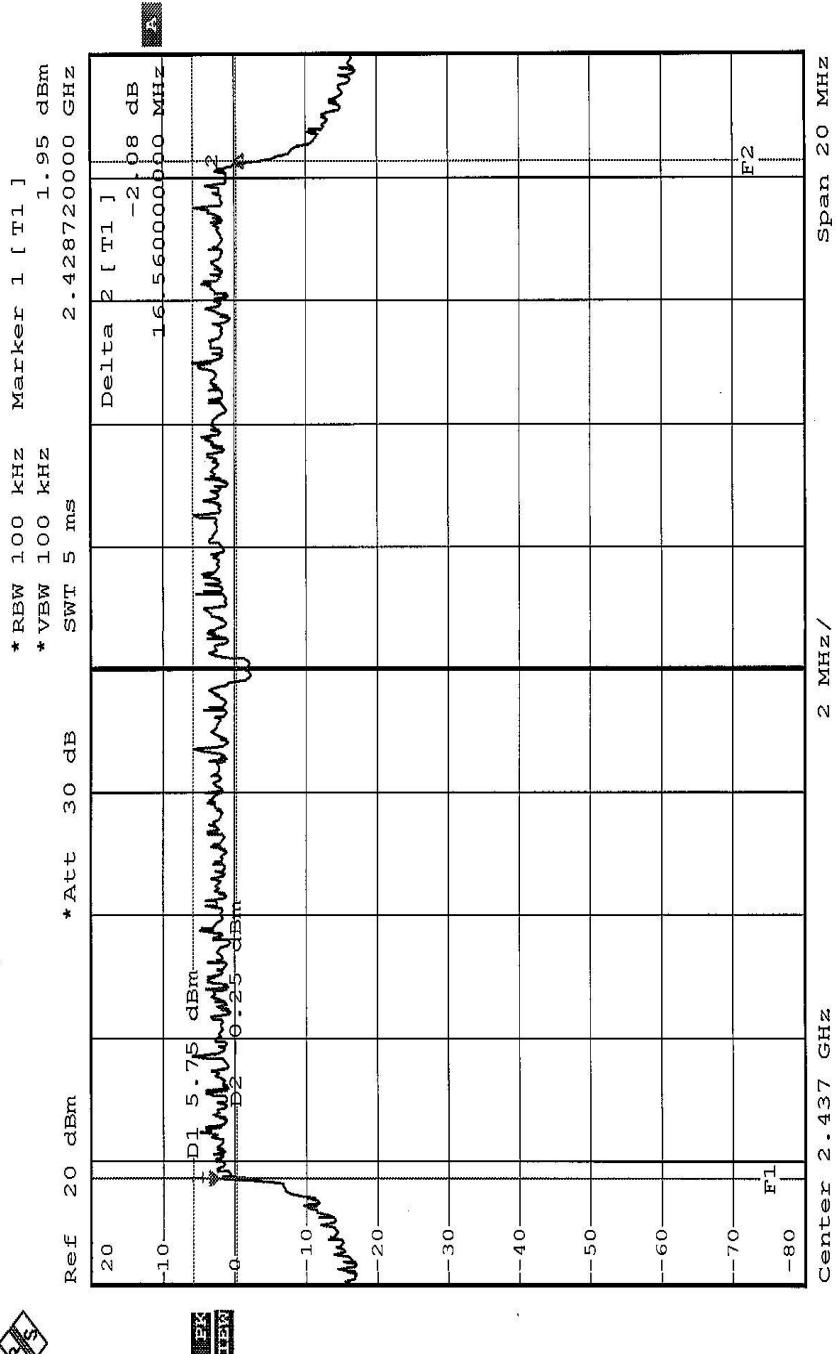

Date: 13. AUG. 2003 22:13:13

CH11

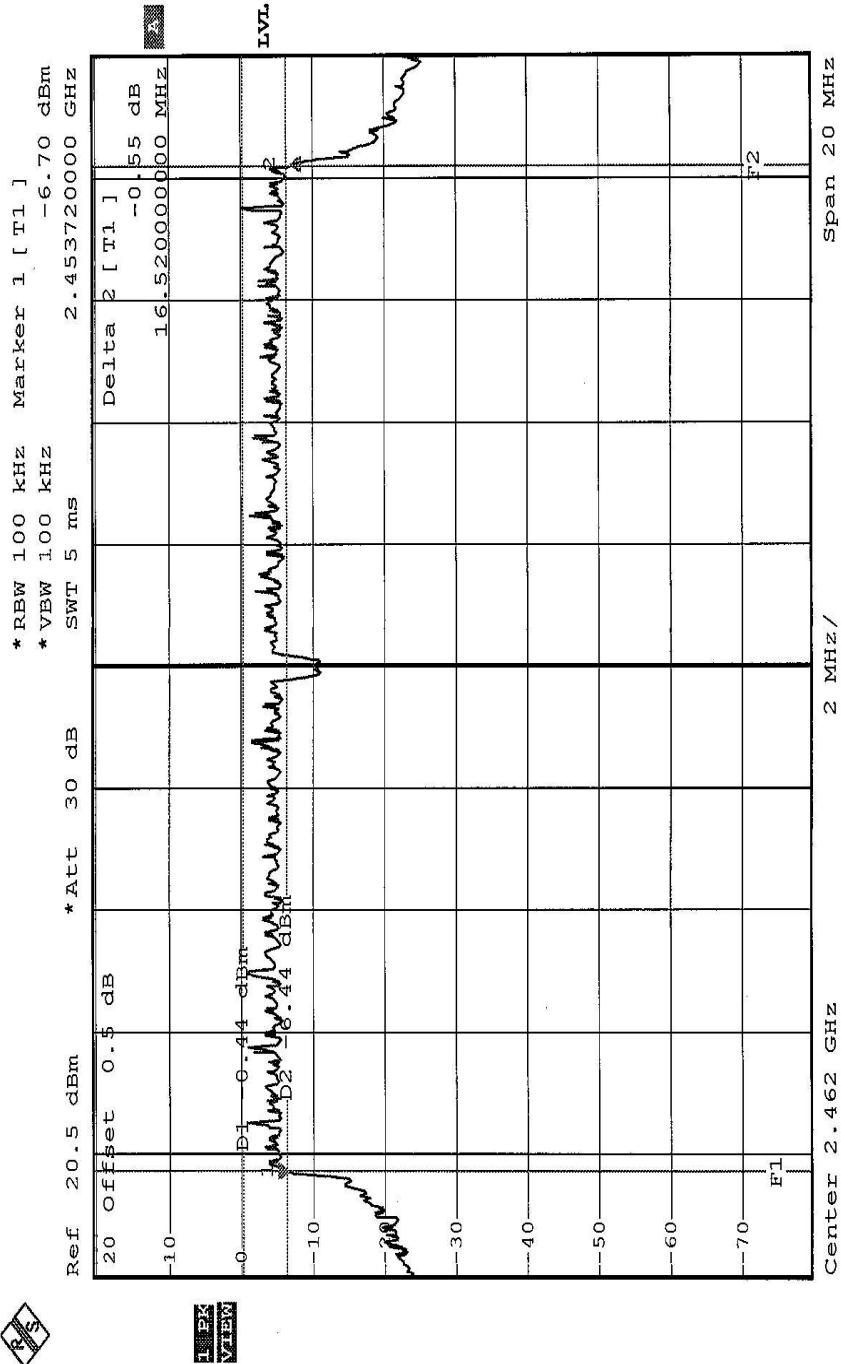

Date: 13.AUG.2003 22:17:31

#### 4.4 MAXIMUM PEAK OUTPUT POWER

##### 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

##### 4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004
R&S SIGNAL GENERATOR	SMP04	100011	May 28, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	B048470	Mar. 05, 2004
NARDA DETECTOR	4503A	FSCM99899	NA

**NOTE:**

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator . The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

#### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.4.5 TEST SETUP



#### 4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

## 4.4.7 TEST RESULTS

<b>EUT</b>	802.11g Wireless PCI Adapter	<b>MODEL</b>	SL-3054PCI Aries
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 61%RH, 991 hPa
<b>MODE</b>	CCK	<b>TESTED BY</b>	Ansen Lei

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.62	30	PASS
6	2437	18.68	30	PASS
11	2462	12.21	30	PASS

<b>EUT</b>	802.11g Wireless PCI Adapter	<b>MODEL</b>	SL-3054PCI Aries
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 61%RH, 991 hPa
<b>MODE</b>	OFDM	<b>TESTED BY</b>	Ansen Lei

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	18.72	30	PASS
6	2437	22.37	30	PASS
11	2462	14.78	30	PASS

## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2004

**NOTE:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

#### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.5.5 TEST SETUP



#### 4.5.6 EUT OPERATING CONDITIONS


Same as 4.3.6

## 4.5.7 TEST RESULTS

<b>EUT</b>	802.11g Wireless PCI Adapter	<b>MODEL</b>	SL-3054PCI Aries
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 61%RH, 991 hPa
<b>MODE</b>	CCK	<b>TESTED BY</b>	Ansen Lei


CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-5.90	8	PASS
6	2437	-5.57	8	PASS
11	2462	-10.28	8	PASS

CH1

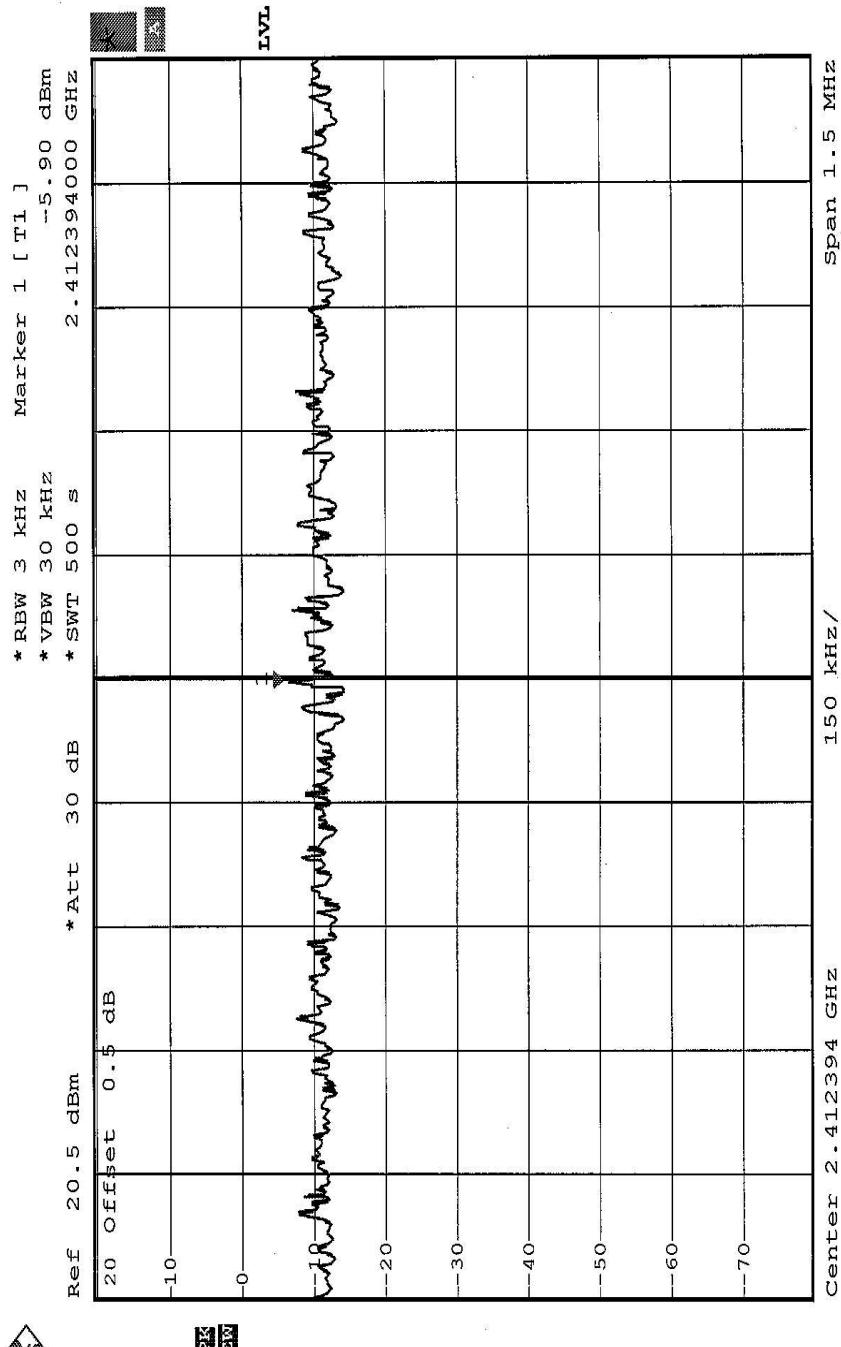


Date: 13-AUG-2003 20:27:04

CH6

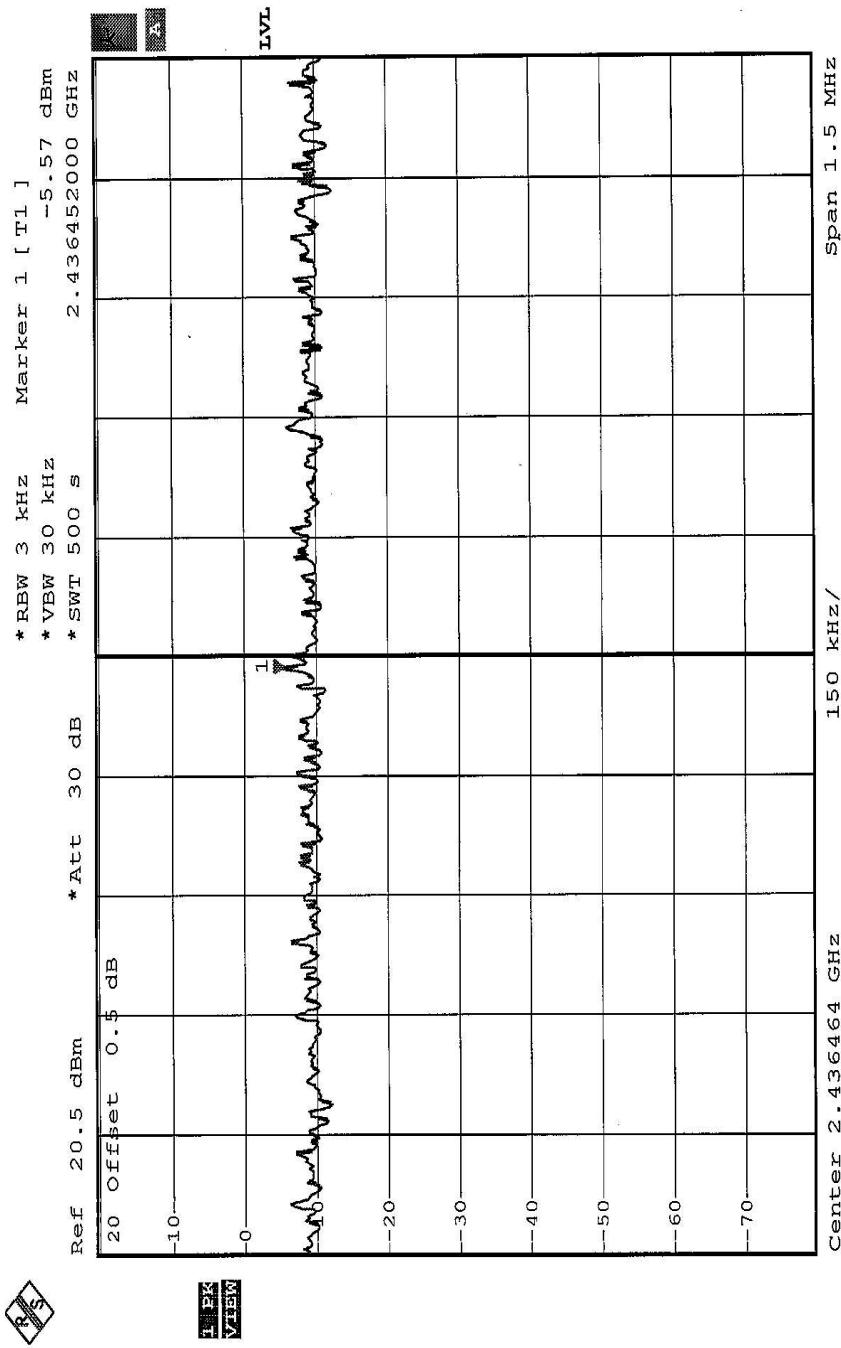

Date: 13.AUG.2003 20:33:27

CH11

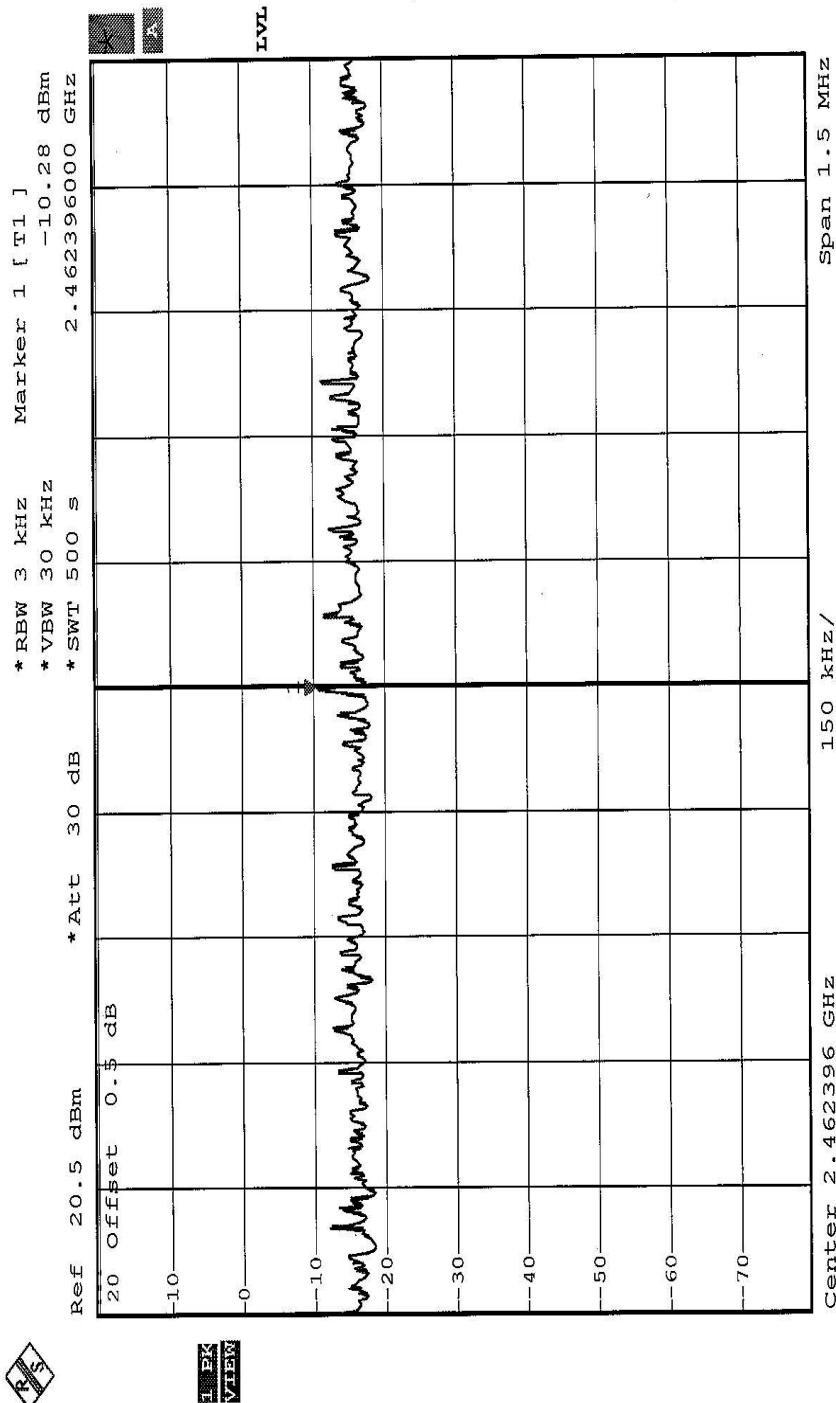


Date: 13.AUG.2003 20:36:18

<b>EUT</b>	802.11g Wireless PCI Adapter	<b>MODEL</b>	SL-3054PCI Aries
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 61%RH, 991 hPa
<b>MODE</b>	OFDM	<b>TESTED BY</b>	Ansen Lei

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-9.35	8	PASS
6	2437	-7.15	8	PASS
11	2462	-12.66	8	PASS




CH1

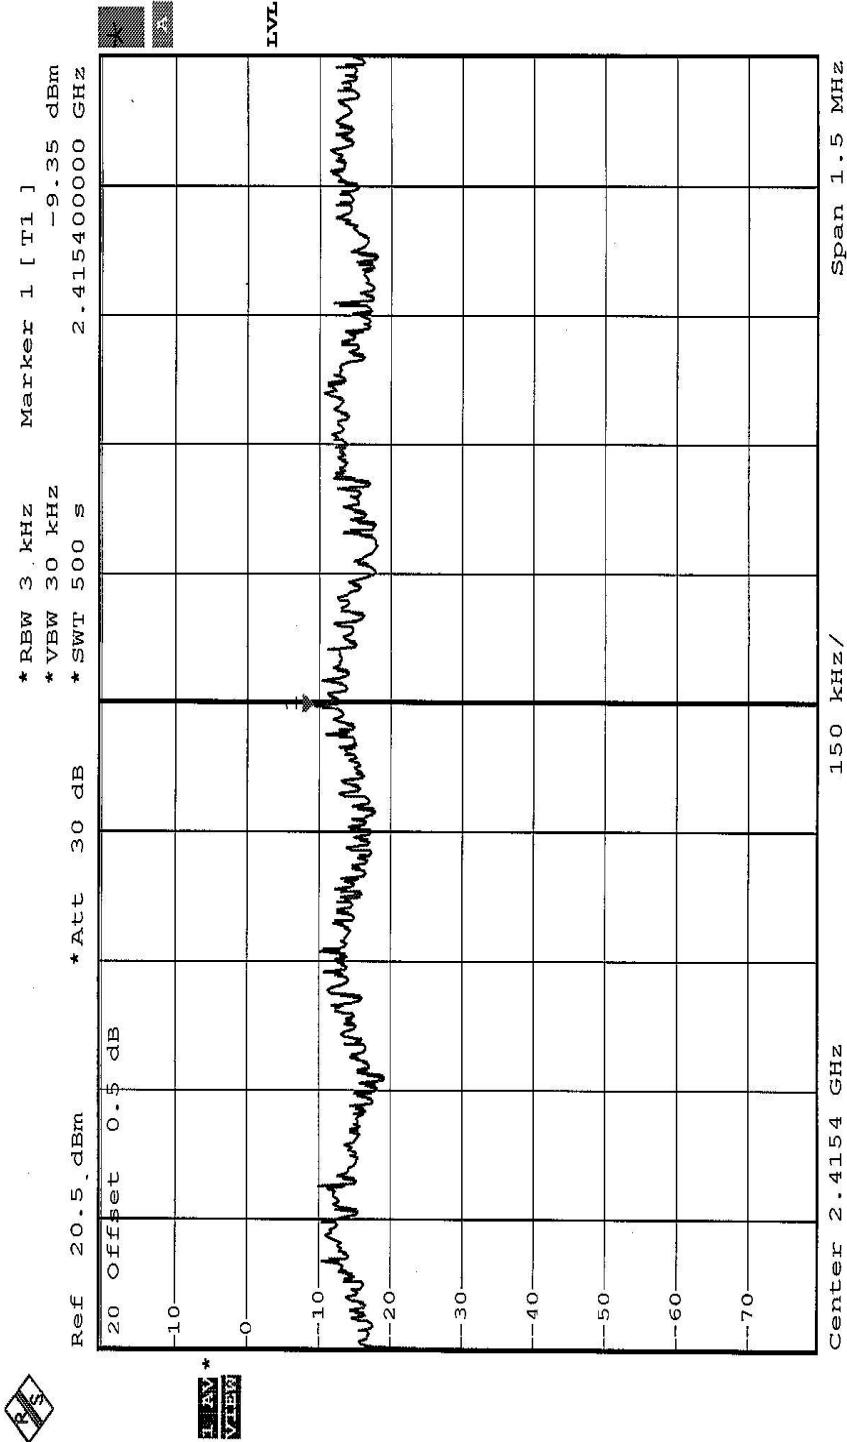


Date:

CH6

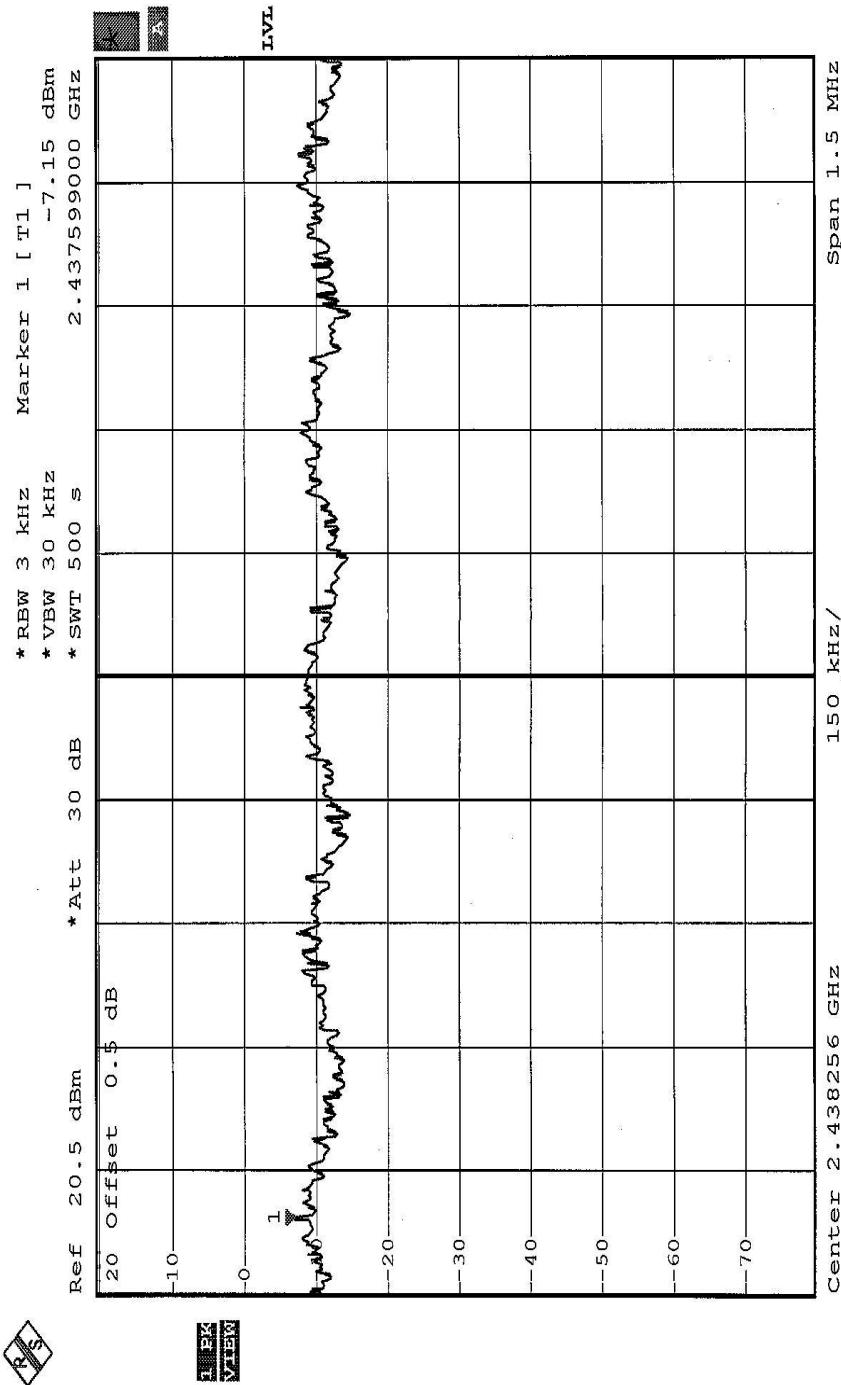

Date: 13.AUG.2003 22:16:28

CH11

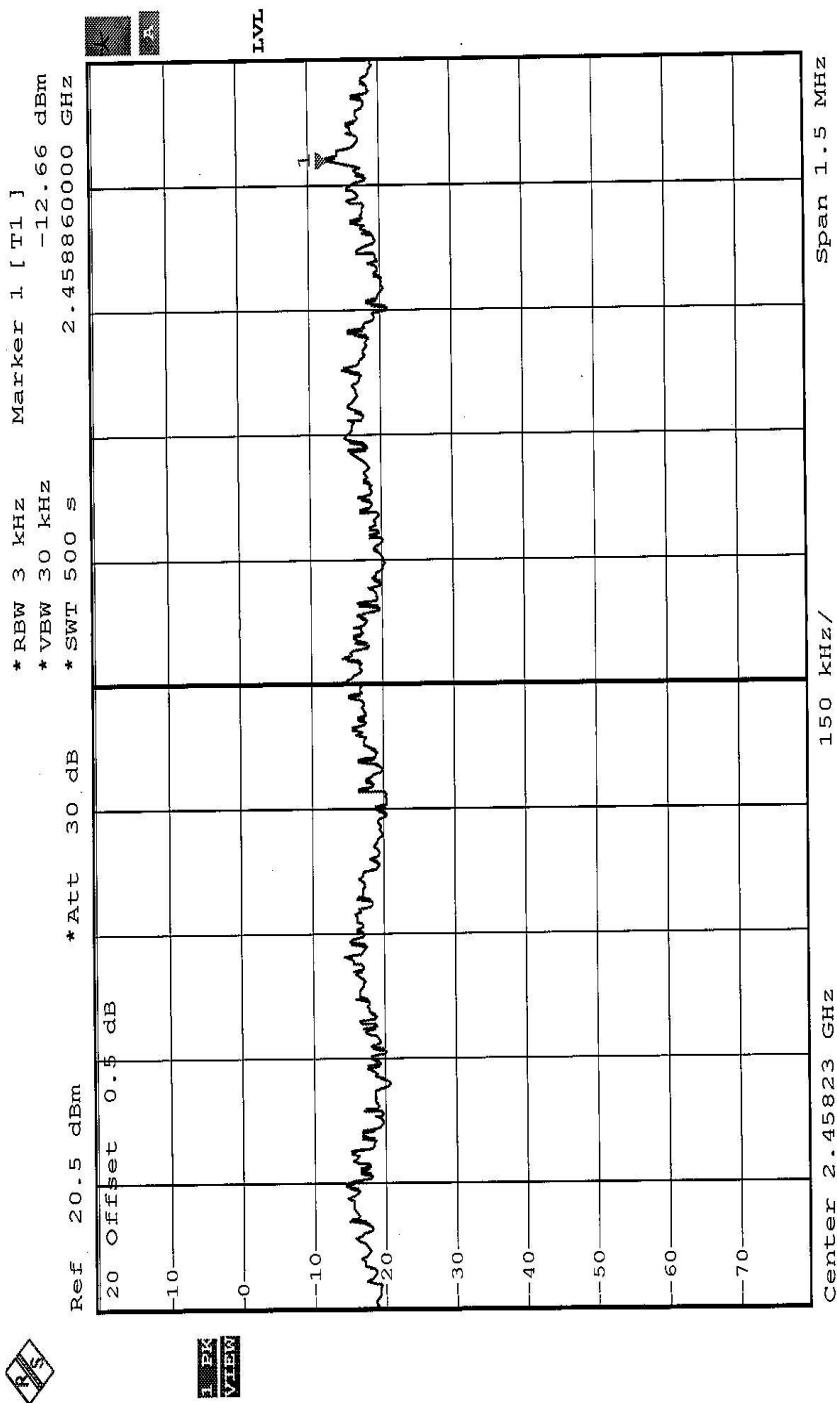

Date:

## 4.6 BAND EDGES MEASUREMENT

### 4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

**NOTE:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 1MHz and 300 Hz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.6.5 EUT OPERATING CONDITION


Same as Item 4.3.6

#### 4.6.6 TEST RESULTS


The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

**NOTE1:** The band edge emission plot on the following 1-2 page shows 52.72dB / 53.00dB delta between carrier maximum power and local maximum emission in restrict band (2.3484GHz / 2.4960GHz). The emission of carrier strength list in the test result of channel 1 of CCK mode at the item 4.2.7 (page 25) is 102dB<sub>UV</sub>/m, so the maximum field strength in restrict band is  $102 - 52.72 = 49.28$  dB<sub>UV</sub>/m which is under 54 dB<sub>UV</sub>/m limit.


**NOTE2:** The band edge emission plot on the following 3-4 pages shows 45.59dB / 42.42dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz / 2.4837GHz). The emission of carrier strength list in the test result of channel 1 of OFDM mode at the item 4.2.7 (page 28) is 98.3dB<sub>UV</sub>/m, so the maximum field strength in restrict band is  $98.3 - 45.59 = 52.71$  dB<sub>UV</sub>/m which is under 54dB<sub>UV</sub>/m limit.

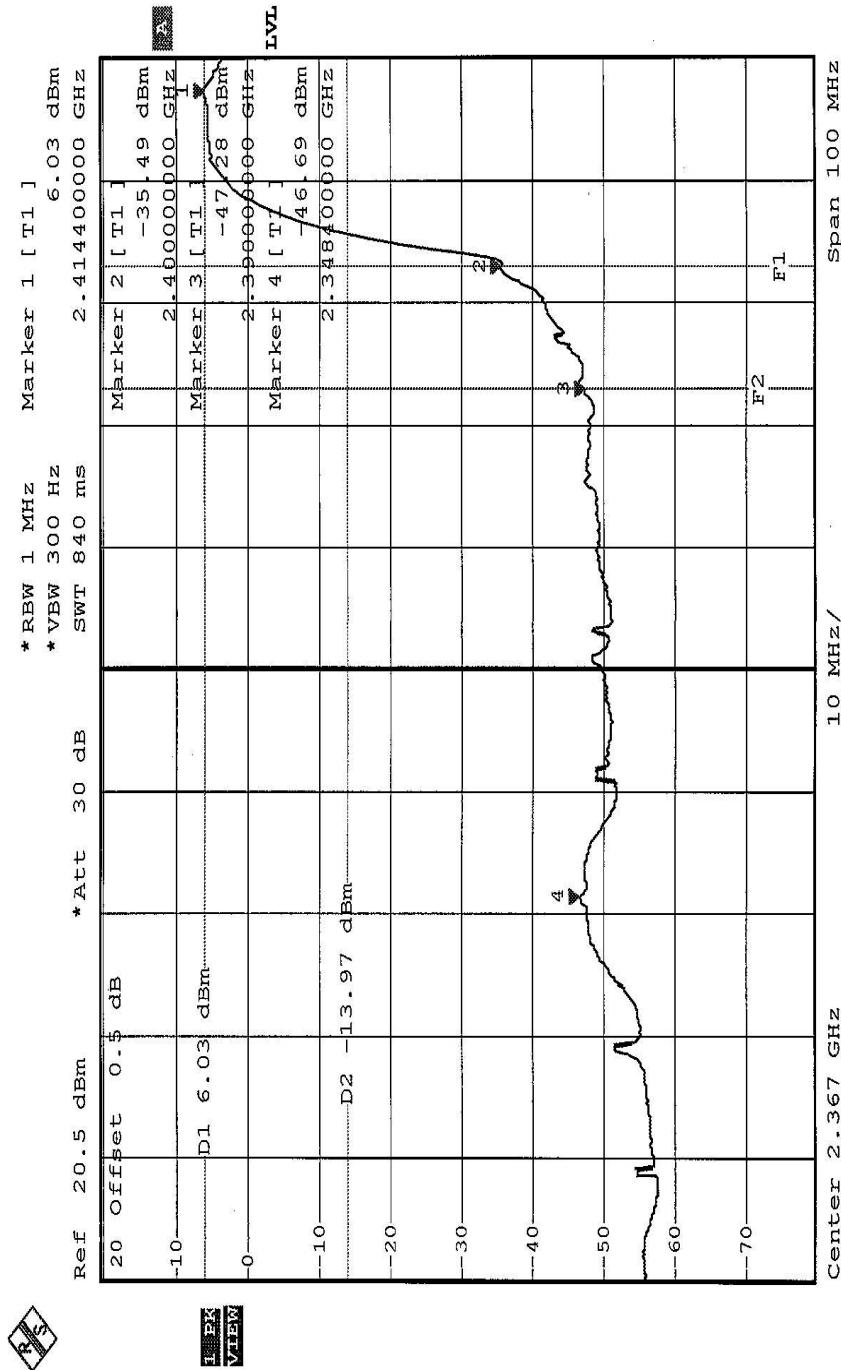


Date: 13.AUG.2003 21:08:50

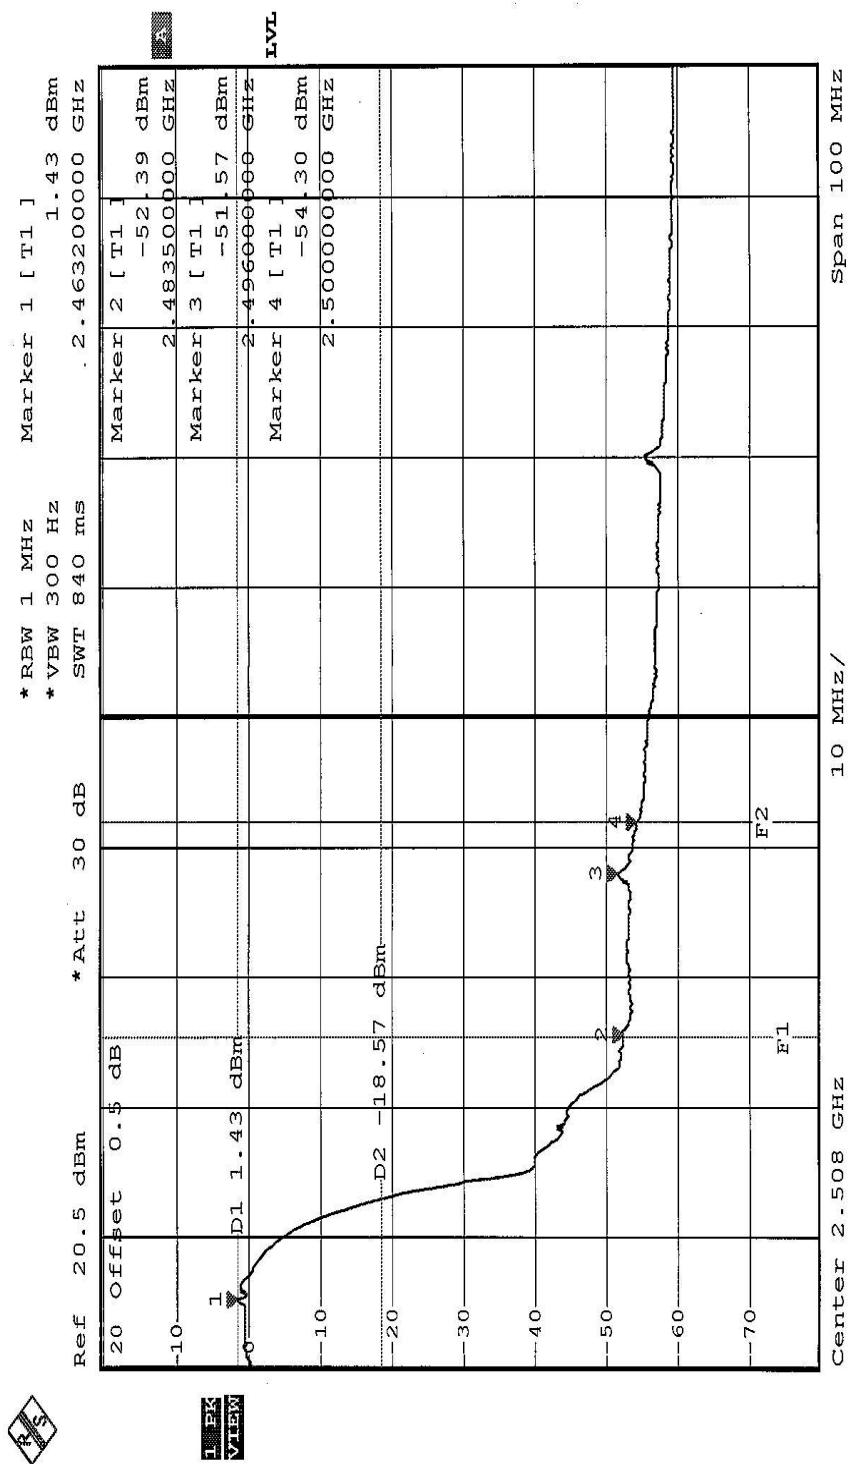

Date: 13.AUG.2003 20:41:38

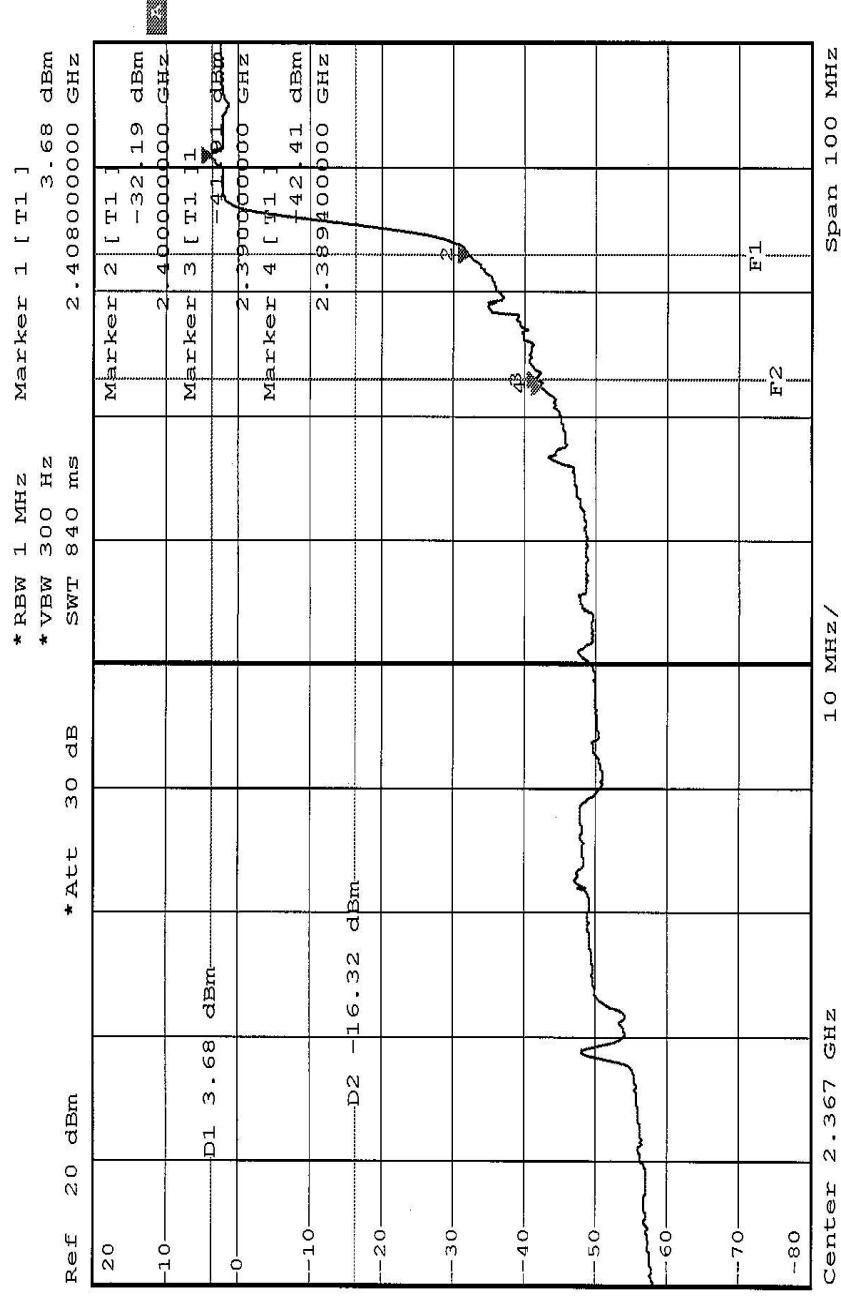

13.AUG.2003 22:11:23

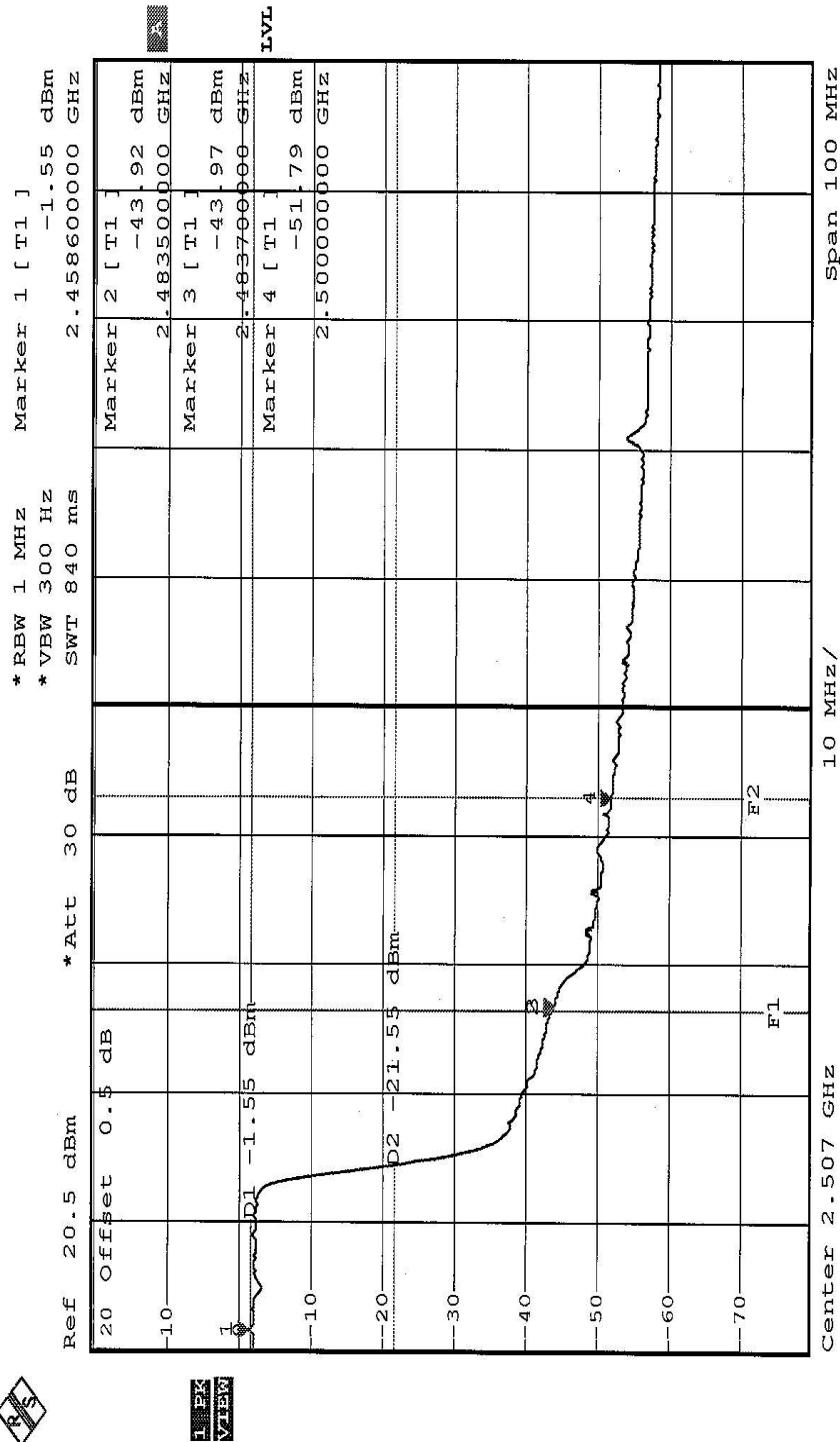

Date : 13.AUG.2003 22:23:41

## 4.7 ANTENNA REQUIREMENT

### 4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole antenna with Reversed SMA antenna connector. The maximum Gain of this antenna is 2dBi.

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

### CONDUCTED EMISSION TEST

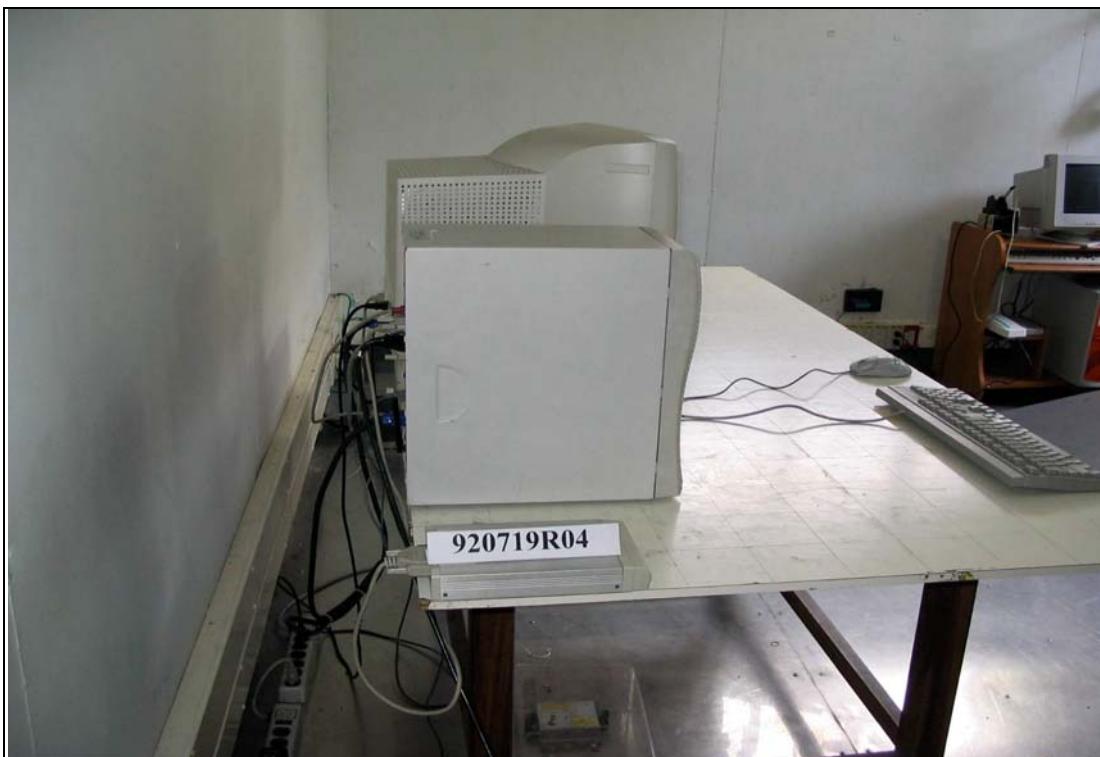

RADIATED EMISSION TEST





## 6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

<b>USA</b>	FCC, NVLAP
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>New Zealand</b>	MoC
<b>Norway</b>	NEMKO
<b>R.O.C.</b>	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml).

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC Lab:**  
Tel: 886-2-26052180  
Fax: 886-2-26052943

**Hsin Chu EMC Lab:**  
Tel: 886-35-935343  
Fax: 886-35-935342

**Lin Kou Safety Lab:**  
Tel: 886-2-26093195  
Fax: 886-2-26093184

**Lin Kou RF&Telecom Lab**  
Tel: 886-3-3270910  
Fax: 886-3-3270892

**Email:** [service@mail.adt.com.tw](mailto:service@mail.adt.com.tw)  
**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.