



Vertical

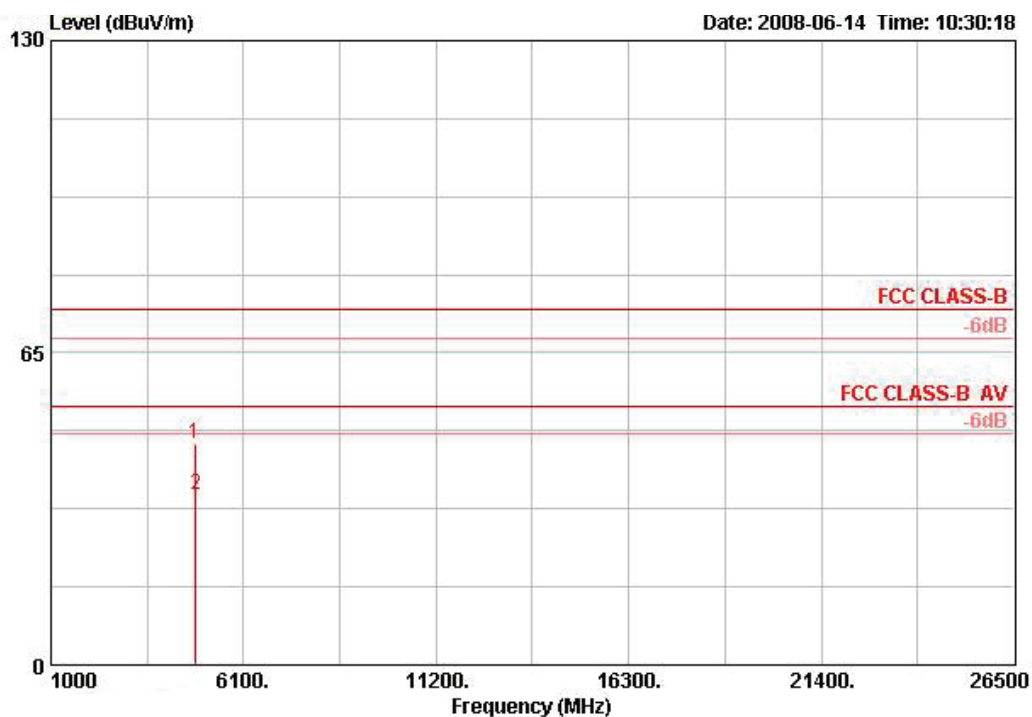

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4822.310	46.05	-27.95	74.00	44.54	33.39	3.37	35.25	PEAK	112	87	VERTICAL
2	4824.110	35.57	-18.43	54.00	34.06	33.39	3.37	35.25	AVERAGE	112	87	VERTICAL


Temperature	24.3°C	Humidity	62%
Test Engineer	Roy Huang	Configurations	802.11g CH 6

Horizontal

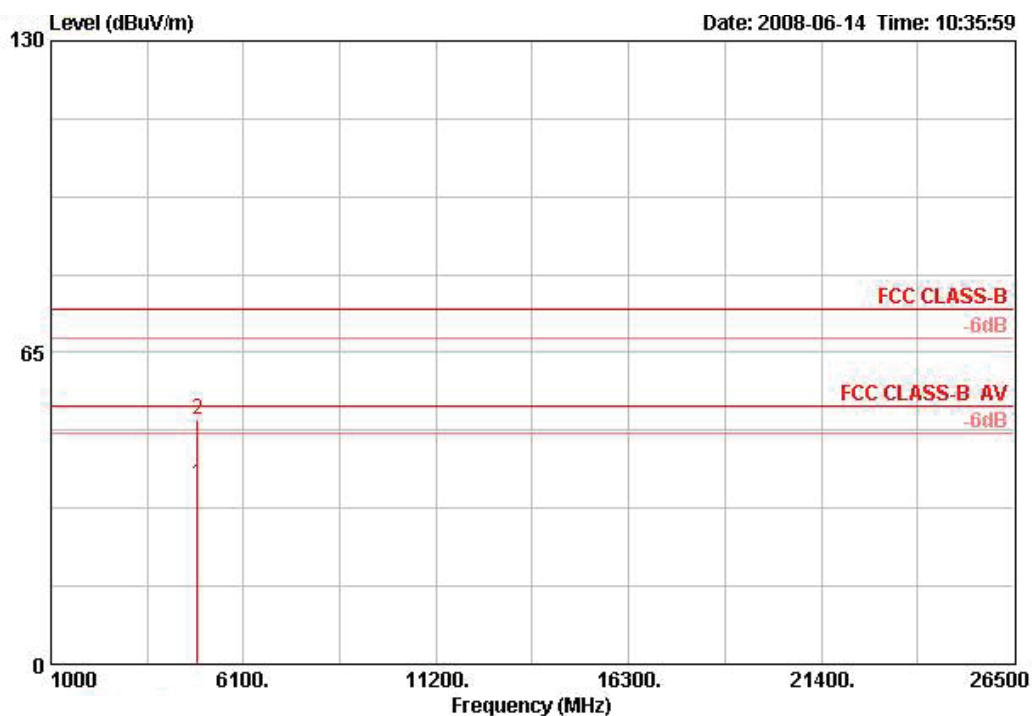

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4874.210	37.55	-16.45	54.00	35.93	33.48	3.38	35.25	AVERAGE	100	83	HORIZONTAL
2	4874.780	51.17	-22.83	74.00	49.55	33.48	3.38	35.25	PEAK	100	83	HORIZONTAL


Vertical

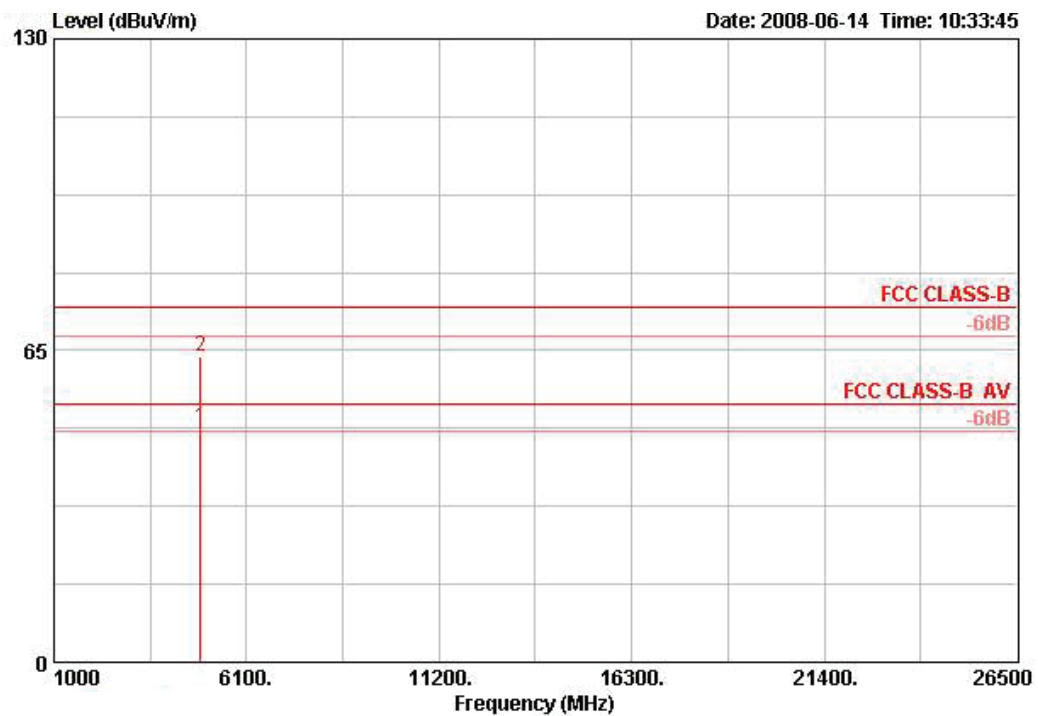

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 !	4874.630	49.03	-4.97	54.00	47.41	33.48	3.38	35.25	AVERAGE	148	276	VERTICAL
2	4875.980	63.73	-10.27	74.00	62.11	33.48	3.38	35.25	PEAK	148	276	VERTICAL


Temperature	24.3°C	Humidity	62%
Test Engineer	Roy Huang	Configurations	802.11g CH 11

Horizontal

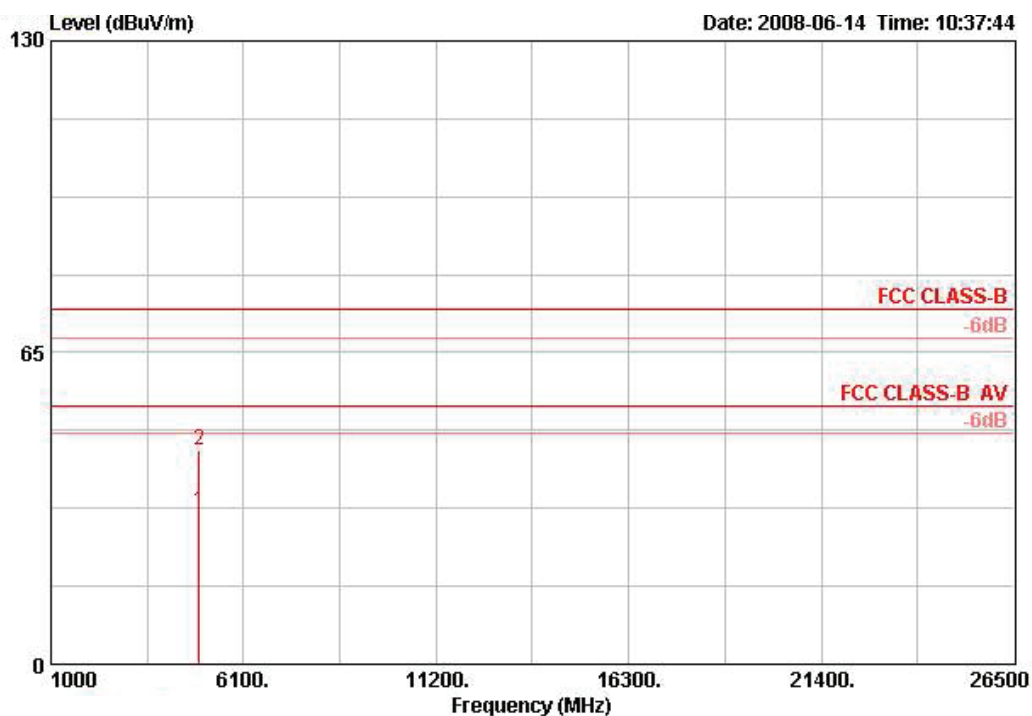

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4921.520	31.81	-22.19	54.00	30.08	33.58	3.40	35.24	AVERAGE	100	360	HORIZONTAL
2	4925.200	44.56	-29.44	74.00	42.83	33.58	3.40	35.24	PEAK	100	360	HORIZONTAL

Vertical

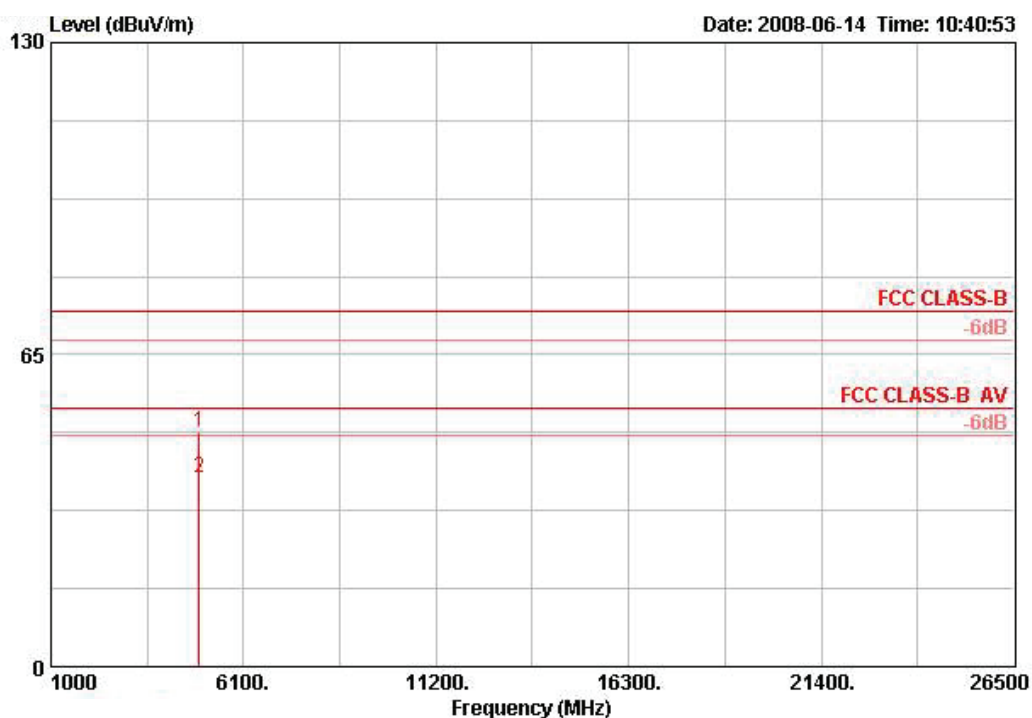

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4921.580	48.80	-25.20	74.00	47.07	33.58	3.40	35.24	PEAK	105	283	VERTICAL
2	4922.500	39.47	-14.53	54.00	37.74	33.58	3.40	35.24	AVERAGE	105	283	VERTICAL

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24.3°C	Humidity	62%
Test Engineer	Roy Huang	Configurations	802.11a CH 149

Horizontal

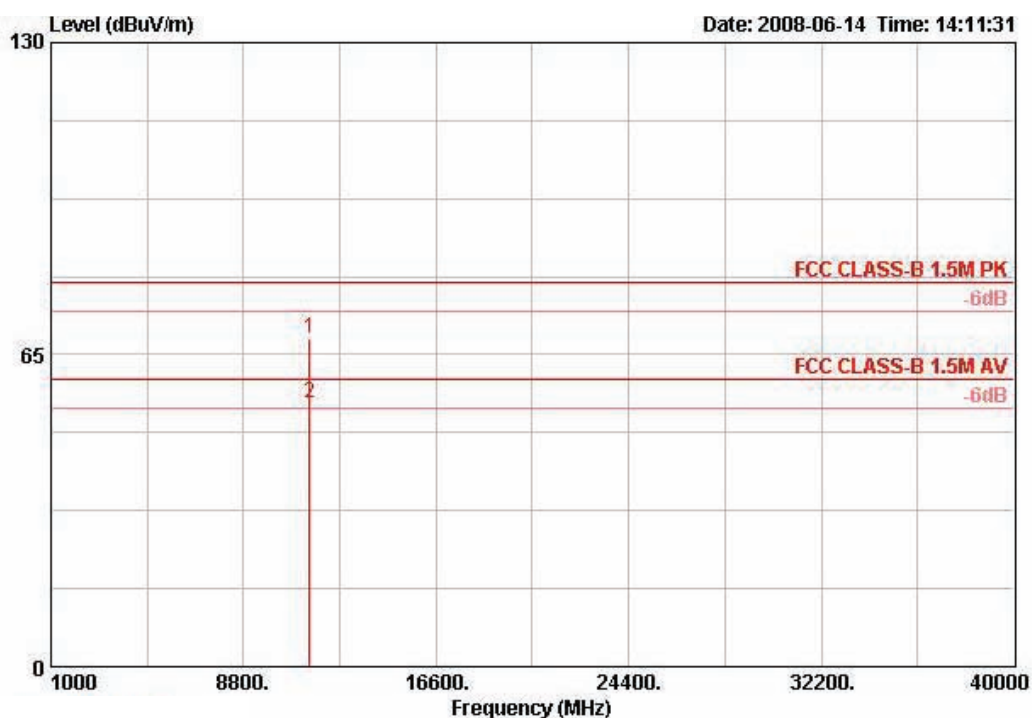

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11488.200	68.44	-11.56	80.00	58.75	39.50	5.14	34.95	PEAK	112	288	HORIZONTAL
2	11488.960	54.92	-5.08	60.00	45.24	39.50	5.14	34.95	AVERAGE	112	288	HORIZONTAL


Vertical

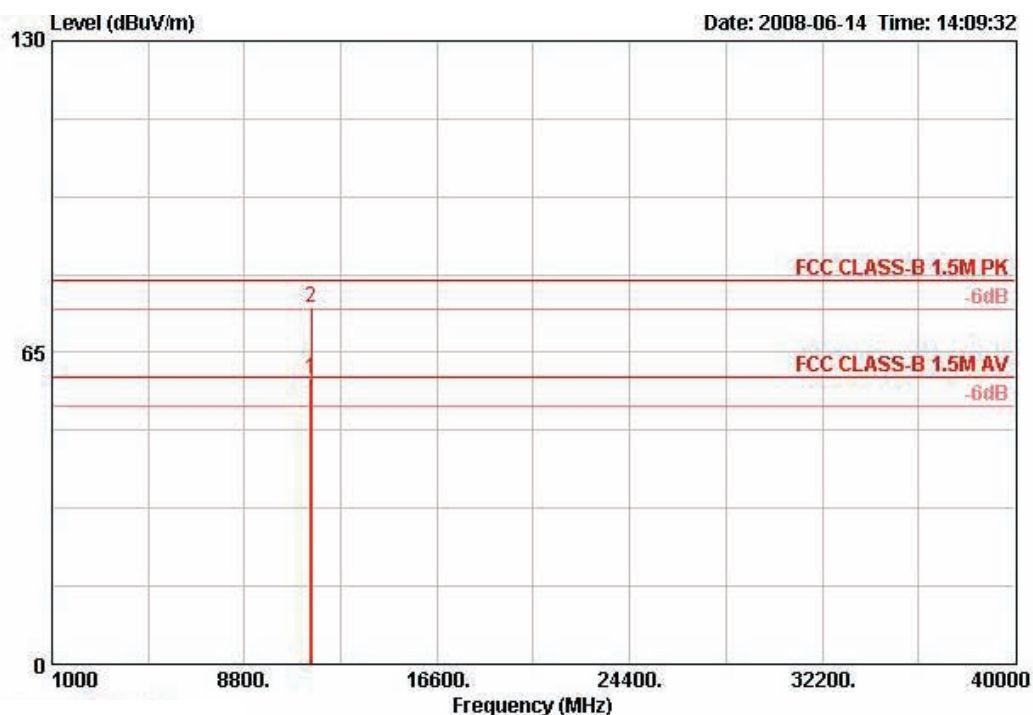

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11488.820	59.46	-0.54	60.00	49.77	39.50	5.14	34.95	AVERAGE	100	94	VERTICAL
2 !	11492.100	74.33	-5.67	80.00	64.65	39.50	5.14	34.95	PEAK	100	94	VERTICAL


Temperature	24.3°C	Humidity	62%
Test Engineer	Roy Huang	Configurations	802.11a CH 157

Horizontal

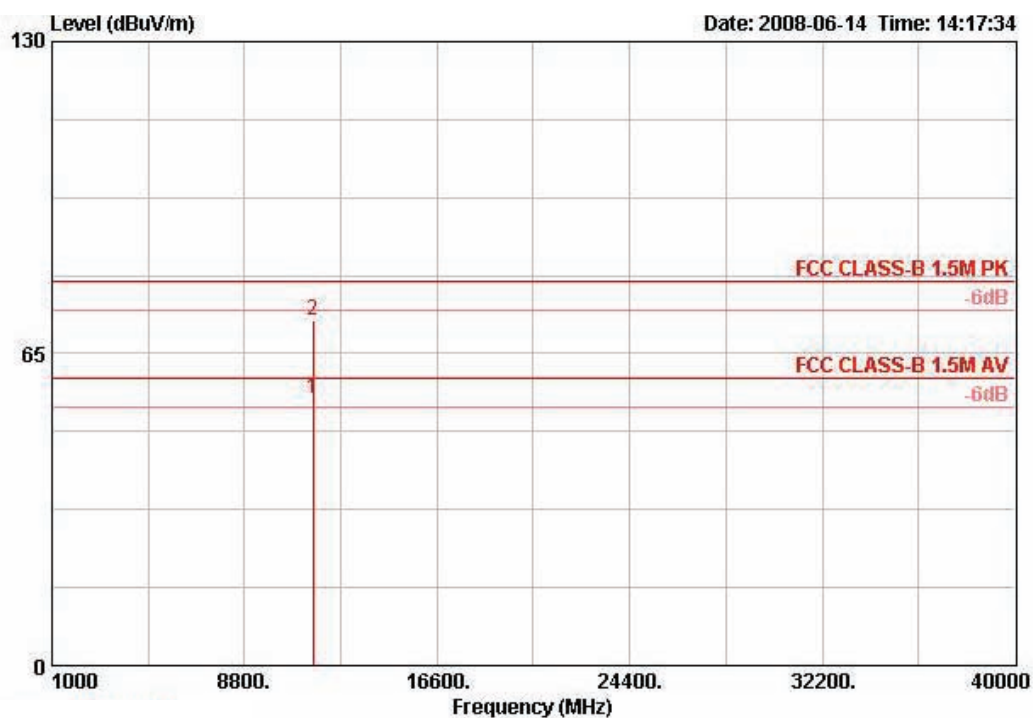

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 !	11571.220	55.67	-4.33	60.00	45.99	39.47	5.18	34.96	AVERAGE	114	245	HORIZONTAL
2	11574.260	72.07	-7.93	80.00	62.39	39.47	5.18	34.96	PEAK	114	245	HORIZONTAL


Vertical

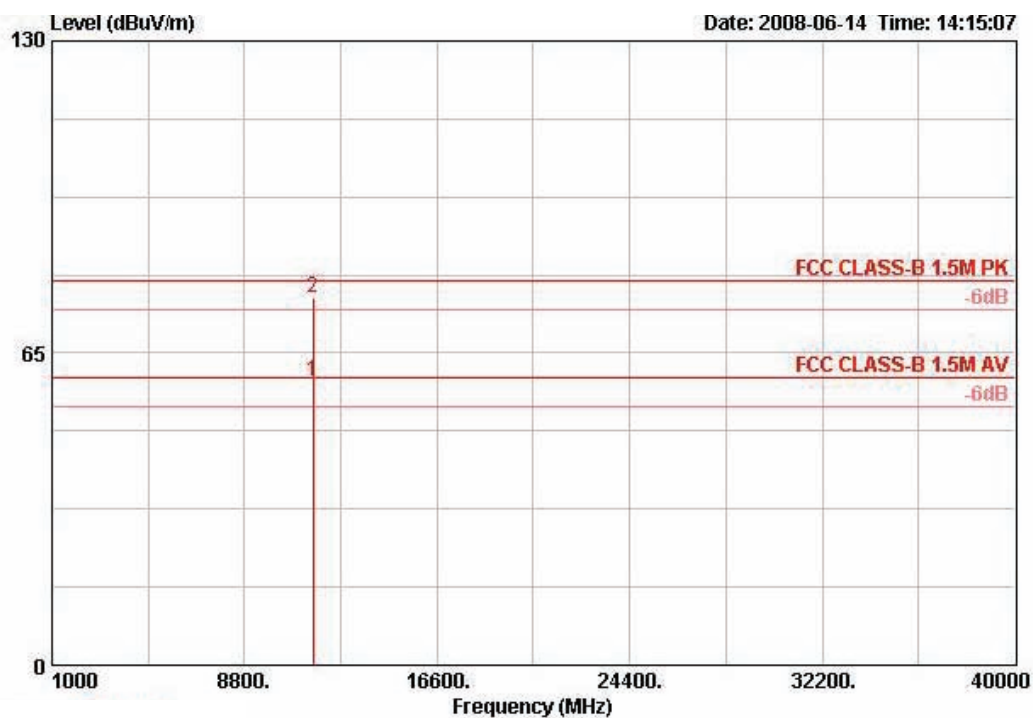

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11571.500	59.23	-0.77	60.00	49.54	39.47	5.18	34.96	AVERAGE	100	96	VERTICAL
2 !	11571.920	76.48	-3.52	80.00	66.79	39.47	5.18	34.96	PEAK	100	96	VERTICAL


Temperature	24.3°C	Humidity	62%
Test Engineer	Roy Huang	Configurations	802.11a CH 165

Horizontal

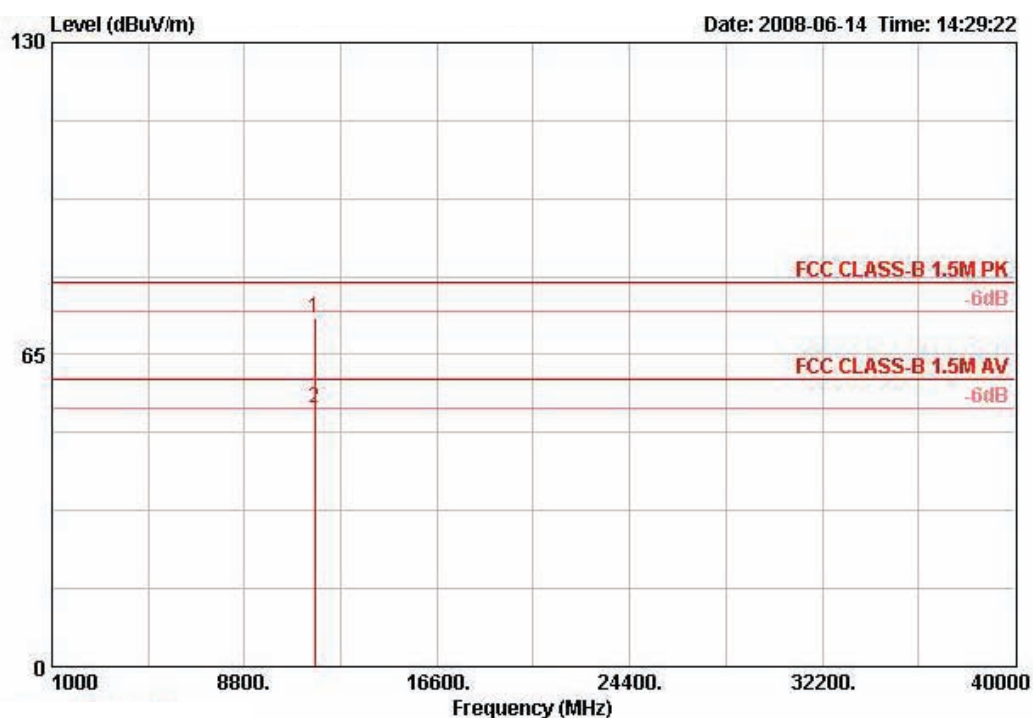

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11648.080	72.71	-7.29	80.00	63.02	39.44	5.20	34.97	PEAK	110	289	HORIZONTAL
2	11651.580	53.91	-6.09	60.00	44.23	39.44	5.20	34.97	AVERAGE	110	289	HORIZONTAL

Vertical

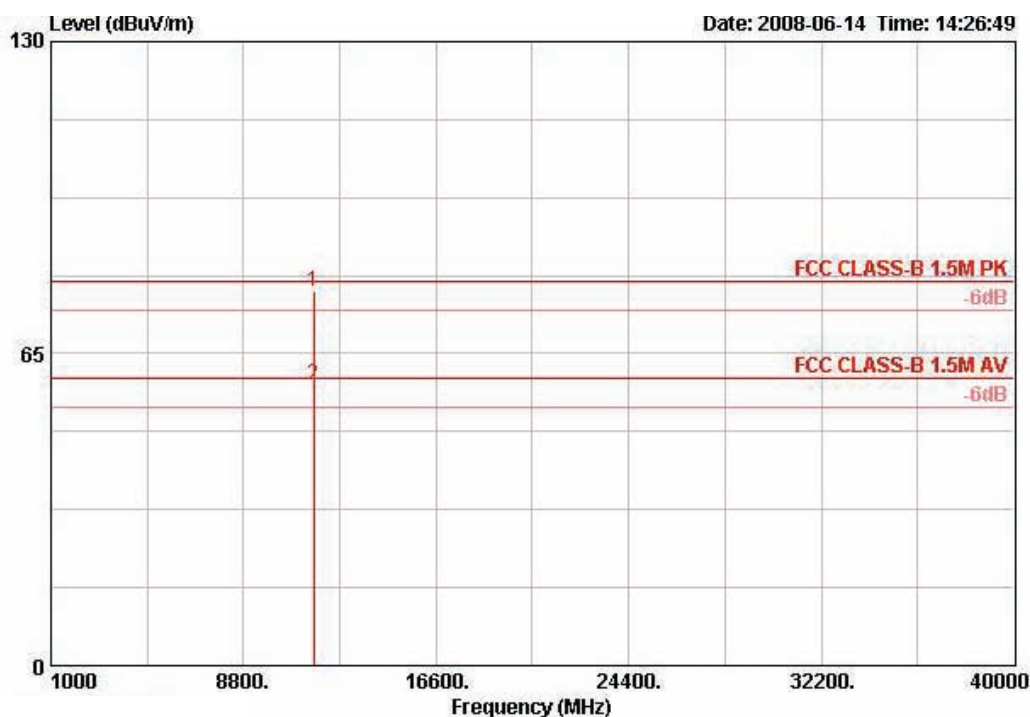

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11647.940	78.07	-1.93	80.00	68.39	39.44	5.20	34.97	PEAK	100	95	VERTICAL
2 @	11650.940	58.56	-1.44	60.00	48.88	39.44	5.20	34.97	AVERAGE	100	95	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1 MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	24.3°C	Humidity	62%
Test Engineer	Roy Huang	Configurations	802.11b CH 1, 6, 11
Test Date	Jun. 14, 2008		

Channel 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamplifier Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2385.800	61.49	-12.51	74.00	31.09	28.05	2.35	0.00 PEAK	100	259	VERTICAL
2 @	2386.400	53.54	-0.46	54.00	23.15	28.05	2.35	0.00 AVERAGE	100	259	VERTICAL
3 @	2409.200	104.21			73.76	28.09	2.36	0.00 AVERAGE	100	259	VERTICAL
4 @	2410.600	107.55			77.09	28.09	2.36	0.00 PEAK	100	259	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamplifier Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2389.400	47.26	-6.74	54.00	16.86	28.05	2.35	0.00 AVERAGE	100	261	VERTICAL
2	2390.000	57.29	-16.71	74.00	26.87	28.05	2.36	0.00 PEAK	100	261	VERTICAL
3 @	2436.200	105.44			74.92	28.13	2.38	0.00 AVERAGE	100	261	VERTICAL
4 @	2438.200	109.29			78.73	28.18	2.38	0.00 PEAK	100	261	VERTICAL
5	2483.900	46.29	-7.71	54.00	15.61	28.26	2.41	0.00 AVERAGE	100	261	VERTICAL
6	2484.100	56.58	-17.42	74.00	25.91	28.26	2.41	0.00 PEAK	100	261	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamplifier Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2459.200	103.96			73.35	28.22	2.40	0.00 AVERAGE	100	275	VERTICAL
2 @	2460.600	107.37			76.76	28.22	2.40	0.00 PEAK	100	275	VERTICAL
3	2486.300	57.68	-16.32	74.00	27.01	28.26	2.41	0.00 PEAK	100	275	VERTICAL
4	2487.900	47.84	-6.16	54.00	17.12	28.30	2.41	0.00 AVERAGE	100	275	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	24.3°C	Humidity	62%
Test Engineer	Roy Huang	Configurations	802.11g CH 1, 6, 11
Test Date	Jun. 14, 2008		

Channel 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	2389.600	71.32	-2.68	74.00	40.92	28.05	2.35	0.00	PEAK	100	261	VERTICAL
2 @	2390.000	53.49	-0.51	54.00	23.07	28.05	2.36	0.00	AVERAGE	100	261	VERTICAL
3 @	2405.600	110.45			79.99	28.09	2.36	0.00	PEAK	100	261	VERTICAL
4 @	2407.200	99.59			69.13	28.09	2.36	0.00	AVERAGE	100	261	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	2388.800	67.79	-6.21	74.00	37.39	28.05	2.35	0.00	PEAK	100	259	VERTICAL
2 @	2390.000	53.33	-0.67	54.00	22.91	28.05	2.36	0.00	AVERAGE	100	259	VERTICAL
3 @	2438.200	105.06			74.50	28.18	2.38	0.00	AVERAGE	100	259	VERTICAL
4 @	2438.800	115.26			84.71	28.18	2.38	0.00	PEAK	100	259	VERTICAL
5 @	2483.500	51.70	-2.30	54.00	21.02	28.26	2.41	0.00	AVERAGE	100	259	VERTICAL
6	2485.500	66.27	-7.73	74.00	35.60	28.26	2.41	0.00	PEAK	100	259	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	2456.000	108.91			78.29	28.22	2.40	0.00	PEAK	100	275	VERTICAL
2 @	2456.200	99.20			68.59	28.22	2.40	0.00	AVERAGE	100	275	VERTICAL
3 @	2483.500	53.62	-0.38	54.00	22.95	28.26	2.41	0.00	AVERAGE	100	275	VERTICAL
4 @	2484.100	71.35	-2.65	74.00	40.68	28.26	2.41	0.00	PEAK	100	275	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	24.3°C	Humidity	62%
Test Engineer	Roy Huang	Configurations	802.11a CH 149, 157, 165
Test Date	Jun. 14, 2008		

Channel 149

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	5740.400	119.75			81.17	34.89	3.69	0.00	PEAK	107	80	VERTICAL
2 @	5747.000	110.09			71.50	34.89	3.69	0.00	AVERAGE	107	80	VERTICAL

Item 1, 2 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	5786.200	107.94			69.31	34.93	3.69	0.00	AVERAGE	141	82	VERTICAL
2 @	5787.600	119.48			80.85	34.93	3.69	0.00	PEAK	141	82	VERTICAL

Item 1, 2 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	5822.400	116.84			78.19	34.96	3.69	0.00	PEAK	106	92	VERTICAL
2 @	5827.200	107.01			68.36	34.96	3.69	0.00	AVERAGE	106	92	VERTICAL

Item 1, 2 are the fundamental frequency at 5825 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Low Band Edge Plot on Configuration IEEE 802.11b / 2412 MHz

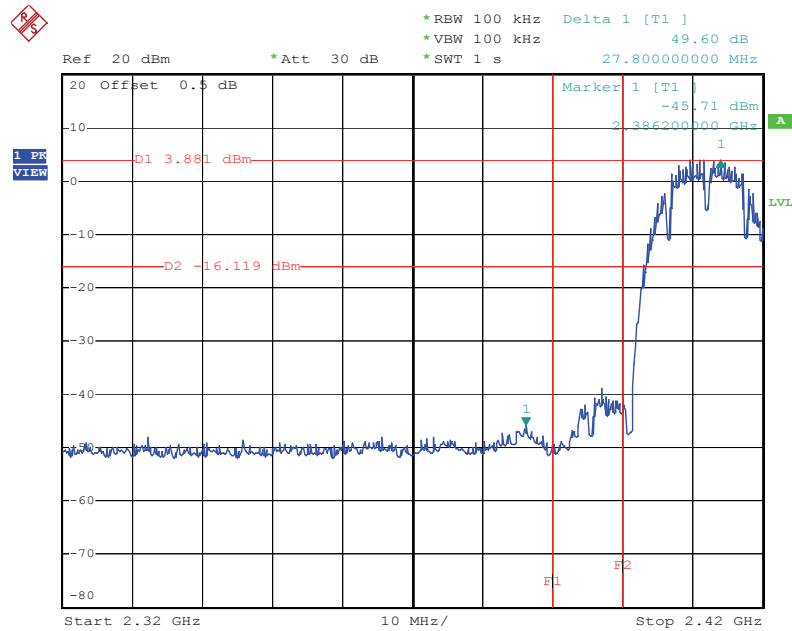


Date: 18.JUN.2008 17:33:25

High Band Edge Plot on Configuration IEEE 802.11b / 2462 MHz

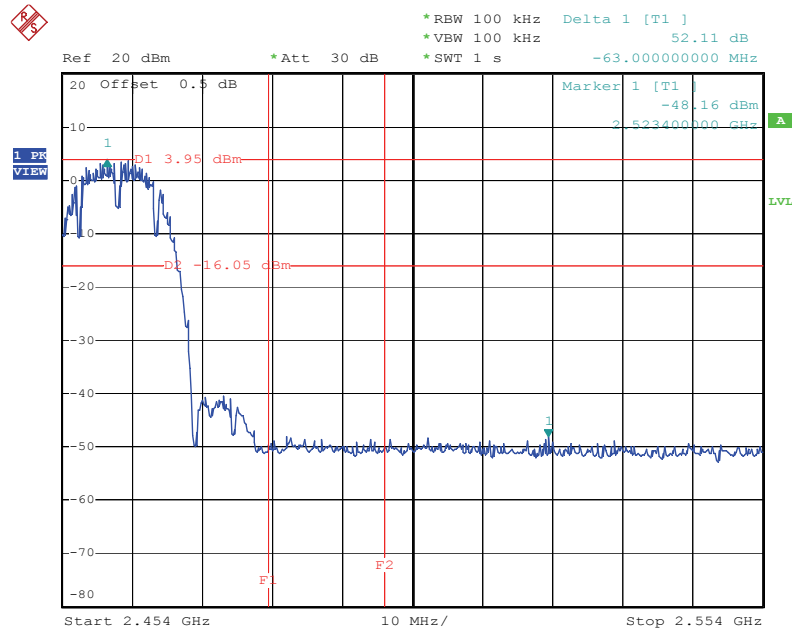


Date: 18.JUN.2008 17:34:59

Low Band Edge Plot on Configuration IEEE 802.11g / 2412 MHz

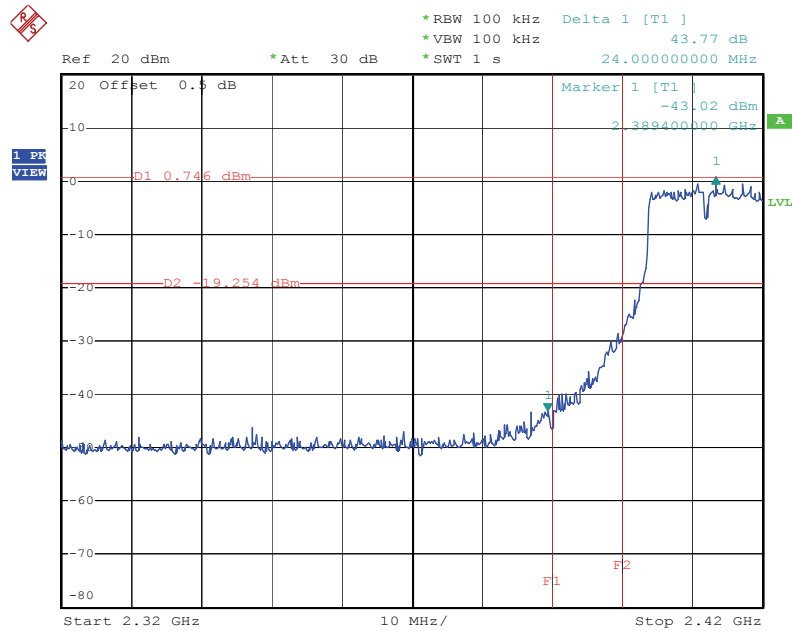


Date: 18.JUN.2008 17:37:48

High Band Edge Plot on Configuration IEEE 802.11g / 2462 MHz

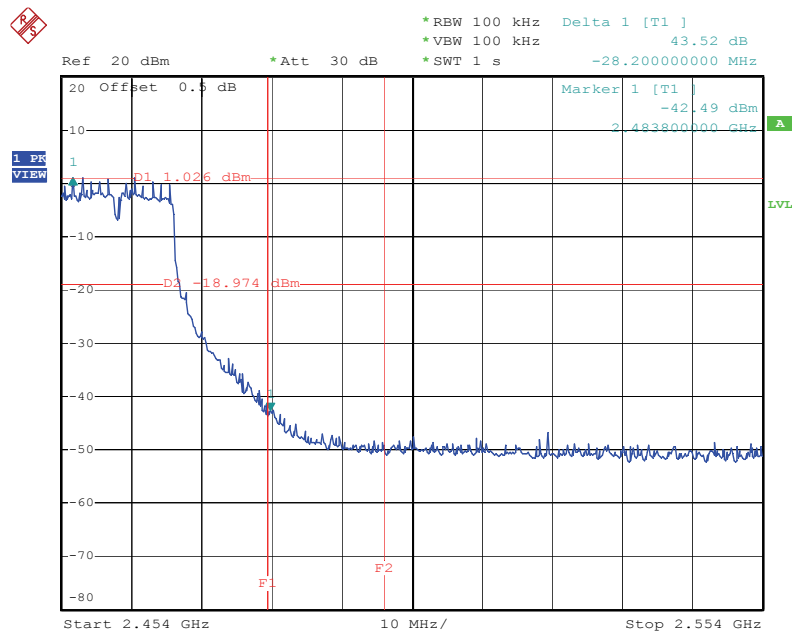


Date: 18.JUN.2008 17:35:59

Low Band Edge Plot on Configuration IEEE 802.11a / 5745 MHz

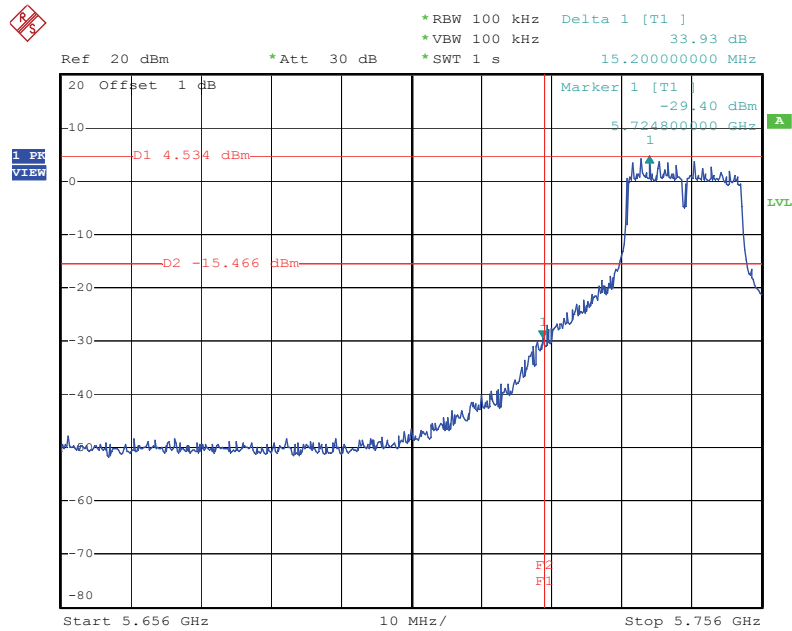

Date: 18.JUN.2008 17:43:09

High Band Edge Plot on Configuration IEEE 802.11a / 5825 MHz

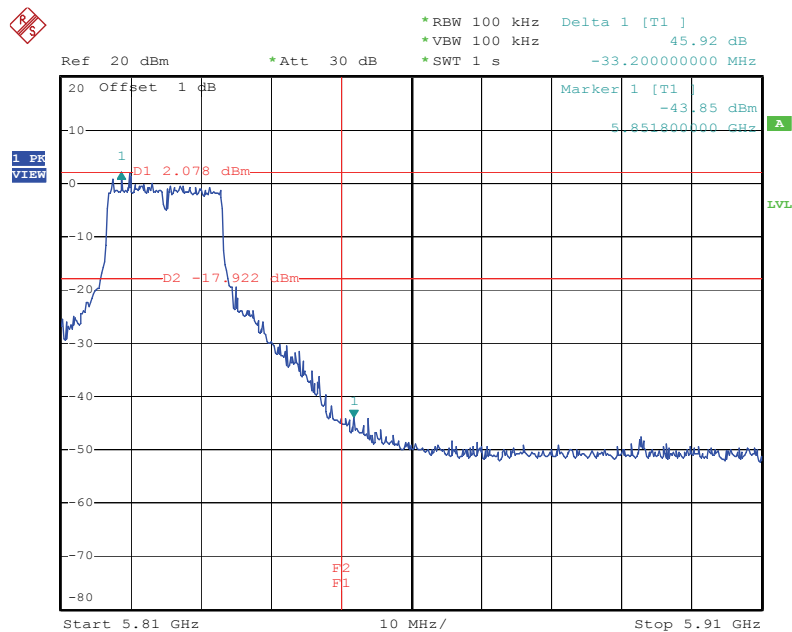

Date: 18.JUN.2008 17:45:07

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Mar. 03, 2008	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 31, 2008	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2008	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2008	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz – 30MHz	Mar. 27, 2008	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 14, 2007	Radiation (03CH03-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 13, 2008	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 14, 2008	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jun. 07, 2007	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jun. 06, 2008	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Jan. 22, 2007*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100305	9 kHz - 40 GHz	Sep. 27, 2007	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2006*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Jul. 21, 2007	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Mar. 04, 2008	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan. 18, 2008	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec. 03, 2007	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec. 03, 2007	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Jan. 10, 2008	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jun. 27, 2007	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100458	DC ~ 30GHz	Jun. 27, 2007	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun. 27, 2007	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	May 04, 2007*	Conducted (TH01-HY)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2008	Conducted (TH01-HY)
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2007	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2007	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2007	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Nov. 14, 2007	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 10, 2008	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Note: *Calibration Interval of instruments listed above is two year.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : LI190-070110

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 10, 2007

PI, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.