

FCC RADIO TEST REPORT

Applicant's company	Wistron NeWeb Corporation
Applicant Address	20 Park Avenue II, Hsinchu Science Park, Hsinchu 308,Taiwan,R.O.C.
FCC ID	NKR-DNMA-92
Manufacturer's company	Wistron NeWeb Corporation
Manufacturer Address	20 Park Avenue II, Hsinchu Science Park, Hsinchu 308,Taiwan,R.O.C.

Product Name	WLAN a/b/g/n mini-PCI Module
Brand Name	WNC
Model Name	DNMA-92
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5350MHz / 5470 ~ 5725MHz
Received Date	Mar. 18, 2009
Final Test Date	Jul. 20, 2011
Submission Type	Class II Change
Operating Mode	Client (without radar detection function)
Class II Change	Please refer to section 3.7



Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a (5150 ~ 5350MHz / 5470 ~ 5725MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009** and **47 CFR FCC Part 15 Subpart E**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	5
3.5. Table for Test Modes	6
3.6. Table for Testing Locations.....	7
3.7. Table for Class II Change	7
3.8. Table for Supporting Units	7
3.9. Table for Parameters of Test Software Setting	8
3.10. Test Configurations	9
4. TEST RESULT	11
4.1. AC Power Line Conducted Emissions Measurement.....	11
4.2. 99% Occupied Bandwidth Measurement	15
4.3. Maximum Conducted Output Power Measurement.....	31
4.4. Power Spectral Density Measurement	47
4.5. Peak Excursion Measurement	59
4.6. Radiated Emissions Measurement	66
4.7. Band Edge Emissions Measurement	97
4.8. Frequency Stability Measurement	108
4.9. Antenna Requirements	110
5. LIST OF MEASURING EQUIPMENTS	111
6. TEST LOCATION.....	113
7. TAF CERTIFICATE OF ACCREDITATION	114
APPENDIX A. TEST PHOTOS	A1 ~ A9
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR171319AA	Rev. 01	Initial issue of report	Aug. 02, 2011

1. CERTIFICATE OF COMPLIANCE

Product Name : WLAN a/b/g/n mini-PCI Module
Brand Name : WNC
Model Name : DNMA-92
Applicant : Wistron NeWeb Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Mar. 18, 2009 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Jordan Hsiao

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	10.18 dB
4.2	15.407(a)	26dB Spectrum Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	0.00 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.09 dB
4.5	15.407(a)	Peak Excursion	Complies	6.26 dB
4.6	15.407(b)	Radiated Emissions	Complies	1.20 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.01 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
Peak Excursion	±0.5dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	5150 ~ 5350MHz / 5470 ~ 5725MHz
Channel Number	19 for 20MHz bandwidth ; 9 for 40MHz bandwidth
Channel Band Width (99%)	MCS8 (20MHz): 24.48 MHz ; MCS8 (40MHz): 36.64 MHz
Conducted Output Power	Band 1: MCS8 (20MHz): 16.41 dBm ; MCS8 (40MHz): 16.50 dBm Band 2: MCS8 (20MHz): 23.57 dBm ; MCS8 (40MHz): 20.82 dBm Band 3: MCS8 (20MHz): 23.81 dBm ; MCS8 (40MHz): 19.88 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11a

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5350MHz / 5470 ~ 5725MHz
Channel Number	19
Channel Band Width (99%)	11a: 18.40 MHz
Conducted Output Power	Band 1: 13.81 dBm ; Band 2: 20.08 dBm ; Band 3: 20.70 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna & Band width

Antenna	Single (TX)		Two (TX)	
Band width Mode	20 MHz	40 MHz	20 MHz	40 MHz
IEEE 802.11a	X	X	V	X
IEEE 802.11n	X	X	V	V

IEEE 802.11n spec

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Datarate(Mbps)			
									800nsGI		400nsGI	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.444	30
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.889	60
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.333	90
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.778	120
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.667	180
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.556	240
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.000	270
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.444	300

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

3.2. Accessories

N/A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
3	WNC	RPAA-A1-5G	PIFA Antenna	I-PEX	5.85
4	WNC	RPAA-A1-5G	PIFA Antenna	I-PEX	5.95

Note: The EUT has four Antennas. Two for 2.4GHz Band use, two for 5GHz Band use.

Both Ant. 3 and Ant. 4 can be used as transmitting/receiving antenna.

3.4. Table for Carrier Frequencies

For IEEE 802.11a, use Channel 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140.

There are two bandwidth systems for IEEE 802.11n.

For both 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140.

For both 40MHz bandwidth systems, use Channel 38, 46, 54, 62, 102, 110, 118, 126, 134.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
5250~5350 MHz Band 2	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310 MHz
	56	5280 MHz	64	5320 MHz
5470~5725 MHz Band 3	100	5500 MHz	120	5600 MHz
	102	5510MHz	124	5620 MHz
	104	5520 MHz	126	5630 MHz
	108	5540 MHz	128	5640 MHz
	110	5550 MHz	132	5660 MHz
	112	5560 MHz	134	5670 MHz
	116	5580 MHz	136	5680 MHz
	118	5590 MHz	140	5700 MHz

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal Link		Auto	-	-
Max. Conducted Output Power Power Spectral Density	MCS8/20MHz	Band 1~3	13Mbps	36/40/48/52/60/ 64/100/116/140	3/4/3+4
	MCS8/40MHz	Band 1~3	27Mbps	38/46/54/62/ 102/118/134	3/4/3+4
	11a/BPSK	Band 1~3	13Mbps	36/40/48/52/60/ 64/100/116/140	3/4/3+4
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement Peak Excursion	MCS8/20MHz	Band 1~3	13Mbps	36/40/48/52/60/ 64/100/116/140	3+4
	MCS8/40MHz	Band 1~3	27Mbps	38/46/54/62/ 102/118/134	3+4
	11a/BPSK	Band 1~3	13Mbps	36/40/48/52/60/ 64/100/116/140	3+4
Radiated Emission Below 1GHz	Normal Link		Auto	-	-
Radiated Emission Above 1GHz	MCS8/20MHz	Band 1~3	13Mbps	36/40/48/52/60/ 64/100/116/140	3+4
	MCS8/40MHz	Band 1~3	27Mbps	38/46/54/62/ 102/118/134	3+4
	11a/BPSK	Band 1~3	13Mbps	36/40/48/52/60/ 64/100/116/140	3+4
Band Edge Emission	MCS8/20MHz	Band 1~3	13Mbps	36/40/48/52/60/ 64/100/116/140	3+4
	MCS8/40MHz	Band 1~3	27Mbps	38/46/54/62/ 102/118/134	3+4
	11a/BPSK	Band 1~3	13Mbps	36/40/48/52/60/ 64/100/116/140	3+4
Frequency Stability	Un-modulation		-	40/60	N/A

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	187376	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	187376	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Class II Change

This product is an extension of original one reported under Sporton project number: 931819

Below is the table for the change of the product with respect to the original one.

Modifications	Description	Performance Checking
Add 4 antennas	Add four PIFA antennas. Ant. 1 (Model No.: RPAA-A1-2.4G) only can be used in 2.4GHz Band. Gain: 2.98dBi. Ant. 2 (Model No.: RPAA-A1-2.4G) only can be used in 2.4GHz Band. Gain: 3.84dBi. Ant. 3 (Model No.: RPAA-A1-5G) only can be used in 5GHz Band. Gain: 5.85dBi. Ant. 4 (Model No.: RPAA-A1-5G) only can be used in 5GHz Band. Gain: 5.95dBi.	Conducted Emissions Max. Conducted Output Power 26dB Spectrum Bandwidth 99% Occupied Bandwidth Power Spectral Density Peak Excursion Radiated Emissions Band Edge Emission Frequency Stability

3.8. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D400	QDS-BRCM1005-D
Mouse	logitech	AMS0706W	DoC
Modem	ACEEX	DM1414	IFAXDM1414
Wireless AP	Planex	GW-AP54SGX	N/A

3.9. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11n MCS8 20MHz

Test Software Version	ART Revision 0.7 BUILD #19								
Frequency	5180 MHz	5200 MHz	5240 MHz	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz
MCS8 20MHz	12.5	12.5	12.5	19.5	16	12.5	10.5	20	10.5

Power Parameters of IEEE 802.11n MCS8 40MHz

Test Software Version	ART Revision 0.7 BUILD #19						
Frequency	5190 MHz	5230 MHz	5270 MHz	5310 MHz	5510 MHz	5550 MHz	5670 MHz
MCS8 40MHz	11	12	16.5	11	9	15	13

Power Parameters of IEEE 802.11a

Test Software Version	ART Revision 0.7 BUILD #19								
Frequency	5180 MHz	5200 MHz	5240 MHz	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz
IEEE 802.11a	8.5	8.5	8.5	16	16	15	11	15	11

During the test, "ART Revision 0.7 BUILD #19" under WIN XP was executed the test program to control the EUT continuously transmit RF signal.



3.10.1. Radiation Emissions Test Configuration

The diagram illustrates a connection setup for a laptop. At the top, a vertical line labeled "AC MAIN" represents the power source. A horizontal line, labeled "1", connects the AC MAIN to a rectangular box labeled "EUT" (External Unit). To the left of the EUT, two oval shapes labeled "ANT" are connected to the EUT by lines labeled "2" and "3". To the right of the EUT, a vertical line connects to a laptop. The laptop is represented by a rounded rectangle with several ports on its left side, labeled from top to bottom: "USB x 2", "RJ-45", "LPT", "VGA", "RS232", and "DC". The word "Notebook" is written below the laptop.

1. POWER CABLE, 260cm, NON-SHIELDED
 2. ANT CABLE, 10cm ,SHIELDED
 3. ANT CABLE, 22cm ,SHIELDED

AC MAIN

1

ANT 2

ANT 3

EUT

DC

USB x 2

RJ-11

RJ-45

LPT

VGA

RS232


Notebook

1. POWER CABLE, 260cm, NON-SHIELDED

2. ANT CABLE, 16cm ,SHIELDED

3. ANT CABLE, 25cm ,SHIELDED

3.10.2. AC Power Line Conduction Emissions Test Configuration

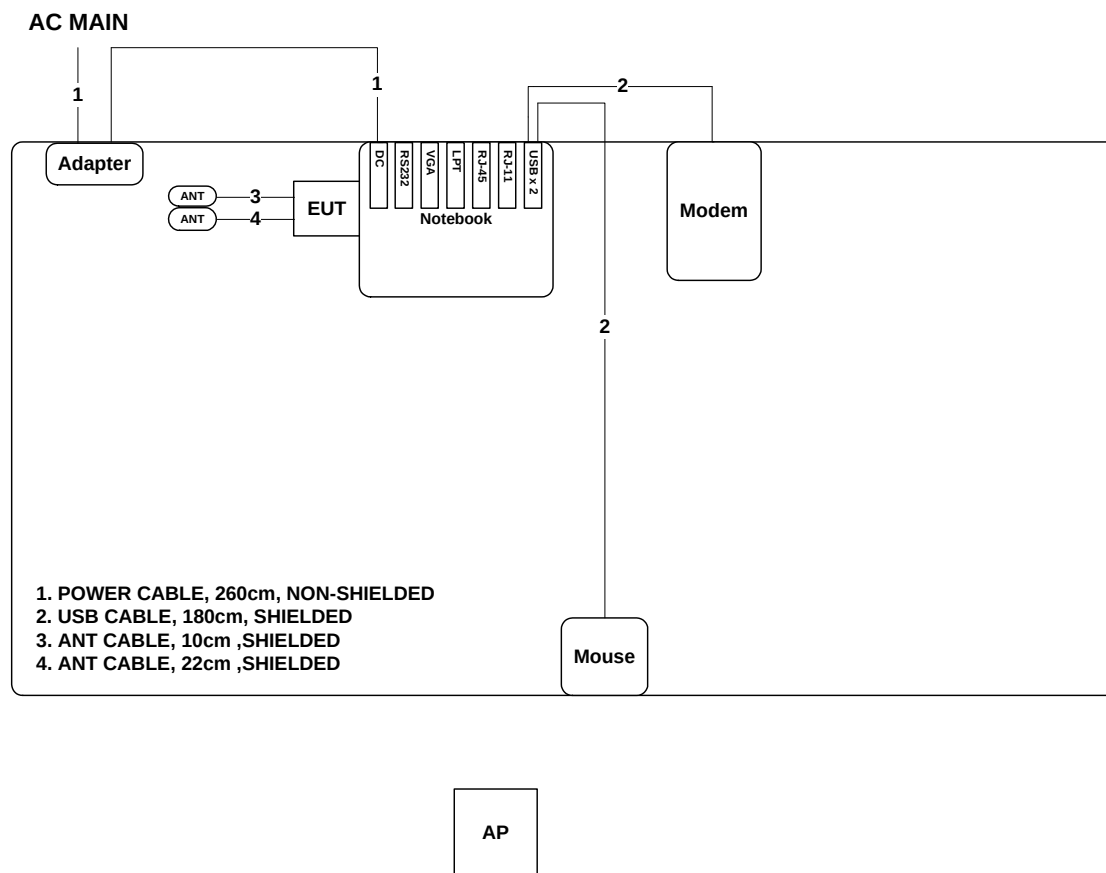

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.



10 cm

10 cm

EUT

5

Non-conductive Table
1.5 x 1 m

80 cm

40 cm

Conducting Ground Plane
Extends At Least 0.5m
Beyond EUT System Footprint

LISN

LISN

Bonded To Ground Plane

3.1

3.2

3.3

3

1

1

2

7

6

5


- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

There is no deviation with the original standard.

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	62%
Test Engineer	Peter Wu	Phase	Line
Configuration	Normal Link		

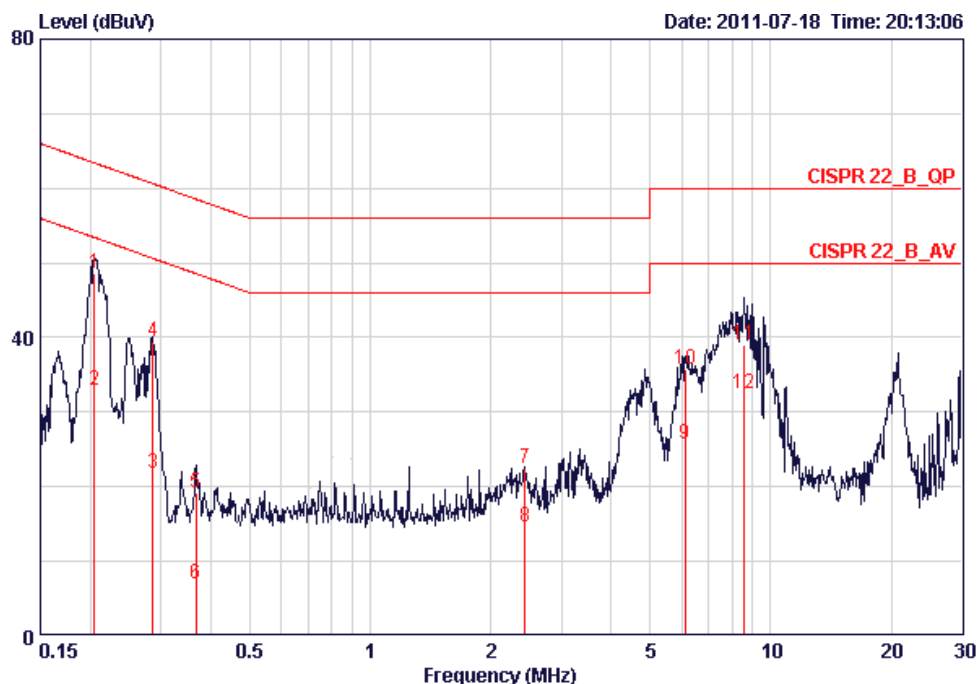

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.20505	48.51	-14.89	63.40	48.26	0.05	0.20	QP
2	0.20505	32.96	-20.44	53.40	32.71	0.05	0.20	AVERAGE
3	0.28630	21.80	-28.83	50.63	21.56	0.04	0.20	AVERAGE
4	0.28630	39.56	-21.07	60.63	39.32	0.04	0.20	QP
5	0.36725	19.25	-39.31	58.56	19.02	0.03	0.20	QP
6	0.36725	6.89	-41.67	48.56	6.66	0.03	0.20	AVERAGE
7	2.435	22.48	-33.52	56.00	22.22	0.06	0.20	QP
8	2.435	14.69	-31.31	46.00	14.43	0.06	0.20	AVERAGE
9	6.121	25.63	-24.37	50.00	25.09	0.22	0.33	AVERAGE
10	6.121	35.68	-24.32	60.00	35.14	0.22	0.33	QP
11	8.546	38.93	-21.07	60.00	38.32	0.31	0.30	QP
12	8.546	32.55	-17.45	50.00	31.94	0.31	0.30	AVERAGE

Temperature	24°C	Humidity	62%
Test Engineer	Peter Wu	Phase	Neutral
Configuration	Normal Link		

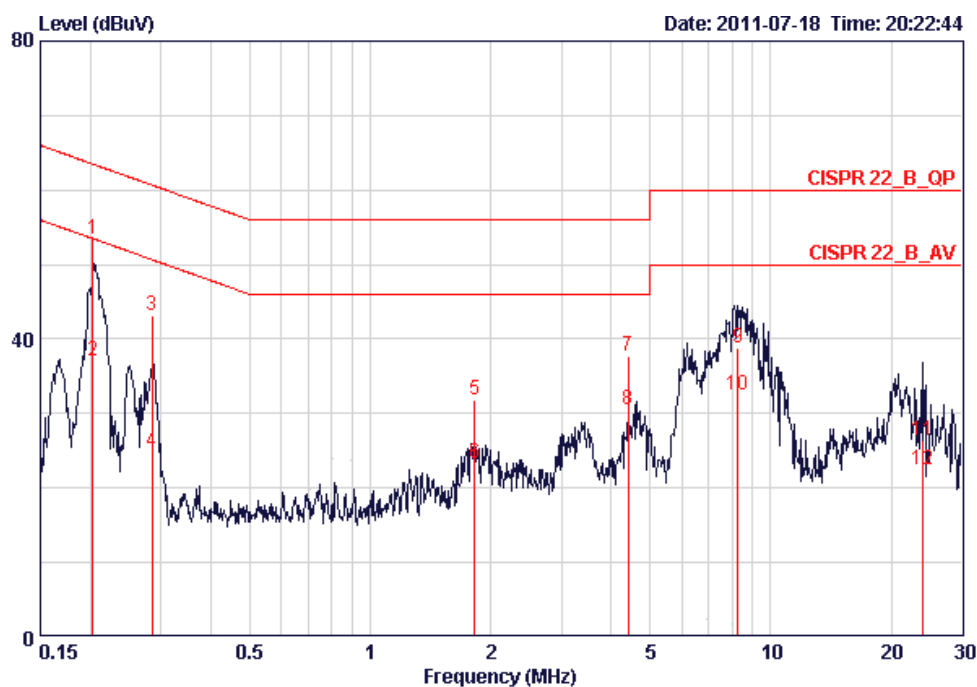

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.20289	53.31	-10.18	63.49	53.06	0.05	0.20	QP
2	0.20289	36.95	-16.54	53.49	36.70	0.05	0.20	AVERAGE
3	0.28478	43.22	-17.46	60.68	42.98	0.04	0.20	QP
4	0.28478	24.90	-25.78	50.68	24.66	0.04	0.20	AVERAGE
5	1.819	31.91	-24.09	56.00	31.70	0.05	0.17	QP
6	1.819	23.40	-22.60	46.00	23.19	0.05	0.17	AVERAGE
7	4.407	37.65	-18.35	56.00	37.22	0.13	0.30	QP
8	4.407	30.55	-15.45	46.00	30.12	0.13	0.30	AVERAGE
9	8.279	38.87	-21.13	60.00	38.22	0.30	0.35	QP
10	8.279	32.40	-17.60	50.00	31.75	0.30	0.35	AVERAGE
11	23.888	26.47	-33.53	60.00	24.90	1.07	0.50	QP
12	23.888	22.41	-27.59	50.00	20.84	1.07	0.50	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits. But resolution bandwidth within band edge measurement is 1% of the 99% occupied bandwidth.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 300 kHz and the video bandwidth of 1000 kHz were used.
3. Measured the spectrum width with power higher than 26dB below carrier.

4.2.4. Test Setup Layout

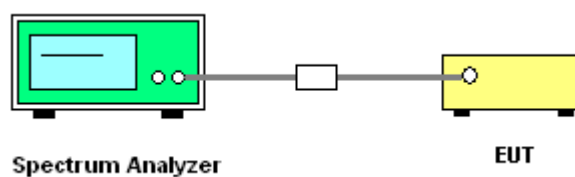

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 99% Occupied Bandwidth

Temperature	24°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS8 20MHz / Ant. 3 + Ant. 4

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	25.44	18.40
40	5200 MHz	25.60	18.40
48	5240 MHz	25.60	18.40
52	5260 MHz	38.08	19.68
60	5300 MHz	25.12	18.40
64	5320 MHz	25.12	18.40
100	5500 MHz	24.96	18.40
116	5580 MHz	40.32	24.48
140	5700 MHz	25.28	18.40

Configuration IEEE 802.11n MCS8 40MHz / Ant. 3 + Ant. 4


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	45.60	36.48
46	5230 MHz	47.04	36.64
54	5270 MHz	57.60	36.64
62	5310 MHz	45.92	36.48
102	5510MHz	47.36	36.64
110	5550 MHz	55.36	36.64
134	5670 MHz	46.88	36.64

Temperature	24°C	Humidity	56%
Test Engineer	Allen Liu / Jacky Ho	Configurations	IEEE 802.11a

Configuration IEEE 802.11a / Ant. 3 + Ant. 4


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	22.80	16.96
40	5200 MHz	23.20	16.96
48	5240 MHz	22.72	16.96
52	5260 MHz	23.84	17.12
60	5300 MHz	26.40	17.12
64	5320 MHz	23.68	17.12
100	5500 MHz	23.52	16.96
116	5580 MHz	24.32	17.12
140	5700 MHz	25.28	18.40

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. 3 + Ant. 4 / 5180 MHz

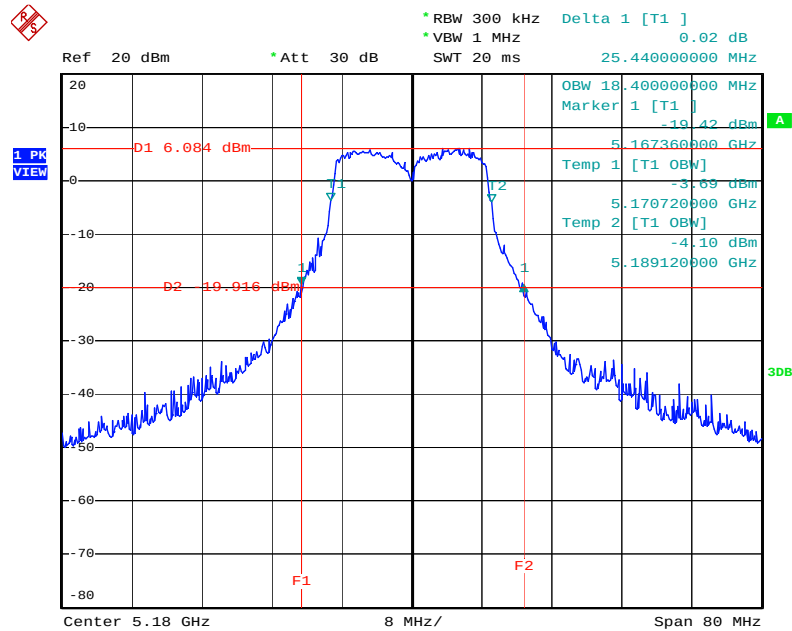


Date: 26.MAR.2009 13:24:25

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. 3 + Ant. 4 / 5200 MHz

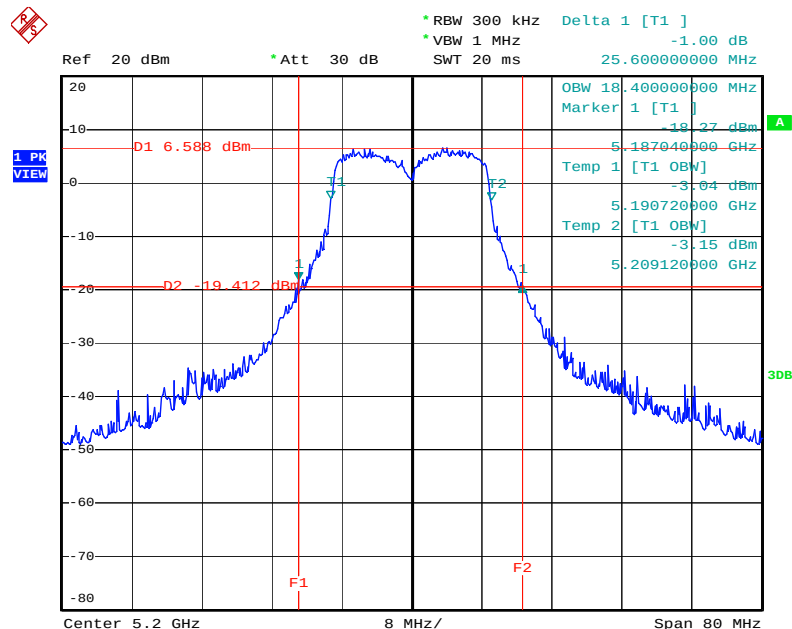


Date: 26.MAR.2009 13:23:41

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. 3 + Ant. 4 / 5240 MHz

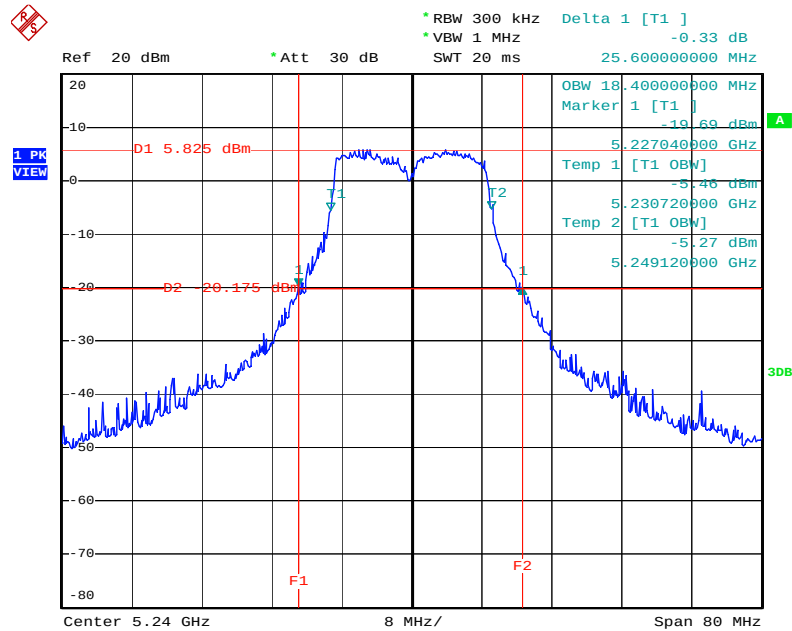


Date: 26.MAR.2009 13:22:56

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. 3 + Ant. 4 / 5260 MHz

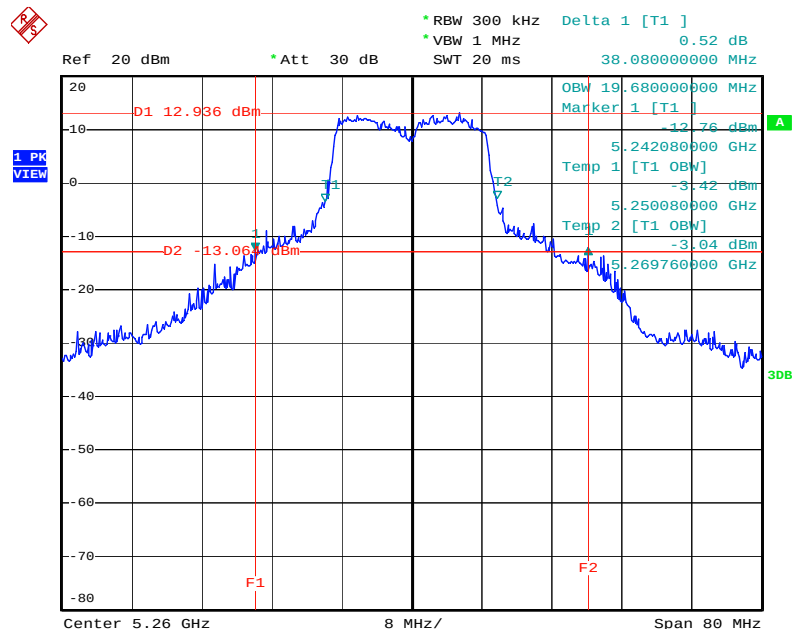


Date: 26.MAR.2009 13:22:06

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. 3 + Ant. 4 / 5300 MHz

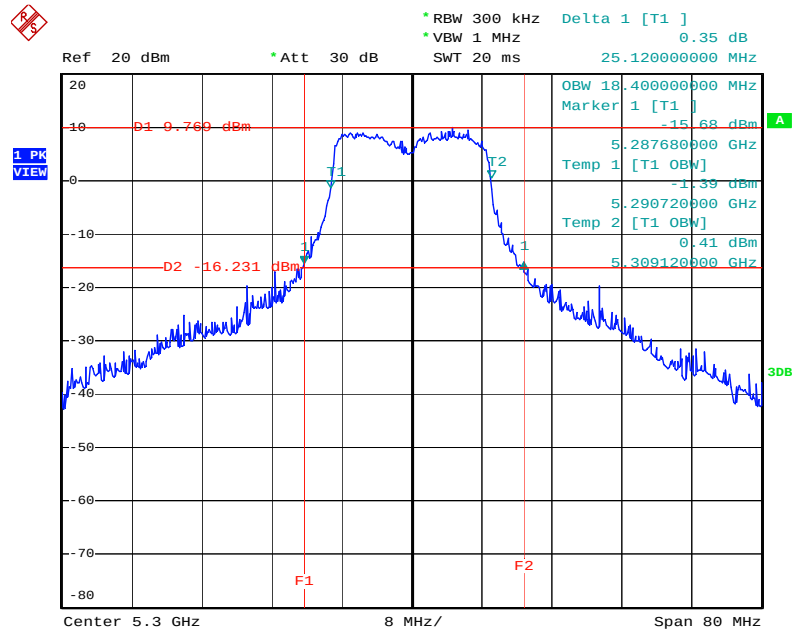


Date: 26.MAR.2009 13:21:17

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. 3 + Ant. 4 / 5320 MHz

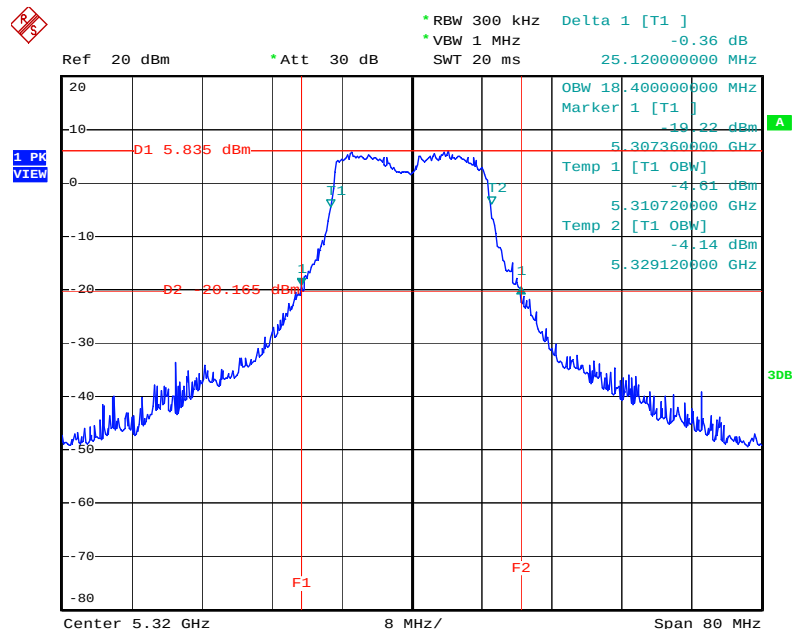


Date: 26.MAR.2009 13:20:32

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. 3 + Ant. 4 / 5500 MHz

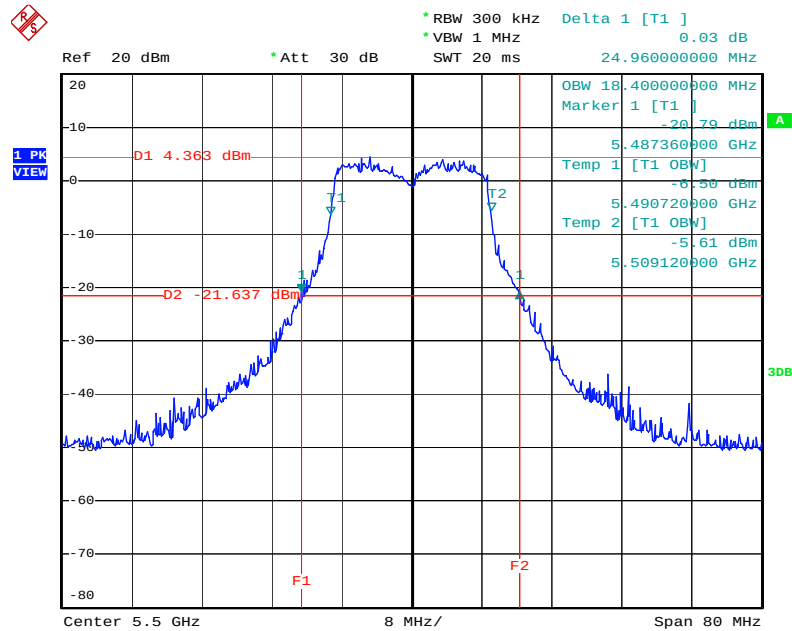


Date: 26.MAR.2009 13:19:19

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. 3 + Ant. 4 / 5580 MHz

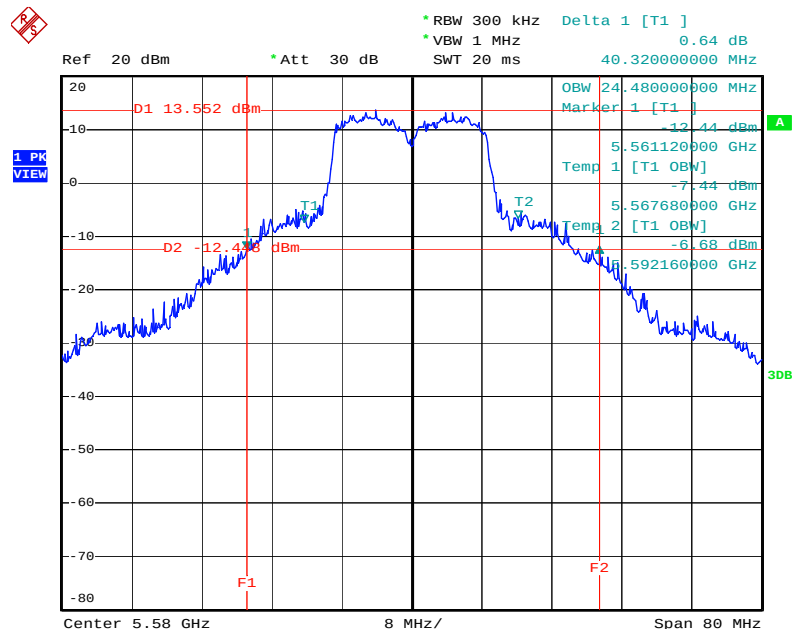


Date: 26.MAR.2009 13:18:25

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. 3 + Ant. 4 / 5700 MHz

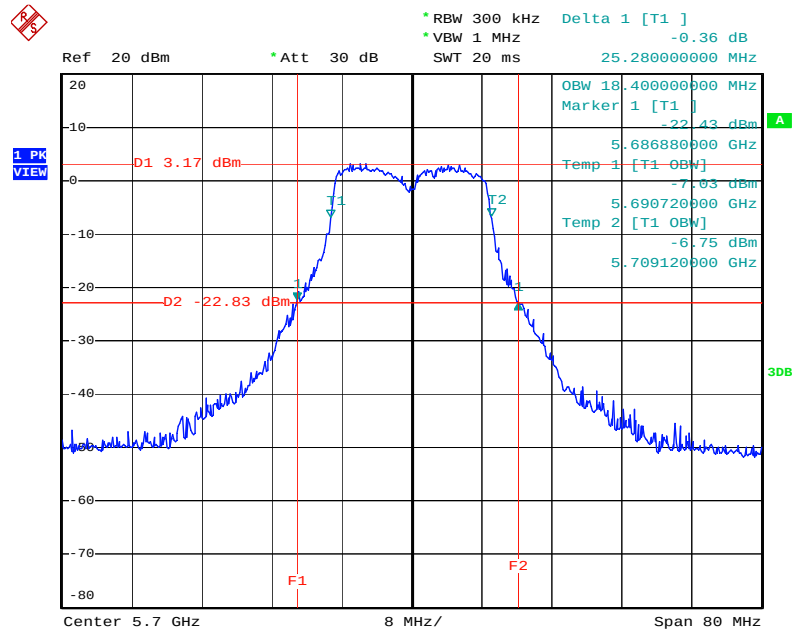


Date: 26.MAR.2009 14:56:28

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 3 + Ant. 4 / 5190 MHz

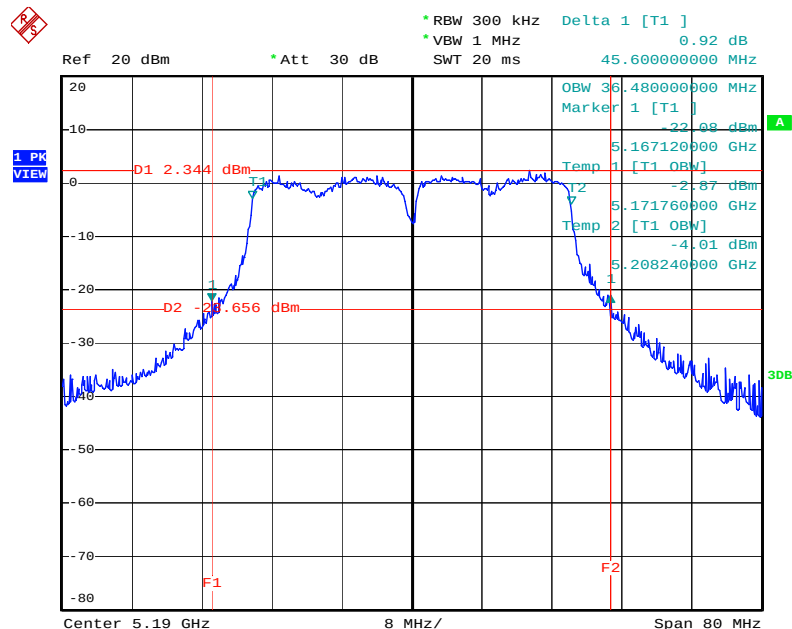


Date: 26.MAR.2009 13:27:44

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 3 + Ant. 4 / 5230 MHz

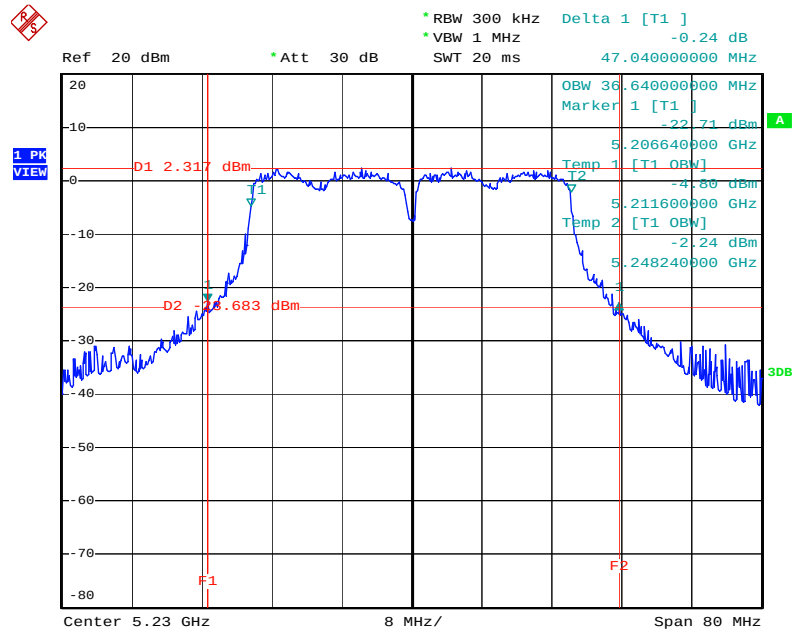


Date: 26.MAR.2009 13:30:11

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 3 + Ant. 4 / 5270 MHz

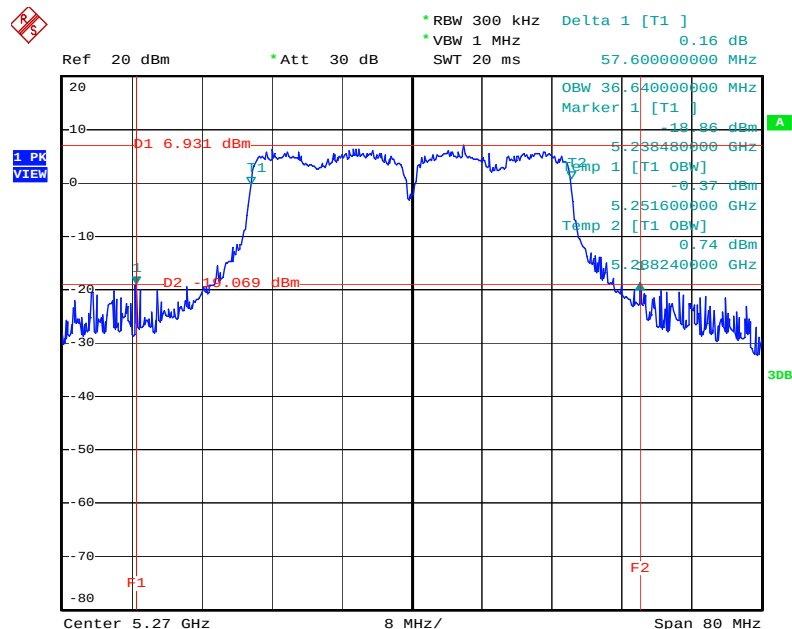


Date: 26.MAR.2009 13:31:07

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 3 + Ant. 4 / 5310 MHz

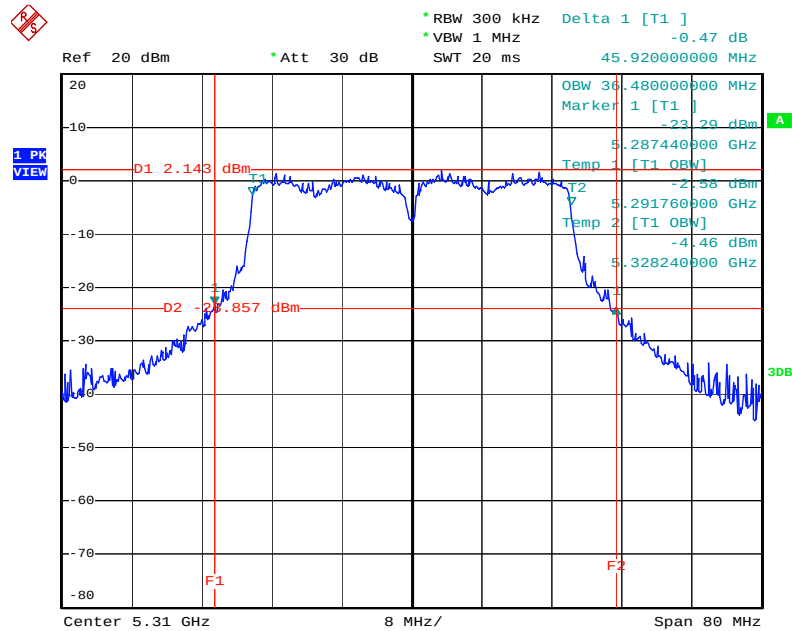


Date: 26.MAR.2009 13:32:12

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 3 + Ant. 4 / 5510MHz

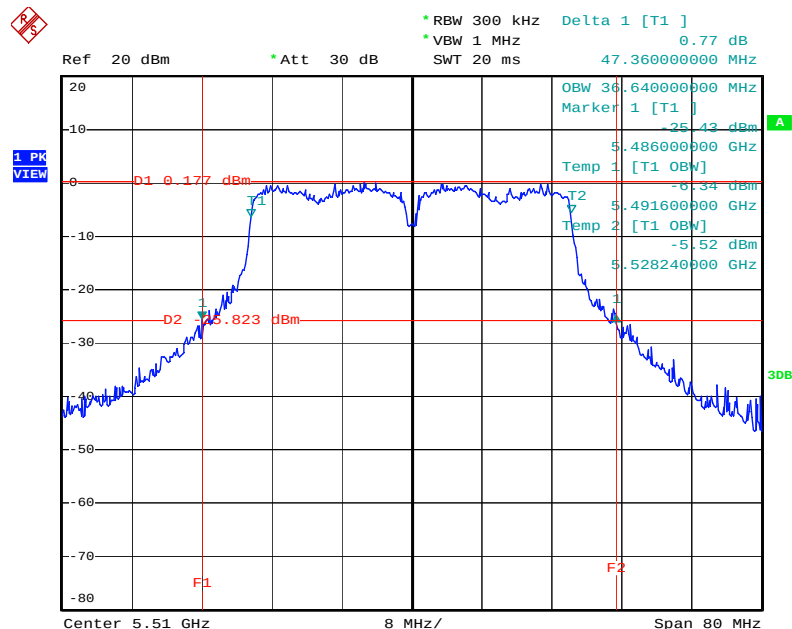


Date: 26.MAR.2009 13:34:13

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 3 + Ant. 4 / 5550 MHz

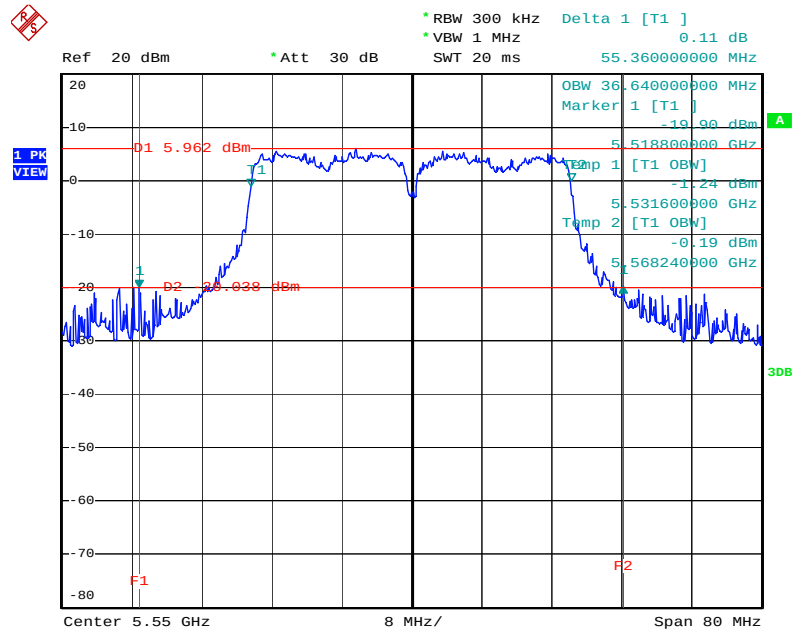


Date: 26.MAR.2009 13:35:00

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 3 + Ant. 4 / 5670 MHz

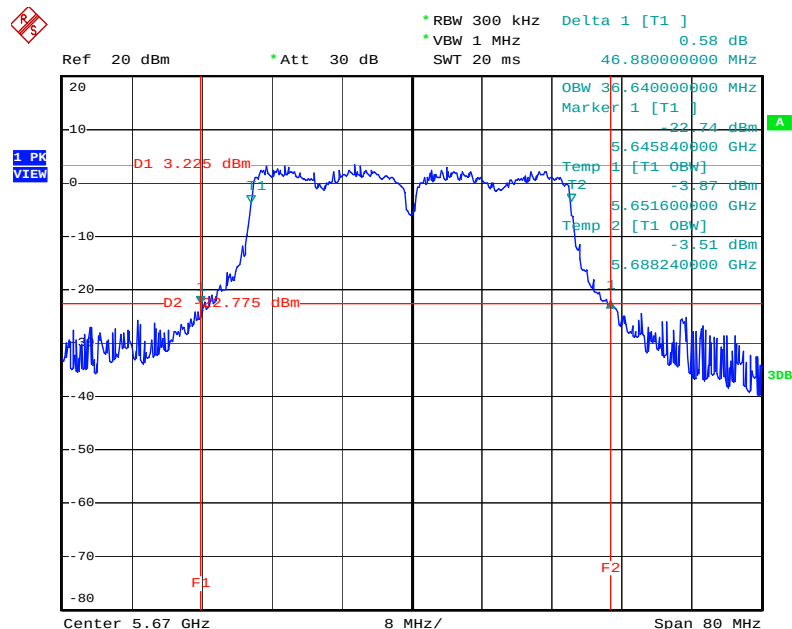


Date: 26.MAR.2009 13:35:45

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 4 / 5180 MHz

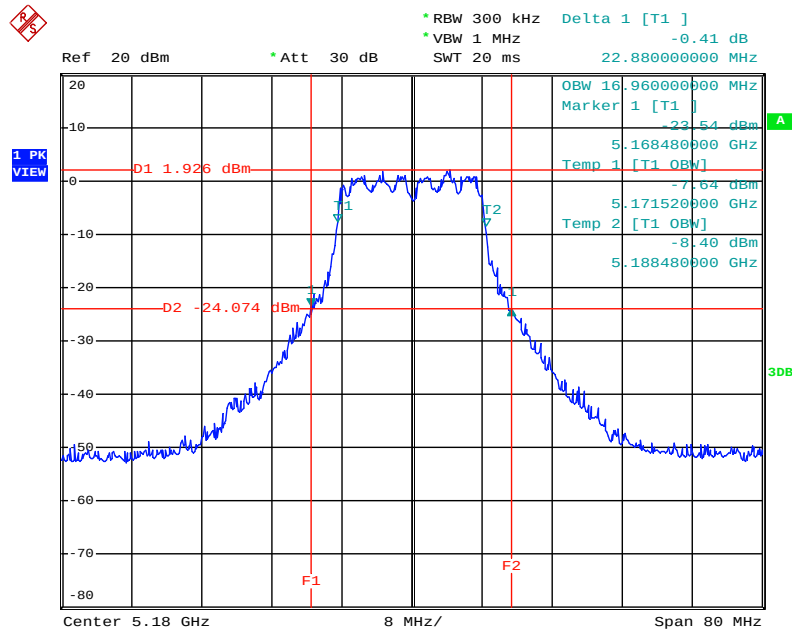


Date: 19.JUL.2011 18:12:40

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 4 / 5200 MHz

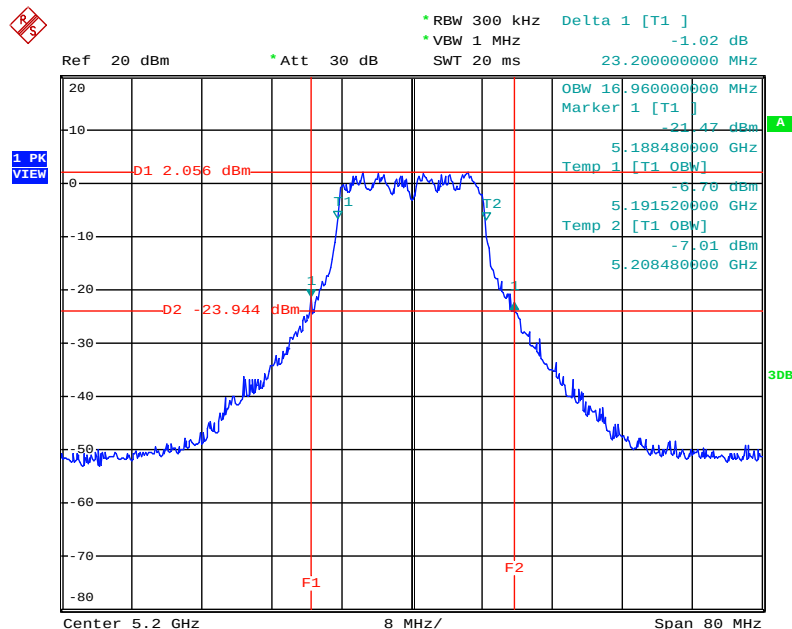


Date: 19.JUL.2011 18:14:44

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 4 / 5240 MHz

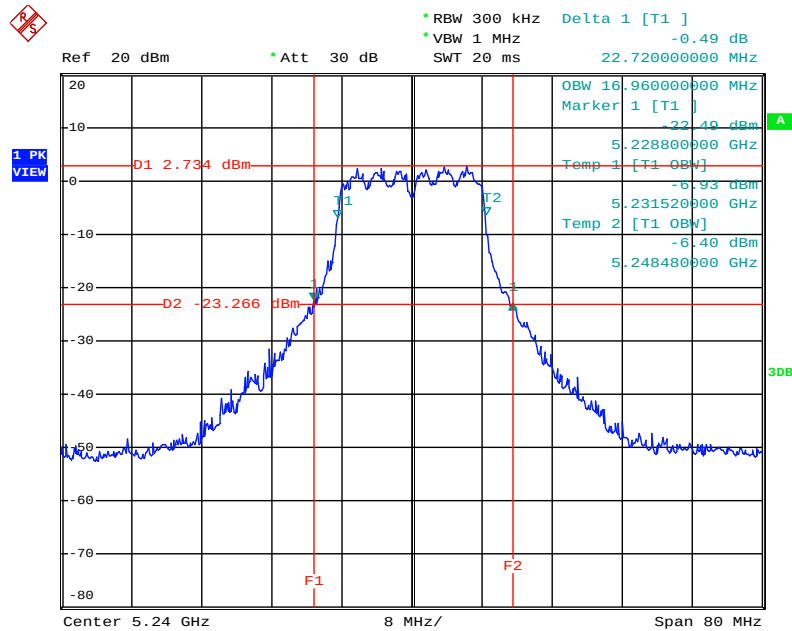


Date: 19.JUL.2011 18:21:32

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 4 / 5260 MHz

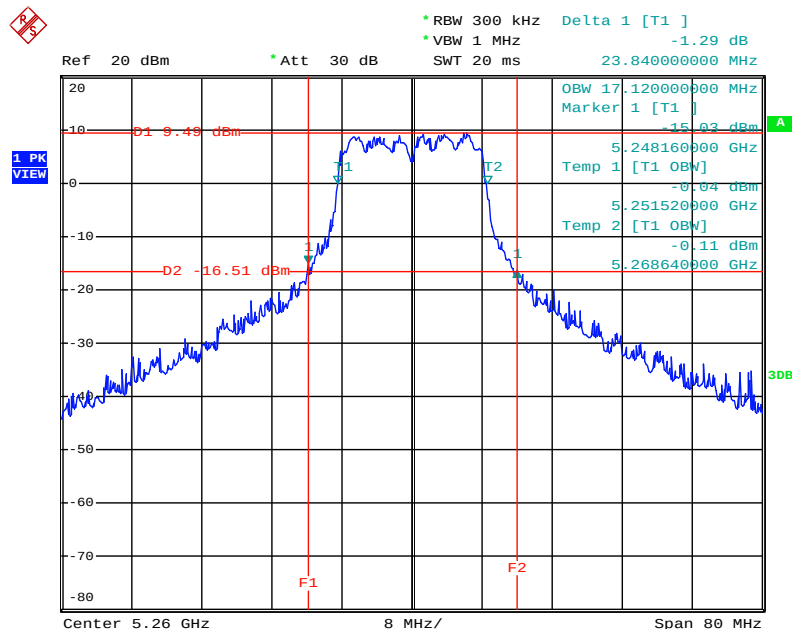


Date: 19.JUL.2011 18:22:56

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 4 / 5300 MHz

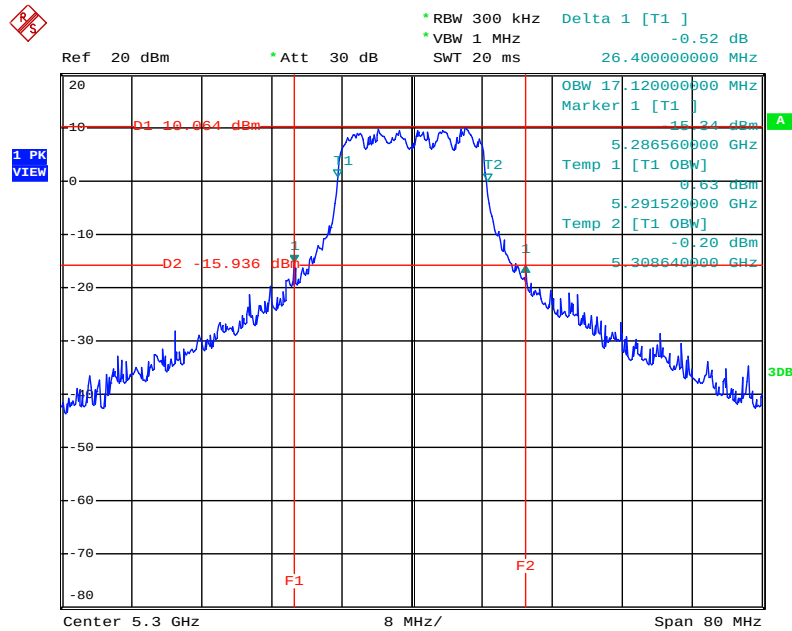


Date: 19.JUL.2011 18:24:13

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 4 / 5320 MHz

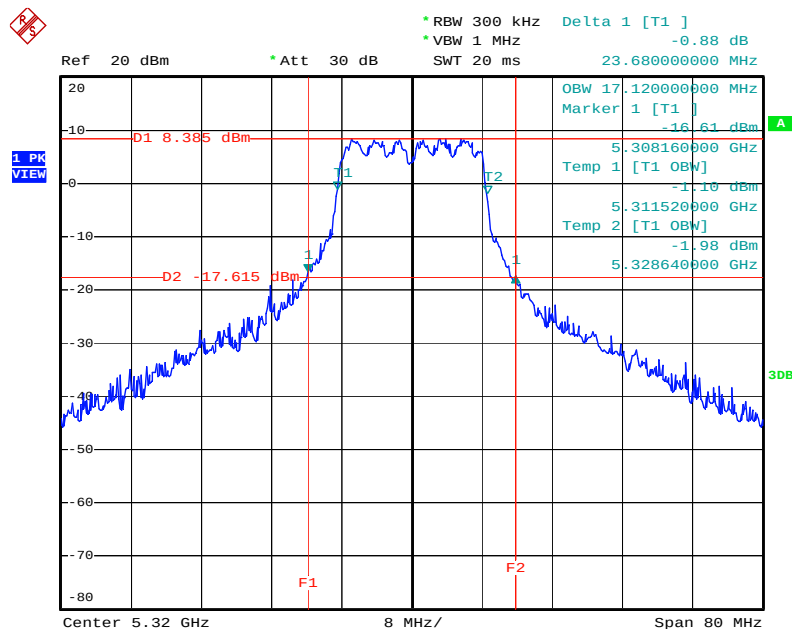


Date: 26.MAR.2009 13:12:53

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 4 / 5500 MHz

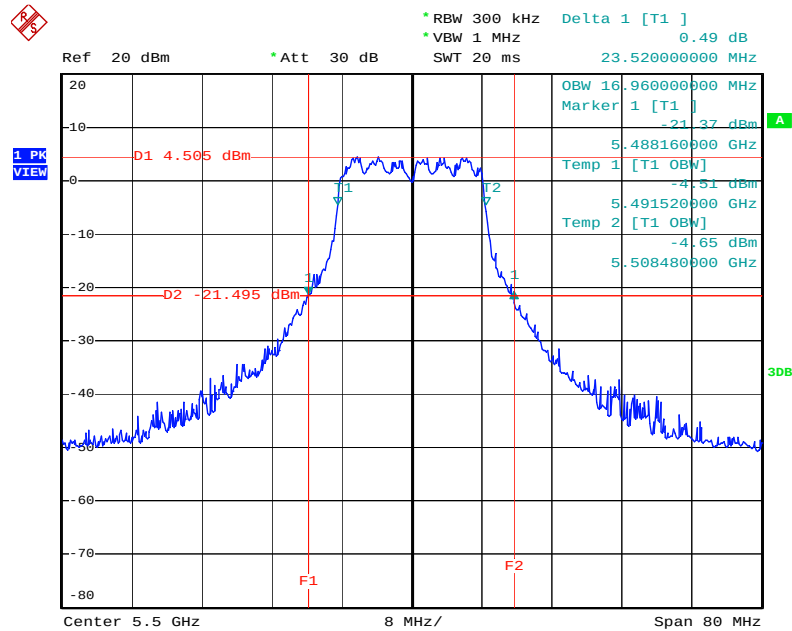


Date: 26.MAR.2009 13:14:11

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 4 / 5580 MHz

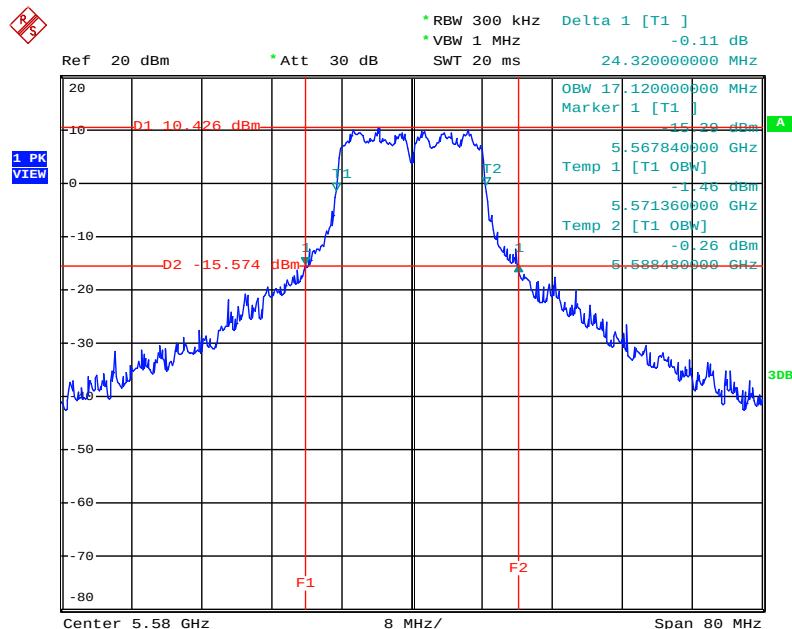

Date: 19.JUL.2011 18:27:29

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 4 / 5700 MHz

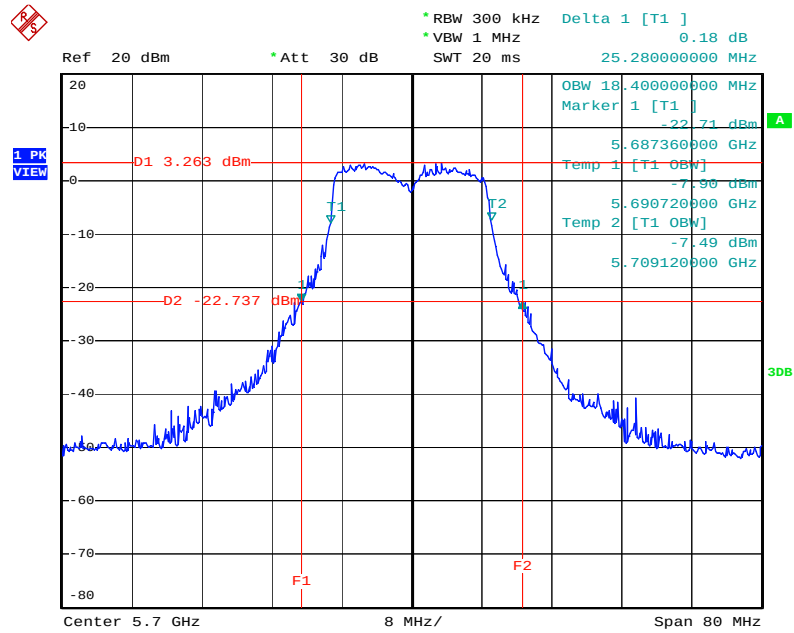

Date: 26.MAR.2009 13:17:31

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or $4 \text{ dBm} + 10\log B$, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.470-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or $11 \text{ dBm} + 10\log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725~5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W or $17 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 17 dBm in any 1 MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain up to 23 dBi without any corresponding reduction in the transmitter peak output power or peak power spectral density. For fixed, point-to-point U-NII transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in peak transmitter power and peak power spectral density for each 1 dB of antenna gain in excess of 23 dBi would be required.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	RMS
Trace	MAX HOLD
Sweep Time	Auto

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with FCC Public Notice DA 02-2138, August 30, 2002.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout

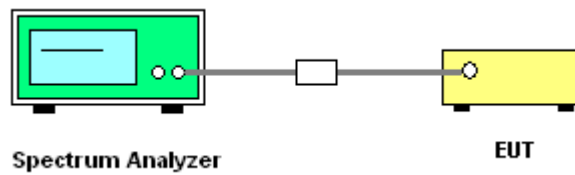

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	24°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS8 20MHz Ant. 3

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	13.51	17.00	Complies
40	5200 MHz	13.84	17.00	Complies
48	5240 MHz	13.50	17.00	Complies
52	5260 MHz	20.60	24.00	Complies
60	5300 MHz	17.92	24.00	Complies
64	5320 MHz	14.34	24.00	Complies
100	5500 MHz	12.55	24.00	Complies
116	5580 MHz	20.75	24.00	Complies
140	5700 MHz	12.00	24.00	Complies

Configuration IEEE 802.11n MCS8 20MHz Ant. 4

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	13.22	17.00	Complies
40	5200 MHz	12.90	17.00	Complies
48	5240 MHz	13.13	17.00	Complies
52	5260 MHz	20.51	24.00	Complies
60	5300 MHz	18.24	24.00	Complies
64	5320 MHz	14.69	24.00	Complies
100	5500 MHz	13.38	24.00	Complies
116	5580 MHz	20.85	24.00	Complies
140	5700 MHz	11.88	24.00	Complies

Configuration IEEE 802.11n MCS8 20MHz Ant. 3 + Ant. 4

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	16.38	17.00	Complies
40	5200 MHz	16.41	17.00	Complies
48	5240 MHz	16.33	17.00	Complies
52	5260 MHz	23.57	24.00	Complies
60	5300 MHz	21.09	24.00	Complies
64	5320 MHz	17.53	24.00	Complies
100	5500 MHz	16.00	24.00	Complies
116	5580 MHz	23.81	24.00	Complies
140	5700 MHz	14.95	24.00	Complies

Configuration IEEE 802.11n MCS8 40MHz Ant. 3

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	13.00	17.00	Complies
46	5230 MHz	13.81	17.00	Complies
54	5270 MHz	17.64	24.00	Complies
62	5310 MHz	12.54	24.00	Complies
102	5510MHz	11.58	24.00	Complies
110	5550 MHz	16.54	24.00	Complies
134	5670 MHz	14.18	24.00	Complies

Configuration IEEE 802.11n MCS8 40MHz Ant. 4

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	12.27	17.00	Complies
46	5230 MHz	13.14	17.00	Complies
54	5270 MHz	17.98	24.00	Complies
62	5310 MHz	13.19	24.00	Complies
102	5510MHz	10.89	24.00	Complies
110	5550 MHz	17.18	24.00	Complies
134	5670 MHz	14.24	24.00	Complies

Configuration IEEE 802.11n MCS8 40MHz Ant. 3 + Ant. 4

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	15.66	17.00	Complies
46	5230 MHz	16.50	17.00	Complies
54	5270 MHz	20.82	24.00	Complies
62	5310 MHz	15.89	24.00	Complies
102	5510MHz	14.26	24.00	Complies
110	5550 MHz	19.88	24.00	Complies
134	5670 MHz	17.22	24.00	Complies

Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.

Temperature	24°C	Humidity	56%
Test Engineer	Allen Liu / Jacky Ho	Configurations	802.11a

Configuration IEEE 802.11a Ant. 3

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	10.60	14.09	Complies
40	5200 MHz	10.98	14.09	Complies
48	5240 MHz	10.60	14.09	Complies
52	5260 MHz	17.55	21.09	Complies
60	5300 MHz	17.38	21.09	Complies
64	5320 MHz	17.22	21.09	Complies
100	5500 MHz	12.83	21.09	Complies
116	5580 MHz	17.57	21.09	Complies
140	5700 MHz	12.74	21.09	Complies

Configuration IEEE 802.11a Ant. 4

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	11.00	14.09	Complies
40	5200 MHz	10.53	14.09	Complies
48	5240 MHz	10.66	14.09	Complies
52	5260 MHz	17.92	21.09	Complies
60	5300 MHz	18.16	21.09	Complies
64	5320 MHz	17.05	21.09	Complies
100	5500 MHz	13.66	21.09	Complies
116	5580 MHz	17.81	21.09	Complies
140	5700 MHz	12.65	21.09	Complies

Configuration IEEE 802.11a Ant. 3 + Ant. 4

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	13.81	14.09	Complies
40	5200 MHz	13.77	14.09	Complies
48	5240 MHz	13.64	14.09	Complies
52	5260 MHz	20.75	21.09	Complies
60	5300 MHz	20.80	21.09	Complies
64	5320 MHz	20.15	21.09	Complies
100	5500 MHz	16.28	21.09	Complies
116	5580 MHz	20.70	21.09	Complies
140	5700 MHz	15.71	21.09	Complies

NOTE 1: Directional gain = 8.91dBi > 6dBi, so the limit of Power Spectral Density is


Band 1: $17 - (8.91 - 6) = 14.09$ dBm ;

Band 2 / Band 3: $24 - (8.91 - 6) = 21.09$ dBm.

Note 2: All the test values were listed in the report.


For plots, only the channel with maximum results was shown.

Conducted Output Power Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. 3 / 5200 MHz

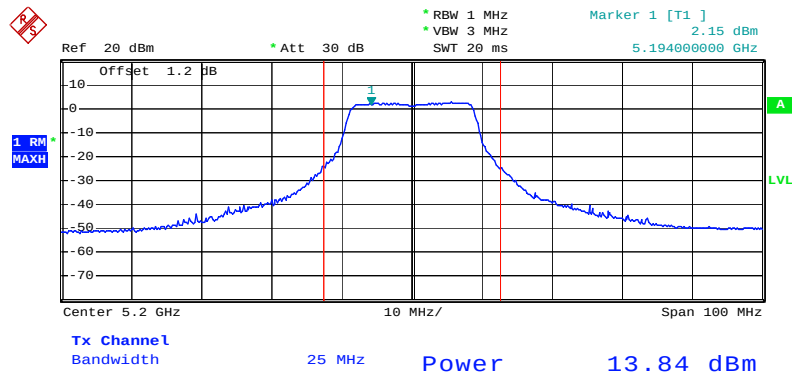


Date: 25.MAR.2009 17:30:51

Conducted Output Power Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. 4 / 5200 MHz

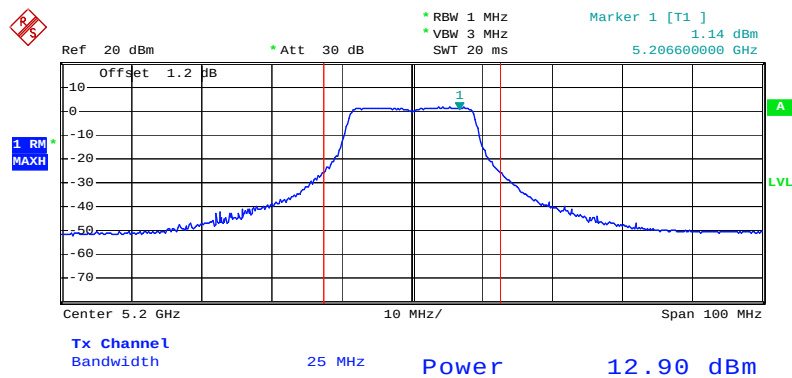


Date: 25.MAR.2009 17:30:23

Conducted Output Power Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. 3 / 5260 MHz

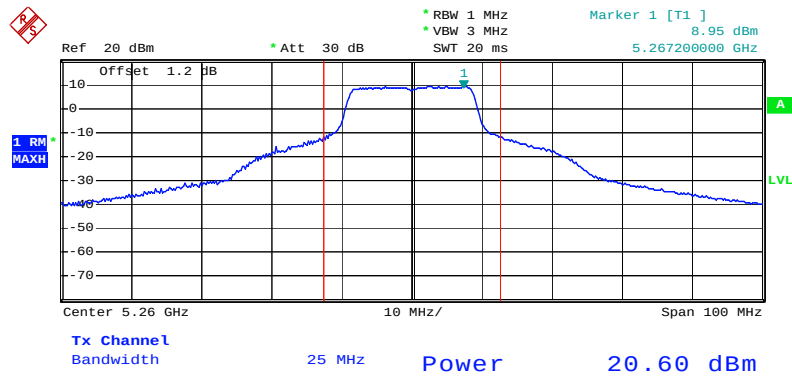


Date: 25.MAR.2009 17:35:37

Conducted Output Power Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. 4 / 5260 MHz

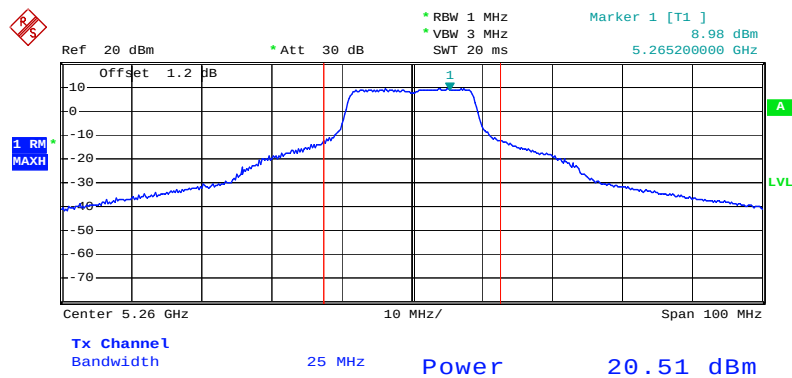


Date: 25.MAR.2009 17:35:00

Conducted Output Power Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. 3 / 5580 MHz

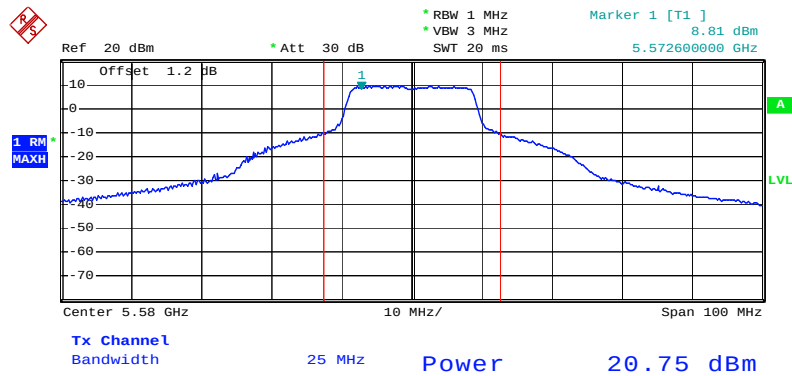


Date: 25.MAR.2009 17:44:32

Conducted Output Power Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. 4 / 5580 MHz

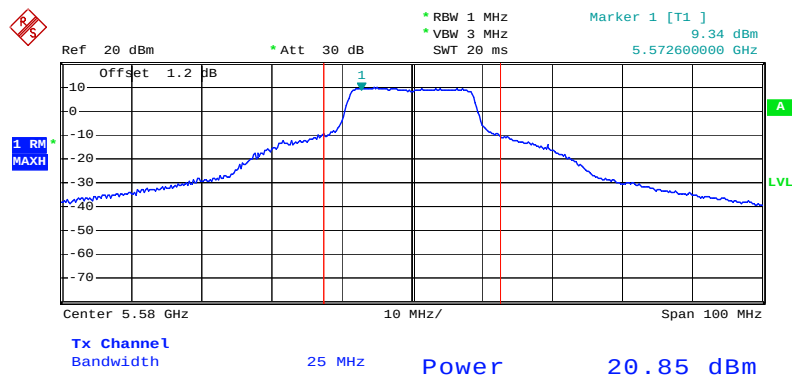


Date: 25.MAR.2009 17:43:59

Conducted Output Power Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 3 / 5230 MHz

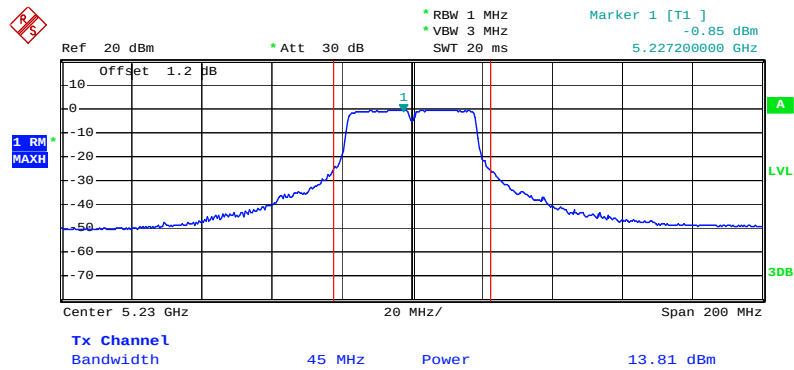


Date: 25.MAR.2009 11:59:15

Conducted Output Power Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 4 / 5230 MHz

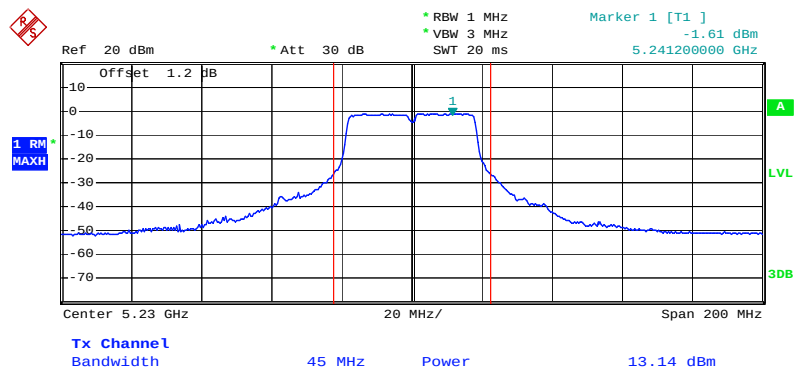


Date: 25.MAR.2009 12:00:35

Conducted Output Power Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 3 / 5270 MHz

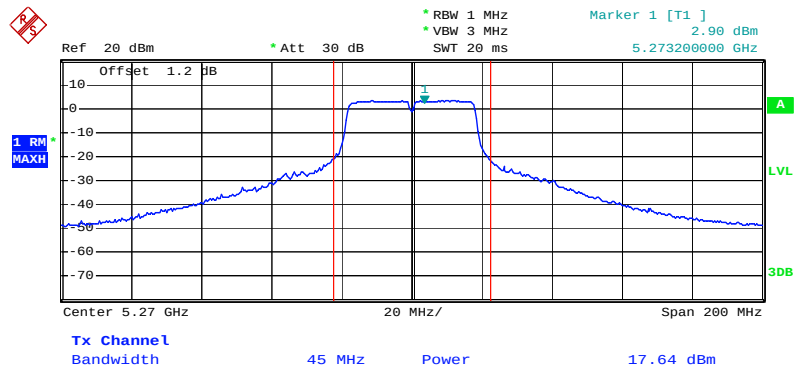


Date: 25.MAR.2009 12:04:35

Conducted Output Power Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 4 / 5270 MHz

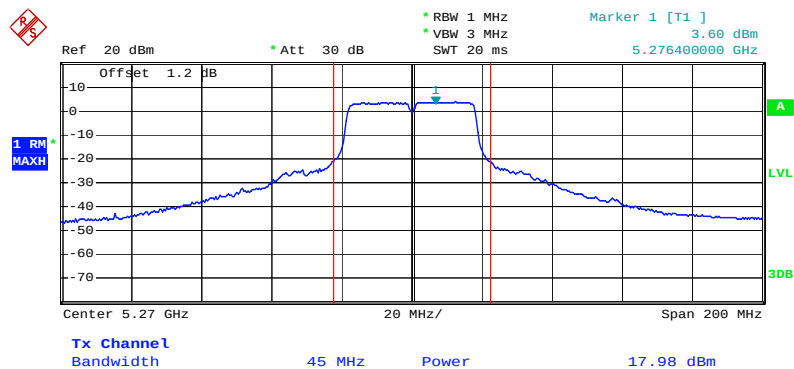


Date: 25.MAR.2009 12:03:26

Conducted Output Power Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 3 / 5550 MHz

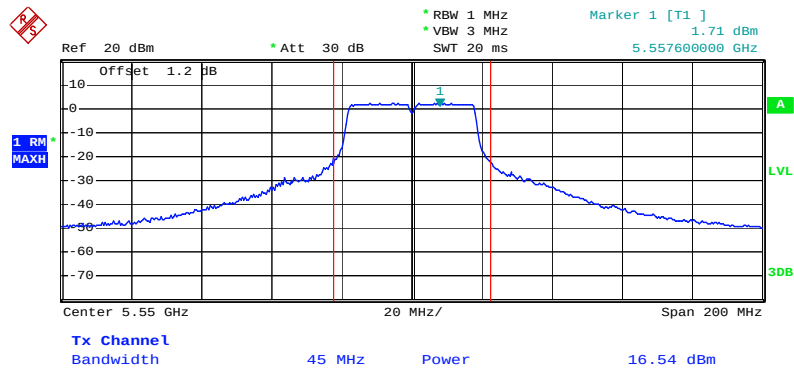


Date: 25.MAR.2009 12:18:51

Conducted Output Power Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 4 / 5550 MHz

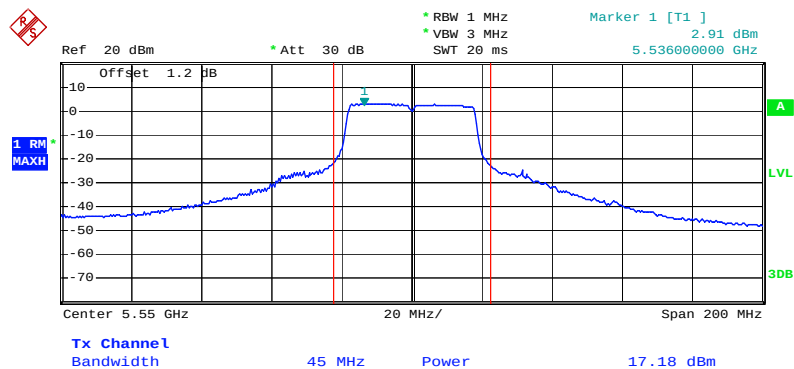


Date: 25.MAR.2009 12:16:55

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 3 / 5180 MHz

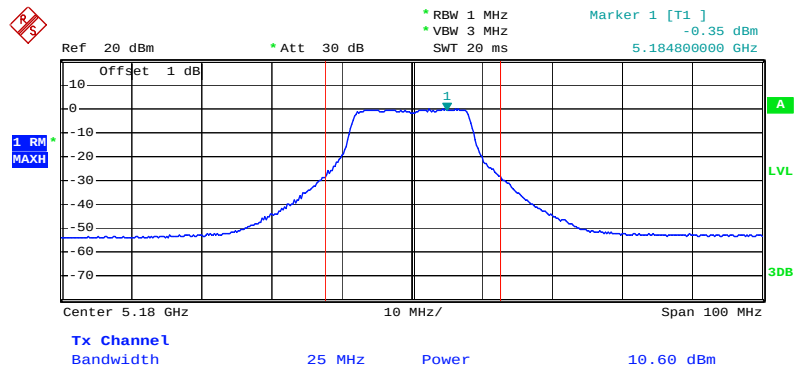


Date: 20.JUL.2011 22:53:33

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 4 / 5180 MHz

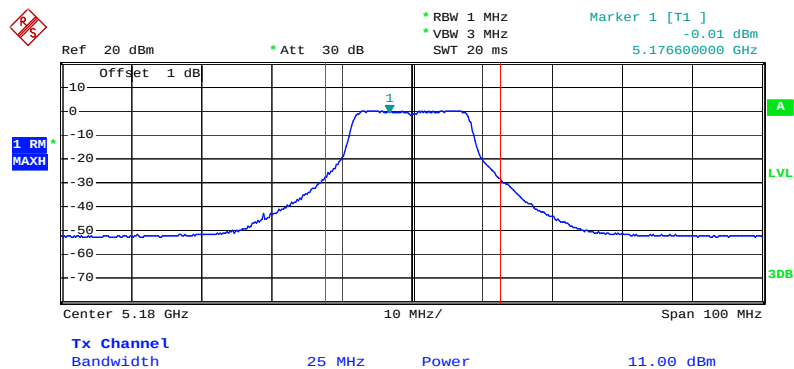


Date: 20.JUL.2011 22:55:05

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 3 / 5300 MHz

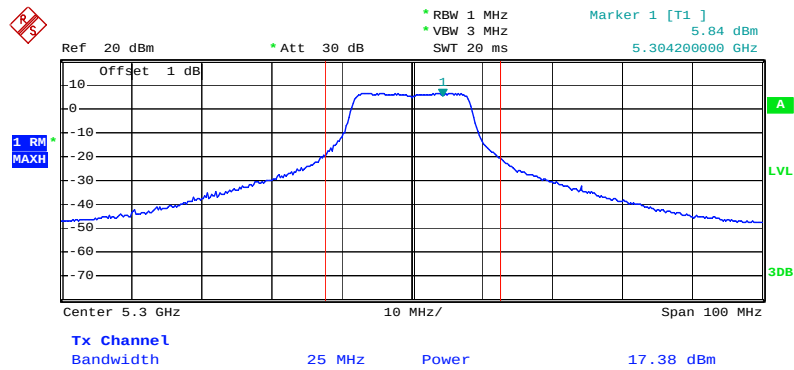


Date: 20.JUL.2011 23:06:24

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 4 / 5300 MHz

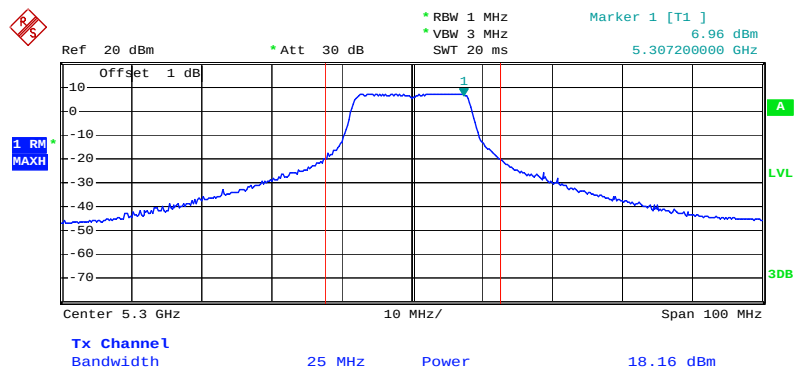


Date: 20.JUL.2011 23:08:18

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 3 / 5580 MHz

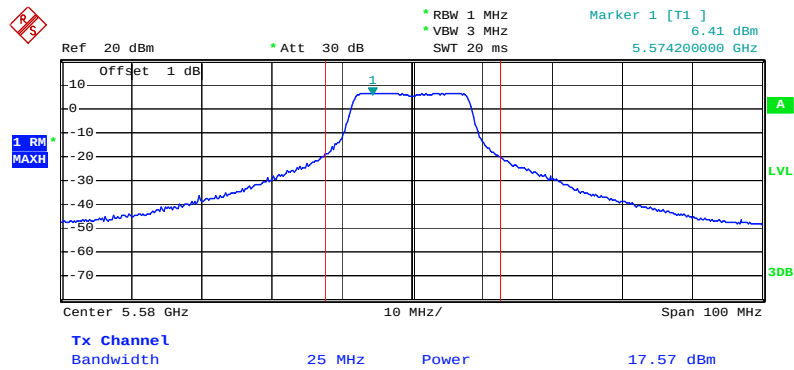

Date: 20.JUL.2011 23:11:53

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 4 / 5580 MHz

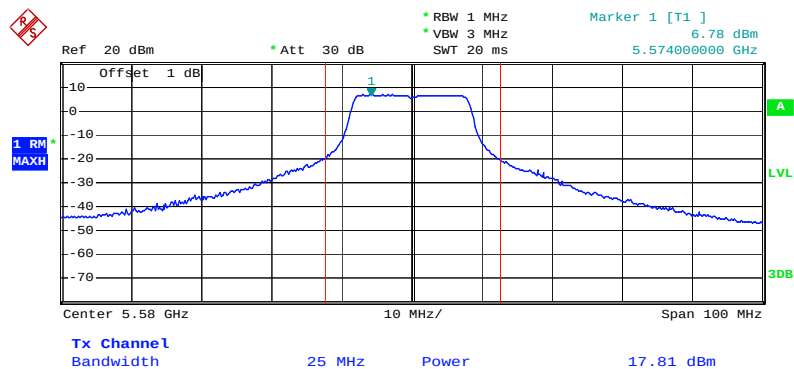

Date: 20.JUL.2011 23:12:59

4.4. Power Spectral Density Measurement

4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4
5.25-5.35 GHz	11
5470-5725	11

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	SAMPLE
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.4.3. Test Procedures

1. The test procedure is the same as section 4.6.3.
2. Trace A, Set RBW = 1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
3. Delta Mark trace A Maximum frequency and trace B same frequency.
4. Repeat the above procedure until measurements for all frequencies were complete.

4.4.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	23°C	Humidity	60%
Test Engineer	Jacky Ho	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS8 20MHz

Channel	Frequency	Power Density (dBm/3kHz)		Total Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
		Ant. 3	Ant. 4			
36	5180 MHz	0.35	-0.09	3.15	4.00	Complies
40	5200 MHz	0.29	0.21	3.26	4.00	Complies
48	5240 MHz	0.47	0.39	3.44	4.00	Complies
52	5260 MHz	7.54	7.67	10.62	11.00	Complies
60	5300 MHz	6.72	7.13	9.94	11.00	Complies
64	5320 MHz	3.08	3.77	6.45	11.00	Complies
100	5500 MHz	5.39	5.54	8.48	11.00	Complies
116	5580 MHz	7.52	7.53	10.54	11.00	Complies
140	5700 MHz	6.94	6.33	9.66	11.00	Complies

Configuration IEEE 802.11n MCS8 40MHz

Channel	Frequency	Power Density (dBm/3kHz)		Total Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
		Ant. 3	Ant. 4			
38	5190 MHz	-3.18	-3.83	-0.48	4.00	Complies
46	5230 MHz	-2.85	-2.98	0.10	4.00	Complies
54	5270 MHz	1.63	2.09	4.88	11.00	Complies
62	5310 MHz	-2.37	-2.88	0.39	11.00	Complies
102	5510MHz	-1.65	-1.16	1.61	11.00	Complies
110	5550 MHz	2.27	2.23	5.26	11.00	Complies
134	5670 MHz	3.51	3.91	6.72	11.00	Complies

Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.

Temperature	23°C	Humidity	60%
Test Engineer	Jacky Ho	Configurations	IEEE 802.11a

Configuration IEEE 802.11a

Channel	Frequency	Power Density (dBm/3kHz)		Total Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
		Ant. 3	Ant. 4			
36	5180 MHz	-3.07	-2.41	0.28	1.09	Complies
40	5200 MHz	-2.46	-2.31	0.63	1.09	Complies
48	5240 MHz	-2.22	-2.44	0.68	1.09	Complies
52	5260 MHz	4.86	5.12	8.00	8.09	Complies
60	5300 MHz	4.70	5.20	7.97	8.09	Complies
64	5320 MHz	2.80	3.18	6.00	8.09	Complies
100	5500 MHz	4.83	4.59	7.72	8.09	Complies
116	5580 MHz	4.97	3.47	7.29	8.09	Complies
140	5700 MHz	4.24	3.90	7.08	8.09	Complies

NOTE 1: Directional gain = 8.91 dBi > 6dBi, so the limit of Power Spectral Density is


Band 1: $17 - (8.91 - 6) = 14.09$ dBm ;

Band 2 / Band 3: $24 - (8.91 - 6) = 21.09$ dBm.

Note 2: All the test values were listed in the report.


For plots, only the channel with maximum results was shown.

Power Density Plot on Configuration IEEE 802.11n MCS8 20MHz / Ant. 3 / 5240 MHz

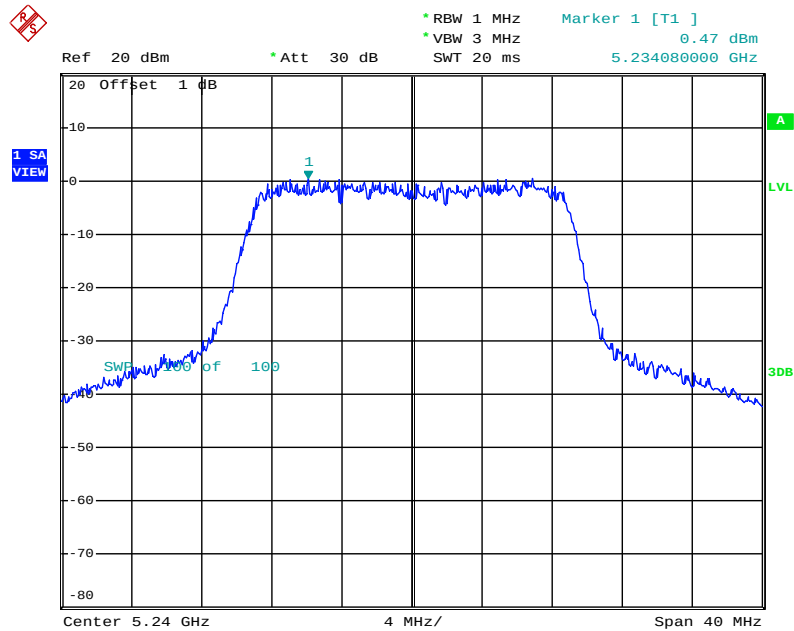


Date: 19.JUL.2011 21:43:24

Power Density Plot on Configuration IEEE 802.11n MCS8 20MHz / Ant. 4 / 5240 MHz

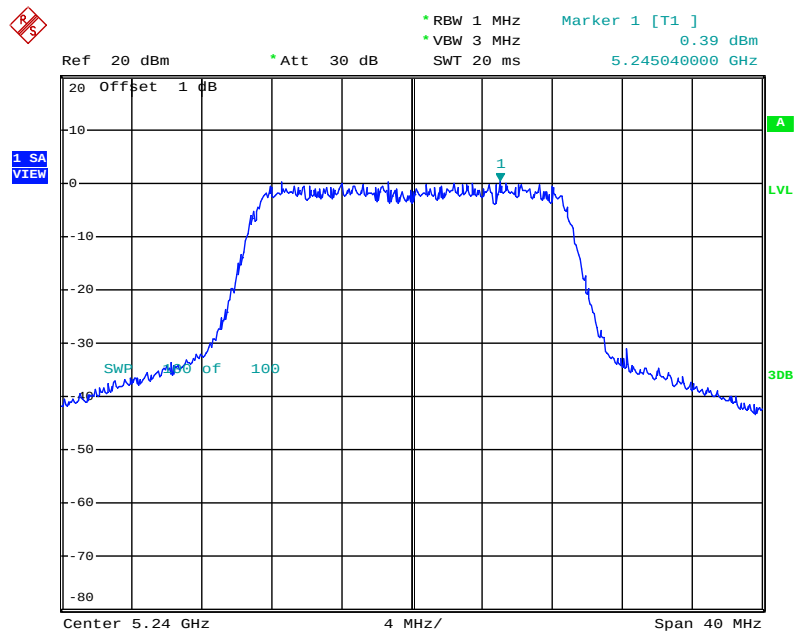


Date: 19.JUL.2011 21:42:50

Power Density Plot on Configuration IEEE 802.11n MCS8 20MHz / Ant. 3 / 5260 MHz

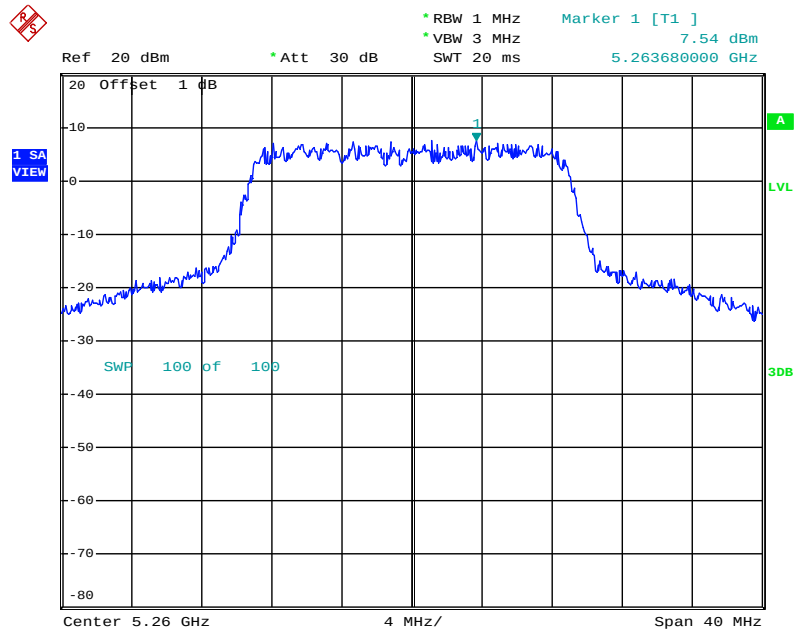


Date: 19.JUL.2011 21:44:10

Power Density Plot on Configuration IEEE 802.11n MCS8 20MHz / Ant. 4 / 5260 MHz

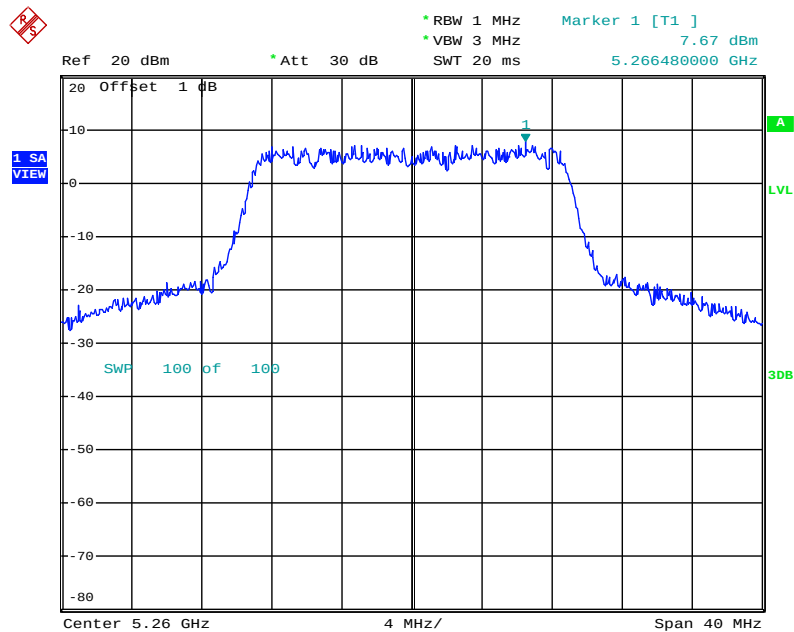


Date: 19.JUL.2011 21:44:49

Power Density Plot on Configuration IEEE 802.11n MCS8 20MHz / Ant. 3 / 5580 MHz

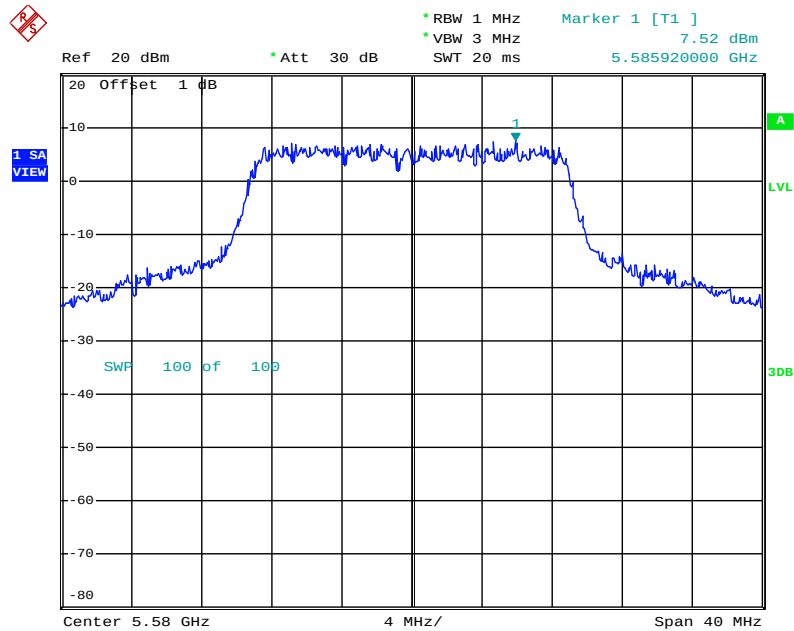


Date: 19.JUL.2011 21:50:21

Power Density Plot on Configuration IEEE 802.11n MCS8 20MHz / Ant. 4 / 5580 MHz

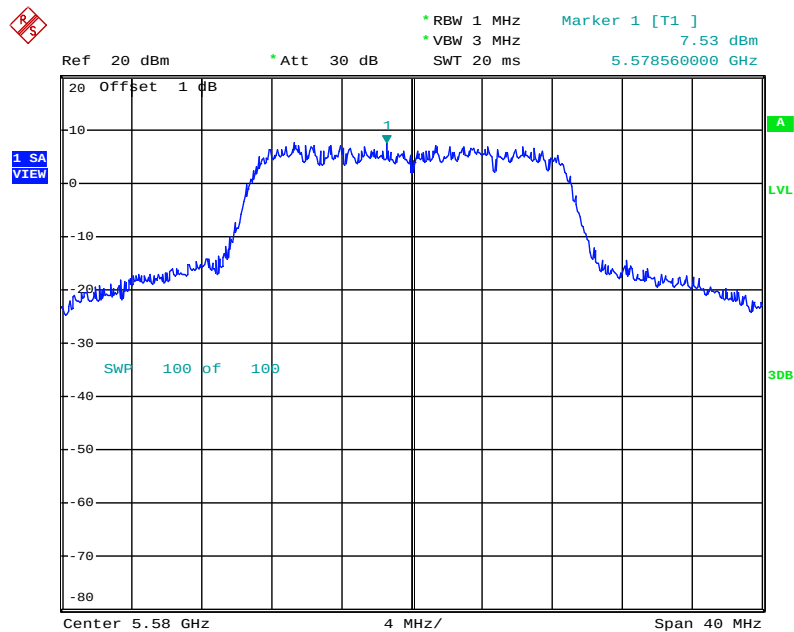


Date: 19.JUL.2011 21:50:53

Power Density Plot on Configuration IEEE 802.11n MCS8 40MHz / Ant. 3 / 5230 MHz

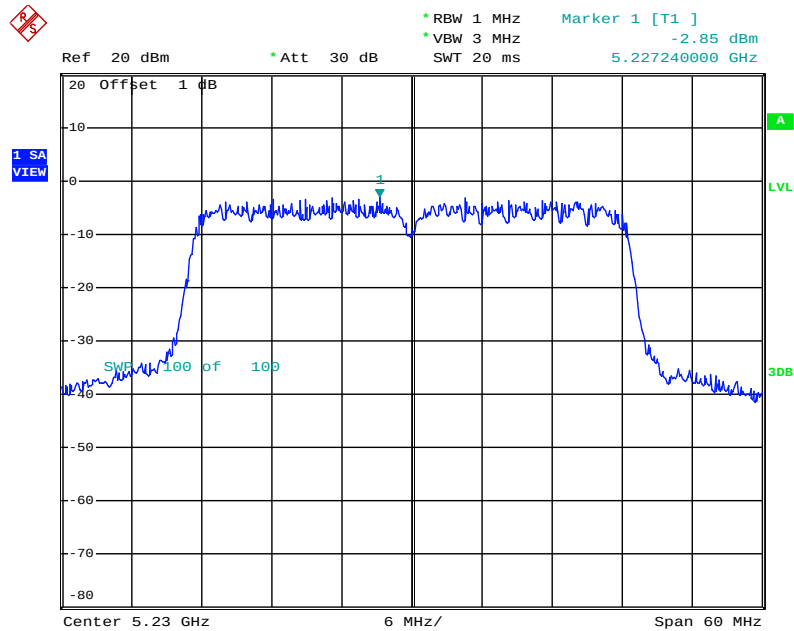


Date: 19.JUL.2011 21:56:00

Power Density Plot on Configuration IEEE 802.11n MCS8 40MHz / Ant. 4 / 5230 MHz

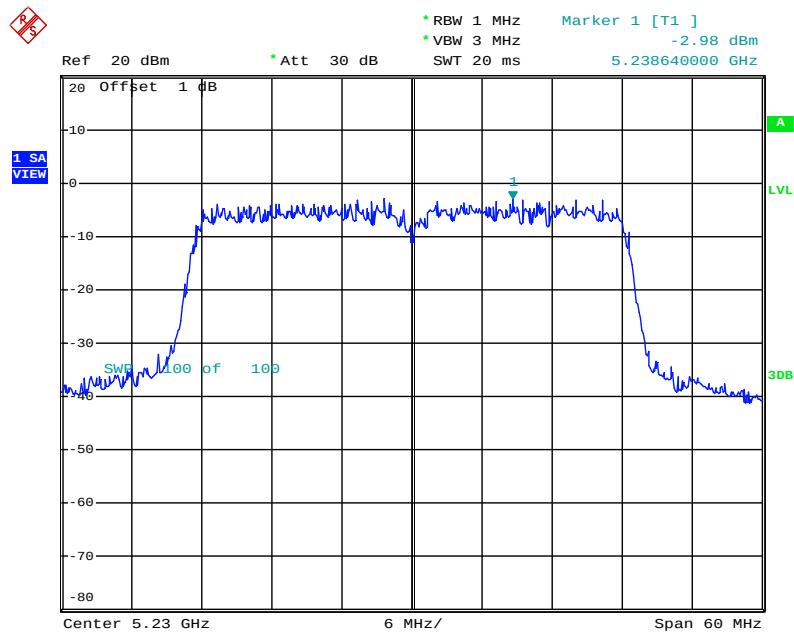


Date: 19.JUL.2011 21:55:22

Power Density Plot on Configuration IEEE 802.11n MCS8 40MHz / Ant. 3 / 5270 MHz

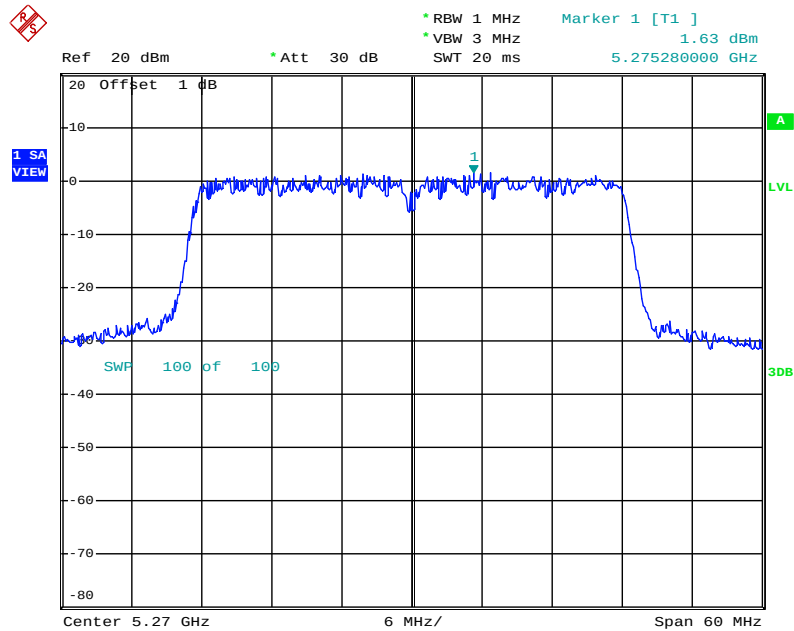


Date: 19.JUL.2011 21:56:47

Power Density Plot on Configuration IEEE 802.11n MCS8 40MHz / Ant. 4 / 5270 MHz

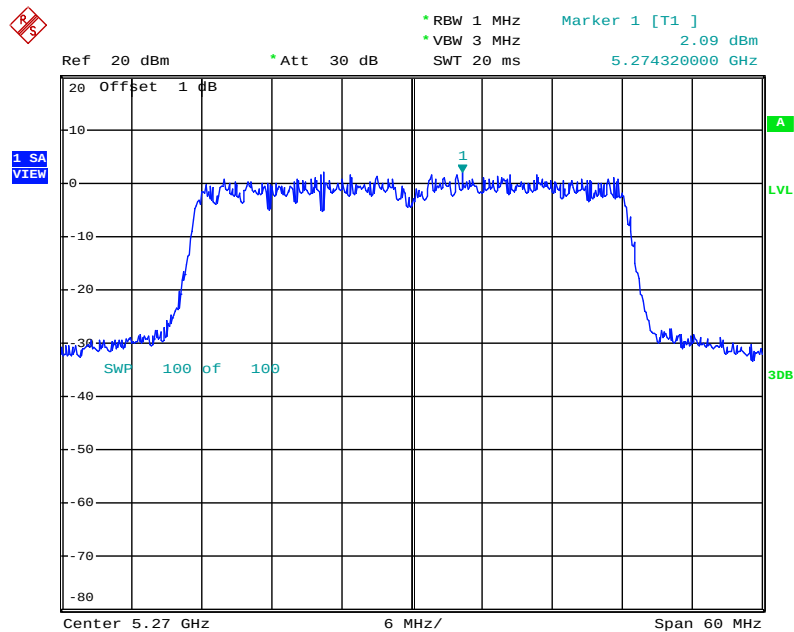


Date: 19.JUL.2011 21:57:24

Power Density Plot on Configuration IEEE 802.11n MCS8 40MHz / Ant. 3 / 5670 MHz

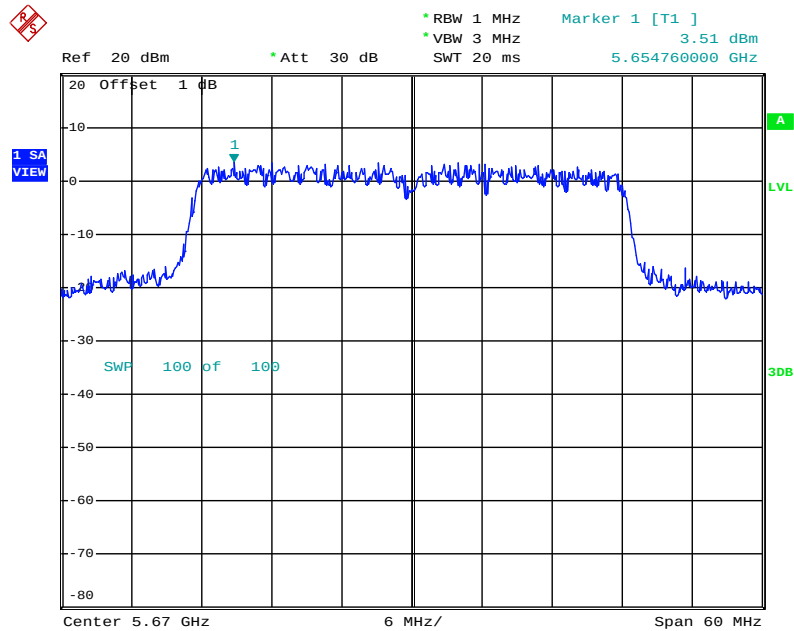


Date: 19.JUL.2011 22:02:34

Power Density Plot on Configuration IEEE 802.11n MCS8 40MHz / Ant. 4 / 5670 MHz

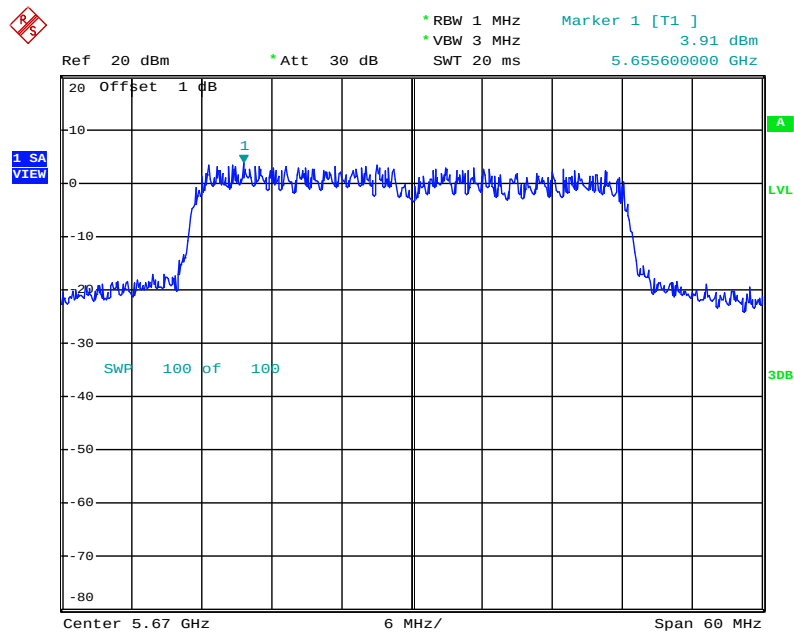


Date: 19.JUL.2011 22:03:22

Power Density Plot on Configuration IEEE 802.11a / Ant. 3 / 5240 MHz

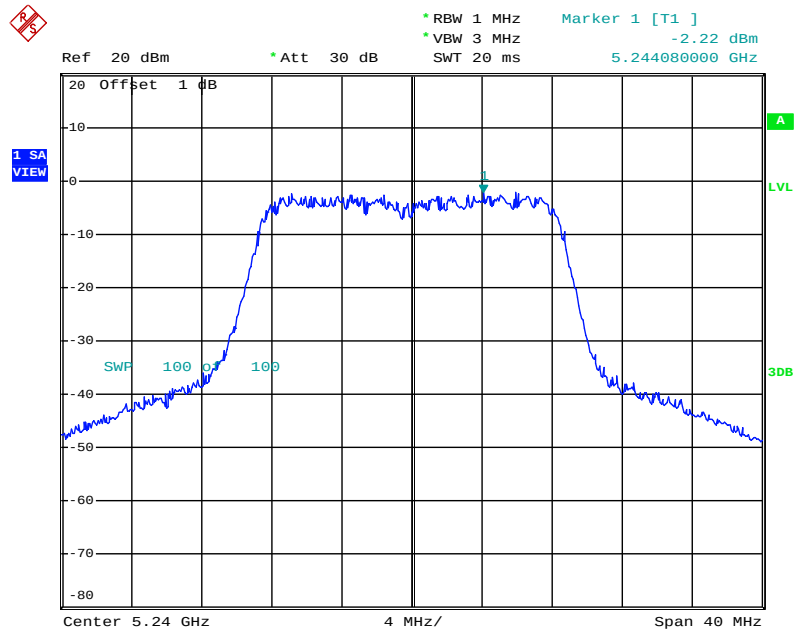


Date: 19.JUL.2011 20:40:22

Power Density Plot on Configuration IEEE 802.11a / Ant. 4 / 5240 MHz

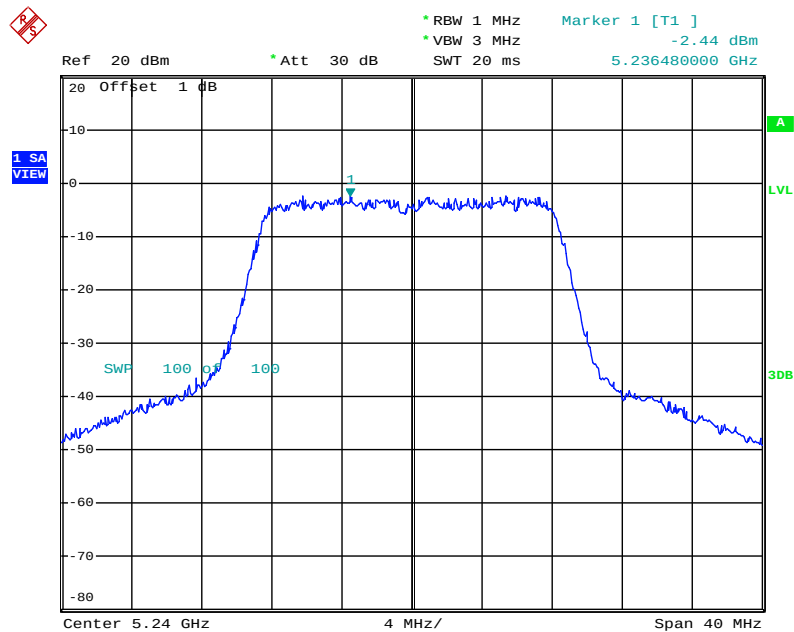


Date: 19.JUL.2011 20:40:52

Power Density Plot on Configuration IEEE 802.11a / Ant. 3 / 5260 MHz

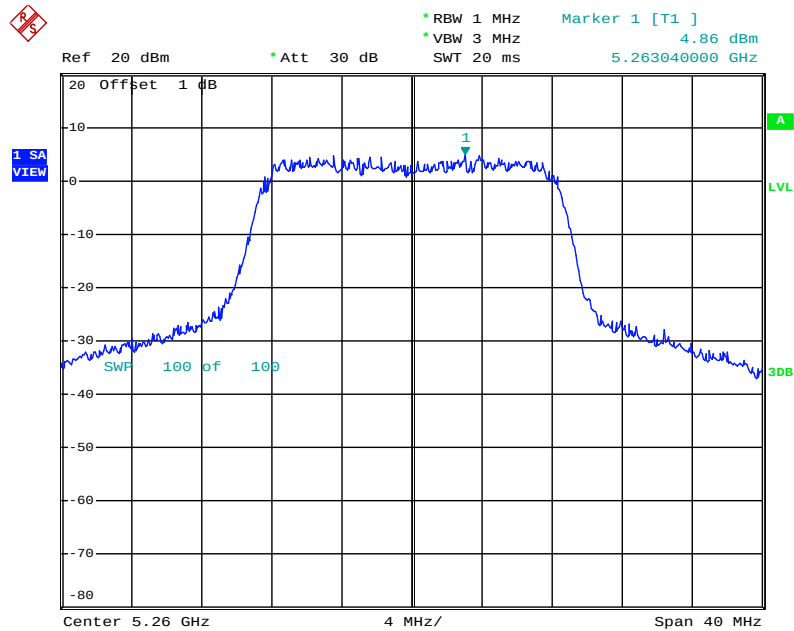


Date: 19.JUL.2011 21:25:51

Power Density Plot on Configuration IEEE 802.11a / Ant. 4 / 5260 MHz

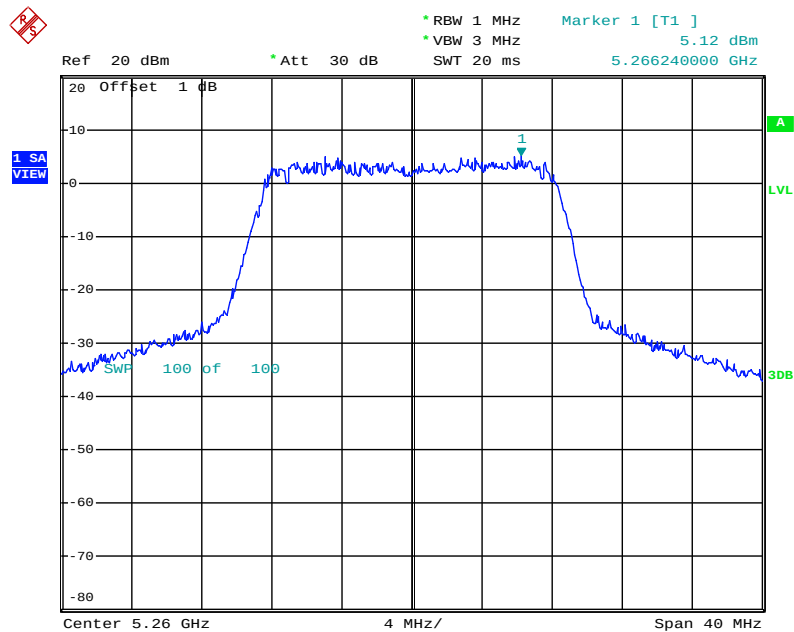


Date: 19.JUL.2011 21:26:56

Power Density Plot on Configuration IEEE 802.11a / Ant. 3 / 5500 MHz

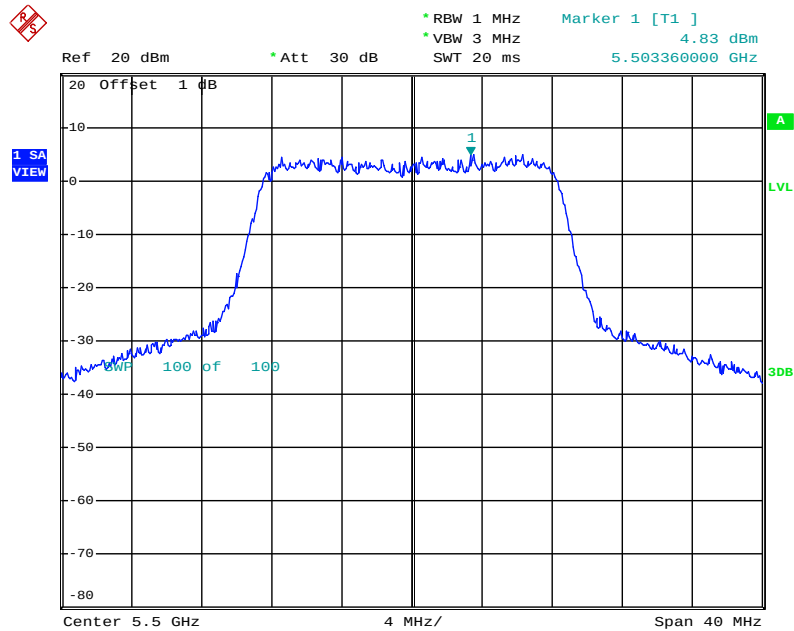

Date: 19.JUL.2011 21:33:58

Power Density Plot on Configuration IEEE 802.11a / Ant. 4 / 5500 MHz

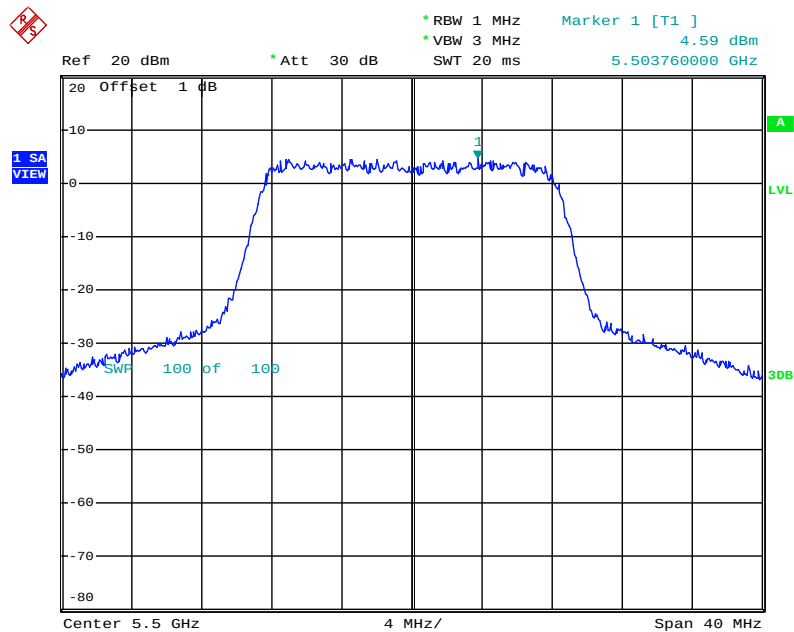

Date: 19.JUL.2011 21:34:43

4.5. Peak Excursion Measurement

4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz (Peak Trace) / 1000 kHz (Average Trace)
VB	3000 kHz (Peak Trace) / 300 kHz (Average Trace)
Detector	Peak (Peak Trace) / Sample (Average Trace)
Trace	Max Hold
Sweep Time	60s

4.5.3. Test Procedures

1. The test procedure is the same as section 4.6.3.
2. Trace A, Set RBW = 1MHz, VBW = 3MHz, Span > 26dB bandwidth, Max. hold.
3. Delta Mark trace A Maximum frequency and trace B same frequency.
4. Repeat the above procedure until measurements for all frequencies were complete.

4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Peak Excursion

Temperature	24°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS8 20MHz / Ant. 3 + Ant. 4

Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
36	5180 MHz	5.53	13	Complies
40	5200 MHz	5.75	13	Complies
48	5240 MHz	6.30	13	Complies
52	5260 MHz	5.77	13	Complies
60	5300 MHz	5.83	13	Complies
64	5320 MHz	5.08	13	Complies
100	5500 MHz	5.47	13	Complies
116	5580 MHz	5.94	13	Complies
140	5700 MHz	5.68	13	Complies

Configuration IEEE 802.11n MCS8 40MHz / Ant. 3 + Ant. 4

Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
38	5190 MHz	6.74	13	Complies
46	5230 MHz	5.67	13	Complies
54	5270 MHz	5.33	13	Complies
62	5310 MHz	5.56	13	Complies
102	5510MHz	5.67	13	Complies
110	5550 MHz	5.91	13	Complies
134	5670 MHz	5.41	13	Complies

Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.

Temperature	24°C	Humidity	56%
Test Engineer	Allen Liu / Jacky Ho	Configurations	IEEE 802.11a


Configuration IEEE 802.11a / Ant. 3 + Ant. 4

Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
36	5180 MHz	6.14	13	Complies
40	5200 MHz	4.72	13	Complies
48	5240 MHz	4.09	13	Complies
52	5260 MHz	5.90	13	Complies
60	5300 MHz	5.69	13	Complies
64	5320 MHz	5.00	13	Complies
100	5500 MHz	5.00	13	Complies
116	5580 MHz	4.56	13	Complies
140	5700 MHz	5.00	13	Complies

Note: All the test values were listed in the report.


For plots, only the channel with maximum results was shown.

Peak Excursion Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. 3 + Ant. 4 / 5240 MHz

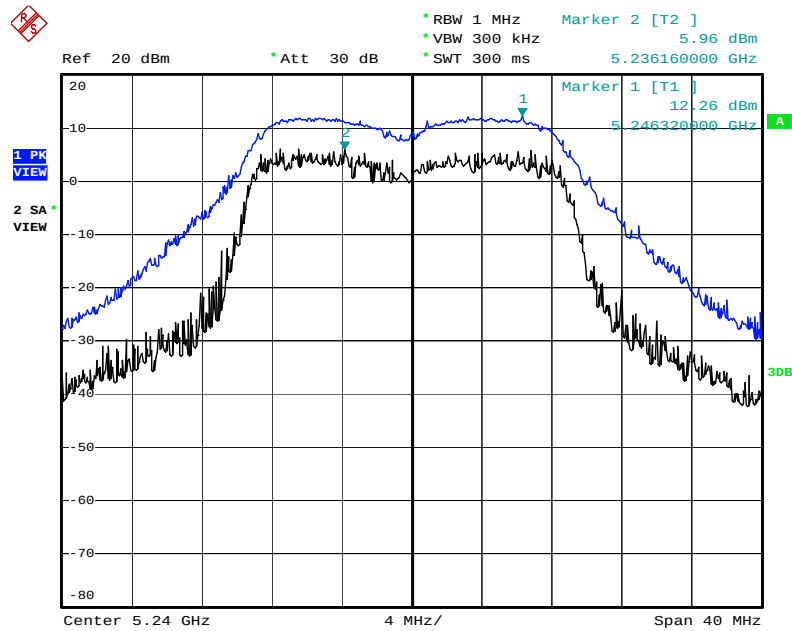


Date: 26.MAR.2009 13:23:14

Peak Excursion Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. 3 + Ant. 4 / 5300 MHz

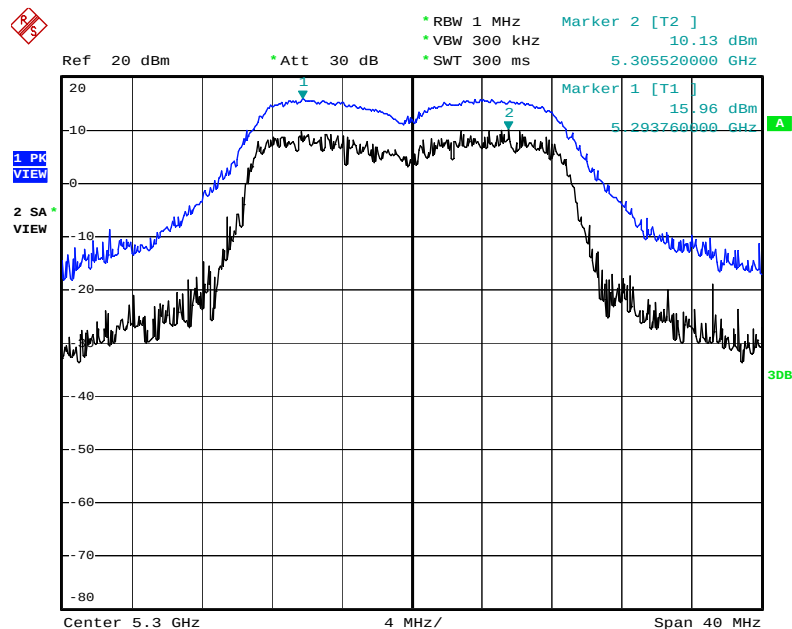


Date: 26.MAR.2009 13:21:35

Peak Excursion Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. 3 + Ant. 4 / 5580 MHz

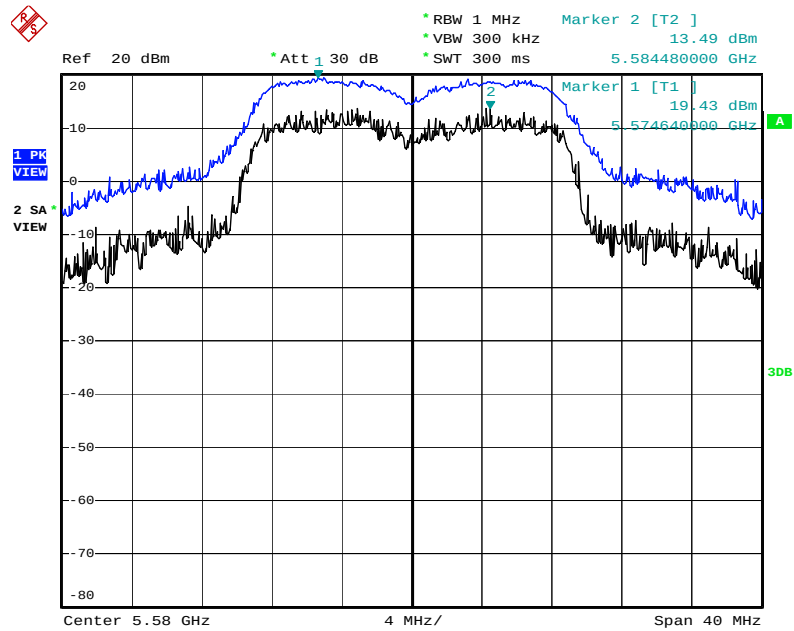


Date: 26.MAR.2009 13:18:45

Peak Excursion Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 3 + Ant. 4 / 5190 MHz

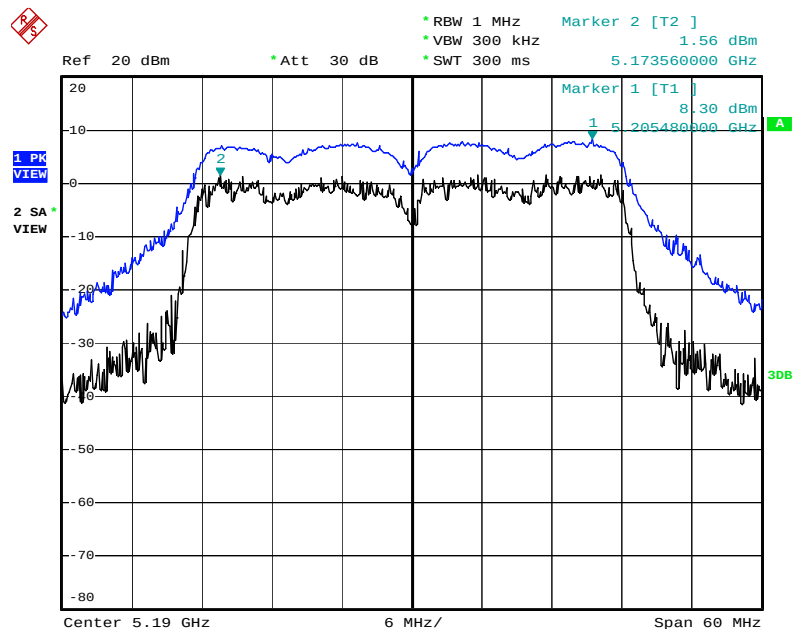


Date: 26.MAR.2009 13:28:02

Peak Excursion Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 3 + Ant. 4 / 5510MHz

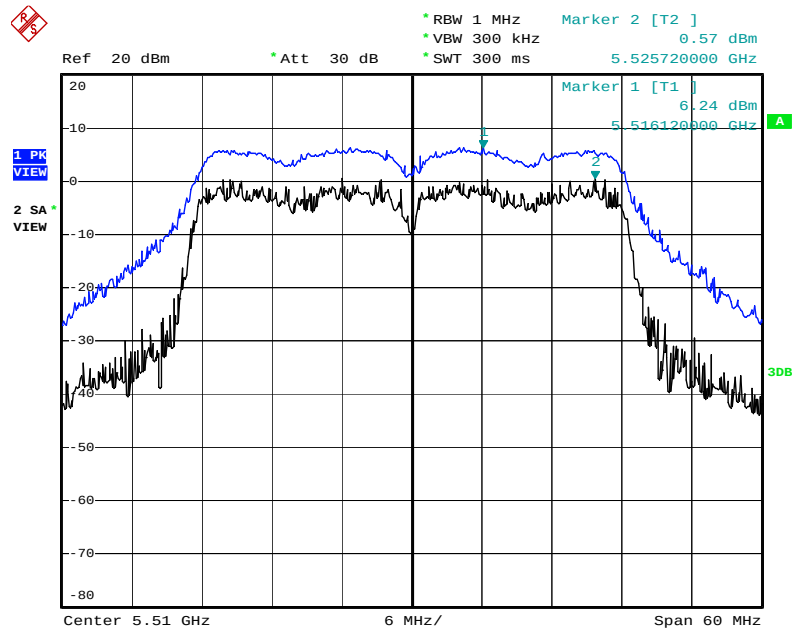


Date: 26.MAR.2009 13:34:31

Peak Excursion Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 4 / 5180 MHz

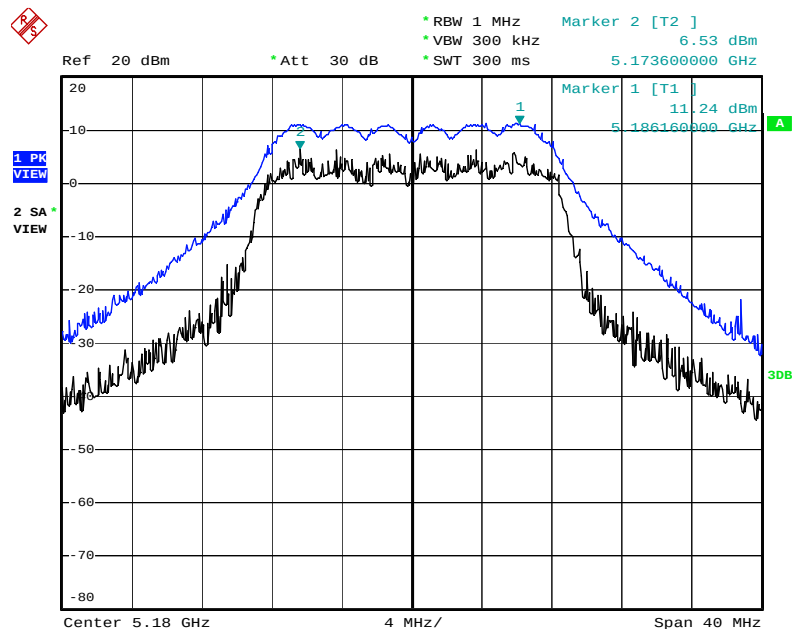


Date: 26.MAR.2009 13:04:23

Peak Excursion Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 4 / 5260 MHz

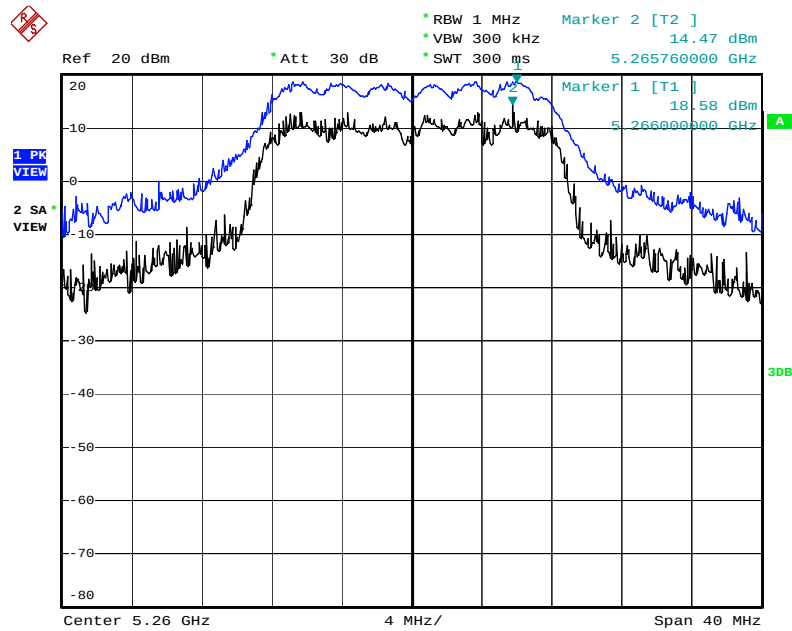

Date: 26.MAR.2009 13:08:37

Peak Excursion Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 4 / 5500 MHz

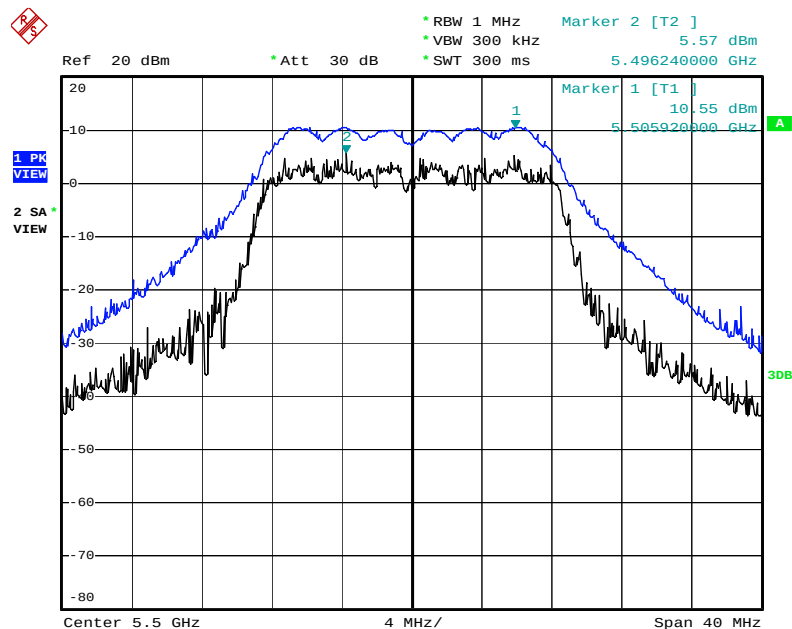

Date: 26.MAR.2009 13:14:31

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1 000 MHz
Stop Frequency	40 GHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout

For radiated emissions below 1GHz

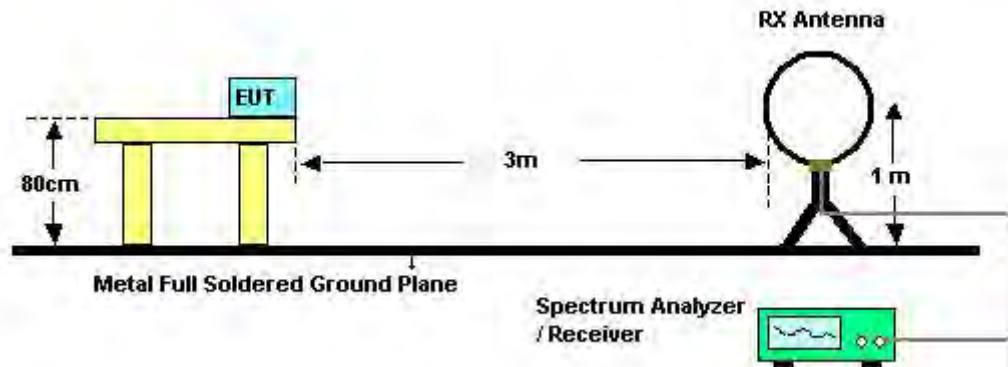

For radiated emissions above 1GHz

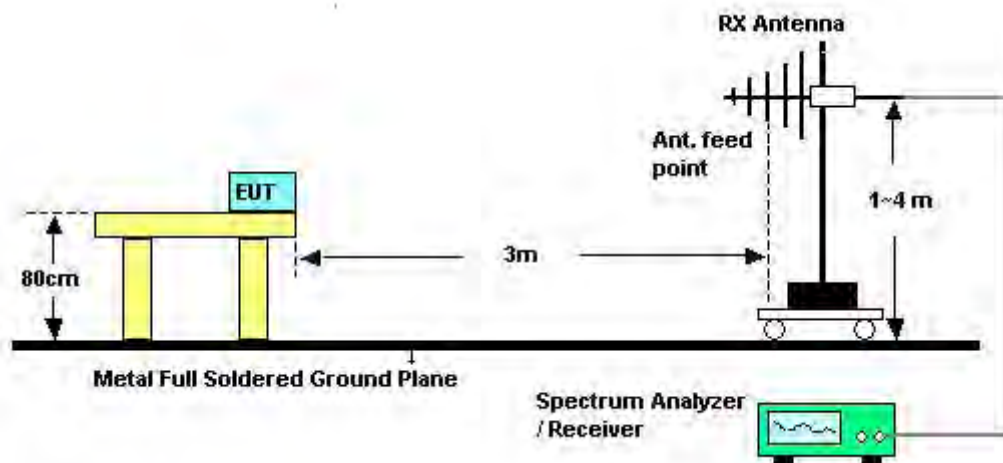

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	Normal Link
Test Date	Jul. 20, 2011		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	Normal Link

Horizontal

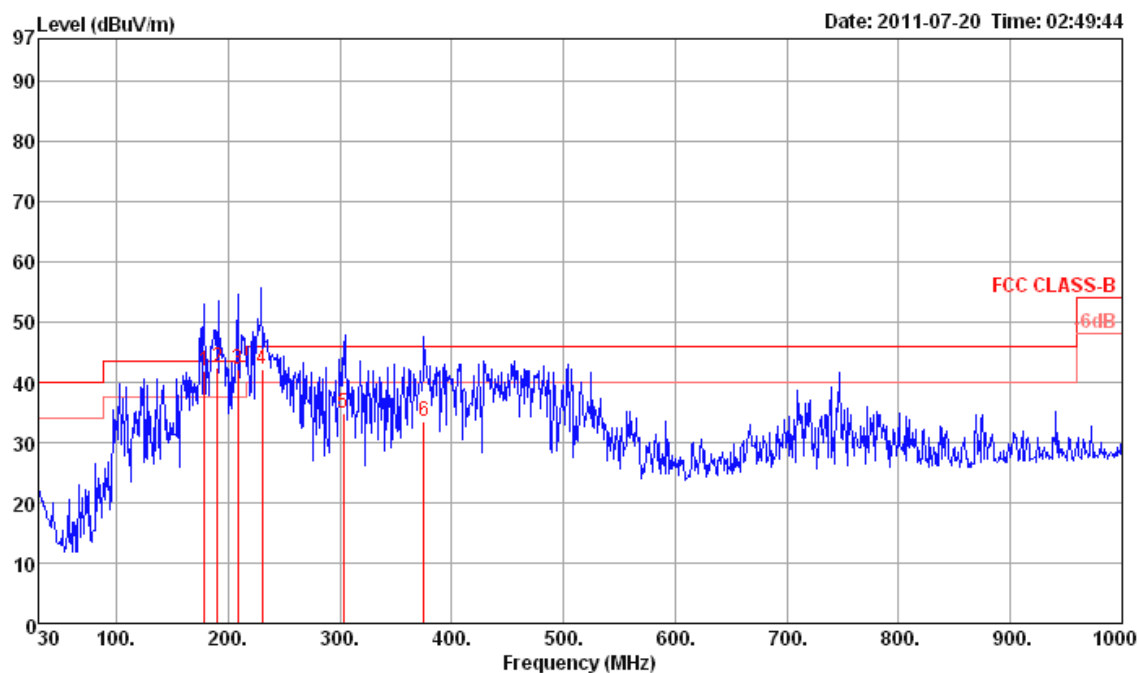

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark
				dB	dBuV	dB	dB/m	dB	Pol/Phase
1	178.73	41.83	43.50	-1.67	54.30	1.60	13.13	27.20	QP
2	190.66	42.30	43.50	-1.20	56.90	1.65	10.89	27.14	QP
3	208.83	42.25	43.50	-1.25	57.90	1.74	9.69	27.08	QP
4	229.99	42.05	46.00	-3.95	56.00	1.82	11.27	27.04	QP
5	303.23	34.85	46.00	-11.15	46.20	2.11	13.46	26.92	QP
6	375.01	33.43	46.00	-12.57	43.21	2.25	15.40	27.43	QP

Vertical

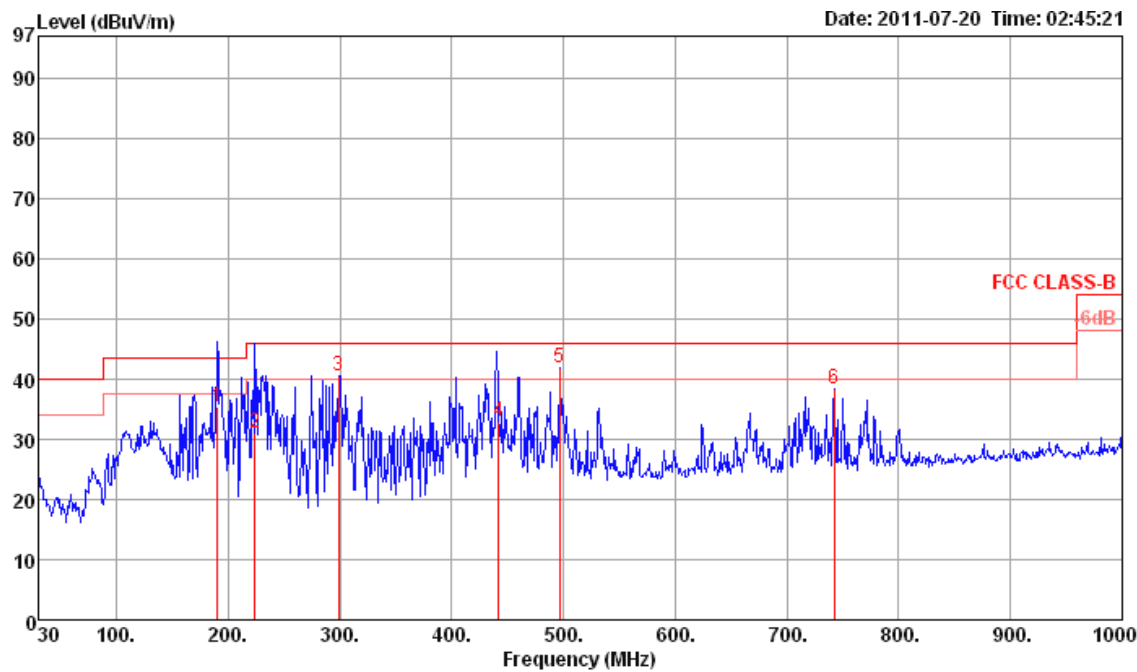

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	
1	190.56	35.50	43.50	-8.00	50.10	1.65	10.89	27.14	QP
2	224.02	31.08	46.00	-14.92	45.49	1.80	10.84	27.05	QP
3	298.69	40.53	46.00	-5.47	51.98	2.10	13.35	26.90	Peak
4	442.13	33.07	46.00	-12.93	41.61	2.55	16.72	27.81	QP
5	496.57	42.00	46.00	-4.00	49.82	2.69	17.57	28.08	Peak
6	741.98	38.46	46.00	-7.54	43.45	3.47	19.37	27.83	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n MCS8 20MHz Ch 36 / Ant. 3 + Ant. 4
Test Date	Jul. 15, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	15537.80	54.34	74.00	-19.66	42.73	8.07	34.69	38.23	265	100	Peak	HORIZONTAL
2 a	15541.88	41.90	54.00	-12.10	30.29	8.07	34.69	38.23	265	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	15540.28	42.05	54.00	-11.95	30.44	8.07	34.69	38.23	169	100	Average	VERTICAL
2 p	15544.76	56.25	74.00	-17.75	44.62	8.07	34.69	38.25	169	100	Peak	VERTICAL

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n MCS8 20MHz Ch 40 / Ant. 3 + Ant. 4
Test Date	Jul. 15, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	15595.14	56.44	74.00	-17.56	44.78	8.10	34.74	38.30	164	100	Peak	HORIZONTAL
2 a	15599.84	43.53	54.00	-10.47	31.89	8.11	34.77	38.30	164	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	15599.84	45.80	54.00	-8.20	34.16	8.11	34.77	38.30	170	100	Average	VERTICAL
2 p	15607.00	59.11	74.00	-14.89	47.47	8.11	34.77	38.30	170	100	Peak	VERTICAL

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n MCS8 20MHz Ch 48 / Ant. 3 + Ant. 4
Test Date	Jul. 15, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	15718.24	45.62	54.00	-8.38	33.88	8.18	34.86	38.42	164	100	Average	HORIZONTAL
2 p	15726.60	59.51	74.00	-14.49	47.79	8.19	34.89	38.42	164	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	15718.08	61.65	74.00	-12.35	49.91	8.18	34.86	38.42	161	100	Peak	VERTICAL
2 a	15718.40	48.42	54.00	-5.58	36.68	8.18	34.86	38.42	161	100	Average	VERTICAL

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n MCS8 20MHz Ch 52 / Ant. 3 + Ant. 4
Test Date	Jul. 15, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	15775.72	59.44	74.00	-14.56	47.66	8.21	34.91	38.48	134	104	Peak	HORIZONTAL
2 a	15778.56	45.80	54.00	-8.20	34.04	8.22	34.94	38.48	134	104	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	15778.44	48.58	54.00	-5.42	36.82	8.22	34.94	38.48	140	100	Average	VERTICAL
2 p	15778.84	62.01	74.00	-11.99	50.25	8.22	34.94	38.48	140	100	Peak	VERTICAL

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n MCS8 20MHz Ch 60 / Ant. 3 + Ant. 4
Test Date	Jul. 15, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	10601.92	38.58	54.00	-15.42	28.43	6.67	35.08	38.56	67	100	Average	HORIZONTAL
2	10605.88	50.92	74.00	-23.08	40.77	6.67	35.08	38.56	67	100	Peak	HORIZONTAL
3 a	15902.36	46.26	54.00	-7.74	34.39	8.29	35.03	38.61	316	157	Average	HORIZONTAL
4 p	15903.96	60.56	74.00	-13.44	48.69	8.29	35.03	38.61	316	157	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	10596.40	50.95	88.00	-37.05	40.80	6.68	35.10	38.57	258	100	Peak	VERTICAL
2	10607.92	38.87	54.00	-15.13	28.72	6.67	35.08	38.56	258	100	Average	VERTICAL
3 p	15902.32	58.52	74.00	-15.48	46.65	8.29	35.03	38.61	155	100	Peak	VERTICAL
4 a	15902.64	45.79	54.00	-8.21	33.92	8.29	35.03	38.61	155	100	Average	VERTICAL

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n MCS8 20MHz Ch 64 / Ant. 3 + Ant. 4
Test Date	Jul. 15, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	15956.76	55.55	74.00	-18.45	43.66	8.33	35.11	38.67	255	100	Peak	HORIZONTAL
2 a	15959.08	43.41	54.00	-10.59	31.52	8.33	35.11	38.67	255	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	15963.00	43.72	54.00	-10.28	31.83	8.33	35.11	38.67	151	100	Average	VERTICAL
2 p	15966.12	55.70	74.00	-18.30	43.81	8.33	35.11	38.67	151	100	Peak	VERTICAL

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n MCS8 20MHz Ch 100 / Ant. 3 + Ant. 4
Test Date	Jul. 15, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	10991.52	38.45	54.00	-15.55	28.22	6.52	34.69	38.40	242	100	Average	HORIZONTAL
2 p	11008.56	50.74	74.00	-23.26	40.51	6.52	34.69	38.40	242	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11000.96	50.45	74.00	-23.55	40.22	6.52	34.69	38.40	112	100	Peak	VERTICAL
2 a	11003.64	38.57	54.00	-15.43	28.34	6.52	34.69	38.40	112	100	Average	VERTICAL

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n MCS8 20MHz Ch 116 / Ant. 3 + Ant. 4
Test Date	Jul. 15, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11158.88	38.83	54.00	-15.17	28.47	6.64	34.71	38.43	254	100	Average	HORIZONTAL
2 p	11159.08	50.82	74.00	-23.18	40.46	6.64	34.71	38.43	254	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11160.04	41.71	54.00	-12.29	31.35	6.64	34.71	38.43	346	100	Average	VERTICAL
2 p	11160.12	55.32	74.00	-18.68	44.96	6.64	34.71	38.43	346	100	Peak	VERTICAL

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n MCS8 20MHz Ch 140 / Ant. 3 + Ant. 4
Test Date	Jul. 15, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11405.40	51.40	74.00	-22.60	40.81	6.85	34.74	38.48	121	100	Peak	HORIZONTAL
2 a	11409.68	38.92	54.00	-15.08	28.33	6.85	34.74	38.48	121	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11396.16	50.77	74.00	-23.23	40.18	6.85	34.74	38.48	262	100	Peak	VERTICAL
2 a	11404.04	39.16	54.00	-14.84	28.57	6.85	34.74	38.48	262	100	Average	VERTICAL

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n MCS8 40MHz Ch 38 / Ant. 3 + Ant. 4
Test Date	Jul. 16, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1 a	15560.36	41.16	54.00	-12.84	29.55	8.08	34.72	38.25	56	100	Average	HORIZONTAL
2 p	15560.68	54.77	74.00	-19.23	43.14	8.08	34.72	38.27	56	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1 a	15560.32	40.96	54.00	-13.04	29.35	8.08	34.72	38.25	221	100	Average	VERTICAL
2 p	15574.92	54.34	74.00	-19.66	42.71	8.10	34.74	38.27	221	100	Peak	VERTICAL

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n MCS8 40MHz Ch 46 / Ant. 3 + Ant. 4
Test Date	Jul. 16, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	15680.96	41.29	54.00	-12.71	29.58	8.16	34.84	38.39	263	100	Average	HORIZONTAL
2 p	15691.96	55.18	74.00	-18.82	43.47	8.16	34.84	38.39	263	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	15687.92	55.30	74.00	-18.70	43.59	8.16	34.84	38.39	147	100	Peak	VERTICAL
2 a	15692.16	41.79	54.00	-12.21	30.08	8.16	34.84	38.39	147	100	Average	VERTICAL

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n MCS8 40MHz Ch 54 / Ant. 3 + Ant. 4
Test Date	Jul. 16, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	15802.68	55.52	74.00	-18.48	43.73	8.22	34.94	38.51	102	100	Peak	HORIZONTAL
2 a	15806.76	41.68	54.00	-12.32	29.89	8.24	34.96	38.51	102	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	15803.80	56.01	74.00	-17.99	44.22	8.24	34.96	38.51	279	100	Peak	VERTICAL
2 a	15807.80	41.69	54.00	-12.31	29.90	8.24	34.96	38.51	279	100	Average	VERTICAL

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n MCS8 40MHz Ch 62 / Ant. 3 + Ant. 4
Test Date	Jul. 16, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	10612.52	37.76	54.00	-16.24	27.61	6.67	35.08	38.56	44	100	Average	HORIZONTAL
2	10627.68	51.04	74.00	-22.96	40.88	6.66	35.05	38.55	44	100	Peak	HORIZONTAL
3 a	15922.68	41.99	54.00	-12.01	30.12	8.30	35.06	38.63	250	100	Average	HORIZONTAL
4 p	15927.52	55.56	74.00	-18.44	43.69	8.30	35.06	38.63	250	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	10610.00	37.91	54.00	-16.09	27.76	6.67	35.08	38.56	246	100	Average	VERTICAL
2	10617.88	51.18	74.00	-22.82	41.04	6.67	35.08	38.55	246	100	Peak	VERTICAL
3 a	15933.28	42.03	54.00	-11.97	30.16	8.32	35.08	38.63	107	100	Average	VERTICAL
4 p	15934.92	55.63	74.00	-18.37	43.74	8.32	35.08	38.65	107	100	Peak	VERTICAL

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n MCS8 40MHz Ch 102 / Ant. 3 + Ant. 4
Test Date	Jul. 16, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11016.00	50.45	74.00	-23.55	40.20	6.54	34.69	38.40	230	100	Peak	HORIZONTAL
2 a	11019.48	37.07	54.00	-16.93	26.82	6.54	34.69	38.40	230	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10997.60	50.39	74.00	-23.61	40.16	6.52	34.69	38.40	128	100	Peak	VERTICAL
2 a	11020.20	37.35	54.00	-16.65	27.10	6.54	34.69	38.40	128	100	Average	VERTICAL

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n MCS8 40MHz Ch 110 / Ant. 3 + Ant. 4
Test Date	Jul. 16, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11081.90	51.16	74.00	-22.84	40.86	6.58	34.70	38.42	66	100	Peak	HORIZONTAL
2 a	11115.20	37.67	54.00	-16.33	27.33	6.62	34.70	38.42	66	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11112.40	37.63	54.00	-16.37	27.29	6.62	34.70	38.42	240	100	Average	VERTICAL
2 p	11115.70	50.71	74.00	-23.29	40.37	6.62	34.70	38.42	240	100	Peak	VERTICAL

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n MCS8 40MHz Ch 134 / Ant. 3 + Ant. 4
Test Date	Jul. 16, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11323.50	50.24	74.00	-23.76	39.72	6.79	34.73	38.46	172	100	Peak	HORIZONTAL
2 a	11334.70	37.79	54.00	-16.21	27.26	6.79	34.73	38.47	172	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11328.60	50.22	74.00	-23.78	39.69	6.79	34.73	38.47	276	100	Peak	VERTICAL
2 a	11335.50	39.70	54.00	-14.30	29.17	6.79	34.73	38.47	276	100	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11a Ch 36 / Ant. 3 + Ant. 4
Test Date	Jul. 15, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	15534.92	54.73	74.00	-19.27	43.12	8.07	34.69	38.23	163	100	Peak	HORIZONTAL
2 a	15539.48	42.10	54.00	-11.90	30.49	8.07	34.69	38.23	163	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	15539.36	43.79	54.00	-10.21	32.18	8.07	34.69	38.23	170	108	Average	VERTICAL
2 p	15543.80	58.21	74.00	-15.79	46.58	8.07	34.69	38.25	170	108	Peak	VERTICAL

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11a Ch 40 / Ant. 3 + Ant. 4
Test Date	Jul. 15, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	15590.72	60.93	74.00	-13.07	49.28	8.10	34.74	38.29	133	100	Peak	HORIZONTAL
2 a	15603.52	46.01	54.00	-7.99	34.37	8.11	34.77	38.30	133	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	15598.72	63.71	74.00	-10.29	52.05	8.10	34.74	38.30	165	100	Peak	VERTICAL
2 a	15601.08	47.99	54.00	-6.01	36.35	8.11	34.77	38.30	165	100	Average	VERTICAL

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11a Ch 48 / Ant. 3 + Ant. 4
Test Date	Jul. 15, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	15720.48	47.38	54.00	-6.62	35.64	8.18	34.86	38.42	164	100	Average	HORIZONTAL
2 p	15720.76	61.36	74.00	-12.64	49.62	8.18	34.86	38.42	164	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	15715.60	49.26	54.00	-4.74	37.52	8.18	34.86	38.42	157	100	Average	VERTICAL
2 p	15721.00	64.53	74.00	-9.47	52.79	8.18	34.86	38.42	157	100	Peak	VERTICAL

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11a Ch 52 / Ant. 3 + Ant. 4
Test Date	Jul. 15, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	15773.20	61.91	74.00	-12.09	50.13	8.21	34.91	38.48	133	100	Peak	HORIZONTAL
2 a	15774.96	47.87	54.00	-6.13	36.09	8.21	34.91	38.48	133	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	15783.04	64.89	74.00	-9.11	53.12	8.22	34.94	38.49	140	100	Peak	VERTICAL
2 a	15784.16	48.90	54.00	-5.10	37.13	8.22	34.94	38.49	140	100	Average	VERTICAL

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11a Ch 60 / Ant. 3 + Ant. 4
Test Date	Jul. 15, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	10604.12	38.48	54.00	-15.52	28.33	6.67	35.08	38.56	137	100	Average	HORIZONTAL
2	10605.60	52.13	74.00	-21.87	41.98	6.67	35.08	38.56	137	100	Peak	HORIZONTAL
3 a	15903.16	44.48	54.00	-9.52	32.61	8.29	35.03	38.61	73	100	Average	HORIZONTAL
4 p	15904.72	56.88	74.00	-17.12	45.01	8.29	35.03	38.61	73	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	10605.72	38.91	54.00	-15.09	28.76	6.67	35.08	38.56	57	100	Average	VERTICAL
2	10608.68	50.90	74.00	-23.10	40.75	6.67	35.08	38.56	57	100	Peak	VERTICAL
3 a	15901.20	46.19	54.00	-7.81	34.32	8.29	35.03	38.61	140	100	Average	VERTICAL
4 p	15904.16	60.24	74.00	-13.76	48.37	8.29	35.03	38.61	140	100	Peak	VERTICAL

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11a Ch 64 / Ant. 3 + Ant. 4
Test Date	Jul. 15, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	10814.16	38.19	54.00	-15.81	27.99	6.59	34.87	38.48	75	100	Average	HORIZONTAL
2 p	10825.36	51.03	74.00	-22.97	40.84	6.59	34.87	38.47	75	100	Peak	HORIZONTAL
3	16313.40	57.29	88.00	-30.71	44.44	8.63	34.99	39.21	75	100	Peak	HORIZONTAL
4	16315.04	44.25	68.00	-23.75	31.40	8.63	34.99	39.21	75	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10812.44	51.07	74.00	-22.93	40.87	6.59	34.87	38.48	142	100	Peak	VERTICAL
2 a	10814.16	39.19	54.00	-14.81	28.99	6.59	34.87	38.48	142	100	Average	VERTICAL
3	16317.48	44.11	68.00	-23.89	31.26	8.63	34.99	39.21	243	100	Average	VERTICAL
4	16318.16	56.53	88.00	-31.47	43.68	8.63	34.99	39.21	243	100	Peak	VERTICAL

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11a Ch 100 / Ant. 3 + Ant. 4
Test Date	Jul. 15, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11004.16	38.55	54.00	-15.45	28.32	6.52	34.69	38.40	91	100	Average	HORIZONTAL
2 p	11008.52	50.84	74.00	-23.16	40.61	6.52	34.69	38.40	95	100	Peak	HORIZONTAL
3	16496.04	57.82	88.00	-30.18	44.46	8.78	34.92	39.50	32	100	Peak	HORIZONTAL
4	16496.08	45.14	68.00	-22.86	31.78	8.78	34.92	39.50	32	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10994.96	51.29	74.00	-22.71	41.06	6.52	34.69	38.40	31	100	Peak	VERTICAL
2 a	10999.28	38.40	54.00	-15.60	28.17	6.52	34.69	38.40	31	100	Average	VERTICAL
3	16495.36	46.37	68.00	-21.63	33.04	8.78	34.92	39.47	159	112	Average	VERTICAL
4	16496.12	58.95	88.00	-29.05	45.59	8.78	34.92	39.50	159	112	Peak	VERTICAL

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11a Ch 116 / Ant. 3 + Ant. 4
Test Date	Jul. 15, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11193.92	51.31	74.00	-22.69	40.90	6.68	34.71	38.44	74	100	Peak	HORIZONTAL
2 a	11209.80	38.46	54.00	-15.54	28.05	6.68	34.71	38.44	74	100	Average	HORIZONTAL
3	16798.56	49.09	68.00	-18.91	33.62	9.18	34.38	40.67	340	114	Average	HORIZONTAL
4	16808.80	63.44	88.00	-24.56	47.90	9.18	34.38	40.74	340	114	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11160.08	52.64	74.00	-21.36	42.28	6.64	34.71	38.43	170	100	Peak	VERTICAL
2 a	11160.56	42.56	54.00	-11.44	32.20	6.64	34.71	38.43	170	100	Average	VERTICAL
3	16741.28	65.16	88.00	-22.84	50.13	9.08	34.52	40.47	214	105	Peak	VERTICAL
4	16742.26	51.22	68.00	-16.78	36.19	9.08	34.52	40.47	214	105	Average	VERTICAL

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11a Ch 140 / Ant. 3 + Ant. 4
Test Date	Jul. 15, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11399.57	39.15	54.00	-14.85	28.56	6.85	34.74	38.48	145	100	Average	HORIZONTAL
2 p	11400.28	52.02	74.00	-21.98	41.43	6.85	34.74	38.48	145	100	Peak	HORIZONTAL
3	17100.84	49.71	68.00	-18.29	32.55	9.56	34.04	41.64	143	100	Average	HORIZONTAL
4	17102.92	65.21	88.00	-22.79	48.05	9.56	34.04	41.64	143	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11400.12	39.48	54.00	-14.52	28.89	6.85	34.74	38.48	206	100	Average	VERTICAL
2	11406.68	51.77	74.00	-22.23	41.18	6.85	34.74	38.48	206	100	Peak	VERTICAL
3 p	17098.52	65.90	88.00	-22.10	48.74	9.56	34.04	41.64	143	103	Peak	VERTICAL
4	17103.68	51.35	68.00	-16.65	34.15	9.59	34.03	41.64	143	103	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1 MHz / 1 MHz for Peak

4.7.3. Test Procedures

- The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.
- In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n MCS8 20MHz Ch 36, 40 / Ant. 3 + Ant. 4
Test Date	Jul. 15, 2011		

Channel 36

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	5150.00	69.96	74.00	-4.04	32.22	4.67	0.00	33.07	130	149	Peak	HORIZONTAL
2 !	5150.00	53.91	54.00	-0.09	16.17	4.67	0.00	33.07	130	149	Average	HORIZONTAL
3 a	5173.60	101.54				4.70	0.00	33.13	130	149	Average	HORIZONTAL
4 p	5184.40	113.46				4.70	0.00	33.13	130	149	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	5149.60	68.20	74.00	-5.80	30.46	4.67	0.00	33.07	138	146	Peak	HORIZONTAL
2 !	5150.00	53.76	54.00	-0.24	16.02	4.67	0.00	33.07	138	146	Average	HORIZONTAL
3 p	5204.00	117.24				4.74	0.00	33.16	138	146	Peak	HORIZONTAL
4 a	5207.20	105.46				4.74	0.00	33.16	138	146	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n MCS8 20MHz Ch 60, 64 / Ant. 3 + Ant. 4
Test Date	Jul. 15, 2011		

Channel 60

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	5295.20	116.57				4.85	0.00	33.34	139	141	Peak	HORIZONTAL
2 a	5306.40	104.94				4.89	0.00	33.34	139	141	Average	HORIZONTAL
3 !	5350.00	53.74	54.00	-0.26	15.35	4.96	0.00	33.43	139	141	Average	HORIZONTAL
4 !	5350.80	68.84	74.00	-5.16	30.45	4.96	0.00	33.43	139	141	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	5312.60	115.10				4.89	0.00	33.37	152	141	Peak	HORIZONTAL
2 a	5326.20	102.28				4.92	0.00	33.37	152	141	Average	HORIZONTAL
3 !	5350.00	53.55	54.00	-0.45	15.16	4.96	0.00	33.43	152	141	Average	HORIZONTAL
4 !	5351.80	69.82	74.00	-4.18	31.43	4.96	0.00	33.43	152	141	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n MCS8 20MHz Ch 100, 120, 140 / Ant. 3 + Ant. 4
Test Date	Jul. 15, 2011		

Channel 100

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	5459.00	69.23	74.00	-4.77	30.52	5.10	0.00	33.61	153	124	Peak	HORIZONTAL
2 !	5460.00	53.78	54.00	-0.22	15.07	5.10	0.00	33.61	153	124	Average	HORIZONTAL
3 a	5496.20	103.56				5.14	0.00	33.67	153	124	Average	HORIZONTAL
4 p	5505.60	116.64				5.14	0.00	33.70	153	124	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5500 MHz.

Channel 140

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	5696.40	116.59				5.16	0.00	34.27	134	139	Peak	HORIZONTAL
2 a	5706.20	104.65				5.16	0.00	34.32	134	139	Average	HORIZONTAL
3 !	5725.00	67.89	68.00	-0.11	28.36	5.16	0.00	34.37	134	139	Average	HORIZONTAL
4 !	5726.20	82.89	88.00	-5.11	43.36	5.16	0.00	34.37	134	139	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n MCS8 40MHz Ch 38, 46 / Ant. 3 + Ant. 4
Test Date	Jul. 16, 2011		

Channel 38

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	5148.80	67.53	74.00	-6.47	29.79	4.67	0.00	33.07	139	146	Peak	HORIZONTAL
2	5150.00	53.33	54.00	-0.67	15.59	4.67	0.00	33.07	139	146	Average	HORIZONTAL
3	5204.80	107.67				4.74	0.00	33.16	139	146	Peak	HORIZONTAL
4	5204.80	93.79				4.74	0.00	33.16	139	146	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	5136.80	68.01	74.00	-5.99	30.34	4.63	0.00	33.04	138	144	Peak	HORIZONTAL
2	5150.00	53.57	54.00	-0.43	15.83	4.67	0.00	33.07	138	144	Average	HORIZONTAL
3	5240.40	113.25				4.78	0.00	33.22	138	144	Peak	HORIZONTAL
4	5241.60	100.77				4.78	0.00	33.25	138	144	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n MCS8 40MHz Ch 54, 62 / Ant. 3 + Ant. 4
Test Date	Jul. 16, 2011		

Channel 54

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	5278.00	112.31				4.85	0.00	33.31	152	140	Peak	HORIZONTAL
2 a	5278.80	99.60				4.85	0.00	33.31	152	140	Average	HORIZONTAL
3 !	5350.00	53.52	54.00	-0.48	15.13	4.96	0.00	33.43	152	140	Average	HORIZONTAL
4 !	5360.40	68.49	74.00	-5.51	30.10	4.96	0.00	33.43	152	140	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5270 MHz.

Channel 62

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	5312.00	106.78				4.89	0.00	33.37	153	139	Peak	HORIZONTAL
2 a	5323.60	94.96				4.92	0.00	33.37	153	139	Average	HORIZONTAL
3 !	5350.00	53.83	54.00	-0.17	15.44	4.96	0.00	33.43	153	139	Average	HORIZONTAL
4 !	5355.20	68.16	74.00	-5.84	29.77	4.96	0.00	33.43	153	139	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5310 MHz.

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n MCS8 40MHz Ch 102, 110, 134 / Ant. 3 + Ant. 4
Test Date	Jul. 16, 2011		

Channel 102

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	5457.20	72.43	74.00	-1.57	33.72	5.10	0.00	33.61	151	133	Peak	HORIZONTAL
2 !	5460.00	52.96	54.00	-1.04	14.25	5.10	0.00	33.61	151	133	Average	HORIZONTAL
3 a	5514.80	96.58				5.14	0.00	33.75	151	133	Average	HORIZONTAL
4 p	5520.80	109.53				5.14	0.00	33.75	151	133	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5510MHz.

Channel 110

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	5456.80	71.13	74.00	-2.87	32.42	5.10	0.00	33.61	151	133	Peak	HORIZONTAL
2 !	5460.00	53.69	54.00	-0.31	14.98	5.10	0.00	33.61	151	133	Average	HORIZONTAL
3 a	5543.60	100.85				5.14	0.00	33.80	151	133	Average	HORIZONTAL
4 p	5564.40	113.80				5.15	0.00	33.86	151	133	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5550 MHz.

Channel 134

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	5656.00	101.59				5.16	0.00	34.17	18	132	Average	HORIZONTAL
2 p	5658.40	114.53				5.16	0.00	34.17	18	132	Peak	HORIZONTAL
3 !	5725.00	63.34	68.00	-4.66	23.81	5.16	0.00	34.37	18	132	Average	HORIZONTAL
4	5727.40	80.87	88.00	-7.13	41.34	5.16	0.00	34.37	18	132	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5670 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11a Ch 36, 40 / Ant. 3 + Ant. 4
Test Date	Jul. 15, 2011		

Channel 36

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	5148.20	71.61	74.00	-2.39	33.87	4.67	0.00	33.07	140	100	Peak	HORIZONTAL
2 !	5149.20	53.78	54.00	-0.22	16.04	4.67	0.00	33.07	140	100	Average	HORIZONTAL
3 p	5173.80	112.27				4.70	0.00	33.13	140	100	Peak	HORIZONTAL
4 a	5185.80	101.43				4.70	0.00	33.13	140	100	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	5147.60	71.54	74.00	-2.46	33.80	4.67	0.00	33.07	138	144	Peak	HORIZONTAL
2 !	5150.00	53.99	54.00	-0.01	16.25	4.67	0.00	33.07	138	144	Average	HORIZONTAL
3 p	5204.40	119.68				4.74	0.00	33.16	138	144	Peak	HORIZONTAL
4 a	5206.00	108.08				4.74	0.00	33.16	138	144	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11a Ch 60, 64 / Ant. 3 + Ant. 3
Test Date	Jul. 15, 2011		

Channel 60

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	5303.20	117.73				4.89	0.00	33.34	150	139	Peak	HORIZONTAL
2 a	5304.80	105.92				4.89	0.00	33.34	150	139	Average	HORIZONTAL
3 !	5350.40	68.26	74.00	-5.74	29.87	4.96	0.00	33.43	150	139	Peak	HORIZONTAL
4 !	5353.20	53.87	54.00	-0.13	15.48	4.96	0.00	33.43	150	139	Average	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	5326.60	104.84				4.92	0.00	33.40	155	140	Average	HORIZONTAL
2 p	5327.00	115.69				4.92	0.00	33.40	155	140	Peak	HORIZONTAL
3 !	5350.00	52.35	54.00	-1.65	13.96	4.96	0.00	33.43	155	140	Average	HORIZONTAL
4 !	5352.00	72.99	74.00	-1.01	34.60	4.96	0.00	33.43	155	140	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

Temperature	25°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	IEEE 802.11a Ch 100, 140 / Ant. 3 + Ant. 3
Test Date	Jul. 15, 2011		

Channel 100

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	5459.20	71.70	74.00	-2.30	32.99	5.10	0.00	33.61	144	133	Peak	HORIZONTAL
2 !	5459.80	53.13	54.00	-0.87	14.42	5.10	0.00	33.61	144	133	Average	HORIZONTAL
3 a	5501.80	105.47				5.14	0.00	33.70	144	133	Average	HORIZONTAL
4 p	5502.40	116.18				5.14	0.00	33.70	144	133	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5500 MHz.

Channel 140

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	5693.20	118.53				5.16	0.00	34.27	147	133	Peak	HORIZONTAL
2 a	5707.80	106.92				5.16	0.00	34.32	147	133	Average	HORIZONTAL
3 !	5725.60	66.07	68.00	-1.93	26.54	5.16	0.00	34.37	147	133	Average	HORIZONTAL
4 !	5728.80	86.70	88.00	-1.30	47.17	5.16	0.00	34.37	147	133	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.8. Frequency Stability Measurement

4.8.1. Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emissions is maintained within the band of operation under all conditions of normal operation as specified in the user's manual or $\pm 20\text{ppm}$ (IEEE 802.11 specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than $\pm 20\text{ppm}$ (IEEE 802.11 specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is $-30^\circ\text{C} \sim 50^\circ\text{C}$.

4.8.4. Test Setup Layout

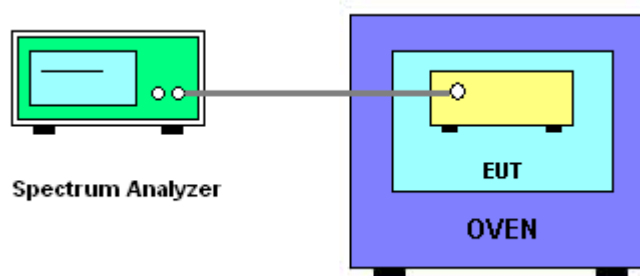

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5300
126.50	5299.994600
110.00	5299.999400
93.50	5300.002400
Max. Deviation (MHz)	0.005400
Max. Deviation (ppm)	1.02

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5300
-30	5300.035400
-20	5300.033000
-10	5300.024600
0	5300.021600
10	5300.001200
20	5299.999800
30	5299.996800
40	5299.994600
50	5299.992300
Max. Deviation (MHz)	0.035400
Max. Deviation (ppm)	6.68

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Sep. 01, 2010	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Oct. 28, 2010	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9K ~ 30MHz	Nov. 16, 2010	Conduction (CO01-CB)
Capacitive Voltage Probe	SCHAFFNER	CVP2200A	18697	150K ~ 30MHz	Sep. 28, 2010	Conduction (CO01-CB)
RF Current Probe	SOLAR.	ESH2-Z1	041039	9K ~ 30MHz	Sep. 28, 2010	Conduction (CO01-CB)
PULSE LIMITER	R&S	ESH3-Z2	100430	9K~30MHz	Jan. 04, 2011	Conduction (CO01-CB)
COND Cable		Cable		0.15MHz~30MHz	Dec. 04, 2010	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Oct. 17, 2010	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 22, 2010	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 08, 2010	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 17, 2010	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2010	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Nov. 17, 2010	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP	100304	9kHz ~ 40GHz	Nov. 22, 2010	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 22, 2011	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Sep. 09, 2010*	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N/A	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N/A	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2010	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 17, 2010	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 17, 2010	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2010	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2010	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV30	101026	9KHz~30GHz	Jul. 23, 2010	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	May 20, 2011	Conducted (TH01-CB)
Thermo-Hygro Meter	N/A	HC 520	#1	15~70 degree	Nov. 02, 2010	Conducted (TH01-CB)
RF Power Divider	HP	11636A	00306	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Power Splitter	Anaren	44100	1839	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Power Splitter	Anaren	42100	17930	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-12	-	1 GHz – 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-13	-	1 GHz – 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 13, 2010	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 08, 2010	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

Note: *Calibration Interval of instruments listed above is two year.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-091230

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2010 to January 09, 2013
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : December 30, 2009

P1, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix