


FCC Test Report

FCC ID : NKR-DNUA134
Equipment : 802.11n a/b/g USB module
Model No. : DNUA-134
Brand Name : WNC
Applicant : Wistron Neweb Corporation
Address : 20 Park Avenue II, Hsinchu Science Park,
Hsinchu 308,Taiwan,R.O.C.
Standard : 47 CFR FCC Part 15.407
Received Date : Aug. 02, 2013
Tested Date : Oct. 29 ~ Dec. 12, 2013

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	8
1.3	Test Setup Chart	8
1.4	The Equipment List	9
1.5	Testing Applied Standards	10
1.6	Measurement Uncertainty	11
2	TEST CONFIGURATION.....	12
2.1	Testing Condition	12
2.2	The Worst Test Modes and Channel Details	12
3	TRANSMITTER TEST RESULTS.....	13
3.1	Conducted Emissions.....	13
3.2	Emission Bandwidth	16
3.3	RF Output Power	19
3.4	Peak Power Spectral Density	21
3.5	Peak Excursion.....	24
3.6	Transmitter Radiated and Band Edge Emissions	27
3.7	Frequency Stability.....	82
4	TEST LABORATORY INFORMATION	84

Release Record

Report No.	Version	Description	Issued Date
FR380201-01AN	Rev. 01	Initial issue	Jan. 20, 2014
FR380201-01AN	Rev. 02	Modified power limit	Jan. 23, 2014

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.154MHz 45.93 (Margin -9.85dB) - AV	Pass
15.407(b) 15.209	Radiated Emissions	[dBuV/m at 3m]: 10520.00MHz 53.00 (Margin -1.00dB) – AV 10600.00MHz 53.00 (Margin -1.00dB) – AV 5350.00MHz 73.00 (Margin -1.00dB) – PK 5725.00MHz 73.00 (Margin -1.00dB) – PK 5150.00MHz 53.00 (Margin -1.00dB) – AV	Pass
15.407(a)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(a)	RF Output Power	Power [dBm]: 5150~5250 MHz:16.55 5250~5350 MHz:21.96 5470~5725 MHz:22.39	Pass
15.407(a)	Peak Power Spectral Density	Meet the requirement of limit	Pass
15.407(a)	Peak Excursion	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
5150-5250 5250-5350 5470-5725	a	5180-5240 5260-5320 5500-5700	36-48 [4] 52-64 [4] 100-140 [8]	2	6-54 Mbps
5150-5250 5250-5350 5470-5725	n (HT20)	5180-5240 5260-5320 5500-5700	36-48 [4] 52-64 [4] 100-140 [8]	2	MCS 0-15
5150-5250 5250-5350 5470-5725	n (HT40)	5190-5230 5270-5310 5510-5670	38-46 [2] 54-62 [2] 102-134 [3]	2	MCS 0-15

Note 1: RF output power specifies that Maximum Conducted Output Power.
Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Details

Ant. No.	Type	Operating Frequency (MHz) / Gain (dBi)				Connector
		5150~5250	5250~5350	5470~5725	5725~5850	
1	Printed	2.55	3.12	3.22	2.51	U.FL
2	Printed	2.44	2.23	2.98	3.06	U.FL

1.1.3 EUT Operational Condition

Power Supply Type	5Vdc from Host
-------------------	----------------

1.1.4 Accessories

N/A

1.1.5 Channel List

Frequency band (MHz)		5150~5725	
802.11 a / n HT20		802.11n HT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
36	5180	38	5190
40	5200	46	5230
44	5220	54	5270
48	5240	62	5310
52	5260	102	5510
56	5280	110	5550
60	5300	134	5670
64	5320	---	---
100	5500	---	---
104	5520	---	---
108	5540	---	---
112	5560	---	---
116	5580	---	---
132	5660	---	---
136	5680	---	---
140	5700	---	---

1.1.6 Test Tool and Duty Cycle

Test Tool	ART2-GUI V2.3
Duty Cycle Of Test Signal (%)	98.60% - IEEE 802.11a 98.87% - IEEE 802.11n (HT20) 98.19% - IEEE 802.11n (HT40)
Duty Factor	0.06 - IEEE 802.11a 0.05 - IEEE 802.11n (HT20) 0.08 - IEEE 802.11n (HT40)


1.1.7 Power Setting

Channel	Frequency(MHz)	Modulation Mode		
		11a	HT20	HT40
CH 36	5180	12.5	12.5	---
CH 40	5200	13	13	---
CH 48	5240	13	13.5	---
CH 52	5260	20	20.5	---
CH 60	5300	20	20.5	---
CH 64	5320	18.5	18.5	---
CH 100	5500	16.5	16.5	---
CH 116	5580	20.5	20.5	---
CH 140	5700	14.5	13.5	---
CH 38	5190	---	---	13
CH 46	5230	---	---	14
CH 54	5270	---	---	20
CH 62	5310	---	---	14
CH 102	5510	---	---	12.5
CH 110	5550	---	---	20.5
CH 134	5670	---	---	16

1.2 Local Support Equipment List

Support Equipment List						
No.	Equipment	Brand	Model	S/N	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	E6430	---	DoC	USB 1m shielded cable w/o core.

1.3 Test Setup Chart

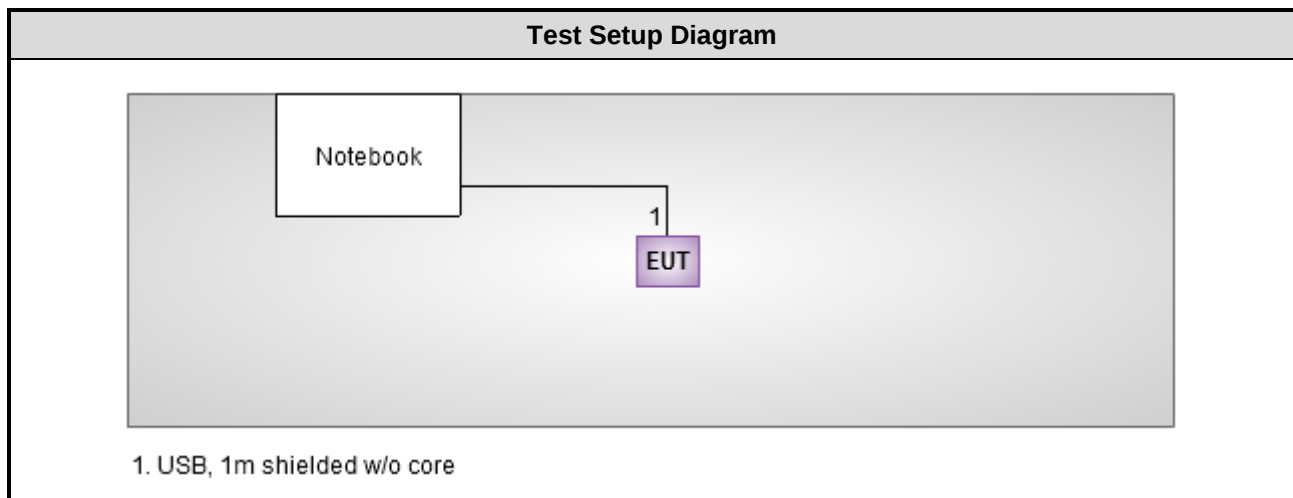

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 15, 2013	Oct. 14, 2014
LISN	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-667	Nov. 23, 2013	Nov. 22, 2014
LISN (Support Unit)	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-666	Dec. 04, 2013	Dec. 03, 2014
ISN	TESEQ	ISN T800	34406	Apr. 08, 2013	Apr. 07, 2014
ISN	TESEQ	ISN T200A	30494	Apr. 09, 2013	Apr. 08, 2014
ISN	TESEQ	ISN ST08	22589	Jan. 24, 2013	Jan. 23, 2014
RF Current Probe	FCC	F-33-4	121630	Nov. 29, 2013	Nov. 28, 2014
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Apr. 24, 2013	Apr. 23, 2014
ESH3-Z6 V-Network(+)	R&S	ESH3-Z6	100920	Nov. 29, 2013	Nov. 28, 2014
ESH3-Z6 V-Network(-)	R&S	ESH3-Z6	100951	Jan. 30, 2013	Jan. 29, 2014
Two-Line V-Network	R&S	ENV216	101579	Jan. 07, 2013	Jan. 06, 2014
50 ohm terminal	NA	50	01	Apr. 22, 2013	Apr. 21, 2014
50 ohm terminal	NA	50	02	Apr. 22, 2013	Apr. 21, 2014
50 ohm terminal	NA	50	03	Apr. 22, 2013	Apr. 21, 2014
50 ohm terminal (Support Unit)	NA	50	04	Apr. 22, 2013	Apr. 21, 2014
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV 40	101063	Feb. 18, 2013	Feb. 17, 2014
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Dec. 11, 2013	Dec. 10, 2014
Power Meter	Anritsu	ML2495A	1241002	Oct. 24, 2013	Oct. 23, 2014
Power Sensor	Anritsu	MA2411B	1027366	Oct. 24, 2013	Oct. 23, 2014
Signal Generator	R&S	SMB100A	175727	Jan. 14, 2013	Jan. 13, 2014
Radio Communication Analyzer	Anritsu	MT8820C	6201240341	Mar. 13, 2013	Mar. 12, 2014
Wideband Radio Communication Tester	R&S	CMW500	106070	Jan. 29, 2013	Jan. 28, 2014
Bluetooth Tester	R&S	CBT	100959	Jan. 09, 2013	Jan. 08, 2014
MXG-B RF Vector Signal Generator	Agilent	N5182B	MY53050081	Apr. 19, 2013	Apr. 18, 2014
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission above 1GHz				
Test Site	966 chamber 2 / (03CH02-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101499	Jan. 28, 2013	Jan. 27, 2014
Receiver	R&S	ESR3	101657	Jan. 30, 2013	Jan. 29, 2014
Bilog Antenna	Schwarzbeck	VULB9168	VULB9168-524	Jan. 11, 2013	Jan. 10, 2014
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120D	BBHA 9120 D 1095	Jan. 29, 2013	Jan. 28, 2014
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Jan. 14, 2013	Jan. 13, 2014
Amplifier	Burgeon	BPA-530	100218	Dec. 09, 2013	Dec. 08, 2014
Amplifier	Agilent	83017A	MY39501309	Dec. 09, 2013	Dec. 08, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16140/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable-R03m	Woken	CFD400NL-LW	CFD400NL-003	Dec. 25, 2012	Dec. 24, 2013
RF Cable-R10m	Woken	CFD400NL-LW	CFD400NL-004	Dec. 25, 2012	Dec. 24, 2013
control	EM Electronics	EM1000	060608	N/A	N/A
Note: Calibration Interval of instruments listed above is one year.					

Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014
Amplifier	EM	EM18G40G	060572	Jun. 20, 2013	Jun. 19, 2015
Note: Calibration Interval of instruments listed above is two year.					

1.5 Testing Applied Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.407

ANSI C63.10-2009

FCC KDB 412172

FCC KDB 789033 D01 General UNII Test procedures v01r03

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

Note: The EUT has been tested and complied with FCC part 15B requirement. FCC Part 15B test results are issued to another report.

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 74.147 Hz
Conducted power	± 0.717 dB
Power density	± 2.687 dB
Frequency error	± 74.147 Hz
Temperature	± 0.3 °C
AC conducted emission	± 2.43 dB
Radiated emission	± 2.49 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	20°C / 61%	Skys Huang
Radiated Emissions	03CH02-WS	23°C / 63% 21°C / 60%	Anderson Hong Aska Huang
RF Conducted	TH01-WS	20°C / 61%	Mark Liao

➤ FCC site registration No.: 657002

➤ IC site registration No.: 10807A-2

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data rate (Mbps) / MCS	Test Configuration
Conducted Emissions	HT40	5580	MCS 0	---
Radiated Emissions <1GHz	HT40	5580	MCS 0	---
Radiated Emissions >1GHz RF Output Power Emission Bandwidth Peak Power Spectral Density	11a	5180 / 5200 / 5240 / 5260 / 5300 5320 / 5500 / 5580 / 5700	6 Mbps	---
	HT20	5180 / 5200 / 5240 / 5260 / 5300 5320 / 5500 / 5580 / 5700	MCS 0	---
	HT40	5190 / 5230 / 5270 / 5310 / 5510 5550 / 5670	MCS 0	---
Peak Excursion	11a	5180 / 5300 / 5580	6 Mbps	---
	HT20	5240 / 5300 / 5500	MCS 0	---
	HT40	5190 / 5310 / 5550	MCS 0	---
Frequency Stability	Un-modulation	5320	---	---
NOTE: 1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Z-plane results were found as the worst case and were shown in this report.				

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

3.1.3 Test Setup




- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions

Modulation Mode	11a	Test Freq. (MHz)	5580
Power Phase	Line		

Level (dBUV)

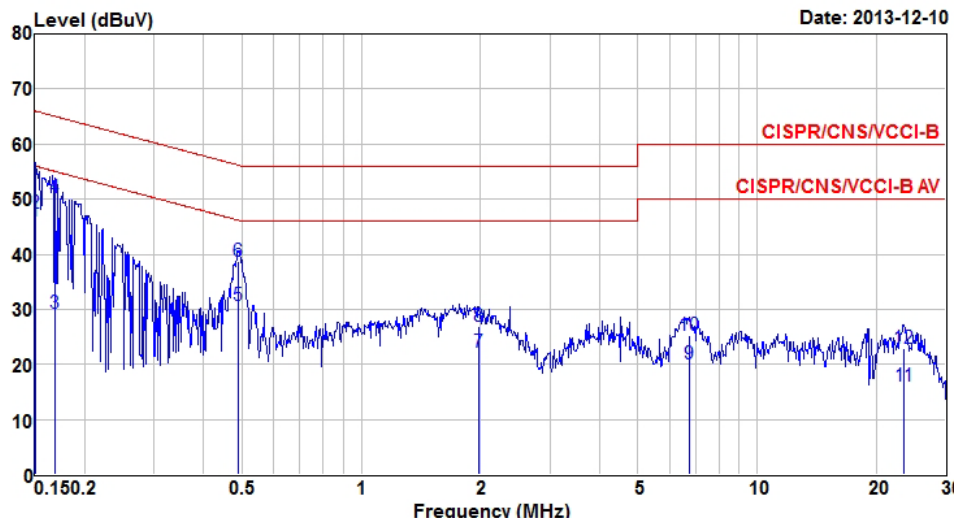
Modulation Mode	11a	Test Freq. (MHz)	5580																																																																																																																																																			
Power Phase	Neutral																																																																																																																																																					
Level (dBuV)  Frequency (MHz) Date: 2013-12-10 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>LISN</th><th>cable</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV</th><th>Line</th><th>Limit</th><th>Level</th><th>factor</th><th>loss</th><th></th></tr><tr><th></th><th></th><th></th><th>dBuV</th><th>dB</th><th>dBuV</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>*</td><td>0.151</td><td>45.95</td><td>55.96</td><td>-10.01</td><td>45.41</td><td>0.48</td><td>0.06</td><td>Average</td></tr><tr><td>2</td><td></td><td>0.151</td><td>47.55</td><td>65.96</td><td>-18.41</td><td>47.01</td><td>0.48</td><td>0.06</td><td>QP</td></tr><tr><td>3</td><td></td><td>0.169</td><td>29.29</td><td>55.03</td><td>-25.74</td><td>28.70</td><td>0.48</td><td>0.11</td><td>Average</td></tr><tr><td>4</td><td></td><td>0.169</td><td>50.36</td><td>65.03</td><td>-14.67</td><td>49.77</td><td>0.48</td><td>0.11</td><td>QP</td></tr><tr><td>5</td><td></td><td>0.490</td><td>30.61</td><td>46.17</td><td>-15.56</td><td>30.09</td><td>0.47</td><td>0.05</td><td>Average</td></tr><tr><td>6</td><td></td><td>0.490</td><td>38.64</td><td>56.17</td><td>-17.53</td><td>38.12</td><td>0.47</td><td>0.05</td><td>QP</td></tr><tr><td>7</td><td></td><td>1.980</td><td>22.22</td><td>46.00</td><td>-23.78</td><td>21.56</td><td>0.50</td><td>0.16</td><td>Average</td></tr><tr><td>8</td><td></td><td>1.980</td><td>26.81</td><td>56.00</td><td>-29.19</td><td>26.15</td><td>0.50</td><td>0.16</td><td>QP</td></tr><tr><td>9</td><td></td><td>6.733</td><td>20.00</td><td>50.00</td><td>-30.00</td><td>19.29</td><td>0.54</td><td>0.17</td><td>Average</td></tr><tr><td>10</td><td></td><td>6.733</td><td>25.30</td><td>60.00</td><td>-34.70</td><td>24.59</td><td>0.54</td><td>0.17</td><td>QP</td></tr><tr><td>11</td><td></td><td>23.511</td><td>16.05</td><td>50.00</td><td>-33.95</td><td>15.10</td><td>0.54</td><td>0.41</td><td>Average</td></tr><tr><td>12</td><td></td><td>23.511</td><td>22.79</td><td>60.00</td><td>-37.21</td><td>21.84</td><td>0.54</td><td>0.41</td><td>QP</td></tr></table>					Freq	Level	Limit	Over	Read	LISN	cable	Remark		MHz	dBuV	Line	Limit	Level	factor	loss					dBuV	dB	dBuV	dB	dB		1	*	0.151	45.95	55.96	-10.01	45.41	0.48	0.06	Average	2		0.151	47.55	65.96	-18.41	47.01	0.48	0.06	QP	3		0.169	29.29	55.03	-25.74	28.70	0.48	0.11	Average	4		0.169	50.36	65.03	-14.67	49.77	0.48	0.11	QP	5		0.490	30.61	46.17	-15.56	30.09	0.47	0.05	Average	6		0.490	38.64	56.17	-17.53	38.12	0.47	0.05	QP	7		1.980	22.22	46.00	-23.78	21.56	0.50	0.16	Average	8		1.980	26.81	56.00	-29.19	26.15	0.50	0.16	QP	9		6.733	20.00	50.00	-30.00	19.29	0.54	0.17	Average	10		6.733	25.30	60.00	-34.70	24.59	0.54	0.17	QP	11		23.511	16.05	50.00	-33.95	15.10	0.54	0.41	Average	12		23.511	22.79	60.00	-37.21	21.84	0.54	0.41	QP
	Freq	Level	Limit	Over	Read	LISN	cable	Remark																																																																																																																																														
	MHz	dBuV	Line	Limit	Level	factor	loss																																																																																																																																															
			dBuV	dB	dBuV	dB	dB																																																																																																																																															
1	*	0.151	45.95	55.96	-10.01	45.41	0.48	0.06	Average																																																																																																																																													
2		0.151	47.55	65.96	-18.41	47.01	0.48	0.06	QP																																																																																																																																													
3		0.169	29.29	55.03	-25.74	28.70	0.48	0.11	Average																																																																																																																																													
4		0.169	50.36	65.03	-14.67	49.77	0.48	0.11	QP																																																																																																																																													
5		0.490	30.61	46.17	-15.56	30.09	0.47	0.05	Average																																																																																																																																													
6		0.490	38.64	56.17	-17.53	38.12	0.47	0.05	QP																																																																																																																																													
7		1.980	22.22	46.00	-23.78	21.56	0.50	0.16	Average																																																																																																																																													
8		1.980	26.81	56.00	-29.19	26.15	0.50	0.16	QP																																																																																																																																													
9		6.733	20.00	50.00	-30.00	19.29	0.54	0.17	Average																																																																																																																																													
10		6.733	25.30	60.00	-34.70	24.59	0.54	0.17	QP																																																																																																																																													
11		23.511	16.05	50.00	-33.95	15.10	0.54	0.41	Average																																																																																																																																													
12		23.511	22.79	60.00	-37.21	21.84	0.54	0.41	QP																																																																																																																																													
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB). Note 2: Over Limit (dBuV) = Limit Line (dBuV) – Level (dBuV).																																																																																																																																																						

3.2 Emission Bandwidth

3.2.1 Test Procedures

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW, Detector = Peak.
3. Trace mode = max hold.
4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.


3.2.2 Test Setup



3.2.3 Test Result of Emission Bandwidth

Modulation Mode	N _{TX}	Freq. (MHz)	26dB Bandwidth (MHz)				99% Bandwidth (MHz)				Limit (dBm)	
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3	26dB BW	99% BW
11a	2	5180	25.28	24.70	---	---	17.02	16.90	---	---	17.00	16.28
11a	2	5200	28.41	25.22	---	---	17.19	16.90	---	---	17.00	16.28
11a	2	5240	24.99	25.80	---	---	17.08	16.96	---	---	17.00	16.29
11a	2	5260	44.52	43.57	---	---	27.53	25.70	---	---	24.00	24.00
11a	2	5300	44.09	42.43	---	---	26.57	25.01	---	---	24.00	24.00
11a	2	5320	42.78	42.35	---	---	24.05	21.97	---	---	24.00	24.00
11a	2	5500	41.91	39.91	---	---	21.27	20.06	---	---	24.00	24.00
11a	2	5580	46.00	45.30	---	---	29.96	29.44	---	---	24.00	24.00
11a	2	5700	39.83	37.91	---	---	20.41	19.54	---	---	24.00	23.91
HT20	2	5180	25.16	25.28	---	---	18.06	18.00	---	---	17.00	16.55
HT20	2	5200	28.75	26.67	---	---	18.18	18.06	---	---	17.00	16.57
HT20	2	5240	27.71	27.19	---	---	18.18	18.12	---	---	17.00	16.58
HT20	2	5260	45.83	47.04	---	---	28.31	27.53	---	---	24.00	24.00
HT20	2	5300	46.87	46.43	---	---	26.74	26.48	---	---	24.00	24.00
HT20	2	5320	43.83	45.22	---	---	23.10	23.27	---	---	24.00	24.00
HT20	2	5500	44.17	44.09	---	---	21.97	21.53	---	---	24.00	24.00
HT20	2	5580	49.04	47.13	---	---	30.30	26.70	---	---	24.00	24.00
HT20	2	5700	39.74	41.30	---	---	20.23	20.06	---	---	24.00	24.00
HT40	2	5190	61.22	57.28	---	---	37.63	37.40	---	---	17.00	17.00
HT40	2	5230	61.10	55.77	---	---	37.63	37.51	---	---	17.00	17.00
HT40	2	5270	85.22	84.06	---	---	47.32	43.85	---	---	24.00	24.00
HT40	2	5310	51.01	53.80	---	---	37.51	37.40	---	---	24.00	24.00
HT40	2	5510	50.20	48.81	---	---	37.51	37.28	---	---	24.00	24.00
HT40	2	5550	95.22	93.77	---	---	57.74	54.70	---	---	24.00	24.00
HT40	2	5670	82.32	82.46	---	---	41.97	40.09	---	---	24.00	24.00

Worst Plots

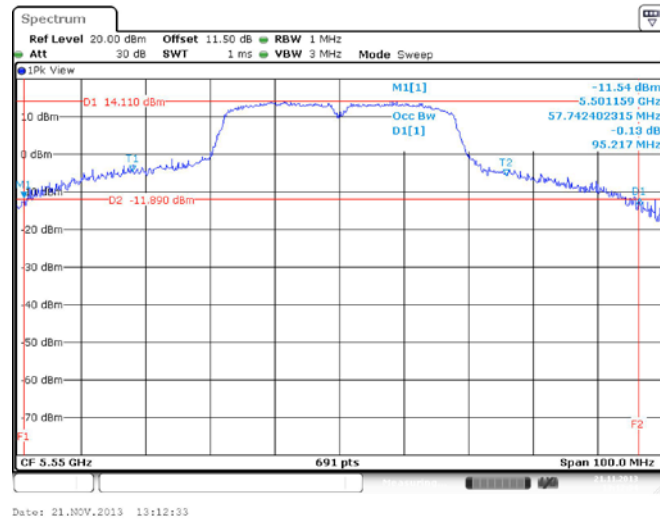

3.3 RF Output Power

3.3.1 Limit of RF Output Power


Frequency Band (GHz)		Limit
☒	5.15~5.25	50mW or 4dBm+10 log B
☒	5.25~5.35	250mW or 11dBm+10 log B
☒	5.47~5.725	250mW or 11dBm+10 log B

Note: "B" is the 26dB emission bandwidth in MHz.

3.3.2 Test Procedures

- ☒ **Method PM-G (Measurement using a gated RF average power meter)**
 - ☒ Measurements may is performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.3.3 Test Setup



3.3.4 Test Result of Maximum Conducted Output Power

Modulation Mode	N _{TX}	Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11a	2	5180	12.31	12.12	---	---	33.31	15.23	17.00
11a	2	5200	13.41	13.02	---	---	41.97	16.23	17.00
11a	2	5240	13.13	12.99	---	---	40.47	16.07	17.00
11a	2	5260	18.43	18.59	---	---	141.94	21.52	24.00
11a	2	5300	18.32	18.35	---	---	136.31	21.35	24.00
11a	2	5320	17.35	17.29	---	---	107.90	20.33	24.00
11a	2	5500	16.24	16.17	---	---	83.47	19.22	23.89
11a	2	5580	19.24	19.51	---	---	173.28	22.39	23.89
11a	2	5700	15.03	15.25	---	---	65.34	18.15	23.89
HT20	2	5180	12.31	12.16	---	---	33.47	15.25	17.00
HT20	2	5200	13.35	12.93	---	---	41.26	16.16	17.00
HT20	2	5240	13.25	13.03	---	---	41.23	16.15	17.00
HT20	2	5260	18.94	18.96	---	---	157.05	21.96	24.00
HT20	2	5300	18.95	18.45	---	---	148.51	21.72	24.00
HT20	2	5320	17.24	17.13	---	---	104.61	20.20	24.00
HT20	2	5500	16.13	16.16	---	---	82.33	19.16	23.89
HT20	2	5580	19.16	19.42	---	---	169.91	22.30	23.89
HT20	2	5700	14.32	14.43	---	---	54.77	17.39	23.89
HT40	2	5190	13.57	13.18	---	---	43.55	16.39	17.00
HT40	2	5230	13.82	13.25	---	---	45.23	16.55	17.00
HT40	2	5270	18.04	18.11	---	---	128.39	21.09	24.00
HT40	2	5310	13.22	13.10	---	---	41.41	16.17	24.00
HT40	2	5510	13.10	13.34	---	---	41.99	16.23	23.89
HT40	2	5550	19.21	19.03	---	---	163.35	22.13	23.89
HT40	2	5670	16.25	16.43	---	---	86.12	19.35	23.89

3.4 Peak Power Spectral Density

3.4.1 Limit of Peak Power Spectral Density

	Frequency Band (GHz)	Limit (dBm)
☒	5.15~5.25	4
☒	5.25~5.35	11
☒	5.47~5.725	11

3.4.2 Test Procedures

☒ Method SA-1

1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level.


☐ Method SA-2

1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
2. Trace average at 100 traces
3. Use the peak marker function to determine the maximum amplitude level.
4. Add $10 \log(1/x)$, where x is the duty cycle

☐ Method SA-2 Alternative

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
2. Set sweep time $\geq 10 * (\text{number of points in sweep}) * (\text{total on/off period of the transmitted signal})$.
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add $10 \log(1/x)$, where x is the duty cycle.

3.4.3 Test Setup




3.4.4 Test Result of Peak Power Spectral Density

Modulation Mode	N _{TX}	Freq. (MHz)	PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)
11a	2	5180	2.32	0	2.36	4
11a	2	5200	2.26	0	3.45	4
11a	2	5240	2.52	0	3.13	4
11a	2	5260	2.80	0	9.03	11
11a	2	5300	2.31	0	8.70	11
11a	2	5320	2.10	0	7.68	11
11a	2	5500	4.76	0	6.99	10.89
11a	2	5580	5.62	0	9.99	10.89
11a	2	5700	4.45	0	5.54	10.89
HT20	2	5180	-0.13	0	2.02	4
HT20	2	5200	-0.23	0	3.00	4
HT20	2	5240	0.30	0	3.41	4
HT20	2	5260	0.03	0	9.25	11
HT20	2	5300	0.13	0	8.74	11
HT20	2	5320	-0.22	0	7.35	11
HT20	2	5500	0.18	0	6.32	10.89
HT20	2	5580	-0.10	0	9.36	10.89
HT20	2	5700	-0.54	0	4.55	10.89
HT40	2	5190	-3.34	0	-0.03	4
HT40	2	5230	-3.80	0	0.37	4
HT40	2	5270	-3.87	0	5.13	11
HT40	2	5310	-3.81	0	0.17	11
HT40	2	5510	-3.36	0	-2.44	10.89
HT40	2	5550	-3.13	0	6.27	10.89
HT40	2	5670	-3.07	0	3.02	10.89

Note:

- 1) Test result for HT20 / HT40 is bin-by-bin summing measured value of each TX port.
- 2) For 5470~5725 MHz band , Directional gain = $10 * \log((10^{3.22/20} + 10^{2.98/20})^2 / 2) = 6.11 \text{ dBi} > 6 \text{ dBi}$
Limit shall be reduced to 11 dBm – (6.11 dBi – 6 dBi) = 10.89 dBm

Worst Plots

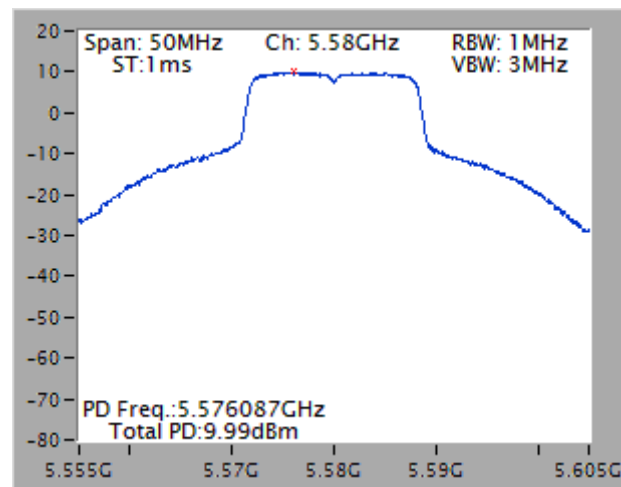

3.5 Peak Excursion


3.5.1 Peak Excursion Limit

Peak excursion of the modulation envelope shall not exceed 13 dB across any 1 MHz bandwidth.

3.5.2 Test Procedures

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = peak.
2. Trace mode = max-hold. Allow the sweeps to continue until the trace stabilizes.
3. Use the peak search function to find the peak of the spectrum.
4. Use the procedure of section 3.4.2 to measure the PPSD.
5. Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD

3.5.3 Test Setup



3.5.4 Test Result of Peak Excursion


Mode	Modulation Mode	N _{TX}	Freq. (MHz)	Measured value(dB)	Duty factor (dB)	Peak Excursion (dB)	Limit
11a	BPSK	2	5240	8	0.00	8.00	13
11a	QPSK	2	5240	9.33	0.11	9.22	13
11a	16QAM	2	5240	10.46	0.23	10.23	13
11a	64QAM	2	5240	10.5	0.47	10.03	13
HT20	BPSK	2	5200	8.53	0.00	8.53	13
HT20	QPSK	2	5200	9.93	0.12	9.81	13
HT20	16QAM	2	5200	9.38	0.25	9.13	13
HT20	64QAM	2	5200	9.66	0.48	9.18	13
HT40	BPSK	2	5230	8.56	0.00	8.56	13
HT40	QPSK	2	5230	9.29	0.25	9.04	13
HT40	16QAM	2	5230	9.96	0.49	9.47	13
HT40	64QAM	2	5230	10.7	0.85	9.85	13

Mode	Modulation Mode	N _{TX}	Freq. (MHz)	Measured value(dB)	Duty factor (dB)	Peak Excursion (dB)	Limit
11a	BPSK	2	5260	9.14	0.00	9.14	13
11a	QPSK	2	5260	9.48	0.11	9.37	13
11a	16QAM	2	5260	9.9	0.23	9.67	13
11a	64QAM	2	5260	10.21	0.47	9.74	13
HT20	BPSK	2	5300	8.21	0.00	8.21	13
HT20	QPSK	2	5300	9.3	0.12	9.18	13
HT20	16QAM	2	5300	9.15	0.25	8.90	13
HT20	64QAM	2	5300	9.24	0.48	8.76	13
HT40	BPSK	2	5270	9.1	0.00	9.10	13
HT40	QPSK	2	5270	10.48	0.25	10.23	13
HT40	16QAM	2	5270	10.16	0.49	9.67	13
HT40	64QAM	2	5270	11.5	0.85	10.65	13

Note: Measured value = Peak-max-hold spectrum to the maximum of the average spectrum for continuous transmission. Since the duty cycle is < 98 %, duty factor is required to average spectrum
Peak excursion = Measured value – duty factor

Mode	Modulation Mode	N _{TX}	Freq. (MHz)	Measured value(dB)	Duty factor (dB)	Peak Excursion (dB)	Limit
11a	BPSK	2	5700	9.15	0.00	9.15	13
11a	QPSK	2	5700	9.46	0.11	9.35	13
11a	16QAM	2	5700	9.92	0.23	9.69	13
11a	64QAM	2	5700	9.97	0.47	9.50	13
HT20	BPSK	2	5700	8.28	0.00	8.28	13
HT20	QPSK	2	5700	9.53	0.12	9.41	13
HT20	16QAM	2	5700	9.62	0.25	9.37	13
HT20	64QAM	2	5700	9.76	0.48	9.28	13
HT40	BPSK	2	5670	8.34	0.00	8.34	13
HT40	QPSK	2	5670	10.42	0.25	10.17	13
HT40	16QAM	2	5670	10.14	0.49	9.65	13
HT40	64QAM	2	5670	10.14	0.85	9.29	13

Note: Measured value = Peak-max-hold spectrum to the maximum of the average spectrum for continuous transmission. Since the duty cycle is < 98 %, duty factor is required to average spectrum
Peak exclusion = Measured value – duty factor

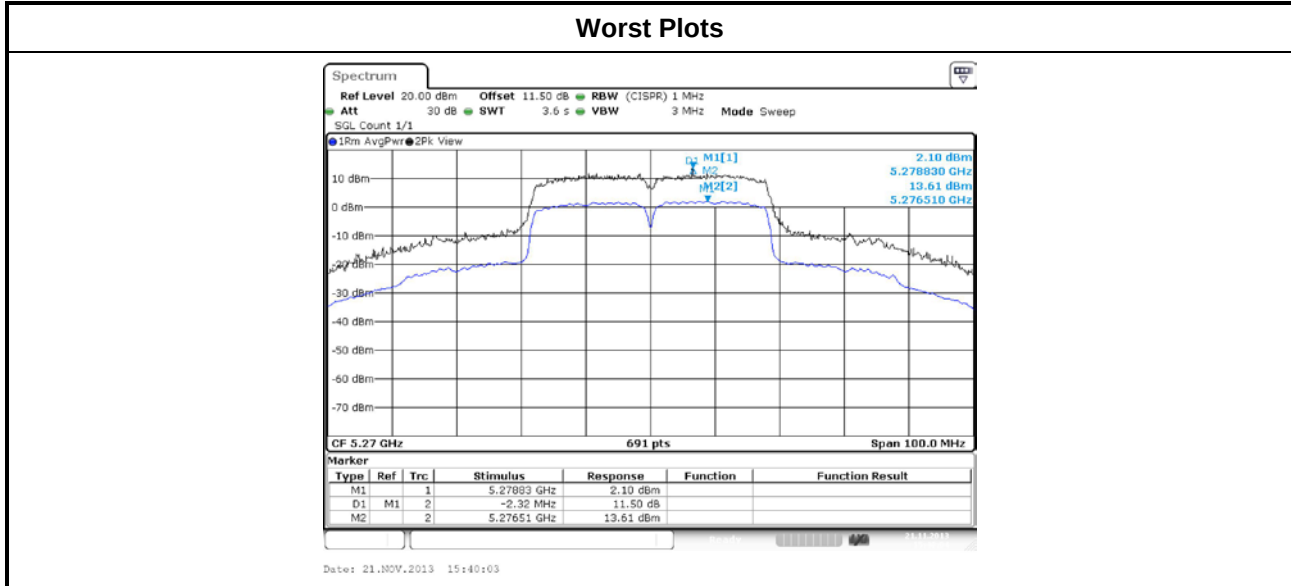

Note: Measured value
= Peak-max-hold spectrum to the maximum of the average spectrum for continuous transmission
= Mark 2 – Mark 1

3.6 Transmitter Radiated and Band Edge Emissions

3.6.1 Limit of Transmitter Radiated and Band Edge Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.825 GHz	5.715 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] 5.825 5.835 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.6.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360° . A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360° , the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.6.3 Test Setup

Radiated Emissions below 1 GHz

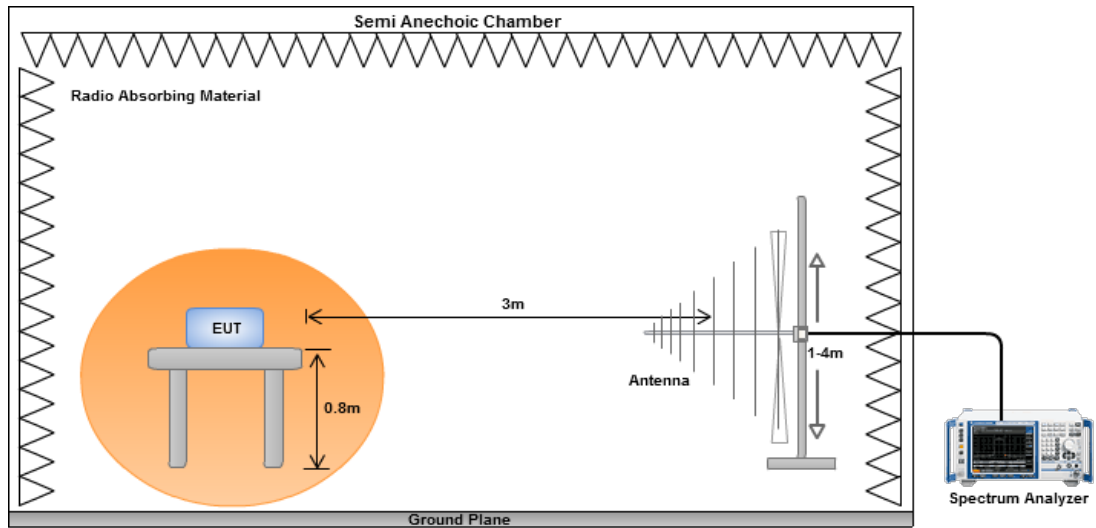


Radiated Emissions above 1 GHz

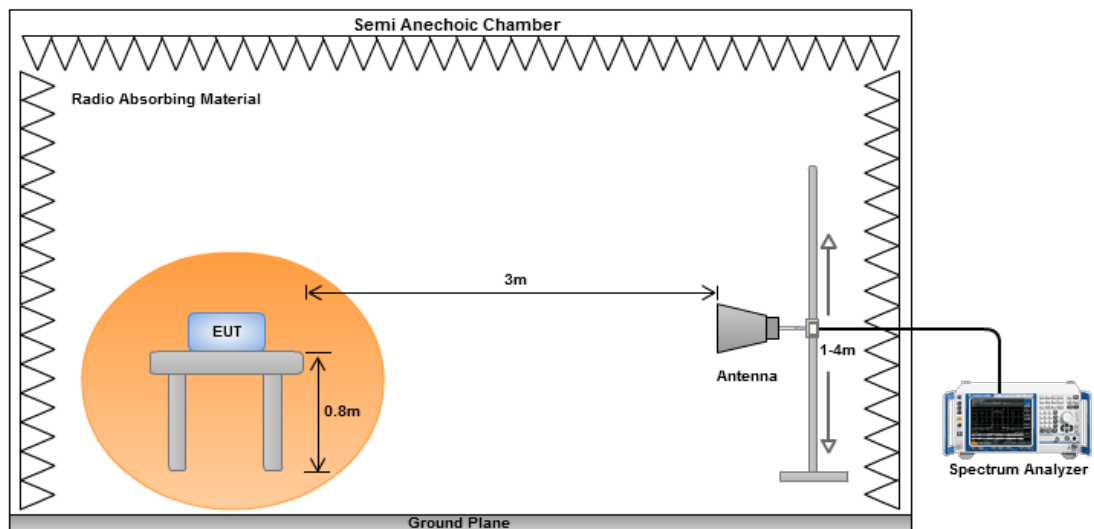

3.6.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	11a	Test Freq. (MHz)	5580
Polarization	Horizontal		

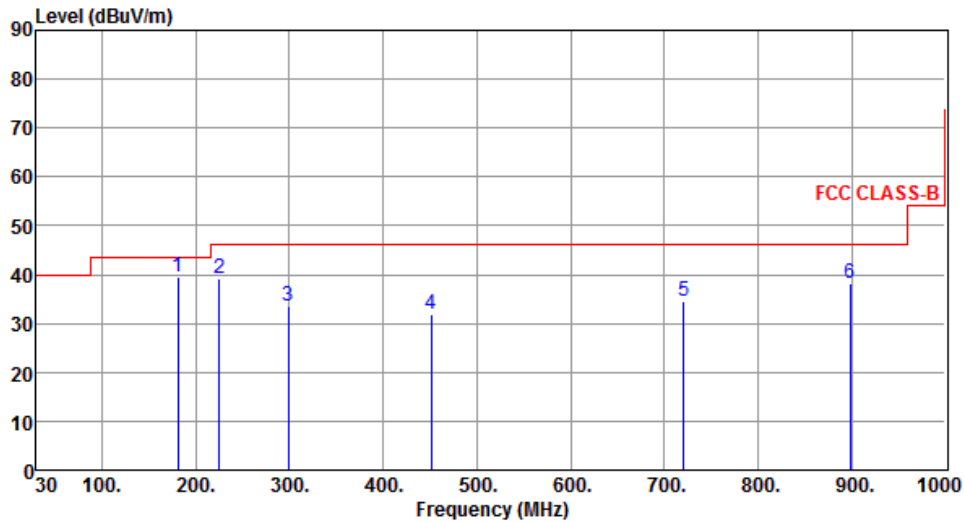


The graph displays the radiated unwanted emissions for a transmitter. The y-axis represents the Level in dBuV/m, ranging from 0 to 90. The x-axis represents the Frequency in MHz, ranging from 30 to 1000. A red line indicates the FCC CLASS-B limit, which is 40 dBuV/m from 30 MHz to 100 MHz, 45 dBuV/m from 100 MHz to 1000 MHz, and 55 dBuV/m from 1000 MHz to 1100 MHz. Six emission peaks are identified and labeled 1 through 6, with their respective frequencies and levels listed in the table below.

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	181.32	39.60	43.50	-3.90	57.91	-18.31	Peak	---	---
2	224.97	39.19	46.00	-6.81	57.54	-18.35	Peak	---	---
3	298.69	33.68	46.00	-12.32	49.29	-15.61	Peak	---	---
4	450.98	31.81	46.00	-14.19	43.59	-11.78	Peak	---	---
5	720.64	34.43	46.00	-11.57	41.57	-7.14	Peak	---	---
6	898.15	38.08	46.00	-7.92	43.02	-4.94	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5580
Polarization	Vertical		

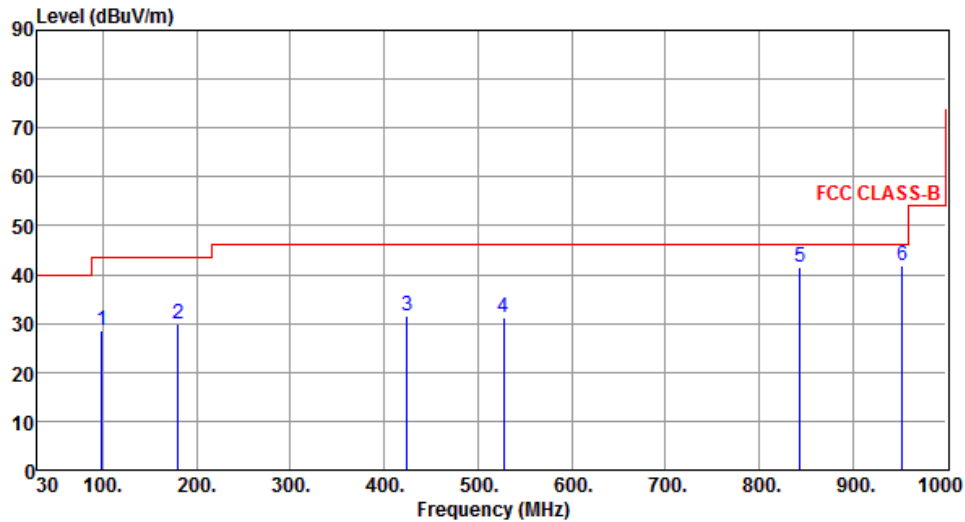

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	98.87	28.51	43.50	-14.99	49.93	-21.42	Peak	---	---
2	180.35	29.98	43.50	-13.52	48.21	-18.23	Peak	---	---
3	424.79	31.69	46.00	-14.31	44.11	-12.42	Peak	---	---
4	527.61	31.17	46.00	-14.83	41.71	-10.54	Peak	---	---
5	843.83	41.45	46.00	-4.55	46.94	-5.49	Peak	---	---
6	952.47	41.78	46.00	-4.22	45.61	-3.83	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.6.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a


Modulation	11a	Test Freq. (MHz)	5180
Polarization	Horizontal		



	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	34.23	54.00	-19.77	40.57	-6.34	Average	---	---
2	1500.00	47.57	74.00	-26.43	53.91	-6.34	Peak	---	---
3	5150.00	44.88	54.00	-9.12	39.63	5.25	Average	---	---
4	5150.00	58.22	74.00	-15.78	52.97	5.25	Peak	---	---
5	10360.00	61.37	68.20	-6.83	47.82	13.55	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Vertical		

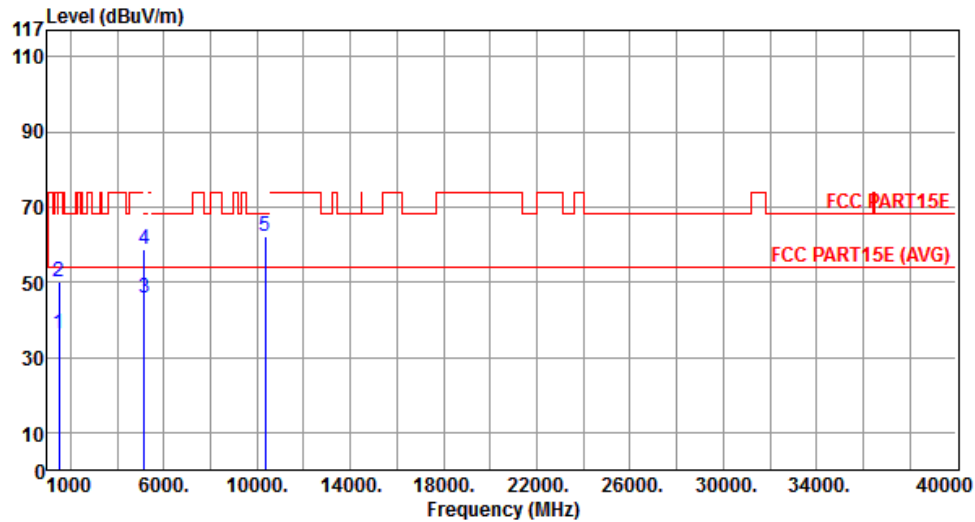

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	36.11	54.00	-17.89	42.45	-6.34	Average	---	---
2	1500.00	50.29	74.00	-23.71	56.63	-6.34	Peak	---	---
3	5150.00	45.86	54.00	-8.14	40.61	5.25	Average	---	---
4	5150.00	58.83	74.00	-15.17	53.58	5.25	Peak	---	---
5	10360.00	62.37	68.20	-5.83	48.82	13.55	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Modulation	11a	Test Freq. (MHz)	5200
Polarization	Horizontal		
Level (dBuV/m) 117 110 90 70 50 30 10 0 1000 6000 10000 14000 18000 22000 26000 30000 34000 40000 Frequency (MHz) 1 2 3 4 5 1500.00 1500.00 10400.00 15600.00 15600.00 Emission level dBuV/m 34.52 47.81 61.53 43.82 57.39 Limit dBuV/m 54.00 74.00 68.20 54.00 74.00 Margin dB -19.48 -26.19 -6.67 -10.18 -16.61 SA reading dBuV 40.86 54.15 47.90 27.82 41.39 Factor dB -6.34 -6.34 13.63 16.00 16.00 Remark Average Peak Peak Average Peak ANT High cm --- Turn Table deg --- Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). </			

Modulation	11a	Test Freq. (MHz)	5200
Polarization	Vertical		
Level (dBuV/m) 117 110 90 70 50 30 10 0 1000 6000 10000 14000 18000 22000 26000 30000 34000 40000 Frequency (MHz) 1 2 3 4 5 1500.00 1500.00 10400.00 15600.00 15600.00 Emission level dBuV/m 36.44 50.53 62.82 44.70 57.76 Limit dBuV/m 54.00 74.00 68.20 54.00 74.00 Margin dB -17.56 -23.47 -5.38 -9.30 -16.24 SA reading dBuV 42.78 56.87 49.19 28.70 41.76 Factor dB -6.34 -6.34 13.63 16.00 16.00 Remark Average Peak Peak Average Peak ANT High cm --- Turn Table deg --- Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Horizontal		
Level (dBuV/m) </			

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Vertical		
Level (dBuV/m) <			

Modulation	11a	Test Freq. (MHz)	5260
Polarization	Horizontal		

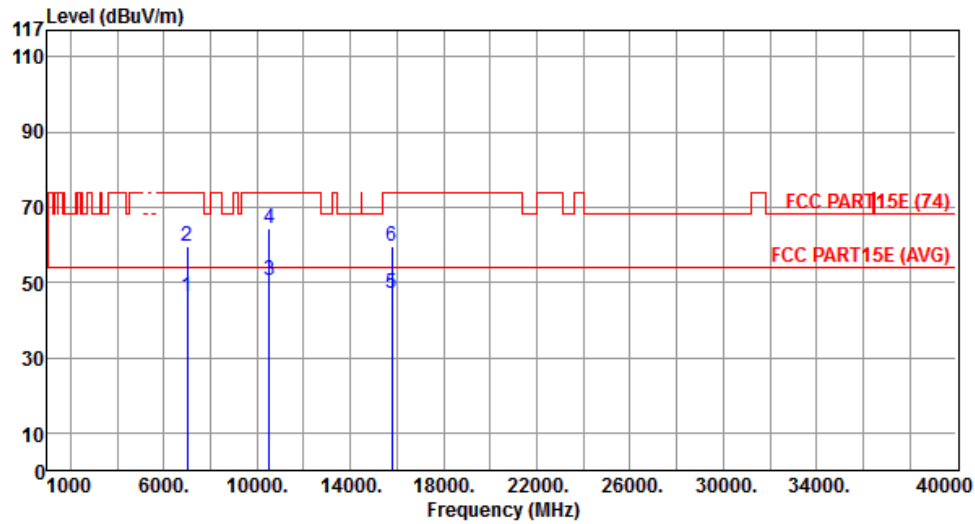

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	7013.30	46.01	54.00	-7.99	37.11	8.90	Average	---	---
2	7013.30	59.44	74.00	-14.56	50.54	8.90	Peak	---	---
3	10520.00	50.63	54.00	-3.37	36.76	13.87	Average	---	---
4	10520.00	64.44	74.00	-9.56	50.57	13.87	Peak	---	---
5	15780.00	47.10	54.00	-6.90	31.37	15.73	Average	---	---
6	15780.00	59.39	74.00	-14.61	43.66	15.73	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5260																																																																						
Polarization	Vertical																																																																								
Level (dBuV/m) 117 110 90 70 50 30 10 0 1000 6000 10000 14000 18000 22000 26000 30000 34000 40000 Frequency (MHz) 2 4 6 1 3 5 FCC PART15E (74) FCC PART15E (AVG) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7013.30</td><td>46.68</td><td>54.00</td><td>-7.32</td><td>37.78</td><td>8.90</td><td>Average</td><td>---</td><td>---</td></tr><tr><td>2</td><td>7013.30</td><td>60.98</td><td>74.00</td><td>-13.02</td><td>52.08</td><td>8.90</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>10520.00</td><td>53.00</td><td>54.00</td><td>-1.00</td><td>39.13</td><td>13.87</td><td>Average</td><td>---</td><td>---</td></tr><tr><td>4</td><td>10520.00</td><td>69.68</td><td>74.00</td><td>-4.32</td><td>55.81</td><td>13.87</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>15780.00</td><td>47.98</td><td>54.00</td><td>-6.02</td><td>32.25</td><td>15.73</td><td>Average</td><td>---</td><td>---</td></tr><tr><td>6</td><td>15780.00</td><td>62.97</td><td>74.00</td><td>-11.03</td><td>47.24</td><td>15.73</td><td>Peak</td><td>---</td><td>---</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	7013.30	46.68	54.00	-7.32	37.78	8.90	Average	---	---	2	7013.30	60.98	74.00	-13.02	52.08	8.90	Peak	---	---	3	10520.00	53.00	54.00	-1.00	39.13	13.87	Average	---	---	4	10520.00	69.68	74.00	-4.32	55.81	13.87	Peak	---	---	5	15780.00	47.98	54.00	-6.02	32.25	15.73	Average	---	---	6	15780.00	62.97	74.00	-11.03	47.24	15.73	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																
1	7013.30	46.68	54.00	-7.32	37.78	8.90	Average	---	---																																																																
2	7013.30	60.98	74.00	-13.02	52.08	8.90	Peak	---	---																																																																
3	10520.00	53.00	54.00	-1.00	39.13	13.87	Average	---	---																																																																
4	10520.00	69.68	74.00	-4.32	55.81	13.87	Peak	---	---																																																																
5	15780.00	47.98	54.00	-6.02	32.25	15.73	Average	---	---																																																																
6	15780.00	62.97	74.00	-11.03	47.24	15.73	Peak	---	---																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

Modulation	11a	Test Freq. (MHz)	5300
Polarization	Horizontal		
Level (dBuV/m)			

Modulation	11a	Test Freq. (MHz)	5300
Polarization	Vertical		

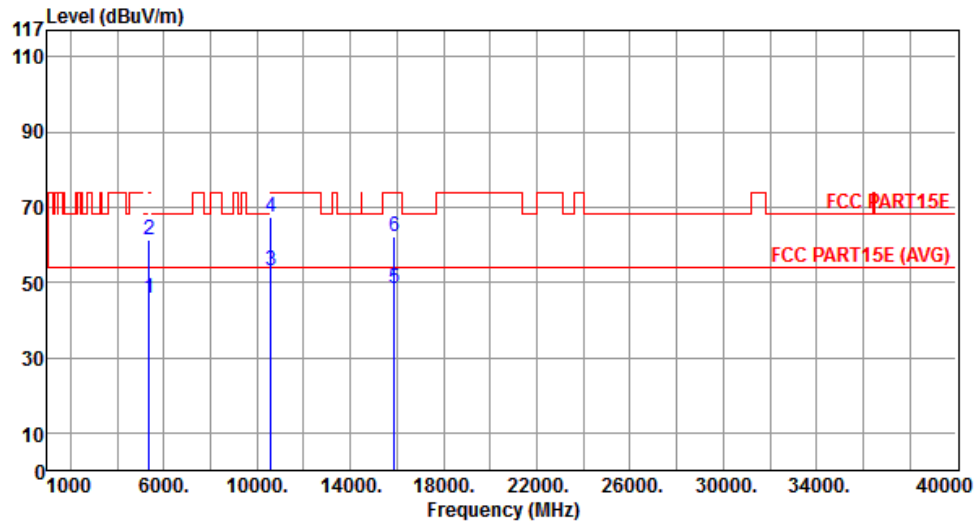


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	45.70	54.00	-8.30	40.30	5.40	Average	---	---
2	5350.00	61.20	74.00	-12.80	55.80	5.40	Peak	---	---
3	10600.00	53.00	54.00	-1.00	39.00	14.00	Average	---	---
4	10600.00	67.43	74.00	-6.57	53.43	14.00	Peak	---	---
5	15900.00	48.48	54.00	-5.52	32.93	15.55	Average	---	---
6	15900.00	62.19	74.00	-11.81	46.64	15.55	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5320
Polarization	Horizontal		

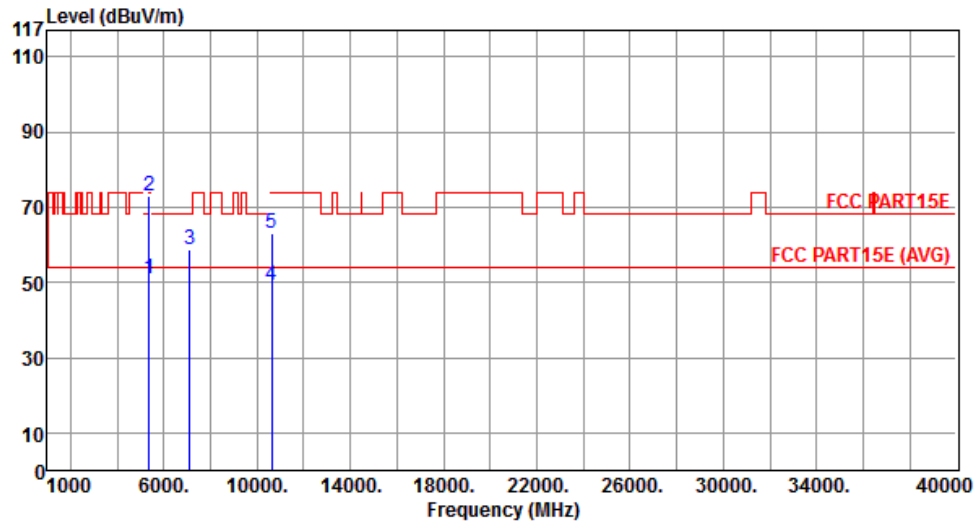


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	50.98	54.00	-3.02	45.57	5.41	Average	---	---
2	5350.00	72.95	74.00	-1.05	67.54	5.41	Peak	---	---
3	7093.30	58.90	68.20	-9.30	49.79	9.11	Peak	---	---
4	10640.00	49.10	54.00	-4.90	35.03	14.07	Average	---	---
5	10640.00	63.08	74.00	-10.92	49.01	14.07	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5320
Polarization	Vertical		

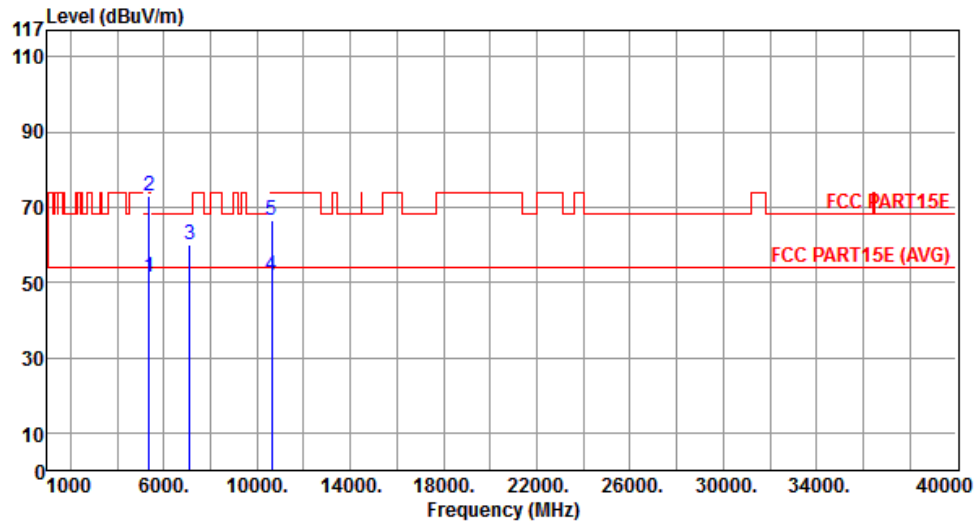

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	51.40	54.00	-2.60	45.99	5.41	Average	---	---
2	5350.00	73.00	74.00	-1.00	67.59	5.41	Peak	---	---
3	7093.30	60.20	68.20	-8.00	51.09	9.11	Peak	---	---
4	10640.00	51.80	54.00	-2.20	37.73	14.07	Average	---	---
5	10640.00	66.28	74.00	-7.72	52.21	14.07	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5500																																																																																										
Polarization	Horizontal																																																																																												
Level (dBuV/m) 117 110 90 70 50 30 10 0 1000 6000 10000 14000 18000 22000 26000 30000 34000 40000 Frequency (MHz) 4 2 3 6 5 FCC PART15E (74) FCC PART15E (AVG) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>46.18</td><td>54.00</td><td>-7.82</td><td>40.60</td><td>5.58</td><td>Average</td><td>---</td><td>---</td></tr><tr><td>2</td><td>5460.00</td><td>62.78</td><td>74.00</td><td>-11.22</td><td>57.20</td><td>5.58</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>5470.00</td><td>51.28</td><td>54.00</td><td>-2.72</td><td>45.67</td><td>5.61</td><td>Average</td><td>---</td><td>---</td></tr><tr><td>4</td><td>5470.00</td><td>72.51</td><td>74.00</td><td>-1.49</td><td>66.90</td><td>5.61</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>11000.00</td><td>44.31</td><td>54.00</td><td>-9.69</td><td>29.63</td><td>14.68</td><td>Average</td><td>---</td><td>---</td></tr><tr><td>6</td><td>11000.00</td><td>57.82</td><td>74.00</td><td>-16.18</td><td>43.14</td><td>14.68</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB		High	Table									cm	deg	1	5460.00	46.18	54.00	-7.82	40.60	5.58	Average	---	---	2	5460.00	62.78	74.00	-11.22	57.20	5.58	Peak	---	---	3	5470.00	51.28	54.00	-2.72	45.67	5.61	Average	---	---	4	5470.00	72.51	74.00	-1.49	66.90	5.61	Peak	---	---	5	11000.00	44.31	54.00	-9.69	29.63	14.68	Average	---	---	6	11000.00	57.82	74.00	-16.18	43.14	14.68	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB		High	Table																																																																																				
								cm	deg																																																																																				
1	5460.00	46.18	54.00	-7.82	40.60	5.58	Average	---	---																																																																																				
2	5460.00	62.78	74.00	-11.22	57.20	5.58	Peak	---	---																																																																																				
3	5470.00	51.28	54.00	-2.72	45.67	5.61	Average	---	---																																																																																				
4	5470.00	72.51	74.00	-1.49	66.90	5.61	Peak	---	---																																																																																				
5	11000.00	44.31	54.00	-9.69	29.63	14.68	Average	---	---																																																																																				
6	11000.00	57.82	74.00	-16.18	43.14	14.68	Peak	---	---																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

Modulation	11a	Test Freq. (MHz)	5500
Polarization	Vertical		
 </			


Modulation	11a	Test Freq. (MHz)	5580
Polarization	Horizontal		

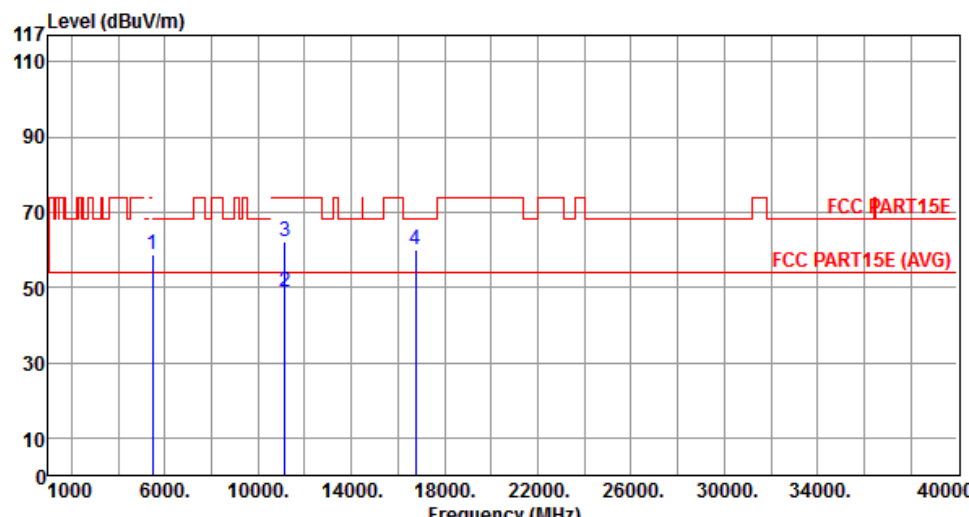

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5470.00	58.91	68.20	-9.29	53.30	5.61	Peak	---	---
2	11160.00	48.70	54.00	-5.30	33.98	14.72	Average	---	---
3	11160.00	62.12	74.00	-11.88	47.40	14.72	Peak	---	---
4	16740.00	59.94	68.20	-8.26	42.19	17.75	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5580
Polarization	Vertical		

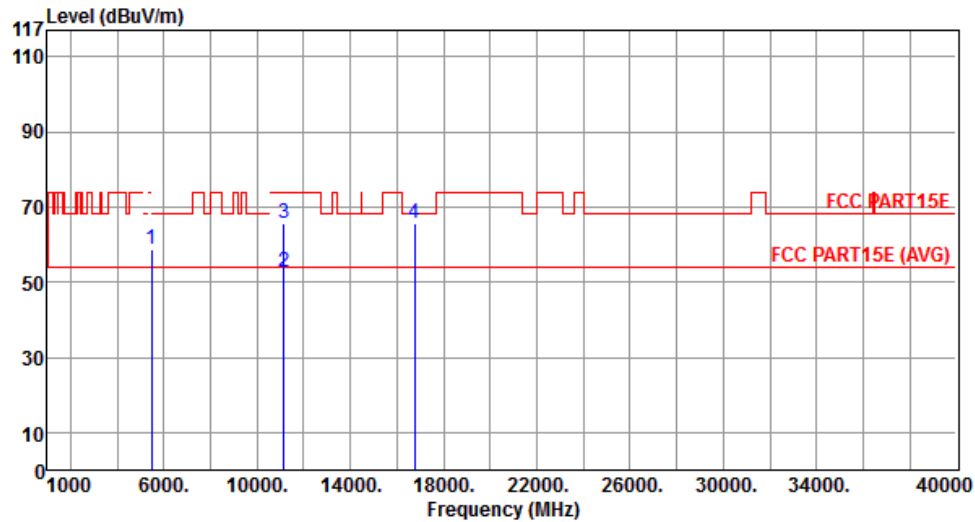


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5470.00	58.51	68.20	-9.69	52.90	5.61	Peak	---	---
2	11160.00	52.53	54.00	-1.47	37.81	14.72	Average	---	---
3	11160.00	65.66	74.00	-8.34	50.94	14.72	Peak	---	---
4	16740.00	65.65	68.20	-2.55	47.90	17.75	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Horizontal		

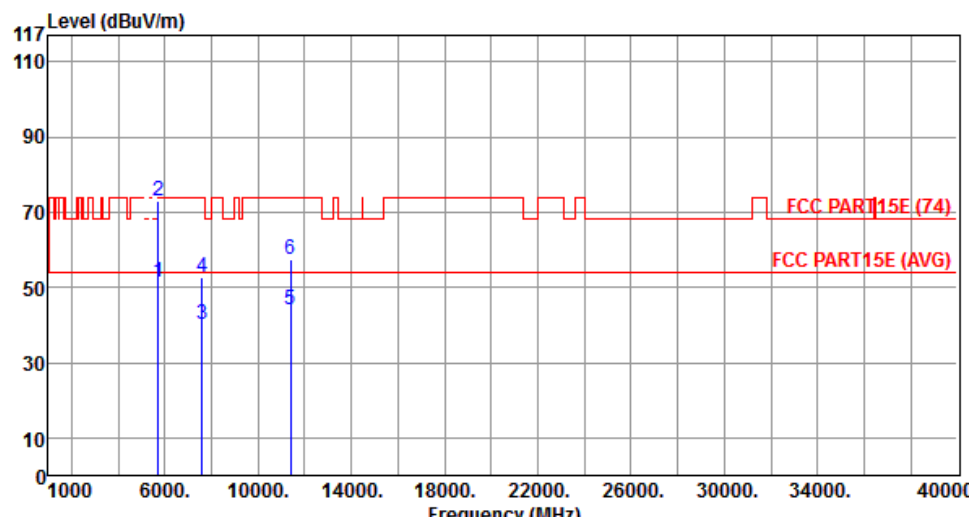

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	51.43	54.00	-2.57	45.33	6.10	Average	---	---
2	5725.00	72.90	74.00	-1.10	66.80	6.10	Peak	---	---
3	7600.00	40.23	54.00	-13.77	30.28	9.95	Average	---	---
4	7600.00	52.78	74.00	-21.22	42.83	9.95	Peak	---	---
5	11400.00	43.99	54.00	-10.01	29.18	14.81	Average	---	---
6	11400.00	57.52	74.00	-16.48	42.71	14.81	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5700																																																																						
Polarization	Vertical																																																																								
Level (dBuV/m) 117 110 90 70 50 30 10 0 1000 6000 10000 14000 18000 22000 26000 30000 34000 40000 Frequency (MHz) 1 2 3 4 5 6 5725.00 5725.00 7600.00 7600.00 11400.00 11400.00 48.13 65.84 47.44 54.47 49.95 64.04 54.00 74.00 54.00 74.00 54.00 74.00 -5.87 -8.16 -6.56 -19.53 -4.05 -9.96 42.02 59.73 37.49 44.52 35.14 49.23 6.11 6.11 9.95 9.95 14.81 14.81 Average Peak Average Peak Average Peak --- --- --- --- --- --- --- --- --- --- --- --- FCC PART 15E (74) FCC PART 15E (AVG) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5725.00</td><td>48.13</td><td>54.00</td><td>-5.87</td><td>42.02</td><td>6.11</td><td>Average</td><td>---</td><td>---</td></tr><tr><td>2</td><td>5725.00</td><td>65.84</td><td>74.00</td><td>-8.16</td><td>59.73</td><td>6.11</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>7600.00</td><td>47.44</td><td>54.00</td><td>-6.56</td><td>37.49</td><td>9.95</td><td>Average</td><td>---</td><td>---</td></tr><tr><td>4</td><td>7600.00</td><td>54.47</td><td>74.00</td><td>-19.53</td><td>44.52</td><td>9.95</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>11400.00</td><td>49.95</td><td>54.00</td><td>-4.05</td><td>35.14</td><td>14.81</td><td>Average</td><td>---</td><td>---</td></tr><tr><td>6</td><td>11400.00</td><td>64.04</td><td>74.00</td><td>-9.96</td><td>49.23</td><td>14.81</td><td>Peak</td><td>---</td><td>---</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	5725.00	48.13	54.00	-5.87	42.02	6.11	Average	---	---	2	5725.00	65.84	74.00	-8.16	59.73	6.11	Peak	---	---	3	7600.00	47.44	54.00	-6.56	37.49	9.95	Average	---	---	4	7600.00	54.47	74.00	-19.53	44.52	9.95	Peak	---	---	5	11400.00	49.95	54.00	-4.05	35.14	14.81	Average	---	---	6	11400.00	64.04	74.00	-9.96	49.23	14.81	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																
1	5725.00	48.13	54.00	-5.87	42.02	6.11	Average	---	---																																																																
2	5725.00	65.84	74.00	-8.16	59.73	6.11	Peak	---	---																																																																
3	7600.00	47.44	54.00	-6.56	37.49	9.95	Average	---	---																																																																
4	7600.00	54.47	74.00	-19.53	44.52	9.95	Peak	---	---																																																																
5	11400.00	49.95	54.00	-4.05	35.14	14.81	Average	---	---																																																																
6	11400.00	64.04	74.00	-9.96	49.23	14.81	Peak	---	---																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

3.6.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20


Modulation	HT20	Test Freq. (MHz)	5180
Polarization	Horizontal		



	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	34.58	54.00	-19.42	40.92	-6.34	Average	---	---
2	1500.00	47.88	74.00	-26.12	54.22	-6.34	Peak	---	---
3	5150.00	44.46	54.00	-9.54	39.21	5.25	Average	---	---
4	5150.00	57.35	74.00	-16.65	52.10	5.25	Peak	---	---
5	10360.00	61.03	68.20	-7.17	47.48	13.55	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	5180
Polarization	Vertical		

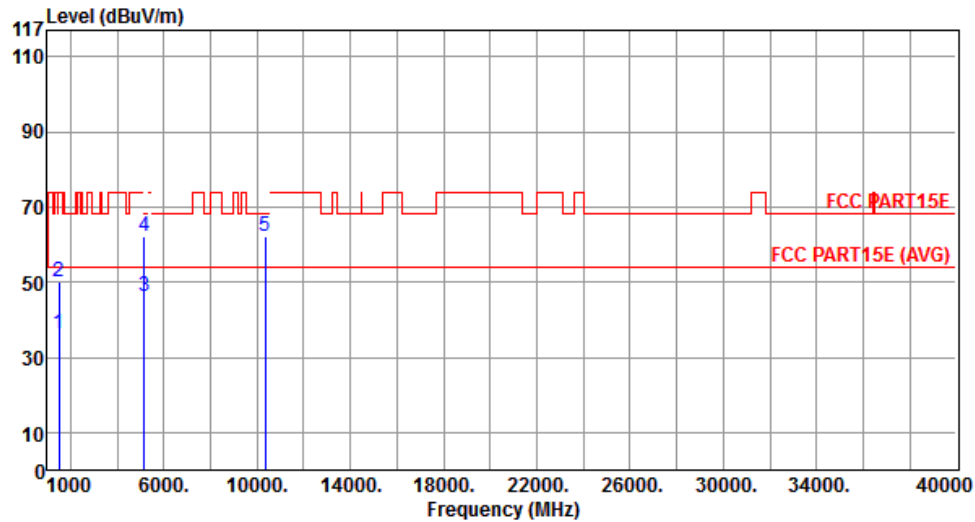


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	36.48	54.00	-17.52	42.82	-6.34	Average	---	---
2	1500.00	50.14	74.00	-23.86	56.48	-6.34	Peak	---	---
3	5150.00	46.11	54.00	-7.89	40.86	5.25	Average	---	---
4	5150.00	62.23	74.00	-11.77	56.98	5.25	Peak	---	---
5	10360.00	61.97	68.20	-6.23	48.42	13.55	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Modulation	HT20	Test Freq. (MHz)	5200
Polarization	Horizontal		

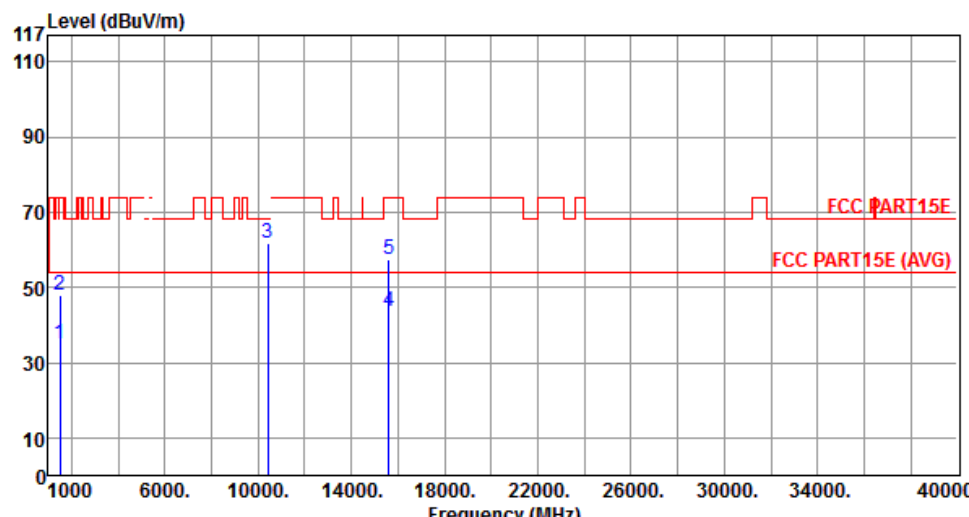

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	34.82	54.00	-19.18	41.16	-6.34	Average	---	---
2	1500.00	48.13	74.00	-25.87	54.47	-6.34	Peak	---	---
3	10400.00	61.53	68.20	-6.67	47.90	13.63	Peak	---	---
4	15600.00	43.82	54.00	-10.18	27.82	16.00	Average	---	---
5	15600.00	57.39	74.00	-16.61	41.39	16.00	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	5200
Polarization	Vertical		

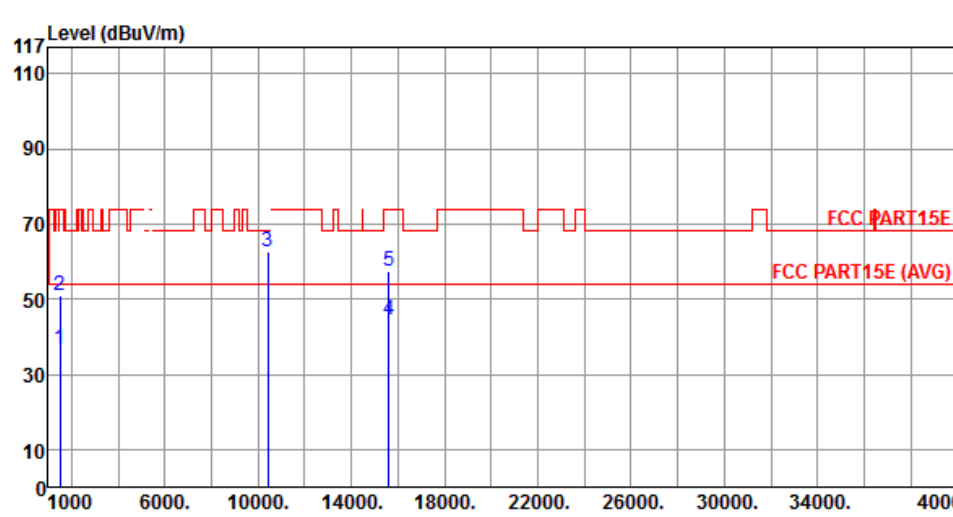

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	36.73	54.00	-17.27	43.07	-6.34	Average	---	---
2	1500.00	50.84	74.00	-23.16	57.18	-6.34	Peak	---	---
3	10400.00	62.55	68.20	-5.65	48.92	13.63	Peak	---	---
4	15600.00	44.43	54.00	-9.57	28.43	16.00	Average	---	---
5	15600.00	57.38	74.00	-16.62	41.38	16.00	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	5240
Polarization	Horizontal		
Level (dBuV/m) </			

Modulation	HT20	Test Freq. (MHz)	5240
Polarization	Vertical		
Level (dBuV/m)			

Modulation	HT20	Test Freq. (MHz)	5260
Polarization	Horizontal		
Level (dBuV/m) </			


Modulation	HT20	Test Freq. (MHz)	5260
Polarization	Vertical		

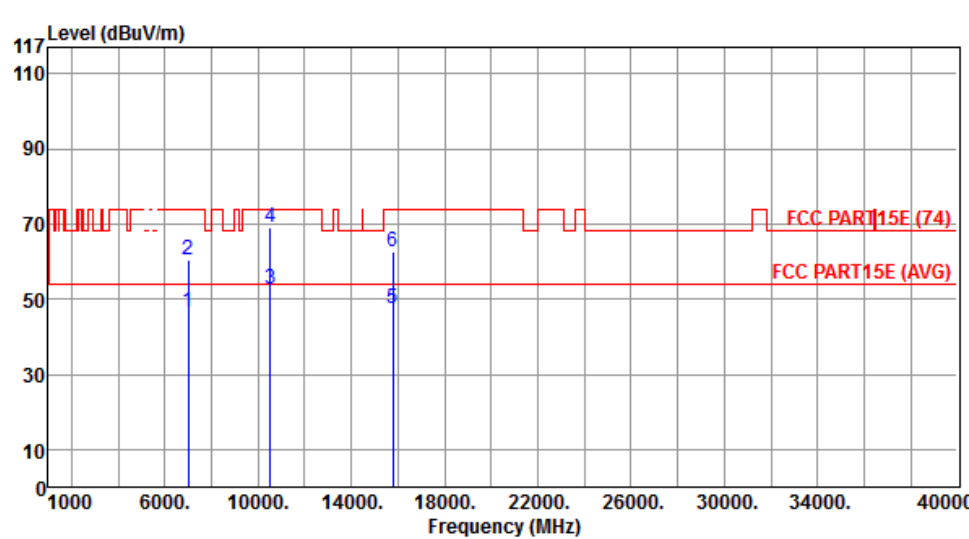

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	7013.30	46.43	54.00	-7.57	37.55	8.88	Average	---	---
2	7013.30	60.52	74.00	-13.48	51.64	8.88	Peak	---	---
3	10520.00	52.84	54.00	-1.16	38.98	13.86	Average	---	---
4	10520.00	69.28	74.00	-4.72	55.42	13.86	Peak	---	---
5	15780.00	47.63	54.00	-6.37	31.90	15.73	Average	---	---
6	15780.00	62.62	74.00	-11.38	46.89	15.73	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	5300
Polarization	Horizontal		

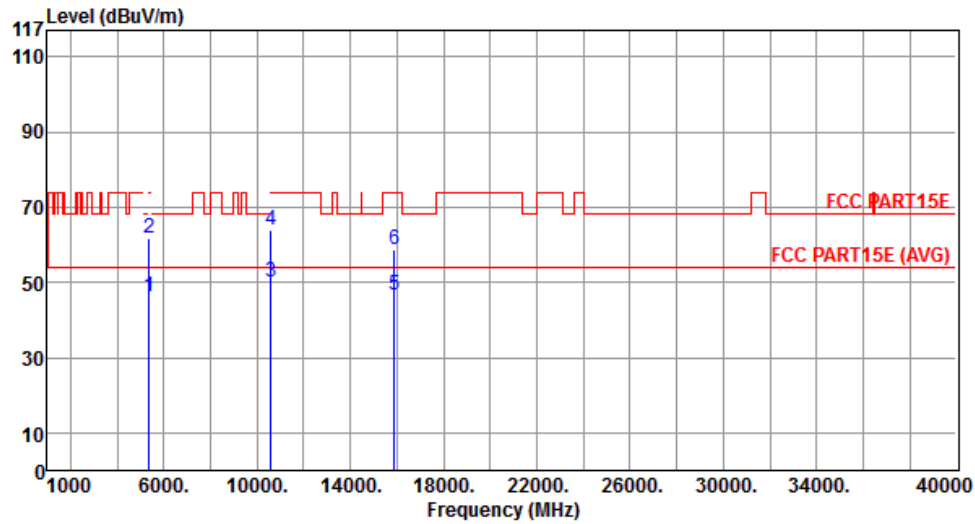

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	46.10	54.00	-7.90	40.70	5.40	Average	---	---
2	5350.00	61.87	74.00	-12.13	56.47	5.40	Peak	---	---
3	10600.00	50.02	54.00	-3.98	36.03	13.99	Average	---	---
4	10600.00	63.84	74.00	-10.16	49.85	13.99	Peak	---	---
5	15900.00	46.52	54.00	-7.48	30.98	15.54	Average	---	---
6	15900.00	58.79	74.00	-15.21	43.25	15.54	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	5300
Polarization	Vertical		
Level (dBuV/m) </			

Modulation	HT20	Test Freq. (MHz)	5320
Polarization	Horizontal		

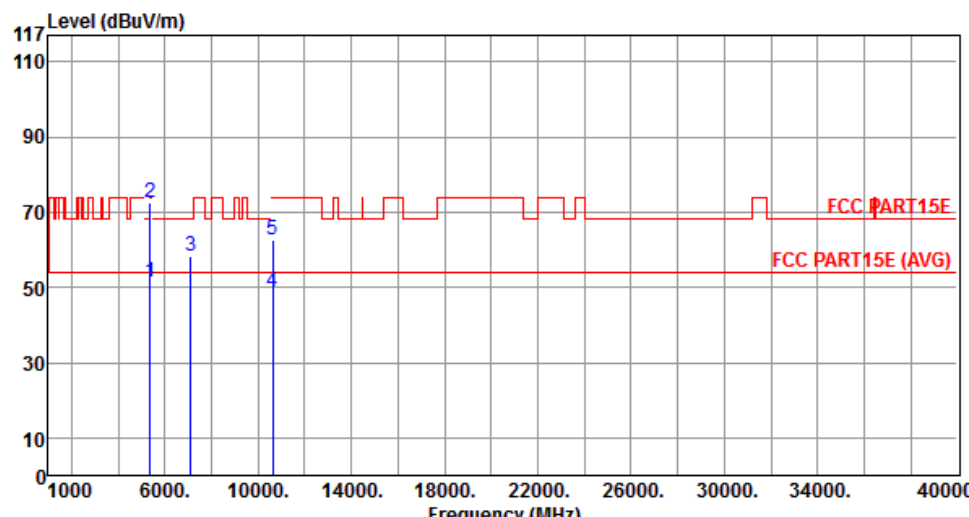


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	51.55	54.00	-2.45	46.14	5.41	Average	---	---
2	5350.00	72.50	74.00	-1.50	67.09	5.41	Peak	---	---
3	7093.30	58.43	68.20	-9.77	49.32	9.11	Peak	---	---
4	10640.00	48.78	54.00	-5.22	34.71	14.07	Average	---	---
5	10640.00	62.81	74.00	-11.19	48.74	14.07	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	5320
Polarization	Vertical		
Level (dBuV/m) <			

Modulation	HT20	Test Freq. (MHz)	5500
Polarization	Horizontal		
Level (dBuV/m)			

Modulation	HT20	Test Freq. (MHz)	5500
Polarization	Vertical		

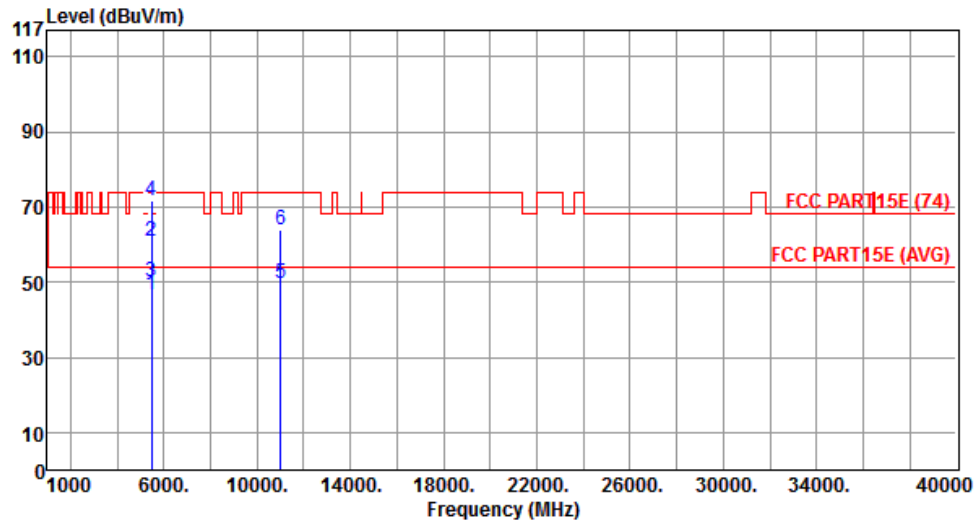


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	46.68	54.00	-7.32	41.10	5.58	Average	---	---
2	5460.00	61.06	74.00	-12.94	55.48	5.58	Peak	---	---
3	5470.00	50.01	54.00	-3.99	44.40	5.61	Average	---	---
4	5470.00	71.85	74.00	-2.15	66.24	5.61	Peak	---	---
5	11000.00	49.71	54.00	-4.29	35.03	14.68	Average	---	---
6	11000.00	63.97	74.00	-10.03	49.29	14.68	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Modulation	HT20	Test Freq. (MHz)	5580
Polarization	Horizontal		

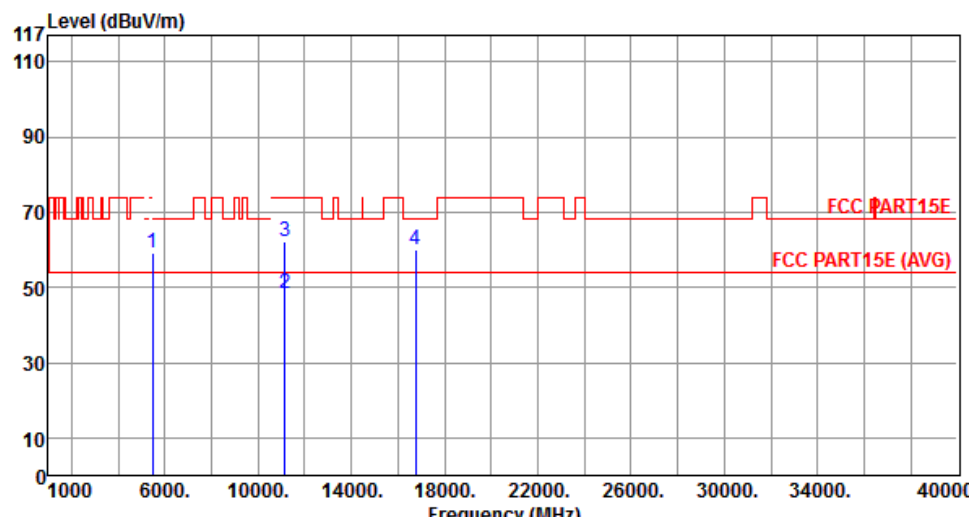

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5470.00	59.22	68.20	-8.98	53.61	5.61	Peak	---	---
2	11160.00	48.22	54.00	-5.78	33.48	14.74	Average	---	---
3	11160.00	61.98	74.00	-12.02	47.24	14.74	Peak	---	---
4	16740.00	60.11	68.30	-8.19	42.35	17.76	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	5580
Polarization	Vertical		

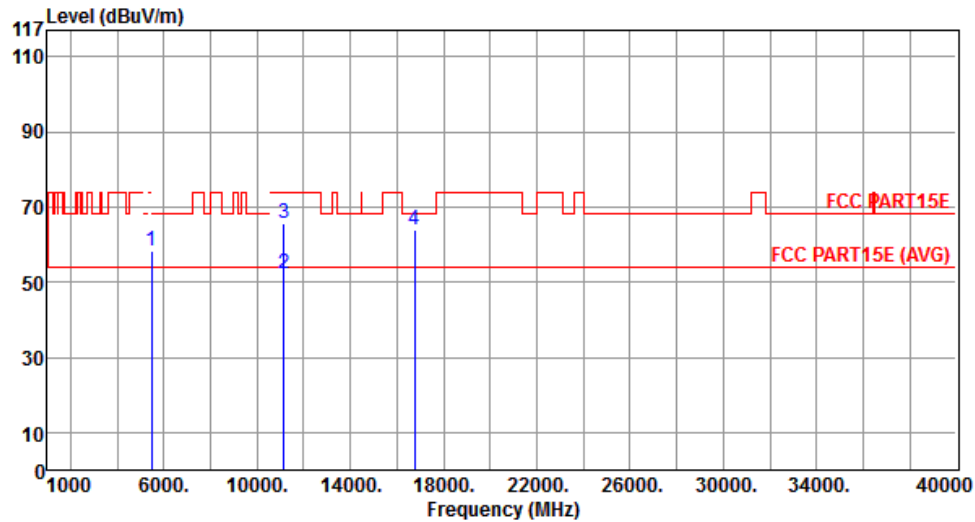


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5470.00	58.36	68.20	-9.84	52.75	5.61	Peak	---	---
2	11160.00	52.17	54.00	-1.83	37.43	14.74	Average	---	---
3	11160.00	65.43	74.00	-8.57	50.69	14.74	Peak	---	---
4	16740.00	63.71	68.30	-4.59	45.96	17.75	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	5700
Polarization	Horizontal		

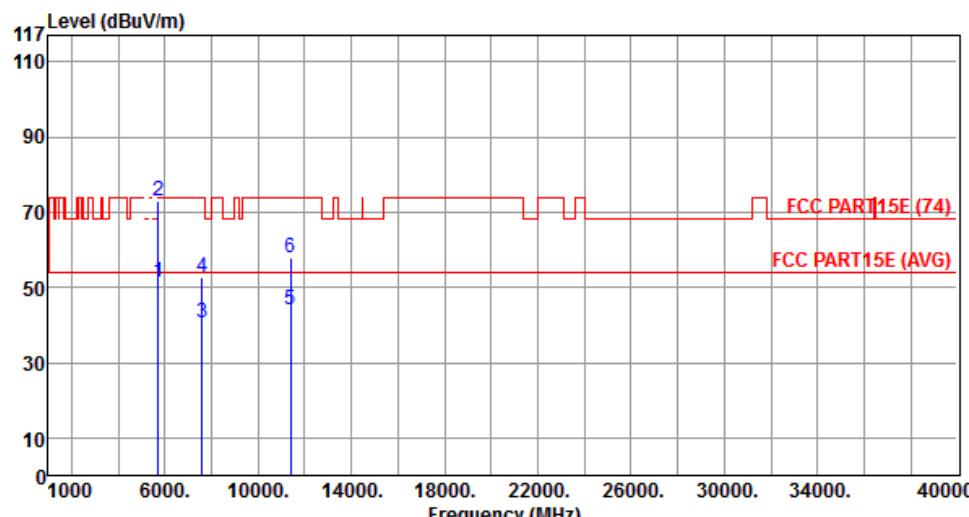


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	51.56	54.00	-2.44	45.46	6.10	Average	---	---
2	5725.00	73.00	74.00	-1.00	66.90	6.10	Peak	---	---
3	7600.00	40.54	54.00	-13.46	30.59	9.95	Average	---	---
4	7600.00	52.62	74.00	-21.38	42.67	9.95	Peak	---	---
5	11400.00	44.16	54.00	-9.84	29.35	14.81	Average	---	---
6	11400.00	57.67	74.00	-16.33	42.86	14.81	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	5700																																																																						
Polarization	Vertical																																																																								
Level (dBuV/m) 117 110 90 70 50 30 10 0 1000 6000. 10000. 14000. 18000. 22000. 26000. 30000. 34000. 40000 117 110 90 70 50 30 10 0 Frequency (MHz) 1 2 3 4 5 6 5725.00 5725.00 7600.00 7600.00 11400.00 11400.00 47.91 69.96 47.79 54.58 50.23 64.46 54.00 74.00 54.00 74.00 54.00 74.00 -6.09 -4.04 -6.21 -19.42 -3.77 -9.54 41.81 63.86 37.84 44.63 35.42 49.65 6.10 6.10 9.95 9.95 14.81 14.81 Average Peak Average Peak Average Peak --- --- --- --- --- --- --- --- --- --- --- --- FCC PART15E (74) FCC PART15E (AVG) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5725.00</td><td>47.91</td><td>54.00</td><td>-6.09</td><td>41.81</td><td>6.10</td><td>Average</td><td>---</td><td>---</td></tr><tr><td>2</td><td>5725.00</td><td>69.96</td><td>74.00</td><td>-4.04</td><td>63.86</td><td>6.10</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>7600.00</td><td>47.79</td><td>54.00</td><td>-6.21</td><td>37.84</td><td>9.95</td><td>Average</td><td>---</td><td>---</td></tr><tr><td>4</td><td>7600.00</td><td>54.58</td><td>74.00</td><td>-19.42</td><td>44.63</td><td>9.95</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>11400.00</td><td>50.23</td><td>54.00</td><td>-3.77</td><td>35.42</td><td>14.81</td><td>Average</td><td>---</td><td>---</td></tr><tr><td>6</td><td>11400.00</td><td>64.46</td><td>74.00</td><td>-9.54</td><td>49.65</td><td>14.81</td><td>Peak</td><td>---</td><td>---</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	5725.00	47.91	54.00	-6.09	41.81	6.10	Average	---	---	2	5725.00	69.96	74.00	-4.04	63.86	6.10	Peak	---	---	3	7600.00	47.79	54.00	-6.21	37.84	9.95	Average	---	---	4	7600.00	54.58	74.00	-19.42	44.63	9.95	Peak	---	---	5	11400.00	50.23	54.00	-3.77	35.42	14.81	Average	---	---	6	11400.00	64.46	74.00	-9.54	49.65	14.81	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																
1	5725.00	47.91	54.00	-6.09	41.81	6.10	Average	---	---																																																																
2	5725.00	69.96	74.00	-4.04	63.86	6.10	Peak	---	---																																																																
3	7600.00	47.79	54.00	-6.21	37.84	9.95	Average	---	---																																																																
4	7600.00	54.58	74.00	-19.42	44.63	9.95	Peak	---	---																																																																
5	11400.00	50.23	54.00	-3.77	35.42	14.81	Average	---	---																																																																
6	11400.00	64.46	74.00	-9.54	49.65	14.81	Peak	---	---																																																																

3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40


Modulation	HT40	Test Freq. (MHz)	5190
Polarization	Horizontal		

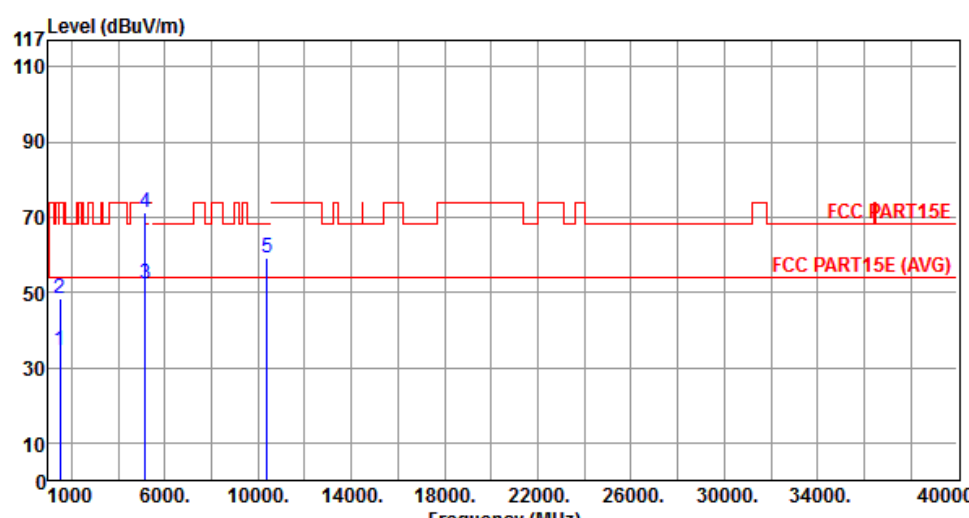

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	34.55	54.00	-19.45	40.86	-6.31	Average	---	---
2	1500.00	48.17	74.00	-25.83	54.48	-6.31	Peak	---	---
3	5150.00	52.35	54.00	-1.65	47.10	5.25	Average	---	---
4	5150.00	71.42	74.00	-2.58	66.17	5.25	Peak	---	---
5	10380.00	59.15	68.20	-9.05	45.56	13.59	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	5190
Polarization	Vertical		

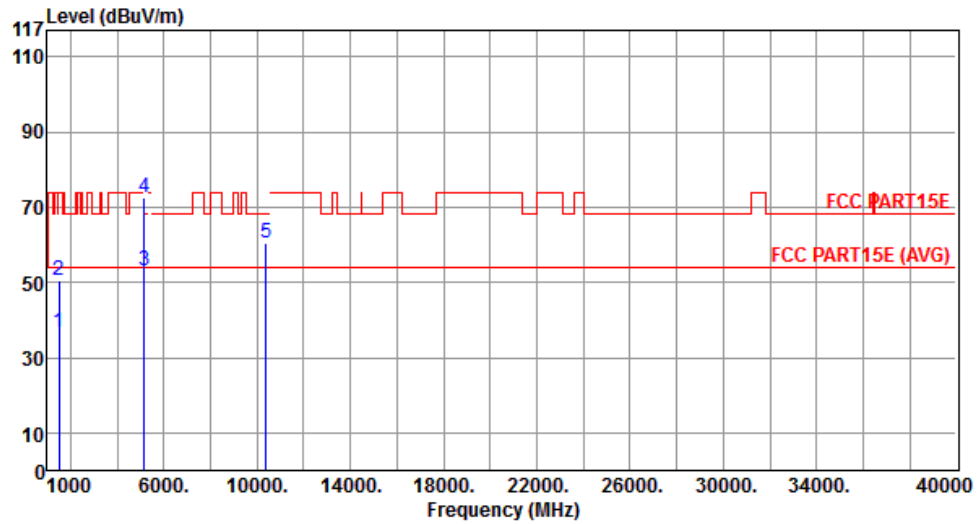


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	36.72	54.00	-17.28	43.03	-6.31	Average	---	---
2	1500.00	50.53	74.00	-23.47	56.84	-6.31	Peak	---	---
3	5150.00	53.00	54.00	-1.00	47.75	5.25	Average	---	---
4	5150.00	72.57	74.00	-1.43	67.32	5.25	Peak	---	---
5	10380.00	60.44	68.20	-7.76	46.85	13.59	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	5230
Polarization	Horizontal		

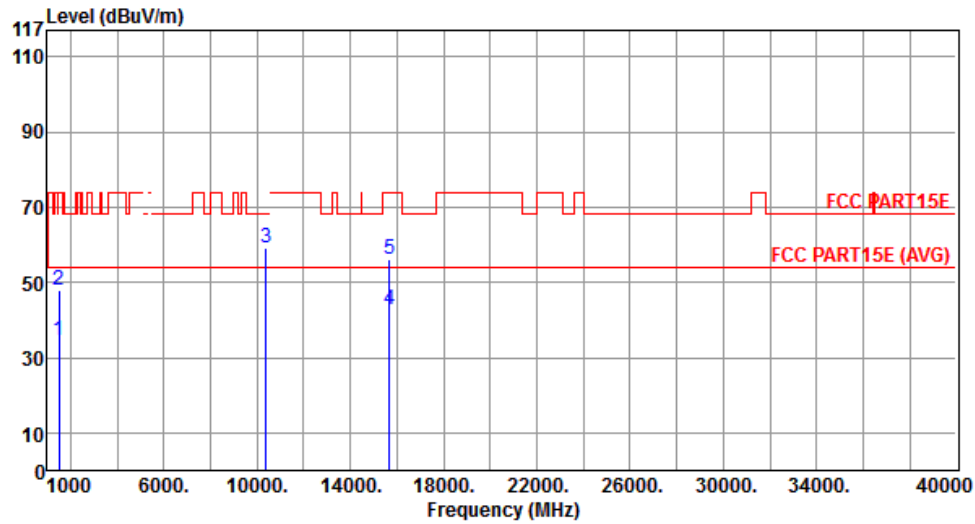


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	34.43	54.00	-19.57	40.74	-6.31	Average	---	---
2	1500.00	48.07	74.00	-25.93	54.38	-6.31	Peak	---	---
3	10380.00	59.15	68.20	-9.05	45.56	13.59	Peak	---	---
4	15690.00	42.67	54.00	-11.33	26.80	15.87	Average	---	---
5	15690.00	56.22	74.00	-17.78	40.35	15.87	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Modulation	HT40	Test Freq. (MHz)	5230
Polarization	Vertical		

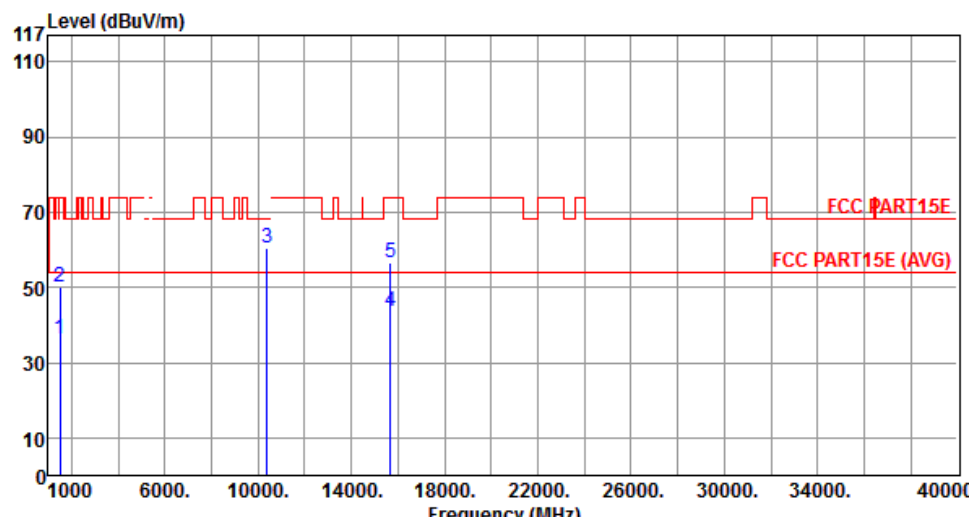

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	36.44	54.00	-17.56	42.75	-6.31	Average	---	---
2	1500.00	50.29	74.00	-23.71	56.60	-6.31	Peak	---	---
3	10380.00	60.44	68.20	-7.76	46.85	13.59	Peak	---	---
4	15690.00	43.43	54.00	-10.57	27.56	15.87	Average	---	---
5	15690.00	56.55	74.00	-17.45	40.68	15.87	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	5270
Polarization	Horizontal		

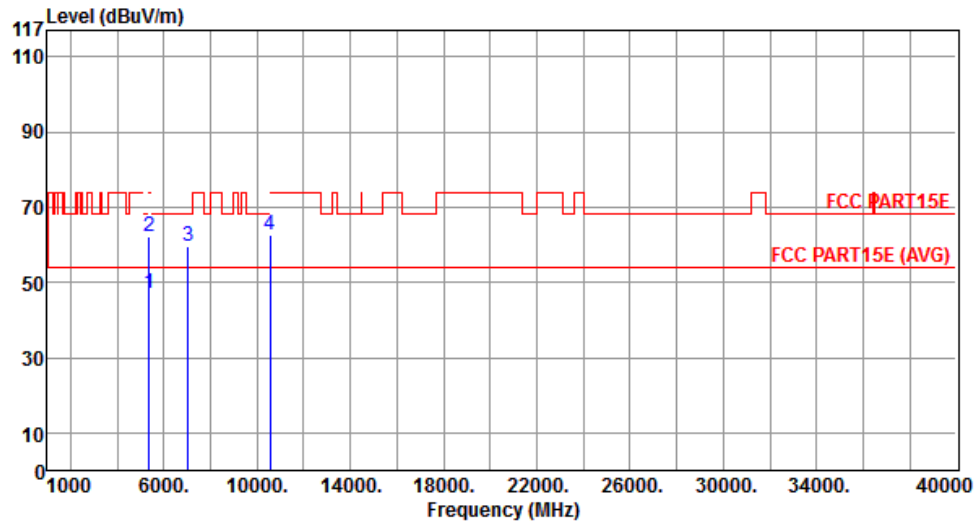


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	47.00	54.00	-7.00	41.60	5.40	Average	---	---
2	5350.00	62.30	74.00	-11.70	56.90	5.40	Peak	---	---
3	7026.30	59.41	68.20	-8.79	50.48	8.93	Peak	---	---
4	10540.00	62.51	68.20	-5.69	48.61	13.90	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	5270
Polarization	Vertical		

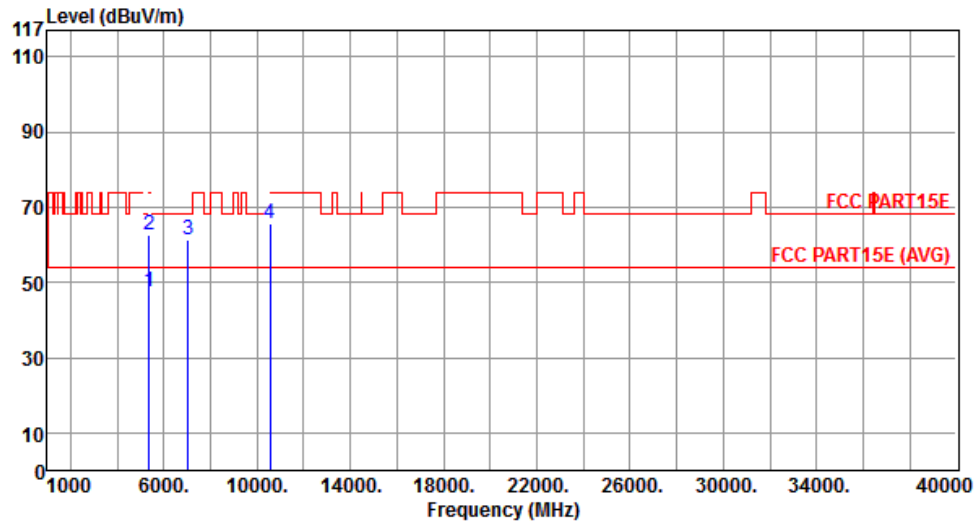


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	47.40	54.00	-6.60	42.00	5.40	Average	---	---
2	5350.00	62.64	74.00	-11.36	57.24	5.40	Peak	---	---
3	7026.30	61.11	68.20	-7.09	52.18	8.93	Peak	---	---
4	10540.00	65.64	68.20	-2.56	51.74	13.90	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	5310
Polarization	Horizontal		

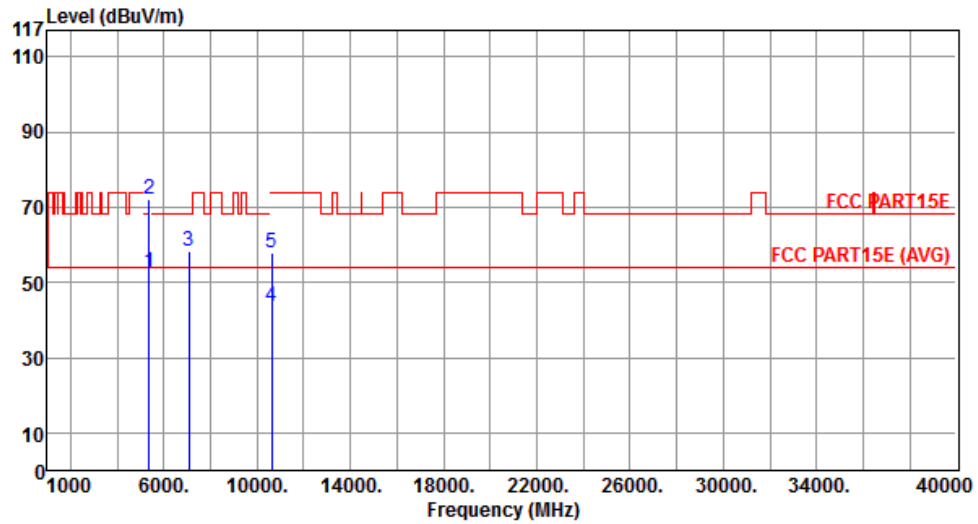

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	52.60	54.00	-1.40	47.19	5.41	Average	---	---
2	5350.00	72.00	74.00	-2.00	66.59	5.41	Peak	---	---
3	7080.00	58.33	68.20	-9.87	49.25	9.08	Peak	---	---
4	10620.00	43.52	54.00	-10.48	29.49	14.03	Average	---	---
5	10620.00	57.71	74.00	-16.29	43.68	14.03	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	5310
Polarization	Vertical		
Level (dBuV/m) </			

Modulation	HT40	Test Freq. (MHz)	5510
Polarization	Horizontal		

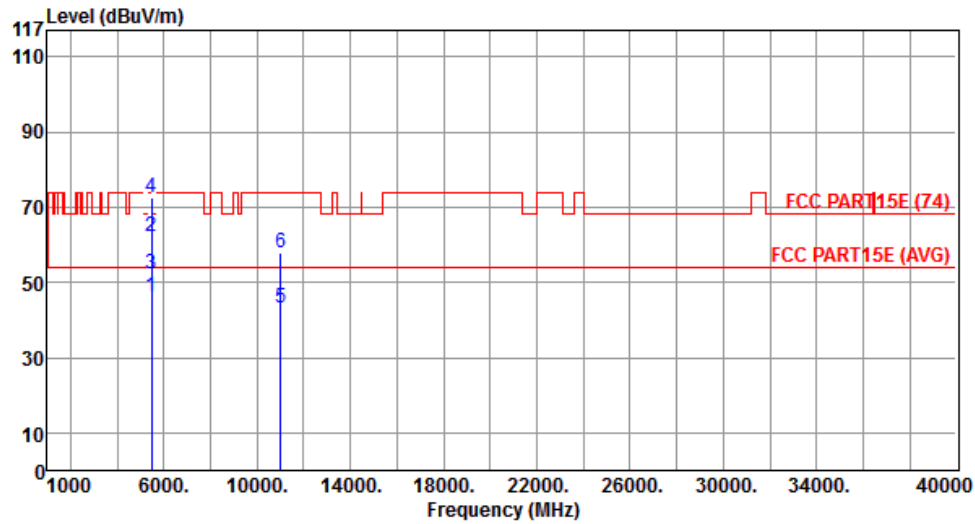

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	46.08	54.00	-7.92	40.50	5.58	Average	---	---
2	5460.00	62.04	74.00	-11.96	56.46	5.58	Peak	---	---
3	5470.00	52.11	54.00	-1.89	46.50	5.61	Average	---	---
4	5470.00	72.51	74.00	-1.49	66.90	5.61	Peak	---	---
5	11020.00	43.27	54.00	-10.73	28.58	14.69	Average	---	---
6	11020.00	57.75	74.00	-16.25	43.06	14.69	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	5510
Polarization	Vertical		
Level (dBuV/m) </			


Modulation	HT40	Test Freq. (MHz)	5550
Polarization	Horizontal		

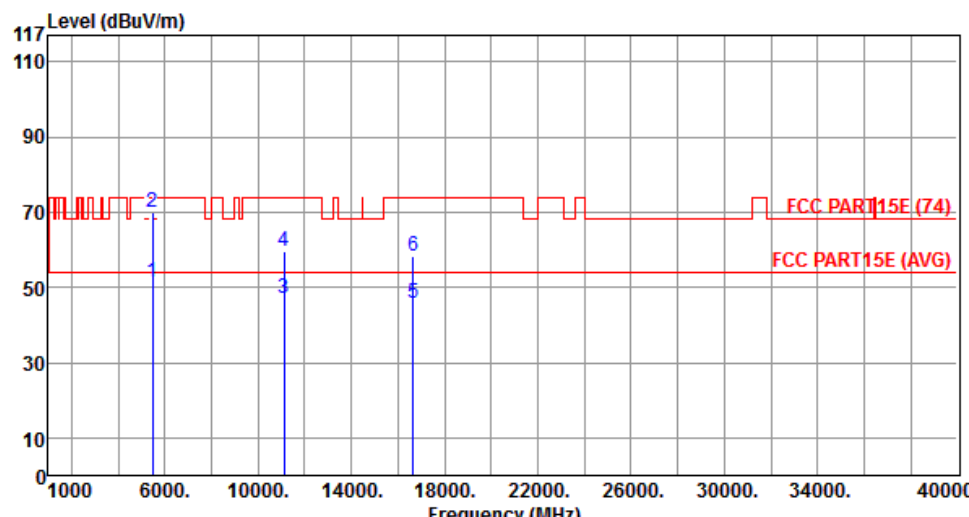

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5470.00	51.45	54.00	-2.55	45.81	5.64	Average	---	---
2	5470.00	69.74	74.00	-4.26	64.10	5.64	Peak	---	---
3	11100.00	47.24	54.00	-6.76	32.53	14.71	Average	---	---
4	11100.00	59.62	74.00	-14.38	44.91	14.71	Peak	---	---
5	16650.00	45.57	54.00	-8.43	28.12	17.45	Average	---	---
6	16650.00	58.33	74.00	-15.67	40.88	17.45	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	5550
Polarization	Vertical		

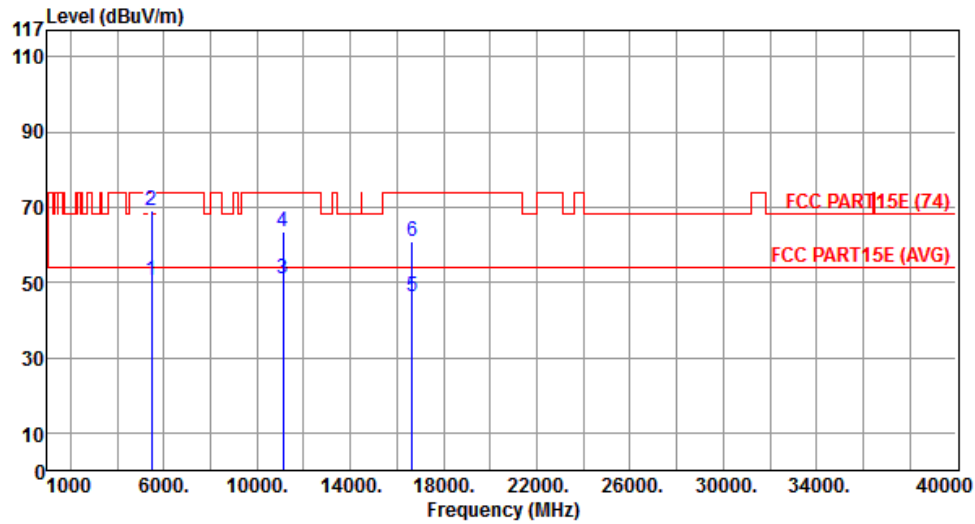


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5470.00	50.59	54.00	-3.41	44.95	5.64	Average	---	---
2	5470.00	68.91	74.00	-5.09	63.27	5.64	Peak	---	---
3	11100.00	50.83	54.00	-3.17	36.12	14.71	Average	---	---
4	11100.00	63.61	74.00	-10.39	48.90	14.71	Peak	---	---
5	16650.00	46.32	54.00	-7.68	28.87	17.45	Average	---	---
6	16650.00	60.69	74.00	-13.31	43.24	17.45	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	5670
Polarization	Horizontal		

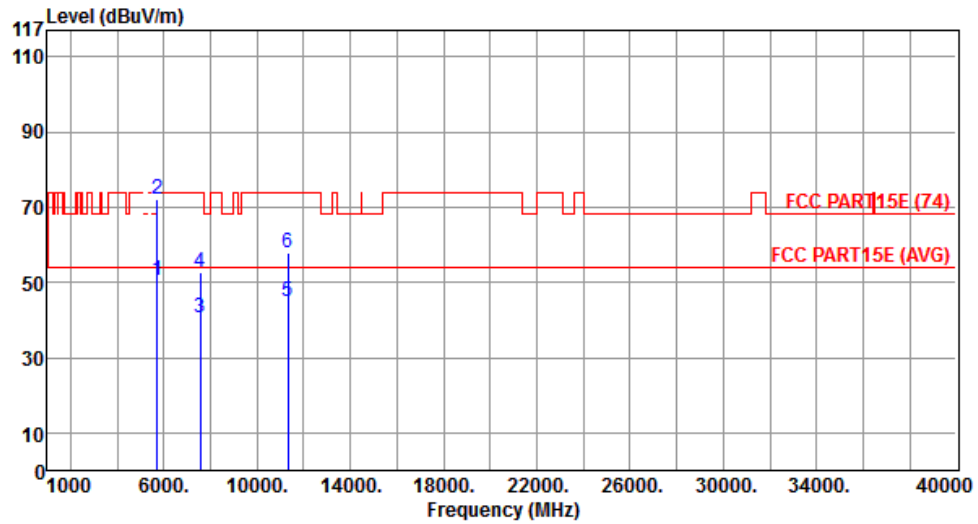


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	50.31	54.00	-3.69	44.21	6.10	Average	---	---
2	5725.00	72.31	74.00	-1.69	66.21	6.10	Peak	---	---
3	7560.00	40.44	54.00	-13.56	30.52	9.92	Average	---	---
4	7560.00	52.88	74.00	-21.12	42.96	9.92	Peak	---	---
5	11340.00	45.02	54.00	-8.98	30.24	14.78	Average	---	---
6	11340.00	57.66	74.00	-16.34	42.88	14.78	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	5670
Polarization	Vertical		

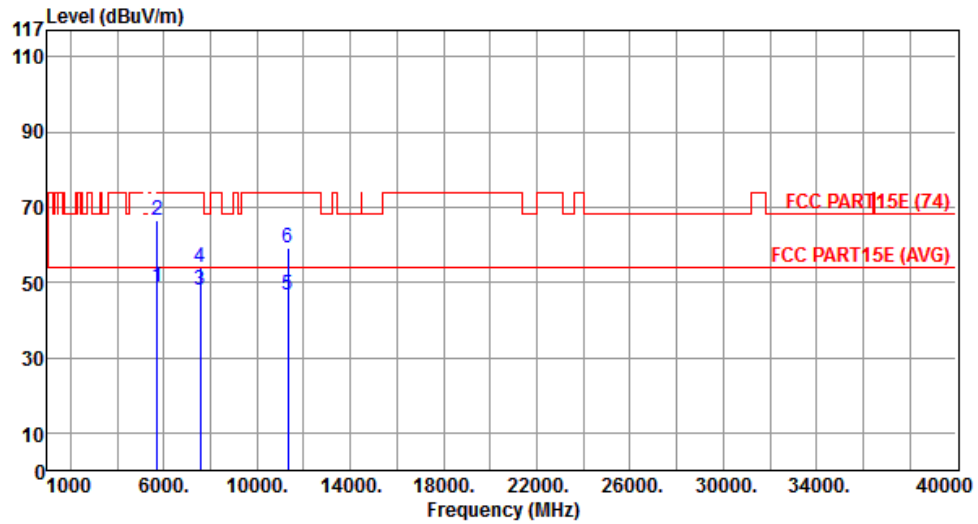

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	48.75	54.00	-5.25	42.64	6.11	Average	---	---
2	5725.00	66.62	74.00	-7.38	60.51	6.11	Peak	---	---
3	7560.00	47.77	54.00	-6.23	37.85	9.92	Average	---	---
4	7560.00	54.17	74.00	-19.83	44.25	9.92	Peak	---	---
5	11340.00	46.65	54.00	-7.35	31.87	14.78	Average	---	---
6	11340.00	58.97	74.00	-15.03	44.19	14.78	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.7 Frequency Stability


3.7.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.7.2 Test Procedures

1. The EUT is installed in an environment test chamber with external power source.
2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT.
3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
4. When temperature is stabled, measure the frequency stability.
5. The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.

3.7.3 Test Setup

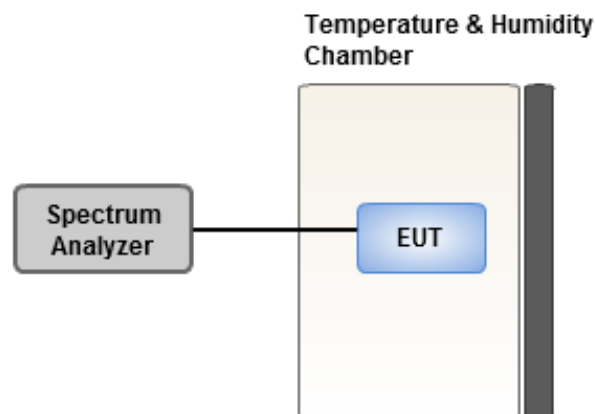

3.7.4 Test Result of Frequency Stability

Frequency: 5320 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	0.79	0.37	0.83	0.59
T20°CVmin	0.77	0.89	1.02	0.59
T60°CVnom	2.18	1.69	2.24	1.64
T40°CVnom	2.11	2.27	2.18	1.54
T30°CVnom	1.54	1.42	0.93	1.69
T20°CVnom	1.11	1.43	1.47	0.71
T10°CVnom	0.43	0.37	-0.03	0.49
T0°CVnom	0.62	-0.24	0.11	0.32
T-10°CVnom	0.32	-0.39	-0.32	0.21
T-20°CVnom	-0.29	-0.54	-0.15	0.09
T-30°CVnom	-0.36	-0.11	-0.35	-0.54
Vnom [V]: 110		Vmax [V]: 126.5		Vmin [V]: 93.5
Tnom [°C]: 20		Tmax [°C]: 60		Tmin [°C]: -30

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==