



Highest Band edge: n260-BW:100MHz-1CC-BPSK-Beam ID 87+343


1RB65-Horizontal Polarization

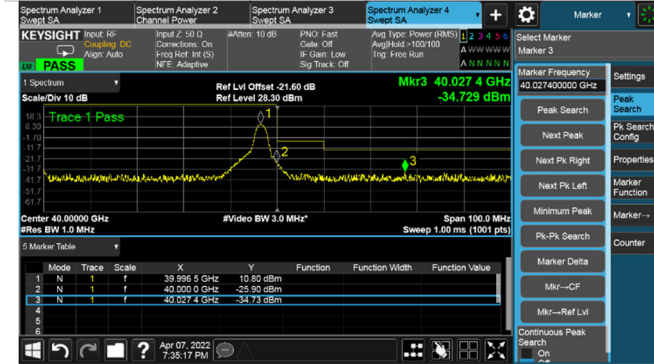


1RB65-Vertical Polarization

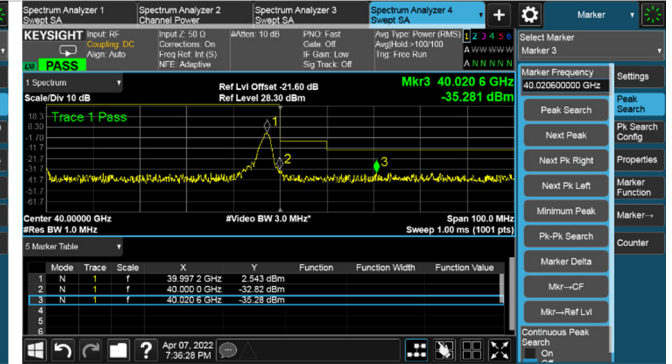


20RB46-Horizontal Polarization

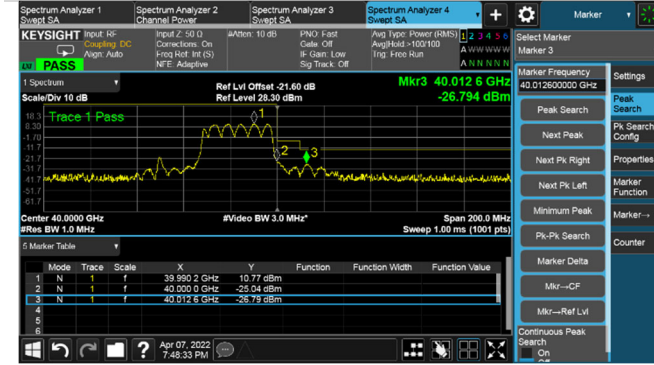


20RB46-Vertical Polarization

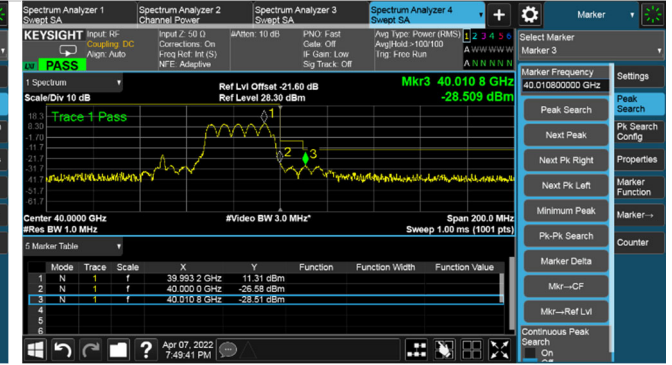

64RB2-Horizontal Polarization

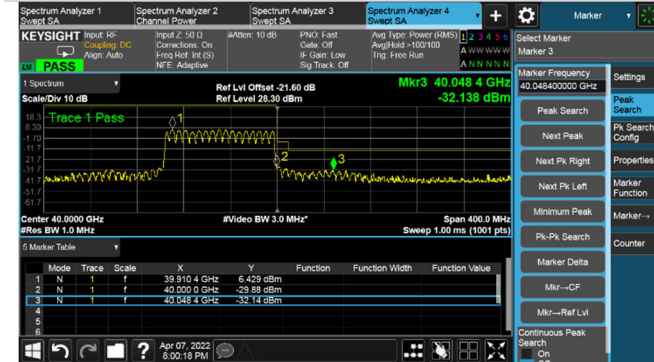


64RB2-Vertical Polarization

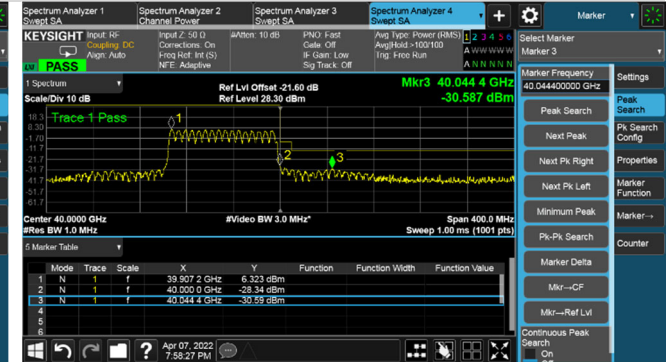


Bandwidth (MHz)	CC	Modulation	Band edge	Beam ID	Resource block (RB)	Frequency Range (MHz)	Ant. Pol. (H/V)	EIRP (dBm)	Array Gain (dBi)	Conductive Power (dBm)	Limit (dBm)	Margin (dB)			
100	1	QPSK	Highest	87	1RB65	40000-40010	H	-9.02	21.60	-30.62	-5	-24.73			
						40000-40010	V	-8.13	21.60	-29.73					
					>=40010	H	-15.14	21.60	-36.74	-13	-23.74				
						V	-16.07	21.60	-37.67						
						20RB46	40000-40010	H	-7.67			21.60	-29.27	-5	-23.81
							40000-40010	V	-7.21			21.60	-28.81		
					>=40010	H	-11.66	21.60	-33.26	-13	-20.14				
						V	-11.54	21.60	-33.14						
						64RB2	40000-40010	H	-10.07			21.60	-31.67	-5	-26.54
							40000-40010	V	-9.94			21.60	-31.54		
					>=40010	H	-11.93	21.60	-33.53	-13	-19.45				
						V	-10.85	21.60	-32.45						
				343		1RB65	40000-40010	H	-11.28			21.60	-32.88	-5	-27.11
							40000-40010	V	-10.51			21.60	-32.11		
					>=40010	H	-13.71	21.60	-35.31	-13	-22.31				
						V	-13.84	21.60	-35.44						
						20RB46	40000-40010	H	-6.16			21.60	-27.76	-5	-22.76
							40000-40010	V	-6.37			21.60	-27.97		
					>=40010	H	-12.43	21.60	-34.03	-13	-18.42				
						V	-9.82	21.60	-31.42						
						64RB2	40000-40010	H	-9.81			21.60	-31.41	-5	-26.41
							40000-40010	V	-11.68			21.60	-33.28		
					>=40010	H	-11.46	21.60	-33.06	-13	-20.06				
						V	-12.00	21.60	-33.60						
				87+343		1RB65	40000-40010	H	-4.77			21.60	-26.37	-5	-21.37
							40000-40010	V	-12.14			21.60	-33.74		
					>=40010	H	-15.14	21.60	-36.74	-13	-22.89				
						V	-14.29	21.60	-35.89						
						20RB46	40000-40010	H	-1.22			21.60	-22.82	-5	-16.55
							40000-40010	V	0.05			21.60	-21.55		
					>=40010	H	-3.43	21.60	-25.03	-13	-10.69				
						V	-2.09	21.60	-23.69						
						64RB2	40000-40010	H	-5.88			21.60	-27.48	-5	-20.56
							40000-40010	V	-3.96			21.60	-25.56		
					>=40010	H	-5.57	21.60	-27.17	-13	-13.59				
						V	-4.99	21.60	-26.59						

## Highest Band edge: n260-BW:100MHz-1CC-QPSK-Beam ID 87


### 1RB65-Horizontal Polarization

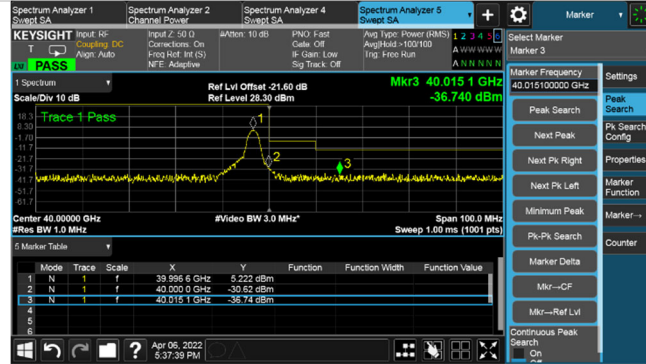


### 1RB65-Vertical Polarization

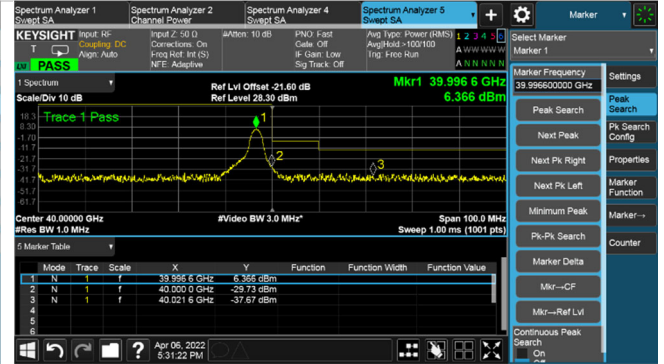


### 20RB46-Horizontal Polarization

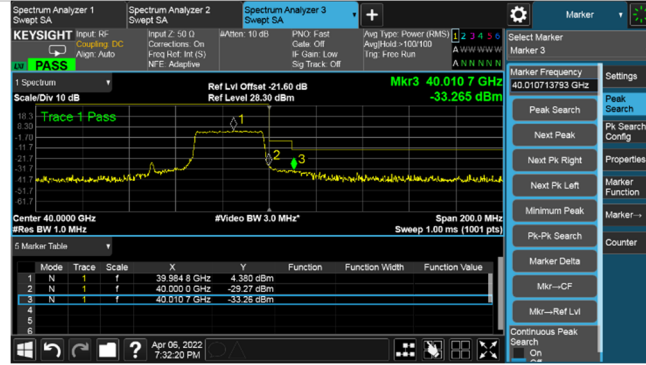


### 20RB46-Vertical Polarization

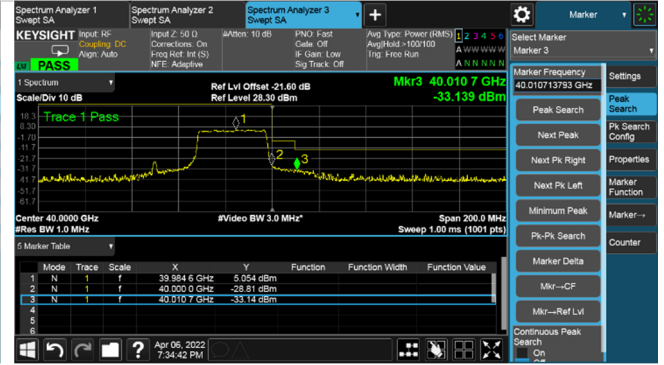

### 64RB2-Horizontal Polarization

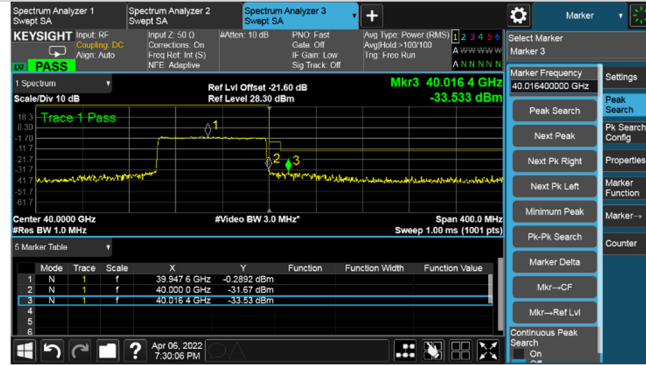


### 64RB2-Vertical Polarization

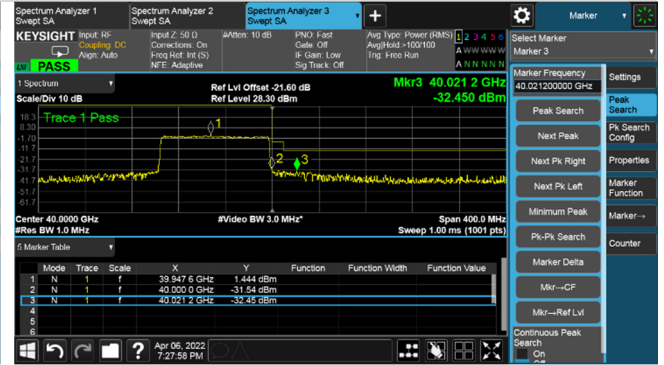


Highest Band edge: n260-BW:100MHz-ICC-QPSK-Beam ID 343


1RB65-Horizontal Polarization

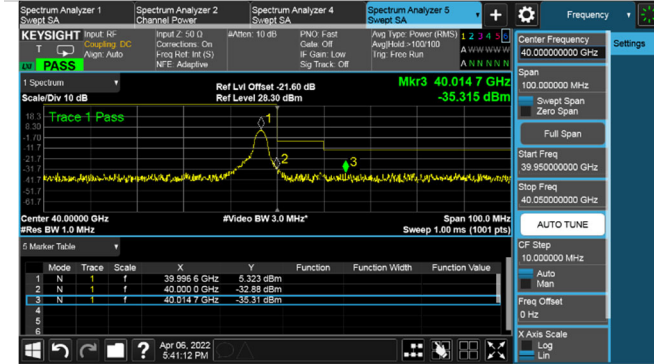


1RB65-Vertical Polarization

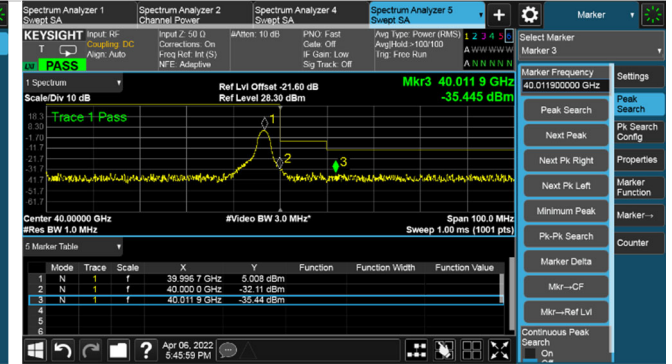


20RB46-Horizontal Polarization

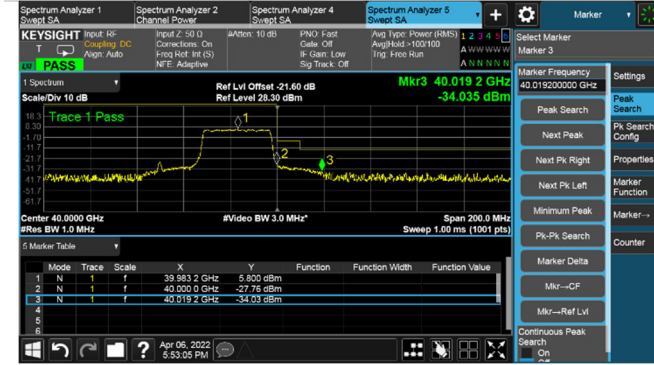


20RB46-Vertical Polarization

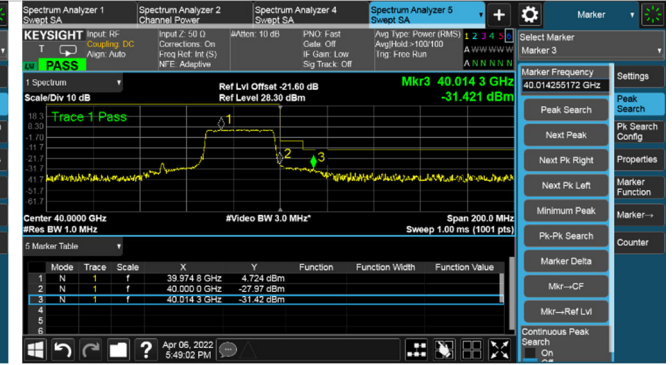

64RB2-Horizontal Polarization

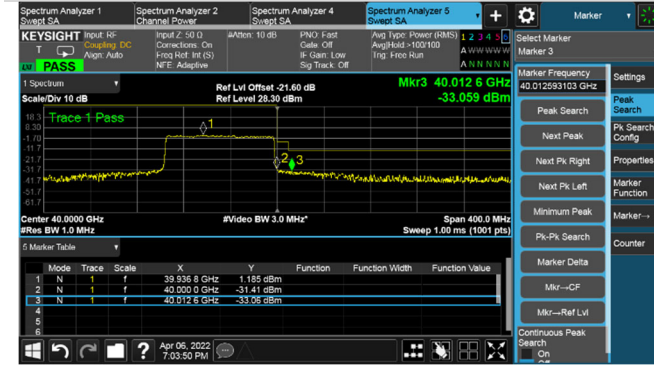


64RB2-Vertical Polarization

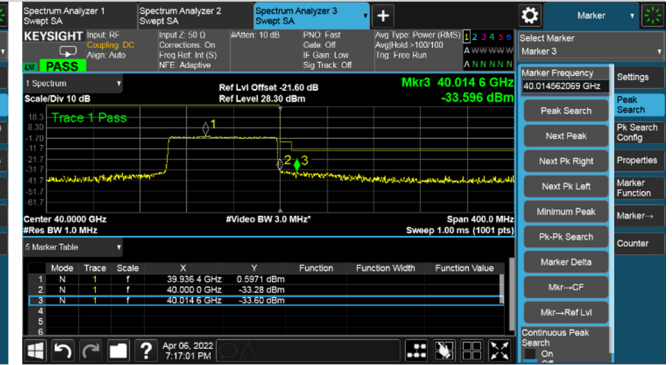


Highest Band edge: n260-BW:100MHz-1CC-QPSK-Beam ID 87+343


1RB65-Horizontal Polarization

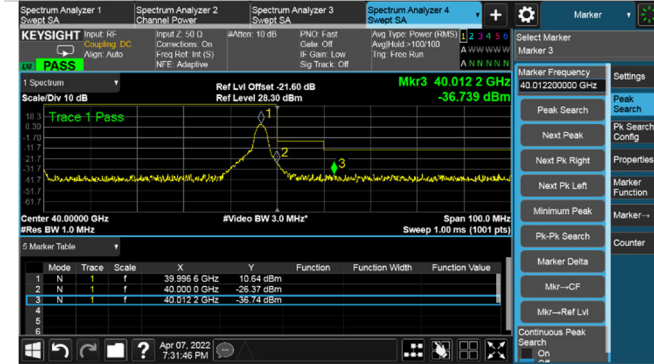


1RB65-Vertical Polarization

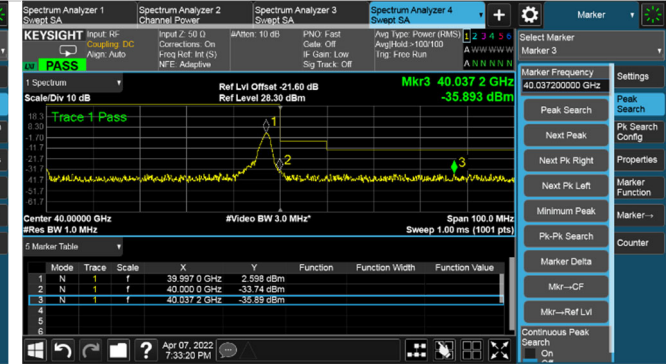


20RB46-Horizontal Polarization

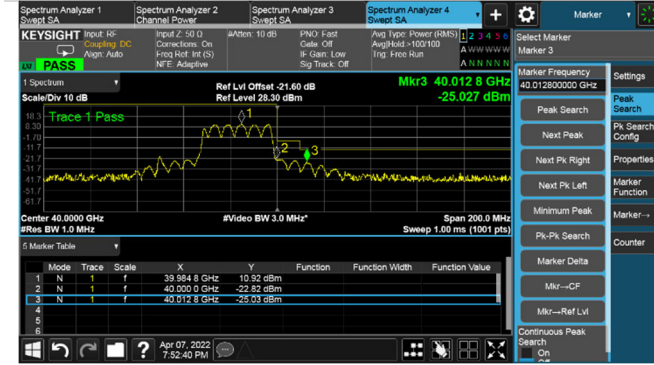


20RB46-Vertical Polarization

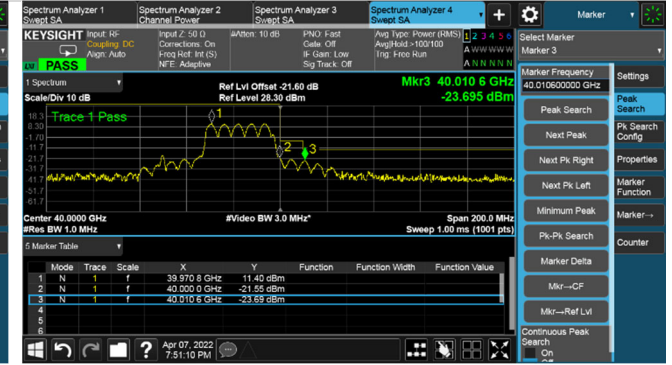

64RB2-Horizontal Polarization

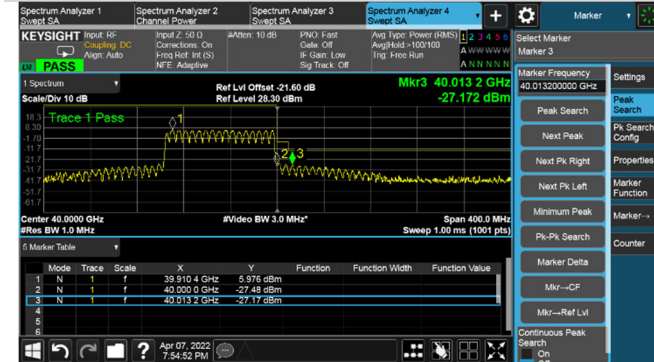

64RB2-Vertical Polarization

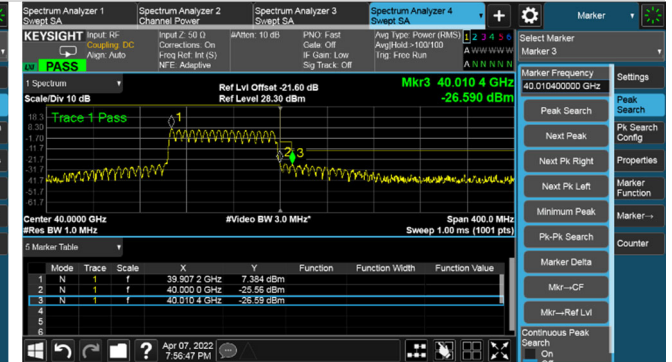

**Lowest Band edge (n260-2CC-100 MHz)**

Bandwidth (MHz)	CC	Modulation	Band edge	Beam ID	Resource block (RB)	Frequency Range (MHz)	Ant. Pol. (H/V)	EIRP (dBm)	Array Gain (dBi)	Conductive Power (dBm)	Limit (dBm)	Margin (dB)
100	2	BPSK	Lowest	87	1RB0	36990-37000	H	-10.38	21.60	-31.98	-5	-24.53
							V	-7.93	21.60	-29.53		
					<=36990	H	-13.35	21.60	-34.95	-13	-21.12	
						V	-12.52	21.60	-34.12			
					20RB0	36990-37000	H	-15.63	21.60	-37.23	-5	-32.23
							V	-16.03	21.60	-37.63		
					<=36990	H	-13.99	21.60	-35.59	-13	-21.92	
						V	-13.32	21.60	-34.92			
					64RB0	36990-37000	H	-14.38	21.60	-35.98	-5	-29.06
							V	-12.46	21.60	-34.06		
					<=36990	H	-12.11	21.60	-33.71	-13	-20.71	
						V	-12.15	21.60	-33.75			
				343	1RB0	36990-37000	H	-11.04	21.60	-32.64	-5	-26.90
							V	-10.30	21.60	-31.90		
					<=36990	H	-13.43	21.60	-35.03	-13	-22.03	
						V	-13.96	21.60	-35.56			
					20RB0	36990-37000	H	-18.48	21.60	-40.08	-5	-31.69
							V	-15.09	21.60	-36.69		
					<=36990	H	-14.49	21.60	-36.09	-13	-20.49	
						V	-11.89	21.60	-33.49			
					64RB0	36990-37000	H	-15.68	21.60	-37.28	-5	-30.04
							V	-13.44	21.60	-35.04		
					<=36990	H	-11.99	21.60	-33.59	-13	-20.51	
						V	-11.91	21.60	-33.51			
87+343	1RB0	36990-37000	H	-11.06	21.60	-33.27	-5	-20.84				
			V	-4.24	21.60	-26.27						
	<=36990	H	-13.08	21.60	-33.30	-13	-21.68					
		V	-17.09	21.60	-37.07							
	20RB0	36990-37000	H	-14.00	21.60	-35.60	-5	-29.22				
			V	-12.62	21.60	-34.22						
	<=36990	H	-15.02	21.60	-36.62	-13	-20.56					
		V	-11.96	21.60	-33.56							
	64RB0	36990-37000	H	-10.95	21.60	-32.55	-5	-27.55				
			V	-12.90	21.60	-34.50						
	<=36990	H	-12.71	21.60	-34.31	-13	-19.80					
		V	-11.20	21.60	-32.80							