



International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

FCC Test Report

FCC ID : NKR-P75
Equipment : Wireless LAN Adaptor
Model No. : DNUA-P75
Brand Name : Panasonic
Applicant : Wistron NeWeb Corp.
Address : 20 Park Avenue II, Hsinchu Science Park,
Hsinchu 308, Taiwan, R.O.C.
Standard : 47 CFR FCC Part 15.407
Received Date : Aug. 01, 2013
Tested Date : Aug. 08 ~ Aug. 26, 2013

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

Gary Chang / Manager





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	8
1.3	Test Setup Chart	8
1.4	The Equipment List	9
1.5	Testing Applied Standards	11
1.6	Measurement Uncertainty	11
2	TEST CONFIGURATION.....	12
2.1	Testing Condition	12
2.2	The Worst Test Modes and Channel Details	12
3	TRANSMITTER TEST RESULTS.....	13
3.1	Conducted Emissions.....	13
3.2	Emission Bandwidth	16
3.3	RF Output Power.....	19
3.4	Peak Power Spectral Density	21
3.5	Peak Excursion.....	24
3.6	Transmitter Radiated and Band Edge Emissions	27
3.7	Frequency Stability	82



International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Release Record

Report No.	Version	Description	Issued Date
FR380101AN	Rev. 01	Initial issue	Sep. 06, 2013



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.150MHz 45.82 (Margin -10.18dB) - AV	Pass
15.407(b) 15.209	Radiated Emissions	[dBuV/m at 3m]: 5470.00MHz 72.96 (Margin -1.04dB) - Peak	Pass
15.407(a)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(a)	RF Output Power	Power [dBm]: 5150~5250 MHz: 16.51 5250~5350 MHz: 20.43 5470~5725 MHz: 20.00	Pass
15.407(a)	Peak Power Spectral Density	Meet the requirement of limit	Pass
15.407(a)	Peak Excursion	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
5150-5250		5180-5240	36-48 [4]		
5250-5350	a	5260-5320	52-64 [4]	2	6-54 Mbps
5470-5725		5500-5700	100-140 [8]		
5150-5250		5180-5240	36-48 [4]		
5250-5350	n (HT20)	5260-5320	52-64 [4]	2	MCS 0-15
5470-5725		5500-5700	100-140 [8]		
5150-5250		5190-5230	38-46 [2]		
5250-5350	n (HT40)	5270-5310	54-62 [2]	2	MCS 0-15
5470-5725		5510-5670	102-134 [3]		

Note 1: RF output power specifies that Maximum Conducted Output Power.
Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Details

Ant. No.	Model	Type	Connector	Operating Frequency (MHz) / Gain (dBi)				
				2400~2483.5	5150~5250	5250~5350	5470~5725	5725~5850
1	ANT0 (Left)	Printed	NA	1.82	2.49	2.49	2.32	2.32
2	ANT1 (Right)	Printed	NA	-1.56	2.74	2.78	3.28	2.2

1.1.3 EUT Operational Condition

Supply Voltage	<input type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC (5Vdc)	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input type="checkbox"/> External DC adapter	<input checked="" type="checkbox"/> From Host

1.1.4 Accessories

N/A



1.1.5 Channel List

Frequency band (MHz)		5150~5725	
802.11 a / n HT20		802.11n HT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
36	5180	38	5190
40	5200	46	5230
44	5220	54	5270
48	5240	62	5310
52	5260	102	5510
56	5280	110	5550
60	5300	134	5670
64	5320	---	---
100	5500	---	---
104	5520	---	---
108	5540	---	---
112	5560	---	---
116	5580	---	---
132	5660	---	---
136	5680	---	---
140	5700	---	---

1.1.6 Test Tool and Duty Cycle

Test Tool	ART2-GUI V2.3
Duty Cycle Of Test Signal (%)	99.23% - IEEE 802.11a 99.17% - IEEE 802.11n (HT20) 98.20% - IEEE 802.11n (HT40)
Duty Factor	0.03 - IEEE 802.11a 0.04 - IEEE 802.11n (HT20) 0.08 - IEEE 802.11n (HT40)



1.1.7 Power Setting


Channel	Frequency(MHz)	Modulation Mode		
		11a	HT20	HT40
CH 36	5180	14	14	---
CH 40	5200	14	14	---
CH 48	5240	14.5	14.5	---
CH 52	5260	19	19	---
CH 60	5300	19	19	---
CH 64	5320	17.5	17.5	---
CH 100	5500	16	16	---
CH 116	5580	18	18	---
CH 140	5700	14.5	14.5	---
CH 38	5190	---	---	12.5
CH 46	5230	---	---	14.5
CH 54	5270	---	---	20
CH 62	5310	---	---	12.5
CH 102	5510	---	---	12.5
CH 110	5550	---	---	20
CH 134	5670	---	---	16



1.2 Local Support Equipment List

Support Equipment List						
No.	Equipment	Brand	Model	S/N	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	E5430	---	DoC	USB 1m non-shielded cable w/o core.

1.3 Test Setup Chart

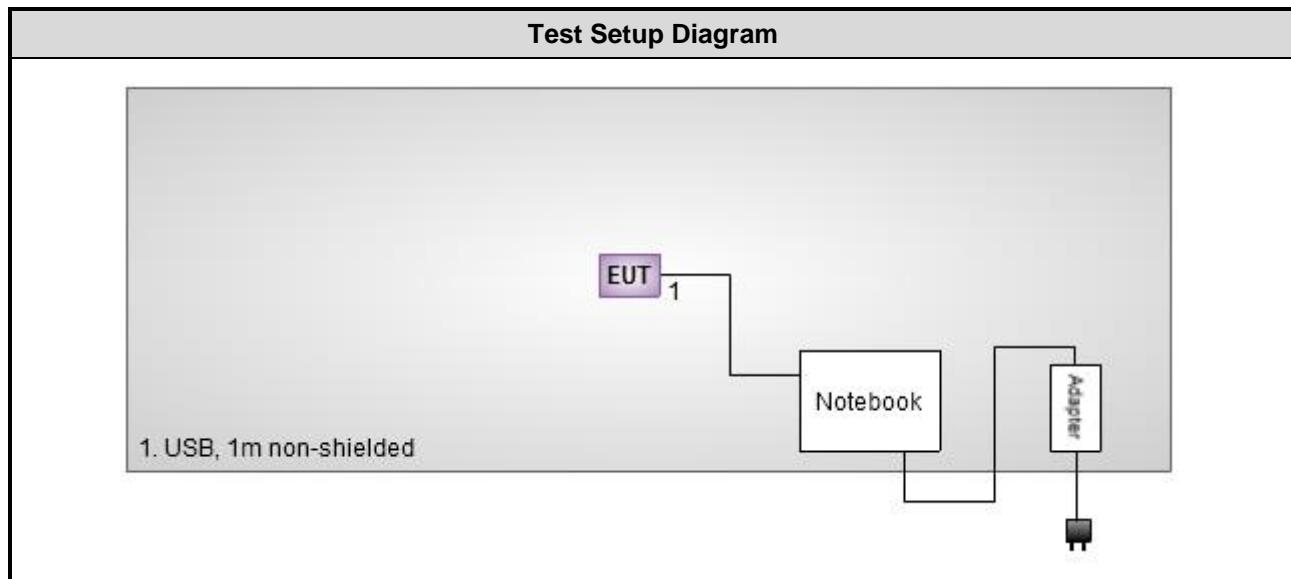



1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 02, 2012	Oct. 01, 2013
LISN	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-667	Dec. 04, 2012	Dec. 03, 2013
LISN (Support Unit)	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-666	Dec. 04, 2012	Dec. 03, 2013
ISN	TESEQ	ISN T800	34406	Apr. 08, 2013	Apr. 07, 2014
ISN	TESEQ	ISN T200A	30494	Apr. 09, 2013	Apr. 08, 2014
ISN	TESEQ	ISN T8-Cat6	27262	Sep. 17, 2012	Sep. 16, 2013
ISN	TESEQ	ISN ST08	22589	Jan. 24, 2013	Jan. 23, 2014
RF Current Probe	FCC	F-33-4	121630	Dec. 04, 2012	Dec. 03, 2013
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Dec. 25, 2012	Dec. 24, 2013
ESH3-Z6 V-Network(+)	R&S	ESH3-Z6	100920	Nov. 21, 2012	Nov. 20, 2013
ESH3-Z6 V-Network(-)	R&S	ESH3-Z6	100951	Jan. 30, 2013	Jan. 29, 2014
Two-Line V-Network	R&S	ENV216	101579	Jan. 07, 2013	Jan. 06, 2014
50 ohm terminal	NA	50	01	Apr. 22, 2013	Apr. 21, 2014
50 ohm terminal	NA	50	02	Apr. 22, 2013	Apr. 21, 2014
50 ohm terminal	NA	50	03	Apr. 22, 2013	Apr. 21, 2014
50 ohm terminal (Support Unit)	NA	50	04	Apr. 22, 2013	Apr. 21, 2014
Note: Calibration Interval of instruments listed above is one year.					



International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Test Item	Radiated Emission above 1GHz				
Test Site	966 chamber1 / (03CH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
3m semi-anechoic chamber	CHAMPRO	SAC-03	03CH01-WS	Jan. 04, 2013	Jan. 03, 2014
Spectrum Analyzer	R&S	FSV40	101498	Jan. 24, 2013	Jan. 23, 2014
Receiver	ROHDE&SCHWARZ	ESR3	101658	Jan. 28, 2013	Jan. 27, 2014
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jan. 11, 2013	Jan. 10, 2014
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Feb. 18, 2013	Feb. 17, 2014
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Jan. 14, 2013	Jan. 13, 2014
Amplifier	Burgeon	BPA-530	100219	Nov. 28, 2012	Nov. 27, 2013
Amplifier	Agilent	83017A	MY39501308	Dec. 18, 2012	Dec. 17, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable-R03m	Woken	CFD400NL-LW	CFD400NL-001	Dec. 25, 2012	Dec. 24, 2013
RF Cable-R10m	Woken	CFD400NL-LW	CFD400NL-002	Dec. 25, 2012	Dec. 24, 2013
control	EM Electronics	EM1000	60612	N/A	N/A

Note: Calibration Interval of instruments listed above is one year.

Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014
Amplifier	MITEQ	AMF-6F-260400	9121372	Apr. 19, 2013	Apr. 18, 2015
Note: Calibration Interval of instruments listed above is two year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV 40	101063	Feb. 18, 2013	Feb. 17, 2014
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Nov. 29, 2012	Nov. 28, 2013
Power Meter	Anritsu	ML2495A	1241002	Oct. 15, 2012	Oct. 14, 2013
Power Sensor	Anritsu	MA2411B	1027366	Oct. 24, 2012	Oct. 23, 2013
Signal Generator	R&S	SMB100A	175727	Jan. 14, 2013	Jan. 13, 2014

Note: Calibration Interval of instruments listed above is one year.



1.5 Testing Applied Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.407

ANSI C63.10-2009

FCC KDB 412172

FCC KDB 789033 D01 General UNII Test procedures v01r03

FCC KDB 662911 D01 Multiple Transmitter Output v02

Note: The EUT has been tested and complied with FCC part 15B requirement. FCC Part 15B test results are issued to another report.

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±74.147 Hz
Conducted power	±0.717 dB
Power density	±2.687 dB
Frequency error	±74.147 Hz
Temperature	±0.3 °C
AC conducted emission	±2.43 dB
Radiated emission	±2.49 dB



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	23°C / 68%	Peter Lin
Radiated Emissions	03CH02-WS	24°C / 65%	Mark Liao
RF Conducted	TH01-WS	25°C / 62%	Felix Sung

➤ FCC site registration No.: 657002

➤ IC site registration No.: 10807A-2

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data rate (Mbps) / MCS	Test Configuration
Conducted Emissions	HT40	5270	MCS 0	---
Radiated Emissions (below 1GHz)	HT40	5270	MCS 0	---
Radiated Emissions >1GHz RF Output Power Emission Bandwidth Peak Power Spectral Density	11a HT20 HT40	5180 / 5200 / 5240 / 5260 / 5300 5320 / 5500 / 5580 / 5700 5180 / 5200 / 5240 / 5260 / 5300 5320 / 5500 / 5580 / 5700 5190 / 5230 / 5270 / 5310 / 5510 5550 / 5670	6 MCS 0 MCS 0	--- --- ---
Peak Excursion	11a HT20 HT40	5180 / 5260 / 5580 5240 / 5300 / 5580 5230 / 5270 / 5550	6 MCS 0 MCS 0	--- --- ---
Frequency Stability	Un-modulation	5320	---	---

NOTE:

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.



3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

3.1.3 Test Setup

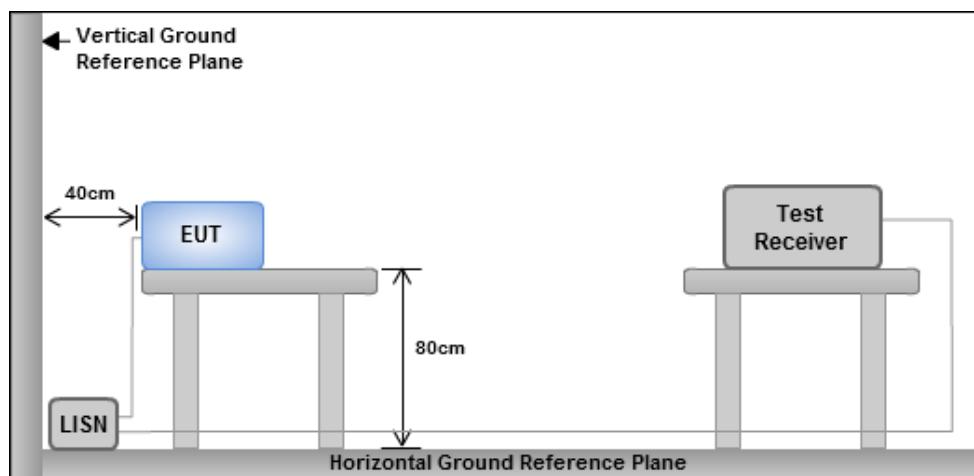


Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes



3.1.4 Test Result of Conducted Emissions

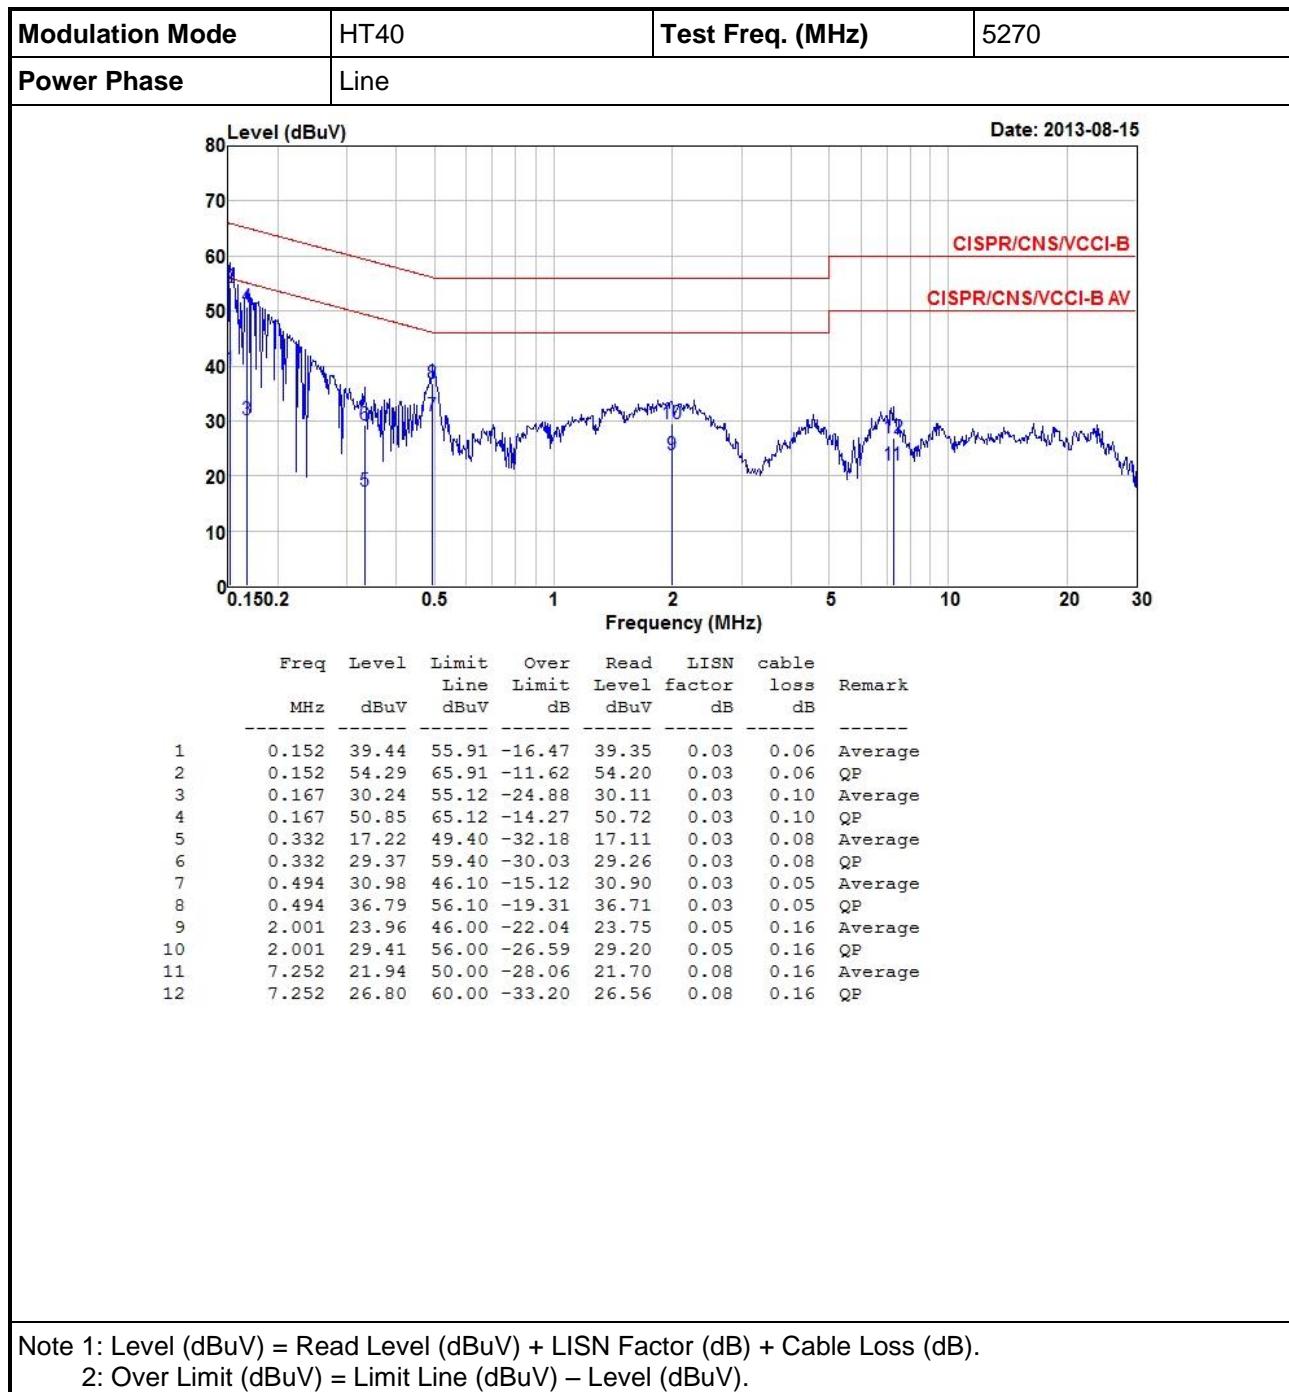




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

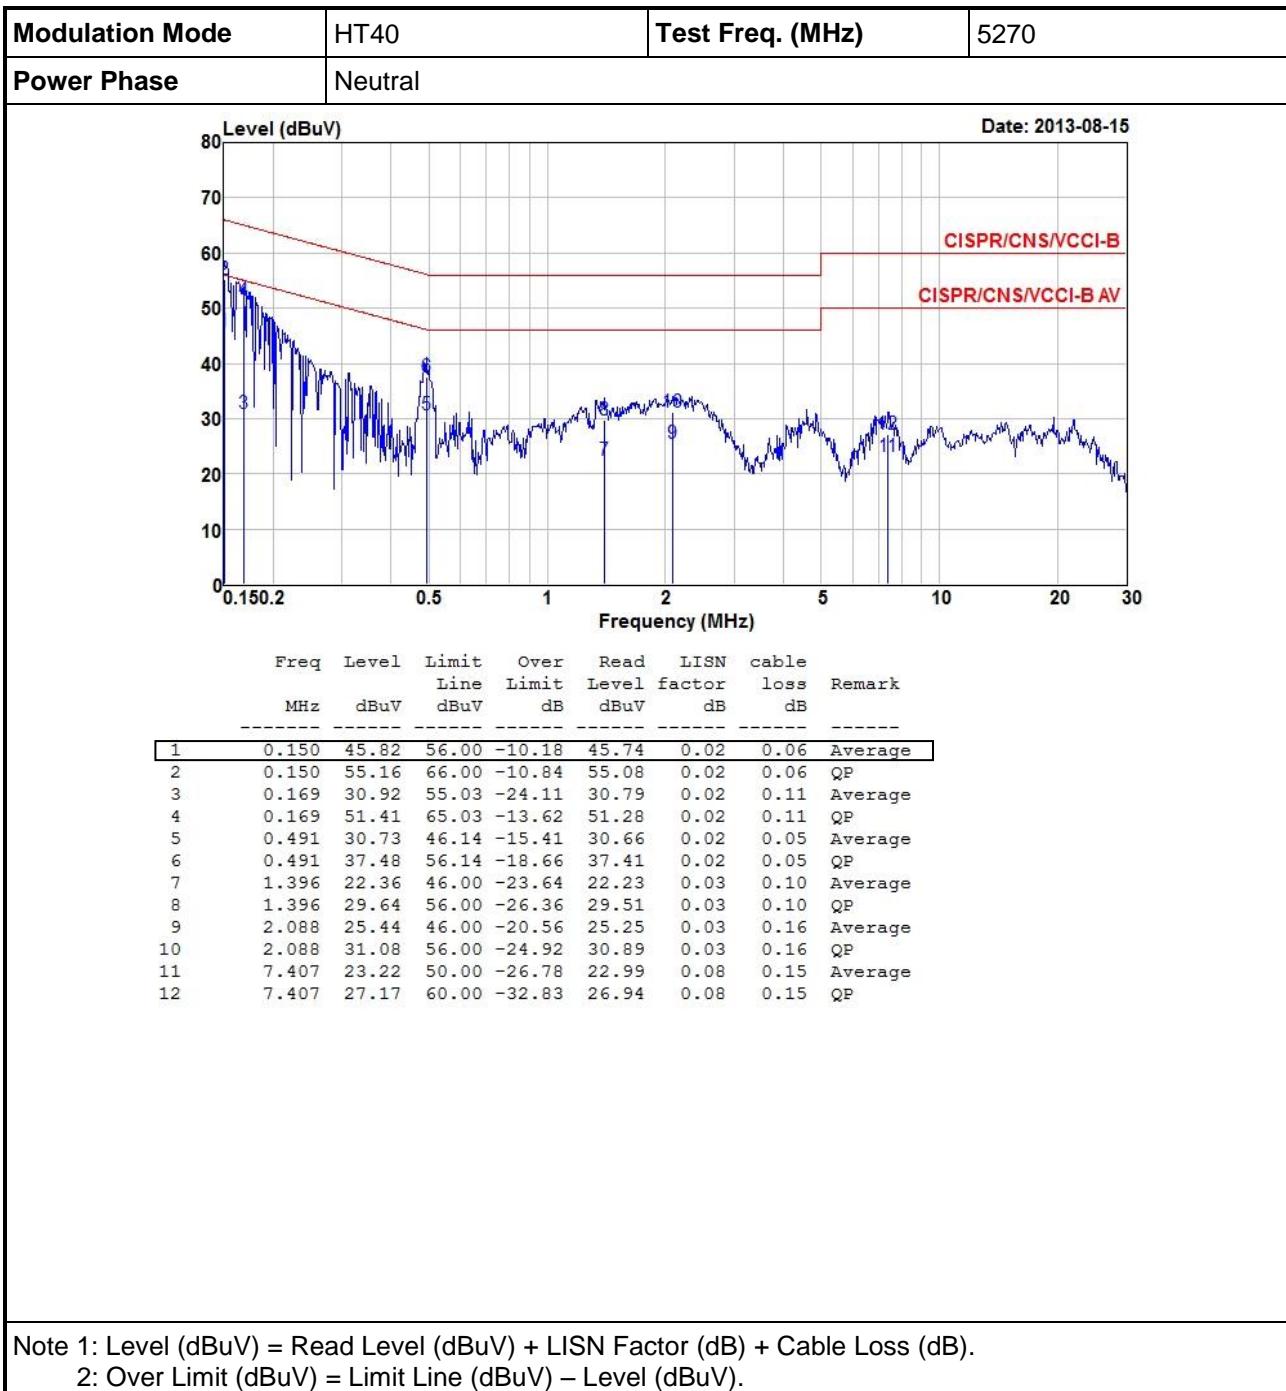




3.2 Emission Bandwidth

3.2.1 Test Procedures

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW, Detector = Peak.
3. Trace mode = max hold.
4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

3.2.2 Test Setup





3.2.3 Test Result of Emission Bandwidth

Modulation Mode	N _{TX}	Freq. (MHz)	26dB Bandwidth (MHz)				99% Bandwidth (MHz)				Limit (dBm)	
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3	26dB BW	99% BW
11a	2	5180	33.22	27.42	---	---	17.42	17.13	---	---	17.00	16.34
11a	2	5200	28.23	31.36	---	---	17.19	17.42	---	---	17.00	16.35
11a	2	5240	28.41	31.54	---	---	17.31	17.25	---	---	17.00	16.37
11a	2	5260	38.09	37.33	---	---	20.55	20.32	---	---	24.00	24.00
11a	2	5300	37.33	36.99	---	---	19.57	20.03	---	---	24.00	23.92
11a	2	5320	36.75	37.74	---	---	18.70	19.45	---	---	24.00	23.72
11a	2	5500	32.58	33.86	---	---	17.66	17.48	---	---	24.00	23.43
11a	2	5580	36.00	37.22	---	---	18.81	20.72	---	---	24.00	23.74
11a	2	5700	30.55	34.61	---	---	17.48	17.60	---	---	24.00	23.43
HT20	2	5180	24.52	33.74	---	---	18.00	18.35	---	---	17.00	16.55
HT20	2	5200	24.93	35.71	---	---	18.12	18.35	---	---	17.00	16.58
HT20	2	5240	26.84	32.64	---	---	18.12	18.29	---	---	17.00	16.58
HT20	2	5260	38.09	36.12	---	---	19.45	18.58	---	---	24.00	23.69
HT20	2	5300	36.52	37.68	---	---	18.93	19.10	---	---	24.00	23.77
HT20	2	5320	36.23	37.97	---	---	18.70	20.49	---	---	24.00	23.72
HT20	2	5500	33.97	34.72	---	---	18.41	18.52	---	---	24.00	23.65
HT20	2	5580	37.97	37.91	---	---	20.26	21.19	---	---	24.00	24.00
HT20	2	5700	30.09	33.04	---	---	18.23	18.23	---	---	24.00	23.61
HT40	2	5190	49.04	55.88	---	---	37.40	37.28	---	---	17.00	17.00
HT40	2	5230	52.52	67.83	---	---	37.63	37.86	---	---	17.00	17.00
HT40	2	5270	78.26	78.61	---	---	39.02	39.25	---	---	24.00	24.00
HT40	2	5310	50.09	62.84	---	---	37.28	37.28	---	---	24.00	24.00
HT40	2	5510	47.77	56.00	---	---	37.51	37.28	---	---	24.00	24.00
HT40	2	5550	71.88	71.88	---	---	38.90	38.55	---	---	24.00	24.00
HT40	2	5670	78.38	77.68	---	---	39.59	39.13	---	---	24.00	24.00




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Worst Plots

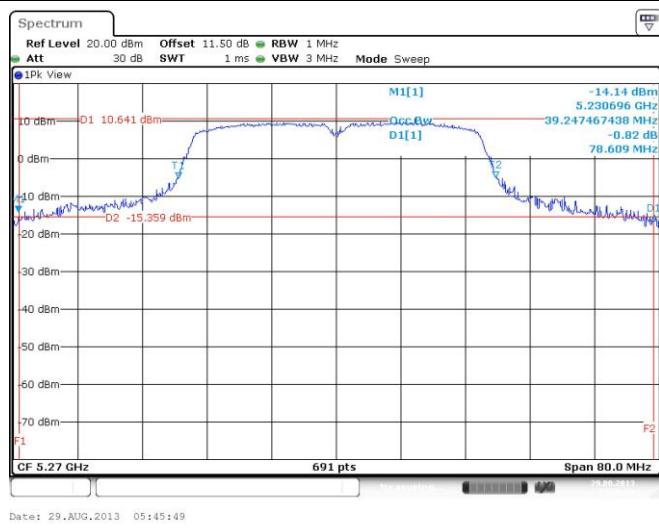



3.3 RF Output Power

3.3.1 Limit of RF Output Power

Frequency Band (GHz)	Limit
<input checked="" type="checkbox"/> 5.15~5.25	50mW or 4dBm+10 log B
<input checked="" type="checkbox"/> 5.25~5.35	250mW or 11dBm+10 log B
<input checked="" type="checkbox"/> 5.47~5.725	250mW or 11dBm+10 log B

Note: "B" is the 26dB emission bandwidth in MHz.

3.3.2 Test Procedures

Method PM-G (Measurement using a gated RF average power meter)

- Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.3.3 Test Setup





3.3.4 Test Result of Maximum Conducted Output Power

Modulation Mode	N _{TX}	Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11a	2	5180	13.42	13.51	---	---	44.417	16.48	17.00
11a	2	5200	13.16	13.31	---	---	42.130	16.25	17.00
11a	2	5240	13.11	13.32	---	---	41.943	16.23	17.00
11a	2	5260	16.36	16.92	---	---	92.455	19.66	24.00
11a	2	5300	16.11	16.78	---	---	88.475	19.47	24.00
11a	2	5320	15.10	15.71	---	---	69.599	18.43	24.00
11a	2	5500	14.01	14.32	---	---	52.216	17.18	24.00
11a	2	5580	15.11	15.04	---	---	64.349	18.09	24.00
11a	2	5700	12.76	12.26	---	---	35.707	15.53	24.00
HT20	2	5180	13.11	13.35	---	---	42.092	16.24	17.00
HT20	2	5200	13.06	13.32	---	---	41.708	16.20	17.00
HT20	2	5240	13.20	13.42	---	---	42.872	16.32	17.00
HT20	2	5260	16.40	16.68	---	---	90.210	19.55	24.00
HT20	2	5300	15.94	16.92	---	---	88.468	19.47	24.00
HT20	2	5320	14.92	15.86	---	---	69.593	18.43	24.00
HT20	2	5500	13.89	14.12	---	---	50.313	17.02	24.00
HT20	2	5580	15.08	15.29	---	---	66.017	18.20	24.00
HT20	2	5700	12.63	12.14	---	---	34.691	15.40	24.00
HT40	2	5190	10.21	10.92	---	---	22.855	13.59	17.00
HT40	2	5230	13.36	13.63	---	---	44.745	16.51	17.00
HT40	2	5270	17.16	17.67	---	---	110.479	20.43	24.00
HT40	2	5310	9.28	10.36	---	---	19.337	12.86	24.00
HT40	2	5510	9.43	9.51	---	---	17.703	12.48	24.00
HT40	2	5550	16.91	17.06	---	---	99.907	20.00	24.00
HT40	2	5670	14.19	13.51	---	---	48.681	16.87	24.00



3.4 Peak Power Spectral Density

3.4.1 Limit of Peak Power Spectral Density

Frequency Band (GHz)	Limit (dBm)
<input checked="" type="checkbox"/> 5.15~5.25	4
<input checked="" type="checkbox"/> 5.25~5.35	11
<input checked="" type="checkbox"/> 5.47~5.725	11

3.4.2 Test Procedures

Method SA-1

1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level.

Method SA-2


1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
2. Trace average at 100 traces
3. Use the peak marker function to determine the maximum amplitude level.
4. Add $10 \log(1/x)$, where x is the duty cycle

Method SA-2 Alternative

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
2. Set sweep time $\geq 10 * (\text{number of points in sweep}) * (\text{total on/off period of the transmitted signal})$.
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add $10 \log(1/x)$, where x is the duty cycle.

Note: 11a and HT20 uses Method SA-1, HT40 uses Method SA-2 Alternative.

3.4.3 Test Setup





3.4.4 Test Result of Peak Power Spectral Density

Modulation Mode	N _{TX}	Freq. (MHz)	PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)
11a	2	5180	3.87	0	3.87	4
11a	2	5200	3.63	0	3.63	4
11a	2	5240	3.44	0	3.44	4
11a	2	5260	6.47	0	6.47	11
11a	2	5300	6.22	0	6.22	11
11a	2	5320	5.12	0	5.12	11
11a	2	5500	4.04	0	4.04	11
11a	2	5580	6.16	0	6.16	11
11a	2	5700	2.30	0	2.30	11
HT20	2	5180	3.57	0	3.57	4
HT20	2	5200	3.61	0	3.61	4
HT20	2	5240	3.60	0	3.60	4
HT20	2	5260	6.20	0	6.20	11
HT20	2	5300	6.07	0	6.07	11
HT20	2	5320	4.75	0	4.75	11
HT20	2	5500	3.27	0	3.27	11
HT20	2	5580	6.10	0	6.10	11
HT20	2	5700	2.22	0	2.22	11
HT40	2	5190	-2.88	0	-2.88	4
HT40	2	5230	-0.24	0	-0.24	4
HT40	2	5270	3.91	0	3.91	11
HT40	2	5310	-3.27	0	-3.27	11
HT40	2	5510	-3.90	0	-3.90	11
HT40	2	5550	3.56	0	3.56	11
HT40	2	5670	0.72	0	0.72	11

Note: Test result is bin-by-bin summing measured value of each TX port.




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Worst Plots

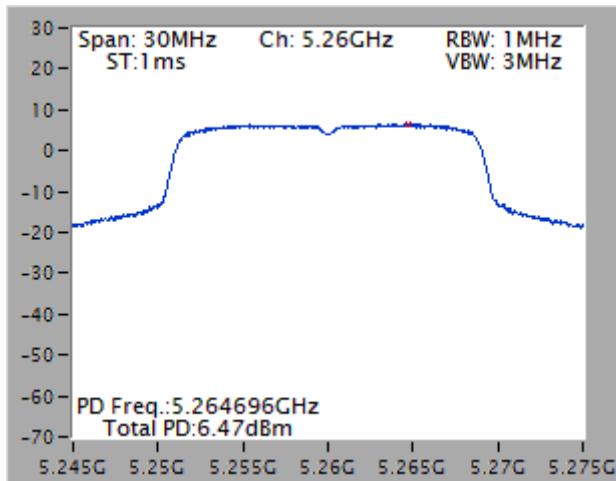



3.5 Peak Excursion


3.5.1 Peak Excursion Limit

Peak excursion of the modulation envelope shall not exceed 13 dB across any 1 MHz bandwidth.

3.5.2 Test Procedures

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = peak.
2. Trace mode = max-hold. Allow the sweeps to continue until the trace stabilizes.
3. Use the peak search function to find the peak of the spectrum.
4. Use the procedure of section 3.4.2 to measure the PPSD.
5. Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD

3.5.3 Test Setup





3.5.4 Test Result of Peak Excursion

Mode	Modulation Mode	N _{TX}	Freq. (MHz)	Measured value(dB)	Duty factor (dB)	Peak Excursion (dB)	Limit
11a	BPSK	2	5180	8.95	0.00	8.95	13
11a	QPSK	2	5180	8.79	0.00	8.79	13
11a	16QAM	2	5180	9.37	0.23	9.14	13
11a	64QAM	2	5180	9.84	0.48	9.36	13
HT20	BPSK	2	5240	7.93	0.00	7.93	13
HT20	QPSK	2	5240	9.03	0.00	9.03	13
HT20	16QAM	2	5240	9.64	0.23	9.41	13
HT20	64QAM	2	5240	9.33	0.48	8.85	13
HT40	BPSK	2	5230	9.22	0.00	9.22	13
HT40	QPSK	2	5230	8.9	0.25	8.65	13
HT40	16QAM	2	5230	9.32	0.45	8.87	13
HT40	64QAM	2	5230	9.48	0.87	8.61	13


Mode	Modulation Mode	N _{TX}	Freq. (MHz)	Measured value(dB)	Duty factor (dB)	Peak Excursion (dB)	Limit
11a	BPSK	2	5260	8.05	0.00	8.05	13
11a	QPSK	2	5260	8.99	0.00	8.99	13
11a	16QAM	2	5260	9.43	0.23	9.20	13
11a	64QAM	2	5260	9.8	0.48	9.32	13
HT20	BPSK	2	5300	8.05	0.00	8.05	13
HT20	QPSK	2	5300	8.98	0.00	8.98	13
HT20	16QAM	2	5300	9.75	0.23	9.52	13
HT20	64QAM	2	5300	9.73	0.48	9.25	13
HT40	BPSK	2	5270	7.94	0.00	7.94	13
HT40	QPSK	2	5270	10.18	0.25	9.93	13
HT40	16QAM	2	5270	9.74	0.45	9.29	13
HT40	64QAM	2	5270	9.98	0.87	9.11	13

Note: Measured value = Peak-max-hold spectrum to the maximum of the average spectrum for continuous transmission. Since the duty cycle is < 98 %, duty factor is required to average spectrum
Peak exclusion = Measured value – duty factor



Mode	Modulation Mode	N _{TX}	Freq. (MHz)	Measured value(dB)	Duty factor (dB)	Peak Excursion (dB)	Limit
11a	BPSK	2	5580	9.18	0.00	9.18	13
11a	QPSK	2	5580	8.75	0.00	8.75	13
11a	16QAM	2	5580	9.41	0.23	9.18	13
11a	64QAM	2	5580	10.18	0.48	9.70	13
HT20	BPSK	2	5580	8.55	0.00	8.55	13
HT20	QPSK	2	5580	8.25	0.00	8.25	13
HT20	16QAM	2	5580	9.18	0.23	8.95	13
HT20	64QAM	2	5580	9.62	0.48	9.14	13
HT40	BPSK	2	5550	8.62	0.00	8.62	13
HT40	QPSK	2	5550	9.09	0.25	8.84	13
HT40	16QAM	2	5550	9.9	0.45	9.45	13
HT40	64QAM	2	5550	10.07	0.87	9.20	13

Note: Measured value = Peak-max-hold spectrum to the maximum of the average spectrum for continuous transmission. Since the duty cycle is < 98 %, duty factor is required to average spectrum
 Peak exclusion = Measured value – duty factor

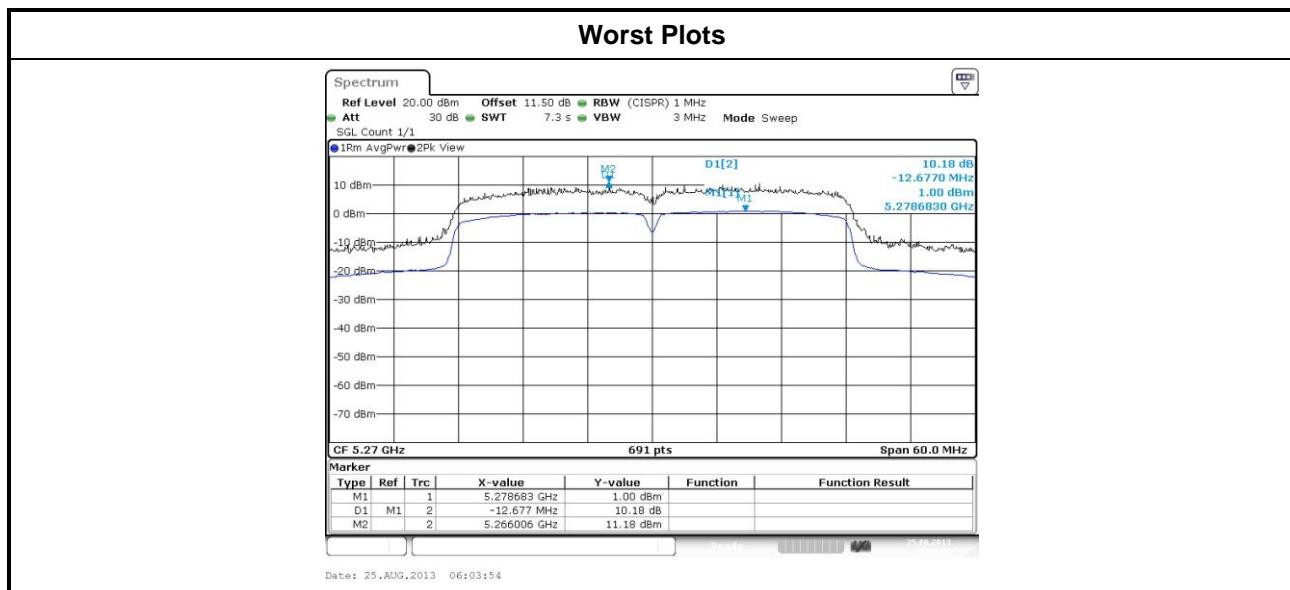

Note: Measured value

= Peak-max-hold spectrum to the maximum of the average spectrum for continuous transmission
 = Mark 2 – Mark 1



3.6 Transmitter Radiated and Band Edge Emissions

3.6.1 Limit of Transmitter Radiated and Band Edge Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.825 GHz	5.715 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] 5.825 5.835 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).



3.6.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.




3.6.3 Test Setup

Radiated Emissions below 1 GHz

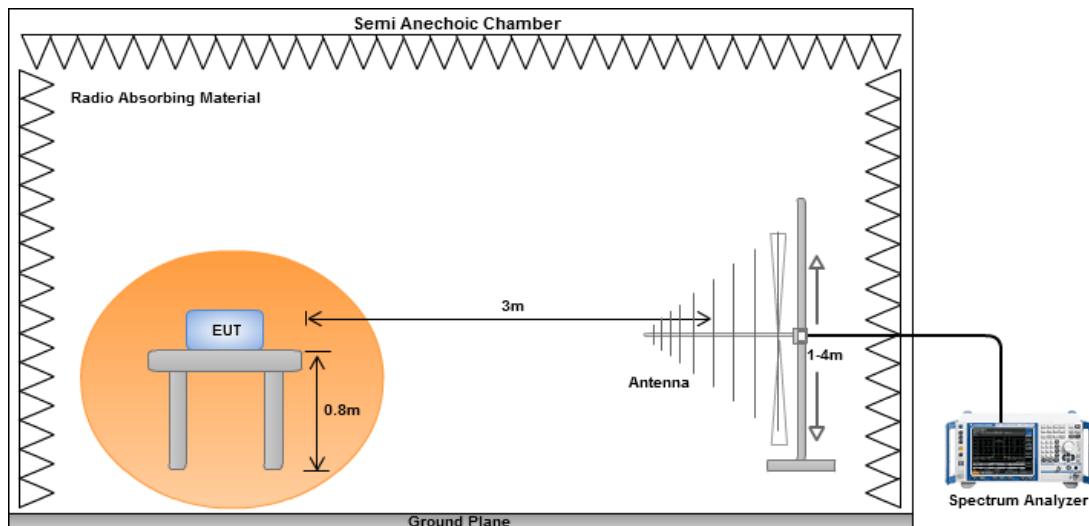


Radiated Emissions above 1 GHz

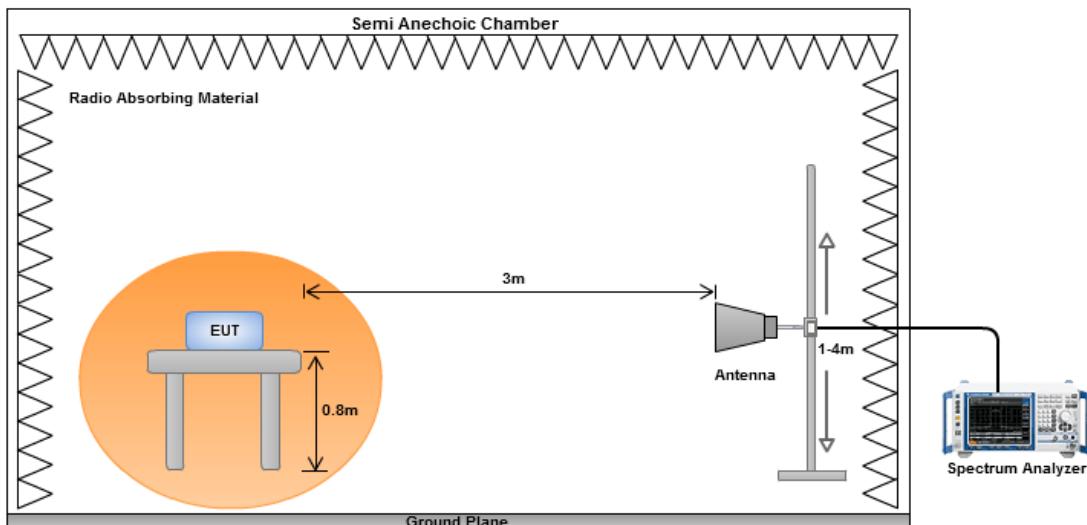



3.6.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

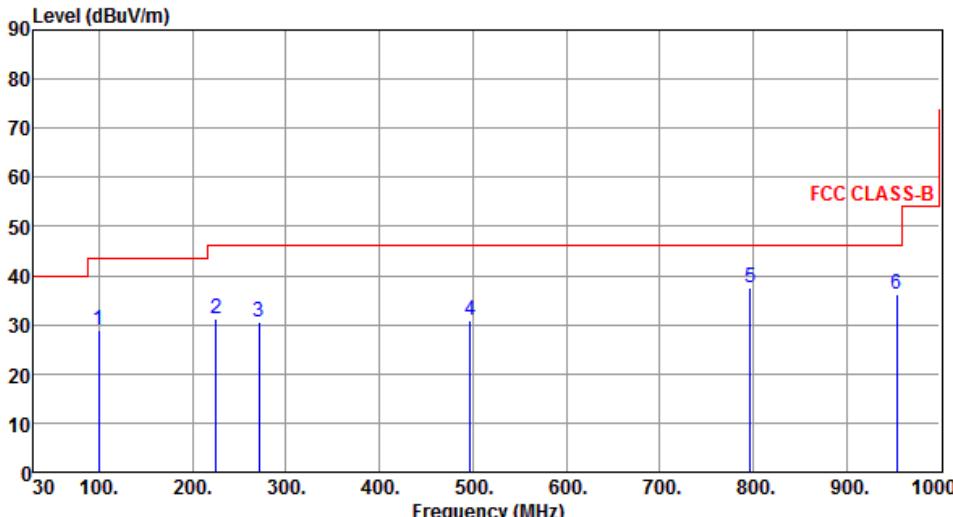Modulation Mode	HT40	Test Freq. (MHz)	5270																																																															
Polarization	Horizontal																																																																	
																																																																		
<table><thead><tr><th></th><th>Freq. (MHz)</th><th>Emission level (dBuV/m)</th><th>Margin (dB)</th><th>SA reading (dBuV)</th><th>Factor (dB)</th><th>Remark</th><th>ANT High (cm)</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>99.84</td><td>28.75</td><td>43.50</td><td>-14.75</td><td>50.07</td><td>-21.32</td><td>Peak</td><td>---</td></tr><tr><td>2</td><td>224.97</td><td>31.33</td><td>46.00</td><td>-14.67</td><td>49.68</td><td>-18.35</td><td>Peak</td><td>---</td></tr><tr><td>3</td><td>271.53</td><td>30.58</td><td>46.00</td><td>-15.42</td><td>47.00</td><td>-16.42</td><td>Peak</td><td>---</td></tr><tr><td>4</td><td>497.54</td><td>30.86</td><td>46.00</td><td>-15.14</td><td>41.84</td><td>-10.98</td><td>Peak</td><td>---</td></tr><tr><td>5</td><td>797.27</td><td>37.68</td><td>46.00</td><td>-8.32</td><td>43.79</td><td>-6.11</td><td>Peak</td><td>---</td></tr><tr><td>6</td><td>953.44</td><td>36.19</td><td>46.00</td><td>-9.81</td><td>40.01</td><td>-3.82</td><td>Peak</td><td>---</td></tr></tbody></table>					Freq. (MHz)	Emission level (dBuV/m)	Margin (dB)	SA reading (dBuV)	Factor (dB)	Remark	ANT High (cm)	Turn Table deg	1	99.84	28.75	43.50	-14.75	50.07	-21.32	Peak	---	2	224.97	31.33	46.00	-14.67	49.68	-18.35	Peak	---	3	271.53	30.58	46.00	-15.42	47.00	-16.42	Peak	---	4	497.54	30.86	46.00	-15.14	41.84	-10.98	Peak	---	5	797.27	37.68	46.00	-8.32	43.79	-6.11	Peak	---	6	953.44	36.19	46.00	-9.81	40.01	-3.82	Peak	---
	Freq. (MHz)	Emission level (dBuV/m)	Margin (dB)	SA reading (dBuV)	Factor (dB)	Remark	ANT High (cm)	Turn Table deg																																																										
1	99.84	28.75	43.50	-14.75	50.07	-21.32	Peak	---																																																										
2	224.97	31.33	46.00	-14.67	49.68	-18.35	Peak	---																																																										
3	271.53	30.58	46.00	-15.42	47.00	-16.42	Peak	---																																																										
4	497.54	30.86	46.00	-15.14	41.84	-10.98	Peak	---																																																										
5	797.27	37.68	46.00	-8.32	43.79	-6.11	Peak	---																																																										
6	953.44	36.19	46.00	-9.81	40.01	-3.82	Peak	---																																																										
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)</p> <p>*Factor includes antenna factor, cable loss and amplifier gain</p> <p>Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																		




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.


Tel: 886-3-271-8666

Fax: 886-3-318-0155

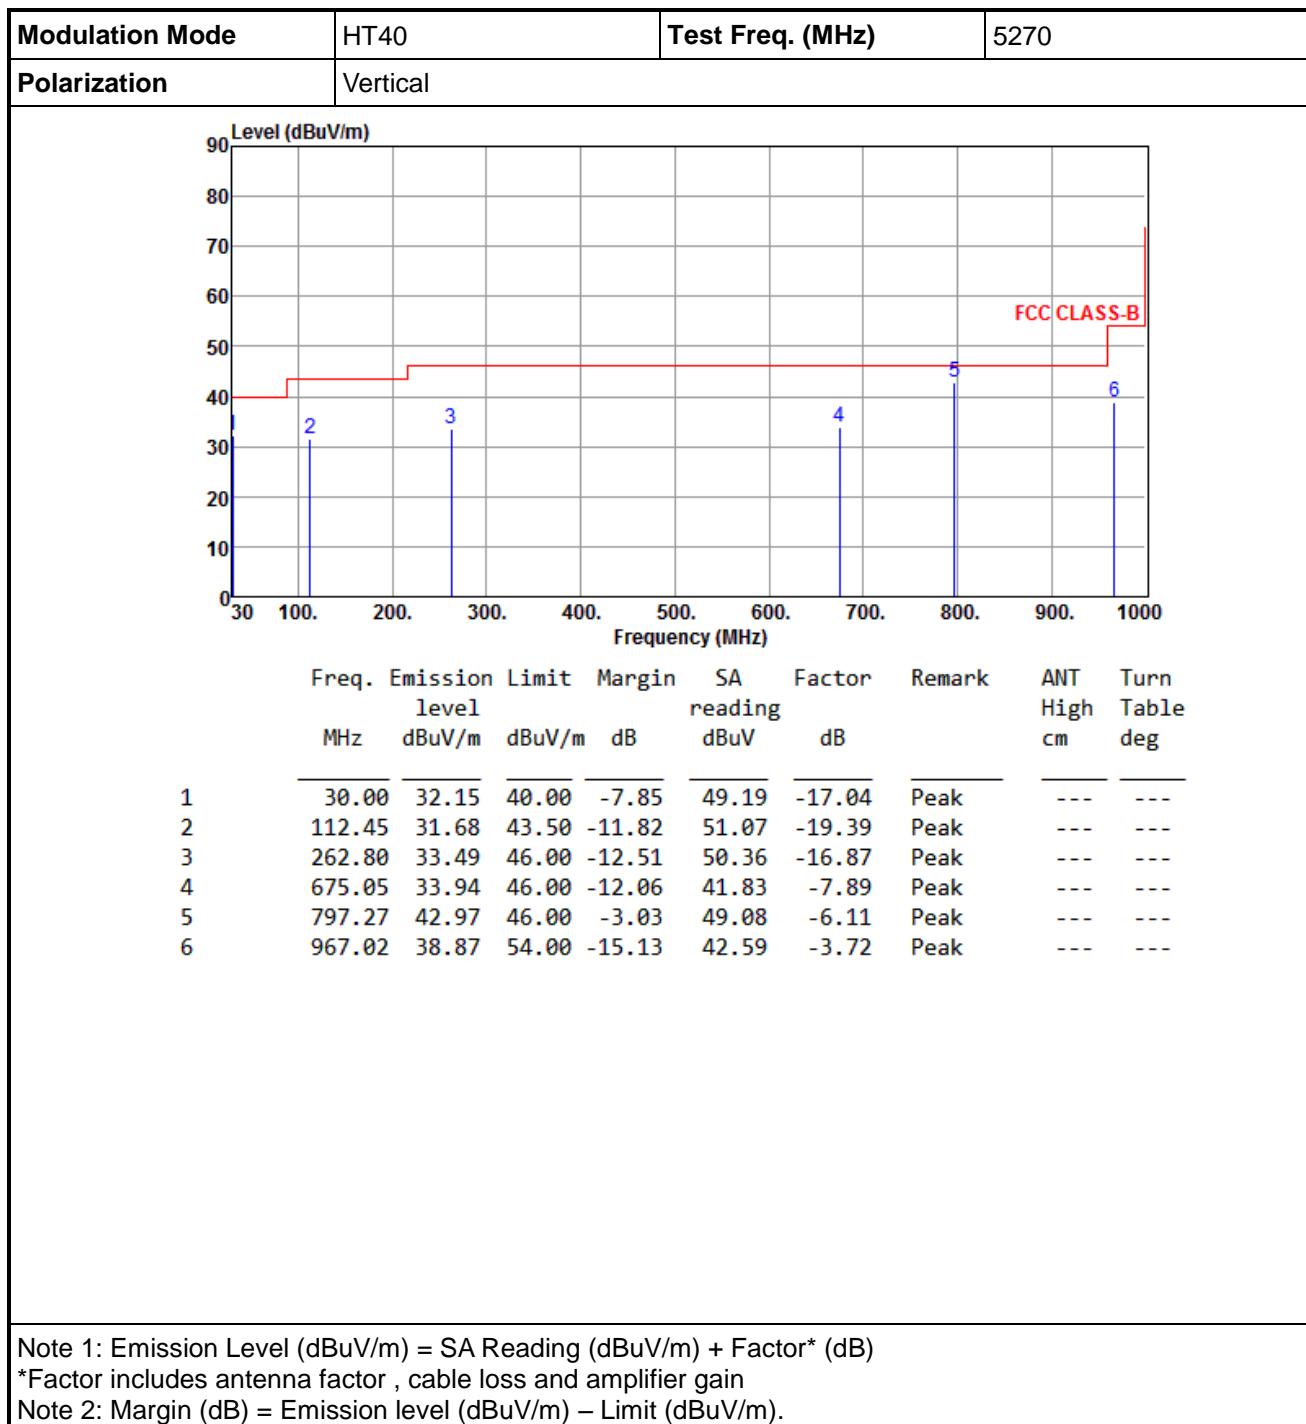



3.6.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

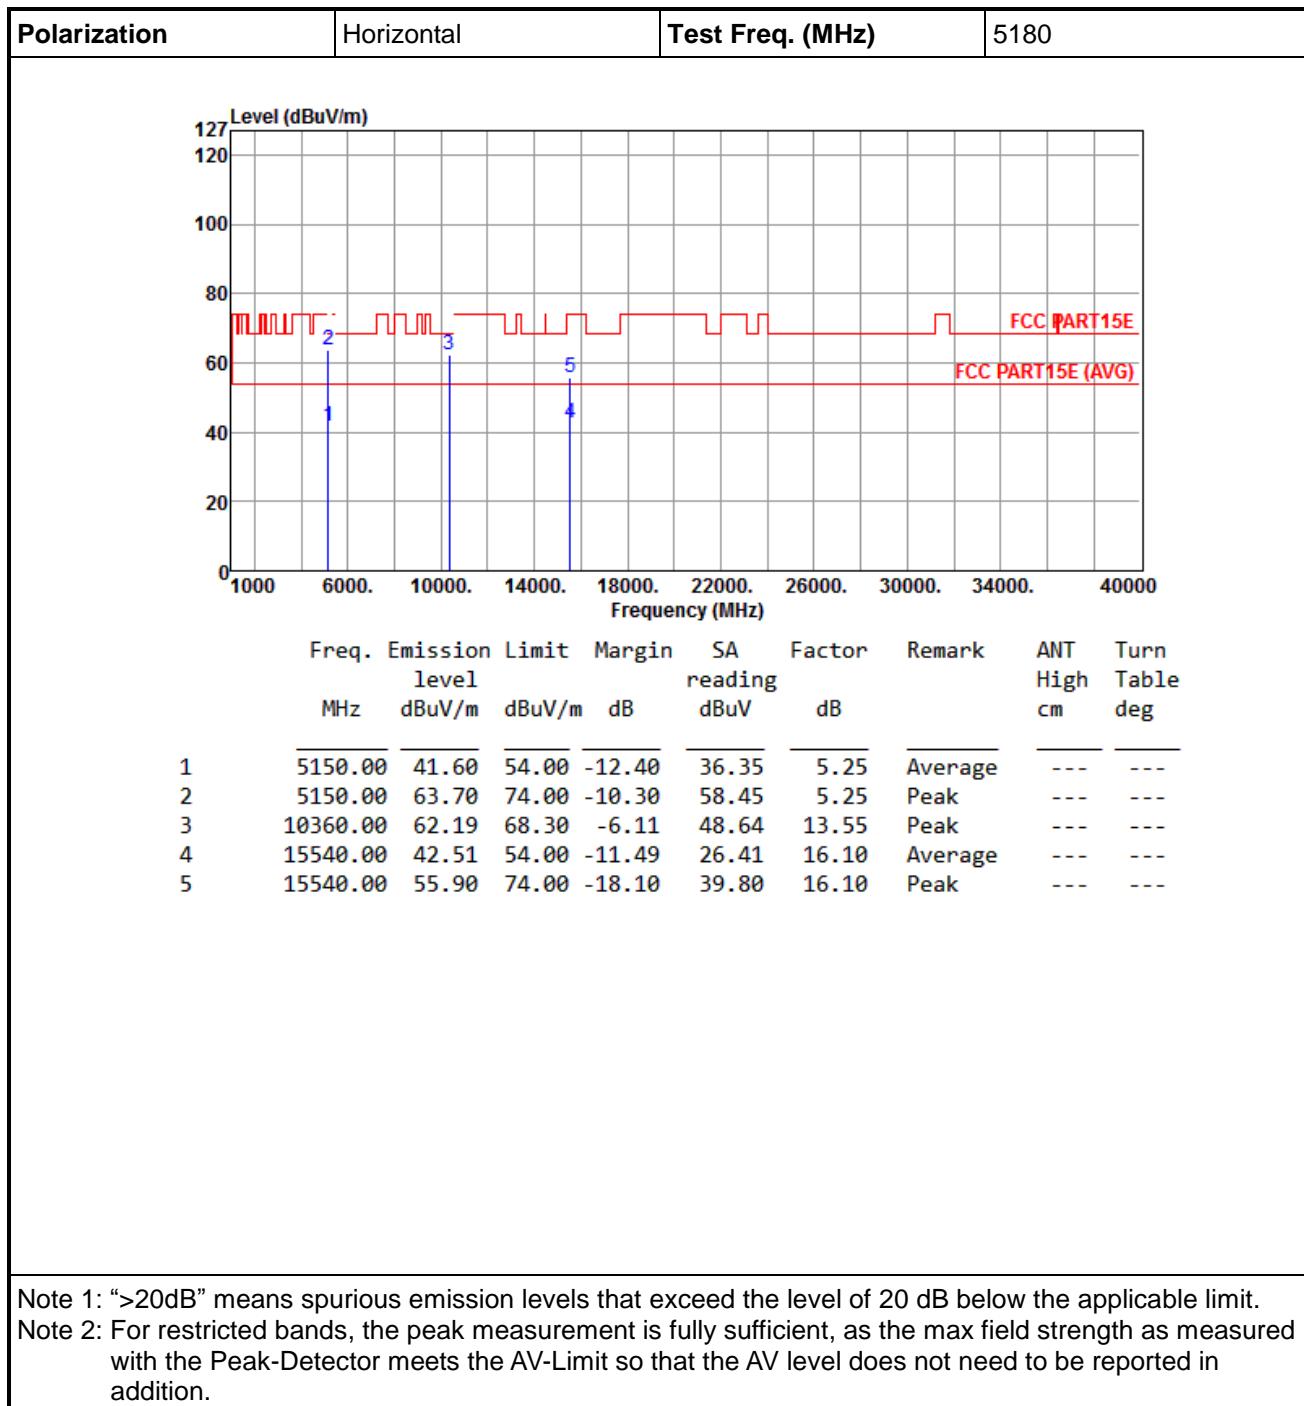




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

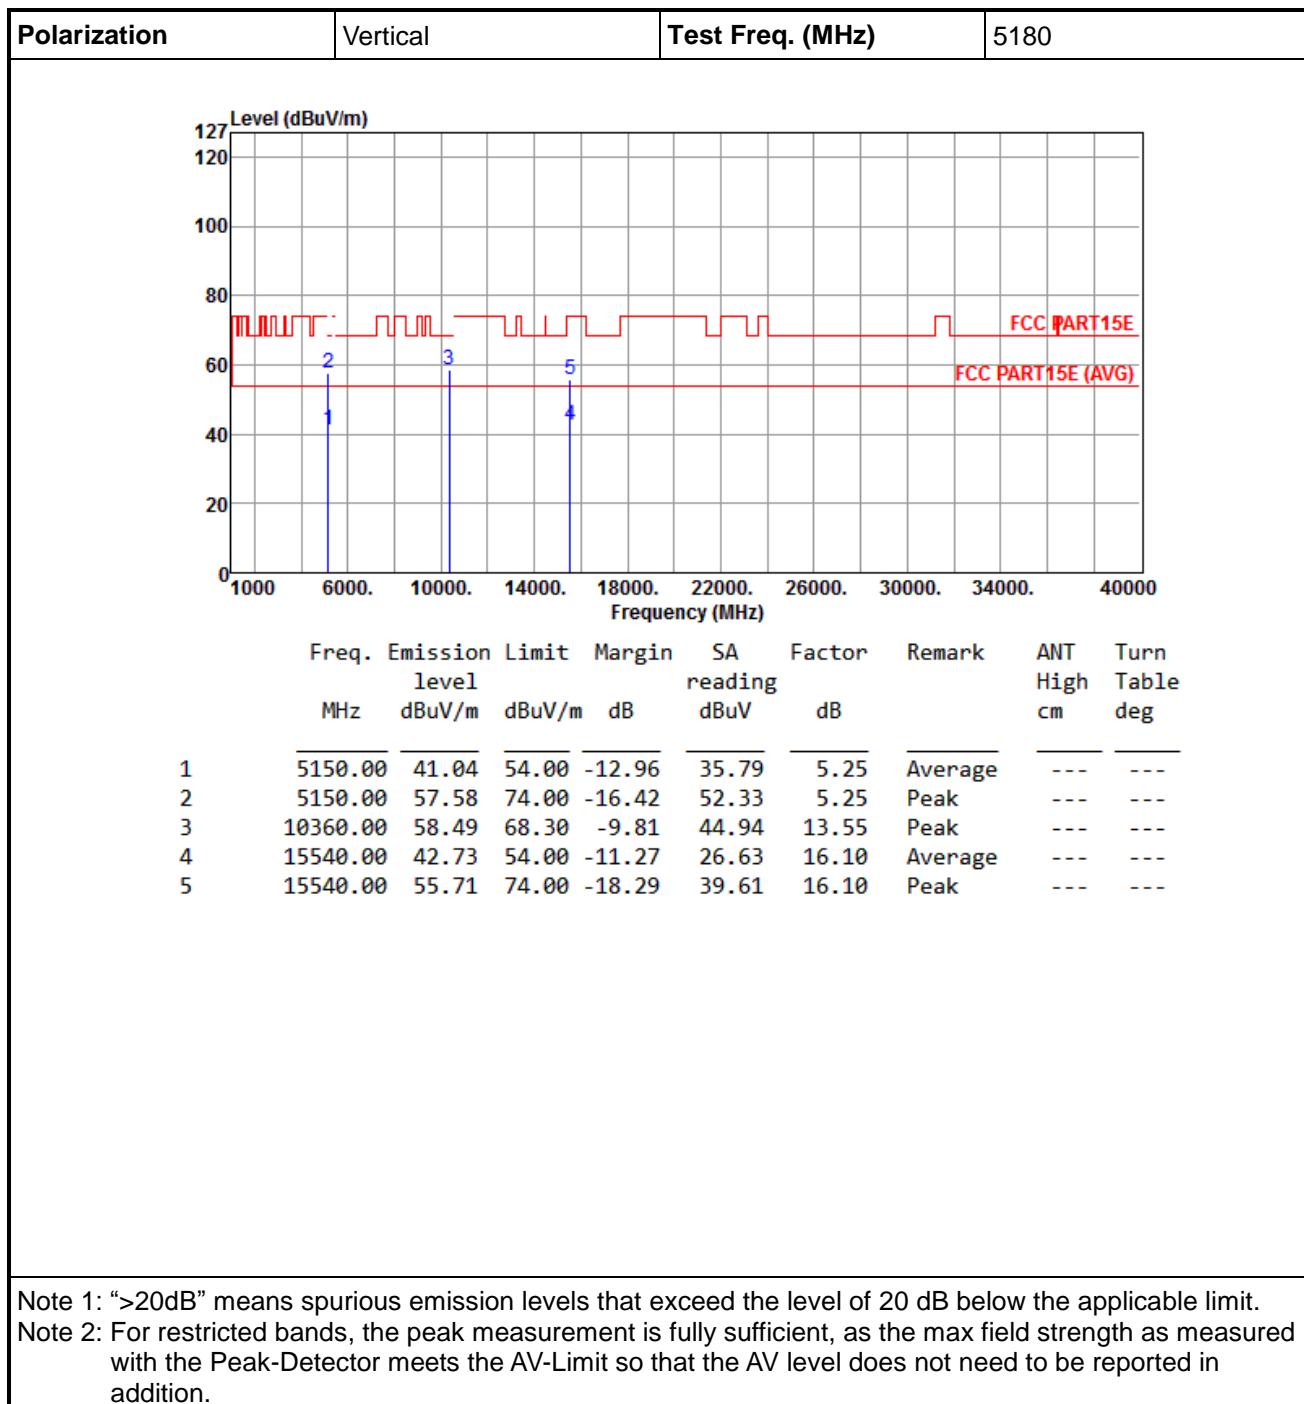




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

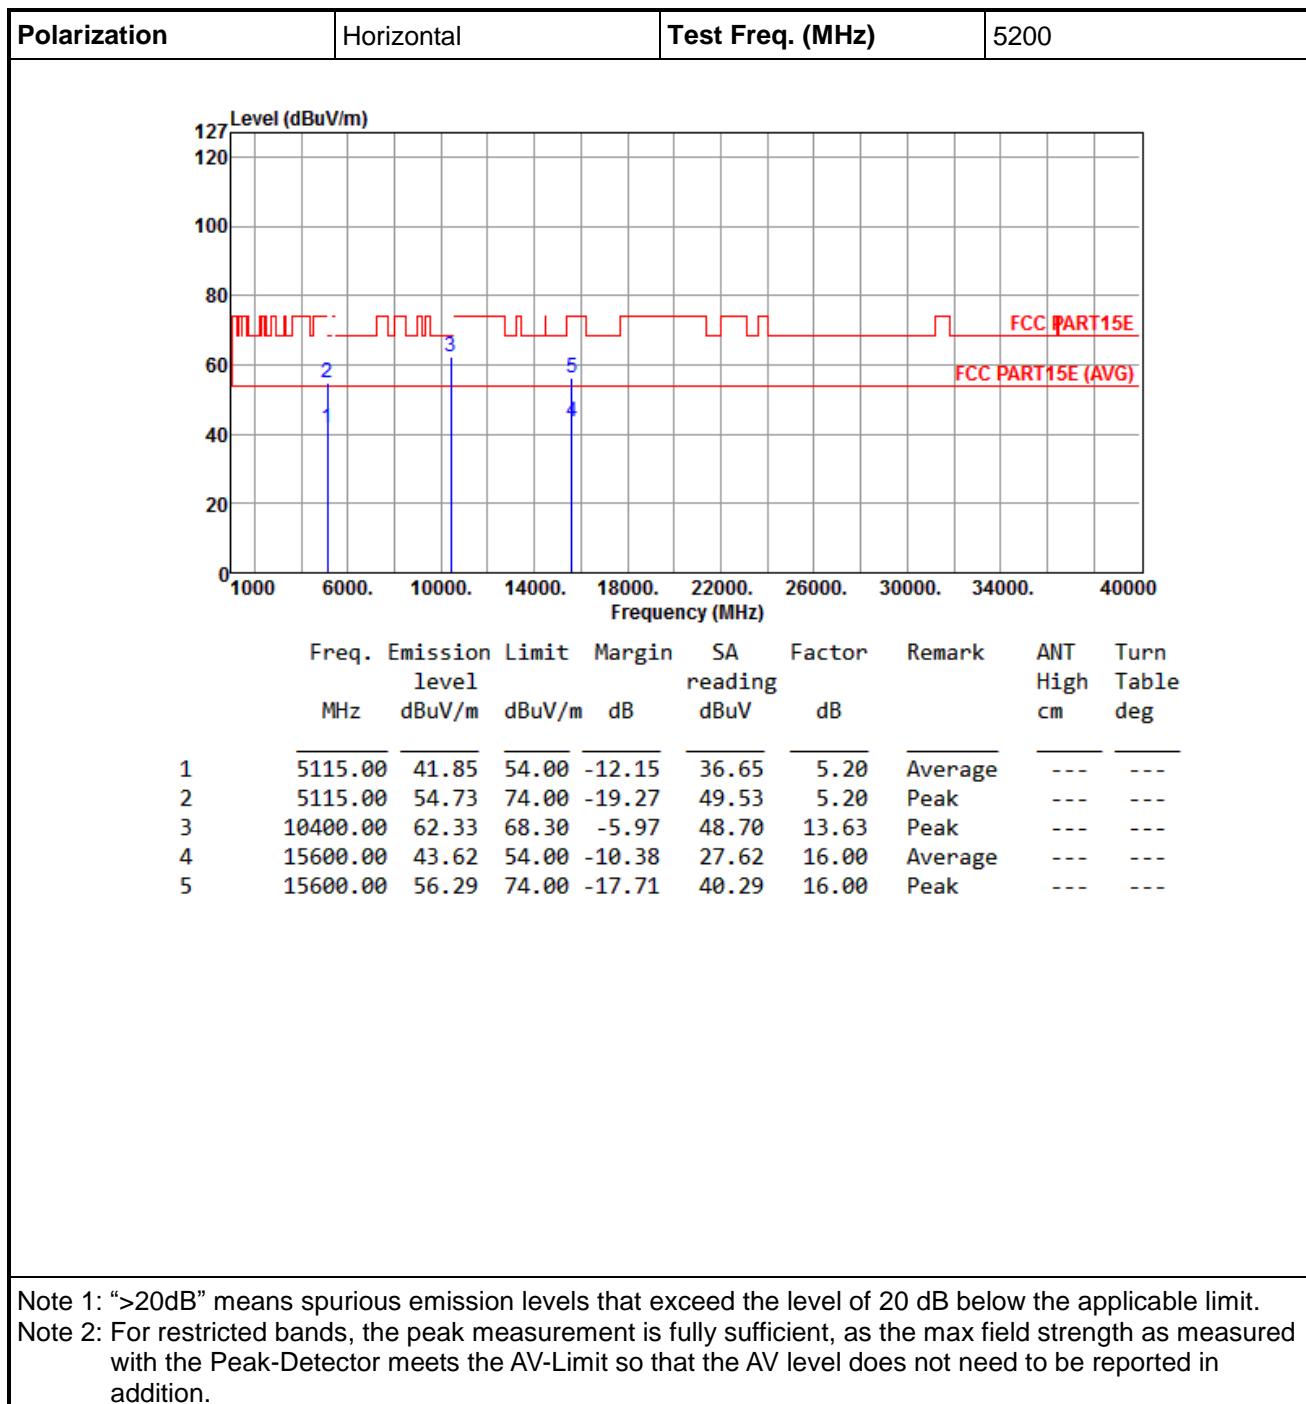




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

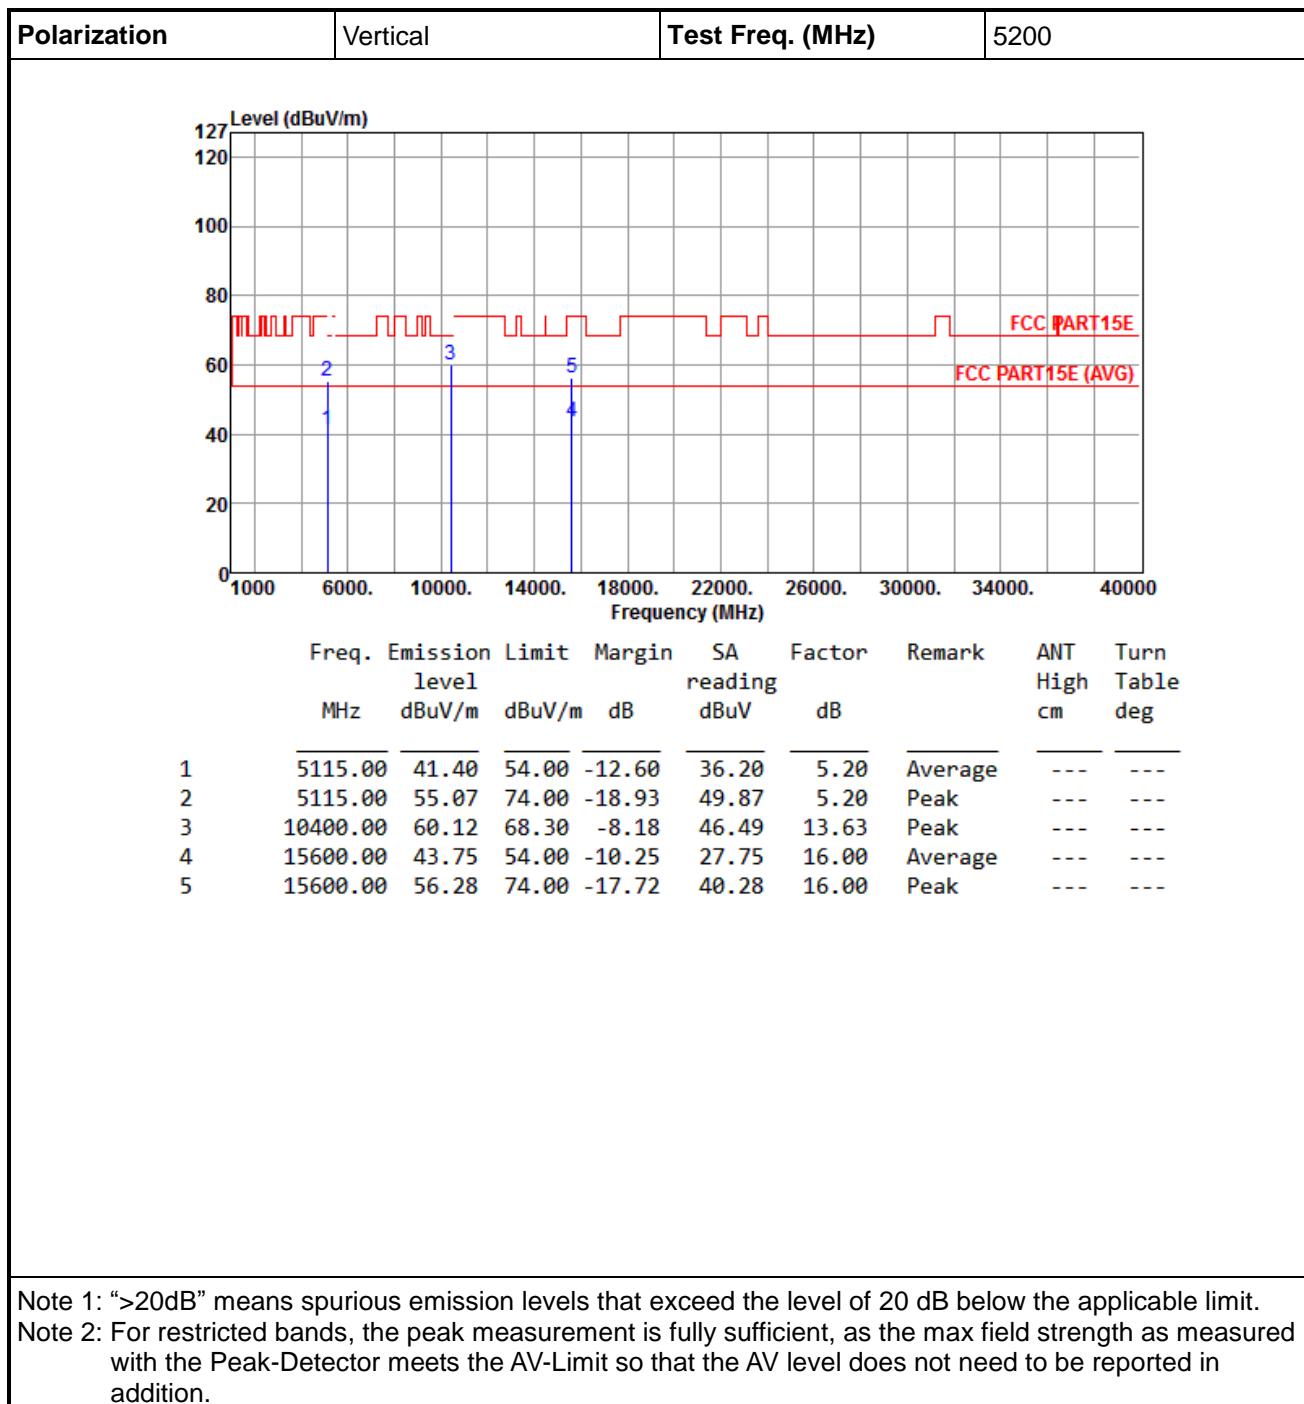




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

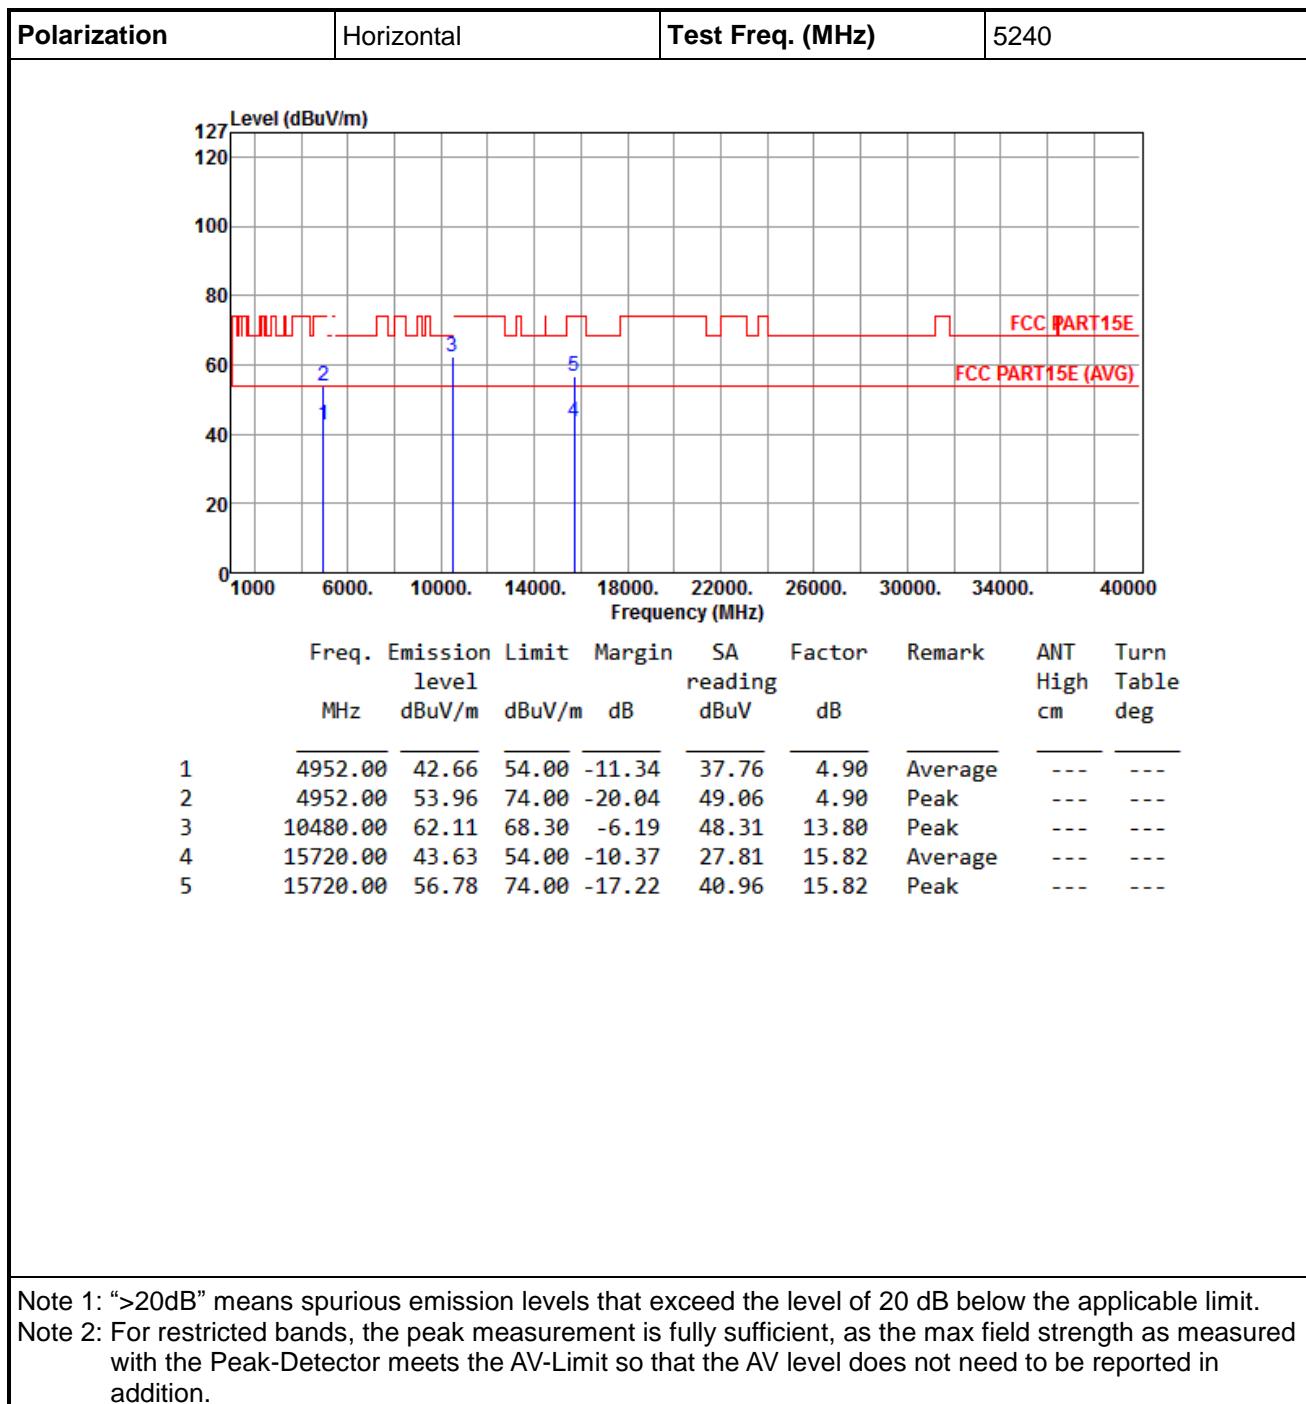




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

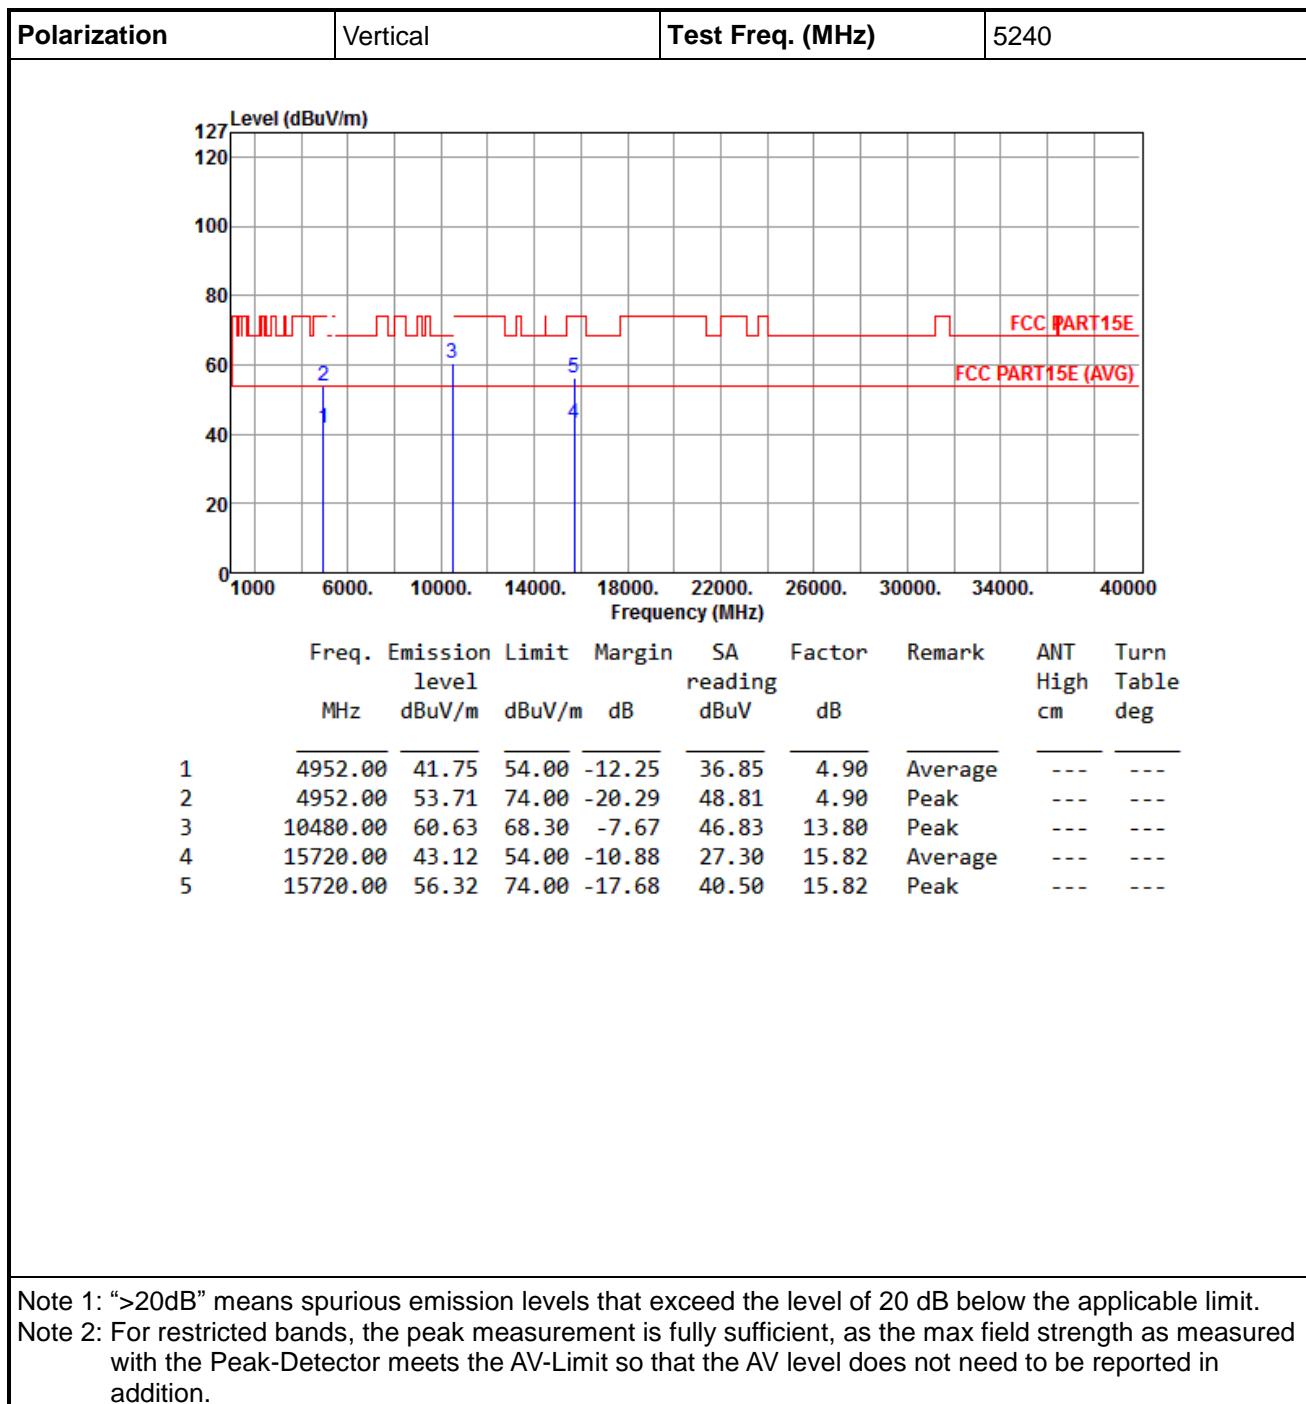




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

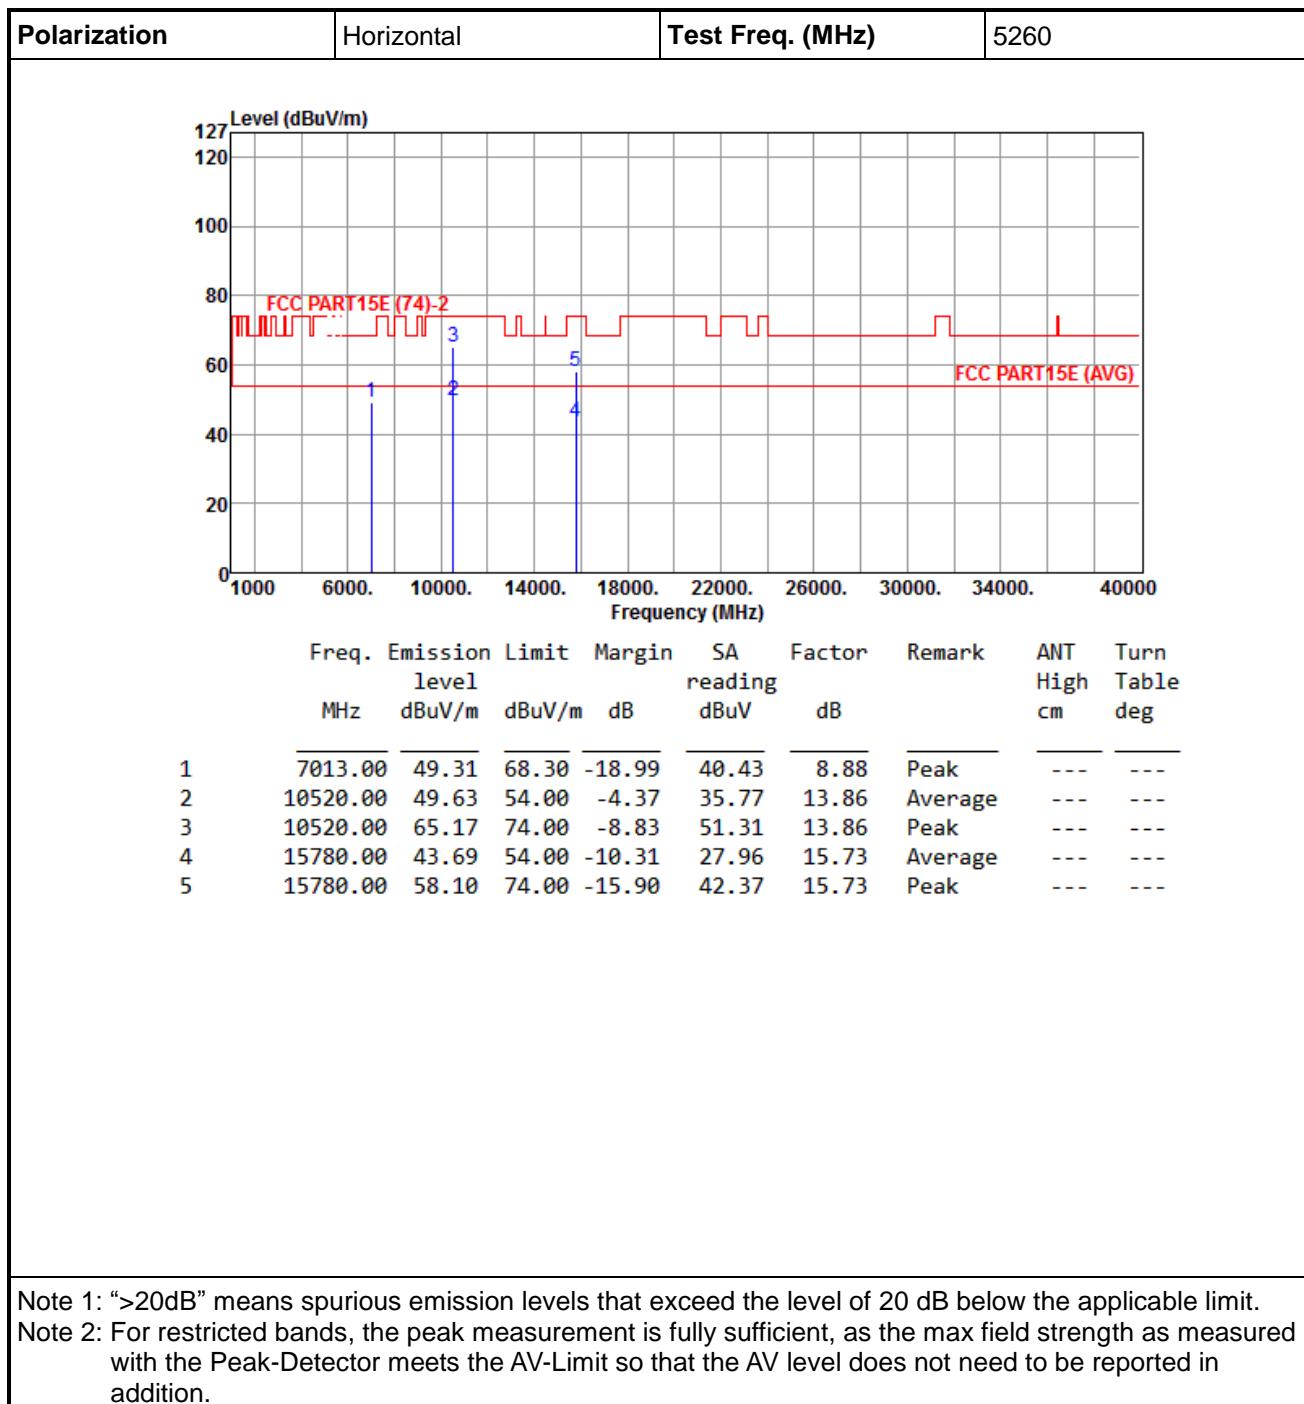




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

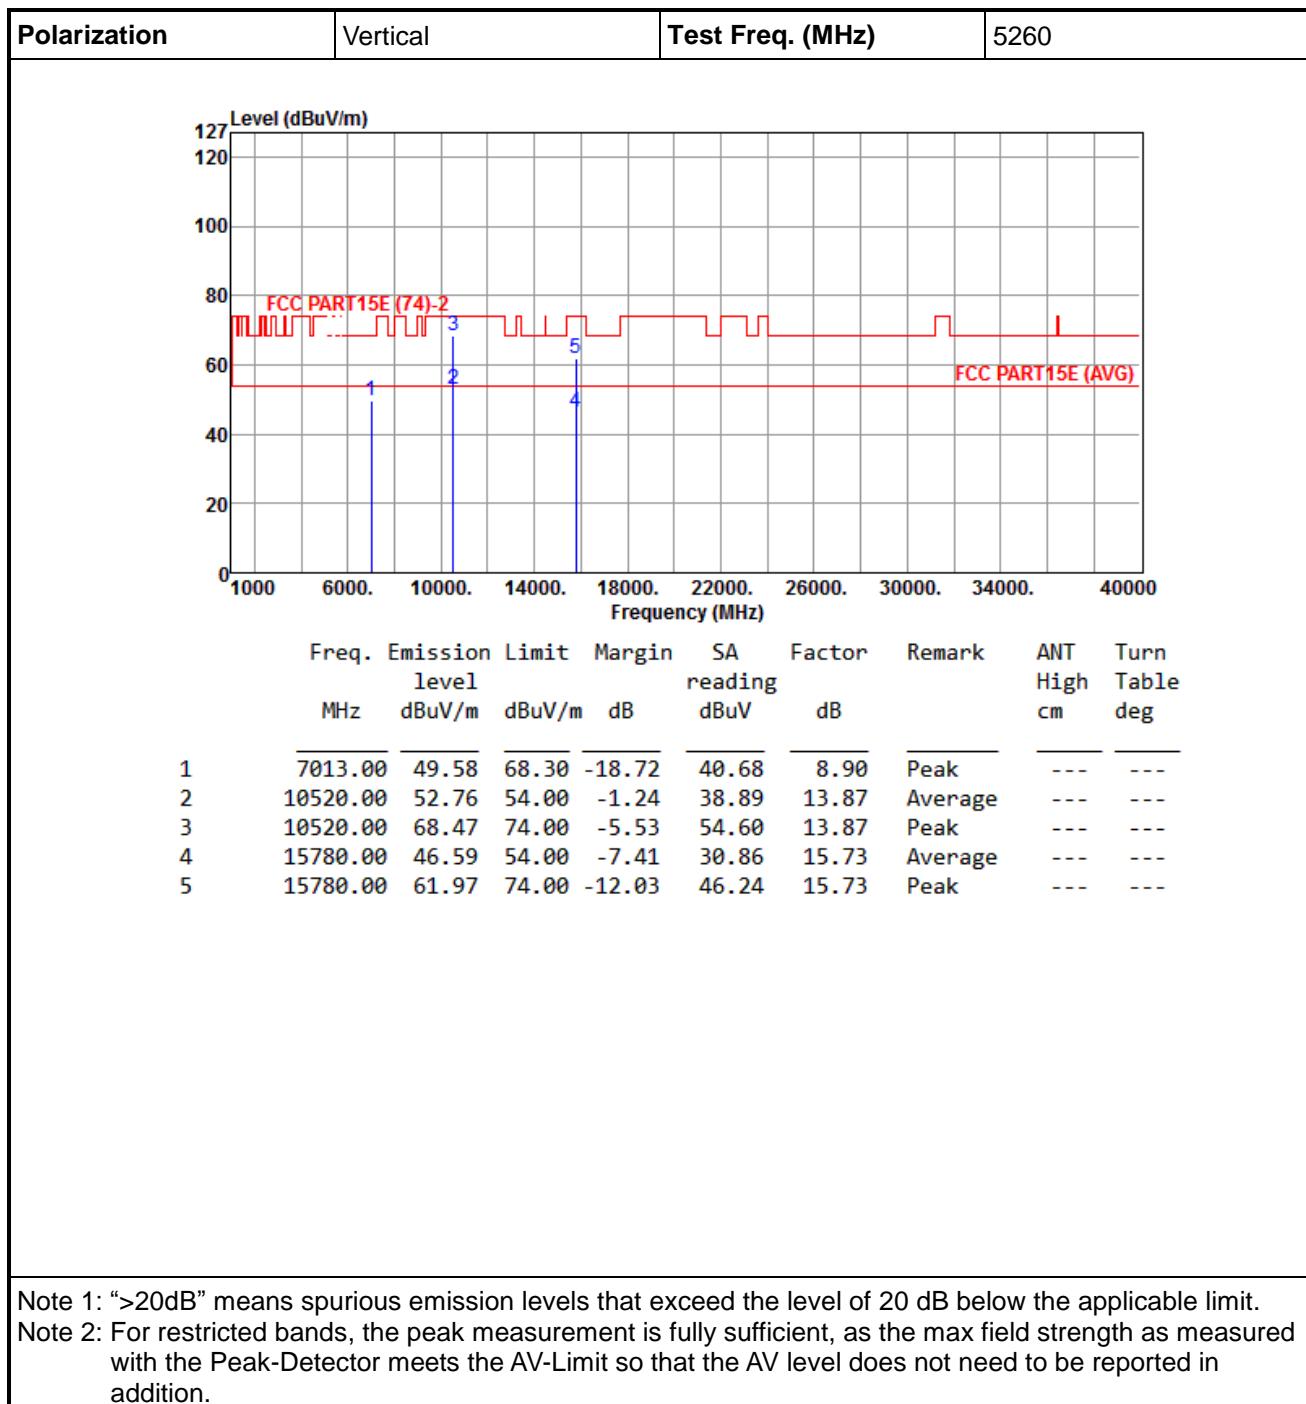




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

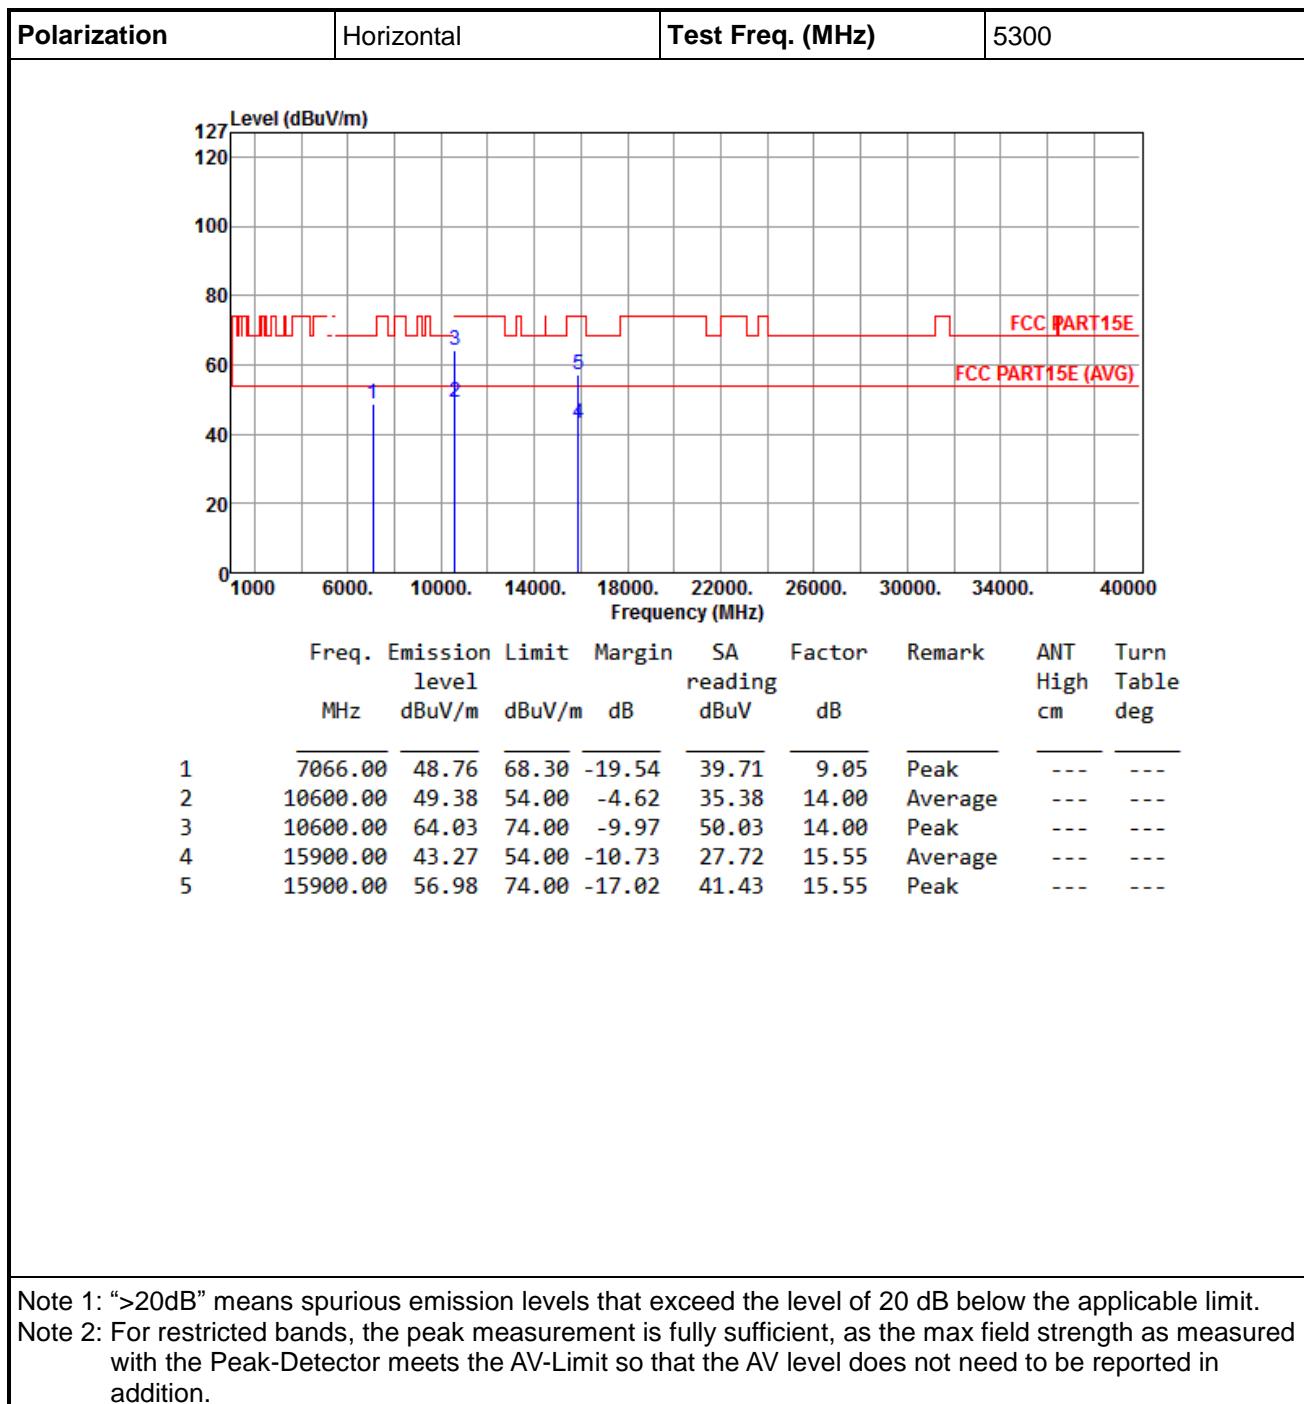




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

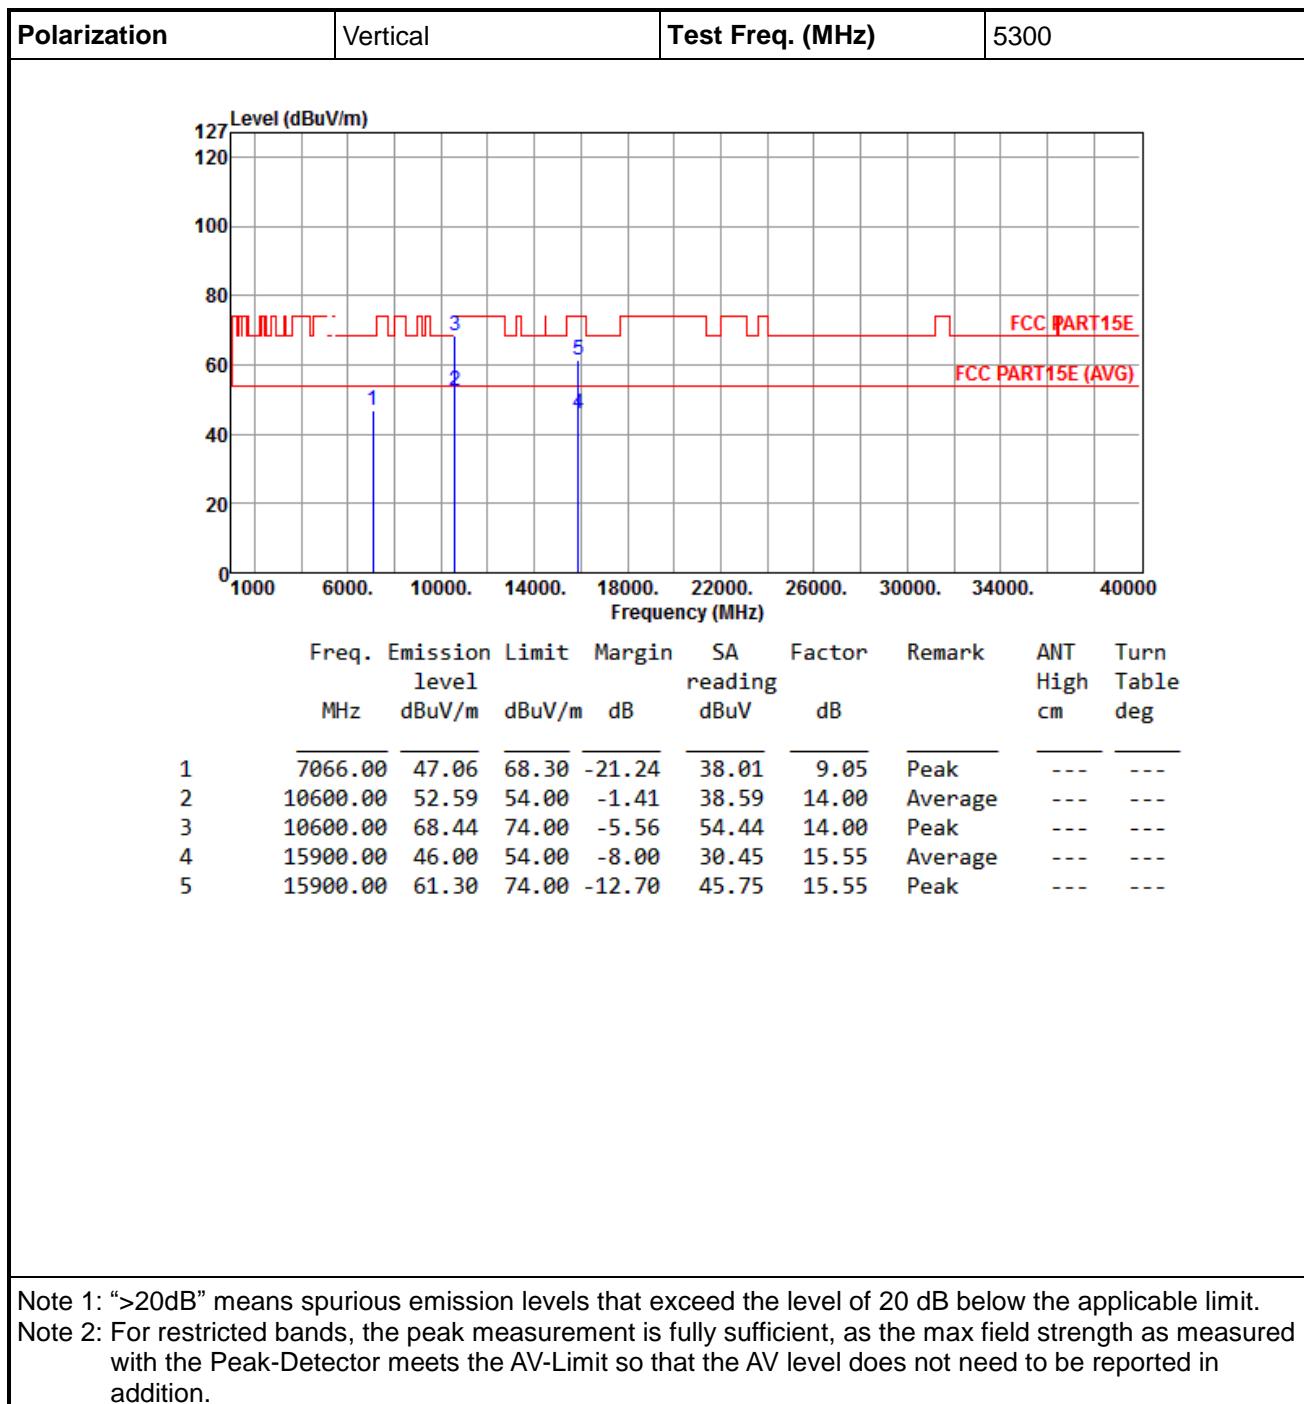




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

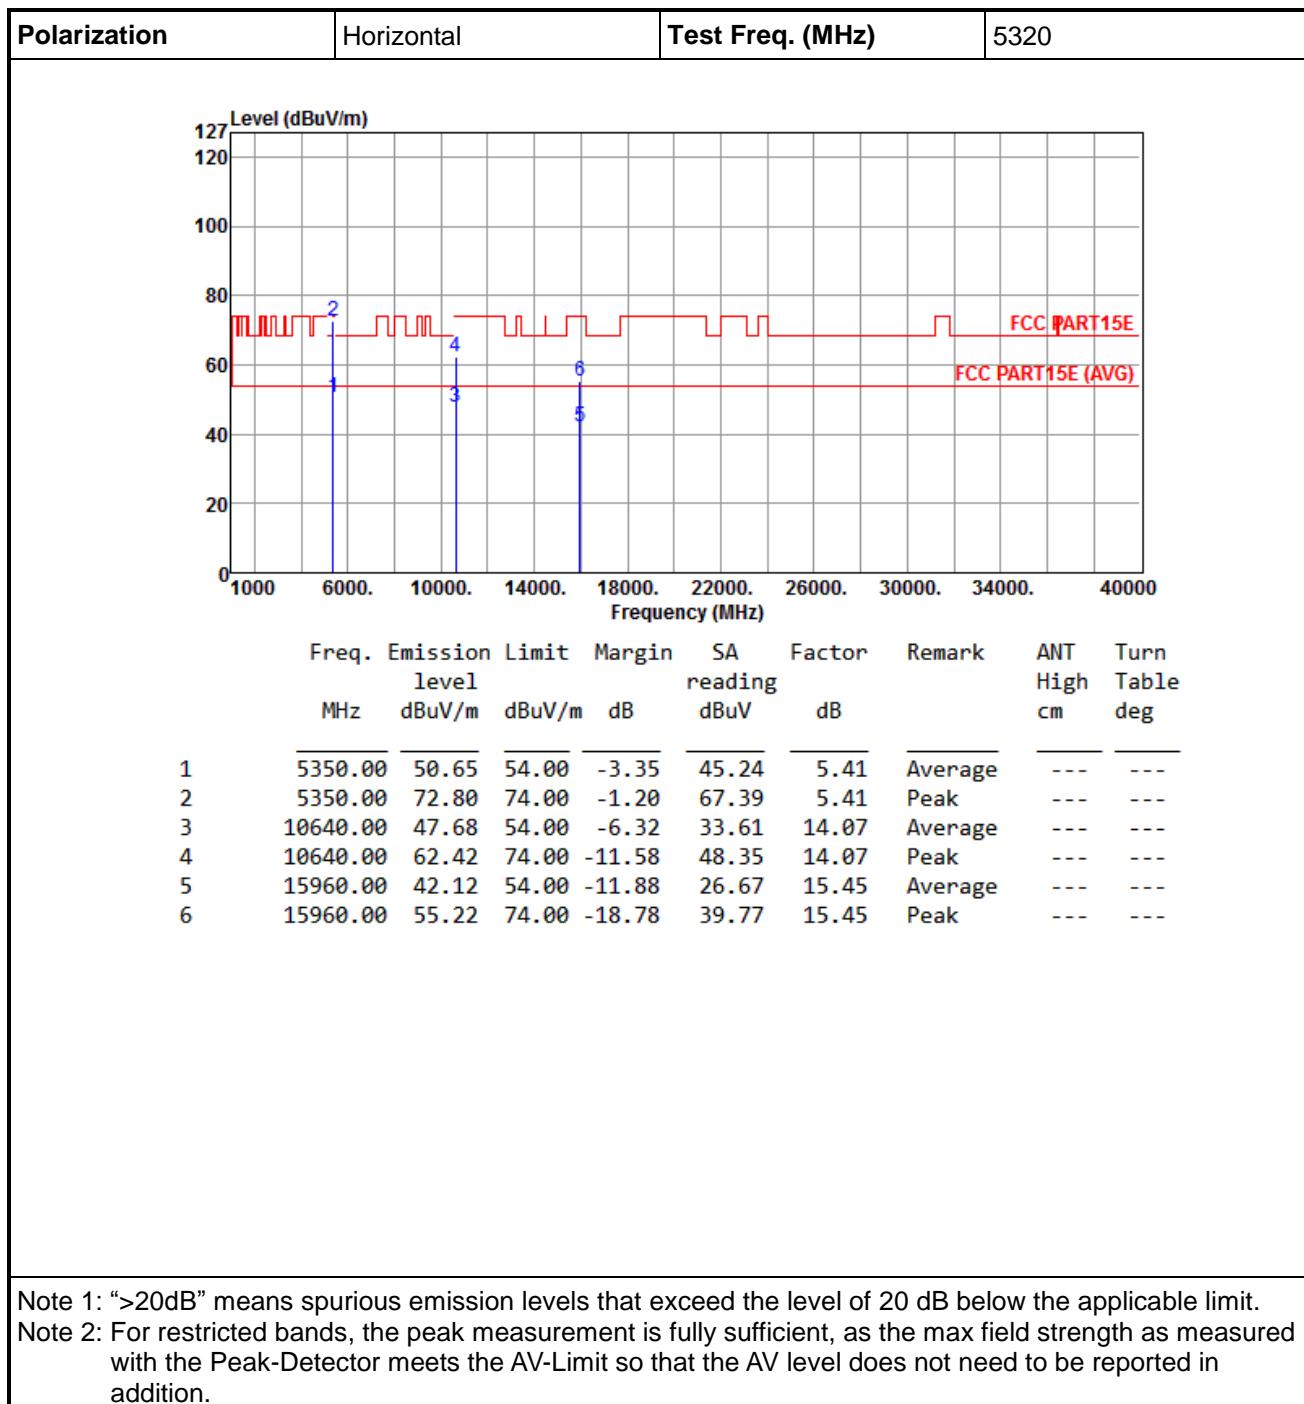




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

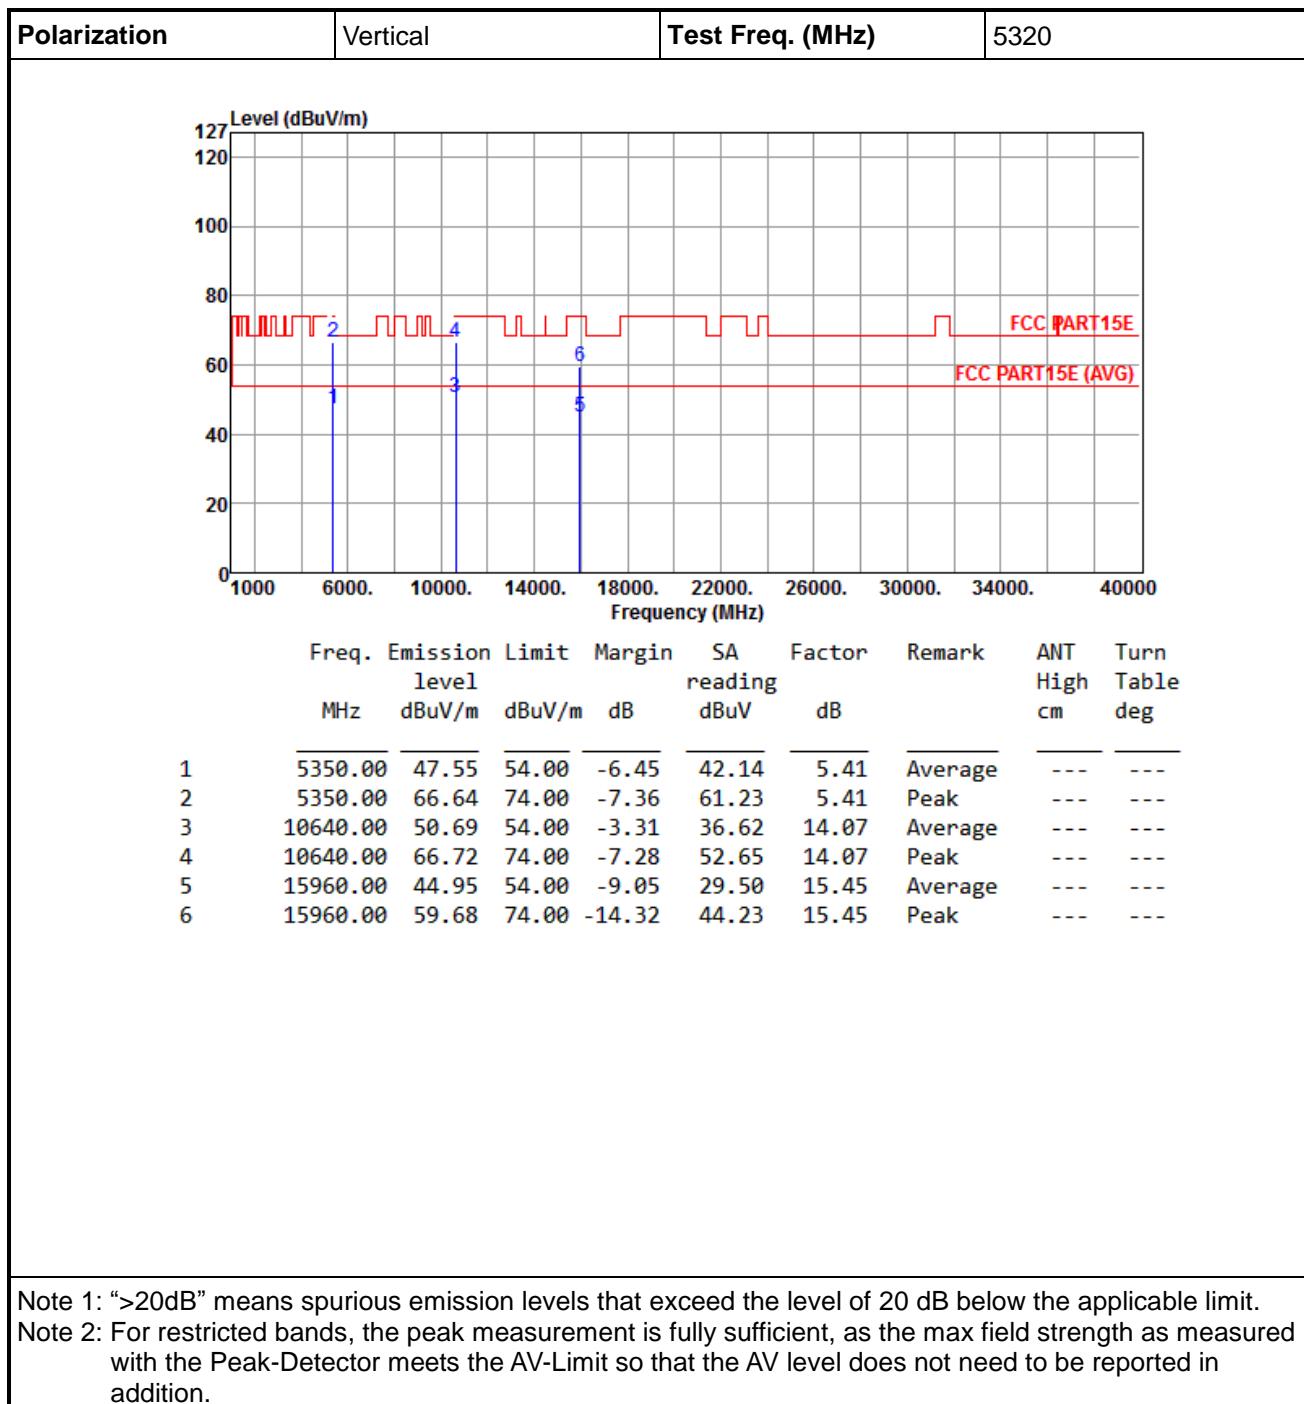




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

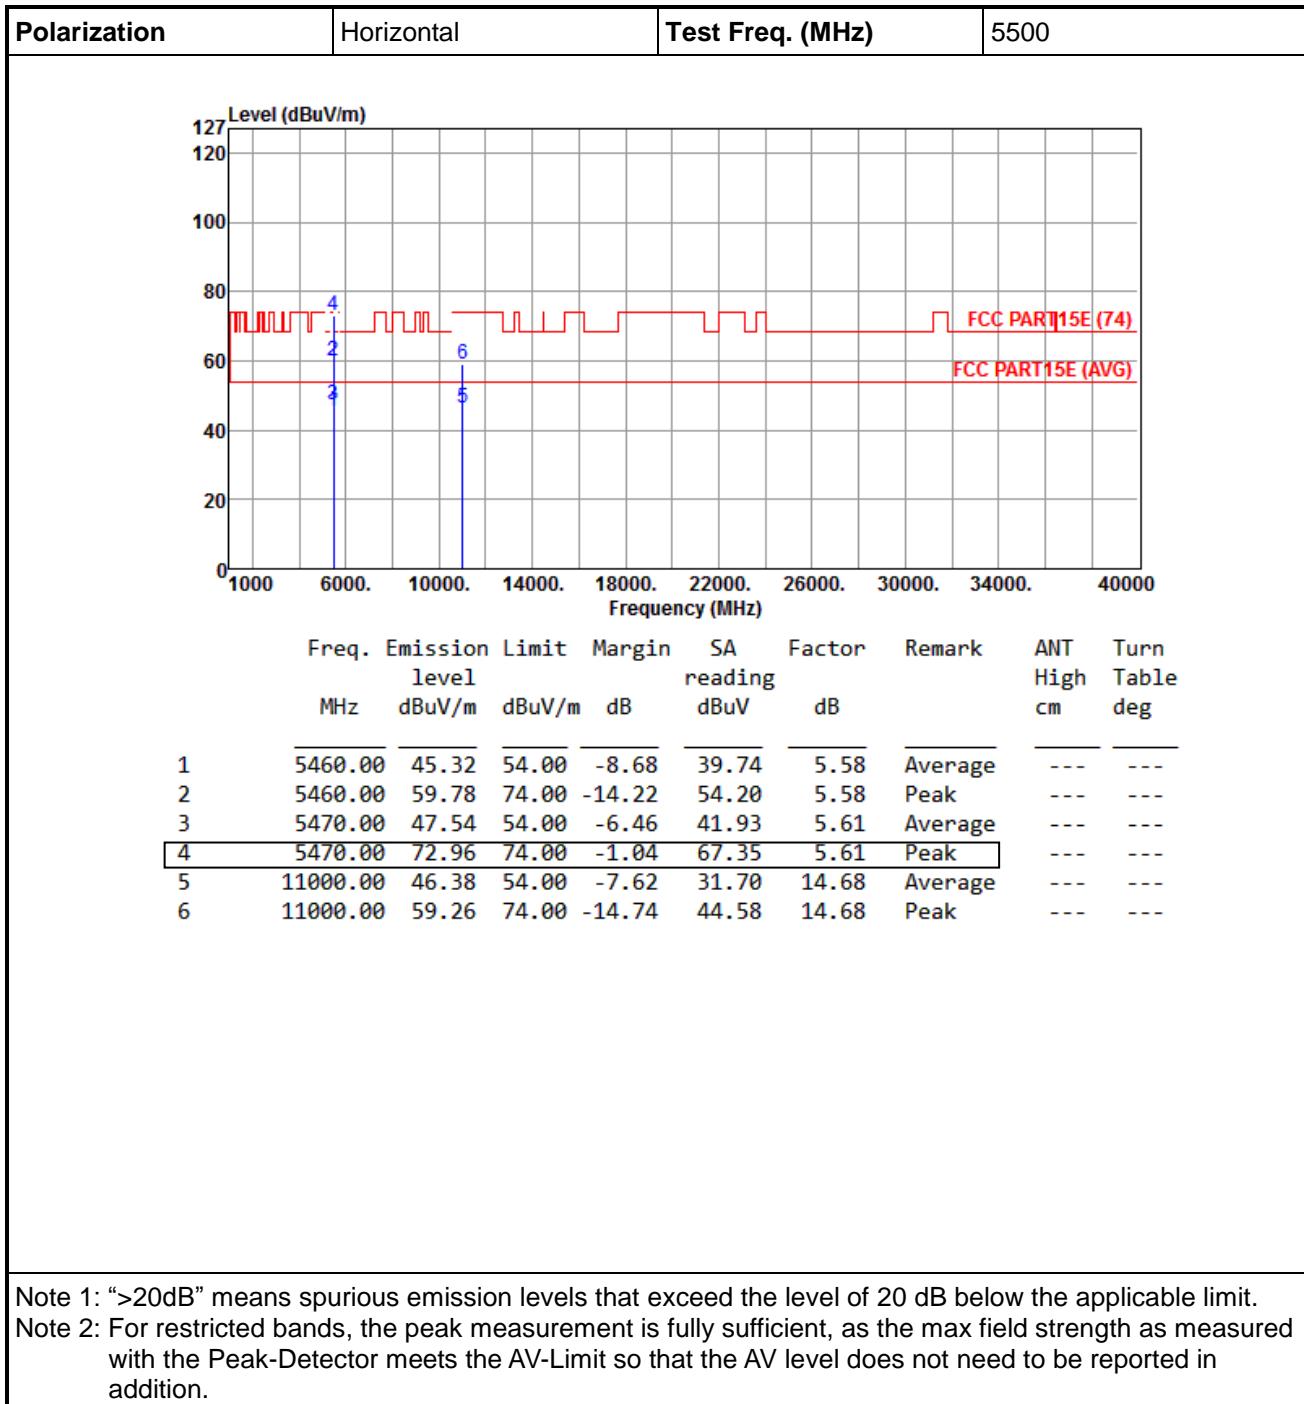



International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Polarization	Vertical	Test Freq. (MHz)	5500																																																																
<table><thead><tr><th>Freq.</th><th>Emission level</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>45.34</td><td>54.00</td><td>-8.66</td><td>39.76</td><td>5.58</td><td>Average</td></tr><tr><td>2</td><td>5460.00</td><td>57.05</td><td>74.00</td><td>-16.95</td><td>51.47</td><td>5.58</td><td>Peak</td></tr><tr><td>3</td><td>5470.00</td><td>46.28</td><td>54.00</td><td>-7.72</td><td>40.67</td><td>5.61</td><td>Average</td></tr><tr><td>4</td><td>5470.00</td><td>66.93</td><td>74.00</td><td>-7.07</td><td>61.32</td><td>5.61</td><td>Peak</td></tr><tr><td>5</td><td>11000.00</td><td>47.65</td><td>54.00</td><td>-6.35</td><td>32.97</td><td>14.68</td><td>Average</td></tr><tr><td>6</td><td>11000.00</td><td>63.52</td><td>74.00</td><td>-10.48</td><td>48.84</td><td>14.68</td><td>Peak</td></tr></tbody></table>				Freq.	Emission level	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV		cm	deg	1	5460.00	45.34	54.00	-8.66	39.76	5.58	Average	2	5460.00	57.05	74.00	-16.95	51.47	5.58	Peak	3	5470.00	46.28	54.00	-7.72	40.67	5.61	Average	4	5470.00	66.93	74.00	-7.07	61.32	5.61	Peak	5	11000.00	47.65	54.00	-6.35	32.97	14.68	Average	6	11000.00	63.52	74.00	-10.48	48.84	14.68	Peak
Freq.	Emission level	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV		cm	deg																																																												
1	5460.00	45.34	54.00	-8.66	39.76	5.58	Average																																																												
2	5460.00	57.05	74.00	-16.95	51.47	5.58	Peak																																																												
3	5470.00	46.28	54.00	-7.72	40.67	5.61	Average																																																												
4	5470.00	66.93	74.00	-7.07	61.32	5.61	Peak																																																												
5	11000.00	47.65	54.00	-6.35	32.97	14.68	Average																																																												
6	11000.00	63.52	74.00	-10.48	48.84	14.68	Peak																																																												
Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.																																																																			
Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.																																																																			




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

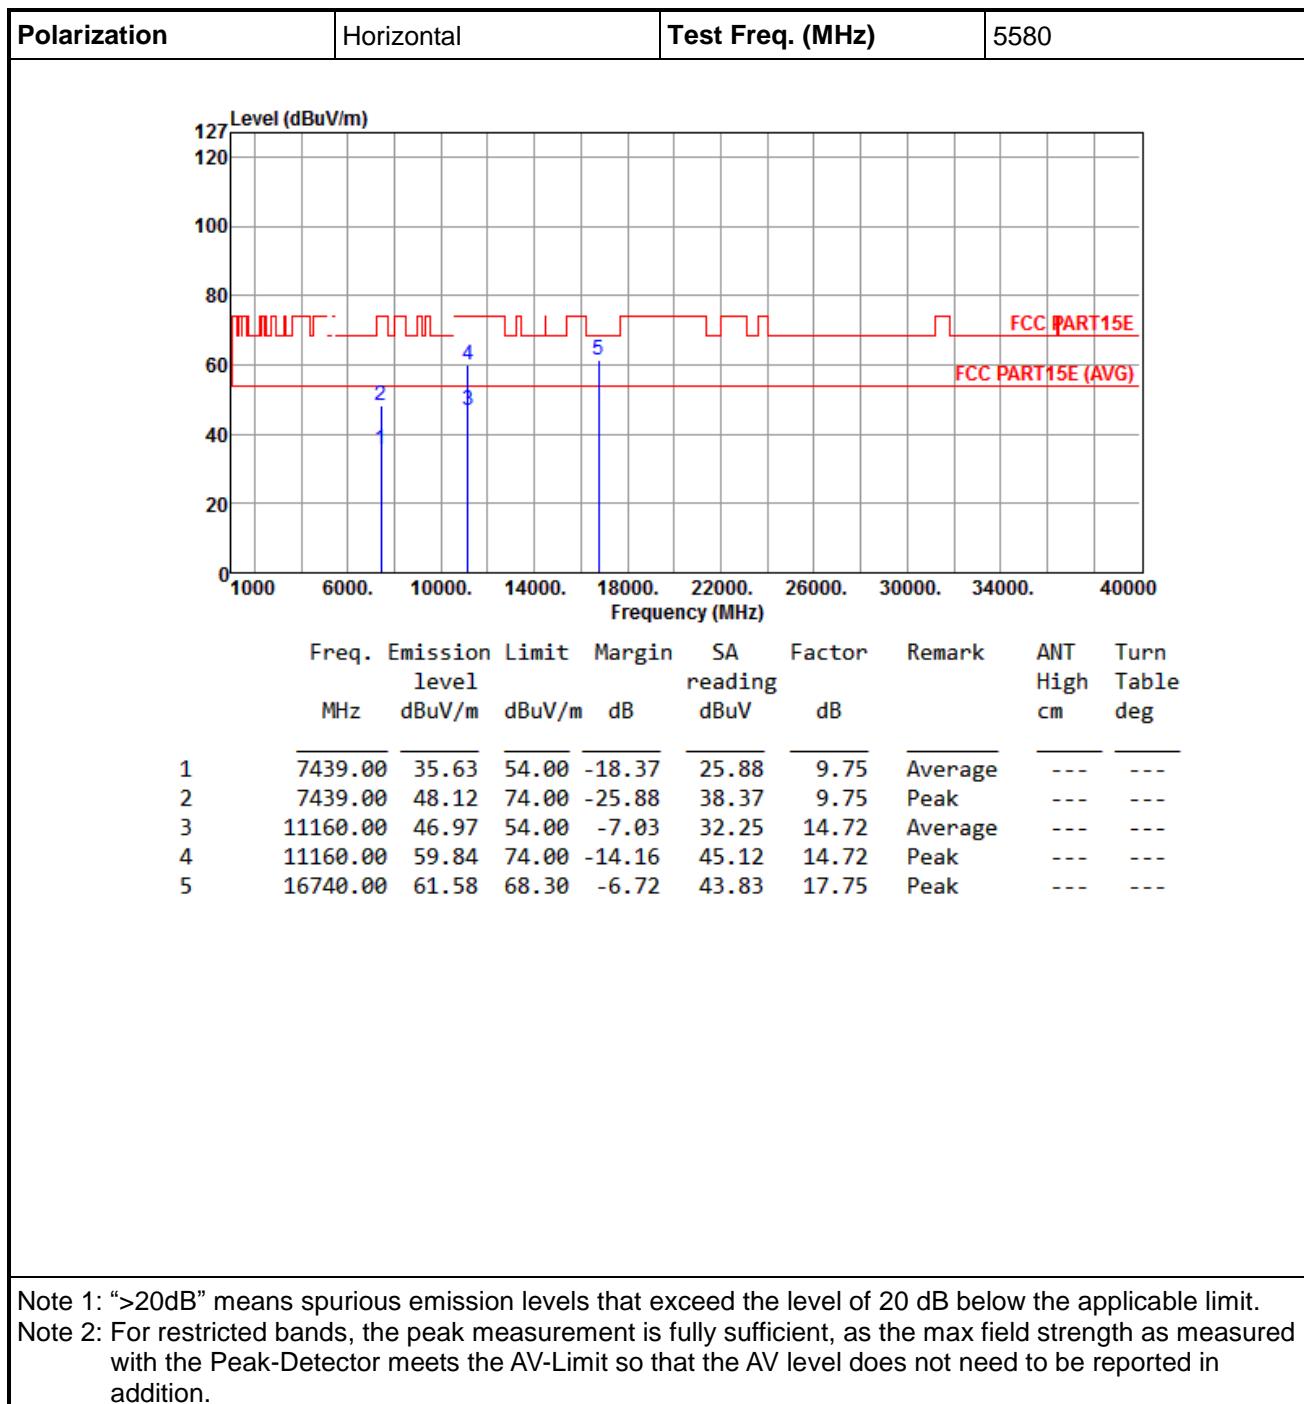




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

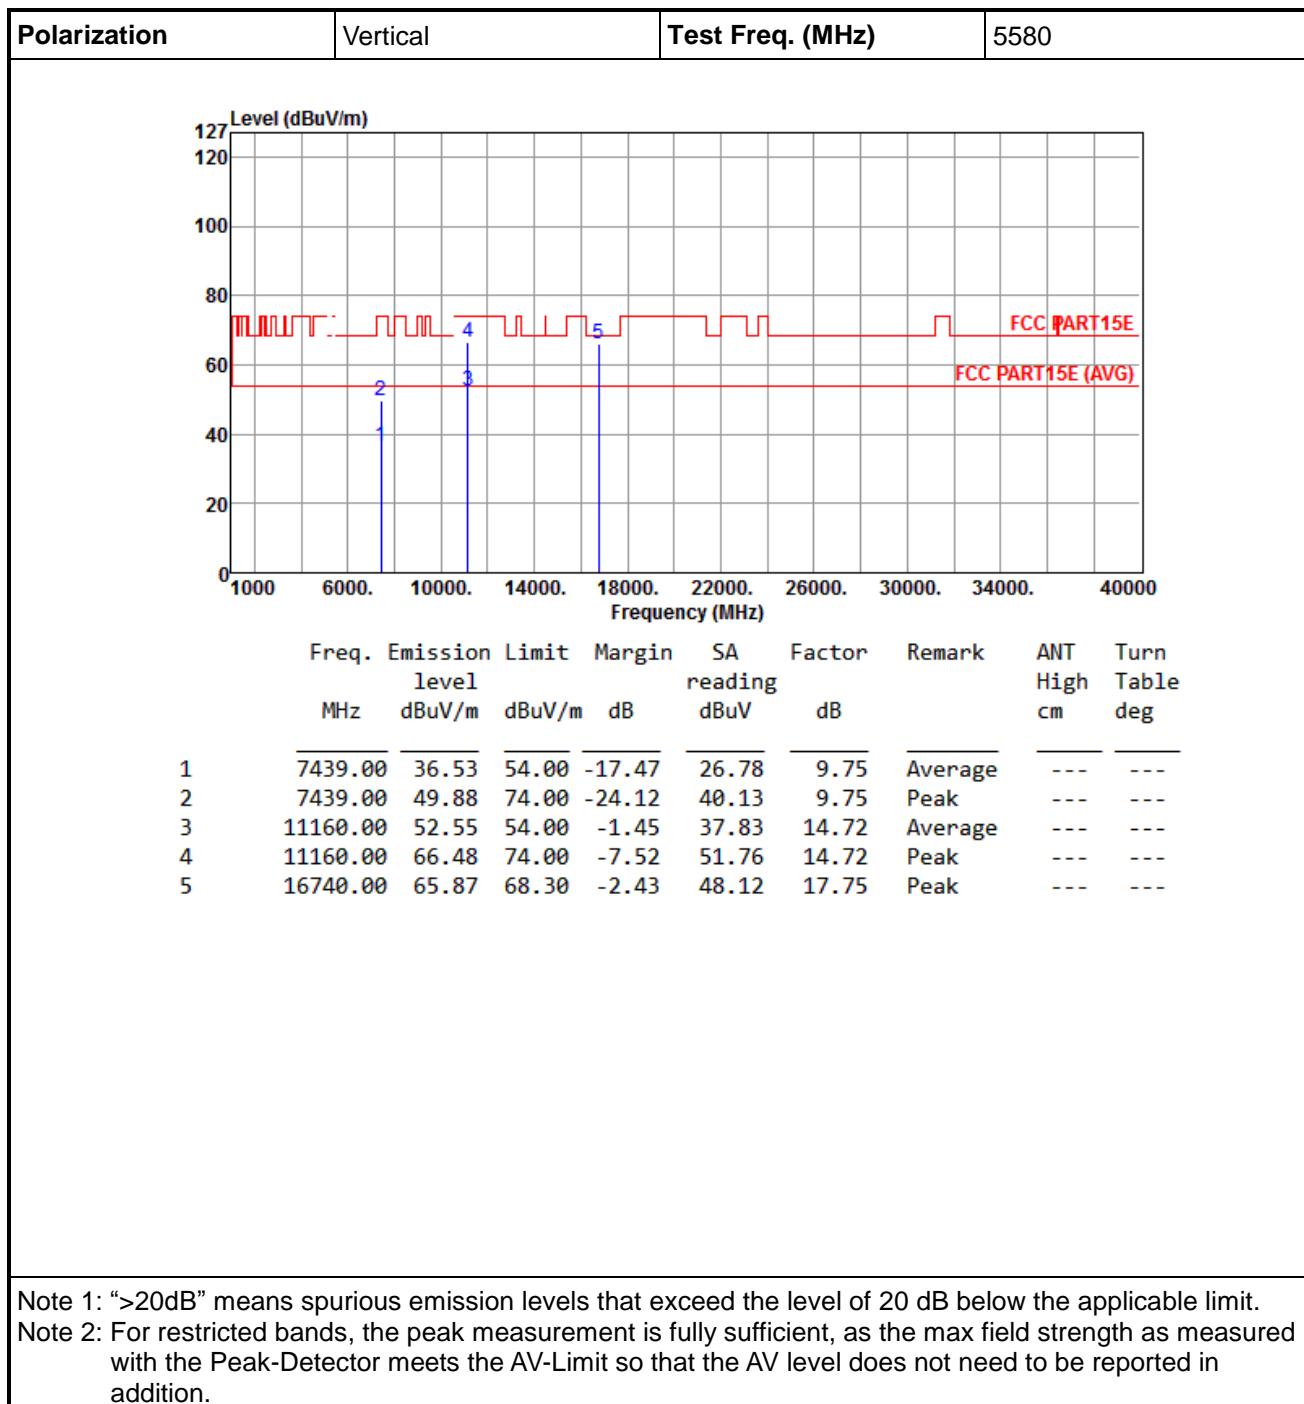




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

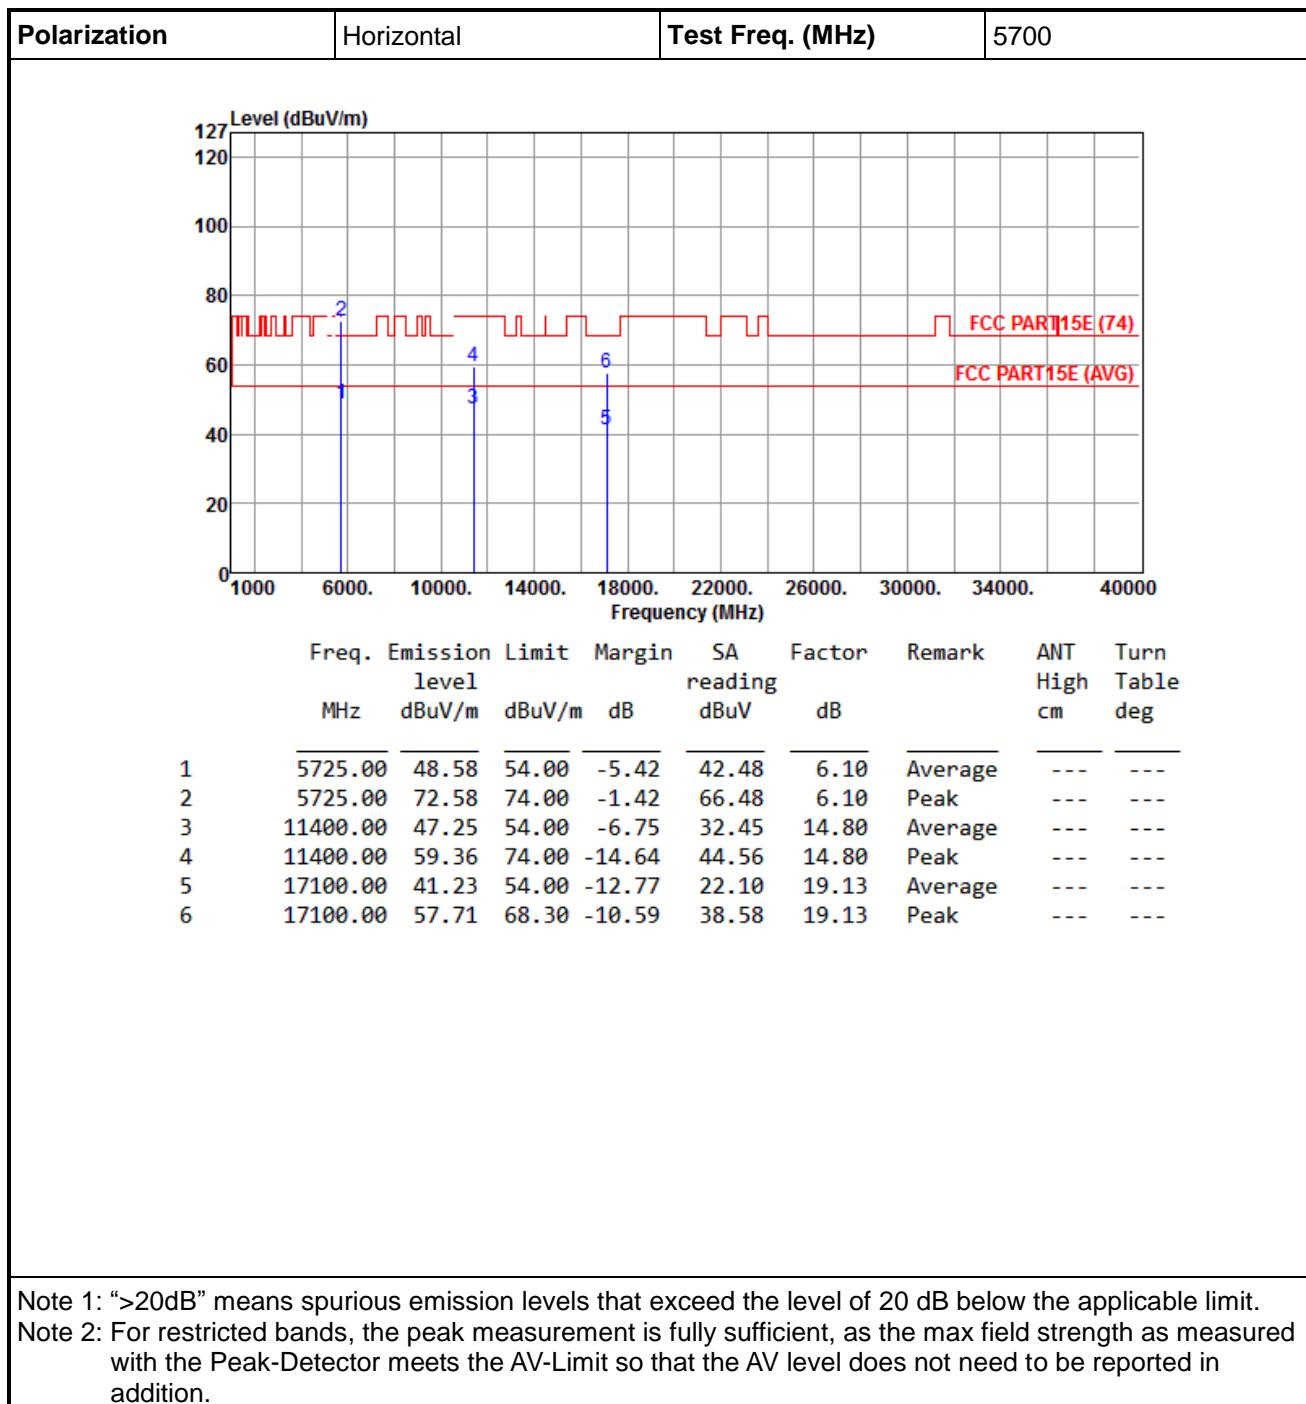




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.


Tel: 886-3-271-8666

Fax: 886-3-318-0155

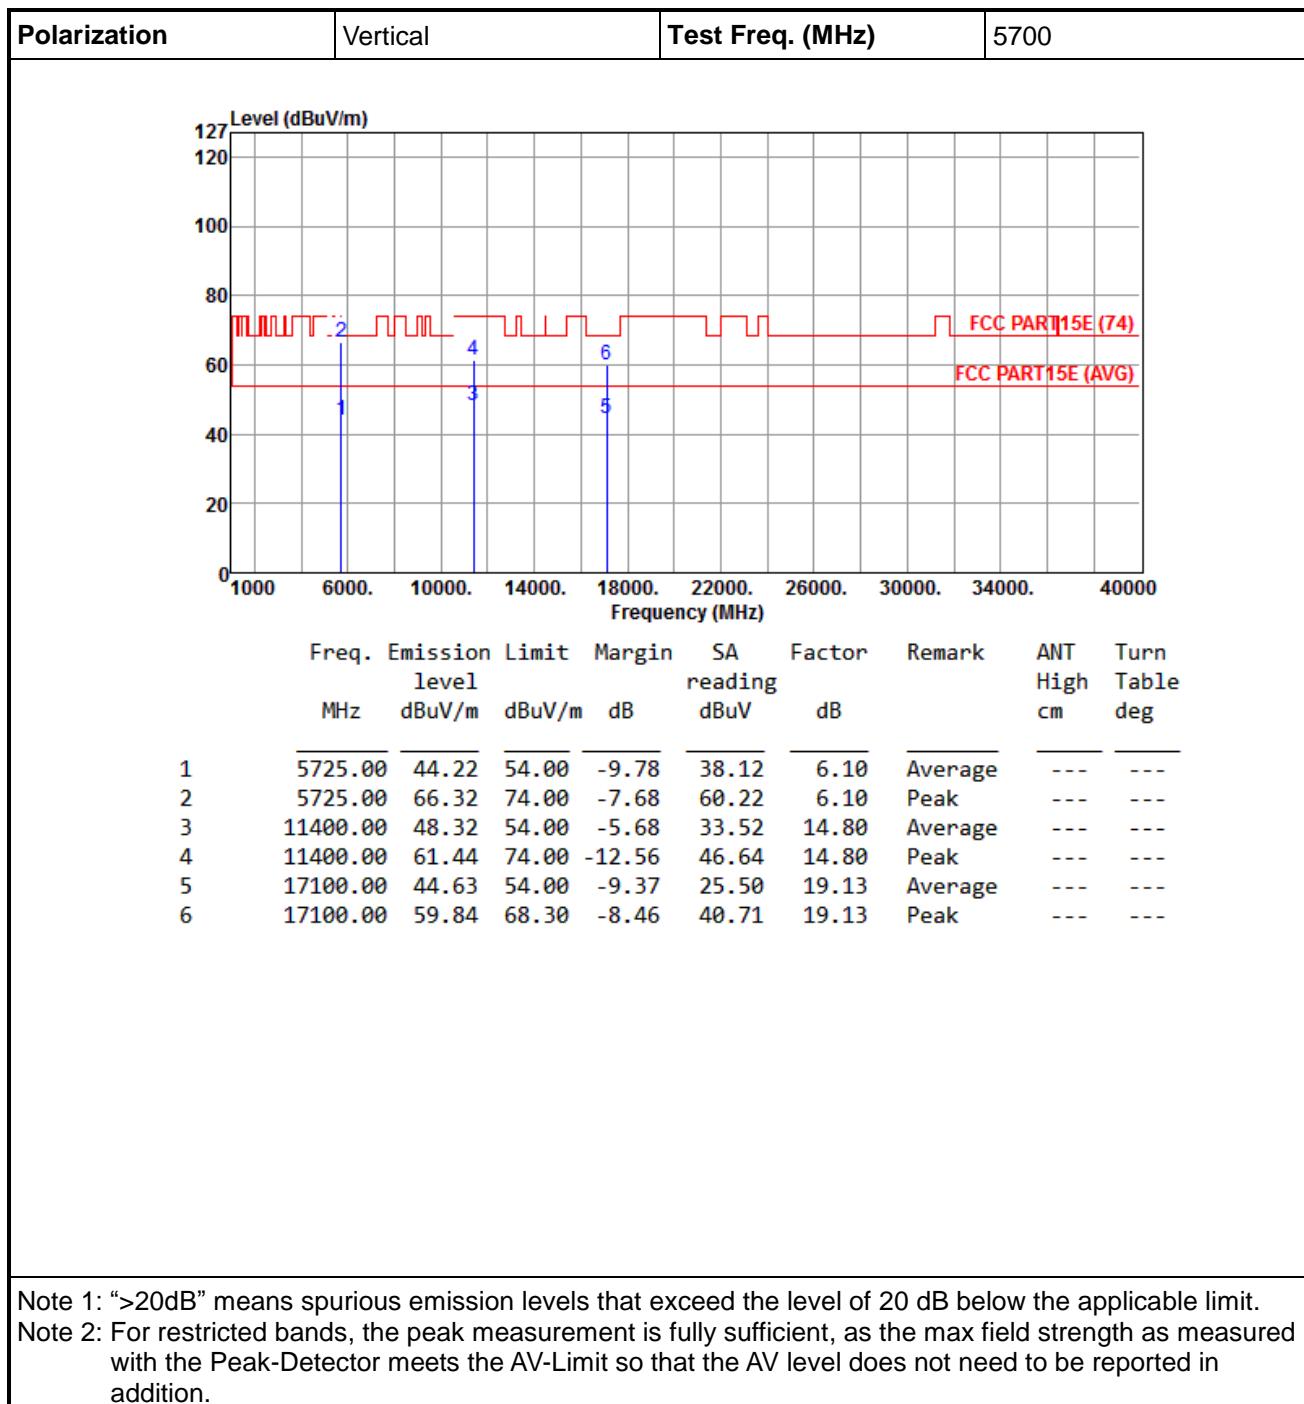



3.6.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

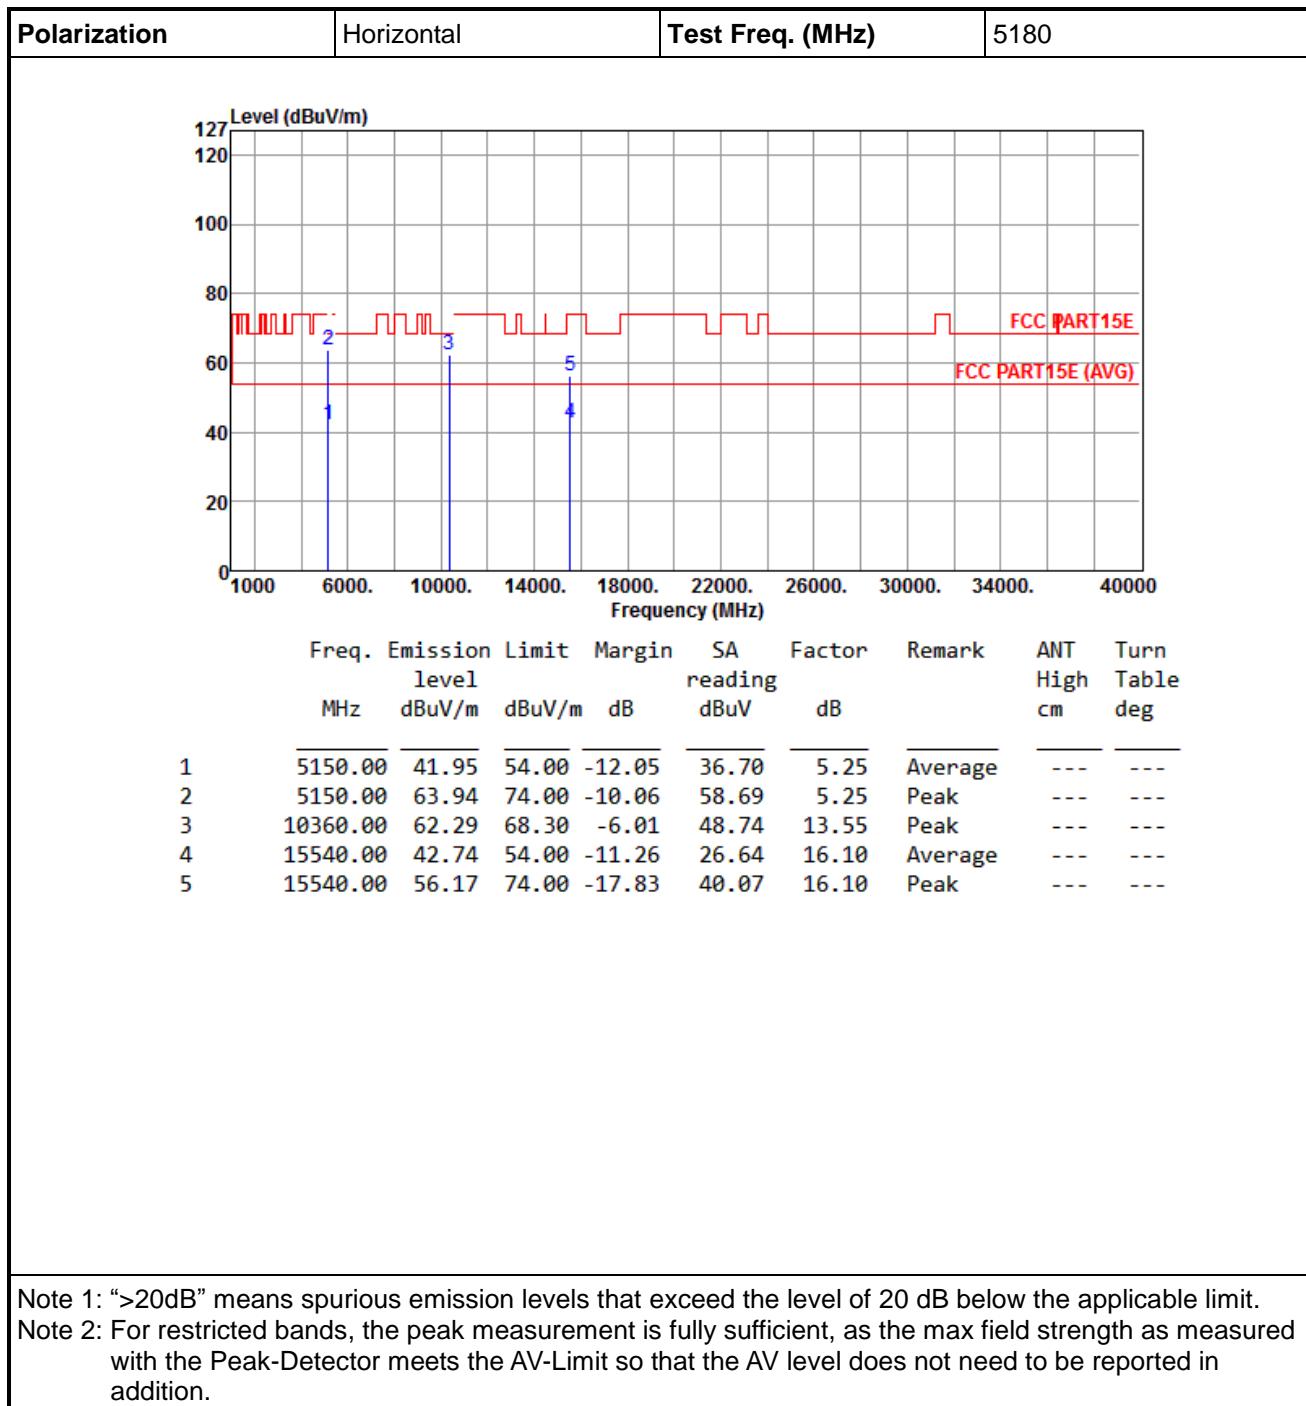




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

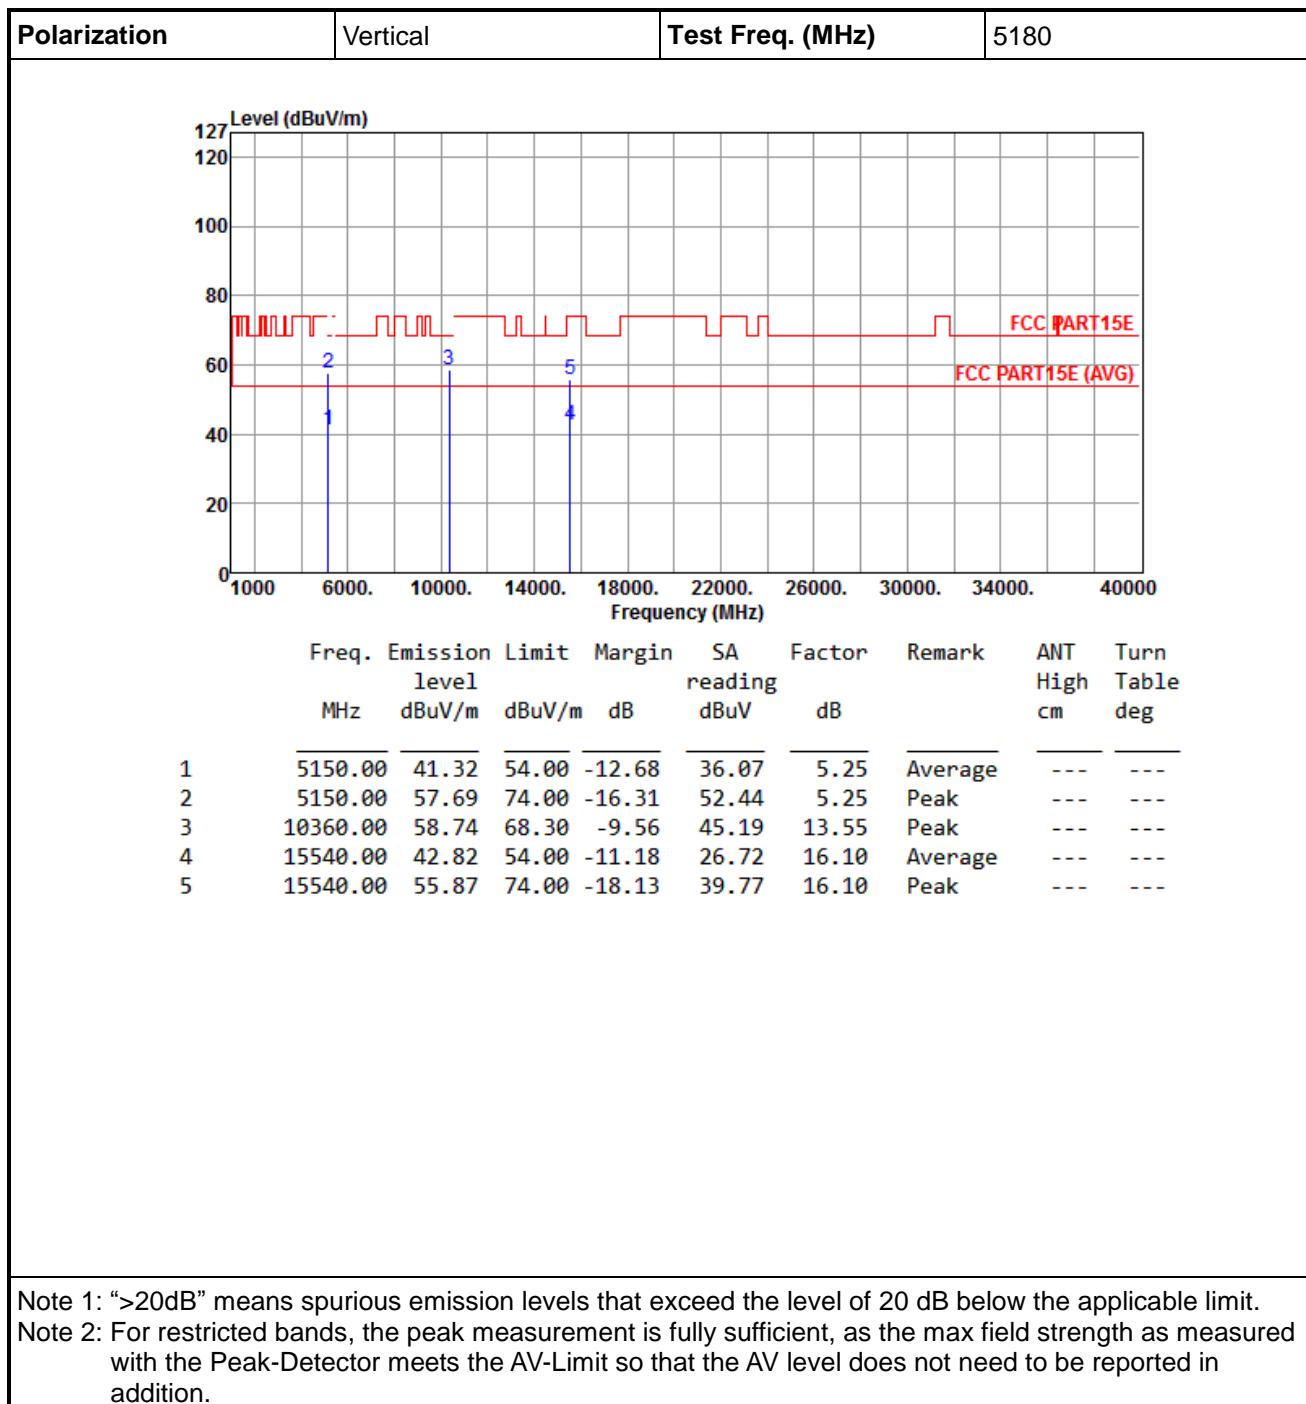




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

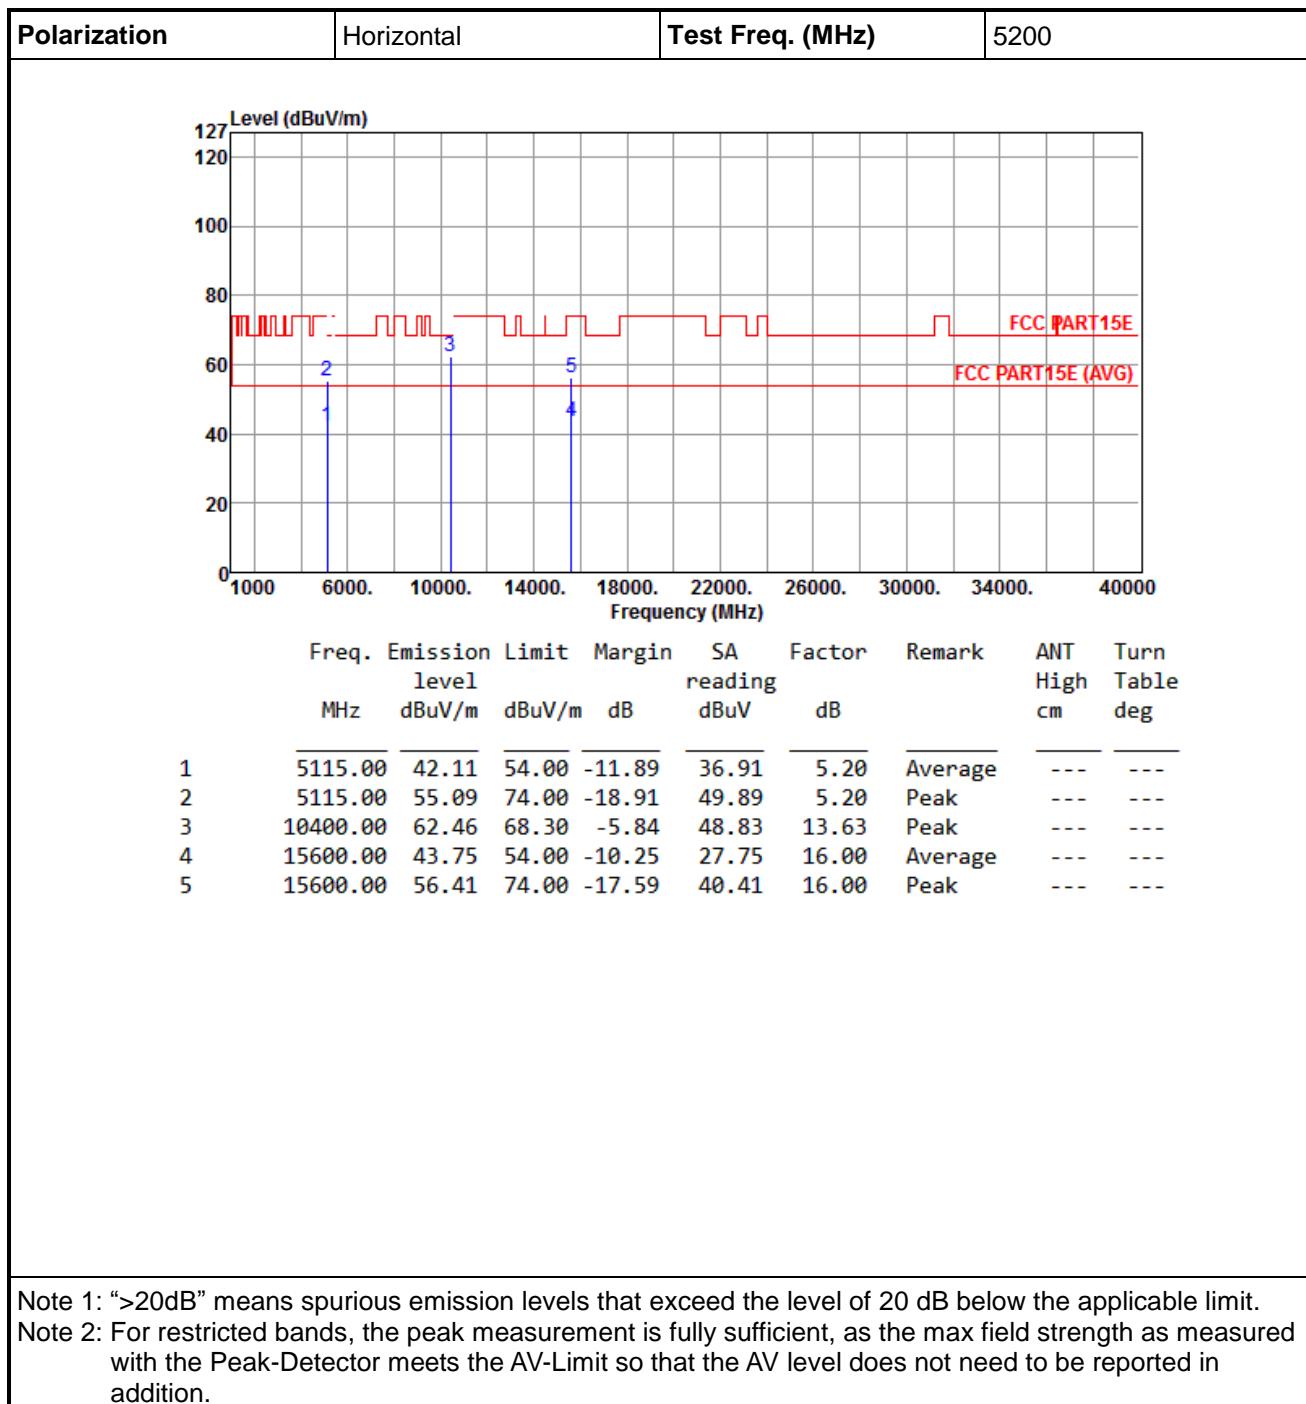




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

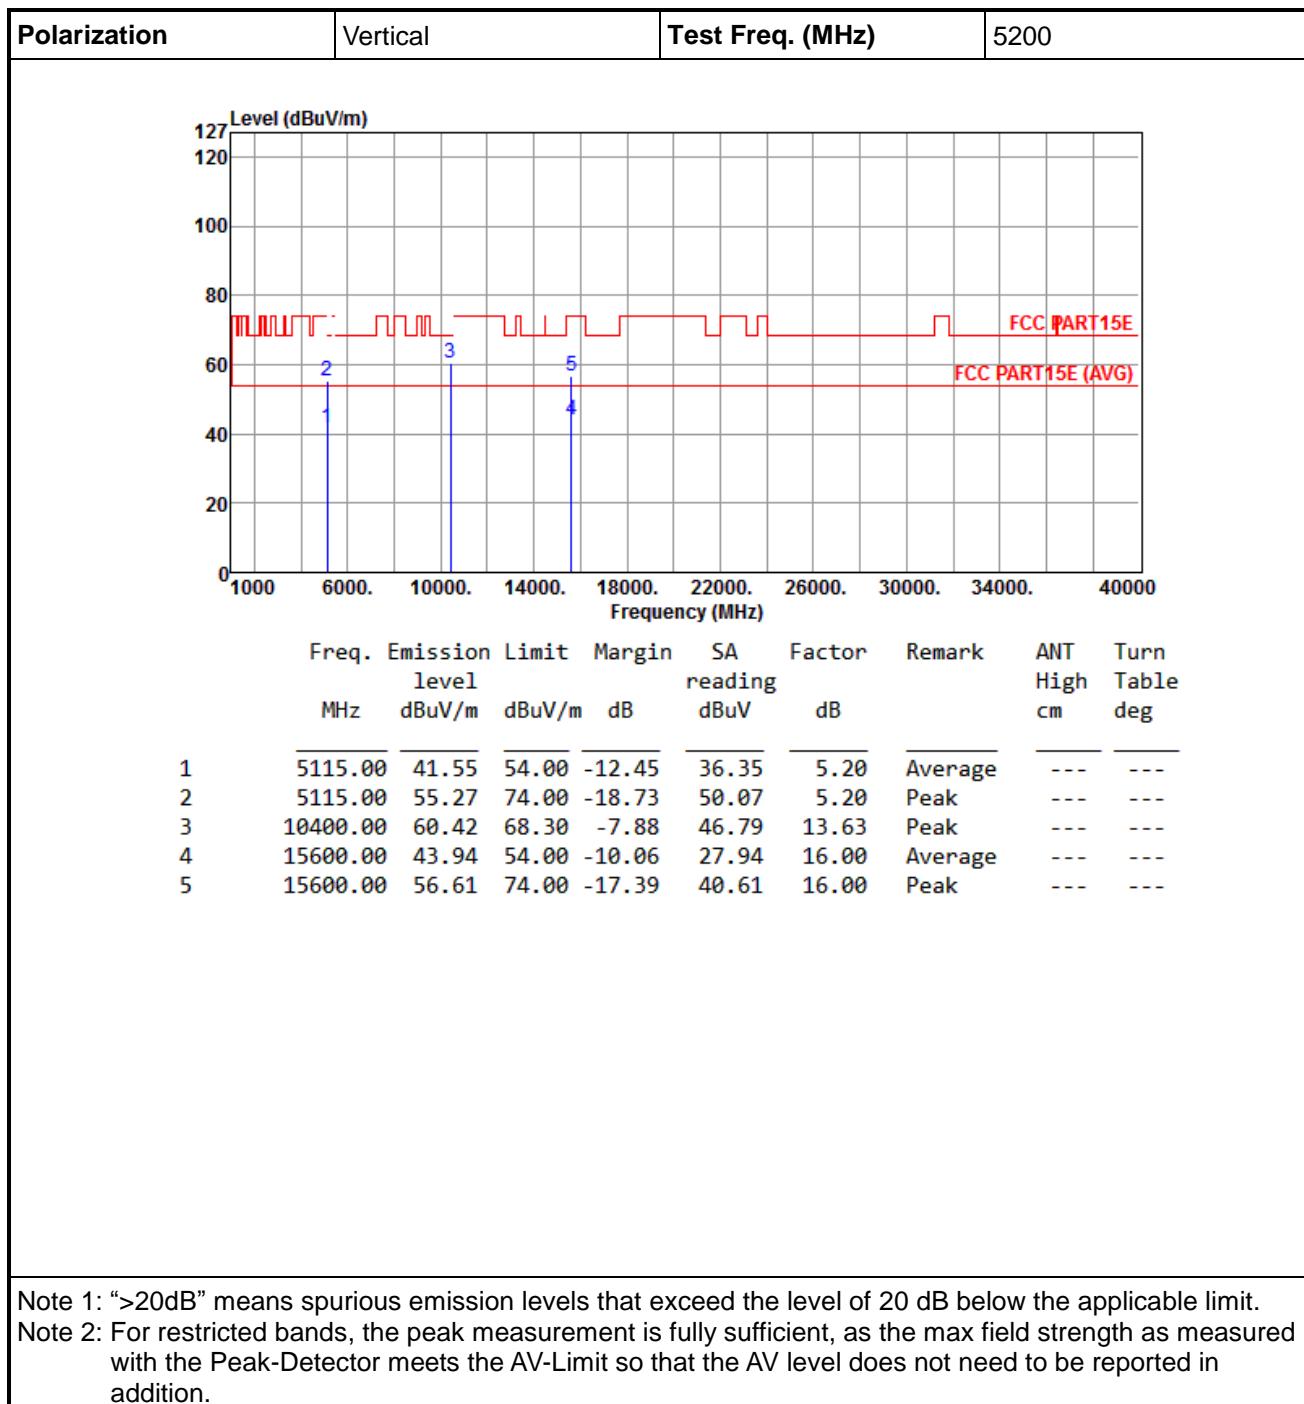





International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

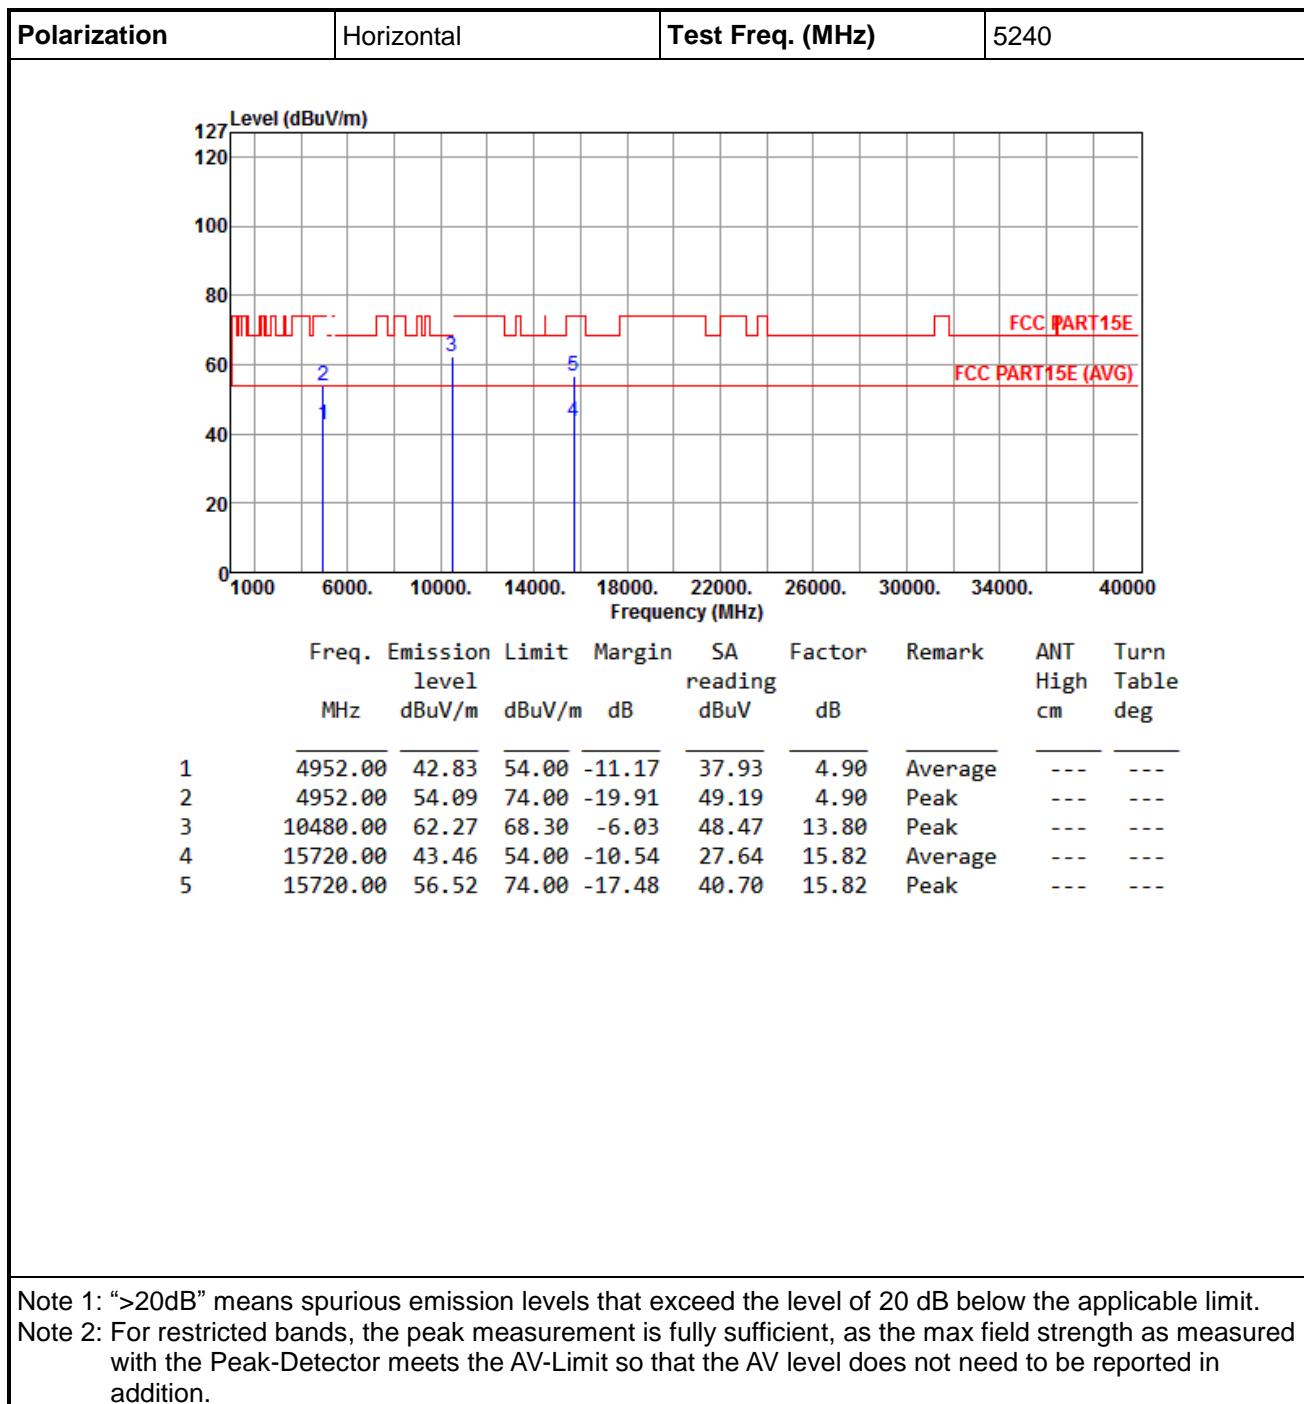

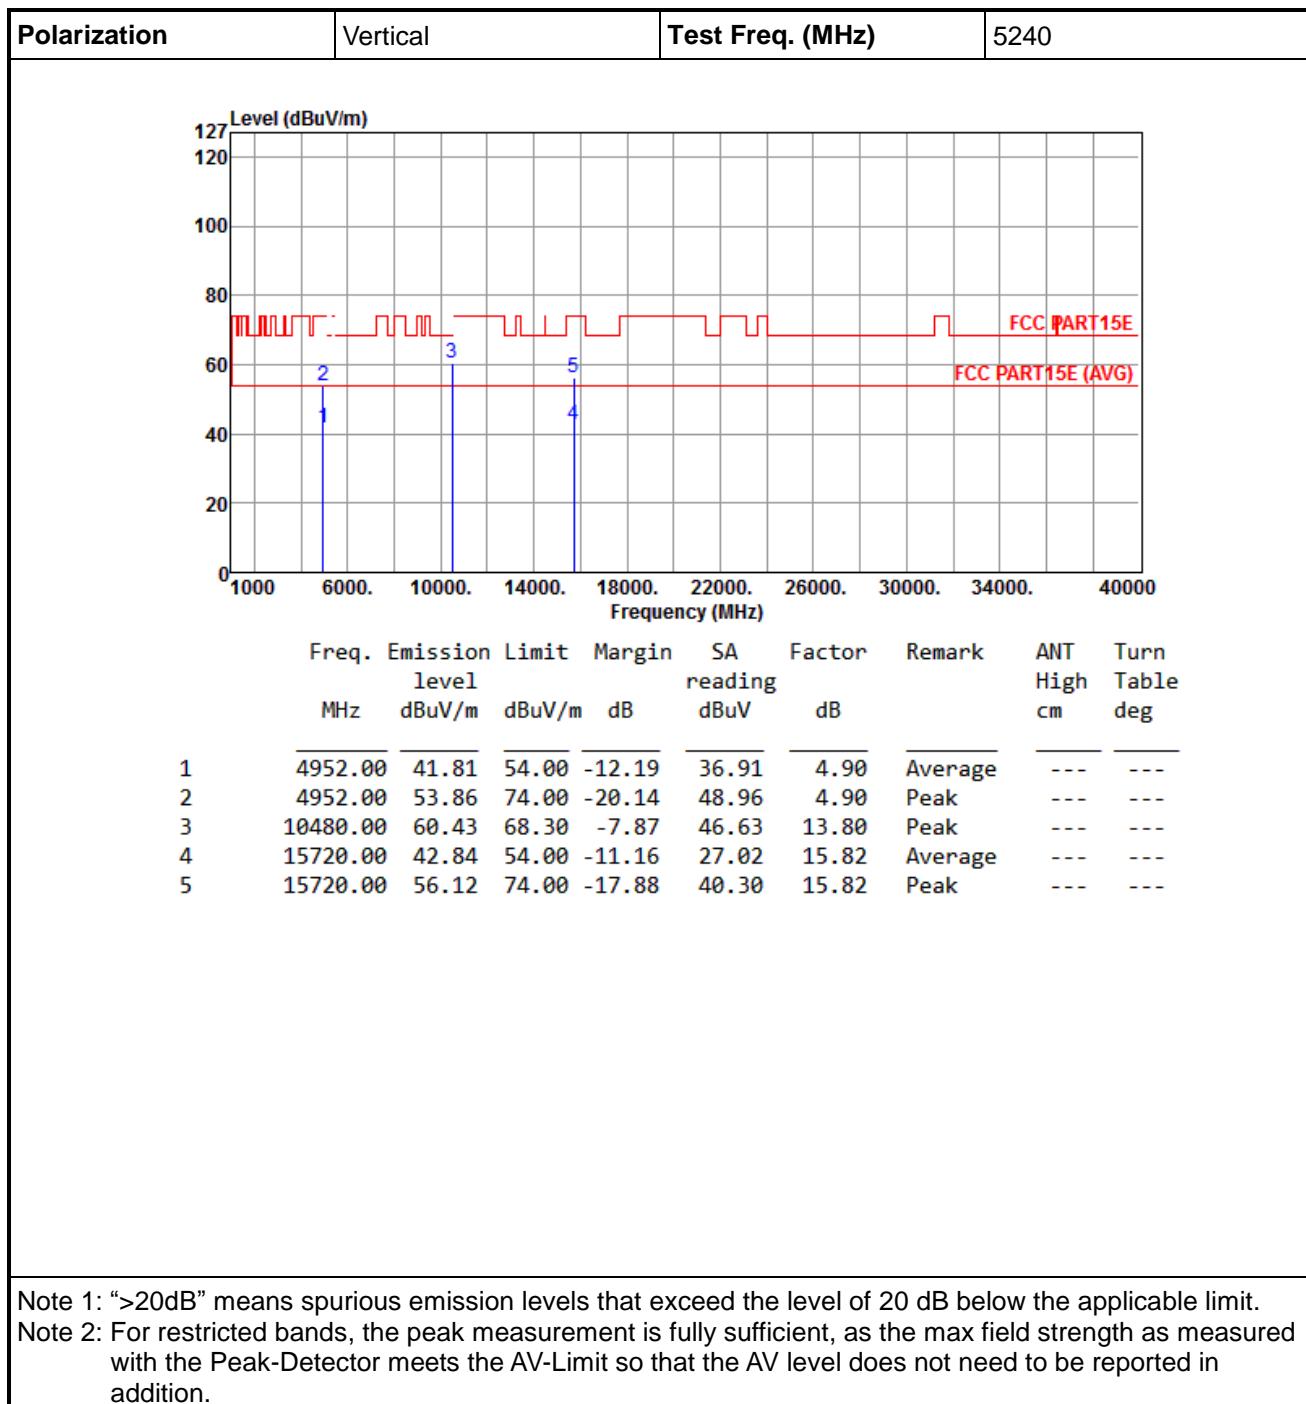




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

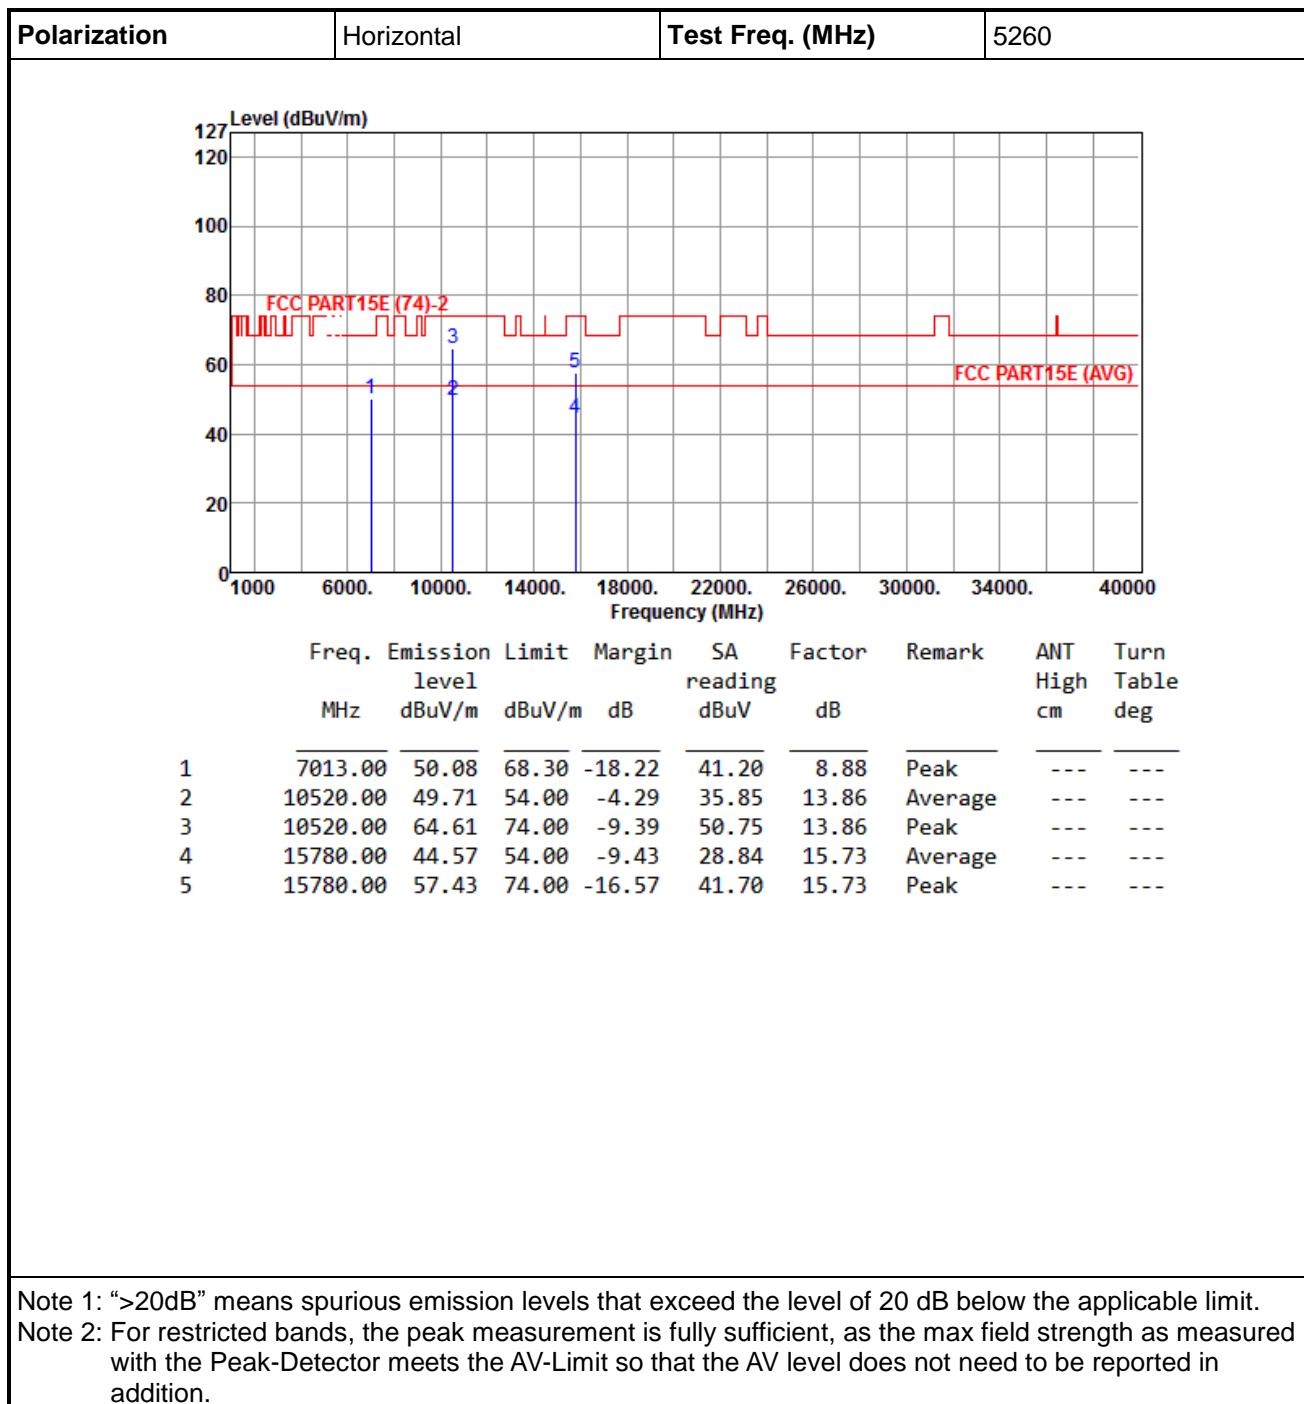




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

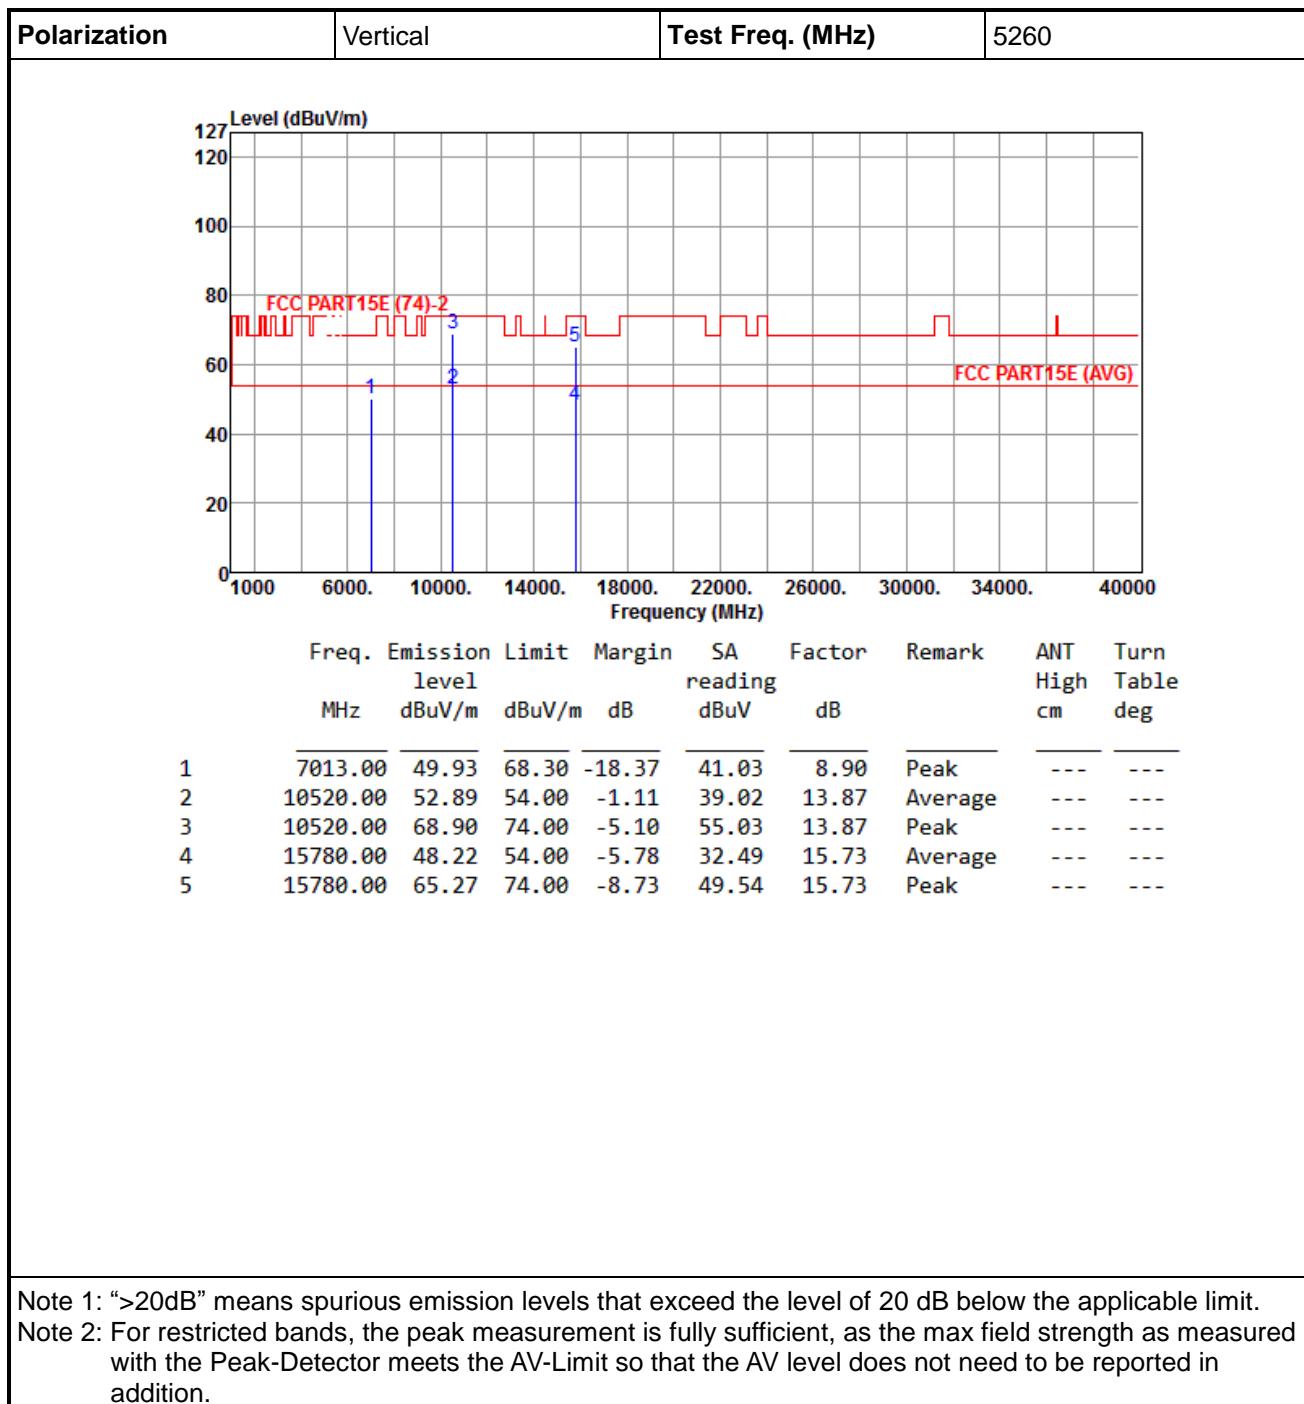





International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

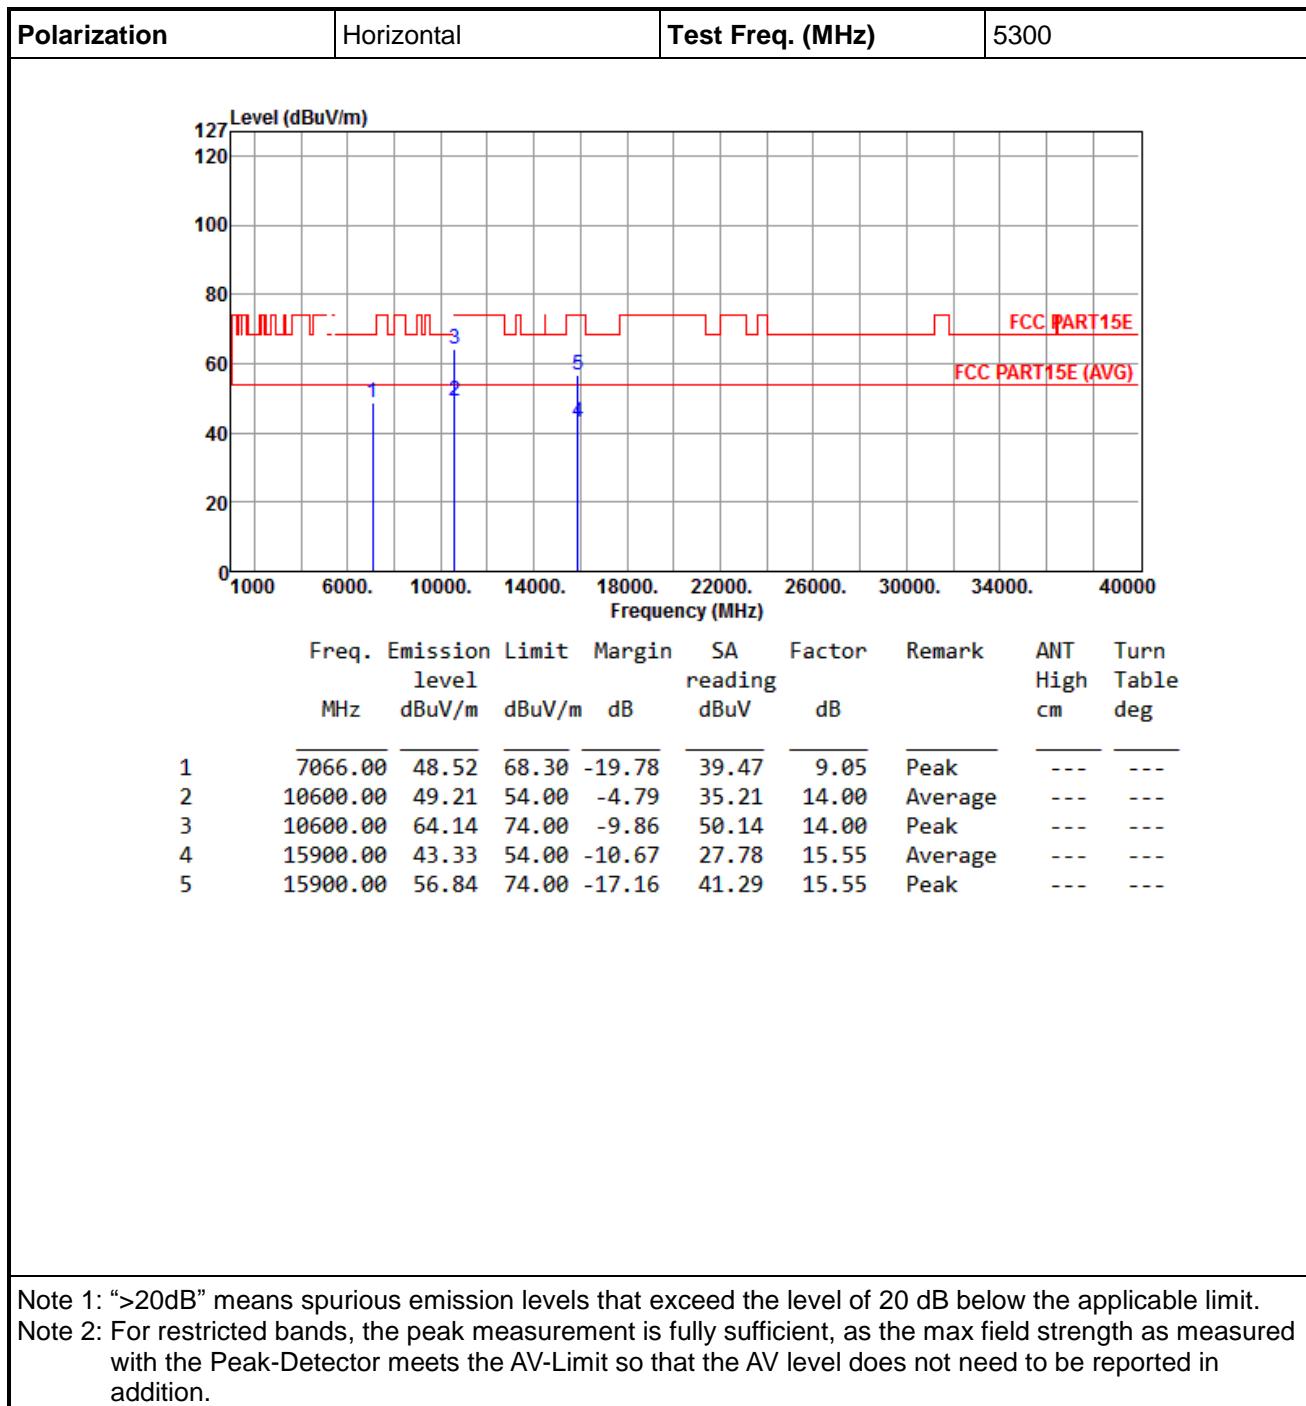

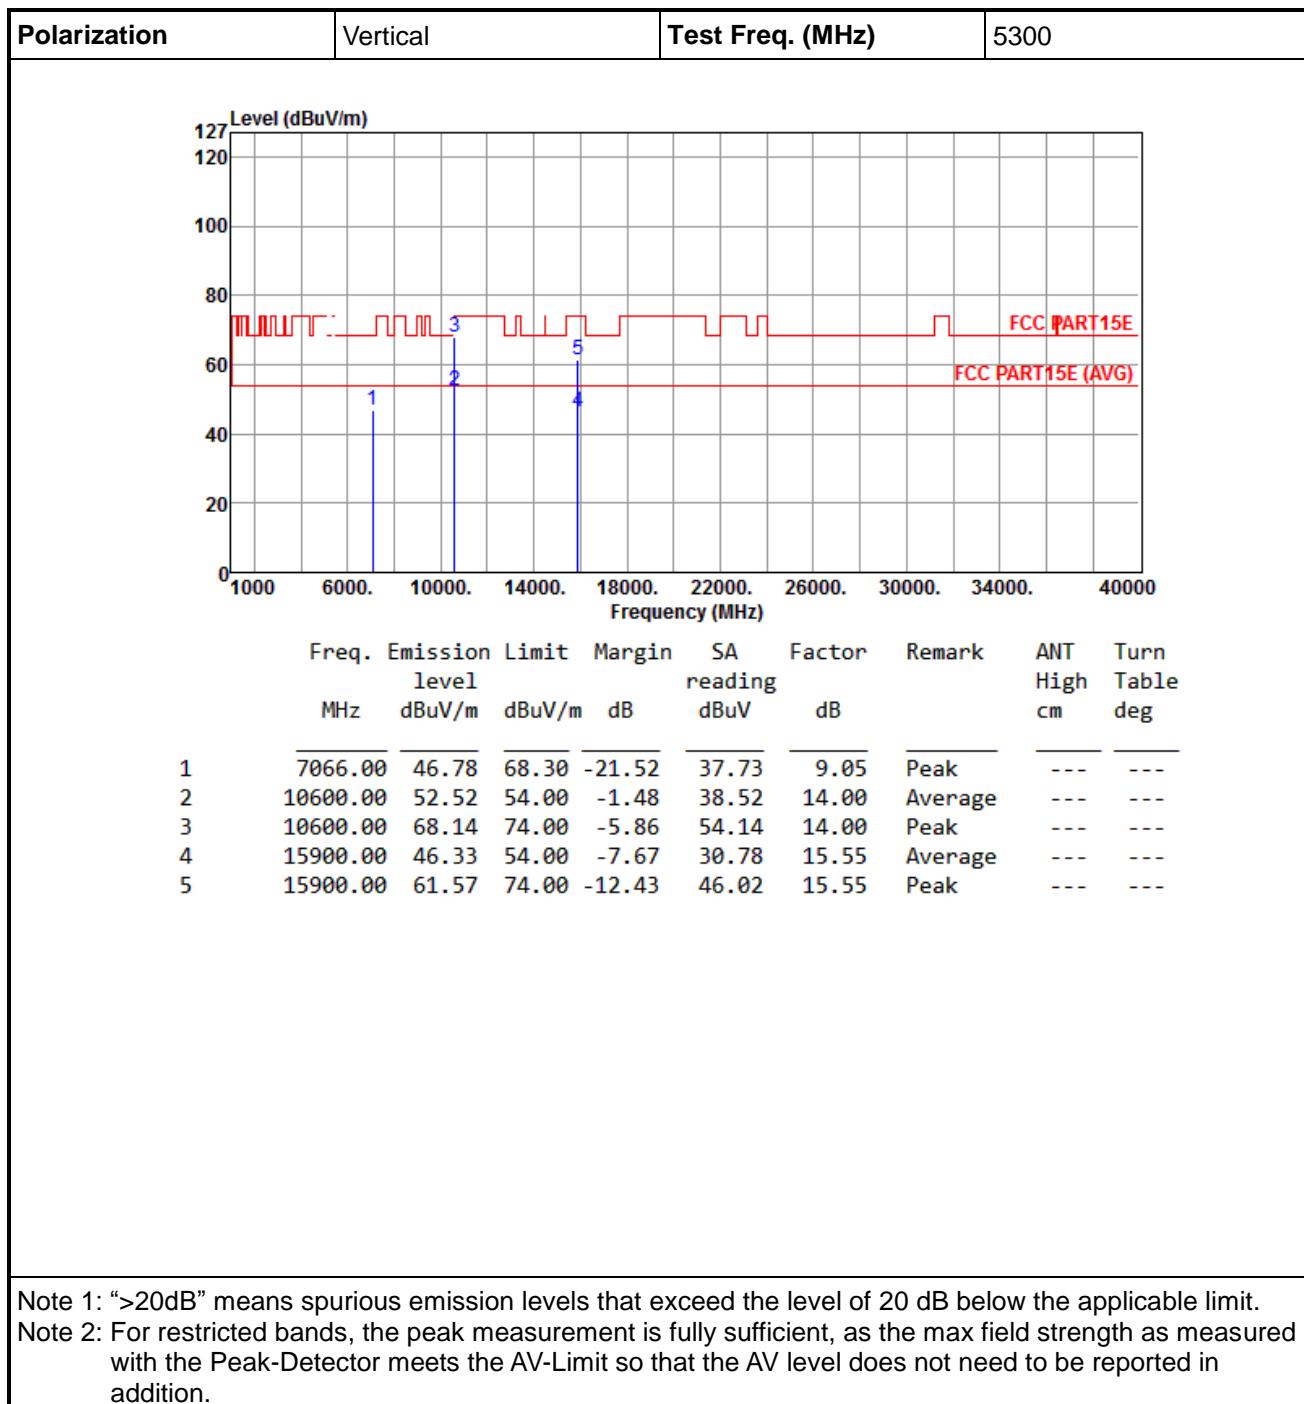




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

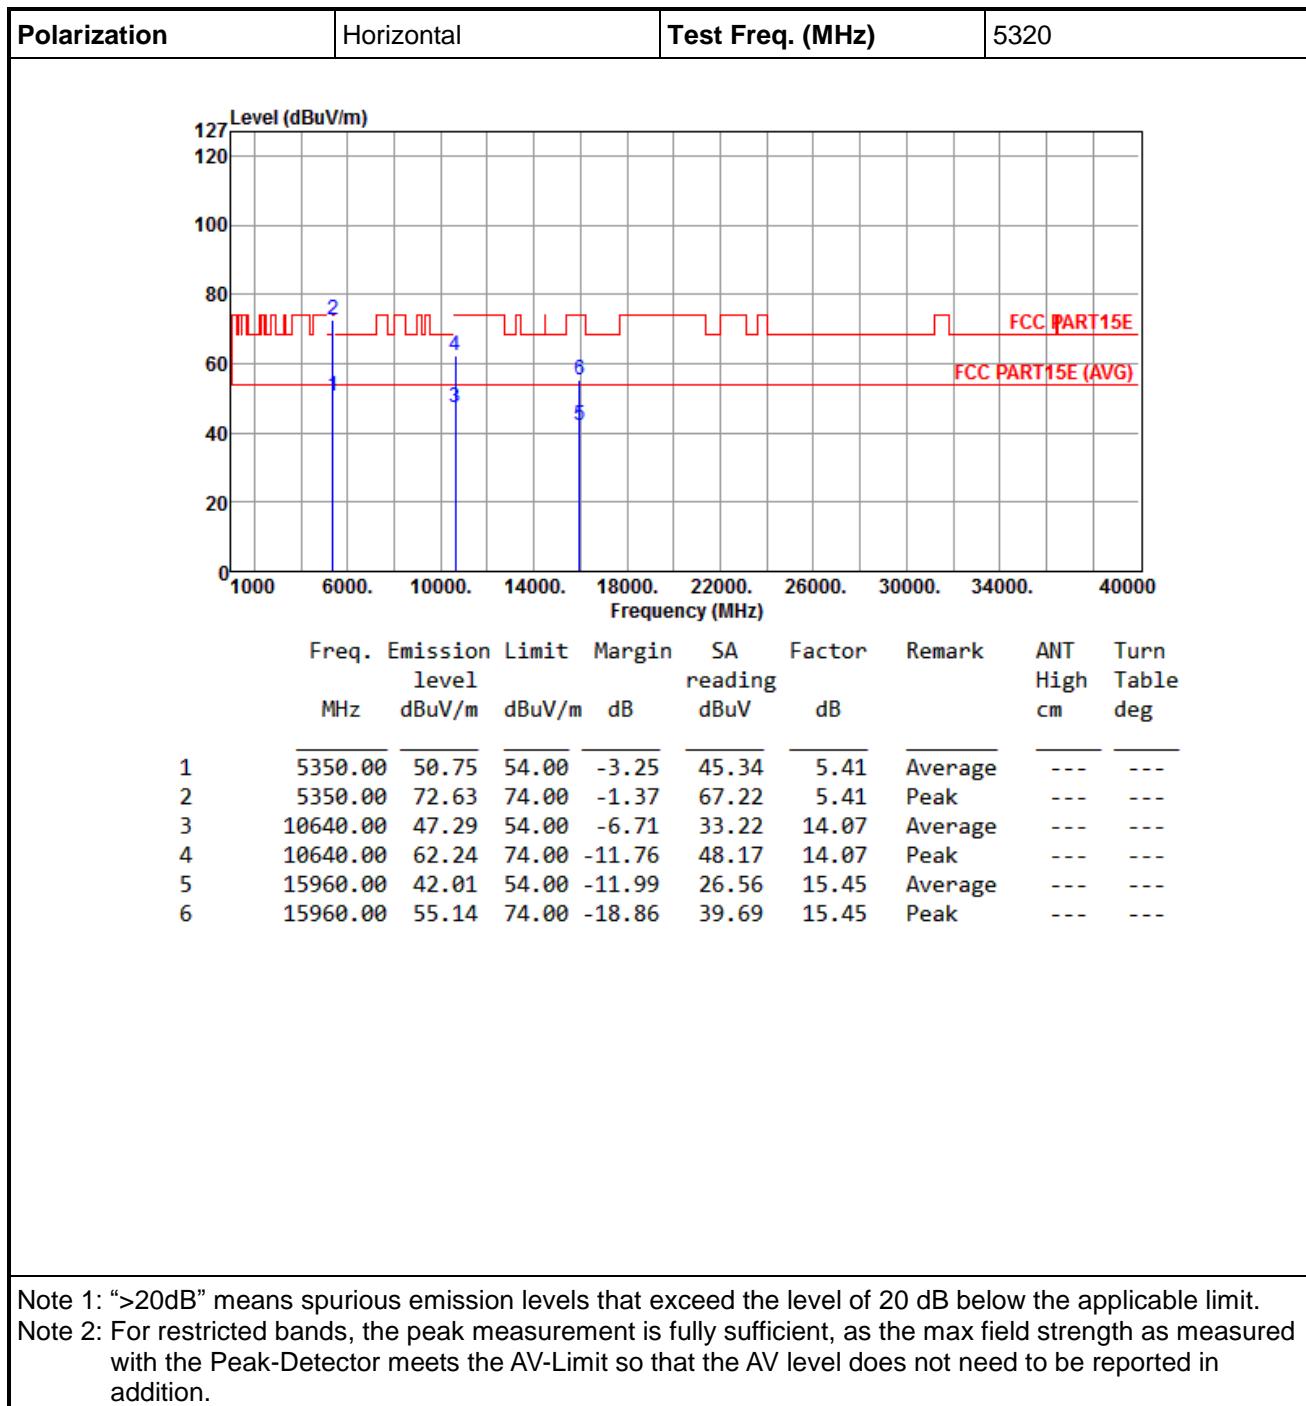





International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

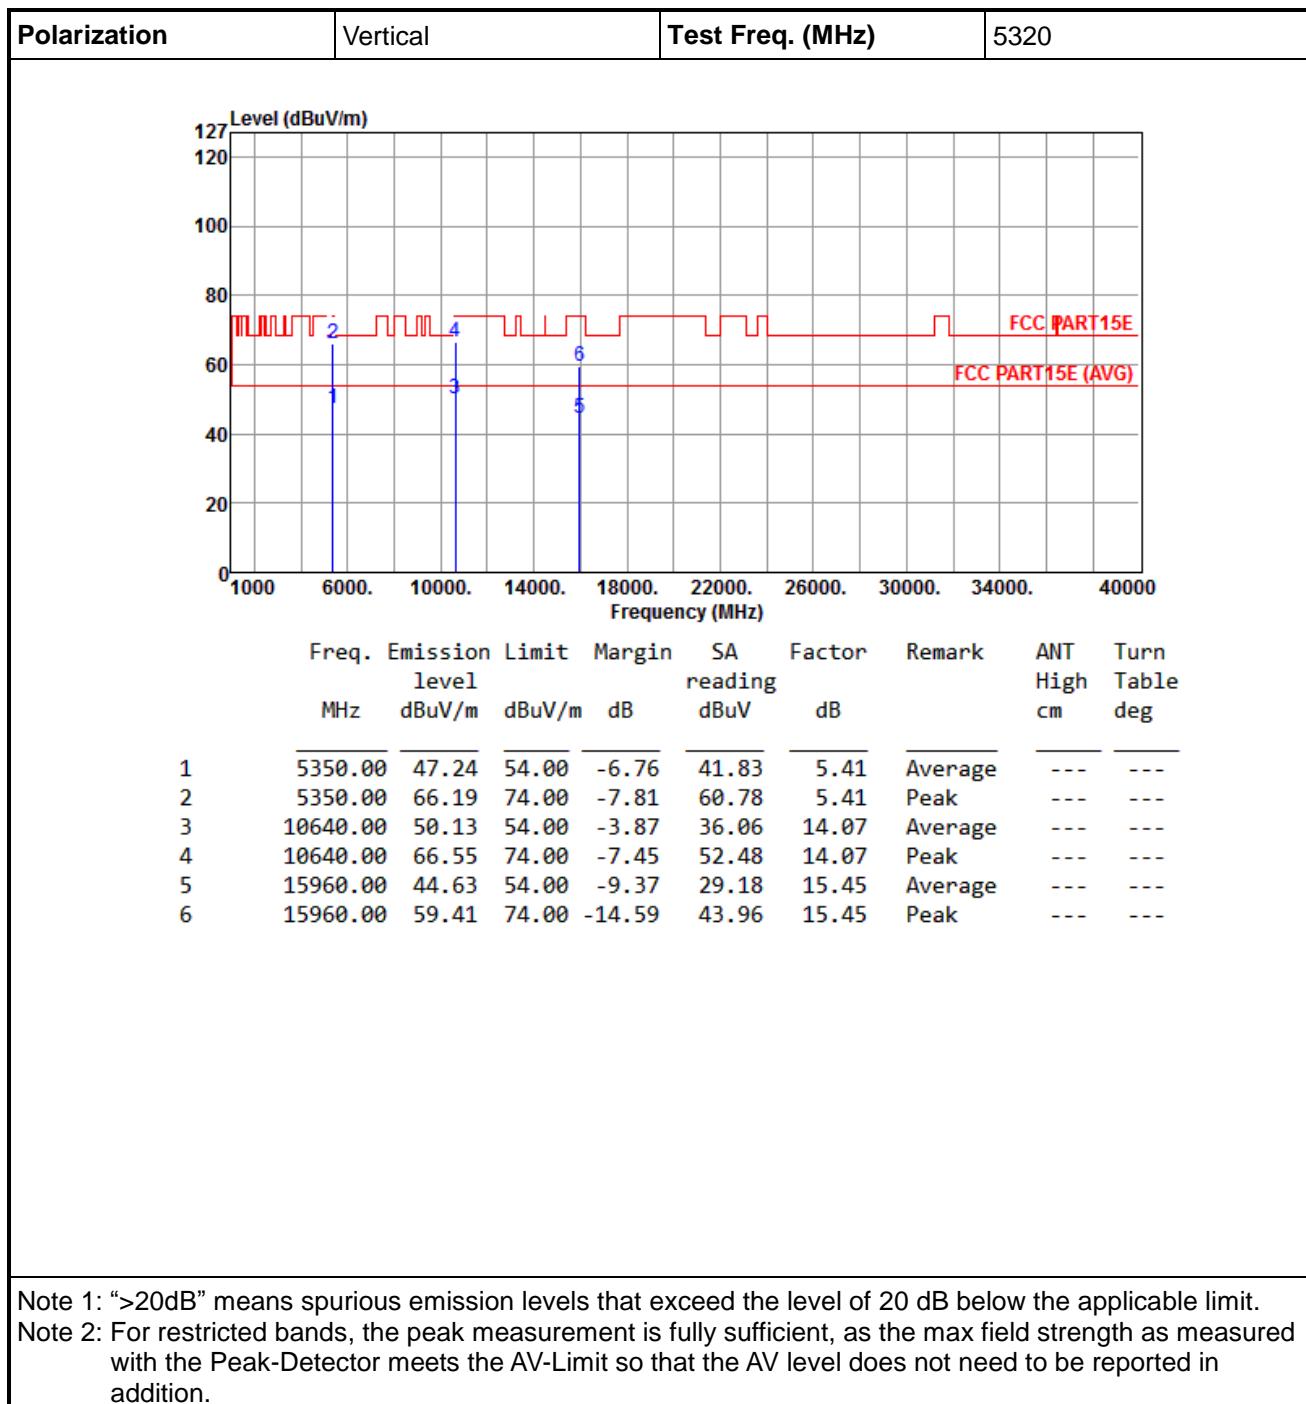

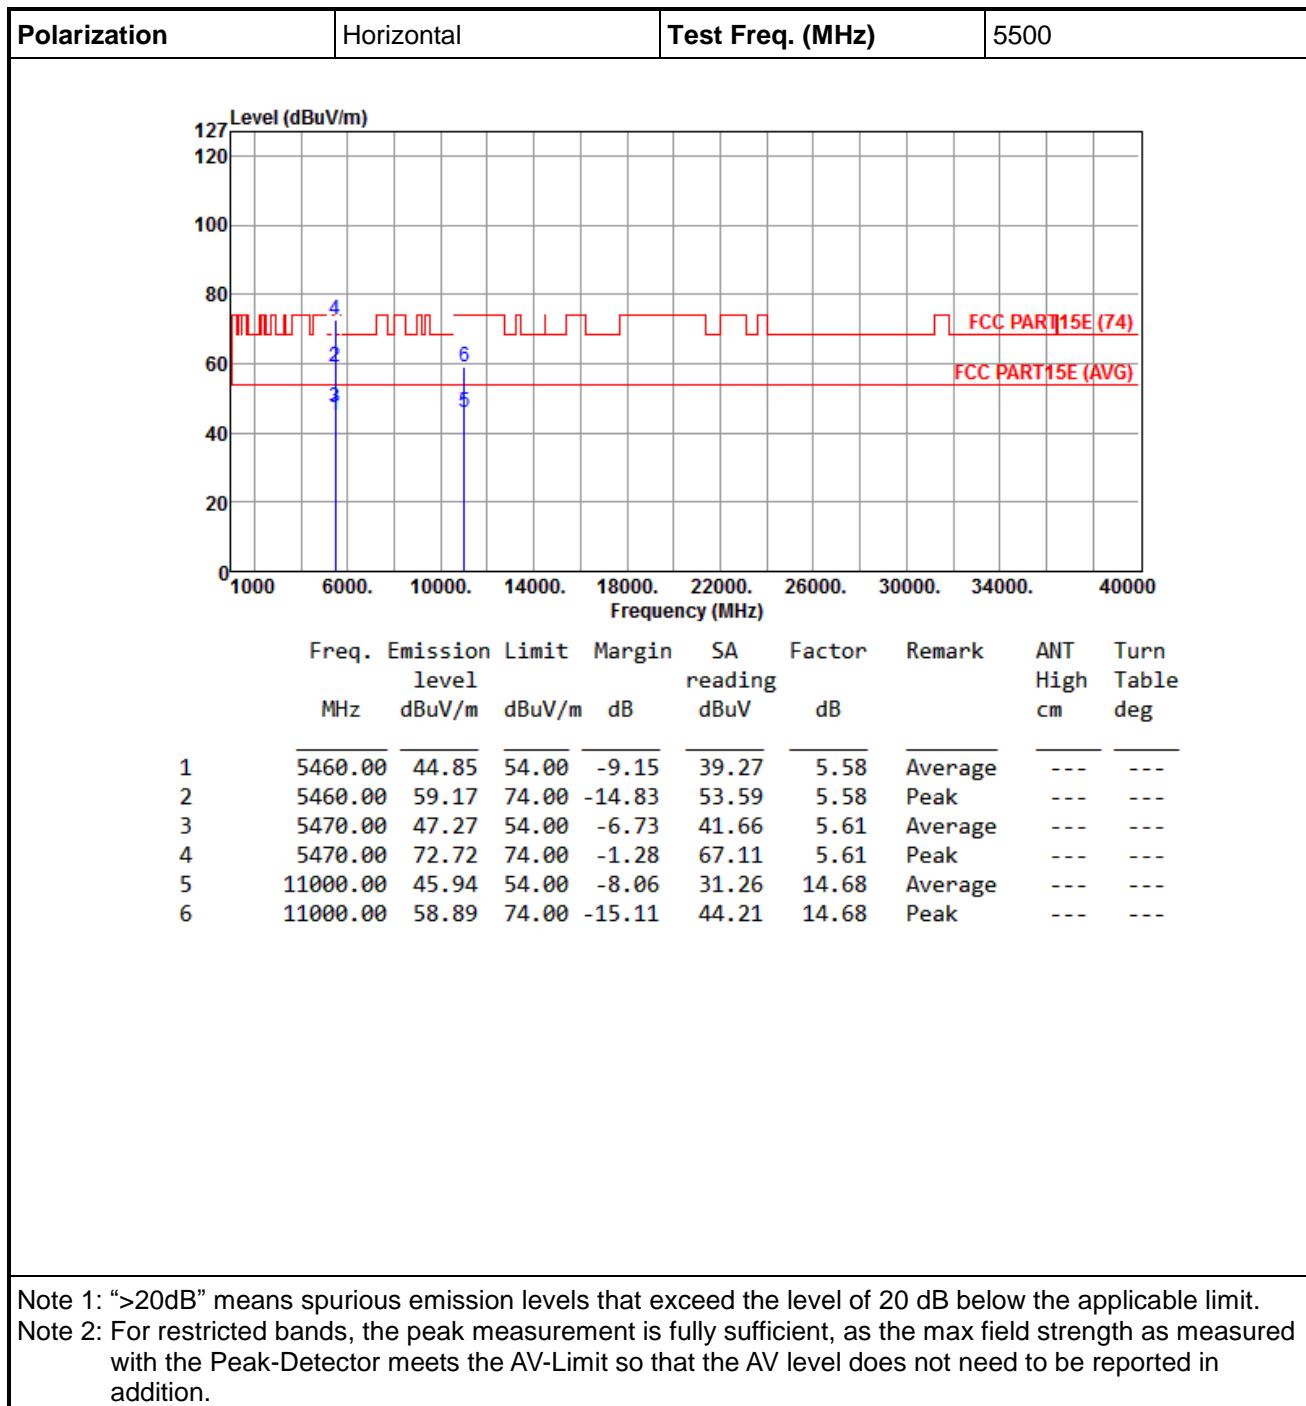

	Freq. MHz	Emission level dBuV/m	Limit level dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	44.85	54.00	-9.15	39.27	5.58	Average	---	---
2	5460.00	59.17	74.00	-14.83	53.59	5.58	Peak	---	---
3	5470.00	47.27	54.00	-6.73	41.66	5.61	Average	---	---
4	5470.00	72.72	74.00	-1.28	67.11	5.61	Peak	---	---
5	11000.00	45.94	54.00	-8.06	31.26	14.68	Average	---	---
6	11000.00	58.89	74.00	-15.11	44.21	14.68	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

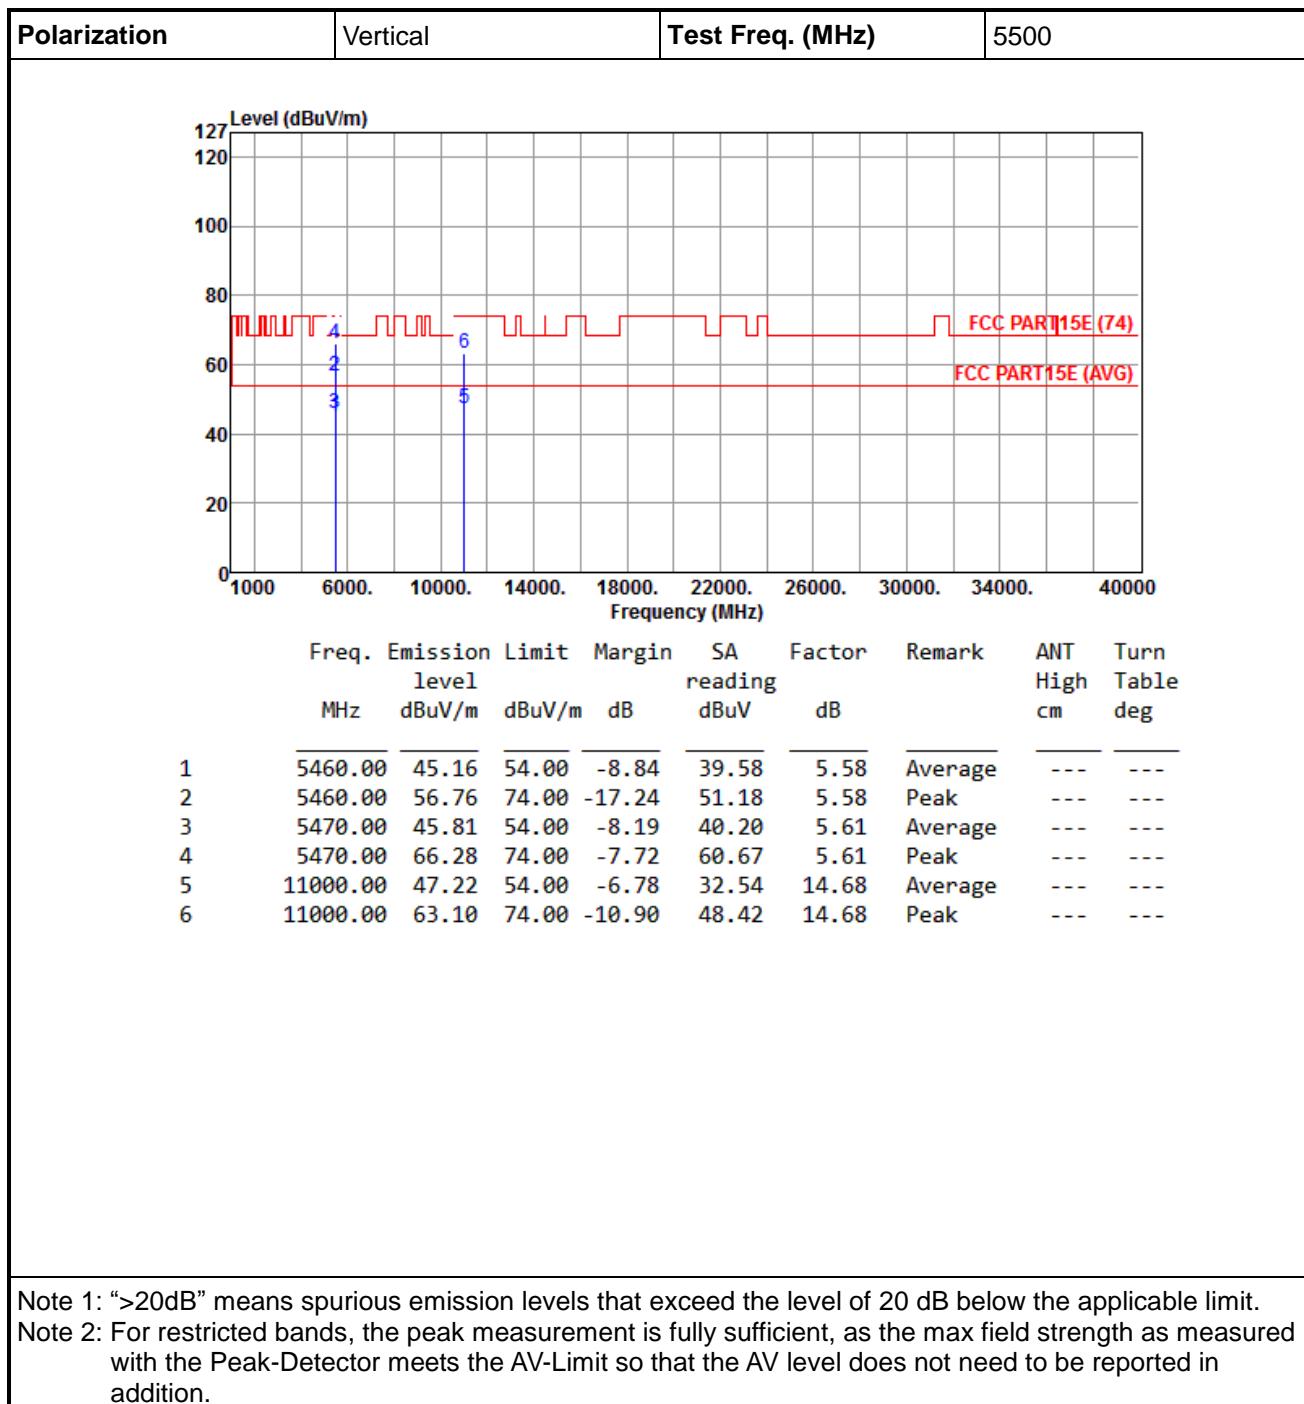




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

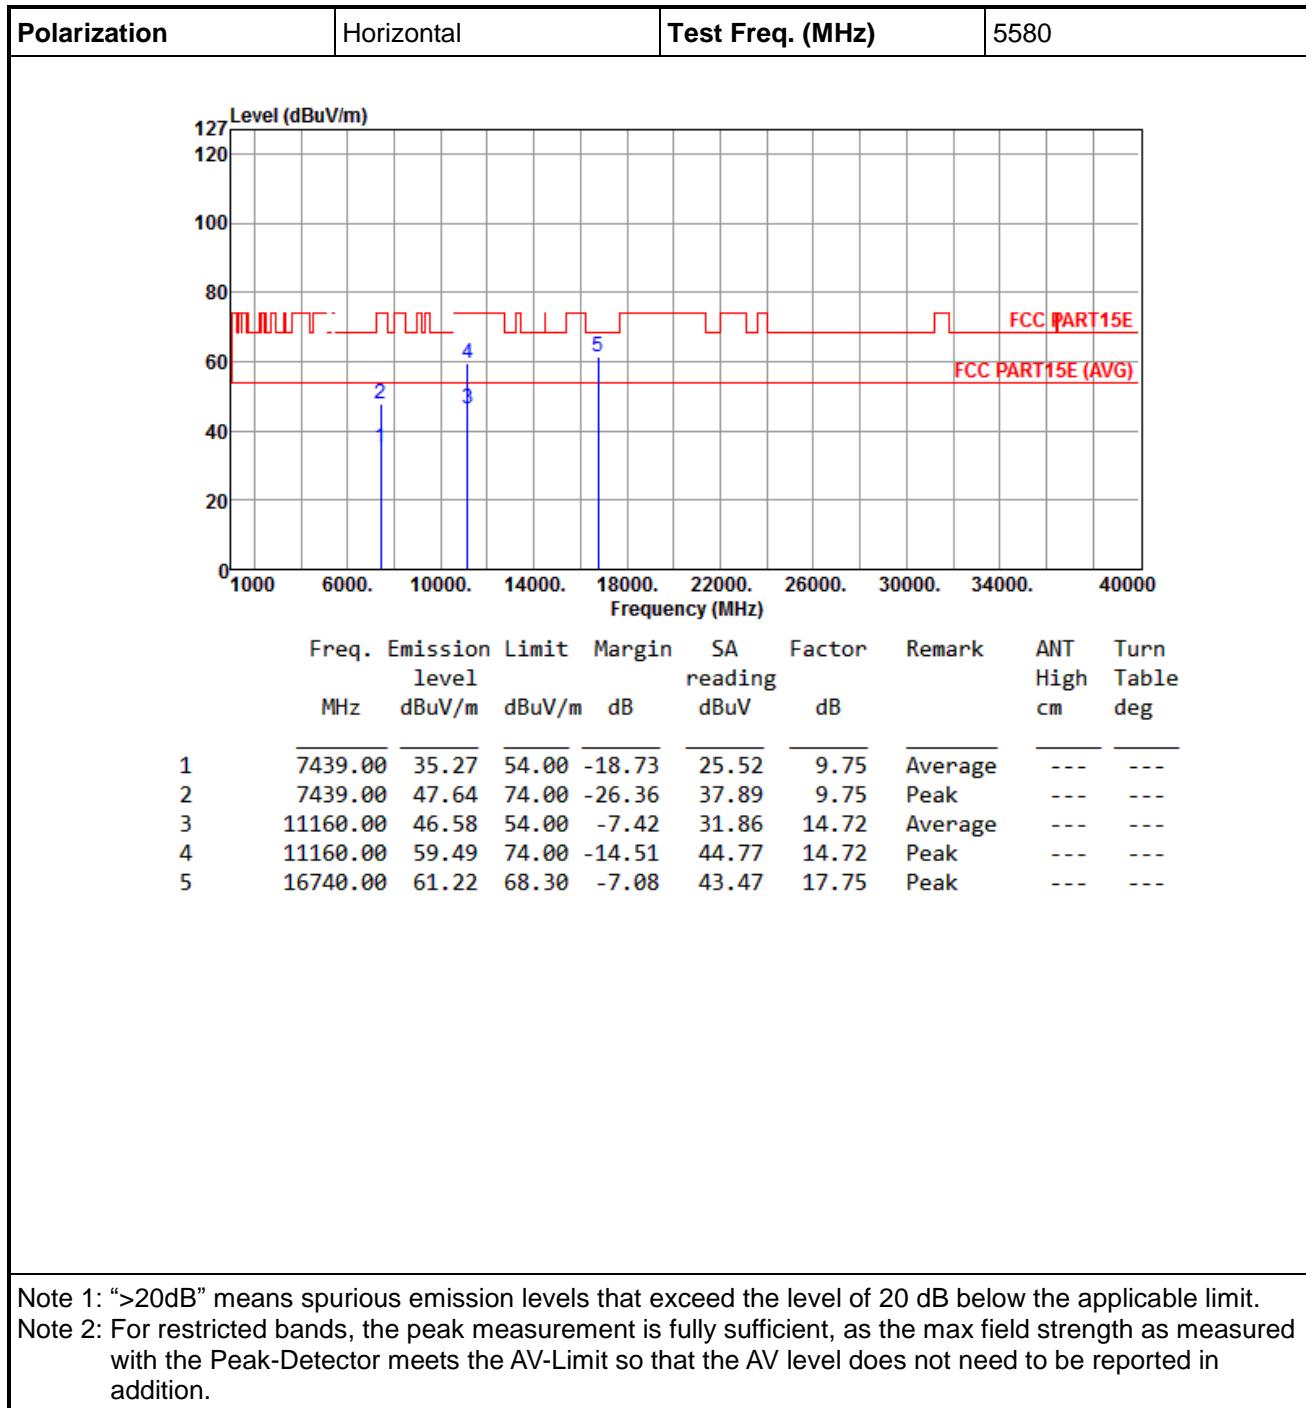





International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

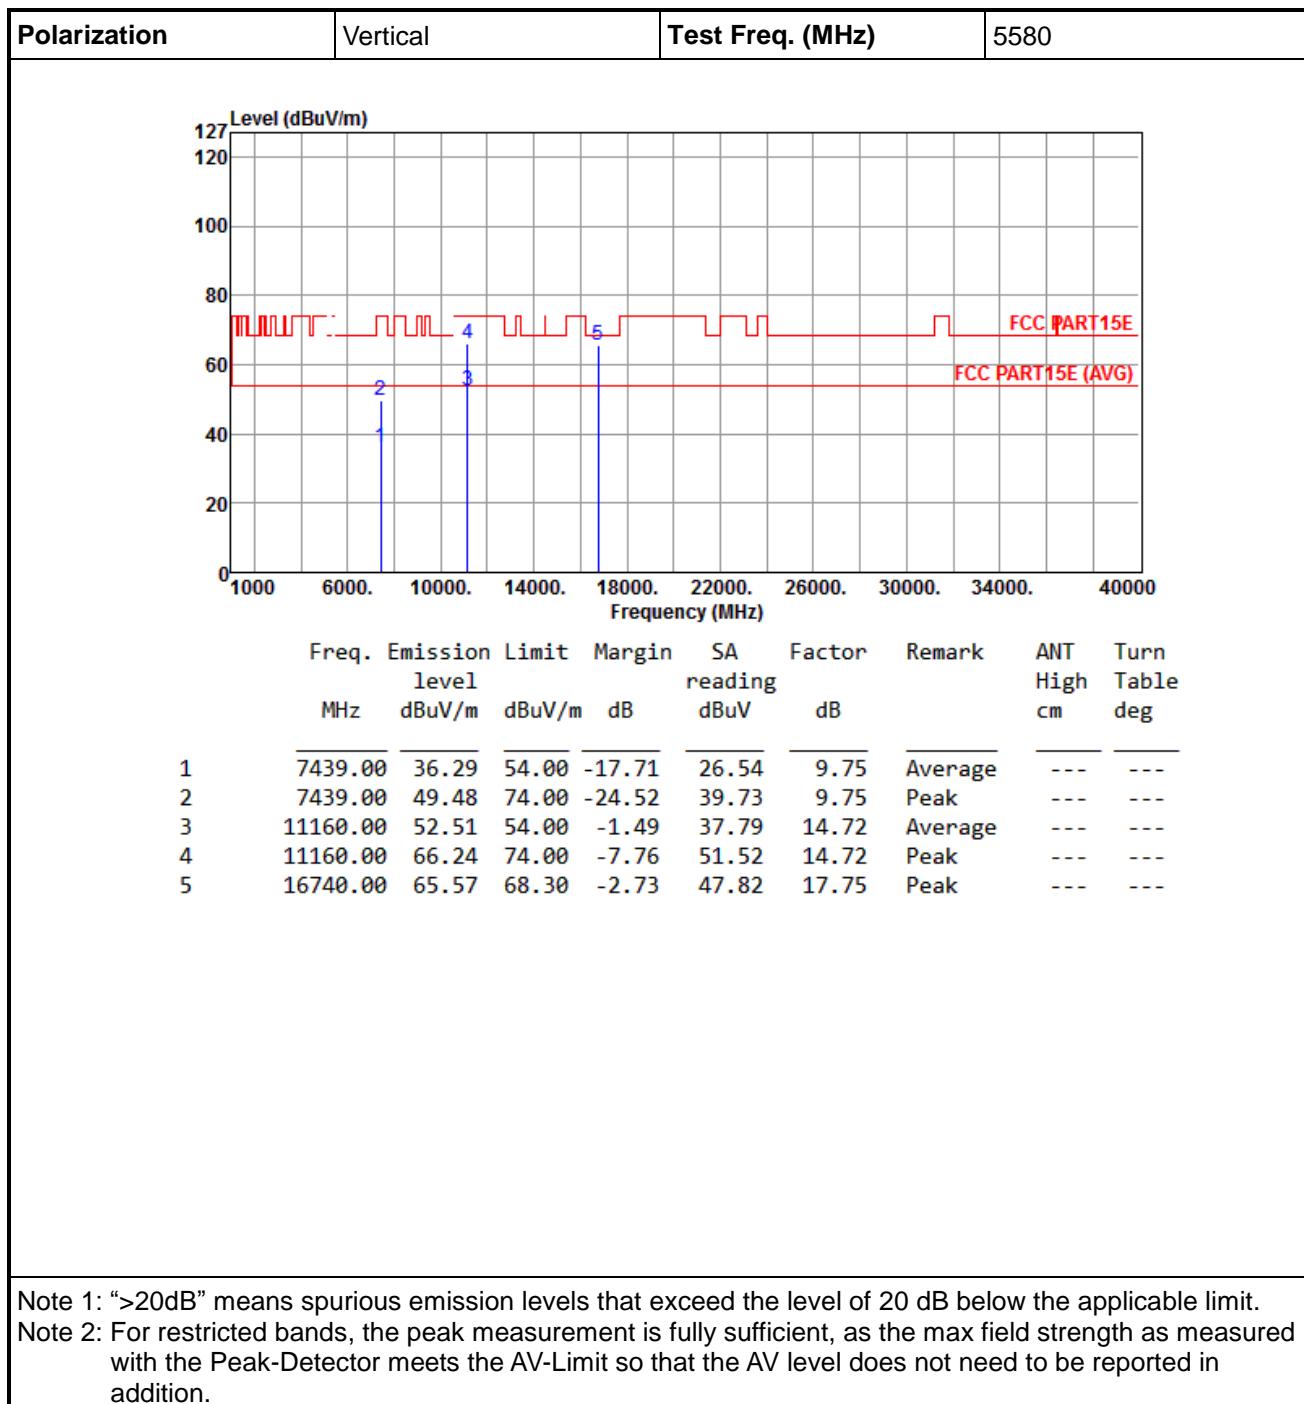

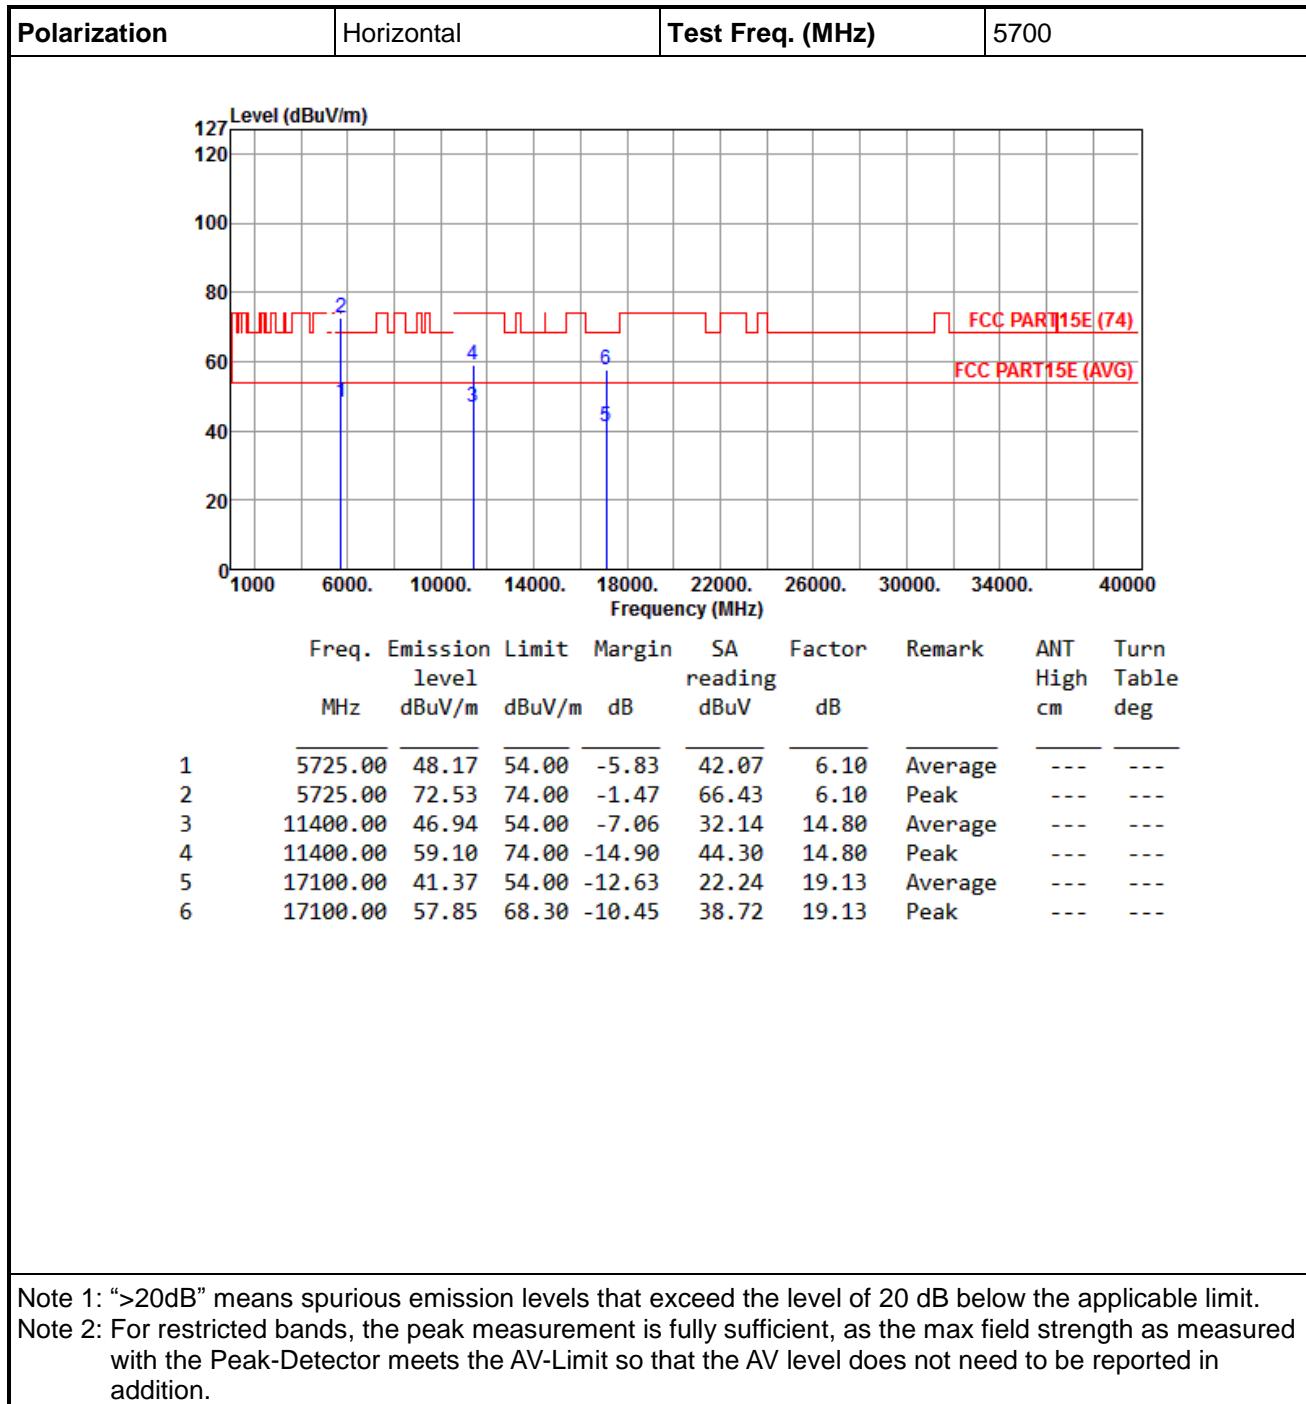




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.


Tel: 886-3-271-8666

Fax: 886-3-318-0155

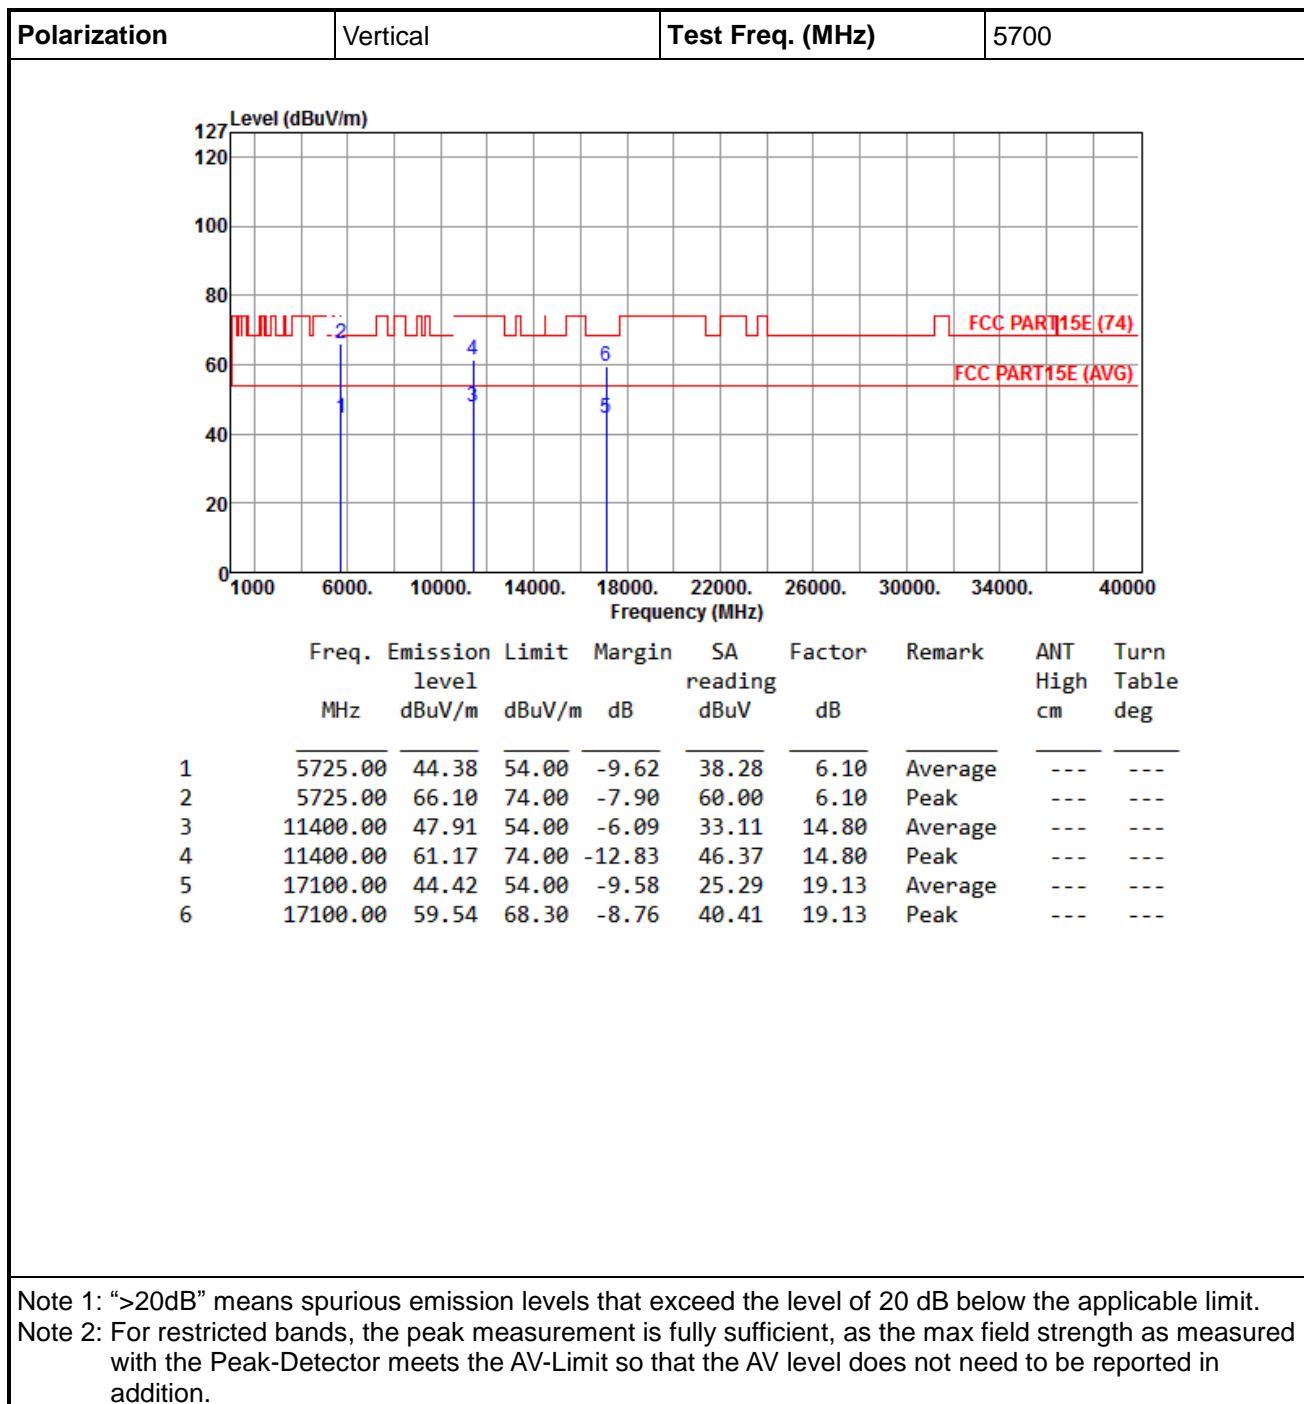



3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

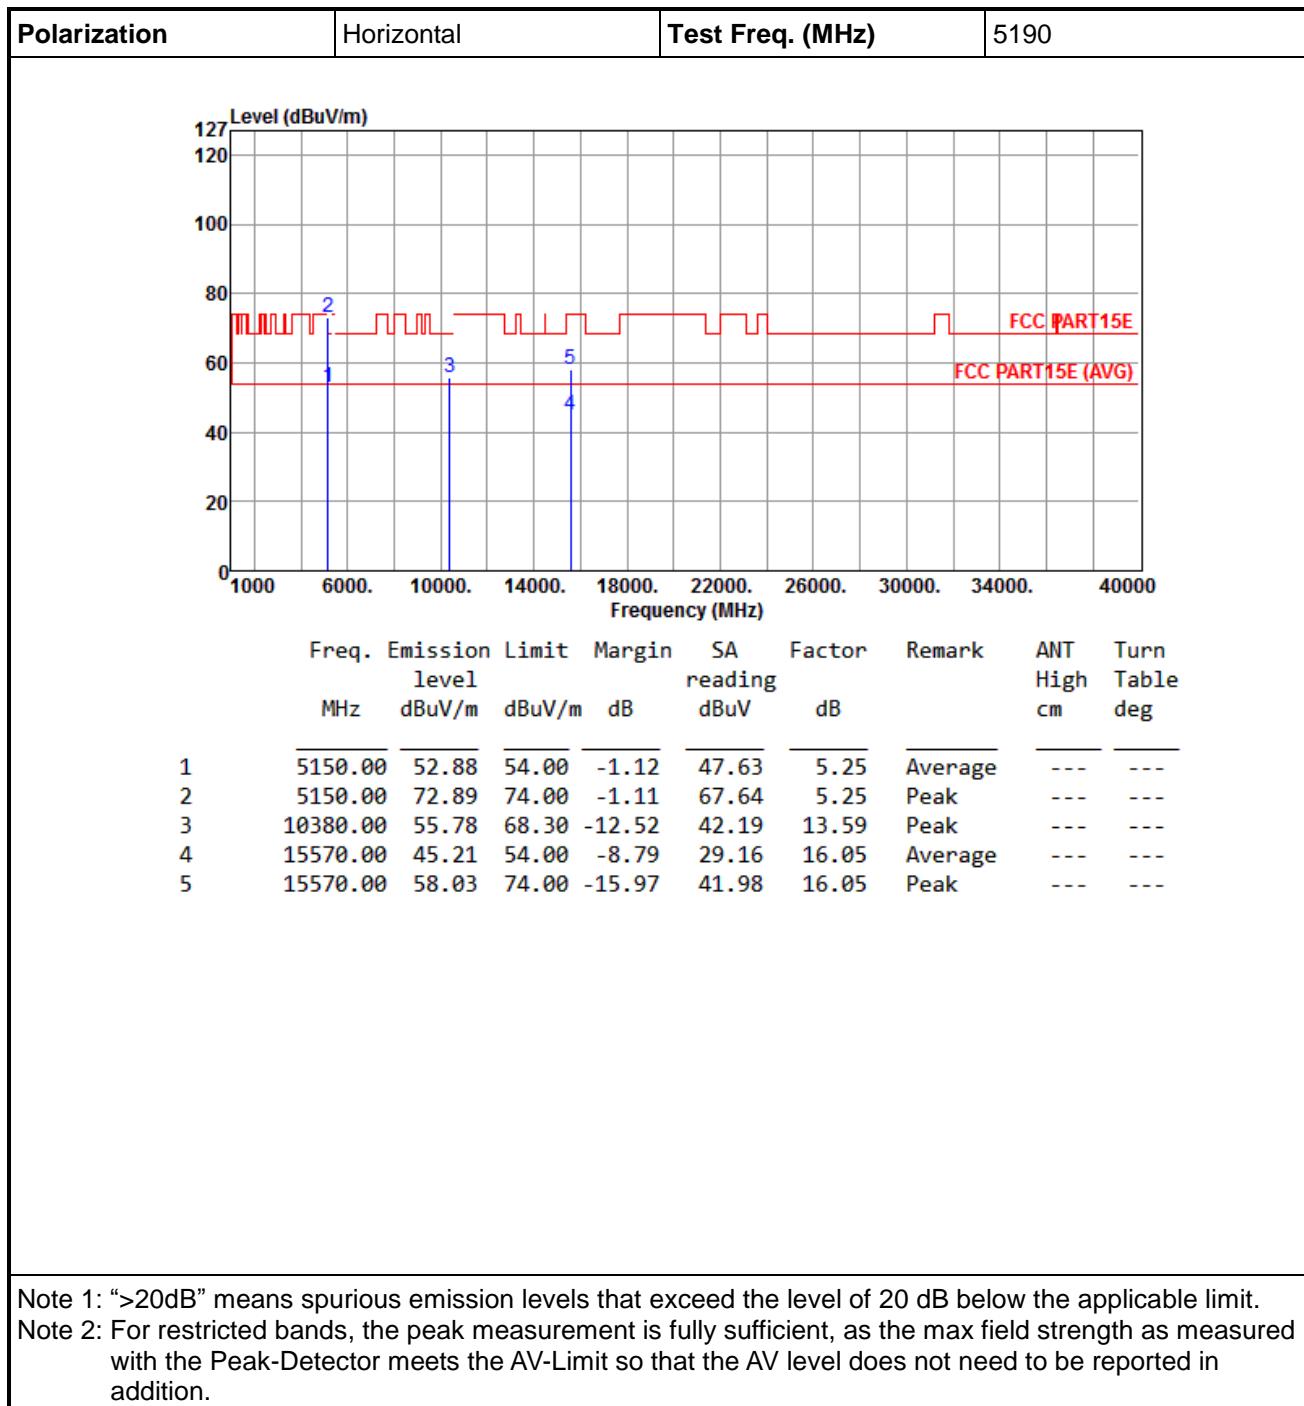




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

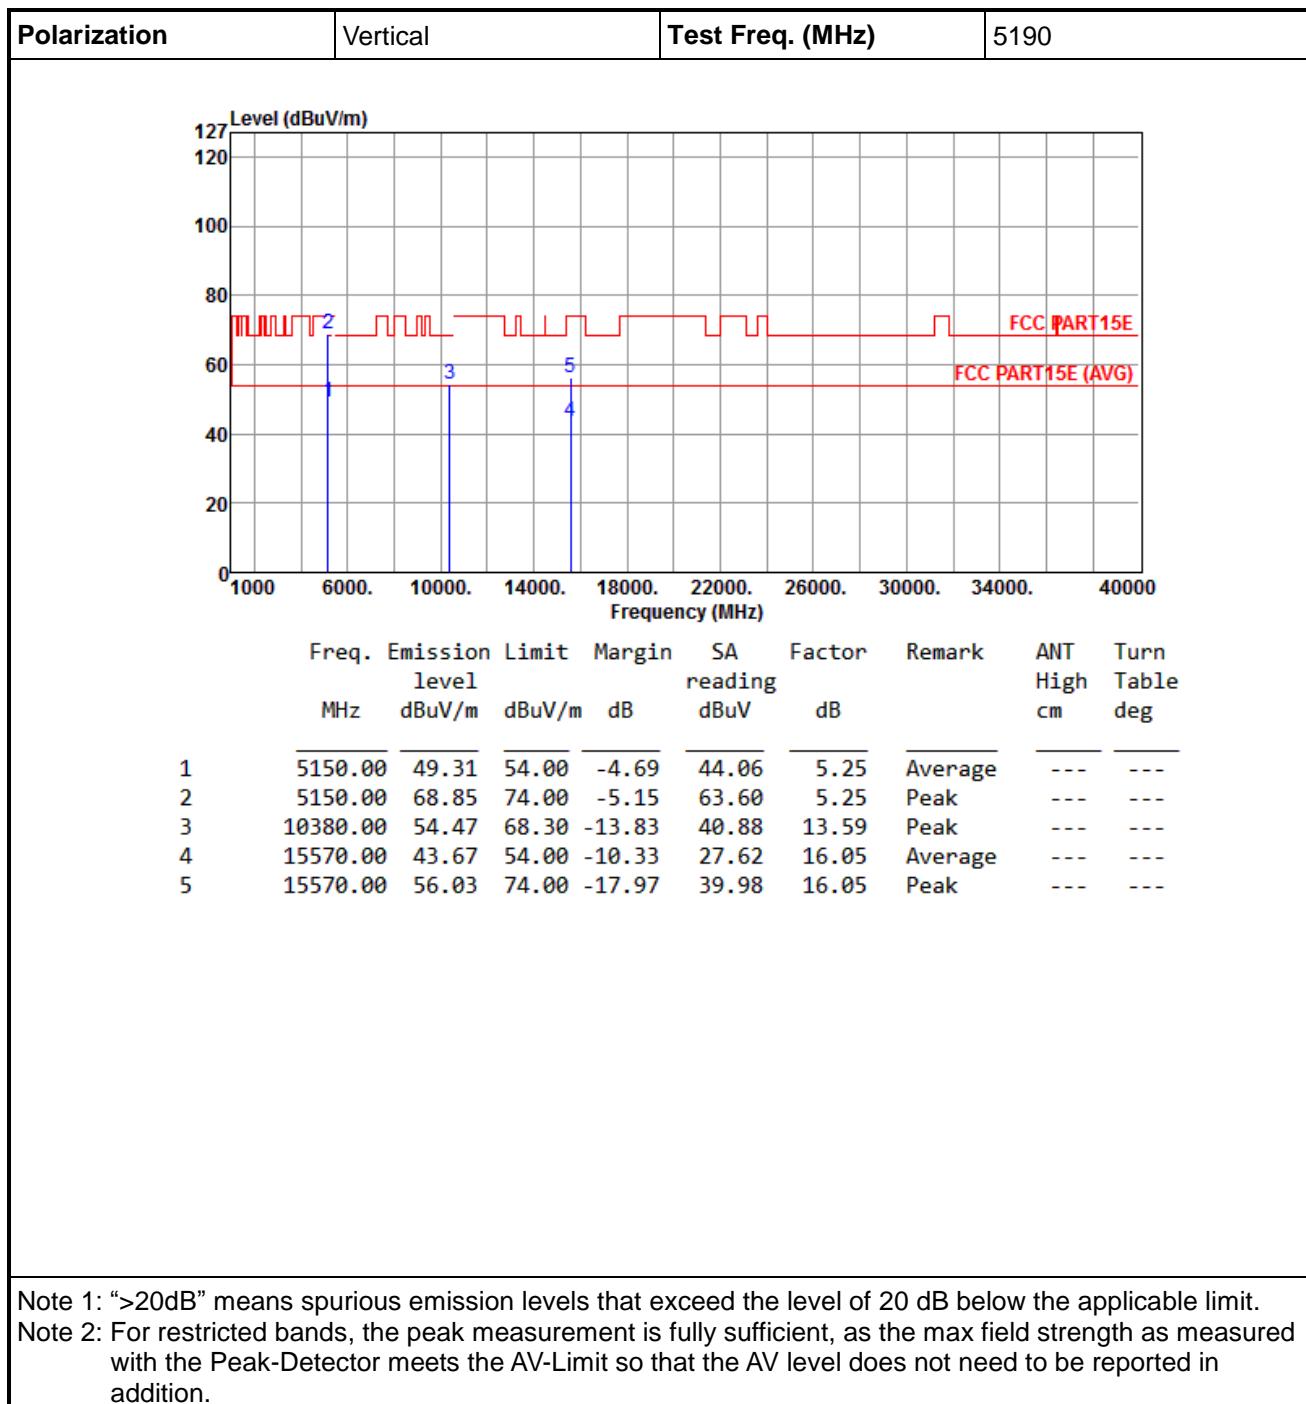




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

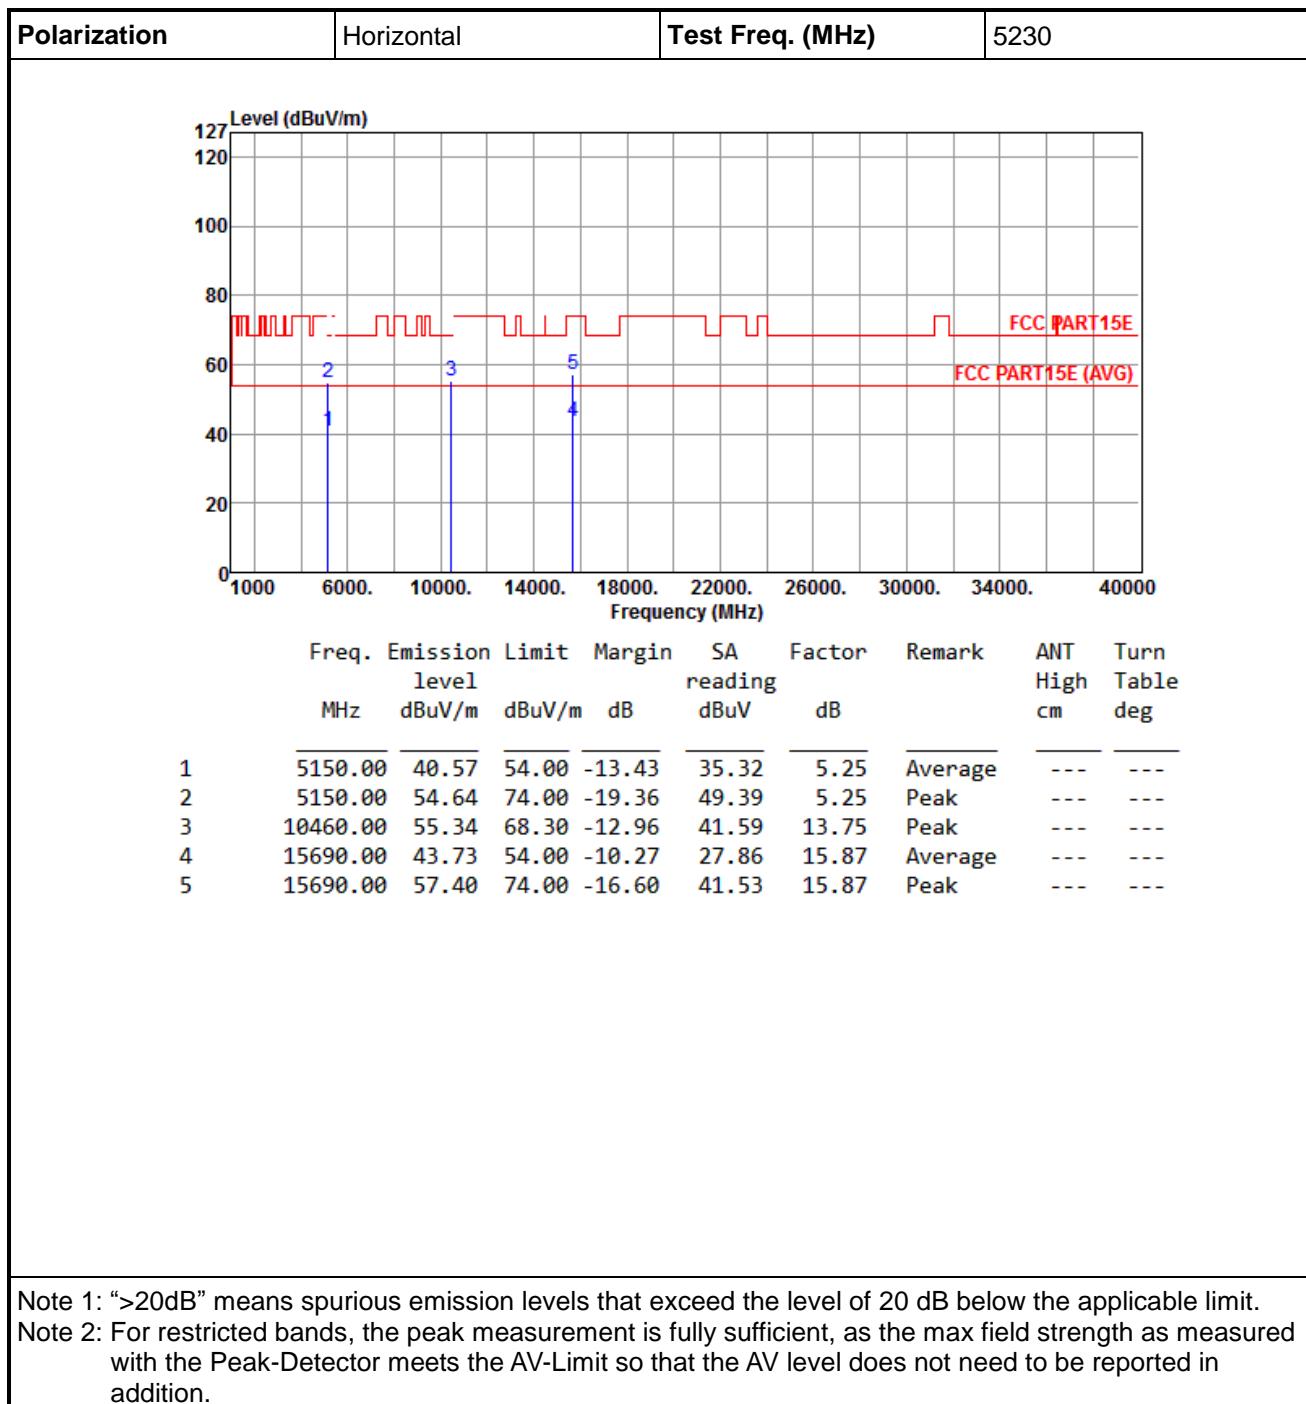




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

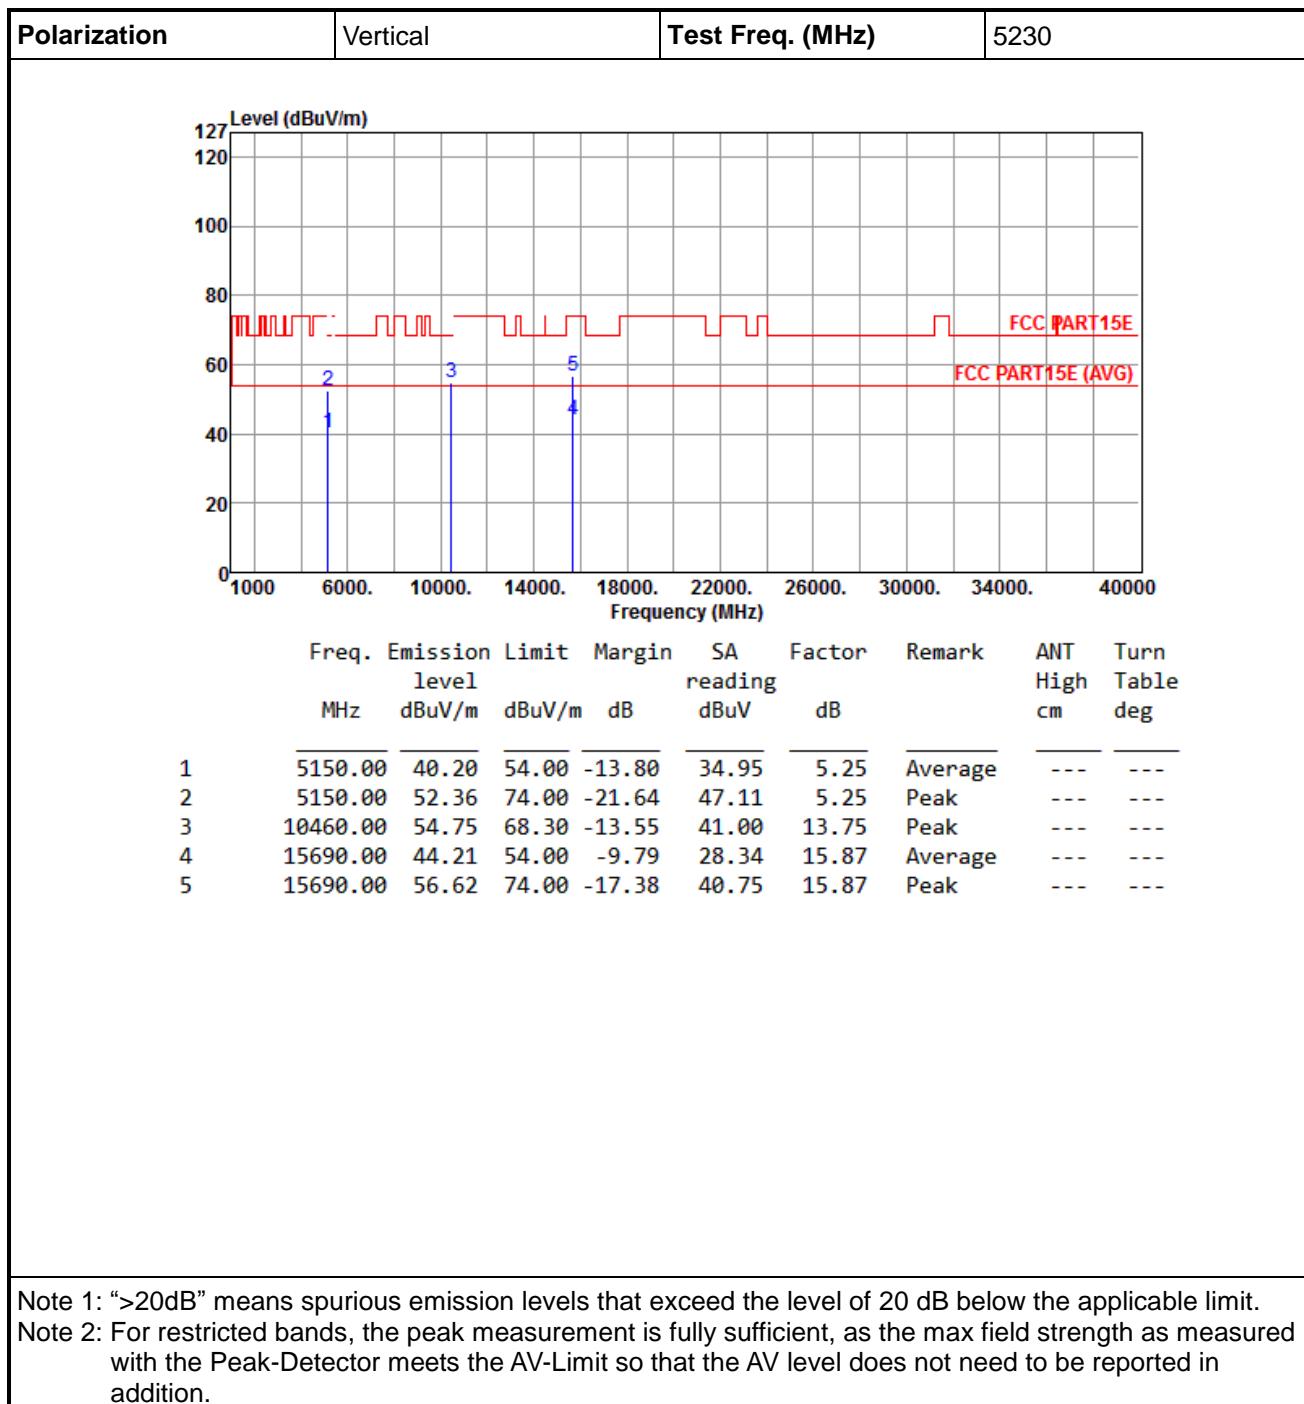




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

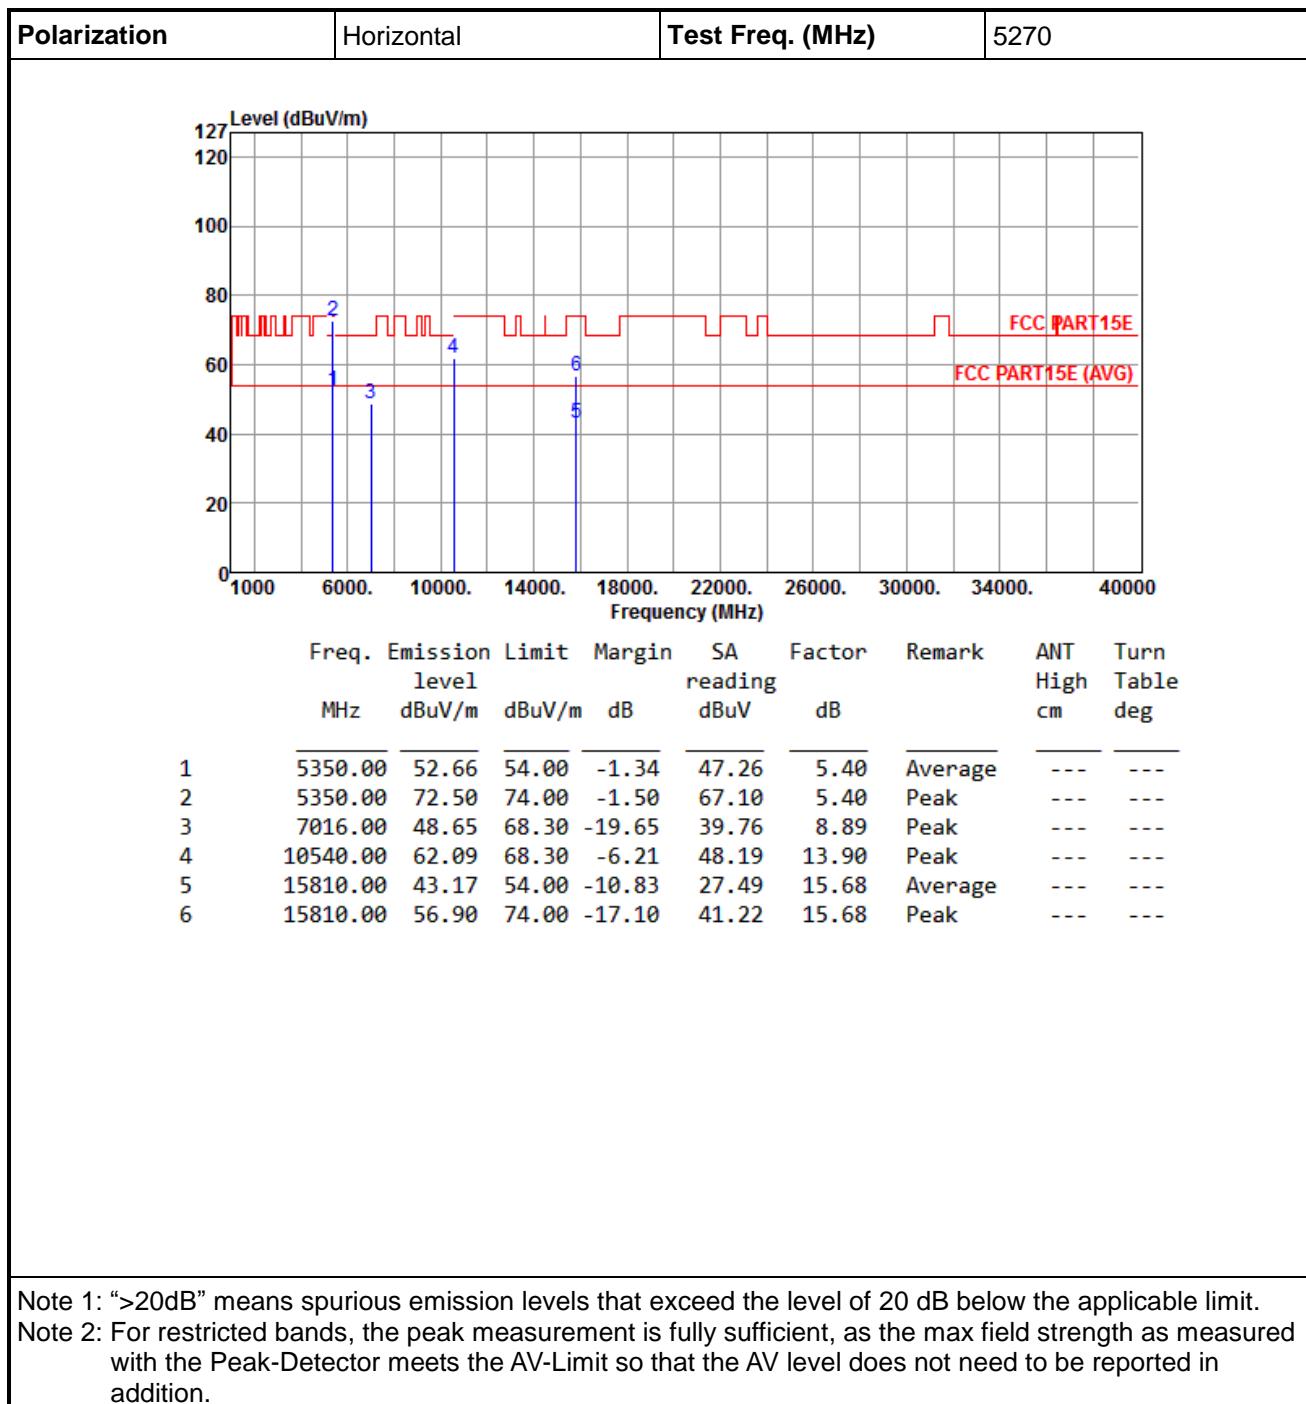




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

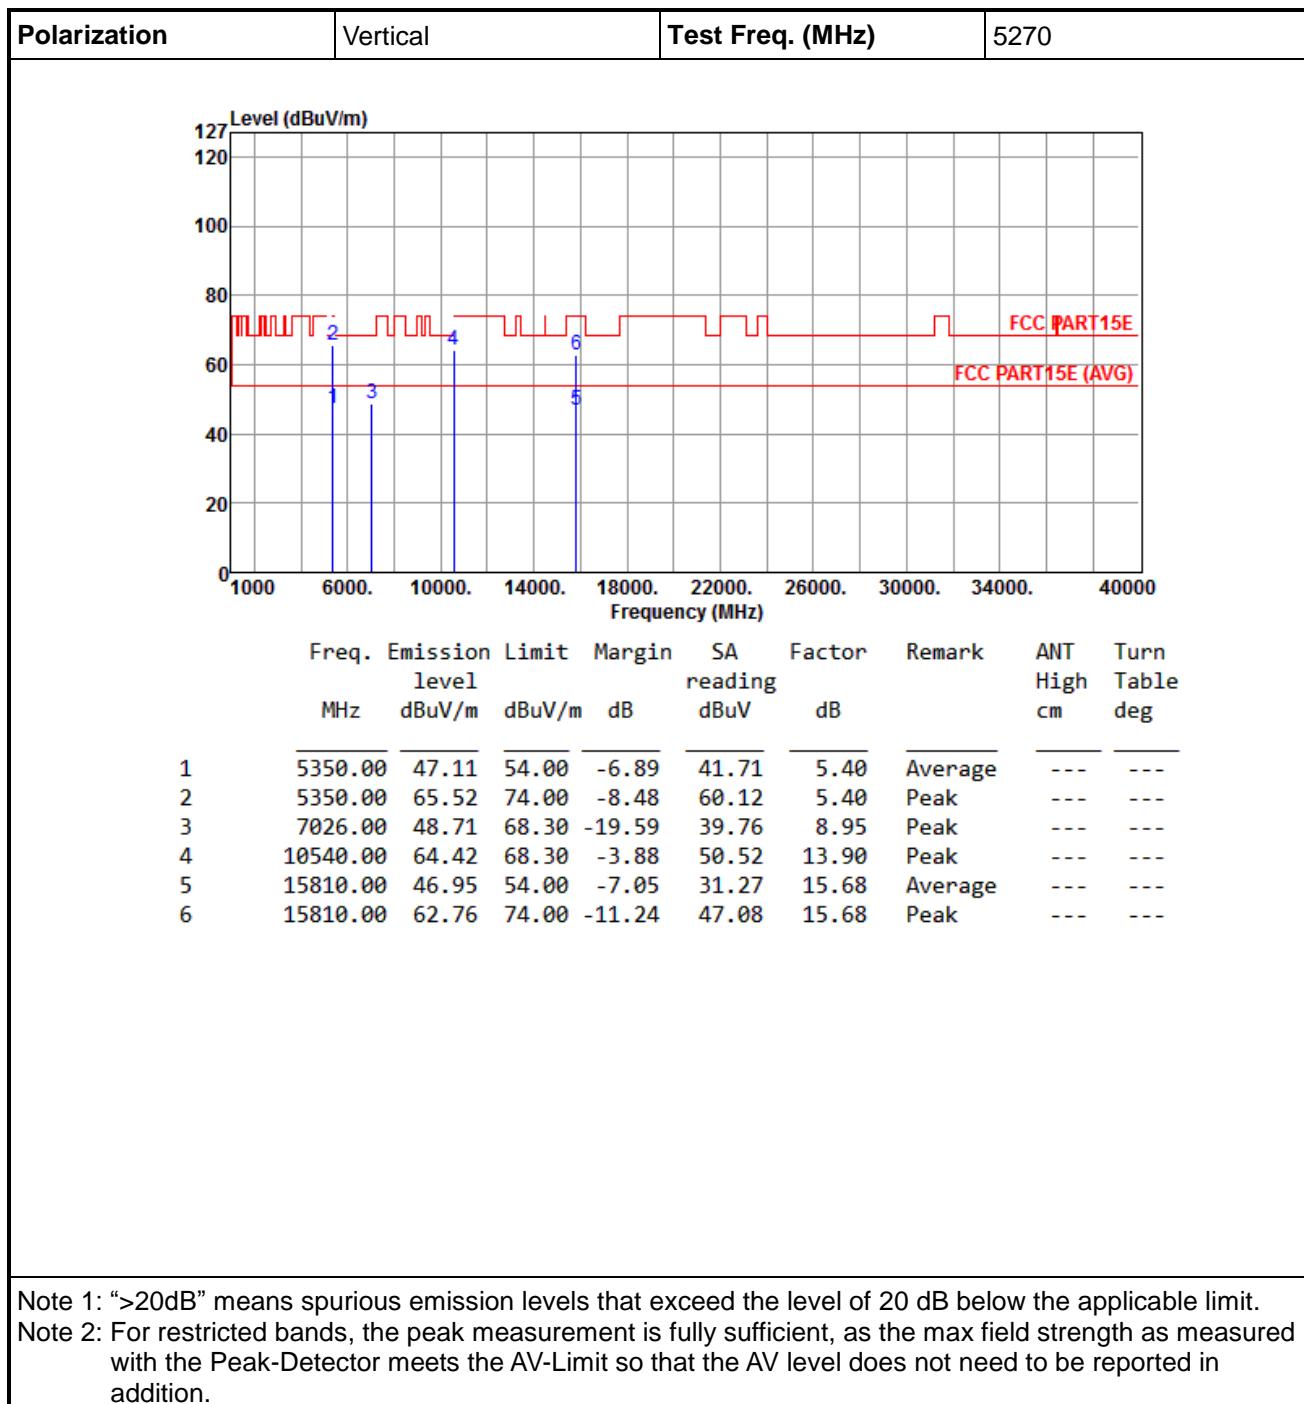




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

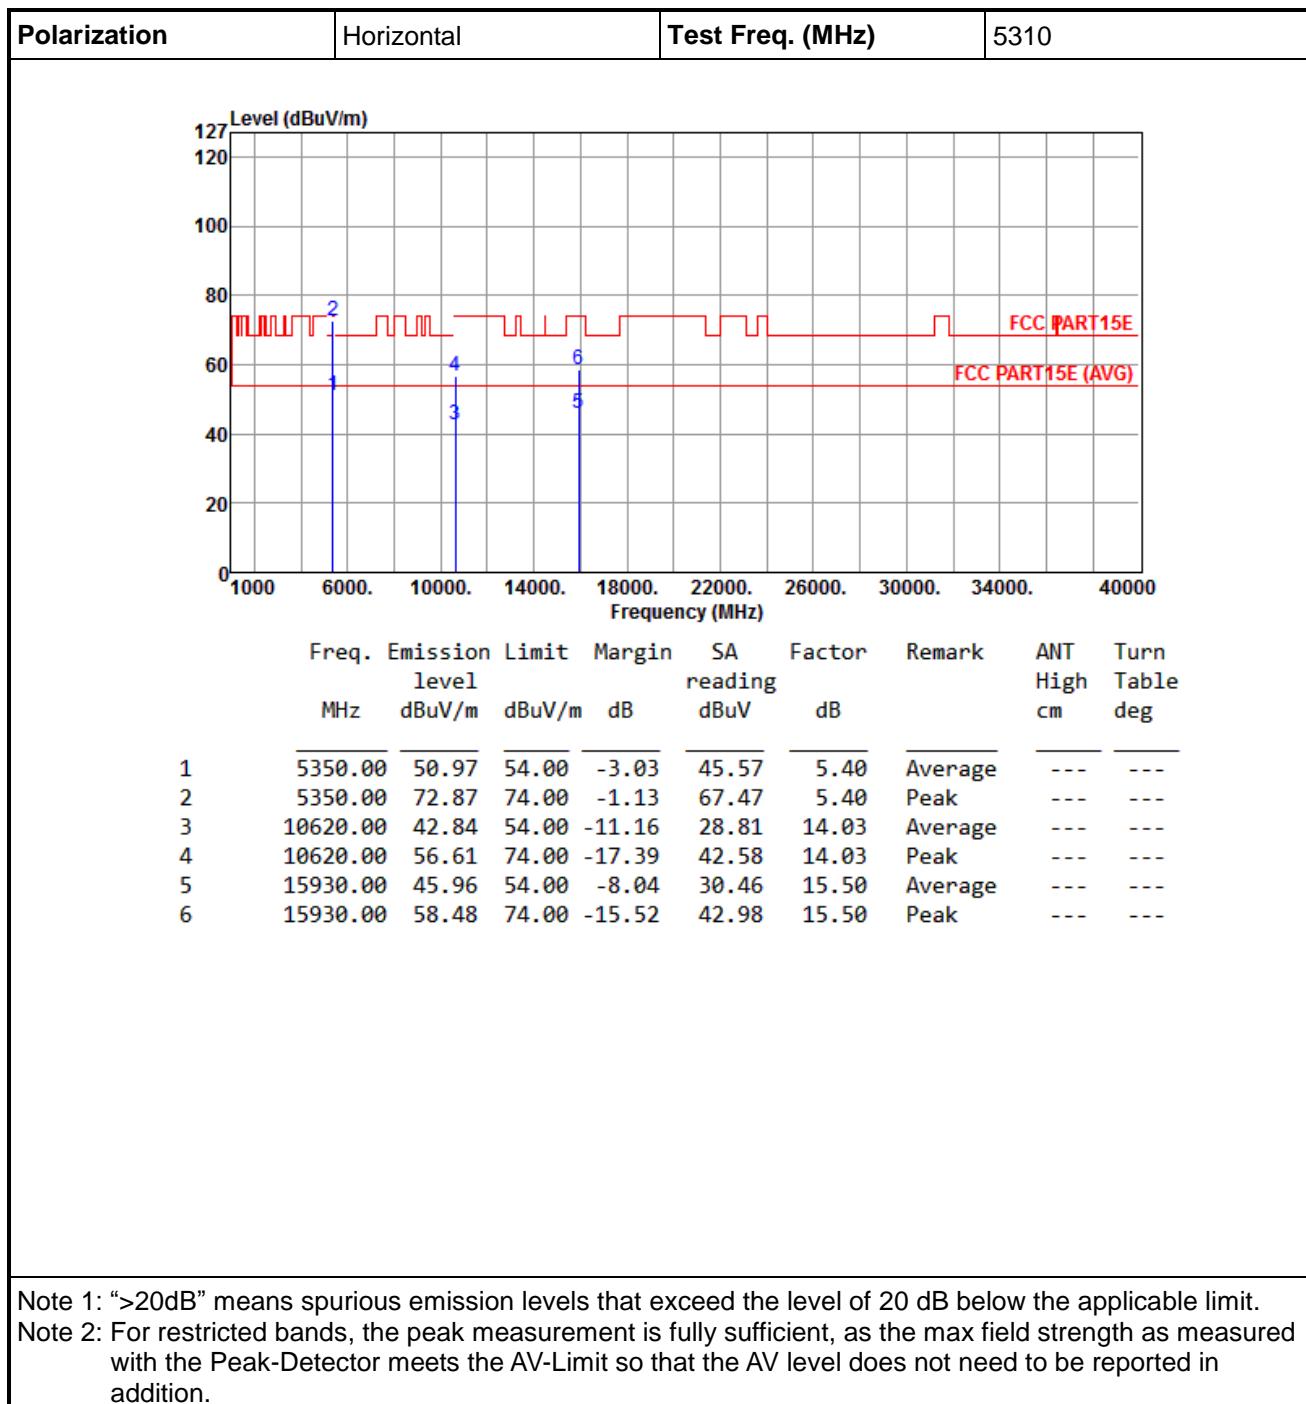





International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

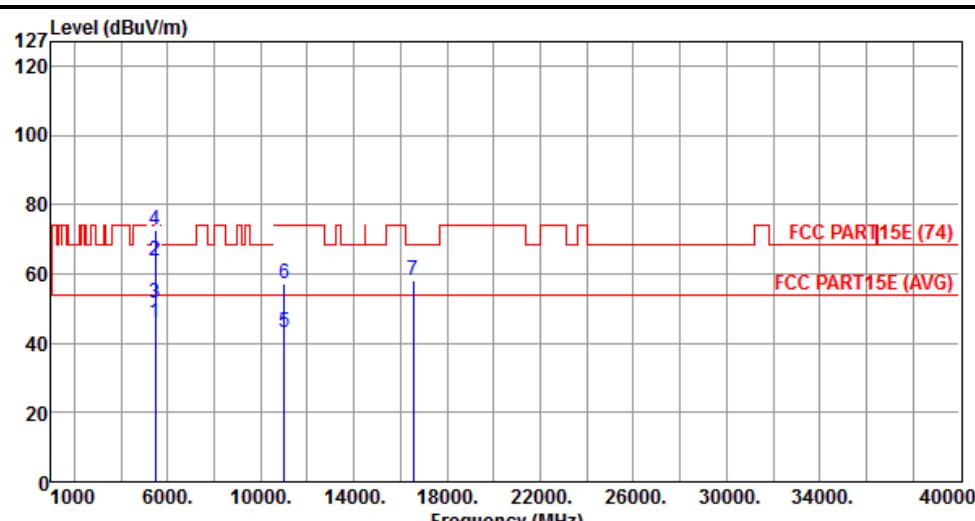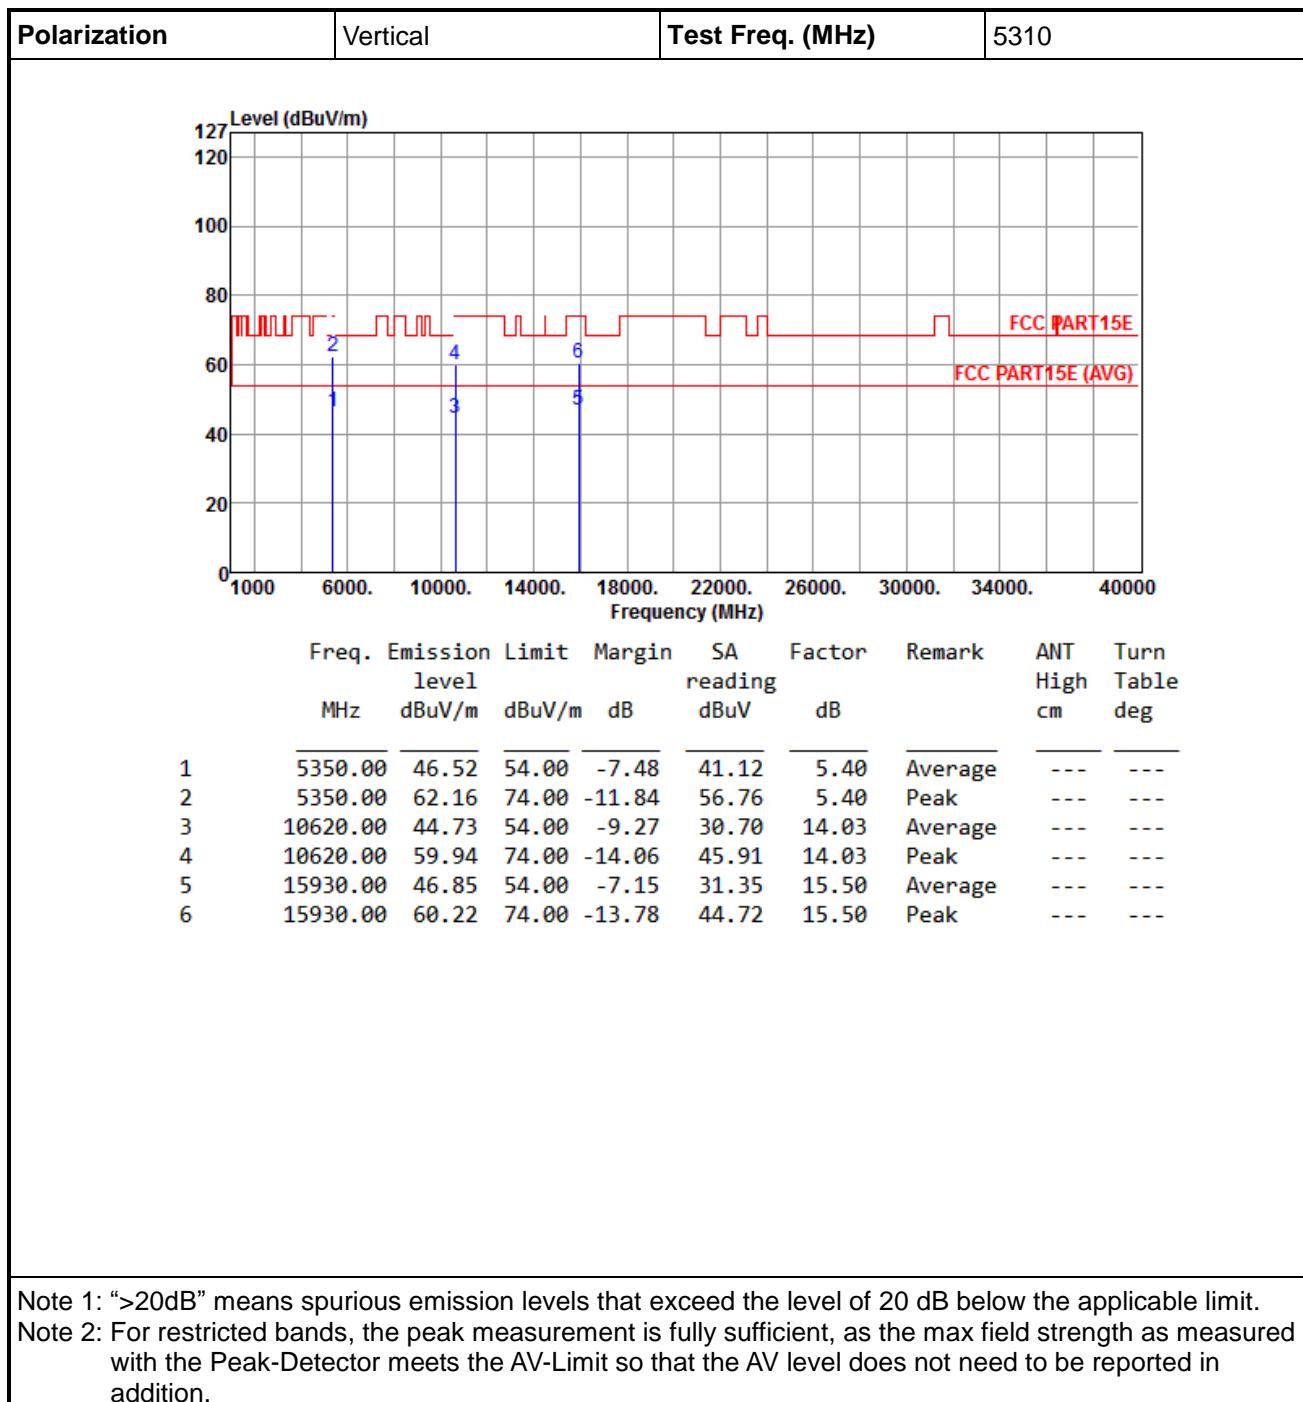





International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

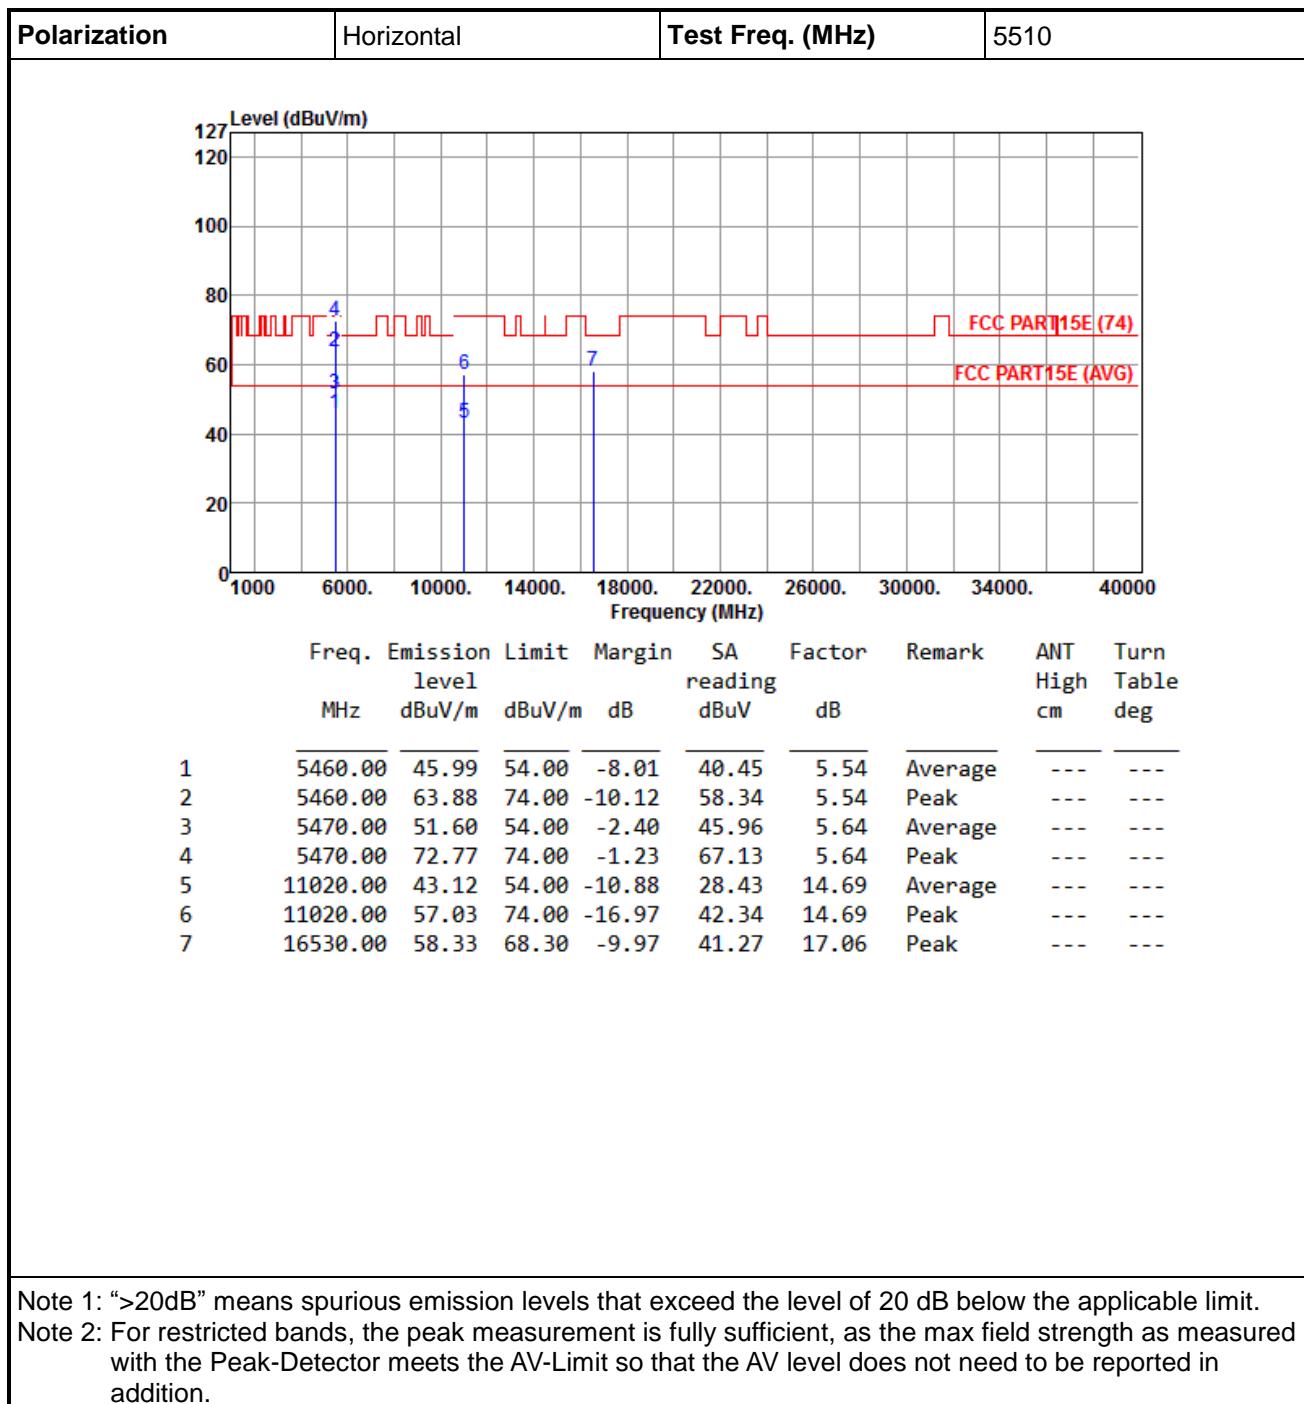

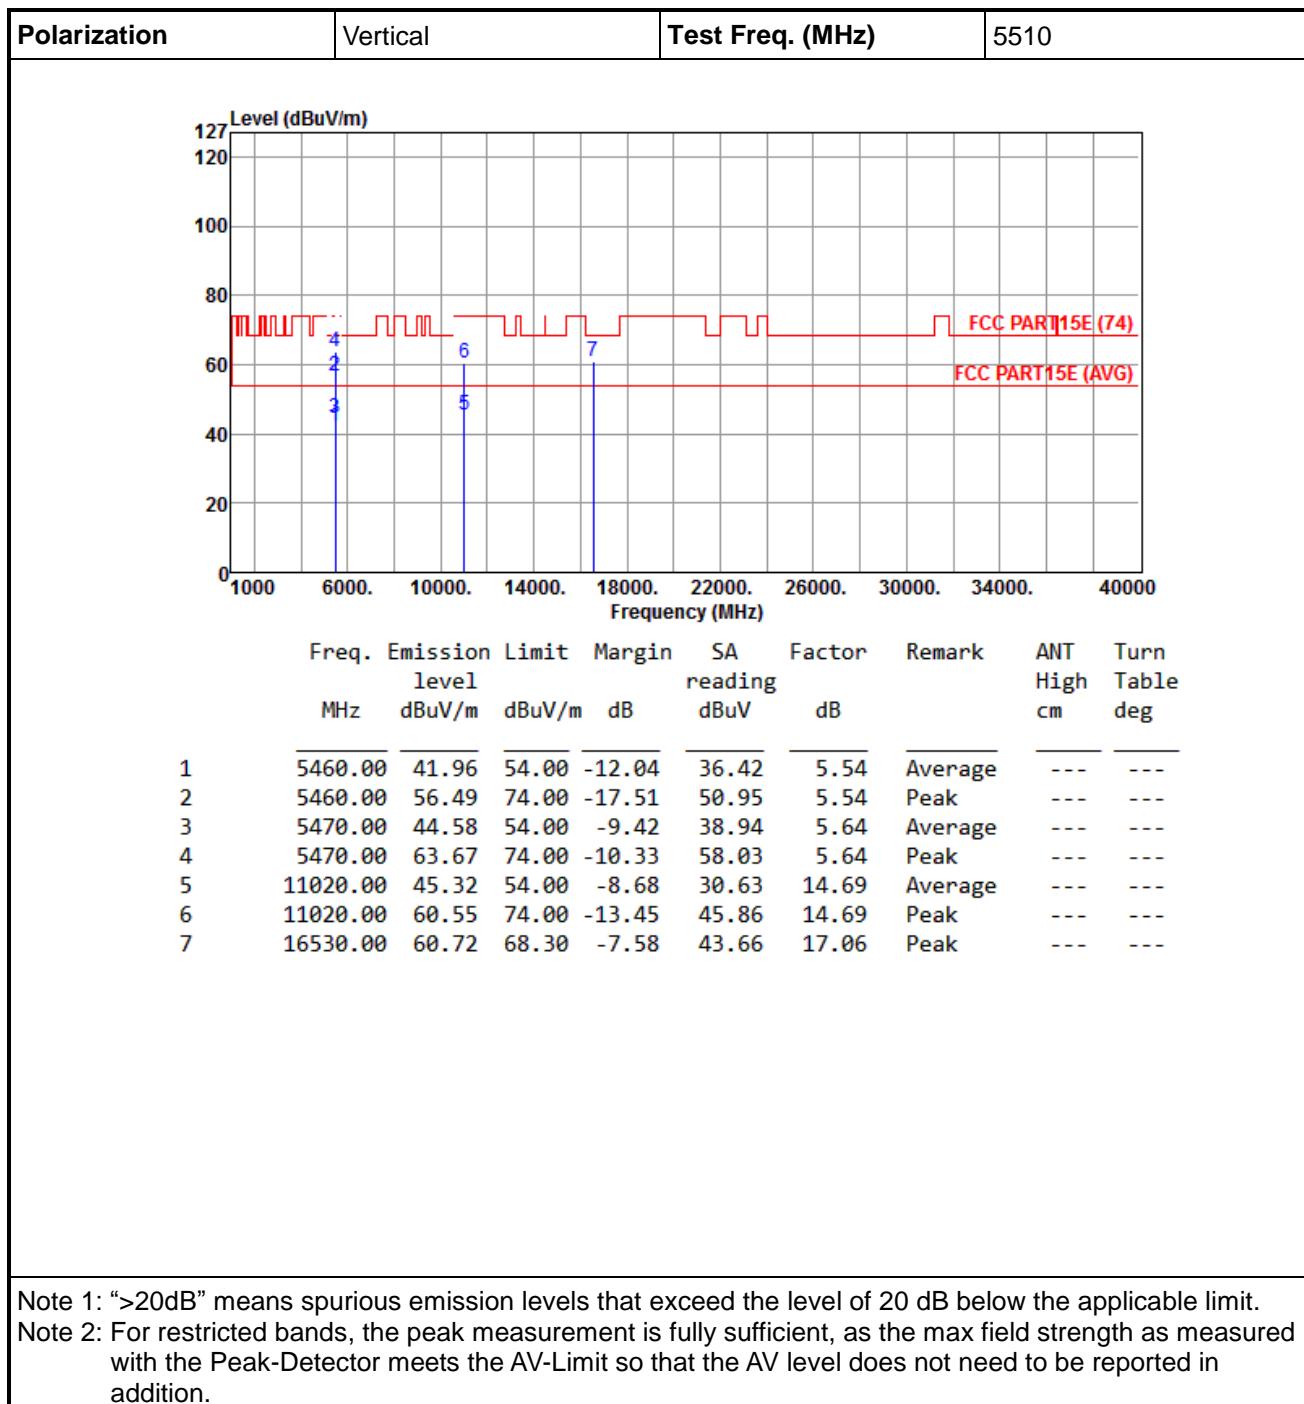



International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Polarization	Horizontal	Test Freq. (MHz)	5550																																																																																	
<table><thead><tr><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>45.94</td><td>54.00</td><td>-8.06</td><td>40.40</td><td>5.54</td><td>Average</td><td>---</td></tr><tr><td>2</td><td>5460.00</td><td>71.17</td><td>74.00</td><td>-2.83</td><td>65.63</td><td>5.54</td><td>Peak</td><td>---</td></tr><tr><td>3</td><td>5470.00</td><td>49.79</td><td>54.00</td><td>-4.21</td><td>44.15</td><td>5.64</td><td>Average</td><td>---</td></tr><tr><td>4</td><td>5470.00</td><td>72.88</td><td>74.00</td><td>-1.12</td><td>67.24</td><td>5.64</td><td>Peak</td><td>---</td></tr><tr><td>5</td><td>11100.00</td><td>46.74</td><td>54.00</td><td>-7.26</td><td>32.03</td><td>14.71</td><td>Average</td><td>---</td></tr><tr><td>6</td><td>11100.00</td><td>59.56</td><td>74.00</td><td>-14.44</td><td>44.85</td><td>14.71</td><td>Peak</td><td>---</td></tr><tr><td>7</td><td>16650.00</td><td>59.09</td><td>68.30</td><td>-9.21</td><td>41.64</td><td>17.45</td><td>Peak</td><td>---</td></tr></tbody></table>				Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5460.00	45.94	54.00	-8.06	40.40	5.54	Average	---	2	5460.00	71.17	74.00	-2.83	65.63	5.54	Peak	---	3	5470.00	49.79	54.00	-4.21	44.15	5.64	Average	---	4	5470.00	72.88	74.00	-1.12	67.24	5.64	Peak	---	5	11100.00	46.74	54.00	-7.26	32.03	14.71	Average	---	6	11100.00	59.56	74.00	-14.44	44.85	14.71	Peak	---	7	16650.00	59.09	68.30	-9.21	41.64	17.45	Peak	---
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																																												
1	5460.00	45.94	54.00	-8.06	40.40	5.54	Average	---																																																																												
2	5460.00	71.17	74.00	-2.83	65.63	5.54	Peak	---																																																																												
3	5470.00	49.79	54.00	-4.21	44.15	5.64	Average	---																																																																												
4	5470.00	72.88	74.00	-1.12	67.24	5.64	Peak	---																																																																												
5	11100.00	46.74	54.00	-7.26	32.03	14.71	Average	---																																																																												
6	11100.00	59.56	74.00	-14.44	44.85	14.71	Peak	---																																																																												
7	16650.00	59.09	68.30	-9.21	41.64	17.45	Peak	---																																																																												
Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.																																																																																				
Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.																																																																																				



International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Polarization	Vertical	Test Freq. (MHz)	5550																																																																																	
<table><thead><tr><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>42.16</td><td>54.00</td><td>-11.84</td><td>36.62</td><td>5.54</td><td>Average</td><td>---</td></tr><tr><td>2</td><td>5460.00</td><td>60.91</td><td>74.00</td><td>-13.09</td><td>55.37</td><td>5.54</td><td>Peak</td><td>---</td></tr><tr><td>3</td><td>5470.00</td><td>44.07</td><td>54.00</td><td>-9.93</td><td>38.43</td><td>5.64</td><td>Average</td><td>---</td></tr><tr><td>4</td><td>5470.00</td><td>63.64</td><td>74.00</td><td>-10.36</td><td>58.00</td><td>5.64</td><td>Peak</td><td>---</td></tr><tr><td>5</td><td>11100.00</td><td>49.54</td><td>54.00</td><td>-4.46</td><td>34.83</td><td>14.71</td><td>Average</td><td>---</td></tr><tr><td>6</td><td>11100.00</td><td>64.15</td><td>74.00</td><td>-9.85</td><td>49.44</td><td>14.71</td><td>Peak</td><td>---</td></tr><tr><td>7</td><td>16650.00</td><td>63.01</td><td>68.30</td><td>-5.29</td><td>45.56</td><td>17.45</td><td>Peak</td><td>---</td></tr></tbody></table>				Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5460.00	42.16	54.00	-11.84	36.62	5.54	Average	---	2	5460.00	60.91	74.00	-13.09	55.37	5.54	Peak	---	3	5470.00	44.07	54.00	-9.93	38.43	5.64	Average	---	4	5470.00	63.64	74.00	-10.36	58.00	5.64	Peak	---	5	11100.00	49.54	54.00	-4.46	34.83	14.71	Average	---	6	11100.00	64.15	74.00	-9.85	49.44	14.71	Peak	---	7	16650.00	63.01	68.30	-5.29	45.56	17.45	Peak	---
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																																												
1	5460.00	42.16	54.00	-11.84	36.62	5.54	Average	---																																																																												
2	5460.00	60.91	74.00	-13.09	55.37	5.54	Peak	---																																																																												
3	5470.00	44.07	54.00	-9.93	38.43	5.64	Average	---																																																																												
4	5470.00	63.64	74.00	-10.36	58.00	5.64	Peak	---																																																																												
5	11100.00	49.54	54.00	-4.46	34.83	14.71	Average	---																																																																												
6	11100.00	64.15	74.00	-9.85	49.44	14.71	Peak	---																																																																												
7	16650.00	63.01	68.30	-5.29	45.56	17.45	Peak	---																																																																												
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</p> <p>Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>																																																																																				




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

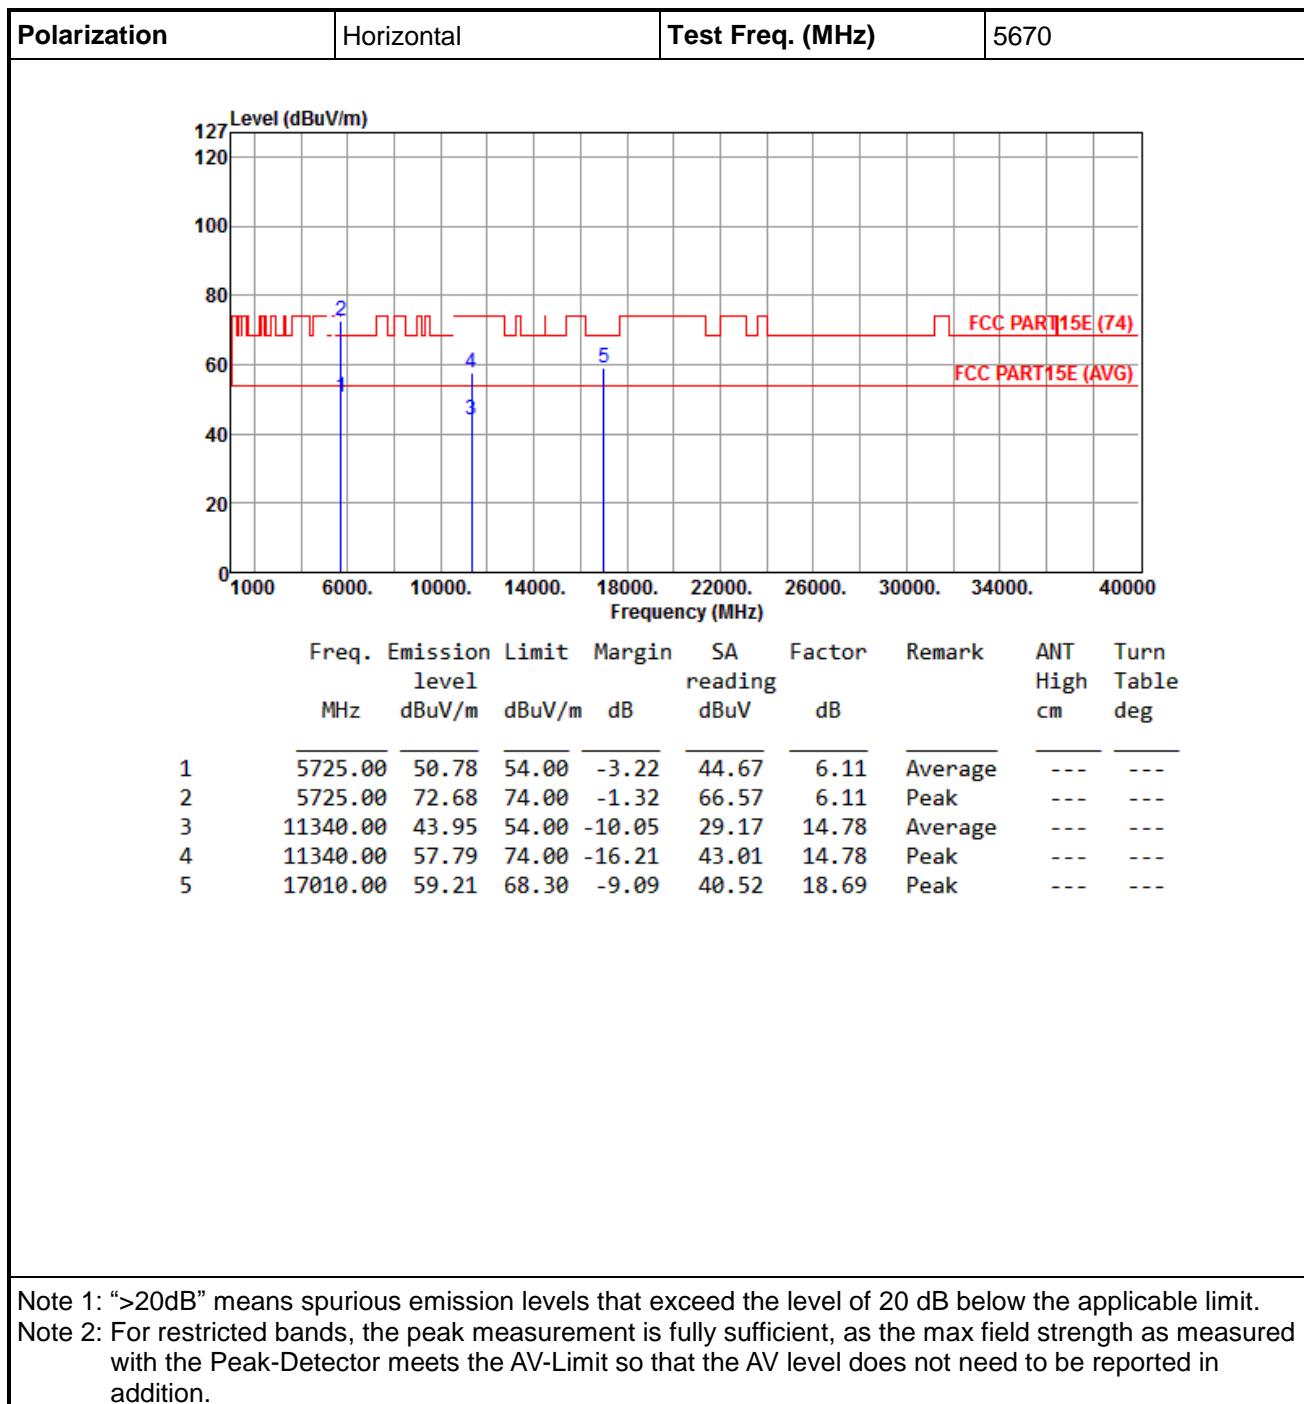




International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

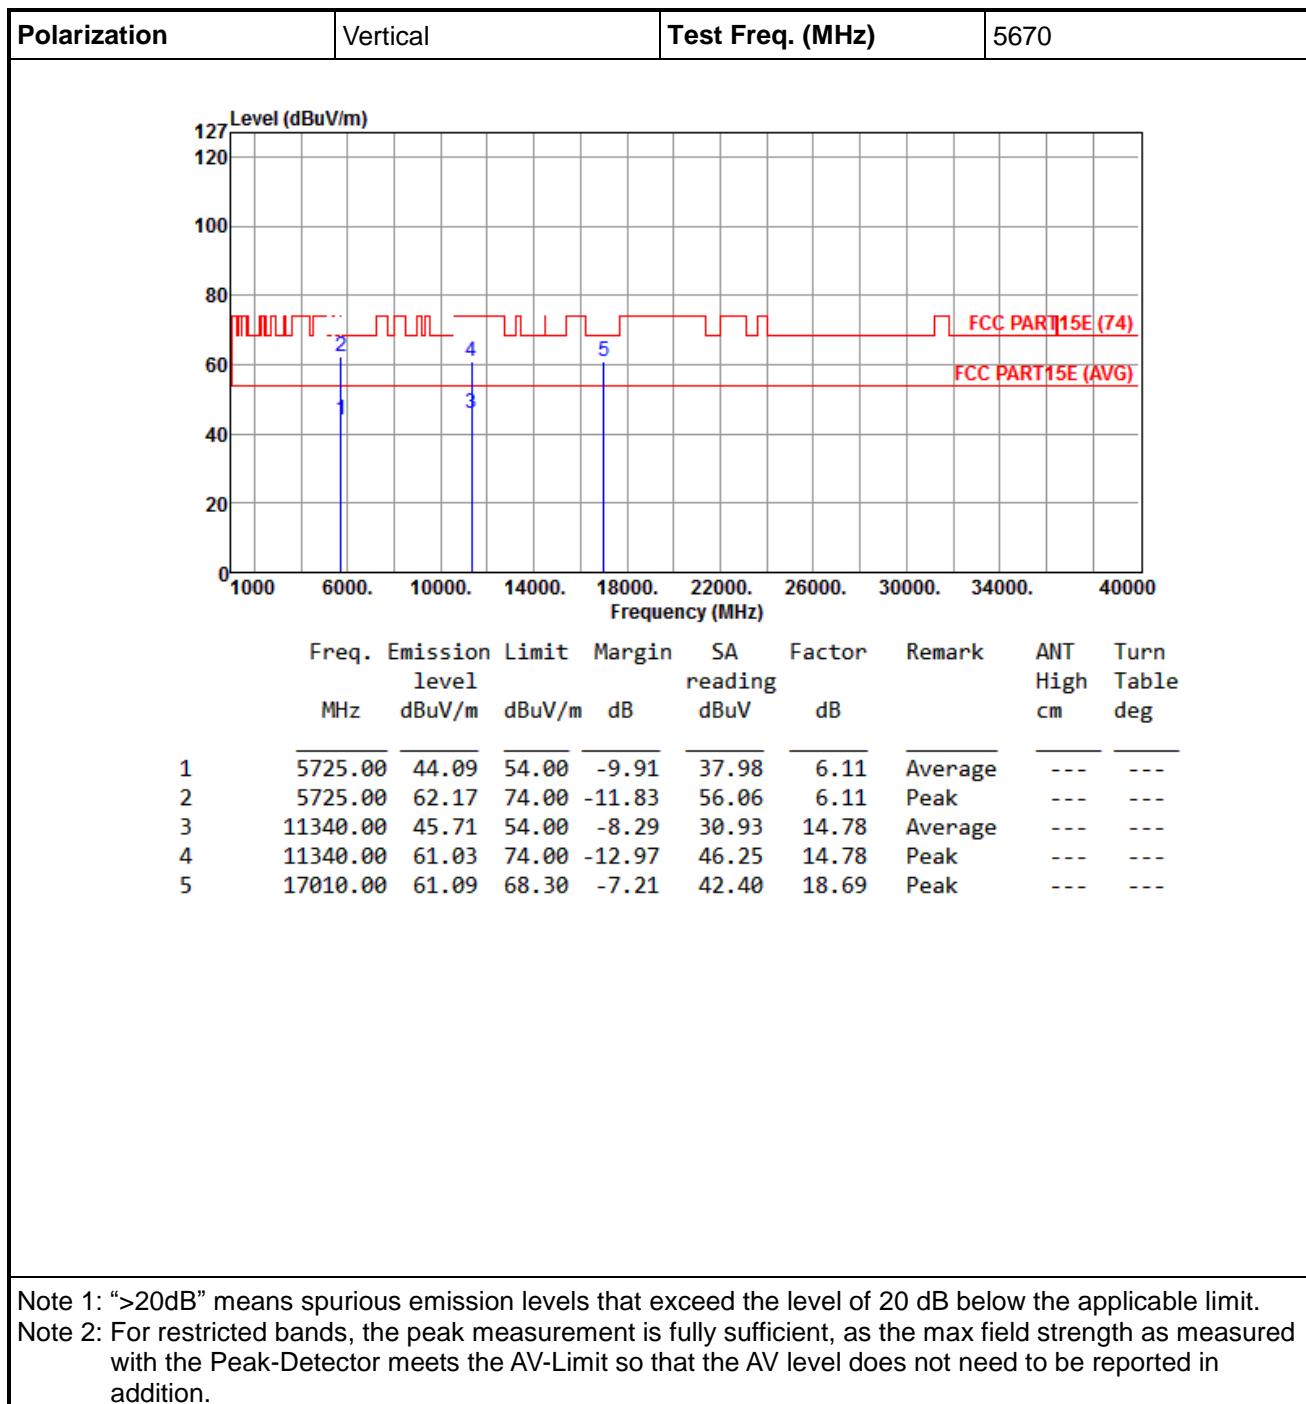



3.7 Frequency Stability


3.7.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.7.2 Test Procedures

1. The EUT is installed in an environment test chamber with external power source.
2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT.
3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
4. When temperature is stabled, measure the frequency stability.
5. The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.

3.7.3 Test Setup

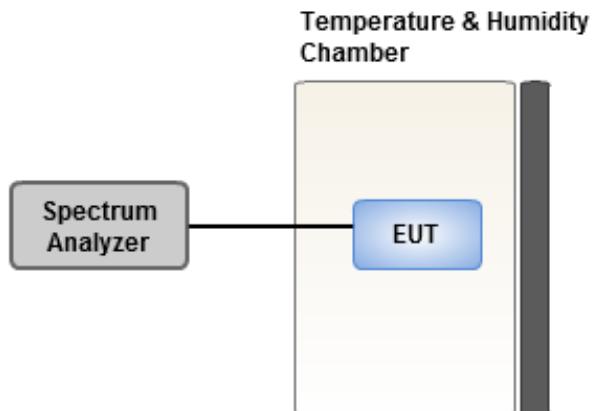



3.7.4 Test Result of Frequency Stability

Frequency: 5320 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	0.57	0.38	0.30	1.33
T20°C Vmin	4.71	4.71	5.18	4.76
T60°C Vnom	3.93	4.10	3.72	4.41
T50°C Vnom	-1.63	-1.61	-1.20	-1.52
T40°C Vnom	-0.40	-0.32	-0.58	-0.24
T30°C Vnom	0.75	0.49	0.84	0.97
T20°C Vnom	0.62	1.11	0.70	0.23
T10°C Vnom	-0.39	0.33	-0.28	0.30
T0°C Vnom	-1.27	-1.69	-0.94	-0.82
T-10°C Vnom	-0.69	-0.50	-0.35	-0.77
T-20°C Vnom	-0.03	0.63	0.65	-0.16
T-30°C Vnom	-1.00	-0.66	-0.87	-0.86
Vnom [V]: 110	Vmax [V]: 126.5		Vmin [V]: 93.5	
Tnom [°C]: 20	Tmax [°C]: 60		Tmin [°C]: -30	

==END==