
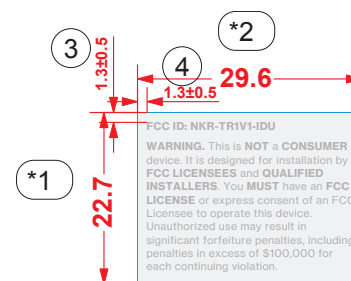


REVISIONS

REV	DESCRIPTION	DATE	APPROVE
A	NEW RELEASE	03/27/20	SAM SUN

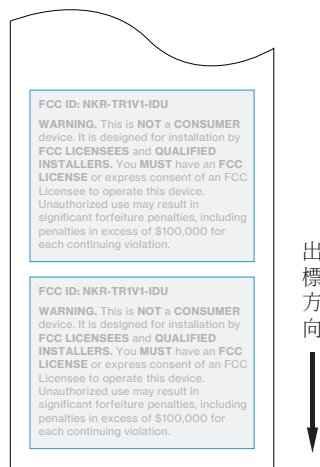


NOTES:

1. MATERIAL: PET, $t=0.075$
ADHESIVE: 網紋背膠
FINISH: 上霧PET, $T=0.025$
2. COLOR: LV11 PRIMARY GARY,PMS COOL GREY 5C
3. 捲狀出貨，不加虛刀
4. 離型紙左右間距各 $3\pm0.5\text{MM}$,上下間距各 $3.0\pm0.3\text{MM}$
5. 被貼物材質:ABS
6. 印刷公差:尺寸30mm以下為 $\pm0.3\text{mm}$,120~315mm為 $\pm0.5\text{mm}$,315以上 $\pm0.8\text{mm}$
7. TEST REQUIREMENT

- DIE LINE (DO NOT PRINT)
- PMS COOL GREY 5C
- LV11 PRIMARY GARY(參照限度樣本)

	TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1	附著力測試	ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5 % is affected.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE: INTEGRAL DIMENSIONS ± 0.2 1 PLACE DECIMAL ± 0.2 ANGULAR DIMENSIONS ± 2° HOLES UNDER Ø5.00 ± 0.2			THIRD ANGLE PROJECTION 			WNC 啟碁科技股份有限公司 Wistron NeWeb Corp. 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-5788726		
DWG TITLE						LABEL, FCC WARNING, UPDATED, TR1		
DRAWN	AMANDA LAI	03/27/20	SIZE	DWG NO.			REV	
ENGR	AMANDA LAI	03/27/20	A4	4L.TR100.00401			A	
APVD	SAM SUN	03/27/20	SCALE	1/1		SHEET	1 OF 1	