

Test Report
FOR
FCC Part 15 Subpart C & E

of

Notebook Personal Computer
(with WLAN a+b+g Mini-PCI Module EM-500AG inside)

Model

MS2143

(Brand: acer)

Applied by:

Wistron NeWeb Corporation
No. 10-1, Li-hsin Road I,
Science-based Industrial Park Hsinchu 300,
Taiwan, R. O. C.



Test Performed by:

International Standards Laboratory

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.
Lung-Tan Hsiang, Tao Yuan County 325
Taiwan, R.O.C.
Tel:(03)407-1718 Fax:(03)407-1738

Report Number: ISL-03LR023FC

Test Date: 2003/11/30

NVLAP Lab. Code: 200234-0; VCCI: R-1435, C-1440; NEMKO Aut. No: ELA 113; BSMI Lab. Code: SL2-IN-E-0013

Contents of Report

- 1. General..... 1
 - 1.1 Certification of Accuracy of Test Data..... 1
- 2. Test Results Summary..... 2
- 3. Description of Equipment Under Test (EUT)..... 3
 - 3.1 Test Standards and Procedure 5
 - 3.2 General Test Conditions 5
- 4. TEST RESULTS (802.11b)..... 6
 - 4.1 Powerline Conducted Emissions [Section 15.207] 6
 - 4.1.1 EUT Configuration..... 6
 - 4.1.2 Test Procedure 6
 - 4.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested) 6
 - 4.1.4 Test Data:..... 7
 - 4.2 Bandwidth for DSSS [Section 15.247 (a)(2)]..... 9
 - 4.2.1 Test Procedure 9
 - 4.2.2 Test Setup 9
 - 4.2.3 Test Data..... 9
 - 4.3 DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]..... 12
 - 4.3.1 Test Procedure 12
 - 4.3.2 Test Setup 12
 - 4.3.3 Test Data:..... 12
 - 4.4 Radiated Emission Measurement [Section [15.247(c)(4)] 13
 - 4.4.1 EUT Configuration..... 13
 - 4.4.2 Test Procedure 13
 - 4.4.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested) 13
 - 4.4.4 Test Data (30MHz – 1GHz) :..... 14
 - 4.4.5 Test Data 15
 - 4.5 Band Edge Measurement 18
 - 4.5.1 Test Procedure (Conducted)..... 18
 - 4.5.2 Test Setup (Conducted)..... 18
 - 4.5.3 Test Data:..... 18
 - 4.5.4 Band Edge measurement Test Procedure (Radiated)..... 20
 - 4.5.5 Test Setup (Radiated) 20
 - 4.5.6 Test Data:..... 21
 - 4.6 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]..... 24
 - 4.7 DSSS Peak Power Spectral Density [Section 15.247(d)] 25
 - 4.7.1 Test Procedure 25
 - 4.7.2 Test Setup 25
 - 4.7.3 Test Data:..... 25
- 5. TEST RESULTS (802.11g)..... 28
 - 5.1 Powerline Conducted Emissions [Section 15.207] 28
 - 5.1.1 EUT Configuration..... 28
 - 5.1.2 Test Procedure 28
 - 5.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested) 28
 - 5.1.4 Test Data:..... 29

- 5.2 Bandwidth for DSSS [Section 15.247 (a)(2)]..... 31
 - 5.2.1 Test Procedure 31
- 5.3 31
 - 5.3.1 Test Setup 31
 - 5.3.2 Test Data:..... 31
- 5.4 DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]..... 34
 - 5.4.1 Test Procedure 34
- 5.5 34
 - 5.5.1 Test Setup 34
 - 5.5.2 Test Data..... 34
- 5.6 Radiated Emission Measurement [Section [15.247(c)(4)] 35
 - 5.6.1 EUT Configuration..... 35
 - 5.6.2 Test Procedure 35
 - 5.6.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested) 35
 - 5.6.4 Test Data (30MHz – 1GHz) :..... 36
 - 5.6.5 Test Data (1GHz – 25 GHz) 37
- 5.7 Band Edge Measurement 40
 - 5.7.1 Test Procedure (Conducted) 40
 - 5.7.2 Test Setup (Conducted) 40
 - 5.7.3 Test Data:..... 40
 - 5.7.4 Test Procedure (Radiated) 42
 - 5.7.5 Test Setup (Radiated) 42
 - 5.7.6 Test Data:..... 43
- 5.8 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]..... 46
- 5.9 DSSS Peak Power Spectral Density [Section 15.247(d)] 47
 - 5.9.1 Test Procedure 47
 - 5.9.2 Test Setup 47
 - 5.9.3 Test Data:..... 47
- 6. TEST RESULTS (802.11a)..... 50
 - 6.1 Maximum Peak Output Power [Section 15.407 (a)(1)(2)(3)]..... 50
 - 6.1.1 Test Procedure 50
 - 6.1.2 Test Setup 50
 - 6.1.3 Test Data: (Normal Mode)..... 50
 - 6.1.4 Test Data: (Turbo Mode)..... 51
 - 6.2 Peak Power Spectral Density [Section 15.407(a)(1)(2)(3)] 58
 - 6.2.1 Test Procedure 58
 - 6.2.2 Test Setup 58
 - 6.2.3 Test Data: (Normal Mode)..... 58
 - 6.2.4 Test Data: (Turbo Mode)..... 58
 - 6.3 Peak Power Excursion Measurement [Section 15.407(a)(6)]..... 66
 - 6.3.1 Test Procedure 66
 - 6.3.2 Test Setup 66
 - 6.3.3 Test Data: (Normal Mode)..... 66
 - 6.3.4 Test Data: (Turbo Mode)..... 66
 - 6.4 Powerline Conducted Emissions [Section 15.207 & 15.407 (b)(5)] 73
 - 6.4.1 EUT Configuration..... 73

- 6.4.2 Test Procedure 73
- 6.4.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested) 73
- 6.4.4 Test Data:..... 74
- 6.5 Radiated Emission Measurement [Section 15.209 & 15.407(b)(5)] 76
 - 6.5.1 EUT Configuration..... 76
 - 6.5.2 Test Procedure 76
 - 6.5.3 EMI Receiver/Spectrum Analyzer Configuration 76
 - 6.5.4 Test Data (30MHz – 1GHz) 77
 - 6.5.5 Test Data (1GHz – 40 GHz, Transmitting) 78
- 6.6 Band Edge Measurement (Section 15.407 (b) (1) (2))..... 89
 - 6.6.1 Test Procedure (Conducted)..... 89
 - 6.6.2 Test Setup (Conducted)..... 89
 - 6.6.3 Test Data (conducted):..... 89
 - 6.6.4 Bandedge Measurement Test Procedure (Radiated)..... 92
 - 6.6.5 Test Setup (Radiated) 93
 - 6.6.6 Test Data (Radiated):..... 94
- 6.7 RF Exposure Measurement [Section 15.407(f)(4) & 1.1307(b)]...... 99
- Refer to SAR Test Report..... 99
- 6.8 Frequency Stability [Section 15.407(g)] 100
 - 6.8.1 Limits of Frequency Stability Measurement 100
 - 6.8.2 Test Procedure 100
 - 6.8.3 Test Setup 100
 - 6.8.4 Test Data..... 101
- 7. Appendix..... 102
 - 7.1 Appendix A: Measurement Procedure for Power line Conducted Emissions 102
 - 7.2 Appendix B: Test Procedure for Radiated Emissions..... 103
 - 7.3 Appendix C: Test Equipment..... 104
 - 7.3.1 Test Equipment List..... 104
 - 7.3.2 Software for Controlling Spectrum/Receiver and Calculating Test Data..... 105
 - 7.4 Appendix D: Layout of EUT and Support Equipment..... 106
 - 7.4.1 General Conducted Test Configuration 106
 - 7.4.2 General Radiation Test Configuration..... 107
 - 7.5 Appendix E: Description of Support Equipment 108
 - 7.5.1 Description of Support Equipment 108
 - 7.5.2 Software for Controlling Support Unit..... 108
 - 7.5.3 I/O Cable Condition of EUT and Support Units..... 109
 - 7.6 Appendix F: Accuracy of Measurement..... 110
 - 7.7 Appendix G: Photographs of EUT Configuration Test Set Up 112
 - 7.8 Appendix H: Antenna Spec..... 114

1. . General

1.1 Certification of Accuracy of Test Data

The electromagnetic interference tests which this report describes were conducted by an independent electromagnetic compatibility consultant, International Standards Laboratory in accordance with the test procedure specified in CFR 47 Part 15 Subpart C (Section 15.247), Subpart E (15.407) , and ANSI C63.4 Rules.

The test results contained in this report accurately represent the measurements of the EMC characteristics and the energy generated by sample equipment under test at the time of the test.

Equipment Tested: Notebook Personal Computer
(with WLAN a+b+g Mini-PCI module EM-500AG inside)
Model:MS2143
Applied by Wistron NeWeb Corp.

Sample received Date: 2003/11/05

Final test Date : 2003/11/30

Test Site: Chamber 02, Conduction 02

Temperature 21° C(Conduction Test); 22° C (Radiation Test)

Humidity: 51% (Conduction Test); 48% (Radiation Test)

Test Engineer: Jerry Chiou

The results show that the sample equipment tested as described in this report is in compliance with the Class B conducted and radiated emission limits of FCC Rules Part 15 Subpart B, and the limit of Part Subpart C Sec. 15.247; and the limits of FCC Part 15 Subpart E (Section 15.407).

Approve & Signature



Eddy Hsiung/Director

Test results given in this report apply only to the specific sample(s) tested under stated test conditions. This report shall not be reproduced other than in full without the explicit written consent of ISL. This report totally contains 117 pages, including 1 cover page , 3 contents page, and 113 pages for the test description. This report must not be use to claim product endorsement by NVLAP or any agency of the U.S. Government.

This test data shown below is traceable to NIST or national or international standard. International Standards Laboratory certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

2. Test Results Summary

The 802.11b and 802.11g functions of EUT has been tested to the FCC regulations listed below:

Tested Standards: 47 CFR Part 15 Subpart C			
Standard Section	Test Type	Result	Remarks
15.207	AC Power Line Emissions	Pass	
15.247(a)(2)	Spectrum Bandwidth Of DSSS device	Pass	
15.247(b)	Max. Peak Output Power	Pass	
15.247(c)	Radiated Emissions 30MHz – 25 GHz	Pass	
15.247(c)	Band Edge Measurement	Pass	
15.247(b)(4)	Radiation Exposure	Pass	SAR report attached
15.247(d)	Power Spectral Density	Pass	

The 802.11a functions of EUT has been tested to the FCC regulations listed below:

Tested Standards: 47 CFR Part 15 Subpart E			
Standard Section	Test Type	Result	Remarks
15.407(a)(1)(2)(3)	Peak Transmit Power	Pass	
15.407(a)(1)(2)(3)	Peak Power Spectral Density	Pass	
15.407(a)(6)	Peak Power Excursion	Pass	
15.407(b)(5)	AC Power Line Emissions	Pass	
15.407(b)(5)	Radiated Emissions 30MHz – 40 GHz	Pass	
15.407(f)	Radiation exposure	Pass	SAR report attached
15.407(g)	Frequency Stability	Pass	

3. Description of Equipment Under Test (EUT)

Description: Notebook Personal Computer
(with WLAN a+b+g Mini-PCI module
CM6 inside)

Model No.: MS2143

FCC ID: NKRMS2143CM6

Brand: acer

Wireless LAN Module: Wistron NeWeb, Model: EM-500AG
(802.11a/b/g)

Frequency Range 802.11a: 5180 - 5320 MHz, 5745 - 5805 MHz

Frequency Range 802.11b/g: 2412 - 2462 MHz

Support channel:

802.11a Normal mode 12 Channels

802.11a Turbo mode 5 Channels

802.11b 11 Channels

802.11g 11 Channels

Modulation Skill:

802.11a Normal mode OFDM (6 Mbps – 54 Mbps)

802.11a Turbo mode OFDM (12 Mbps – 108 MBps)

802.11b DBPSK(1Mbps), DQPSK(2Mbps),
CCK(5.5/11Mbps)

802.11g OFDM (6M - 54Mbps)

Antennas Type: Triple-band PIFA Type in Meta
Model: EBO-A
made by Wistron NeWeb Corp.

Antenna Connected: Connected to RF connector on the PCB of the
802.11a/b/g WLAN Adapter. The user is not
possible to change the antenna without
disassembling the notebook computer.

Antenna peak Gain:

Main antenna 2.89 dBi (2.500GHz), 4.82 dBi(5.350GHz)

Aux antenna -0.77 dBi (2.500GHz), 3.38 dBi(5.6475GHz)

Power Type of LAN module: 3.3V DC from Notebook PC

The channel and the operation frequency of 802.11b and 802.11g is listed below:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437		

The channel and the operation frequency of 802.11a Normal Mode is listed below:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	5180	07	5300
02	5200	08	5320
03	5220	09	5745
04	5240	10	5765
05	5260	11	5785
06	5280	12	5805

The channel and the operation frequency of 802.11a Turbo Mode is listed below:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	5210	04	5760
02	5250	05	5800
03	5290		

AC Power Adapter Manufacturer:	Liteon ADT 120W 3P PA-1121-02AC REV.A
AC Power Cord Type:	Unshielded, 1.8m (Detachable) to Power Adapter
DC Power Cable Type:	Unshielded, 1.8m (Non-Detachable) at Power Adapter (With a Core)
SODIMM DDR333:	Micron MT8VDDT3264HDG-335C3 256MB
LCD:	14.1 AU (Model:B141XN04 V.2
Hard Disk Driver:	HGST (Model: IC25N020ATMR04-0) 20GB
DVD ROM Driver:	QSI (Model: SDR-083)
Combo Driver:	QSI (Model: SBW-242U)
MDC Modem Module:	Ambit (Model:T60M283.10)
DVD-Dual Driver:	Pioneer(Model: DVR-K12D)
1394 C0nnector:	one 4 Pins
USB Connector:	four 4 Pins
RJ11 Connector:	one 2 Pins
RJ45 Connector:	one 8 Pins
VGA Connector:	one 15 Pins
Mini PCI Slot:	one
TV Port:	one 7 Pins
Line out Port:	one
Line-in Port:	one
DC IN Port:	one
Battery:	Li-ION, 12cell
Speed & CPU	
Speed	CPU
100MHz	AMD Athlon XP ATH64 DTR3000+1.8G 1ML2 KC.A3302.89H
100MHz	AMD Athlon XP ATH64 DTR3300+2.0G 1ML2 KC.A3002.89H

3.1 Test Standards and Procedure

Test Specification: FCC Part 15 subpart C (Section 15.247) and subpart E (Section 15.407) and/or CISPR 22/EN55022, RSS210

Test Procedure: ANSI C63.4, CFR 47 Sec. 15.247, Sec. 15.407 as detailed in Appendices

3.2 General Test Conditions

1. During the test, the EUT was set in continuously transmitting mode with a duty cycle of 99% (maximum allowed).
2. The channel 1, 6, 11 of 802.11b and 802.11g of EUT were all tested.
3. The channel 1, 4, 5, 8,9,12 of Normal Mode of 802.11a and Channel 1, 2, 3,4,5 of Turbo Mode of 802.11a were also all tested.
4. "Normal mode" of 802.11a and 802.11g allows data rates up to 54 Mbps. The EUT was tested in the data rate that produced the highest output power (6 Mbps)
5. "Turbo mode" of 802.11a allows data rates up to 108 Mbps. The EUT was tested in the data rate that produced the highest output power (12 Mbps).
6. Both Main antenna and Aux antenna of EUT are able to be used as the Transmitting Antenna. Both antennas have been tested respectively, and the worst data is showed in the report.

4. TEST RESULTS (802.11b)

4.1 Powerline Conducted Emissions [Section 15.207]

4.1.1 EUT Configuration

The EUT was set up on the non-conductive table that is 1.0 by 1.5 meter, 80cm above ground. The wall of the shielded room was located 40cm to the rear of the EUT.

Power to the EUT was provided through the LISN. The impedance vs. frequency characteristic of the LISN is complied with the limit shown on the figure 1 of ANSI C63.4-2001.

Both lines (neutral and hot) were connected to the LISN in series at testing. A coaxial-type connector which provides one 50 ohms terminating impedance was provided for connecting the test instrument. The excess length of the power cord was folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

If the EUT is a Personal Computer or a peripheral of personal computer, and the personal computer has an auxiliary AC outlet which can be used for providing power to an external monitor, then all measurements will be made with the monitor power from first the computer-mounted AC outlet and then a floor-mounted AC outlet.

4.1.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. The main power line conducted EMI tests were run on the hot and neutral conductors of the power cord and the results were recorded. The effect of varying the position of the interface cables has been investigated to find the configuration that produces maximum emission.

At the frequencies where the peak values of the emissions were higher than 6dB below the applicable limits, the emissions were also measured with the quasi-peak detectors. At the frequencies where the quasi-peak values of the emissions were higher than 6dB below the applicable average limits, the emissions were also measured with the average detectors.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

4.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range:	150 KHz--30MHz
Detector Function:	Quasi-Peak/Average
Bandwidth (RBW):	9KHz

4.1.4 Test Data:

Table Power Line Conducted Emissions (Hot) Channel 1, 6, 11

Frequency (MHz)	Corrective Factor		Quasi-Peak			Average		
	LISN Loss (dB)	Cable Loss (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
0.41940	0.10	0.03	47.56	58.30	-10.74	30.61	48.30	-17.69
0.46146	0.11	0.03	41.58	57.10	-15.52	25.50	47.10	-21.60
0.65463	0.14	0.04	44.27	56.00	-11.73	25.76	46.00	-20.24
0.68181	0.15	0.04	37.96	56.00	-18.04	27.66	46.00	-18.34
0.97906	0.20	0.07	42.17	56.00	-13.83	26.55	46.00	-19.45
1.06463	0.48	0.07	38.05	56.00	-17.95	29.21	46.00	-16.79
1.31385	0.41	0.08	36.66	56.00	-19.34	23.41	46.00	-22.59
1.93950	0.22	0.10	33.16	56.00	-22.84	24.54	46.00	-21.46
2.20121	0.21	0.10	31.99	56.00	-24.01	22.75	46.00	-23.25
16.1308	0.75	0.29	39.58	60.00	-20.42	31.34	50.00	-18.66


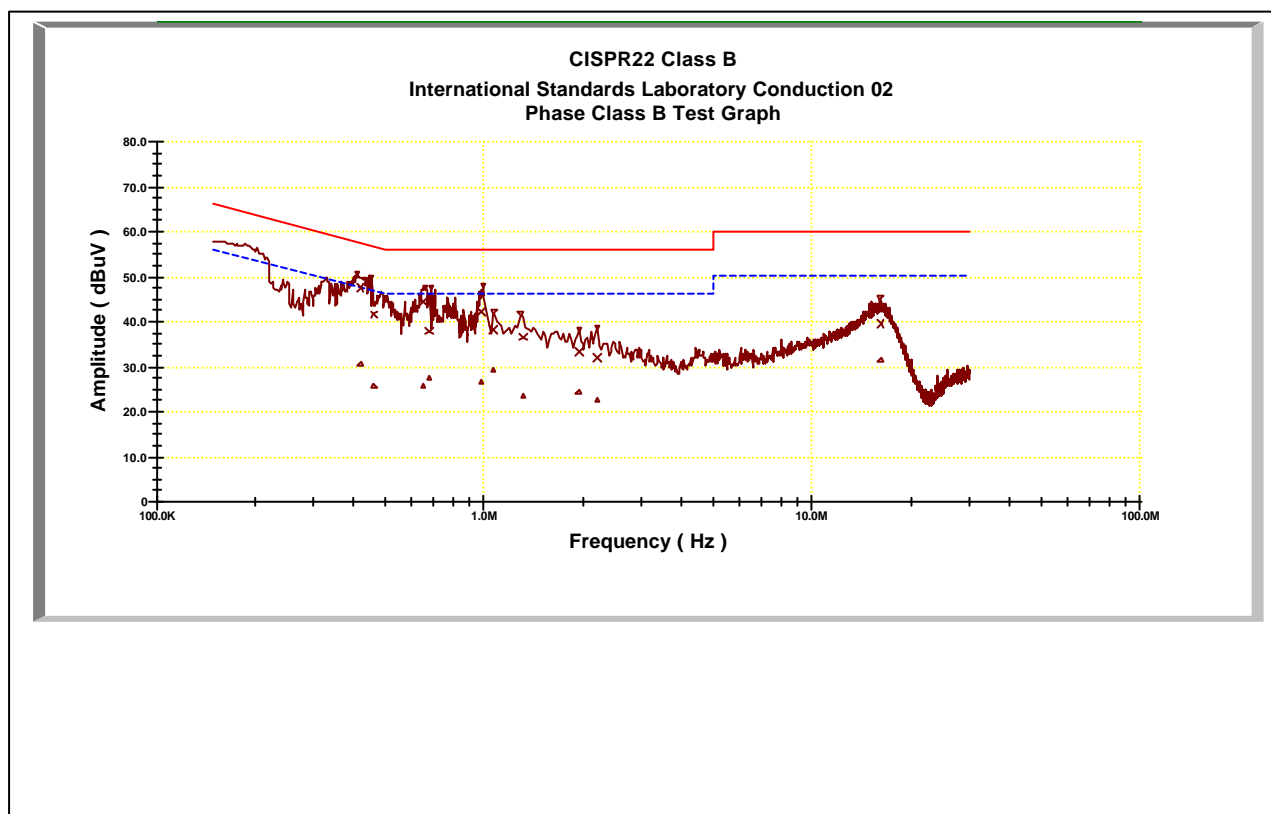


Table Power Line Conducted Emissions (Neutral) Channel 1, 6, 11

Frequency (MHz)	Corrective Factor		Quasi-Peak			Average		
	LISN Loss (dB)	Cable Loss (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
0.33798	0.10	0.02	40.61	60.63	-20.02	21.98	50.63	-28.65
0.42998	0.10	0.03	44.67	58.00	-13.33	27.11	48.00	-20.89
0.66751	0.14	0.04	38.14	56.00	-17.86	20.42	46.00	-25.58
0.67128	0.15	0.04	37.48	56.00	-18.52	19.30	46.00	-26.70
0.99873	0.20	0.07	36.78	56.00	-19.22	18.74	46.00	-27.26
1.30958	0.27	0.08	36.68	56.00	-19.32	19.58	46.00	-26.42
1.62939	0.24	0.09	33.47	56.00	-22.53	20.87	46.00	-25.13
2.10828	0.20	0.10	34.18	56.00	-21.82	23.31	46.00	-22.69
3.07014	0.20	0.11	33.50	56.00	-22.50	24.57	46.00	-21.43
16.6390	0.43	0.29	37.30	60.00	-22.70	28.66	50.00	-21.34

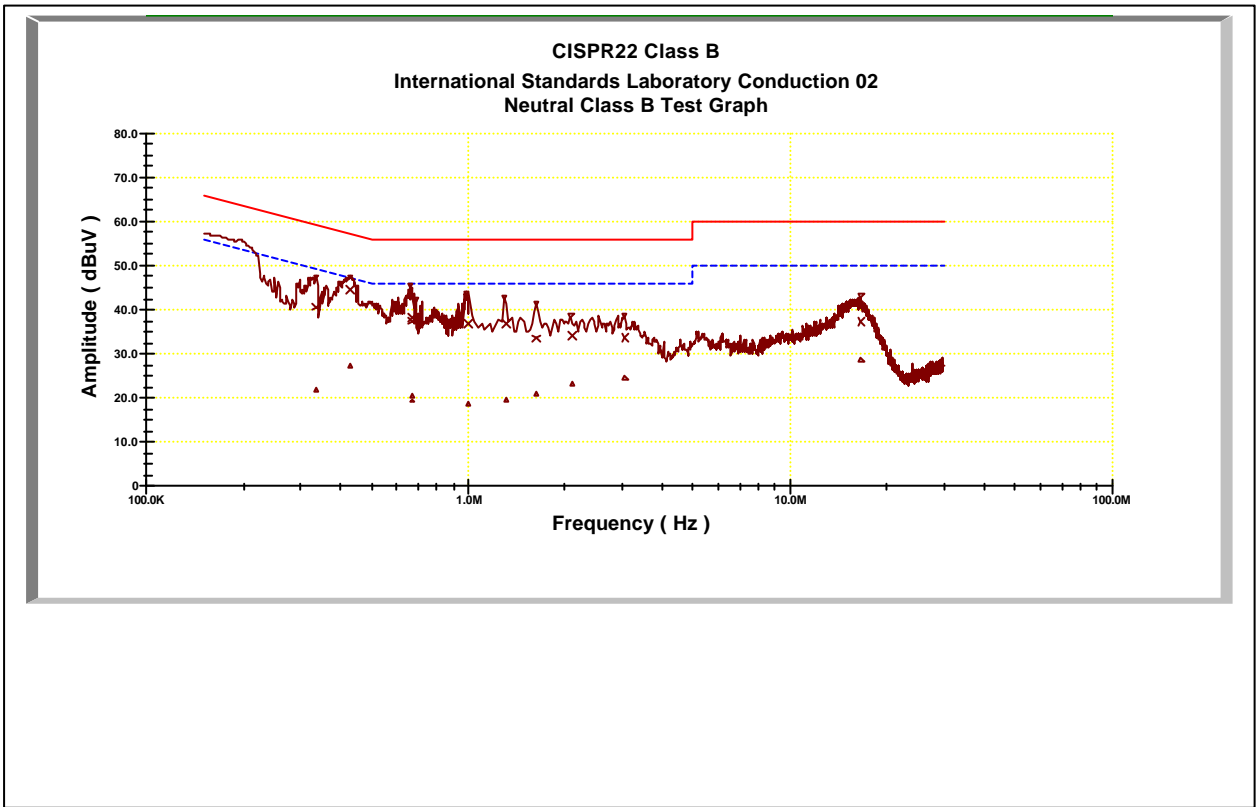

* NOTE: During the test, the EMI receiver was set to Max. Hold then switch the EUT Channel between 1 , 6, 11 to get the maximum reading of all these channels .
 Margin = Amplitude + Insertion Loss- Limit
 A margin of -8dB means that the emission is 8dB below the limit


4.2 Bandwidth for DSSS [Section 15.247 (a)(2)]

4.2.1 Test Procedure

The Transmitter output of EUT was connected to the spectrum analyzer. The 6 dB bandwidth of the fundamental frequency was measured. The setting of spectrum analyzer is as follows

Equipment mode: Spectrum analyzer
Detector function: Peak mode
RBW: 100KHz
VBW: 100KHz

4.2.2 Test Setup

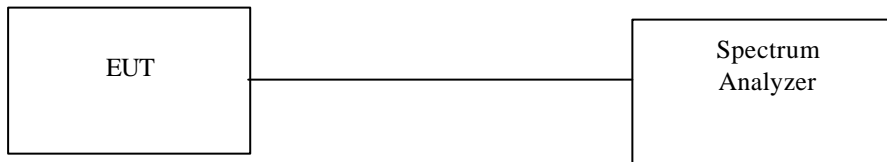


4.2.3 Test Data


Table 6dB Bandwidth

Chennel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Pass/Fail
1	2412	12.20	0.5	Pass
6	2437	12.44	0.5	Pass
11	2462	12.36	0.5	Pass


Channel1:

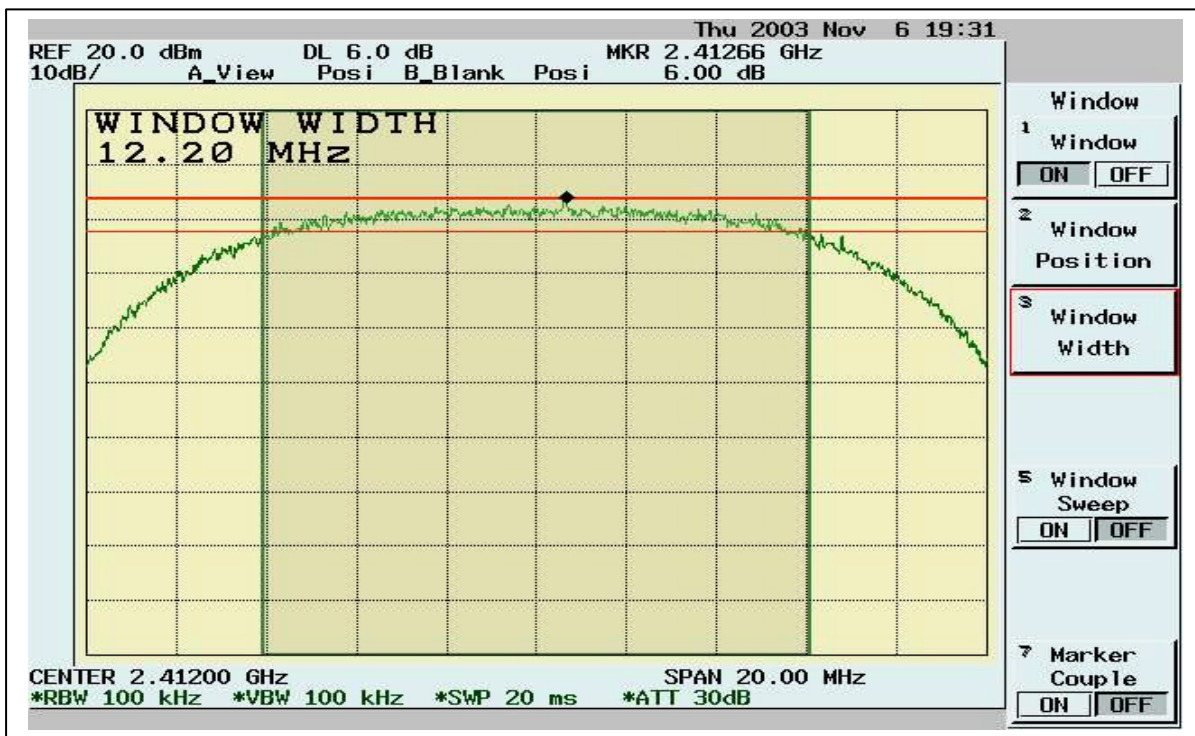

Channel6:

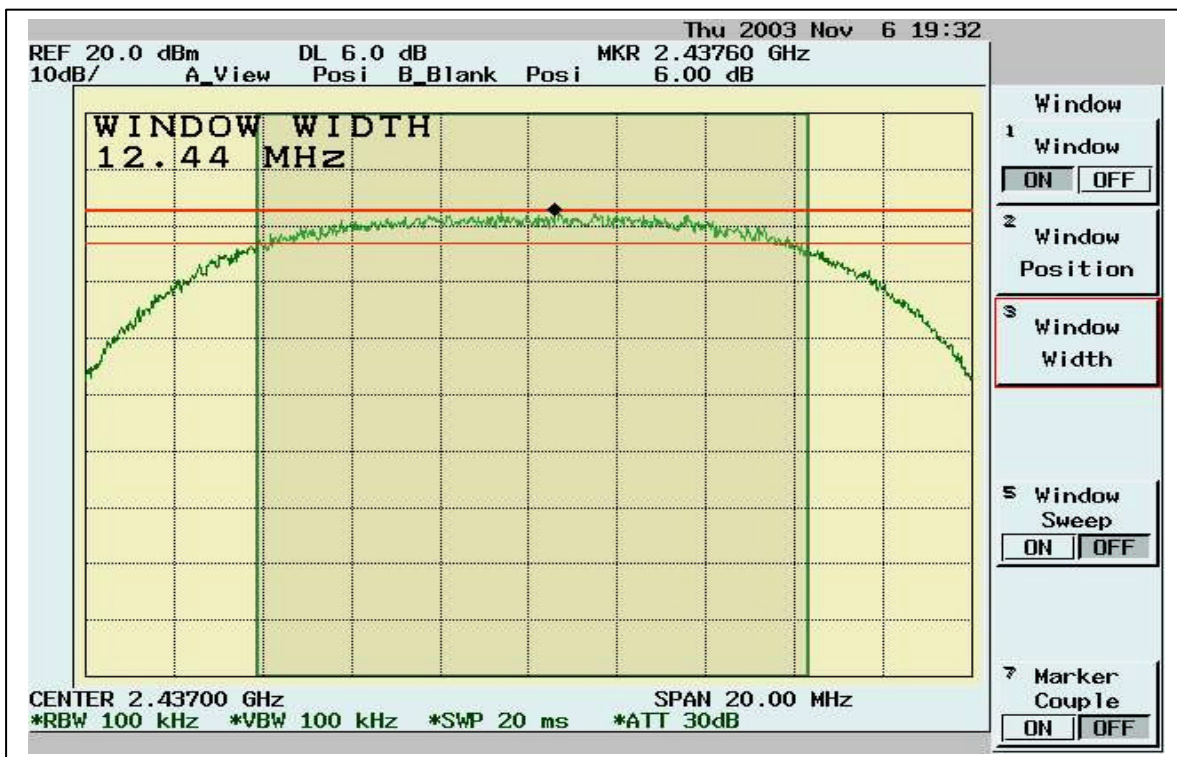

Channel11:

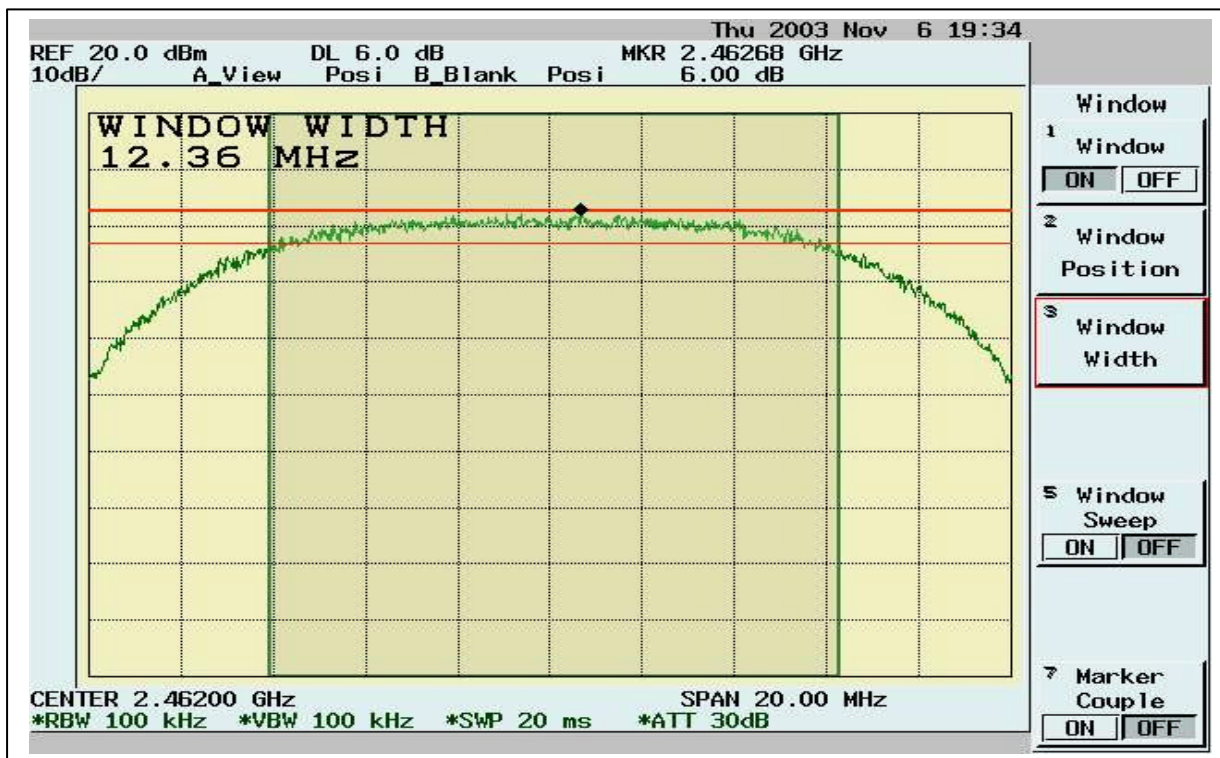

4.3 DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]

4.3.1 Test Procedure

1. The Transmitter output of EUT was connected to the peak power analyzer.

4.3.2 Test Setup



4.3.3 Test Data:

Table Maximum Peak Output Power

Chennel	Frequency (MHz)	Peak Power Output (mW)	Peak Power Output (dBm)	Limit (dBm)	Pass/Fail
1	2412	56.182	17.496	30	Pass
6	2437	55.373	17.433	30	Pass
11	2462	54.588	17.371	30	Pass

4.4 Radiated Emission Measurement [Section [15.247(c)(4)]

4.4.1 EUT Configuration

The equipment under test was set up on the 10 meter chamber with measurement distance of 3 meters. The EUT was placed on a non-conductive table 80cm above ground.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

4.4.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. We found the maximum readings by varying the height of antenna and then rotating the turntable. Both polarization of antenna, horizontal and vertical, are measured.

30M to 1GHz: The highest emissions between 30 MHz to 1000 MHz were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission.

1GHz – 25GHz: The highest emissions were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in peak mode to determine the precise amplitude of the emission. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission. During test the EMI receiver and spectrum was setup according to *EMI Receiver/Spectrum Analyzer Configuration*.

For the test of 2nd to 10th harmonics frequencies, the equipment setup was also refer to *EMI Receiver/Spectrum Analyzer Configuration*. The frequencies were tested using Peak mode first, if the test data is higher than the emissions limit, an additional measurement using Average mode will be performed and the average reading will be compared to the limit and record in test report.

4.4.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range Tested:	30MHz~1000MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth (RBW):	120KHz
Video Bandwidth (VBW)	1MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Peak Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	1MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Average Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	10 Hz

4.4.4 Test Data (30MHz – 1GHz) :

30M – 1GHz Open Field Radiated Emissions (Horizontal) Channel 1, 6, 11

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin* (dB)	Height (cm)	Position (°)
264.74	9.85	12.45	4.31	0.00	26.62	46.00	-19.38	100.00	232.00
287.05	9.80	12.34	4.46	0.00	26.60	46.00	-19.40	150.00	264.00
331.67	7.98	13.49	4.76	0.00	26.22	46.00	-19.78	100.00	232.00
431.58	11.29	15.85	5.39	0.00	32.53	46.00	-13.47	100.00	183.00
443.22	4.77	15.95	5.45	0.00	26.17	46.00	-19.83	150.00	200.00
463.59	10.91	16.30	5.57	0.00	32.78	46.00	-13.22	200.00	170.00
472.32	4.61	16.49	5.61	0.00	26.72	46.00	-19.28	100.00	200.00
480.08	7.45	16.66	5.66	0.00	29.77	46.00	-16.23	150.00	71.00
486.87	4.11	16.81	5.71	0.00	26.63	46.00	-19.37	100.00	55.00
499.48	14.45	17.09	5.79	0.00	37.33	46.00	-8.67	200.00	71.00

30M – 1GHz Open Field Radiated Emissions (Vertical) Channel 1, 6, 11

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin* (dB)	Height (cm)	Position (°)
165.8	13.34	8.68	3.44	0.00	25.46	43.50	-18.04	100.00	336.00
430.61	6.25	15.84	5.38	0.00	27.48	46.00	-18.52	150.00	140.00
499.48	7.27	17.09	5.79	0.00	30.14	46.00	-15.86	150.00	270.00
531.49	5.59	17.86	5.97	0.00	29.41	46.00	-16.59	100.00	156.00
565.44	4.23	18.30	6.14	0.00	28.68	46.00	-17.32	200.00	108.00
623.64	2.86	18.49	6.42	0.00	27.77	46.00	-18.23	200.00	336.00
632.37	6.74	18.56	6.47	0.00	31.77	46.00	-14.23	200.00	287.00
650.8	2.39	18.70	6.55	0.00	27.65	46.00	-18.35	100.00	254.00
658.56	1.98	18.73	6.59	0.00	27.31	46.00	-18.69	100.00	140.00
665.35	5.40	18.76	6.62	0.00	30.78	46.00	-15.22	150.00	270.00

* NOTE:

During the test, the EUT was set to Channel 1, 6, 11 respectively to get the maximum reading of all the critical emission frequencies.

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 30MHz to 1GHz have been tested

4.4.5 Test Data .

1GHz~ 25 GHz (Horizontal), Channel 1 : 2412 MHz

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Position (°)
3088.91	47.43	30.91	1.38	46.59	33.12	54	-20.88	100	167
3411.59	49.70	31.29	1.48	46.64	35.84	54	-18.16	100	128
7130.87	41.98	39.84	2.34	46.25	37.92	54	-16.08	102	154
14586.4	25.71	44.43	3.42	41.80	31.76	54	-22.24	100	176
14824.2	25.98	43.95	3.45	43.05	30.33	54	-23.67	100	261
15656.3	27.17	43.30	3.53	42.27	31.74	54	-22.26	100	181

1GHz~ 25 GHz (Vertical), , Channel 1 : 2412 MHz

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Position (°)
3428.57	54.95	31.31	1.49	46.64	41.11	54	-12.89	110	110
3581.42	50.29	31.50	1.54	46.56	36.77	54	-17.23	100	183
3751.25	47.30	31.70	1.60	46.38	34.23	54	-19.77	100	275
5568.43	46.95	36.19	2.06	47.30	37.89	54	-16.11	102	112
7215.78	46.67	39.74	2.36	46.22	42.56	54	-11.44	100	193
14688.3	30.95	44.22	3.43	42.34	36.27	54	-17.73	105	226

Note:

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss -
Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal), , Channel 6 : 2437 MHz

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Position (°)
3156.84	45.45	30.99	1.40	46.60	31.23	54	-22.77	105	110
3428.57	50.37	31.31	1.49	46.64	36.53	54	-17.47	100	129
5602.40	41.38	36.18	2.07	47.27	32.36	54	-21.64	100	138
7130.87	41.95	39.84	2.34	46.25	37.89	54	-16.11	100	112
14688.3	26.14	44.22	3.43	42.34	31.46	54	-22.54	101	200
15724.3	26.21	43.52	3.54	42.05	31.23	54	-22.77	100	191

1GHz~ 25 GHz (Vertical), Channel 6 : 2437 MHz

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin*	Height (cm)	Position (°)
3190.81	46.80	31.03	1.41	46.61	32.64	54	-21.36	100	123
3411.59	54.57	31.29	1.48	46.64	40.71	54	-13.29	100	184
5585.41	46.87	36.18	2.07	47.29	37.83	54	-16.17	103	122
7147.85	42.27	39.82	2.35	46.24	38.20	54	-15.80	101	192
7300.70	44.16	39.64	2.37	46.18	39.99	54	-14.01	100	205
14688.3	29.70	44.22	3.43	42.34	35.02	54	-18.98	100	246

Note:

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal), Channel 11: 2462 MHz

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin* (dB)	Height (cm)	Position (°)
3088.91	44.91	30.91	1.38	46.59	30.60	54	-23.40	100	115
3411.59	50.44	31.29	1.48	46.64	36.58	54	-17.42	100	294
7147.85	41.89	39.82	2.35	46.24	37.81	54	-16.19	105	198
14688.3	26.77	44.22	3.43	42.34	32.08	54	-21.92	100	289
15282.7	25.79	43.15	3.49	43.30	29.13	54	-24.87	101	121
15639.4	26.93	43.25	3.53	42.33	31.38	54	-22.62	100	305

1GHz~ 25 GHz (Vertical), Channel 11 : 2462 MHz

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin* (dB)	Height (cm)	Position (°)
3411.59	54.90	31.29	1.48	46.64	41.04	54	-12.96	103	108
3581.42	46.48	31.50	1.54	46.56	32.95	54	-21.05	100	292
5619.38	43.87	36.18	2.07	47.26	34.86	54	-19.14	105	148
7130.87	41.84	39.84	2.34	46.25	37.78	54	-16.22	100	283
7368.63	38.62	39.56	2.39	46.15	34.41	54	-19.59	101	205
14688.3	28.27	44.22	3.43	42.34	33.58	54	-20.42	100	103

Note:

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit


All frequencies from 1GHz to 25 GHz have been tested.

4.5 Band Edge Measurement

4.5.1 Test Procedure (Conducted)

1. The Transmitter output of EUT was connected to the spectrum analyzer.
 Equipment mode: Spectrum analyzer
 Detector function: Peak mode
 SPAN: 100MHz
 RBW: 100KHz
 VBW: 100KHz
 Center frequency: 2.4GHz, 2.4835GHz.
 Sweep time= 200ms sec.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band.

4.5.2 Test Setup (Conducted)

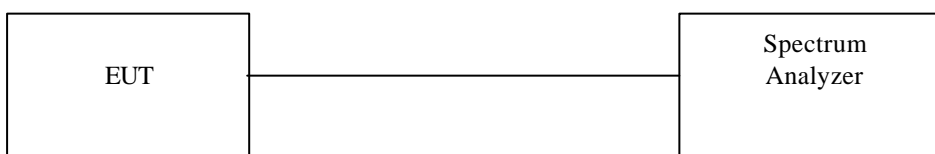

4.5.3 Test Data:

Band Edge measurement (Conducted)

Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Carrier - Outsideband Limit: > 20dB (dB)	Pass/Fail
1	2412.6	111.28	---	---
Outside band	2400.0	72.38	38.9	Pass
11	2462.5	108.59	---	---
Outside band	2474.5	73.15	35.44	Pass

Note: Two RF output(MAIN & AUX) have been test,the worse data shown above

Band Edge Conducted measurement



Band Edge Conducted Measurement



4.5.4 Band Edge measurement Test Procedure (Radiated)

1. Antenna and Turntable test procedure same as *Radiated Emission Measurement*
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN: 100MHz
RBW: 1MHz
VBW: 1MHz
Center frequency: 2.395GHz, 2.48 GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band.
4. For peak frequency emission level measurement in Restricted Band ,
Change RBW: 1MHz ,
VBW: 10Hz,
Span: 100MHz.
5. Get the spectrum reading after Maximum Hold function is completed.

4.5.5 Test Setup (Radiated)

Same as *Radiated Emission Measurement*

4.5.6 Test Data:

Band Edge measurement (Radiated)

Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Correction Factor (dB/m)	Emission Level (dBuV/m)	dBc (Limit: > 20dBc)	Limit (dBuV/m)	Equip. Setup VBW	Pass or Fail
1(peak mode)	2413.0	75.94	31.67	107.61	---	---	1MHz	---
Outside band	2399.7	38.97	31.67	70.64	36.97	---	1MHz	Pass
1(average mode)	2413.4	66.88	31.67	98.55	---	---	10Hz	---
Restricted band	2368.0	18.77	31.67	50.44	-----	54	10Hz	Pass
11(peak mode)	2463.1	76.21	31.64	107.85	----	---	1MHz	---
Outside band	2474.6	39.13	31.64	70.77	37.08	---	1MHz	Pass
11(average mode)	2461.1	67.53	31.64	99.17	----	---	10Hz	---
Restricted band	2495.9	18.22	31.64	49.86	-----	54	10Hz	Pass

Note: The Spectrum plot of emission level measurement in Restricted band is attached.

Emission Level = Spectrum Reading + Correction Factor

Correction Factor = Antenna Factor + cable loss – amplifier gain

Band Edge measurement for radiated emission in Restricted Band(Radiated)

Peak Mode (Channel 1)



Band Edge measurement for radiated emission in Restricted Band(Radiated)

Average Mode (Channel 1)



Band Edge measurement for radiated emission in Restricted Band(Radiated)

Peak Mode (Channel 11)



Band Edge measurement for radiated emission in Restricted Band(Radiated)

Average Mode (Channel 11)



4.6 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]

Refer to SAR Test Report attached

4.7 DSSS Peak Power Spectral Density [Section 15.247(d)]

4.7.1 Test Procedure

1. The Transmitter output of EUT was connected to the spectrum analyzer.
 Equipment mode: Spectrum analyzer
 Detector function: Peak mode
 SPAN: 1.5MHz
 RBW: 3KHz
 VBW: 30KHz
 Center frequency: fundamental frequency tested.
 Sweep time= 500 sec.
2. Using Peak Search to read the peak power after Maximun Hold function is completed.

4.7.2 Test Setup




4.7.3 Test Data:

Maximum Peak Output Power Density


Chennel	Frequency (MHz)	Spectrum Reading (dBm/3KHz)	Cable Loss (dB)	Peak Power Output (dBm/3KHz)	Limit (dBm/3KHz)	Pass/Fail
1	2412	-9.52	1.09	-8.43	8	Pass
6	2437	-7.22	1.09	-6.13	8	Pass
11	2462	-10.33	1.09	-9.24	8	Pass

Note: Two RF output(MAIN & AUX) have been test,the worse data shown above.


Channel 1

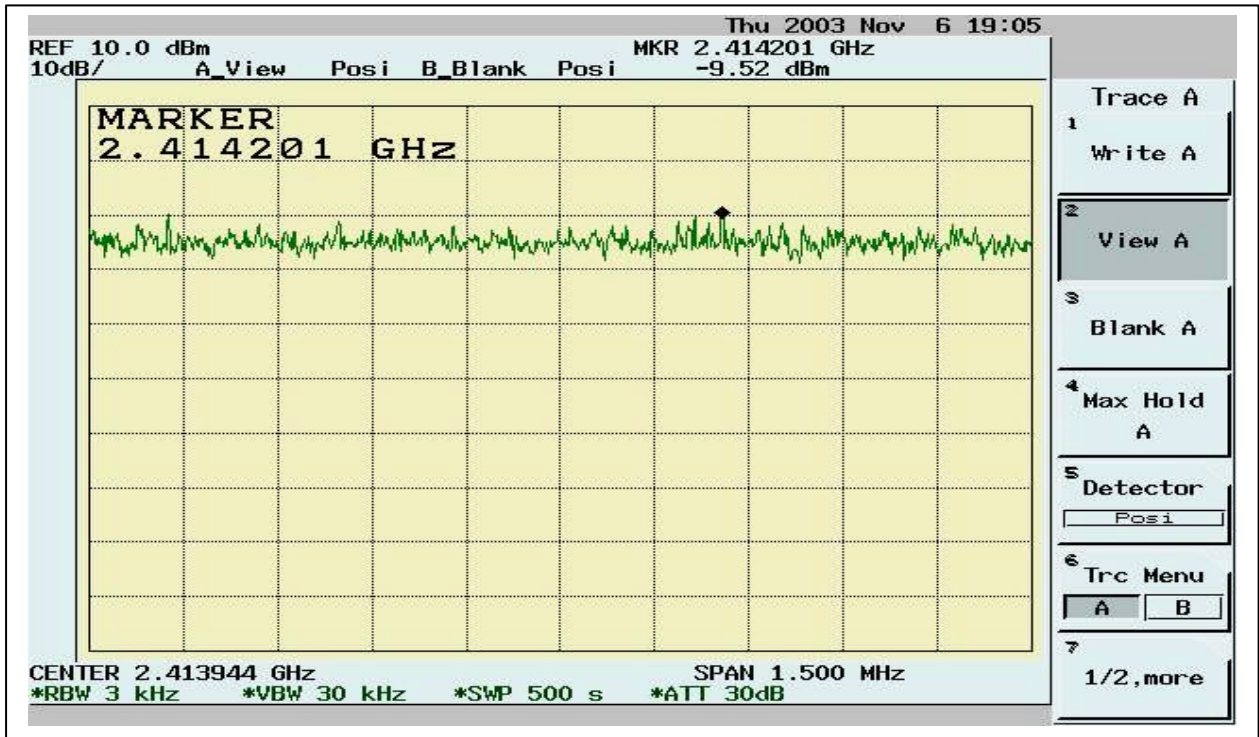

Channel6

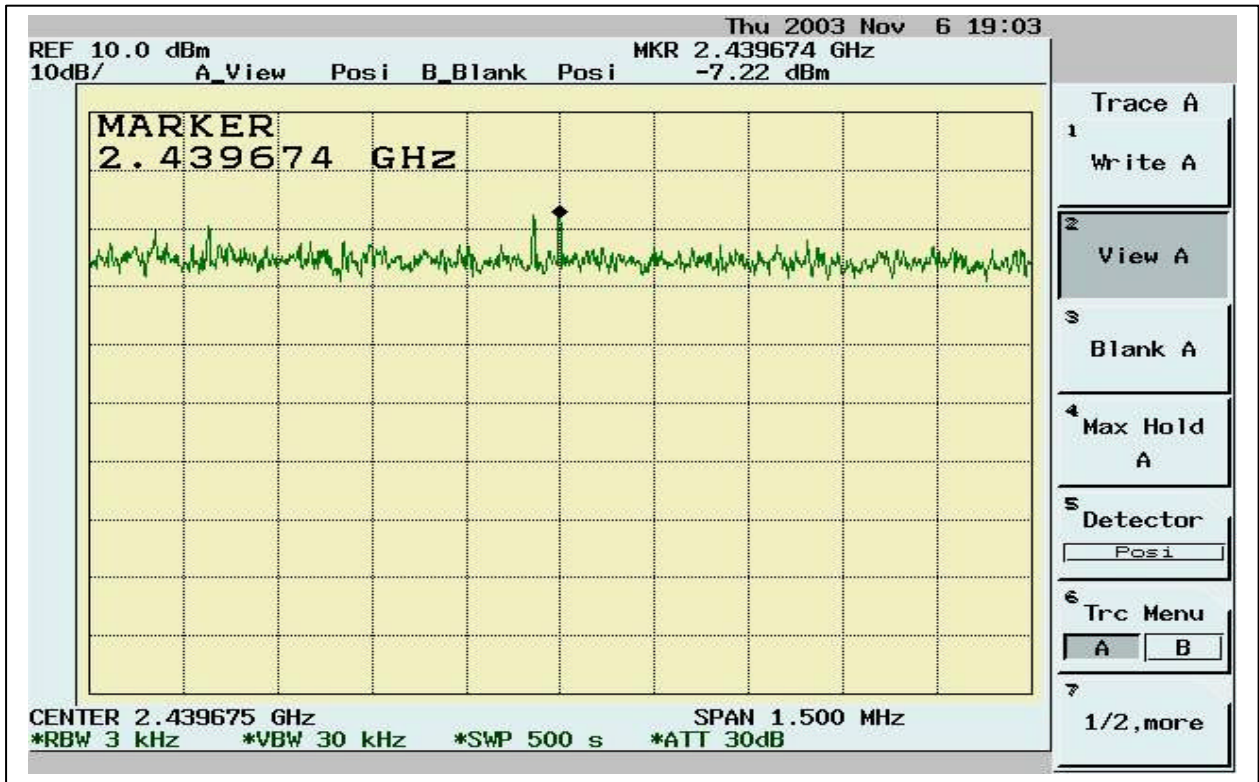

Channel 11

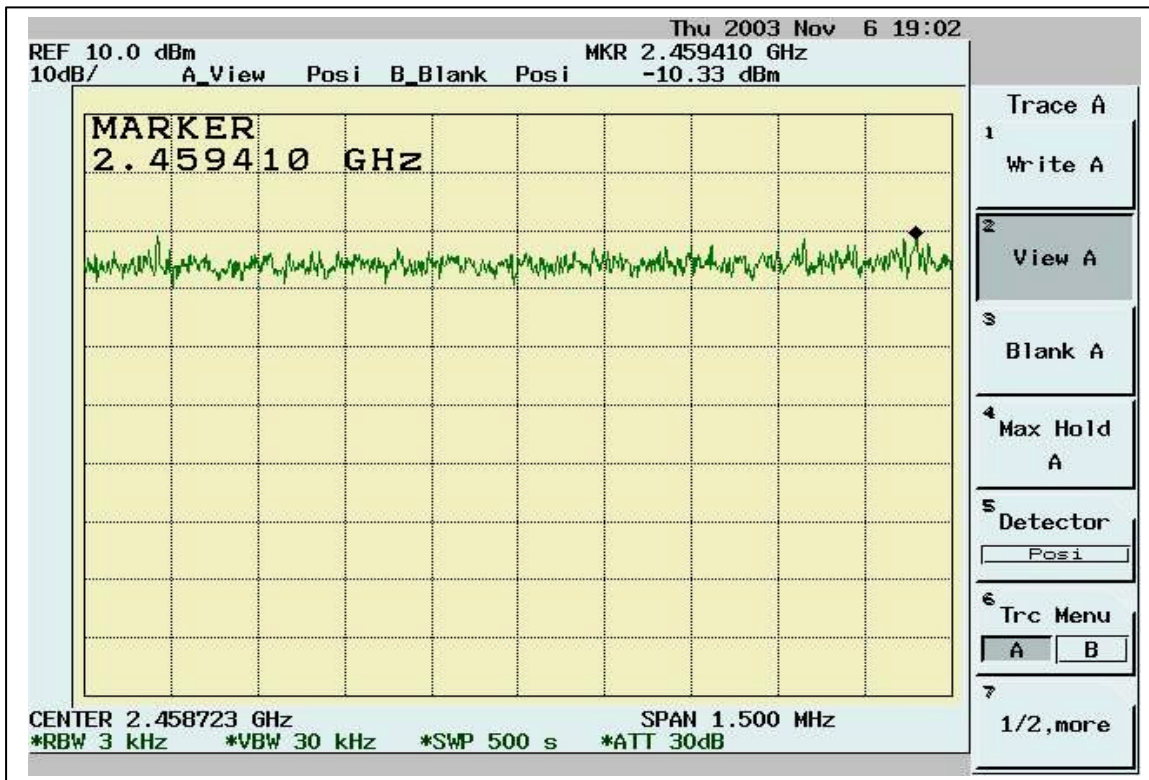

5. TEST RESULTS (802.11g)

5.1 Powerline Conducted Emissions [Section 15.207]

5.1.1 EUT Configuration

The conducted emission test setups are in accordance with Figs 9, 10(a) and 10(b) of ANSI C63.4-2001, CFR 47 Part 15 Subpart B; or EN55022:1994/ A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1996.

The EUT was set up on the non-conductive table that is 1.0 by 1.5 meter, 80cm above ground. The wall of the shielded room was located 40cm to the rear of the EUT.

Power to the EUT was provided through the LISN. The impedance vs. frequency characteristic of the LISN is complied with the limit shown on the figure 1 of ANSI C63.4-2001.

Both lines (neutral and hot) were connected to the LISN in series at testing. A coaxial-type connector which provides one 50 ohms terminating impedance was provided for connecting the test instrument. The excess length of the power cord was folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

If the EUT is a Personal Computer or a peripheral of personal computer, and the personal computer has an auxiliary AC outlet which can be used for providing power to an external monitor, then all measurements will be made with the monitor power from first the computer-mounted AC outlet and then a floor-mounted AC outlet.

5.1.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. The main power line conducted EMI tests were run on the hot and neutral conductors of the power cord and the results were recorded. The effect of varying the position of the interface cables has been investigated to find the configuration that produces maximum emission.

At the frequencies where the peak values of the emissions were higher than 6dB below the applicable limits, the emissions were also measured with the quasi-peak detectors. At the frequencies where the quasi-peak values of the emissions were higher than 6dB below the applicable average limits, the emissions were also measured with the average detectors.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.


5.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range:	150 KHz--30MHz
Detector Function:	Quasi-Peak/Average
Bandwidth (RBW):	9KHz

5.1.4 Test Data:


Power Line Conducted Emissions (Hot) Channel 1, 6, 11

Frequency (MHz)	Corrective Factor		Quasi-Peak			Average		
	LISN Loss (dB)	Cable Loss (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
0.33206	0.10	0.02	45.13	60.80	-15.67	28.29	50.80	-22.51
0.38395	0.10	0.02	43.82	59.32	-15.49	29.67	49.32	-19.65
0.64983	0.14	0.04	45.02	56.00	-10.98	31.60	46.00	-14.40
0.97918	0.20	0.07	42.47	56.00	-13.53	27.12	46.00	-18.88
0.98726	0.20	0.07	41.47	56.00	-14.53	26.74	46.00	-19.26
1.30043	0.41	0.08	38.44	56.00	-17.56	28.05	46.00	-17.95
5.14773	0.34	0.13	27.94	60.00	-32.06	21.48	50.00	-28.52
12.2228	0.60	0.23	33.72	60.00	-26.28	26.07	50.00	-23.93
15.1108	0.70	0.30	38.66	60.00	-21.34	30.50	50.00	-19.50
29.7601	0.90	0.35	24.49	60.00	-35.51	16.39	50.00	-33.61

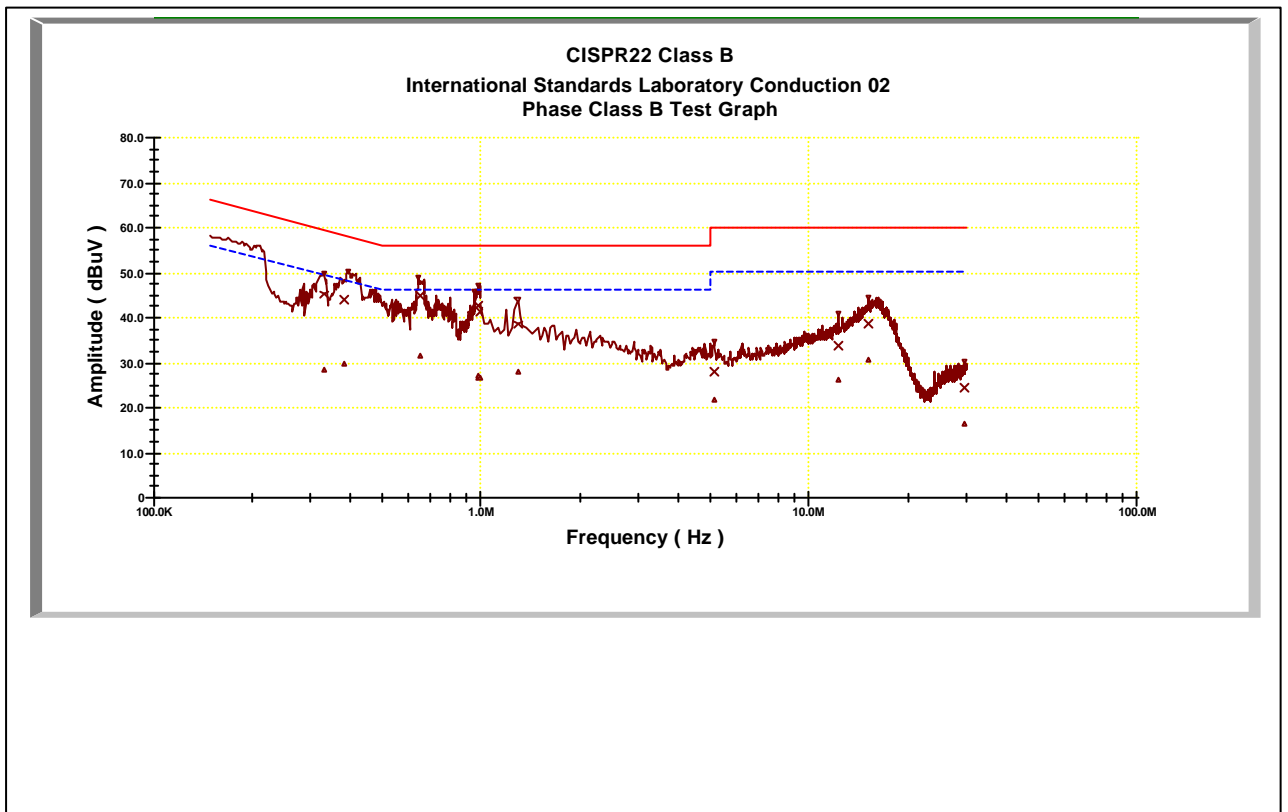

Power Line Conducted Emissions (Neutral) Channel 1, 6, 11

Frequency (MHz)	Corrective Factor		Quasi-Peak			Average		
	LISN Loss (dB)	Cable Loss (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
0.32558	0.10	0.02	45.55	60.98	-15.43	28.51	50.98	-22.47
0.40731	0.10	0.03	41.21	58.65	-17.44	25.14	48.65	-23.51
0.47243	0.11	0.03	36.39	56.79	-20.40	23.03	46.79	-23.76
0.47398	0.11	0.03	36.19	56.74	-20.55	23.26	46.74	-23.48
0.49005	0.12	0.03	35.65	56.28	-20.63	21.37	46.28	-24.91
1.02516	0.30	0.07	33.64	56.00	-22.36	21.36	46.00	-24.64
1.17121	0.28	0.08	31.19	56.00	-24.81	20.78	46.00	-25.22
1.29675	0.27	0.08	37.80	56.00	-18.20	22.27	46.00	-23.73
1.38496	0.26	0.08	30.87	56.00	-25.13	21.75	46.00	-24.25
1.87218	0.21	0.10	33.60	56.00	-22.40	23.80	46.00	-22.20

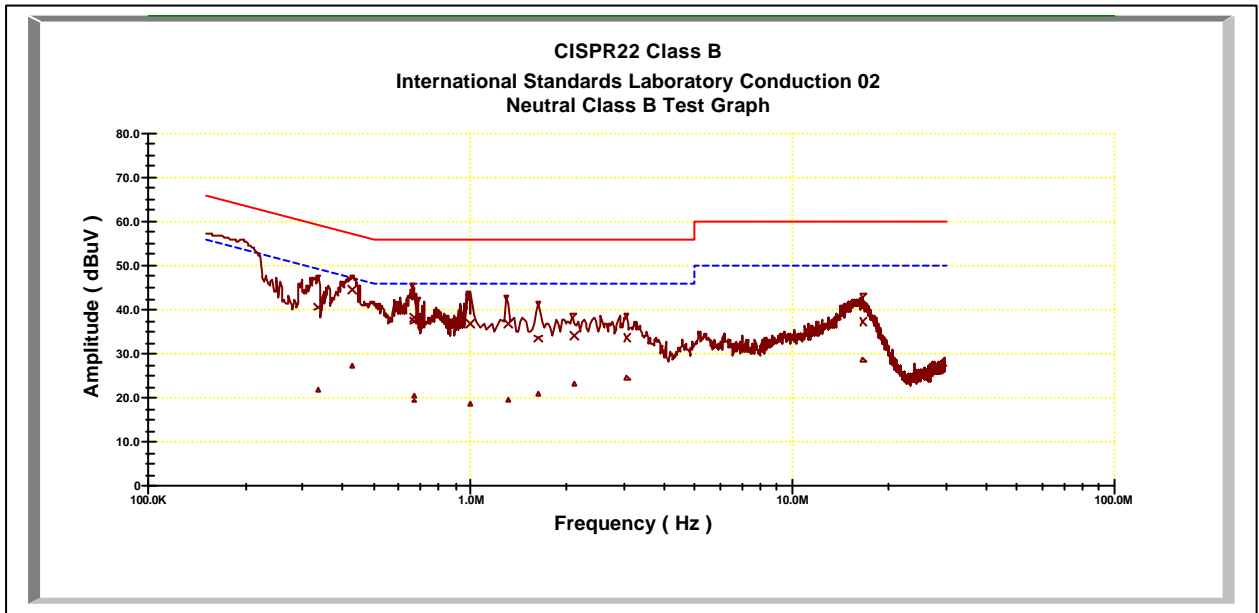

* NOTE: During the test, the EMI receiver was set to Max. Hold then switch the EUT Channel between 1 , 6, 11 to get the maximum reading of all these channels.
 Margin = Amplitude + Insertion Loss- Limit
 A margin of -8dB means that the emission is 8dB below the limit

5.2 Bandwidth for DSSS [Section 15.247 (a)(2)]


5.2.1 Test Procedure

5.3

The Transmitter output of EUT was connected to the spectrum analyzer. The 6 dB bandwidth of the fundamental frequency was measured. The setting of spectrum analyzer is as follows

Equipment mode: Spectrum analyzer
Detector function: Peak mode
RBW: 100KHz
VBW: 100KHz


5.3.1 Test Setup

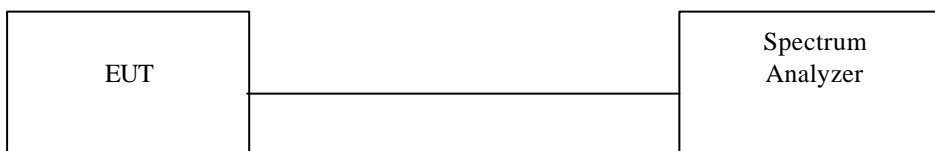


5.3.2 Test Data:

6dB Bandwidth				
Chennel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Pass/Fail
1	2412	16.52	0.5	Pass
6	2437	16.56	0.5	Pass
11	2462	16.56	0.5	Pass


Channel 1:

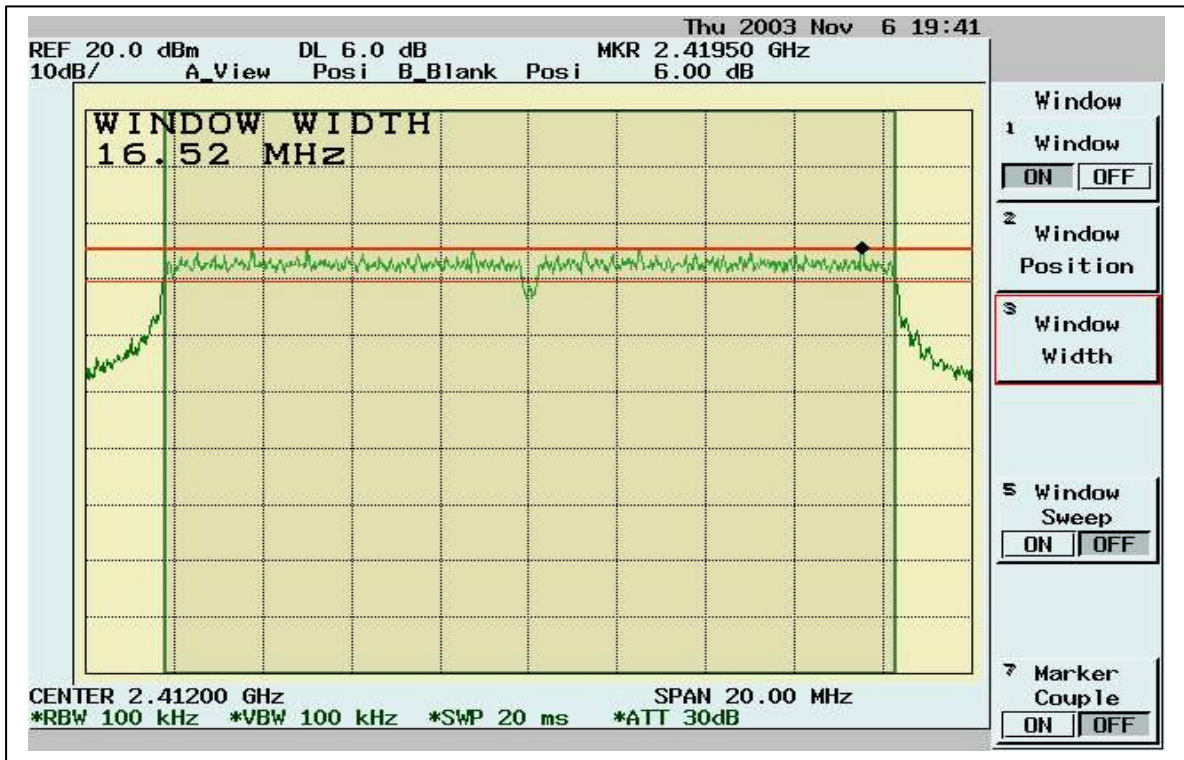

Channel 6:

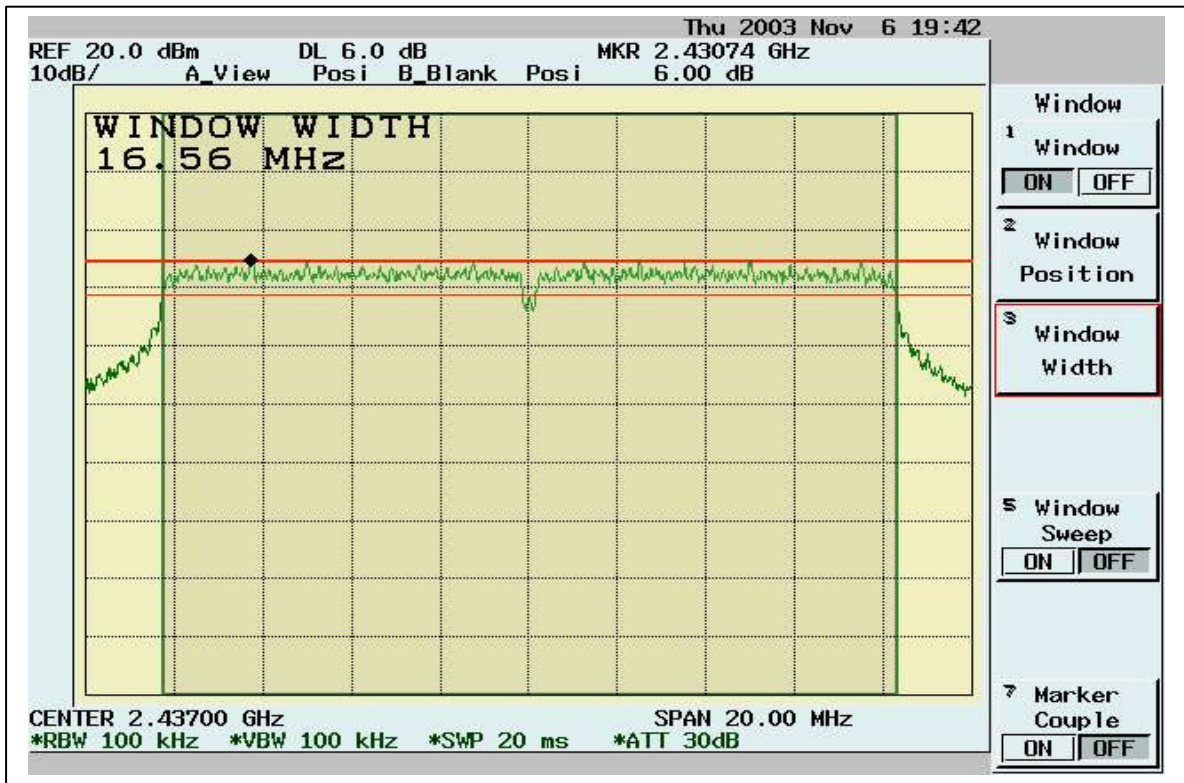

Channel 11:

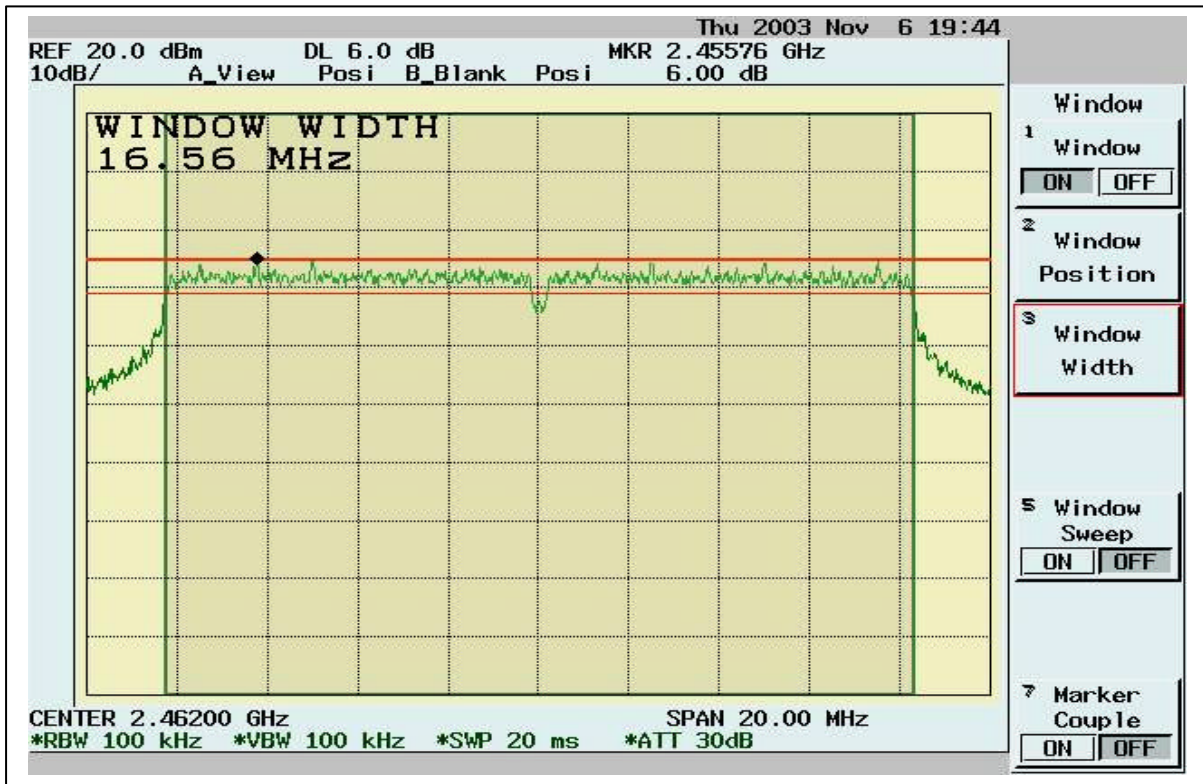

5.4 DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]

5.4.1 Test Procedure

5.5

2. The Transmitter output of EUT was connected to the peak power analyzer.

5.5.1 Test Setup



5.5.2 Test Data

Maximum Peak Output Power

Channel	Frequency (MHz)	Peak Power Output (mW)	Peak Power Output (dBm)	Limit (dBm)	Pass/Fail
1	2412	62.13	17.933	30	Pass
6	2437	55.37	17.433	30	Pass
11	2462	53.80	17.308	30	Pass

Note: Two RF output(MAIN & AUX) have been test,the worse data shown above.

5.6 Radiated Emission Measurement [Section [15.247(c)(4)]

5.6.1 EUT Configuration

The equipment under test was set up on the 10 meter chamber with measurement distance of 3 meters. The EUT was placed on a non-conductive table 80cm above ground.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

5.6.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. We found the maximum readings by varying the height of antenna and then rotating the turntable. Both polarization of antenna, horizontal and vertical, are measured.

30M to 1GHz: The highest emissions between 30 MHz to 1000 MHz were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission.

1GHz – 25GHz: The highest emissions were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in peak mode to determine the precise amplitude of the emission. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission. During test the EMI receiver and spectrum was setup according to *EMI Receiver/Spectrum Analyzer Configuration*.

For the test of 2nd to 10th harmonics frequencies, the equipment setup was also refer to *EMI Receiver/Spectrum Analyzer Configuration*. The frequencies were tested using Peak mode first, if the test data is higher than the emissions limit, an additional measurement using Average mode will be performed and the average reading will be compared to the limit and record in test report.

5.6.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range Tested:	30MHz~1000MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth (RBW):	120KHz
Video Bandwidth (VBW)	1MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Peak Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	1MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Average Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	10 Hz

5.6.4 Test Data (30MHz – 1GHz) :

30M – 1GHz Open Field Radiated Emissions (Horizontal) Channel 1, 6, 11

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin* (dB)	Height (cm)	Position (°)
106.63	11.16	11.20	2.74	0.00	25.10	43.50	-18.40	100.00	55.00
232.73	12.70	9.87	4.09	0.00	26.67	46.00	-19.33	100.00	252.00
264.74	10.16	12.45	4.31	0.00	26.92	46.00	-19.08	150.00	203.00
287.05	10.25	12.34	4.46	0.00	27.05	46.00	-18.95	100.00	268.00
298.69	8.52	12.57	4.52	0.00	25.62	46.00	-20.38	100.00	235.00
431.58	11.59	15.85	5.39	0.00	32.83	46.00	-13.17	150.00	203.00
465.53	11.18	16.34	5.58	0.00	33.10	46.00	-12.90	100.00	71.00
472.32	5.17	16.49	5.61	0.00	27.28	46.00	-18.72	200.00	55.00
480.08	4.90	16.66	5.66	0.00	27.22	46.00	-18.78	200.00	203.00
497.54	13.54	17.05	5.77	0.00	36.36	46.00	-9.64	100.00	55.00

30M – 1GHz Open Field Radiated Emissions (Vertical) Channel 1, 6, 11

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin* (dB)	Height (cm)	Position (°)
106.63	10.32	11.20	2.74	0.00	24.26	43.50	-19.24	200.00	254.00
165.8	14.19	8.68	3.44	0.00	26.31	43.50	-17.19	100.00	11.00
198.78	11.25	8.86	3.77	0.00	23.88	43.50	-19.62	150.00	189.00
464.56	6.12	16.32	5.57	0.00	28.01	46.00	-17.99	100.00	205.00
499.48	6.85	17.09	5.79	0.00	29.73	46.00	-16.27	100.00	270.00
530.52	5.05	17.83	5.96	0.00	28.85	46.00	-17.15	150.00	270.00
544.1	1.92	18.16	6.04	0.00	26.12	46.00	-19.88	100.00	270.00
563.5	5.52	18.30	6.13	0.00	29.96	46.00	-16.04	100.00	108.00
596.48	2.91	18.30	6.30	0.00	27.52	46.00	-18.48	150.00	270.00
632.37	7.32	18.56	6.47	0.00	32.34	46.00	-13.66	150.00	286.00

* NOTE:

During the Pre-test, the EUT has been tested for Channel 1, 6, 11 transmit from Main and Aux antenna respectively to get all the critical emission frequencies. In the final test all the critical emission frequencies has been tested and the test data are listed above.

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 30MHz to 1GHz have been tested

5.6.5 Test Data (1GHz – 25 GHz) .

1GHz~ 25 GHz (Horizontal), Channel 1 : 2412 MHz

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Position (°)
3428.57	50.68	31.31	1.49	46.64	36.84	54.00	-17.16	100	255
3581.42	43.38	31.50	1.54	46.56	29.85	54.00	-24.15	100	125
7164.83	41.73	39.80	2.35	46.24	37.65	54.00	-16.35	103	135
11410.6	26.16	42.06	3.01	41.40	29.84	54.00	-24.16	101	136
13686.3	26.70	42.27	3.32	42.17	30.12	54.00	-23.88	100	325
14688.3	31.91	44.22	3.43	42.34	37.23	54.00	-16.77	100	180

1GHz~ 25 GHz (Vertical), Channel 1 : 2412 MHz

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Position (°)
3377.62	50.68	31.25	1.47	46.63	36.77	54.00	-17.23	106	125
3428.57	54.66	31.31	1.49	46.64	40.83	54.00	-13.17	108	135
3581.42	45.31	31.50	1.54	46.56	31.79	54.00	-22.21	112	136
3734.27	46.00	31.68	1.59	46.40	32.88	54.00	-21.12	105	325
7147.85	42.21	39.82	2.35	46.24	38.13	54.00	-15.87	100	180
14688.3	31.38	44.22	3.43	42.34	36.70	54.00	-17.30	107	235

Note:

“ * ” : Fundamental Frequency

“***” Not in the restricted band, Limit level=Fundamental Emission-20dB

“ pk” : peak reading

“ av” : average reading

“ ---” : No meter reading data due to the emission level is smaller than spectrum noise level.

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal) , Channel 6 : 2437 MHz

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin* (dB)	Height (cm)	Position (°)
3428.57	50.41	31.31	1.49	46.64	36.58	54.00	-17.42	102	120
3581.42	43.86	31.50	1.54	46.56	30.34	54.00	-23.66	100	114
6315.68	37.69	36.73	2.20	46.68	29.93	54.00	-24.07	107	146
7164.83	42.09	39.80	2.35	46.24	38.00	54.00	-16.00	100	303
14688.3	31.46	44.22	3.43	42.34	36.78	54.00	-17.22	103	175
15673.3	26.56	43.35	3.54	42.21	31.24	54.00	-22.76	100	210

1GHz~ 25 GHz (Vertical), Channel 6 : 2437 MHz

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin* (dB)	Height (cm)	Position (°)
3428.57	55.74	31.31	1.49	46.64	41.91	54.00	-12.09	100	120
3581.42	50.59	31.50	1.54	46.56	37.07	54.00	-16.93	113	114
5602.40	43.63	36.18	2.07	47.27	34.60	54.00	-19.40	101	146
7164.83	42.70	39.80	2.35	46.24	38.61	54.00	-15.39	106	303
14688.3	31.30	44.22	3.43	42.34	36.61	54.00	-17.39	105	175
16692.3	26.38	45.14	3.65	42.12	33.04	54.00	-20.96	101	210

Note:

“ * ” : Fundamental Frequency

“**” Not in the restricted band, Limit level=Fundamental Emission-20dB

“ pk ”: peak reading

“ av ”: average reading

“ --- ” : No meter reading data due to the emission level is smaller than spectrum noise level.

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal), Channel 11: 2462 MHz

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turtable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Amp. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin* (dB)	Height (cm)	Position (°)
3428.57	51.13	31.31	1.49	46.64	37.29	54.00	-16.71	105	112
7164.83	42.05	39.80	2.35	46.24	37.97	54.00	-16.03	100	95
7759.24	34.01	40.33	2.46	44.88	31.92	54.00	-22.08	101	173
7963.04	32.45	41.07	2.49	43.92	32.09	54.00	-21.91	102	285
11427.6	26.23	42.12	3.02	41.43	29.94	54.00	-24.06	103	170
14688.3	32.07	44.22	3.43	42.34	37.39	54.00	-16.61	100	220

1GHz~ 25 GHz (Vertical), Channel 11 : 2462 MHz

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turtable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Amp. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin* (dB)	Height (cm)	Position (°)
3258.74	45.99	31.11	1.43	46.62	31.92	54.00	-22.08	101	112
3428.57	55.06	31.31	1.49	46.64	41.23	54.00	-12.77	100	95
3581.42	47.02	31.50	1.54	46.56	33.49	54.00	-20.51	105	173
3734.27	45.75	31.68	1.59	46.40	32.63	54.00	-21.37	100	285
7130.87	42.33	39.84	2.34	46.25	38.26	54.00	-15.74	106	170
14688.3	30.73	44.22	3.43	42.34	36.04	54.00	-17.96	100	220

Note:

“ * ” : Fundamental Frequency

“**” Not in the restricted band, Limit level=Fundamental Emission-20dB

“ pk ”: peak reading

“ av ”: average reading

“ --- ” : No meter reading data due to the emission level is smaller than spectrum noise level.

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 1GHz to 25 GHz have been tested.

5.7 Band Edge Measurement

5.7.1 Test Procedure (Conducted)

1. The Transmitter output of EUT was connected to the spectrum analyzer.
 Equipment mode: Spectrum analyzer
 Detector function: Peak mode
 SPAN: 100MHz
 RBW: 100KHz
 VBW: 100KHz
 Center frequency: 2.4GHz, 2.4835GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band.

5.7.2 Test Setup (Conducted)



5.7.3 Test Data:

Table Band Edge measurement (Conducted)

Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Carrier - Outsideband Limit: > 20dB (dB)	Pass/Fail
1	2405.7	102.13	---	---
Outside band	2400.0	76.79	25.34	Pass
11	2467.0	101.56	---	---
Outside band	2474.3	74.84	26.72	Pass

Note: Two RF output(MAIN & AUX) have been test,the worse data shown above.

Band Edge Conducted measurement



Band Edge Conducted Measurement



5.7.4 Test Procedure (Radiated)

1. Antenna and Turntable test procedure same as Radiated Emission Measurement.
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN: 100MHz
RBW: 1MHz
VBW: 1MHz
Center frequency: 2.395GHz, 2.48 GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band.
4. For peak frequency emission level measurement in Restricted Band ,
Change RBW: 1MHz ,
VBW: 10Hz,
Span: 100MHz.
5. Get the spectrum reading after Maximum Hold function is completed.

5.7.5 Test Setup (Radiated)

Same as *Radiated Emission Measurement*

5.7.6 Test Data:

Table Band Edge measurement (Radiated)

Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit: > 20dB (dBC)	Limit (dBuV/m)	Equip. Setup VBW	Pass or Fail
1(peak mode)	2414.8	71.61	31.67	103.28	---	-----	1MHz	-----
Outside band	2400	50.73	31.67	82.4	20.88	-----	1MHz	Pass
1(average mode)	2419.0	60.03	31.67	91.7	---	-----	10Hz	-----
Restricted band	2368.1	19	31.67	50.67	-----	54	10Hz	Pass
11(peak mode)	2464.9	70.92	31.64	102.56	----	-----	1MHz	-----
Outside band	2479.6	40.3	31.64	71.94	30.62	-----	1MHz	Pass
11(average mode)	2458.9	58.63	31.64	90.27	----	-----	10Hz	-----
Restricted band	2528.1	15.71	31.64	47.35	-----	54	10Hz	Pass

Note: The Spectrum plot of emission level measurement in Restricted band is attached.

Emission Level = Spectrum Reading + Correction Factor

Correction Factor = Antenna Factor + cable loss – amplifier gain

Both Horizontal and Vertical polarization have been tested and the worst data is listed above.

Band Edge measurement for radiated emission in Restricted Band(Radiated)

Peak Mode (Channel 1)



Band Edge measurement for radiated emission in Restricted Band(Radiated)

Average Mode (Channel 1)



Band Edge measurement for radiated emission in Restricted Band(Radiated)

Peak Mode (Channel 11)



Band Edge measurement for radiated emission in Restricted Band(Radiated)

Average Mode (Channel 11)



5.8 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]

Refer to SAR Test Report attached