

Test Report

FOR

FCC Part 15 Subpart C

of

WLAN 802.11g Mini-PCI Module

(tested with acer Notebook Computer ZI5)

Model

RM8

(Brand: Wistron NeWeb)

Applied by:

Wistron NeWeb Corporation
No. 10-1, Li-hsin Road I,
Science-based Industrial Park Hsinchu 300,
Taiwan, R. O. C.



Test Performed by:

International Standards Laboratory

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.
Lung-Tan Hsiang, Tao Yuan County 325
Taiwan, R.O.C.
Tel:(03)407-1718 Fax:(03)407-1738

Report Number: 04LR012FC

HCLAB; NVLAP200234-0; VCCI: R341, G354; NEMKO/ELA 113a, 113c; BSMI/SL2-IN-E-0037; SL2-RI-E-0037; CNLA: 1178
LTLAB; NVLAP200234-0; VCCI: R1435, G1440; NEMKO/ELA 113b, 113d; BSMI/SL2-IN-E-0013; CNLA: 0997

Test Date: 2004/02/22

Contents of Report

1.	General.....	1
1.1	Certification of Accuracy of Test Data.....	1
2.	Test Results Summary.....	2
3.	Description of Equipment Under Test (EUT).....	3
3.1	Test Standards and Procedure.....	4
3.2	General Test Conditions	4
4.	TEST RESULTS (802.11b).....	5
4.1	Powerline Conducted Emissions [Section 15.207]	5
4.1.1	EUT Configuration.....	5
4.1.2	Test Procedure.....	5
4.1.3	EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested).....	5
4.1.4	Test Data:.....	6
4.2	Bandwidth for DSSS [Section 15.247 (a)(2)].....	8
4.2.1	Test Procedure.....	8
4.2.2	Test Setup.....	8
4.2.3	Test Data.....	8
4.3	DSSS Maximum Peak Output Power [Section 15.247 (b)(1)].....	9
4.3.1	Test Procedure.....	9
4.3.2	Test Setup.....	9
4.3.3	Test Data:.....	9
4.4	Radiated Emission Measurement [Section [15.247(c)(4)].....	10
4.4.1	EUT Configuration.....	10
4.4.2	Test Procedure.....	10
4.4.3	EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested).....	10
4.4.4	Test Data (30MHz – 1GHz) :.....	11
4.4.5	Test Data (1GHz – 25 GHz).....	12
4.5	Band Edge Measurement	15
4.5.1	Test Procedure (Conducted).....	15
4.5.2	Test Setup (Conducted).....	15
4.5.3	Test Data:.....	15
4.5.4	Band Edge measurement Test Procedure (Radiated).....	16
4.5.5	Test Setup (Radiated).....	16
4.5.6	Test Data:.....	17
4.6	RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)].....	22
4.7	DSSS Peak Power Spectral Density [Section 15.247(d)]......	23
4.7.1	Test Procedure.....	23
4.7.2	Test Setup.....	23
4.7.3	Test Data:.....	23
5.	TEST RESULTS (802.11g).....	24
5.1	Powerline Conducted Emissions [Section 15.207]	24
5.1.1	EUT Configuration.....	24
5.1.2	Test Procedure.....	24
5.1.3	EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested).....	24
5.1.4	Test Data:.....	25
5.2	Bandwidth for DSSS [Section 15.247 (a)(2)].....	27
5.2.1	Test Procedure.....	27
5.2.2	Test Setup.....	27
5.2.3	Test Data:.....	27
5.3	DSSS Maximum Peak Output Power [Section 15.247 (b)(1)].....	28
5.3.1	Test Procedure.....	28
5.3.2	Test Setup.....	28
5.3.3	Test Data:.....	28
5.4	Radiated Emission Measurement [Section [15.247(c)(4)].....	29
5.4.1	EUT Configuration.....	29
5.4.2	Test Procedure.....	29
5.4.3	EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested).....	29
5.4.4	Test Data (30MHz – 1GHz) :.....	30
5.4.5	Test Data (1GHz – 25 GHz, Transmitting from Main antenna).....	31
5.5	Band Edge Measurement	34
5.5.1	Test Procedure (Conducted).....	34
5.5.2	Test Setup (Conducted).....	34
5.5.3	Test Data:.....	34
5.5.4	Test Procedure (Radiated).....	35

5.5.5	Test Setup (Radiated).....	35
5.5.6	Test Data.....	36
5.6	RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)].....	41
See the MPE report.....		41
5.7	DSSS Peak Power Spectral Density [Section 15.247(d)].....	42
5.7.1	Test Procedure.....	42
5.7.2	Test Setup.....	42
5.7.3	Test Data.....	42
6.	Appendix	43
6.1	Appendix A: Measurement Procedure for Powerline Conducted Emissions.....	43
6.2	Appendix B: Test Procedure for Radiated Emissions	44
6.3	Appendix C: Test Equipment.....	45
6.3.1	Test Equipment List.....	45
6.3.2	Software for Controlling Spectrum/Receiver and Calculating Test Data.....	46
6.4	Appendix D: Layout of EUT and Support Equipment	47
6.4.1	General Conducted Test Configuration.....	47
6.4.2	General Radiation Test Configuration.....	48
6.5	Appendix E: Description of Support Equipment.....	49
6.5.1	Description of Support Equipment.....	49
6.5.2	Software for Controlling Support Unit.....	51
6.5.3	I/O Cable Condition of EUT and Support Units.....	51
6.6	Appendix F: Accuracy of Measurement.....	52
6.7	Appendix G: Photographs of EUT Configuration Test Set Up.....	54
6.8	Appendix H: Antenna Spec.....	58

1. General

1.1 Certification of Accuracy of Test Data

The electromagnetic interference tests which this report describes were conducted by an independent electromagnetic compatibility consultant, International Standards Laboratory in accordance with the test procedure specified in CFR 47 Part 15 Subpart C (Section 15.247) , and ANSI C63.4 Rules.

The test results contained in this report accurately represent the measurements of the EMC characteristics and the energy generated by sample equipment under test at the time of the test.

Equipment Tested WLAN 802.11g Mini-PCI Module
Model: RM8
Applied by Wistron NeWeb Corp.

Sample received Date: 2004/02/16

Final test Date : 2004/02/22


Test Site: Chamber 02, Conduction 02

Temperature	20°C(Conduction Test);	23°C (Radiation Test)
Humidity:	52% (Conduction Test);	51% (Radiation Test)

Test Engineer: Jerry Chiou

The results show that the sample equipment tested as described in this report is in compliance with the Class B conducted and radiated emission limits of FCC Rules Part 15 Subpart B, and the limit of Part Subpart C Sec. 15.247.

Approve & Signature



Eddy Hsiung/Director

Test results given in this report apply only to the specific sample(s) tested under stated test conditions.
This report shall not be reproduced other than in full without the explicit written consent of ISL. This report totally contains 59 pages, including 1 cover page , 1 contents page, and 57 pages for the test description.
This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

This test data shown below is traceable to NIST or national or international standard.
International Standards Laboratory certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

2. Test Results Summary

The 802.11b and 802.11g functions of EUT has been tested to the FCC regulations listed below:

Tested Standards: 47 CFR Part 15 Subpart C			
Standard Section	Test Type	Result	Remarks
15.207	AC Power Line Emissions	Pass	
15.247(a)(2)	Spectrum Bandwidth Of DSSS device	Pass	See ISL report 03LR026FC
15.247(b)	Max. Peak Output Power	Pass	See ISL report 03LR026FC
15.247(c)	Radiated Emissions 30MHz – 25 GHz	Pass	
15.247 (c)	Band Edge Measurement	Pass	
15.247(b)(4)	Radiation Exposure	Pass	
15.247 (d)	Power Spectral Density	Pass	See ISL report 03LR026FC

3. Description of Equipment Under Test (EUT)

Description:	WLAN 802.11g Mini-PCI Module
Model No.:	RM8
FCC ID:	NKRRM8
Brand:	Wistron NeWeb
Frequency Range 802.11b/g:	2400-2483.5 MHz
Support channel: 802.11b/g	11 Channels
Modulation Skill: 802.11b	DBPSK(1Mbps), DQPSK(2Mbps), CCK(5.5/11Mbps)
802.11g	OFDM (6M - 54Mbps)
Antennas Type:	PIFA Type in Metal made by FOXCONN Corp.
Antenna Connected:	Connected to RF connector on the PCB of the 802.11g WLAN Adapter.
Antenna peak Gain:	
Main antenna	4 dBi
Aux antenna	2.82 dBi
Power Type of LAN module:	3.3V DC from Notebook PC

The channel and the operation frequency of 802.11b and 802.11g is listed below:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437		

The EUT had been tested and granted, the FCC ID is NKRRM8, please refer to ISL report 03LR026FC. For a class II change, the EUT is now using a new set of antennas, and tested with a new Notebook PC (brand: acer, model: Z15).

During the test, the EUT was tested as a modular device of a notebook PC using a PCMCIA extender board to extend the EUT outside the notebook PC enclosure. The EUT was then connected to a set of antennas via its transmit and receive connectors.

3.1 Test Standards and Procedure

Test Specification: FCC Part 15 subpart C (Section 15.247) and subpart B and/or CISPR 22/EN55022, RSS210

Test Procedure: ANSI C63.4, CFR 47 Sec. 15.247 as detailed in Appendices

3.2 General Test Conditions

1. During the test, the EUT was set in continuously transmitting mode with a duty cycle of 99% (maximum allowed).
2. The channel 1, 6, 11 of 802.11b and 802.11g of EUT were all tested.
3. "Normal mode" of 802.11g allows data rates up to 54 Mbps.

4. TEST RESULTS (802.11b)

4.1 Powerline Conducted Emissions [Section 15.207]

4.1.1 EUT Configuration

The EUT was set up on the non-conductive table that is 1.0 by 1.5 meter, 80cm above ground. The wall of the shielded room was located 40cm to the rear of the EUT.

Power to the EUT was provided through the LISN. The impedance vs. frequency characteristic of the LISN is complied with the limit shown on the figure 1 of ANSI C63.4-2001.

Both lines (neutral and hot) were connected to the LISN in series at testing. A coaxial-type connector which provides one 50 ohms terminating impedance was provided for connecting the test instrument. The excess length of the power cord was folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

If the EUT is a Personal Computer or a peripheral of personal computer, and the personal computer has an auxiliary AC outlet which can be used for providing power to an external monitor, then all measurements will be made with the monitor power from first the computer-mounted AC outlet and then a floor-mounted AC outlet.

4.1.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. The main power line conducted EMI tests were run on the hot and neutral conductors of the power cord and the results were recorded. The effect of varying the position of the interface cables has been investigated to find the configuration that produces maximum emission.

At the frequencies where the peak values of the emissions were higher than 6dB below the applicable limits, the emissions were also measured with the quasi-peak detectors. At the frequencies where the quasi-peak values of the emissions were higher than 6dB below the applicable average limits, the emissions were also measured with the average detectors.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.


4.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range:	150 KHz--30MHz
Detector Function:	Quasi-Peak/Average
Bandwidth (RBW):	9KHz

4.1.4 Test Data:


Power Line Conducted Emissions (Hot) Channel 1, 6, 11

Frequency (MHz)	Corrective Factor		Quasi-Peak			Average		
	LISN Loss (dB)	Cable Loss (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
0.89283	0.18	0.06	28.51	56.00	-27.49	13.45	46.00	-32.55
0.89473	0.18	0.06	24.59	56.00	-31.41	13.16	46.00	-32.84
0.89913	0.18	0.06	25.81	56.00	-30.19	15.06	46.00	-30.94
0.90585	0.18	0.06	26.39	56.00	-29.61	13.18	46.00	-32.82
0.95896	0.19	0.07	31.04	56.00	-24.96	13.31	46.00	-32.69
1.29121	0.41	0.08	26.12	56.00	-29.88	17.76	46.00	-28.24
1.49873	0.35	0.08	28.19	56.00	-27.81	19.83	46.00	-26.17
2.11398	0.21	0.10	29.12	56.00	-26.88	17.49	46.00	-28.51
4.34843	0.31	0.12	27.65	56.00	-28.35	20.46	46.00	-25.54
12.6042	0.61	0.24	32.41	60.00	-27.59	26.22	50.00	-23.78

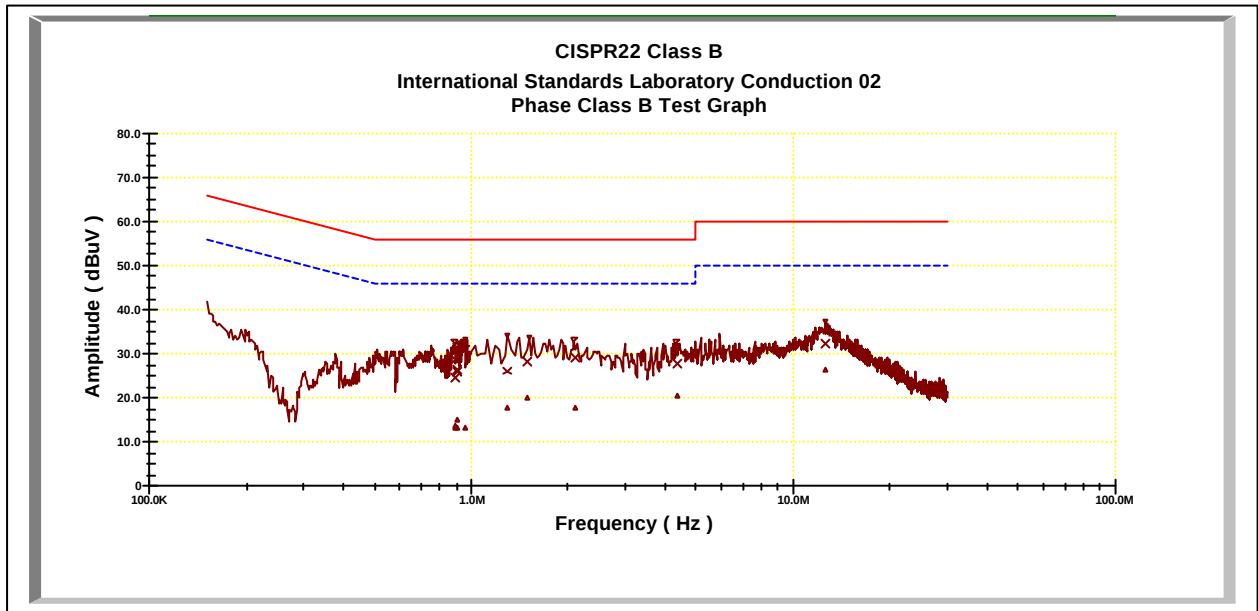

Power Line Conducted Emissions (Neutral) Channel 1, 6, 11

Frequency (MHz)	Corrective Factor		Quasi-Peak			Average		
	LISN Loss (dB)	Cable Loss (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
0.52043	0.12	0.03	23.81	56.00	-32.19	12.81	46.00	-33.19
0.7165	0.15	0.05	21.84	56.00	-34.16	12.32	46.00	-33.68
0.77793	0.16	0.05	22.62	56.00	-33.38	12.58	46.00	-33.42
0.902	0.18	0.06	21.94	56.00	-34.06	14.14	46.00	-31.86
0.93366	0.19	0.06	25.41	56.00	-30.59	11.22	46.00	-34.78
4.4825	0.21	0.12	26.59	56.00	-29.41	16.35	46.00	-29.65
4.88935	0.22	0.13	25.30	56.00	-30.70	16.13	46.00	-29.87
9.85558	0.31	0.18	28.96	60.00	-31.04	22.98	50.00	-27.02
12.6146	0.36	0.24	31.29	60.00	-28.71	24.93	50.00	-25.07
12.8391	0.36	0.25	30.46	60.00	-29.54	24.71	50.00	-25.29

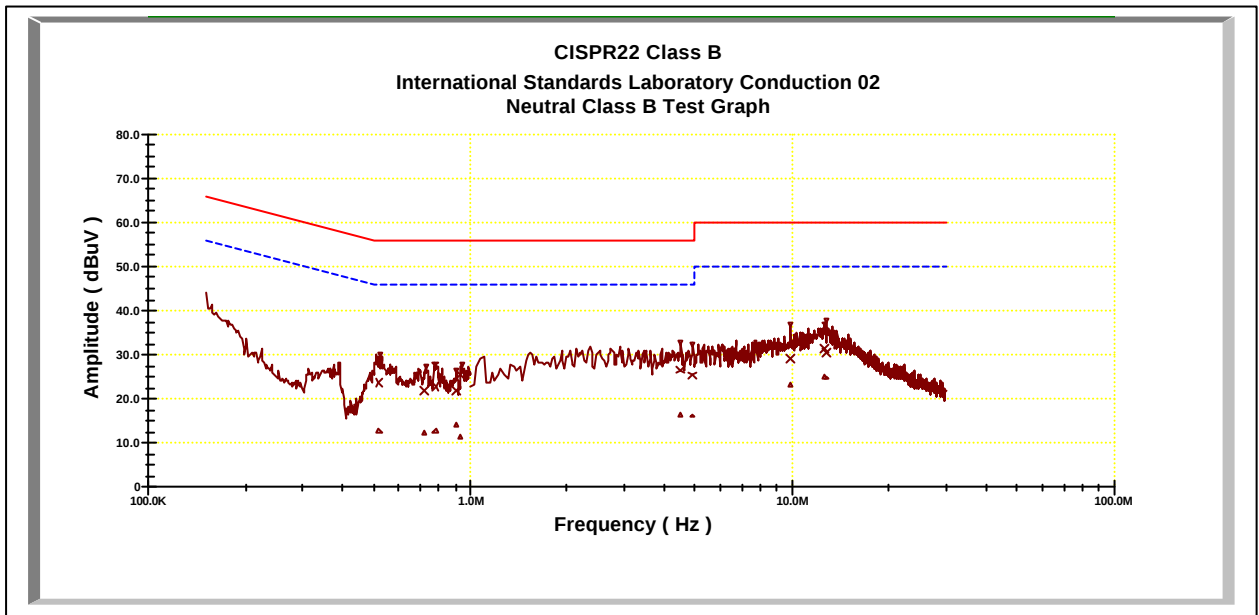

* NOTE: During the test, the EMI receiver was set to Max. Hold then switch the EUT Channel between 1, 6, 11 to get the maximum reading of all these channels.
Margin = Amplitude + Insertion Loss- Limit
A margin of -8dB means that the emission is 8dB below the limit


4.2 Bandwidth for DSSS [Section 15.247 (a)(2)]

4.2.1 Test Procedure

The Transmitter output of EUT was connected to the spectrum analyzer. The 6 dB bandwidth of the fundamental frequency was measured. The setting of spectrum analyzer is as follows

Equipment mode: Spectrum analyzer
Detector function: Peak mode
RBW: 100KHz
VBW: 100KHz

4.2.2 Test Setup

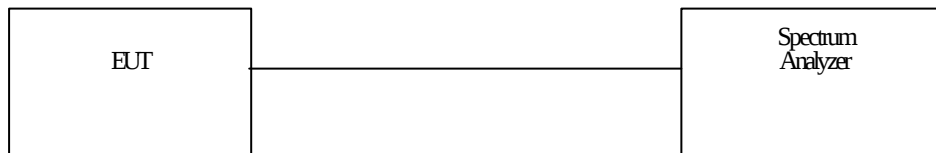

4.2.3 Test Data

See ISL report 03LR026FC

4.3 DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]

4.3.1 Test Procedure

The Transmitter output of EUT was connected to the peak power analyzer .

4.3.2 Test Setup



4.3.3 Test Data

See ISL report 03LR026FC

4.4 Radiated Emission Measurement [Section [15.247(c)(4)]

4.4.1 EUT Configuration

The equipment under test was set up on the 10 meter chamber with measurement distance of 3 meters. The EUT was placed on a non-conductive table 80cm above ground.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

4.4.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. We found the maximum readings by varying the height of antenna and then rotating the turntable. Both polarization of antenna, horizontal and vertical, are measured.

30M to 1GHz: The highest emissions between 30 MHz to 1000 MHz were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission.

1GHz – 25GHz: The highest emissions were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in peak mode to determine the precise amplitude of the emission. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission. During test the EMI receiver and spectrum was setup according to *EMI Receiver/Spectrum Analyzer Configuration*.

For the test of 2nd to 10th harmonics frequencies, the equipment setup was also refer to *EMI Receiver/Spectrum Analyzer Configuration*. The frequencies were tested using Peak mode first, if the test data is higher than the emissions limit, an additional measurement using Average mode will be performed and the average reading will be compared to the limit and record in test report.

4.4.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range Tested:	30MHz~1000MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth (RBW):	120KHz
Video Bandwidth (VBW)	1MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Peak Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	1MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Average Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	10 Hz

4.4.4 Test Data (30MHz – 1GHz) :

30M – 1GHz Open Field Radiated Emissions (Horizontal) Channel 1, 6, 11

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Tumtable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin* (dB)	Height (cm)	Position (°)
66.86	18.70	5.60	2.18	0.00	26.47	40.00	-13.53	150.00	268.00
69.77	16.23	5.60	2.24	0.00	24.06	40.00	-15.94	150.00	252.00
72.68	15.41	5.87	2.27	0.00	23.55	40.00	-16.45	100.00	236.00
99.84	27.18	10.27	2.68	0.00	40.12	43.50	-3.38	150.00	301.00
166.77	26.34	8.76	3.45	0.00	38.55	43.50	-4.95	100.00	334.00
181.32	13.71	8.51	3.58	0.00	25.81	43.50	-17.69	200.00	317.00
300.63	12.95	13.61	4.53	0.00	31.10	46.00	-14.90	100.00	236.00
333.61	8.83	14.07	4.78	0.00	27.67	46.00	-18.33	200.00	268.00
367.56	13.35	14.90	5.02	0.00	33.27	46.00	-12.73	100.00	8.00
433.52	9.62	16.27	5.40	0.00	31.29	46.00	-14.71	100.00	317.00

30M – 1GHz Open Field Radiated Emissions (Vertical) Channel 1, 6, 11

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Tumtable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin* (dB)	Height (cm)	Position (°)
32.91	3.22	16.62	1.55	0.00	21.39	40.00	-18.61	250.00	222.00
62.98	15.81	5.60	2.11	0.00	23.52	40.00	-16.48	150.00	254.00
66.86	15.56	5.60	2.18	0.00	23.34	40.00	-16.66	200.00	254.00
69.77	14.03	5.60	2.24	0.00	21.87	40.00	-18.13	100.00	59.00
82.38	9.86	7.00	2.43	0.00	19.30	40.00	-20.70	200.00	173.00
99.84	22.84	10.27	2.68	0.00	35.78	43.50	-7.72	100.00	206.00
166.77	19.48	8.76	3.45	0.00	31.70	43.50	-11.80	100.00	352.00
179.38	9.77	8.51	3.56	0.00	21.85	43.50	-21.65	100.00	26.00
367.56	4.35	14.90	5.02	0.00	24.27	46.00	-21.73	200.00	287.00
433.52	2.40	16.27	5.40	0.00	24.06	46.00	-21.94	200.00	287.00

* NOTE:

During the test, the EUT was set to Channel 1, 6, 11 respectively to get the maximum reading of all the critical emission frequencies.

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 30MHz to 1GHz have been tested

4.4.5 Test Data (1GHz – 25 GHz).

1GHz~25 GHz (Horizontal), Channel 1 : 2412 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Tumble
Freq. (MHz)	Ampl. (dBuV) (pk)	Ant. (dB/m)	Cable (dB)	Pre-Ampl.(d B)	Ampl. (dBuV/m)	Limit (dBuV/m) (av)	Margin (dB)	Height (cm)	Position (°)
2913.09	38.48	30.75	1.32	46.52	24.03	54.00	-29.97	100	267
3250.25	40.74	31.10	1.43	46.62	26.66	54.00	-27.34	100	199
4006.99	54.41	32.02	1.68	46.12	41.99	54.00	-12.01	100	288
4807.69	48.30	34.69	1.93	46.87	38.05	54.00	-15.95	101	208
8186.81	40.05	41.13	2.53	43.27	40.43	54.00	-13.57	102	121
9643.36	41.44	39.20	2.78	42.07	41.34	54.00	-12.66	102	338

‘pk’— peak, ‘av’—average

1GHz~25 GHz (Vertical), Channel 1 : 2412 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Tumble
Freq. (MHz)	Ampl. (dBuV) (pk)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m) (av)	Margin (dB)	Height (cm)	Position (°)
3257.74	41.13	31.11	1.43	46.62	27.05	54.00	-26.95	104	114
3380.12	39.16	31.26	1.47	46.63	25.25	54.00	-28.75	100	298
3608.39	61.29	31.53	1.55	46.53	47.84	54.00	-6.16	101	296
4807.69	52.52	34.69	1.93	46.87	42.27	54.00	-11.73	100	112
9643.36	46.10	39.20	2.78	42.07	46.00	54.00	-8.00	101	291
10122.9	47.41	39.25	2.84	41.06	48.44	54.00	-5.56	100	99

‘pk’— peak, ‘av’—average

Note:

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss -
Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~25 GHz (Horizontal), Channel 6 : 2437 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Tumble
Freq. (MHz)	Ampl. (dBuV) (pk)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m) (av)	Margin (dB)	Height (cm)	Position (°)
3235.26	41.05	31.08	1.43	46.61	26.94	54.00	-27.06	100	290
3340.16	39.55	31.21	1.46	46.63	25.60	54.00	-28.40	101	349
4006.99	54.41	32.02	1.68	46.12	42.00	54.00	-12.00	100	264
4807.69	47.55	34.69	1.93	46.87	37.30	54.00	-16.70	100	119
8516.48	39.69	40.98	2.59	42.48	40.78	54.00	-13.22	100	352
11591.4	36.22	42.35	3.04	41.80	39.80	54.00	-14.20	100	112

'pk'— peak, 'av'—average

1GHz~25 GHz (Vertical), Channel 6 : 2437 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Tumble
Freq. (MHz)	Ampl. (dBuV) (pk)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m) (av)	Margin (dB)	Height (cm)	Position (°)
3270.23	40.19	31.12	1.44	46.62	26.13	54.00	-27.87	100	214
3497.50	39.07	31.40	1.51	46.65	25.33	54.00	-28.67	101	110
3608.39	60.45	31.53	1.55	46.53	46.99	54.00	-7.01	100	347
4807.69	52.33	34.69	1.93	46.87	42.08	54.00	-11.92	100	224
8012.99	42.51	41.19	2.50	43.72	42.49	54.00	-11.51	100	118
9745.25	43.57	39.20	2.79	41.81	43.75	54.00	-10.25	100	188

'pk'— peak, 'av'—average

Note:

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss -

Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~25 GHz (Horizontal), Channel 11: 2462 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Tumble
Freq. (MHz)	Ampl. (dBuV) (pk)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m) (av)	Margin (dB)	Height (cm)	Position (°)
3270.23	39.95	31.12	1.44	46.62	25.89	54.00	-28.11	100	234
3497.50	39.52	31.40	1.51	46.65	25.78	54.00	-28.22	100	225
4006.99	53.05	32.02	1.68	46.12	40.63	54.00	-13.37	101	282
4807.69	47.45	34.69	1.93	46.87	37.19	54.00	-16.81	100	220
8342.66	40.31	41.06	2.56	42.87	41.06	54.00	-12.94	100	165
11519.5	36.53	42.39	3.03	41.63	40.31	54.00	-13.69	100	166

'pk'—peak, 'av'—average

1GHz~25 GHz (Vertical), Channel 11: 2462 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Tumble
Freq. (MHz)	Ampl. (dBuV) (pk)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m) (av)	Margin (dB)	Height (cm)	Position (°)
3247.75	40.85	31.10	1.43	46.61	26.76	54.00	-27.24	104	312
3608.39	60.64	31.53	1.55	46.53	47.19	54.00	-6.81	101	110
4006.99	57.25	32.02	1.68	46.12	44.84	54.00	-9.16	100	311
4328.67	54.28	32.92	1.79	46.43	42.56	54.00	-11.44	100	224
8012.99	41.97	41.19	2.50	43.72	41.95	54.00	-12.05	100	65
9841.16	41.24	39.20	2.80	41.56	41.69	54.00	-12.31	103	128

'pk'—peak, 'av'—average

Note:

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit


All frequencies from 1GHz to 25 GHz have been tested.

4.5 Band Edge Measurement

4.5.1 Test Procedure (Conducted)

1. The Transmitter output of EUT was connected to the spectrum analyzer.
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN: 100MHz
RBW: 100KHz
VBW: 100KHz
Center frequency: 2.412GHz, 2.462GHz.
Sweep time= 200ms sec.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band.

4.5.2 Test Setup (Conducted)

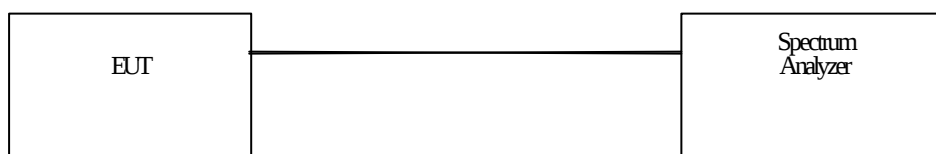

4.5.3 Test Data:

See ISL report 03LR026FC

4.5.4 Band Edge measurement Test Procedure (Radiated)

1. Antenna and Turntable test procedure same as *Radiated Emission Measurement*
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN:100MHz
RBW: 1MHz
VBW: 1MHz
Center frequency: 2.395GHz, 2.48 GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band.
4. For peak frequency emission level measurement in Restricted Band ,
Change RBW: 1MHz ,
VBW: 10Hz,
Span: 100MHz.
5. Get the spectrum reading after Maximum Hold function is completed.

4.5.5 Test Setup (Radiated)

Same as *Radiated Emission Measurement*

4.5.6 Test Data:

Table Band Edge measurement (Radiated)

Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit: > 20dB (dBC)	Limit (dBuV/m)	Equip. Setup VBW	Pass or Fail
1(peak mode)	2409.3	71.22	31.67	102.89	---	---	1MHz	---
Outside band	2397.1	32.55	31.67	64.22	38.67	---	1MHz	Pass
1(average mode)	2415.2	65.34	31.67	97.01	---	---	10Hz	---
Restricted band	2390.0	12.69	31.67	44.36	-----	54	10Hz	Pass
11(peak mode)	2459.2	72.23	31.64	103.87	----	---	1MHz	---
Outside band	2474.0	32.58	31.64	64.22	39.65	---	1MHz	Pass
11(average mode)	2464.8	65.20	31.64	96.84	----	---	10Hz	---
Restricted band	2483.6	14.11	31.64	45.75	-----	54	10Hz	Pass

Note: The Spectrum plot of emission level measurement in Restricted band is attached.

Emission Level = Spectrum Reading + Correction Factor

Correction Factor = Antenna Factor + cable loss – amplifier gain

Band Edge measurement for radiated emission in Restricted Band(Radiated)

Peak Mode (Channel 1)



Band Edge measurement for radiated emission in Restricted Band(Radiated)

Average Mode (Channel 1)



Band Edge measurement for radiated emission in Restricted Band(Radiated)

Peak Mode (Channel 11)



Band Edge measurement for radiated emission in Restricted Band(Radiated)

Average Mode (Channel 11)



4.6 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]


See the MPE report.

4.7 DSSS Peak Power Spectral Density [Section 15.247(d)]

4.7.1 Test Procedure

1. The Transmitter output of EUT was connected to the spectrum analyzer.
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN:1.5MHz
RBW: 3KHz
VBW: 30KHz
Center frequency: fundamental frequency tested.
Sweep time= 500 sec.
2. Using Peak Search to read the peak power after Maximum Hold function is completed.

4.7.2 Test Setup

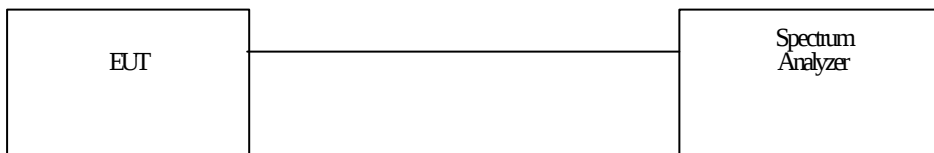

4.7.3 Test Data:

See ISL report 03LR026FC

5. TEST RESULTS (802.11g)

5.1 Powerline Conducted Emissions [Section 15.207]

5.1.1 EUT Configuration

The conducted emission test setups are in accordance with Figs 9, 10(a) and 10(b) of ANSI C63.4-2001, CFR 47 Part 15 Subpart B; or EN55022:1994/ A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1996.

The EUT was set up on the non-conductive table that is 1.0 by 1.5 meter, 80cm above ground. The wall of the shielded room was located 40cm to the rear of the EUT.

Power to the EUT was provided through the LISN. The impedance vs. frequency characteristic of the LISN is complied with the limit shown on the figure 1 of ANSI C63.4-2001.

Both lines (neutral and hot) were connected to the LISN in series at testing. A coaxial-type connector which provides one 50 ohms terminating impedance was provided for connecting the test instrument. The excess length of the power cord was folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

If the EUT is a Personal Computer or a peripheral of personal computer, and the personal computer has an auxiliary AC outlet which can be used for providing power to an external monitor, then all measurements will be made with the monitor power from first the computer-mounted AC outlet and then a floor-mounted AC outlet.

5.1.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. The main power line conducted EMI tests were run on the hot and neutral conductors of the power cord and the results were recorded. The effect of varying the position of the interface cables has been investigated to find the configuration that produces maximum emission.

At the frequencies where the peak values of the emissions were higher than 6dB below the applicable limits, the emissions were also measured with the quasi-peak detectors. At the frequencies where the quasi-peak values of the emissions were higher than 6dB below the applicable average limits, the emissions were also measured with the average detectors.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.


5.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range:	150 KHz--30MHz
Detector Function:	Quasi-Peak/Average
Bandwidth (RBW):	9KHz

5.1.4 Test Data:


Power Line Conducted Emissions (Hot) Channel 1, 6, 11

Frequency (MHz)	Corrective Factor		Quasi-Peak			Average		
	LISN Loss (dB)	Cable Loss (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
0.57521	0.13	0.04	27.46	56.00	-28.54	9.07	46.00	-36.93
0.76713	0.16	0.05	29.49	56.00	-26.51	14.18	46.00	-31.82
0.8916	0.18	0.06	29.71	56.00	-26.29	12.76	46.00	-33.24
0.90718	0.18	0.06	22.90	56.00	-33.10	11.44	46.00	-34.56
0.96898	0.19	0.07	29.56	56.00	-26.44	14.58	46.00	-31.42
1.34155	0.40	0.08	27.34	56.00	-28.66	14.67	46.00	-31.33
1.97043	0.21	0.10	29.92	56.00	-26.08	16.51	46.00	-29.49
4.24749	0.31	0.12	28.48	56.00	-27.52	18.51	46.00	-27.49
4.4421	0.32	0.12	27.71	56.00	-28.29	19.33	46.00	-26.67
12.1087	0.59	0.23	31.24	60.00	-28.76	25.16	50.00	-24.84

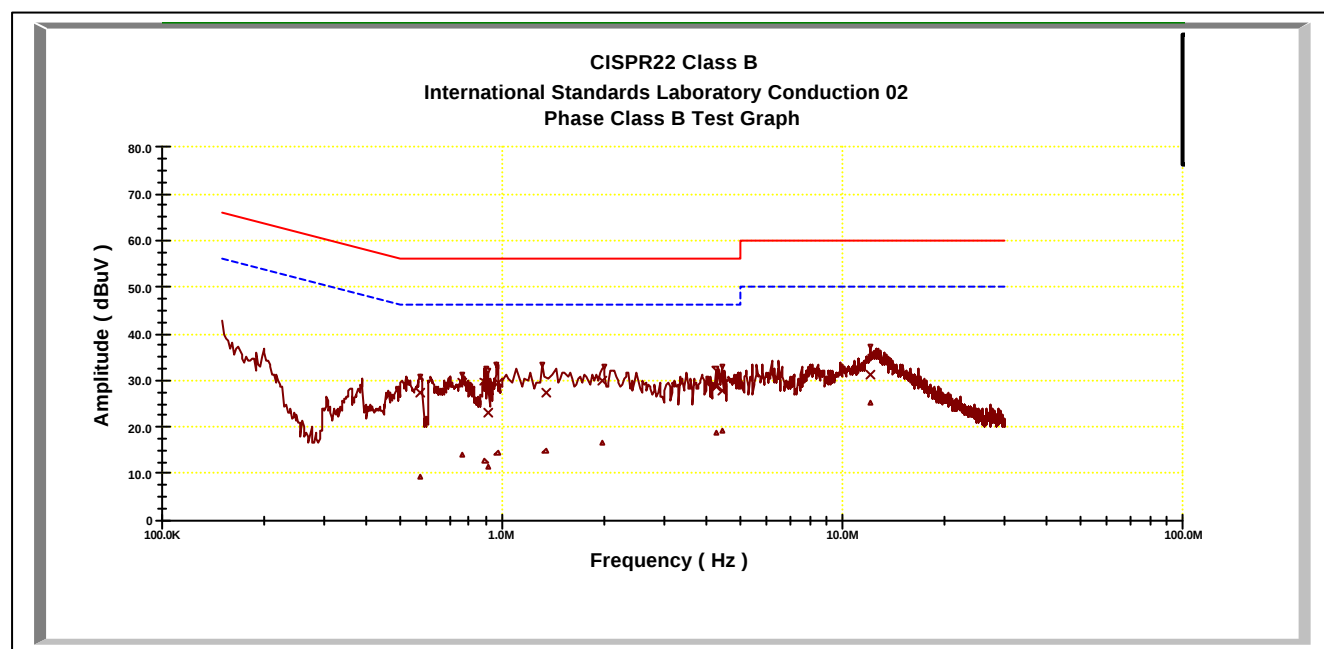

Power Line Conducted Emissions (Neutral) Channel 1, 6, 11

Frequency (MHz)	Corrective Factor		Quasi-Peak			Average		
	LISN Loss (dB)	Cable Loss (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
0.52308	0.12	0.03	23.68	56.00	-32.32	12.45	46.00	-33.55
0.71506	0.15	0.05	23.30	56.00	-32.70	11.16	46.00	-34.84
0.72168	0.15	0.05	20.76	56.00	-35.24	9.91	46.00	-36.09
0.8016	0.17	0.05	22.06	56.00	-33.94	14.03	46.00	-31.97
0.91396	0.19	0.06	22.90	56.00	-33.10	10.68	46.00	-35.32
2.12473	0.20	0.10	27.86	56.00	-28.14	15.55	46.00	-30.45
2.50306	0.20	0.11	27.52	56.00	-28.48	16.27	46.00	-29.73
4.43235	0.21	0.12	27.16	56.00	-28.84	17.14	46.00	-28.86
4.66479	0.21	0.13	25.14	56.00	-30.86	15.93	46.00	-30.07
12.8655	0.36	0.25	30.84	60.00	-29.16	24.47	50.00	-25.53

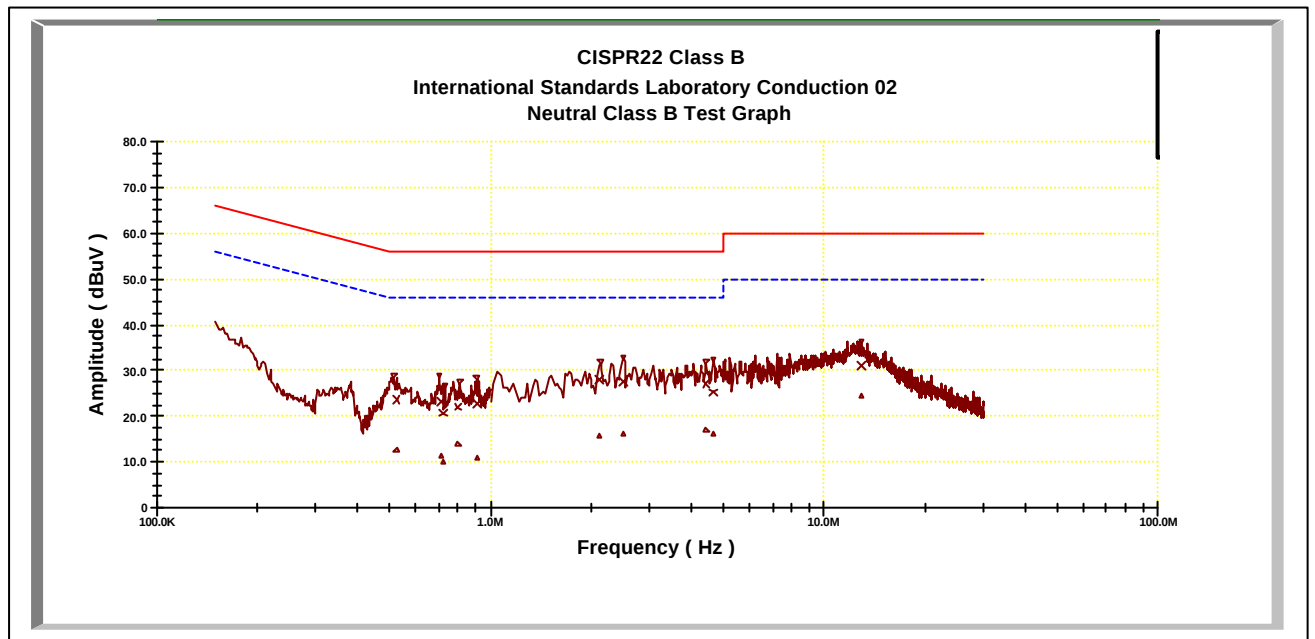

of all these channels.
 Two type of antennas have been test, and the worse data show above.
 Margin = Amplitude + Insertion Loss- Limit
 A margin of -8dB means that the emission is 8dB below the limit


5.2 Bandwidth for DSSS [Section 15.247 (a)(2)]

5.2.1 Test Procedure

The Transmitter output of EUT was connected to the spectrum analyzer. The 6 dB bandwidth of the fundamental frequency was measured. The setting of spectrum analyzer is as follows

Equipment mode: Spectrum analyzer
Detector function: Peak mode
RBW: 100KHz
VBW: 100KHz

5.2.2 Test Setup

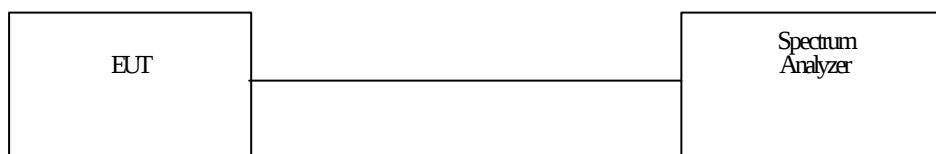

5.2.3 Test Data


See ISL report 03LR026FC

5.3 DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]

5.3.1 Test Procedure

1. The Transmitter output of EUT was connected to the peak power analyzer .

5.3.2 Test Setup

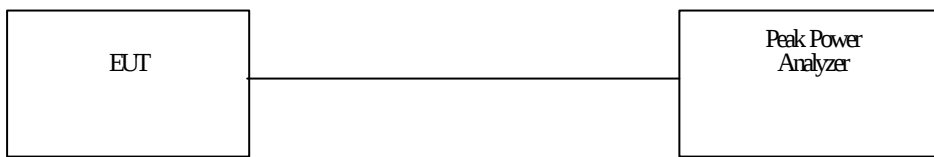

5.3.3 Test Data

See ISL report 03LR026FC

5.4 Radiated Emission Measurement [Section [15.247(c)(4)]

5.4.1 EUT Configuration

The equipment under test was set up on the 10 meter chamber with measurement distance of 3 meters. The EUT was placed on a non-conductive table 80cm above ground.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

5.4.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. We found the maximum readings by varying the height of antenna and then rotating the turntable. Both polarization of antenna, horizontal and vertical, are measured.

30M to 1GHz: The highest emissions between 30 MHz to 1000 MHz were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission.

1GHz – 25GHz: The highest emissions were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in peak mode to determine the precise amplitude of the emission. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission. During test the EMI receiver and spectrum was setup according to *EMI Receiver/Spectrum Analyzer Configuration*. For the test of 2nd to 10th harmonics frequencies, the equipment setup was also refer to *EMI Receiver/Spectrum Analyzer Configuration*. The frequencies were tested using Peak mode first, if the test data is higher than the emissions limit, an additional measurement using Average mode will be performed and the average reading will be compared to the limit and record in test report.

5.4.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range Tested:	30MHz~1000MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth (RBW):	120KHz
Video Bandwidth (VBW)	1MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Peak Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	1MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Average Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	10 Hz

5.4.4 Test Data (30MHz – 1GHz) :

30M – 1GHz Open Field Radiated Emissions (Horizontal) Channel 1, 6, 11

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Tumble
Freq. (MHz)	Ampl. (dBμV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBμV/m)	Limit (dBμV/m)	Margin* (dB)	Height (m)	Position (°)
66.86	20.10	5.60	2.18	0.00	27.88	40.00	-12.12	150.00	254.00
78.5	16.68	6.45	2.37	0.00	25.50	40.00	-14.50	100.00	222.00
97.9	17.39	9.88	2.64	0.00	29.91	43.50	-13.59	150.00	222.00
99.84	27.30	10.27	2.68	0.00	40.25	43.50	-3.25	100.00	222.00
101.78	17.25	10.51	2.69	0.00	30.46	43.50	-13.04	100.00	222.00
166.77	26.10	8.76	3.45	0.00	38.31	43.50	-5.19	100.00	271.00
180.35	17.02	8.50	3.57	0.00	29.10	43.50	-14.40	100.00	172.00
367.56	14.15	14.90	5.02	0.00	34.06	46.00	-11.94	100.00	320.00
400.54	9.85	16.00	5.21	0.00	31.07	46.00	-14.93	200.00	140.00
433.52	11.98	16.27	5.40	0.00	33.65	46.00	-12.35	200.00	320.00

30M – 1GHz Open Field Radiated Emissions (Vertical) Channel 1, 6, 11

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Tumble
Freq. (MHz)	Ampl. (dBμV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBμV/m)	Limit (dBμV/m)	Margin* (dB)	Height (m)	Position (°)
32.91	3.20	16.62	1.55	0.00	21.38	40.00	-18.62	100.00	284.00
66.86	16.80	5.60	2.18	0.00	24.58	40.00	-15.42	150.00	186.00
69.77	14.52	5.60	2.24	0.00	22.35	40.00	-17.65	100.00	317.00
87.23	11.88	7.83	2.50	0.00	22.21	40.00	-17.79	100.00	317.00
99.84	24.37	10.27	2.68	0.00	37.31	43.50	-6.19	150.00	268.00
101.78	10.77	10.51	2.69	0.00	23.97	43.50	-19.53	100.00	252.00
166.77	20.81	8.76	3.45	0.00	33.02	43.50	-10.48	150.00	40.00
168.71	11.94	8.73	3.47	0.00	24.13	43.50	-19.37	100.00	40.00
199.75	11.42	8.89	3.78	0.00	24.09	43.50	-19.41	150.00	56.00
433.52	4.80	16.27	5.40	0.00	26.47	46.00	-19.53	100.00	334.00

* NOTE:

During the Pre-test, the EUT has been tested for Channel 1, 6, 11 transmit from Main and Aux antenna respectively to get all the critical emission frequencies. In the final test all the critical emission frequencies has been tested and the test data are listed above.

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 30MHz to 1GHz have been tested

5.4.5 Test Data (1GHz– 25 GHz, Transmitting from Main antenna).

1GHz~25 GHz (Horizontal), Channel 1 : 2412 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Tumble
Freq. (MHz)	Ampl. (dBuV) (pk)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m) (av)	Margin (dB)	Height (cm)	Position (°)
3080.42	37.98	30.90	1.37	46.59	23.66	54.00	-30.34	100	113
3435.06	38.80	31.32	1.49	46.64	24.98	54.00	-29.02	100	323
4006.99	52.70	32.02	1.68	46.12	40.29	54.00	-13.71	100	158
4807.69	47.42	34.69	1.93	46.87	37.17	54.00	-16.83	101	222
8582.42	40.25	40.90	2.60	42.53	41.22	54.00	-12.78	101	208
11549.5	36.47	42.37	3.03	41.70	40.17	54.00	-13.83	101	122

'pk'— peak, 'av'—average

1GHz~25 GHz (Vertical), Channel 1 : 2412 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Tumble
Freq. (MHz)	Ampl. (dBuV) (pk)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m) (av)	Margin (dB)	Height (cm)	Position (°)
3252.75	40.43	31.10	1.43	46.62	26.35	54.00	-27.65	103	156
3415.08	39.13	31.30	1.49	46.64	25.28	54.00	-28.72	100	132
3608.39	59.68	31.53	1.55	46.53	46.23	54.00	-7.77	100	284
4807.69	51.84	34.69	1.93	46.87	41.58	54.00	-12.42	102	118
9643.36	42.40	39.20	2.78	42.07	42.30	54.00	-11.70	101	276
11423.6	36.71	42.11	3.01	41.42	40.41	54.00	-13.59	100	131

'pk'— peak, 'av'—average

Note:

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss -
Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~25 GHz (Horizontal), Channel 6 : 2437 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Tumble
Freq. (MHz)	Ampl. (dBuV) (pk)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m) (av)	Margin (dB)	Height (cm)	Position (°)
3180.32	40.15	31.02	1.41	46.61	25.97	54.00	-28.03	101	232
3480.02	39.47	31.38	1.51	46.65	25.71	54.00	-28.29	101	93
4006.99	52.59	32.02	1.68	46.12	40.17	54.00	-13.83	100	293
4807.69	46.77	34.69	1.93	46.87	36.52	54.00	-17.48	100	291
7311.69	47.81	39.63	2.38	46.17	43.64	54.00	-10.36	100	230
8528.47	39.91	40.97	2.59	42.49	40.97	54.00	-13.03	101	359

'pk'— peak, 'av'—average

1GHz~25 GHz (Vertical), Channel 6 : 2437 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Tumble
Freq. (MHz)	Ampl. (dBuV) (pk)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m) (av)	Margin (dB)	Height (cm)	Position (°)
3152.85	40.11	30.98	1.40	46.60	25.89	54.00	-28.11	102	39
3232.77	40.48	31.08	1.42	46.61	26.37	54.00	-27.63	101	147
3608.39	59.48	31.53	1.55	46.53	46.02	54.00	-7.98	100	18
4807.69	52.27	34.69	1.93	46.87	42.02	54.00	-11.98	102	191
7311.69	45.97	39.63	2.38	46.17	41.80	54.00	-12.20	104	345
9739.26	40.84	39.20	2.79	41.82	41.00	54.00	-13.00	103	339

'pk'— peak, 'av'—average

Note:

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss -
Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~25 GHz (Horizontal), Channel 11: 2462 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Tumble
Freq. (MHz)	Ampl. (dBuV) (pk)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m) (av)	Margin (dB)	Height (cm)	Position (°)
3150.35	40.07	30.98	1.40	46.60	25.85	54.00	-28.15	100	194
3497.50	38.82	31.40	1.51	46.65	25.08	54.00	-28.92	100	186
4006.99	53.16	32.02	1.68	46.12	40.75	54.00	-13.25	100	167
4926.57	48.21	35.19	1.95	46.98	38.38	54.00	-15.62	101	109
7377.62	45.53	39.55	2.39	46.14	41.32	54.00	-12.68	103	163
8618.38	40.02	40.86	2.61	42.56	40.92	54.00	-13.08	102	91

'pk'—peak, 'av'—average

1GHz~25 GHz (Vertical), Channel 11: 2462 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Tumble
Freq. (MHz)	Ampl. (dBuV) (pk)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m) (av)	Margin (dB)	Height (cm)	Position (°)
2918.08	38.45	30.75	1.32	46.52	24.00	54.00	-30.00	100	139
3260.24	40.44	31.11	1.43	46.62	26.37	54.00	-27.63	100	147
3608.39	59.48	31.53	1.55	46.53	46.02	54.00	-7.98	100	118
4807.69	51.61	34.69	1.93	46.87	41.36	54.00	-12.64	102	191
7377.62	47.22	39.55	2.39	46.14	43.01	54.00	-10.99	104	345
8012.99	42.77	41.19	2.50	43.72	42.75	54.00	-11.25	103	139

'pk'—peak, 'av'—average

Note:

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit


All frequencies from 1GHz to 25 GHz have been tested.

5.5 Band Edge Measurement

5.5.1 Test Procedure (Conducted)

1. The Transmitter output of EUT was connected to the spectrum analyzer.
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN: 100MHz
RBW: 100KHz
VBW: 100KHz
Center frequency: 2.4GHz, 2.4835GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band.

5.5.2 Test Setup (Conducted)

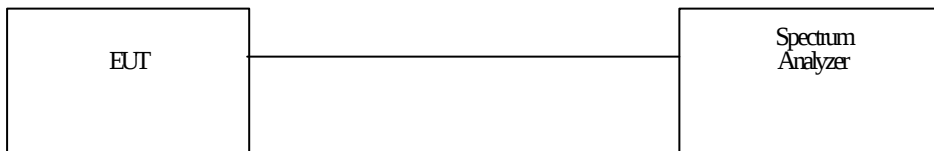

5.5.3 Test Data:

See ISL report 03LR026FC

5.5.4 Test Procedure (Radiated)

1. Antenna and Turntable test procedure same as Radiated Emission Measurement.
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN: 100MHz
RBW: 1MHz
VBW: 1MHz
Center frequency: 2.395GHz, 2.48 GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band.
4. For peak frequency emission level measurement in Restricted Band ,
Change RBW: 1MHz ,
VBW: 10Hz,
Span: 100MHz.
5. Get the spectrum reading after Maximum Hold function is completed.

5.5.5 Test Setup (Radiated)

Same as *Radiated Emission Measurement*

5.5.6 Test Data:

Table Band Edge measurement (Radiated)

Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit: > 20dB (dBC)	Limit (dBuV/m)	Equip. Setup VBW	Pass or Fail
1(peak mode)	2414.3	77.28	31.67	108.95	---	-----	1MHz	-----
Outside band	2399.8	48.13	31.67	79.8	29.15	-----	1MHz	Pass
1(average mode)	2405.8	44.67	31.67	76.34	---	-----	10Hz	-----
Restricted band	2390.0	10.66	31.67	42.33	-----	54	10Hz	Pass
11(peak mode)	2456.7	74.08	31.64	105.72	----	-----	1MHz	-----
Outside band	2472.8	44.56	31.64	76.2	29.52	-----	1MHz	Pass
11(average mode)	2456.9	43.78	31.64	75.42	----	-----	10Hz	-----
Restricted band	2483.6	11.78	31.64	43.42	-----	54	10Hz	Pass

Note: The Spectrum plot of emission level measurement in Restricted band is attached.

Emission Level = Spectrum Reading + Correction Factor

Correction Factor = Antenna Factor + cable loss – amplifier gain

Both Horizontal and Vertical polarization have been tested and the worst data is listed above.

Band Edge measurement for radiated emission in Restricted Band(Radiated)

Peak Mode (Channel 1)



Band Edge measurement for radiated emission in Restricted Band(Radiated)

Average Mode (Channel 1)



Band Edge measurement for radiated emission in Restricted Band(Radiated)

Peak Mode (Channel 11)



Band Edge measurement for radiated emission in Restricted Band(Radiated)

Average Mode (Channel 11)



5.6 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]

See the MPE report

5.7 DSSS Peak Power Spectral Density [Section 15.247(d)]

5.7.1 Test Procedure

1. The Transmitter output of EUT was connected to the spectrum analyzer.
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN:1.5MHz
RBW: 3KHz
VBW: 30KHz
Center frequency: fundamental frequency tested.
Sweep time= 500 sec.
2. Using Peak Search to read the peak power after Maximum Hold function is completed.

5.7.2 Test Setup



5.7.3 Test Data:

See ISL report 03LR026FC

6. Appendix

6.1 Appendix A: Measurement Procedure for Powerline Conducted Emissions

The EUT is set up in accordance with the suggested configuration given in ANSI C63.4-2001, CFR 47 Part 15 Subpart B; or EN55022:1994/ A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1996. The measurements are performed in a 3.5m x 3.4m x 2.5m shielded room, which referred as Conduction 01 test site, or a 3m x 3m x 2.3m test site, which referred as Conduction 02 test site. The EUT was placed on non-conduction 1.0m x 1.5m table, which is 0.8 meters above an earth-grounded.

Power to the EUT was provided through the LISN which has the Impedance (50ohm/50uH) vs. Frequency Characteristic in accordance with the Figure 1 of the ANSI C63.4-2001 or CISPR16. Power to the LISNs were filtered to eliminate ambient signal interference and these filters were bonded to the ground plane. Peripheral equipment required to provide a functional system (support equipment) for EUT testing was powered from the second LISN through a ganged, metal power outlet box which is bonded to the ground plane at the LISN.

If the EUT is supplied with a flexible power cord, the power cord length in excess of the distance separating the EUT from the LISN shall be folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length. If the EUT is provided with a permanently coiled power cord, bundling of the cord is not required. If the EUT is supplied without a power cord, the EUT shall be connected to the LISN by a power cord of the type specified by the manufacturer which shall not be longer than 1 meter. The excess power cord shall be bundled as described above. If a non-flexible power cord is provided with the EUT, it shall be cut to the length necessary to attach the EUT to the LISN and shall not be bundled.

The interconnecting cables were arranged and moved to get the maximum according to ANSI C63.4-2001, CFR 47 Part 15 Subpart B; or EN55022:1994/ A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1996. Both the line of power cord, hot and neutral, were measured.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

6.2 Appendix B: Test Procedure for Radiated Emissions

Preliminary Measurements in the Anechoic Chamber

The radiated emissions are initially measured in the anechoic chamber at a measurement distance of 3 meters. Desktop EUT are placed on a wooden stand 0.8 meter in height. The measurement antenna is 3 meters from the EUT. The test setup in anechoic chamber is the same as open site. The turntable rotated 360°C. The antenna height is varied from 1-2.5m. The primary objective of the radiated measurements in the anechoic chamber is to identify the frequency spectrum in the absence of the electromagnetic environment existing on the open test site. The frequencies can then be pre-selected on the open test site to obtain the corresponding amplitude. The initial scan is made with the spectrum analyzer in automatic sweep mode. The spectrum peaks are then measured manually to determine the exact frequencies.

Measurements on the Open Site or 10m EMC Chamber

The radiated emissions test will then be repeated on the open site or 10m EMC chamber to measure the amplitudes accurately and without the multiple reflections existing in the shielded room. The EUT and support equipment are set up on the turntable of one of the 3 or 10 meter open field sites. Desktop EUT are set up on a wooden stand 0.8 meter above the ground.

For the initial measurements, the receiving antenna is varied from 1-4 meter height and is changed in the vertical plane from vertical to horizontal polarization at each frequency. Both reading are recorded with the quasi-peak detector with 120KHz bandwidth. For frequency between 30 MHz and 1000MHz, the reading is recorded with peak detector or quasi-peak detector. For frequency above 1 GHz, the reading is recorded with peak detector or average detector with 1 MHz bandwidth.

At the highest amplitudes observed, the EUT is rotated in the horizontal plane while changing the antenna polarization in the vertical plane to maximize the reading. The interconnecting cables were arranged and moved to get the maximum according to ANSI C63.4-2001, CFR 47 Part 15 Subpart B; or EN55022:1994/ A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1996. Once the maximum reading is obtained, the antenna elevation and polarization will be varied between specified limits to maximize the readings.

6.3 Appendix C: Test Equipment

6.3.1 Test Equipment List

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Conduction	50 Ohms Load Conduction 02	EMCO	N/A	ISL-50ohms conduction 02	11/21/2003	11/21/2004
Conduction	Coaxial Cable 1F-C2	Harbour Industries	RG400	1F-C2	06/03/2003	06/03/2004
Conduction	Digital Hygro-Thermometer Conduct	MicroLife	HT-2126G	ISL-Conduction0 2	12/16/2003	12/16/2004
Conduction	EMI Receiver 02	HP	85460A	3448A00183	08/21/2003	08/21/2004
Conduction	ISN T4	Schaffner	ISN T400	16593	08/20/2002	08/20/2004
Conduction	LISN 01	R&S	ESH2-Z5	890485013	05/07/2003	05/07/2004
Conduction	LISN 03	R&S	ESH3-Z5 831.5518.52	828874D10	10/31/2003	10/31/2004
Radiation	Spectrum Analyzer 06	Advantest	R3162	91700295	09/25/2003	09/24/2004
Radiation	EMI Receiver 05	AEI	ER 55CR	55390143234	11/07/2003	11/07/2004
Radiation	BIL OG Antenna 08	Schaffner	CBL 6112B	2756	06/04/2003	06/04/2004
Radiation	Microwave Cable Chmb 02 3M	HUBER+SUHN ER AG	Sucoflex 103	42731/3 & 42729/3	03/21/2003	03/21/2004
Radiation	Coaxial Cable Chmb 02-10M	Belden	RG-8/U	Chmb 02-10M	01/14/2004	01/14/2005
Radiation	Digital Hygro-Thermometer Chmb 02	MicroLife	HT-2126G	Chmb 02	02/07/2004	02/07/2005
Rad. Above 1Ghz	Horn Antenna 02	Com-Power	AH-118	10088	02/25/2003	02/25/2004
Rad. Above 1Ghz	Horn Antenna 04	Com-Power	AH-826	081-001	10/17/2003	10/17/2004
Rad. above 1Ghz	Horn Antenna 05	Com-Power	AH-640	100A	09/13/2003	09/13/2004
Rad. above 1Ghz	Microwave Cable Chmb 05	HUBER+SUHN ER AG	Sucoflex 103	42726/3 & 42727/3	09/11/2003	09/11/2004
Rad. Above 1Ghz	Preamplifier 02	MITEQ	AFS44-00102650 -40-10P-44	728229	05/07/2003	05/07/2004
Rad. Above 1Ghz	Preamplifier 09	MITEQ	AFS44-00102650 -40-10P-44	858687	02/28/2003	02/28/2004

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
RF	Peak Power Analyzer	HP	8990A	3621A01269	09/12/2003	09/12/2004
Rad. Above 1Ghz	Preamplifier 10	MITEQ	JS-26004000-27-5A	818471	02/28/2003	02/28/2004
Rad. Above 1Ghz	Signal Generator 03	Anritsu	MG3692A	6200162550	02/05/2004	02/05/2005
Rad. Above 1Ghz	Signal Generator 04	Anritsu	MG3692A	020311	02/06/2004	02/06/2005
Rad. Above 1Ghz	Spectrum Analyzer 07	Advantest	R3182	110600649	10/17/2003	10/17/2004


Note: Calibration traceable to NIST or national or international standards.

6.3.2 Software for Controlling Spectrum/Receiver and Calculating Test Data


Radiation/Conduction	Filename	Version	Issued Date
Conduction	Tile.exe	1.12E	7/7/2000
Radiation	Tile.exe	1.12C	6/16/2000

6.4 Appendix D: Layout of EUT and Support Equipment

6.4.1 General Conducted Test Configuration

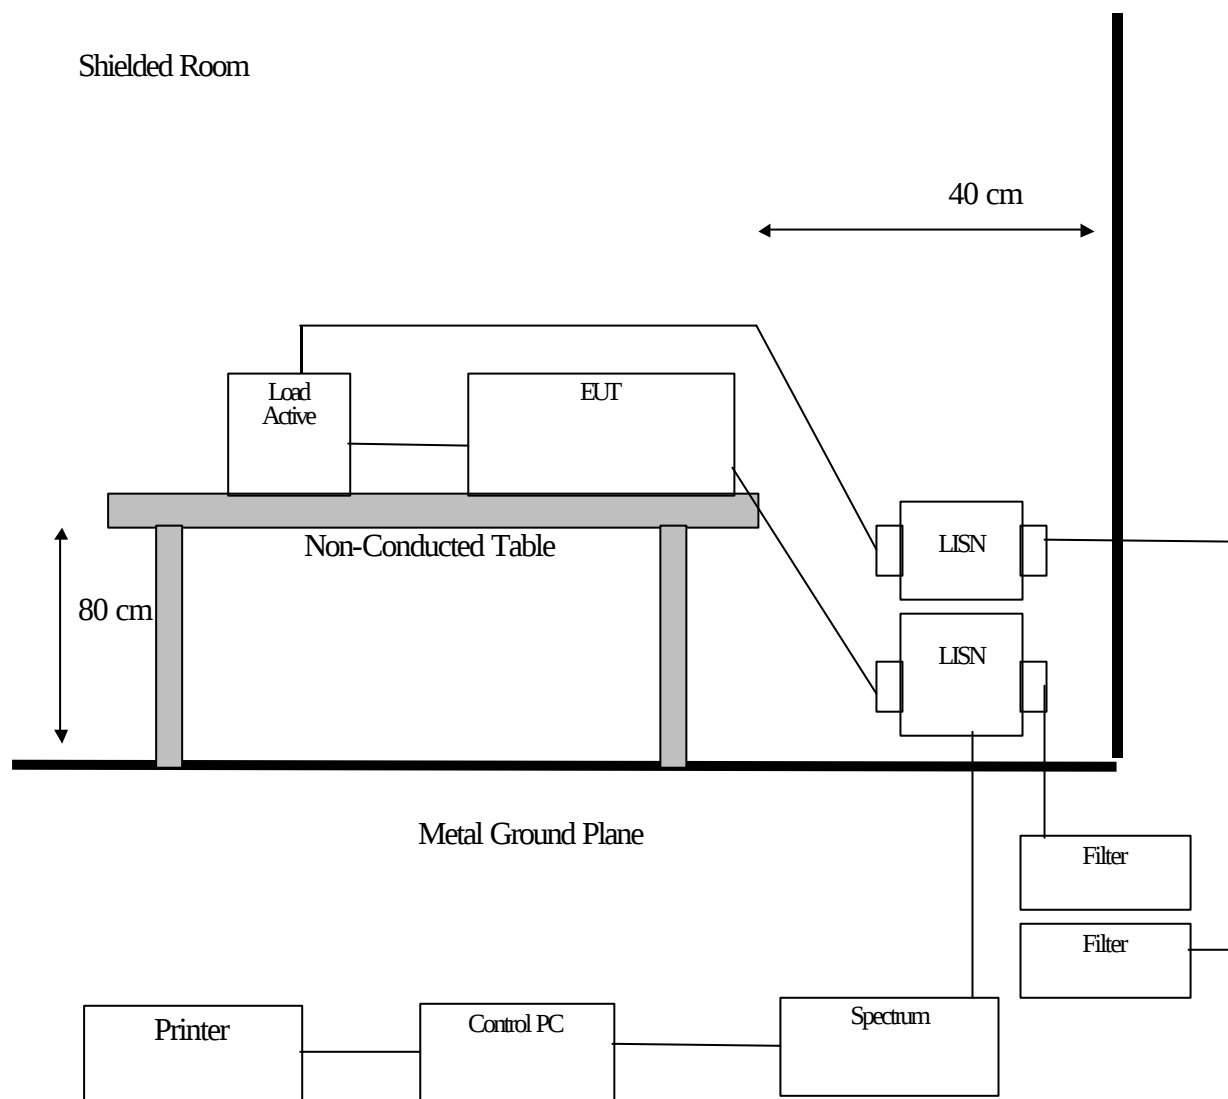

6.4.2 General Radiation Test Configuration

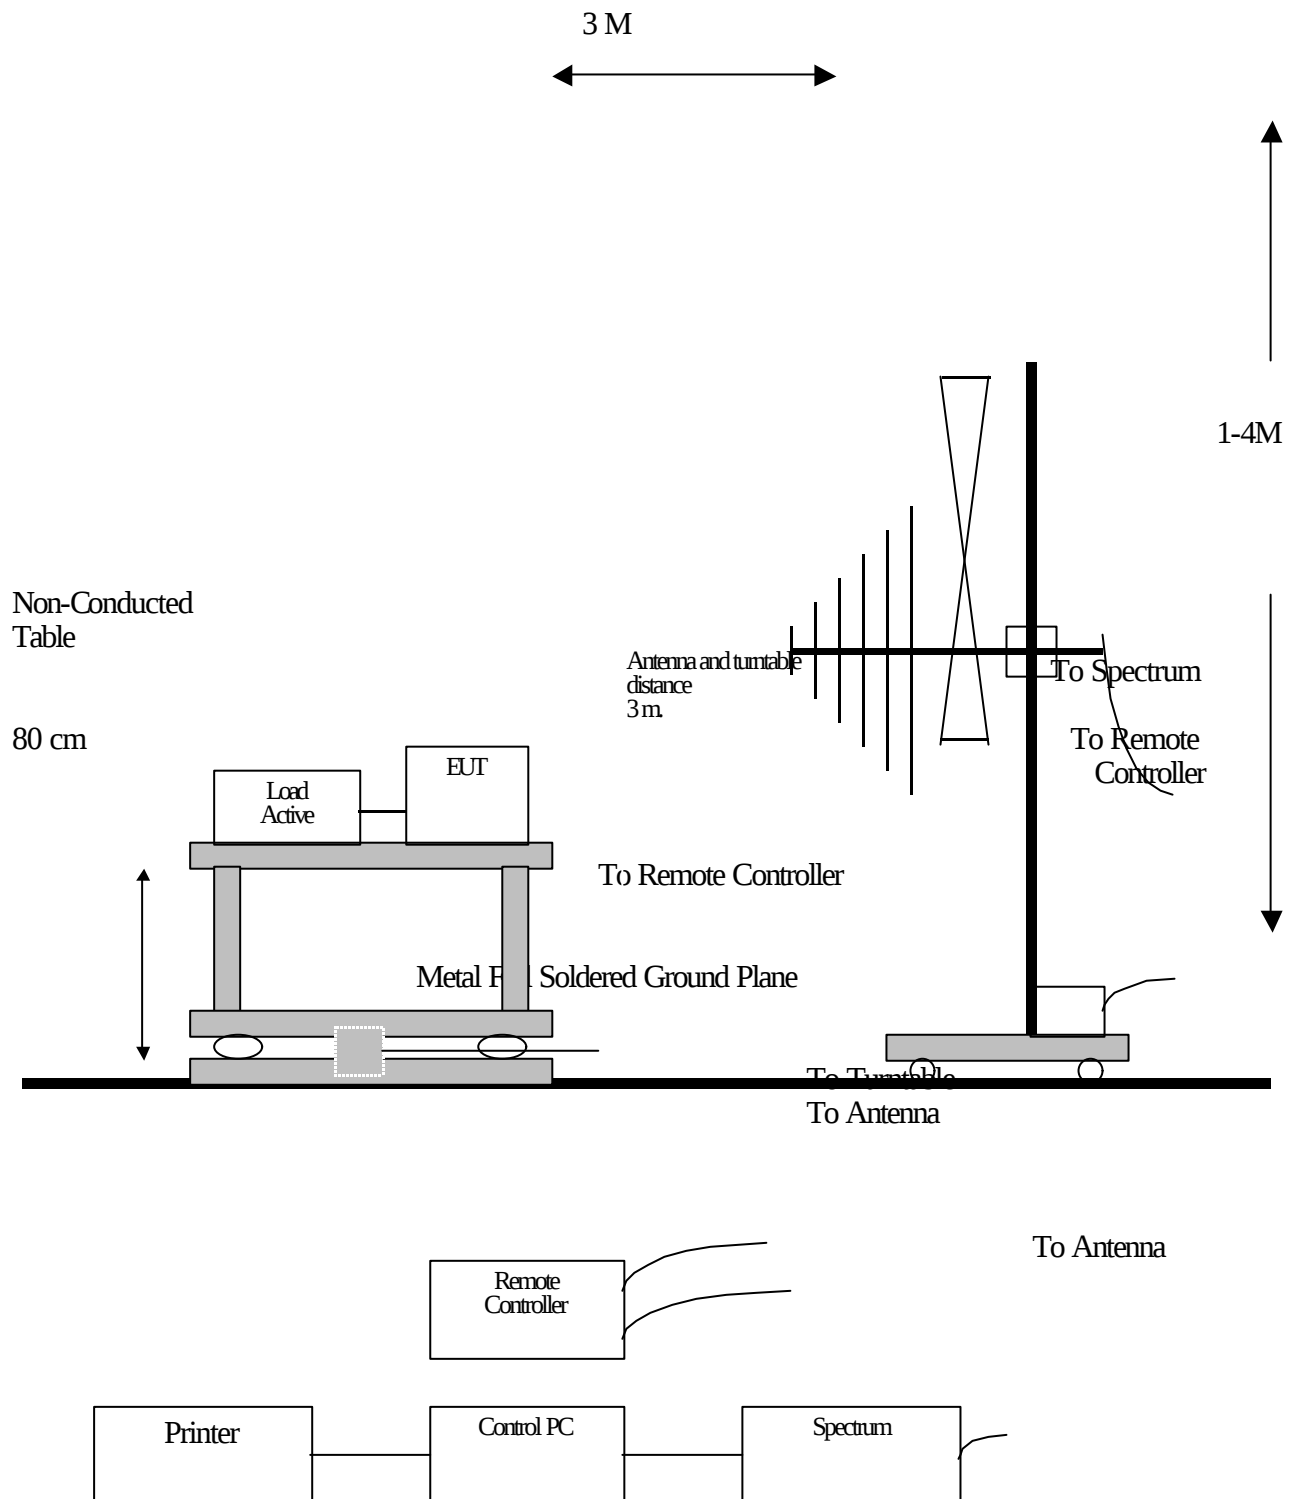

6.5 Appendix E: Description of Support Equipment

6.5.1 Description of Support Equipment

Support Unit 1.

Description:	Acer Monitor
Model:	G781
Serial Number:	999007101214400445T7AA31T
Power Cord:	Non-shielded, Detachable
FCC ID:	(Comply with FCC Standards)

Support Unit 2.

Description:	Logitech USB Mouse
Model Number:	930978-1000
Serial Number:	N/A
Power Supply Type:	N/A
Power Cord:	N/A
FCC ID:	N/A (comply with FCC DOC)

Support Unit 3.

Description:	Notebook Personal Computer
Model No.:	ZI5
Brand:	acer
AC Power Adapter Manufacturer:	Liteon ADT 90W 3Pin PA-1900-05QA(PFC)
HDD:	Toshiba PLUTO (Model: MK8025GAS) 80GB
DVD ROM Driver:	QSI (Model: SDR-083)
Combo Driver:	QSI (Model: SBW-242U)
MDC Modem Module:	Ambit (Model:T60M283.10)
ODD:	HLDS (Model: GWA-4040N) DVD-Dual
RAM:	Elpida EBD11UD8ABDA-6B 1GB
AC Power Cord Type:	Unshielded, 1.8m (Detachable) to Power Adapter
DC Power Cable Type:	Unshielded, 1.8m (Non-Detachable) at Power Adapter (With a Core)
OSC/Clock Frequencies:	133MHz
1394 C0nnect0r:	one 4 Pins
USB Connector:	four 4 Pins
RJ11 Connector:	one 2 Pins
RJ45 Connector:	one 8 Pins
VGA Connector:	one 15 Pins
Mini PCI Slot:	one
TV Port:	one 7 Pins
Line out Port:	one
Line-in Port:	one
DC IN Port:	one
Battery:	Sanyo, LiIon 8cell
LCD:	15SXGA+CMO/IDT (Model:N150P2-L04)
CPU	AMD Athlon 64 2800+(35W)

6.5.2 Software for Controlling Support Unit

A test program which generates a complete line of continuously repeating "H" pattern is used as the software test program. The program was executed as follows:

- A. Read and write to the disk drives.
- B. Send H pattern to the video port device (Monitor).
- C. Repeat the above steps.

	Filename	Issued Date
Monitor	HH.bat	8/20/1991

6.5.3 I/O Cable Condition of EUT and Support Units

Description	Path	Cable Length	Cable Type	Connector Type
AC Power Cord	110V (~240V) to AC Power Cord Inlet (3-pin)	1.8M	Nonshielded, Detachable	Plastic Head
Mouse Data Cable	Mouse to PC USB port	1.8M	Shielded, Undetachable	Metal Head
Monitor Data Cable	Monitor to PC VGA port	1.6M	Shielded, Un-detachable	Metal Head

6.6 Appendix F: Accuracy of Measurement

Test Site: Conduction 02

Item	Source of Uncertainty	Probability Distribution	Total Uncertainties (dB)		Standard Uncertainty (dB)	
1	Systematic Effects: (Assessment from 20 repeat observation; 1 reading on EUT)	Normal	k=2	0.104	k=1	0.052
2	Random Effects: (Assessment from 20 random observations; 1 reading on EUT)	Normal	k=2	0.330	k=1	0.165
3	Receiver Calibration	Rectangular	k=1.73	1.000	k=1	0.577
4	LISN Factor Calibration	Normal	k=2	1.200	k=1	0.600
5	Cable Loss Calibration	Normal	k=2	1.000	k=1	0.500
6	Combined Standard Uncertainty $U_c(y)$	Normal			k=1	0.850
7	Total Uncertainty @95% min. Confidence Level	Normal	k=2	1.701		

Measurement Uncertainty Calculations:

$$U_c(y) = \text{square root} (u_1(y)^2 + u_2(y)^2 + \dots + u_n(y)^2)$$

$$U = 2 * U_c(y)$$

Note: The measurement Uncertainties mentioned above also refer to NIS 81-1994 of NAMAS : The treatment of Uncertainty in EMC Measurement.

Test Site: Chamber 02-3M

Item	Source of Uncertainty	Probability Distribution	Total Uncertainties (dB)		Standard Uncertainty (dB)	
1	Systematic Effects: (Assessment from 20 repeat observation; 1 reading on EUT)	Normal	k=2	0.067	k=1	0.034
2	Random Effects: (Assessment from 20 random observations; 1 reading on EUT)	Normal	k=2	0.103	k=1	0.052
3	Receiver Calibration	Rectangular	k=1.73	1.000	k=1	0.577
4	Antenna Factor Calibration	Normal	k=2	1.700	k=1	0.850
5	Cable Loss Calibration	Normal	k=2	1.000	k=1	0.500
6	Combined Standard Uncertainty Uc(y)	Normal			k=1	1.029
7	Total Uncertainty @95% min. Confidence Level	Normal	k=2	2.059		

Measurement Uncertainty Calculations:


$$U_c(y) = \text{square root} (u_1(y)^2 + u_2(y)^2 + \dots + u_n(y)^2)$$

$$U = 2 * U_c(y)$$


Note: The measurement Uncertainties mentioned above also refer to NIS 81-1994 of NAMAS : The treatment of Uncertainty in EMC Measurement.

6.7 Appendix G: Photographs of EUT Configuration Test Set Up

The Front View of Highest Conducted Set-up For EUT

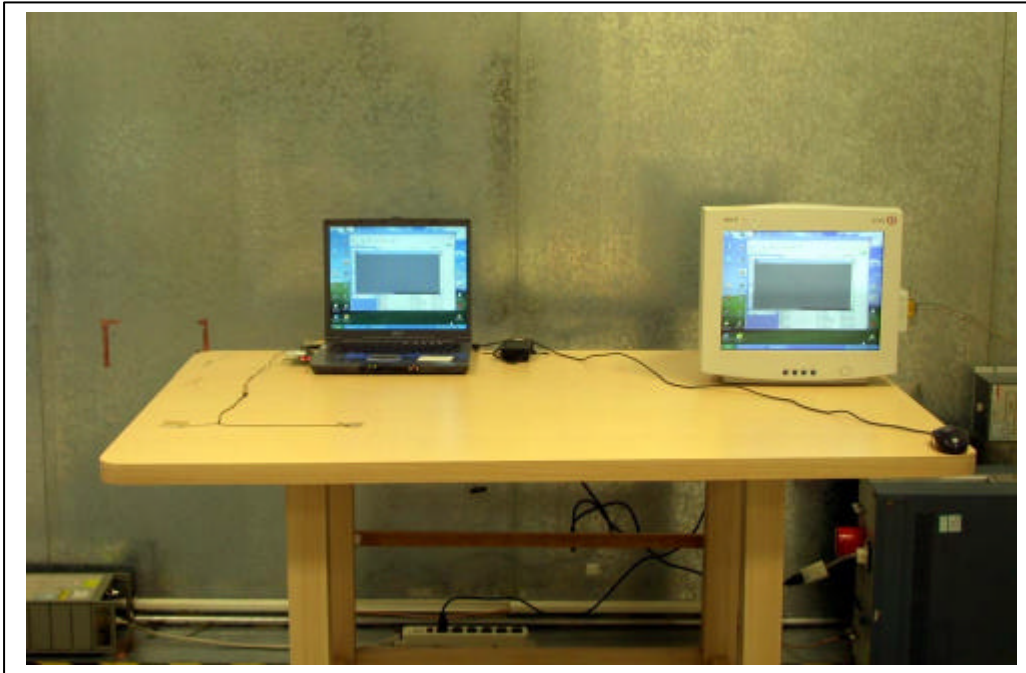


The Back View of Highest Conducted Set-up For EUT

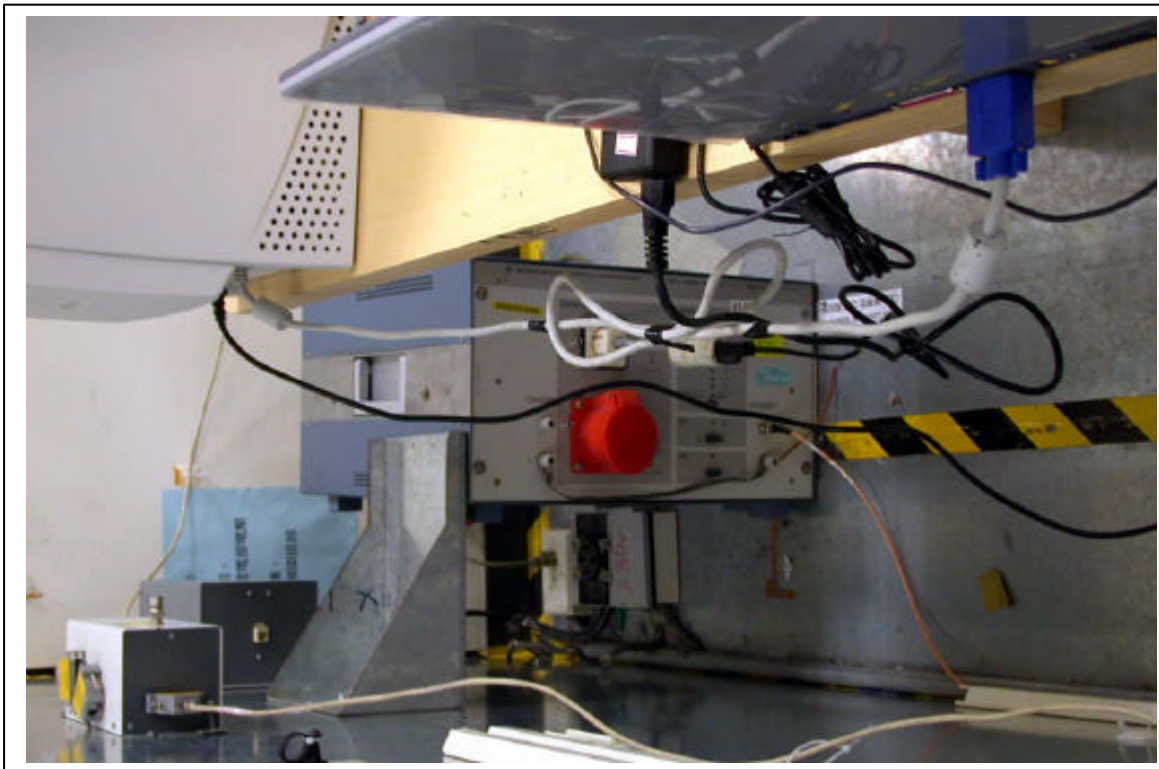




The Front View of Highest Radiated Set-up For EUT

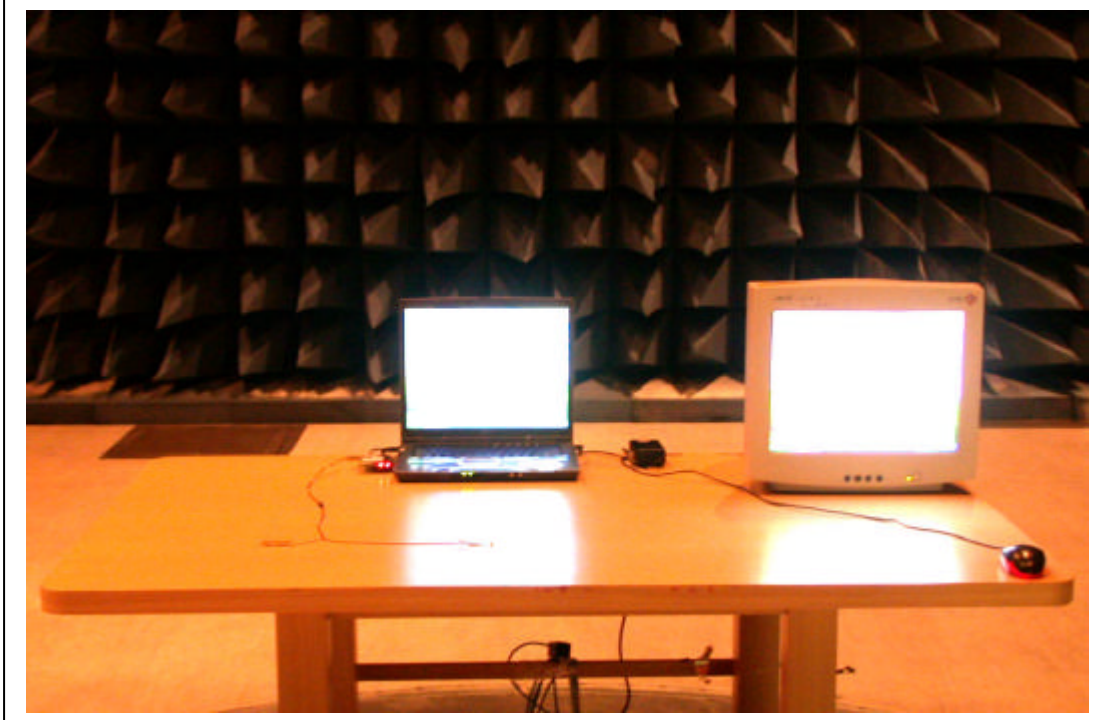

The Back View of Highest Radiated Set-up For EUT

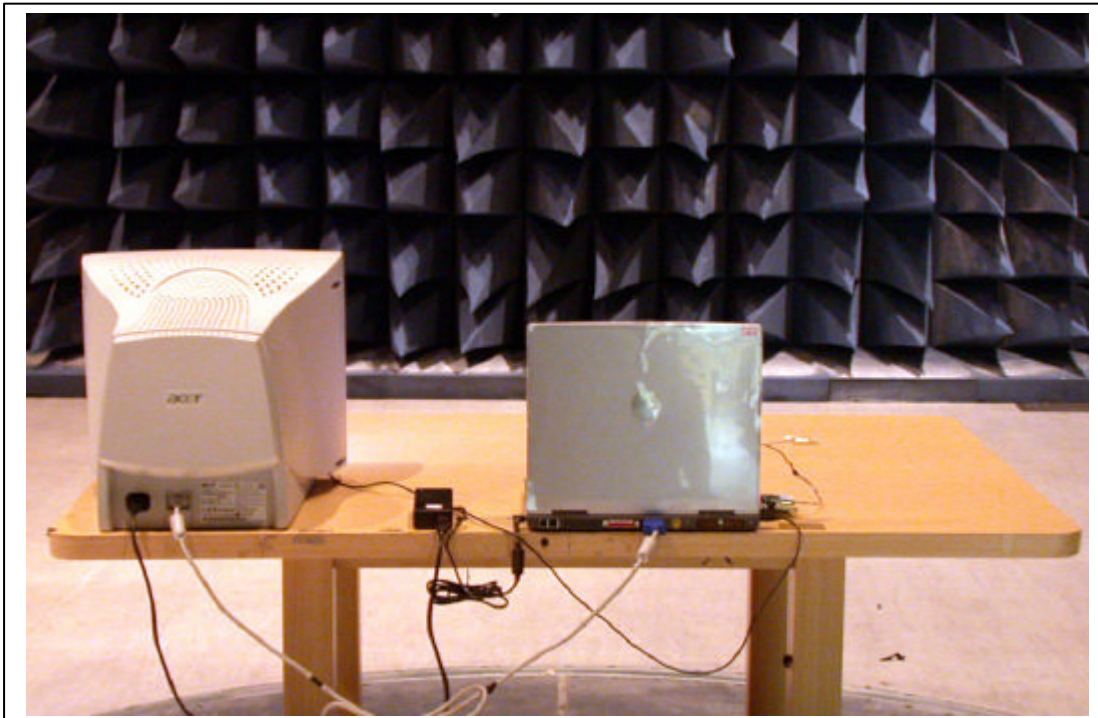

6.8 Appendix H: Antenna Spec.

Please refer to the attached file.