



FCC RADIO TEST REPORT

FCC ID : NKRRXAM-JD1
Equipment : 802.11 abgn/ac/ax Access Point
Brand Name : WNC
Model Name : RXAM-JD1
Applicant : Wistron NeWeb Corporation
20 Park Avenue II, Hsinchu Science Park, Hsinchu 308 Taiwan
Manufacturer : Wistron NeWeb Corporation
20 Park Avenue II, Hsinchu Science Park, Hsinchu 308 Taiwan
Standard : 47 CFR FCC Part 15.247

The product was received on May 26, 2020, and testing was started from May 26, 2020 and completed on Jun. 23, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	7
1.3 Testing Location Information	7
1.4 Measurement Uncertainty	7
2 Test Configuration of EUT.....	8
2.1 Test Channel Mode	8
2.2 The Worst Case Measurement Configuration.....	9
2.3 EUT Operation during Test	10
2.4 Accessories	10
2.5 Support Equipment.....	11
2.6 Test Setup Diagram	12
3 Transmitter Test Result	15
3.1 AC Power-line Conducted Emissions	15
3.2 DTS Bandwidth	17
3.3 Maximum Conducted Output Power	18
3.4 Power Spectral Density	20
3.5 Emissions in Non-restricted Frequency Bands	22
3.6 Emissions in Restricted Frequency Bands.....	23
4 Test Equipment and Calibration Data	27
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of DTS Bandwidth	
Appendix C. Test Results of Maximum Conducted Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Emissions in Non-restricted Frequency Bands	
Appendix F. Test Results of Emissions in Restricted Frequency Bands	
Appendix G. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A10_6 Ver1.2



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Cindy Peng

1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number
2400-2483.5	LE	2402-2480	0-39 [40]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	BT-LE(1Mbps)	1	1TX
2.4-2.4835GHz	BT-LE(500Kb/s)	1	1TX
2.4-2.4835GHz	BT-LE(125Kb/s)	1	1TX
2.4-2.4835GHz	BT-LE(2Mbps)	2	1TX

Note:

- ♦ Bluetooth LE uses a GFSK modulation.
- ♦ BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Ant.	Port		Brand	Model Name	Type	Connector	Gain (dBi)	
	WLAN 2.4GHz	WLAN 5GHz					WLAN 2.4GHz	WLAN 5GHz
1	2	3	WNC	95XKAM15.G20	PIFA	I-PEX	3.0	6.9
2	4	1	WNC	95XKAM15.G19	PIFA	I-PEX	3.0	6.2
3	3	2	WNC	95XKAM15.G18	PIFA	I-PEX	2.9	4.7
4	1	4	WNC	95XKAM15.G21	PIFA	I-PEX	4.4	6.7
Ant.	Port		Brand	Model Name	Type	Connector	Gain (dBi)	
							Bluetooth	
5	1		WNC	95XKAM15.G22	PIFA	I-PEX	6.8	

Note1: The above information was declared by manufacturer.

Note2: The EUT has five antennas.

For 2.4GHz WLAN function, 802.11b/g/n/VHT/ax mode (4TX/4RX):

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

For 5GHz WLAN function, 802.11a/n/ac/ax mode (4TX/4RX):

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

For Bluetooth function (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

**1.1.3 Mode Test Duty Cycle**

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
BT-LE(1Mbps)	0.634	1.98	400.641u	3k
BT-LE(2Mbps)	0.333	4.78	207.969u	10k

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From PoE			
Function	☒	Point-to-multipoint	☐	Point-to-point
Test Software Version	DutApiMimoApApp V0.0.1.39			
Support Mode	☒	LE 1M PHY: 1 Mb/s		
	☒	LE Coded PHY (S=2): 500 Kb/s		
	☒	LE Coded PHY (S=8): 125 Kb/s		
	☒	LE 2M PHY: 2 Mb/s		

Note: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 558074 D01 v05r02
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location				
☐	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)	TEL : 886-3-327-3456	FAX : 886-3-327-0973
☒	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.	TEL : 886-3-656-9065	FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-CB	Serway Li	25.4~26.6°C / 54~57%	Jun. 13, 2020~Jun. 23, 2020
Radiated Below 1GHz	03CH04-CB	Eason Chen	23.7~25.6°C / 63~70%	May 26, 2020
Radiated Above 1GHz	03CH02-CB	Eason Chen	24.8~26°C / 54~57%	Jun. 11, 2020~Jun. 19, 2020
AC Conduction	CO01-CB	Wei Li	24~25°C / 60~63%	May 27, 2020

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086D with Industry Canada.

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	5.1 dB	Confidence levels of 95%
Conducted Emission	2.4 dB	Confidence levels of 95%
Output Power Measurement	1.5 dB	Confidence levels of 95%
Power Density Measurement	2.4 dB	Confidence levels of 95%
Bandwidth Measurement	2%	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode	Power Setting
BT-LE(1Mbps)	-
2402MHz	4
2440MHz	4
2480MHz	4
BT-LE(2Mbps)	-
2402MHz	4
2440MHz	4
2480MHz	4

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	Normal Link (WLAN), CTX (Bluetooth)
1	WLAN 2.4GHz + WLAN 5GHz (Normal Link) + Bluetooth (CTX)

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link (WLAN), CTX (Bluetooth)
1	WLAN 2.4GHz + WLAN 5GHz (Normal Link) + Bluetooth (CTX) - EUT in Z axis
2	WLAN 2.4GHz + WLAN 5GHz (Normal Link) + Bluetooth (CTX) - EUT in Y axis
For operating mode 1 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
1	EUT in Z axis
2	EUT in Y axis
Mode 2 has been evaluated to be the worst case after evaluating. Consequently, measurement will follow this same test mode.	



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz + WLAN 5GHz + Bluetooth
Refer to Sporton Test Report No.: FA052068 for Co-location RF Exposure Evaluation.	

Note: The PoE are for measurement only, would not be marketed.

PoE information as below:

Equipment	Brand Name	Model Name	FCC ID
PoE	Microsemi	PD-9001GR/AT/AC	N/A
PoE	PHOHING	POEA30U-1ATE	N/A

2.3 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

2.4 Accessories

Bracket*1



2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	Microsemi	PD-9001GR/AT/AC	N/A
B	ETH0/PoE PC	DELL	T3400	N/A
C	2.4G NB	DELL	E6430	N/A
D	5G NB	DELL	E6430	N/A
E	ETH1/PoE PC	DELL	T3400	N/A

For Radiated (below 1GHz):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	Microsemi	PD-9001GR/AT/AC	N/A
B	PC	DELL	T3400	N/A
C	2.4G NB	DELL	E4300	N/A
D	5G NB	DELL	E4300	N/A


For Radiated (above 1GHz):


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	PHOHING	POEA30U-1ATE	N/A
B	NB	DELL	E4300	N/A

For RF Conducted:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	PoE	Microsemi	PD-9001GR/AT/AC	N/A

2.6 Test Setup Diagram

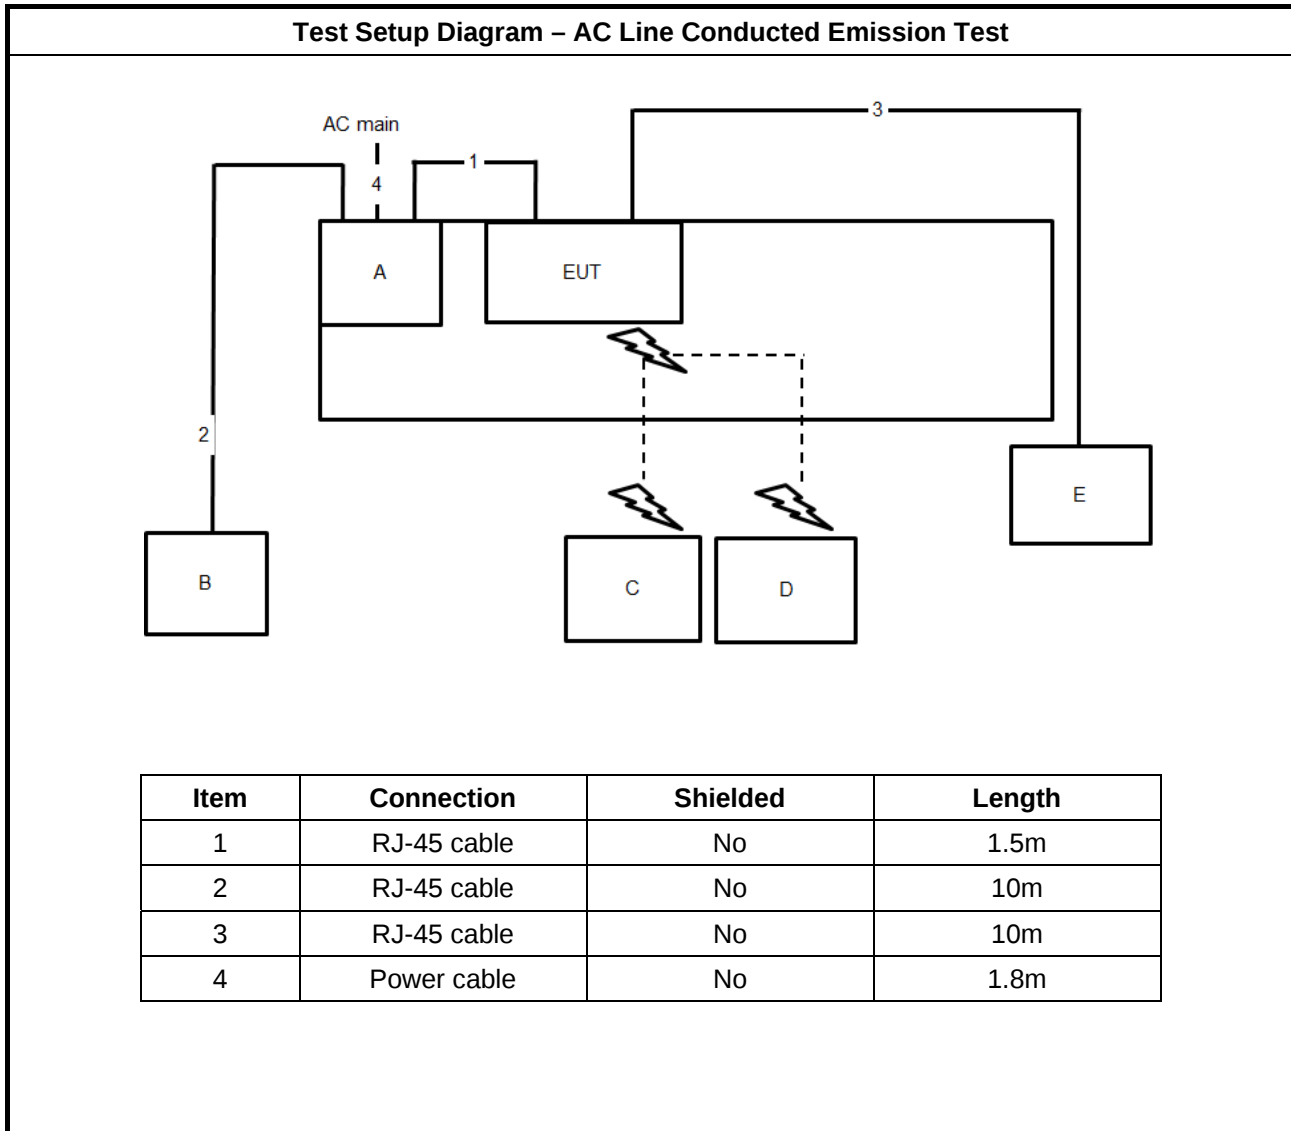

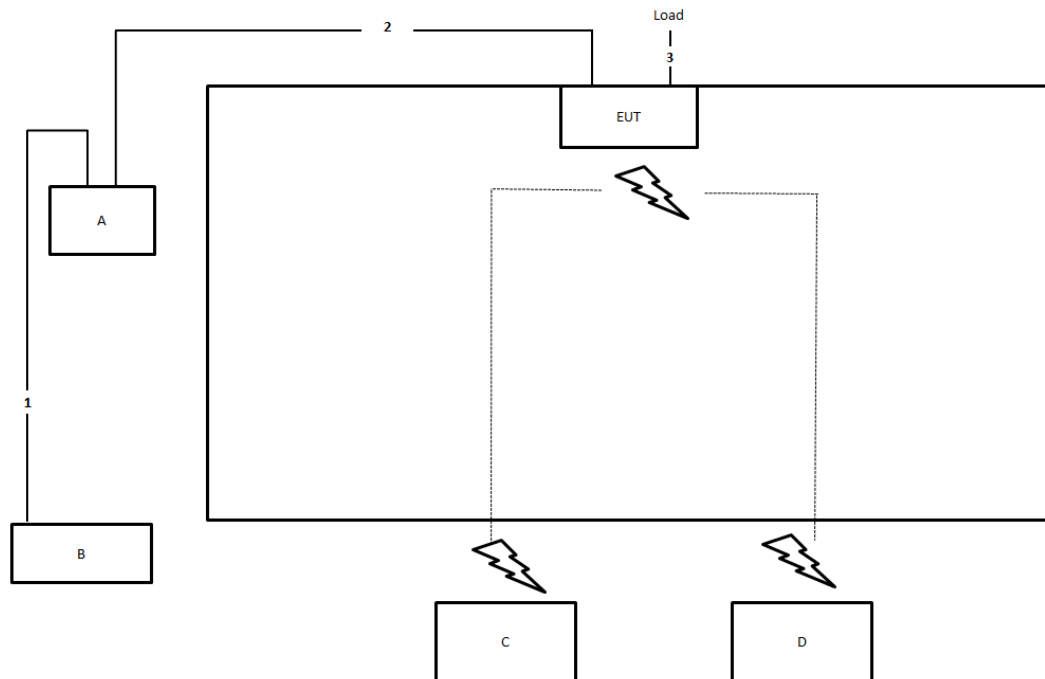Test Setup Diagram - Radiated Test < 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	1.5m

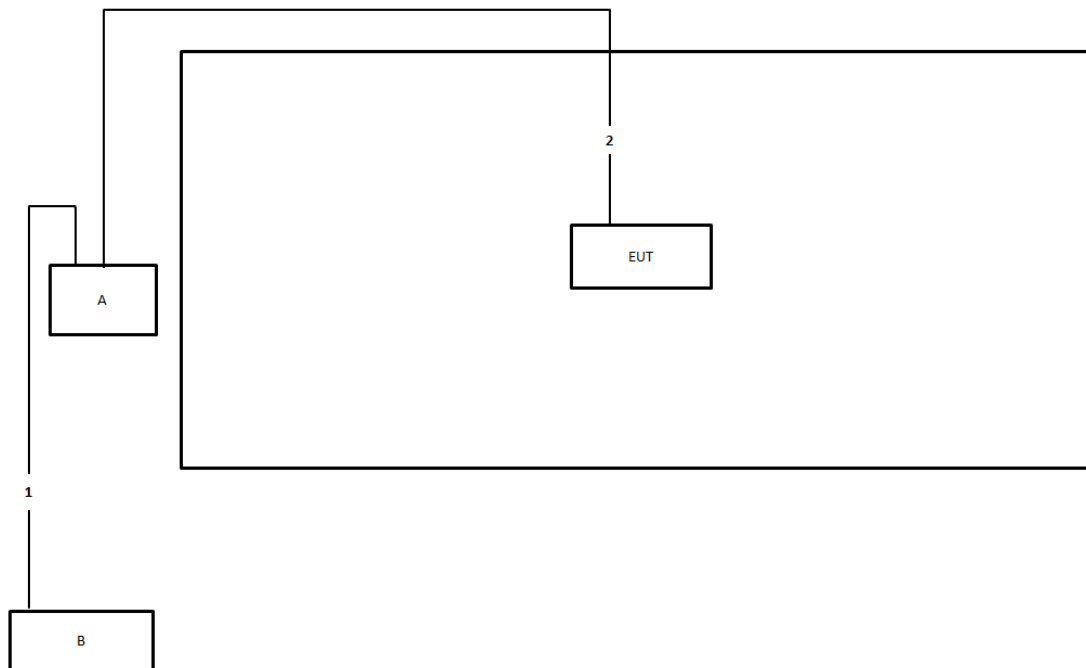Test Setup Diagram - Radiated Test > 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	1.5m
2	RJ-45 cable	No	10m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
▪ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

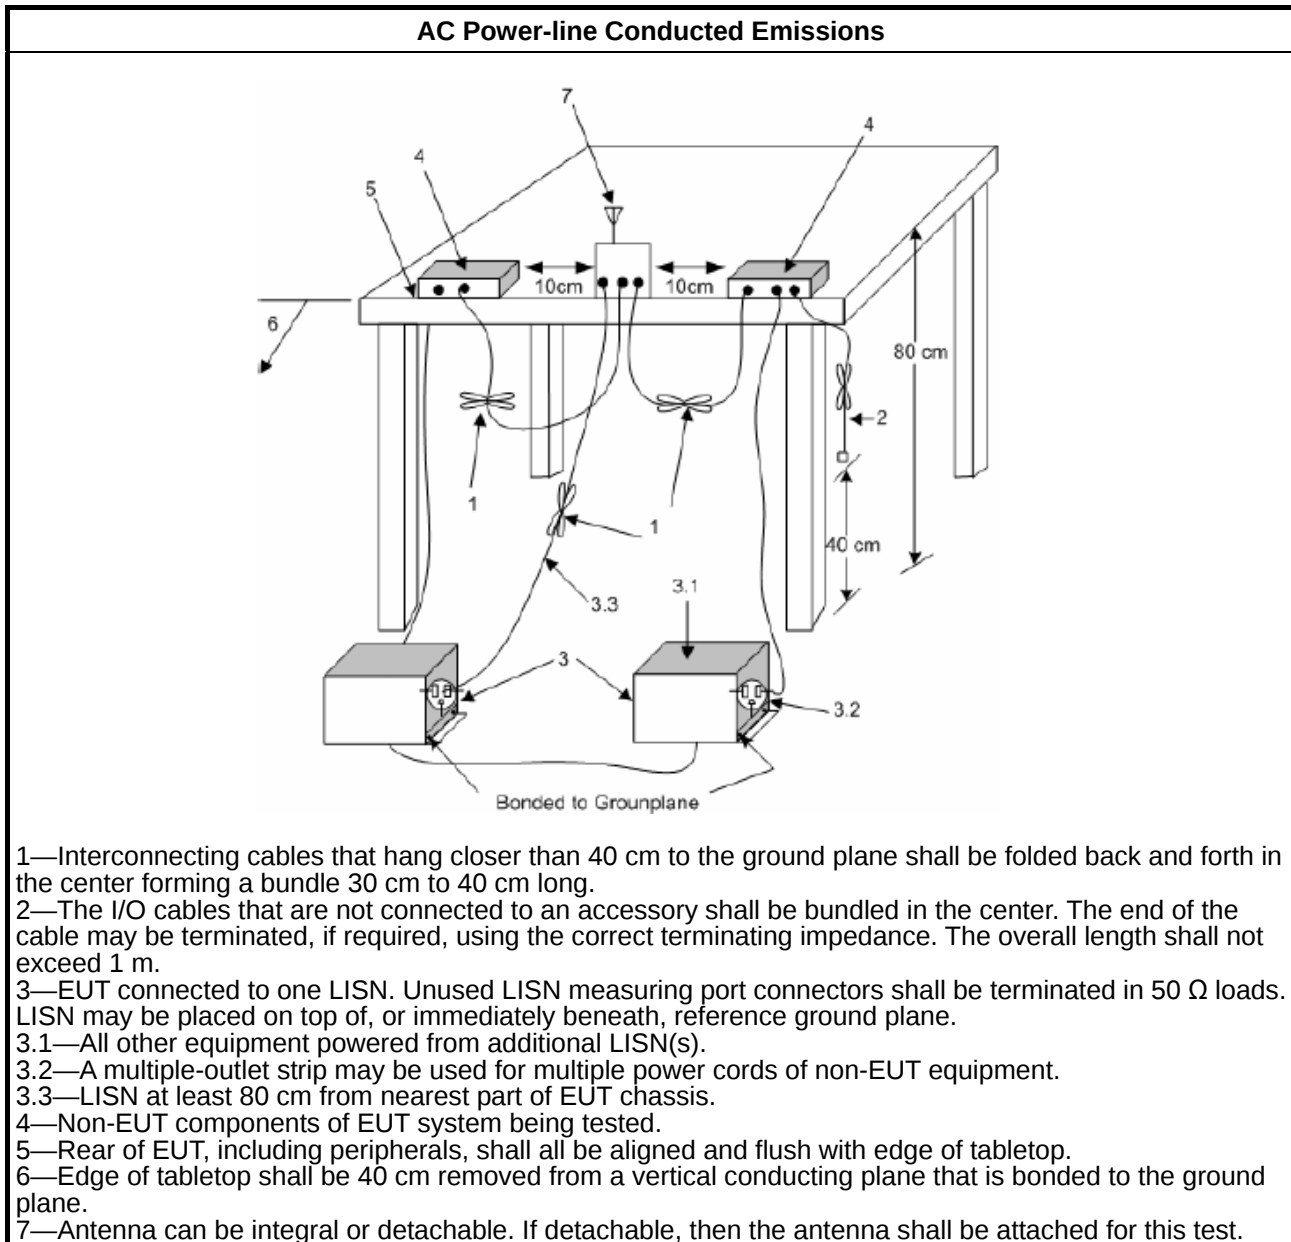

1.1.1. Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading (dBUV) = LISN Factor + Cable Loss + Read Level = Level
- Margin = - Limit + (Read Level + LISN Factor + Cable Loss)

3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
▪	6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
▪	For the emission bandwidth shall be measured using one of the options below:
☒	Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
☐	Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

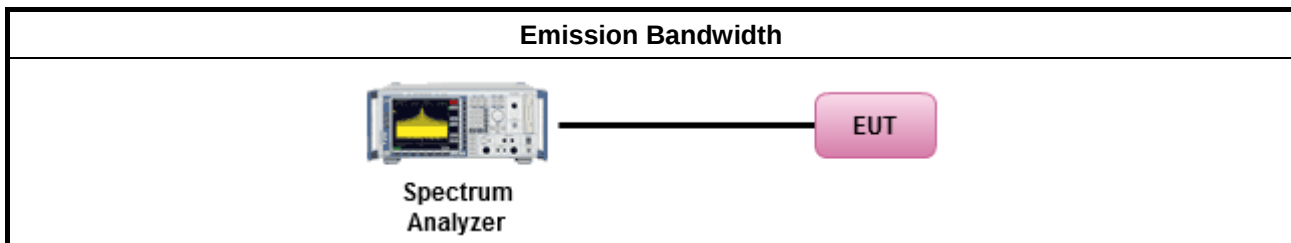

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm - Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm - Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	

3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
▪ Maximum Peak Conducted Output Power	
☐	Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW $\geq$ EBW method).
☐	Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
▪ Maximum Conducted Output Power	
[duty cycle $\geq$ 98% or external video / power trigger]	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
☐	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
☒	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).

For conducted measurement.	
	If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
	If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

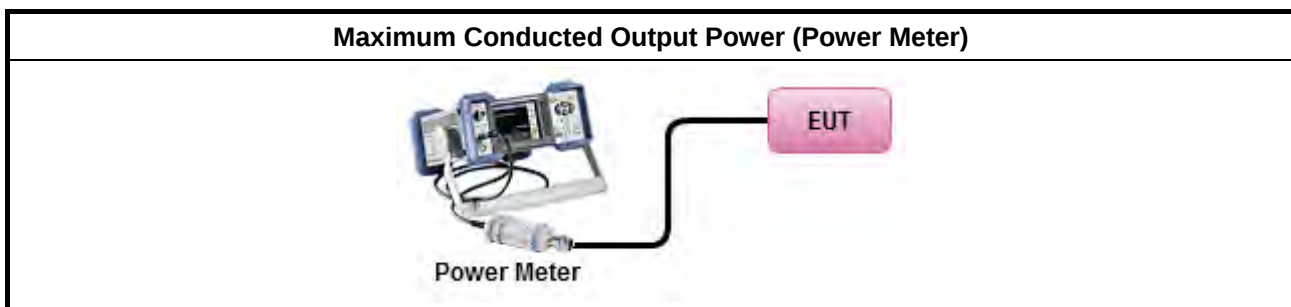

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
▪ Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).	
☒	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD. [duty cycle $\geq 98\%$ or external video / power trigger]
▪ For conducted measurement.	
▪ If The EUT supports multiple transmit chains using options given below:	
☐	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$. Or each transmit chains shall be add $10 \log(N)$ to compared with the limit.

3.4.4 Test Setup

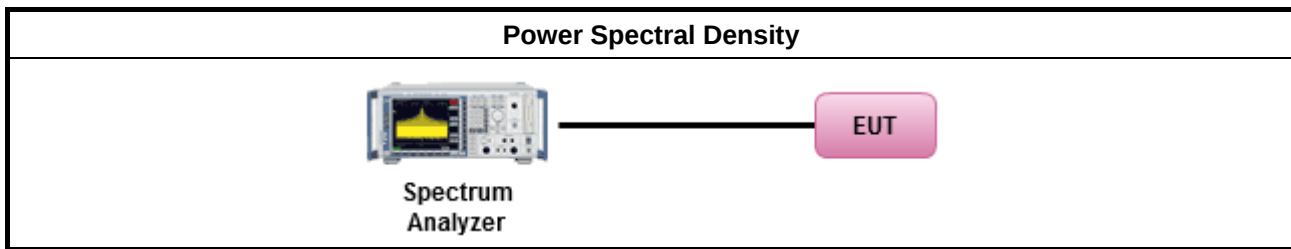

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

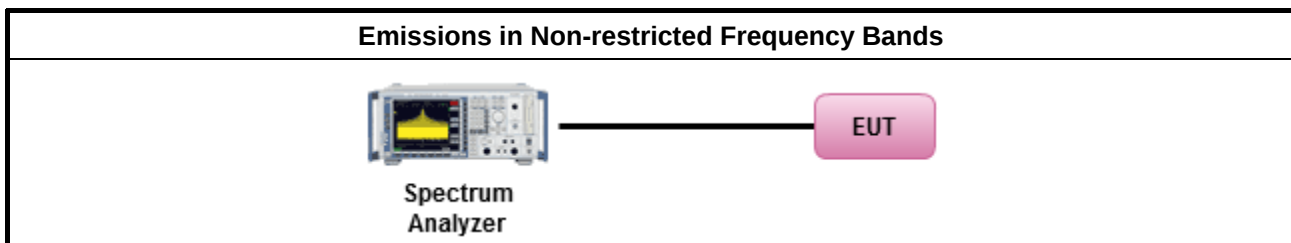

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E



3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.


3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$).
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
	For the transmitter band-edge emissions shall be measured using following options below:
	Refer as FCC KDB 558074 clause 8.7 & c63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

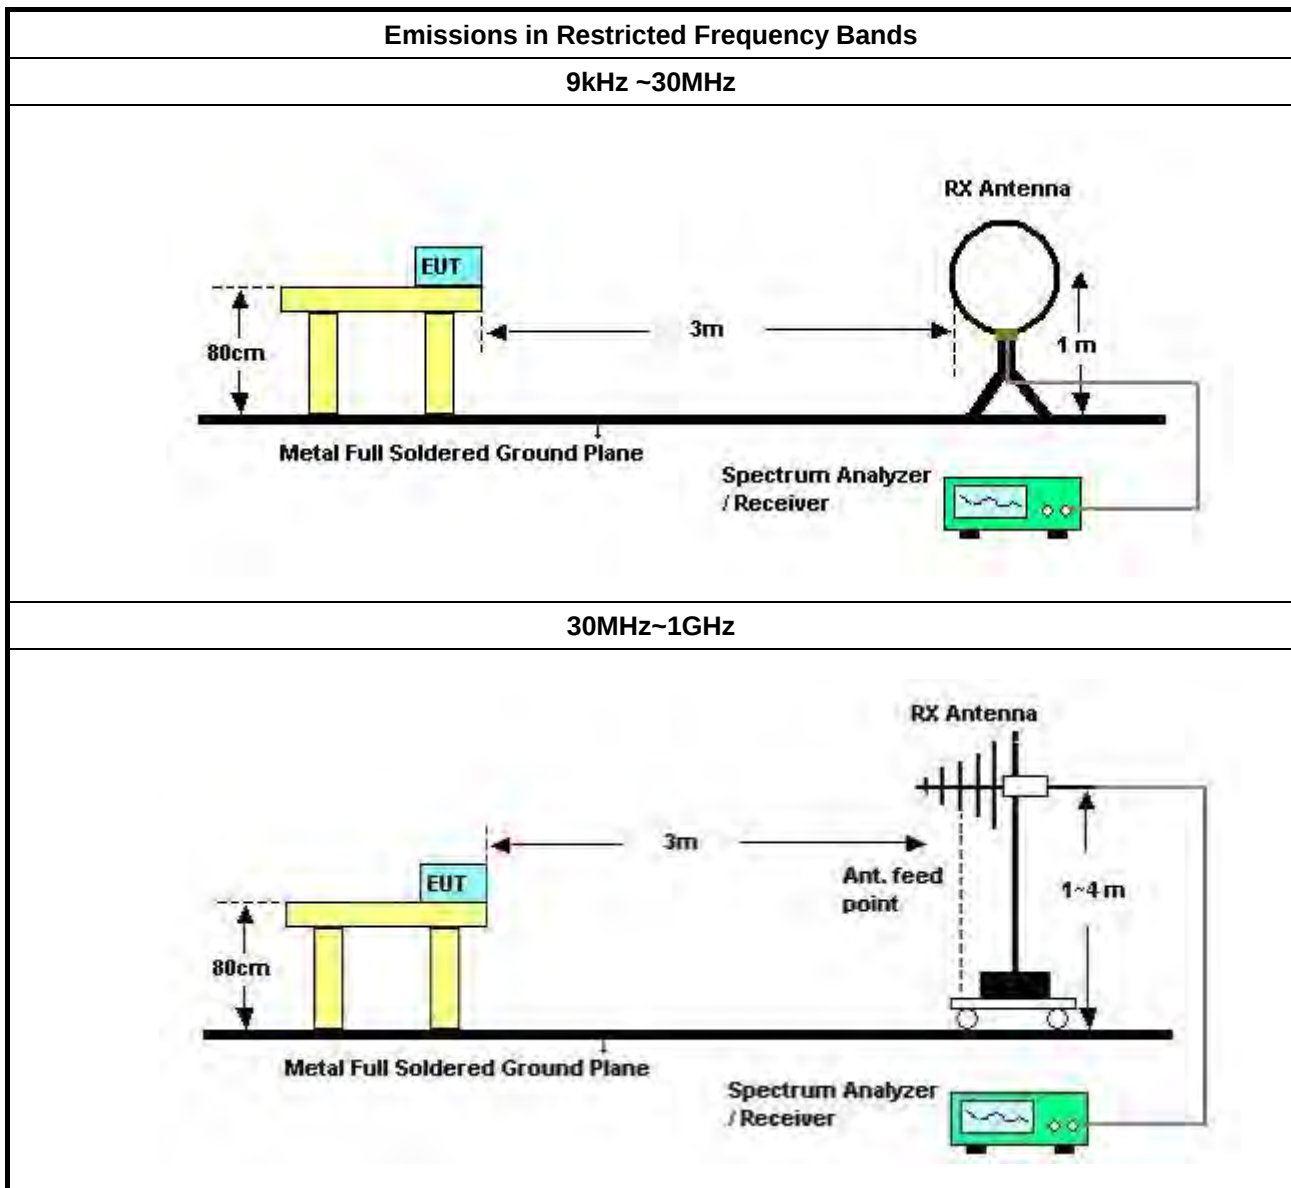

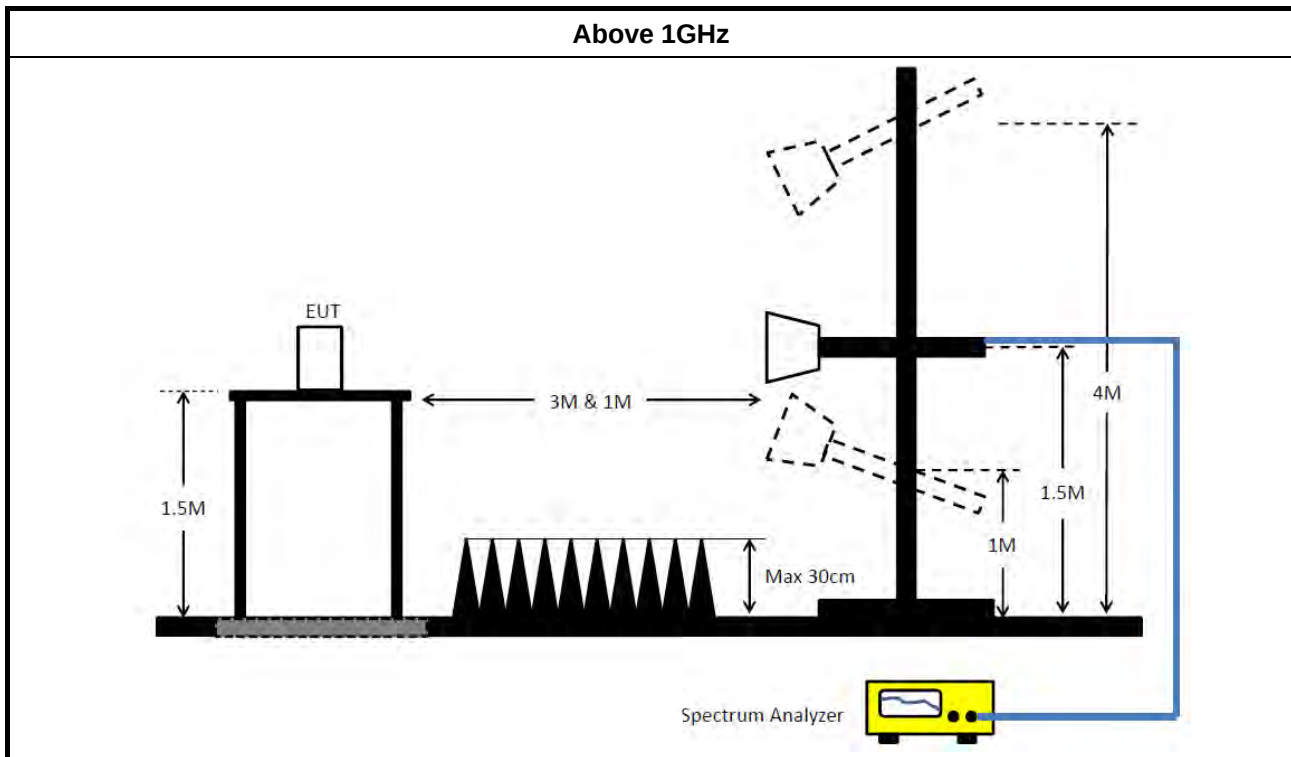

3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor (if applicable) = Level.

3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10 harmonic or 40 GHz, whichever is appropriate.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Feb. 26, 2020	Feb. 25, 2021	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 25, 2019	Dec. 24, 2020	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Feb. 25, 2020	Feb. 24, 2021	Conduction (CO01-CB)
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Jan. 31, 2020	Jan. 30, 2021	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	May 20, 2020	May 19, 2021	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Apr. 13, 2020	Apr. 12, 2021	Radiation (03CH04-CB)
BILOG ANTENNA with 6 dB attenuator	Schaffner & EMCI	CBL6112B & N-6-06	22021&AT-N0 607	30MHz ~ 1GHz	Oct. 12, 2019	Oct. 11, 2020	Radiation (03CH04-CB)
Pre-Amplifier	Agilent	310N	187291	0.1MHz ~ 1GHz	Mar. 19, 2020	Mar. 18, 2021	Radiation (03CH04-CB)
Spectrum Analyzer	R&S	FSP40	100142	9kHz~40GHz	Dec. 18, 2019	Dec. 17, 2020	Radiation (03CH04-CB)
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	May 13, 2020	May 12, 2021	Radiation (03CH04-CB)
RF Cable-low	Woken	RG402	Low Cable-03+22	30MHz ~ 1GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH04-CB)
Horn Antenna	EMCO	3115	9610-4976	1GHz ~ 18GHz	Apr. 21, 2020	Apr. 20, 2021	Radiation (03CH02-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jun. 27, 2019	Jun. 26, 2020	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Aug. 21, 2019	Aug. 20, 2020	Radiation (03CH02-CB)
Pre-Amplifier	MITEQ	TTA1840-35-H G	1864479	18GHz ~ 40GHz	Jul. 03, 2019	Jul. 02, 2020	Radiation (03CH02-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Aug. 15, 2019	Aug. 14, 2020	Radiation (03CH02-CB)
High Cable	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH02-CB)
High Cable	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz ~ 40 GHz	Jul. 24, 2019	Jul. 23, 2020	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz ~ 40 GHz	Jul. 24, 2019	Jul. 23, 2020	Radiation (03CH02-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	May 05, 2020	May 04, 2021	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz –26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz –26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz –26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz –26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-28	1 GHz –26.5 GHz	Nov. 18, 2019	Nov. 17, 2020	Conducted (TH01-CB)
Power Sensor	Agilent	E9327A	US40442088	50MHz~18GHz	Feb. 07, 2020	Feb. 06, 2021	Conducted (TH01-CB)
Power Meter	Agilent	E4416A	GB41291199	50MHz~18GHz	Feb. 07, 2020	Feb. 06, 2021	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.





AC Power Port Conducted Emission Result

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition
Mode 1	Pass	QP	478.5k	39.01	56.36	-17.35	9.88	Line

27/05/2020

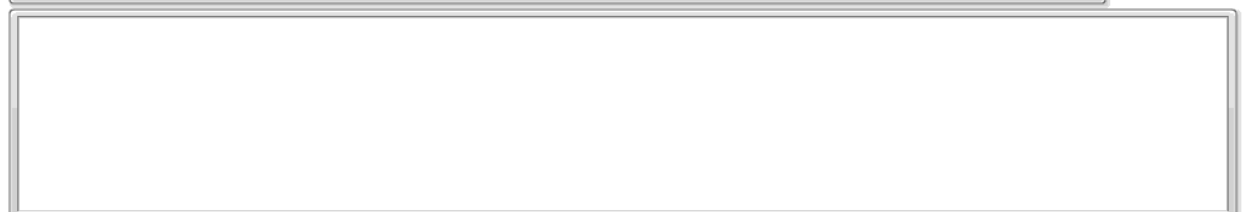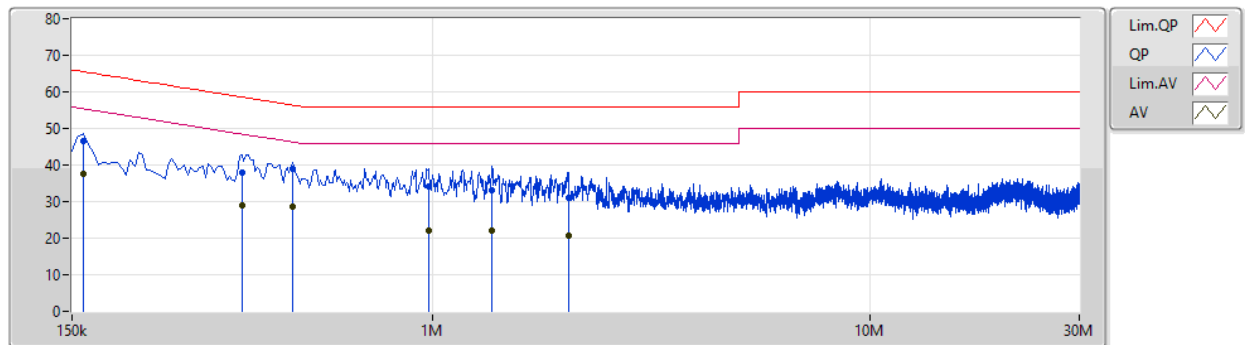

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor	Condition	Comment	Raw (dBuV)	AF (dB)	CL (dB)	AT (dB)			
QP	159k	46.43	65.52	-19.09	9.87	Line	-	36.56	0.05	0.03	9.79			
AV	159k	37.64	55.52	-17.88	9.87	Line	-	27.77	0.05	0.03	9.79			
QP	366k	37.96	58.60	-20.64	9.88	Line	-	28.08	0.04	0.03	9.81			
AV	366k	28.82	48.60	-19.78	9.88	Line	-	18.94	0.04	0.03	9.81			
QP	478.5k	39.01	56.36	-17.35	9.88	Line	"Worst"	29.13	0.04	0.03	9.81			
AV	478.5k	28.67	46.36	-17.69	9.88	Line	-	18.79	0.04	0.03	9.81			
QP	982.5k	33.97	56.00	-22.03	9.91	Line	-	24.06	0.05	0.04	9.82			
AV	982.5k	21.99	46.00	-24.01	9.91	Line	-	12.08	0.05	0.04	9.82			
QP	1.365M	33.17	56.00	-22.83	9.92	Line	-	23.25	0.05	0.05	9.82			
AV	1.365M	22.05	46.00	-23.95	9.92	Line	-	12.13	0.05	0.05	9.82			
QP	2.04M	31.06	56.00	-24.94	9.96	Line	-	21.10	0.06	0.07	9.83			
AV	2.04M	20.67	46.00	-25.33	9.96	Line	-	10.71	0.06	0.07	9.83			

27/05/2020

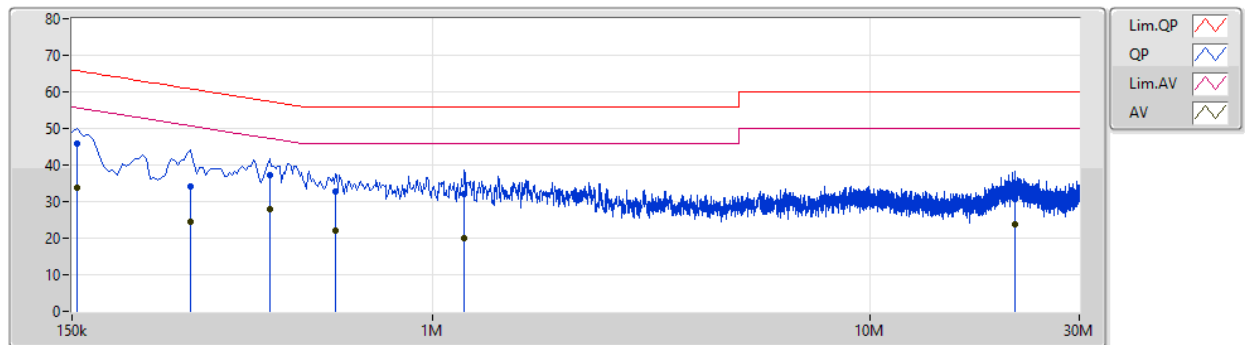

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor	Condition	Comment	Raw (dBuV)	AF (dB)	CL (dB)	AT (dB)			
QP	154.5k	45.91	65.75	-19.84	9.86	Neutral	-	36.05	0.04	0.03	9.79			
AV	154.5k	33.74	55.75	-22.01	9.86	Neutral	-	23.88	0.04	0.03	9.79			
QP	280.5k	34.14	60.80	-26.66	9.87	Neutral	-	24.27	0.04	0.03	9.80			
AV	280.5k	24.40	50.80	-26.40	9.87	Neutral	-	14.53	0.04	0.03	9.80			
QP	424.5k	37.22	57.36	-20.14	9.88	Neutral	-	27.34	0.04	0.03	9.81			
AV	424.5k	27.77	47.36	-19.59	9.88	Neutral	"Worst"	17.89	0.04	0.03	9.81			
QP	600k	32.80	56.00	-23.20	9.89	Neutral	-	22.91	0.05	0.03	9.81			
AV	600k	22.07	46.00	-23.93	9.89	Neutral	-	12.18	0.05	0.03	9.81			
QP	1.181M	32.10	56.00	-23.90	9.93	Neutral	-	22.17	0.06	0.05	9.82			
AV	1.181M	19.84	46.00	-26.16	9.93	Neutral	-	9.91	0.06	0.05	9.82			
QP	21.422M	30.53	60.00	-29.47	10.56	Neutral	-	19.97	0.23	0.33	10.00			
AV	21.422M	23.78	50.00	-26.22	10.56	Neutral	-	13.22	0.23	0.33	10.00			

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	672.5k	1.023M	1M02F1D	672.5k	1.023M
BT-LE(2Mbps)	855k	2.024M	2M02F1D	852.5k	2.024M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	672.5k	1.023M
2440MHz	Pass	500k	672.5k	1.023M
2480MHz	Pass	500k	672.5k	1.023M
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	500k	852.5k	2.024M
2440MHz	Pass	500k	855k	2.024M
2480MHz	Pass	500k	852.5k	2.024M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

BT-LE(1Mbps)
2402MHz

16/06/2020

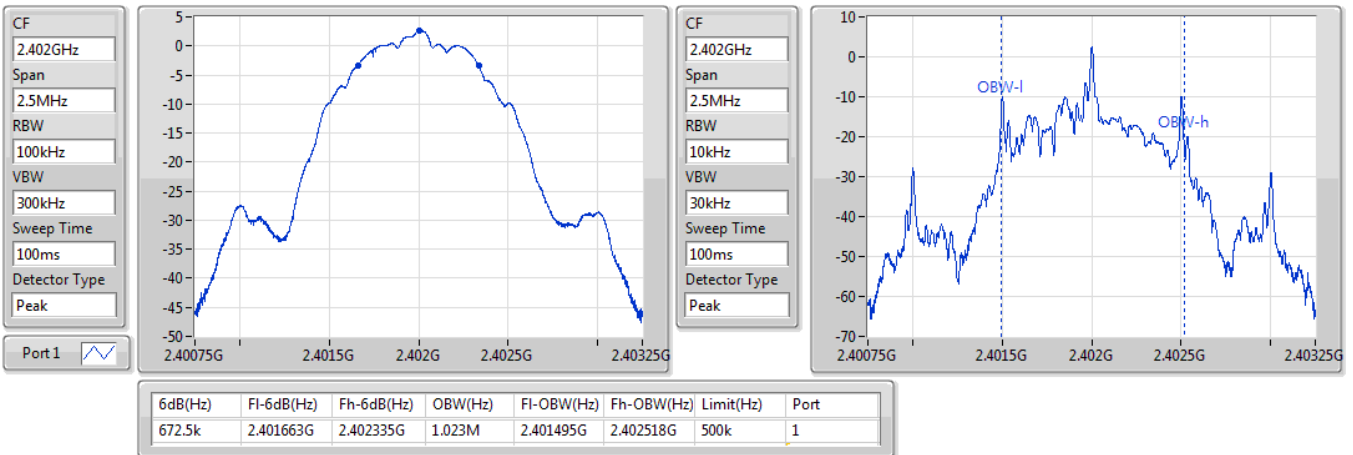

BT-LE(1Mbps)
2440MHz

16/06/2020

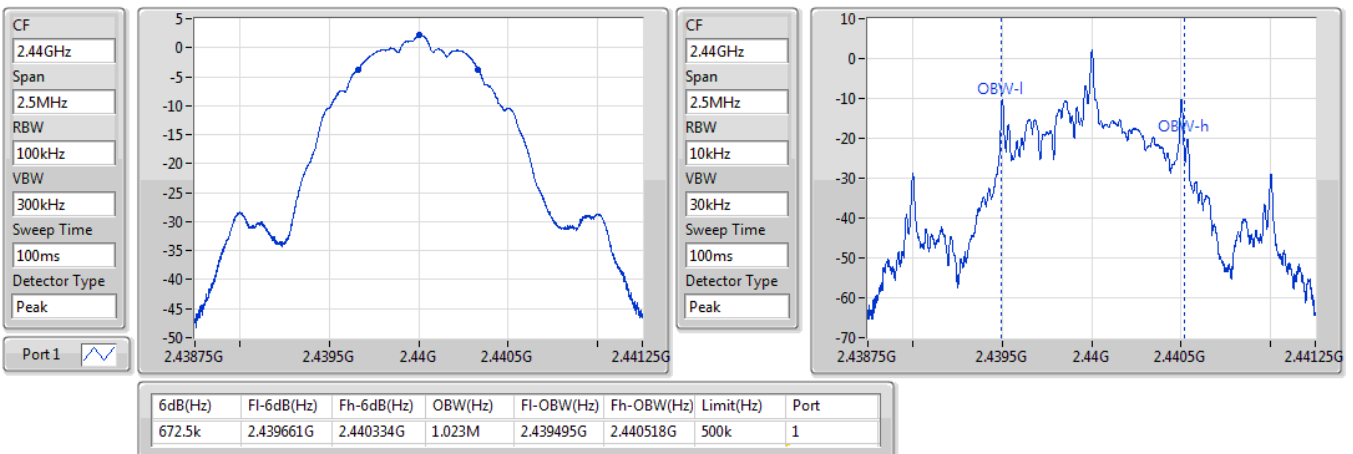


BT-LE(1Mbps)
EBW
2480MHz

16/06/2020

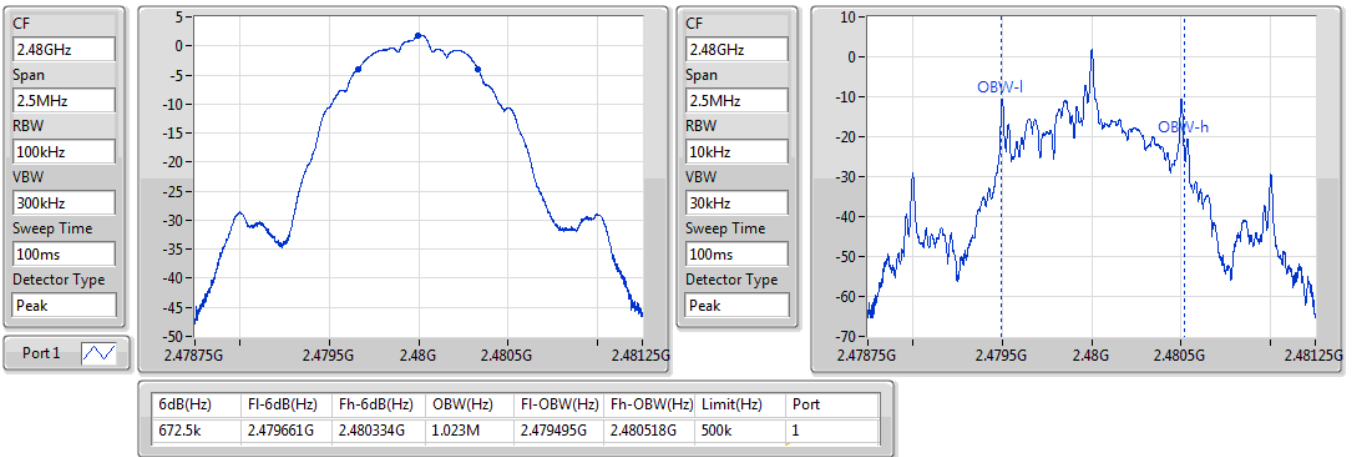

BT-LE(2Mbps)
EBW
2402MHz

16/06/2020

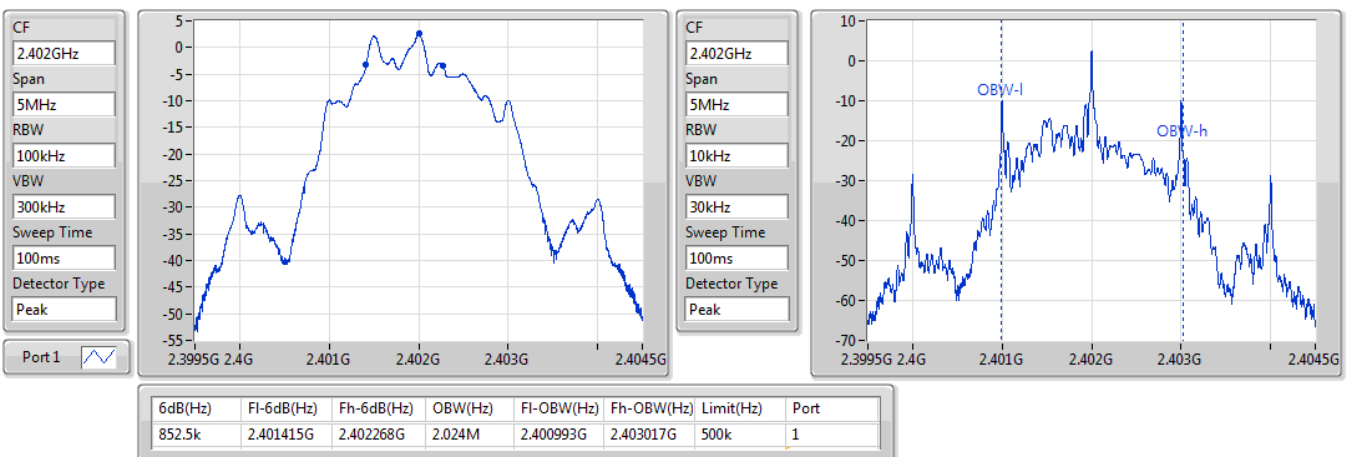


BT-LE(2Mbps)
EBW
2440MHz

16/06/2020

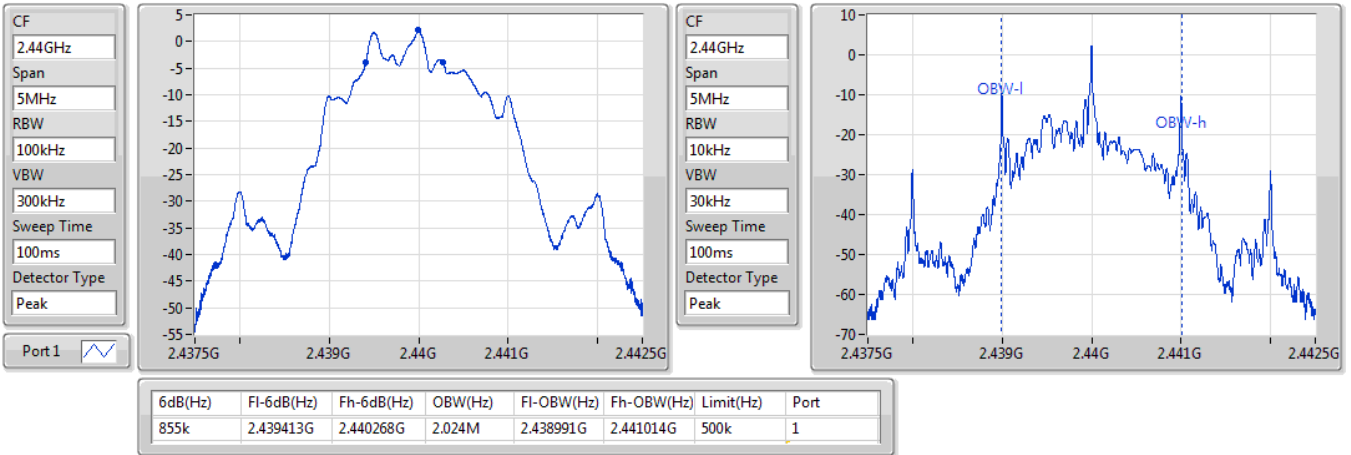
BT-LE(2Mbps)
EBW
2480MHz

16/06/2020

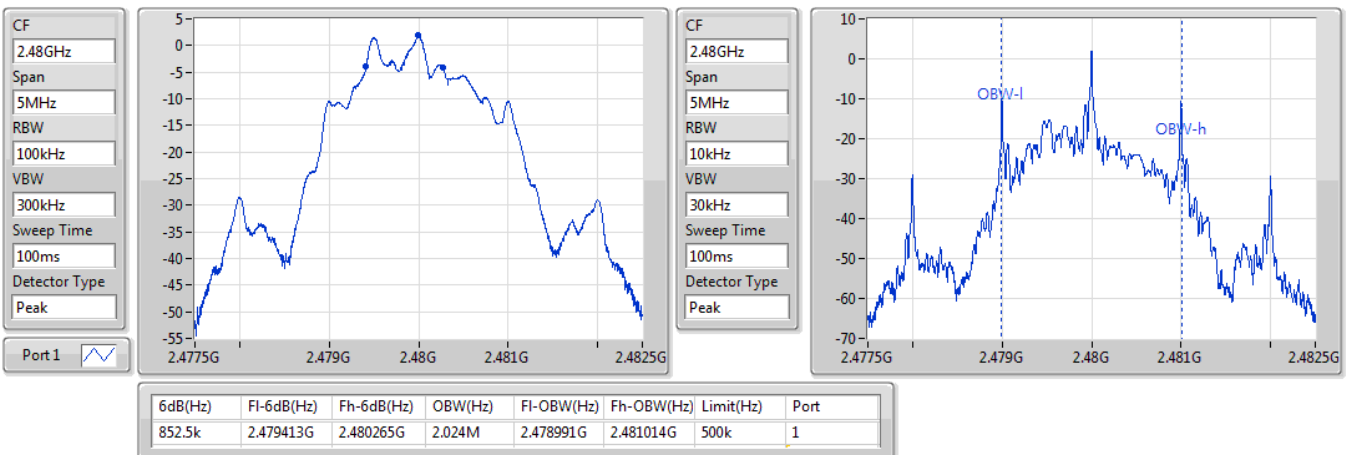



Average Power-DTS Result

Appendix C

Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	3.09	0.00204
BT-LE(2Mbps)	3.08	0.00203



Average Power-DTS Result

Appendix C

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	6.80	3.09	29.20
2440MHz	Pass	6.80	2.65	29.20
2480MHz	Pass	6.80	2.41	29.20
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	6.80	3.08	29.20
2440MHz	Pass	6.80	2.64	29.20
2480MHz	Pass	6.80	2.42	29.20

DG = Directional Gain; **Port X** = Port X output power



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	1.50
BT-LE(2Mbps)	-1.81

RBW=3 kHz.



Result

Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	6.80	1.50	7.20
2440MHz	Pass	6.80	0.81	7.20
2480MHz	Pass	6.80	0.92	7.20
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	6.80	-1.81	7.20
2440MHz	Pass	6.80	-2.28	7.20
2480MHz	Pass	6.80	-2.54	7.20

DG = Directional Gain; RBW=3 kHz;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;


BT-LE(1Mbps)

PSD

2402MHz

16/06/2020

CF
2.402GHz
Span
1.5MHz
RBW
3kHz
VBW
10kHz
Sweep Time
632.18121us
Detector Type
Peak

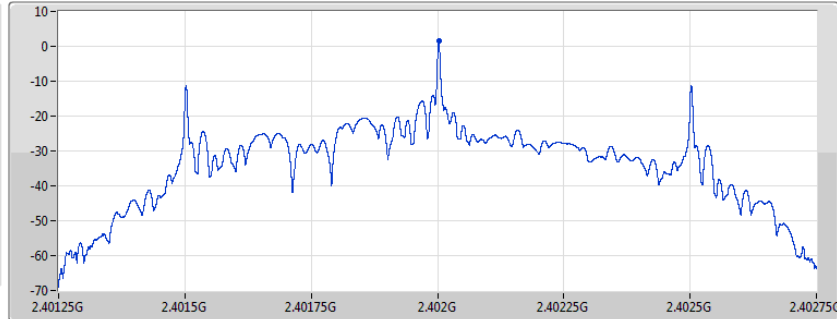

Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.50	1.50	1.50


BT-LE(1Mbps)

PSD

2440MHz

16/06/2020

CF
2.44GHz
Span
1.5MHz
RBW
3kHz
VBW
10kHz
Sweep Time
632.18121us
Detector Type
Peak

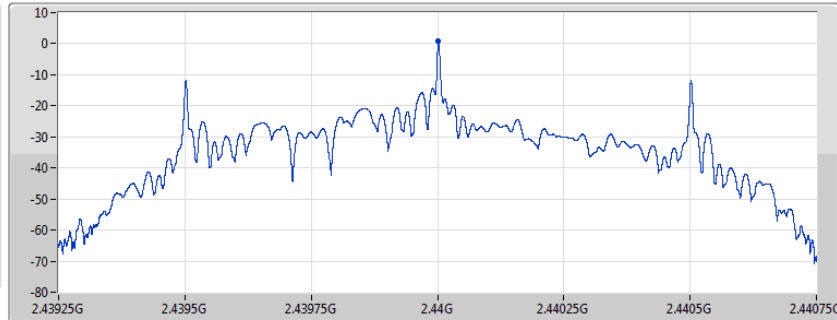

Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.81	0.81	0.81


BT-LE(1Mbps)

PSD

2480MHz

16/06/2020

CF
2.48GHz
Span
1.5MHz
RBW
3kHz
VBW
10kHz
Sweep Time
632.18121us
Detector Type
Peak

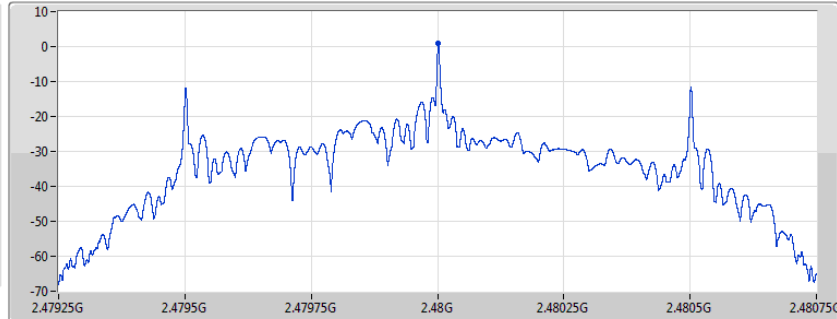

Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.92	0.92	0.92


BT-LE(2Mbps)

PSD

2402MHz

16/06/2020

CF
2.402GHz
Span
3MHz
RBW
3kHz
VBW
10kHz
Sweep Time
632.01845us
Detector Type
Peak

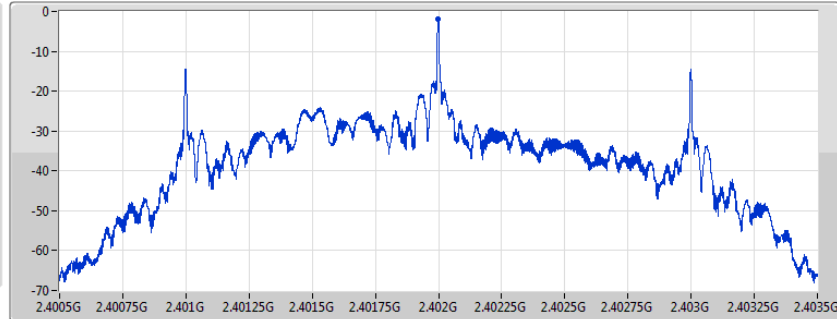

Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.81	-1.81	-1.81


BT-LE(2Mbps)

PSD

2440MHz

16/06/2020

CF
2.44GHz
Span
3MHz
RBW
3kHz
VBW
10kHz
Sweep Time
632.01845us
Detector Type
Peak

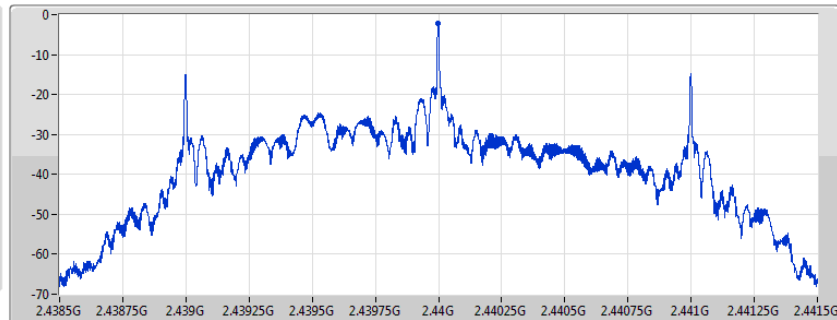

Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.28	-2.28	-2.28


BT-LE(2Mbps)

PSD

2480MHz

16/06/2020

CF
2.48GHz
Span
3MHz
RBW
3kHz
VBW
10kHz
Sweep Time
632.01845us
Detector Type
Peak

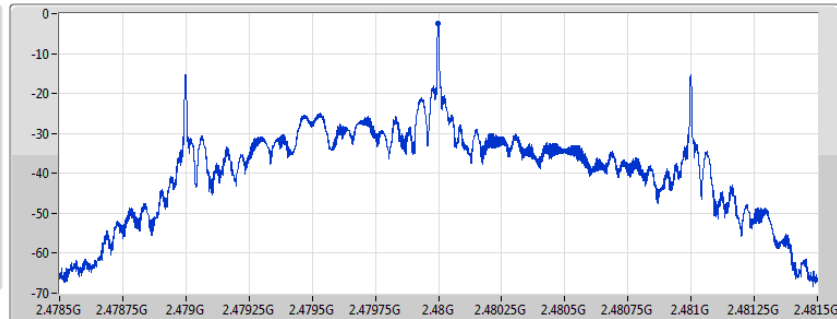

Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.54	-2.54	-2.54



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.402G	2.59	-27.41	958.54M	-52.76	2.39453G	-51.99	2.4G	-54.58	2.48752G	-50.81	16.77753G	-46.57	1
BT-LE(2Mbps)	Pass	2.402G	2.54	-27.46	2.11592G	-52.02	2.4G	-27.96	2.4G	-28.51	2.49221G	-51.84	16.71566G	-46.37	1

Result



Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.402G	2.59	-27.41	917.13M	-53.03	2.39453G	-51.22	2.4G	-55.05	2.49779G	-51.50	16.8647G	-46.64	1
2440MHz	Pass	2.402G	2.59	-27.41	883.05M	-52.88	2.39999G	-51.20	2.4G	-51.49	2.48863G	-51.63	23.43087G	-46.52	1
2480MHz	Pass	2.402G	2.59	-27.41	958.54M	-52.76	2.39453G	-51.99	2.4G	-54.58	2.48752G	-50.81	16.77753G	-46.57	1
BT-LE(2Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.402G	2.54	-27.46	2.11592G	-52.02	2.4G	-27.96	2.4G	-28.51	2.49221G	-51.84	16.71566G	-46.37	1
2440MHz	Pass	2.402G	2.54	-27.46	2.11357G	-52.65	2.39996G	-51.08	2.4G	-52.68	2.48794G	-51.55	16.76347G	-46.59	1
2480MHz	Pass	2.402G	2.54	-27.46	1.76959G	-52.69	2.39494G	-51.76	2.4G	-55.08	2.48698G	-49.74	24.58381G	-46.35	1

BT-LE(1Mbps)

2402MHz

CSE NdB

16/06/2020

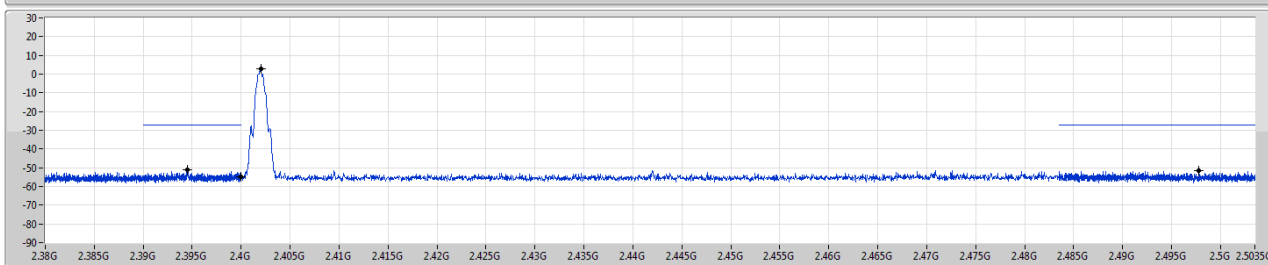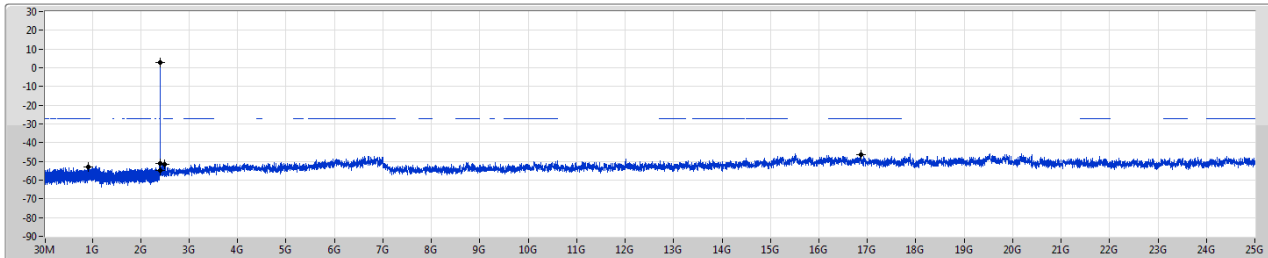



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.402G	2.59	-27.41	917.13M	-53.03	2.39453G	-51.22	2.4G	-55.05	2.49779G	-51.50	16.8647G	-46.64	1

BT-LE(1Mbps)

2440MHz

CSE NdB

16/06/2020

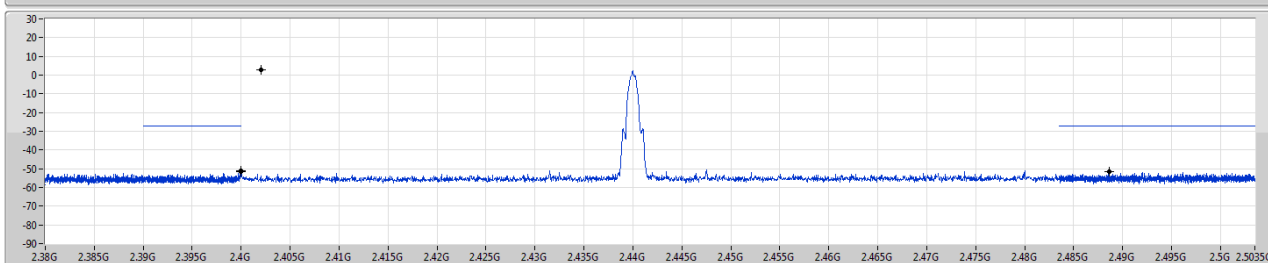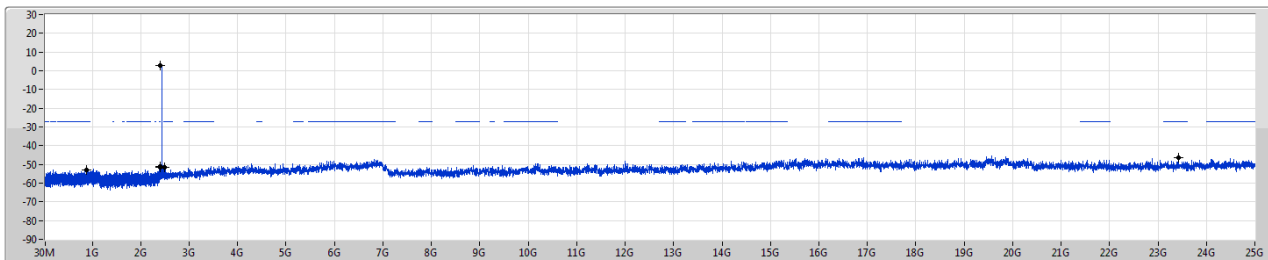

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.402G	2.59	-27.41	883.05M	-52.88	2.39999G	-51.20	2.4G	-51.49	2.48863G	-51.63	23.43087G	-46.52	1


BT-LE(1Mbps)

2480MHz

CSE NdB

16/06/2020

Port 1

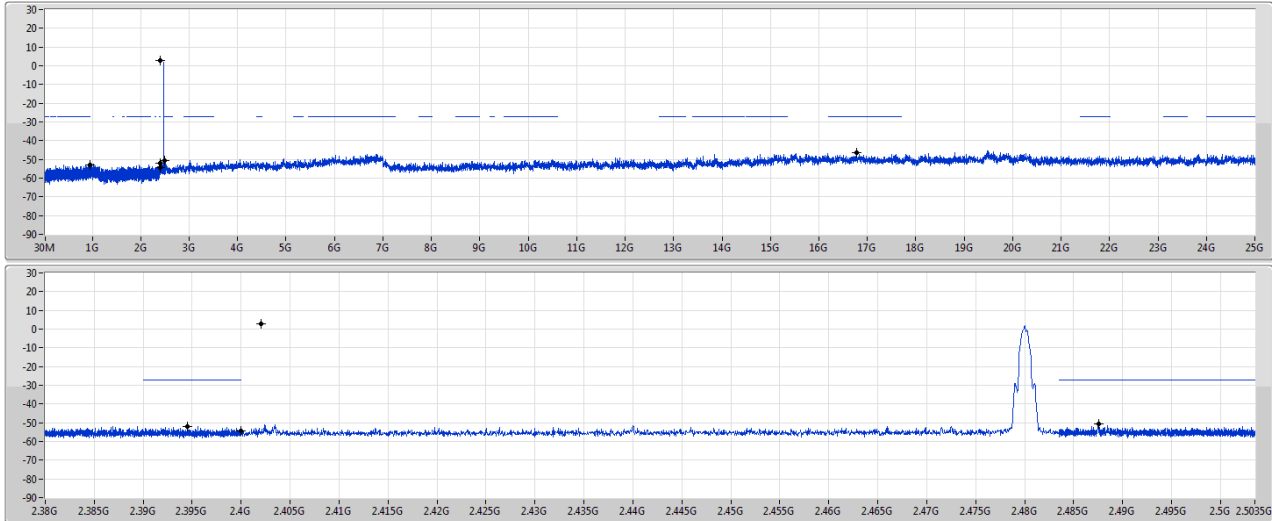

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.402G	2.59	-27.41	958.54M	-52.76	2.39453G	-51.99	2.4G	-54.58	2.48752G	-50.81	16.77753G	-46.57	1


BT-LE(2Mbps)

2402MHz

CSE NdB

16/06/2020

Port 1

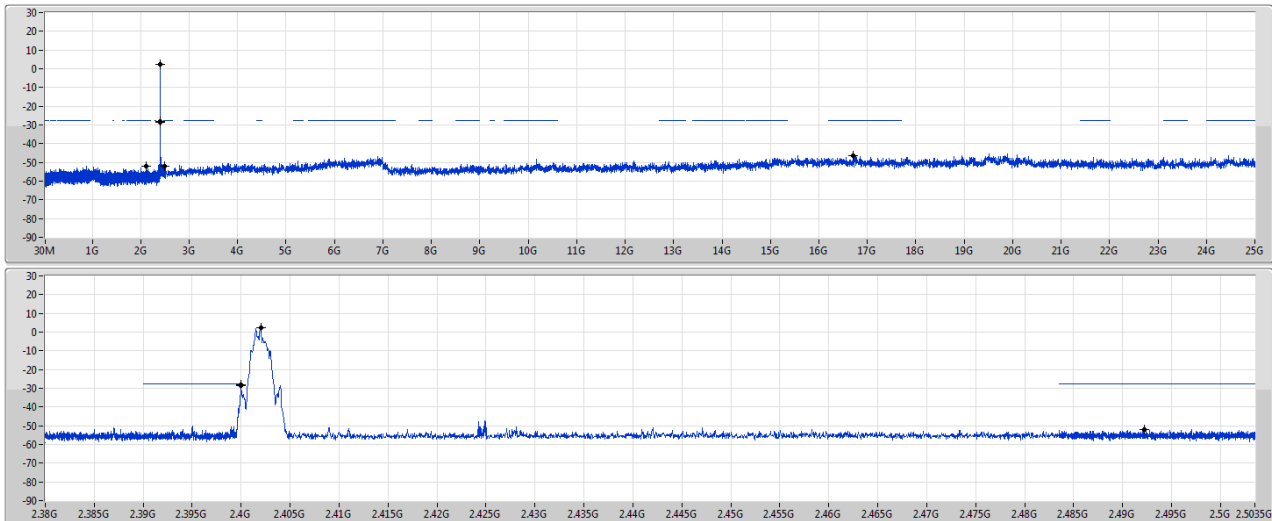

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.402G	2.54	-27.46	2.11592G	-52.02	2.4G	-27.96	2.4G	-28.51	2.49221G	-51.84	16.71566G	-46.37	1

BT-LE(2Mbps)

2440MHz

CSE NdB

16/06/2020

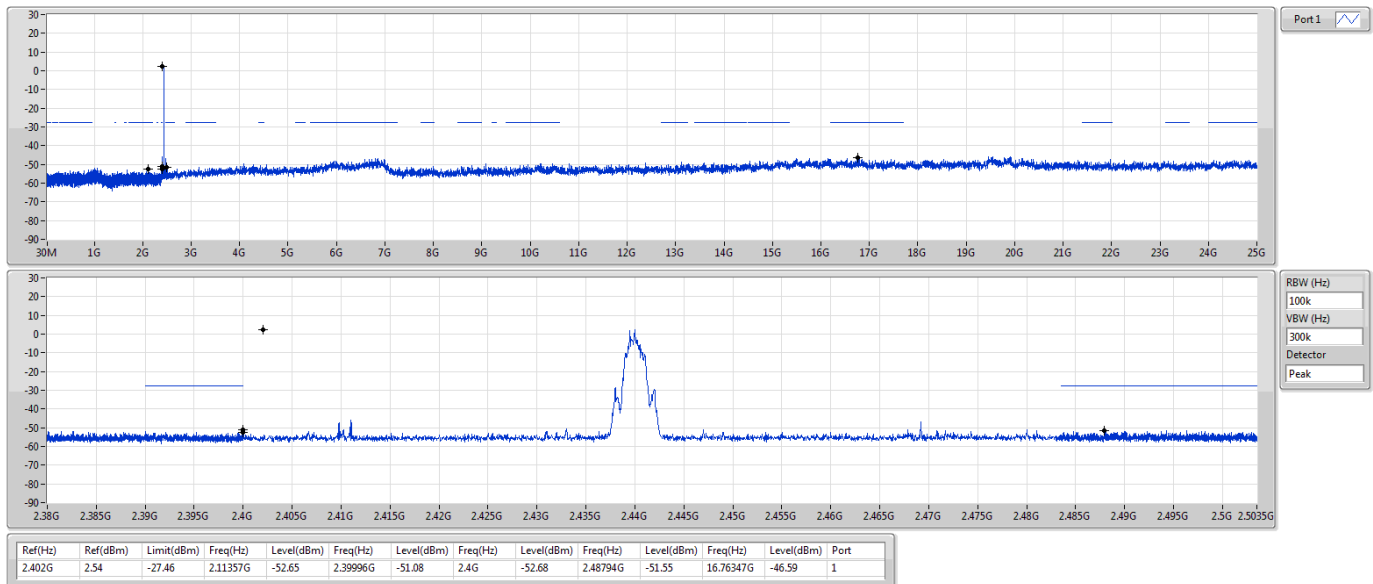


BT-LE(2Mbps)

2480MHz

CSE NdB

16/06/2020

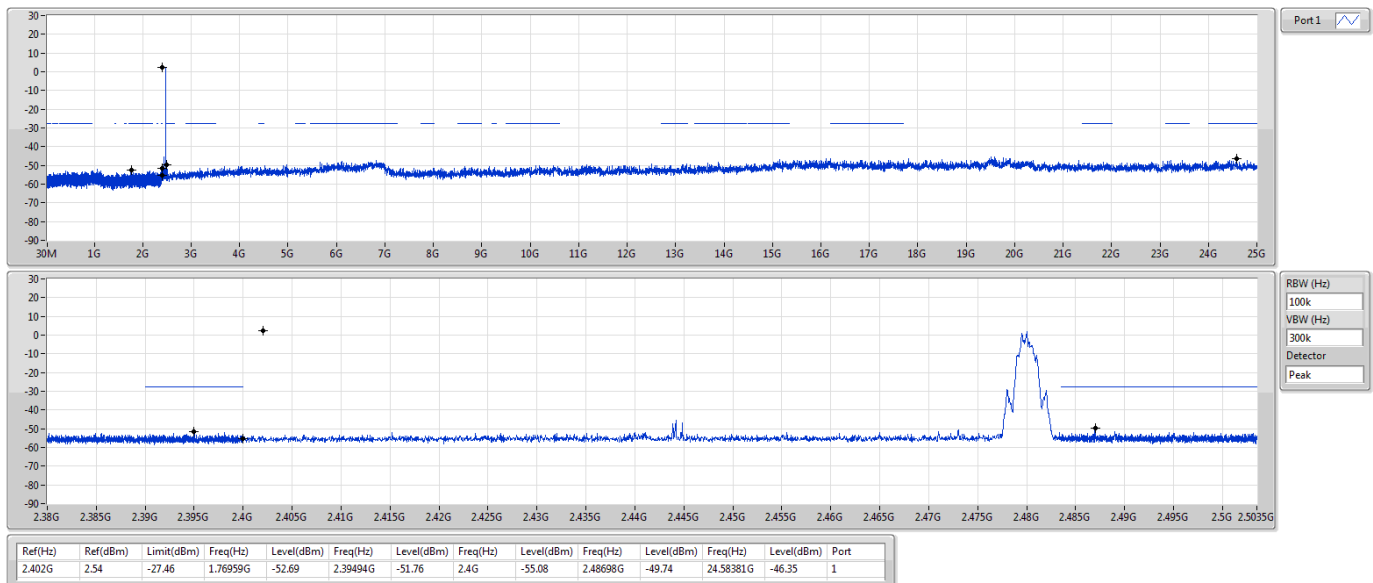




Radiated Emissions below 1GHz Result

Appendix F.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	PK	46.49M	36.94	40.00	-3.06	Vertical

26/05/2020

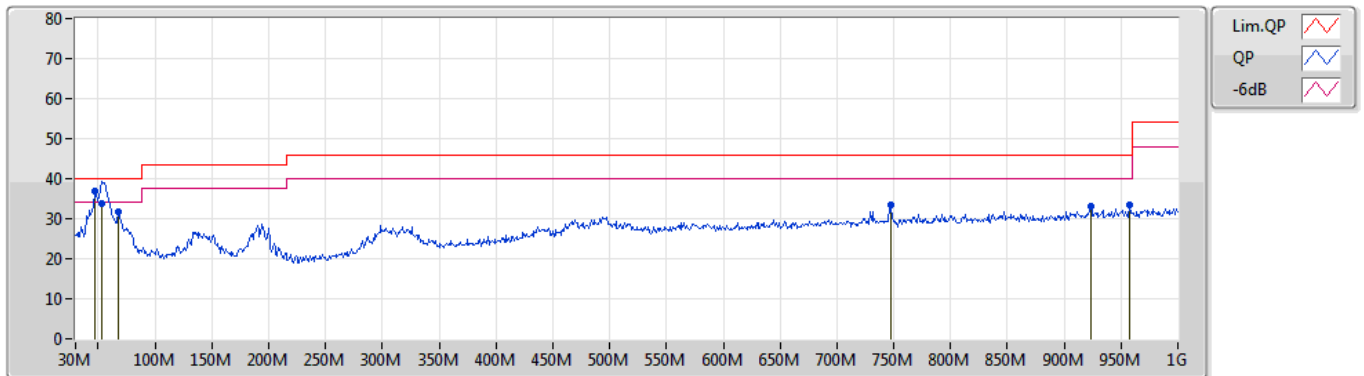

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
PK	46.49M	36.94	40.00	-3.06	-16.55	3	Vertical	147	1.00	"Worst"	53.49	15.13	0.83	32.51
QP	53.28M	33.92	40.00	-6.08	-18.58	3	Vertical	147	1.00	-	52.50	13.00	0.90	32.48
PK	67.83M	31.64	40.00	-8.36	-19.18	3	Vertical	204	1.50	-	50.82	12.27	0.96	32.41
PK	747.8M	33.57	46.00	-12.43	-3.18	3	Vertical	332	2.00	-	36.75	25.75	3.30	32.23
PK	923.37M	33.19	46.00	-12.81	-1.11	3	Vertical	127	2.00	-	34.30	26.78	3.69	31.58
PK	957.32M	33.42	46.00	-12.58	-0.58	3	Vertical	356	3.00	-	34.00	26.96	3.80	31.34

27/05/2020

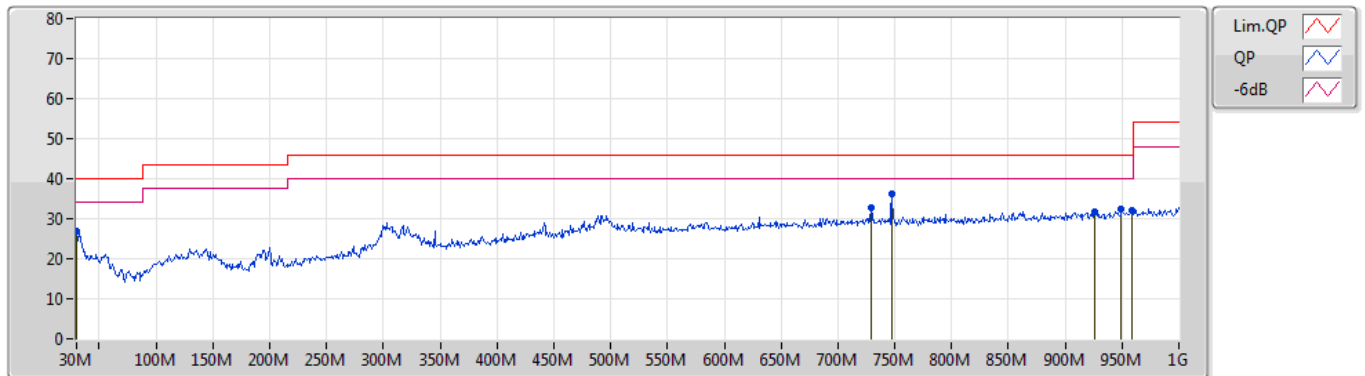

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
PK	30M	27.06	40.00	-12.94	-7.55	3	Horizontal	261	1.50	-	34.61	24.10	0.70	32.35
PK	729.37M	32.78	46.00	-13.22	-3.39	3	Horizontal	203	1.25	-	36.17	25.66	3.26	32.31
PK	747.8M	36.13	46.00	-9.87	-3.18	3	Horizontal	360	1.50	"Worst"	39.31	25.75	3.30	32.23
PK	926.28M	31.87	46.00	-14.13	-1.06	3	Horizontal	201	1.50	-	32.93	26.80	3.71	31.57
PK	949.56M	32.45	46.00	-13.55	-0.73	3	Horizontal	42	1.50	-	33.18	26.91	3.80	31.44
PK	959.26M	31.98	46.00	-14.02	-0.55	3	Horizontal	308	2.00	-	32.53	26.97	3.80	31.32



RSE TX above 1GHz Result

Appendix F.2


Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
BT-LE(2Mbps)	Pass	AV	2.3778G	50.37	54.00	-3.63	3	Vertical	356	2.67	-

BT-LE(1Mbps)

2402MHz_TX

16/06/2020

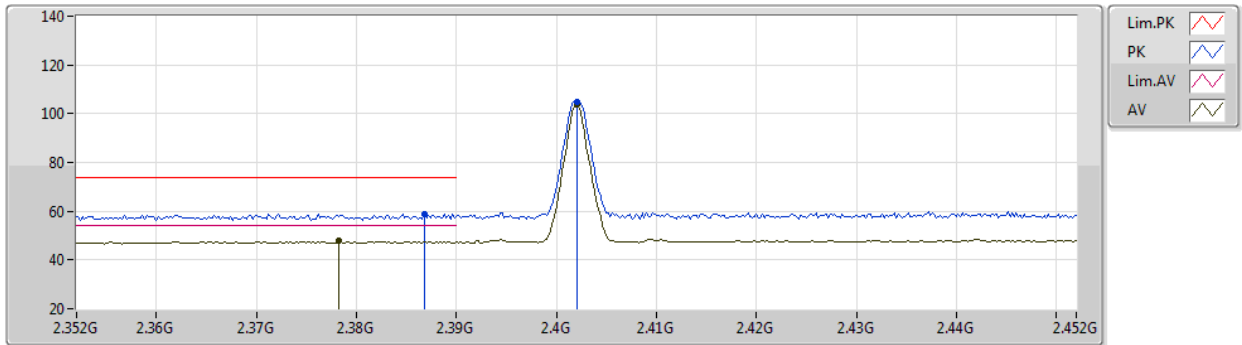


EUT Y_1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3868G	58.78	74.00	-15.22	27.02	3	Vertical	347	2.63	-	28.26	3.50	-
AV	2.3782G	47.72	54.00	-6.28	15.99	3	Vertical	347	2.63	-	28.23	3.50	-
PK	2.402G	104.73	Inf	-Inf	72.92	3	Vertical	347	2.63	-	28.31	3.50	-
AV	2.402G	103.78	Inf	-Inf	71.97	3	Vertical	347	2.63	-	28.31	3.50	-

BT-LE(1Mbps)

2402MHz_TX

16/06/2020

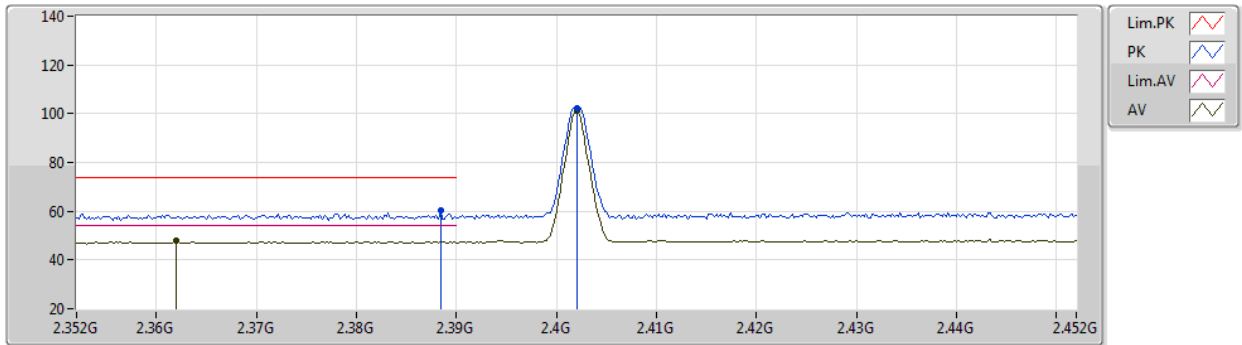


EUT Y_1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3884G	60.21	74.00	-13.79	28.44	3	Horizontal	11	2.13	-	28.27	3.50	-
AV	2.362G	47.78	54.00	-6.22	16.09	3	Horizontal	11	2.13	-	28.19	3.50	-
PK	2.402G	102.18	Inf	-Inf	70.37	3	Horizontal	11	2.13	-	28.31	3.50	-
AV	2.402G	101.29	Inf	-Inf	69.48	3	Horizontal	11	2.13	-	28.31	3.50	-

BT-LE(1Mbps)

2402MHz_TX

16/06/2020

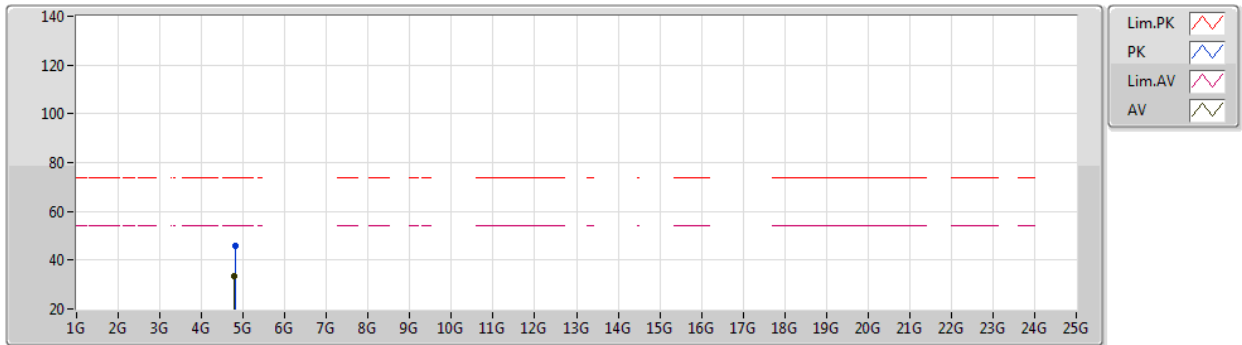


EUT_V_1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.8184G	45.97	74.00	-28.03	37.66	3	Vertical	110	1.37	-	32.87	5.81	30.37
AV	4.79398G	33.39	54.00	-20.61	25.19	3	Vertical	110	1.37	-	32.79	5.79	30.38

BT-LE(1Mbps)

2402MHz_TX

16/06/2020

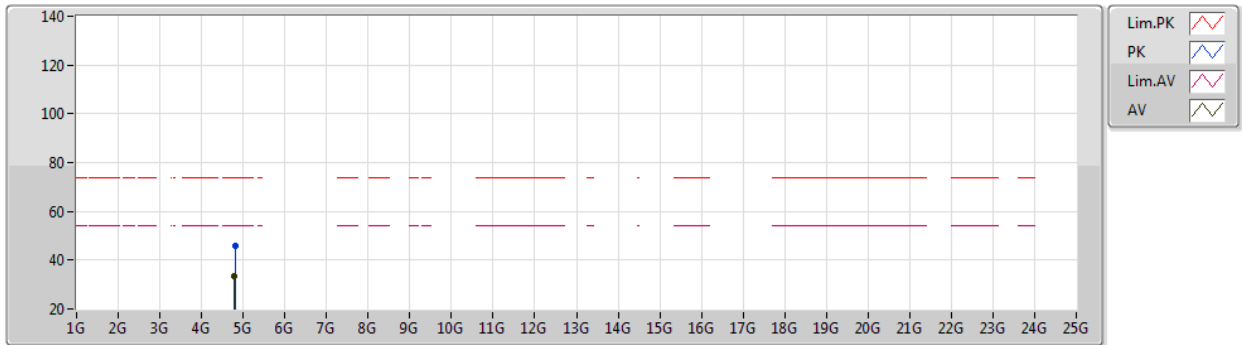


EUT_V1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.81126G	46.06	74.00	-27.94	37.78	3	Horizontal	87	1.89	-	32.85	5.81	30.38
AV	4.79242G	33.33	54.00	-20.67	25.13	3	Horizontal	87	1.89	-	32.79	5.79	30.38

BT-LE(1Mbps)

2440MHz_TX

16/06/2020

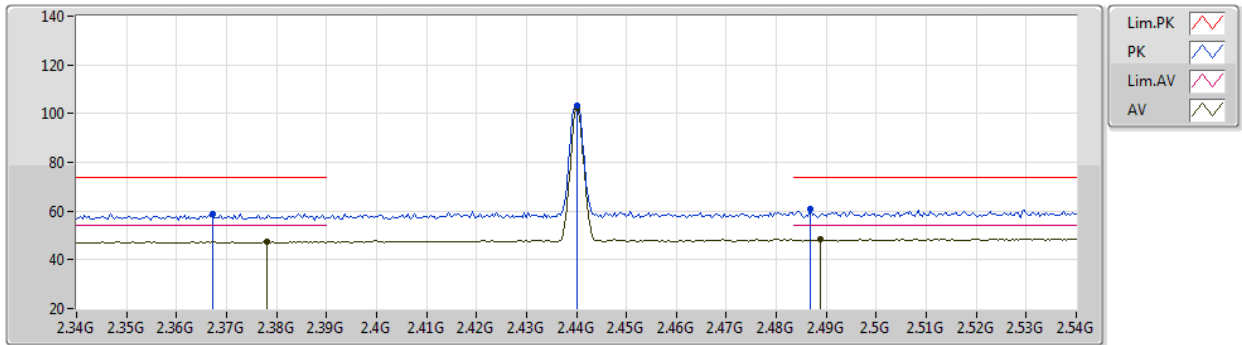


EUT V_1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3672G	58.96	74.00	-15.04	27.26	3	Vertical	0	2.12	-	28.20	3.50	-
AV	2.378G	47.45	54.00	-6.55	15.72	3	Vertical	0	2.12	-	28.23	3.50	-
PK	2.44G	103.02	Inf	-Inf	71.06	3	Vertical	0	2.12	-	28.42	3.54	-
AV	2.44G	102.14	Inf	-Inf	70.18	3	Vertical	0	2.12	-	28.42	3.54	-
PK	2.4868G	60.77	74.00	-13.23	28.62	3	Vertical	0	2.12	-	28.56	3.59	-
AV	2.4888G	48.28	54.00	-5.72	16.12	3	Vertical	0	2.12	-	28.57	3.59	-

BT-LE(1Mbps)

2440MHz_TX

16/06/2020

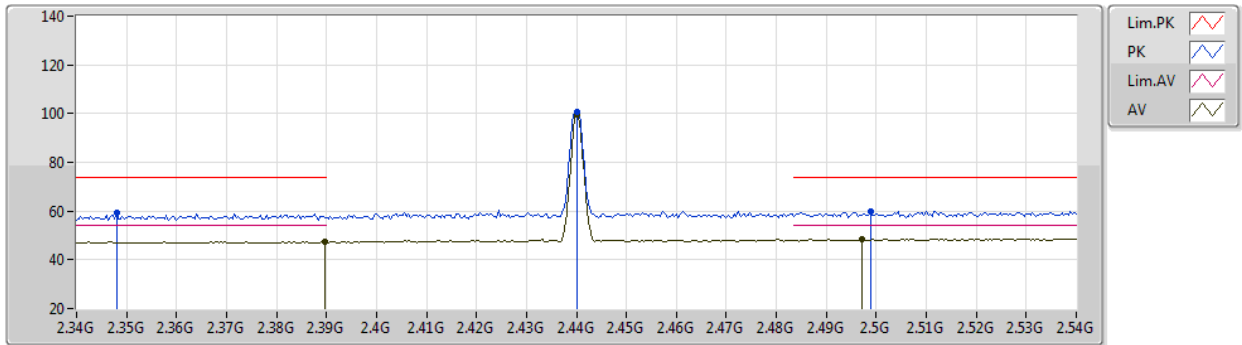


EUT_V1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.348G	59.10	74.00	-14.90	27.46	3	Horizontal	4	2.32	-	28.14	3.50	-
AV	2.3896G	47.42	54.00	-6.58	15.65	3	Horizontal	4	2.32	-	28.27	3.50	-
PK	2.44G	100.78	Inf	-Inf	68.82	3	Horizontal	4	2.32	-	28.42	3.54	-
AV	2.44G	99.91	Inf	-Inf	67.95	3	Horizontal	4	2.32	-	28.42	3.54	-
PK	2.4988G	59.64	74.00	-14.36	27.44	3	Horizontal	4	2.32	-	28.60	3.60	-
AV	2.4972G	48.43	54.00	-5.57	16.24	3	Horizontal	4	2.32	-	28.59	3.60	-

BT-LE(1Mbps)

2440MHz_TX

16/06/2020

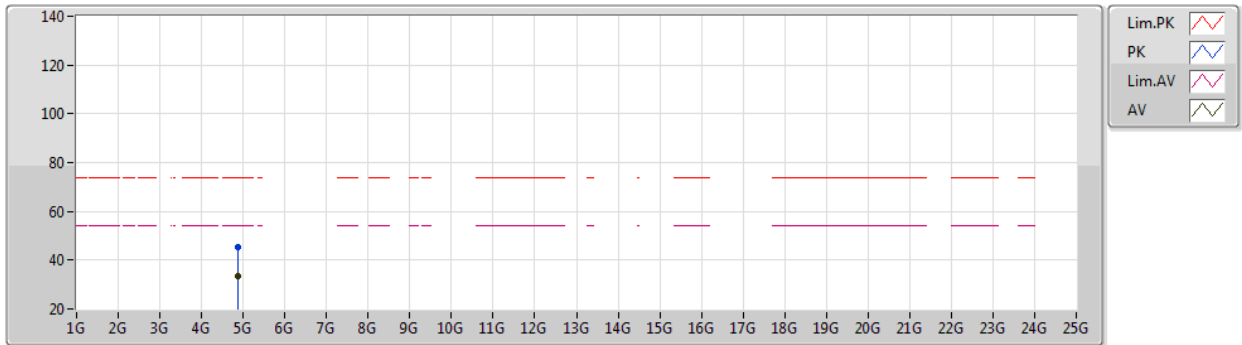


EUT Y_1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.86638G	45.58	74.00	-28.42	37.04	3	Vertical	41	1.09	-	33.07	5.83	30.36
AV	4.86548G	33.32	54.00	-20.68	24.79	3	Vertical	41	1.09	-	33.06	5.83	30.36

BT-LE(1Mbps)

2440MHz_TX

16/06/2020

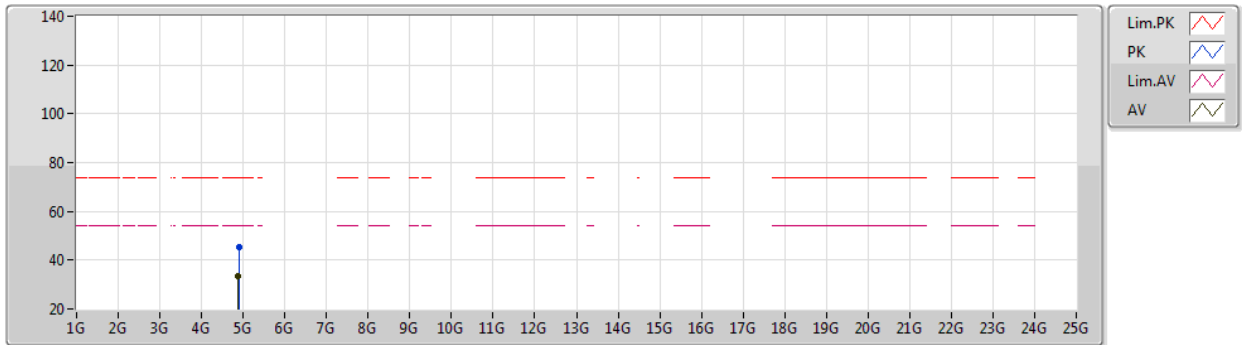


EUT Y_1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.88924G	45.44	74.00	-28.56	36.79	3	Horizontal	298	1.70	-	33.16	5.84	30.35
AV	4.86512G	33.31	54.00	-20.69	24.78	3	Horizontal	298	1.70	-	33.06	5.83	30.36

BT-LE(1Mbps)

2480MHz_TX

16/06/2020

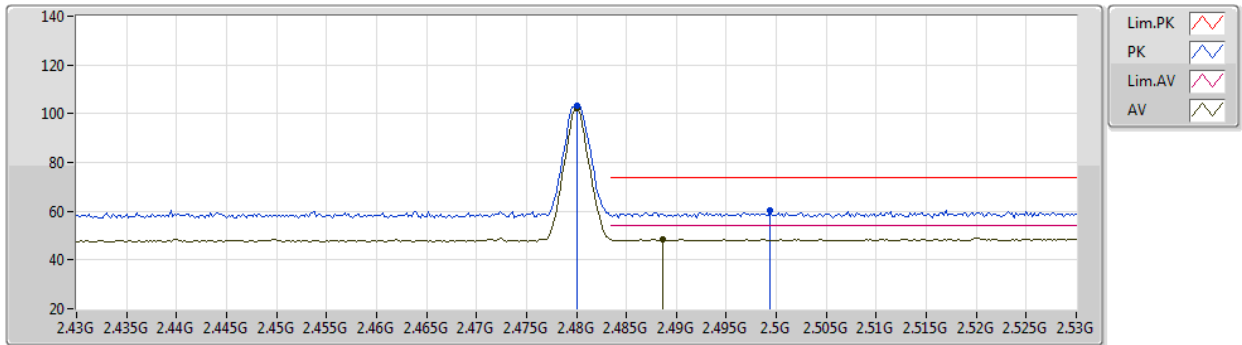


EUT Y_1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.48G	103.06	Inf	-Inf	70.94	3	Vertical	336	2.28	-	28.54	3.58	-
AV	2.48G	102.13	Inf	-Inf	70.01	3	Vertical	336	2.28	-	28.54	3.58	-
PK	2.4994G	60.47	74.00	-13.53	28.27	3	Vertical	336	2.28	-	28.60	3.60	-
AV	2.4886G	48.40	54.00	-5.60	16.24	3	Vertical	336	2.28	-	28.57	3.59	-

BT-LE(1Mbps)

2480MHz_TX

16/06/2020

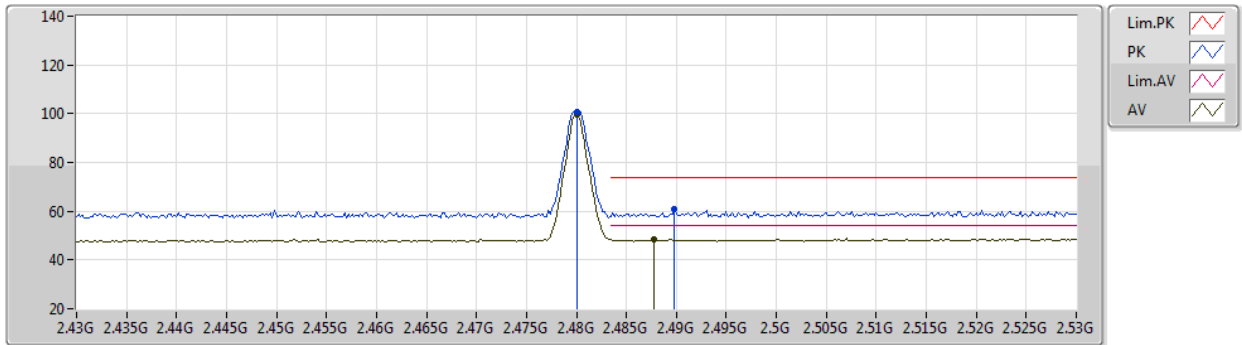


EUT Y_1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.48G	100.57	Inf	-Inf	68.45	3	Horizontal	5	2.75	-	28.54	3.58	-
AV	2.48G	99.62	Inf	-Inf	67.50	3	Horizontal	5	2.75	-	28.54	3.58	-
PK	2.4898G	60.85	74.00	-13.15	28.69	3	Horizontal	5	2.75	-	28.57	3.59	-
AV	2.4878G	48.55	54.00	-5.45	16.40	3	Horizontal	5	2.75	-	28.56	3.59	-

BT-LE(1Mbps)

2480MHz_TX

16/06/2020

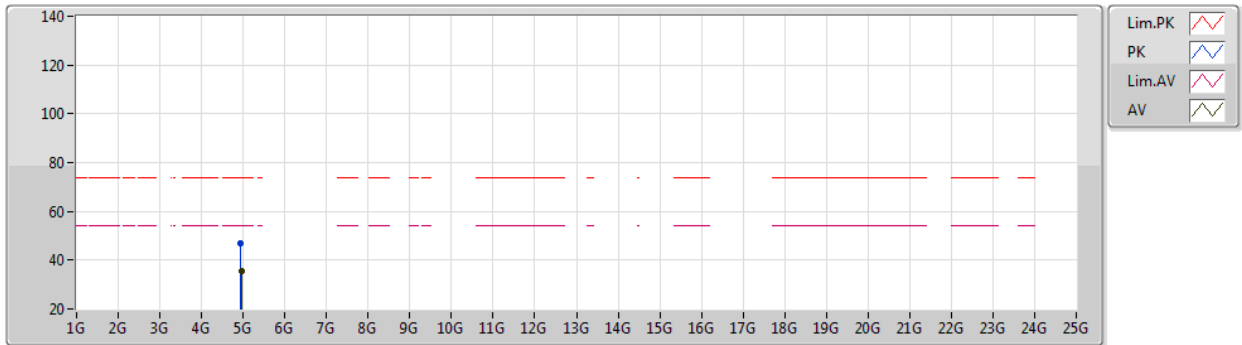


EUT_V1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.94908G	46.90	74.00	-27.10	38.12	3	Vertical	1	1.80	-	33.25	5.87	30.34
AV	4.95994G	35.65	54.00	-18.35	26.85	3	Vertical	1	1.80	-	33.26	5.88	30.34

BT-LE(1Mbps)

2480MHz_TX

16/06/2020

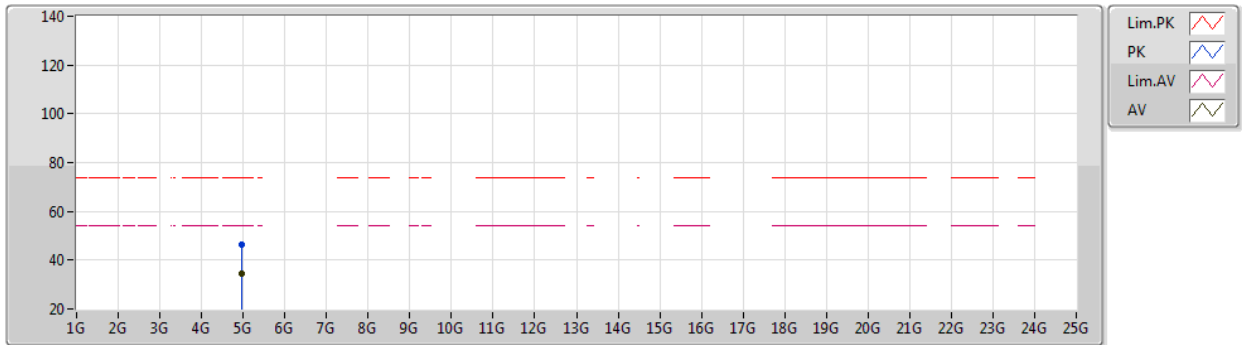


EUT_V1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.96564G	46.63	74.00	-27.37	37.82	3	Horizontal	340	1.80	-	33.27	5.88	30.34
AV	4.96G	34.57	54.00	-19.43	25.77	3	Horizontal	340	1.80	-	33.26	5.88	30.34

BT-LE(2Mbps)

2402MHz_TX

16/06/2020

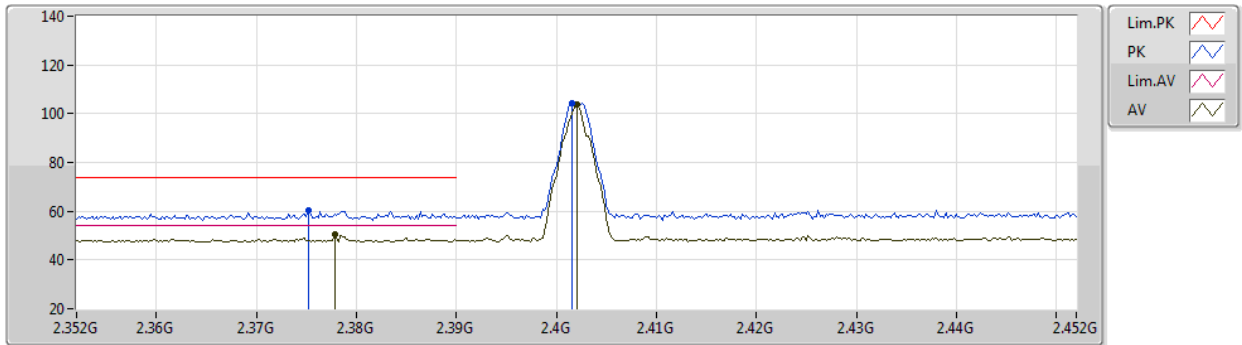


EUT Y_1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3752G	60.23	74.00	-13.77	28.50	3	Vertical	356	2.67	-	28.23	3.50	-
AV	2.3778G	50.37	54.00	-3.63	18.64	3	Vertical	356	2.67	-	28.23	3.50	-
PK	2.4016G	104.31	Inf	-Inf	72.51	3	Vertical	356	2.67	-	28.30	3.50	-
AV	2.402G	103.58	Inf	-Inf	71.77	3	Vertical	356	2.67	-	28.31	3.50	-

BT-LE(2Mbps)

2402MHz_TX

16/06/2020

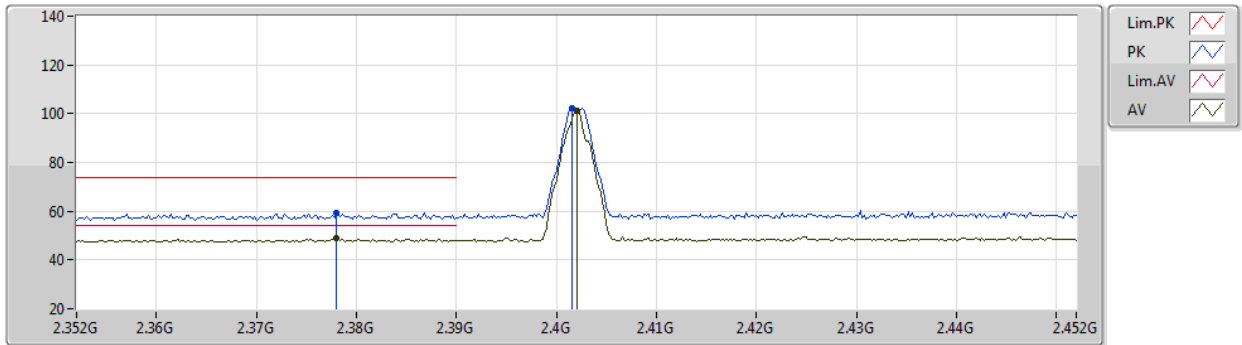


EUT Y_1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.378G	59.23	74.00	-14.77	27.50	3	Horizontal	8	2.13	-	28.23	3.50	-
AV	2.378G	49.07	54.00	-4.93	17.34	3	Horizontal	8	2.13	-	28.23	3.50	-
PK	2.4016G	102.16	Inf	-Inf	70.36	3	Horizontal	8	2.13	-	28.30	3.50	-
AV	2.402G	101.41	Inf	-Inf	69.60	3	Horizontal	8	2.13	-	28.31	3.50	-

BT-LE(2Mbps)

2402MHz_TX

16/06/2020

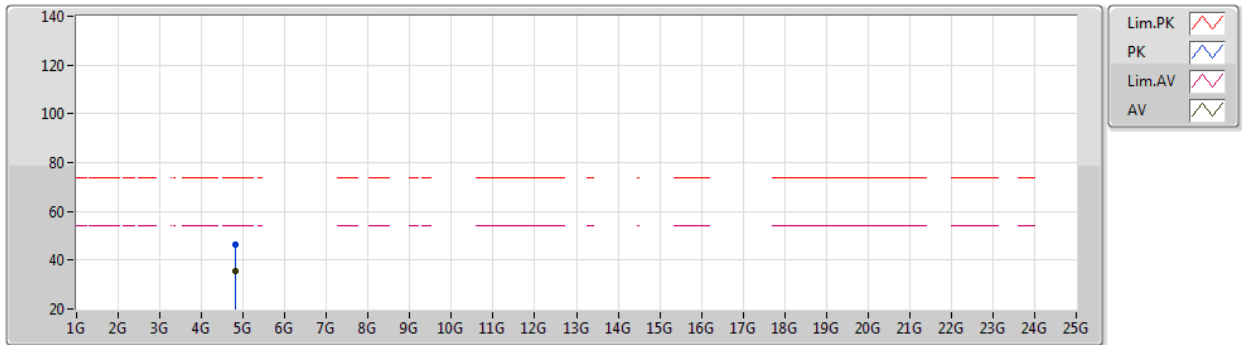


EUT Y_1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.80208G	46.21	74.00	-27.79	37.98	3	Vertical	146	2.23	-	32.81	5.80	30.38
AV	4.8076G	35.26	54.00	-18.74	27.01	3	Vertical	146	2.23	-	32.83	5.80	30.38

BT-LE(2Mbps)

2402MHz_TX

16/06/2020

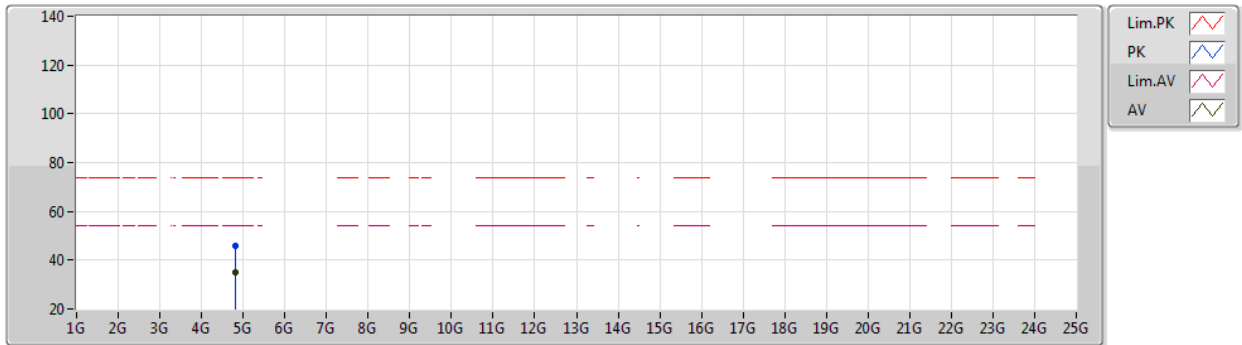


EUT_V1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.81378G	45.67	74.00	-28.33	37.38	3	Horizontal	212	1.45	-	32.86	5.81	30.38
AV	4.80538G	34.77	54.00	-19.23	26.53	3	Horizontal	212	1.45	-	32.82	5.80	30.38

BT-LE(2Mbps)

2440MHz_TX

16/06/2020

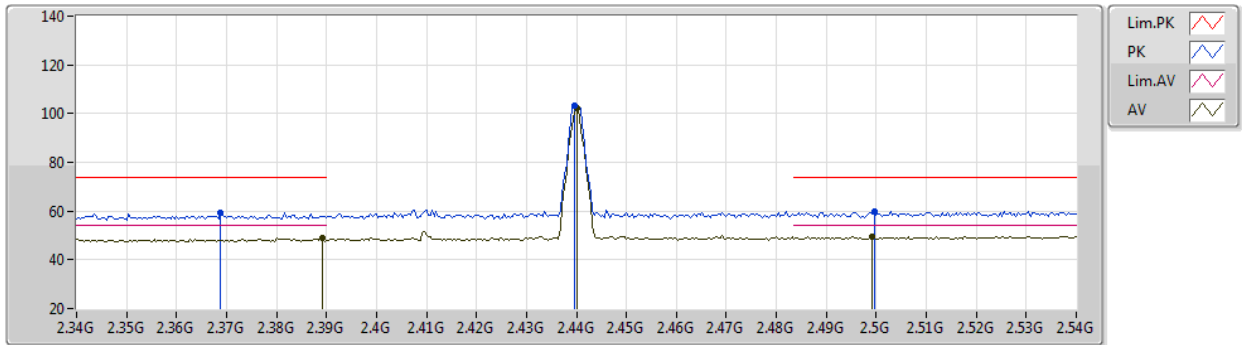


EUT Y_1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3688G	59.18	74.00	-14.82	27.47	3	Vertical	360	2.64	-	28.21	3.50	-
AV	2.3892G	49.22	54.00	-4.78	17.45	3	Vertical	360	2.64	-	28.27	3.50	-
PK	2.4396G	103.37	Inf	-Inf	71.41	3	Vertical	360	2.64	-	28.42	3.54	-
AV	2.44G	102.49	Inf	-Inf	70.53	3	Vertical	360	2.64	-	28.42	3.54	-
PK	2.4996G	59.91	74.00	-14.09	27.71	3	Vertical	360	2.64	-	28.60	3.60	-
AV	2.4992G	49.39	54.00	-4.61	17.19	3	Vertical	360	2.64	-	28.60	3.60	-

BT-LE(2Mbps)

2440MHz_TX

16/06/2020

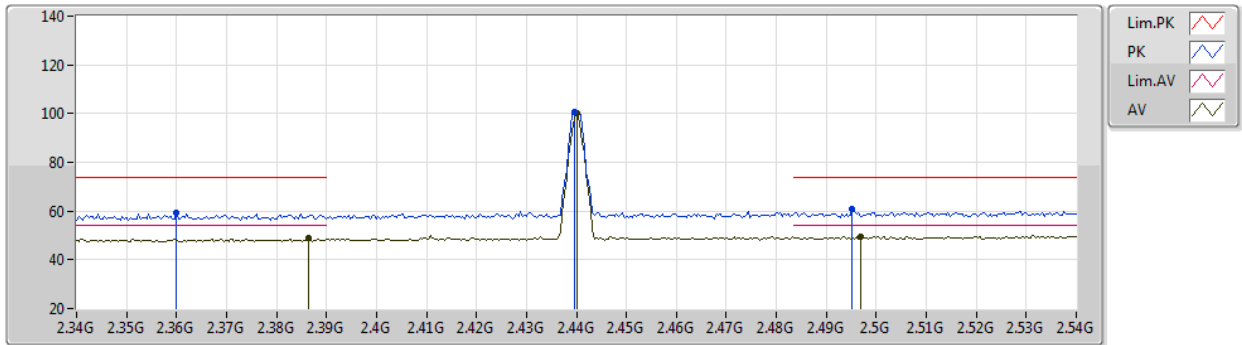


EUT Y_1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.36G	59.24	74.00	-14.76	27.56	3	Horizontal	6	2.30	-	28.18	3.50	-
AV	2.3864G	48.85	54.00	-5.15	17.09	3	Horizontal	6	2.30	-	28.26	3.50	-
PK	2.4396G	100.83	Inf	-Inf	68.87	3	Horizontal	6	2.30	-	28.42	3.54	-
AV	2.44G	100.06	Inf	-Inf	68.10	3	Horizontal	6	2.30	-	28.42	3.54	-
PK	2.4952G	60.77	74.00	-13.23	28.58	3	Horizontal	6	2.30	-	28.59	3.60	-
AV	2.4968G	49.56	54.00	-4.44	17.37	3	Horizontal	6	2.30	-	28.59	3.60	-

BT-LE(2Mbps)

2440MHz_TX

16/06/2020

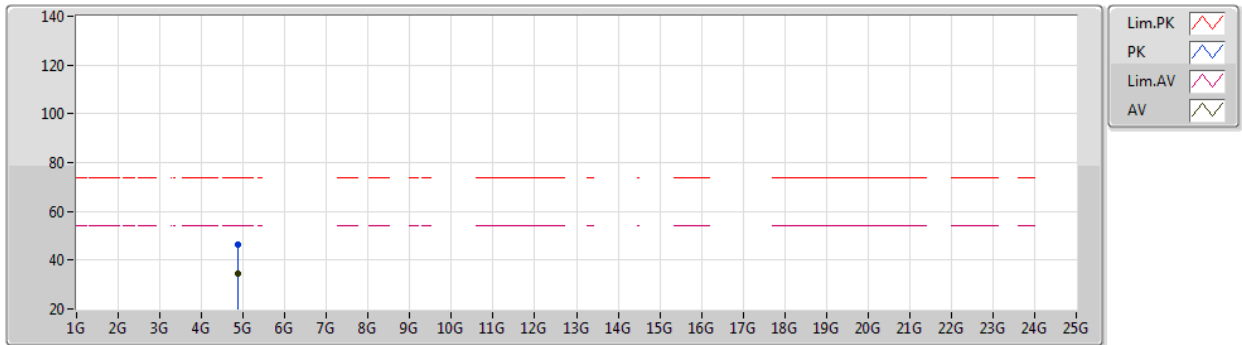


EUT V_1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.877G	46.17	74.00	-27.83	37.58	3	Vertical	111	1.39	-	33.11	5.84	30.36
AV	4.88678G	34.55	54.00	-19.45	25.91	3	Vertical	111	1.39	-	33.15	5.84	30.35

BT-LE(2Mbps)

2440MHz_TX

16/06/2020

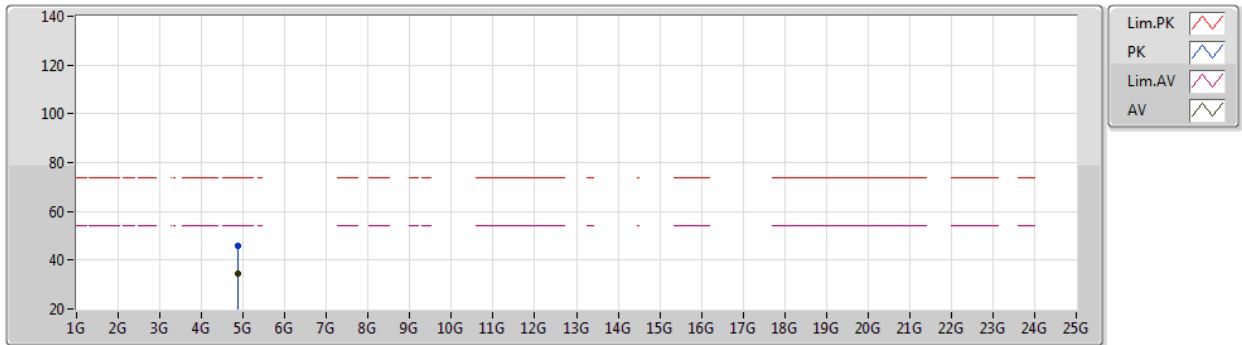


EUT Y_1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.8653G	45.97	74.00	-28.03	37.44	3	Horizontal	355	2.53	-	33.06	5.83	30.36
AV	4.88558G	34.73	54.00	-19.27	26.10	3	Horizontal	355	2.53	-	33.14	5.84	30.35

BT-LE(2Mbps)

2480MHz_TX

16/06/2020

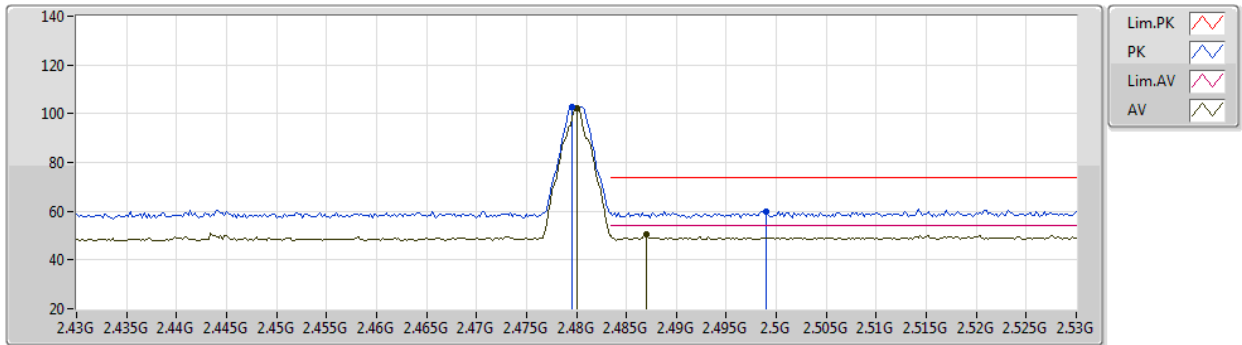


EUT Y_1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4796G	103.00	Inf	-Inf	70.88	3	Vertical	342	2.29	-	28.54	3.58	-
AV	2.48G	102.26	Inf	-Inf	70.14	3	Vertical	342	2.29	-	28.54	3.58	-
PK	2.499G	59.96	74.00	-14.04	27.76	3	Vertical	342	2.29	-	28.60	3.60	-
AV	2.487G	50.37	54.00	-3.63	18.22	3	Vertical	342	2.29	-	28.56	3.59	-

BT-LE(2Mbps)

2480MHz_TX

16/06/2020

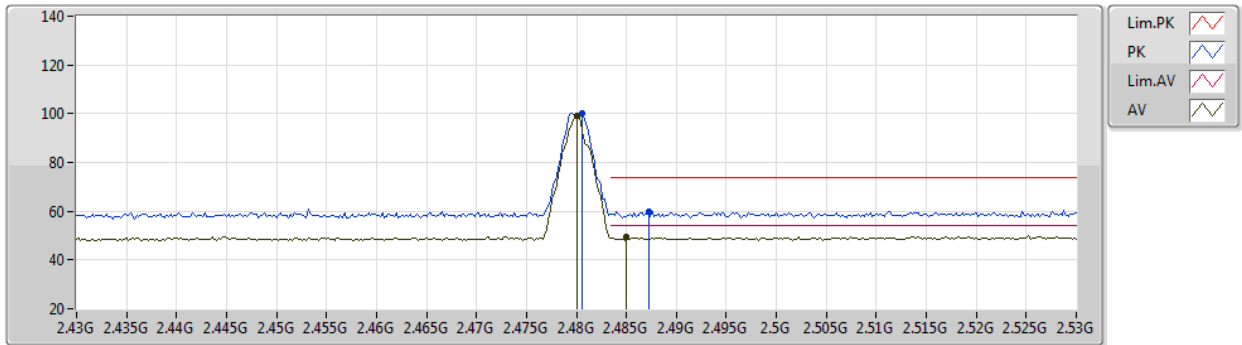


EUT Y_1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4806G	100.13	Inf	-Inf	68.01	3	Horizontal	3	2.76	-	28.54	3.58	-
AV	2.48G	99.39	Inf	-Inf	67.27	3	Horizontal	3	2.76	-	28.54	3.58	-
PK	2.4872G	60.02	74.00	-13.98	27.87	3	Horizontal	3	2.76	-	28.56	3.59	-
AV	2.485G	49.31	54.00	-4.69	17.16	3	Horizontal	3	2.76	-	28.56	3.59	-

BT-LE(2Mbps)

2480MHz_TX

16/06/2020

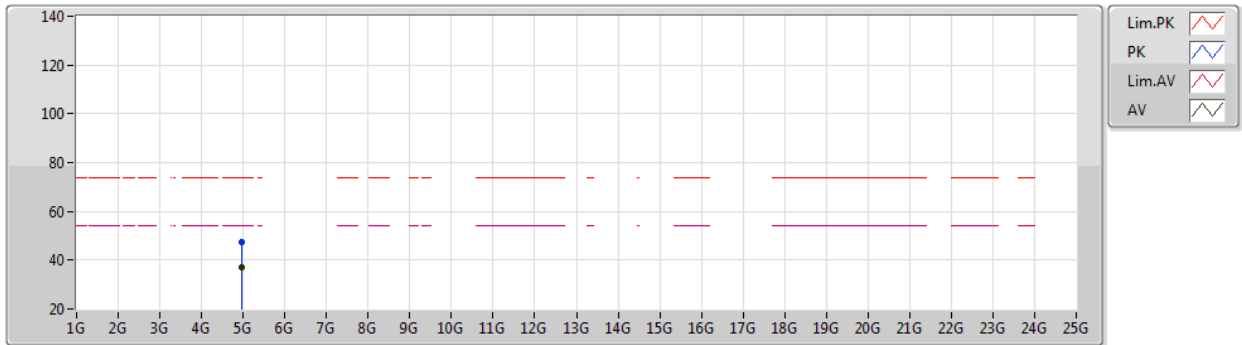


EUT_V1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.95574G	47.36	74.00	-26.64	38.56	3	Vertical	359	2.05	-	33.26	5.88	30.34
AV	4.96012G	37.08	54.00	-16.92	28.28	3	Vertical	359	2.05	-	33.26	5.88	30.34

BT-LE(2Mbps)

2480MHz_TX

16/06/2020

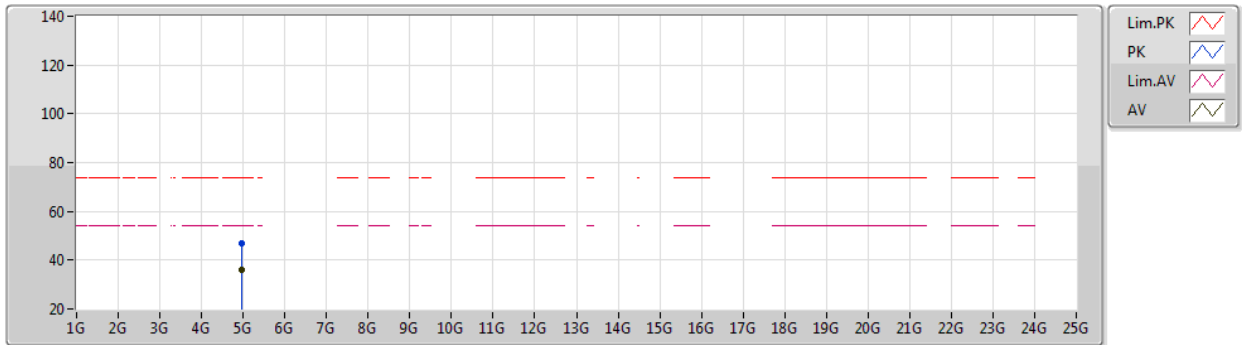

EUT V_1TX
Setting 4
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.9618G	46.77	74.00	-27.23	37.97	3	Horizontal	37	1.80	-	33.26	5.88	30.34
AV	4.9534G	35.84	54.00	-18.16	27.05	3	Horizontal	37	1.80	-	33.25	5.88	30.34