


Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	21°C	Humidity	63%
Test Engineer	Rion Li	Configurations	2.4GHz Bluetooth + 2.4GHz WLAN

Horizontal

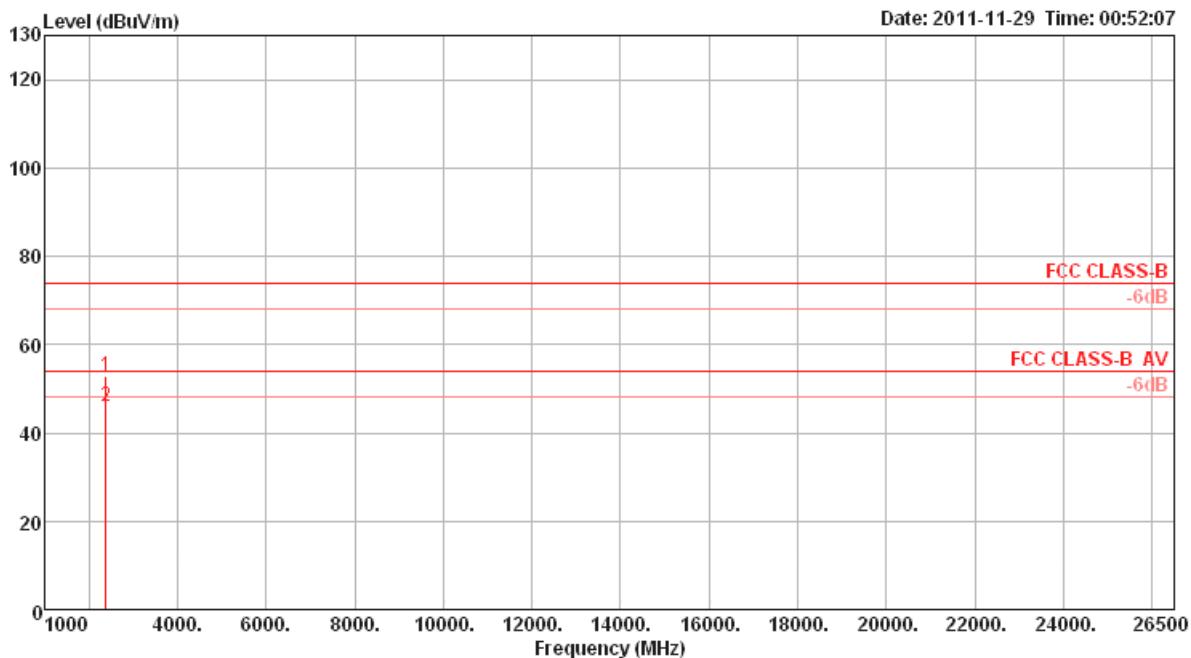

Freq	Level	Limit	Over	Read	Cable			Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
					Line	Limit	Level						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1	2381.44	52.89	74.00	-21.11	55.75	4.11	28.01	34.98 Peak		100	24	HORIZONTAL	
2	2381.98	46.04	54.00	-7.96	48.90	4.11	28.01	34.98 Average		100	24	HORIZONTAL	

Vertical

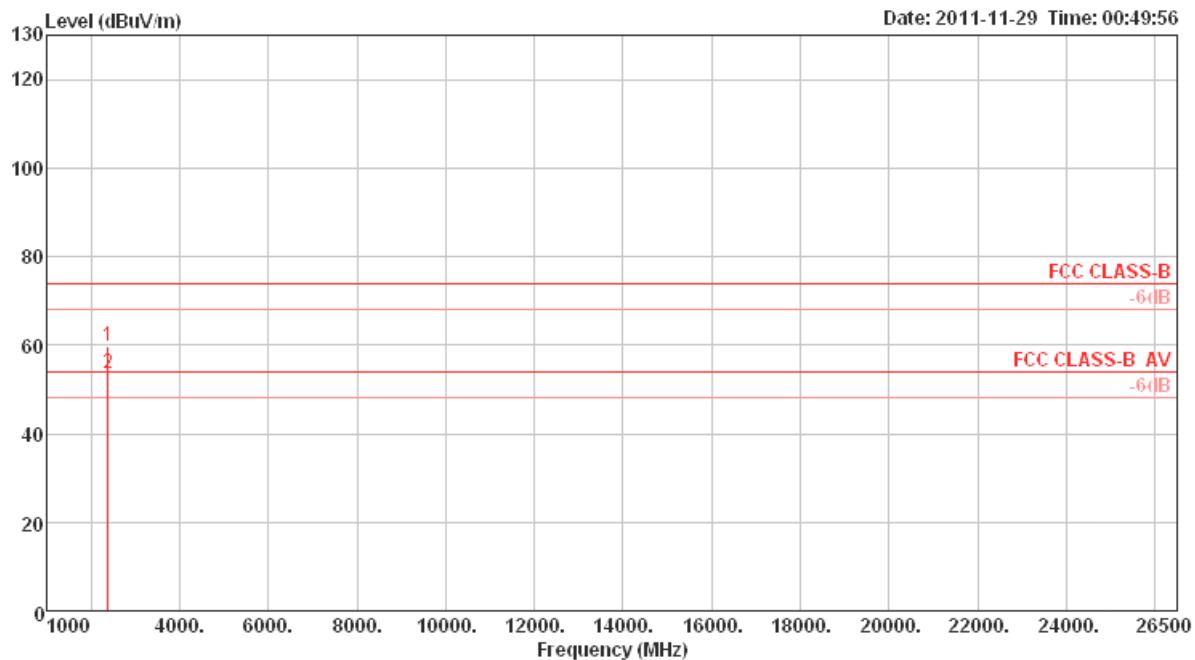

Freq	Level	Limit	Over	Read	CableAntenna Preamp			A/Pos	T/Pos	Pol/Phase
					Line	Limit	Level			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2381.46	59.87	74.00	-14.13	62.73	4.11	28.01	34.98	Peak	100 80 VERTICAL
2	2381.98	53.66	54.00	-0.34	56.52	4.11	28.01	34.98	Average	100 80 VERTICAL