

# FCC SAR Test Report

Report No. : SA120626C35

Applicant : HTC Corporation

Address : 23,Xinghua Rd.,Taoyuan 330,Taiwan,R.O.C.

Product : Smart Phone

FCC ID : NM8PM63100

Brand : HTC

Model No. : PM63100

Standards : FCC 47 CFR Part 2 (2.1093) / IEEE C95.1:1991 / IEEE 1528:2003  
FCC OET Bulletin 65 Supplement C (Edition 01-01)  
KDB 248227 D01 v01r02 / KDB 648474 D01 v01r05 / KDB 941225 D01 v02  
KDB 941225 D03 v01 / KDB 941225 D05 v01 / KDB 941225 D06 v01

Date of Testing : Jul. 06, 2012 ~ Oct. 29, 2012

**CERTIFICATION:** The above equipment have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch - Taiwan HwaYa Lab**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's SAR characteristics under the conditions specified in this report. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies.

Prepared By :   
Ivonne Wu / Senior Specialist

Approved By :   
Roy Wu / Manager



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

|                                                             |    |
|-------------------------------------------------------------|----|
| Release Control Record .....                                | 3  |
| 1. Summary of Maximum SAR Value .....                       | 4  |
| 2. Description of Equipment Under Test .....                | 5  |
| 3. SAR Measurement System .....                             | 7  |
| 3.1 Definition of Specific Absorption Rate (SAR).....       | 7  |
| 3.2 SPEAG DASY System .....                                 | 7  |
| 3.2.1 Robot.....                                            | 8  |
| 3.2.2 Probes.....                                           | 9  |
| 3.2.3 Data Acquisition Electronics (DAE) .....              | 9  |
| 3.2.4 Phantoms .....                                        | 10 |
| 3.2.5 Device Holder.....                                    | 11 |
| 3.2.6 System Validation Dipoles.....                        | 11 |
| 3.2.7 Tissue Simulating Liquids.....                        | 12 |
| 3.3 SAR System Verification .....                           | 14 |
| 3.4 SAR Measurement Procedure .....                         | 15 |
| 3.4.1 Area & Zoom Scan Procedure .....                      | 15 |
| 3.4.2 Volume Scan Procedure.....                            | 15 |
| 3.4.3 Power Drift Monitoring.....                           | 15 |
| 3.4.4 Spatial Peak SAR Evaluation .....                     | 16 |
| 3.4.5 SAR Averaged Methods .....                            | 16 |
| 4. SAR Measurement Evaluation .....                         | 17 |
| 4.1 EUT Configuration and Setting.....                      | 17 |
| 4.2 EUT Testing Position .....                              | 19 |
| 4.3 Tissue Verification .....                               | 22 |
| 4.4 System Verification.....                                | 23 |
| 4.5 Conducted Power Results.....                            | 24 |
| 4.6 SAR Testing Results.....                                | 30 |
| 4.6.1 SAR Results for Head .....                            | 30 |
| 4.6.2 SAR Results for Body.....                             | 33 |
| 4.6.3 Simultaneous Multi-band Transmission Evaluation ..... | 41 |
| 5. Calibration of Test Equipment.....                       | 46 |
| 6. Measurement Uncertainty .....                            | 47 |
| 7. Information on the Testing Laboratories .....            | 49 |
| Appendix A. SAR Plots of System Verification                |    |
| Appendix B. SAR Plots of SAR Measurement                    |    |
| Appendix C. Calibration Certificate for Probe and Dipole    |    |
| Appendix D. Photographs of EUT and Setup                    |    |



## Release Control Record

| Issue No. | Reason for Change                                             | Date Issued   |
|-----------|---------------------------------------------------------------|---------------|
| R01       | Original release                                              | Jul. 25, 2012 |
| R02       | Update report for adding test result of 802.11a and LTE 16QAM | Oct. 30, 2012 |

## 1. Summary of Maximum SAR Value

| Mode / Band   | Test Position           | SAR-1g (W/kg) |
|---------------|-------------------------|---------------|
| GSM850        | Head                    | 0.464         |
|               | Body Worn (1 cm Gap)    | 0.981         |
|               | Hotspot Mode (1 cm Gap) | 1.18          |
| GSM1900       | Head                    | 0.667         |
|               | Body Worn (1 cm Gap)    | 1.02          |
|               | Hotspot Mode (1 cm Gap) | 1.03          |
| WCDMA Band II | Head                    | 0.835         |
|               | Body Worn (1 cm Gap)    | 1.04          |
|               | Hotspot Mode (1 cm Gap) | 1.15          |
| WCDMA Band V  | Head                    | 0.321         |
|               | Body Worn (1 cm Gap)    | 0.558         |
|               | Hotspot Mode (1 cm Gap) | 0.665         |
| LTE Band 2    | Head                    | 0.902         |
|               | Body Worn (1 cm Gap)    | 1             |
|               | Hotspot Mode (1 cm Gap) | 1.04          |
| LTE Band 4    | Head                    | 0.866         |
|               | Body Worn (1 cm Gap)    | 1.12          |
|               | Hotspot Mode (1 cm Gap) | 1.13          |
| LTE Band 5    | Head                    | 0.329         |
|               | Body Worn (1 cm Gap)    | 0.427         |
|               | Hotspot Mode (1 cm Gap) | 0.504         |
| LTE Band 17   | Head                    | 0.637         |
|               | Body Worn (1 cm Gap)    | 0.198         |
|               | Hotspot Mode (1 cm Gap) | 0.249         |
| WLAN 2.4GHz   | Head                    | 0.328         |
|               | Body Worn (1 cm Gap)    | 0.193         |
|               | Hotspot Mode (1 cm Gap) | 0.203         |
| WLAN 5GHz     | Head                    | 0.036         |
|               | Body Worn (1 cm Gap)    | 0.191         |
|               | Hotspot Mode (1 cm Gap) | 0.179         |
| Bluetooth     | Head                    | N/A           |
|               | Body Worn (1 cm Gap)    | N/A           |
|               | Hotspot Mode (1 cm Gap) | N/A           |

### Note:

- The SAR limit (**1.6 W/kg**) for general population/uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1991.
- Since the maximum output power of Bluetooth is less than  $P_{Ref}$  (10.8 dBm) and the closest separation distance of WWAN and Bluetooth antennas is larger than 2.5 cm, SAR testing for Bluetooth is not required.

## 2. Description of Equipment Under Test

|                                                    |                                                                                                                                                                                                                                                                                                                                     |
|----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>EUT Type</b>                                    | Smart Phone                                                                                                                                                                                                                                                                                                                         |
| <b>FCC ID</b>                                      | NM8PM63100                                                                                                                                                                                                                                                                                                                          |
| <b>Brand Name</b>                                  | HTC                                                                                                                                                                                                                                                                                                                                 |
| <b>Model Name</b>                                  | PM63100                                                                                                                                                                                                                                                                                                                             |
| <b>Tx Frequency Bands<br/>(Unit: MHz)</b>          | GSM850 : 824 ~ 849<br>GSM1900 : 1850 ~ 1910<br>WCDMA Band II : 1850 ~ 1910<br>WCDMA Band V : 824 ~ 849<br>LTE Band 2 : 1850 ~ 1910<br>LTE Band 4 : 1710 ~ 1755<br>LTE Band 5 : 824 ~ 849<br>LTE Band 17 : 704 ~ 716<br>WLAN : 2400 ~ 2483.5, 5150 ~ 5350, 5470 ~ 5725, 5725 ~ 5825<br>Bluetooth : 2400 ~ 2483.5                     |
| <b>Uplink Modulations</b>                          | GSM & GPRS : GMSK<br>EDGE : 8PSK<br>WCDMA : QPSK<br>LTE : QPSK, 16QAM<br>802.11b : DSSS<br>802.11a/g/n : OFDM<br>Bluetooth : GFSK                                                                                                                                                                                                   |
| <b>Maximum AVG Conducted Power<br/>(Unit: dBm)</b> | GSM850 : 33.70<br>GSM1900 : 30.53<br>WCDMA Band II : 23.89<br>WCDMA Band V : 23.80<br>LTE Band 2 : 23.42<br>LTE Band 4 : 23.61<br>LTE Band 5 : 22.43<br>LTE Band 17 : 23.26<br>802.11b : 17.53<br>802.11g : 12.60<br>802.11n HT20 (2.4GHz) : 11.51<br>802.11a : 13.45<br>802.11n HT20 (5GHz) : 13.87<br>802.11n HT40 (5GHz) : 13.10 |
| <b>Antenna Type</b>                                | Fixed Internal Antenna                                                                                                                                                                                                                                                                                                              |
| <b>EUT Stage</b>                                   | Production Unit                                                                                                                                                                                                                                                                                                                     |

**Note:**

1. The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.

## FCC SAR Test Report

The EUT is a voice/data transmitter device that contains one WWAN transmitter. The GSM, WCDMA and LTE cannot transmit simultaneously. Confirming the LTE transmitter follows 3GPP standards, is category 3, BW 5/10 MHz, band 2/4/5/17, supports QPSK / 16QAM modulations, and supports data transmission only. Tested per 3GPP 36.521 maximum transmit procedures for both QPSK / 16QAM.

**LTE Maximum Power Reduction in accordance with 3GPP 36.101:** Power Reduction in accordance to 3GPP is active all times during LTE operation.

| Modulation | Channel bandwidth / Transmission bandwidth configuration (RB) |           | 3GPP Requirement (dB) | LTE MPR Setting (dB) |
|------------|---------------------------------------------------------------|-----------|-----------------------|----------------------|
|            | BW 5 MHz                                                      | BW 10 MHz |                       |                      |
| QPSK       | > 8                                                           | > 12      | <= 1                  | 1                    |
| 16QAM      | <= 8                                                          | <= 12     | <= 1                  | 1                    |
| 16QAM      | > 8                                                           | > 12      | <= 2                  | 2                    |

Note: MPR is according to the standard and implemented in the circuit (mandatory).

In addition, the device is compliant with A-MPR requirements defined in 36.101 section 6.2.4 that may be required to meet 3GPP Adjacent Channel Leakage Ratio ("ACLR") requirements. A-MPR was disabled for all FCC compliance testing.

### 3. SAR Measurement System

#### 3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be related to the electrical field in the tissue by


$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

#### 3.2 SPEAG DASY System

DASY system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY4/5 software defined. The DASY software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.

## FCC SAR Test Report

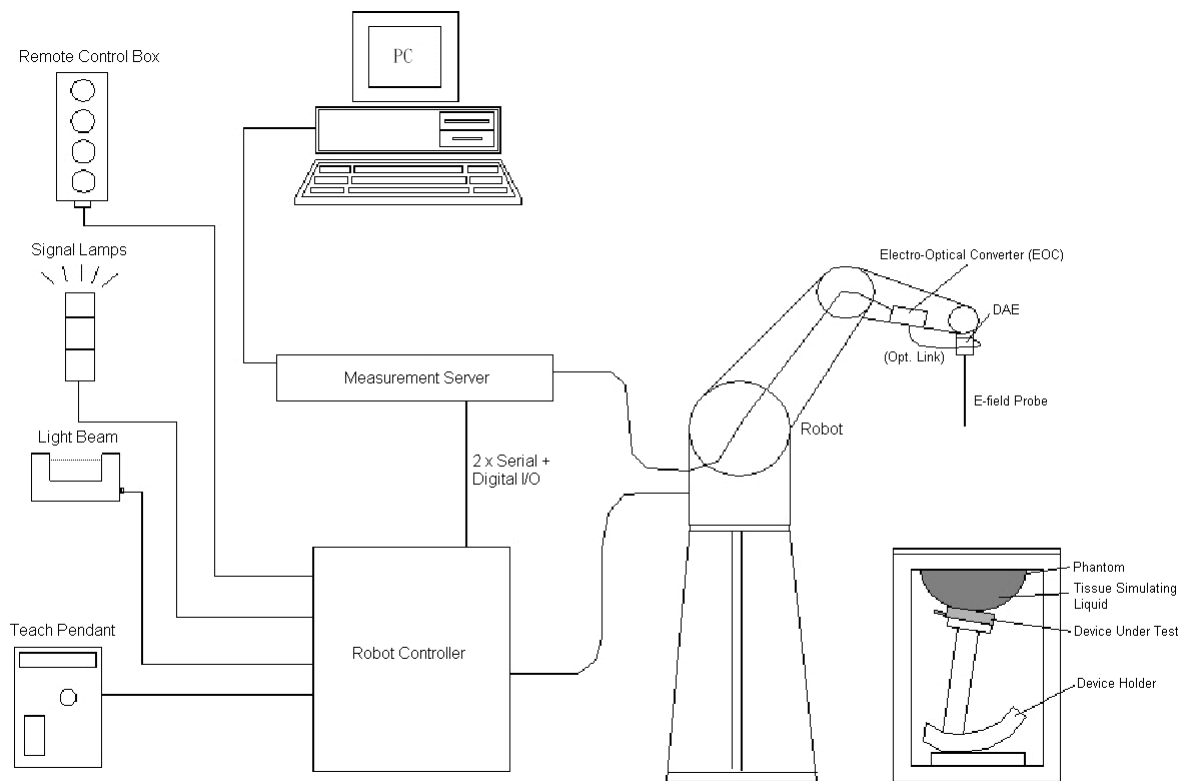

**Fig-3.1 DASY System Setup**

### 3.2.1 Robot

The DASY system uses the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability  $\pm 0.035$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



**Fig-3.2 DASY4**



**Fig-3.3 DASY5**

## 3.2.2 Probes

The SAR measurement is conducted with the dosimetric probe. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.

|                      |                                                                                                                                                          |                                                                                     |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>         | EX3DV4                                                                                                                                                   |  |
| <b>Construction</b>  | Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE). |                                                                                     |
| <b>Frequency</b>     | 10 MHz to 6 GHz<br>Linearity: $\pm 0.2$ dB                                                                                                               |                                                                                     |
| <b>Directivity</b>   | $\pm 0.3$ dB in HSL (rotation around probe axis)<br>$\pm 0.5$ dB in tissue material (rotation normal to probe axis)                                      |                                                                                     |
| <b>Dynamic Range</b> | 10 $\mu$ W/g to 100 mW/g<br>Linearity: $\pm 0.2$ dB (noise: typically $< 1$ $\mu$ W/g)                                                                   |                                                                                     |
| <b>Dimensions</b>    | Overall length: 337 mm (Tip: 20 mm)<br>Tip diameter: 2.5 mm (Body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm                     |                                                                                     |


|                      |                                                                                                                                                                               |                                                                                      |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Model</b>         | ES3DV3                                                                                                                                                                        |  |
| <b>Construction</b>  | Symmetrical design with triangular core. Interleaved sensors. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE). |                                                                                      |
| <b>Frequency</b>     | 10 MHz to 4 GHz<br>Linearity: $\pm 0.2$ dB                                                                                                                                    |                                                                                      |
| <b>Directivity</b>   | $\pm 0.2$ dB in HSL (rotation around probe axis)<br>$\pm 0.3$ dB in tissue material (rotation normal to probe axis)                                                           |                                                                                      |
| <b>Dynamic Range</b> | 5 $\mu$ W/g to 100 mW/g<br>Linearity: $\pm 0.2$ dB                                                                                                                            |                                                                                      |
| <b>Dimensions</b>    | Overall length: 337 mm (Tip: 20 mm)<br>Tip diameter: 3.9 mm (Body: 12 mm)<br>Distance from probe tip to dipole centers: 2.0 mm                                                |                                                                                      |

## 3.2.3 Data Acquisition Electronics (DAE)

|                             |                                                                                                                                                                                                                                                        |                                                                                       |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Model</b>                | DAE3, DAE4                                                                                                                                                                                                                                             |  |
| <b>Construction</b>         | Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop. |                                                                                       |
| <b>Measurement Range</b>    | -100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)                                                                                                                                                                                 |                                                                                       |
| <b>Input Offset Voltage</b> | $< 5$ $\mu$ V (with auto zero)                                                                                                                                                                                                                         |                                                                                       |
| <b>Input Bias Current</b>   | $< 50$ fA                                                                                                                                                                                                                                              |                                                                                       |
| <b>Dimensions</b>           | 60 x 60 x 68 mm                                                                                                                                                                                                                                        |                                                                                       |


## 3.2.4 Phantoms

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                     |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>           | Twin SAM                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |  |
| <b>Construction</b>    | The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot. |                                                                                     |
| <b>Material</b>        | Vinylester, glass fiber reinforced (VE-GF)                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                     |
| <b>Shell Thickness</b> | $2 \pm 0.2$ mm ( $6 \pm 0.2$ mm at ear point)                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                     |
| <b>Dimensions</b>      | Length: 1000 mm<br>Width: 500 mm<br>Height: adjustable feet                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                     |
| <b>Filling Volume</b>  | approx. 25 liters                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                     |

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                      |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Model</b>           | ELI                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  |
| <b>Construction</b>    | Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles. |                                                                                      |
| <b>Material</b>        | Vinylester, glass fiber reinforced (VE-GF)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                      |
| <b>Shell Thickness</b> | $2.0 \pm 0.2$ mm (bottom plate)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                      |
| <b>Dimensions</b>      | Major axis: 600 mm<br>Minor axis: 400 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                      |
| <b>Filling Volume</b>  | approx. 30 liters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                      |

## 3.2.5 Device Holder

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                     |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>        | Mounting Device                                                                                                                                                                                                                                                                                                                                                                                                               |  |
| <b>Construction</b> | In combination with the Twin SAM Phantom or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). |                                                                                     |
| <b>Material</b>     | POM                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                     |

|                     |                                                                                                                                                                                                                                                                                         |                                                                                     |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>        | Laptop Extensions Kit                                                                                                                                                                                                                                                                   |  |
| <b>Construction</b> | Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. |                                                                                     |
| <b>Material</b>     | POM, Acrylic glass, Foam                                                                                                                                                                                                                                                                |                                                                                     |


## 3.2.6 System Validation Dipoles

|                         |                                                                                                                                                                      |                                                                                       |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Model</b>            | D-Serial                                                                                                                                                             |  |
| <b>Construction</b>     | Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions. |                                                                                       |
| <b>Frequency</b>        | 750 MHz to 5800 MHz                                                                                                                                                  |                                                                                       |
| <b>Return Loss</b>      | > 20 dB                                                                                                                                                              |                                                                                       |
| <b>Power Capability</b> | > 100 W (f < 1GHz), > 40 W (f > 1GHz)                                                                                                                                |                                                                                       |

## FCC SAR Test Report

### 3.2.7 Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in Table-3.1.

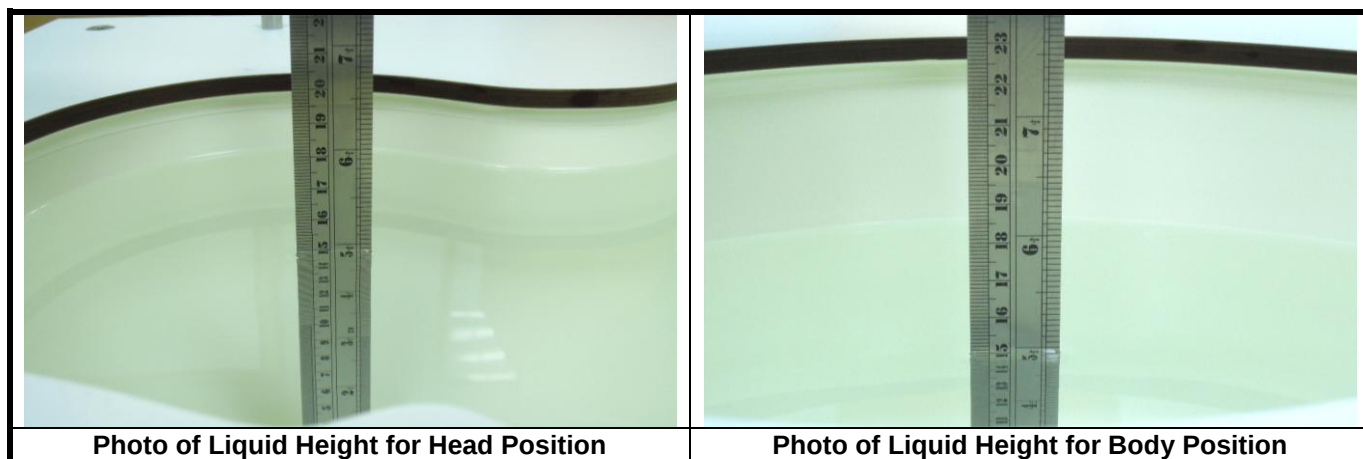

The dielectric properties of the head tissue simulating liquids are defined in IEEE 1528 and FCC OET 65 Supplement C Appendix C. For the body tissue simulating liquids, the dielectric properties are defined in FCC OET 65 Supplement C Appendix C. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

**Table-3.1 Targets of Tissue Simulating Liquid**

| Frequency (MHz) | Target Permittivity | Range of $\pm 5\%$ | Target Conductivity | Range of $\pm 5\%$ |
|-----------------|---------------------|--------------------|---------------------|--------------------|
| <b>For Head</b> |                     |                    |                     |                    |
| 750             | 41.9                | 39.8 ~ 44.0        | 0.89                | 0.85 ~ 0.93        |
| 835             | 41.5                | 39.4 ~ 43.6        | 0.90                | 0.86 ~ 0.95        |
| 1750            | 40.1                | 38.1 ~ 42.1        | 1.37                | 1.30 ~ 1.44        |
| 1900            | 40.0                | 38.0 ~ 42.0        | 1.40                | 1.33 ~ 1.47        |
| 2450            | 39.2                | 37.2 ~ 41.2        | 1.80                | 1.71 ~ 1.89        |
| 5200            | 36.0                | 34.2 ~ 37.8        | 4.66                | 4.43 ~ 4.89        |
| 5300            | 35.9                | 34.1 ~ 37.7        | 4.76                | 4.52 ~ 5.00        |
| 5500            | 35.6                | 33.8 ~ 37.4        | 4.96                | 4.71 ~ 5.21        |
| 5600            | 35.5                | 33.7 ~ 37.3        | 5.07                | 4.82 ~ 5.32        |
| 5800            | 35.3                | 33.5 ~ 37.1        | 5.27                | 5.01 ~ 5.53        |
| <b>For Body</b> |                     |                    |                     |                    |
| 750             | 55.5                | 52.7 ~ 58.3        | 0.96                | 0.91 ~ 1.01        |
| 835             | 55.2                | 52.4 ~ 58.0        | 0.97                | 0.92 ~ 1.02        |
| 1750            | 53.4                | 50.7 ~ 56.1        | 1.49                | 1.42 ~ 1.56        |
| 1900            | 53.3                | 50.6 ~ 56.0        | 1.52                | 1.44 ~ 1.60        |
| 2450            | 52.7                | 50.1 ~ 55.3        | 1.95                | 1.85 ~ 2.05        |
| 5200            | 49.0                | 46.6 ~ 51.5        | 5.30                | 5.04 ~ 5.57        |
| 5300            | 48.9                | 46.5 ~ 51.3        | 5.42                | 5.15 ~ 5.69        |
| 5500            | 48.6                | 46.2 ~ 51.0        | 5.65                | 5.37 ~ 5.93        |
| 5600            | 48.5                | 46.1 ~ 50.9        | 5.77                | 5.48 ~ 6.06        |
| 5800            | 48.2                | 45.8 ~ 50.6        | 6.00                | 5.70 ~ 6.30        |

The following table gives the recipes for tissue simulating liquids.


**Table-3.2 Recipes of Tissue Simulating Liquid**

| Tissue Type | Bactericide | DGBE | HEC | NaCl | Sucrose | Triton X-100 | Water | Diethylene Glycol Mono-hexylether |
|-------------|-------------|------|-----|------|---------|--------------|-------|-----------------------------------|
| H750        | 0.2         | -    | 0.2 | 1.5  | 56.0    | -            | 42.1  | -                                 |
| H835        | 0.2         | -    | 0.2 | 1.5  | 57.0    | -            | 41.1  | -                                 |
| H1750       | -           | 47.0 | -   | 0.4  | -       | -            | 52.6  | -                                 |
| H1900       | -           | 44.5 | -   | 0.2  | -       | -            | 55.3  | -                                 |
| H2450       | -           | 45.0 | -   | 0.1  | -       | -            | 54.9  | -                                 |
| H5G         | -           | -    | -   | -    | -       | 17.2         | 65.5  | 17.3                              |
| B750        | 0.2         | -    | 0.2 | 0.8  | 48.8    | -            | 50.0  | -                                 |
| B835        | 0.2         | -    | 0.2 | 0.9  | 48.5    | -            | 50.2  | -                                 |
| B1750       | -           | 31.0 | -   | 0.2  | -       | -            | 68.8  | -                                 |
| B1900       | -           | 29.5 | -   | 0.3  | -       | -            | 70.2  | -                                 |
| B2450       | -           | 31.4 | -   | 0.1  | -       | -            | 68.5  | -                                 |
| B5G         | -           | -    | -   | -    | -       | 10.7         | 78.6  | 10.7                              |

## FCC SAR Test Report

### 3.3 SAR System Verification

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

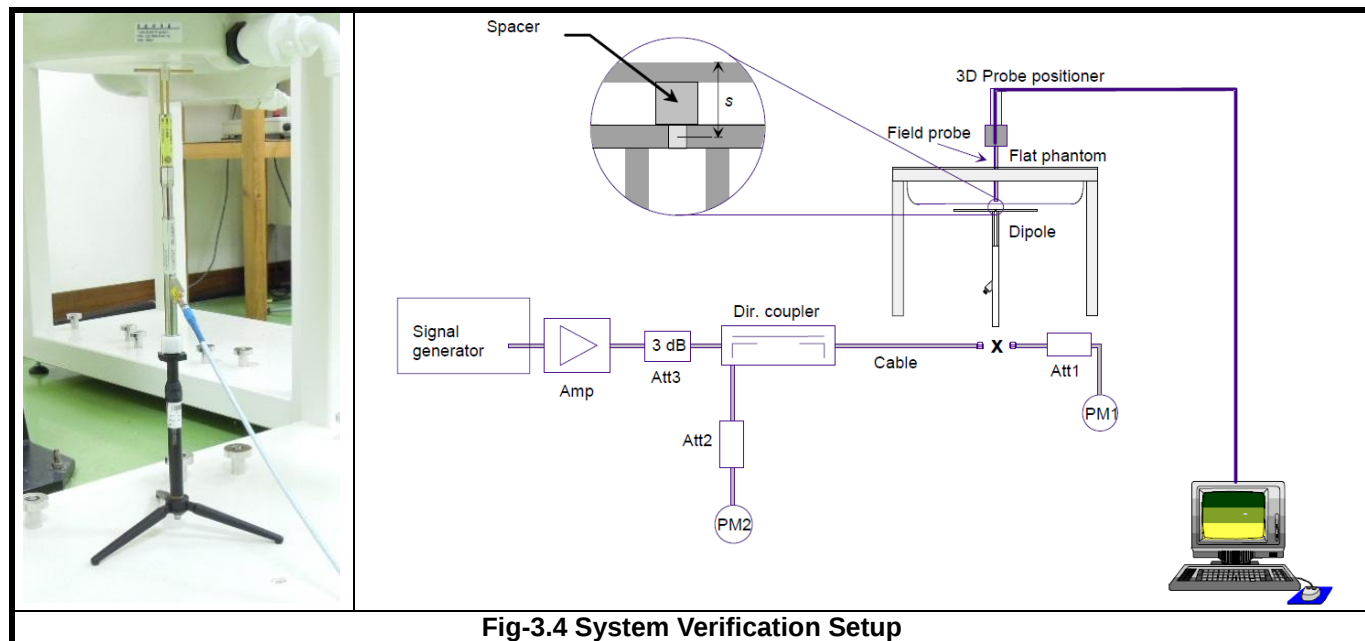

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The power meter PM1 measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to 6 GHz) at the dipole connector and the power meter PM2 is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2.

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

## FCC SAR Test Report

### 3.4 SAR Measurement Procedure

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- (a) Make EUT to transmit maximum output power
- (b) Measure conducted output power through RF cable
- (c) Place the EUT in the specific position of phantom
- (d) Perform SAR testing steps on the DASY system
- (e) Record the SAR value

#### 3.4.1 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for below 3 GHz, and 7x7x9 points with step size 4, 4 and 2.5 mm for above 5 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

#### 3.4.2 Volume Scan Procedure

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

#### 3.4.3 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

## FCC SAR Test Report

### 3.4.4 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

### 3.4.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

## **4. SAR Measurement Evaluation**

### **4.1 EUT Configuration and Setting**

For WWAN SAR testing, the EUT was linked and controlled by base station emulator. Communication between the EUT and the emulator was established by air link. The distance between the EUT and the communicating antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during SAR testing.

For GSM850, the power control level is set to 5. For GPRS850 (GMSK, CS1), the power control level is set to 5. For EDGE850 (GMSK: MCS1, 8PSK:MCS9), the power control level is set to 8. For GSM1900, the power control level is set to 0. For GPRS1900 (GMSK, CS1), the power control level is set to 0. For EDGE1900 (GMSK: MCS1, 8PSK:MCS9), the power control level is set to 2. Head SAR is tested under GSM link mode. Body SAR is tested under maximum source-based time-average power mode of GPRS/EDGE.

For WCDMA, head and body SAR is tested under 12.2k RMC mode with power control set all up bits. SAR for AMR is not required since its power is less than 1/4 dB higher than RMC. SAR for HSDPA/HSUPA is not required since its power is less than 1/4 dB higher than RMC without HSDPA/HSUPA.

For LTE, set the related parameters of operating band, channel bandwidth, uplink channel number, modulation type, and RB in base station simulator. When the EUT has registered and communicated to base station simulator, set the simulator to make EUT transmitting the maximum radiated power. The steps for system simulator (Anritsu MT8820C) setup are as below.

1. Press the "Std" button to select "LTE 22.20S" function
2. Choose the "Screen Select" item to "Fundamental Measurement"
3. Enter the "Common" item
4. Set the Operating Band
5. Set the Channel Bandwidth
6. Set the UL Channel & Frequency
7. Set the Modulation
8. Set the RB number and RB shift
9. Press "Start Call" button when EUT register to the system simulator
10. Set the TX-1 Max. Power to make the EUT transmit maximum output power

For WLAN SAR testing, the EUT has installed WLAN engineering testing software which can provide continuous transmitting RF signal. This RF signal utilized in SAR measurement has almost 100% duty cycle. The data rates for WLAN SAR testing were set in 1 Mbps for 802.11b, 6 Mbps for 802.11a, and MCS0 for 802.11n HT20 due to the highest RF output power.


## FCC SAR Test Report

A D T

This EUT has one WWAN transmitter with two WWAN antenna antennas, and one WLAN/BT transmitter and one WLAN/BT antenna. The possible configuration for simultaneous transmission is shown as below.

| Simultaneous Tx Combination | Configuration                                 | Head (Voice / VoIP) | Body Worn (Voice / VoIP) | Hotspot (Data) |
|-----------------------------|-----------------------------------------------|---------------------|--------------------------|----------------|
| 1                           | GSM850 (Voice / Data) + WLAN/BT (Data)        | V                   | V                        | V              |
| 2                           | GSM1900 (Voice / Data) + WLAN/BT (Data)       | V                   | V                        | V              |
| 3                           | WCDMA Band II (Voice / Data) + WLAN/BT (Data) | V                   | V                        | V              |
| 4                           | WCDMA Band V (Voice / Data) + WLAN/BT (Data)  | V                   | V                        | V              |
| 5                           | LTE Band 2 (Data) + WLAN/BT (Data)            | V                   | V                        | V              |
| 6                           | LTE Band 4 (Data) + WLAN/BT (Data)            | V                   | V                        | V              |
| 7                           | LTE Band 5 (Data) + WLAN/BT (Data)            | V                   | V                        | V              |
| 8                           | LTE Band 17 (Data) + WLAN/BT (Data)           | V                   | V                        | V              |

### <Antenna Location>

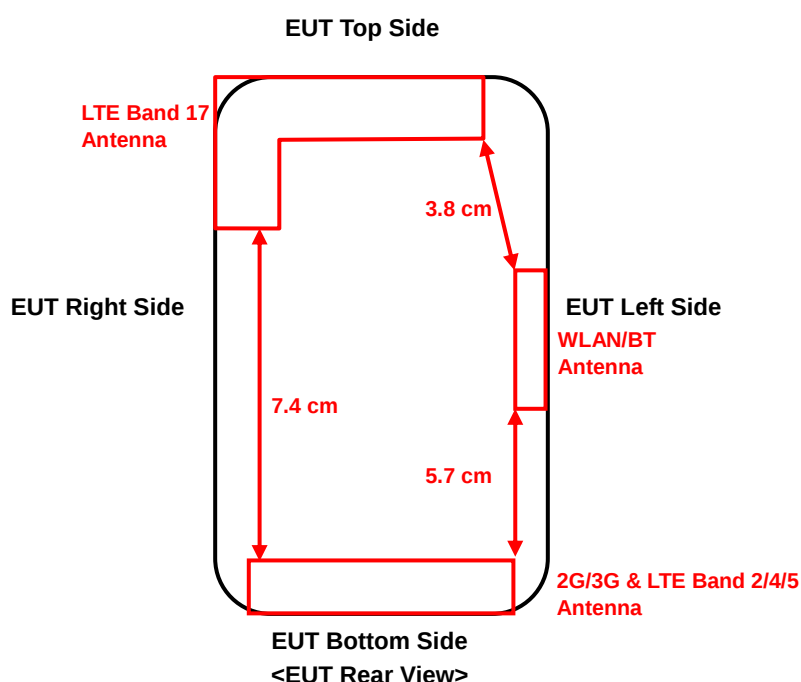

This device supports WiFi hotspot function, so body SAR was tested under 1 cm for the surfaces / slide edges where a transmitting antenna is within 2.5 cm from the edge. Since the SAR is required for antenna located within 2.5 cm from edge, SAR testing for each antenna is listed as below.

**2G/3G & LTE 2/4/5 Antenna :** Front Face, Rear Face, Left Side, Right Side, Bottom Side

**WLAN/Bluetooth Antenna :** Front Face, Rear Face, Left Side

**LTE Band 17 Antenna :** Front Face, Rear Face, Left Side, Right Side, Top Side


## FCC SAR Test Report

### 4.2 EUT Testing Position

This EUT was tested in **Right Cheek, Right Tilted, Left Cheek, Left Tilted, Front Face, Rear Face, Right Side, Left Side, Top Side** and **Bottom Side** positions as illustrated below:

#### 1. Define two imaginary lines on the handset

- The vertical centerline passes through two points on the front side of the handset - the midpoint of the width  $w_t$  of the handset at the level of the acoustic output, and the midpoint of the width  $w_b$  of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

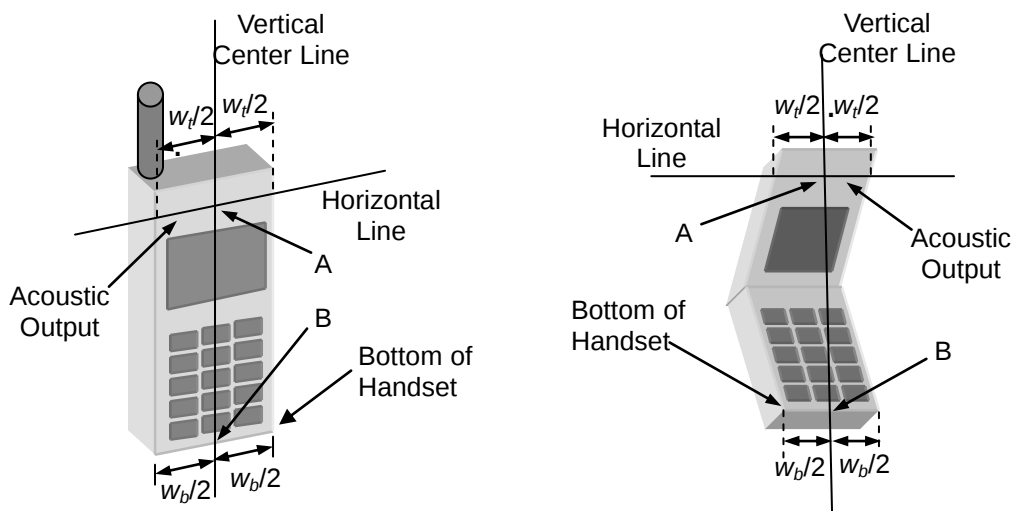

**Fig-4.1 Illustration for Handset Vertical and Horizontal Reference Lines**

## FCC SAR Test Report

### 2. Cheek Position

- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig-4.2).

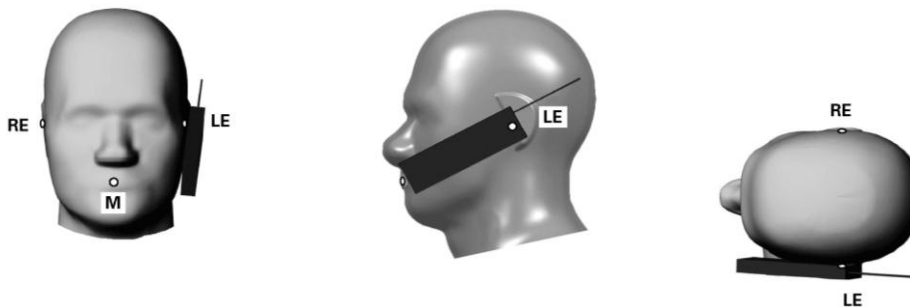


Fig-4.2 Illustration for Cheek Position

### 3. Tilted Position

- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig-4.3).


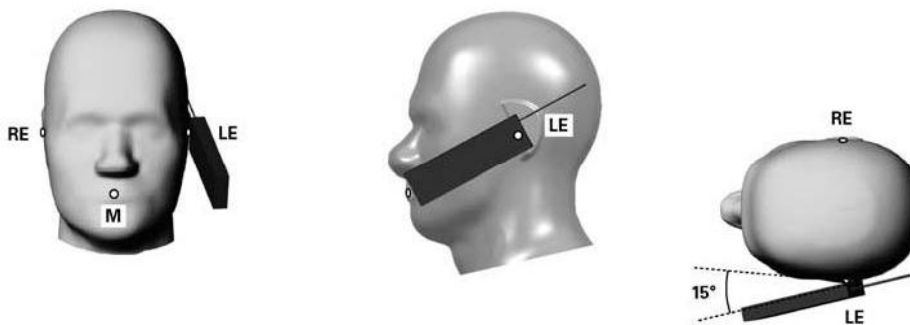


Fig-4.3 Illustration for Tilted Position

## FCC SAR Test Report

### 4. Body Worn Position

- To position the EUT parallel to the phantom surface.
- To adjust the EUT parallel to the flat phantom.
- To adjust the distance between the EUT surface and the flat phantom to 1 cm.

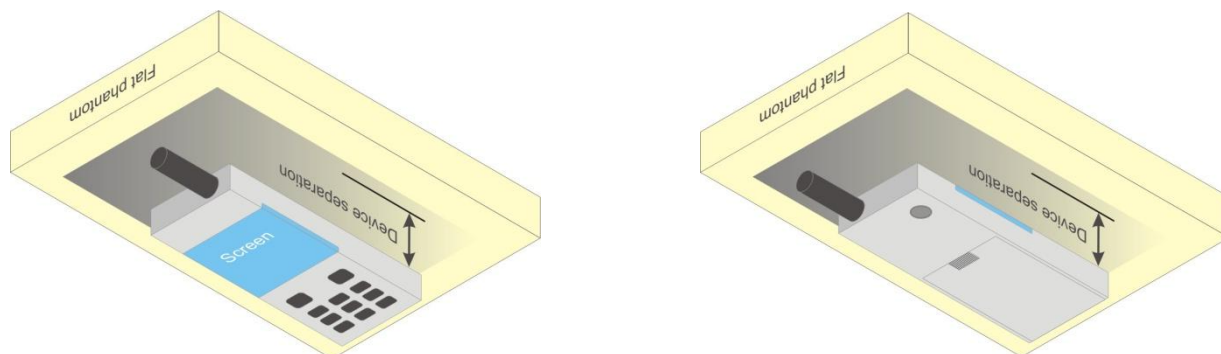

**Fig-4.4 Illustration for Body Worn Position**

## 4.3 Tissue Verification

The measuring results for tissue simulating liquid are shown as below.

| Tissue Type | Frequency (MHz) | Liquid Temp. (°C) | Measured Conductivity ( $\sigma$ ) | Measured Permittivity ( $\epsilon_r$ ) | Target Conductivity ( $\sigma$ ) | Target Permittivity ( $\epsilon_r$ ) | Conductivity Deviation (%) | Permittivity Deviation (%) | Test Date     |
|-------------|-----------------|-------------------|------------------------------------|----------------------------------------|----------------------------------|--------------------------------------|----------------------------|----------------------------|---------------|
| H750        | 750             | 20.5              | 0.89                               | 41.109                                 | 0.89                             | 41.9                                 | 0.00                       | -1.89                      | Jul. 11, 2012 |
| H750        | 750             | 20.4              | 0.892                              | 41.542                                 | 0.89                             | 41.9                                 | 0.22                       | -0.85                      | Oct. 29, 2012 |
| H835        | 835             | 20.7              | 0.916                              | 42.727                                 | 0.90                             | 41.5                                 | 1.78                       | 2.96                       | Jul. 08, 2012 |
| H835        | 835             | 20.4              | 0.898                              | 42.034                                 | 0.90                             | 41.5                                 | -0.22                      | 1.29                       | Jul. 11, 2012 |
| H835        | 835             | 20.4              | 0.919                              | 43.197                                 | 0.90                             | 41.5                                 | 2.11                       | 4.09                       | Oct. 22, 2012 |
| H1750       | 1750            | 20.2              | 1.341                              | 41.381                                 | 1.37                             | 40.1                                 | -2.12                      | 3.19                       | Jul. 11, 2012 |
| H1750       | 1750            | 20.1              | 1.347                              | 39.78                                  | 1.37                             | 40.1                                 | -1.68                      | -0.80                      | Oct. 24, 2012 |
| H1900       | 1900            | 20.7              | 1.436                              | 39.743                                 | 1.40                             | 40.0                                 | 2.57                       | -0.64                      | Jul. 09, 2012 |
| H1900       | 1900            | 20.5              | 1.436                              | 39.743                                 | 1.40                             | 40.0                                 | 2.57                       | -0.64                      | Jul. 11, 2012 |
| H1900       | 1900            | 20.5              | 1.43                               | 39.76                                  | 1.40                             | 40.0                                 | 2.14                       | -0.60                      | Jul. 20, 2012 |
| H1900       | 1900            | 20.1              | 1.422                              | 40.423                                 | 1.40                             | 40.0                                 | 1.57                       | 1.06                       | Oct. 24, 2012 |
| H2450       | 2450            | 21.0              | 1.77                               | 40.30                                  | 1.80                             | 39.2                                 | -1.67                      | 2.81                       | Jul. 06, 2012 |
| H5G         | 5200            | 20.6              | 4.70                               | 37.081                                 | 4.66                             | 36.0                                 | 0.86                       | 3.00                       | Jul. 12, 2012 |
| H5G         | 5200            | 20.5              | 4.592                              | 36.805                                 | 4.66                             | 36.0                                 | -1.46                      | 2.24                       | Oct. 19, 2012 |
| H5G         | 5500            | 20.6              | 5.082                              | 36.452                                 | 4.96                             | 35.6                                 | 2.46                       | 2.39                       | Jul. 12, 2012 |
| H5G         | 5800            | 20.6              | 5.44                               | 35.757                                 | 5.27                             | 35.3                                 | 3.23                       | 1.29                       | Jul. 12, 2012 |
| B750        | 750             | 20.7              | 0.967                              | 55.252                                 | 0.96                             | 55.5                                 | 0.73                       | -0.45                      | Jul. 10, 2012 |
| B750        | 750             | 20.8              | 0.974                              | 55.974                                 | 0.96                             | 55.5                                 | 1.46                       | 0.85                       | Oct. 24, 2012 |
| B835        | 835             | 21.1              | 0.978                              | 55.60                                  | 0.97                             | 55.2                                 | 0.82                       | 0.72                       | Jul. 06, 2012 |
| B835        | 835             | 20.3              | 0.979                              | 55.898                                 | 0.97                             | 55.2                                 | 0.93                       | 1.26                       | Jul. 10, 2012 |
| B835        | 835             | 20.8              | 0.993                              | 56.706                                 | 0.97                             | 55.2                                 | 2.37                       | 2.73                       | Oct. 24, 2012 |
| B1750       | 1750            | 20.6              | 1.468                              | 53.671                                 | 1.49                             | 53.4                                 | -1.48                      | 0.51                       | Jul. 06, 2012 |
| B1750       | 1750            | 20.5              | 1.477                              | 52.379                                 | 1.49                             | 53.4                                 | -0.87                      | -1.91                      | Jul. 07, 2012 |
| B1750       | 1750            | 20.2              | 1.47                               | 53.80                                  | 1.49                             | 53.4                                 | -1.34                      | 0.75                       | Oct. 22, 2012 |
| B1900       | 1900            | 21.3              | 1.55                               | 52.80                                  | 1.52                             | 53.3                                 | 1.97                       | -0.94                      | Jul. 06, 2012 |
| B1900       | 1900            | 20.5              | 1.554                              | 53.967                                 | 1.52                             | 53.3                                 | 2.24                       | 1.25                       | Jul. 09, 2012 |
| B1900       | 1900            | 20.2              | 1.55                               | 52.60                                  | 1.52                             | 53.3                                 | 1.97                       | -1.31                      | Oct. 22, 2012 |
| B2450       | 2450            | 21.2              | 1.99                               | 54.30                                  | 1.95                             | 52.7                                 | 2.05                       | 3.04                       | Jul. 06, 2012 |
| B5G         | 5200            | 20.4              | 5.27                               | 49.057                                 | 5.30                             | 49.0                                 | -0.57                      | 0.12                       | Jul. 12, 2012 |
| B5G         | 5200            | 21.6              | 5.263                              | 49.005                                 | 5.30                             | 49.0                                 | -0.70                      | 0.01                       | Oct. 21, 2012 |
| B5G         | 5500            | 20.6              | 5.717                              | 48.431                                 | 5.65                             | 48.6                                 | 1.19                       | -0.35                      | Jul. 13, 2012 |
| B5G         | 5800            | 20.6              | 6.123                              | 47.668                                 | 6.00                             | 48.2                                 | 2.05                       | -1.10                      | Jul. 13, 2012 |

### Note:

The dielectric properties of the tissue simulating liquid must be measured within 24 hours before the SAR testing and within  $\pm 5\%$  of the target values. Liquid temperature during the SAR testing must be within  $\pm 2^\circ\text{C}$ .

## 4.4 System Verification

The measuring results for system check are shown as below.

| Test Date     | Type | Frequency (MHz) | 1W Target SAR-1g (W/kg) | Measured SAR-1g (W/kg) | Normalized to 1W SAR-1g (W/kg) | Deviation (%) | Dipole S/N | Probe S/N | DAE S/N |
|---------------|------|-----------------|-------------------------|------------------------|--------------------------------|---------------|------------|-----------|---------|
| Jul. 11, 2012 | Head | 750             | 8.44                    | 2.19                   | 8.76                           | 3.79          | 1013       | 3590      | 861     |
| Oct. 29, 2012 | Head | 750             | 8.44                    | 2.21                   | 8.84                           | 4.74          | 1013       | 3590      | 861     |
| Jul. 08, 2012 | Head | 835             | 9.46                    | 2.32                   | 9.28                           | -1.90         | 4d021      | 3820      | 579     |
| Jul. 11, 2012 | Head | 835             | 9.46                    | 2.42                   | 9.68                           | 2.33          | 4d021      | 3590      | 861     |
| Oct. 22, 2012 | Head | 835             | 9.46                    | 2.39                   | 9.56                           | 1.06          | 4d021      | 3864      | 579     |
| Jul. 11, 2012 | Head | 1750            | 36.60                   | 9.16                   | 36.64                          | 0.11          | 1055       | 3590      | 861     |
| Oct. 24, 2012 | Head | 1750            | 36.00                   | 8.77                   | 35.08                          | -2.56         | 1055       | 3590      | 861     |
| Jul. 09, 2012 | Head | 1900            | 38.90                   | 10.30                  | 41.20                          | 5.91          | 5d036      | 3820      | 579     |
| Jul. 11, 2012 | Head | 1900            | 38.90                   | 9.90                   | 39.60                          | 1.80          | 5d036      | 3590      | 861     |
| Jul. 20, 2012 | Head | 1900            | 38.90                   | 9.90                   | 39.60                          | 1.80          | 5d036      | 3650      | 910     |
| Oct. 24, 2012 | Head | 1900            | 38.90                   | 9.14                   | 36.56                          | -6.02         | 5d036      | 3590      | 861     |
| Jul. 06, 2012 | Head | 2450            | 52.90                   | 12.40                  | 49.60                          | -6.24         | 737        | 3590      | 861     |
| Jul. 12, 2012 | Head | 5200            | 79.60                   | 7.47                   | 74.70                          | -6.16         | 1018       | 3590      | 861     |
| Oct. 19, 2012 | Head | 5200            | 79.60                   | 8.11                   | 81.10                          | 1.88          | 1018       | 3820      | 910     |
| Jul. 12, 2012 | Head | 5500            | 84.70                   | 8.57                   | 85.70                          | 1.18          | 1018       | 3590      | 861     |
| Jul. 12, 2012 | Head | 5800            | 78.60                   | 8.24                   | 82.40                          | 4.83          | 1018       | 3590      | 861     |
| Jul. 10, 2012 | Body | 750             | 8.76                    | 2.36                   | 9.44                           | 7.76          | 1013       | 3590      | 861     |
| Oct. 24, 2012 | Body | 750             | 8.76                    | 2.33                   | 9.32                           | 6.39          | 1013       | 3590      | 861     |
| Jul. 06, 2012 | Body | 835             | 9.60                    | 2.39                   | 9.56                           | -0.42         | 4d021      | 3590      | 861     |
| Jul. 10, 2012 | Body | 835             | 9.60                    | 2.39                   | 9.56                           | -0.42         | 4d021      | 3590      | 861     |
| Oct. 24, 2012 | Body | 835             | 9.60                    | 2.29                   | 9.16                           | -4.58         | 4d021      | 3590      | 861     |
| Jul. 06, 2012 | Body | 1750            | 38.00                   | 9.14                   | 36.56                          | -3.79         | 1055       | 3820      | 579     |
| Jul. 07, 2012 | Body | 1750            | 38.00                   | 9.24                   | 36.96                          | -2.74         | 1055       | 3820      | 579     |
| Oct. 22, 2012 | Body | 1750            | 37.20                   | 9.57                   | 38.28                          | 2.90          | 1055       | 3820      | 910     |
| Jul. 06, 2012 | Body | 1900            | 38.90                   | 9.39                   | 37.56                          | -3.44         | 5d036      | 3590      | 861     |
| Jul. 09, 2012 | Body | 1900            | 38.90                   | 9.98                   | 39.92                          | 2.62          | 5d036      | 3820      | 579     |
| Oct. 22, 2012 | Body | 1900            | 38.90                   | 9.85                   | 39.40                          | 1.29          | 5d036      | 3820      | 910     |
| Jul. 06, 2012 | Body | 2450            | 50.00                   | 13.30                  | 53.20                          | 6.40          | 737        | 3590      | 861     |
| Jul. 12, 2012 | Body | 5200            | 72.70                   | 7.60                   | 76.00                          | 4.54          | 1018       | 3590      | 861     |
| Oct. 21, 2012 | Body | 5200            | 72.70                   | 7.82                   | 78.20                          | 7.57          | 1018       | 3578      | 1277    |
| Jul. 13, 2012 | Body | 5500            | 78.30                   | 8.13                   | 81.30                          | 3.83          | 1018       | 3650      | 910     |
| Jul. 13, 2012 | Body | 5800            | 73.40                   | 6.92                   | 69.20                          | -5.72         | 1018       | 3650      | 910     |

### Note:

Comparing to the reference SAR value provided by SPEAG, the validation data should be within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots can be referred to Appendix A of this report.

## 4.5 Conducted Power Results

The measuring conducted power (Unit: dBm) are shown as below.

| Band                                       | GSM850 |              |       | GSM1900 |        |              |
|--------------------------------------------|--------|--------------|-------|---------|--------|--------------|
| Channel                                    | 128    | 189          | 251   | 512     | 661    | 810          |
| Frequency (MHz)                            | 824.2  | 836.4        | 848.8 | 1850.2  | 1880.0 | 1909.8       |
| <b>Maximum Burst-Averaged Output Power</b> |        |              |       |         |        |              |
| GSM (GMSK, 1 Uplink)                       | 33.32  | <b>33.70</b> | 33.65 | 30.29   | 30.33  | <b>30.53</b> |
| GPRS 8 (GMSK, 1 Uplink)                    | 33.25  | 33.62        | 33.56 | 30.34   | 30.40  | 30.52        |
| GPRS 10 (GMSK, 2 Uplink)                   | 31.53  | 31.58        | 31.45 | 28.93   | 28.98  | 29.15        |
| EDGE 8 (GMSK, 1 Uplink)                    | 33.30  | 33.67        | 33.61 | 30.24   | 30.29  | 30.44        |
| EDGE 10 (GMSK, 2 Uplink)                   | 31.55  | 31.54        | 31.40 | 28.84   | 28.89  | 29.07        |
| EDGE 8 (8PSK, 1 Uplink)                    | 26.70  | 26.75        | 26.81 | 26.35   | 26.36  | 26.48        |
| EDGE 10 (8PSK, 2 Uplink)                   | 26.52  | 26.53        | 26.50 | 26.16   | 26.11  | 26.18        |
| <b>Maximum Frame-Averaged Output Power</b> |        |              |       |         |        |              |
| GSM (GMSK, 1 Uplink)                       | 24.32  | 24.70        | 24.65 | 21.29   | 21.33  | 21.53        |
| GPRS 8 (GMSK, 1 Uplink)                    | 24.25  | 24.62        | 24.56 | 21.34   | 21.40  | 21.52        |
| GPRS 10 (GMSK, 2 Uplink)                   | 25.53  | <b>25.58</b> | 25.45 | 22.93   | 22.98  | <b>23.15</b> |
| EDGE 8 (GMSK, 1 Uplink)                    | 24.30  | 24.67        | 24.61 | 21.24   | 21.29  | 21.44        |
| EDGE 10 (GMSK, 2 Uplink)                   | 25.55  | 25.54        | 25.40 | 22.84   | 22.89  | 23.07        |
| EDGE 8 (8PSK, 1 Uplink)                    | 17.70  | 17.75        | 17.81 | 17.35   | 17.36  | 17.48        |
| EDGE 10 (8PSK, 2 Uplink)                   | 20.52  | 20.53        | 20.50 | 20.16   | 20.11  | 20.18        |

### Note:

- SAR testing for GSM/GPRS/EDGE was performed on the maximum frame-averaged power mode.
- The frame-averaged power is linearly scaled the maximum burst-averaged power based on time slots. The calculated methods are shown as below:  
Frame-averaged power = Burst-averaged power (1 Uplink) - 9 dBm  
Frame-averaged power = Burst averaged power (2 Uplink) - 6 dBm

| Band            | WCDMA Band II |              |        | WCDMA Band V |              |       |
|-----------------|---------------|--------------|--------|--------------|--------------|-------|
| Channel         | 9262          | 9400         | 9538   | 4132         | 4182         | 4233  |
| Frequency (MHz) | 1852.4        | 1880.0       | 1907.6 | 826.4        | 836.4        | 846.6 |
| RMC 12.2K       | 23.67         | <b>23.89</b> | 23.46  | 23.78        | <b>23.80</b> | 23.61 |
| HSDPA Subtest-1 | 23.68         | 23.82        | 23.59  | 22.64        | 22.84        | 22.68 |
| HSDPA Subtest-2 | 23.66         | 23.85        | 23.48  | 22.68        | 22.86        | 22.66 |
| HSDPA Subtest-3 | 22.32         | 22.38        | 22.05  | 22.15        | 22.37        | 22.19 |
| HSDPA Subtest-4 | 22.28         | 22.32        | 21.95  | 22.13        | 22.24        | 22.11 |
| HSUPA Subtest-1 | 22.76         | 23.54        | 23.20  | 21.98        | 22.08        | 22.69 |
| HSUPA Subtest-2 | 21.63         | 21.78        | 21.51  | 21.55        | 21.70        | 21.53 |
| HSUPA Subtest-3 | 21.92         | 22.21        | 21.68  | 21.28        | 21.57        | 21.70 |
| HSUPA Subtest-4 | 22.14         | 21.83        | 21.66  | 21.78        | 21.92        | 21.66 |
| HSUPA Subtest-5 | 23.75         | 23.65        | 23.56  | 22.79        | 22.96        | 22.83 |

# FCC SAR Test Report

A D T

| LTE Band 2 |            |       |                 |    |           |              |     |                |                |
|------------|------------|-------|-----------------|----|-----------|--------------|-----|----------------|----------------|
| BW         | Modulation | CH    | Frequency (MHz) | RB | RB Offset | Target Power | MPR | Expected Power | Measured Power |
| 5 MHz      | QPSK       | 18625 | 1852.5          | 1  | 0         | 23.5         | 0   | 23.5           | 23.01          |
|            |            | 18900 | 1880.0          | 1  | 0         | 23.5         | 0   | 23.5           | 23.11          |
|            |            | 19175 | 1907.5          | 1  | 0         | 23.5         | 0   | 23.5           | 22.78          |
|            |            | 18625 | 1852.5          | 1  | 24        | 23.5         | 0   | 23.5           | 23.02          |
|            |            | 18900 | 1880.0          | 1  | 24        | 23.5         | 0   | 23.5           | <b>23.21</b>   |
|            |            | 19175 | 1907.5          | 1  | 24        | 23.5         | 0   | 23.5           | 22.89          |
|            |            | 18625 | 1852.5          | 12 | 6         | 23.5         | 1   | 22.5           | 22.13          |
|            |            | 18900 | 1880.0          | 12 | 6         | 23.5         | 1   | 22.5           | 22.26          |
|            |            | 19175 | 1907.5          | 12 | 6         | 23.5         | 1   | 22.5           | 21.79          |
|            |            | 18625 | 1852.5          | 25 | 0         | 23.5         | 1   | 22.5           | 22.03          |
|            |            | 18900 | 1880.0          | 25 | 0         | 23.5         | 1   | 22.5           | 22.13          |
|            |            | 19175 | 1907.5          | 25 | 0         | 23.5         | 1   | 22.5           | 21.57          |
|            | 16QAM      | 18625 | 1852.5          | 1  | 0         | 23.5         | 1   | 22.5           | 21.98          |
|            |            | 18900 | 1880.0          | 1  | 0         | 23.5         | 1   | 22.5           | 22.11          |
|            |            | 19175 | 1907.5          | 1  | 0         | 23.5         | 1   | 22.5           | 21.82          |
|            |            | 18625 | 1852.5          | 1  | 24        | 23.5         | 1   | 22.5           | 22.05          |
|            |            | 18900 | 1880.0          | 1  | 24        | 23.5         | 1   | 22.5           | <b>22.25</b>   |
|            |            | 19175 | 1907.5          | 1  | 24        | 23.5         | 1   | 22.5           | 21.89          |
|            |            | 18625 | 1852.5          | 12 | 6         | 23.5         | 2   | 21.5           | 21.20          |
|            |            | 18900 | 1880.0          | 12 | 6         | 23.5         | 2   | 21.5           | 21.30          |
|            |            | 19175 | 1907.5          | 12 | 6         | 23.5         | 2   | 21.5           | 20.94          |
|            |            | 18625 | 1852.5          | 25 | 0         | 23.5         | 2   | 21.5           | 21.02          |
|            |            | 18900 | 1880.0          | 25 | 0         | 23.5         | 2   | 21.5           | 21.10          |
|            |            | 19175 | 1907.5          | 25 | 0         | 23.5         | 2   | 21.5           | 20.67          |
| 10 MHz     | QPSK       | 18650 | 1855            | 1  | 0         | 23.5         | 0   | 23.5           | 23.28          |
|            |            | 18900 | 1880            | 1  | 0         | 23.5         | 0   | 23.5           | 23.37          |
|            |            | 19150 | 1905            | 1  | 0         | 23.5         | 0   | 23.5           | 23.13          |
|            |            | 18650 | 1855            | 1  | 49        | 23.5         | 0   | 23.5           | 23.21          |
|            |            | 18900 | 1880            | 1  | 49        | 23.5         | 0   | 23.5           | <b>23.42</b>   |
|            |            | 19150 | 1905            | 1  | 49        | 23.5         | 0   | 23.5           | 22.80          |
|            |            | 18650 | 1855            | 25 | 12        | 23.5         | 1   | 22.5           | 22.35          |
|            |            | 18900 | 1880            | 25 | 12        | 23.5         | 1   | 22.5           | 22.41          |
|            |            | 19150 | 1905            | 25 | 12        | 23.5         | 1   | 22.5           | 22.03          |
|            |            | 18650 | 1855            | 50 | 0         | 23.5         | 1   | 22.5           | 22.17          |
|            |            | 18900 | 1880            | 50 | 0         | 23.5         | 1   | 22.5           | 22.19          |
|            |            | 19150 | 1905            | 50 | 0         | 23.5         | 1   | 22.5           | 21.98          |
|            | 16QAM      | 18650 | 1855            | 1  | 0         | 23.5         | 1   | 22.5           | 22.30          |
|            |            | 18900 | 1880            | 1  | 0         | 23.5         | 1   | 22.5           | 22.43          |
|            |            | 19150 | 1905            | 1  | 0         | 23.5         | 1   | 22.5           | 22.20          |
|            |            | 18650 | 1855            | 1  | 49        | 23.5         | 1   | 22.5           | 22.19          |
|            |            | 18900 | 1880            | 1  | 49        | 23.5         | 1   | 22.5           | <b>22.49</b>   |
|            |            | 19150 | 1905            | 1  | 49        | 23.5         | 1   | 22.5           | 21.80          |
|            |            | 18650 | 1855            | 25 | 12        | 23.5         | 2   | 21.5           | 21.34          |
|            |            | 18900 | 1880            | 25 | 12        | 23.5         | 2   | 21.5           | 21.44          |
|            |            | 19150 | 1905            | 25 | 12        | 23.5         | 2   | 21.5           | 21.10          |
|            |            | 18650 | 1855            | 50 | 0         | 23.5         | 2   | 21.5           | 21.22          |
|            |            | 18900 | 1880            | 50 | 0         | 23.5         | 2   | 21.5           | 21.27          |
|            |            | 19150 | 1905            | 50 | 0         | 23.5         | 2   | 21.5           | 21.00          |

# FCC SAR Test Report

A D T

| LTE Band 4 |            |       |                 |    |           |              |     |                |                |
|------------|------------|-------|-----------------|----|-----------|--------------|-----|----------------|----------------|
| BW         | Modulation | CH    | Frequency (MHz) | RB | RB Offset | Target Power | MPR | Expected Power | Measured Power |
| 5 MHz      | QPSK       | 19975 | 1712.5          | 1  | 0         | 23.7         | 0   | 23.7           | 23.50          |
|            |            | 20175 | 1732.5          | 1  | 0         | 23.7         | 0   | 23.7           | 23.07          |
|            |            | 20375 | 1752.5          | 1  | 0         | 23.7         | 0   | 23.7           | 23.56          |
|            |            | 19975 | 1712.5          | 1  | 24        | 23.7         | 0   | 23.7           | 23.39          |
|            |            | 20175 | 1732.5          | 1  | 24        | 23.7         | 0   | 23.7           | 23.12          |
|            |            | 20375 | 1752.5          | 1  | 24        | 23.7         | 0   | 23.7           | 23.60          |
|            |            | 19975 | 1712.5          | 12 | 6         | 23.7         | 1   | 22.7           | 22.41          |
|            |            | 20175 | 1732.5          | 12 | 6         | 23.7         | 1   | 22.7           | 22.14          |
|            |            | 20375 | 1752.5          | 12 | 6         | 23.7         | 1   | 22.7           | 22.62          |
|            |            | 19975 | 1712.5          | 25 | 0         | 23.7         | 1   | 22.7           | 22.47          |
|            |            | 20175 | 1732.5          | 25 | 0         | 23.7         | 1   | 22.7           | 21.99          |
|            |            | 20375 | 1752.5          | 25 | 0         | 23.7         | 1   | 22.7           | 22.44          |
|            | 16QAM      | 19975 | 1712.5          | 1  | 0         | 23.7         | 1   | 22.7           | 22.41          |
|            |            | 20175 | 1732.5          | 1  | 0         | 23.7         | 1   | 22.7           | 22.03          |
|            |            | 20375 | 1752.5          | 1  | 0         | 23.7         | 1   | 22.7           | 22.53          |
|            |            | 19975 | 1712.5          | 1  | 24        | 23.7         | 1   | 22.7           | 22.38          |
|            |            | 20175 | 1732.5          | 1  | 24        | 23.7         | 1   | 22.7           | 22.05          |
|            |            | 20375 | 1752.5          | 1  | 24        | 23.7         | 1   | 22.7           | 22.57          |
|            |            | 19975 | 1712.5          | 12 | 6         | 23.7         | 2   | 21.7           | 21.50          |
|            |            | 20175 | 1732.5          | 12 | 6         | 23.7         | 2   | 21.7           | 21.15          |
|            |            | 20375 | 1752.5          | 12 | 6         | 23.7         | 2   | 21.7           | 21.67          |
|            |            | 19975 | 1712.5          | 25 | 0         | 23.7         | 2   | 21.7           | 21.36          |
| 10 MHz     | QPSK       | 20000 | 1715            | 1  | 0         | 23.7         | 0   | 23.7           | 23.49          |
|            |            | 20175 | 1732.5          | 1  | 0         | 23.7         | 0   | 23.7           | 23.20          |
|            |            | 20350 | 1750            | 1  | 0         | 23.7         | 0   | 23.7           | 23.61          |
|            |            | 20000 | 1715            | 1  | 49        | 23.7         | 0   | 23.7           | 23.33          |
|            |            | 20175 | 1732.5          | 1  | 49        | 23.7         | 0   | 23.7           | 23.10          |
|            |            | 20350 | 1750            | 1  | 49        | 23.7         | 0   | 23.7           | 23.59          |
|            |            | 20000 | 1715            | 25 | 12        | 23.7         | 1   | 22.7           | 22.34          |
|            |            | 20175 | 1732.5          | 25 | 12        | 23.7         | 1   | 22.7           | 22.03          |
|            |            | 20350 | 1750            | 25 | 12        | 23.7         | 1   | 22.7           | 22.54          |
|            |            | 20000 | 1715            | 50 | 0         | 23.7         | 1   | 22.7           | 22.15          |
|            | 16QAM      | 20175 | 1732.5          | 50 | 0         | 23.7         | 1   | 22.7           | 21.87          |
|            |            | 20350 | 1750            | 50 | 0         | 23.7         | 1   | 22.7           | 22.27          |
|            |            | 20000 | 1715            | 1  | 0         | 23.7         | 1   | 22.7           | 22.44          |
|            |            | 20175 | 1732.5          | 1  | 0         | 23.7         | 1   | 22.7           | 22.20          |
|            |            | 20350 | 1750            | 1  | 0         | 23.7         | 1   | 22.7           | 22.56          |
|            |            | 20000 | 1715            | 1  | 49        | 23.7         | 1   | 22.7           | 22.31          |
|            |            | 20175 | 1732.5          | 1  | 49        | 23.7         | 1   | 22.7           | 22.09          |
|            |            | 20350 | 1750            | 1  | 49        | 23.7         | 1   | 22.7           | 22.48          |
|            |            | 20000 | 1715            | 25 | 12        | 23.7         | 2   | 21.7           | 21.30          |
|            |            | 20175 | 1732.5          | 25 | 12        | 23.7         | 2   | 21.7           | 20.99          |
|            |            | 20350 | 1750            | 25 | 12        | 23.7         | 2   | 21.7           | 21.53          |
|            |            | 20000 | 1715            | 50 | 0         | 23.7         | 2   | 21.7           | 21.13          |
|            |            | 20175 | 1732.5          | 50 | 0         | 23.7         | 2   | 21.7           | 20.86          |
|            |            | 20350 | 1750            | 50 | 0         | 23.7         | 2   | 21.7           | 21.32          |

# FCC SAR Test Report

A D T

| LTE Band 5 |            |       |                 |    |           |              |     |                |                |
|------------|------------|-------|-----------------|----|-----------|--------------|-----|----------------|----------------|
| BW         | Modulation | CH    | Frequency (MHz) | RB | RB Offset | Target Power | MPR | Expected Power | Measured Power |
| 5 MHz      | QPSK       | 20425 | 826.5           | 1  | 0         | 22.5         | 0   | 22.5           | <b>22.38</b>   |
|            |            | 20525 | 836.5           | 1  | 0         | 22.5         | 0   | 22.5           | 22.17          |
|            |            | 20625 | 846.5           | 1  | 0         | 22.5         | 0   | 22.5           | 22.29          |
|            |            | 20425 | 826.5           | 1  | 24        | 22.5         | 0   | 22.5           | 22.33          |
|            |            | 20525 | 836.5           | 1  | 24        | 22.5         | 0   | 22.5           | 22.32          |
|            |            | 20625 | 846.5           | 1  | 24        | 22.5         | 0   | 22.5           | 22.17          |
|            |            | 20425 | 826.5           | 12 | 6         | 22.5         | 1   | 21.5           | 21.34          |
|            |            | 20525 | 836.5           | 12 | 6         | 22.5         | 1   | 21.5           | 21.34          |
|            |            | 20625 | 846.5           | 12 | 6         | 22.5         | 1   | 21.5           | 21.48          |
|            |            | 20425 | 826.5           | 25 | 0         | 22.5         | 1   | 21.5           | 21.25          |
|            |            | 20525 | 836.5           | 25 | 0         | 22.5         | 1   | 21.5           | 21.26          |
|            |            | 20625 | 846.5           | 25 | 0         | 22.5         | 1   | 21.5           | 21.28          |
|            | 16QAM      | 20425 | 826.5           | 1  | 0         | 22.5         | 1   | 21.5           | 21.25          |
|            |            | 20525 | 836.5           | 1  | 0         | 22.5         | 1   | 21.5           | 21.20          |
|            |            | 20625 | 846.5           | 1  | 0         | 22.5         | 1   | 21.5           | 21.28          |
|            |            | 20425 | 826.5           | 1  | 24        | 22.5         | 1   | 21.5           | 21.27          |
|            |            | 20525 | 836.5           | 1  | 24        | 22.5         | 1   | 21.5           | <b>21.29</b>   |
|            |            | 20625 | 846.5           | 1  | 24        | 22.5         | 1   | 21.5           | 21.19          |
|            |            | 20425 | 826.5           | 12 | 6         | 22.5         | 2   | 20.5           | 20.45          |
|            |            | 20525 | 836.5           | 12 | 6         | 22.5         | 2   | 20.5           | 20.37          |
|            |            | 20625 | 846.5           | 12 | 6         | 22.5         | 2   | 20.5           | 20.54          |
|            |            | 20425 | 826.5           | 25 | 0         | 22.5         | 2   | 20.5           | 20.34          |
|            |            | 20525 | 836.5           | 25 | 0         | 22.5         | 2   | 20.5           | 20.23          |
|            |            | 20625 | 846.5           | 25 | 0         | 22.5         | 2   | 20.5           | 20.32          |
| 10 MHz     | QPSK       | 20450 | 829             | 1  | 0         | 22.5         | 0   | 22.5           | 22.32          |
|            |            | 20525 | 836.5           | 1  | 0         | 22.5         | 0   | 22.5           | 22.16          |
|            |            | 20600 | 844             | 1  | 0         | 22.5         | 0   | 22.5           | <b>22.43</b>   |
|            |            | 20450 | 829             | 1  | 49        | 22.5         | 0   | 22.5           | 22.19          |
|            |            | 20525 | 836.5           | 1  | 49        | 22.5         | 0   | 22.5           | 22.40          |
|            |            | 20600 | 844             | 1  | 49        | 22.5         | 0   | 22.5           | 22.22          |
|            |            | 20450 | 829             | 25 | 12        | 22.5         | 1   | 21.5           | 21.31          |
|            |            | 20525 | 836.5           | 25 | 12        | 22.5         | 1   | 21.5           | 21.25          |
|            |            | 20600 | 844             | 25 | 12        | 22.5         | 1   | 21.5           | 21.42          |
|            |            | 20450 | 829             | 50 | 0         | 22.5         | 1   | 21.5           | 21.18          |
|            |            | 20525 | 836.5           | 50 | 0         | 22.5         | 1   | 21.5           | 21.17          |
|            |            | 20600 | 844             | 50 | 0         | 22.5         | 1   | 21.5           | 21.22          |
|            | 16QAM      | 20450 | 829             | 1  | 0         | 22.5         | 1   | 21.5           | 21.30          |
|            |            | 20525 | 836.5           | 1  | 0         | 22.5         | 1   | 21.5           | 21.20          |
|            |            | 20600 | 844             | 1  | 0         | 22.5         | 1   | 21.5           | <b>21.38</b>   |
|            |            | 20450 | 829             | 1  | 49        | 22.5         | 1   | 21.5           | 21.25          |
|            |            | 20525 | 836.5           | 1  | 49        | 22.5         | 1   | 21.5           | 21.37          |
|            |            | 20600 | 844             | 1  | 49        | 22.5         | 1   | 21.5           | 21.22          |
|            |            | 20450 | 829             | 25 | 12        | 22.5         | 2   | 20.5           | 20.35          |
|            |            | 20525 | 836.5           | 25 | 12        | 22.5         | 2   | 20.5           | 20.24          |
|            |            | 20600 | 844             | 25 | 12        | 22.5         | 2   | 20.5           | 20.42          |
|            |            | 20450 | 829             | 50 | 0         | 22.5         | 2   | 20.5           | 20.26          |
|            |            | 20525 | 836.5           | 50 | 0         | 22.5         | 2   | 20.5           | 20.25          |
|            |            | 20600 | 844             | 50 | 0         | 22.5         | 2   | 20.5           | 20.28          |

# FCC SAR Test Report

A D T

| LTE Band 17 |            |       |                 |    |           |              |     |                |                |
|-------------|------------|-------|-----------------|----|-----------|--------------|-----|----------------|----------------|
| BW          | Modulation | CH    | Frequency (MHz) | RB | RB Offset | Target Power | MPR | Expected Power | Measured Power |
| 5 MHz       | QPSK       | 23755 | 706.5           | 1  | 0         | 23.3         | 0   | 23.3           | 22.69          |
|             |            | 23790 | 710             | 1  | 0         | 23.3         | 0   | 23.3           | 22.97          |
|             |            | 23825 | 713.5           | 1  | 0         | 23.3         | 0   | 23.3           | <b>23.23</b>   |
|             |            | 23755 | 706.5           | 1  | 24        | 23.3         | 0   | 23.3           | 23.05          |
|             |            | 23790 | 710             | 1  | 24        | 23.3         | 0   | 23.3           | 23.11          |
|             |            | 23825 | 713.5           | 1  | 24        | 23.3         | 0   | 23.3           | 22.73          |
|             |            | 23755 | 706.5           | 12 | 6         | 23.3         | 1   | 22.3           | 21.87          |
|             |            | 23790 | 710             | 12 | 6         | 23.3         | 1   | 22.3           | 22.14          |
|             |            | 23825 | 713.5           | 12 | 6         | 23.3         | 1   | 22.3           | 22.21          |
|             |            | 23755 | 706.5           | 25 | 0         | 23.3         | 1   | 22.3           | 21.73          |
|             |            | 23790 | 710             | 25 | 0         | 23.3         | 1   | 22.3           | 22.00          |
|             |            | 23825 | 713.5           | 25 | 0         | 23.3         | 1   | 22.3           | 22.08          |
|             | 16QAM      | 23755 | 706.5           | 1  | 0         | 23.3         | 1   | 22.3           | 21.62          |
|             |            | 23790 | 710             | 1  | 0         | 23.3         | 1   | 22.3           | 21.91          |
|             |            | 23825 | 713.5           | 1  | 0         | 23.3         | 1   | 22.3           | <b>22.21</b>   |
|             |            | 23755 | 706.5           | 1  | 24        | 23.3         | 1   | 22.3           | 22.03          |
|             |            | 23790 | 710             | 1  | 24        | 23.3         | 1   | 22.3           | 22.05          |
|             |            | 23825 | 713.5           | 1  | 24        | 23.3         | 1   | 22.3           | 21.83          |
|             |            | 23755 | 706.5           | 12 | 6         | 23.3         | 2   | 21.3           | 20.92          |
|             |            | 23790 | 710             | 12 | 6         | 23.3         | 2   | 21.3           | 21.21          |
|             |            | 23825 | 713.5           | 12 | 6         | 23.3         | 2   | 21.3           | 21.24          |
|             |            | 23755 | 706.5           | 25 | 0         | 23.3         | 2   | 21.3           | 20.68          |
|             |            | 23790 | 710             | 25 | 0         | 23.3         | 2   | 21.3           | 20.99          |
|             |            | 23825 | 713.5           | 25 | 0         | 23.3         | 2   | 21.3           | 21.06          |
| 10 MHz      | QPSK       | 23780 | 709             | 1  | 0         | 23.3         | 0   | 23.3           | 22.57          |
|             |            | 23790 | 710             | 1  | 0         | 23.3         | 0   | 23.3           | 22.65          |
|             |            | 23800 | 711             | 1  | 0         | 23.3         | 0   | 23.3           | 22.88          |
|             |            | 23780 | 709             | 1  | 49        | 23.3         | 0   | 23.3           | 23.15          |
|             |            | 23790 | 710             | 1  | 49        | 23.3         | 0   | 23.3           | <b>23.26</b>   |
|             |            | 23800 | 711             | 1  | 49        | 23.3         | 0   | 23.3           | 22.81          |
|             |            | 23780 | 709             | 25 | 12        | 23.3         | 1   | 22.3           | 21.94          |
|             |            | 23790 | 710             | 25 | 12        | 23.3         | 1   | 22.3           | 22.04          |
|             |            | 23800 | 711             | 25 | 12        | 23.3         | 1   | 22.3           | 22.04          |
|             |            | 23780 | 709             | 50 | 0         | 23.3         | 1   | 22.3           | 21.73          |
|             |            | 23790 | 710             | 50 | 0         | 23.3         | 1   | 22.3           | 21.81          |
|             |            | 23800 | 711             | 50 | 0         | 23.3         | 1   | 22.3           | 21.84          |
|             | 16QAM      | 23780 | 709             | 1  | 0         | 23.3         | 1   | 22.3           | 21.65          |
|             |            | 23790 | 710             | 1  | 0         | 23.3         | 1   | 22.3           | 21.74          |
|             |            | 23800 | 711             | 1  | 0         | 23.3         | 1   | 22.3           | 21.91          |
|             |            | 23780 | 709             | 1  | 49        | 23.3         | 1   | 22.3           | 22.19          |
|             |            | 23790 | 710             | 1  | 49        | 23.3         | 1   | 22.3           | <b>22.20</b>   |
|             |            | 23800 | 711             | 1  | 49        | 23.3         | 1   | 22.3           | 21.92          |
|             |            | 23780 | 709             | 25 | 12        | 23.3         | 2   | 21.3           | 20.94          |
|             |            | 23790 | 710             | 25 | 12        | 23.3         | 2   | 21.3           | 21.00          |
|             |            | 23800 | 711             | 25 | 12        | 23.3         | 2   | 21.3           | 21.06          |
|             |            | 23780 | 709             | 50 | 0         | 23.3         | 2   | 21.3           | 20.76          |
|             |            | 23790 | 710             | 50 | 0         | 23.3         | 2   | 21.3           | 20.75          |
|             |            | 23800 | 711             | 50 | 0         | 23.3         | 2   | 21.3           | 20.81          |

# FCC SAR Test Report

A D T

| Band            | 802.11b |       |       | 802.11g |       |       |
|-----------------|---------|-------|-------|---------|-------|-------|
| Channel         | 1       | 6     | 11    | 1       | 6     | 11    |
| Frequency (MHz) | 2412    | 2437  | 2462  | 2412    | 2437  | 2462  |
| Average Power   | 17.21   | 17.35 | 17.53 | 12.32   | 12.59 | 12.60 |

| Band            | 802.11n (HT20) |       |       | - |   |   |
|-----------------|----------------|-------|-------|---|---|---|
| Channel         | 1              | 6     | 11    | - | - | - |
| Frequency (MHz) | 2412           | 2437  | 2462  | - | - | - |
| Average Power   | 11.19          | 11.41 | 11.51 | - | - | - |

| Band            | 802.11a |       |       |       |       |       |       |       |
|-----------------|---------|-------|-------|-------|-------|-------|-------|-------|
| Channel         | 36      | 40    | 44    | 48    | 52    | 56    | 60    | 64    |
| Frequency (MHz) | 5180    | 5200  | 5220  | 5240  | 5260  | 5280  | 5300  | 5320  |
| Average Power   | 13.02   | 13.08 | 13.07 | 12.98 | 12.98 | 13.02 | 12.84 | 12.93 |

| Band            | 802.11a |       |       |       |       |       |       |       |
|-----------------|---------|-------|-------|-------|-------|-------|-------|-------|
| Channel         | 100     | 104   | 108   | 112   | 116   | 132   | 136   | 140   |
| Frequency (MHz) | 5500    | 5520  | 5540  | 5560  | 5580  | 5660  | 5680  | 5700  |
| Average Power   | 13.45   | 13.40 | 13.41 | 13.44 | 13.34 | 13.33 | 13.26 | 13.33 |

| Band            | 802.11a |       |       |       |   |   |   |   |
|-----------------|---------|-------|-------|-------|---|---|---|---|
| Channel         | 149     | 153   | 157   | 161   | - | - | - | - |
| Frequency (MHz) | 5745    | 5765  | 5785  | 5805  | - | - | - | - |
| Average Power   | 13.31   | 13.28 | 13.36 | 13.38 | - | - | - | - |

| Band            | 802.11n (HT20) |       |       |       |       |       |       |       |
|-----------------|----------------|-------|-------|-------|-------|-------|-------|-------|
| Channel         | 36             | 40    | 44    | 48    | 52    | 56    | 60    | 64    |
| Frequency (MHz) | 5180           | 5200  | 5220  | 5240  | 5260  | 5280  | 5300  | 5320  |
| Average Power   | 13.57          | 13.86 | 13.75 | 13.87 | 13.76 | 13.52 | 13.53 | 13.53 |

| Band            | 802.11n (HT20) |       |       |       |       |       |       |       |
|-----------------|----------------|-------|-------|-------|-------|-------|-------|-------|
| Channel         | 100            | 104   | 108   | 112   | 116   | 132   | 136   | 140   |
| Frequency (MHz) | 5500           | 5520  | 5540  | 5560  | 5580  | 5660  | 5680  | 5700  |
| Average Power   | 12.81          | 12.65 | 12.64 | 12.57 | 12.67 | 12.51 | 12.39 | 12.56 |

| Band            | 802.11n (HT20) |       |       |       |   |   |   |   |
|-----------------|----------------|-------|-------|-------|---|---|---|---|
| Channel         | 149            | 153   | 157   | 161   | - | - | - | - |
| Frequency (MHz) | 5745           | 5765  | 5785  | 5805  | - | - | - | - |
| Average Power   | 12.46          | 12.61 | 12.65 | 12.73 | - | - | - | - |

| Band            | 802.11n (HT40) |       |       |       |       |       |       |       |
|-----------------|----------------|-------|-------|-------|-------|-------|-------|-------|
| Channel         | 38             | 46    | 54    | 62    | 102   | 134   | 151   | 159   |
| Frequency (MHz) | 5190           | 5230  | 5270  | 5310  | 5510  | 5670  | 5755  | 5795  |
| Average Power   | 12.95          | 12.93 | 12.94 | 12.52 | 13.10 | 12.82 | 12.92 | 12.90 |

## 4.6 SAR Testing Results

### 4.6.1 SAR Results for Head

| Plot No. | Band          | Mode     | Test Position | Channel | SAR-1g (W/kg) |
|----------|---------------|----------|---------------|---------|---------------|
| 1        | GMS850        | GPRS10   | Right Cheek   | 189     | <b>0.464</b>  |
| 2        | GMS850        | GPRS10   | Right Tilted  | 189     | 0.249         |
| 3        | GMS850        | GPRS10   | Left Cheek    | 189     | 0.411         |
| 4        | GMS850        | GPRS10   | Left Tilted   | 189     | 0.261         |
| 5        | GSM1900       | GPRS10   | Right Cheek   | 810     | 0.6           |
| 6        | GSM1900       | GPRS10   | Right Tilted  | 810     | 0.275         |
| 7        | GSM1900       | GPRS10   | Left Cheek    | 810     | <b>0.667</b>  |
| 8        | GSM1900       | GPRS10   | Left Tilted   | 810     | 0.389         |
| 13       | WCDMA Band II | RMC12.2K | Right Cheek   | 9400    | 0.764         |
| 14       | WCDMA Band II | RMC12.2K | Right Tilted  | 9400    | 0.352         |
| 15       | WCDMA Band II | RMC12.2K | Left Cheek    | 9400    | 0.828         |
| 16       | WCDMA Band II | RMC12.2K | Left Tilted   | 9400    | 0.431         |
| 17       | WCDMA Band II | RMC12.2K | Left Cheek    | 9262    | <b>0.835</b>  |
| 18       | WCDMA Band II | RMC12.2K | Left Cheek    | 9538    | 0.83          |
| 9        | WCDMA Band V  | RMC12.2K | Right Cheek   | 4182    | <b>0.321</b>  |
| 10       | WCDMA Band V  | RMC12.2K | Right Tilted  | 4182    | 0.19          |
| 11       | WCDMA Band V  | RMC12.2K | Left Cheek    | 4182    | 0.279         |
| 12       | WCDMA Band V  | RMC12.2K | Left Tilted   | 4182    | 0.199         |
| 101      | 802.11b       | -        | Right Cheek   | 11      | 0.273         |
| 102      | 802.11b       | -        | Right Tilted  | 11      | 0.064         |
| 103      | 802.11b       | -        | Left Cheek    | 11      | <b>0.328</b>  |
| 104      | 802.11b       | -        | Left Tilted   | 11      | 0.041         |
| 701      | 802.11a       | -        | Right Cheek   | 40      | 0.00984       |
| 702      | 802.11a       | -        | Right Tilted  | 40      | 0.00000501    |
| 703      | 802.11a       | -        | Left Cheek    | 40      | 0.032         |
| 704      | 802.11a       | -        | Left Tilted   | 40      | N/A           |
| 650      | 802.11n       | HT20     | Right Cheek   | 48      | 0.013         |
| 651      | 802.11n       | HT20     | Right Tilted  | 48      | 0.00403       |
| 652      | 802.11n       | HT20     | Left Cheek    | 48      | <b>0.036</b>  |
| 653      | 802.11n       | HT20     | Left Tilted   | 48      | 0.00366       |
| 705      | 802.11a       | -        | Right Cheek   | 56      | 0.014         |
| 706      | 802.11a       | -        | Right Tilted  | 56      | 0.0000101     |
| 707      | 802.11a       | -        | Left Cheek    | 56      | 0.019         |
| 708      | 802.11a       | -        | Left Tilted   | 56      | N/A           |
| 654      | 802.11n       | HT20     | Right Cheek   | 52      | 0.031         |
| 655      | 802.11n       | HT20     | Right Tilted  | 52      | 0.00482       |
| 656      | 802.11n       | HT20     | Left Cheek    | 52      | 0.026         |
| 657      | 802.11n       | HT20     | Left Tilted   | 52      | 0.00271       |
| 658      | 802.11a       | -        | Right Cheek   | 100     | 0.016         |
| 659      | 802.11a       | -        | Right Tilted  | 100     | 0.00229       |
| 660      | 802.11a       | -        | Left Cheek    | 100     | 0.03          |
| 661      | 802.11a       | -        | Left Tilted   | 100     | 0.00774       |
| 662      | 802.11a       | -        | Right Cheek   | 161     | 0.0067        |
| 663      | 802.11a       | -        | Right Tilted  | 161     | 0.00484       |
| 664      | 802.11a       | -        | Left Cheek    | 161     | 0.00225       |
| 665      | 802.11a       | -        | Left Tilted   | 161     | 0.013         |



# FCC SAR Test Report

A D T

| Plot No. | Band       | Mode          | Test Position | Channel | RB | Offset | SAR-1g (W/kg) |
|----------|------------|---------------|---------------|---------|----|--------|---------------|
| 595      | LTE Band 2 | QPSK, BW 10M  | Right Cheek   | 18900   | 25 | 12     | 0.649         |
| 599      | LTE Band 2 | QPSK, BW 10M  | Right Cheek   | 18900   | 1  | 0      | 0.84          |
| 603      | LTE Band 2 | QPSK, BW 10M  | Right Cheek   | 18900   | 1  | 49     | 0.817         |
| 596      | LTE Band 2 | QPSK, BW 10M  | Right Tilted  | 18900   | 25 | 12     | 0.29          |
| 600      | LTE Band 2 | QPSK, BW 10M  | Right Tilted  | 18900   | 1  | 0      | 0.371         |
| 604      | LTE Band 2 | QPSK, BW 10M  | Right Tilted  | 18900   | 1  | 49     | 0.351         |
| 597      | LTE Band 2 | QPSK, BW 10M  | Left Cheek    | 18900   | 25 | 12     | 0.694         |
| 601      | LTE Band 2 | QPSK, BW 10M  | Left Cheek    | 18900   | 1  | 0      | <b>0.902</b>  |
| 605      | LTE Band 2 | QPSK, BW 10M  | Left Cheek    | 18900   | 1  | 49     | 0.893         |
| 598      | LTE Band 2 | QPSK, BW 10M  | Left Tilted   | 18900   | 25 | 12     | 0.337         |
| 602      | LTE Band 2 | QPSK, BW 10M  | Left Tilted   | 18900   | 1  | 0      | 0.43          |
| 606      | LTE Band 2 | QPSK, BW 10M  | Left Tilted   | 18900   | 1  | 49     | 0.447         |
| 801      | LTE Band 2 | 16QAM, BW 10M | Right Cheek   | 18900   | 25 | 12     | 0.451         |
| 802      | LTE Band 2 | 16QAM, BW 10M | Right Cheek   | 18900   | 1  | 0      | 0.594         |
| 803      | LTE Band 2 | 16QAM, BW 10M | Right Cheek   | 18900   | 1  | 49     | 0.57          |
| 804      | LTE Band 2 | 16QAM, BW 10M | Right Tilted  | 18900   | 25 | 12     | 0.224         |
| 805      | LTE Band 2 | 16QAM, BW 10M | Right Tilted  | 18900   | 1  | 0      | 0.287         |
| 806      | LTE Band 2 | 16QAM, BW 10M | Right Tilted  | 18900   | 1  | 49     | 0.278         |
| 607      | LTE Band 2 | 16QAM, BW 10M | Left Cheek    | 18900   | 25 | 12     | 0.567         |
| 608      | LTE Band 2 | 16QAM, BW 10M | Left Cheek    | 18900   | 1  | 0      | 0.723         |
| 609      | LTE Band 2 | 16QAM, BW 10M | Left Cheek    | 18900   | 1  | 49     | 0.719         |
| 807      | LTE Band 2 | 16QAM, BW 10M | Left Tilted   | 18900   | 25 | 12     | 0.294         |
| 808      | LTE Band 2 | 16QAM, BW 10M | Left Tilted   | 18900   | 1  | 0      | 0.377         |
| 809      | LTE Band 2 | 16QAM, BW 10M | Left Tilted   | 18900   | 1  | 49     | 0.369         |
| 580      | LTE Band 4 | QPSK, BW 10M  | Right Cheek   | 20350   | 25 | 12     | 0.635         |
| 584      | LTE Band 4 | QPSK, BW 10M  | Right Cheek   | 20350   | 1  | 0      | 0.819         |
| 588      | LTE Band 4 | QPSK, BW 10M  | Right Cheek   | 20350   | 1  | 49     | 0.785         |
| 581      | LTE Band 4 | QPSK, BW 10M  | Right Tilted  | 20350   | 25 | 12     | 0.219         |
| 585      | LTE Band 4 | QPSK, BW 10M  | Right Tilted  | 20350   | 1  | 0      | 0.281         |
| 589      | LTE Band 4 | QPSK, BW 10M  | Right Tilted  | 20350   | 1  | 49     | 0.274         |
| 582      | LTE Band 4 | QPSK, BW 10M  | Left Cheek    | 20350   | 25 | 12     | 0.666         |
| 586      | LTE Band 4 | QPSK, BW 10M  | Left Cheek    | 20350   | 1  | 0      | <b>0.866</b>  |
| 590      | LTE Band 4 | QPSK, BW 10M  | Left Cheek    | 20350   | 1  | 49     | 0.824         |
| 583      | LTE Band 4 | QPSK, BW 10M  | Left Tilted   | 20350   | 25 | 12     | 0.306         |
| 587      | LTE Band 4 | QPSK, BW 10M  | Left Tilted   | 20350   | 1  | 0      | 0.405         |
| 591      | LTE Band 4 | QPSK, BW 10M  | Left Tilted   | 20350   | 1  | 49     | 0.383         |
| 810      | LTE Band 4 | 16QAM, BW 10M | Right Cheek   | 20350   | 25 | 12     | 0.468         |
| 811      | LTE Band 4 | 16QAM, BW 10M | Right Cheek   | 20350   | 1  | 0      | 0.624         |
| 812      | LTE Band 4 | 16QAM, BW 10M | Right Cheek   | 20350   | 1  | 49     | 0.593         |
| 813      | LTE Band 4 | 16QAM, BW 10M | Right Tilted  | 20350   | 25 | 12     | 0.185         |
| 814      | LTE Band 4 | 16QAM, BW 10M | Right Tilted  | 20350   | 1  | 0      | 0.244         |
| 815      | LTE Band 4 | 16QAM, BW 10M | Right Tilted  | 20350   | 1  | 49     | 0.232         |
| 592      | LTE Band 4 | 16QAM, BW 10M | Left Cheek    | 20350   | 25 | 12     | 0.546         |
| 593      | LTE Band 4 | 16QAM, BW 10M | Left Cheek    | 20350   | 1  | 0      | 0.702         |
| 594      | LTE Band 4 | 16QAM, BW 10M | Left Cheek    | 20350   | 1  | 49     | 0.658         |
| 816      | LTE Band 4 | 16QAM, BW 10M | Left Tilted   | 20350   | 25 | 12     | 0.239         |
| 817      | LTE Band 4 | 16QAM, BW 10M | Left Tilted   | 20350   | 1  | 0      | 0.31          |
| 818      | LTE Band 4 | 16QAM, BW 10M | Left Tilted   | 20350   | 1  | 49     | 0.298         |

# FCC SAR Test Report

A D T

| Plot No. | Band        | Mode          | Test Position | Channel | RB | Offset | SAR-1g (W/kg) |
|----------|-------------|---------------|---------------|---------|----|--------|---------------|
| 565      | LTE Band 5  | QPSK, BW 10M  | Right Cheek   | 20600   | 25 | 12     | 0.256         |
| 569      | LTE Band 5  | QPSK, BW 10M  | Right Cheek   | 20600   | 1  | 0      | 0.286         |
| 573      | LTE Band 5  | QPSK, BW 10M  | Right Cheek   | 20600   | 1  | 49     | <b>0.329</b>  |
| 566      | LTE Band 5  | QPSK, BW 10M  | Right Tilted  | 20600   | 25 | 12     | 0.163         |
| 570      | LTE Band 5  | QPSK, BW 10M  | Right Tilted  | 20600   | 1  | 0      | 0.182         |
| 574      | LTE Band 5  | QPSK, BW 10M  | Right Tilted  | 20600   | 1  | 49     | 0.222         |
| 567      | LTE Band 5  | QPSK, BW 10M  | Left Cheek    | 20600   | 25 | 12     | 0.225         |
| 571      | LTE Band 5  | QPSK, BW 10M  | Left Cheek    | 20600   | 1  | 0      | 0.255         |
| 575      | LTE Band 5  | QPSK, BW 10M  | Left Cheek    | 20600   | 1  | 49     | 0.289         |
| 568      | LTE Band 5  | QPSK, BW 10M  | Left Tilted   | 20600   | 25 | 12     | 0.157         |
| 572      | LTE Band 5  | QPSK, BW 10M  | Left Tilted   | 20600   | 1  | 0      | 0.184         |
| 576      | LTE Band 5  | QPSK, BW 10M  | Left Tilted   | 20600   | 1  | 49     | 0.204         |
| 577      | LTE Band 5  | 16QAM, BW 10M | Right Cheek   | 20600   | 25 | 12     | 0.21          |
| 578      | LTE Band 5  | 16QAM, BW 10M | Right Cheek   | 20600   | 1  | 0      | 0.231         |
| 579      | LTE Band 5  | 16QAM, BW 10M | Right Cheek   | 20600   | 1  | 49     | 0.228         |
| 819      | LTE Band 5  | 16QAM, BW 10M | Right Tilted  | 20600   | 25 | 12     | 0.13          |
| 820      | LTE Band 5  | 16QAM, BW 10M | Right Tilted  | 20600   | 1  | 0      | 0.143         |
| 821      | LTE Band 5  | 16QAM, BW 10M | Right Tilted  | 20600   | 1  | 49     | 0.142         |
| 822      | LTE Band 5  | 16QAM, BW 10M | Left Cheek    | 20600   | 25 | 12     | 0.191         |
| 823      | LTE Band 5  | 16QAM, BW 10M | Left Cheek    | 20600   | 1  | 0      | 0.213         |
| 824      | LTE Band 5  | 16QAM, BW 10M | Left Cheek    | 20600   | 1  | 49     | 0.209         |
| 825      | LTE Band 5  | 16QAM, BW 10M | Left Tilted   | 20600   | 25 | 12     | 0.139         |
| 826      | LTE Band 5  | 16QAM, BW 10M | Left Tilted   | 20600   | 1  | 0      | 0.154         |
| 827      | LTE Band 5  | 16QAM, BW 10M | Left Tilted   | 20600   | 1  | 49     | 0.151         |
| 550      | LTE Band 17 | QPSK, BW 10M  | Right Cheek   | 23790   | 25 | 12     | 0.284         |
| 554      | LTE Band 17 | QPSK, BW 10M  | Right Cheek   | 23790   | 1  | 0      | 0.327         |
| 558      | LTE Band 17 | QPSK, BW 10M  | Right Cheek   | 23790   | 1  | 49     | 0.553         |
| 551      | LTE Band 17 | QPSK, BW 10M  | Right Tilted  | 23790   | 25 | 12     | 0.282         |
| 555      | LTE Band 17 | QPSK, BW 10M  | Right Tilted  | 23790   | 1  | 0      | 0.326         |
| 559      | LTE Band 17 | QPSK, BW 10M  | Right Tilted  | 23790   | 1  | 49     | 0.526         |
| 552      | LTE Band 17 | QPSK, BW 10M  | Left Cheek    | 23790   | 25 | 12     | 0.342         |
| 556      | LTE Band 17 | QPSK, BW 10M  | Left Cheek    | 23790   | 1  | 0      | 0.407         |
| 560      | LTE Band 17 | QPSK, BW 10M  | Left Cheek    | 23790   | 1  | 49     | <b>0.637</b>  |
| 553      | LTE Band 17 | QPSK, BW 10M  | Left Tilted   | 23790   | 25 | 12     | 0.326         |
| 557      | LTE Band 17 | QPSK, BW 10M  | Left Tilted   | 23790   | 1  | 0      | 0.402         |
| 561      | LTE Band 17 | QPSK, BW 10M  | Left Tilted   | 23790   | 1  | 49     | 0.593         |
| 828      | LTE Band 17 | 16QAM, BW 10M | Right Cheek   | 23790   | 25 | 12     | 0.251         |
| 829      | LTE Band 17 | 16QAM, BW 10M | Right Cheek   | 23790   | 1  | 0      | 0.292         |
| 830      | LTE Band 17 | 16QAM, BW 10M | Right Cheek   | 23790   | 1  | 49     | 0.464         |
| 831      | LTE Band 17 | 16QAM, BW 10M | Right Tilted  | 23790   | 25 | 12     | 0.219         |
| 832      | LTE Band 17 | 16QAM, BW 10M | Right Tilted  | 23790   | 1  | 0      | 0.257         |
| 833      | LTE Band 17 | 16QAM, BW 10M | Right Tilted  | 23790   | 1  | 49     | 0.421         |
| 562      | LTE Band 17 | 16QAM, BW 10M | Left Cheek    | 23790   | 25 | 12     | 0.274         |
| 563      | LTE Band 17 | 16QAM, BW 10M | Left Cheek    | 23790   | 1  | 0      | 0.335         |
| 564      | LTE Band 17 | 16QAM, BW 10M | Left Cheek    | 23790   | 1  | 49     | 0.516         |
| 834      | LTE Band 17 | 16QAM, BW 10M | Left Tilted   | 23790   | 25 | 12     | 0.277         |
| 835      | LTE Band 17 | 16QAM, BW 10M | Left Tilted   | 23790   | 1  | 0      | 0.312         |
| 836      | LTE Band 17 | 16QAM, BW 10M | Left Tilted   | 23790   | 1  | 49     | 0.503         |

## FCC SAR Test Report

### Note:

1. SAR is performed on the highest power channel. When the SAR value of highest power channel is less than 0.8 W/kg, SAR testing for optional channel is not required.
2. According to KDB 941225, the SAR testing for 100% RB is not required since the maximum SAR of 50% RB is less than 1.45 W/kg.
3. According to KDB 941225, the SAR testing was performed on largest channel bandwidth, and SAR for other channel bandwidths is not required since the maximum power of smaller channel bandwidth is within 1/2 dB higher or lower of measured for the largest channel bandwidth and maximum SAR of largest channel bandwidth is less than 1.45 W/kg.
4. Since GPRS/EDGE and WLAN of this device supports VOIP capability through 3<sup>rd</sup> party apps software, we have evaluated data mode for head SAR.
5. SAR testing for 802.11g/n is not required because its maximum power is less than 1/4 dB higher than 802.11b.
6. SAR testing for WLAN 5G is performed on the maximum power mode.

### 4.6.2 SAR Results for Body

#### <Body Worn Mode>

| Plot No. | Band          | Mode     | Test Position | Separation Distance (cm) | Channel | SAR-1g (W/kg) |
|----------|---------------|----------|---------------|--------------------------|---------|---------------|
| 56       | GMS850        | GPRS10   | Front Face    | 1                        | 189     | 0.563         |
| 57       | GMS850        | GPRS10   | Rear Face     | 1                        | 189     | 0.848         |
| 82       | GMS850        | GPRS10   | Rear Face     | 1                        | 128     | 0.677         |
| 83       | GMS850        | GPRS10   | Rear Face     | 1                        | 251     | <b>0.981</b>  |
| 63       | GSM1900       | GPRS10   | Front Face    | 1                        | 810     | <b>1.02</b>   |
| 64       | GSM1900       | GPRS10   | Rear Face     | 1                        | 810     | 0.953         |
| 89       | GSM1900       | GPRS10   | Front Face    | 1                        | 512     | 0.667         |
| 90       | GSM1900       | GPRS10   | Front Face    | 1                        | 661     | 0.82          |
| 91       | GSM1900       | GPRS10   | Rear Face     | 1                        | 512     | 0.701         |
| 92       | GSM1900       | GPRS10   | Rear Face     | 1                        | 661     | 0.829         |
| 77       | WCDMA Band II | RMC12.2K | Front Face    | 1                        | 9400    | 0.99          |
| 78       | WCDMA Band II | RMC12.2K | Rear Face     | 1                        | 9400    | <b>1.04</b>   |
| 111      | WCDMA Band II | RMC12.2K | Front Face    | 1                        | 9262    | 0.87          |
| 112      | WCDMA Band II | RMC12.2K | Front Face    | 1                        | 9538    | 0.948         |
| 113      | WCDMA Band II | RMC12.2K | Rear Face     | 1                        | 9262    | 0.946         |
| 114      | WCDMA Band II | RMC12.2K | Rear Face     | 1                        | 9538    | 0.973         |
| 70       | WCDMA Band V  | RMC12.2K | Front Face    | 1                        | 4182    | 0.367         |
| 71       | WCDMA Band V  | RMC12.2K | Rear Face     | 1                        | 4182    | <b>0.558</b>  |
| 109      | 802.11b       | -        | Front Face    | 1                        | 11      | 0.107         |
| 110      | 802.11b       | -        | Rear Face     | 1                        | 11      | <b>0.193</b>  |
| 710      | 802.11a       | -        | Front Face    | 1                        | 40      | 0.00626       |
| 711      | 802.11a       | -        | Rear Face     | 1                        | 40      | 0.00649       |
| 669      | 802.11n       | HT20     | Front Face    | 1                        | 48      | 0.013         |
| 670      | 802.11n       | HT20     | Rear Face     | 1                        | 48      | 0.083         |
| 712      | 802.11a       | -        | Front Face    | 1                        | 56      | 0.00718       |
| 713      | 802.11a       | -        | Rear Face     | 1                        | 56      | 0.081         |
| 674      | 802.11n       | HT20     | Front Face    | 1                        | 52      | 0.024         |
| 675      | 802.11n       | HT20     | Rear Face     | 1                        | 52      | 0.09          |
| 679      | 802.11a       | -        | Front Face    | 1                        | 100     | 0.00927       |
| 680      | 802.11a       | -        | Rear Face     | 1                        | 100     | 0.088         |
| 684      | 802.11a       | -        | Front Face    | 1                        | 161     | 0.00792       |
| 685      | 802.11a       | -        | Rear Face     | 1                        | 161     | <b>0.191</b>  |

# FCC SAR Test Report

A D T

| Plot No. | Band        | Mode          | Test Position | Separation Distance (cm) | Channel | RB | Offset | SAR-1g (W/kg) |
|----------|-------------|---------------|---------------|--------------------------|---------|----|--------|---------------|
| 312      | LTE Band 2  | QPSK, BW 10M  | Front Face    | 1                        | 18900   | 25 | 12     | 0.756         |
| 314      | LTE Band 2  | QPSK, BW 10M  | Front Face    | 1                        | 18900   | 1  | 0      | 0.96          |
| 316      | LTE Band 2  | QPSK, BW 10M  | Front Face    | 1                        | 18900   | 1  | 49     | 0.978         |
| 313      | LTE Band 2  | QPSK, BW 10M  | Rear Face     | 1                        | 18900   | 25 | 12     | 0.787         |
| 315      | LTE Band 2  | QPSK, BW 10M  | Rear Face     | 1                        | 18900   | 1  | 0      | 0.998         |
| 317      | LTE Band 2  | QPSK, BW 10M  | Rear Face     | 1                        | 18900   | 1  | 49     | <b>1</b>      |
| 841      | LTE Band 2  | 16QAM, BW 10M | Front Face    | 1                        | 18900   | 25 | 12     | 0.588         |
| 842      | LTE Band 2  | 16QAM, BW 10M | Front Face    | 1                        | 18900   | 1  | 0      | 0.746         |
| 843      | LTE Band 2  | 16QAM, BW 10M | Front Face    | 1                        | 18900   | 1  | 49     | 0.754         |
| 318      | LTE Band 2  | 16QAM, BW 10M | Rear Face     | 1                        | 18900   | 25 | 12     | 0.654         |
| 319      | LTE Band 2  | 16QAM, BW 10M | Rear Face     | 1                        | 18900   | 1  | 0      | 0.822         |
| 320      | LTE Band 2  | 16QAM, BW 10M | Rear Face     | 1                        | 18900   | 1  | 49     | 0.833         |
| 282      | LTE Band 4  | QPSK, BW 10M  | Front Face    | 1                        | 20350   | 25 | 12     | 0.758         |
| 284      | LTE Band 4  | QPSK, BW 10M  | Front Face    | 1                        | 20350   | 1  | 0      | 0.978         |
| 286      | LTE Band 4  | QPSK, BW 10M  | Front Face    | 1                        | 20350   | 1  | 49     | 0.958         |
| 283      | LTE Band 4  | QPSK, BW 10M  | Rear Face     | 1                        | 20350   | 25 | 12     | 0.856         |
| 324      | LTE Band 4  | QPSK, BW 10M  | Rear Face     | 1                        | 20000   | 25 | 12     | 0.69          |
| 325      | LTE Band 4  | QPSK, BW 10M  | Rear Face     | 1                        | 20175   | 25 | 12     | 0.645         |
| 285      | LTE Band 4  | QPSK, BW 10M  | Rear Face     | 1                        | 20350   | 1  | 0      | <b>1.12</b>   |
| 287      | LTE Band 4  | QPSK, BW 10M  | Rear Face     | 1                        | 20350   | 1  | 49     | 1.08          |
| 844      | LTE Band 4  | 16QAM, BW 10M | Front Face    | 1                        | 20350   | 25 | 12     | 0.553         |
| 845      | LTE Band 4  | 16QAM, BW 10M | Front Face    | 1                        | 20350   | 1  | 0      | 0.718         |
| 846      | LTE Band 4  | 16QAM, BW 10M | Front Face    | 1                        | 20350   | 1  | 49     | 0.696         |
| 288      | LTE Band 4  | 16QAM, BW 10M | Rear Face     | 1                        | 20350   | 25 | 12     | 0.694         |
| 289      | LTE Band 4  | 16QAM, BW 10M | Rear Face     | 1                        | 20350   | 1  | 0      | 0.892         |
| 290      | LTE Band 4  | 16QAM, BW 10M | Rear Face     | 1                        | 20350   | 1  | 49     | 0.844         |
| 252      | LTE Band 5  | QPSK, BW 10M  | Front Face    | 1                        | 20600   | 25 | 12     | 0.214         |
| 254      | LTE Band 5  | QPSK, BW 10M  | Front Face    | 1                        | 20600   | 1  | 0      | 0.249         |
| 256      | LTE Band 5  | QPSK, BW 10M  | Front Face    | 1                        | 20600   | 1  | 49     | 0.269         |
| 253      | LTE Band 5  | QPSK, BW 10M  | Rear Face     | 1                        | 20600   | 25 | 12     | 0.353         |
| 255      | LTE Band 5  | QPSK, BW 10M  | Rear Face     | 1                        | 20600   | 1  | 0      | 0.415         |
| 257      | LTE Band 5  | QPSK, BW 10M  | Rear Face     | 1                        | 20600   | 1  | 49     | <b>0.427</b>  |
| 847      | LTE Band 5  | 16QAM, BW 10M | Front Face    | 1                        | 20600   | 25 | 12     | 0.145         |
| 848      | LTE Band 5  | 16QAM, BW 10M | Front Face    | 1                        | 20600   | 1  | 0      | 0.168         |
| 849      | LTE Band 5  | 16QAM, BW 10M | Front Face    | 1                        | 20600   | 1  | 49     | 0.177         |
| 258      | LTE Band 5  | 16QAM, BW 10M | Rear Face     | 1                        | 20600   | 25 | 12     | 0.281         |
| 259      | LTE Band 5  | 16QAM, BW 10M | Rear Face     | 1                        | 20600   | 1  | 0      | 0.322         |
| 260      | LTE Band 5  | 16QAM, BW 10M | Rear Face     | 1                        | 20600   | 1  | 49     | 0.34          |
| 324      | LTE Band 17 | QPSK, BW 10M  | Front Face    | 1                        | 23790   | 25 | 12     | 0.075         |
| 224      | LTE Band 17 | QPSK, BW 10M  | Front Face    | 1                        | 23790   | 1  | 0      | 0.124         |
| 325      | LTE Band 17 | QPSK, BW 10M  | Front Face    | 1                        | 23790   | 1  | 49     | 0.146         |
| 223      | LTE Band 17 | QPSK, BW 10M  | Rear Face     | 1                        | 23790   | 25 | 12     | 0.075         |
| 225      | LTE Band 17 | QPSK, BW 10M  | Rear Face     | 1                        | 23790   | 1  | 0      | 0.123         |
| 227      | LTE Band 17 | QPSK, BW 10M  | Rear Face     | 1                        | 23790   | 1  | 49     | <b>0.198</b>  |
| 228      | LTE Band 17 | 16QAM, BW 10M | Front Face    | 1                        | 23790   | 25 | 12     | 0.064         |
| 229      | LTE Band 17 | 16QAM, BW 10M | Front Face    | 1                        | 23790   | 1  | 0      | 0.077         |
| 230      | LTE Band 17 | 16QAM, BW 10M | Front Face    | 1                        | 23790   | 1  | 49     | 0.138         |
| 850      | LTE Band 17 | 16QAM, BW 10M | Rear Face     | 1                        | 23790   | 25 | 12     | 0.031         |
| 851      | LTE Band 17 | 16QAM, BW 10M | Rear Face     | 1                        | 23790   | 1  | 0      | 0.044         |
| 852      | LTE Band 17 | 16QAM, BW 10M | Rear Face     | 1                        | 23790   | 1  | 49     | 0.068         |

## FCC SAR Test Report

---

**Note:**

1. SAR is performed on the highest power channel. When the SAR value of highest power channel is less than 0.8 W/kg, SAR testing for optional channel is not required.
2. According to KDB 941225, the SAR testing for 100% RB is not required since the maximum SAR of 50% RB is less than 1.45 W/kg.
3. According to KDB 941225, the SAR testing was performed on largest channel bandwidth, and SAR for other channel bandwidths is not required since the maximum power of smaller channel bandwidth is within 1/2 dB higher or lower of measured for the largest channel bandwidth and maximum SAR of largest channel bandwidth is less than 1.45 W/kg.
4. Since GPRS/EDGE, WCDMA and WLAN of this device supports VOIP capability through 3<sup>rd</sup> party apps software, we have evaluated data mode for body worn mode.
5. SAR testing for 802.11g/n is not required because its maximum power is less than 1/4 dB higher than 802.11b.
6. SAR testing for 802.11n is not required when its maximum power is less than 1/4 dB higher than 802.11a.

# FCC SAR Test Report

A D T

## <Hotspot Mode>

| Plot No. | Band          | Mode     | Test Position | Separation Distance (cm) | Channel | SAR-1g (W/kg) |
|----------|---------------|----------|---------------|--------------------------|---------|---------------|
| 51       | GMS850        | GPRS10   | Front Face    | 1                        | 189     | 0.661         |
| 52       | GMS850        | GPRS10   | Rear Face     | 1                        | 189     | 0.963         |
| 53       | GMS850        | GPRS10   | Left Side     | 1                        | 189     | 0.54          |
| 54       | GMS850        | GPRS10   | Right Side    | 1                        | 189     | 0.675         |
| 55       | GMS850        | GPRS10   | Bottom Side   | 1                        | 189     | 0.15          |
| 80       | GMS850        | GPRS10   | Rear Face     | 1                        | 128     | 0.837         |
| 81       | GMS850        | GPRS10   | Rear Face     | 1                        | 251     | <b>1.18</b>   |
| 58       | GSM1900       | GPRS10   | Front Face    | 1                        | 810     | <b>1.03</b>   |
| 84       | GSM1900       | GPRS10   | Rear Face     | 1                        | 810     | 0.988         |
| 60       | GSM1900       | GPRS10   | Left Side     | 1                        | 810     | 0.368         |
| 61       | GSM1900       | GPRS10   | Right Side    | 1                        | 810     | 0.437         |
| 62       | GSM1900       | GPRS10   | Bottom Side   | 1                        | 810     | 0.982         |
| 87       | GSM1900       | GPRS10   | Front Face    | 1                        | 512     | 0.867         |
| 88       | GSM1900       | GPRS10   | Front Face    | 1                        | 661     | 0.66          |
| 85       | GSM1900       | GPRS10   | Rear Face     | 1                        | 512     | 0.67          |
| 86       | GSM1900       | GPRS10   | Rear Face     | 1                        | 661     | 0.816         |
| 93       | GSM1900       | GPRS10   | Bottom Side   | 1                        | 512     | 0.603         |
| 94       | GSM1900       | GPRS10   | Bottom Side   | 1                        | 661     | 0.75          |
| 72       | WCDMA Band II | RMC12.2K | Front Face    | 1                        | 9400    | 1.03          |
| 73       | WCDMA Band II | RMC12.2K | Rear Face     | 1                        | 9400    | 1.07          |
| 74       | WCDMA Band II | RMC12.2K | Left Side     | 1                        | 9400    | 0.42          |
| 75       | WCDMA Band II | RMC12.2K | Right Side    | 1                        | 9400    | 0.379         |
| 76       | WCDMA Band II | RMC12.2K | Bottom Side   | 1                        | 9400    | <b>1.15</b>   |
| 95       | WCDMA Band II | RMC12.2K | Front Face    | 1                        | 9262    | 0.886         |
| 96       | WCDMA Band II | RMC12.2K | Front Face    | 1                        | 9538    | 1.01          |
| 97       | WCDMA Band II | RMC12.2K | Rear Face     | 1                        | 9262    | 0.99          |
| 98       | WCDMA Band II | RMC12.2K | Rear Face     | 1                        | 9538    | 1.05          |
| 99       | WCDMA Band II | RMC12.2K | Bottom Side   | 1                        | 9262    | 0.957         |
| 100      | WCDMA Band II | RMC12.2K | Bottom Side   | 1                        | 9538    | 1.13          |
| 65       | WCDMA Band V  | RMC12.2K | Front Face    | 1                        | 4182    | 0.456         |
| 66       | WCDMA Band V  | RMC12.2K | Rear Face     | 1                        | 4182    | <b>0.665</b>  |
| 67       | WCDMA Band V  | RMC12.2K | Left Side     | 1                        | 4182    | 0.345         |
| 68       | WCDMA Band V  | RMC12.2K | Right Side    | 1                        | 4182    | 0.508         |
| 69       | WCDMA Band V  | RMC12.2K | Bottom Side   | 1                        | 4182    | 0.104         |
| 105      | 802.11b       | -        | Front Face    | 1                        | 11      | 0.11          |
| 106      | 802.11b       | -        | Rear Face     | 1                        | 11      | <b>0.203</b>  |
| 107      | 802.11b       | -        | Left Side     | 1                        | 11      | 0.14          |
| 714      | 802.11a       | -        | Front Face    | 1                        | 48      | 0.00838       |
| 715      | 802.11a       | -        | Rear Face     | 1                        | 48      | 0.00236       |
| 716      | 802.11a       | -        | Left Side     | 1                        | 48      | 0.000233      |
| 666      | 802.11n       | HT20     | Front Face    | 1                        | 48      | 0.012         |
| 667      | 802.11n       | HT20     | Rear Face     | 1                        | 48      | 0.059         |
| 668      | 802.11n       | HT20     | Left Side     | 1                        | 48      | 0.077         |
| 681      | 802.11a       | -        | Front Face    | 1                        | 161     | 0.012         |
| 682      | 802.11a       | -        | Rear Face     | 1                        | 161     | <b>0.179</b>  |
| 683      | 802.11a       | -        | Left Side     | 1                        | 161     | 0.115         |

# FCC SAR Test Report

A D T

| Plot No. | Band       | Mode          | Test Position | Separation Distance (cm) | Channel | RB | Offset | SAR-1g (W/kg) |
|----------|------------|---------------|---------------|--------------------------|---------|----|--------|---------------|
| 291      | LTE Band 2 | QPSK, BW 10M  | Front Face    | 1                        | 18900   | 25 | 12     | 0.775         |
| 297      | LTE Band 2 | QPSK, BW 10M  | Front Face    | 1                        | 18900   | 1  | 0      | 0.969         |
| 303      | LTE Band 2 | QPSK, BW 10M  | Front Face    | 1                        | 18900   | 1  | 49     | 0.988         |
| 292      | LTE Band 2 | QPSK, BW 10M  | Rear Face     | 1                        | 18900   | 25 | 12     | 0.807         |
| 326      | LTE Band 2 | QPSK, BW 10M  | Rear Face     | 1                        | 18650   | 25 | 12     | 0.724         |
| 327      | LTE Band 2 | QPSK, BW 10M  | Rear Face     | 1                        | 19150   | 25 | 12     | 0.771         |
| 298      | LTE Band 2 | QPSK, BW 10M  | Rear Face     | 1                        | 18900   | 1  | 0      | 1.03          |
| 304      | LTE Band 2 | QPSK, BW 10M  | Rear Face     | 1                        | 18900   | 1  | 49     | <b>1.04</b>   |
| 293      | LTE Band 2 | QPSK, BW 10M  | Left Side     | 1                        | 18900   | 25 | 12     | 0.27          |
| 299      | LTE Band 2 | QPSK, BW 10M  | Left Side     | 1                        | 18900   | 1  | 0      | 0.355         |
| 305      | LTE Band 2 | QPSK, BW 10M  | Left Side     | 1                        | 18900   | 1  | 49     | 0.346         |
| 294      | LTE Band 2 | QPSK, BW 10M  | Right Side    | 1                        | 18900   | 25 | 12     | 0.241         |
| 300      | LTE Band 2 | QPSK, BW 10M  | Right Side    | 1                        | 18900   | 1  | 0      | 0.316         |
| 306      | LTE Band 2 | QPSK, BW 10M  | Right Side    | 1                        | 18900   | 1  | 49     | 0.316         |
| 296      | LTE Band 2 | QPSK, BW 10M  | Bottom Side   | 1                        | 18900   | 25 | 12     | 0.666         |
| 302      | LTE Band 2 | QPSK, BW 10M  | Bottom Side   | 1                        | 18900   | 1  | 0      | 0.838         |
| 308      | LTE Band 2 | QPSK, BW 10M  | Bottom Side   | 1                        | 18900   | 1  | 49     | 0.849         |
| 853      | LTE Band 2 | 16QAM, BW 10M | Front Face    | 1                        | 18900   | 25 | 12     | 0.588         |
| 854      | LTE Band 2 | 16QAM, BW 10M | Front Face    | 1                        | 18900   | 1  | 0      | 0.763         |
| 855      | LTE Band 2 | 16QAM, BW 10M | Front Face    | 1                        | 18900   | 1  | 49     | 0.74          |
| 309      | LTE Band 2 | 16QAM, BW 10M | Rear Face     | 1                        | 18900   | 25 | 12     | 0.429         |
| 310      | LTE Band 2 | 16QAM, BW 10M | Rear Face     | 1                        | 18900   | 1  | 0      | 0.549         |
| 311      | LTE Band 2 | 16QAM, BW 10M | Rear Face     | 1                        | 18900   | 1  | 49     | 0.546         |
| 856      | LTE Band 2 | 16QAM, BW 10M | Left Side     | 1                        | 18900   | 25 | 12     | 0.233         |
| 857      | LTE Band 2 | 16QAM, BW 10M | Left Side     | 1                        | 18900   | 1  | 0      | 0.295         |
| 858      | LTE Band 2 | 16QAM, BW 10M | Left Side     | 1                        | 18900   | 1  | 49     | 0.289         |
| 859      | LTE Band 2 | 16QAM, BW 10M | Right Side    | 1                        | 18900   | 25 | 12     | 0.176         |
| 860      | LTE Band 2 | 16QAM, BW 10M | Right Side    | 1                        | 18900   | 1  | 0      | 0.225         |
| 861      | LTE Band 2 | 16QAM, BW 10M | Right Side    | 1                        | 18900   | 1  | 49     | 0.221         |
| 862      | LTE Band 2 | 16QAM, BW 10M | Bottom Side   | 1                        | 18900   | 25 | 12     | 0.516         |
| 863      | LTE Band 2 | 16QAM, BW 10M | Bottom Side   | 1                        | 18900   | 1  | 0      | 0.661         |
| 864      | LTE Band 2 | 16QAM, BW 10M | Bottom Side   | 1                        | 18900   | 1  | 49     | 0.641         |

# FCC SAR Test Report

A D T

| Plot No. | Band       | Mode          | Test Position | Separation Distance (cm) | Channel | RB | Offset | SAR-1g (W/kg) |
|----------|------------|---------------|---------------|--------------------------|---------|----|--------|---------------|
| 261      | LTE Band 4 | QPSK, BW 10M  | Front Face    | 1                        | 20350   | 25 | 12     | 0.734         |
| 267      | LTE Band 4 | QPSK, BW 10M  | Front Face    | 1                        | 20350   | 1  | 0      | 0.955         |
| 273      | LTE Band 4 | QPSK, BW 10M  | Front Face    | 1                        | 20350   | 1  | 49     | 0.944         |
| 262      | LTE Band 4 | QPSK, BW 10M  | Rear Face     | 1                        | 20350   | 25 | 12     | 0.867         |
| 322      | LTE Band 4 | QPSK, BW 10M  | Rear Face     | 1                        | 20000   | 25 | 12     | 0.697         |
| 323      | LTE Band 4 | QPSK, BW 10M  | Rear Face     | 1                        | 20175   | 25 | 12     | 0.658         |
| 268      | LTE Band 4 | QPSK, BW 10M  | Rear Face     | 1                        | 20350   | 1  | 0      | <b>1.13</b>   |
| 274      | LTE Band 4 | QPSK, BW 10M  | Rear Face     | 1                        | 20350   | 1  | 49     | 1.09          |
| 263      | LTE Band 4 | QPSK, BW 10M  | Left Side     | 1                        | 20350   | 25 | 12     | 0.262         |
| 269      | LTE Band 4 | QPSK, BW 10M  | Left Side     | 1                        | 20350   | 1  | 0      | 0.35          |
| 275      | LTE Band 4 | QPSK, BW 10M  | Left Side     | 1                        | 20350   | 1  | 49     | 0.302         |
| 264      | LTE Band 4 | QPSK, BW 10M  | Right Side    | 1                        | 20350   | 25 | 12     | 0.188         |
| 270      | LTE Band 4 | QPSK, BW 10M  | Right Side    | 1                        | 20350   | 1  | 0      | 0.246         |
| 276      | LTE Band 4 | QPSK, BW 10M  | Right Side    | 1                        | 20350   | 1  | 49     | 0.23          |
| 266      | LTE Band 4 | QPSK, BW 10M  | Bottom Side   | 1                        | 20350   | 25 | 12     | 0.503         |
| 272      | LTE Band 4 | QPSK, BW 10M  | Bottom Side   | 1                        | 20350   | 1  | 0      | 0.635         |
| 278      | LTE Band 4 | QPSK, BW 10M  | Bottom Side   | 1                        | 20350   | 1  | 49     | 0.643         |
| 865      | LTE Band 4 | 16QAM, BW 10M | Front Face    | 1                        | 20350   | 25 | 12     | 0.542         |
| 866      | LTE Band 4 | 16QAM, BW 10M | Front Face    | 1                        | 20350   | 1  | 0      | 0.713         |
| 867      | LTE Band 4 | 16QAM, BW 10M | Front Face    | 1                        | 20350   | 1  | 49     | 0.677         |
| 279      | LTE Band 4 | 16QAM, BW 10M | Rear Face     | 1                        | 20350   | 25 | 12     | 0.585         |
| 280      | LTE Band 4 | 16QAM, BW 10M | Rear Face     | 1                        | 20350   | 1  | 0      | 0.756         |
| 281      | LTE Band 4 | 16QAM, BW 10M | Rear Face     | 1                        | 20350   | 1  | 49     | 0.715         |
| 868      | LTE Band 4 | 16QAM, BW 10M | Left Side     | 1                        | 20350   | 25 | 12     | 0.209         |
| 869      | LTE Band 4 | 16QAM, BW 10M | Left Side     | 1                        | 20350   | 1  | 0      | 0.271         |
| 870      | LTE Band 4 | 16QAM, BW 10M | Left Side     | 1                        | 20350   | 1  | 49     | 0.26          |
| 871      | LTE Band 4 | 16QAM, BW 10M | Right Side    | 1                        | 20350   | 25 | 12     | 0.138         |
| 872      | LTE Band 4 | 16QAM, BW 10M | Right Side    | 1                        | 20350   | 1  | 0      | 0.184         |
| 873      | LTE Band 4 | 16QAM, BW 10M | Right Side    | 1                        | 20350   | 1  | 49     | 0.18          |
| 874      | LTE Band 4 | 16QAM, BW 10M | Bottom Side   | 1                        | 20350   | 25 | 12     | 0.367         |
| 875      | LTE Band 4 | 16QAM, BW 10M | Bottom Side   | 1                        | 20350   | 1  | 0      | 0.483         |
| 876      | LTE Band 4 | 16QAM, BW 10M | Bottom Side   | 1                        | 20350   | 1  | 49     | 0.464         |

# FCC SAR Test Report

A D T

| Plot No. | Band       | Mode          | Test Position | Separation Distance (cm) | Channel | RB | Offset | SAR-1g (W/kg) |
|----------|------------|---------------|---------------|--------------------------|---------|----|--------|---------------|
| 231      | LTE Band 5 | QPSK, BW 10M  | Front Face    | 1                        | 20600   | 25 | 12     | 0.271         |
| 237      | LTE Band 5 | QPSK, BW 10M  | Front Face    | 1                        | 20600   | 1  | 0      | 0.323         |
| 243      | LTE Band 5 | QPSK, BW 10M  | Front Face    | 1                        | 20600   | 1  | 49     | 0.338         |
| 232      | LTE Band 5 | QPSK, BW 10M  | Rear Face     | 1                        | 20600   | 25 | 12     | 0.418         |
| 238      | LTE Band 5 | QPSK, BW 10M  | Rear Face     | 1                        | 20600   | 1  | 0      | 0.499         |
| 244      | LTE Band 5 | QPSK, BW 10M  | Rear Face     | 1                        | 20600   | 1  | 49     | <b>0.504</b>  |
| 233      | LTE Band 5 | QPSK, BW 10M  | Left Side     | 1                        | 20600   | 25 | 12     | 0.266         |
| 239      | LTE Band 5 | QPSK, BW 10M  | Left Side     | 1                        | 20600   | 1  | 0      | 0.328         |
| 245      | LTE Band 5 | QPSK, BW 10M  | Left Side     | 1                        | 20600   | 1  | 49     | 0.311         |
| 234      | LTE Band 5 | QPSK, BW 10M  | Right Side    | 1                        | 20600   | 25 | 12     | 0.345         |
| 240      | LTE Band 5 | QPSK, BW 10M  | Right Side    | 1                        | 20600   | 1  | 0      | 0.426         |
| 246      | LTE Band 5 | QPSK, BW 10M  | Right Side    | 1                        | 20600   | 1  | 49     | 0.42          |
| 236      | LTE Band 5 | QPSK, BW 10M  | Bottom Side   | 1                        | 20600   | 25 | 12     | 0.088         |
| 242      | LTE Band 5 | QPSK, BW 10M  | Bottom Side   | 1                        | 20600   | 1  | 0      | 0.101         |
| 248      | LTE Band 5 | QPSK, BW 10M  | Bottom Side   | 1                        | 20600   | 1  | 49     | 0.118         |
| 877      | LTE Band 5 | 16QAM, BW 10M | Front Face    | 1                        | 20600   | 25 | 12     | 0.217         |
| 878      | LTE Band 5 | 16QAM, BW 10M | Front Face    | 1                        | 20600   | 1  | 0      | 0.251         |
| 879      | LTE Band 5 | 16QAM, BW 10M | Front Face    | 1                        | 20600   | 1  | 49     | 0.261         |
| 249      | LTE Band 5 | 16QAM, BW 10M | Rear Face     | 1                        | 20600   | 25 | 12     | 0.339         |
| 250      | LTE Band 5 | 16QAM, BW 10M | Rear Face     | 1                        | 20600   | 1  | 0      | 0.404         |
| 251      | LTE Band 5 | 16QAM, BW 10M | Rear Face     | 1                        | 20600   | 1  | 49     | 0.411         |
| 880      | LTE Band 5 | 16QAM, BW 10M | Left Side     | 1                        | 20600   | 25 | 12     | 0.16          |
| 881      | LTE Band 5 | 16QAM, BW 10M | Left Side     | 1                        | 20600   | 1  | 0      | 0.189         |
| 882      | LTE Band 5 | 16QAM, BW 10M | Left Side     | 1                        | 20600   | 1  | 49     | 0.195         |
| 883      | LTE Band 5 | 16QAM, BW 10M | Right Side    | 1                        | 20600   | 25 | 12     | 0.222         |
| 884      | LTE Band 5 | 16QAM, BW 10M | Right Side    | 1                        | 20600   | 1  | 0      | 0.263         |
| 885      | LTE Band 5 | 16QAM, BW 10M | Right Side    | 1                        | 20600   | 1  | 49     | 0.274         |
| 886      | LTE Band 5 | 16QAM, BW 10M | Bottom Side   | 1                        | 20600   | 25 | 12     | 0.037         |
| 887      | LTE Band 5 | 16QAM, BW 10M | Bottom Side   | 1                        | 20600   | 1  | 0      | 0.043         |
| 888      | LTE Band 5 | 16QAM, BW 10M | Bottom Side   | 1                        | 20600   | 1  | 49     | 0.045         |

# FCC SAR Test Report

A D T

| Plot No. | Band        | Mode          | Test Position | Separation Distance (cm) | Channel | RB | Offset | SAR-1g (W/kg) |
|----------|-------------|---------------|---------------|--------------------------|---------|----|--------|---------------|
| 321      | LTE Band 17 | QPSK, BW 10M  | Front Face    | 1                        | 23790   | 25 | 12     | 0.11          |
| 322      | LTE Band 17 | QPSK, BW 10M  | Front Face    | 1                        | 23790   | 1  | 0      | 0.122         |
| 323      | LTE Band 17 | QPSK, BW 10M  | Front Face    | 1                        | 23790   | 1  | 49     | 0.203         |
| 202      | LTE Band 17 | QPSK, BW 10M  | Rear Face     | 1                        | 23790   | 25 | 12     | 0.128         |
| 208      | LTE Band 17 | QPSK, BW 10M  | Rear Face     | 1                        | 23790   | 1  | 0      | 0.151         |
| 214      | LTE Band 17 | QPSK, BW 10M  | Rear Face     | 1                        | 23790   | 1  | 49     | <b>0.249</b>  |
| 203      | LTE Band 17 | QPSK, BW 10M  | Left Side     | 1                        | 23790   | 25 | 12     | 0.054         |
| 209      | LTE Band 17 | QPSK, BW 10M  | Left Side     | 1                        | 23790   | 1  | 0      | 0.068         |
| 215      | LTE Band 17 | QPSK, BW 10M  | Left Side     | 1                        | 23790   | 1  | 49     | 0.124         |
| 204      | LTE Band 17 | QPSK, BW 10M  | Right Side    | 1                        | 23790   | 25 | 12     | 0.123         |
| 210      | LTE Band 17 | QPSK, BW 10M  | Right Side    | 1                        | 23790   | 1  | 0      | 0.141         |
| 216      | LTE Band 17 | QPSK, BW 10M  | Right Side    | 1                        | 23790   | 1  | 49     | 0.238         |
| 205      | LTE Band 17 | QPSK, BW 10M  | Top Side      | 1                        | 23790   | 25 | 12     | 0.063         |
| 211      | LTE Band 17 | QPSK, BW 10M  | Top Side      | 1                        | 23790   | 1  | 0      | 0.082         |
| 217      | LTE Band 17 | QPSK, BW 10M  | Top Side      | 1                        | 23790   | 1  | 49     | 0.127         |
| 889      | LTE Band 17 | 16QAM, BW 10M | Front Face    | 1                        | 23790   | 25 | 12     | 0.066         |
| 890      | LTE Band 17 | 16QAM, BW 10M | Front Face    | 1                        | 23790   | 1  | 0      | 0.081         |
| 891      | LTE Band 17 | 16QAM, BW 10M | Front Face    | 1                        | 23790   | 1  | 49     | 0.129         |
| 219      | LTE Band 17 | 16QAM, BW 10M | Rear Face     | 1                        | 23790   | 25 | 12     | 0.112         |
| 220      | LTE Band 17 | 16QAM, BW 10M | Rear Face     | 1                        | 23790   | 1  | 0      | 0.139         |
| 221      | LTE Band 17 | 16QAM, BW 10M | Rear Face     | 1                        | 23790   | 1  | 49     | 0.222         |
| 892      | LTE Band 17 | 16QAM, BW 10M | Left Side     | 1                        | 23790   | 25 | 12     | 0.041         |
| 893      | LTE Band 17 | 16QAM, BW 10M | Left Side     | 1                        | 23790   | 1  | 0      | 0.047         |
| 894      | LTE Band 17 | 16QAM, BW 10M | Left Side     | 1                        | 23790   | 1  | 49     | 0.078         |
| 895      | LTE Band 17 | 16QAM, BW 10M | Right Side    | 1                        | 23790   | 25 | 12     | 0.07          |
| 896      | LTE Band 17 | 16QAM, BW 10M | Right Side    | 1                        | 23790   | 1  | 0      | 0.079         |
| 897      | LTE Band 17 | 16QAM, BW 10M | Right Side    | 1                        | 23790   | 1  | 49     | 0.13          |
| 898      | LTE Band 17 | 16QAM, BW 10M | Top Side      | 1                        | 23790   | 25 | 12     | 0.038         |
| 899      | LTE Band 17 | 16QAM, BW 10M | Top Side      | 1                        | 23790   | 1  | 0      | 0.044         |
| 900      | LTE Band 17 | 16QAM, BW 10M | Top Side      | 1                        | 23790   | 1  | 49     | 0.074         |

## Note:

1. SAR is performed on the highest power channel. When the SAR value of highest power channel is less than 0.8 W/kg, SAR testing for optional channel is not required.
2. According to KDB 941225, the SAR testing for 100% RB is not required since the maximum SAR of 50% RB is less than 1.45 W/kg.
3. According to KDB 941225, the SAR testing was performed on largest channel bandwidth, and SAR for other channel bandwidths is not required since the maximum power of smaller channel bandwidth is within 1/2 dB higher or lower of measured for the largest channel bandwidth and maximum SAR of largest channel bandwidth is less than 1.45 W/kg.
4. SAR testing for 802.11g/n is not required because its maximum power is less than 1/4 dB higher than 802.11b.
5. Only WLAN 5G band 1 and 4 (5.15~5.25 and 5.725~5.85 GHz) support wireless hotspot mode.
6. SAR testing for 802.11n is not required when its maximum power is less than 1/4 dB higher than 802.11a.

**Test Engineer :** Match Tsui, Sam Onn, and Eli Hsu

# FCC SAR Test Report

A D T

## 4.6.3 Simultaneous Multi-band Transmission Evaluation

| No. | Conditions<br>(SAR1 + SAR2) | Mode      | Position     | Max.<br>SAR1 | Max.<br>SAR2 | SAR<br>Summation | SPLSR |
|-----|-----------------------------|-----------|--------------|--------------|--------------|------------------|-------|
| 1   | GSM850<br>+<br>WLAN 2.4G    | Head      | Right Cheek  | 0.464        | 0.273        | 0.737            | -     |
|     |                             |           | Right Tilted | 0.249        | 0.064        | 0.313            | -     |
|     |                             |           | Left Cheek   | 0.411        | 0.328        | 0.739            | -     |
|     |                             |           | Left Tilted  | 0.261        | 0.041        | 0.302            | -     |
|     |                             | Body-Worn | Front Face   | 0.563        | 0.107        | 0.67             | -     |
|     |                             |           | Rear Face    | 0.981        | 0.193        | 1.174            | -     |
|     |                             | Hotspot   | Front Face   | 0.661        | 0.11         | 0.771            | -     |
|     |                             |           | Rear Face    | 1.18         | 0.203        | 1.383            | -     |
|     |                             |           | Left Side    | 0.54         | 0.14         | 0.68             | -     |
|     |                             |           | Right Side   | 0.675        | 0            | 0.675            | -     |
|     |                             |           | Top Side     | 0            | 0            | 0                | -     |
|     |                             |           | Bottom Side  | 0.15         | 0            | 0.15             | -     |
|     | GSM850<br>+<br>WLAN 5G      | Head      | Right Cheek  | 0.464        | 0.031        | 0.495            | -     |
|     |                             |           | Right Tilted | 0.249        | 0.00484      | 0.25384          | -     |
|     |                             |           | Left Cheek   | 0.411        | 0.036        | 0.447            | -     |
|     |                             |           | Left Tilted  | 0.261        | 0.013        | 0.274            | -     |
|     |                             | Body-Worn | Front Face   | 0.563        | 0.024        | 0.587            | -     |
|     |                             |           | Rear Face    | 0.981        | 0.191        | 1.172            | -     |
|     |                             | Hotspot   | Front Face   | 0.661        | 0.012        | 0.673            | -     |
|     |                             |           | Rear Face    | 1.18         | 0.179        | 1.359            | -     |
|     |                             |           | Left Side    | 0.54         | 0.115        | 0.655            | -     |
|     |                             |           | Right Side   | 0.675        | 0            | 0.675            | -     |
|     |                             |           | Top Side     | 0            | 0            | 0                | -     |
|     |                             |           | Bottom Side  | 0.15         | 0            | 0.15             | -     |
| 2   | GSM1900<br>+<br>WLAN 2.4G   | Head      | Right Cheek  | 0.6          | 0.273        | 0.873            | -     |
|     |                             |           | Right Tilted | 0.275        | 0.064        | 0.339            | -     |
|     |                             |           | Left Cheek   | 0.667        | 0.328        | 0.995            | -     |
|     |                             |           | Left Tilted  | 0.389        | 0.041        | 0.43             | -     |
|     |                             | Body-Worn | Front Face   | 1.02         | 0.107        | 1.127            | -     |
|     |                             |           | Rear Face    | 0.953        | 0.193        | 1.146            | -     |
|     |                             | Hotspot   | Front Face   | 1.03         | 0.11         | 1.14             | -     |
|     |                             |           | Rear Face    | 0.988        | 0.203        | 1.191            | -     |
|     |                             |           | Left Side    | 0.368        | 0.14         | 0.508            | -     |
|     |                             |           | Right Side   | 0.437        | 0            | 0.437            | -     |
|     |                             |           | Top Side     | 0            | 0            | 0                | -     |
|     |                             |           | Bottom Side  | 0.982        | 0            | 0.982            | -     |
|     | GSM1900<br>+<br>WLAN 5G     | Head      | Right Cheek  | 0.6          | 0.031        | 0.631            | -     |
|     |                             |           | Right Tilted | 0.275        | 0.00484      | 0.27984          | -     |
|     |                             |           | Left Cheek   | 0.667        | 0.036        | 0.703            | -     |
|     |                             |           | Left Tilted  | 0.389        | 0.013        | 0.402            | -     |
|     |                             | Body-Worn | Front Face   | 1.02         | 0.024        | 1.044            | -     |
|     |                             |           | Rear Face    | 0.953        | 0.191        | 1.144            | -     |
|     |                             | Hotspot   | Front Face   | 1.03         | 0.012        | 1.042            | -     |
|     |                             |           | Rear Face    | 0.988        | 0.179        | 1.167            | -     |
|     |                             |           | Left Side    | 0.368        | 0.115        | 0.483            | -     |
|     |                             |           | Right Side   | 0.437        | 0            | 0.437            | -     |
|     |                             |           | Top Side     | 0            | 0            | 0                | -     |
|     |                             |           | Bottom Side  | 0.982        | 0            | 0.982            | -     |

# FCC SAR Test Report

A D T

| No. | Conditions<br>(SAR1 + SAR2) | Mode      | Position     | Max.<br>SAR1 | Max.<br>SAR2 | SAR<br>Summation | SPLSR |
|-----|-----------------------------|-----------|--------------|--------------|--------------|------------------|-------|
| 3   | WCDMA II<br>+<br>WLAN 2.4G  | Head      | Right Cheek  | 0.764        | 0.273        | 1.037            | -     |
|     |                             |           | Right Tilted | 0.352        | 0.064        | 0.416            | -     |
|     |                             |           | Left Cheek   | 0.835        | 0.328        | 1.163            | -     |
|     |                             |           | Left Tilted  | 0.431        | 0.041        | 0.472            | -     |
|     |                             | Body-Worn | Front Face   | 0.99         | 0.107        | 1.097            | -     |
|     |                             |           | Rear Face    | 1.04         | 0.193        | 1.233            | -     |
|     |                             | Hotspot   | Front Face   | 1.03         | 0.11         | 1.14             | -     |
|     |                             |           | Rear Face    | 1.07         | 0.203        | 1.273            | -     |
|     |                             |           | Left Side    | 0.42         | 0.14         | 0.56             | -     |
|     |                             |           | Right Side   | 0.379        | 0            | 0.379            | -     |
|     |                             |           | Top Side     | 0            | 0            | 0                | -     |
|     |                             |           | Bottom Side  | 1.15         | 0            | 1.15             | -     |
|     | WCDMA II<br>+<br>WLAN 5G    | Head      | Right Cheek  | 0.764        | 0.031        | 0.795            | -     |
|     |                             |           | Right Tilted | 0.352        | 0.00484      | 0.35684          | -     |
|     |                             |           | Left Cheek   | 0.835        | 0.036        | 0.871            | -     |
|     |                             |           | Left Tilted  | 0.431        | 0.013        | 0.444            | -     |
|     |                             | Body-Worn | Front Face   | 0.99         | 0.024        | 1.014            | -     |
|     |                             |           | Rear Face    | 1.04         | 0.191        | 1.231            | -     |
|     |                             | Hotspot   | Front Face   | 1.03         | 0.012        | 1.042            | -     |
|     |                             |           | Rear Face    | 1.07         | 0.179        | 1.249            | -     |
|     |                             |           | Left Side    | 0.42         | 0.115        | 0.535            | -     |
|     |                             |           | Right Side   | 0.379        | 0            | 0.379            | -     |
|     |                             |           | Top Side     | 0            | 0            | 0                | -     |
|     |                             |           | Bottom Side  | 1.15         | 0            | 1.15             | -     |
| 4   | WCDMA V<br>+<br>WLAN 2.4G   | Head      | Right Cheek  | 0.321        | 0.273        | 0.594            | -     |
|     |                             |           | Right Tilted | 0.19         | 0.064        | 0.254            | -     |
|     |                             |           | Left Cheek   | 0.279        | 0.328        | 0.607            | -     |
|     |                             |           | Left Tilted  | 0.199        | 0.041        | 0.24             | -     |
|     |                             | Body-Worn | Front Face   | 0.367        | 0.107        | 0.474            | -     |
|     |                             |           | Rear Face    | 0.558        | 0.193        | 0.751            | -     |
|     |                             | Hotspot   | Front Face   | 0.456        | 0.11         | 0.566            | -     |
|     |                             |           | Rear Face    | 0.665        | 0.203        | 0.868            | -     |
|     |                             |           | Left Side    | 0.345        | 0.14         | 0.485            | -     |
|     |                             |           | Right Side   | 0.508        | 0            | 0.508            | -     |
|     |                             |           | Top Side     | 0            | 0            | 0                | -     |
|     |                             |           | Bottom Side  | 0.104        | 0            | 0.104            | -     |
|     | WCDMA V<br>+<br>WLAN 5G     | Head      | Right Cheek  | 0.321        | 0.031        | 0.352            | -     |
|     |                             |           | Right Tilted | 0.19         | 0.00484      | 0.19484          | -     |
|     |                             |           | Left Cheek   | 0.279        | 0.036        | 0.315            | -     |
|     |                             |           | Left Tilted  | 0.199        | 0.013        | 0.212            | -     |
|     |                             | Body-Worn | Front Face   | 0.367        | 0.024        | 0.391            | -     |
|     |                             |           | Rear Face    | 0.558        | 0.191        | 0.749            | -     |
|     |                             | Hotspot   | Front Face   | 0.456        | 0.012        | 0.468            | -     |
|     |                             |           | Rear Face    | 0.665        | 0.179        | 0.844            | -     |
|     |                             |           | Left Side    | 0.345        | 0.115        | 0.46             | -     |
|     |                             |           | Right Side   | 0.508        | 0            | 0.508            | -     |
|     |                             |           | Top Side     | 0            | 0            | 0                | -     |
|     |                             |           | Bottom Side  | 0.104        | 0            | 0.104            | -     |

# FCC SAR Test Report

A D T

| No. | Conditions<br>(SAR1 + SAR2) | Mode      | Position     | Max.<br>SAR1 | Max.<br>SAR2 | SAR<br>Summation | SPLSR |
|-----|-----------------------------|-----------|--------------|--------------|--------------|------------------|-------|
| 5   | LTE 2<br>+<br>WLAN 2.4G     | Head      | Right Cheek  | 0.84         | 0.273        | 1.113            | -     |
|     |                             |           | Right Tilted | 0.371        | 0.064        | 0.435            | -     |
|     |                             |           | Left Cheek   | 0.902        | 0.328        | 1.23             | -     |
|     |                             |           | Left Tilted  | 0.447        | 0.041        | 0.488            | -     |
|     |                             | Body-Worn | Front Face   | 0.978        | 0.107        | 1.085            | -     |
|     |                             |           | Rear Face    | 1            | 0.193        | 1.193            | -     |
|     |                             | Hotspot   | Front Face   | 0.988        | 0.11         | 1.098            | -     |
|     |                             |           | Rear Face    | 1.04         | 0.203        | 1.243            | -     |
|     |                             |           | Left Side    | 0.355        | 0.14         | 0.495            | -     |
|     |                             |           | Right Side   | 0.316        | 0            | 0.316            | -     |
|     |                             |           | Top Side     | 0            | 0            | 0                | -     |
|     |                             |           | Bottom Side  | 0.849        | 0            | 0.849            | -     |
|     | LTE 2<br>+<br>WLAN 5G       | Head      | Right Cheek  | 0.84         | 0.031        | 0.871            | -     |
|     |                             |           | Right Tilted | 0.371        | 0.00484      | 0.37584          | -     |
|     |                             |           | Left Cheek   | 0.902        | 0.036        | 0.938            | -     |
|     |                             |           | Left Tilted  | 0.447        | 0.013        | 0.46             | -     |
|     |                             | Body-Worn | Front Face   | 0.978        | 0.024        | 1.002            | -     |
|     |                             |           | Rear Face    | 1            | 0.191        | 1.191            | -     |
|     |                             | Hotspot   | Front Face   | 0.988        | 0.012        | 1                | -     |
|     |                             |           | Rear Face    | 1.04         | 0.179        | 1.219            | -     |
|     |                             |           | Left Side    | 0.355        | 0.115        | 0.47             | -     |
|     |                             |           | Right Side   | 0.316        | 0            | 0.316            | -     |
|     |                             |           | Top Side     | 0            | 0            | 0                | -     |
|     |                             |           | Bottom Side  | 0.849        | 0            | 0.849            | -     |
| 6   | LTE 4<br>+<br>WLAN 2.4G     | Head      | Right Cheek  | 0.819        | 0.273        | 1.092            | -     |
|     |                             |           | Right Tilted | 0.281        | 0.064        | 0.345            | -     |
|     |                             |           | Left Cheek   | 0.866        | 0.328        | 1.194            | -     |
|     |                             |           | Left Tilted  | 0.405        | 0.041        | 0.446            | -     |
|     |                             | Body-Worn | Front Face   | 0.978        | 0.107        | 1.085            | -     |
|     |                             |           | Rear Face    | 1.12         | 0.193        | 1.313            | -     |
|     |                             | Hotspot   | Front Face   | 0.955        | 0.11         | 1.065            | -     |
|     |                             |           | Rear Face    | 1.13         | 0.203        | 1.333            | -     |
|     |                             |           | Left Side    | 0.35         | 0.14         | 0.49             | -     |
|     |                             |           | Right Side   | 0.246        | 0            | 0.246            | -     |
|     |                             |           | Top Side     | 0            | 0            | 0                | -     |
|     |                             |           | Bottom Side  | 0.643        | 0            | 0.643            | -     |
|     | LTE 4<br>+<br>WLAN 5G       | Head      | Right Cheek  | 0.819        | 0.031        | 0.85             | -     |
|     |                             |           | Right Tilted | 0.281        | 0.00484      | 0.28584          | -     |
|     |                             |           | Left Cheek   | 0.866        | 0.036        | 0.902            | -     |
|     |                             |           | Left Tilted  | 0.405        | 0.013        | 0.418            | -     |
|     |                             | Body-Worn | Front Face   | 0.978        | 0.024        | 1.002            | -     |
|     |                             |           | Rear Face    | 1.12         | 0.191        | 1.311            | -     |
|     |                             | Hotspot   | Front Face   | 0.955        | 0.012        | 0.967            | -     |
|     |                             |           | Rear Face    | 1.13         | 0.179        | 1.309            | -     |
|     |                             |           | Left Side    | 0.35         | 0.115        | 0.465            | -     |
|     |                             |           | Right Side   | 0.246        | 0            | 0.246            | -     |
|     |                             |           | Top Side     | 0            | 0            | 0                | -     |
|     |                             |           | Bottom Side  | 0.643        | 0            | 0.643            | -     |

# FCC SAR Test Report

A D T

| No. | Conditions<br>(SAR1 + SAR2) | Mode      | Position     | Max.<br>SAR1 | Max.<br>SAR2 | SAR<br>Summation | SPLSR |
|-----|-----------------------------|-----------|--------------|--------------|--------------|------------------|-------|
| 7   | LTE 5<br>+<br>WLAN 2.4G     | Head      | Right Cheek  | 0.329        | 0.273        | 0.602            | -     |
|     |                             |           | Right Tilted | 0.222        | 0.064        | 0.286            | -     |
|     |                             |           | Left Cheek   | 0.289        | 0.328        | 0.617            | -     |
|     |                             |           | Left Tilted  | 0.204        | 0.041        | 0.245            | -     |
|     |                             | Body-Worn | Front Face   | 0.269        | 0.107        | 0.376            | -     |
|     |                             |           | Rear Face    | 0.427        | 0.193        | 0.62             | -     |
|     |                             | Hotspot   | Front Face   | 0.338        | 0.11         | 0.448            | -     |
|     |                             |           | Rear Face    | 0.504        | 0.203        | 0.707            | -     |
|     |                             |           | Left Side    | 0.328        | 0.14         | 0.468            | -     |
|     |                             |           | Right Side   | 0.426        | 0            | 0.426            | -     |
|     |                             |           | Top Side     | 0            | 0            | 0                | -     |
|     |                             |           | Bottom Side  | 0.411        | 0            | 0.411            | -     |
|     | LTE 5<br>+<br>WLAN 5G       | Head      | Right Cheek  | 0.329        | 0.031        | 0.36             | -     |
|     |                             |           | Right Tilted | 0.222        | 0.00484      | 0.22684          | -     |
|     |                             |           | Left Cheek   | 0.289        | 0.036        | 0.325            | -     |
|     |                             |           | Left Tilted  | 0.204        | 0.013        | 0.217            | -     |
|     |                             | Body-Worn | Front Face   | 0.269        | 0.024        | 0.293            | -     |
|     |                             |           | Rear Face    | 0.427        | 0.191        | 0.618            | -     |
|     |                             | Hotspot   | Front Face   | 0.338        | 0.012        | 0.35             | -     |
|     |                             |           | Rear Face    | 0.504        | 0.179        | 0.683            | -     |
|     |                             |           | Left Side    | 0.328        | 0.115        | 0.443            | -     |
|     |                             |           | Right Side   | 0.426        | 0            | 0.426            | -     |
|     |                             |           | Top Side     | 0            | 0            | 0                | -     |
|     |                             |           | Bottom Side  | 0.411        | 0            | 0.411            | -     |
| 8   | LTE 17<br>+<br>WLAN 2.4G    | Head      | Right Cheek  | 0.553        | 0.273        | 0.826            | -     |
|     |                             |           | Right Tilted | 0.526        | 0.064        | 0.59             | -     |
|     |                             |           | Left Cheek   | 0.637        | 0.328        | 0.965            | -     |
|     |                             |           | Left Tilted  | 0.593        | 0.041        | 0.634            | -     |
|     |                             | Body-Worn | Front Face   | 0.146        | 0.107        | 0.253            | -     |
|     |                             |           | Rear Face    | 0.198        | 0.193        | 0.391            | -     |
|     |                             | Hotspot   | Front Face   | 0.203        | 0.11         | 0.313            | -     |
|     |                             |           | Rear Face    | 0.249        | 0.203        | 0.452            | -     |
|     |                             |           | Left Side    | 0.124        | 0.14         | 0.264            | -     |
|     |                             |           | Right Side   | 0.238        | 0            | 0.238            | -     |
|     |                             |           | Top Side     | 0.127        | 0            | 0.127            | -     |
|     |                             |           | Bottom Side  | 0            | 0            | 0                | -     |
|     | LTE 17<br>+<br>WLAN 5G      | Head      | Right Cheek  | 0.553        | 0.031        | 0.584            | -     |
|     |                             |           | Right Tilted | 0.526        | 0.00484      | 0.53084          | -     |
|     |                             |           | Left Cheek   | 0.637        | 0.036        | 0.673            | -     |
|     |                             |           | Left Tilted  | 0.593        | 0.013        | 0.606            | -     |
|     |                             | Body-Worn | Front Face   | 0.146        | 0.024        | 0.17             | -     |
|     |                             |           | Rear Face    | 0.198        | 0.191        | 0.389            | -     |
|     |                             | Hotspot   | Front Face   | 0.203        | 0.012        | 0.215            | -     |
|     |                             |           | Rear Face    | 0.249        | 0.179        | 0.428            | -     |
|     |                             |           | Left Side    | 0.124        | 0.115        | 0.239            | -     |
|     |                             |           | Right Side   | 0.238        | 0            | 0.238            | -     |
|     |                             |           | Top Side     | 0.127        | 0            | 0.127            | -     |
|     |                             |           | Bottom Side  | 0            | 0            | 0                | -     |

## Note:

1. The maximum SAR summation is calculated based on the same configuration and test position.

### Summary:

According to KDB 648474, the simultaneous transmission SAR for WWAN and WLAN was not required, because the SAR summation is less than 1.6 W/kg. The BT standalone SAR and WWAN/BT simultaneous transmission SAR were not required, because the maximum output power of Bluetooth is less than  $P_{\text{Ref}}$  (10.8 dBm) and the closest separation distance of these antennas is larger than 2.5 cm, and maximum WWAN SAR is less than 1.2 W/kg.

## 5. Calibration of Test Equipment

| Equipment                    | Manufacturer | Model          | SN         | Cal. Date     | Cal. Interval |
|------------------------------|--------------|----------------|------------|---------------|---------------|
| System Validation Kit        | SPEAG        | D750V3         | 1013       | Apr. 25, 2012 | Annual        |
| System Validation Kit        | SPEAG        | D835V2         | 4d021      | Apr. 20, 2012 | Annual        |
| System Validation Kit        | SPEAG        | D1750V2        | 1055       | Aug. 09, 2011 | Annual        |
| System Validation Kit        | SPEAG        | D1750V2        | 1055       | Aug. 23, 2012 | Annual        |
| System Validation Kit        | SPEAG        | D1900V2        | 5d036      | Jan. 26, 2012 | Annual        |
| System Validation Kit        | SPEAG        | D2450V2        | 737        | Jan. 24, 2012 | Annual        |
| System Validation Kit        | SPEAG        | D5GHzV2        | 1018       | Jan. 18, 2012 | Annual        |
| Dosimetric E-Field Probe     | SPEAG        | EX3DV4         | 3578       | Jun. 21, 2012 | Annual        |
| Dosimetric E-Field Probe     | SPEAG        | EX3DV4         | 3590       | Feb. 23, 2012 | Annual        |
| Dosimetric E-Field Probe     | SPEAG        | EX3DV4         | 3650       | Oct. 26, 2011 | Annual        |
| Dosimetric E-Field Probe     | SPEAG        | EX3DV4         | 3820       | Dec. 16, 2011 | Annual        |
| Dosimetric E-Field Probe     | SPEAG        | EX3DV4         | 3864       | Jul. 19, 2012 | Annual        |
| Data Acquisition Electronics | SPEAG        | DAE3           | 579        | Apr. 27, 2012 | Annual        |
| Data Acquisition Electronics | SPEAG        | DAE4           | 861        | Aug. 29, 2011 | Annual        |
| Data Acquisition Electronics | SPEAG        | DAE4           | 910        | Dec. 07, 2011 | Annual        |
| Data Acquisition Electronics | SPEAG        | DAE4           | 1277       | Jul. 19, 2012 | Annual        |
| SAM Phantom                  | SPEAG        | QD000P40CD     | TP-1652    | N/A           | N/A           |
| SAM Phantom                  | SPEAG        | QD000P40CD     | TP-1654    | N/A           | N/A           |
| Radio Communication Tester   | Agilent      | E5515C         | MY50266628 | Sep. 26, 2011 | Biennial      |
| Radio Communication Analyzer | Anritsu      | MT8820C        | 6201010284 | Aug. 01, 2011 | Biennial      |
| ENA Series Network Analyzer  | Agilent      | E5071C         | MY46214281 | May 14, 2012  | Annual        |
| MXG Analog Signal Generator  | Agilent      | N5181A         | MY50143868 | May 06, 2012  | Annual        |
| Power Meter                  | Anritsu      | ML2495A        | 1218009    | May 07, 2012  | Annual        |
| Power Sensor                 | Anritsu      | MA2411B        | 1207252    | May 07, 2012  | Annual        |
| EXA Spectrum Analyzer        | Agilent      | N9010A         | MY52100136 | Apr. 23, 2012 | Annual        |
| Dielectric Probe Kit         | Agilent      | 85070D         | E2-020018  | May 14, 2012  | Annual        |
| Thermometer                  | YFE          | YF-160A        | 110600361  | Feb. 21, 2012 | Annual        |
| Directional Coupler          | Woken        | 0110A05602O-10 | 11122702   | Apr. 19, 2012 | Annual        |
| Power Amplifier              | AR           | 5S1G4          | 0339656    | Apr. 23, 2012 | Annual        |
| Power Amplifier              | Mini-Circuit | ZVE-8G         | 001000422  | Apr. 23, 2012 | Annual        |
| Attenuator                   | Woken        | 00800A1G01L-03 | N/A        | Apr. 19, 2012 | Annual        |

## 6. Measurement Uncertainty

| Error Description                    | Uncertainty Value (±%) | Probability Distribution | Divisor | Ci (1g) | Standard Uncertainty (1g) | Vi |
|--------------------------------------|------------------------|--------------------------|---------|---------|---------------------------|----|
| <b>Measurement System</b>            |                        |                          |         |         |                           |    |
| Probe Calibration                    | 6.0                    | Normal                   | 1       | 1       | ± 6.0 %                   | ∞  |
| Axial Isotropy                       | 4.7                    | Rectangular              | √3      | 0.7     | ± 1.9 %                   | ∞  |
| Hemispherical Isotropy               | 9.6                    | Rectangular              | √3      | 0.7     | ± 3.9 %                   | ∞  |
| Boundary Effects                     | 1.0                    | Rectangular              | √3      | 1       | ± 0.6 %                   | ∞  |
| Linearity                            | 4.7                    | Rectangular              | √3      | 1       | ± 2.7 %                   | ∞  |
| System Detection Limits              | 1.0                    | Rectangular              | √3      | 1       | ± 0.6 %                   | ∞  |
| Readout Electronics                  | 0.6                    | Normal                   | 1       | 1       | ± 0.6 %                   | ∞  |
| Response Time                        | 0.0                    | Rectangular              | √3      | 1       | ± 0.0 %                   | ∞  |
| Integration Time                     | 1.7                    | Rectangular              | √3      | 1       | ± 1.0 %                   | ∞  |
| RF Ambient Noise                     | 3.0                    | Rectangular              | √3      | 1       | ± 1.7 %                   | ∞  |
| RF Ambient Reflections               | 3.0                    | Rectangular              | √3      | 1       | ± 1.7 %                   | ∞  |
| Probe Positioner                     | 0.5                    | Rectangular              | √3      | 1       | ± 0.3 %                   | ∞  |
| Probe Positioning                    | 2.9                    | Rectangular              | √3      | 1       | ± 1.7 %                   | ∞  |
| Max. SAR Eval.                       | 2.3                    | Rectangular              | √3      | 1       | ± 1.3 %                   | ∞  |
| <b>Test Sample Related</b>           |                        |                          |         |         |                           |    |
| Device Positioning                   | 3.9                    | Normal                   | 1       | 1       | ± 3.9 %                   | 31 |
| Device Holder                        | 2.7                    | Normal                   | 1       | 1       | ± 2.7 %                   | 19 |
| Power Drift                          | 5.0                    | Rectangular              | √3      | 1       | ± 2.9 %                   | ∞  |
| <b>Phantom and Setup</b>             |                        |                          |         |         |                           |    |
| Phantom Uncertainty                  | 4.0                    | Rectangular              | √3      | 1       | ± 2.3 %                   | ∞  |
| Liquid Conductivity (Target)         | 5.0                    | Rectangular              | √3      | 0.64    | ± 1.8 %                   | ∞  |
| Liquid Conductivity (Meas.)          | 5.0                    | Normal                   | 1       | 0.64    | ± 3.2 %                   | 29 |
| Liquid Permittivity (Target)         | 5.0                    | Rectangular              | √3      | 0.6     | ± 1.7 %                   | ∞  |
| Liquid Permittivity (Meas.)          | 5.0                    | Normal                   | 1       | 0.6     | ± 3.0 %                   | 29 |
| <b>Combined Standard Uncertainty</b> |                        |                          |         |         | ± 11.7 %                  |    |
| <b>Expanded Uncertainty (K=2)</b>    |                        |                          |         |         | ± 23.4 %                  |    |

Uncertainty budget for frequency range 300 MHz to 3 GHz

# FCC SAR Test Report

A D T

| Error Description                    | Uncertainty Value (±%) | Probability Distribution | Divisor | Ci (1g) | Standard Uncertainty (1g) | Vi |
|--------------------------------------|------------------------|--------------------------|---------|---------|---------------------------|----|
| <b>Measurement System</b>            |                        |                          |         |         |                           |    |
| Probe Calibration                    | 6.55                   | Normal                   | 1       | 1       | ± 6.55 %                  | ∞  |
| Axial Isotropy                       | 4.7                    | Rectangular              | √3      | 0.7     | ± 1.9 %                   | ∞  |
| Hemispherical Isotropy               | 9.6                    | Rectangular              | √3      | 0.7     | ± 3.9 %                   | ∞  |
| Boundary Effects                     | 2.0                    | Rectangular              | √3      | 1       | ± 1.2 %                   | ∞  |
| Linearity                            | 4.7                    | Rectangular              | √3      | 1       | ± 2.7 %                   | ∞  |
| System Detection Limits              | 1.0                    | Rectangular              | √3      | 1       | ± 0.6 %                   | ∞  |
| Readout Electronics                  | 0.3                    | Normal                   | 1       | 1       | ± 0.3 %                   | ∞  |
| Response Time                        | 0.8                    | Rectangular              | √3      | 1       | ± 0.5 %                   | ∞  |
| Integration Time                     | 2.6                    | Rectangular              | √3      | 1       | ± 1.5 %                   | ∞  |
| RF Ambient Noise                     | 3.0                    | Rectangular              | √3      | 1       | ± 1.7 %                   | ∞  |
| RF Ambient Reflections               | 3.0                    | Rectangular              | √3      | 1       | ± 1.7 %                   | ∞  |
| Probe Positioner                     | 0.8                    | Rectangular              | √3      | 1       | ± 0.5 %                   | ∞  |
| Probe Positioning                    | 9.9                    | Rectangular              | √3      | 1       | ± 5.7 %                   | ∞  |
| Max. SAR Eval.                       | 4.0                    | Rectangular              | √3      | 1       | ± 2.3 %                   | ∞  |
| <b>Test Sample Related</b>           |                        |                          |         |         |                           |    |
| Device Positioning                   | 3.9                    | Normal                   | 1       | 1       | ± 3.9 %                   | 31 |
| Device Holder                        | 2.7                    | Normal                   | 1       | 1       | ± 2.7 %                   | 19 |
| Power Drift                          | 5.0                    | Rectangular              | √3      | 1       | ± 2.9 %                   | ∞  |
| <b>Phantom and Setup</b>             |                        |                          |         |         |                           |    |
| Phantom Uncertainty                  | 4.0                    | Rectangular              | √3      | 1       | ± 2.3 %                   | ∞  |
| Liquid Conductivity (Target)         | 5.0                    | Rectangular              | √3      | 0.64    | ± 1.8 %                   | ∞  |
| Liquid Conductivity (Meas.)          | 5.0                    | Normal                   | 1       | 0.64    | ± 3.2 %                   | 30 |
| Liquid Permittivity (Target)         | 5.0                    | Rectangular              | √3      | 0.6     | ± 1.7 %                   | ∞  |
| Liquid Permittivity (Meas.)          | 5.0                    | Normal                   | 1       | 0.6     | ± 3.0 %                   | 30 |
| <b>Combined Standard Uncertainty</b> |                        |                          |         |         | ± 13.4 %                  |    |
| <b>Expanded Uncertainty (K=2)</b>    |                        |                          |         |         | ± 26.8 %                  |    |

Uncertainty budget for frequency range 3 GHz to 6 GHz

## 7. Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation and authorization certificates of our laboratories obtained from approval agencies can be downloaded from our web site. If you have any comments, please feel free to contact us at the following:

**Taiwan HwaYa EMC/RF/Safety/Telecom Lab:**

Add: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil., Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-318-3232

Fax: 886-3-327-0892

**Taiwan LinKo EMC/RF Lab:**

Add: No. 47, 14th Ling, Chia Pau Vil., Linkou Dist., New Taipei City 244, Taiwan, R.O.C.

Tel: 886-2-2605-2180

Fax: 886-2-2605-1924

**Taiwan HsinChu EMC/RF Lab:**

Add: No. 81-1, Lu Liao Keng, 9<sup>th</sup> Ling, Wu Lung Vil., Chiung Lin Township, Hsinchu County 307, Taiwan, R.O.C.

Tel: 886-3-593-5343

Fax: 886-3-593-5342

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The road map of all our labs can be found in our web site also.

---END---