

TEST REPORT

Report No.:	EM201	1300033	Application	No.:	ZJ00025891
Client:	ADC T	ADC Telecommunications, INC			
Address:	P.O. Bo	ox 1101, Minneapolis, l	Minnesota		
Sample Description:	InterRe	each Fusion® 700 MHz	(Upper C), A	WSMIMO H	IP
Model:	FSN-W	/4-752121-1-HP			
Test Location:	EMC I	aboratory of Guangzho	ou GRG Metro	ology and Tes	st Co., Ltd.
Test Specification:	FCC PART 27				
Test Date:	2013-01-24 to 2013-02-24				
Issue Date:	2013-02-25				
Test Result:	Pass.				
Prepared By:		Reviewed By:		Approved I	By:
David Li/ Test Engine	er	Jane Cao/ Engineer		Gavin Wu /	Manager
David L	ì	Juneloo		Cravi	n Wu
Date:2013-02-25 Date:20		Date:2013-02-25	Date:2013-02-25 Date:2013-02-25		02-25
Other Aspects:					
None					
Abbreviations: $ok/P = passed$; $fail/F = failed$; $n.a./N = not applicable$					
The test result in this test report refers exclusively to the presented test sample. This report shall not be reproduced except in full, without the written approval of GRGT.					

GRG Metrology and Test Co., Ltd.

Address: 163, Pingyun Road, West of Huangpu Avenue, Guangzhou, Guangdong, P.R. China

Tel:+86-20-38699960

Fax:+86-20-38695185

Email: emc@grg.net.cn

http://www.grgtest.com

Ver.:2.0/ 01. Jan. 2011

Report No.: EM201300033 Application No.: ZJ00025891 Page 2 of 106

DIRECTIONS OF TEST

- 1. This station carries out test task according to the national regulation of verifications which can be traced to National Primary Standards and BIPM.
- 2. The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory.
- 3. If there is any objection concerning the test, the client should inform the laboratory within 15 days from the date of receiving the test report.

Page 3 of 106

TABLE OF CONTENTS

1.	TEST SUMMARY	4
2.	GENERAL INFORMATION	5
	2.1 CLIENT INFORMATION	5
	2.2 MANUFACTURER	
	2.3 BASIC DESCRIPTION OF EUT	
	2.4 STANDARDS APPLICABLE FOR TESTING.	5
	2.5 TEST LOCATION	
	2.6 ACCREDITATION	
	2.7 OTHER INFORMATION REQUESTED BY THE CUSTOMER	
3.	EQUIPMENTS USED DURING TEST	
	FILTER	
4.	TEST RESULTS	8
	4.1 EUT OPERATION	8
	4.2 TEST PROCEDURE & MEASUREMENT DATA	11
	4.2.1 RF OUTPUT POWER	11
	4.2.1.1 MEASUREMENT RECORD	
	4.2.2 CONDUCTED SPURIOUS EMISSIONS	
	4.2.2.1 MEASUREMENT RECORD	
	4.2.3 BAND EDGE	48
	4.2.3.1 MEASUREMENT RECORD	
	4.2.4 RADIATED SPURIOUS EMISSIONS	
	4.2.4.1 MEASUREMENT RECORD	63
	4.2.5 OCCUPIED BANDWIDTH	64
	4.2.5.1 MEASUREMENT RECORD	
	4.2.6 INTERMODULATION	
	4.2.6.1 MEASUREMENT RECORD	
	4.2.7 FREQUENCY STABILITY	
	4.2.7.1 MEASUREMENT RECORD	
Al	PPENDIX A:PHOTOGRAPH OF THE TEST CONFIGURATION	104
Δ1	PPENDIX B: PHOTOGRAPHS OF EUT	106

Report No.: EM201300033 Application No.: ZJ00025891 Page 4 of 106

1. TEST SUMMARY

Test Item	Test Requirement	Test Method	Result
Output Power	FCC part 27.50	FCC part 2.1046 2-11-04/EAB/RF § 27.50 b(4) &d(2)(B) TIA/ EIA 603C	PASS
Conducted Spurious Emission	FCC part 27.53	FCC part 2.1051 2-11-04/EAB/RF § 27.53 c(1)c(5)& h TIA/ EIA 603C	PASS
Band Edge	FCC part 27.53	FCC part 2.1051 2-11-04/EAB/RF § 27.53 c(1)c(5) TIA/EIA 603C	PASS
Radiated Spurious Emission	FCC part 27.53	FCC part 2.1053 2-11-04/EAB/RF § 27.53 c(1) TIA/EIA 603C	PASS
Occupied Bandwidth	2-11-04/EAB/RF	FCC part 2.1049 2-11-04/EAB/RF	PASS
Intermodulation	FCC part 27.53	2-11-04/EAB/RF § 27.53(c) TIA/EIA 603C	PASS
Frequency Stability	FCC part 27.54	FCC part 2.1055 § 27.54 TIA/EIA 603C	PASS

Remark:

Tx: In this whole report Tx (or tx) means Transmitter. Rx: In this whole report Rx (or rx) means Receiver.

Report No.: EM201300033 Application No.: ZJ00025891 Page 5 of 106

2. GENERAL INFORMATION

2.1 CLIENT INFORMATION

Name: ADC Telecommunications, INC

Address: P.O. Box 1101, Minneapolis, Minnesota

2.2 MANUFACTURER

Name: FLEXTRONICS TECH. (SHANGHAI) CO LTD

Address: NO.77, YONG SHENG, JIADING ROAD, MALU, JIADING, SHANGHAI,

CHINA 201801

2.3 BASIC DESCRIPTION OF EUT

Equipment: InterReach Fusion® 700 MHz (Upper C), AWSMIMO HP

Model No.: Main Hub: FSN-W4-MH-1

EHub: FSN-W1-EH-2

RAU: FSN-W4-752121-1-HP

Power Supply: Main Hub and Ehub: AC 100-240V 50/60Hz

Power Supply: RAU:DC 54V (from the Fusion Expansion Hub via the same coax cable)

Adapter N/A

Power Cord 1.5m unscrewed AC power cord

Type of

Modulation WCDMA,LTE

Frequency Band 700MHz Band :746MHz-757MHz downlink,776MHz-787MHz uplink

AWS1 Band:2110MHz-2155MHz downlink,1710MHz-1755MHz uplink AWS2 Band:2110MHz-2155MHz downlink ,1710MHz-1755MHz uplink

Antenna Type N/A

2.4 STANDARDS APPLICABLE FOR TESTING

The standard used FCC part 27

Report No.: EM201300033 Application No.: ZJ00025891 Page 6 of 106

2.5 TEST LOCATION

The tests and measurements refer to this report were performed by Guangzhou GRG Metrology and Test Co., Ltd.

Add.: 163 Pingyun Rd, West of Huangpu Ave, Guangzhou, 510656, P. R. China

Telephone: +86-20-38699959, 38699960, 38699961

Fax: +86-20-38695185

2.6 ACCREDITATION

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC Listed Lab No. 688188
China	CNAS NO.L0446
China	DILAC No.DL175
Canada	Registration No.:8355A-1

2.7 OTHER INFORMATION REQUESTED BY THE CUSTOMER $_{\rm N/A}$

FCC ID: NOO-F0689-011

Report No.: EM201300033 Application No.: ZJ00025891 Page 7 of 106

3. EQUIPMENTS USED DURING TEST

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Radiated Spurious Emi	ssion			
Spectrum Analyzer	R&S	ESU40	100106	2013-09-26
Biconical antenna	ELECTRO-METRICS	BIA-30S	166	2013-10-14
log-periodical antenna	ELECTRO-METRICS	LPA-30	383	2013-07-30
Horn antenna	ETS.LINDGREN	3117	00075824	2013-08-20
Biconical Log-periodic Antenna	ETS.LINDGREN	3142C	00075971	2013-07-29
Horn antenna	SCHWARZBECK	BBHA9120D	D752	2013-10-14
Signal Generator	R&S	SML03	103002	2013-09-02
FILTER	TELONIC	TTR95-3EE	50076	2013-09-06

Output Power/ Occupied Bandwidth/ Conducted Spurious Emission				
EMI Receiver	R&S	ESU40	100106	2013-09-26
Signal Generator	Agilent	N5182B	MY51350261	2013-09-01
Signal generator	Agilent	E4438C	MY47272315	2013-09-26

Intermodulation/ Band Edge/ Frequency Stablility				
Signal Generator	Agilent	N5182B	MY51350261	2013-09-01
Sinal generator	Agilent	E4438C	MY47272315	2012-09-26
EMI Receiver	R&S	ESU40	100106	2013-09-26
Power splitter	Agilent	11667A	MY42254304	2013-09-02
Constant temperature& humidity chamber	CEPREI	CEEC-MSJ-60BE	11015	2013-05-15

Report No.: EM201300033 Application No.: ZJ00025891 Page 8 of 106

4. TEST RESULTS 4.1 EUT OPERATION

Power supply: AC 120V 60Hz

Temperature: 25.0 °C Humidity: 50 % RH Atmospheric Pressure: 1005mbar

Test requirement

Fiber-optic distribution systems are a type of in-building radiation system that receives RF signals from an antenna, distributes the signal over fiber-optic cable, and then retransmits at another location for example within a building or tunnel. Most fiber-optic systems are signal boosters; however, some may be repeaters. These systems generally have two enclosures typically called host (or local or donor unit) and remote. Some systems may also have an optional expander box for fan-out to remotes. The system transmits downlink from the remote unit to handsets, portables, or clients, and transmits uplink signals via from the host unit. Usually but not always the uplink goes through an intermediate amplifier to a "donor" antenna. Therefore both uplink and downlink must be tested, unless filing effectively documents how connection of uplink to donor antenna with or without an intermediate amplifier will be prevented, such as for always only a cabled connection to a base station. Fiber-optic systems are not amplifiers (AMP equipment class) - they are equipment class TNB or PCB. The same approval procedures also apply for multiple-enclosure systems connected by coax cable.

- 1) host unit
- a) transmits uplink to base station via antenna thru coax, passive interface unit, or active interface unit (amplifier)
- b) sends base-station downlink via fiber-optic or coax to remote
- c) receives handset uplink via fiber-optic or coax from remote
- d) optional connection to expansion unit via fiber-optic
- e) separate FCC ID from remote, unless electrically identical
- f) non-transmitting host unit
- i) connects directly to a base station via coax cable but does FCC ID: NOO-F0689-011

Report No.: EM201300033 Application No.: ZJ00025891 Page 9 of 106

not connect to antenna or amplifier

- ii) Part 15 digital device subject to Verification, no FCC ID
- 2) remote unit
- a) receives base-station downlink via fiber-optic or coax from host, transmits via antenna to handsets
- b) returns handset uplink via fiber-optic or coax to host
- c) separate FCC ID from remote, unless electrically identical
- 3) expansion unit
- a) fiber-optic or coax from host
- b) fiber-optic or coax fan-out to remote(s)
- c) Part 15 digital device subject to Verification, no FCC ID
- 4) passive interface unit
- a) contains attenuators, splitters, combiners
- b) coax cable connection between host and base-station
- c) passive device, no FCC ID
- 5) active interface unit
- a) amplifies uplink signal from host unit for transmit by donor antenna
- b) attenuates downlink from donor antenna
- c) coax cable connection between host and active interface unit
- d) usually has separate FCC ID; in some cases could be combined/included with host as one enclosure

The following general definitions follow from this stated in the Part 90 rule sections as listed above. Two of the definitions replace previous EAB internal definitions given for booster, repeater and extender. The general term "extender" is the same as booster, but booster should be used rather than extender. The general term "translator" is the same as repeater, but repeater should be used rather than translator.

External radio frequency power amplifier (ERFPA) - any device which, (1) when used in conjunction with a radio transmitter signal source, is capable of amplification of that signal, and (2) is not an integral part of a radio transmitter as manufactured. The EAS equipment class AMP is used only for an ERFPA device inserted between a transmitter

(TNB/PCB) and an antenna (has only one antenna port)

Booster is a device that automatically reradiates signals from base transmitters without channel translation, for the purpose of improving the reliability of existing service by increasing the signal strength in dead spots. An "in-building radiation system" is a signal booster. These devices are not intended to extend the size of coverage from the originating base station. A booster can be either single or multiple channels.

Repeater is a device that retransmits the signals of other stations. Repeaters are different from boosters in that they can include frequency translation and can extend coverage beyond the design of the original base station. A repeater is typically single channel but can also be multiple channels.

ERFPA (AMP) and boosters/repeaters (TNB/PCB) can generally be authorized for all rule parts except15 and 18.

Tests should be done with each typical signal. e.g., for F3E emissions use 2500 Hz with 2.5 or 5 kHz deviation. Use of CW signal for some tests is acceptable in lieu of actual emission, in some cases when CW signal gives worst case.

The EUT include Host unit, expansion unit and remote unit.

Only remote unit need FCC ID, Host unit and expansion nit do not need separate FCC ID. The EUT belongs to booster(TNB)class.

Report No.: EM201300033 Application No.: ZJ00025891 Page 11 of 106

4.2 TEST PROCEDURE & MEASUREMENT DATA 4.2.1 RF OUTPUT POWER

Test Date: 25 January, 2013 Test Method: FCC part 2.1046

2-11-04/EAB/RF

Test 700MHz Band : FCC 27.50 b(4)

Requirement: The effective radiated power (ERP) of base transmitters and cellular repeaters

must not exceed 1000 Watts/MHz.

AWS Band: FCC 27.50 d(2)(B)

The effective radiated power (EIRP) of base transmitters and cellular repeaters

must not exceed 1640 Watts/MHz.

EUT Operation: The output power of EUT be set to maximum value, the gain of EUT be set to

maximum value by software through the manufacture

Conditions: Normal

Test configuration:

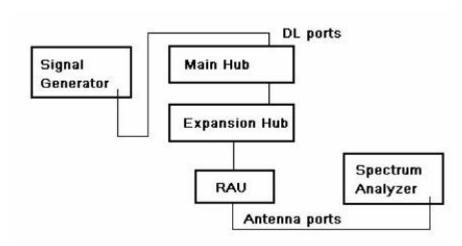


Fig.1 Down Link Configuration

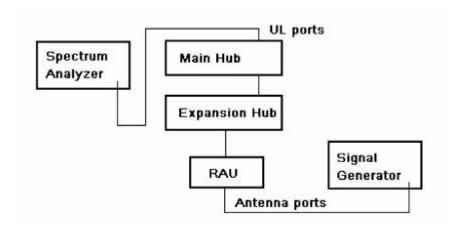


Fig.2 Up Link Configuration

Test Procedure: RF output power test procedure: (Conducted measurement)

a) Connect the equipment as illustrated, when the output power is over the max value of the Spectrum Analyzer, add the attenuator to avoid destroying the facility.

FCC ID: NOO-F0689-011

Report No.: EM201300033 Application No.: ZJ00025891 Page 12 of 106

b) Set the center frequency of the Spectrum Analyzer to the assigned transmitter frequency, key the transmitter, and set the level of the carrier to the full scale reference line.

- c) Do not apply any tone to modulate the EUT
- d) Adjust the Spectrum Analyzer for the following setting:
 - 1) Resolution Bandwidth >> the carrier bandwidth
 - 2) Video Bandwidth refer to standard requirement
- e) Use spectrum analyzer channel power measurement
- f) Record the frequencies and levels of carrier power
- g) Calculate the signal link way loss and final power value

Remark:

Output power:

Power on Form 731 should be clearly understood as either composite of multichannels or per carrier, If power is composite

Include in comments field: "Power output listed is composite for multi-channel operation."

Check that the input drive level is at the maximum input rating and maximum gain setting for all tests. Check both uplink and downlink input level. See manual or brochures/technical description for maximum rating. May need to check FCC identifier of transmitter used for tests.

Confirm device cannot operate in saturation .Are there means to control maximum power and to assure linear operation (use in system configuration may be necessary)? How is saturation or over-modulation prevented for pulsed signal inputs?

Report No.: EM201300033 Application No.: ZJ00025891 Page 13 of 106

4.2.1.1 MEASUREMENT RECORD

700MHz Band:

Frequency Band (746MHz-7	57MHz),Measure Max Out put power (dBm)		
LTE(1.4MHz)	,,		
746.70 MHz	17.94		
752.00 MHz	18.02		
756.30 MHz	17.95		
	Max value in W		
	0.063		
LTE(3MHz)			
747.50 MHz	17.93		
752.00 MHz	18.11		
755.50 MHz	17.94		
Max value in W			
	0.065		
LTE(5MHz)			
748.50 MHz	17.96		
752.00 MHz	18.16		
754.50 MHz	17.97		
Max value in W			
	0.065		
LTE(10MHz)			
751.00 MHz	18.15		
752.00 MHz	18.21		
Max value in W			
	0.066		

Report No.: EM201300033 Application No.: ZJ00025891 Page 14 of 106

2100MHz Band(AWS1):

Frequency Band (2110MHz-2155MHz), Measure Max Out put power (dBm)		
LTE(1.4MHz)		
2110.70 MHz	22.89	
2132.50 MHz	22.91	
2154.30 MHz	22.93	
Ma	nx value in W	
	0.196	
LTE(3MHz)		
2111.50 MHz	22.92	
2132.50 MHz	22.94	
2153.50 MHz	22.95	
Ma	ax value in W	
	0.197	
LTE(5MHz)		
2112.50 MHz	22.90	
2132.50 MHz	22.93	
2152.50 MHz	22.96	
Max value in W		
0.198		
LTE(10MHz)		
2115.00 MHz	22.94	
2132.50 MHz	22.97	
2150.00 MHz	22.93	
Max value in W		
0.198		

2100MHz Band(AWS1):

Frequency Band (2110MHz-2155MHz), Measure Max Out put power (dBm)		
WCDMA		
2112.5 MHz	22.94	
2132.5 MHz	22.98	
2152.5 MHz	22.92	
Max value in W		
	0.199	

Remark: test in single channel status, output power is test in full amplifying status

Report No.: EM201300033 Application No.: ZJ00025891 Page 15 of 106

4.2.2 CONDUCTED SPURIOUS EMISSIONS

Test Date: 26 January, 2013 Test Method: FCC part 2.1051

Test Requirement: 700MHz Band : FCC 27.53 c(1)

The power of any emission outside of the authorized operating

frequency ranges must be attenuated below the transmitting power (P)

by a factor of at least $43 + 10\log(P) dB$, or -13dBm.

AWS Band: FCC 27.53 h

The power of any emission outside of the authorized operating

frequency ranges must be attenuated below the transmitting power (P)

by a factor of at least $43 + 10\log(P)$ dB,or -13dBm.

EUT Operation: The output power of EUT be set to maximum value, the gain of EUT

be set to maximum value by software through the manufacture

Conditions Normal

Report No.: EM201300033 Application No.: ZJ00025891 Page 16 of 106

Test configuration


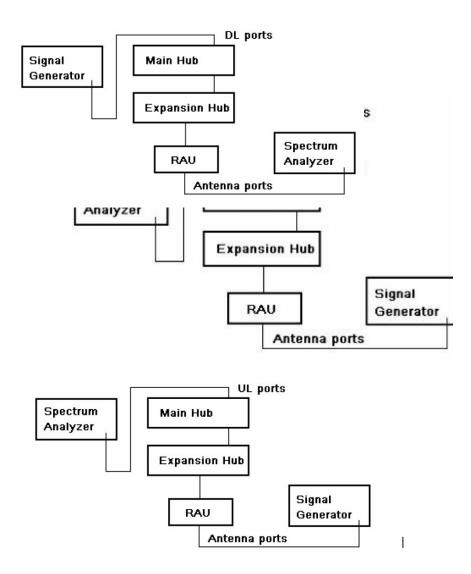


Fig.2 Up Link Configuration

Test Procedure:

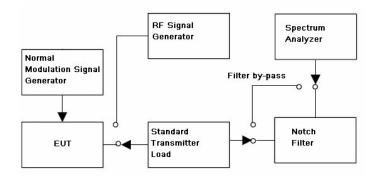

Conducted Emission test procedure:

a)Connect the equipment as illustrated, when the output power is over the max value of the Spectrum Analyzer ,add the attenuator to avoid destroying the facility.

b)Set the center frequency of the Spectrum Analyzer to the assigned

Report No.: EM201300033 Application No.: ZJ00025891 Page 17 of 106

transmitter frequency ,key the transmitter ,and set the level of the carrier to the full scale reference line.

- c)Do not apply any tone to modulate the EUT
- d)Adjust the Spectrum Analyzer for the following setting:
 - 1) Resolution Bandwidth, (base the standard, apply the different set).her is 100KHz for frequency band less than 1GHz, 1MHz for frequency over 1GHz;
- 2)Video Bandwidth refer to standard requirement e)Adjust the center frequency of the spectrum analyzer for incremental coverage of the range from:
- 1)the lowest radio frequency generated in the equipment ,it can be 9KHZ base the test method ,here select 30MHz as lowest frequency start point;
- 2) the highest radio frequency shall higher than 10 times of carrier frequency.
- f)Record the frequencies and levels of carrier power

Report No.: EM201300033 Application No.: ZJ00025891 Page 18 of 106

Remark

The notch filter is used for avoid the EUT fundamental carrier output power making the spectrum overload and the harmonic spurious

brought it.

When the EUT fundamental carrier is not enough to make the


status, the notch filter could be not used.

Report No.: EM201300033 Application No.: ZJ00025891 Page 19 of 106


4.2.2.1 MEASUREMENT RECORD

700MHz Band


700MHz-LTE-1.4M downlink (lowest frequency) 30MHz-1GHz

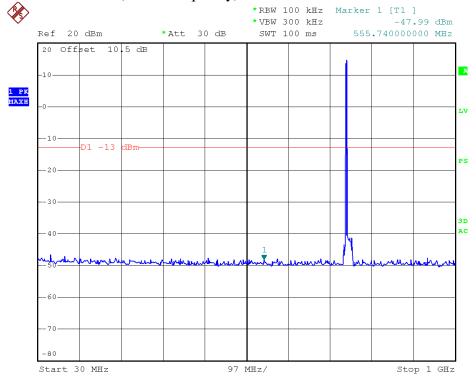


700MHz -LTE-1.4M downlink (lowest frequency) Above 1GHz

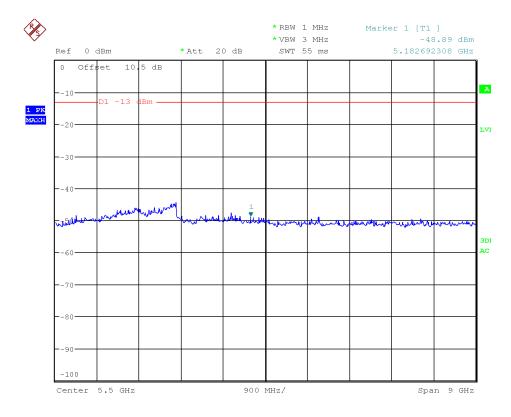


700MHz -LTE-1.4M downlink (middle frequency) 30MHz-1GHz

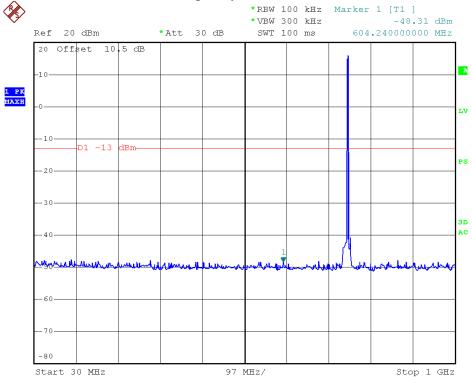


700MHz -LTE-1.4M downlink (middle frequency) Above 1GHz

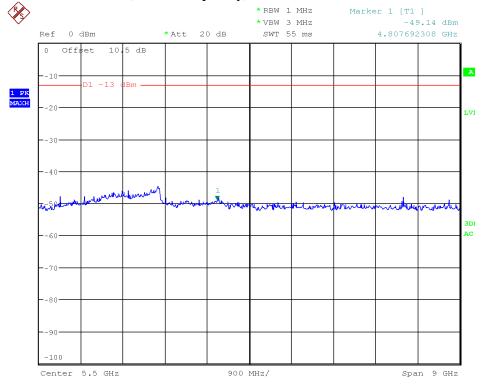


700MHz -LTE-1.4M downlink (highest frequency) 30MHz-1GHz

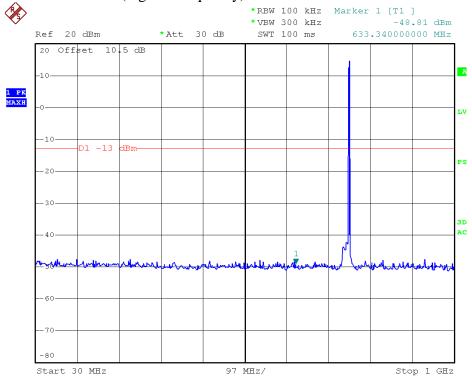


700MHz -LTE-1.4M downlink (highest frequency) Above 1GHz

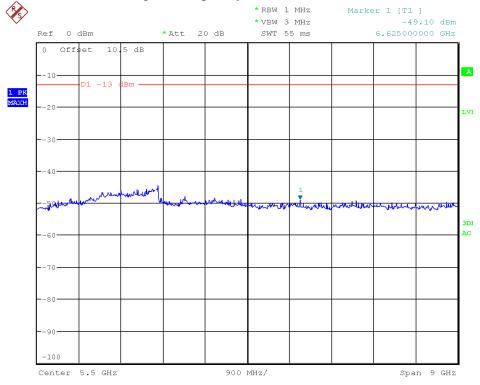


700MHz-LTE-3M downlink (lowest frequency) 30MHz-1GHz

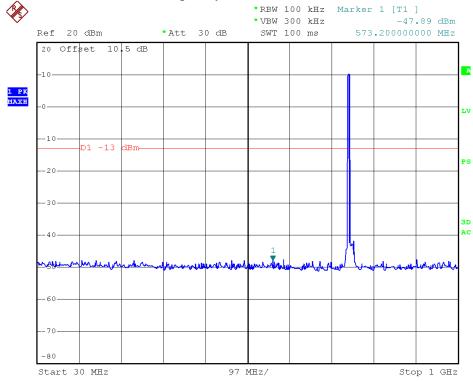


700MHz -LTE-3M downlink (lowest frequency) Above 1GHz

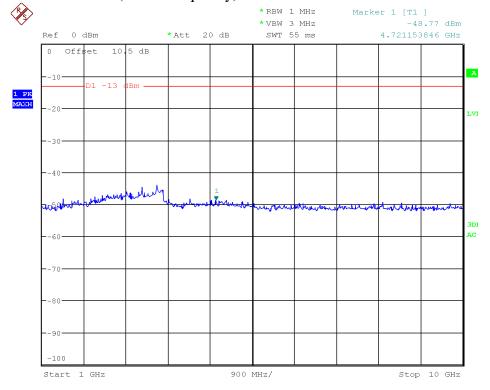


700MHz -LTE-3M downlink (middle frequency) 30MHz-1GHz

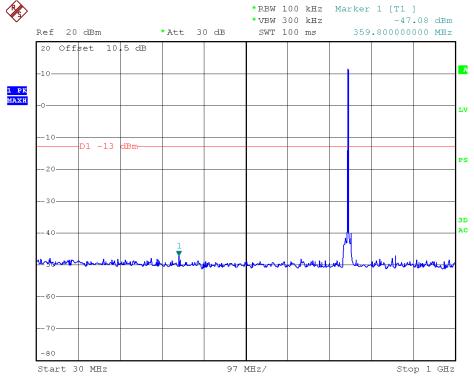


700MHz -LTE-3M downlink (middle frequency) Above 1GHz

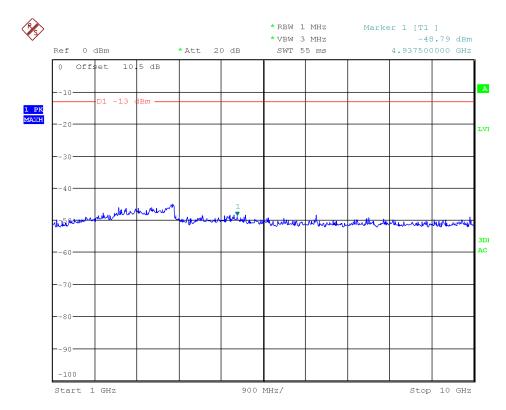


700MHz -LTE-3M downlink (highest frequency) 30MHz-1GHz

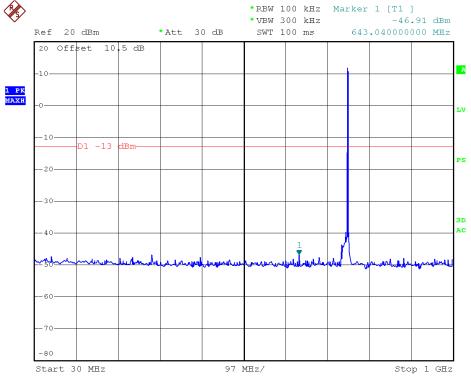


700MHz -LTE-3M downlink (highest frequency) Above 1GHz

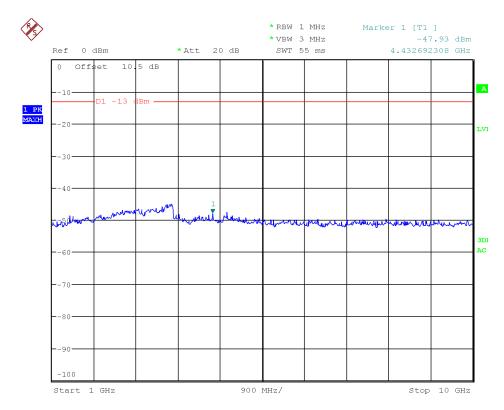


700MHz-LTE-5M downlink (lowest frequency) 30MHz-1GHz

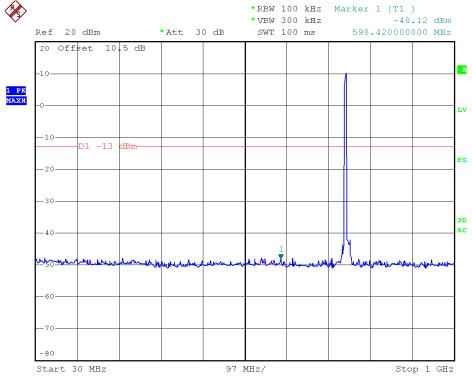


700MHz -LTE-5M downlink (lowest frequency) Above 1GHz

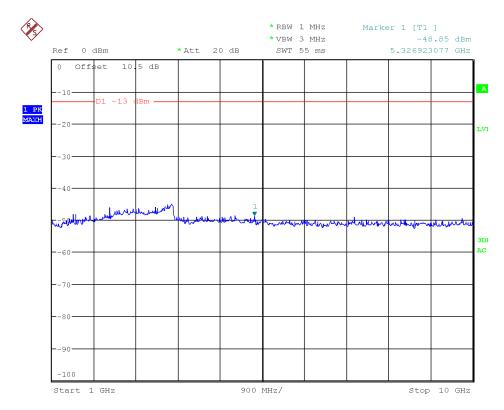


700MHz -LTE-5M downlink (middle frequency) 30MHz-1GHz

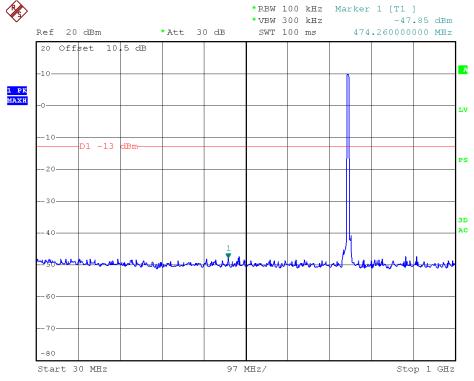


700MHz -LTE-5M downlink (middle frequency) Above 1GHz

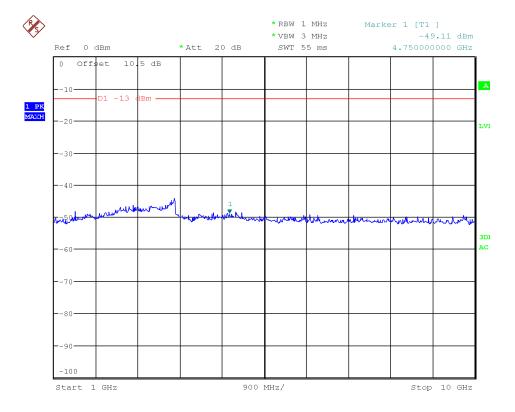


700MHz -LTE-5M downlink (highest frequency) 30MHz-1GHz

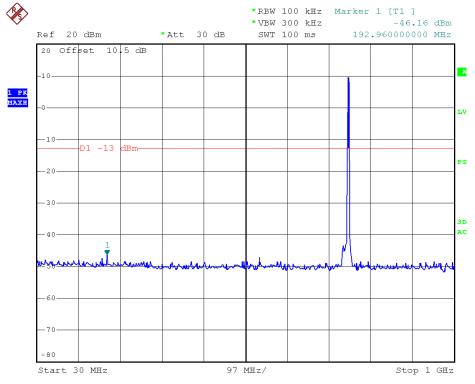


700MHz -LTE-5M downlink (highest frequency) Above 1GHz

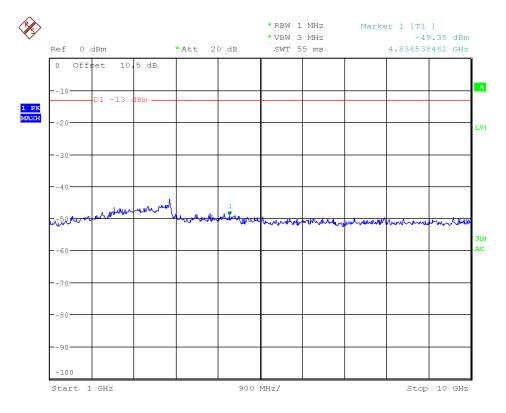


700MHz –LTE-10M downlink (lowest frequency) 30MHz-1GHz

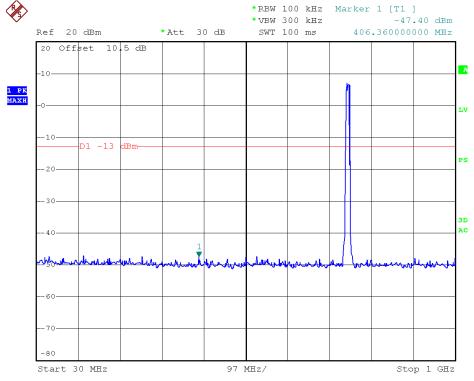


700MHz –LTE-10M downlink (lowest frequency) Above 1GHz

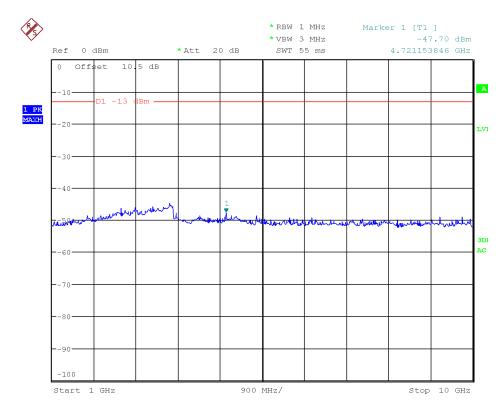


700MHz –LTE-10M downlink (highest frequency) 30MHz-1GHz

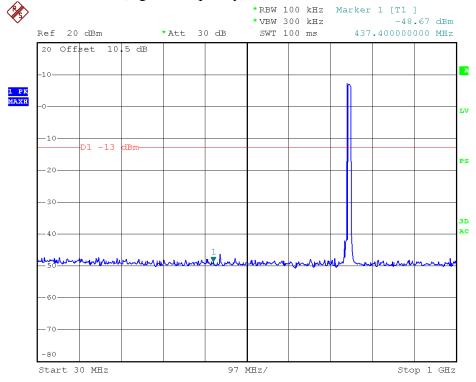


700MHz –LTE-10M downlink (highest frequency) Above 1GHz

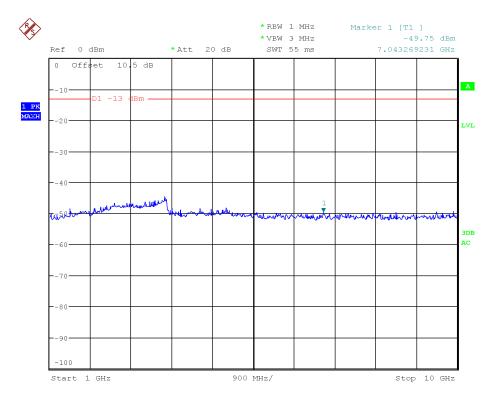

On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

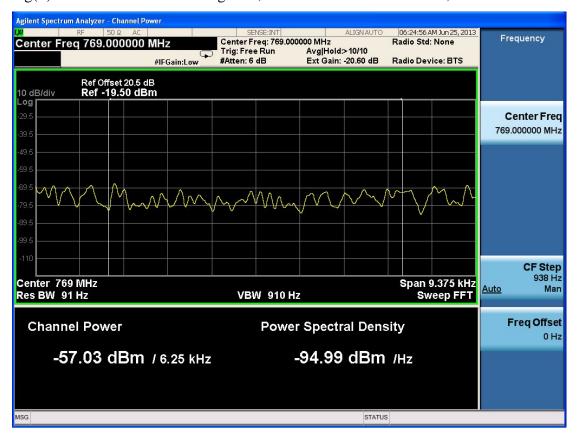


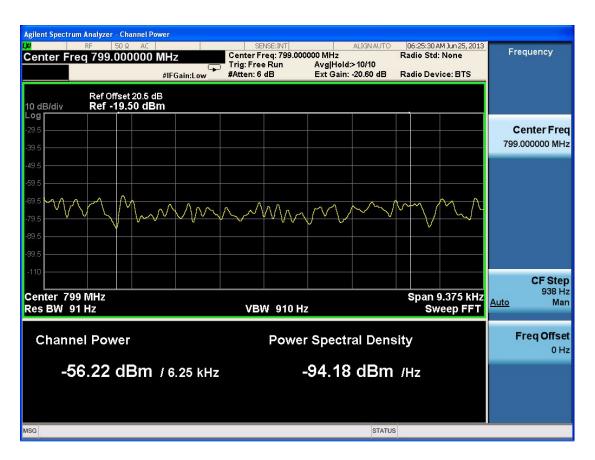

FCC ID: NOO-F0689-011

For operations in the 746-763 MHz, 775-793 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz(-40dBm/MHz) equivalent isotropically radiated power (EIRP) for wideband signals.



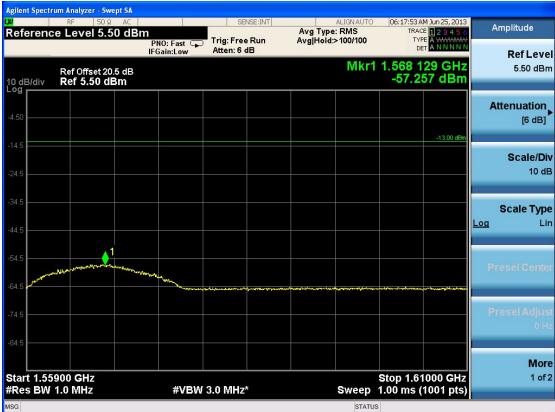

FCC ID: NOO-F0689-011


Report No.: EM201300033 Application No.: ZJ00025891 Page 32 of 106




Report No.: EM201300033 Application No.: ZJ00025891 Page 33 of 106

2100MHz Band(AWS1):


2100MHz -LTE-1.4M downlink (lowest frequency) 30MHz-1GHz

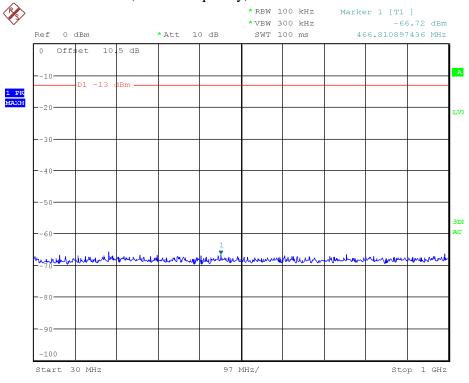


2100MHz -LTE-1.4M downlink (lowest frequency) Above 1GHz

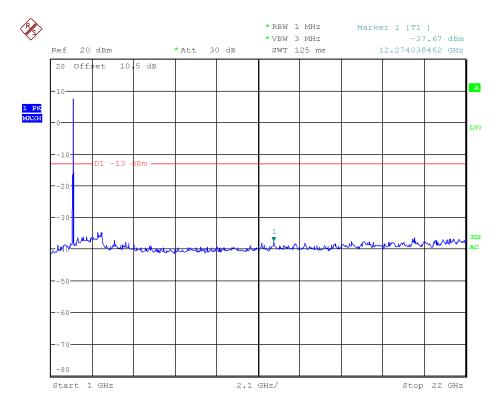


2100MHz -LTE-1.4M downlink (middle frequency) 30MHz-1GHz

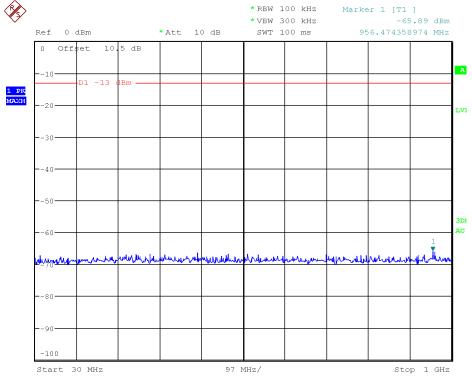


2100MHz -LTE-1.4M downlink (middle frequency) Above 1GHz

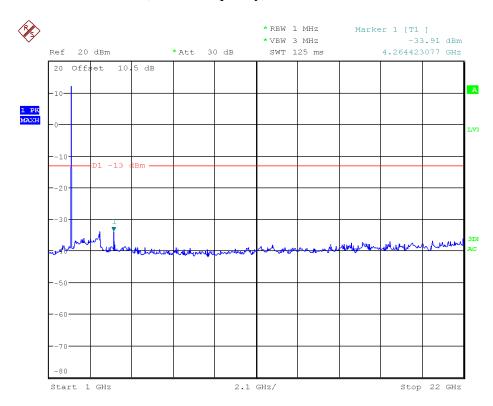


2100MHz –LTE-1.4M downlink (highest frequency) 30MHz-1GHz

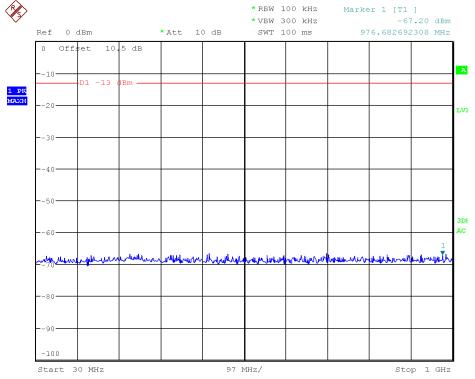


2100MHz -LTE-1.4M downlink (highest frequency) Above 1GHz

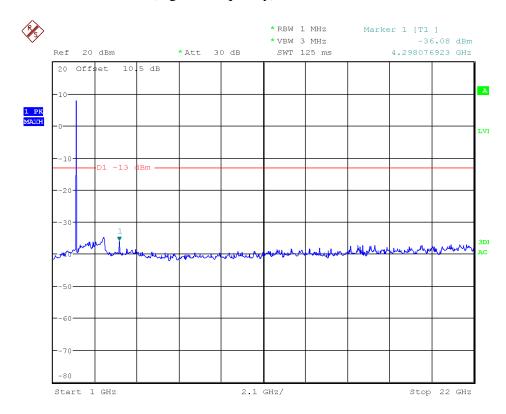


2100MHz –LTE-3M downlink (lowest frequency) 30MHz-1GHz

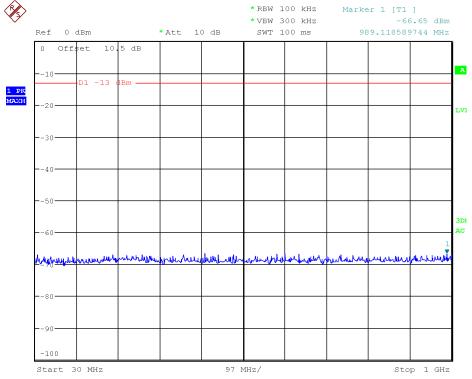


2100MHz -LTE-3M downlink (lowest frequency) Above 1GHz

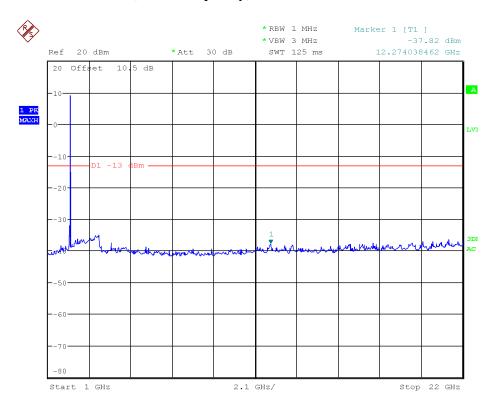


2100MHz -LTE-3M downlink (middle frequency) 30MHz-1GHz

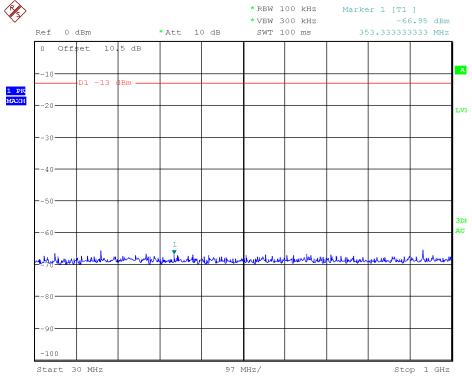


2100MHz -LTE-3M downlink (middle frequency) Above 1GHz

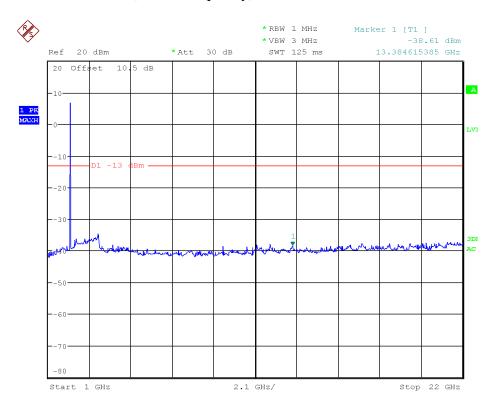


2100MHz -LTE-3M downlink (highest frequency) 30MHz-1GHz

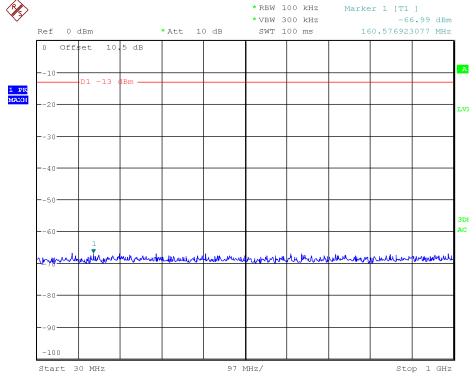


2100MHz –LTE-3M downlink (highest frequency) Above 1GHz

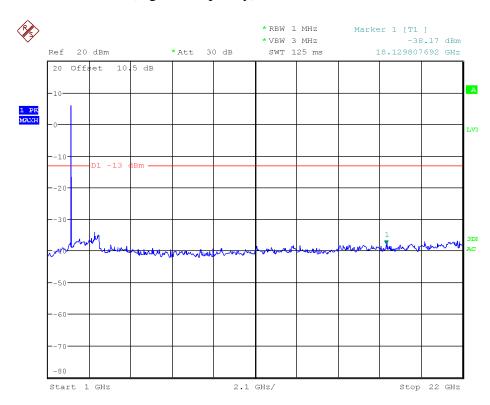


2100MHz –LTE-5M downlink (lowest frequency) 30MHz-1GHz

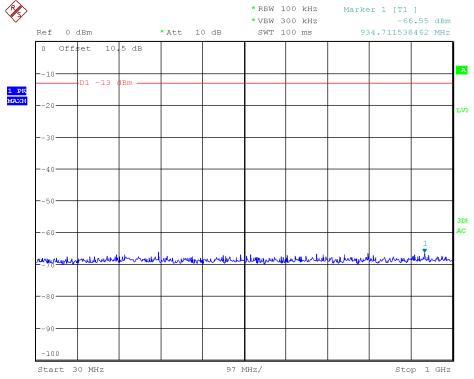


2100MHz -LTE-5M downlink (lowest frequency) Above 1GHz

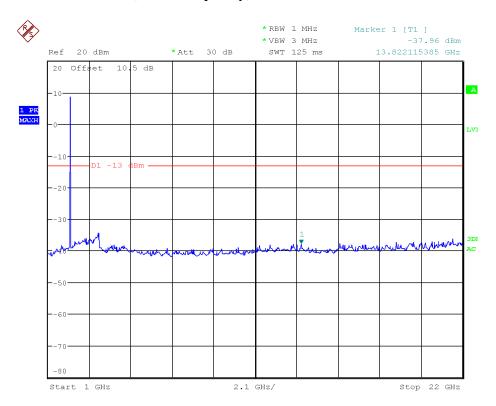


2100MHz -LTE-5M downlink (middle frequency) 30MHz-1GHz

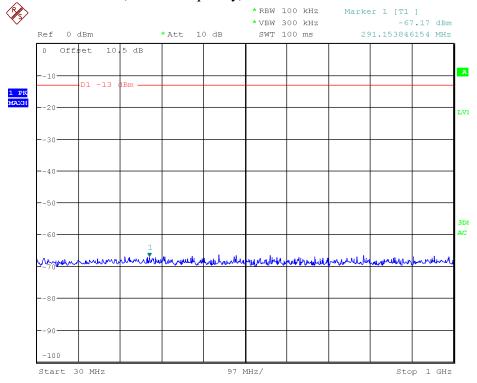


2100MHz -LTE-5M downlink (middle frequency) Above 1GHz

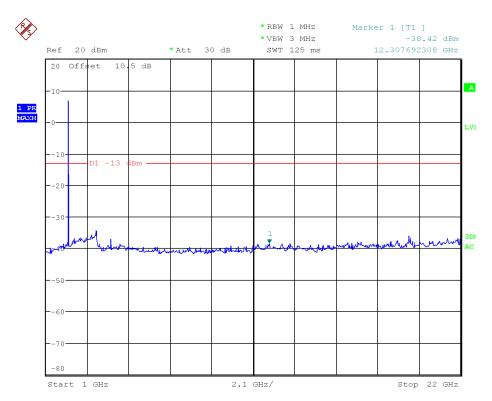


2100MHz –LTE-5M downlink (highest frequency) 30MHz-1GHz

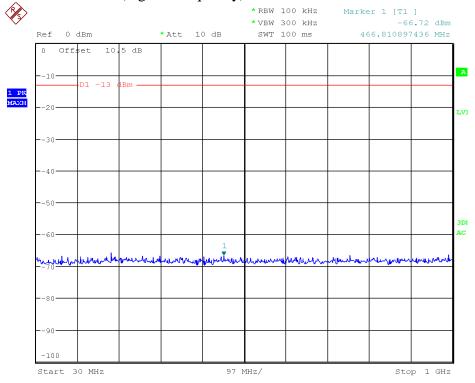


2100MHz –LTE-5M downlink (highest frequency) Above 1GHz

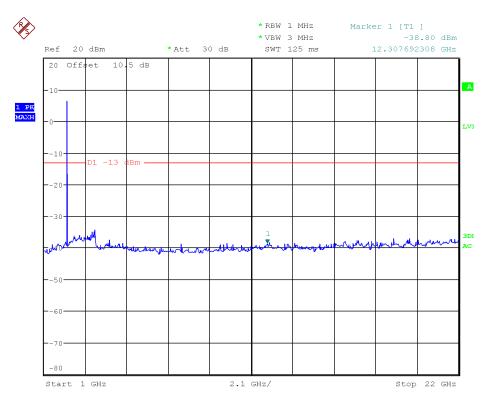


2100MHz -LTE-10M downlink (lowest frequency)30MHz-1GHz

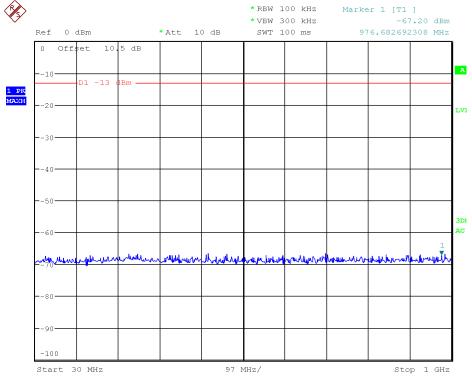


2100MHz –LTE-10M downlink (lowest frequency) Above 1GHz

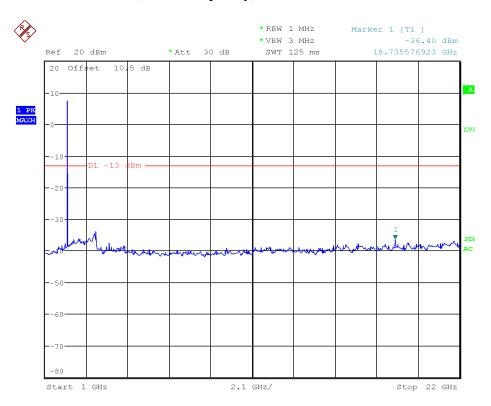


2100MHz –LTE-10M downlink (middle frequency)30MHz-1GHz

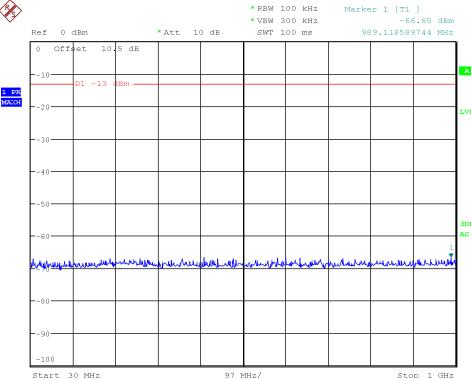


2100MHz –LTE-10M downlink (middle frequency) Above 1GHz

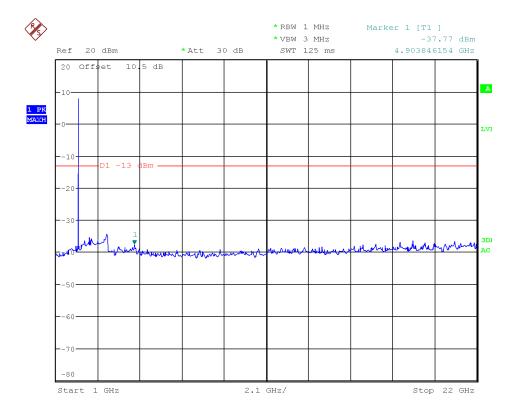


2100MHz –LTE-10M downlink (highest frequency)30MHz-1GHz

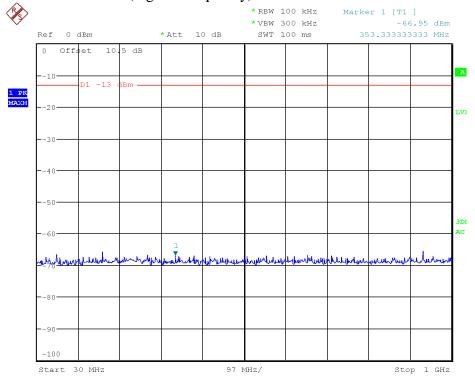


2100MHz -LTE-10M downlink (highest frequency) Above 1GHz

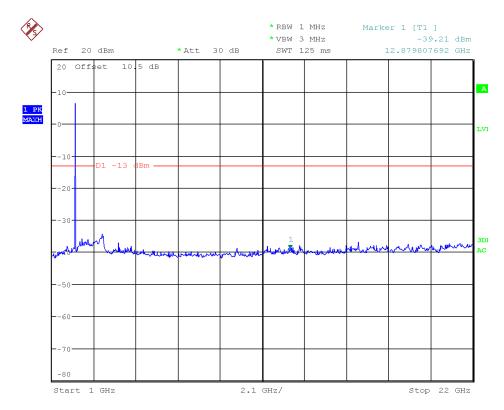


2100MHz -WCDMA downlink (lowest frequency) 30MHz-1GHz

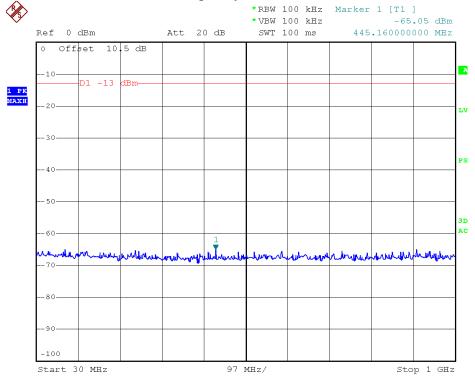


2100MHz -WCDMA downlink (lowest frequency) Above 1GHz

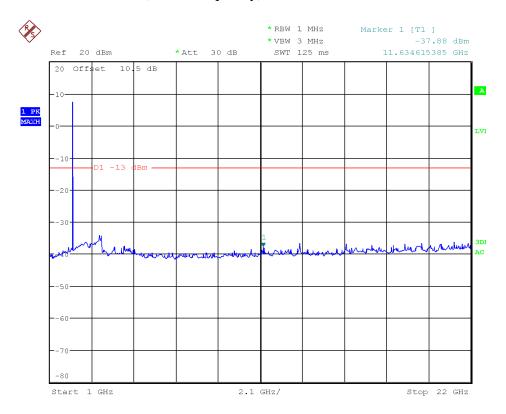


2100MHz - WCDMA downlink (middle frequency) 30MHz-1GHz

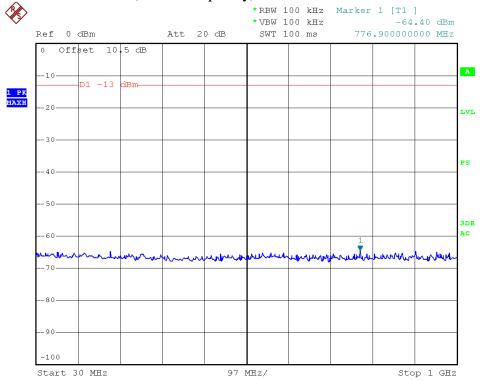


2100MHz – WCDMA downlink (middle frequency) Above 1GHz

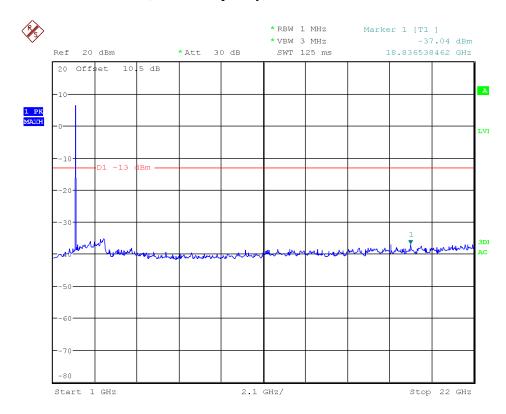

2100MHz -WCDMA downlink (high frequency) 30MHz-1GHz

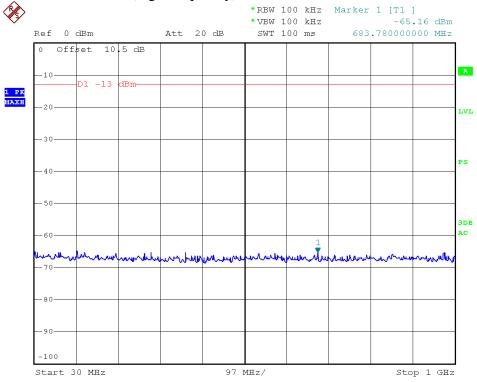

2100MHz -WCDMA downlink (high frequency) Above 1GHz

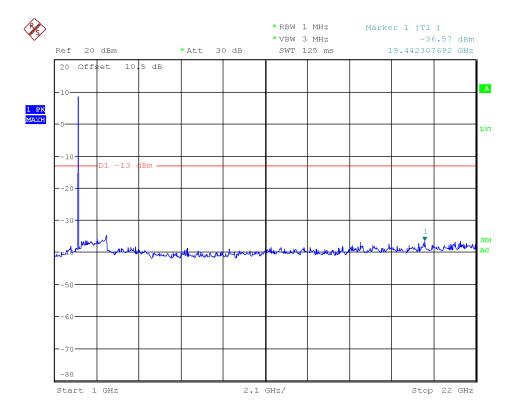

Report No.: EM201300033 Application No.: ZJ00025891 Page 48 of 106

4.2.3 BAND EDGE

Test Date: 28 January, 2013 Test Method: FCC part 2.1051

Test 700MHz Band : FCC 27.53 c(1)

Requirement: The power of any emission outside of the authorized operating frequency

ranges must be attenuated below the transmitting power (P) by a factor of at

least $43 + 10\log(P)$ dB,or -13dBm.

AWS Band: FCC 27.53 h

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at


least $43 + 10\log(P)$ dB,or -13dBm.

Status The output power of EUT be set to maximum value, the gain of EUT be set to

maximum value by software through the manufacture

Conditions Normal

Test configuration

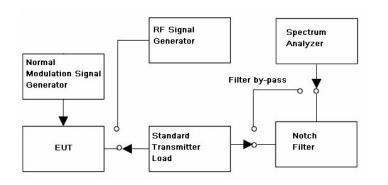

Test

Procedure: Conducted Emission test procedure:

a)Connect the equipment as illustrated, when the output power is over the max value of the Spectrum Analyzer ,add the attenuator to avoid destroying the facility.

b)Set the center frequency of the Spectrum Analyzer to the assigned transmitter frequency ,key the transmitter ,and set the level of the carrier to the full scale reference line.

- c)Do not apply any tone to modulate the EUT
- d)Adjust the Spectrum Analyzer for the following setting:
 - 1)Resolution Bandwidth, (base the standard, apply the different set).her is 100KHz for frequency band less than 1GHz, 1MHz for frequency over 1GHz;
 - 2) Video Bandwidth refer to standard requirement
- e)Adjust the center frequency of the spectrum analyzer for incremental coverage of the range from:

Use spectrum analyzer channel power measurement

1)the lowest radio frequency generated in the equipment, it can be 9KHz base the test method, here select 30MHz as lowest frequency start point;

Report No.: EM201300033 Application No.: ZJ00025891 Page 49 of 106

2) the highest radio frequency shall higher than 10 times of carrier frequency. f)Record the frequencies and levels of carrier power

Remark


The notch filter is used for avoid the EUT fundamental carrier output power making the spectrum overload and the harmonic spurious brought it. When the EUT fundamental carrier is not enough to make the status ,the notch filter could be not used.

Report No.: EM201300033 Application No.: ZJ00025891 Page 50 of 106


4.2.3.1 MEASUREMENT RECORD

700MHz Band:


700MHz-LT-1.4M Channel Bandwidth-Lower Edge

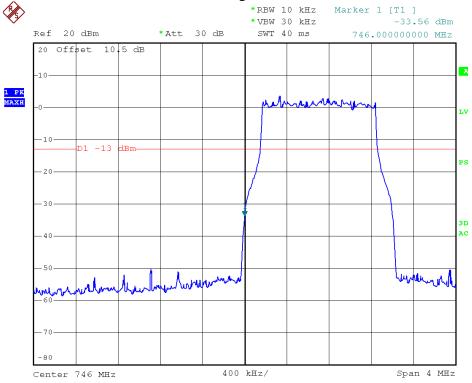


700MHz-LT-1.4M Channel Bandwidth -Upper Edge

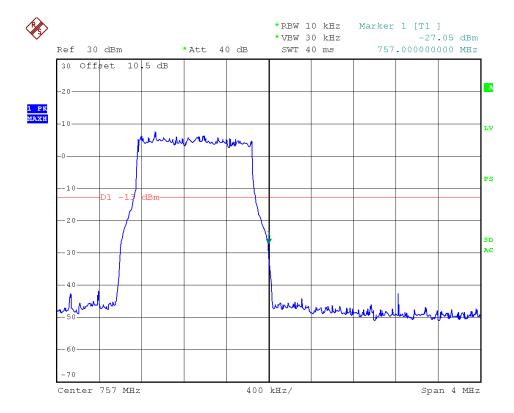


700MHz-LTE-3M Channel Bandwidth -Lower Edge

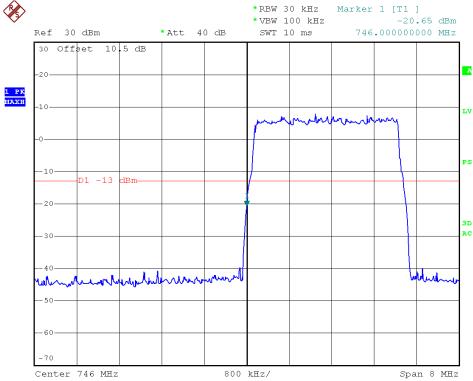


700MHz- LTE-3M Channel Bandwidth -Upper Edge

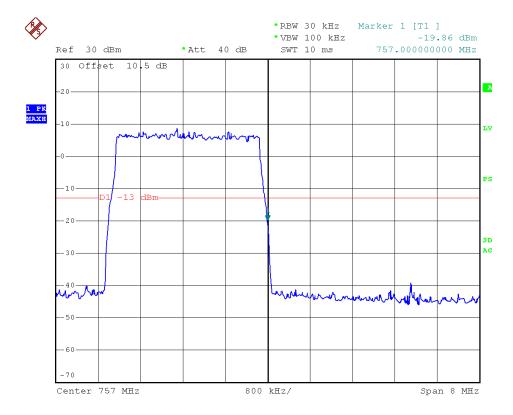


700MHz-LTE-5M Channel Bandwidth -Lower Edge

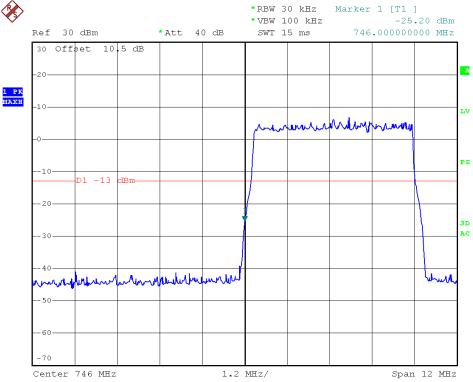


700MHz- LTE-5M Channel Bandwidth -Upper Edge

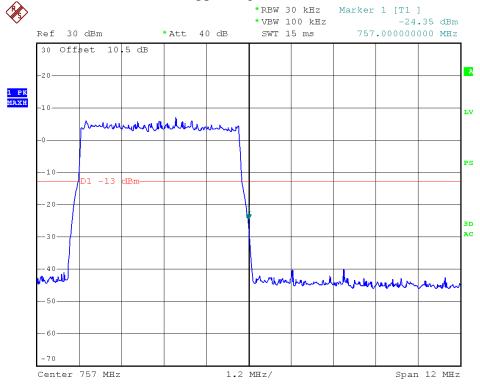

700MHz- LTE-10M Channel Bandwidth -Lower Edge

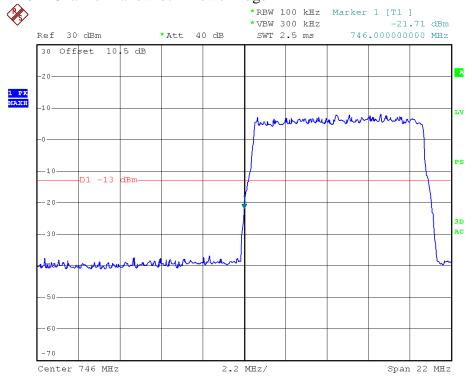


700MHz- LTE-10M Channel Bandwidth -Upper Edge

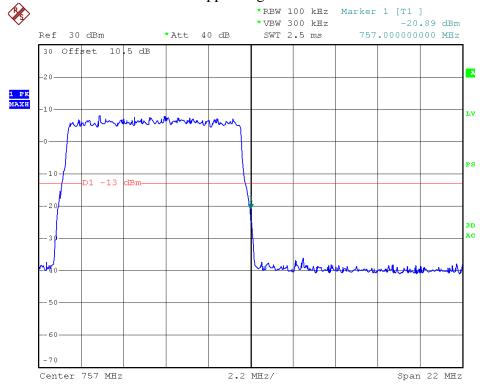


Report No.: EM201300033 Application No.: ZJ00025891 Page 54 of 106

2100MHz Band(AWS1):


2100MHz- LTE-1.4M Channel Bandwidth -Lower Edge

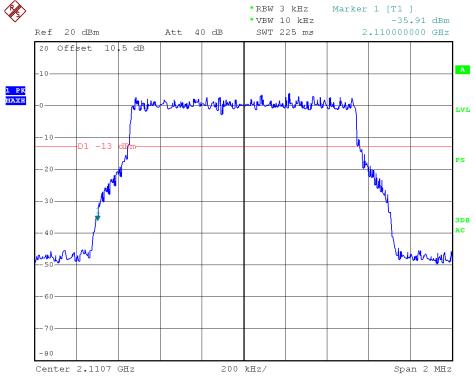


2100MHz- LTE-1.4M Channel Bandwidth -Upper Edge

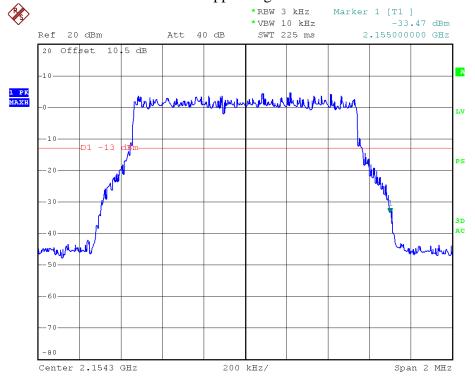

2100MHz- LTE-3M Channel Bandwidth -Lower Edge

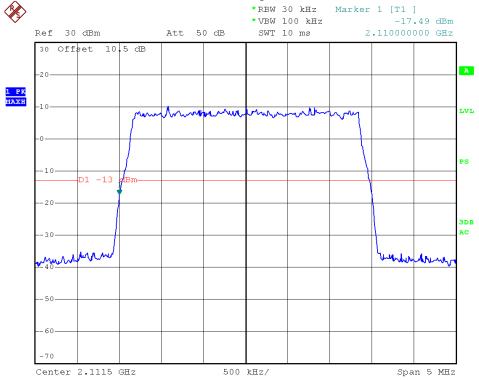


2100MHz- LTE-3M Channel Bandwidth -Upper Edge

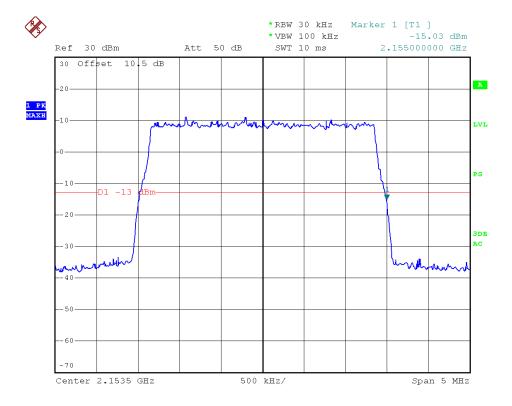


Report No.: EM201300033 Application No.: ZJ00025891 Page 56 of 106

2100MHz- LTE-5M Channel Bandwidth -Lower Edge

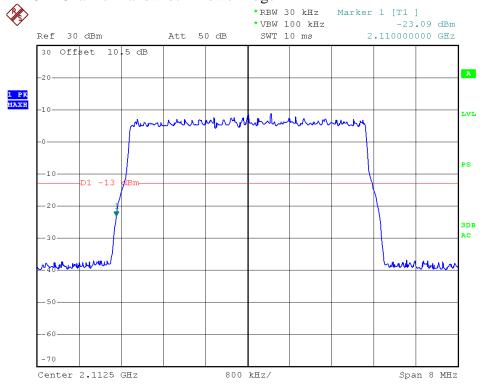


2100MHz- LTE-5M Channel Bandwidth -Upper Edge

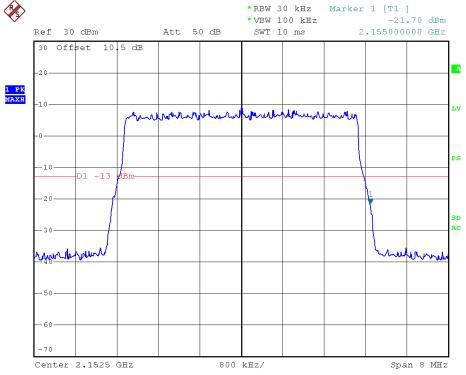


Report No.: EM201300033 Application No.: ZJ00025891 Page 57 of 106

2100MHz- LTE-10M Channel Bandwidth -Lower Edge

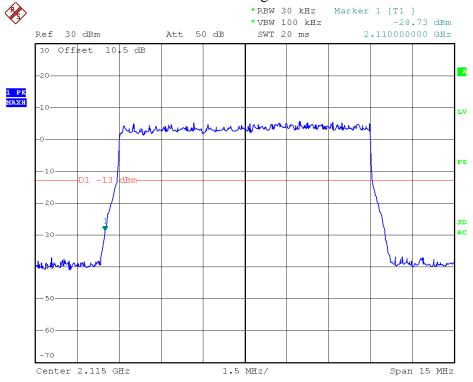


2100MHz- LTE-10M Channel Bandwidth -Upper Edge

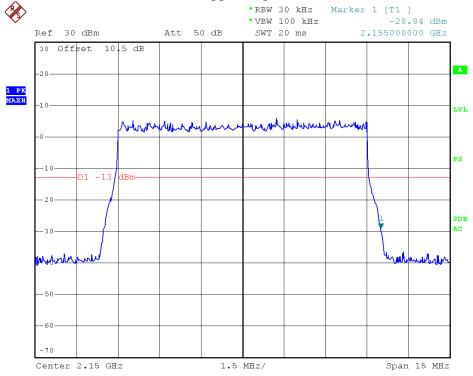


Report No.: EM201300033 Application No.: ZJ00025891 Page 58 of 106

2100MHz-WCDMA-Lower Edge

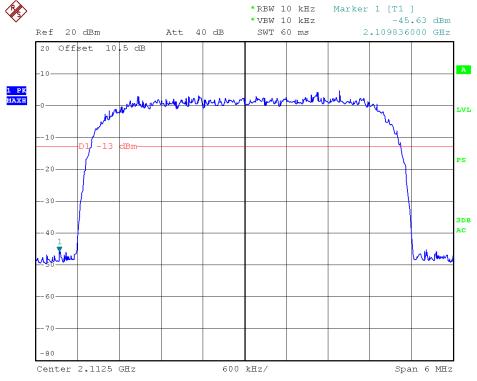

2100MHz-WCDMA-Upper Edge

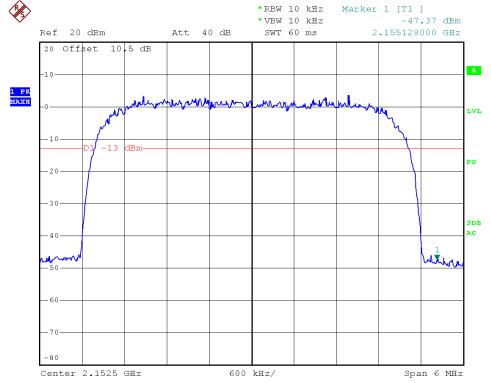

Report No.: EM201300033 Application No.: ZJ00025891 Page 59 of 106

4.2.4 RADIATED SPURIOUS EMISSIONS

Test Date: 29 January, 2013 Test Method: FCC part 2.1053

Test Requirement: 700MHz Band : FCC 27.53 c(1)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power

(P) by a factor of at least 43 + 10log(P) dB,or -13dBm.

AWS Band: FCC 27.53 h

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power

(P) by a factor of at least $43 + 10\log(P) dB$, or -13dBm.

Status The output power of EUT be set to maximum value, the gain of EUT

be set to maximum value by software through the manufacture

Condition Normal conditions

Application Enclosure

Report No.: EM201300033 Application No.: ZJ00025891 Page 60 of 106

Test Configuration:

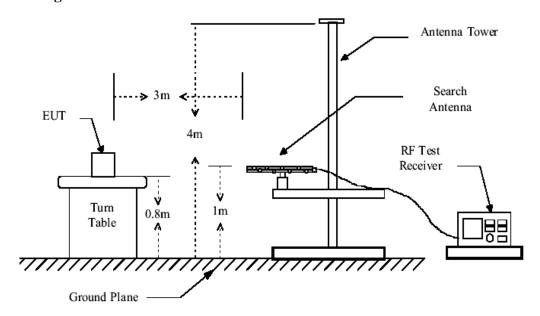


Figure 1. 30 MHz to 1GHz radiated emissions test configuration

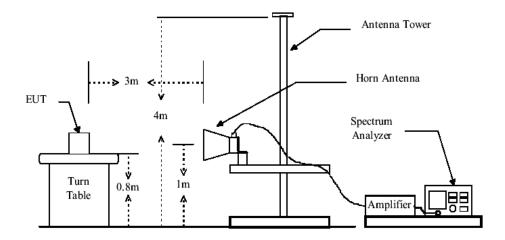


Figure 2. Above 1GHz radiated emissions test configuration

Report No.: EM201300033 Application No.: ZJ00025891 Page 61 of 106

Test Procedure: 1.Test the background noise level with all the facilities


2.Keep one transmitting path, all other connectors shall be connected by normal power or RF

leads,

3. Select the suitable RF notch filter to avoid the test receiver or spectrum analyzer produce unwanted spurious emissions,


- 4. Keep the EUT continuously transmitting in max power.
- 5.Read the radiated emissions of the EUT enclosure.

Radiated Emission Test Procedure:

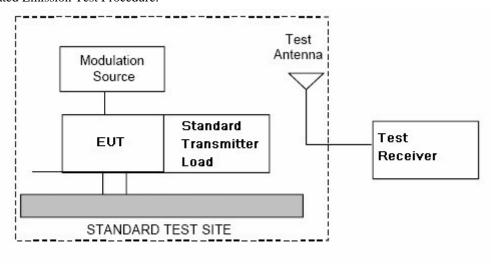

- a)Connect the equipment as illustrated
- b)Adjust the spectrum analyzer for the following setting;
 - 1)RBW=100KHz for spurious emission below 1GHz ,and 1MHz for spurious emission above 1GHz
 - 2)VBW=300KHz for spurious emission below 1GHz ,and3MHz for spurious emission above 1GHz
 - 3)Sweep speed slow enough to maintain measurement calibration
 - 4)Detector Mode=Positive Peak
- c)Place the transmitter to be tested on the turntable in the standard test site, The transmitter is transmitting into a nonradiating load that is placed on the turntable ,the RF cable to this load should be of minimum length.
- d)_Measurements shall be made from 30MHz to 10 times of fundamental carrier, except for the region close to the carrier equal to ±the carrier bandwidth.
- e)Key the transmitter without modulation or normal modulation base the standard.
- f) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Then the turntable should be rotated 360° C to determine the maximum reading. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.
- g) Repeat step f) for each spurious frequency with the test antenna polarized vertically.

Report No.: EM201300033 Application No.: ZJ00025891 Page 62 of 106

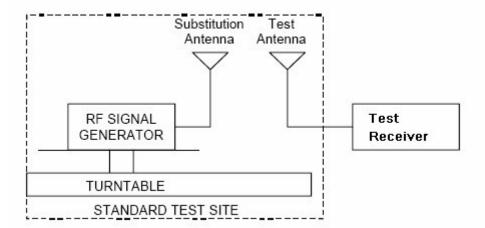

- h) Reconnect the equipment as illustrated.
- i) Keep the spectrum analyzer adjusted as in step b)
- j) Remove the transmitter and replace it with a substitution antenna (the antenna should be half wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter, At the lower frequences, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically, In such case the lower end of the antenna should be 0.3m above the ground.
- k) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends horizontally polarized, and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer .Adjust the level of the signal generator output until the previously recorded maximum reading or this set of conditions is obtained, This should be done carefully repeating the adjustment of the test antenna and generator output.
- 1) Repeat step k) with both antennas vertically plolarized for each spurious frequency.
- m) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in step k) and i)by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula:

Pd(dBm) = Pg(dBm)-cable loss (dB)+antenna gain (dB)

where:

Pd is the dipole equivalent power and

Pg is the generator output power into the substitution antena.

NOTE: It is permissible to use other antennas provided they can be referenced to a dipole.

NOTE: Effective radiated power (e.r.p) refers to the radiation of a half wave tuned dipole instead of an isotropic antenna. There is a constant difference of 2.15 dB between e.i.r.p. and e.r.p.

e.r.p (dBm)=e.i.r.p.(dB)-2.15

Report No.: EM201300033 Application No.: ZJ00025891 Page 63 of 106

4.2.4.1 MEASUREMENT RECORD

Test Frequency	Measuring level(dBm)		Limits	Margin(dB)	
(MHz)	Vertical	Horizontal	(dBm)	Vertical	Horizontal
30	-47.60	-48.30	-13	34.60	35.30
500	-47.75	-46.85	-13	34.75	33.85
1000	-38.15	-41.24	-13	25.15	28.24
2000	-32.54	-30.65	-13	19.54	17.65
5000	-34.35	-35.75	-13	21.35	22.75
10000	-31.13	-30.16	-13	18.13	17.16
15000	-25.67	-25.54	-13	12.67	12.54
20000	-24.68	-23.56	-13	11.68	10.56

Remark:

Sweep all the modulation types emissions in Cellular band and PCS band, find the worse case to report it.

Report No.: EM201300033 Application No.: ZJ00025891 Page 64 of 106

4.2.5 OCCUPIED BANDWIDTH

Test Date: 30 January, 2013

Test FCC part 2.1049&2-11-04/EAB/RF

Method:

Test 2-11-04/EAB/RF

Requirement:

Status The output power of EUT be set to maximum value, the gain of EUT be set to

maximum value by software through the manufacture

Conditions Normal

Test configuration

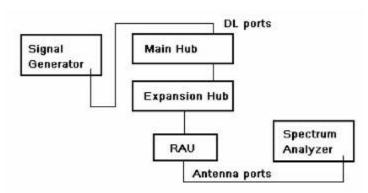


Fig.1 Down Link Configuration

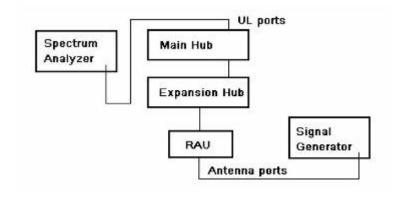


Fig.2 Up Link Configuration

Test Procedure:


- a) Set the spectrum analyzer RBW 300Hz >1% bandwidth of carrier.
- b) Capture the trace of input signal
- c) Connect the equipment as illustrated
- d) Capture the trace of output signal

Report No.: EM201300033 Application No.: ZJ00025891 Page 65 of 106


4.2.5.1 MEASUREMENT RECORD

700MHz Band:

700MHz-LTE-1.4M downlink (lowest frequency)-Input

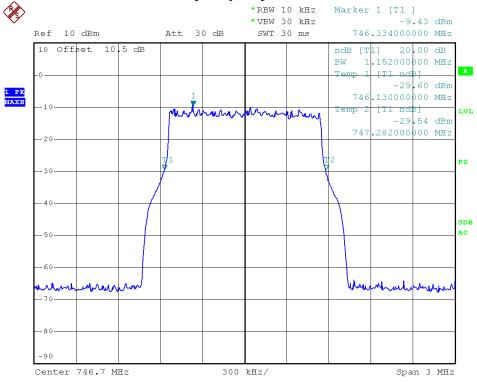


700MHz-LTE-1.4M downlink (lowest frequency)-Output

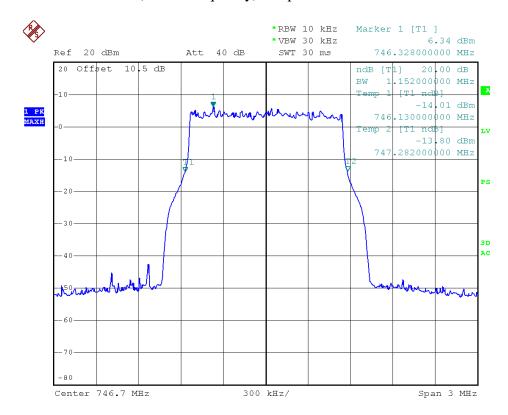


Report No.: EM201300033 Application No.: ZJ00025891 Page 66 of 106


700MHz-LTE-1.4M downlink (middle frequency)-Input

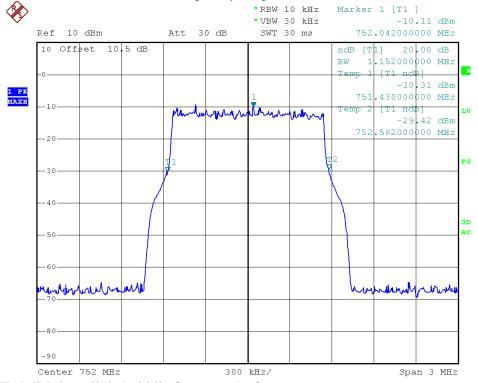


700MHz-LTE-1.4M downlink (middle frequency)- Output

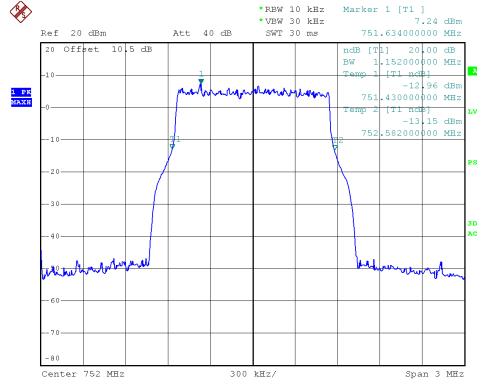


700MHz-LTE –1.4M downlink (highest frequency)-Input

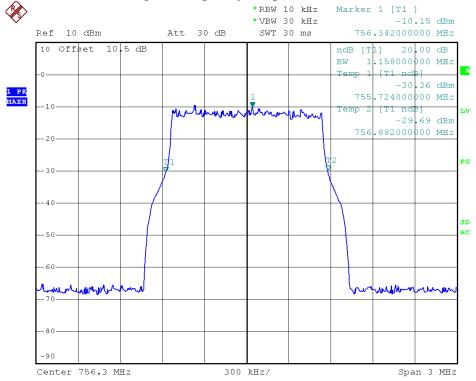


700MHz-LTE-1.4 downlink (highest frequency)- Output

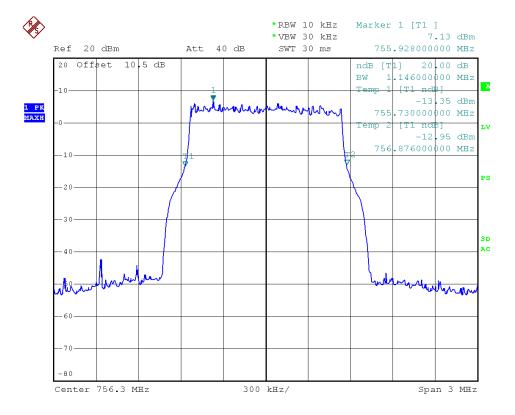


700MHz-LTE-3M downlink (lowest frequency)-Input

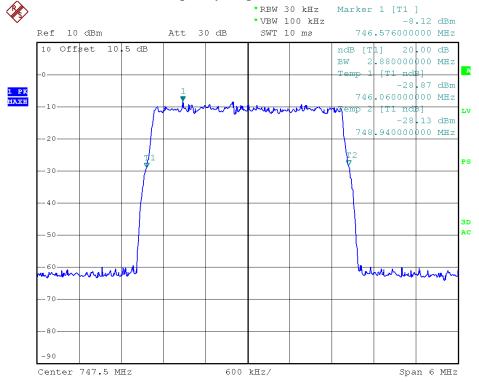


700MHz-LTE-3M downlink (lowest frequency)- Output

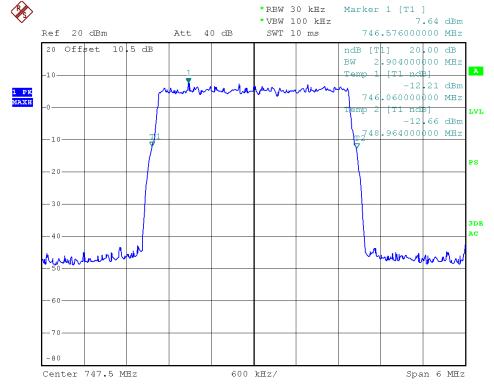


700MHz-LTE-3M downlink (middle frequency)-Input

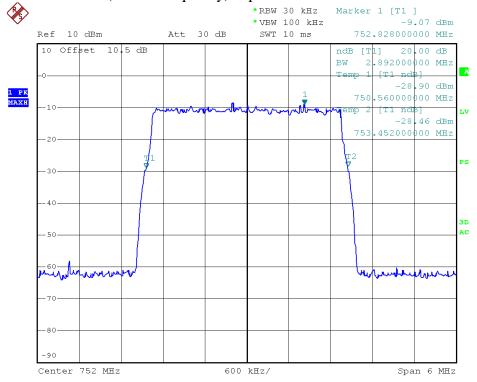


700MHz-LTE-3M downlink (middle frequency)- Output

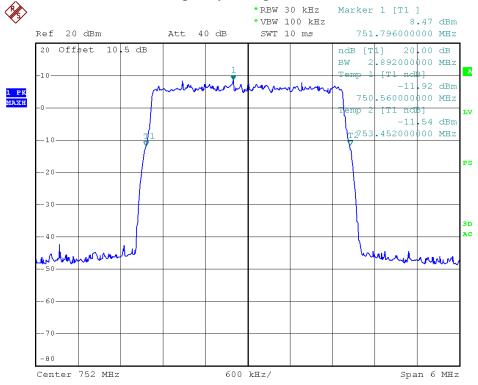


700MHz-LTE-3M downlink (highest frequency)-Input

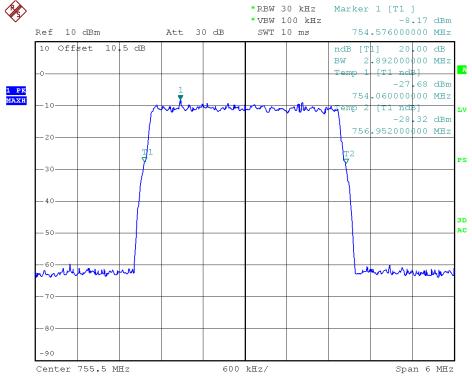


700MHz-LTE-3M downlink (highest frequency)- Output

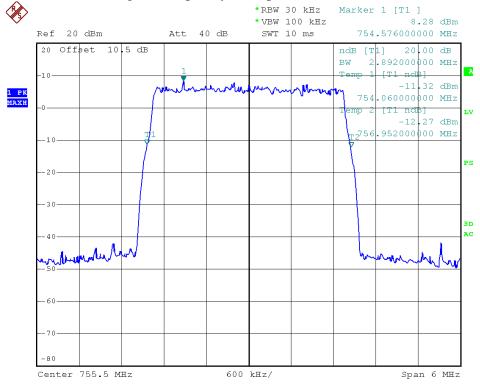

700MHz-LTE-5M downlink (lowest frequency)-Input

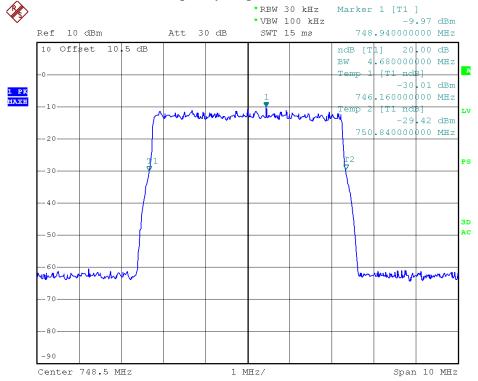


700MHz-LTE-5M downlink (lowest frequency)- Output

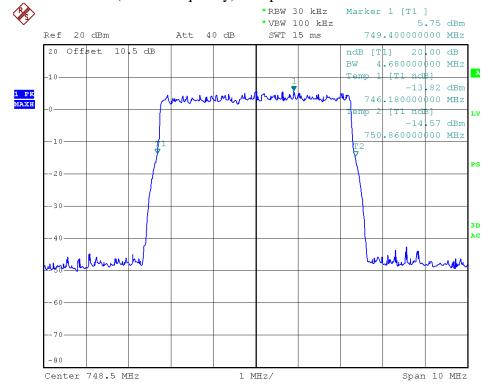


Report No.: EM201300033 Application No.: ZJ00025891 Page 72 of 106

700MHz-LTE-5M downlink (middle frequency)-Input

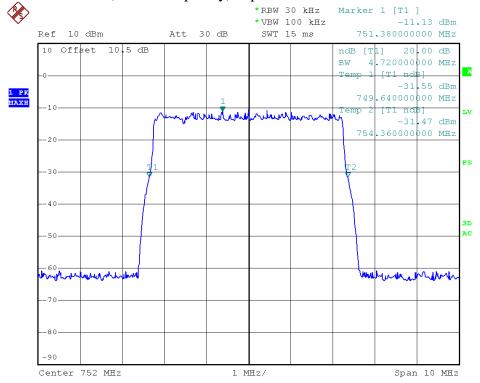


700MHz-LTE-5M downlink (middle frequency)-Ouput

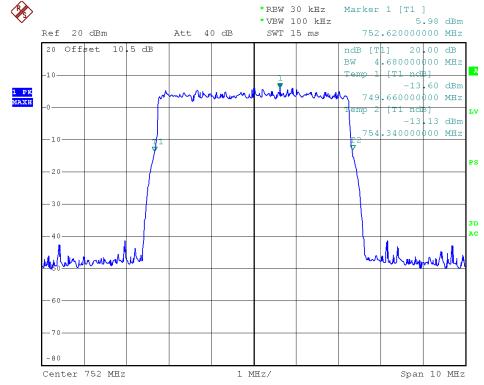


Report No.: EM201300033 Application No.: ZJ00025891 Page 73 of 106


700MHz-LTE-5M downlink (highest frequency)-Input

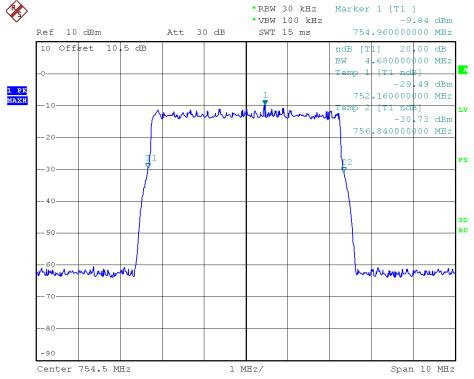


700MHz-LTE-5M downlink (highest frequency)- Output

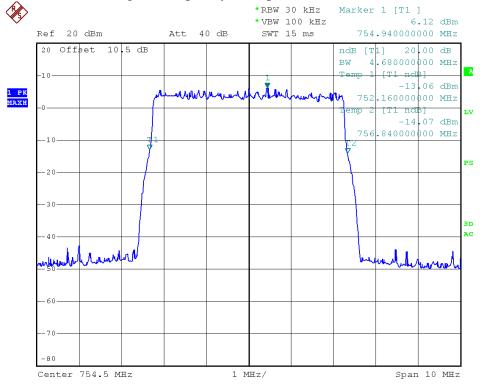


700MHz-LTE-10M downlink (lowest frequency)-Input

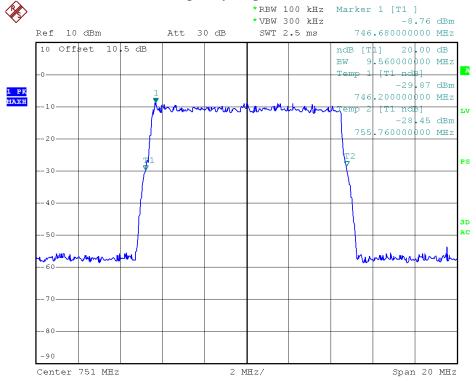


700MHz-LTE-10M downlink (lowest frequency)-Output

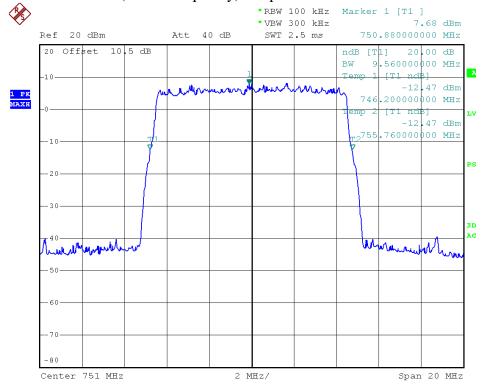

700MHz-LTE-10M downlink (highest frequency)-Input

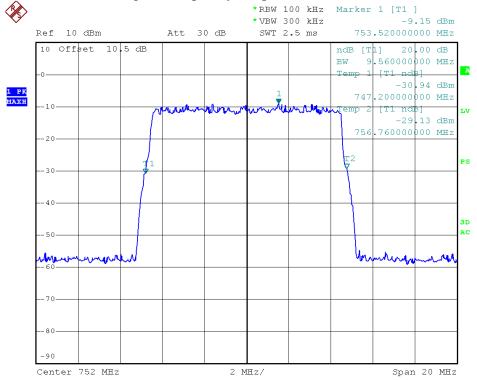


700MHz-LTE-10M downlink (highest frequency)- Output

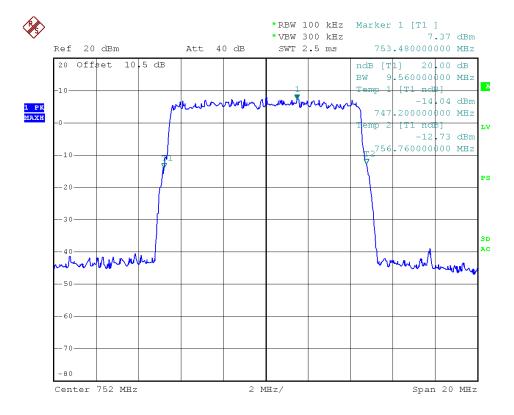


Report No.: EM201300033 Application No.: ZJ00025891 Page 76 of 106

2100MHz-LTE-1.4M downlink (lowest frequency)-Input

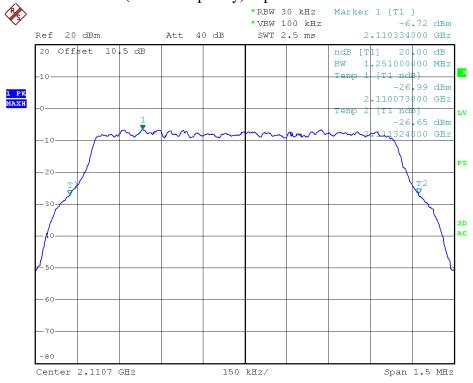


2100MHz-LTE-1.4M downlink (lowest frequency)-Output

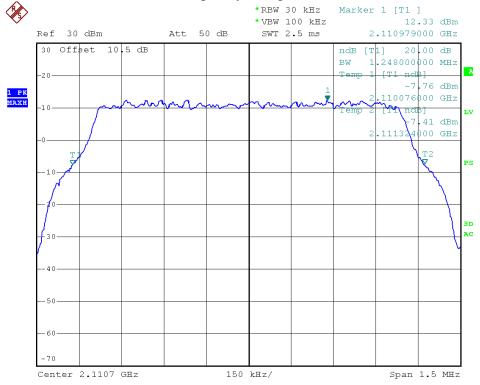


Report No.: EM201300033 Application No.: ZJ00025891 Page 77 of 106

2100MHz-LTE-1.4M downlink (middle frequency)-Input

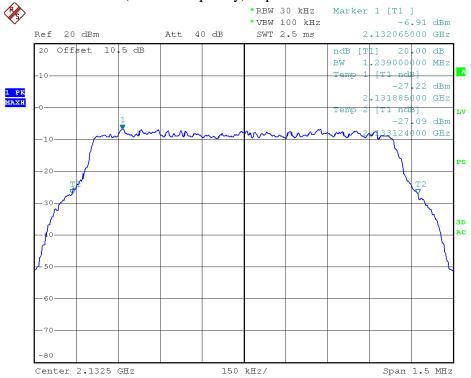


2100MHz-LTE-1.4M downlink (middle frequency)- Output

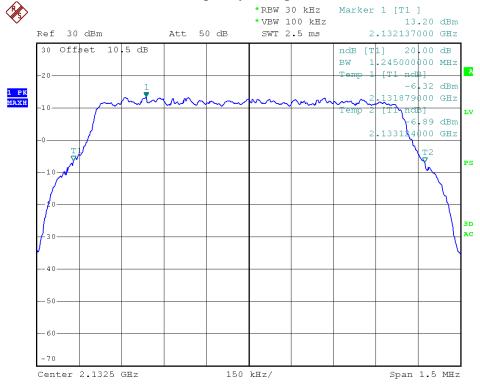


Report No.: EM201300033 Application No.: ZJ00025891 Page 78 of 106

2100MHz-LTE-1.4M downlink (highest frequency)-Input

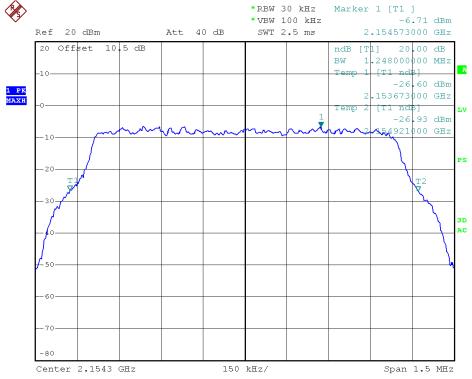


2100MHz-LTE-1.4M downlink (highest frequency)- Output

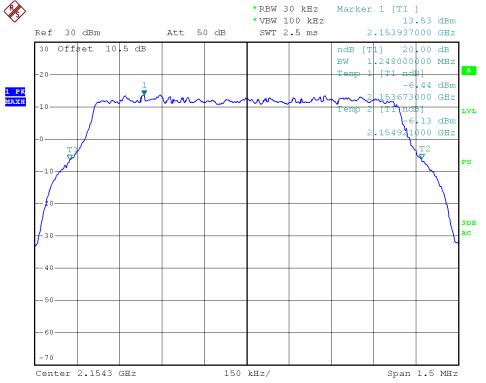


Report No.: EM201300033 Application No.: ZJ00025891 Page 79 of 106

2100MHz-LTE-3M downlink (lowest frequency)-Input

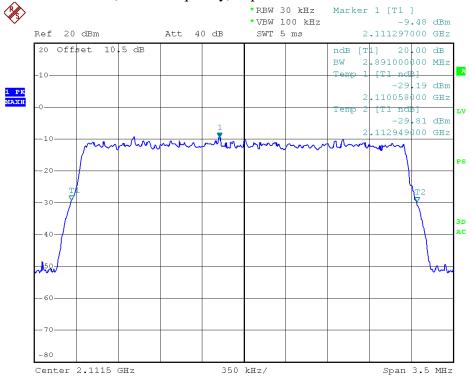


2100MHz-LTE-3M downlink (lowest frequency)-Output

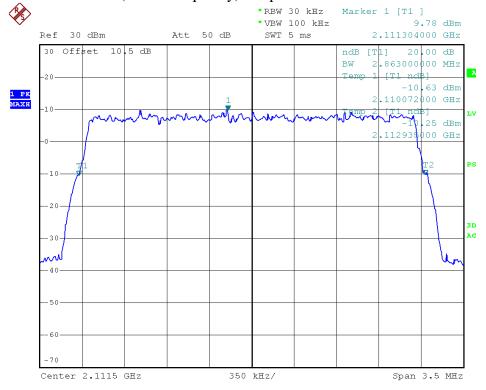


Report No.: EM201300033 Application No.: ZJ00025891 Page 80 of 106

2100MHz-LTE-3M downlink (middle frequency)-Input

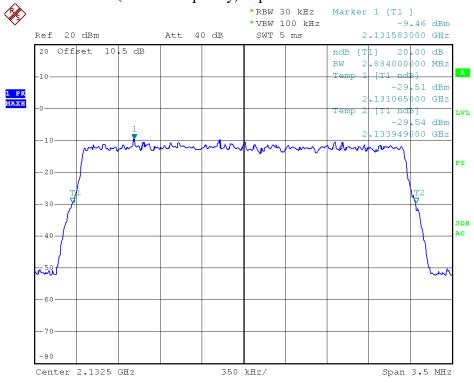


2100MHz-LTE-3M downlink (middle frequency)- Output

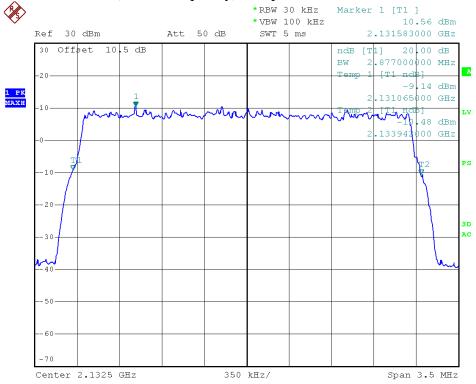


Report No.: EM201300033 Application No.: ZJ00025891 Page 81 of 106

2100MHz-LTE-3M downlink (highest frequency)-Input

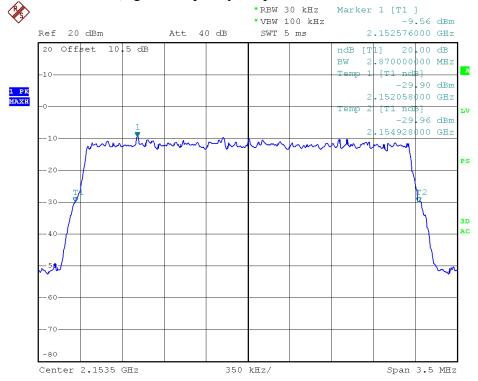


2100MHz-LTE-3M downlink (highest frequency)- Output

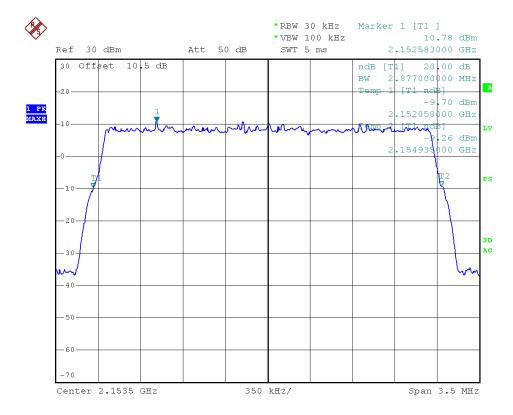


Report No.: EM201300033 Application No.: ZJ00025891 Page 82 of 106

2100MHz-LTE-5M downlink (lowest frequency)-Input

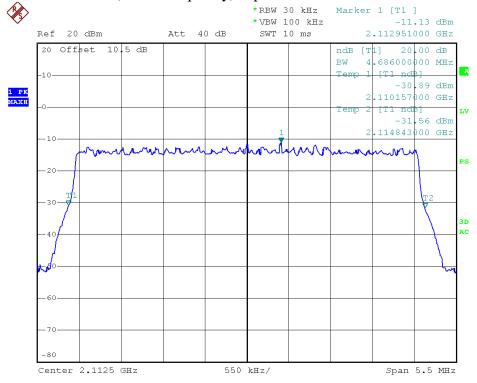


2100MHz-LTE-5M downlink (lowest frequency)-Output

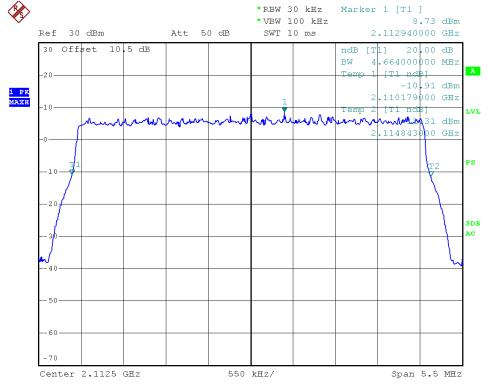


Report No.: EM201300033 Application No.: ZJ00025891 Page 83 of 106

2100MHz-LTE-5M downlink (middle frequency)-Input

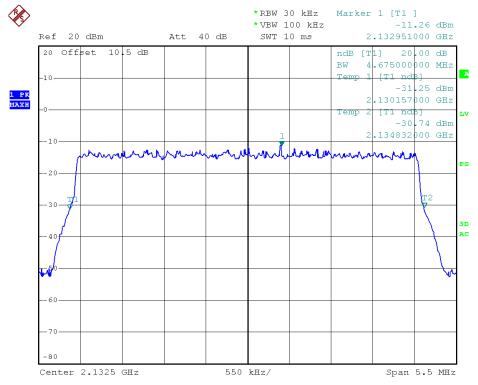


2100MHz-LTE-5M downlink (middle frequency)- Output

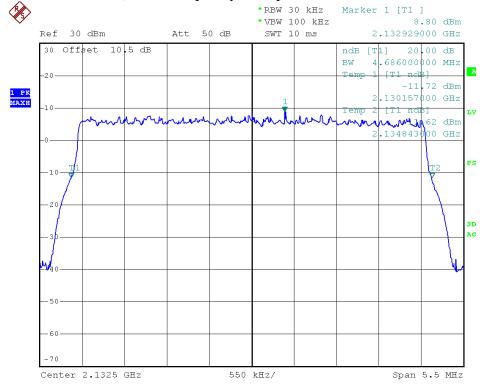


Report No.: EM201300033 Application No.: ZJ00025891 Page 84 of 106


2100MHz-LTE-5M downlink (highest frequency)-Input

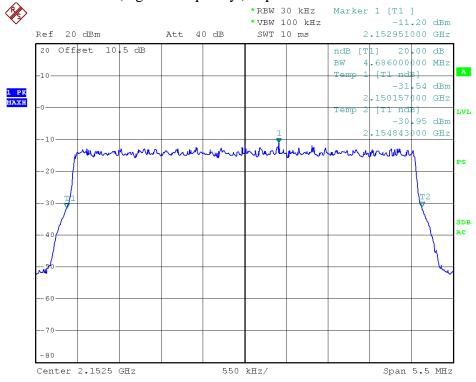


2100MHz-LTE-5M downlink (highest frequency)- Output

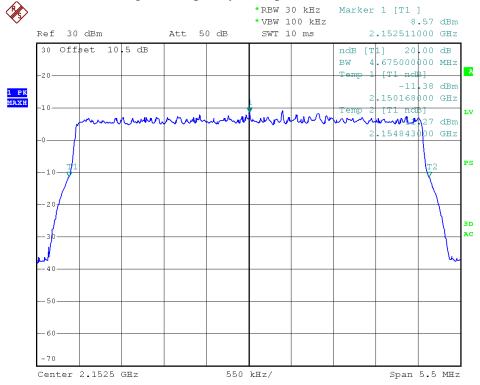

2100MHz-LTE-10M downlink (lowest frequency)-Input

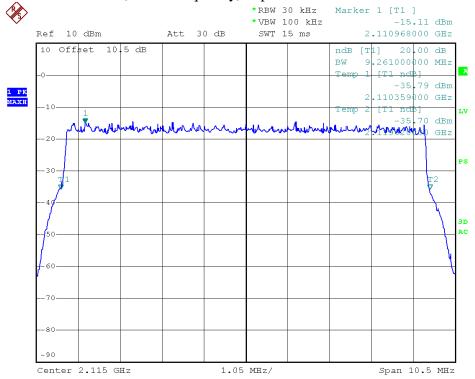


2100MHz-LTE-10M downlink (lowest frequency)-Output

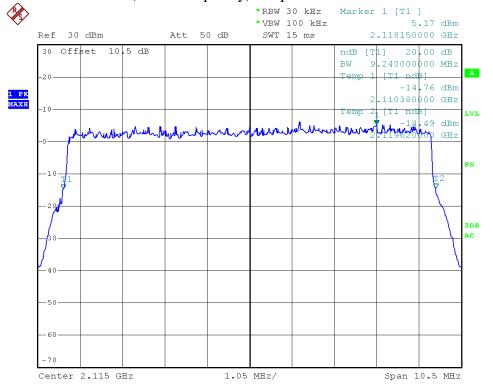


Report No.: EM201300033 Application No.: ZJ00025891 Page 82 of 105

2100MHz-LTE-10M downlink (middle frequency)-Input

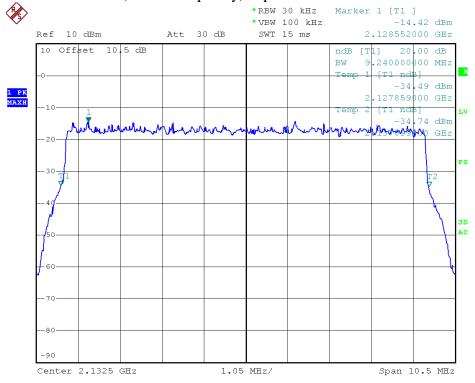


2100MHz-LTE-10M downlink (middle frequency)- Output

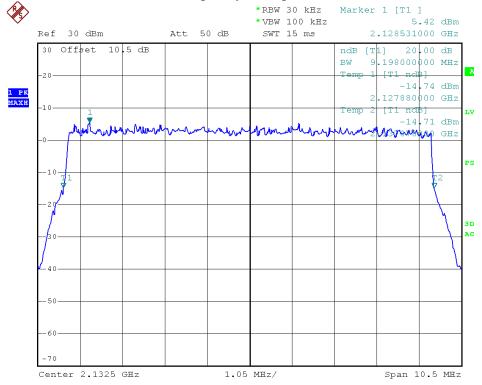


Report No.: EM201300033 Application No.: ZJ00025891 Page 82 of 105


2100MHz-LTE-10M downlink (highest frequency)-Input

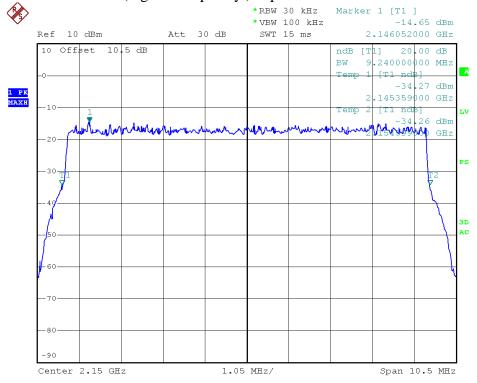


2100MHz-LTE-10M downlink (highest frequency)- Output

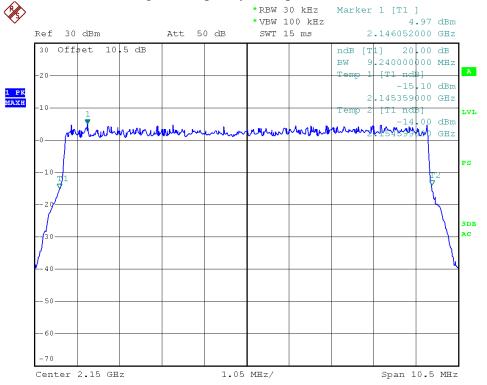

2100MHz-WCDMA downlink (lowest frequency)-Input

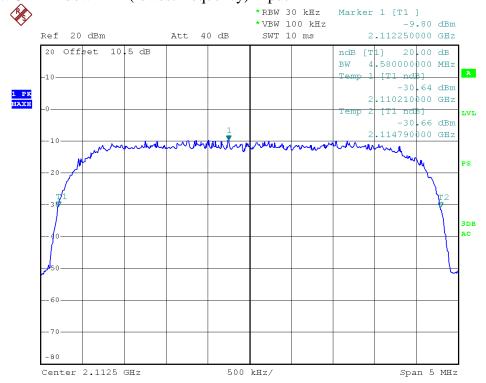


2100MHz-WCDMA downlink (lowest frequency)-Output

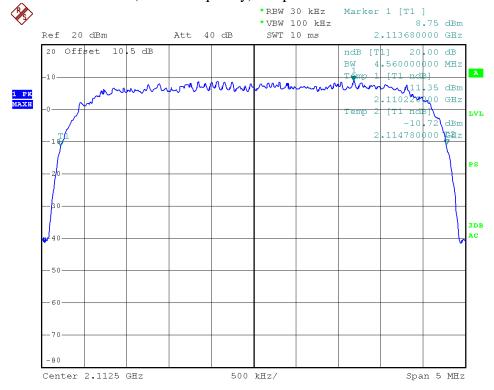


Report No.: EM201300033 Application No.: ZJ00025891 Page 82 of 105

2100MHz-WCDMA downlink (middle frequency)-Input

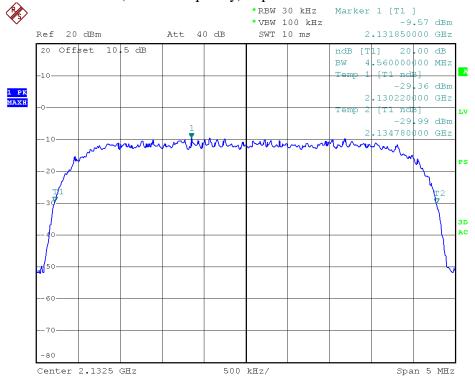


2100MHz-WCDMA downlink (middle frequency)- Output

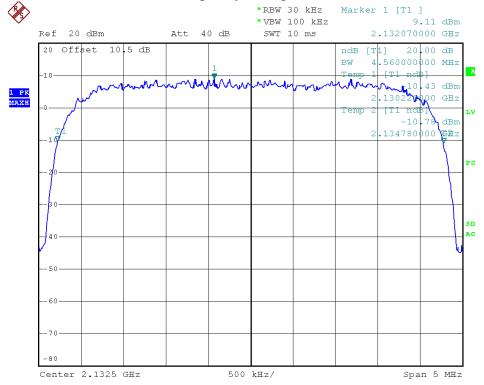


Report No.: EM201300033 Application No.: ZJ00025891 Page 82 of 105

2100MHz-WCDMA downlink (highest frequency)-Input

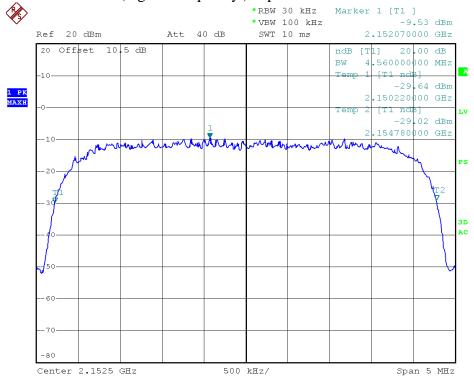

2100MHz-WCDMA downlink (highest frequency)- Output

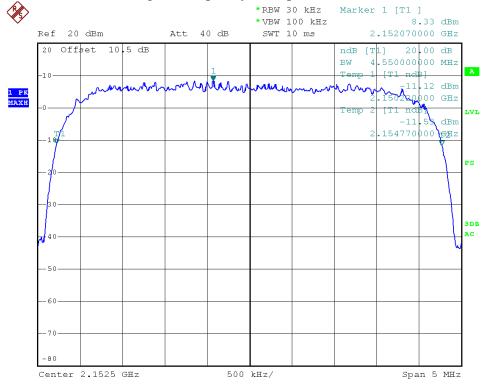

Report No.: EM201300033 Application No.: ZJ00025891 Page 91 of 106

4.2.6 INTERMODULATION

Test Date: 31 January, 2013 Test Method: 2-11-04/EAB/RF

Test Requirement: 700MHz Band : FCC 27.53 c(1)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P)

by a factor of at least $43 + 10\log(P)$ dB,or -13dBm.

AWS Band: FCC 27.53 h

The power of any emission outside of the authorized operating

frequency ranges must be attenuated below the transmitting power (P)

by a factor of at least $43 + 10\log(P)$ dB,or -13dBm.

Status The output power of EUT be set to maximum value, the gain of EUT

be set to maximum value by software through the manufacture

Conditions Normal

Test configuration


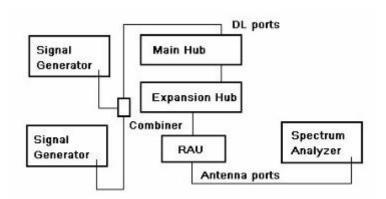


Fig.1 Down Link Intermodulation

Sign

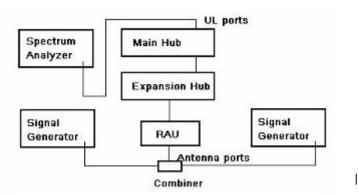

FCC ID: NOO-F0689-011

Report No.: EM201300033 Application No.: ZJ00025891 Page 92 of 106

Fig.2 Up Link Intermodulation

Test Procedure:

- 1. Connect the equipment as illustrated,
- 2. Test the background noise level with all the test facilities
- 3. Keep one transmitting path, all other connectors shall be connected by normal power or RF leads
- 4. Select the attenuator to avoid the test receiver or spectrum analyzer being destroyed
- 5. Keep the EUT continuously transmitting in max power
- 6. Keep two signal generator produce two signal are same in modulation type and level
- 7. Measurement the 3 order intermodulated produced by the EUT (the sum of the two unwanted signal should be rated power)
- 8. Correct for all losses in the RF path
- 9. Read the conducted spurious emission of the EUT antenna port. CW signal rather than typical signal is acceptable(for FM) At maximum drive level, for each modulation :one test with three tones, or two tests(high, low-band edge)with two tones Limit usually is -13dBm conducted Not need for signal channel systems


 Combination of modulation types not needed

Report No.: EM201300033 Application No.: ZJ00025891 Page 93 of 106

4.2.6.1 MEASUREMENT RECORD

700MHz-LTE-1.4M downlink-Lower Edge


Center 757 MHz

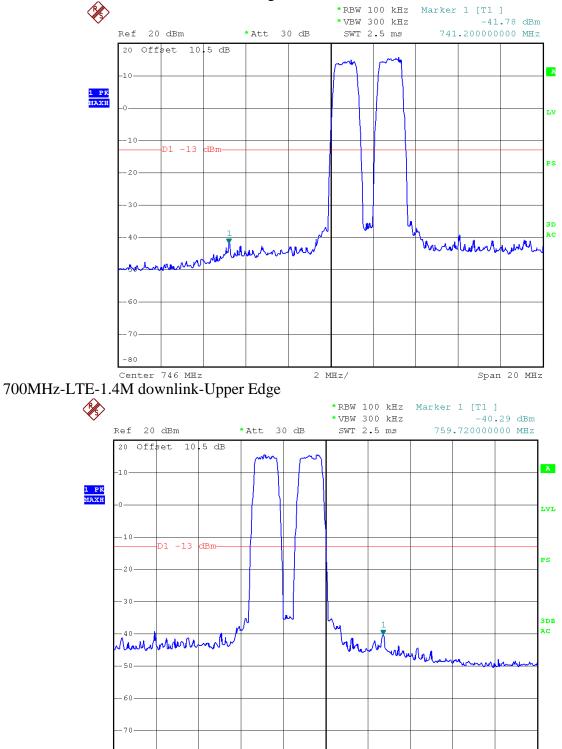


2 MHz/


Span 20 MHz


700MHz-LTE-3M downlink-Lower Edge

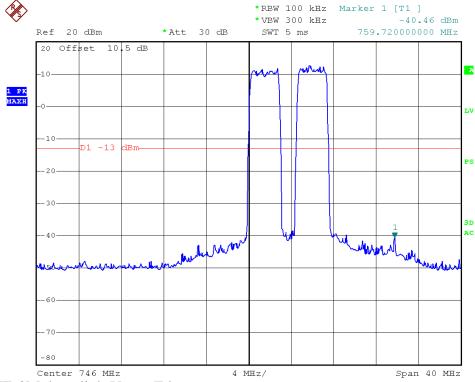


700MHz-LTE-3M downlink-Upper Edge

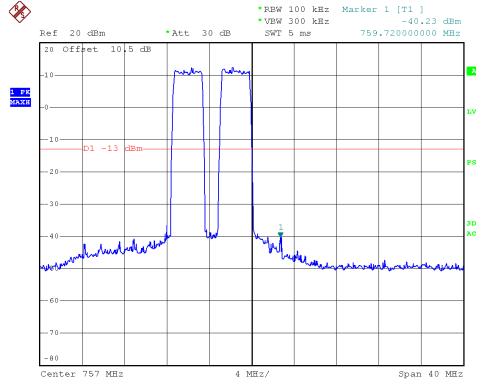



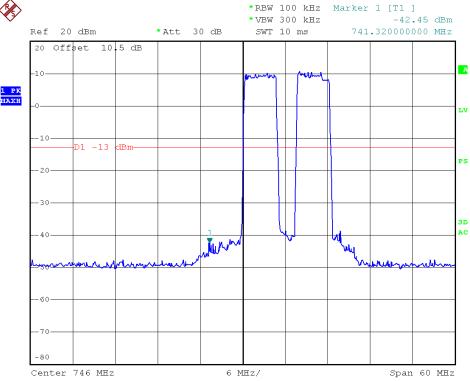


700MHz-LTE-5M downlink-Upper Edge

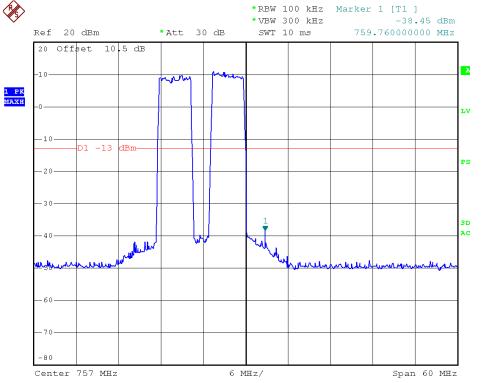


Report No.: EM201300033 Application No.: ZJ00025891 Page 96 of 106


2100MHz-LTE-1.4M downlink-Lower Edge

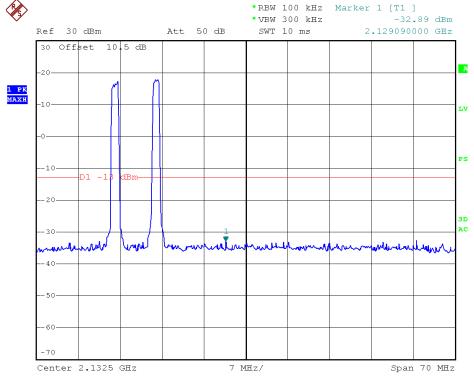


2100MHz-LTE-1.4M downlink-Upper Edge

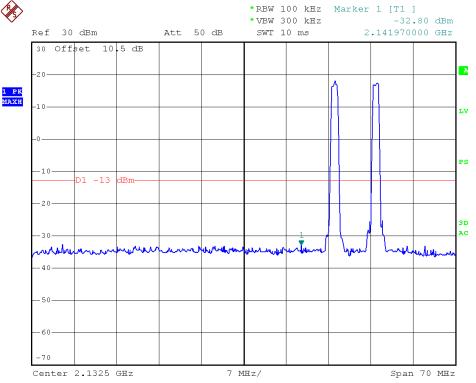


2100 MHz-LTE-3Mdownlink-Lower Edge

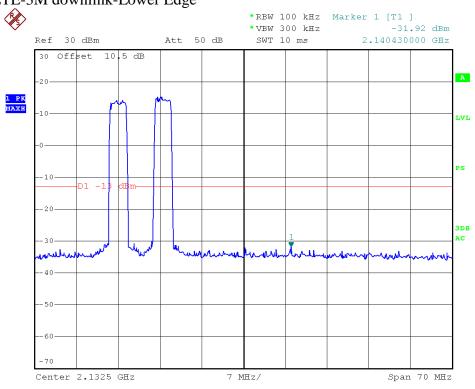


2100MHz-LTE-3M downlink-Upper Edge

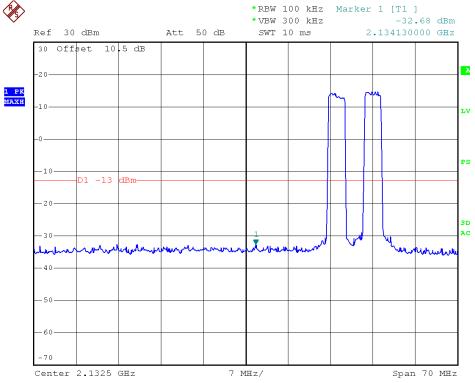

2100MHz-LTE-5M downlink-Lower Edge

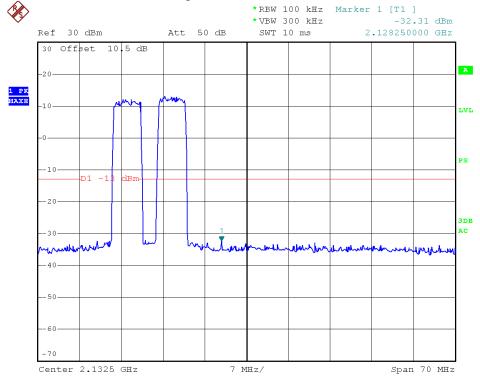


2100MHz-LTE-5M downlink-Upper Edge

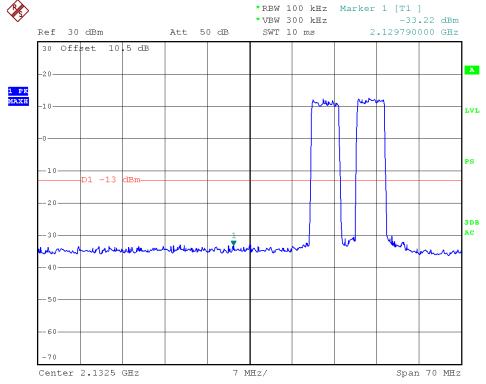


Report No.: EM201300033 Application No.: ZJ00025891 Page 99 of 106

2100MHz-WCDMA downlink-Lower Edge

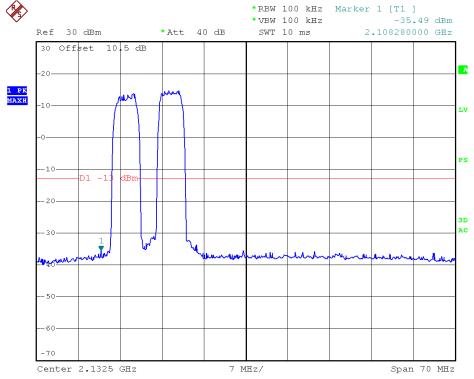

2100MHz-WCDMA downlink-Upper Edge

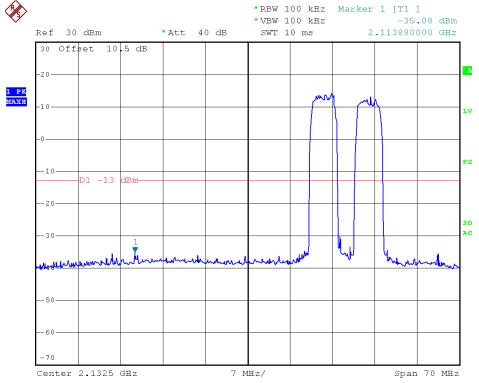

Report No.: EM201300033 Application No.: ZJ00025891 Page 100 of 106

Remark:

For the test in two signal input or intermodulation ,test input signal f1 and f2 will consider as follows conditions:

- 7)EUT frequency band span and the amount of channels;
- 8)f1 is the frequency lower,f2 is the frequency higher, \triangle f is the channel spacing;
- 9)in lower edge test, f1 is the lower frequency+1 channel frequency, and f2 is+2 channel frequency;
- 10) in higher edge test, f1 is the higher frequency-2 channel frequency ,and f2 is-1 channel frequency;
- 11)according to the amplifier characteristic ,the 3rd product will appear when two signals input; 12)base the 3rd product frequency F1=2f1-f2,and F2=2f2-f1,when the f1 and f2 frequency select
- above,
 - a)in lower edge test ,F1=2f1-(f1+ \triangle f)=f1- \triangle f=lower dege frequency;
 - b) in higher edge test ,F2=2f2-(f1- \triangle f)=f1+ \triangle f=higher dege frequency

Report No.: EM201300033 Application No.: ZJ00025891 Page 101 of 106

4.2.7 FREQUENCY STABILITY

Test Date: 01 February, 2013 Test Method: FCC part 2.1055

Test Requirement: FCC 27.54

Specification The frequency stability shall be sufficient to ensure that the

fundamental emission stays within the authorized frequency

block, The frequency stability of the transmitter shall be maintained

within $\pm 0.00025\%$ (± 2.5 ppm)of the center frequency

Status The output power of EUT be set to maximum value, the gain of EUT

be set to maximum value by software through the manufacture

Conditions Temperature condition, Voltage condition

Test procedure 1. Temperature conditions:

a)record the 20°C and normal voltage frequency value as reference

point;

b)vary the temperature from -30° C to 60° C with step 10° C

c)when reach a temperature point ,keep the temperature banlance at

least 1 hour to make the product working in this status; d)record the frequency at the relative temperature.

2. Voltage condition:

a)record the 20°C and normal voltage frequency value as reference

point;

b)vary the voltage from -15% norminal voltage to +15% voltage

c)read the frequency at the relative voltage.

Report No.: EM201300033 Application No.: ZJ00025891 Page 102 of 106

4.2.7.1 MEASUREMENT RECORD

1.Frequency Stability vs temperature 700MHz

Temperature(°C)	Frequency(MHz)	Tolerance(ppm)
60	752.000490	0.652
50	752.000478	0.636
40	752.000465	0.618
30	752.000446	0.593
20	752.000482	0.641
10	752.000467	0.621
0	752.000449	0.597
-10	752.000487	0.648
-20	752.000456	0.606
-30	752.000468	0.622

2100MHz

Temperature($^{\circ}$ C)	Frequency(MHz)	Tolerance(ppm)
60	2132.500483	0.226
50	2132.500465	0.218
40	2132.500472	0.221
30	2132.500462	0.217
20	2132.500454	0.213
10	2132.500501	0.235
0	2132.500489	0.229
-10	2132.500287	0.135
-20	2132.500398	0.187
-30	2132.500380	0.178

Report No.: EM201300033 Application No.: ZJ00025891 Page 103 of 106

2.Frequency Stability vs voltage 700MHz


Voltage(V)	Frequency(MHz)	Tolerance(ppm)
102 (120*0.85)	752.000468	0.622
120	752.000455	0.605
138(120*1.15)	752.000433	0.576


1900MHz


Voltage(V)	Frequency(MHz)	Tolerance(ppm)
102 (120*0.85)	2132.500477	0.224
120	2132.500454	0.213
138(120*1.15)	2132.500469	0.220

APPENDIX A:PHOTOGRAPH OF THE TEST CONFIGURATION



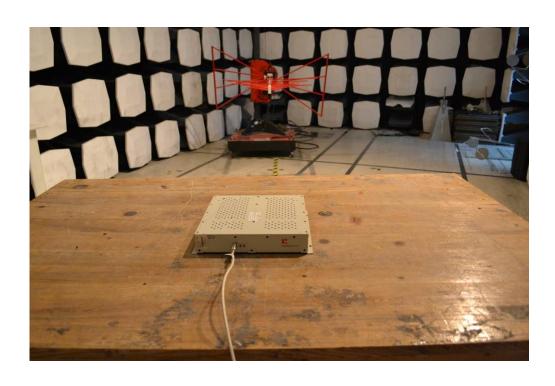


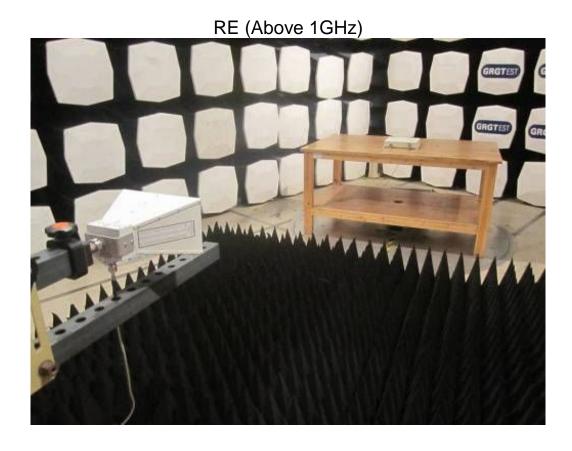


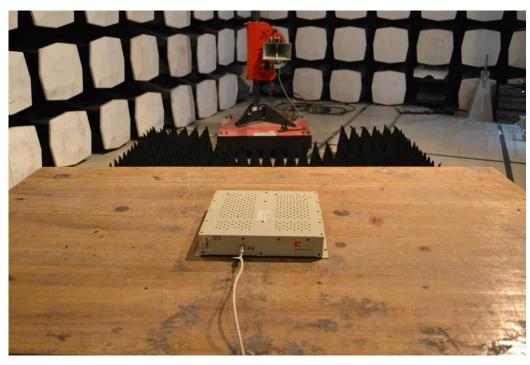

Report No.: EM201300033 Application No.: ZJ00025891 Page 106 of 106


APPENDIX B: PHOTOGRAPHS OF EUT

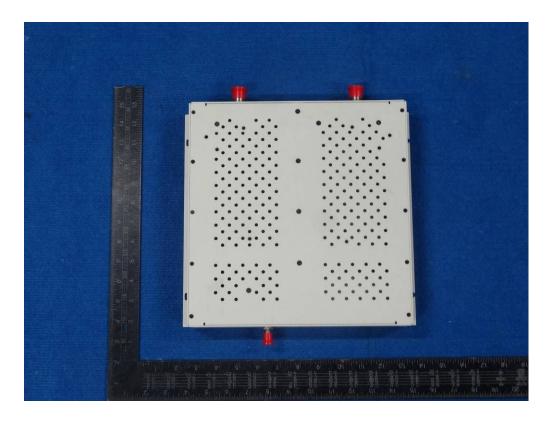

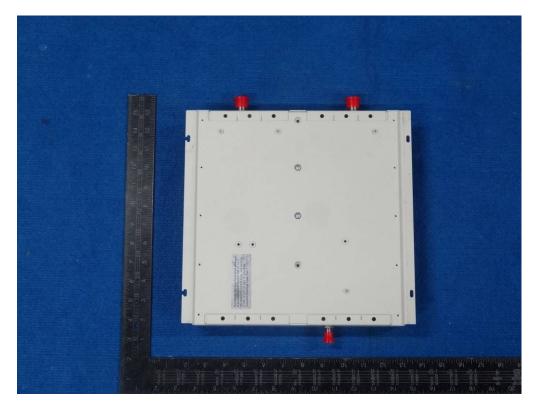



Report No.: EM201300033 Application No.: ZJ00025891 Page 107 of 106



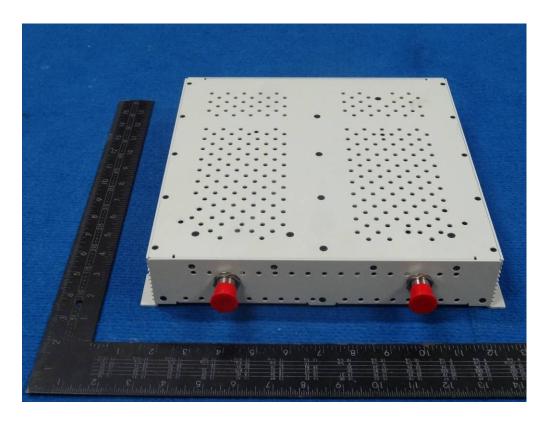


Report No.: EM201300033 Application No.: ZJ00025891 Page 108 of 106

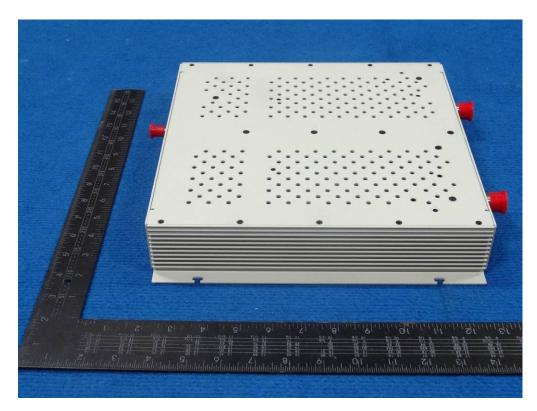

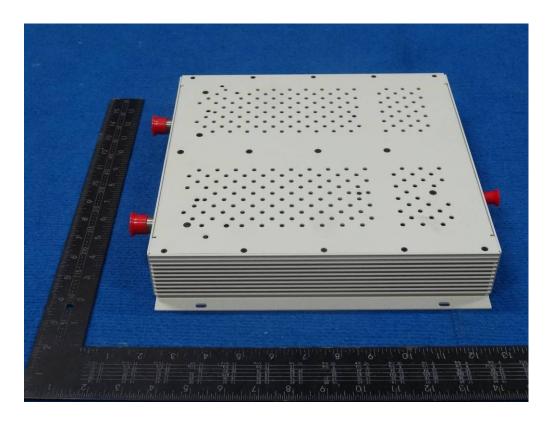

Report No.: EM201300033 Application No.: ZJ00025891 Page 109 of 106

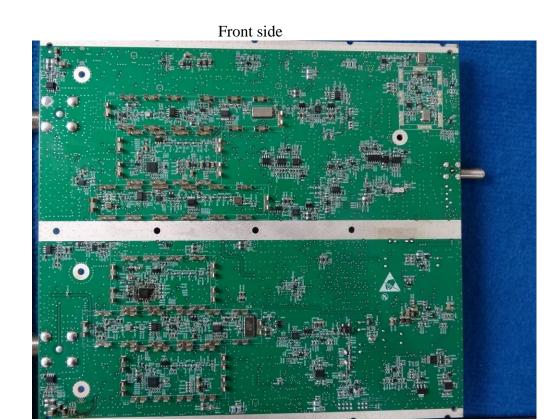

Rear side



------This is the last page of the report. ------