

Test Report

Product	Toy with Bluetooth Low Energy transceiver		
Name and address of the applicant	Lego System A/S Aastvej 1 7190 Billund, Denmark		
Name and address of the manufacturer	Lego System A/S Aastvej 1 7190 Billund, Denmark		
Model	HUB NO.16		
Rating	2402-2480MHz BLE transceiver		
Trademark	LEGO		
Additional information	Bluetooth Low Energy		
Tested according to	FCC Part 15.247 Frequency Hopping Transmitters / Digital Transmission Systems Industry Canada RSS-247, Issue 3 Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices		
Order number	PRJ0042939		
Tested in period	2023-09-12 to 2023-09-30		
Issue date	2024-09-10		
Name and address of the testing laboratory	 Nemko Scandinavia AS Instituttveien 6 2007 Kjeller, Norway www.nemko.com CAB Number: FCC: NO0001 ISED: NO0470 ISED No: 2040D-1   An accredited technical test executed under the Norwegian accreditation scheme		
 Prepared by [Jan G Eriksen]  Approved by [Frode Sveinsen]			
This report was originally distributed electronically with digital signatures. For more information, please contact Nemko Scandinavia AS.			

Revision history

Revision	Date	Comment	Sign
A	2023-11-13	First edition	JGER
B	2024-09-10	Editorials	JGER

GENERAL REMARKS

This report applies only to the sample(s) tested. It is the manufacturer's responsibility to ensure the additional production units of this product are manufactured with identical electrical and mechanical components. The manufacturer is solely responsible for any modifications to the product that could result in non-compliance with the relevant regulations.

This report shall not be reproduced, except in full, without the written approval of Nemko.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Group accepts no responsibility for damage suffered by any third party because of decisions made or actions based on this report.

Opinions expressed within this report regarding general assessments and qualifications for PASS or FAIL to the standards limits and requirements, are not part of the current accreditation. Neither are opinions expressed regarding model variants covered by the testing of this report.

CALIBRATION

All instruments used in the tests given in this test report are calibrated and traceable to national or international standards. Between calibrations all test set-ups are controlled and verified on a regular basis by periodic checks to ensure, with 95% confidence, that the instruments remain within the calibrated levels.

MEASUREMENT UNCERTAINTY

Measurement uncertainties are calculated or considered for all instruments and instrument set-ups used during these tests. Uncertainty figures are found in a separate clause in this report.

CONTENTS

1	INFORMATION	4
1.1	Test Item	4
1.2	Normal test condition	4
1.3	Test Engineer(s)	5
1.4	Antenna Requirement	5
1.5	EUT Operating Modes	5
1.6	Comments	5
2	TEST REPORT SUMMARY	6
2.1	General	6
2.2	Test Summary	6
3	TEST RESULTS	7
3.1	Occupied Bandwidth (99% BW)	7
3.2	DTS Bandwidth	9
3.3	Peak Power Output	11
3.4	Conducted Emissions at Antenna Connector	14
3.5	Restricted Bands of operation	19
3.6	Radiated Emissions, Band Edge	20
3.7	Radiated Emissions, 30 – 1000 MHz.	23
3.8	Radiated Emissions, 1 – 26 GHz	26
3.9	Power Spectral Density (PSD)	35
4	Measurement Uncertainty	37
5	LIST OF TEST EQUIPMENT	38
6	BLOCK DIAGRAM	39
6.1	Power Line Conducted Emission	39
6.2	Conducted Tests	39
6.3	Test Site Radiated Emission	40

1 INFORMATION

1.1 Test Item

Name	HUB NO.16
Model/version	HUB NO.16
FCC ID	NPI103651
IC ID	3072A-103651
Serial number	EP2-080
Hardware identity and/or version	PCBA version D, Schematic version E
Software identity and/or version	0.4.01.0000
Frequency Range	2402 – 2480 MHz
Number of Channels	40
Operating Modes	Bluetooth Low Energy ☒ 1Mb ☒ 2Mb
Type of Modulation	GFSK
Conducted Output Power	< 0 dBm
Antenna Connector	None
Number of Antennas	1
Diversity or Smart Antennas	No
Power Supply	Internal batteries 4 x 1.5 V DC
Desktop Charger	None

Description of Test Item

The tested device is toy train.

The device contains Low Energy Bluetooth with 2 and 1 Mbps datarate.

The device is powered by 4 x 1.5 Volts non-rechargeable batteries.

1.2 Normal test condition

Temperature:	20 - 24 °C
Relative humidity:	20 - 50 %
Normal test voltage:	6 V DC

The values are the limit registered during the test period.

1.3 Test Engineer(s)

Jan G Eriksen

1.4 Antenna Requirement

Does the EUT have detachable antenna(s)?	☐ YES	☒ NO
If detachable, is the antenna connector(s) non-standard?	☐ YES	☐ NO
The tested equipment has only integral antennas. Conducted tests were performed with a temporary antenna connector.		

Requirement: FCC 15.203, 15.204

1.5 EUT Operating Modes


Description of operating modes	EUT in test mode transmitting modulated signals at 2402, 2480, and 2480 MHz respectively. At 1MB the signal is a pulsed wave and 2Mb the signal is non-pulsed.
Additional information	-

1.6 Comments

The radiated measurements were done with the EUT powered by 4 x 1.5 V DC batteries.

Conducted measurements were done with the device powered from external power supply.

The EUT was positioned in three orientations and rotated (0-360 deg) in the XY, XZ, and YZ planes as shown in figure to find the maximum direction:

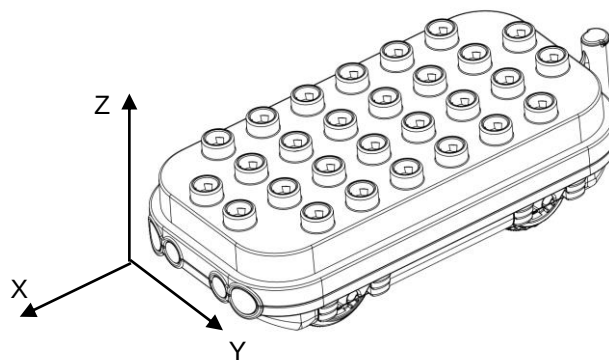

The receiving antenna has also been scanned in height from one to four meters and in horizontal and vertical polarization.

2 TEST REPORT SUMMARY

2.1 General

The tests were conducted for demonstrating compliance with FCC CFR 47 Part 15, paragraph 15.247 and ISSED RSS-247 Issue 3 and RSS-GEN Issue 5.

Tests were performed in accordance with ANSI C63.4-2014 and ANSI C63.10-2013.

Radiated tests were performed in a semi-anechoic chamber at measuring distances of 3m.

A description of the test facility is on file with the FCC and ISSED.

☒ New Submission	☒ Production Unit
☐ Class II Permissive Change	☐ Pre-production Unit
DTS Equipment Code	☐ Family Listing

2.2 Test Summary

Name of test	FCC Part 15 reference	RSS-247 Issue 3, RSS-GEN Issue 5 reference	ANSI C63.10-2013 Reference	Result
Supply Voltage Variations	15.31(e)	6.11 (RSS-GEN)	5.13	NA
Antenna Requirement	15.203	6.8 (RSS-GEN)	5.8	Pass
Power Line Conducted Emission	15.107(a) 15.207(a)	7.2 / 8.8 (RSS-GEN)	6.2	NA
Occupied Bandwidth (99% BW)	N/A	6.7 (RSS-GEN)	6.9.3	
DTS Bandwidth	15.247(a)(2)	5.2 (1) (RSS-247)	11.8 Option 2	Pass
Peak Power Output	15.247(b)	5.4 (RSS-247)	11.9.1.1	Pass
Power Spectral Density	15.247(d)	5.2 (2) (RSS-247)	11.10.2 PKPSD (DTS)	Pass
Spurious Emissions (Antenna Conducted)	15.247(c)	5.5 (RSS-247)	6.7 11.11 (DTS)	Pass
Spurious Emissions (Radiated)	15.247(c) 15.109(a) 15.209(a)	5.5 (RSS-247) 7.3 (RSS-GEN) 8.9 (RSS-GEN)	6.3, 6.5, 6.6, 6.10 11.12, 11.13 (DTS)	Pass

3 TEST RESULTS

3.1 Occupied Bandwidth (99% BW)

ISED Canada RSS-GEN Issue 5, Clause 6.7

Measurement procedure: ANSI C63.10-2013 Clause 6.9.2

EUT in test mode transmitting modulated signals at 2402, 2480, and 2480 MHz respectively. At 1MB the signal is a pulsed wave and 2Mb the signal is non-pulsed.

Test Results: **Complies**


Measurement Data:

Carrier Frequency, Data Rate	Occupied Bandwidth (99% BW) (kHz)	
	1 Mb	2 Mb
2402 MHz	1053.7	2054.8
2440 MHz	1059.3	2055.0
2480 MHz	1062.0	2073.8


See attached plots

Requirements:


No requirement for 99% BW, reported for information only.

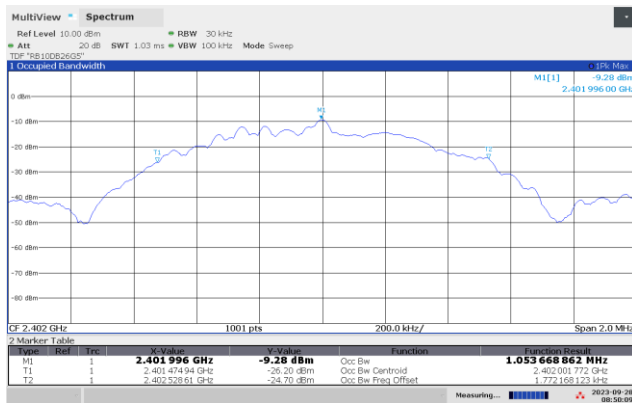


2402 MHz, 99% Occupied BW, 1Mb

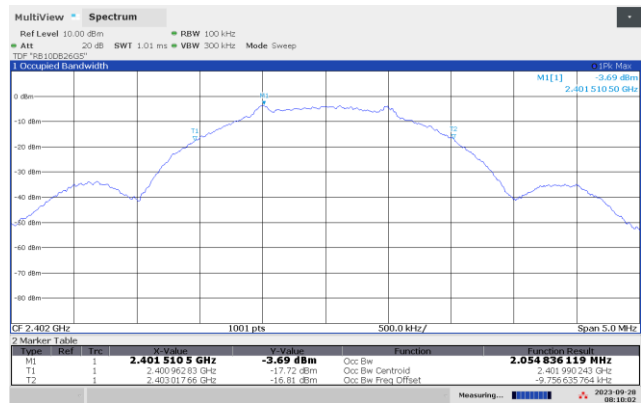


2402 MHz, 99% Occupied BW, 2Mb

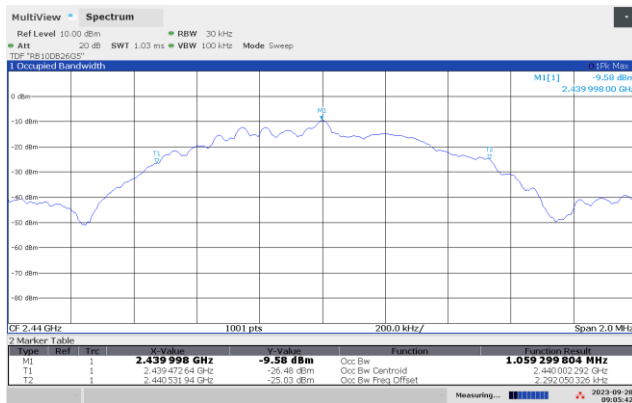


2440 MHz, 99% Occupied BW, 1Mb

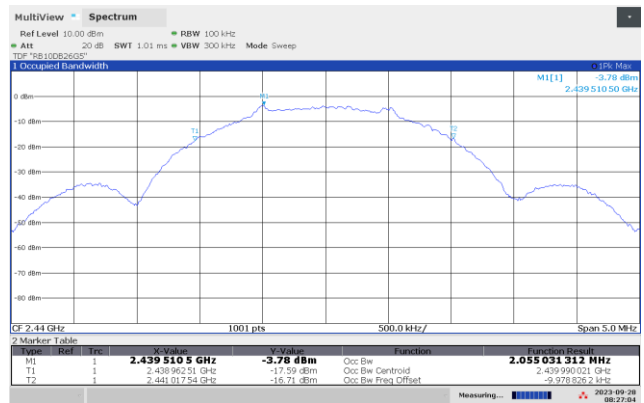

2440 MHz, 99% Occupied BW, 2Mb

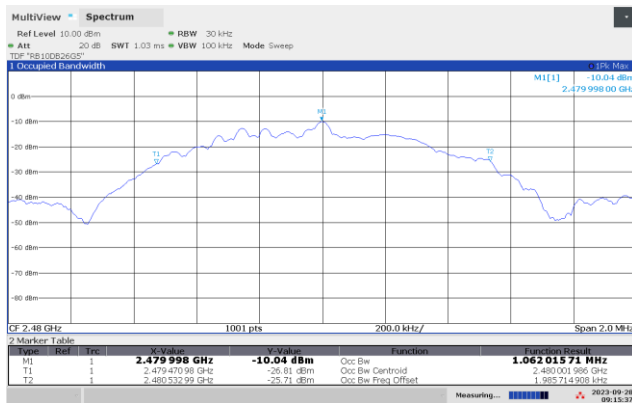

2480 MHz, 99% Occupied BW, 1Mb

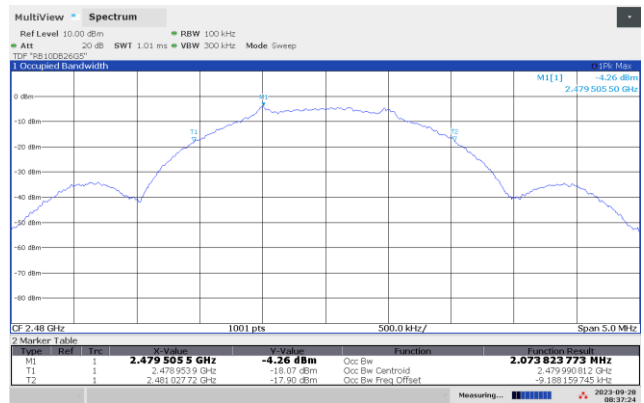

2480 MHz, 99% Occupied BW, 2Mb

3.2 DTS Bandwidth

FCC Part 15.247 (a)(2)

ISED Canada RSS-247 Issue 3, Clause 5.2 (a)

Measurement procedure: ANSI C63.10-2013 Clause 11.8

Test Results: **Complies**

EUT in test mode transmitting modulated signals at 2402, 2480, and 2480 MHz respectively. At 1MB the signal is a pulsed wave and 2Mb the signal is non-pulsed.


Measurement Data:

Modulation type and bitrate	Measured DTS Bandwidth (kHz)		
	2402 MHz	2440 MHz	2480 MHz
GFSK 1 Mbps	671.3	687.8	683.3
GFSK 2 Mbps	1370	1350	1390


Power supply variation within 85 % to 115% of nominal value has no influence on measured value.

Frequency Band	Requirement for systems using Digital Modulation
902-928 MHz	The minimum 6 dB bandwidth shall be at least 500 kHz.
2400-2483.5 MHz	
5725-5850 MHz	


No requirements for Frequency Hopping Systems.

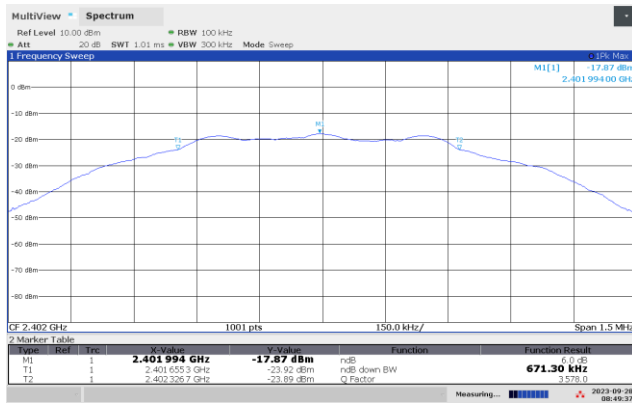


DTS BW, 2402 MHz, 1M

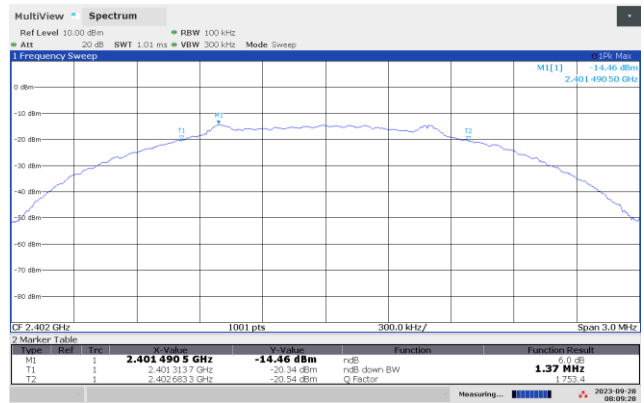


DTS BW, 2402 MHz, 2M

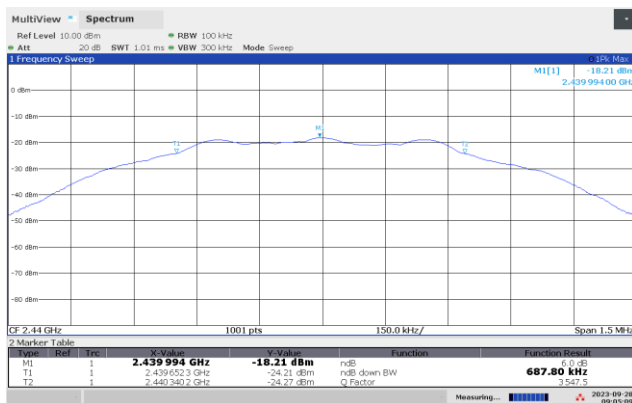


DTS BW, 2440 MHz, 1M

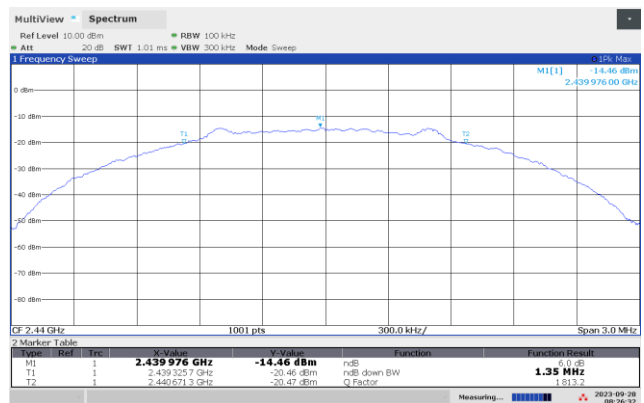

DTS BW, 2440 MHz, 2M

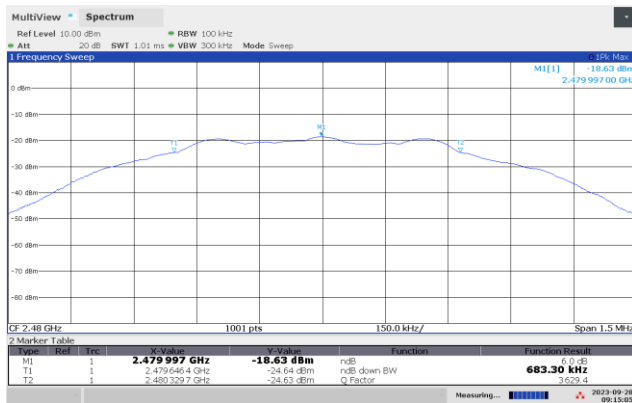

DTS BW, 2480 MHz, 1M

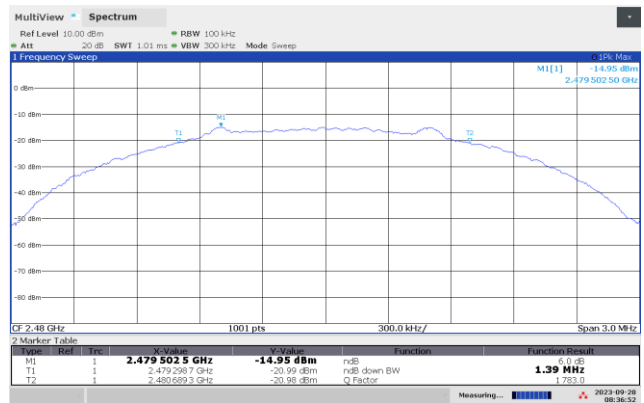

DTS BW, 2480 MHz, 2M

3.3 Peak Power Output

FCC Part 15.247 (b)

ISED Canada RSS-247 Issue 3, Clause 5.4

Measurement procedure: ANSI C63.10-2013 Clause 11.9.1.2

Test Results: Complies

EUT in test mode transmitting modulated signals at 2402, 2480, and 2480 MHz respectively. At 1MB the signal is a pulsed wave and 2Mb the signal is non-pulsed.

Maximization of the signal was performed at 2Mb and then the value at 1Mb was measured at the found maximum position (angle, height, polarization).

Measurement Data:

Carrier Frequency	Peak Conducted Power, dBm		Peak EIRP, dBuV/m *)		Antenna gain dBi
	GFSK 1Mb	GFSK 2Mb	GFSK 1Mb	GFSK 2Mb	GFSK 2M
2402 MHz	-6.96	-2.12	89.55	93.31	0.20
2440 MHz	-7.30	-2.24	90.87	94.32	1.33
2480 MHz	-7.70	-2.63	89.66	94.01	1.41

Note: *) Measured field strength at 3 meters distance.

Output Power reported is Maximum Peak Power.



The Integrated Band Power Method was used to measure Output Power

Radiated Power was calculated from measured Field Strength using the method described in FCC KDB 412172 D01.

Antenna Gain is less than 6 dBi.


See attached plots.

Frequency Band	Requirements for Frequency Hopping systems
902-928 MHz	For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels
2400-2483.5 MHz	For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts
5725-5850 MHz	For all frequency hopping systems in the 5725-5850 MHz band: 1 watt
Requirements for Digital Modulation systems	
For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the 1 Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the <i>maximum conducted output power</i> is the highest total transmit power occurring in any mode.	
Maximum allowed Antenna Gain	
If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced below the stated value above by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	

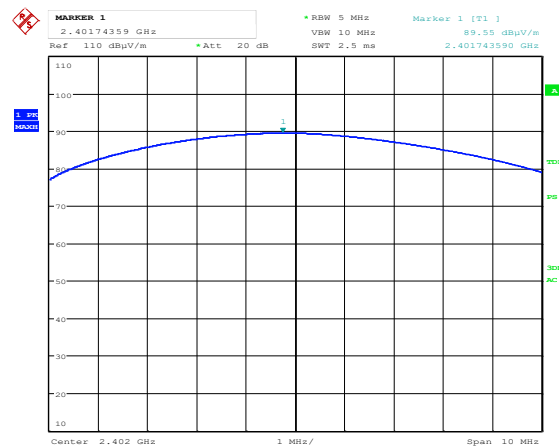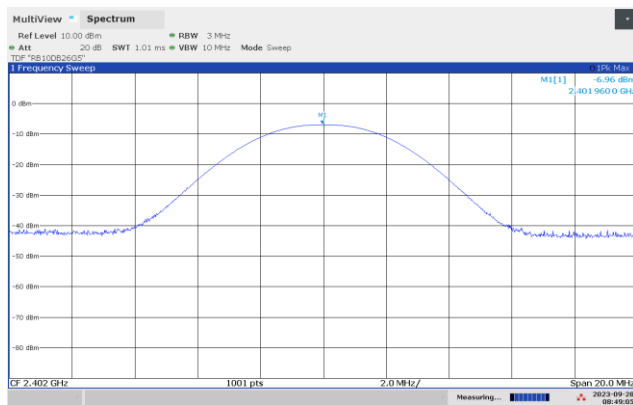


Date: 1.OCT.2023 10:57:54

Peak Power, 2402 MHz, 1Mb

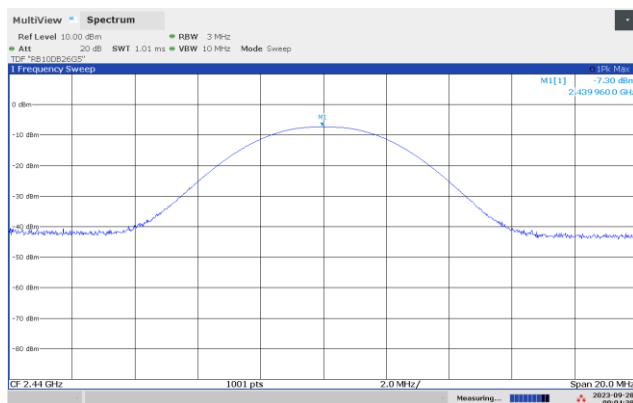


Peak EIRP, 2402 MHz, 1Mb

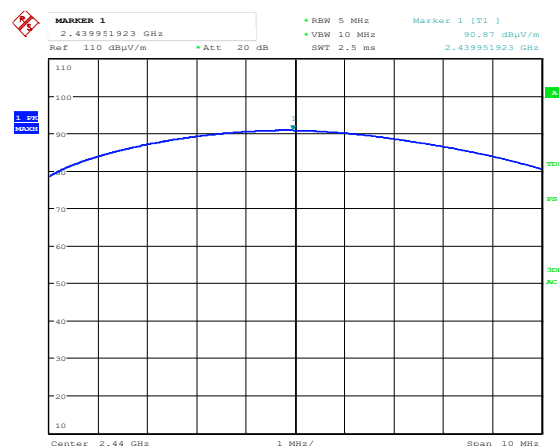


Date: 2.OCT.2023 06:33:49

Peak Power, 2440 MHz, 1Mb

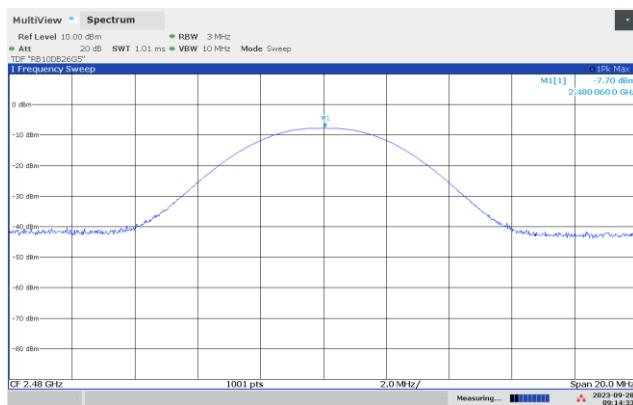



Peak EIRP, 2440 MHz, 1Mb

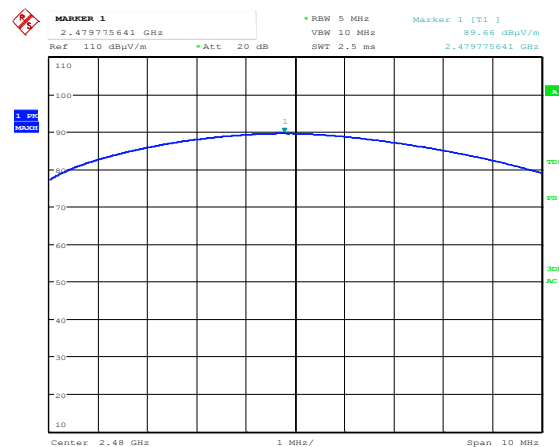

Date: 1.OCT.2023 11:33:29


Peak Power, 2480 MHz, 1Mb

Peak EIRP, 2480 MHz, 1Mb

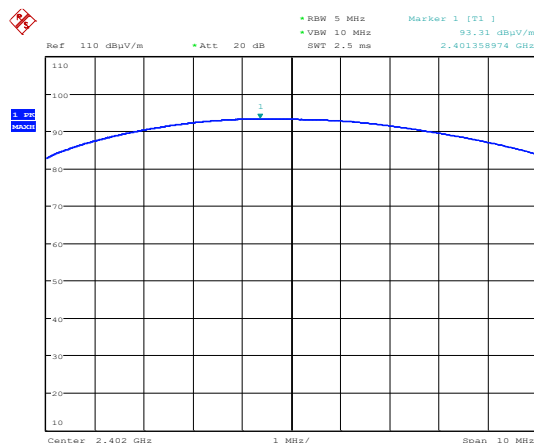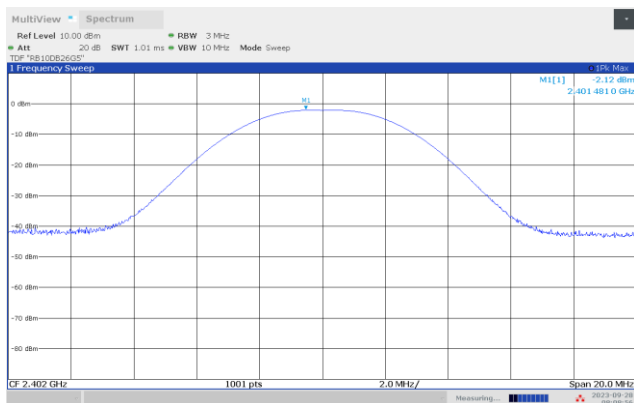


Date: 1.OCT.2023 10:51:55

Peak Power, 2402 MHz, 2Mb

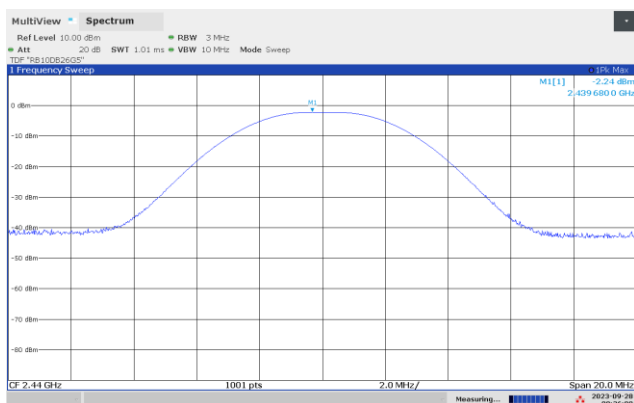


Peak EIRP, 2402 MHz, 2Mb

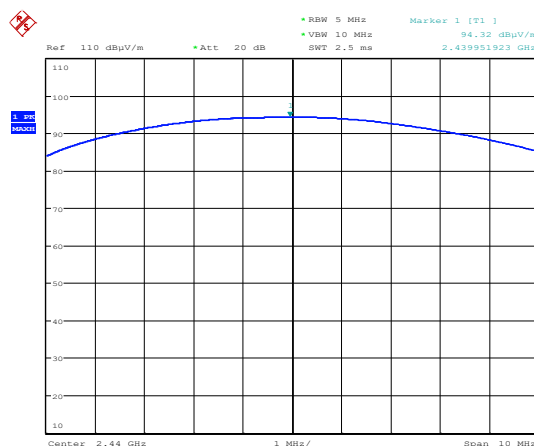


Date: 2.OCT.2023 06:27:24

Peak Power, 2440 MHz, 2Mb

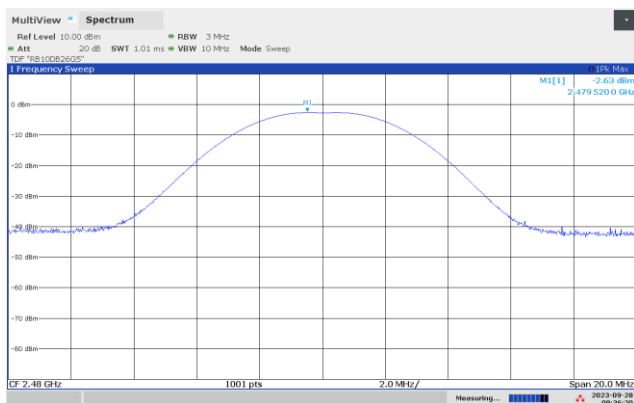

Peak EIRP, 2440 MHz, 2Mb

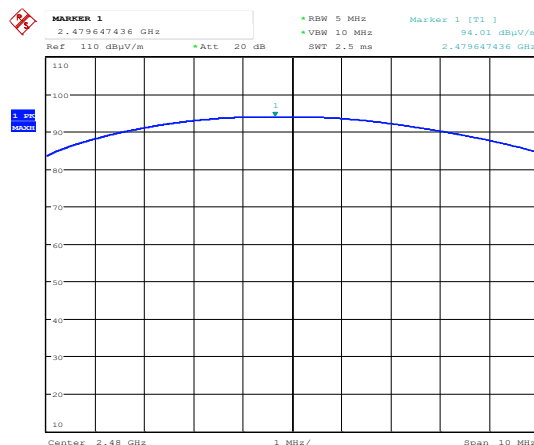

Date: 1.OCT.2023 11:28:13

Peak Power, 2480 MHz, 2Mb

Peak EIRP, 2480 MHz, 2Mb

3.4 Conducted Emissions at Antenna Connector

FCC Part 15.247 (d)

ISED Canada RSS-247 Issue 3, Clause 5.5

Measurement procedure: ANSI C63.10-2013 Clause 11.11

Test Results: Complies

EUT in test mode transmitting modulated signals at 2402, 2480, and 2480 MHz respectively. At 1MB the signal is a pulsed wave and 2Mb the signal is non-pulsed.


Measurement Data:

Carrier Frequency	Highest Value (dBc)	Margin (dB)	Verdict
2402 MHz, 1Mb	30.4	10.4	Pass
2402 MHz, 2Mb	35.8	15.8	Pass
2440 MHz, 1Mb	30.9	10.9	Pass
2440 MHz, 2Mb	35.7	15.7	Pass
2480 MHz, 1Mb	31.6	11.6	Pass
2480 MHz, 2Mb	36.0	16.0	Pass


Measured with Peak Detector

RF conducted power to 25 GHz: see attached plots.


Requirements for all systems	
Peak measurement	RMS averaging (alternative measurement)
20 dB or more below carrier measured in 100 kHz bandwidth	30 dB or more below carrier measured in 100 kHz bandwidth
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.	

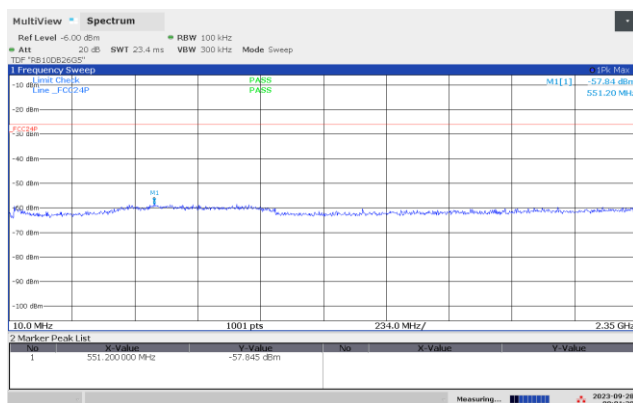


Conducted Emissions 10-2350 MHz, 2402 MHz, 1Mb

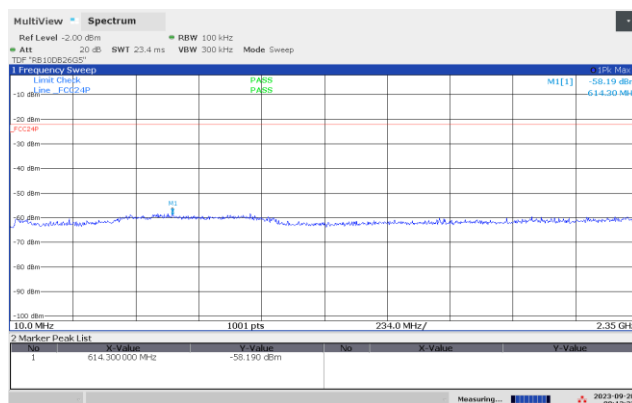


Conducted Emissions 10-2350 MHz, 2402 MHz, 2Mb

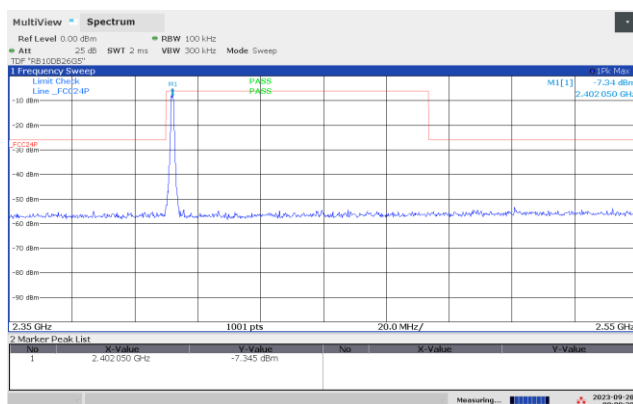


Conducted Emissions 2350-2550 MHz, 2402 MHz, 1Mb

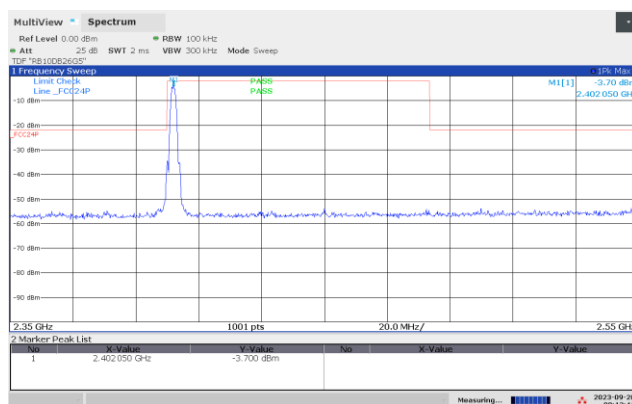


Conducted Emissions 2350-2550 MHz, 2402 MHz, 2Mb

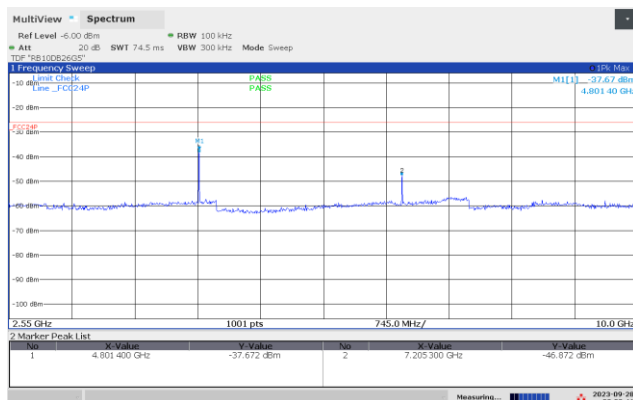


Conducted Emissions 2550-10000 MHz, 2402 MHz, 1Mb

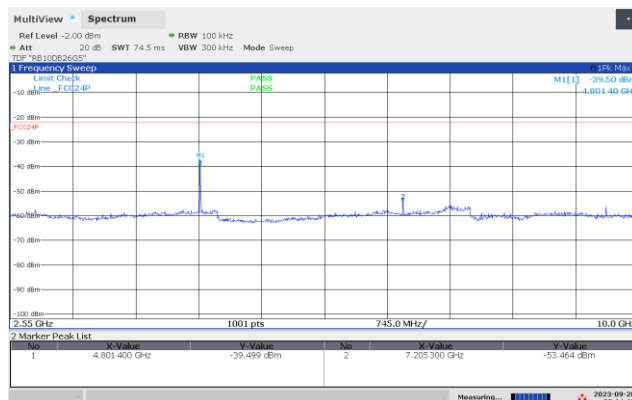


Conducted Emissions 2550-10000 MHz, 2402 MHz, 2Mb

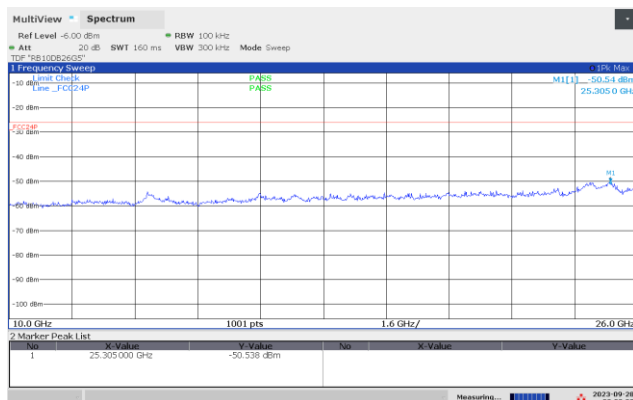


Conducted Emissions 10-26 GHz, 2402 MHz, 1Mb

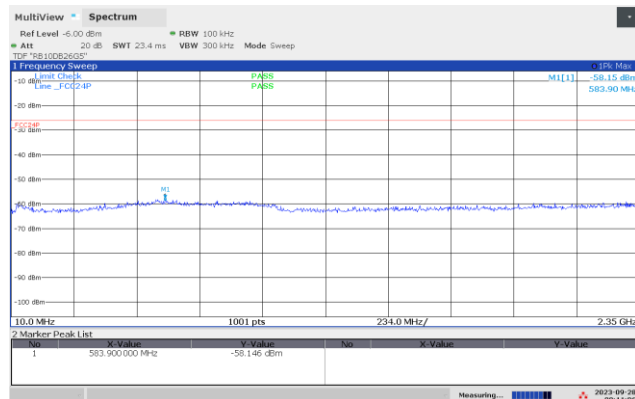


Conducted Emissions 10-26 GHz, 2402 MHz, 2Mb

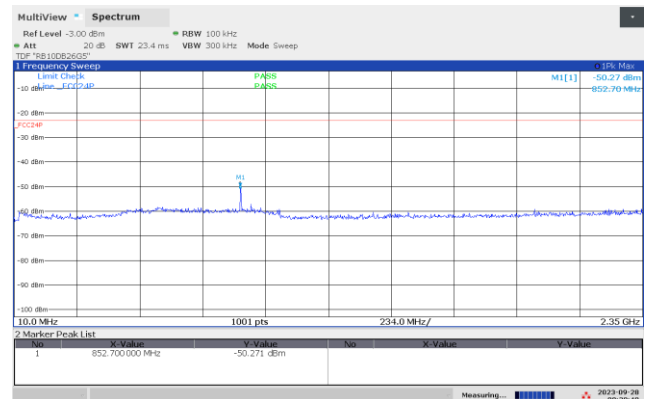


Conducted Emissions 10-2350 MHz, 2440 MHz, 1Mb

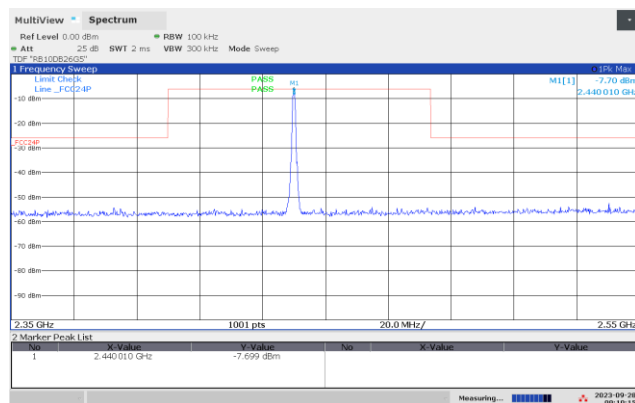


Conducted Emissions 10-2350 MHz, 2440 MHz, 2Mb

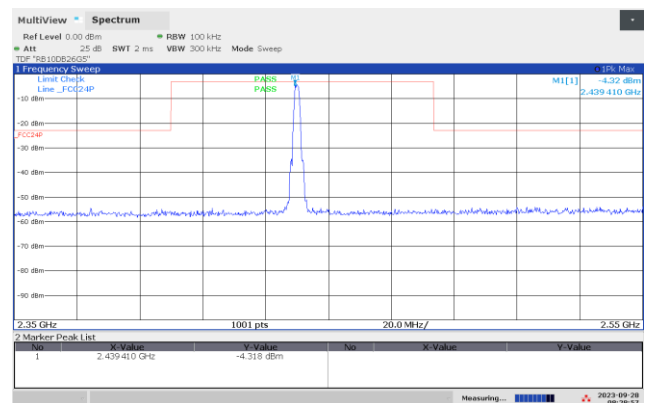


Conducted Emissions 2350-2550 MHz, 2440 MHz, 1Mb

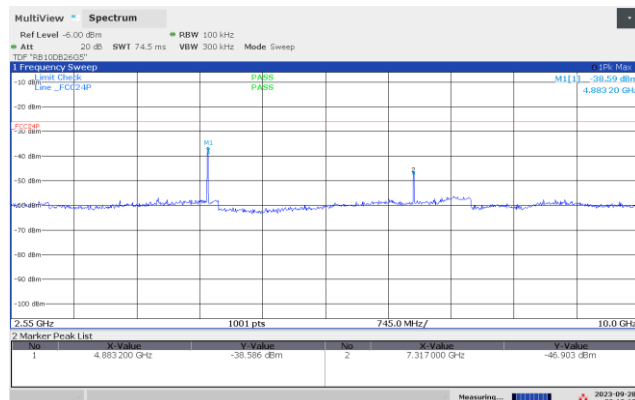


Conducted Emissions 2350-2550 MHz, 2440 MHz, 2Mb

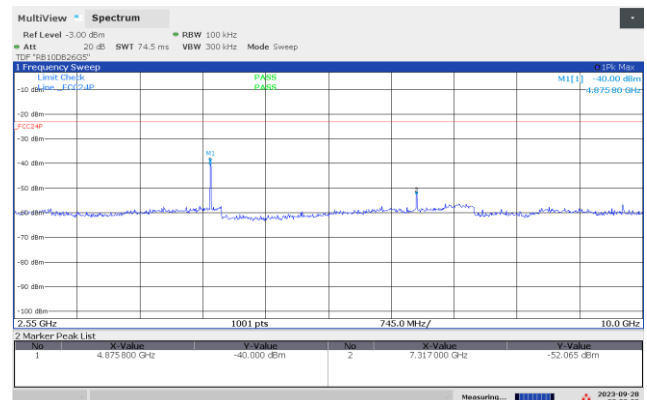


Conducted Emissions 2550-10000 MHz, 2440 MHz, 1Mb

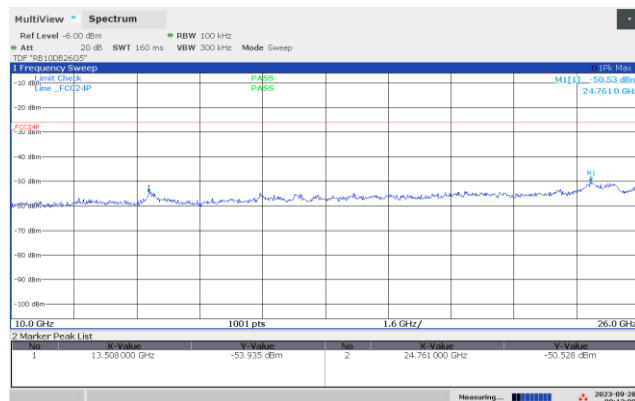


Conducted Emissions 2550-10000 MHz, 2440 MHz, 2Mb

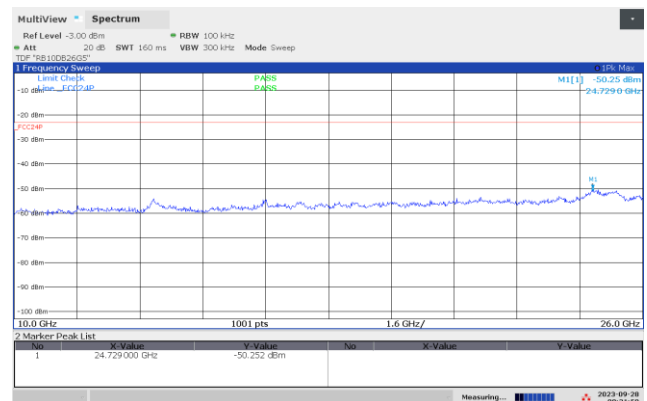


Conducted Emissions 10-26 GHz, 2440 MHz, 1Mb

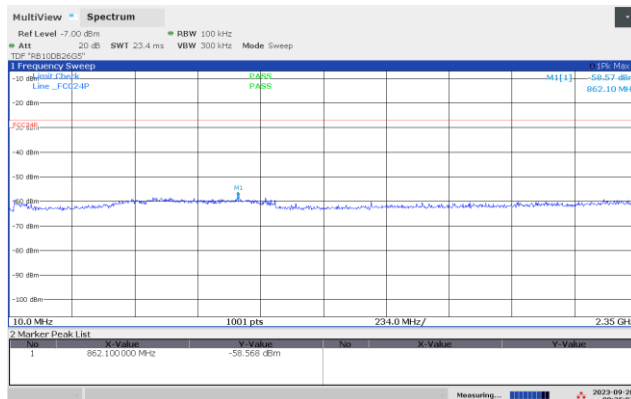


Conducted Emissions 10-26 GHz, 2440 MHz, 2Mb

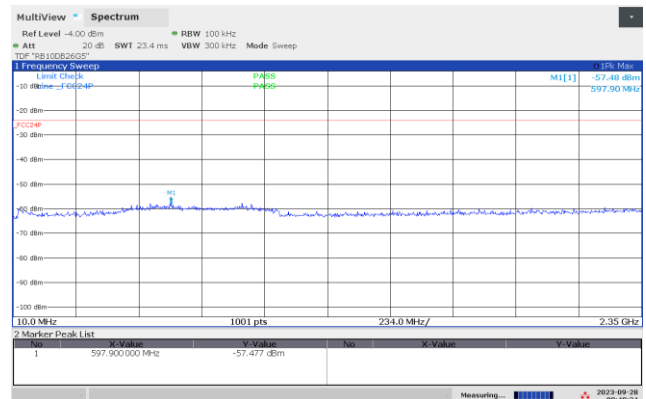


Conducted Emissions 10-2350 MHz, 2480 MHz, 1Mb

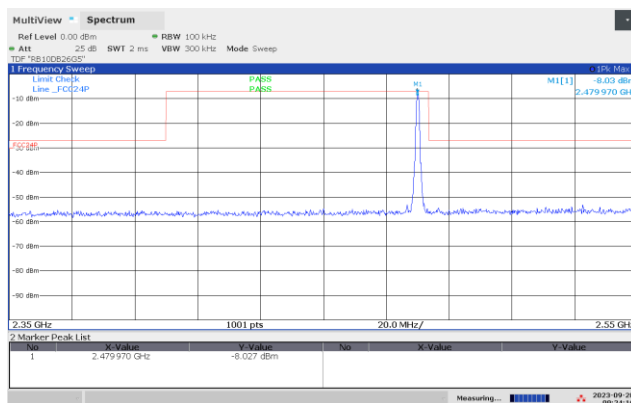


Conducted Emissions 10-2350 MHz, 2480 MHz, 2Mb

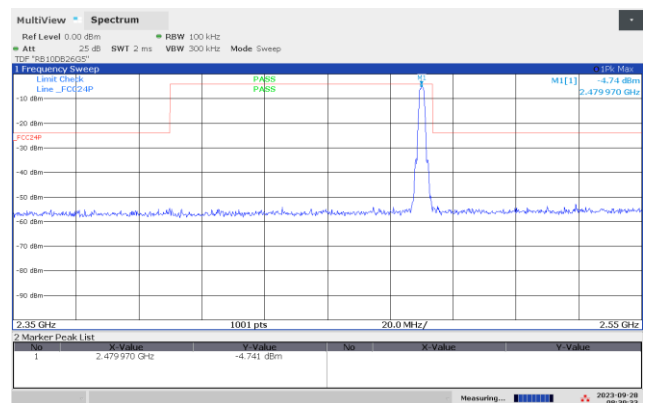

Conducted Emissions 2350-2550 MHz, 2480 MHz, 1Mb

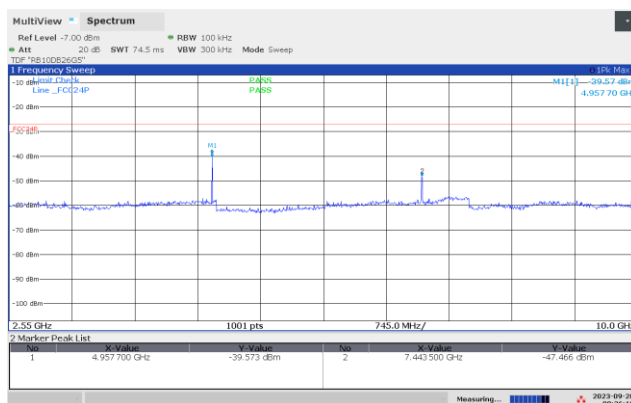


Conducted Emissions 2350-2550 MHz, 2480 MHz, 2Mb

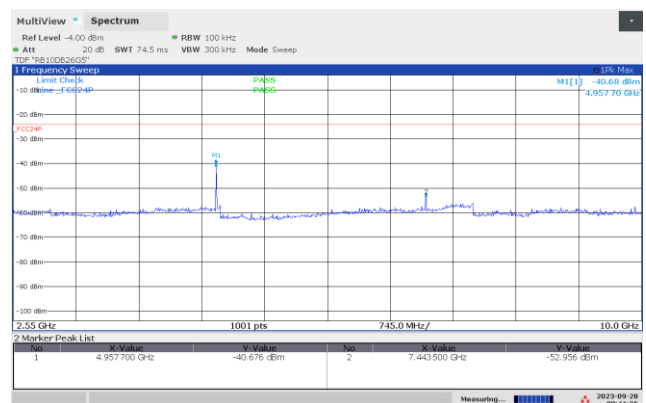


Conducted Emissions 2550-10000 MHz, 2480 MHz, 1Mb

Conducted Emissions 2550-10000 MHz, 2480 MHz, 2Mb

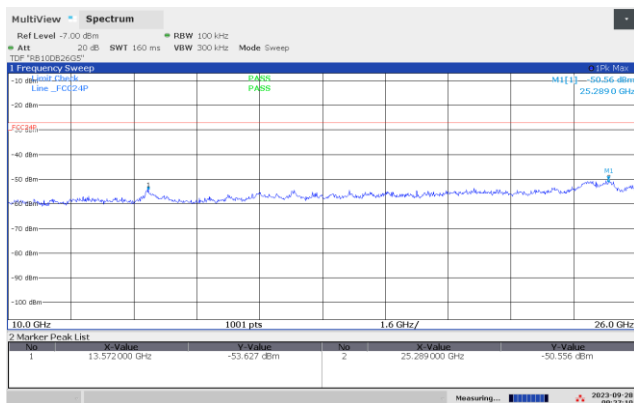

Conducted Emissions 10-26 GHz, 2480 MHz, 1Mb

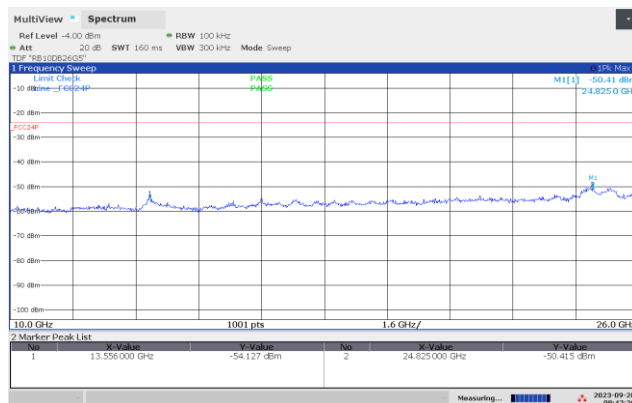

Conducted Emissions 10-26 GHz, 2480 MHz, 2Mb

3.5 Restricted Bands of operation

Restricted Bands of operation for FCC and ISSED are defined in FCC Part 15.205 and ISSED RSS-GEN, Issue 5 clause 8.10.

Generally, no fundamentals are allowed in the restricted bands and all emissions must comply with the limits in FCC 15.209 or RSS-GEN, Issue 5, clause 8.9.

FCC (MHz)	ISSED (MHz)	FCC (GHz)	ISSED (GHz)
0.090-0.110		0.96-1.24 1.3-1.427	0.96-1.427
0.495-0.505		1.435-1.6265	
2.1735-2.1905		1.6455-1.6465	
	3.020-3.026	1.660-1.710	
4.125-4.128		1.7188-1.7222	
4.17725-4.17775		2.2-2.3	
4.20725-4.20775		2.31-2.39	
	5.677-5.683	2.4835-2.5	
6.215-6.218		2.69-2.9	2.655-2.9
6.26775-6.26825		3.26-3.267	
6.31175-6.31225		3.332-3.339	
8.291-8.294		3.3458-3.358	
8.362-8.366		3.6-4.4	3.5-4.4
8.37625-8.38675		4.5-5.15	
8.41425-8.41475		5.35-5.46	
12.29-12.293		7.25-7.75	
12.51975-12.52025		8.025-8.5	
12.57675-12.57725		9.0-9.2	
13.36-13.41		9.3-9.5	
16.42-16.423		10.6-12.7	
16.69475-16.69525		13.25-13.4	
16.80425-16.80475		14.47-14.5	
25.5-25.67		15.35-16.2	
37.5-38.25		17.7-21.4	
73-74.6		22.01-23.12	
74.8-75.2		23.6-24.0	
108-121.94 123-138	108-138	31.2-31.8	
149.9-150.05		36.43-36.5	
156.52475-156.52525		Above 38.6	
156.7-156.9			
162.0125-167.17			
167.72-173.2			
240-285			
322-335.4			
399.9-410			
608-614			

Frequencies in **Bold** text are specific for FCC or ISSED, all other frequencies are common.

3.6 Radiated Emissions, Band Edge

FCC Part 15.209 (a)

ISED Canada RSS-GEN Issue 5, Clause 7.3 / 8.9

Measurement procedure: ANSI C63.10-2013 Clause 11.12

Test Results: Complies

EUT in test mode transmitting modulated signals at 2402, 2480, and 2480 MHz respectively. At 1MB the signal is a pulsed wave and 2Mb the signal is non-pulsed.

For 2Mb both the peak and average levels are measured and compared with the respective limits. For 1Mb only the peak level is measured and used in the table below as it complies with both peak and average limits.


Measurement Data:

Peak Detector					
Modulation and Bitrate	Measured field strength (dB μ V/m)		Limit	Margin	
	2390 MHz	2483.5 MHz	dB	dB	
GFSK, 1Mb	44.1	48.8	74	29.9	25.2
GFSK, 2Mb	45.0	56.6	74	29.0	17.4

Average Detector					
Modulation and Bitrate	Measured field strength (dB μ V/m)		Limit	Margin	
	2390 MHz	2483.5 MHz	dB	dB	
GFSK, 1Mb	< 44.1	< 48.8	54	> 9.9	> 3.5
GFSK, 2Mb	32.7	50.7	54	21.3	3.3


Duty cycle correction of the measured levels is not calculated as both bitrates correspond to the applicable levels.

See attached plots.

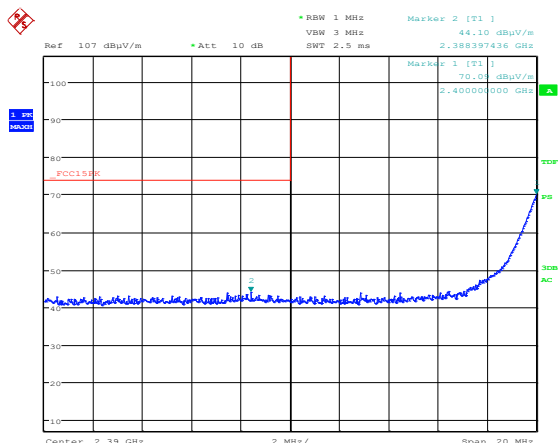


Date: 1.OCT.2023 11:16:35

XZ-plane, VP, Lower Band Edge, 2402 MHz, 1Mb, Peak

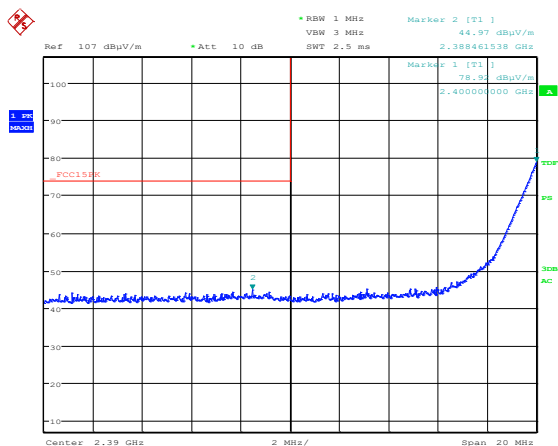


Date: 1.OCT.2023 11:11:56

XZ-plane, VP, Lower Band Edge, 2402 MHz, 2Mb, Peak

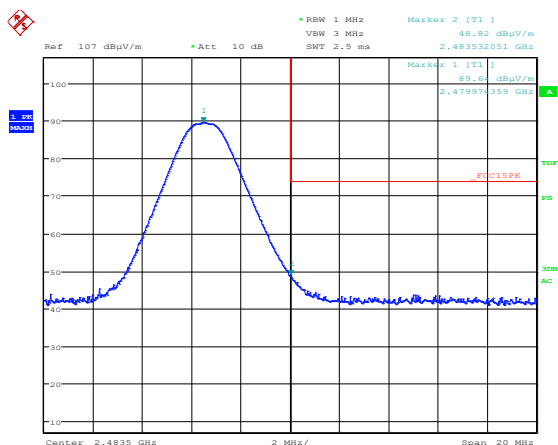

Date: 1.OCT.2023 11:32:37

XY-plane, HP, Upper Band Edge, 2480 MHz, 1Mb, Peak

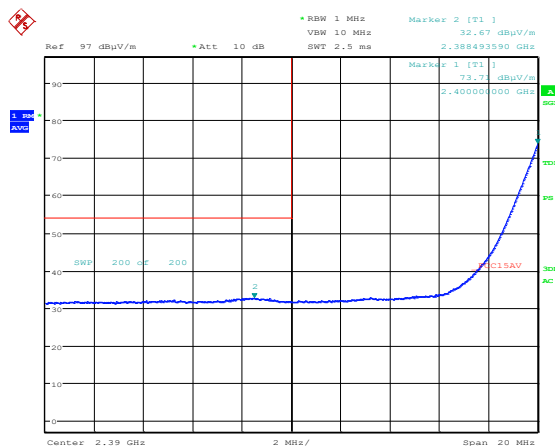

Date: 1.OCT.2023 11:13:28

XZ-plane, VP, Lower Band Edge, 2402 MHz, 2Mb, Average



XY-plane, HP, Upper Band Edge, 2480 MHz, 2Mb, Peak



XY-plane, HP, Upper Band Edge, 2480 MHz, 2Mb, Average

3.7 Radiated Emissions, 30 – 1000 MHz.

FCC Part 15.209 (a)

ISED Canada RSS-GEN Issue 5, Clause 7.3/8.9

Measurement procedure: ANSI C63.10-2013 Clause 11.12

Test Results: Complies

EUT in test mode transmitting modulated signals at 2402, 2480, and 2480 MHz respectively. At 1Mb the signal is a pulsed wave and 2Mb the signal is non-pulsed.

Measurement Data:

Detector: Peak or Quasi-Peak as applicable.


Measuring distance 3 m

Measured Frequency (MHz)	Carrier Frequency (MHz)	Modulation	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
30 – 88	2402/2440/2480	1Mb/2Mb	< 33	40.0	> 6
88 – 216	2402/2440/2480	1Mb/2Mb	< 30	43.5	> 13.5
216 – 960	2402/2440/2480	1Mb/2Mb	< 42	46.0	> 4
960 – 1000	2402/2440/2480	1Mb/2Mb	< 45	54.0	> 9

See attached plots


Requirements/Limit

FCC	Part 15.209 @ frequencies defined in §15.205	
ISED	RSS-GEN Issue 5, Clause 8.9 @ frequencies defined in clause 8.10	
Frequency	Radiated emission limit @3 meters	
30 – 88 MHz	100 µV/m	40.0 dBµV/m
88 – 216 MHz	150 µV/m	43.5 dBµV/m
216 – 960 MHz	200 µV/m	46.0 dBµV/m
960 – 1000 MHz	500 µV/m	54.0 dBµV/m
	Limits above are with Quasi Peak Detector	

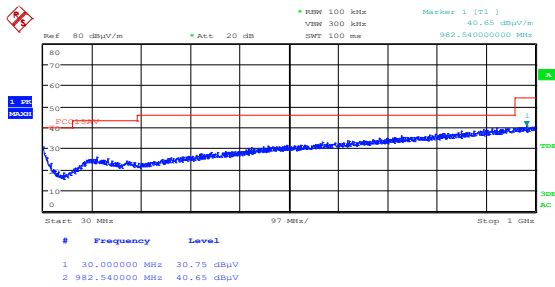


Date: 12.SEP.2023 09:09:40

Radiated Emissions 30 - 1000 MHz, 2402, 1Mb, HP

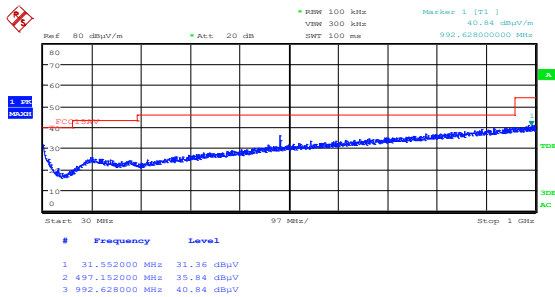


Date: 12.SEP.2023 09:23:38

Radiated Emissions 30 - 1000 MHz, 2402, 2Mb, HP

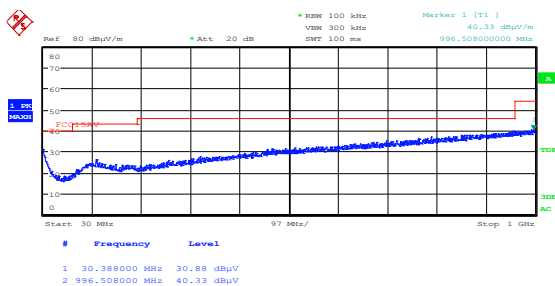


Date: 12.SEP.2023 09:32:46

Radiated Emissions 30 - 1000 MHz, 2440, 1Mb, HP

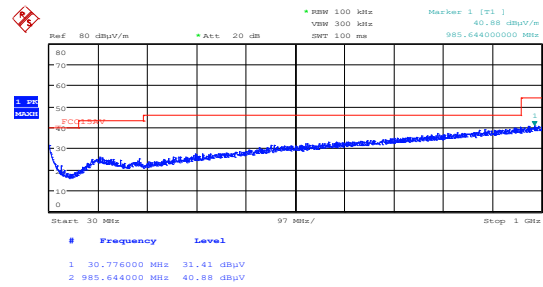


Date: 12.SEP.2023 09:07:41

Radiated Emissions 30 - 1000 MHz, 2402, 1Mb, VP

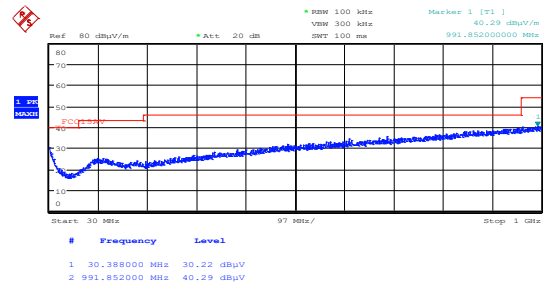


Date: 12.SEP.2023 09:25:37

Radiated Emissions 30 - 1000 MHz, 2402, 2Mb, VP

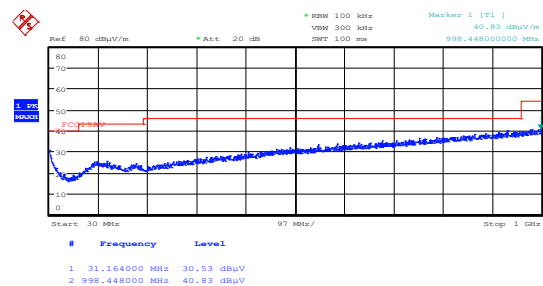


Date: 12.SEP.2023 09:30:46

Radiated Emissions 30 - 1000 MHz, 2440, 1Mb, VP

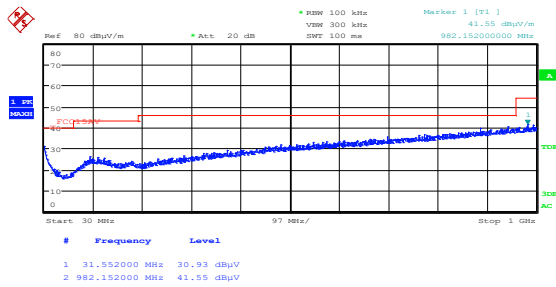


Date: 12.SEP.2023 09:39:42

Radiated Emissions 30 - 1000 MHz, 2440, 2Mb, HP

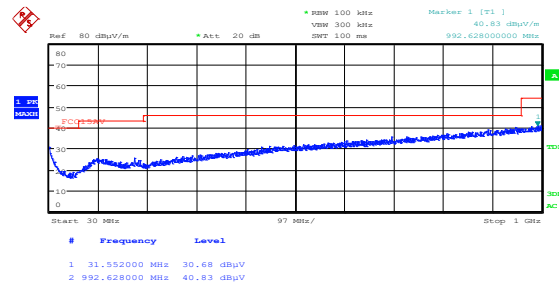


Date: 12.SEP.2023 09:37:43

Radiated Emissions 30 - 1000 MHz, 2440, 2Mb, VP

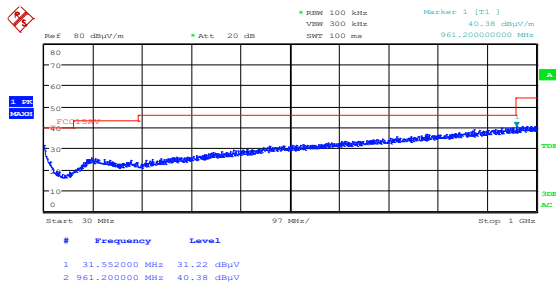


Date: 12.SEP.2023 09:44:59

Radiated Emissions 30 - 1000 MHz, 2480, 1Mb, HP

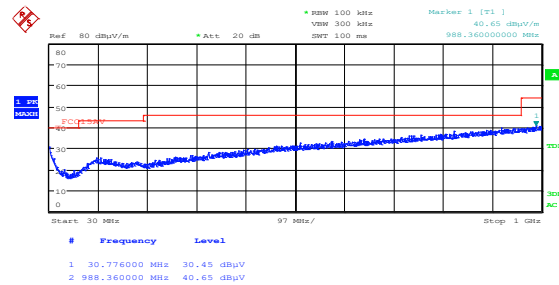


Date: 12.SEP.2023 09:43:00

Radiated Emissions 30 - 1000 MHz, 2480, 1Mb, VP

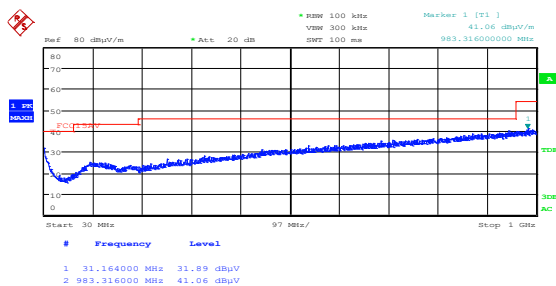

Date: 12.SEP.2023 09:51:25

Radiated Emissions 30 - 1000 MHz, 2480, 2Mb, HP

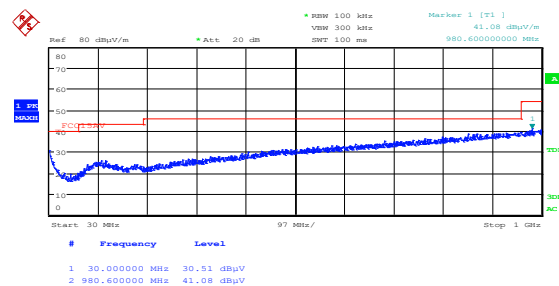

Date: 12.SEP.2023 09:49:26

Radiated Emissions 30 - 1000 MHz, 2480, 2Mb, VP

3.8 Radiated Emissions, 1 – 26 GHz

FCC Part 15.209 (a)

ISED Canada RSS-GEN Issue 5, Clause 7.3/8.9

Measurement procedure: ANSI C63.10-2013 Clause 11.12

Test Results: Complies

EUT in test mode transmitting modulated signals at 2402, 2480, and 2480 MHz respectively. At 1MB the signal is a pulsed wave and 2Mb the signal is non-pulsed.

Measurement Data:

Measuring distance: 3m (1 – 18 GHz)

A pre-scan was performed above 18 GHz and no spurious emissions were detected.

RBW=1 MHz

Measured Frequency (GHz)	Carrier Frequency (MHz)	Modulation	Measured Emissions (dBμV/m)		Limit (dBμV/m)		Margin (dB)	
		1Mb / 2Mb	Peak	Average	Pk	Av	Pk	Av
4804	2402	1Mb	49.3	< 49.3	74	54	> 20	> 4.7
4804	2402	2Mb	50.5	< 50.5	74	54	> 20	> 3.5
4880	2440	2Mb	50.9	< 50.9	74	54	> 20	> 3.1
4960	2480	2Mb	51.4	< 51.4	74	54	> 20	> 2.6
7320	2440	1Mb	52.7	< 52.7	74	54	> 20	> 1.3
7440	2480	2Mb	52.8	< 52.8	74	54	> 20	> 1.2
12010	2402	1Mb / 2Mb	< 50 *	< 50 *	74	54	> 20	> 4
12130	2440	1Mb / 2Mb	< 50 *	< 50 *	74	54	> 20	> 4
12400	2480	1Mb / 2Mb	< 50 *	< 50 *	74	54	> 20	> 4
19216	2402	1Mb / 2Mb	< 50 *	< 50 *	74	54	> 20	> 4
19408	2440	1Mb / 2Mb	< 50 *	< 50 *	74	54	> 20	> 4
19840	2480	1Mb / 2Mb	< 50 *	< 50 *	74	54	> 20	> 4

Note: *) no visible spurious seen at these harmonic frequencies in restricted bands


A Band Reject Filter was used for measurements from 1 GHz to 18 GHz

Antenna factor, amplifier gain and cable loss are included in spectrum analyzer "Transducer factor".

See plots.


Requirements/Limit

FCC	Part 15.209 @ frequencies defined in §15.205	
ISED	RSS-GEN Issue 5, clause 8.9 @ frequencies defined in clause 8.10	
	Radiated emission limit @3 meters	
Frequency	Average Detector	Peak Detector
1 – 26 GHz	54.0 dBμV/m	74.0 dBμV/m

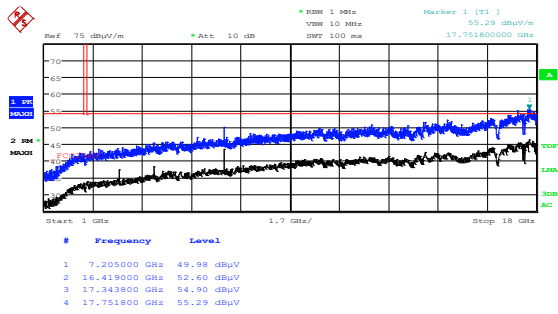


Date: 12.SEP.2023 12:37:39

Radiated Emissions 1 - 18 GHz, XY-plane, 2402, 1Mb, HP 250 cm

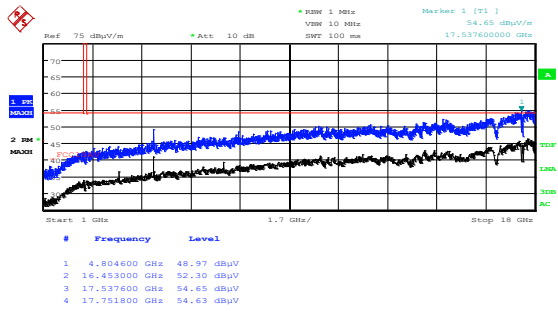


Date: 12.SEP.2023 12:44:26

Radiated Emissions 1 - 18 GHz, YZ-plane, 2402, 1Mb, HP 250 cm

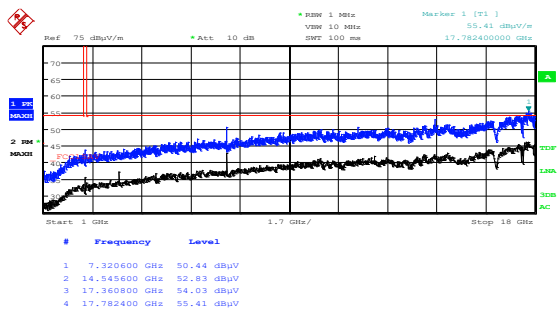


Date: 12.SEP.2023 12:54:49

Radiated Emissions 1 - 18 GHz, XY-plane, 2440, 1Mb, HP 250 cm

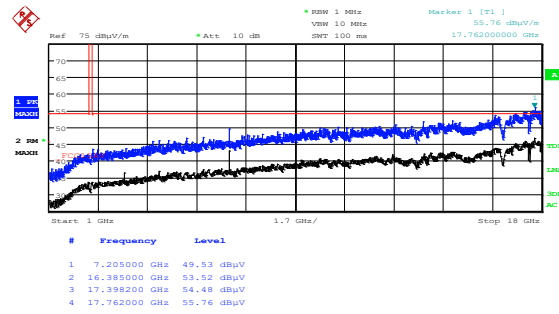


Date: 12.SEP.2023 12:35:39

Radiated Emissions 1 - 18 GHz, XY-plane, 2402, 1Mb, VP 150 cm

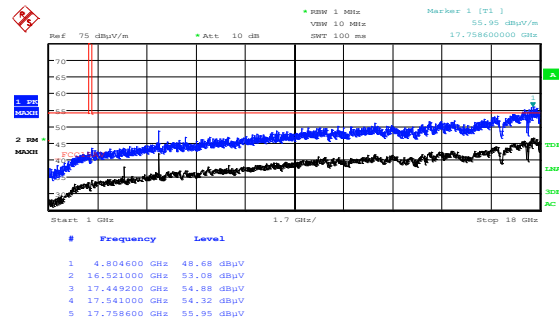


Date: 12.SEP.2023 12:42:27

Radiated Emissions 1 - 18 GHz, YZ-plane, 2402, 1Mb, VP 150 cm

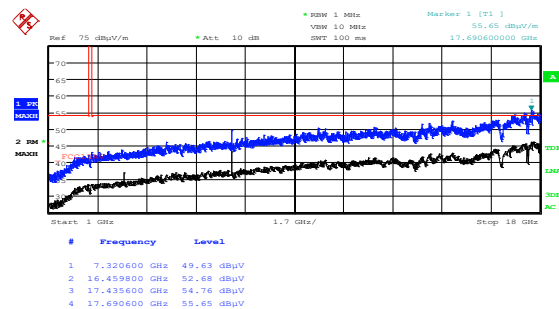


Date: 12.SEP.2023 12:52:49

Radiated Emissions 1 - 18 GHz, XY-plane, 2440, 1Mb, VP 150 cm

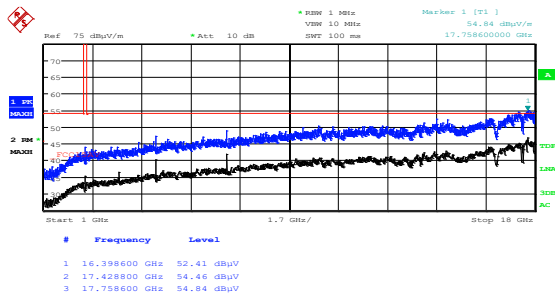


Date: 12.SEP.2023 12:49:43

Radiated Emissions 1 - 18 GHz, YZ-plane, 2440, 1Mb, HP 250 cm

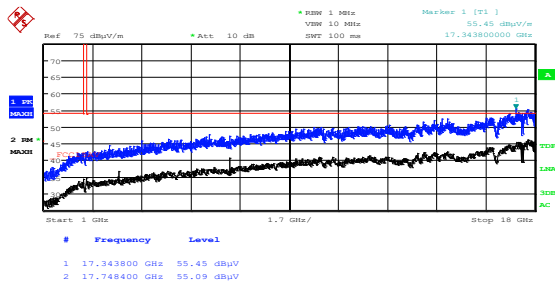


Date: 12.SEP.2023 12:59:58

Radiated Emissions 1 - 18 GHz, XY-plane, 2480, 1Mb, HP 250 cm

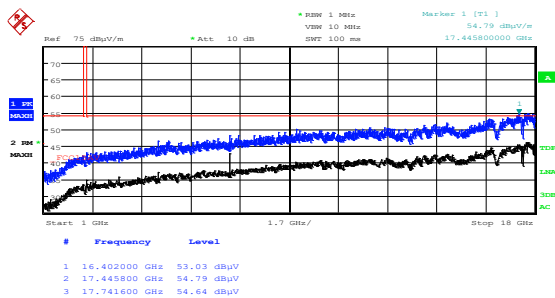


Date: 12.SEP.2023 13:06:18

Radiated Emissions 1 - 18 GHz, YZ-plane, 2480, 1Mb, HP 250 cm

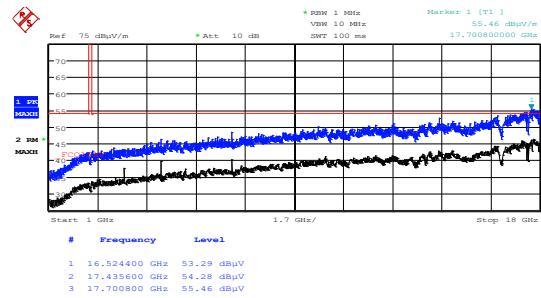


Date: 12.SEP.2023 12:47:43

Radiated Emissions 1 - 18 GHz, YZ-plane, 2440, 1Mb, VP 150 cm

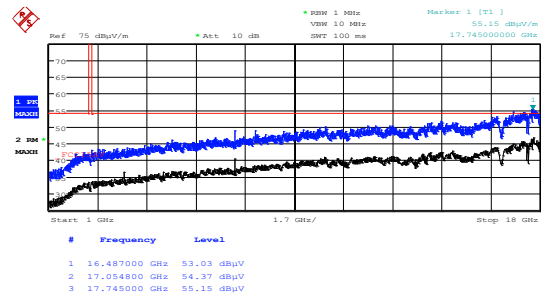


Date: 12.SEP.2023 12:57:58

Radiated Emissions 1 - 18 GHz, XY-plane, 2480, 1Mb, VP 150 cm

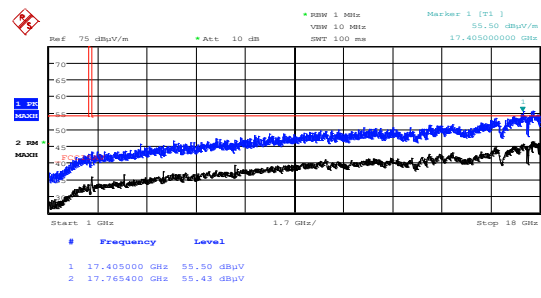


Date: 12.SEP.2023 13:04:18

Radiated Emissions 1 - 18 GHz, YZ-plane, 2480, 1Mb, VP 150 cm

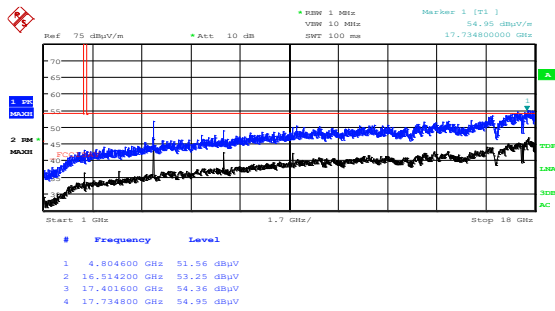


Date: 12.SEP.2023 12:32:39

Radiated Emissions 1 - 18 GHz, XY-plane, 2402, 2Mb, HP 250 cm

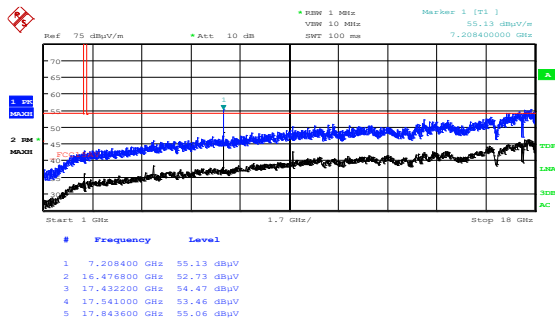


Date: 12.SEP.2023 12:27:58

Radiated Emissions 1 - 18 GHz, YZ-plane, 2402, 2Mb, HP 250 cm

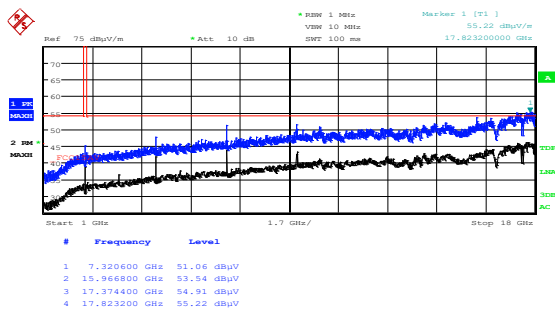


Date: 12.SEP.2023 12:10:47

Radiated Emissions 1 - 18 GHz, XY-plane, 2440, 2Mb, HP 250 cm

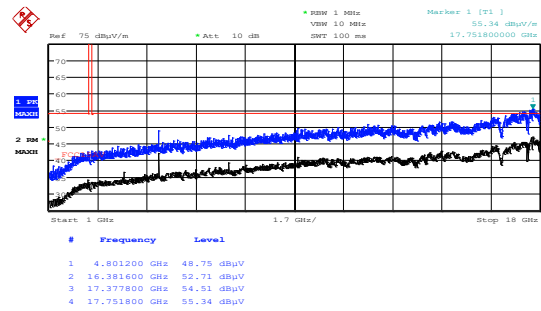


Date: 12.SEP.2023 12:30:39

Radiated Emissions 1 - 18 GHz, XY-plane, 2402, 2Mb, VP 150 cm

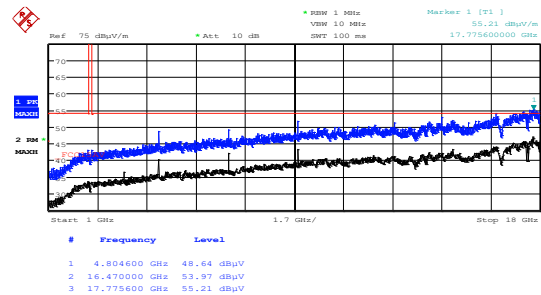


Date: 12.SEP.2023 12:25:59

Radiated Emissions 1 - 18 GHz, YZ-plane, 2402, 2Mb, VP 150 cm

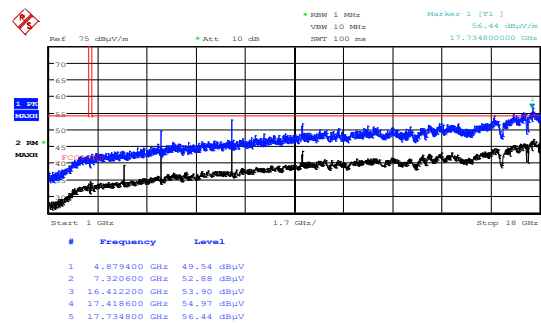


Date: 12.SEP.2023 12:08:47

Radiated Emissions 1 - 18 GHz, XY-plane, 2440, 2Mb, VP 150 cm

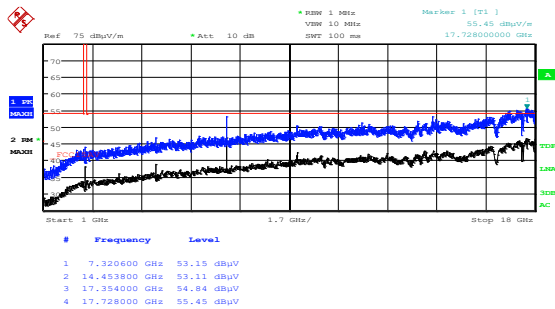


Date: 12.SEP.2023 11:22:37

Radiated Emissions 1 - 18 GHz, YZ-plane, 2440, 2Mb, HP 250 cm

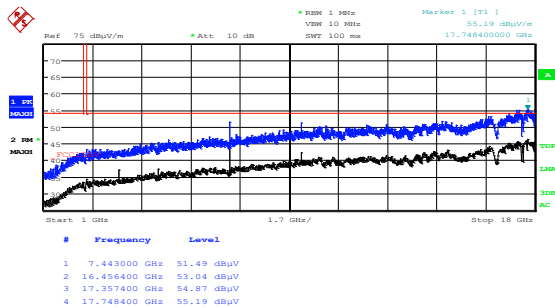


Date: 12.SEP.2023 12:17:32

Radiated Emissions 1 - 18 GHz, XY-plane, 2480, 2Mb, HP 250 cm

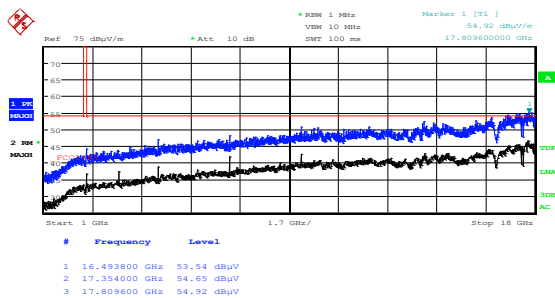


Date: 12.SEP.2023 12:22:55

Radiated Emissions 1 - 18 GHz, YZ-plane, 2480, 2Mb, HP 250 cm

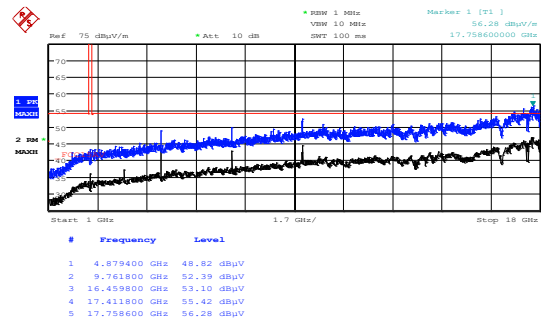


Date: 12.SEP.2023 11:20:38

Radiated Emissions 1 - 18 GHz, YZ-plane, 2440, 2Mb, VP 150 cm

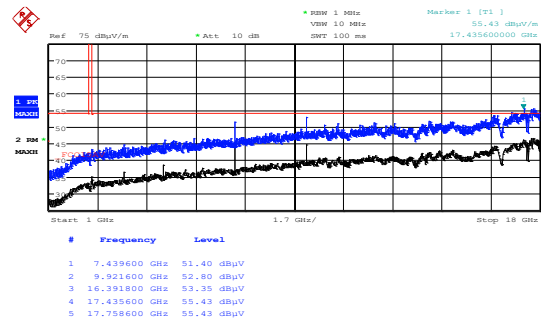


Date: 12.SEP.2023 12:15:33

Radiated Emissions 1 - 18 GHz, XY-plane, 2480, 2Mb, VP 150 cm

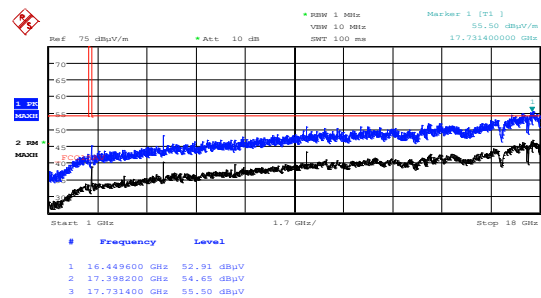


Date: 12.SEP.2023 12:20:55

Radiated Emissions 1 - 18 GHz, YZ-plane, 2480, 2Mb, VP 150 cm

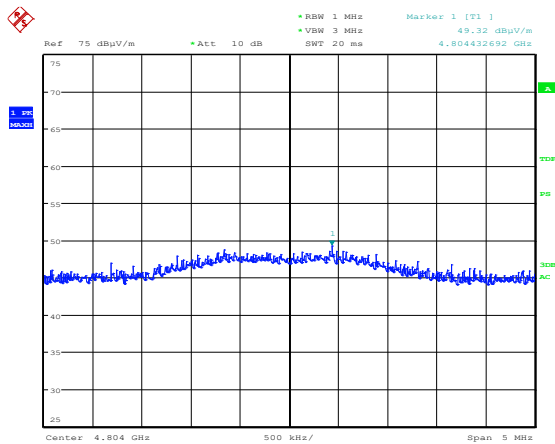


Date: 12.SEP.2023 14:25:44

Radiated Emissions 4804, XY-plane, 2402, 1Mb, HP

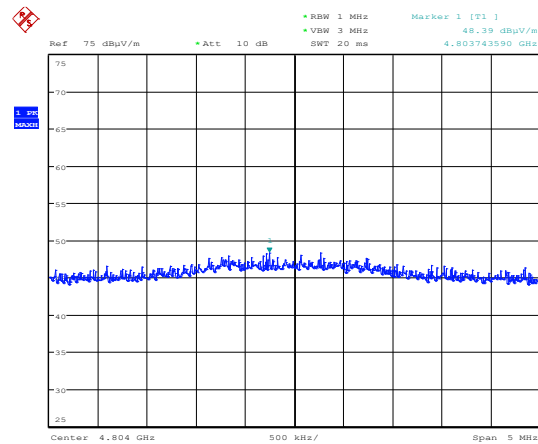


Date: 12.SEP.2023 14:24:13

Radiated Emissions 4804, XY-plane, 2402, 1Mb, VP

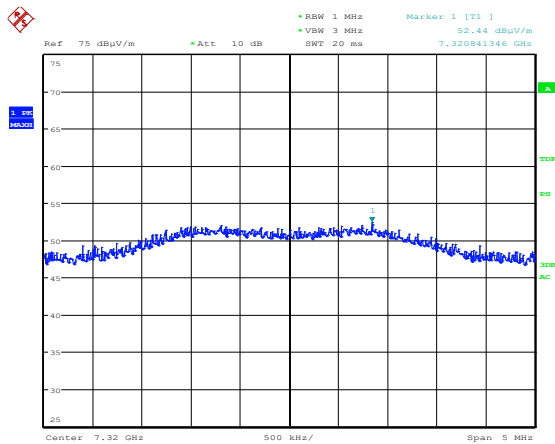


Date: 12.SEP.2023 14:06:47

Radiated Emissions 7320, XY-plane, 2440, 1Mb, HP

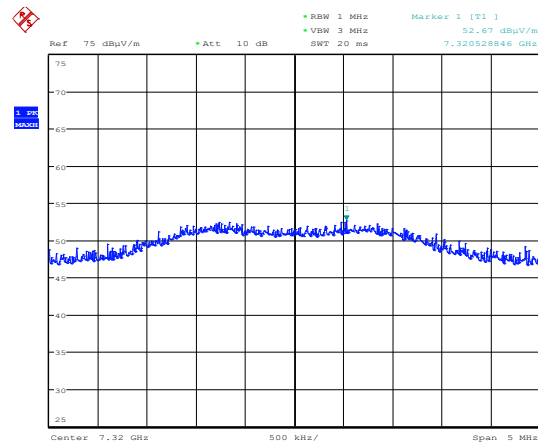


Date: 12.SEP.2023 14:05:29

Radiated Emissions 7320, XY-plane, 2440, 1Mb, VP

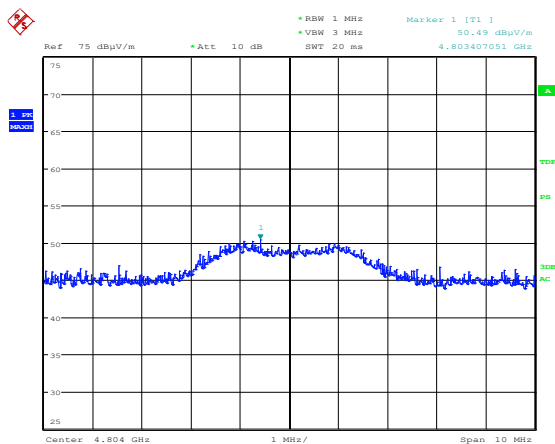


Date: 12.SEP.2023 14:41:31

Radiated Emissions 4804, XY-plane, 2402, 2Mb, HP

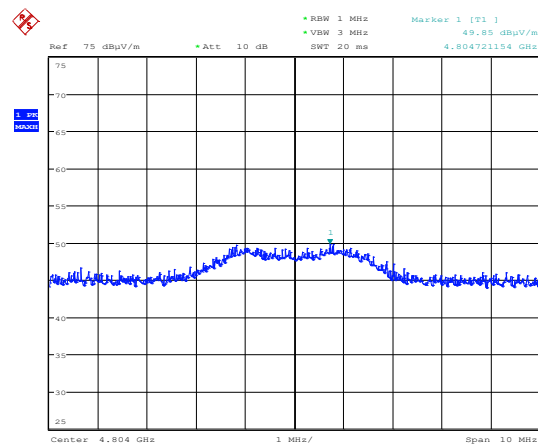


Date: 12.SEP.2023 14:40:16

Radiated Emissions 4804, XY-plane, 2402, 2Mb, VP

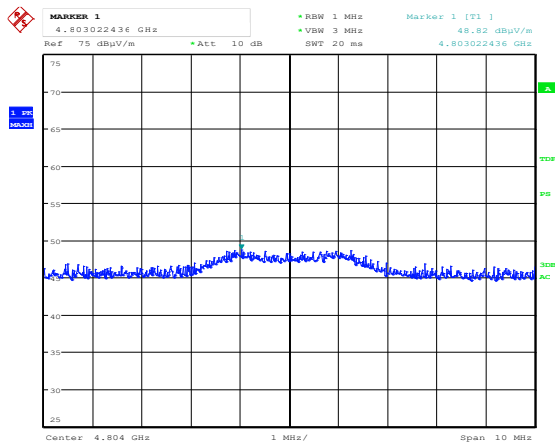


Date: 12.SEP.2023 14:29:31

Radiated Emissions 4804, YZ-plane, 2402, 2Mb, HP

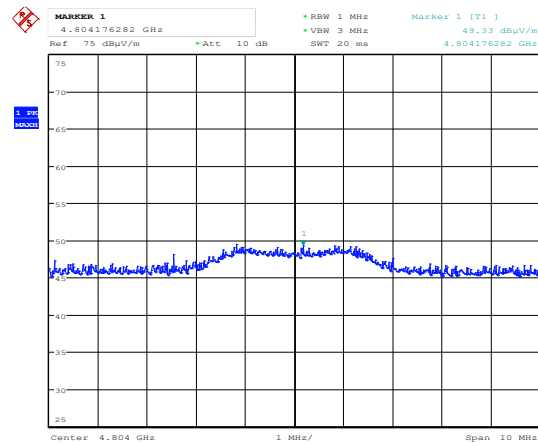


Date: 12.SEP.2023 14:30:58

Radiated Emissions 4804, YZ-plane, 2402, 2Mb, VP

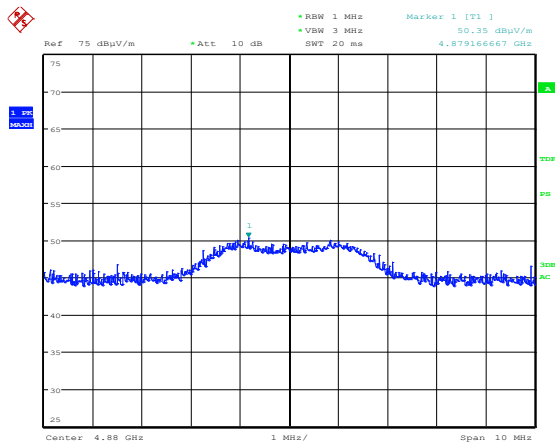


Date: 13.SEP.2023 07:20:49

Radiated Emissions 4880, YZ-plane, 2440, 2Mb, HP

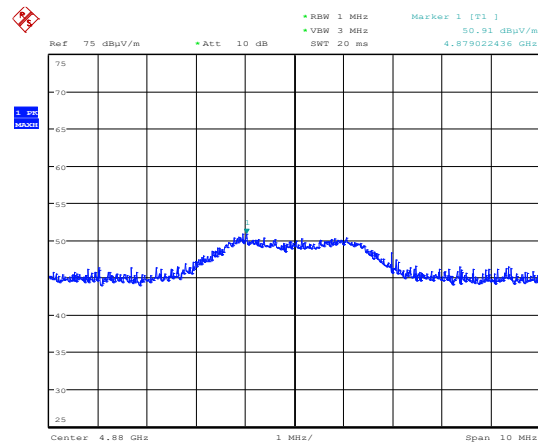


Date: 13.SEP.2023 07:21:56

Radiated Emissions 4880, YZ-plane, 2440, 2Mb, VP

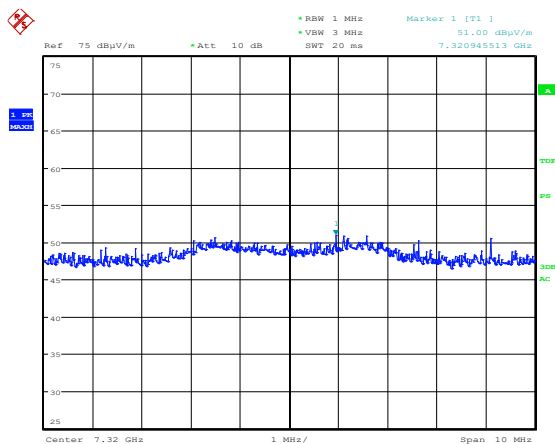


Date: 13.SEP.2023 07:30:26

Radiated Emissions 7320, YZ-plane, 2440, 2Mb, HP

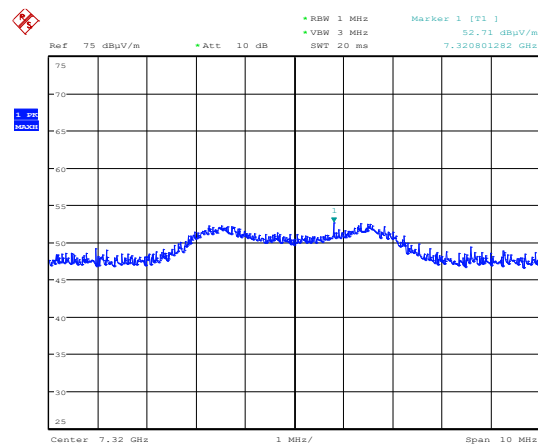


Date: 13.SEP.2023 07:29:13

Radiated Emissions 7320, YZ-plane, 2440, 2Mb, VP

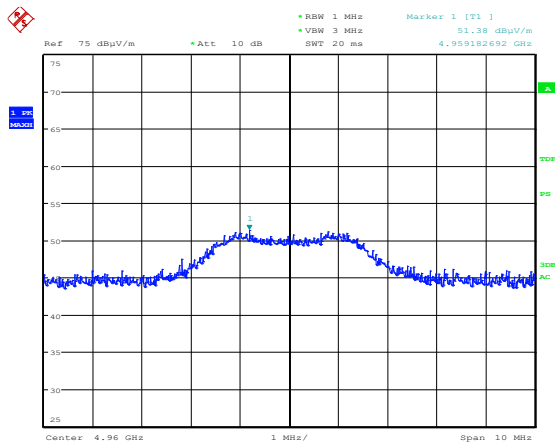


Date: 13.SEP.2023 08:03:29

Radiated Emissions 4960, XY-plane, 2480, 2Mb, HP

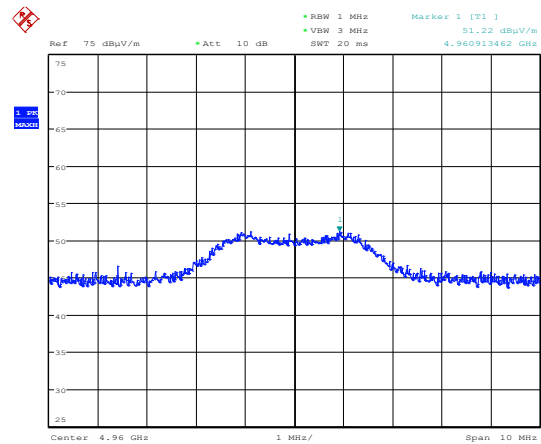


Date: 13.SEP.2023 08:02:23

Radiated Emissions 4960, XY-plane, 2480, 2Mb, VP

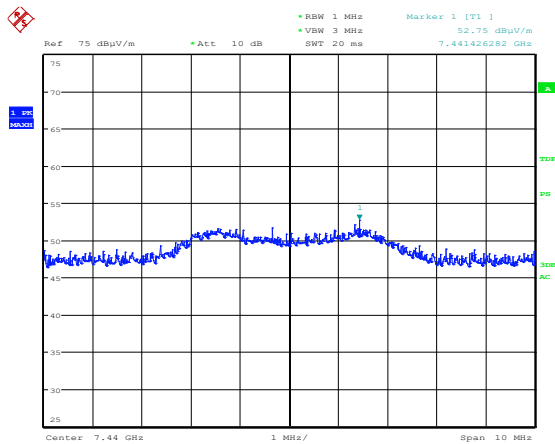


Date: 13.SEP.2023 08:13:33

Radiated Emissions 7440, XY-plane, 2480, 2Mb, HP

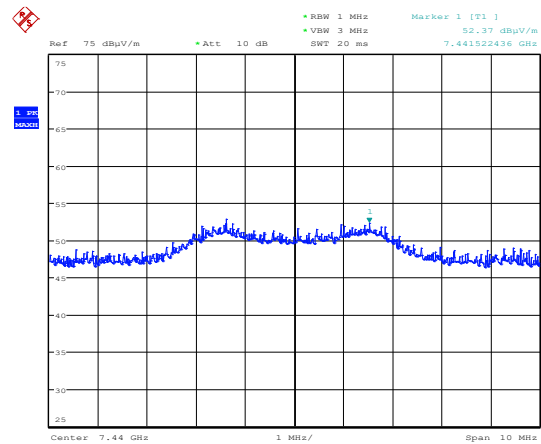


Date: 13.SEP.2023 08:12:36

Radiated Emissions 7440, XY-plane, 2480, 2Mb, VP

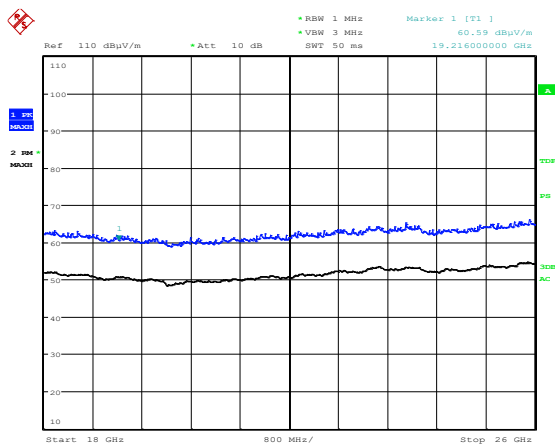


Date: 14.SEP.2023 10:45:54

Radiated Emissions 18-26 GHz, XXXY-plane, 2402, 1Mb, HPVP 160 cm

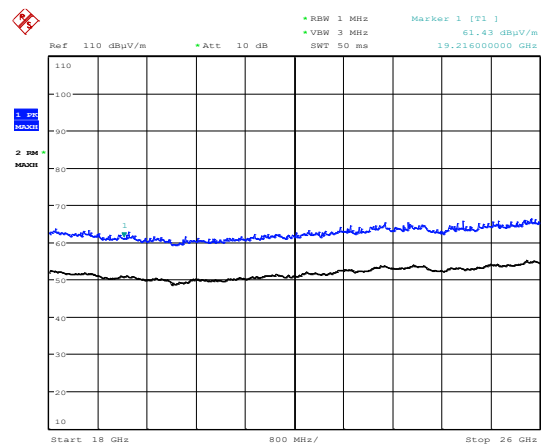


Date: 14.SEP.2023 09:51:20

Radiated Emissions 18-26 GHz, XXXY-plane, 2402, 2Mb, HPVP 160 cm

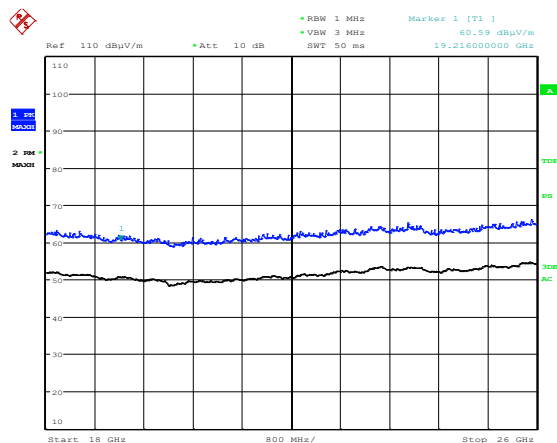


Date: 14.SEP.2023 10:45:54

Radiated Emissions 18-26 GHz, XYZ-plane, 2440, 1Mb, HPVP 160 cm

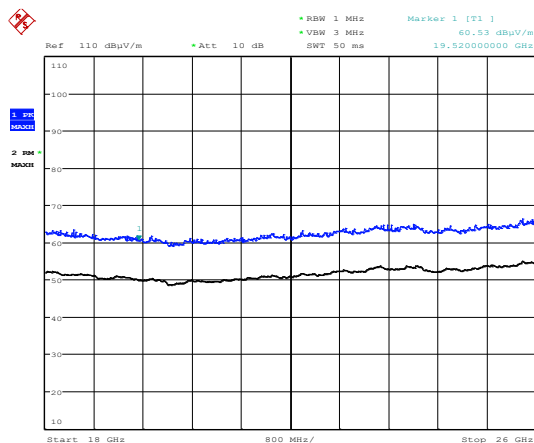


Date: 14.SEP.2023 10:06:45

Radiated Emissions 18-26 GHz, XYZ-plane, 2440, 2Mb, HPVP 160 cm

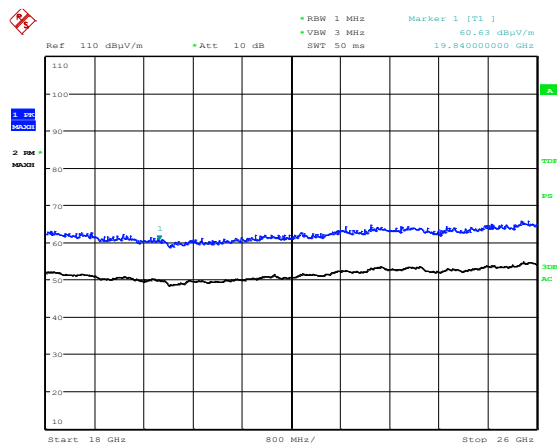

Date: 14.SEP.2023 11:17:10

Radiated Emissions 18-26 GHz, XYZ-plane, 2480, 1Mb, HPVP 160 cm

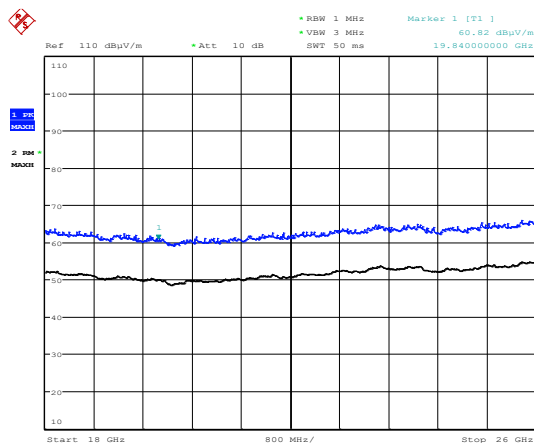

Date: 14.SEP.2023 10:30:31

Radiated Emissions 18-26 GHz, XYZ-plane, 2480, 2Mb, HPVP 160 cm

3.9 Power Spectral Density (PSD)

FCC part 15.247(d)

ISED Canada RSS-247 Issue 3, Clause 5.2 (2)

Measurement procedure: ANSI C63.10-2013 Clause 11.10

Test Results: Complies

EUT in test mode transmitting modulated signals at 2402, 2480, and 2480 MHz respectively. At 1MB the signal is a pulsed wave and 2Mb the signal is non-pulsed.


Measurement Data:

The measurement procedure PKPSD described in ANSI C63.10-2013 was used.


Modulation Type and Bitrate	Measured Power Spectral Density (dBm/3kHz)		
	2402 MHz	2440 MHz	2480 MHz
GFSK 1Mb	-22.2	-22.5	-23.1
GFSK 2Mb	-15.6	-15.9	-16.3

Requirement for systems using Digital Modulation


The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

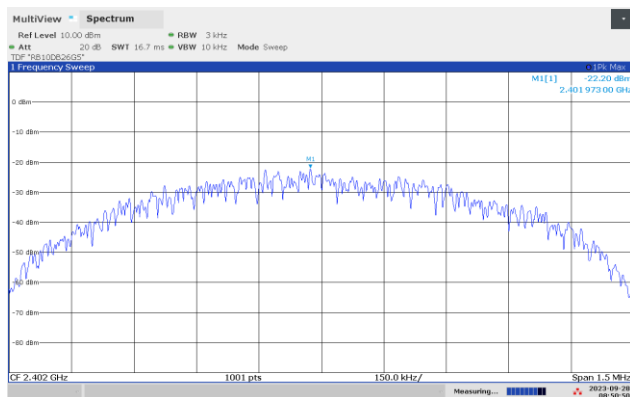


PSD, 2402 MHz, 1Mb

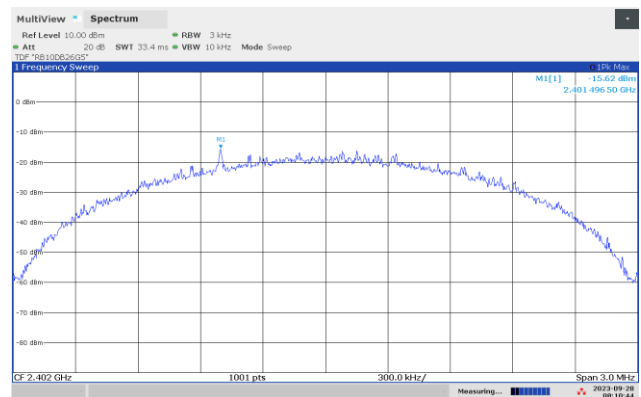


PSD, 2402 MHz, 2Mb

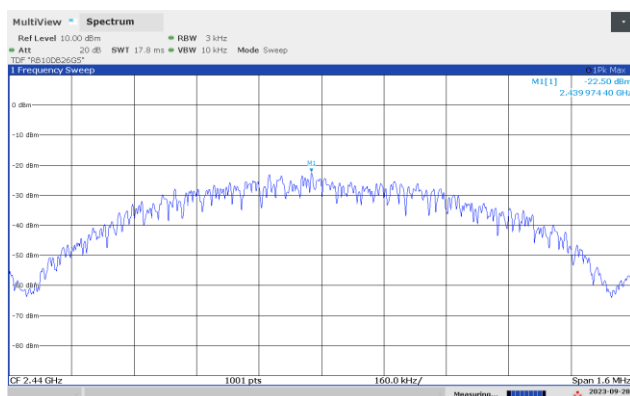


PSD, 2440 MHz, 1Mb

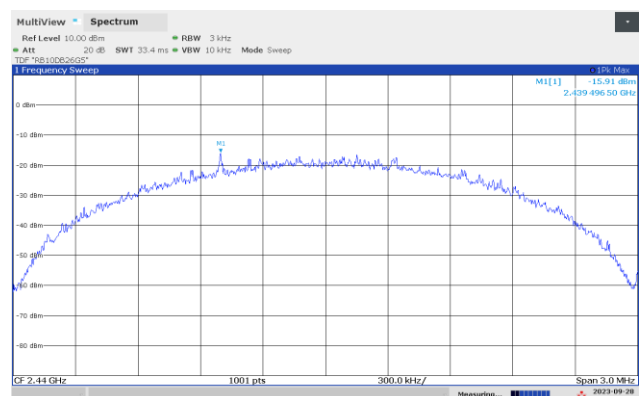

PSD, 2440 MHz, 2Mb

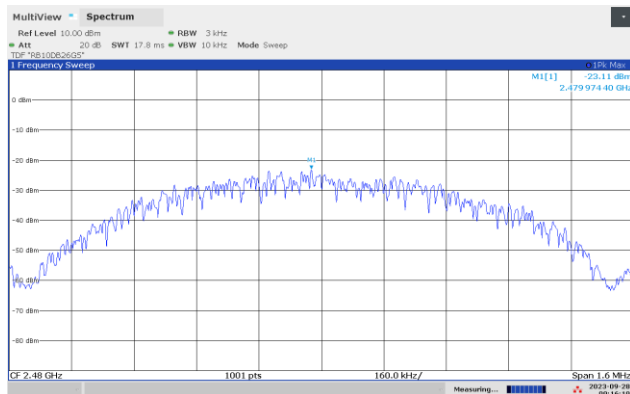

PSD, 2480 MHz, 1Mb

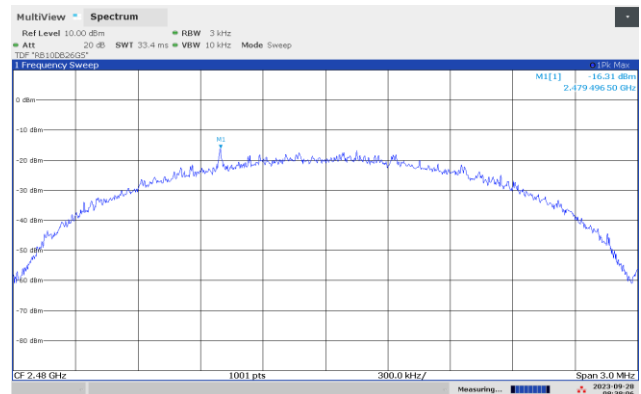

PSD, 2480 MHz, 2Mb

4 Measurement Uncertainty

Measurement Uncertainty Values		
Test Item		Uncertainty
Output Power		±0.5 dB
Power Spectral Density		±0.5 dB
Out of Band Emissions, Conducted	< 3.6 GHz	±0.6 dB
	> 3.6 GHz	±0.9 dB
Spurious Emissions, Radiated	< 1 GHz	±2.5 dB
	> 1 GHz	±2.2 dB
Emission Bandwidth		±4 %
Power Line Conducted Emissions		+2.9 / -4.1 dB
Spectrum Mask Measurements	Frequency	±5 %
	Amplitude	±1.0 dB
Frequency Error		±0.6 ppm
Temperature Uncertainty		±1 °C

All uncertainty values are expanded standard uncertainty to give a confidence level of 95%, based on coverage factor k=2

5 LIST OF TEST EQUIPMENT

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment and ancillaries are identified (numbered) by the Test Laboratory.


No.	Instrument	Type of instrument	Manufacturer	Ref. no.	Cal Date	Cal Due
1	FSW26	Spectrum Analyzer	Rohde & Schwarz	LR 1640	2023.02	2024.02
2	FSW43	Spectrum Analyzer	Rohde & Schwarz	LR 1690	2023.02	2025.02
3	ESU40	EMI receiver	Rohde & Schwarz	LR 1639	2023.02	2024.02
4	ESR7	EMI receiver	Rohde & Schwarz	LR 1675	2021.07	2023.07
5	JB1	Bilog Antenna	SunAR	LR 1734	2023.01	2024.02
6	3115	Horn antenna	EMCO	LR 1330	2022.11	2024.11
7	DBF-520-20	Horn Antenna	SD	LR 101	2021.07	2024.07
8	LNA-40-00101800	Preamplifier	NardaMiteq	LR 1747	2023.08	2024.08
9	638	Horn Antenna	Narda	LR 098	2021.07	2024.07
10	8449B	Preamplifier 26GHz	HP	LR 1322	2023.08	2024.08
11	637	Horn Antenna	Narda	LR 097	2021.07	2024.07
12	JS4 Standalone	Preamplifier 40GHz	NardaMiteq	LR 1591	2023.02	2024.02
13	HFH2-Z2	Loop Antenna	Rohde & Schwarz	LR 1660	2022.01	2024.01
14	CMW500	Communications tester	Rohde & Schwarz	LR 1791	2022.03	2025.03
15	SMBV-100B	Signal generator	Rohde & Schwarz	LR 1743	2022.01	2024.01
16	6810.17A	Attenuator	Suhner	LR 1284		
17	Sucoflex 102	Cable Microwave	Suhner		2021.05	2023.05
18	TS8997	Test System	Rohde & Schwarz	/		
19	SMB100A	RF generator	Rohde & Schwarz	LR 1656	2023.02	2025.02
19.1	SMW200A	Vector generator	Rohde & Schwarz	LR 1807	2022.09	2024.09
19.2	FSVA3044	Spectrum analyzer	Rohde & Schwarz	LR 1808	2022.09	2024.09
19.3	OSP220	open switch and control platform	Rohde & Schwarz	LR 1806	2022.09	2024.09
19.4	OSP120	open switch and control platform	Rohde & Schwarz	LR 1793	2022.02	2024.08
19.5	Model 87 V	Multimeter	Fluke	N-4669	2023.04	2025.04
20	3115	Double Ridged Horn Antenna	EMCO	LR 1226	2022.12	2025.12
21	3115	Double Ridged Horn Antenna	EMCO	LR 1330	2022.11	2025.11
22	No324415	Notch Filter	Microwave Circuits	LR 1785	2021.07	2024.07
23	CPX400S	DC Source	AimTTi	LR 1711	LT 5218 for control	
24	45 DMM	Multimeter	Fluke	LT 5218	2023.04	2025.04
25	6812B	AC Power Source	Agilent	LR 1515	2022.12	2023.12
26	ACS TY80	Climatic Chamber	ACS	LR 1083	2023.03	2025.03
27	VC 4060	Climate Chamber	Votsch	LR 1435	2022.12	2023.12
28						
29						

The software listed below has been used for one or more tests.


No.	Manufacturer	Name	Version	Comment
1	Rohde & Schwarz	EMC32	10.50.40	EMC test software
2	Rohde & Schwarz	GPIBShot	2.7	Screenshots from R&S Spectrum Analyzers

6 BLOCK DIAGRAM

6.1 Power Line Conducted Emission

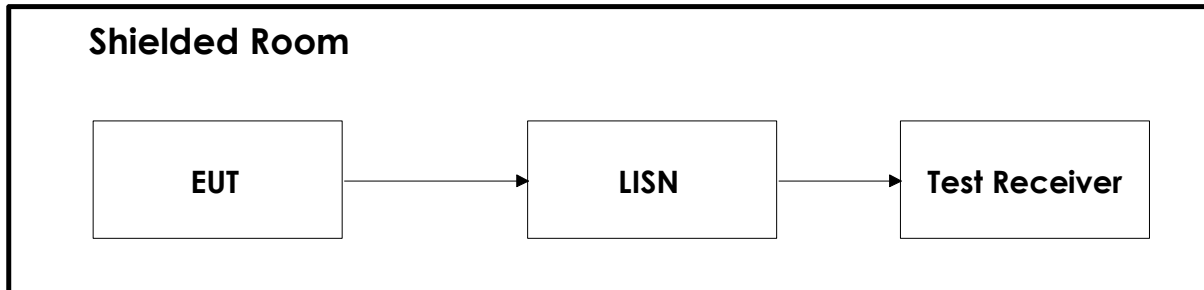


6.2 Conducted Tests



This test set-up is used for all Conducted tests.
For Frequency Stability test the EUT was placed in a climatic chamber.

6.3 Test Site Radiated Emission

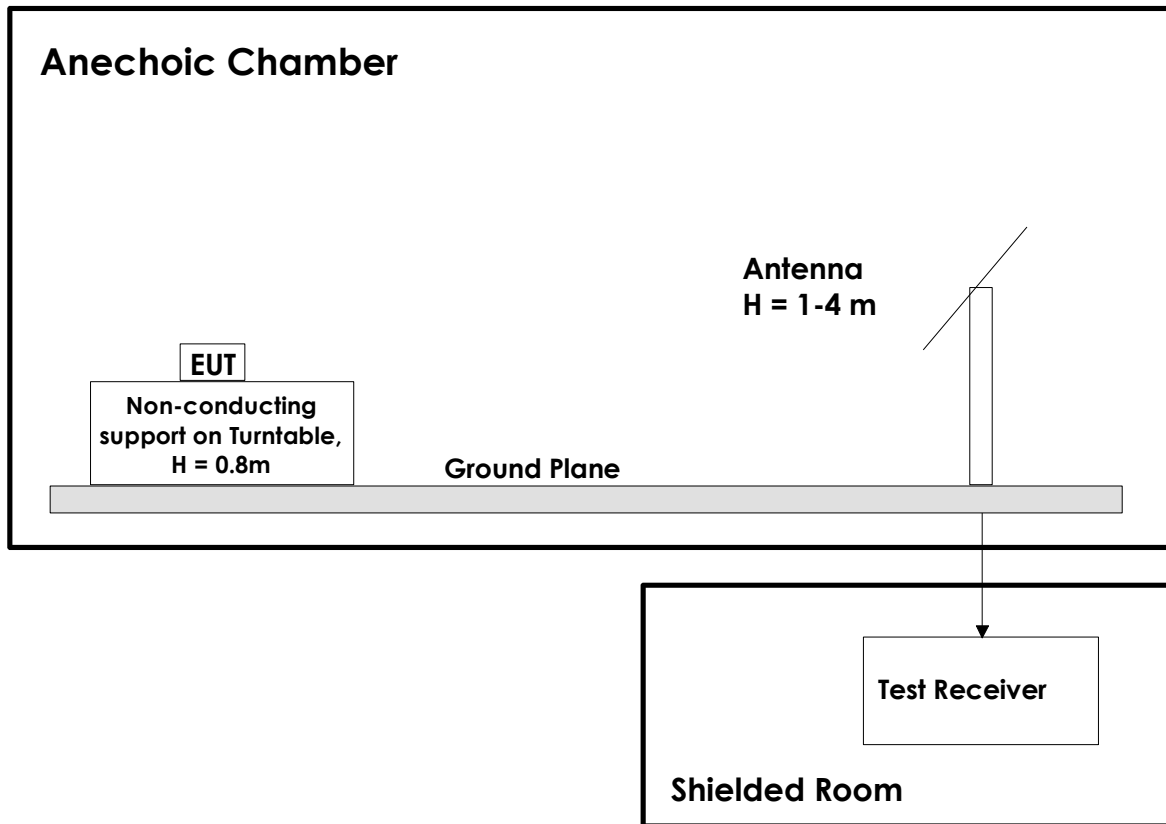

This test setup is used for all radiated emissions tests. For frequencies below 30 MHz the measuring distance is 10m, for all other frequencies it is 3m or 1m. Emissions above 1 GHz are measured with a Spectrum Analyzer and Horn Antenna. For measurements above 18 GHz the test receiver is moved inside the anechoic chamber and located next to the antenna to minimize the cable loss. All measurements at 1GHz and above were performed with turntable height 1.5m and with the ground plane covered by absorbers. A pre-amplifier is used for all measurements above 30 MHz, and High-Pass or Band-Pass filter is used for all harmonics.