

Test Report
FCC Part 22 Subpart H and FCC Part 15 Subpart B
for
Telian Corporation
on the
Cellular Phone
Model Number: MTD-7500
FCC ID: NPQMTD7500

Test Report: 30475841
Date of Report: September 10, 2003
Revised: March 8 2004

Job #: 3047584
Date of Test: September 3 to 5, 2003



A2LA Certificate Number: 1755-01

| | |
|--|--|
| Tested by: <i>B. Gordon</i> | Bruce Gordon, Test Engineer |
| Reviewed by: <i>David Chernomordik</i> | David Chernomordik, EMC Technical Manager |

Review Date: September 18, 2003

All services undertaken are subject to the following general policy: Reports are submitted for exclusive use of the client to whom they are addressed. Their significance is subject to the adequacy and representative character of the samples and to the comprehensiveness of the tests, examinations or surveys made. This report shall not be reproduced except in full, without written consent of Intertek. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.

TABLE OF CONTENTS

| | | |
|-------------|--|-----------|
| 1.0 | Introduction..... | 4 |
| 1.1 | Test Summary | 4 |
| 1.2 | Product Description | 5 |
| 1.3 | Related Submittal(s) Grants..... | 5 |
| 2.0 | RF Power Output,..... | 6 |
| 2.1 | Test Procedure | 6 |
| 2.2 | Test Equipment | 6 |
| 2.3 | Test Results..... | 6 |
| 3.0 | Radiated Power | 14 |
| 3.1 | Test Procedure | 14 |
| 3.2 | Test Equipment | 14 |
| 3.3 | Test Results..... | 14 |
| 4.0 | Modulation Deviation Limiting | 16 |
| 4.1 | Test Procedure | 16 |
| 4.2 | Test Equipment | 16 |
| 4.3 | Test Results..... | 16 |
| 5.0 | Audio Filter Characteristics..... | 18 |
| 5.1 | Test Procedure | 18 |
| 5.2 | Test Equipment | 19 |
| 5.3 | Test Results..... | 19 |
| 6.0 | Emission Limitations, Occupied Bandwidth | 23 |
| 6.1 | Test Procedure | 23 |
| 6.2 | Test Equipment | 24 |
| 6.3 | Test Results..... | 24 |
| 7.0 | Out of Band Emissions at Antenna Terminal | 38 |
| 7.1 | Test Procedure | 38 |
| 7.2 | Test Equipment | 38 |
| 7.3 | Test Results..... | 39 |
| 8.0 | Field Strength of Spurious Radiation..... | 40 |
| 8.1 | Test Procedure | 40 |
| 8.2 | Test Equipment | 40 |
| 8.3 | Test Results..... | 40 |
| 9.0 | Radiated Emissions from digital part and receiver | 42 |
| 9.1 | Radiated Emission Limits | 42 |
| 9.2 | Field Strength Calculation | 43 |
| 9.3 | Test Results..... | 43 |
| 10.0 | Line Conducted Emissions,..... | 46 |
| 10.1 | Test Procedure | 46 |

10.2 Test Equipment 46
10.3 Test Results..... 46

11.0 Frequency Stability vs Temperature..... 48
11.1 Test Procedure 48
11.2 Test Equipment..... 48
11.3 Test Results..... 48

12.0 Frequency Stability vs Voltage 49
12.1 Test Procedure 49
12.2 Test Equipment..... 49
12.3 Test Results..... 49

13.0 Test Equipment 50

14.0 Document History 51

Appendix A - Out of Band Emissions at Antenna Terminal..... 52

1.0 Introduction

1.1 Test Summary

| FCC RULE | DESCRIPTION OF TEST | RESULT | SECTION |
|--------------------------------|--|----------|-----------------------------|
| 2.1046 | RF Power Output | Complies | 2.0 |
| 22.913 | ERP | Complies | 3.0 |
| 2.1047 | Modulation Requirements | Complies | 4.0 |
| 22.915(d)(1) | Audio Filter Characteristics | Complies | 5.0 |
| 2.1049 22.917(b)(d) | Emission Limitation, Occupied Bandwidth | Complies | 6.0 |
| 2.1051, 22.917(e) 22.917(f) | Out of Band Emissions at Antenna Terminals Mobile Emissions In Base Frequency Range | Complies | 7.0 |
| 2.1053 | Field Strength of Spurious Radiation | Complies | 8.0 |
| 15.109 | Radiated emissions from digital part and receiver | Complies | 9.0 |
| 15.107 | AC Line Conducted Emissions | Complies | 10.0 |
| 2.1055 | Frequency Stability vs. Temperature | Complies | 11.0 |
| 2.1055 | Frequency Stability vs. Voltage | Complies | 12.0 |
| 2.1093 | Specific Absorption Rate | Complies | A separate report is issued |

1.2 Product Description

The Telian Corporation Models MTD – 7500 is a dual mode, TDMA and AMPS cellular radiotelephone operating in the band 824 – 849 MHz.

For more information, please refer to the attached product description.

| | |
|---|---|
| Use of Product | Portable Cellular Phone |
| Whether quantity (>1) production is planned | <input checked="" type="checkbox"/> Yes, <input type="checkbox"/> No |
| Cellular Phone modes | AMPS TDMA |
| Type(s) of Emission | 40K0F8W, 40K0F1D, 30K0DXW |
| Allowed Deviation | 12± 10% (AMPS mode) |
| RF Output Power | 26.6 dBm - AMPS 26.8 dBm - TDMA |
| Frequency Range | 824 - 849 MHz |
| Antenna (e) & Gain | Monopole, -2 dBd |
| Detachable antenna? | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |
| Receiver L.O. frequency | 988.65 – 1013.61 MHz |
| External input | <input checked="" type="checkbox"/> Audio <input type="checkbox"/> Digital Data |
| DC power into final RF stage | 3.5 V, 120 mA quiescent current |

1.3 Related Submittal(s) Grants

None

2.0 RF Power Output,
 FCC 2.1046

2.1 Test Procedure

The transmitter output was connected to a calibrated coaxial attenuator, the other end of which was connected to a spectrum analyzer. Transmitter output was read off the spectrum analyzer in dBm. The power output at the transmitter antenna port was determined by adding the value of the attenuator to the spectrum analyzer reading. An HP power meter was also used to measure the RF power.

Tests were performed at three frequencies (low, middle, and high channels) and on all power levels, which can be setup on the transmitters.

2.2 Test Equipment


HP8566B Spectrum Analyzer, 100 Hz - 22 GHz

2.3 Test Results

| Frequency (MHz) | Mode | Maximum measured Conducted Power (dBm) | Plot |
|-----------------|------|--|------|
| 824.04 | AMPS | 26.6 | 2.1 |
| | TDMA | 25.8 | 2.4 |
| 836.55 | AMPS | 26.6 | 2.2 |
| | TDMA | 26.8 | 2.5 |
| 848.97 | AMPS | 26.6 | 2.3 |
| | TDMA | 25.3 | 2.6 |


| Frequency (MHz) | Mode | Level | Measured Conducted Power (dBm) | Plot |
|-----------------|------|---------|--------------------------------|------|
| 836.55 | AMPS | 0, 1, 2 | 26.6 | 2.3a |
| 836.55 | AMPS | 3 | 22.7 | 2.3a |
| 836.55 | AMPS | 4 | 18.7 | 2.3a |
| 836.55 | AMPS | 5 | 14.7 | 2.3a |
| 836.55 | AMPS | 6 | 10.7 | 2.3a |
| 836.55 | AMPS | 7 | 6.7 | 2.3a |

Plot 2.1, AMPS

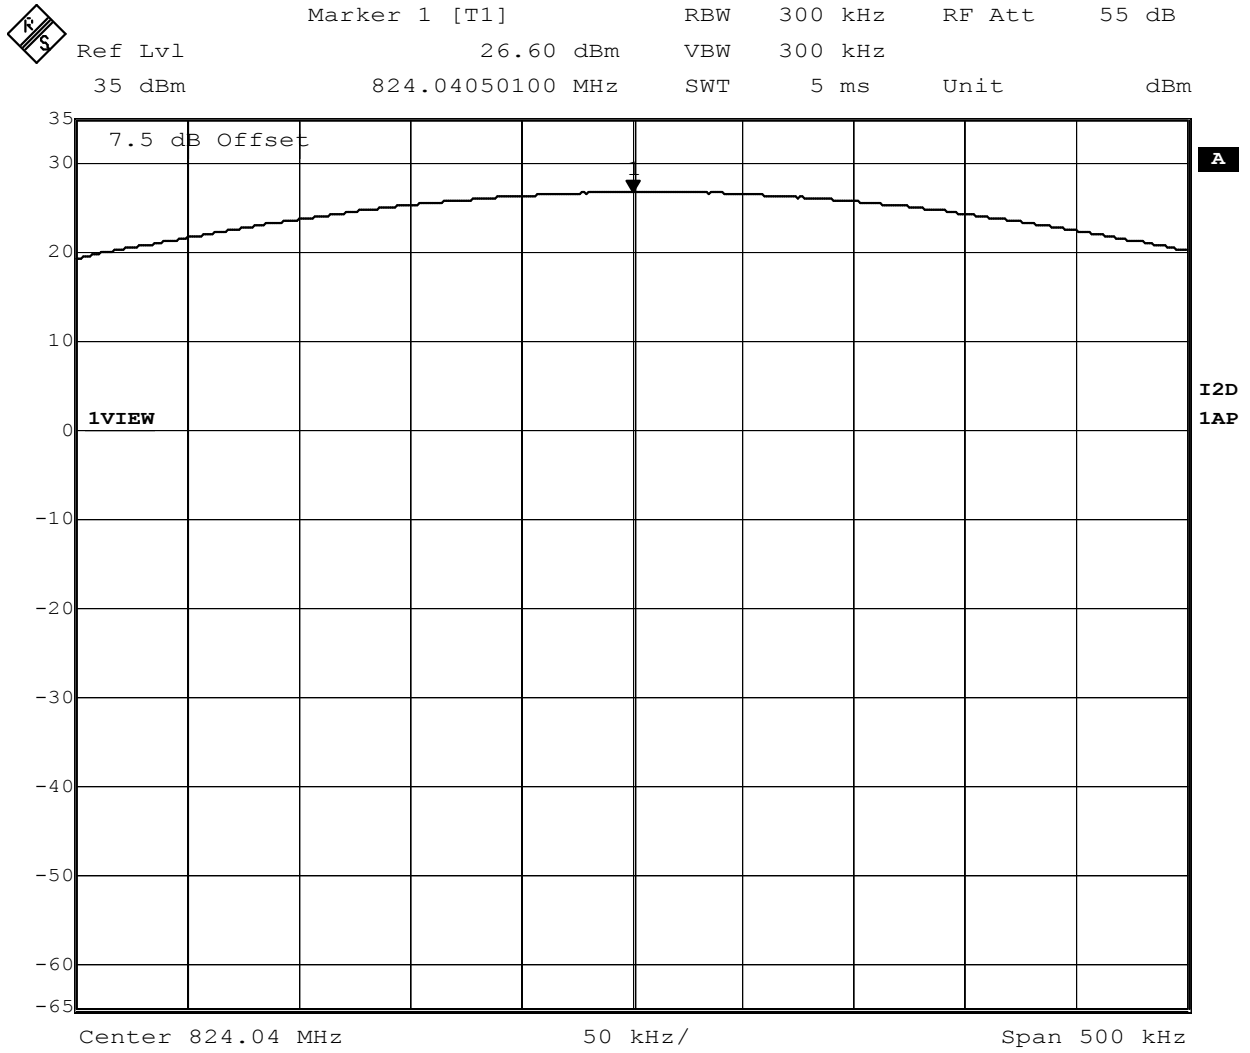

Date: 8.MAR.2004 09:22:21

Plot 2.2, AMPS

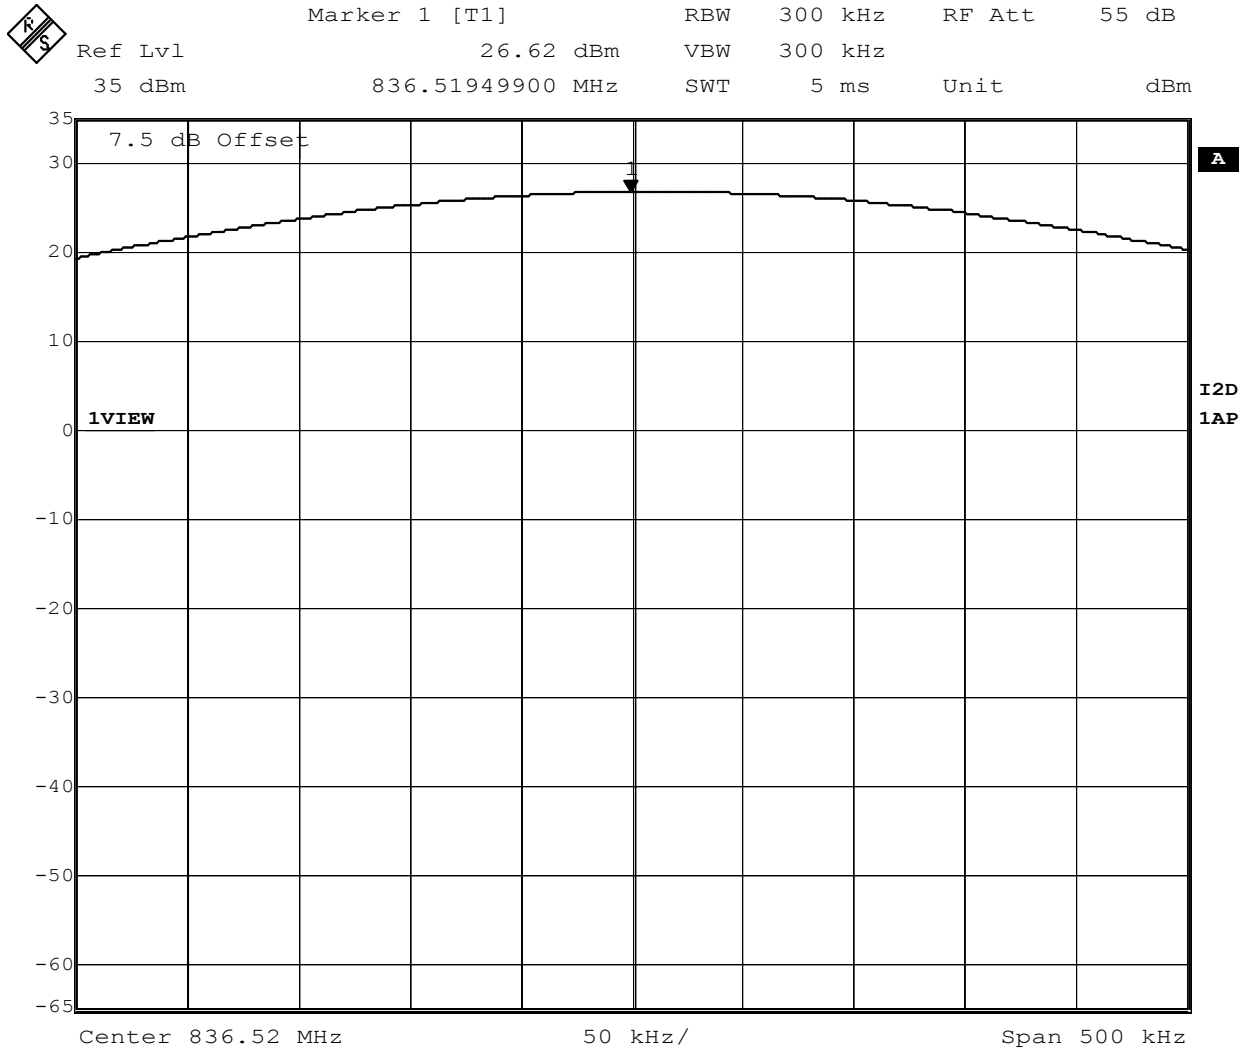


Date: 8.MAR.2004 09:25:42

Plot 2.3, AMPS




| | | | | |
|---------------|------------------|---------|---------|----------|
| Marker 1 [T1] | RBW | 300 kHz | RF Att | 55 dB |
| Ref Lvl | 26.59 dBm | VBW | 300 kHz | |
| 35 dBm | 848.97951904 MHz | SWT | 5 ms | Unit dBm |

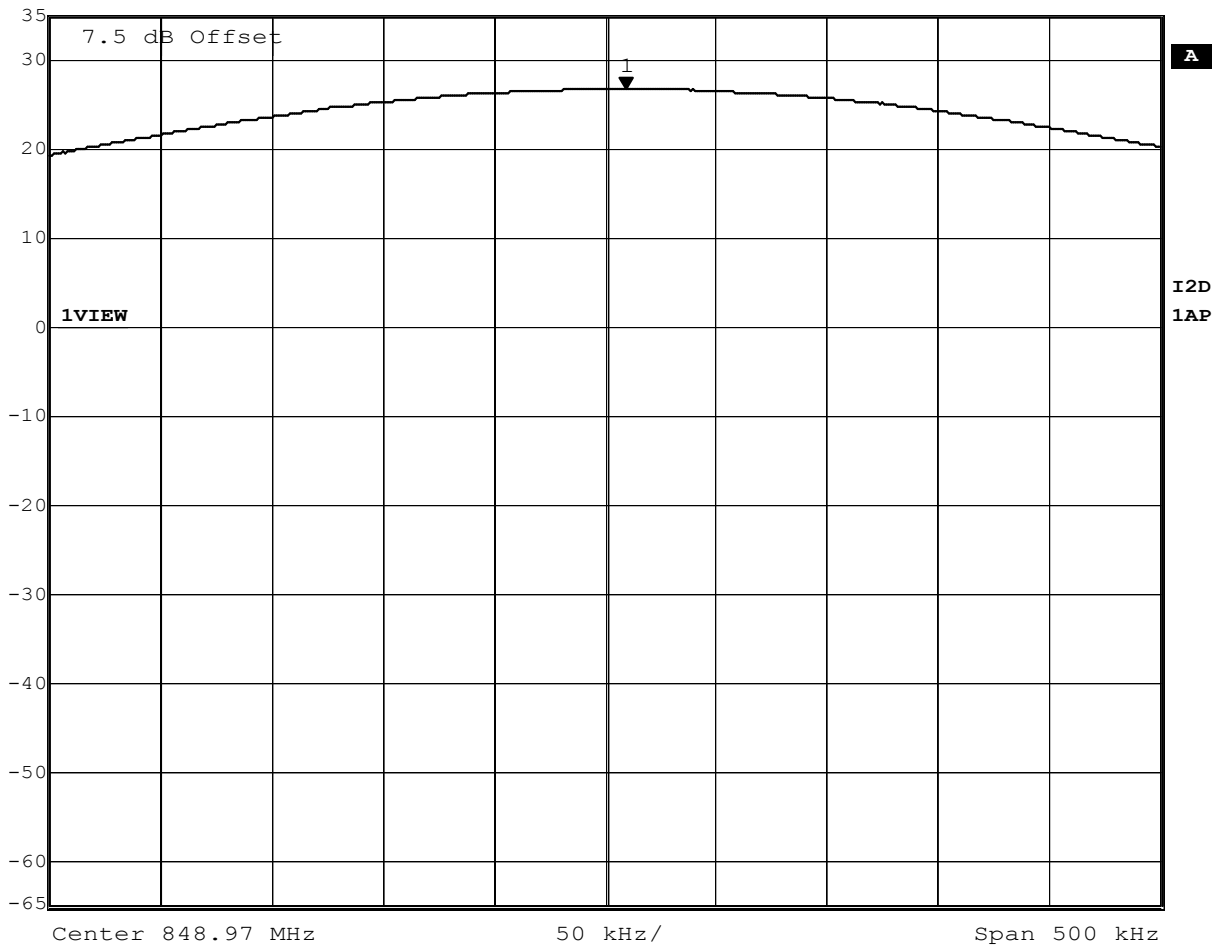


Date: 8.MAR.2004 09:19:30


Plot 2.3a, AMPS

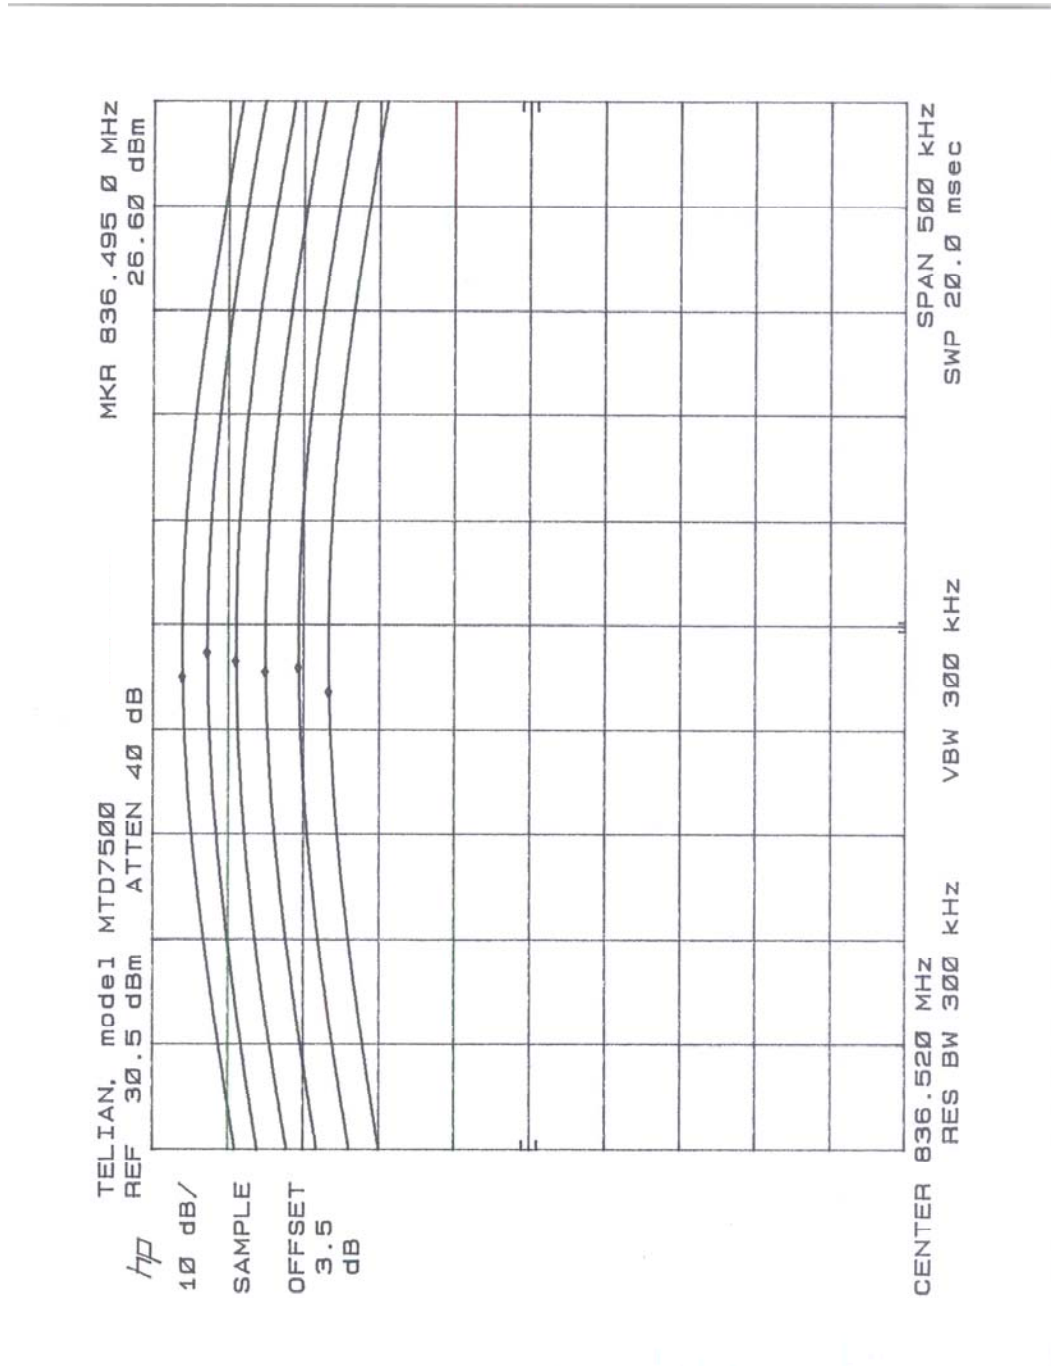


Plot 2.4, TDMA

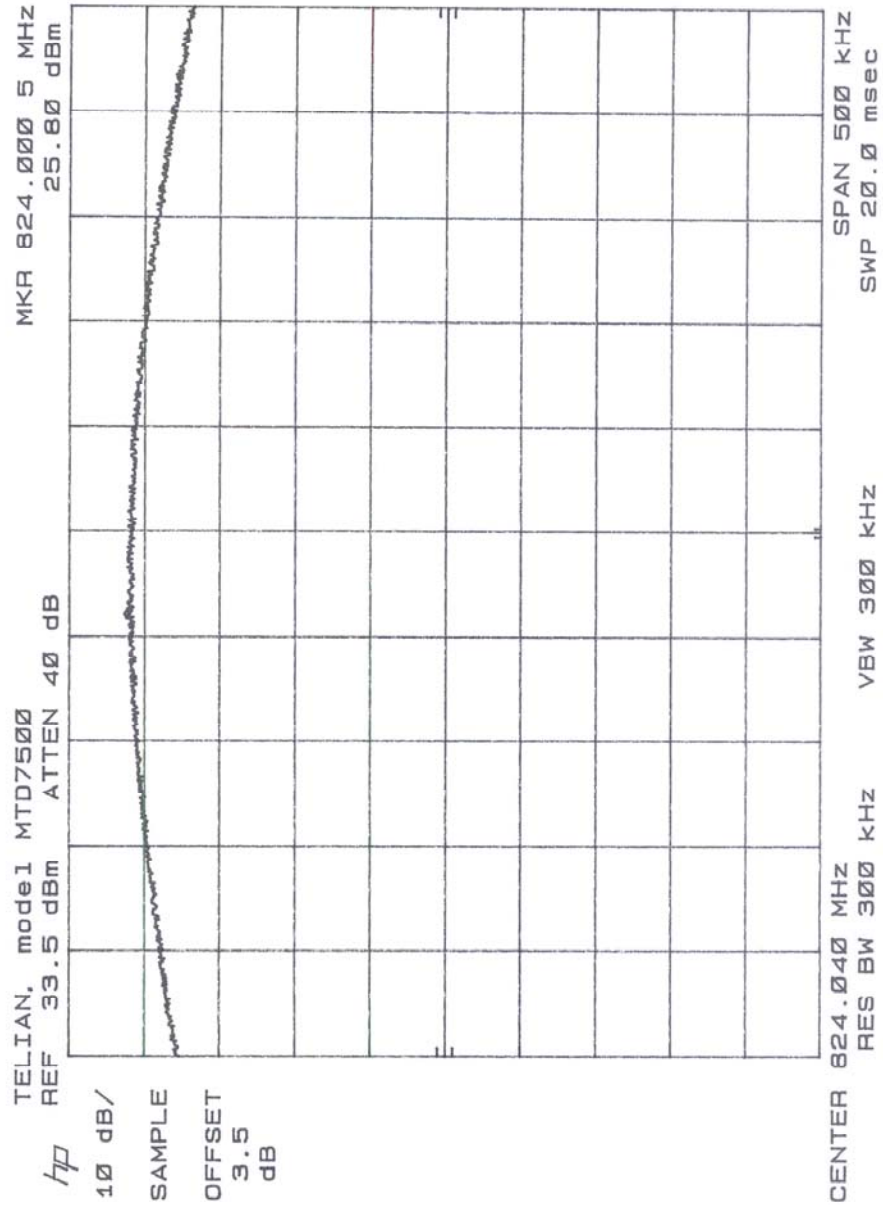

Plot 2.5, TDMA

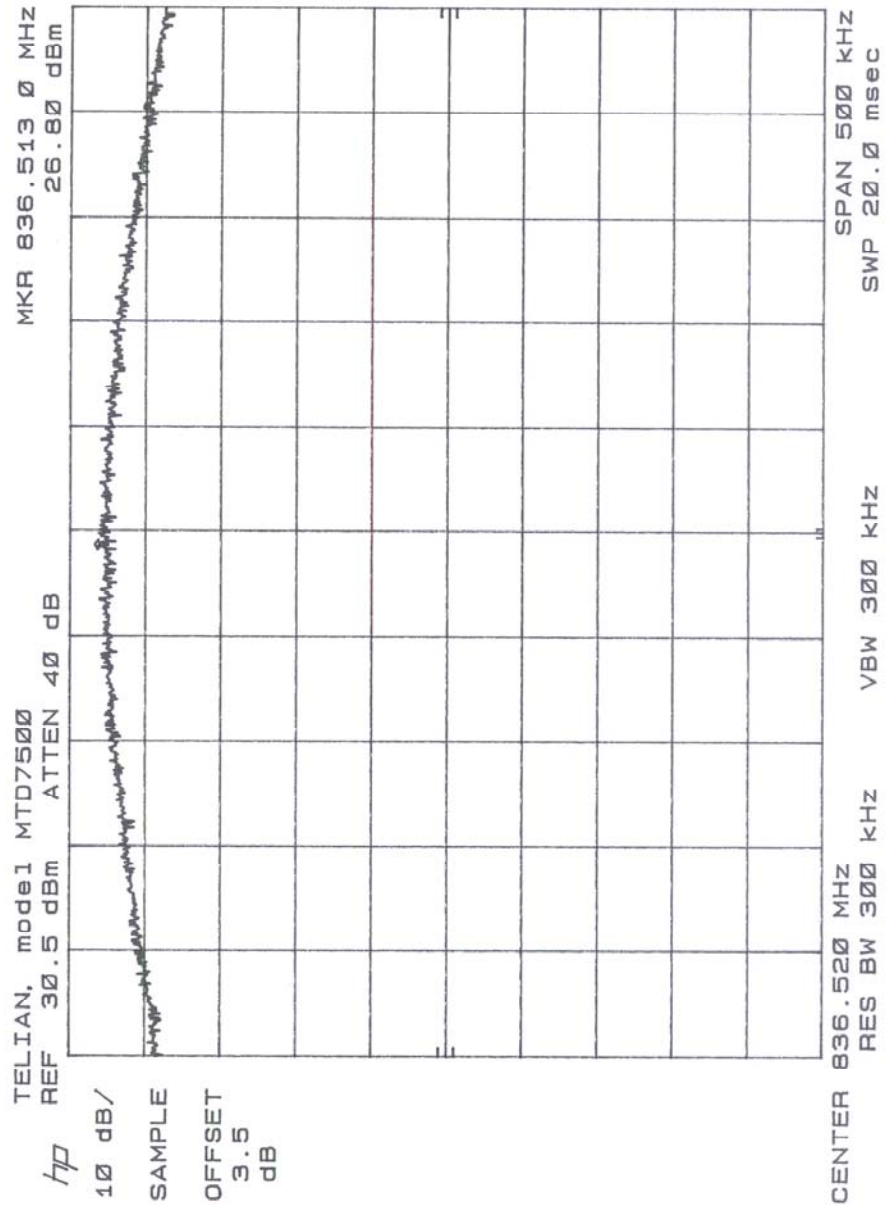

Plot 2.6, TDMA

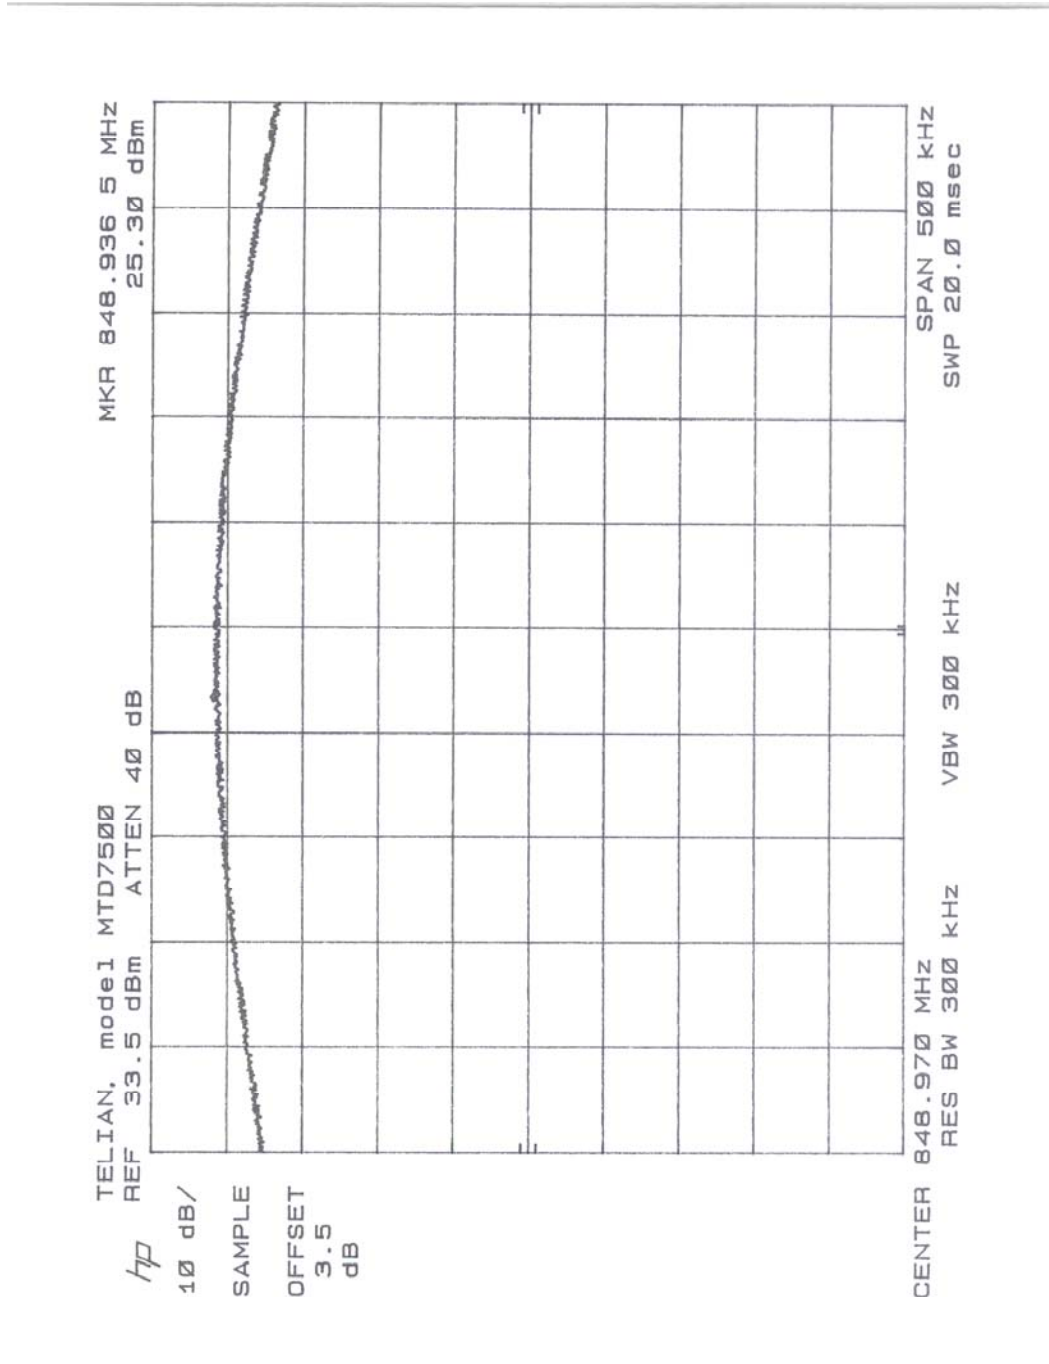

3.0 Radiated Power
FCC 22.913

The Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

3.1 Test Procedure

The EUT was positioned on a non-conductive turntable, 0.8m above the ground plane in a 10m semi-anechoic chamber.

The radiated emission at the fundamental frequency was measured at 3m distance with a test antenna and spectrum analyzer. During the measurement, the resolution and video bandwidths of the spectrum analyzer were set to 100 kHz.

Worst-case emission was recorded with the rotation of the turntable and the raising and lowering of the test antenna. The spectrum analyzer reading in dB(μ V) was recorded.

ERP was measured using a substitution method. The EUT was replaced by half-wave dipole connected to a signal generator. The spectrum analyzer reading was recorded and ERP was calculated as follows:

$$ERP = V_1 - V_2 + V_g,$$

Where V_1 & V_2 are spectrum analyzer readings in dB(μ V) when measured field strength from EUT & generator accordingly; V_g is the generator output in dBm.

3.2 Test Equipment

Hewlett Packard HP8546A Spectrum Analyzer
EMCO 3148 Log Periodic Antenna
CDI Robert's Antenna
Hewlett Packard HP83732A Signal Generator

3.3 Test Results**Complies**

Refer to the attached data sheets.

**Effective Radiated Power
 (Measured by Substitution Method)**

| Frequency MHz | Antenna Polariz. | SA Reading (EUT) dB(μV) | SA Reading (Sig. Gen. +Tuned Dipole) dB(μV) | Signal Generator Output dBm | ERP dBm |
|------------------|---------------------|-------------------------------|---|-----------------------------------|------------|
| AMPS Mode | | | | | |
| 824.04 | V | 94.5 | 40.6 | -30.0 | 23.9 |
| 836.55 | V | 92.8 | 40.6 | -30.0 | 22.2 |
| 848.97 | V | 93.8 | 41.5 | -30.0 | 22.3 |
| TDMA Mode | | | | | |
| 824.04 | V | 92.7 | 40.6 | -30.0 | 22.1 |
| 836.55 | V | 92.1 | 40.6 | -30.0 | 21.5 |
| 848.97 | V | 92.7 | 41.5 | -30.0 | 21.2 |

In AMPS mode the test was performed with the Conducted Power of 26.9 dBm on 824.04 MHz, 26.6 dBm on 836.55 MHz, and 26.7 dBm on 848.97 MHz.

Since the Conducted Power was retested and measured as 26.6 dBm on all three frequencies, the new ERP test data is as following:

| Frequency MHz | ERP dBm |
|------------------|------------|
| AMPS Mode | |
| 824.04 | 23.6 |
| 836.55 | 22.2 |
| 848.97 | 22.2 |
| TDMA Mode | |
| 824.04 | 22.1 |
| 836.55 | 21.5 |
| 848.97 | 21.2 |

4.0 Modulation Deviation Limiting
 FCC 2.1047, 22.915(b)(c)

4.1 Test Procedure

The RF output of the transceiver was connected to the input of an FM deviation meter through sufficient attenuation so as not to overload the meter or distort the readings. An audio signal generator with a variable attenuator on the output was coupled into the external microphone jack of the transceiver, or alternatively, the microphone element was removed and the generator output was connected to the microphone wires by clip leads.

At three different modulating frequencies, the output level of the audio generator was varied and the FM deviation level was recorded (Table 4.1a).

4.2 Test Equipment


Marconi 2955A/2957 Radio Communication Test Set

4.3 Test Results

The deviation did not exceed 13.2 kHz.
 The EUT passed the test.
 See test data in table 4.

| Table 4 Modulation Deviation Limiting | | | | | |
|--|--|--------------|-----------------|----------------|--------------|
| Input Level (mV) | FM Deviation in kHz at Indicated Modulating Frequency | | | | |
| | 300 Hz | 1 kHz | 1.58 kHz | 2.5 kHz | 3 kHz |
| 1 | 0.7 | 1.4 | 2.1 | 3.2 | 3.4 |
| 2 | 0.8 | 1.9 | 3.0 | 4.5 | 4.7 |
| 3 | 0.9 | 2.3 | 3.5 | 5.4 | 5.8 |
| 5 | 1.1 | 2.9 | 4.6 | 6.9 | 7.6 |
| 7 | 1.2 | 3.4 | 5.4 | 8.2 | 8.2 |
| 10 | 1.4 | 4.2 | 6.4 | 9.1 | 8.7 |
| 15 | 1.7 | 5.1 | 7.9 | 9.6 | 9.1 |
| 20 | 1.9 | 5.9 | 8.9 | 9.8 | 9.1 |
| 30 | 2.3 | 7.2 | 9.5 | 10.0 | 9.3 |
| 40 | 2.6 | 7.6 | 10.4 | 10.1 | 9.4 |
| 50 | 2.9 | 8.5 | 11.0 | 10.1 | 9.6 |
| 100 | 4.4 | 9.0 | 11.9 | 10.3 | 9.7 |
| 150 | 4.5 | 9.6 | 12.0 | 10.3 | 9.5 |
| 200 | 4.4 | 9.8 | 12.0 | 10.3 | 9.5 |
| 300 | 4.2 | 9.8 | 12.0 | 10.3 | 9.5 |

Middle Channel: 836.52 MHz

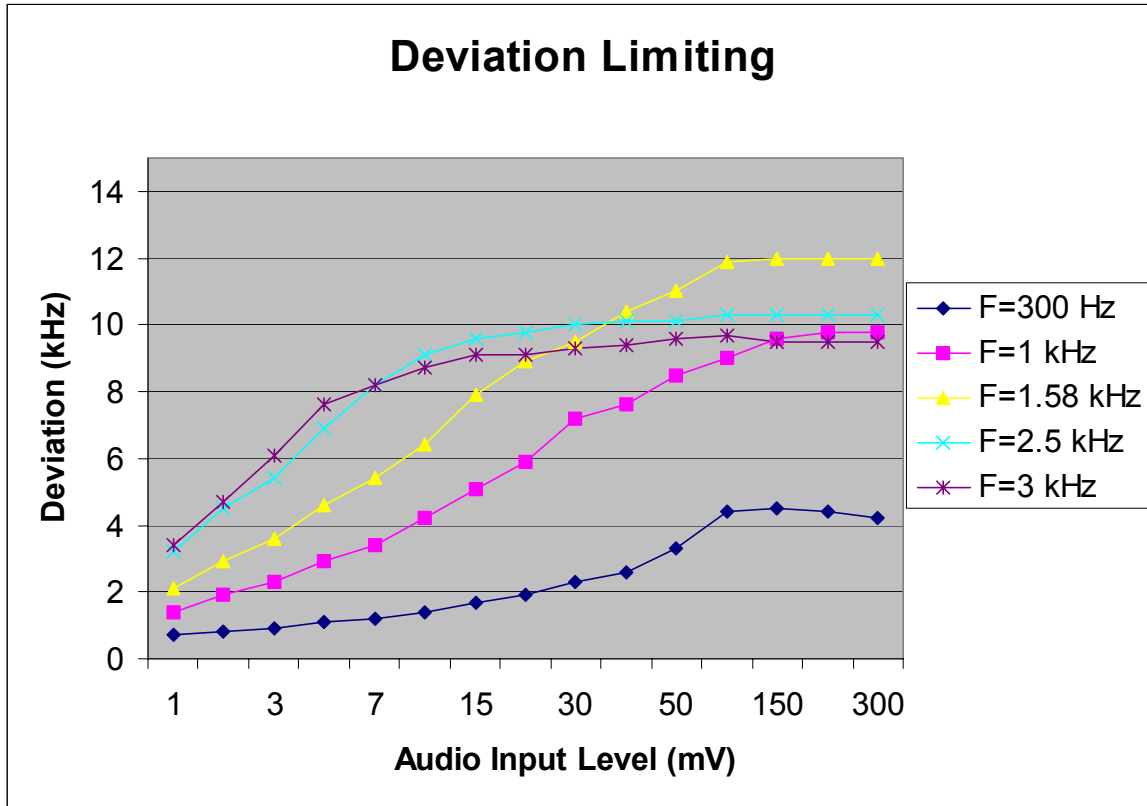

5.0 Audio Filter Characteristics
 FCC 22.915(d)


For mobile stations, these signals must be attenuated, relative to the level at 1 kHz, as follows:

- (i) In the frequency ranges of 3.0 to 5.9 kHz and 6.1 to 15.0 kHz, signals must be attenuated by at least $40 \log (f/3)$ dB, where f is the frequency of the signal in kHz.
- (ii) In the frequency range of 5.9 to 6.1 kHz, signals must be attenuated at least 35 dB.
- (iii) In the frequency range above 15 kHz, signals must be attenuated at least 28 dB.

5.1 Test Procedure

The RF output of the transceiver was connected to the input of an FM deviation meter through sufficient attenuation so as not to overload the meter or distort the readings. An audio signal generator was coupled into the external microphone jack of the transceiver, or alternatively, the microphone element was removed and the generator output was connected to the microphone wires by clip leads.

The test was performed according to the block diagram shown below.

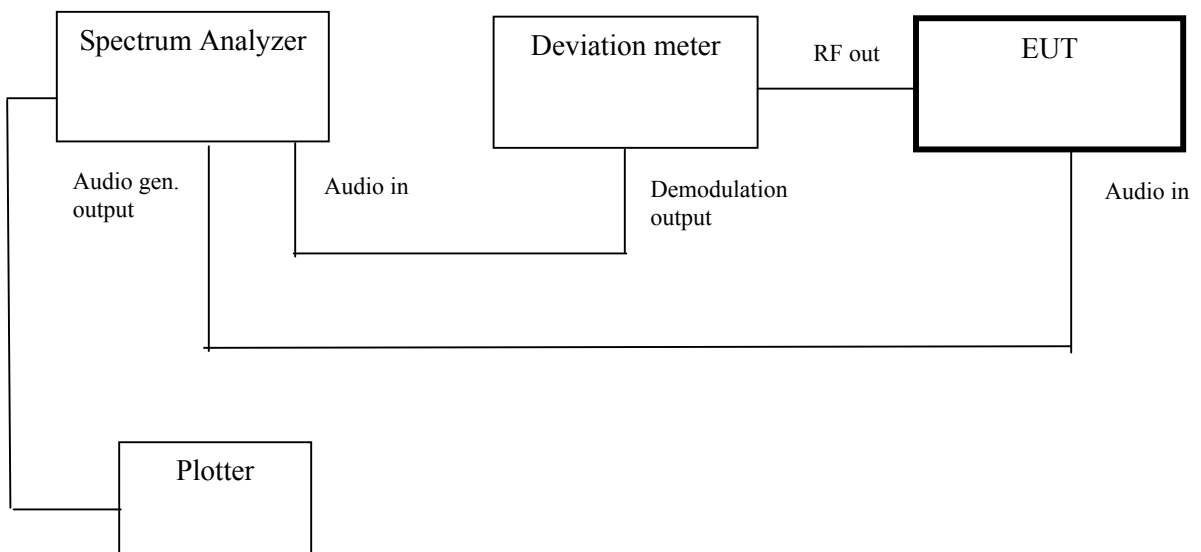

Telian Corporation., Model No: MTD-7500
FCC ID: NPQMTD7500

Date of Test: September 2 to 5, 2003

On that block diagram, the HP 3885A spectrum analyzer having the tracing generator, and the Marconi 2955A Radio Communication Test Set having an output of a demodulator, are used. After the calibration was made (the -20 dBm reading of the spectrum analyzer corresponds to the 9 kHz deviation) the spectrum analyzer was set to scan the frequency from 300 Hz to 30 kHz, with the same audio input level as described above, and with compressor OFF and expander OFF.

The audio filter response was plotted directly from the spectrum analyzer (Refer to Plots 5.1 and 5.2). Using the level measured at 1 kHz as a reference (0 dB), the audio filter response was calculated (See Table 5).

5.2 Test Equipment


Marconi Instruments 2955/2957 Radio Communications Test Set
 HP 3588A Spectrum Analyzer
 HP 7470A Plotter

5.3 Test Results


| |
|---|
| Complies, refer to the attached plots and data table. |
|---|

| Audio Filter Characteristics | |
|------------------------------|------------------|
| Plot Number | Description |
| 5.1 | 300 Hz to 15 kHz |
| 5.2 | 15 kHz to 30 kHz |

5.1

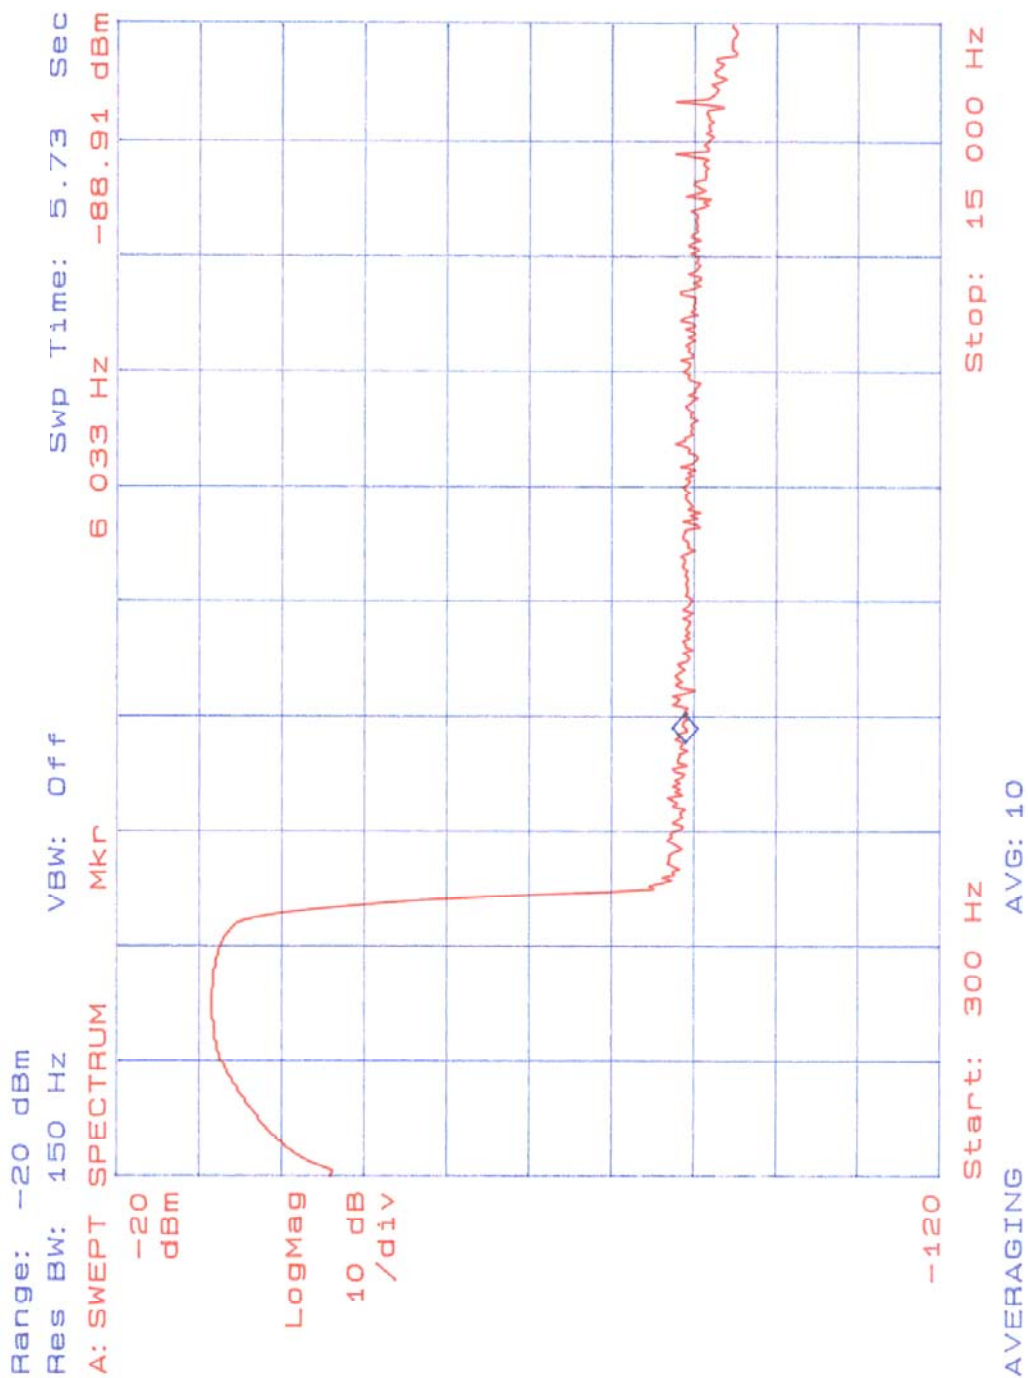

5.2

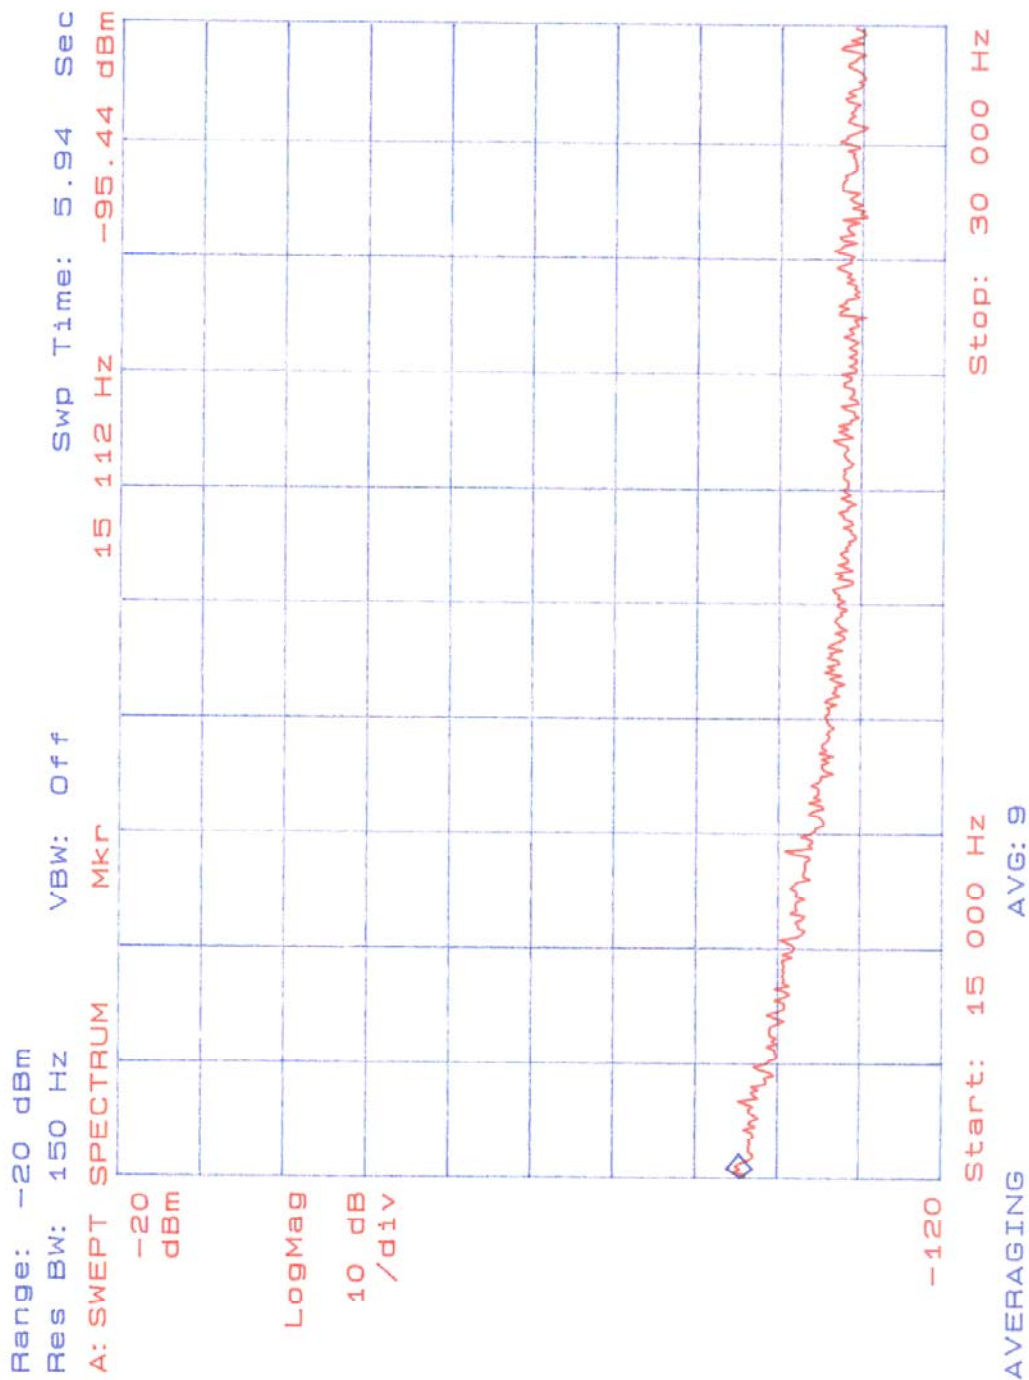

| Table 5 Audio Filter Characteristics | | |
|---|-------------------------------|--------------------|
| Modulation Frequency kHz | Relative Level dBm | Attenuation |
| 0.3 | -43.2 | 10.3 |
| 0.6 | -39.9 | 7.0 |
| 1.0 | -32.9 | 0 |
| 1.5 | -31.2 | -1.7 |
| 2.0 | -30.8 | -2.1 |
| 2.5 | -30.8 | -2.1 |
| 3.0 | -31.4 | -1.5 |
| 3.5 | -33.5 | 0.6 |
| 3.8 | -56.9 | 24.0 |
| 3.9 | -77.1 | 44.2 |
| 4.0 | -88.3 | 55.4 |
| 6.0 | -89.7 | 56.8 |
| 6.0 – 15.0 | < - 88 | > 55 |
| 15 – 30 | < - 90 | > 57 |

6.0 Emission Limitations, Occupied Bandwidth
FCC 2.1049, 22.917(b)(d)

For F3E/F3D emission mask uses with audio filter, the mean power of emissions must be attenuated below the mean power of the unmodulated carrier wave (P) as follows:

- (1) On any frequency removed from the carrier frequency by more than 20 kHz but not more than 45 kHz: at least 26 dB;
- (2) On any frequency removed from the carrier frequency by more than 45 kHz, up to the first multiple of the carrier frequency: at least 60 dB or $(43 + 10 \log P)$ dB, whichever is the lesser attenuation.

For F1D emission mask, the mean power of emissions must be attenuated below the mean power of the unmodulated carrier (P) as follows:

- (1) On any frequency removed from the carrier frequency by more than 20 kHz but no more than 45 kHz: at least 26 dB;
- (2) On any frequency removed from the carrier frequency by more than 45 kHz but not more than 90 kHz: at least 45 dB;
- (2) On any frequency removed from the carrier frequency by more than 90 kHz, up to the first multiple of the carrier frequency: at least 60 dB or $(43 + 10 \log P)$ dB, whichever is the lesser attenuation.

6.1 Test Procedure

The RF output of the transceiver was connected to the input of the spectrum analyzer through sufficient attenuation. The audio generator was connected to the audio input of the transceiver.

The spectrum with no modulation was recorded. The audio input signal was adjusted to obtain the frequencies deviation equal 6 kHz at the audio frequency of maximum response which was determined measuring deviation versus frequency from 300 Hz to 3.5 kHz and was found 1.58 kHz. The audio input level was increased by 16 dB. The audio frequency was set to the frequency 2.5 kHz.

The resolution bandwidth of the spectrum analyzer was set at 300 Hz and the spectrum was recorded in the frequency band 50 kHz and 100 kHz from the carrier frequency. The same plots have been done for wideband emissions, SAT, ST, DTMF, Voice, some of the combinations of these modulating signals and in TDMA mode. In addition, the emissions were recorded for low power (voice plus SAT only).

6.2 Test Equipment

HP 8566B Spectrum Analyzer
 HP8116A Pulse/Function Generator
 HP 7470A Plotter

6.3 Test Results

| | |
|-----------------|------------------------------|
| Complies | Refer to the attached plots. |
|-----------------|------------------------------|


| Plot Number | Description |
|-------------|---|
| 6.1 | Wideband emissions (0, 1, 0, 1), scan 100 kHz |
| 6.2 | DTMF |
| 6.3 | SAT (6 kHz, 2 kHz deviation) |
| 6.4 | ST (10 kHz, 8 kHz deviation), scan 100 kHz |
| 6.5 | ST & SAT (6 kHz & 10 kHz), scan 100 kHz |
| 6.6 | DTMF & SAT, scan 100 kHz |
| 6.7 | Voice (2.5 kHz), scan 100 kHz |
| 6.8 | Voice (2.5 kHz), scan 200 kHz |
| 6.9 | Voice (2.5 kHz) & SAT (6 kHz), scan 100 kHz |
| 6.10 | Voice (2.5 kHz) & SAT (6 kHz), scan 200 kHz |
| 6.11 | TDMA mode, scan 100 kHz |
| 6.12 | TDMA mode, scan 200 kHz |
| 6.13 | Voice (2.5 kHz) & SAT (6 kHz), low power |


Calculation of the necessary bandwidth (Bn) using the Carson's Rule $B_n = 2(M+D)$:


- a) Voice and SAT signals:
 - Voice (M=2.5 kHz, D=12 kHz)
 - SAT (M=6 kHz, D=2 kHz)
 - $B_n = 2(6+12+2) = 40$ kHz
 - Emission Designator: 40K0F8W


- b) Wideband data:
 - Data (M=10 kHz, D=8 kHz)
 - SAT (M=6 kHz, D=2 kHz)
 - $B_n = 2(10+8+2) = 40$ kHz
 - Emission Designator: 40K0F1D


- c) TDMA
 - Emission Designator: 30K0DXW

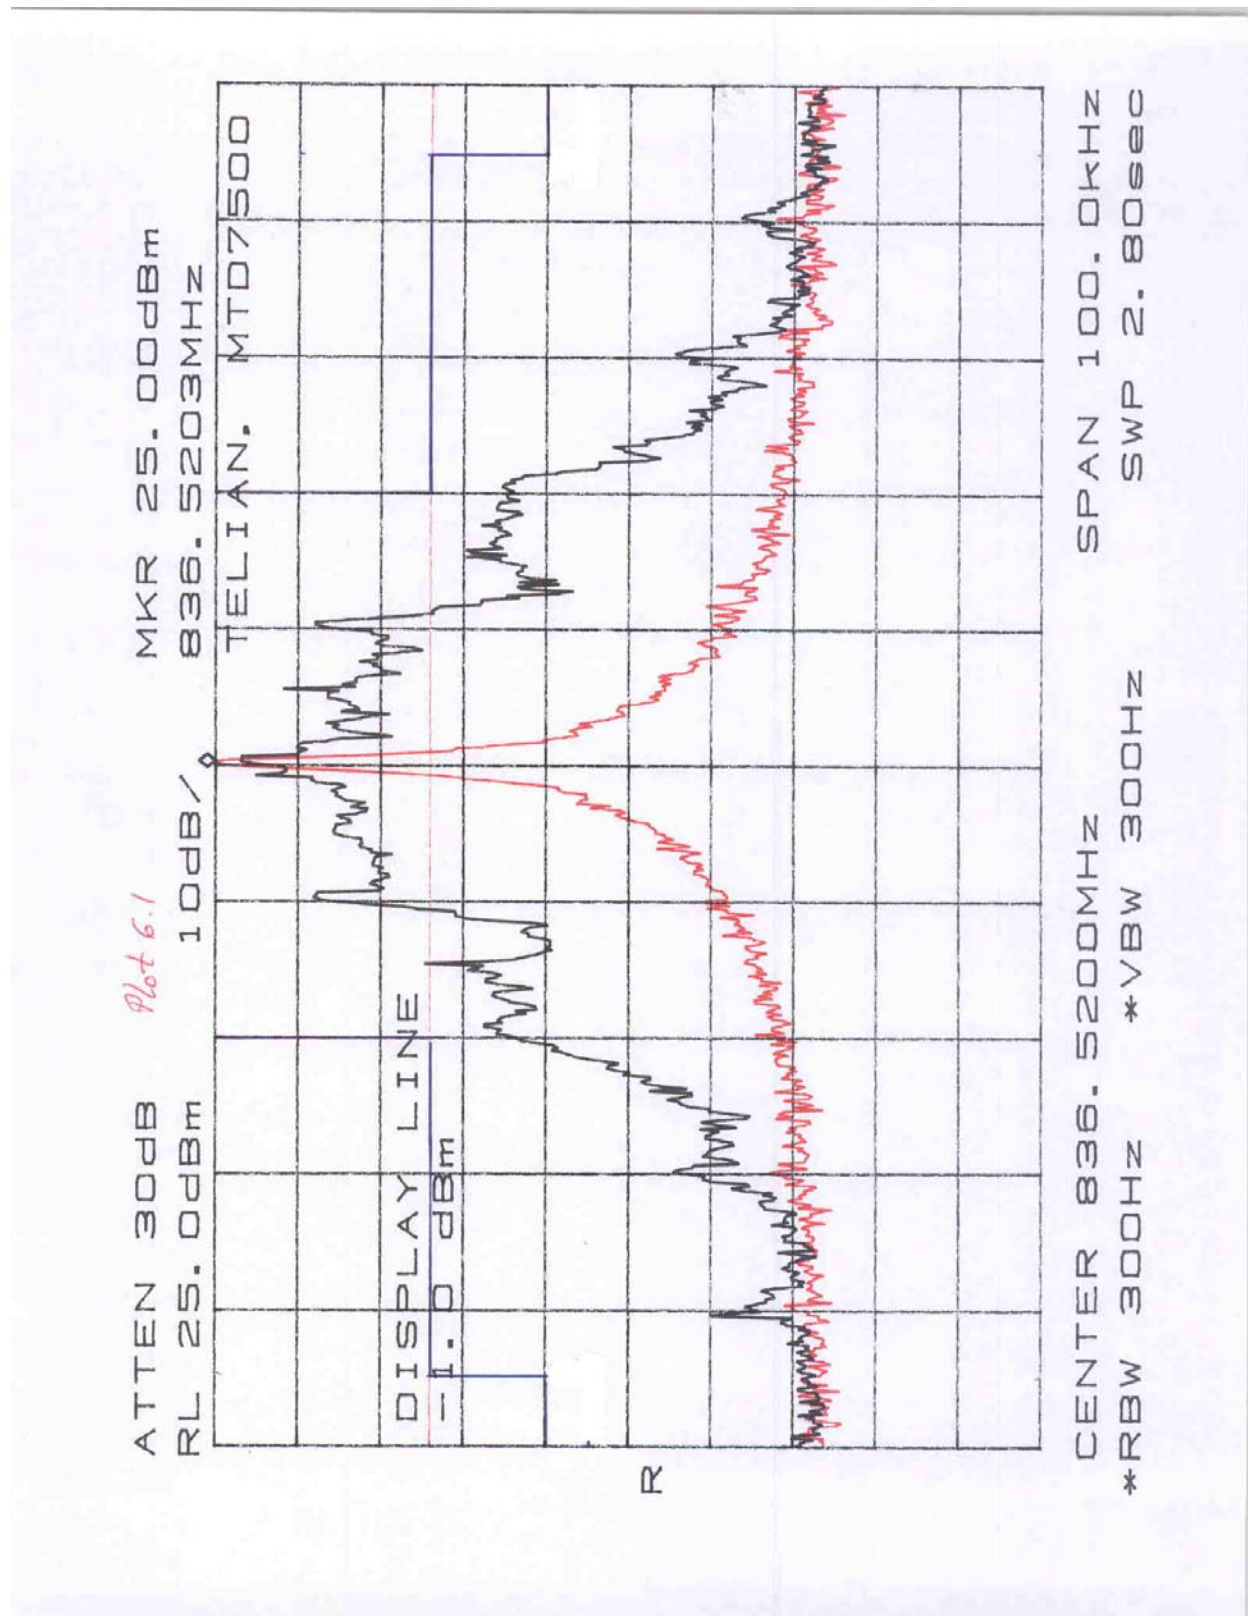


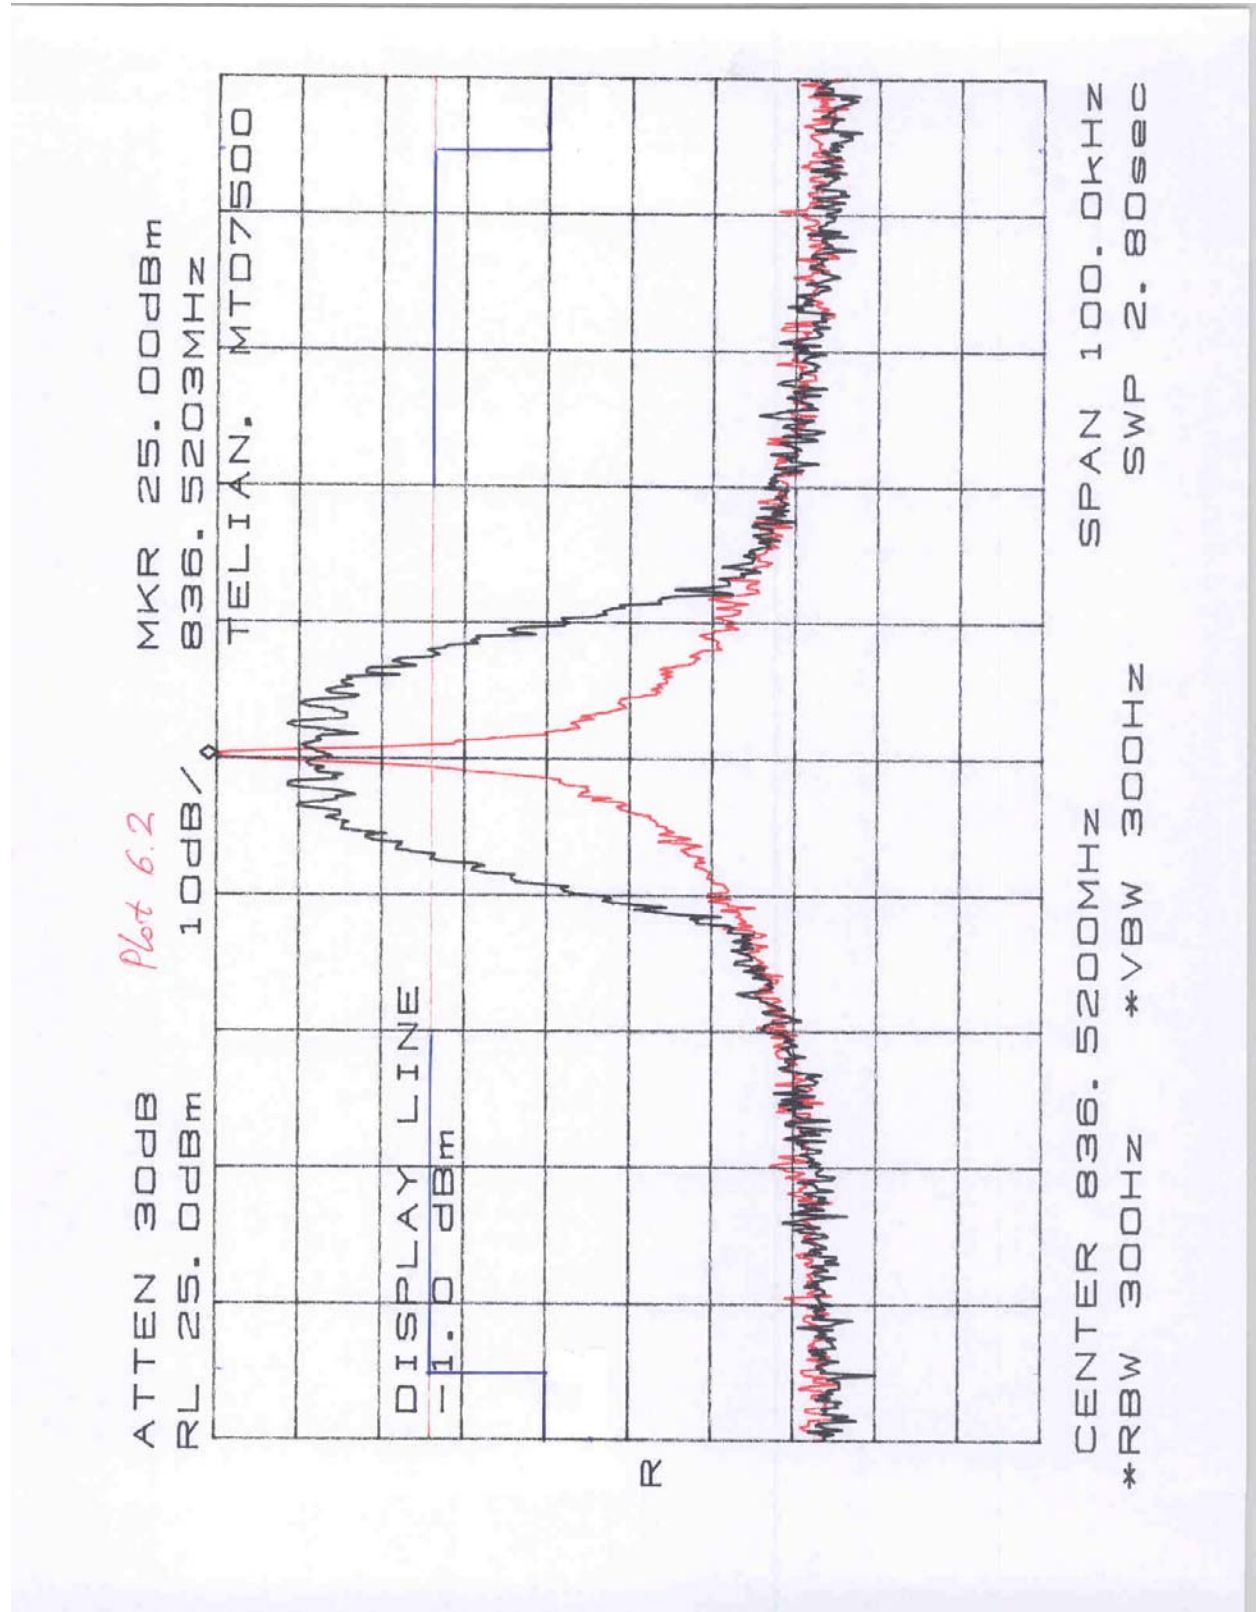


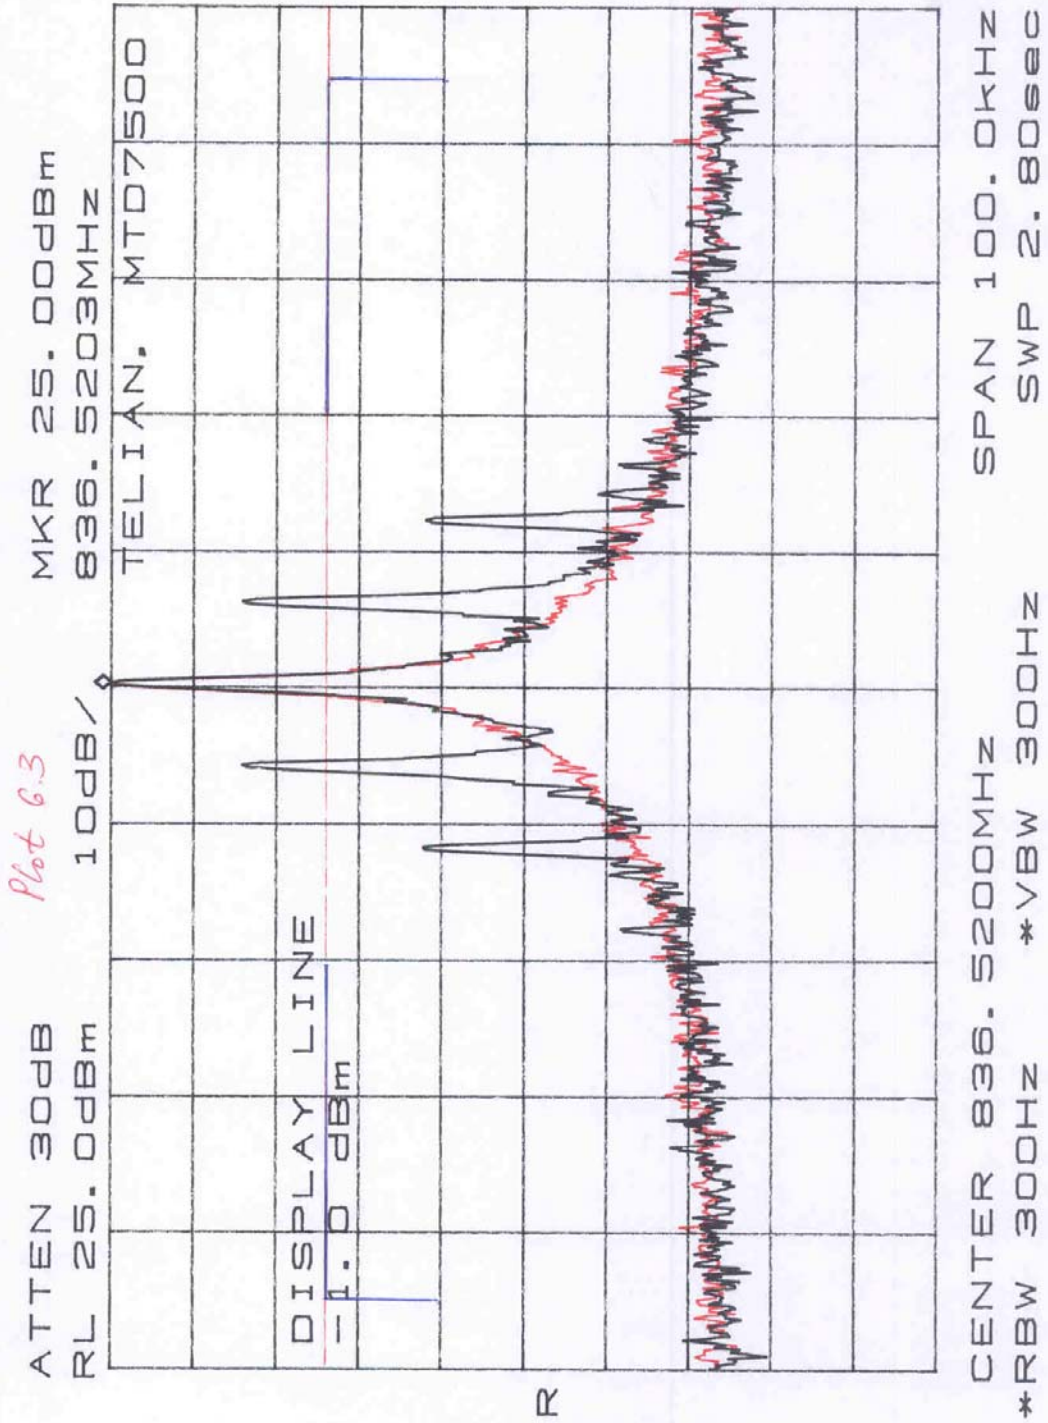


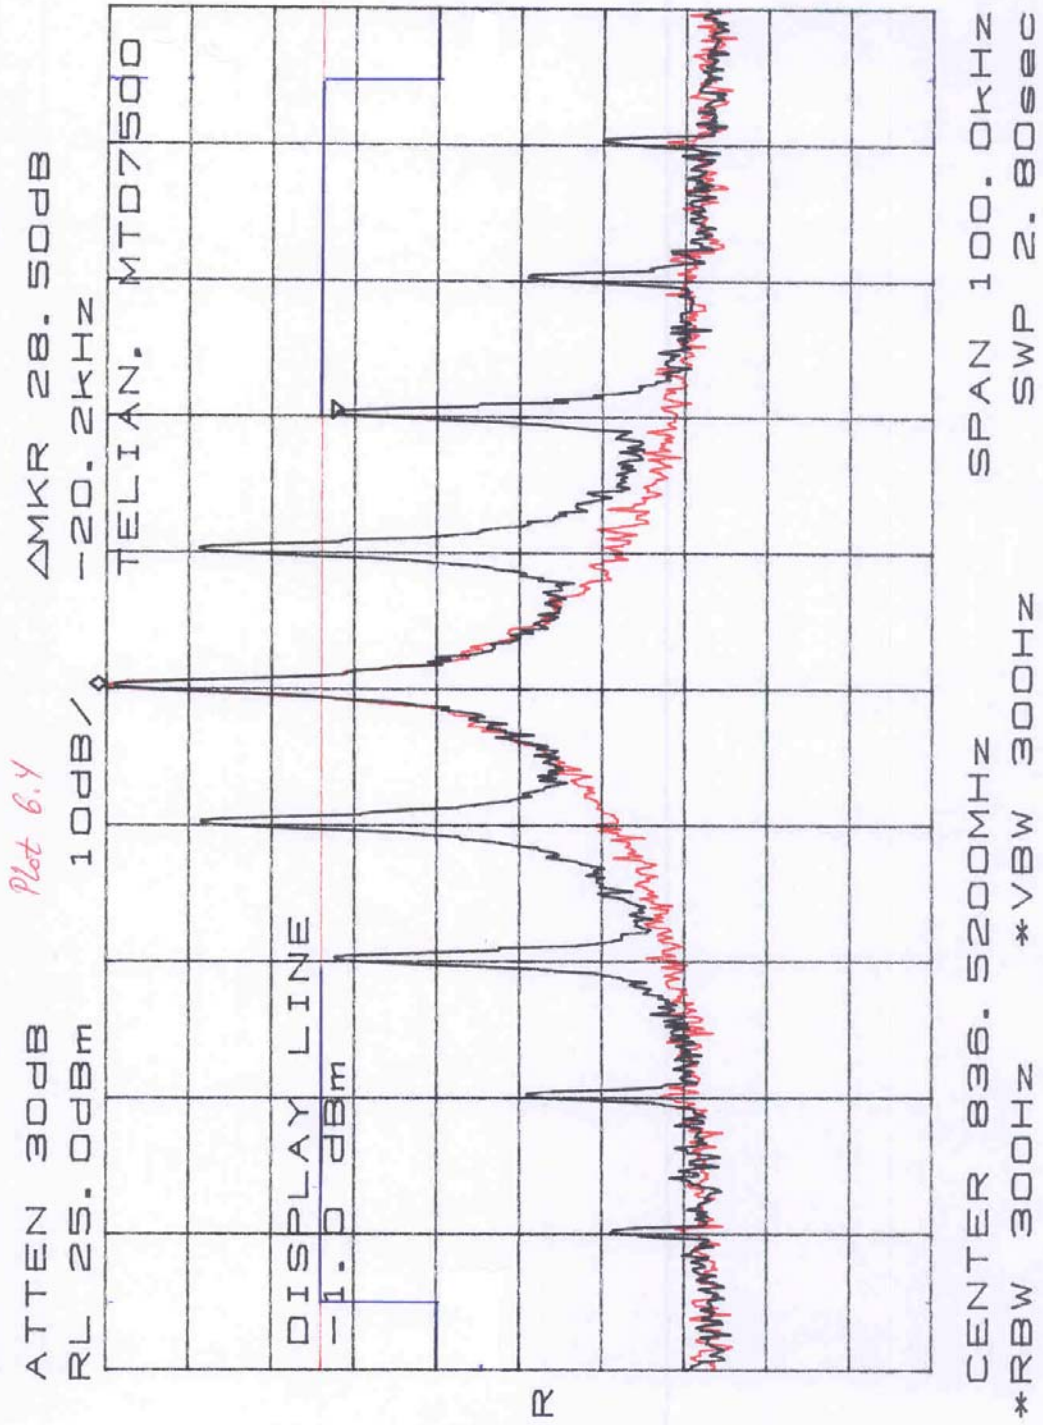


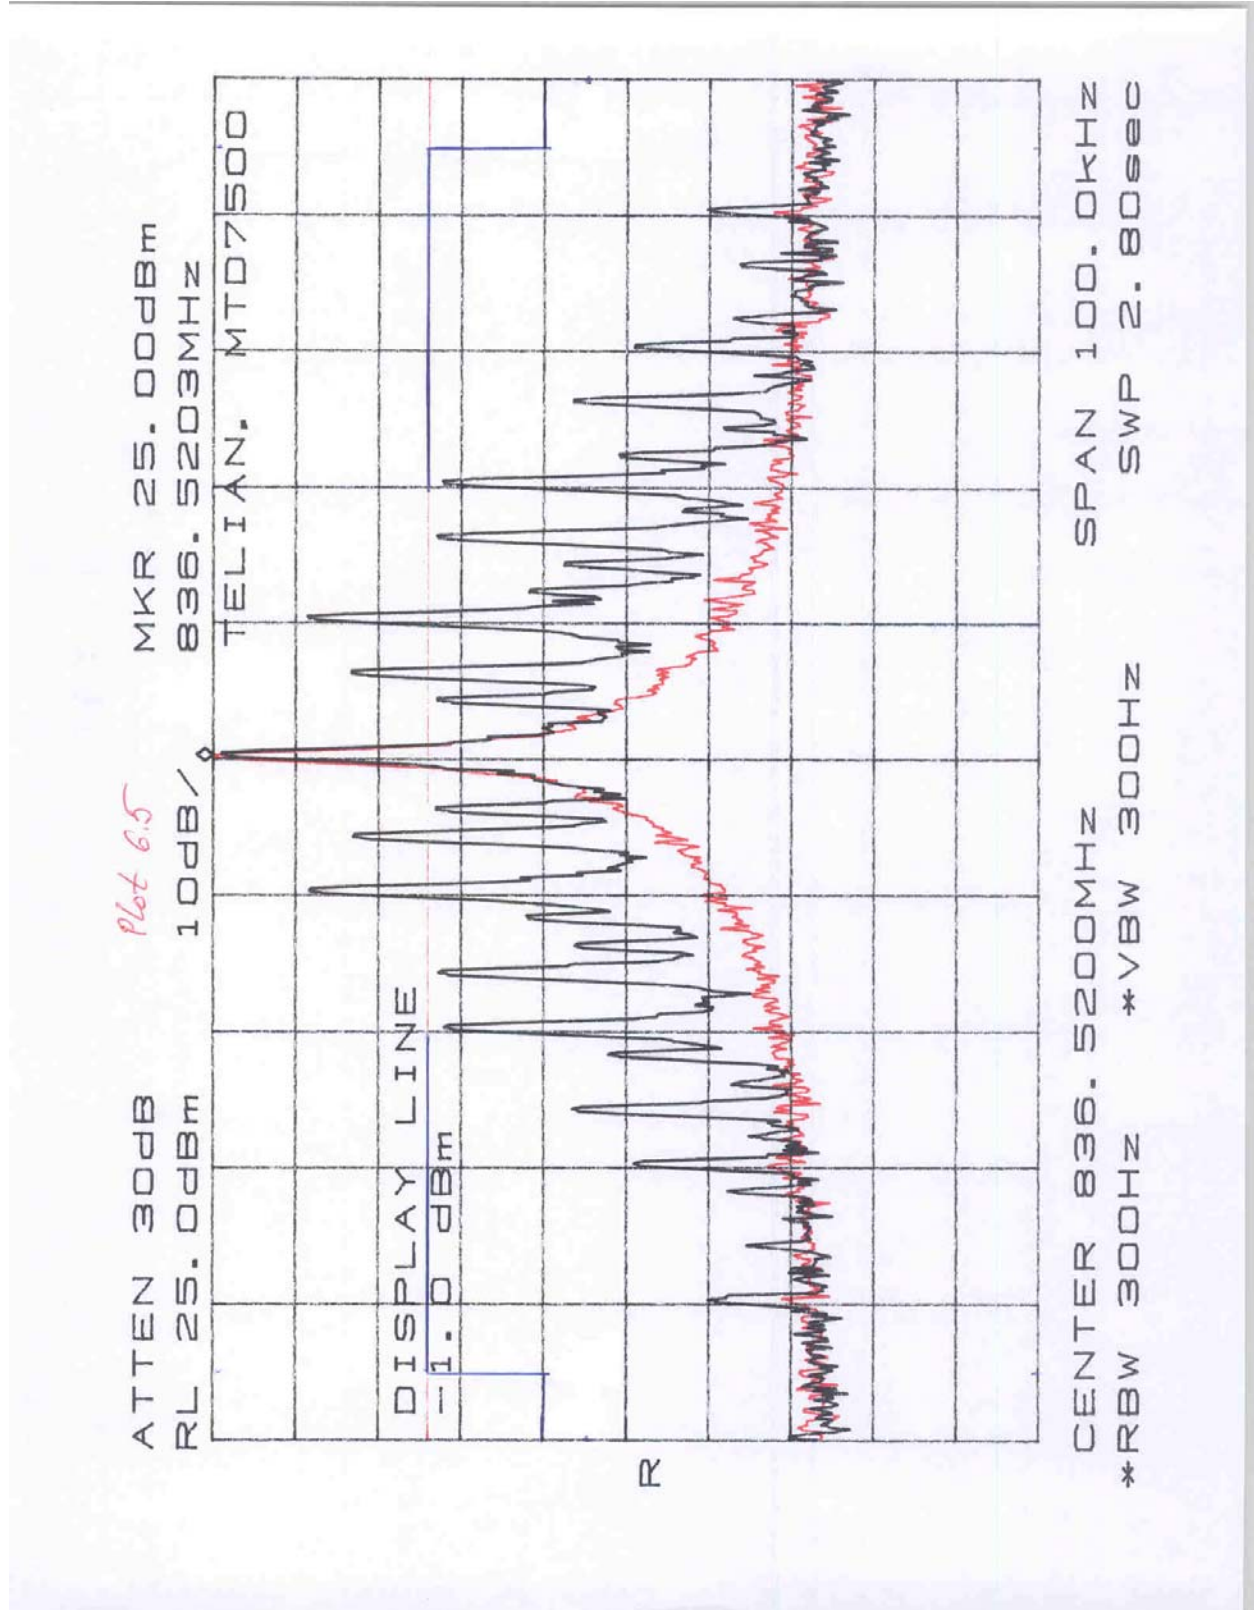


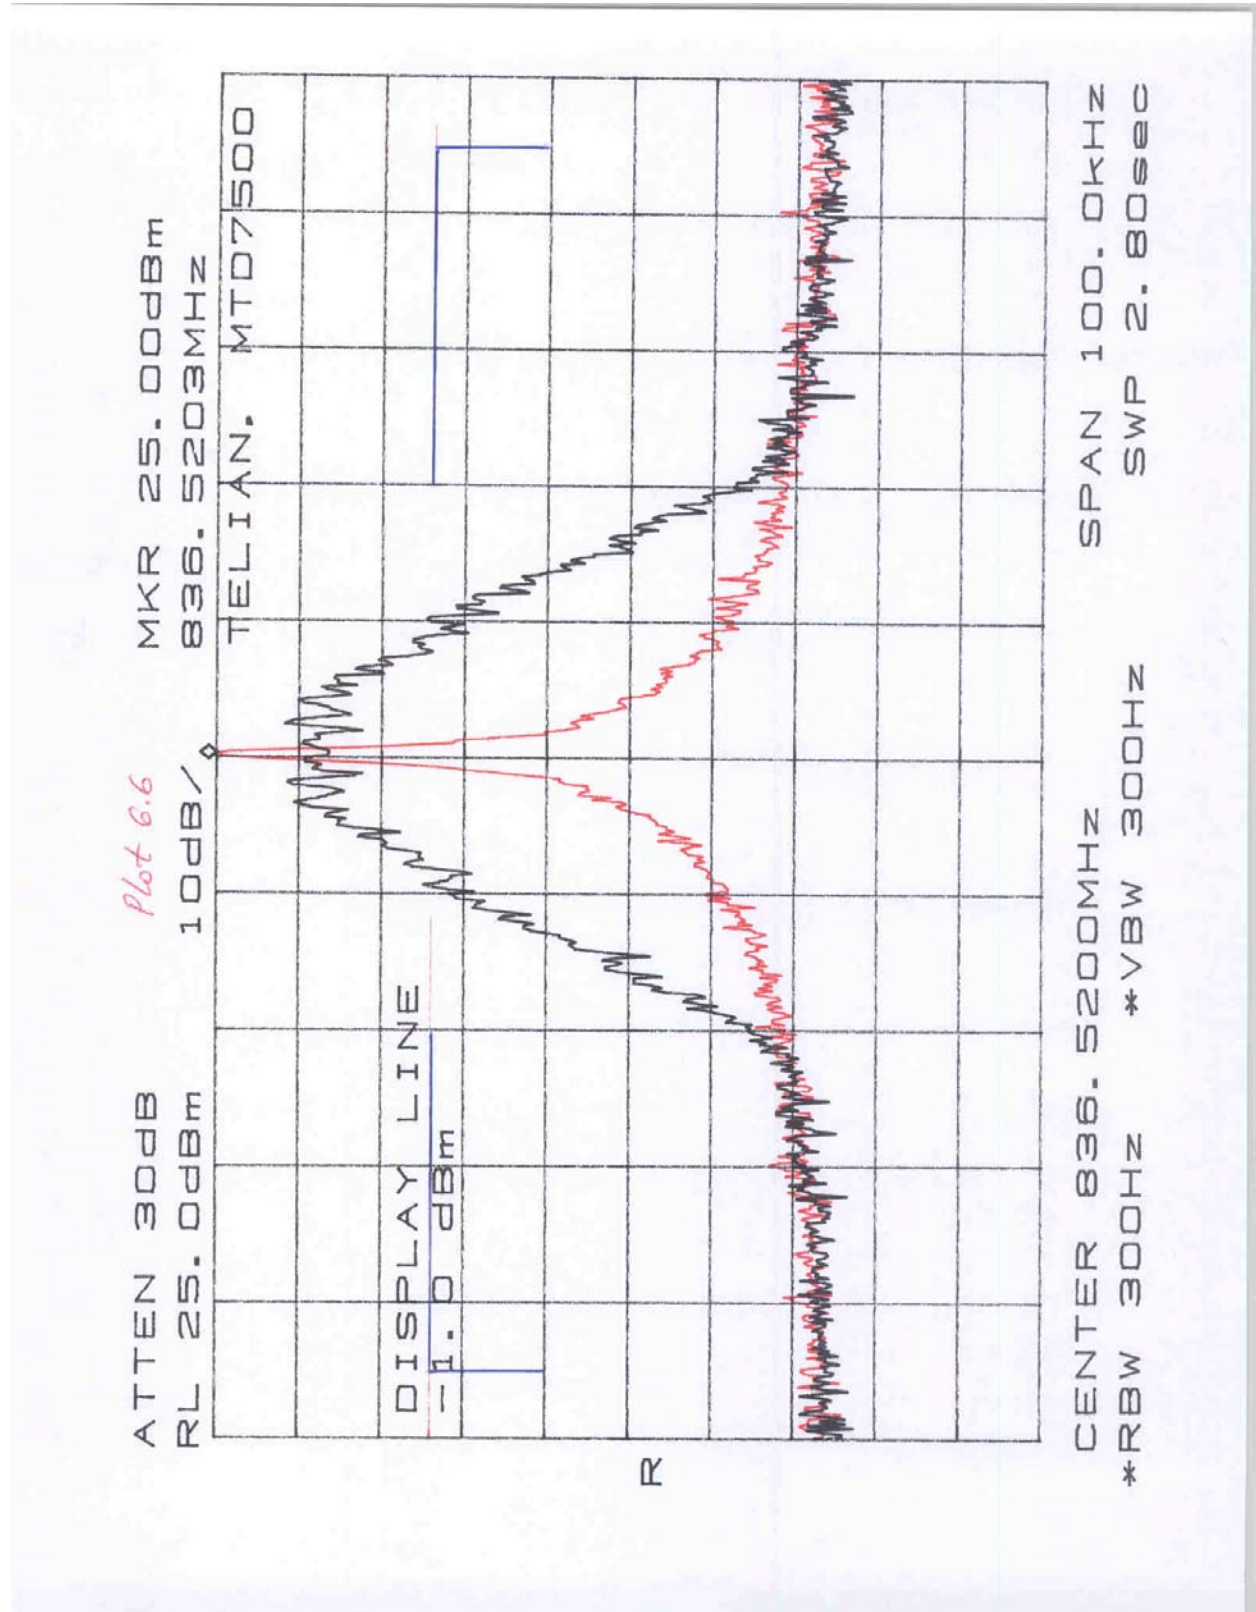


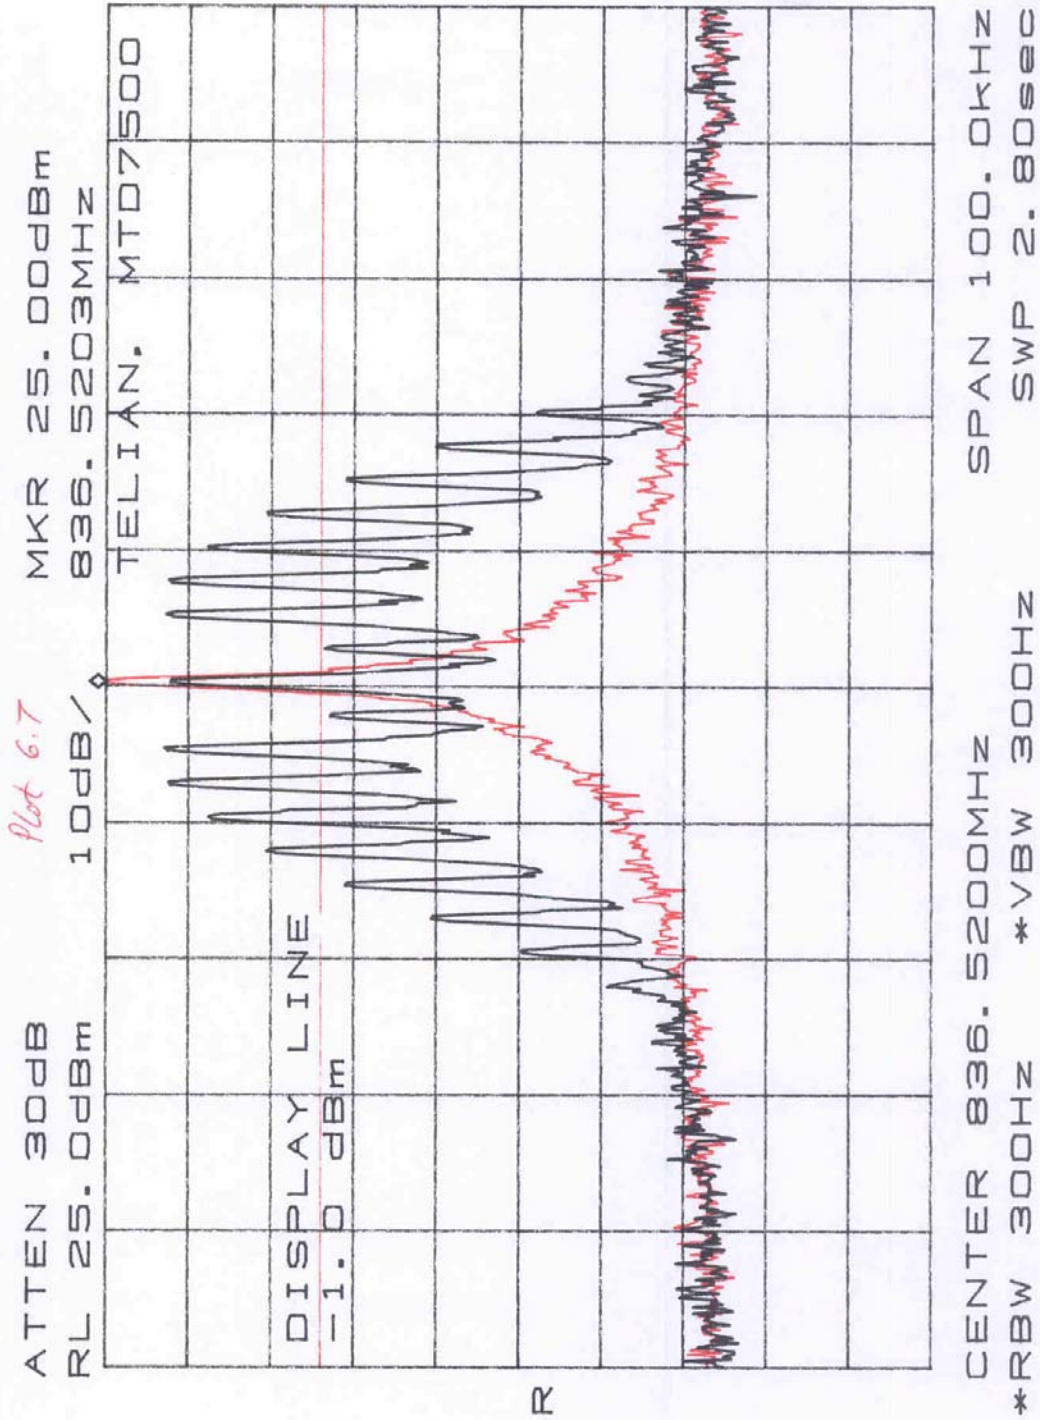


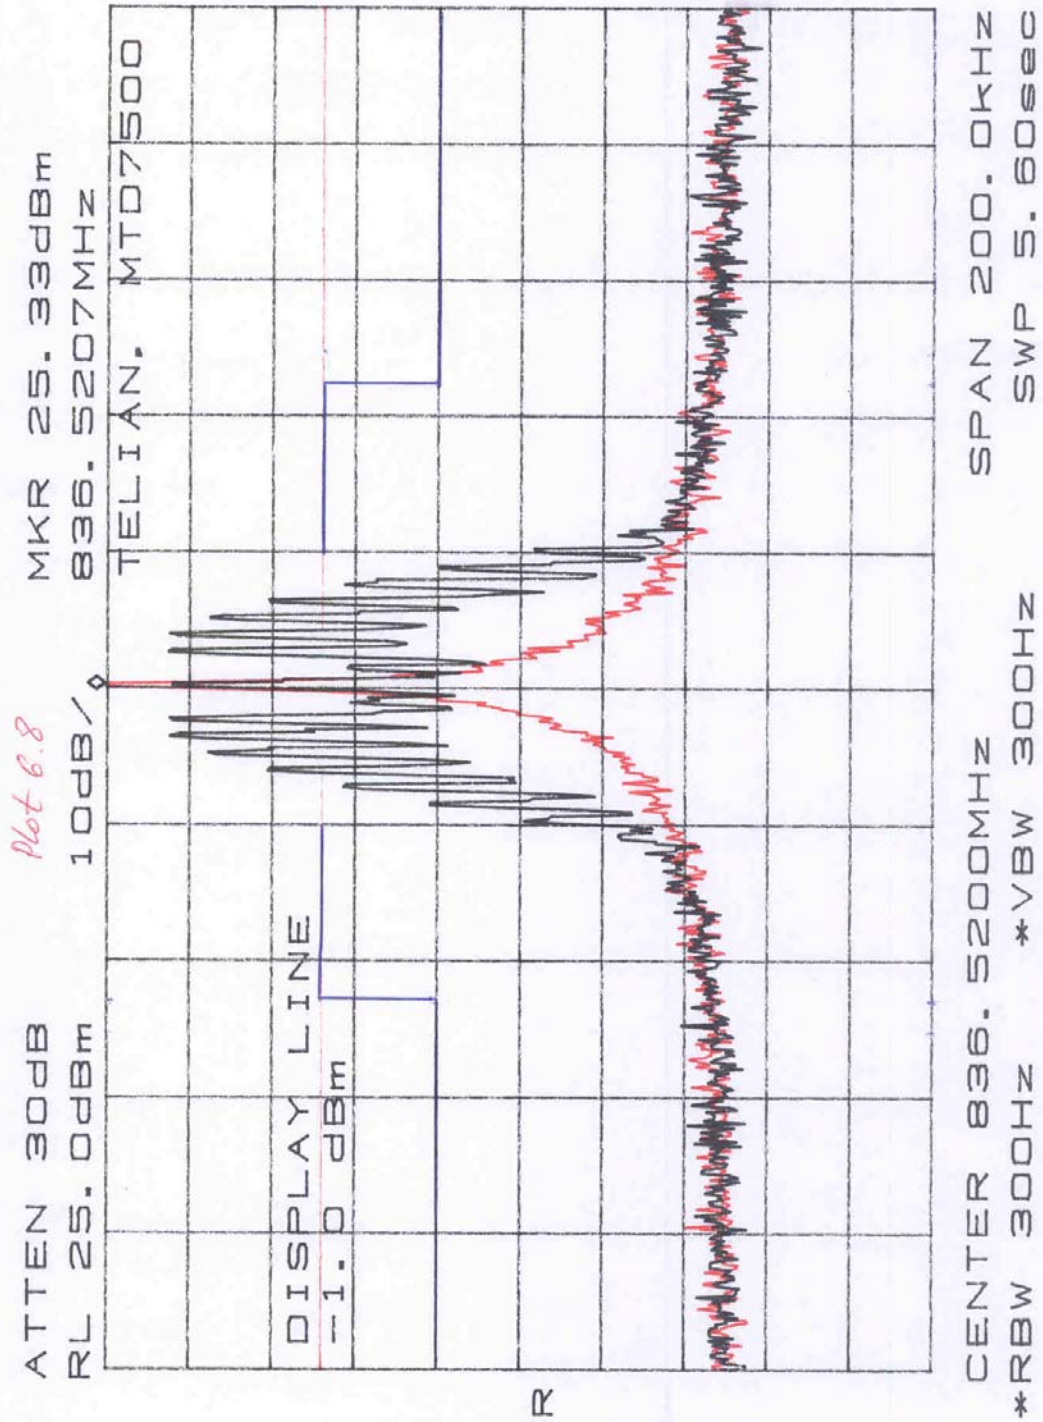


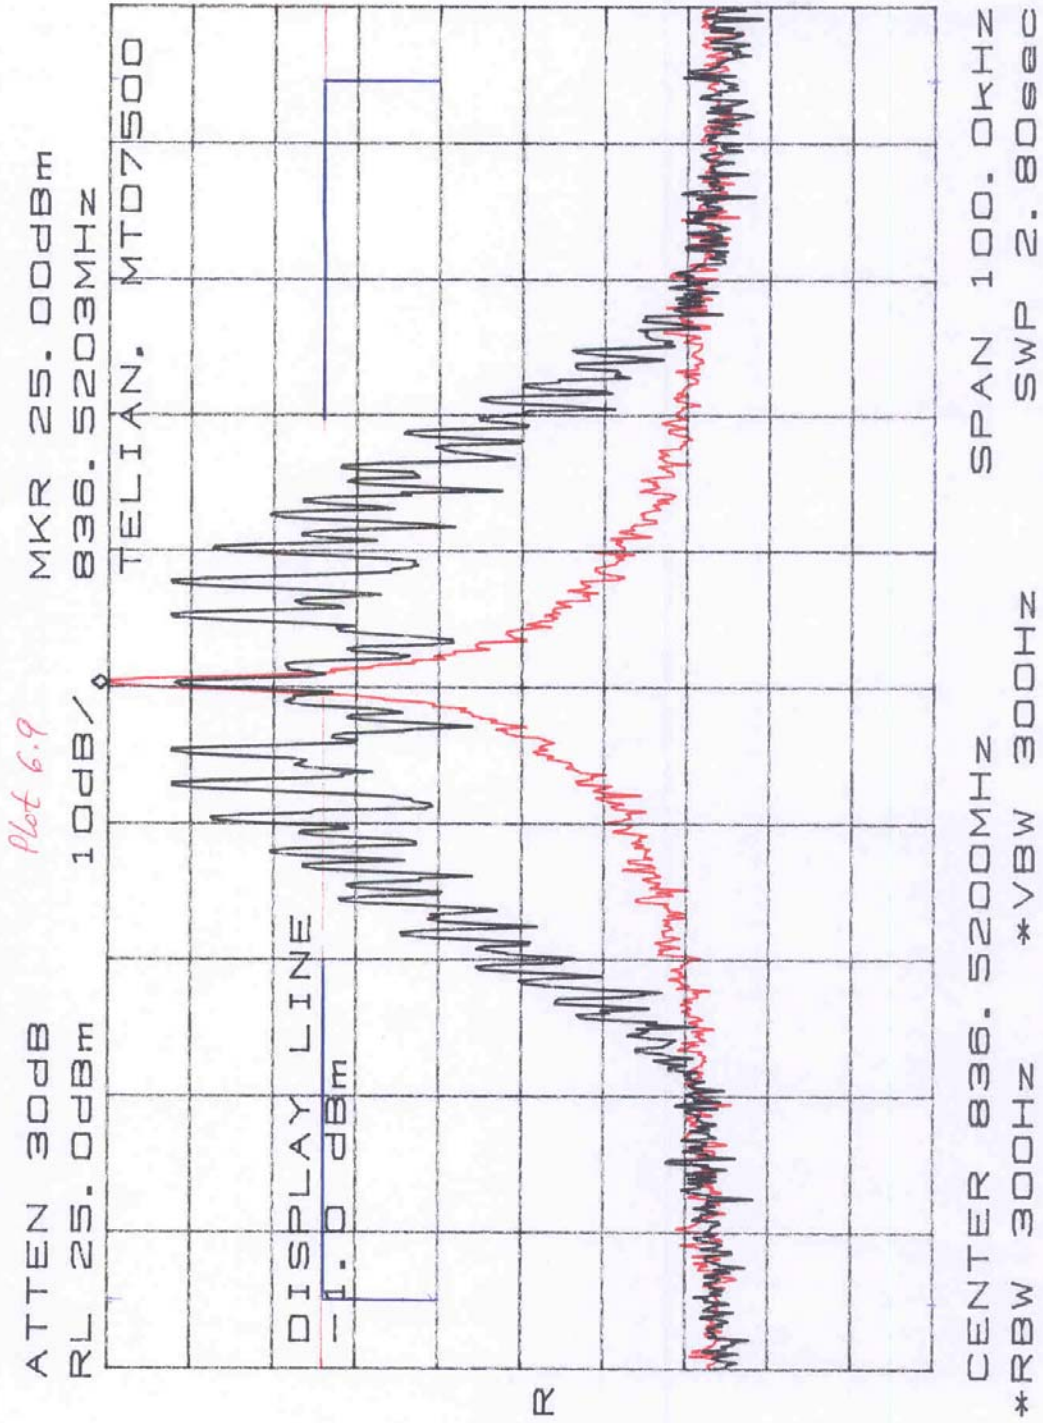

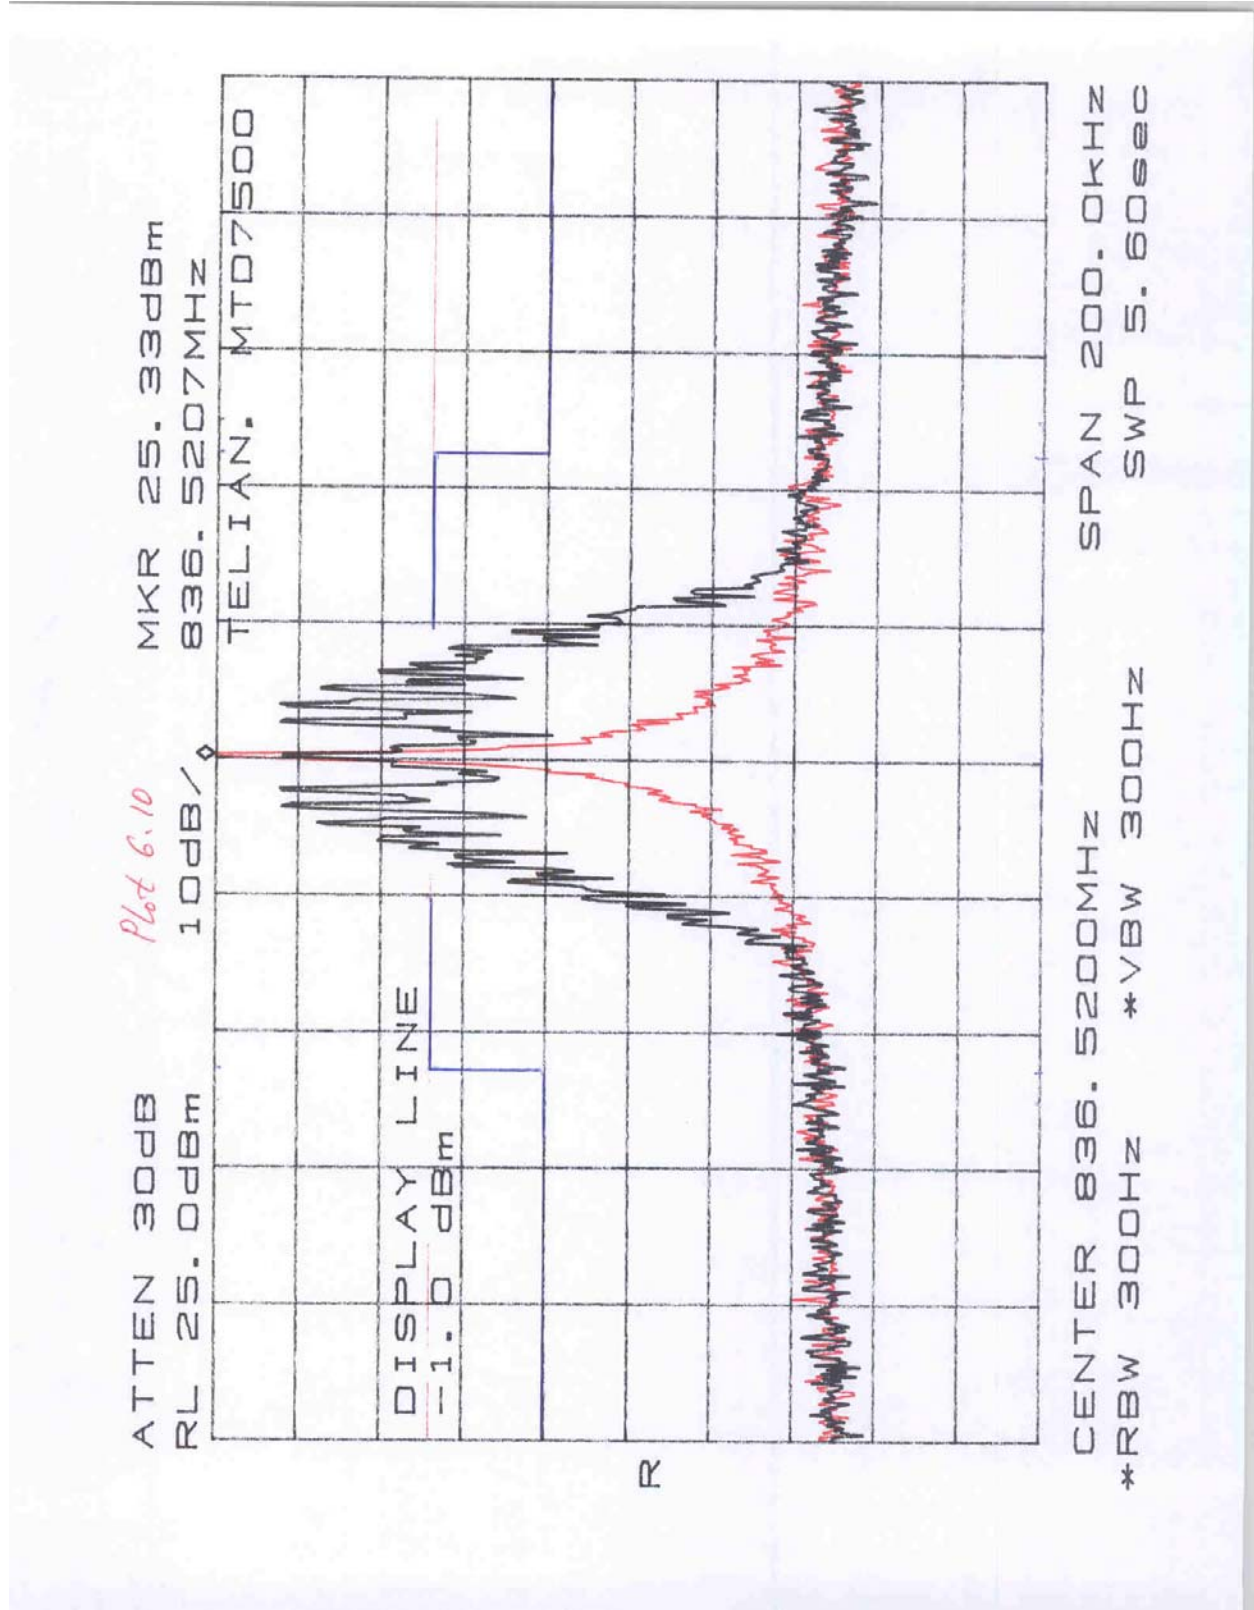

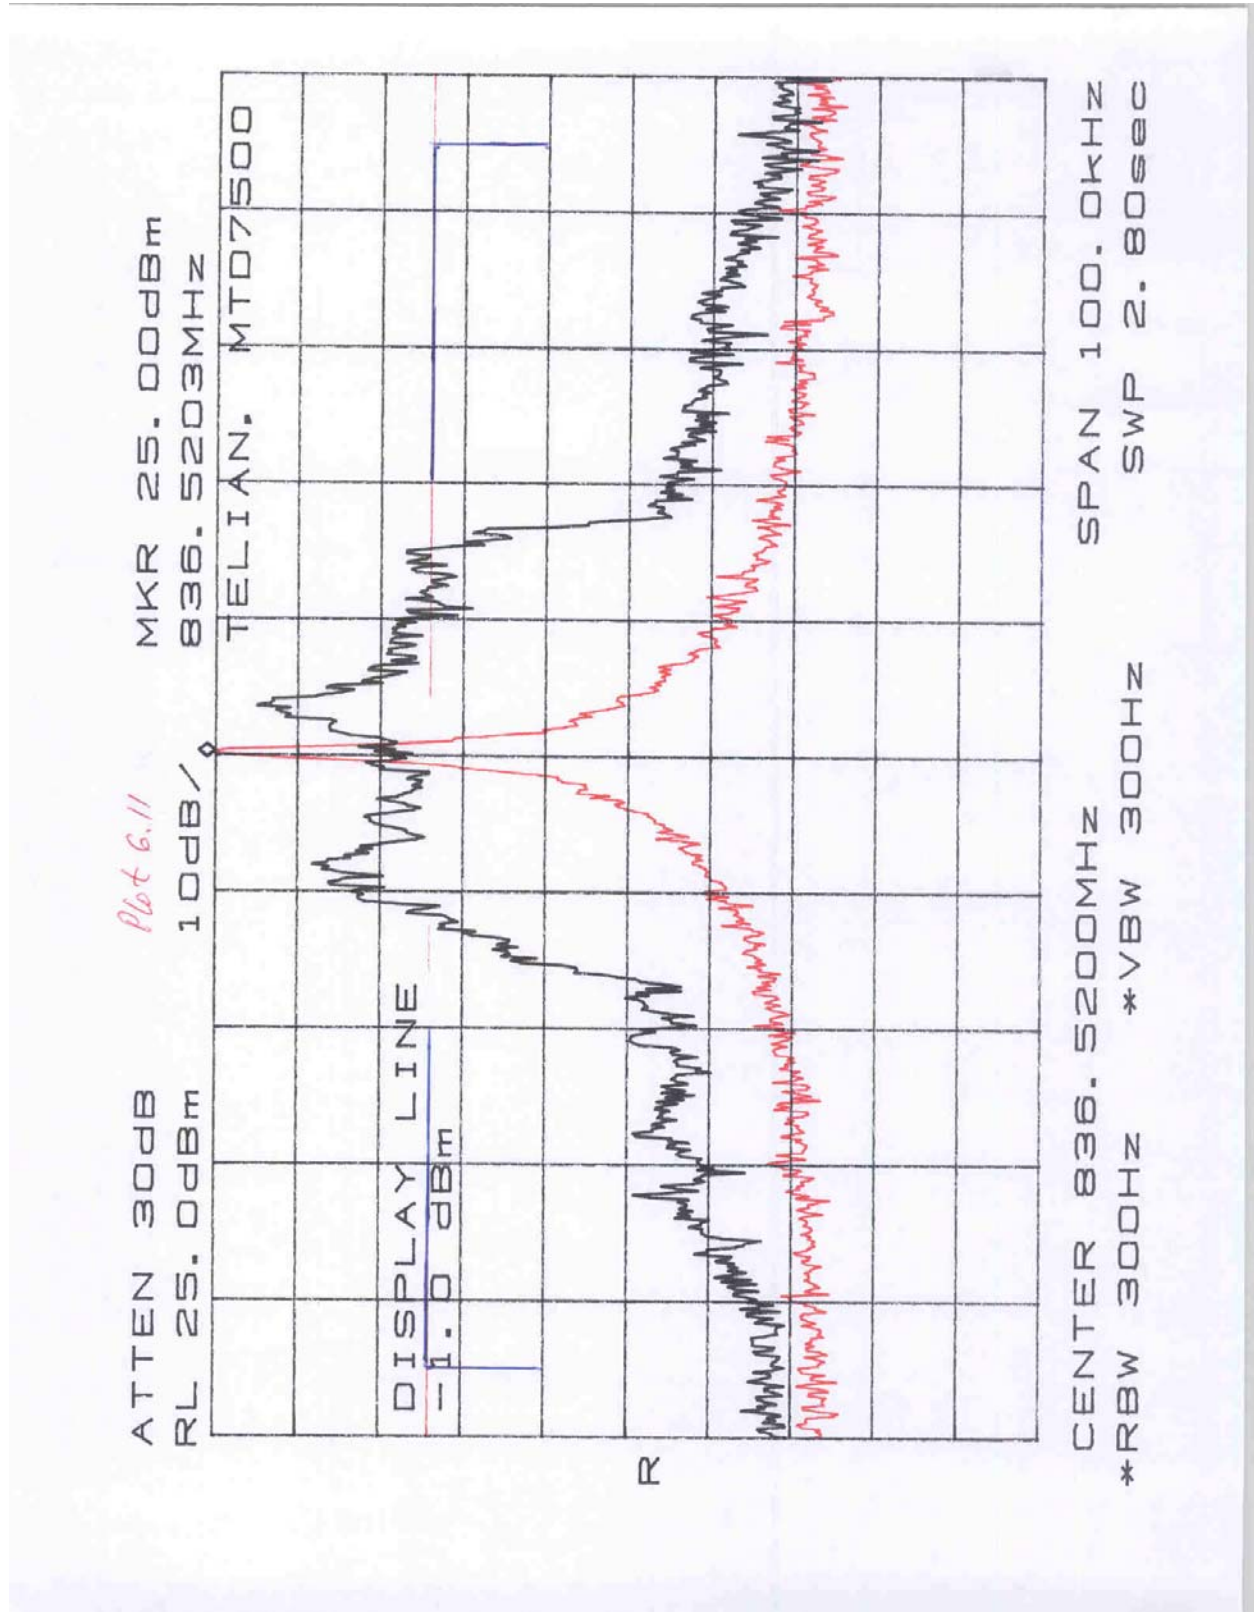

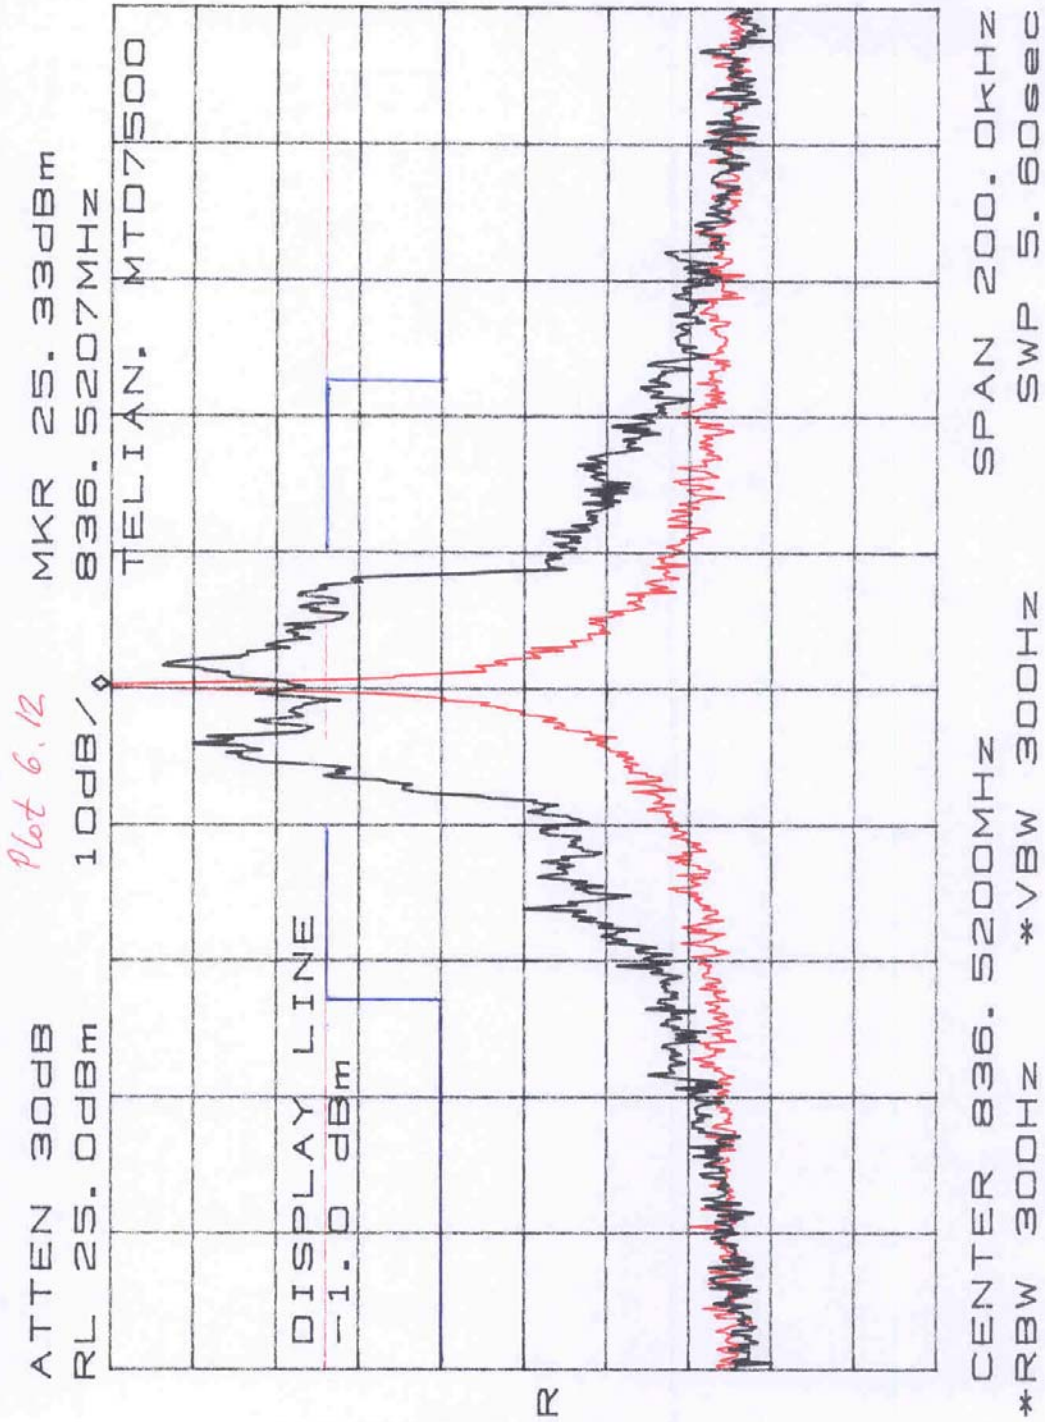

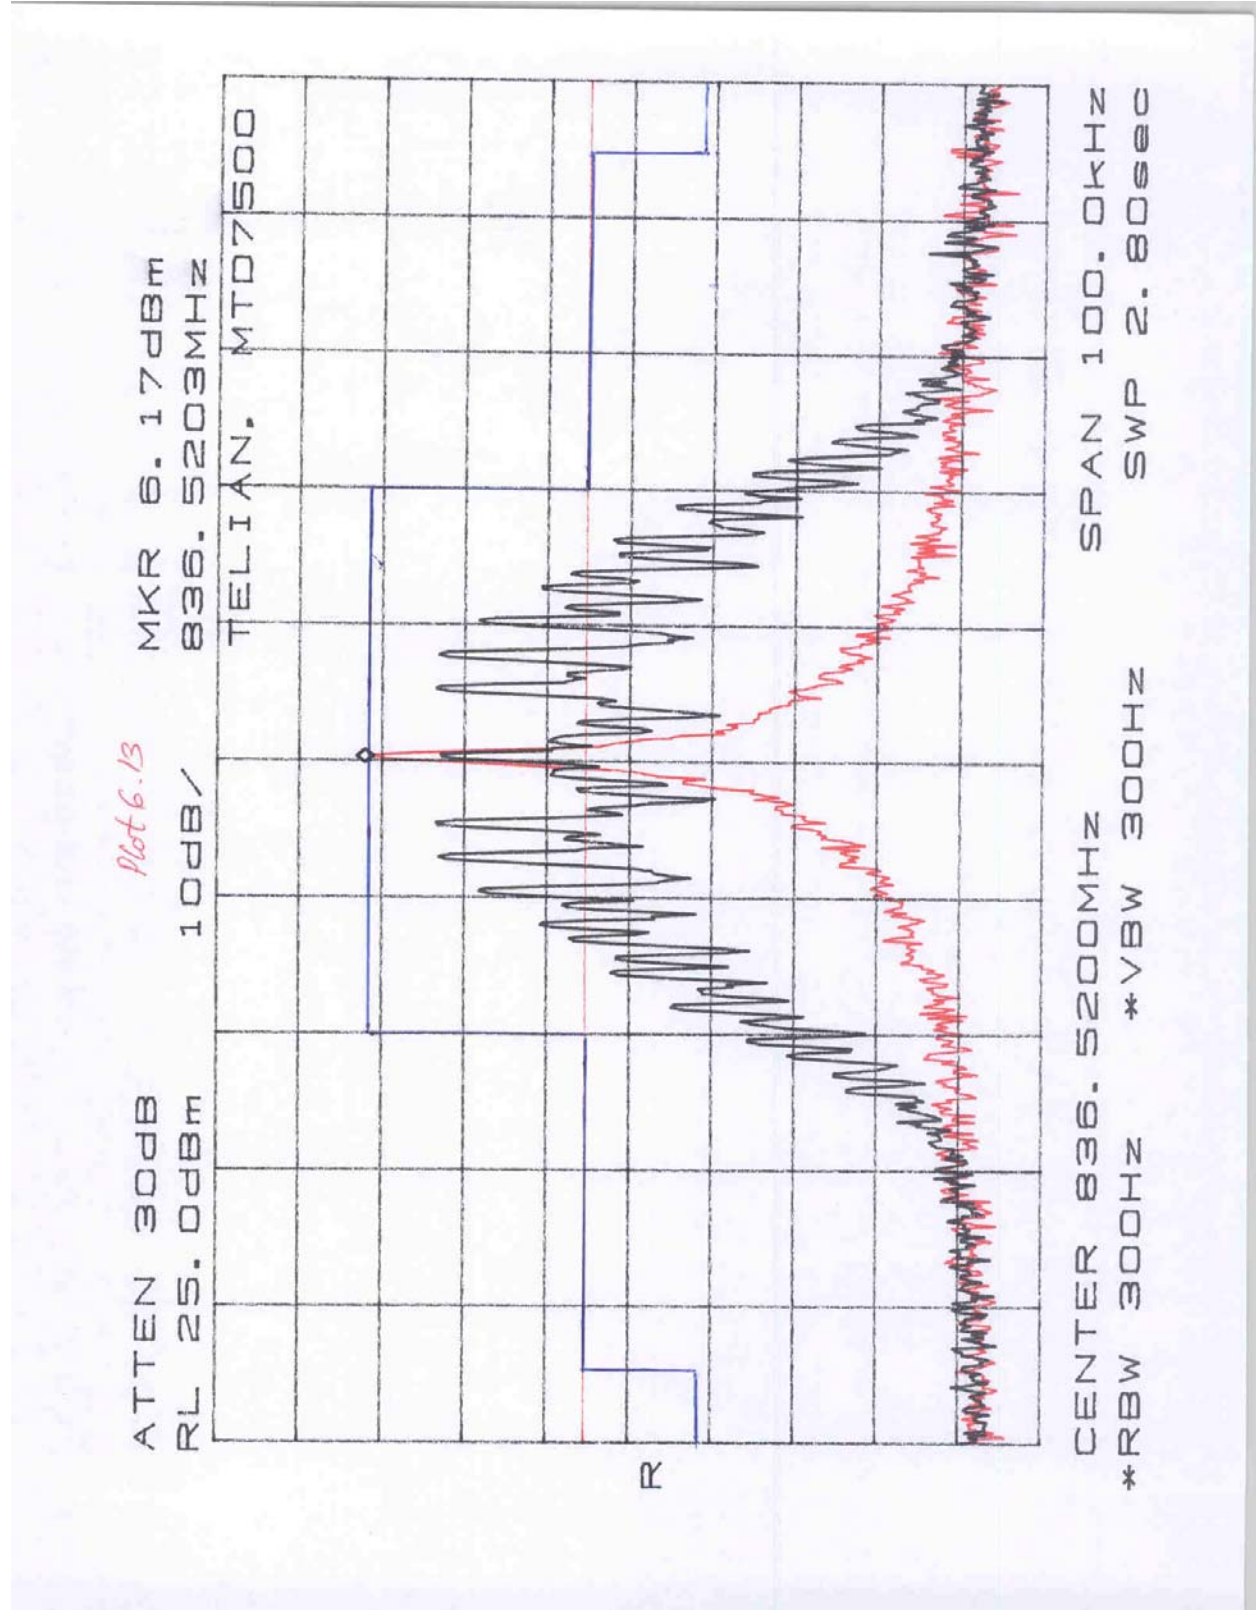

7.0 Out of Band Emissions at Antenna Terminal
FCC 22.917(e), 22.917(f)Out of Band Emissions:

The mean power of emissions must be attenuated below the mean power of the unmodulated carrier (P) on any frequency twice or more than twice the fundamental frequency by at least $(43 + 10 \log P)$ dB.

Mobile Emissions in Base Frequency Range:

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80 dBm at the transmit antenna connector.

7.1 Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.

The resolution bandwidth (RBW) of the spectrum analyzer was set to 300 Hz when measured on frequencies within ± 60 kHz from the carrier.

When measured on frequencies removed from the carrier by more than 60 kHz, $RBW \geq 30$ kHz was used. If on some frequencies the reduced resolution bandwidth was used, the bandwidth correction factor $BCF = 10 \log [RBW/30]$ was applied.

Measurements were performed with EUT setup in TDMA mode; it was verified that this mode is the worst-case out-of-band emissions. Sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.

7.2 Test Equipment

HP 8566B Spectrum Analyzer
HP 7470A Plotter

7.3 Test Results

| | |
|-----------------|----------------------------------|
| Complies | Refer to the plots in Appendix A |
|-----------------|----------------------------------|

| Plot Number | Description |
|--------------------|-----------------------------------|
| 7.1.a - 7.1.e | Low Channel, high power |
| 7.2.a - 7.2.d | Middle Channel, high power |
| 7.3.a - 7.3.f | High Channel, high power |
| 7.4.a - 7.4.d | Middle Channel, low power (5 dBm) |

| Emissions in the receiving band | |
|--|--------------------|
| Plot Number | Description |
| 7.5.a | Low Channel |
| 7.5.b | Middle Channel |
| 7.5.c | High Channel |

8.0 Field Strength of Spurious Radiation
FCC 2.1053

8.1 Test Procedure

The EUT was setup to transmit a maximum power. The accessory headset was connected to the EUT.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT.

The frequency range up to tenth harmonic of each of the three fundamental frequency (low, middle, and high channels) was investigated. The tests were performed with the EUT placed on three orthogonal axis; the worst case of emissions was reported.

For spurious emissions attenuation, the substitution method was used. On each frequency where the Field Strength was found above 63.4 dB(μ V/m) (which corresponds to ERP = -33 dBm), the EUT was substituted by a reference antenna (half-wave dipole - below 1 GHz, or Horn antenna - above 1GHz), connected to a signal generator. The signal generator output was adjusted to obtain the same reading as from EUT. The ERP at the spurious emissions frequency was calculated as in section 3. The spurious emissions attenuation was calculated as the difference between ERP at the fundamental frequency and at the spurious emissions frequency.

The emissions from the digital part and receiver of the EUT were measured as well.

8.2 Test Equipment

EMCO 3115 Horn Antennas
Hewlett Packard HP8566B Spectrum Analyzer
Hewlett Packard HP 83732A Signal Generator
Low Pass Filter
Preamplifier

8.3 Test Results

The measurements by the substitution method were performed only on the frequencies where the Field Strength exceeds 63 dB(μ V/m) for the mode with the highest emission level.

**Effective Radiated Power
 (Measured by Substitution Method)**

| Frequency | Antenna Polariz. | SA Reading (EUT) | Mode | Signal Generator Output required to have the same SA Reading as from EUT | ERP * | ERP Limit |
|--------------------|------------------|------------------|------|--|-------|-----------|
| MHz | | dB(μV) | | V _g dBm | dBm | dBm |
| Channel 824.04 MHz | | | | | | |
| 1648.1 | V | 37.9 | AMPS | -33.1 | -28.0 | -13.0 |
| 4120.2 | H | 59.7 | AMPS | -39.9 | -32.4 | -13.0 |
| Channel 836.52 MHz | | | | | | |
| 1673.0 | V | 38.3 | AMPS | -31.5 | -26.4 | -13.0 |
| 2509.6 | V | 67.8 | AMPS | -28.6 | -21.5 | -13.0 |
| 3346.1 | H | 74.9 | AMPS | -24.5 | -17.0 | -13.0 |
| 4182.3 | H | 72.7 | AMPS | -26.1 | -18.6 | -13.0 |
| 5855.6 | H | 62.6 | AMPS | -31.2 | -22.3 | -13.0 |
| 6692.2 | V | 53.3 | AMPS | -40.5 | -31.4 | -13.0 |
| 7528.7 | V | 55.5 | AMPS | -37.3 | -28.2 | -13.0 |
| Channel 848.97 MHz | | | | | | |
| 1697.9 | V | 35.6 | AMPS | -34.4 | -29.2 | -13.0 |
| 2546.9 | H | 76.9 | AMPS | -26.0 | -18.9 | -13.0 |
| 3395.9 | H | 68.3 | AMPS | -28.1 | -20.6 | -13.0 |
| 4244.9 | H | 72.9 | AMPS | -26.6 | -18.7 | -13.0 |
| 5093.8 | H | 63.0 | AMPS | -29.8 | -21.9 | -13.0 |
| 5942.8 | H | 60.1 | AMPS | -33.2 | -24.1 | -13.0 |
| 7640.7 | V | 55.1 | AMPS | -38.1 | -29.0 | -13.0 |

* ERP is calculated as: $ERP_{(dBm)} = V_{g(dBm)} + G_{(dBd)}$

| | |
|--------------|------------------|
| Test Result: | Complies by 4 dB |
|--------------|------------------|

9.0 Radiated Emissions from digital part and receiver
 FCC 15.109

9.1 Radiated Emission Limits

The following radiated emission limits apply to Class B unintentional radiators:

Radiated Emissions Limits, Section 15.109

| <i>Frequency (MHz)</i> | <i>Class B at 3 m (µV/m)</i> | <i>Class B at 10m (dBµV/m)</i> |
|----------------------------|----------------------------------|------------------------------------|
| 30-88 | 100 | 40.0 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46.0 |
| Above 960 | 500 | 54.0 |

Note: Three sets of units are commonly used for EMI measurement, decibels below one milliwatt (-dBm), decibels above a microvolt (dBµV), and microvolts (µV). To convert between them, use the following formulas: $20 \text{ LOG}_{10}(\mu V) = \text{dB}\mu V$, $\text{dBm} = \text{dB}\mu V - 107$.

9.2 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where FS = Field Strength in dB(μ V/m)

RA = Receiver Amplitude (including preamplifier) in dB(μ V)

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

Assume a receiver reading of 52.0 dB(μ V) is obtained. The antennas factor of 7.4 dB(1/m) and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving field strength of 32 dB(μ V/m). This value in dB(μ V/m) was converted to its corresponding level in μ V/m.

$$RA = 52.0 \text{ dB}(\mu\text{V})$$

$$AF = 7.4 \text{ dB}(1/\text{m})$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$FS = 52.0 + 7.4 + 1.6 - 29.0 = 32 \text{ dB}(\mu\text{V}/\text{m})$$



$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(32 \text{ dB}\mu\text{V}/\text{m})/20] = 39.8 \mu\text{V}/\text{m}$$

9.3 Test Results

The results on the following page(s) were obtained when the device was tested in the condition described in Section 4.

Frequency range investigated is from 30 MHz to 10,000 MHz.

| | |
|--------------|--------------------|
| Test Result: | Complies by 6.1 dB |
|--------------|--------------------|

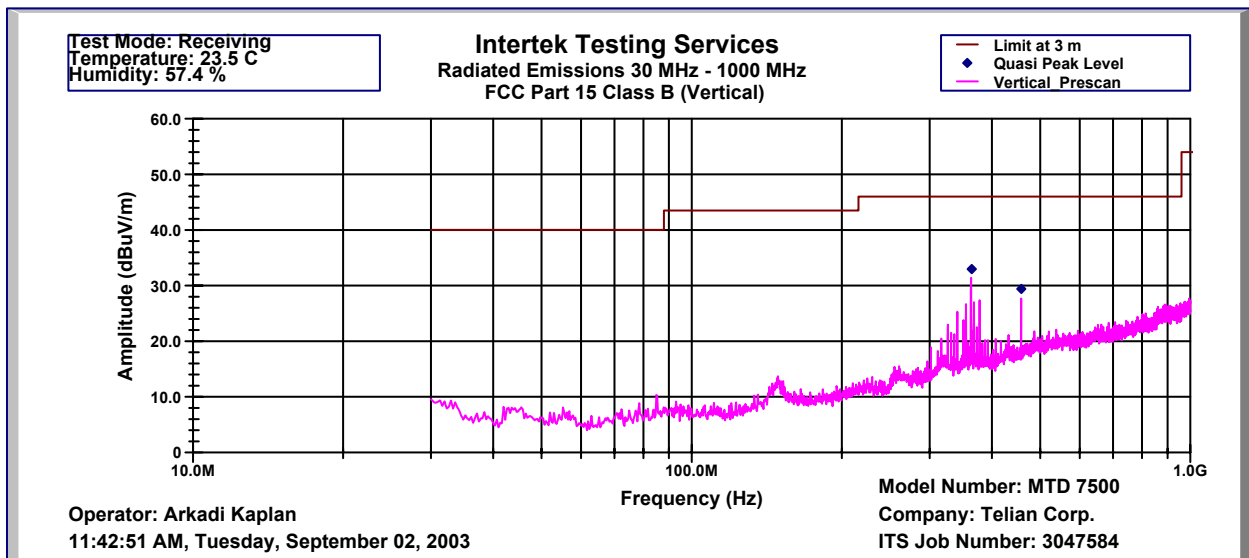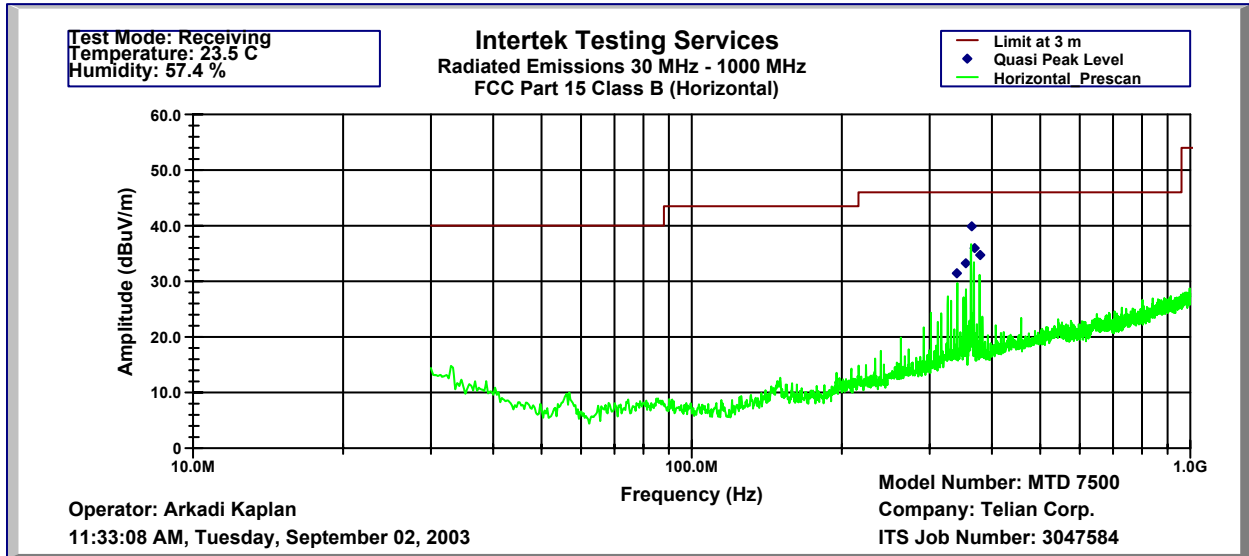

Telian Corporation., Model No: MTD-7500
 FCC ID: NPQMTD7500

Date of Test: September 2 to 5, 2003

Radiated Emissions 30 MHz - 1000 MHz

FCC Part 15 Class B (QP-Horizontal)

Operator: Arkadi Kaplan
 ITS Job Number: 3047584
 09/03/03

Model Number: MTD 7500
 Company: Telian Corp.

| Frequency | Quasi Pk FS | Limit@3m | Margin | RA | AG | CF | AF | Atten |
|-----------|-------------|----------|--------|--------|------|-----|---------|-------|
| MHz | dB(uV/m) | dB(uV/m) | dB | dB(uV) | dB | dB | dB(1/m) | dB |
| 340 | 31.4 | 46 | -14.6 | 43.4 | 32.2 | 1.7 | 15.5 | 3 |
| 355 | 33.2 | 46 | -12.8 | 45.4 | 32.2 | 1.7 | 15.4 | 3 |
| 364 | 39.9 | 46 | -6.1 | 52.0 | 32.3 | 1.7 | 15.4 | 3 |
| 369 | 36.0 | 46 | -10.0 | 48.0 | 32.3 | 1.7 | 15.5 | 3 |
| 379 | 34.7 | 46 | -11.3 | 46.0 | 32.3 | 1.8 | 16.2 | 3 |

Test Mode: Receiving
 Temperature: 23.5 C
 Humidity: 57.4 %

FCC Part 15 Class B (QP-Vertical)

Operator: Arkadi Kaplan
 ITS Job Number: 3047584
 09/03/03

Model Number: MTD 7500
 Company: Telian Corp.

| Frequency | Quasi Pk FS | Limit@3 | Margin | RA | AG | CF | AF | Atten |
|-----------|-------------|----------|--------|--------|------|-----|---------|-------|
| MHz | dB(uV/m) | dB(uV/m) | dB | dB(uV) | dB | dB | dB(1/m) | dB |
| 364 | 33 | 46 | -13.0 | 45.5 | 32.3 | 1.7 | 15.0 | 3 |
| 458 | 29.4 | 46 | -16.6 | 40.0 | 32.3 | 1.9 | 16.8 | 3 |

Test Mode: Receiving
 Temperature: 23.5 C
 Humidity: 57.4 %

10.0 Line Conducted Emissions,
FCC 15.107

10.1 Test Procedure

Test procedure described in the ANSI C63.4 Standard was employed.

The EUT was connected to the charger, that was connected to the AC line through the LISNs.

Both HOT and NEUTRAL leads were tested.



10.2 Test Equipment

HP8568B Spectrum Analyzer
FCC LISN

10.3 Test Results

See the attached plots.

| | |
|--------------|-------------------|
| Test Result: | Complies by 11 dB |
|--------------|-------------------|

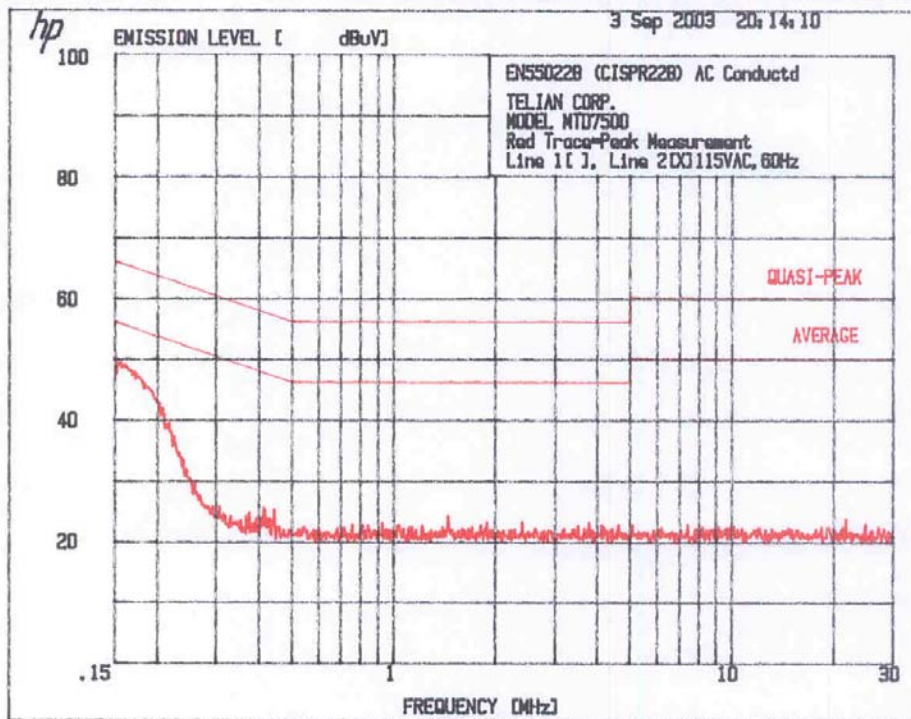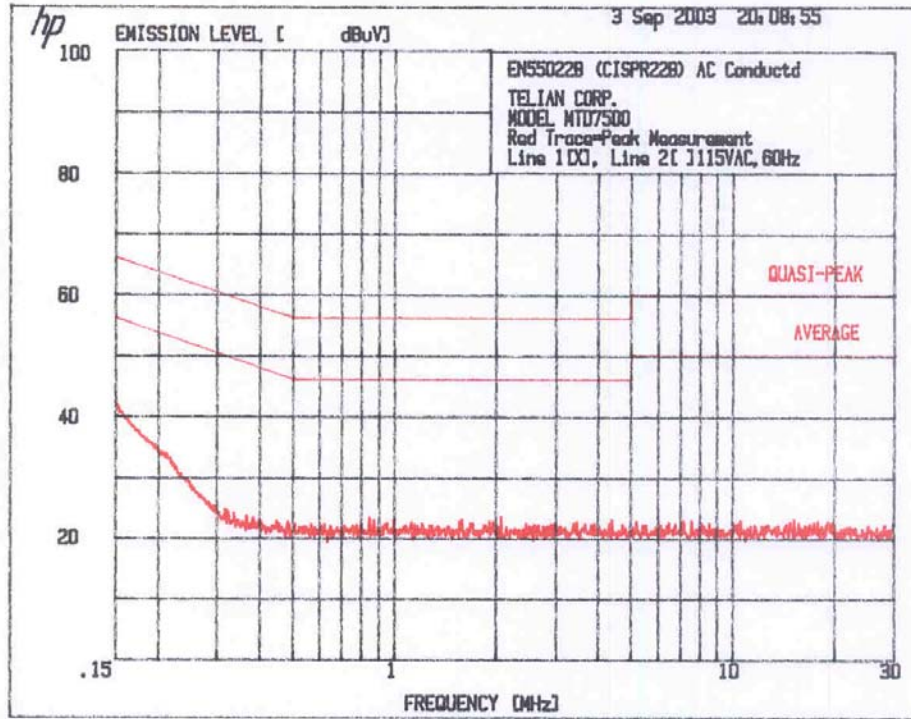

11.0 Frequency Stability vs Temperature
 FCC 2.1055, 22.355

Frequency Tolerance: 2.5 ppm

11.1 Test Procedure

The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for that purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

11.2 Test Equipment

Temperature Chamber, -30°C to +70°C
 Hewlett Packard 5383A Frequency Counter
 DC Power Supply

11.3 Test Results

| | |
|--------------|----------|
| Test Result: | Complies |
|--------------|----------|

Tx Frequency: 836.520000 MHz
Tolerance: +/- 2091.3 Hz

| Temperature (°C) | Measured Frequency (MHz) | Difference (Hz) |
|------------------|--------------------------|-----------------|
| 50 | 836.520150 | 150 |
| 40 | 836.519820 | -180 |
| 30 | 836.519770 | -230 |
| 20 | 836.520150 | 150 |
| 10 | 836.519860 | -140 |
| 0 | 836.520120 | 120 |
| -10 | 836.520340 | 340 |
| -20 | 836.520360 | 360 |
| -30 | 836.520360 | 360 |

Maximum variation is 0.43 ppm

12.0 Frequency Stability vs Voltage
FCC 2.1055, 22.355

Frequency Tolerance: 2.5 ppm

12.1 Test Procedure

An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminates; i.e., the battery end point. The output frequency was recorded for each battery voltage.

12.2 Test Equipment

Hewlett Packard 5383A Frequency Counter
DC Power Supply

12.3 Test Results.

| | |
|--------------|----------|
| Test Result: | Complies |
|--------------|----------|

Tx Frequency: 836.52 MHz
Tolerance: +/- 2091.3 Hz

| Supply (Battery) Volts | Measured Frequency (MHz) | Difference (Hz) |
|------------------------|--------------------------|-----------------|
| 3.43 | 836.520136 | 136 |
| 3.70 | 836.520149 | 149 |
| 4.26 | 836.520155 | 155 |

Maximum variation is 0.43 ppm

13.0 Test Equipment

Measurement equipment used for compliance testing utilized the equipment on the following list:

| Equipment | Manufacturer | Model/Type | Serial # | Cal Int | Cal Due |
|--------------------------------------|-----------------|----------------------|--------------------------|---------|----------|
| BI-Log Antenna | EMCO | 3143 | 9509-1160 | 12 | 9/19/03 |
| Dipole Antenna | CDI | Roberts | 332 | 12 | 9/27/03 |
| Horn Antenna | EMCO | 3115 | 9170-3712 | 12 | 6/17/04 |
| Horn Antenna | EMCO | 3115 | 8812-3049 | 12 | 4/08/04 |
| Pre-Amplifier | Miteq | AMF-4D-001180-24-10P | 799159 | 12 | 9/06/03 |
| Pre-Amplifier | Avantek | AFT-18855 | 8723H705 | 12 | 10/5/03 |
| Spectrum Analyzer w/85650 QP Adapter | Hewlett Packard | 8566B | 2416A00317 2043A00251 | 12 | 10/29/03 |
| Spectrum Analyzer w/8650 QP Adapter | Hewlett Packard | 8568B | 1912A0053 2521A01021 | 12 | 11/20/03 |
| Spectrum Analyzer | Hewlett Packard | 8565E | AE9674 | 12 | 5/27/04 |
| Signal Generator | Hewlett Packard | 83732A | 3222A00119 | 12 | 3/04/04 |
| Radio Communication Test Set | Marconi | 2955/2957 | N/A | 12 | 12/13/03 |
| Pulse/Function generator | Hewlett Packard | HP8116A | | 12 | 10/17/03 |
| LISN | FCC | FCC-LISN-50-50-M-H | 2011 | 12 | 2/08/04 |

14.0 Document History

| Revision/ Job Number | Writer Initials | Date | Change |
|---------------------------------|----------------------------|--------------------|------------------------------------|
| 1.0 /3047584 | DC | September 10, 2003 | Original document |
| 2.0 /3047584 | DC | March 8, 2004 | New output power data in AMPS mode |
| | | | |
| | | | |
| | | | |
| | | | |

Appendix A - Out of Band Emissions at Antenna Terminal