



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION
TEST REPORT**

FOR

BLUETOOTH SERIAL PORT MODULE

MODEL NUMBER: LMX9838SB

FCC ID: ED9LMX9838

REPORT NUMBER: 06U10658-1, REVISION B

ISSUE DATE: FEBRUARY 8, 2007

Prepared for
NATIONAL SEMICONDUCTOR
10105 PACIFIC HEIGHTS BLVD, SUITE 100
SAN DIEGO, CA 92121 USA

Prepared by
COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, USA
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP[®]

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue	Revisions	Revised By
--	01/26/07	Initial Issue	T.C.
B	02/08/07	Corrected typo in antenna gain info.	T.C.

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY.....	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	5
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	5
5. EQUIPMENT UNDER TEST.....	6
5.1. <i>DESCRIPTION OF EUT</i>	6
5.2. <i>MAXIMUM OUTPUT POWER</i>	6
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS.....</i>	7
5.4. <i>SOFTWARE AND FIRMWARE</i>	7
5.5. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	7
5.6. <i>DESCRIPTION OF TEST SETUP</i>	7
6. TEST AND MEASUREMENT EQUIPMENT	9
7. LIMITS AND RESULTS	10
7.1. <i>ANTENNA PORT CHANNEL TESTS</i>	10
7.1.1. 20 dB BANDWIDTH	10
7.1.2. HOPPING FREQUENCY SEPARATION.....	14
7.1.3. NUMBER OF HOPPING CHANNELS	16
7.1.4. AVERAGE TIME OF OCCUPANCY	21
7.1.5. PEAK OUTPUT POWER	23
7.1.6. MAXIMUM PERMISSIBLE EXPOSURE.....	27
7.1.7. AVERAGE POWER.....	30
7.1.8. PEAK POWER SPECTRAL DENSITY	31
7.1.9. CONDUCTED SPURIOUS EMISSIONS.....	35
7.2. <i>RADIATED EMISSIONS.....</i>	44
7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS	44
7.2.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ	47
7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz.....	56
7.3. <i>POWERLINE CONDUCTED EMISSIONS</i>	57
8. SETUP PHOTOS	64

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: NATIONAL SEMICONDUCTOR
10105 PACIFIC HEIGHTS BLVD, SUITE 100
SAN DIEGO, CA 92121 USA

EUT DESCRIPTION: BLUETOOTH SERIAL PORT MODULE

MODEL: LMX9838SB

SERIAL NUMBER: 13, 14

DATE TESTED: OCTOBER 23-26, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES



THANH NGUYEN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Bluetooth Serial Port Module. Two identical EUTs were used for testing. Radiated emissions testing was performed on EUT serial number 13. Antenna port-conducted testing was performed on EUT serial number 14.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Power Density Limit (mW/cm ²)	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
1.0	2.11	-1.48	0.30

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an integral antenna, with a maximum gain of -1.48 dBi.

5.4. SOFTWARE AND FIRMWARE

The EUT driver software installed in the host Laptop during testing was Window XP

The test utility software used during testing was Simply Bleu Commander, rev. 1.6.0.1

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 2441 MHz.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	IBM	T30_2636	78-TV833	DoC
AC/DC Adapter	IBM	02K6661	Z1Z2JY09C51D	DoC
AC/DC Adapter	CUI INC	EPA-121DA-05	0611S	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	2	US 115V	Un-shielded	2m	No
2	DC	2	DC Plug	Un-shielded	1.5m	No
3	Serial	1	DB9	Shielded	1.5m	Yes

TEST SETUP

The EUT is connected to a laptop computer through serial port during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

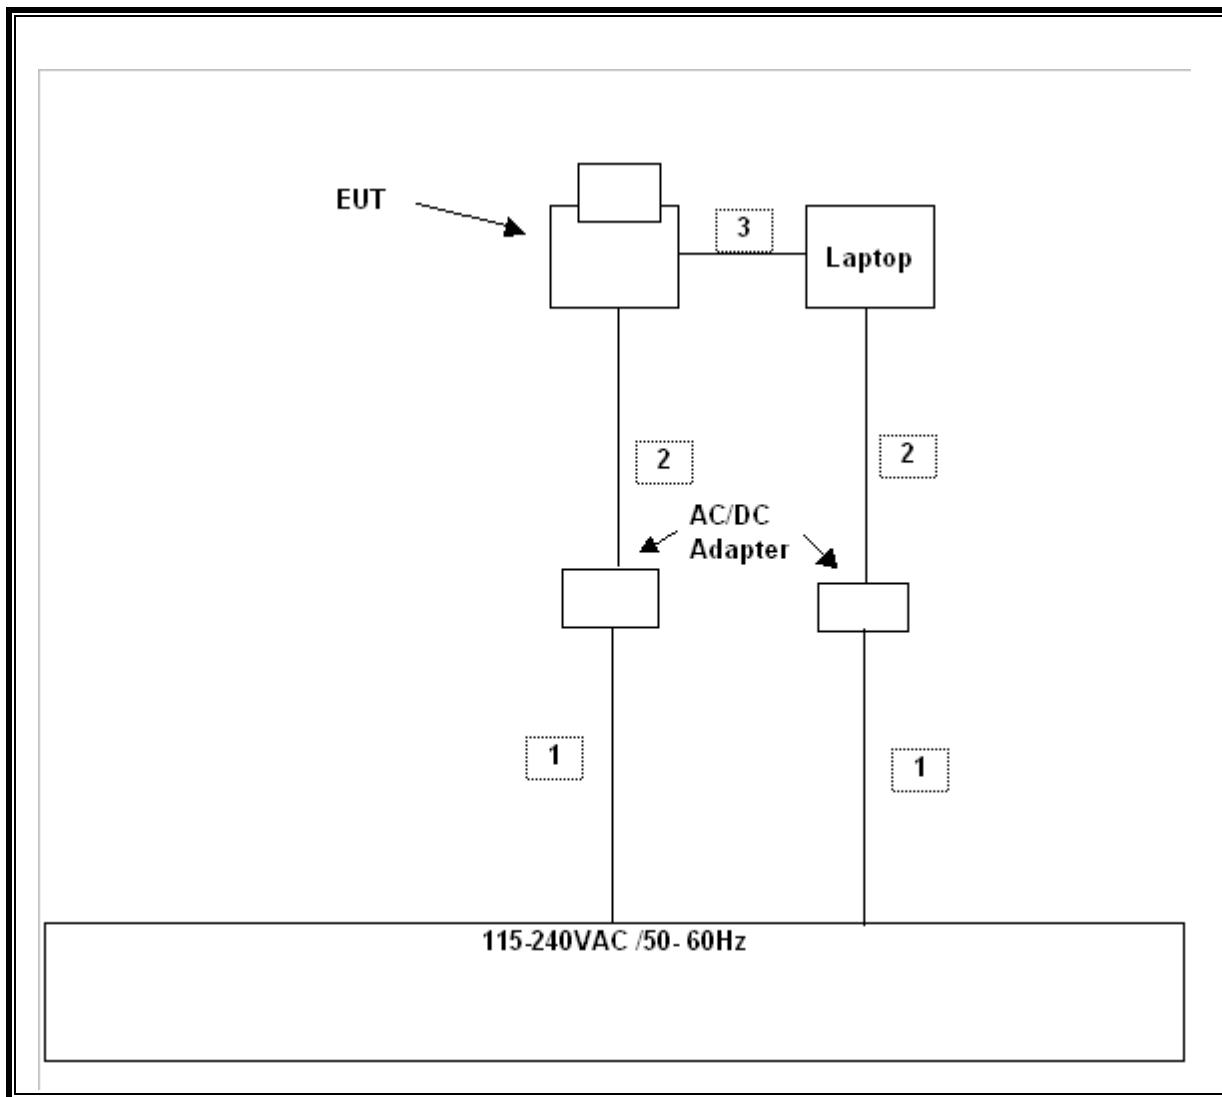

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
EMI Receiver, 9 kHz ~ 2.9 GHz	Agilent / HP	8542E	3942A00286	2/4/2007
RF Filter Section	Agilent / HP	85420E	3705A00256	2/4/07
Antenna, Bilog 30 MHz ~ 2 Ghz	Sunol Sciences	JB1	A121003	8/31/07
EMI Test Receiver	R & S	ESIB40	100192	6/9/07
Power Meter	Agilent / HP	438A	3513U04320	1/12/07
Power Sensor 10MHz - 18GHz	Agilent / HP	8481A	2237A31744	1/11/07
Antenna, Horn 1 ~ 18 GHz	ETS	3117	29301	4/22/07
Preamplifier, 1 ~ 26.5 GHz	Agilent / HP	8449B	3008A00561	10/3/07
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent / HP	E4446A	MY45300064	12/19/06
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	9/13/07
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	9/13/07
SA RF Section, 1.5 GHz	Agilent / HP	85680B	2814A04227	1/7/08
SA Display Section 2	Agilent / HP	85662A	2816A16696	4/7/08
Preamplifier, 1300 MHz	Agilent / HP	8447D	1937A02062	1/23/07

7. LIMITS AND RESULTS

7.1. ANTENNA PORT CHANNEL TESTS

7.1.1. 20 dB BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 1% to 3% of the 20 dB bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled.


RESULTS


No non-compliance noted:

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)
Low	2402	1013
Middle	2441	1023
High	2480	1023

20 dB BANDWIDTH

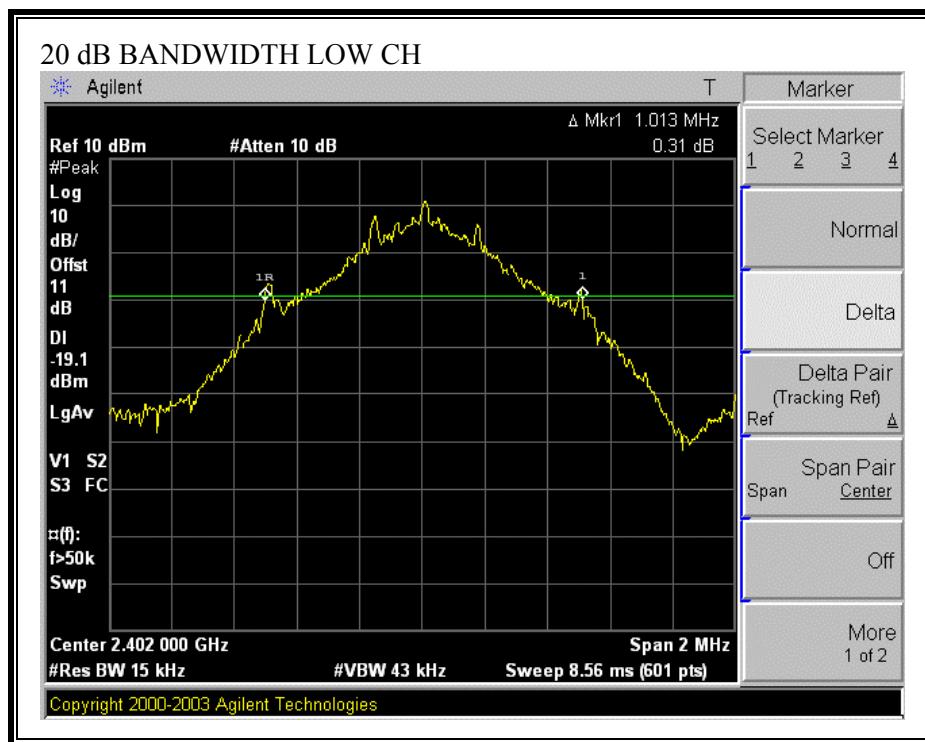

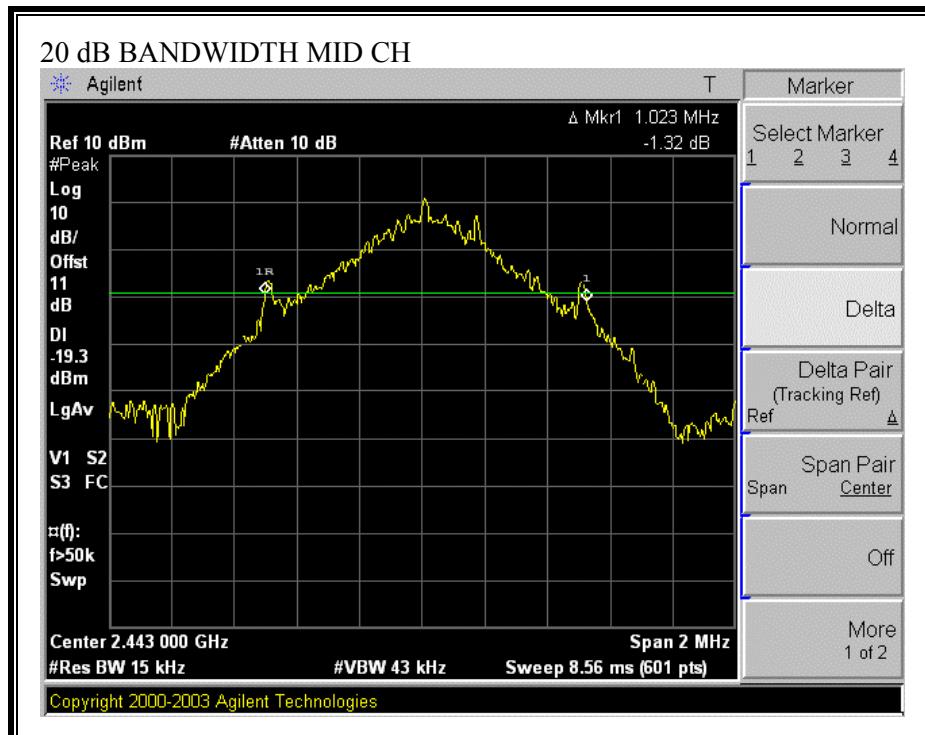

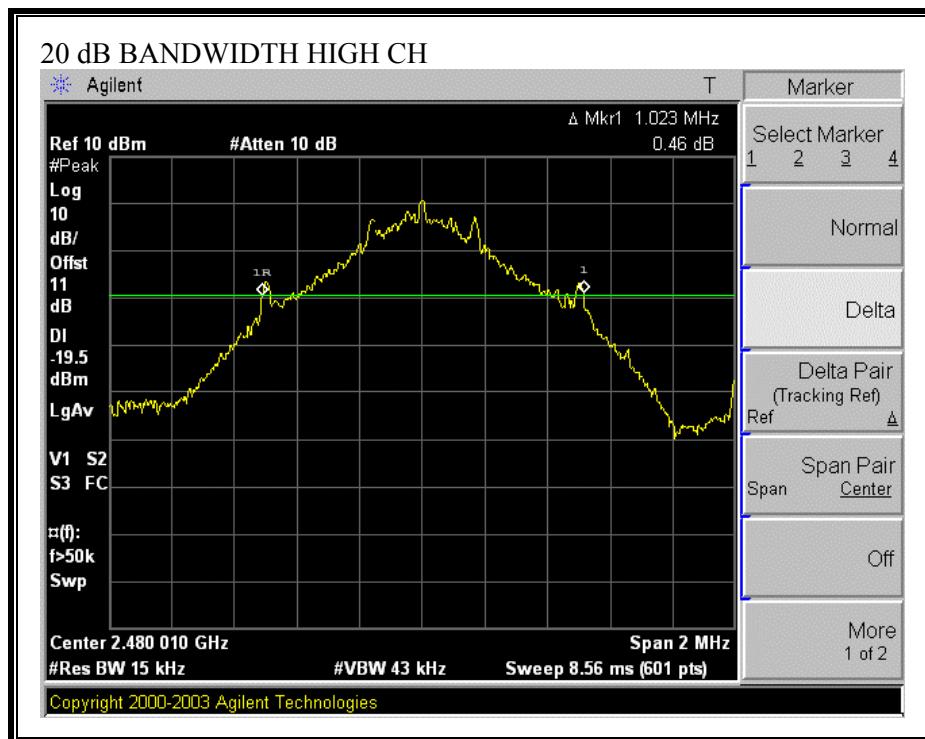

7.1.2. HOPPING FREQUENCY SEPARATION

LIMIT

§15.247 (a) (1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS


No non-compliance noted:

RESULTS

No non-compliance noted:

Frequency (MHz)	Hopping Separation (kHz)	Minimum of 25kHz or Two-Thirds of 20 dB (kHz)	Margin (kHz)
2441	1000	680	320

HOPPING FREQUENCY SEPARATION

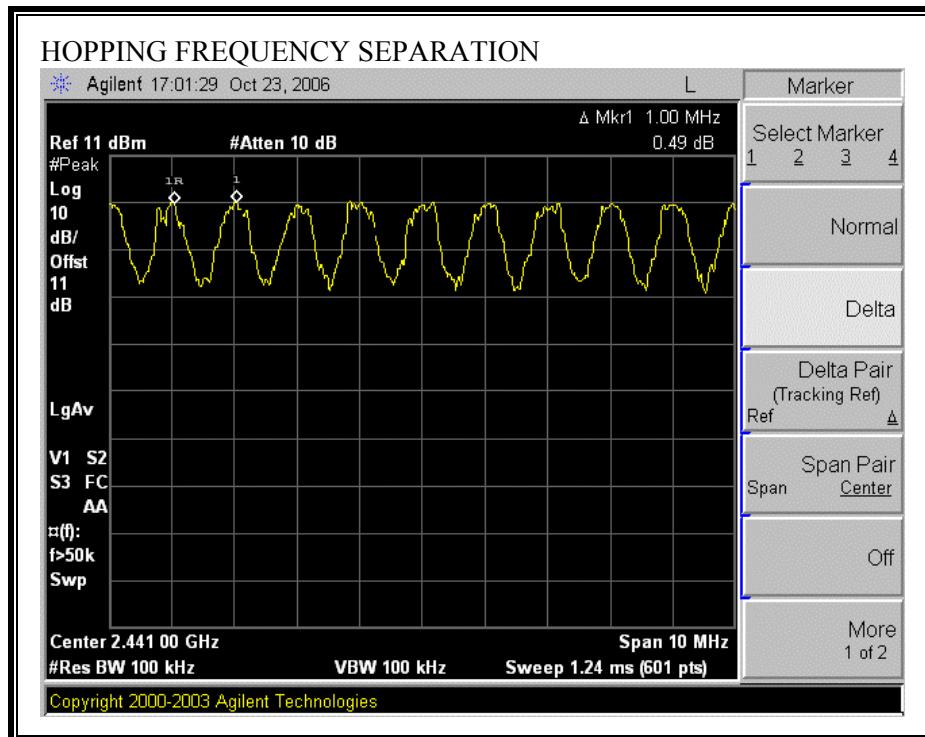

7.1.3. NUMBER OF HOPPING CHANNELS

LIMIT

§15.247 (a) (1) (iii) Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to 1 % of the span. The analyzer is set to Max Hold.


RESULTS


No non-compliance noted:


79 Channels observed.

NUMBER OF HOPPING CHANNELS

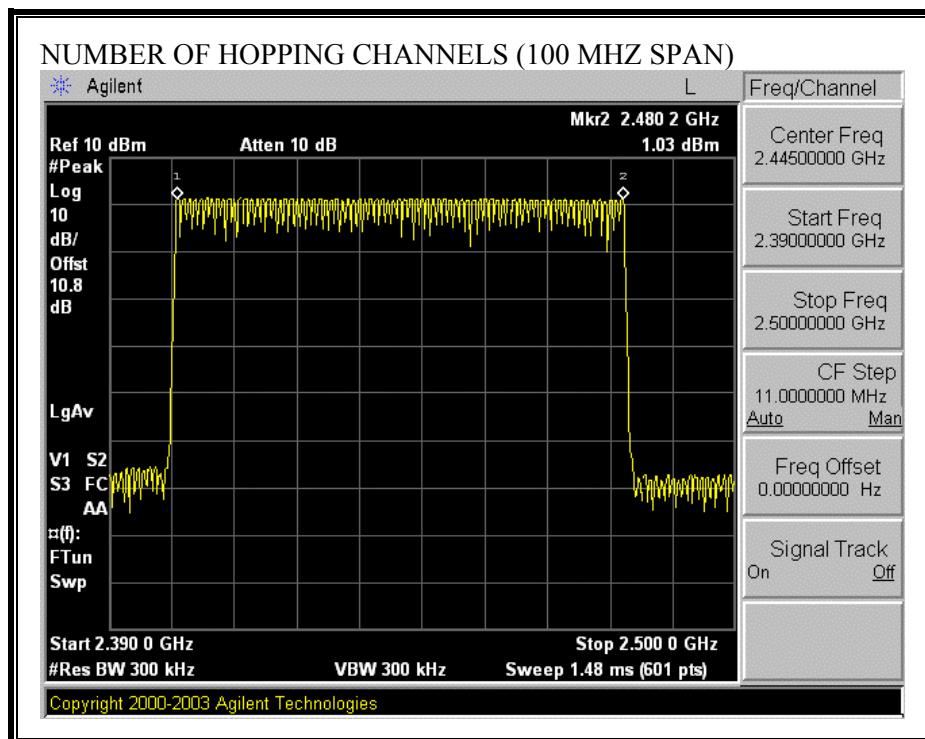

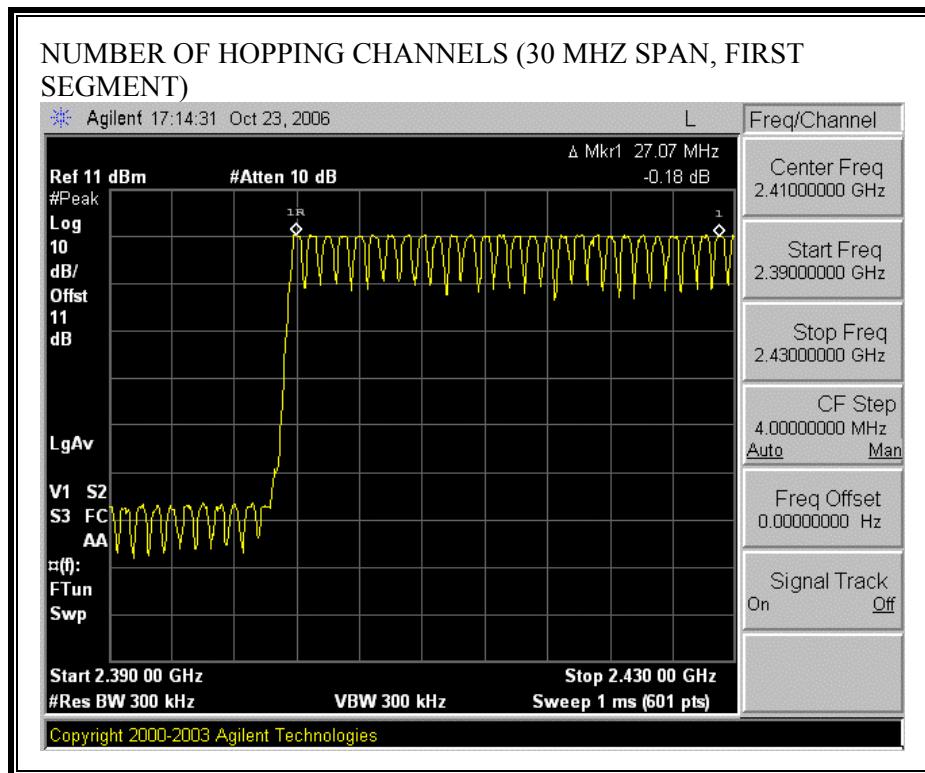

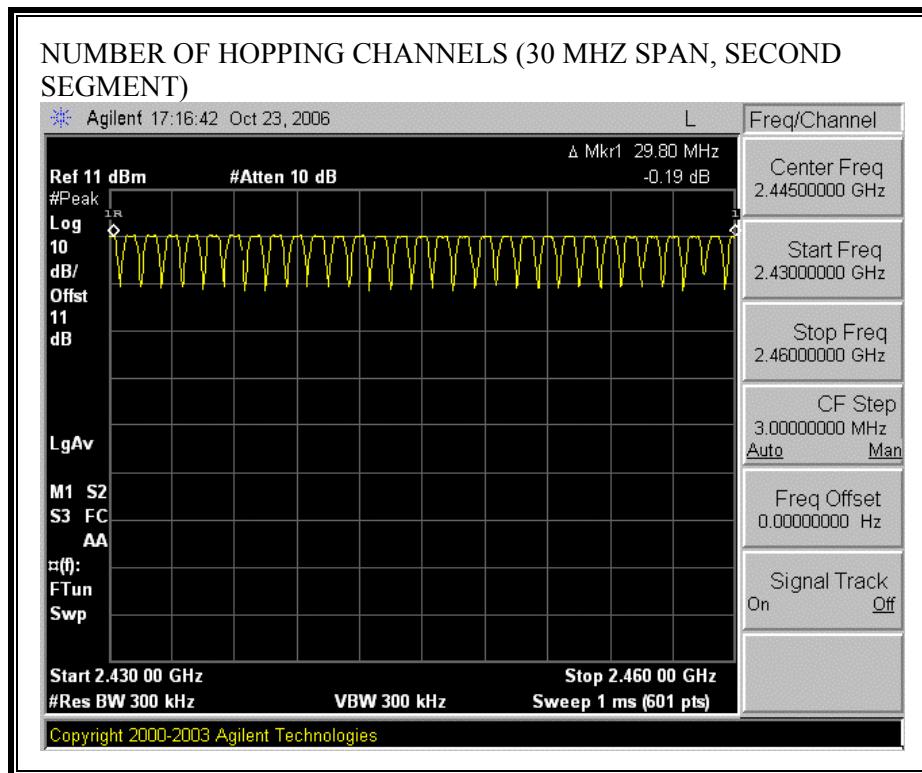

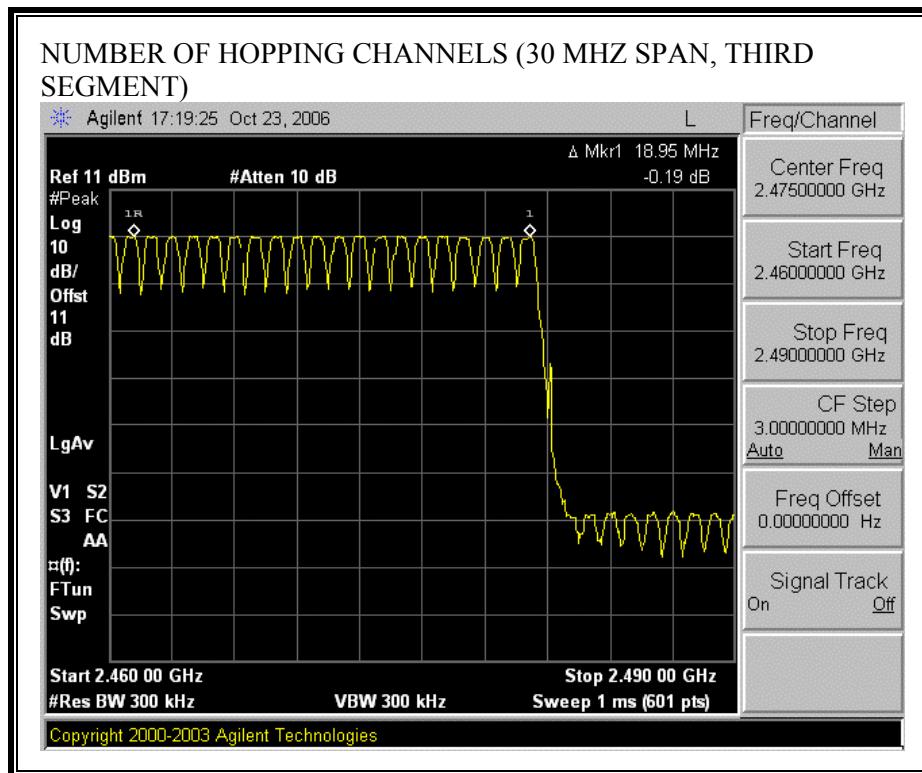

7.1.4. AVERAGE TIME OF OCCUPANCY

LIMIT

§15.247 (a) (1) (iii) Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

RESULTS


No non-compliance noted:

Time Of Occupancy = $10 * 13 \text{ pulses} * 2.875 \text{ msec} = 373.75 \text{ msec}$

PULSE WIDTH

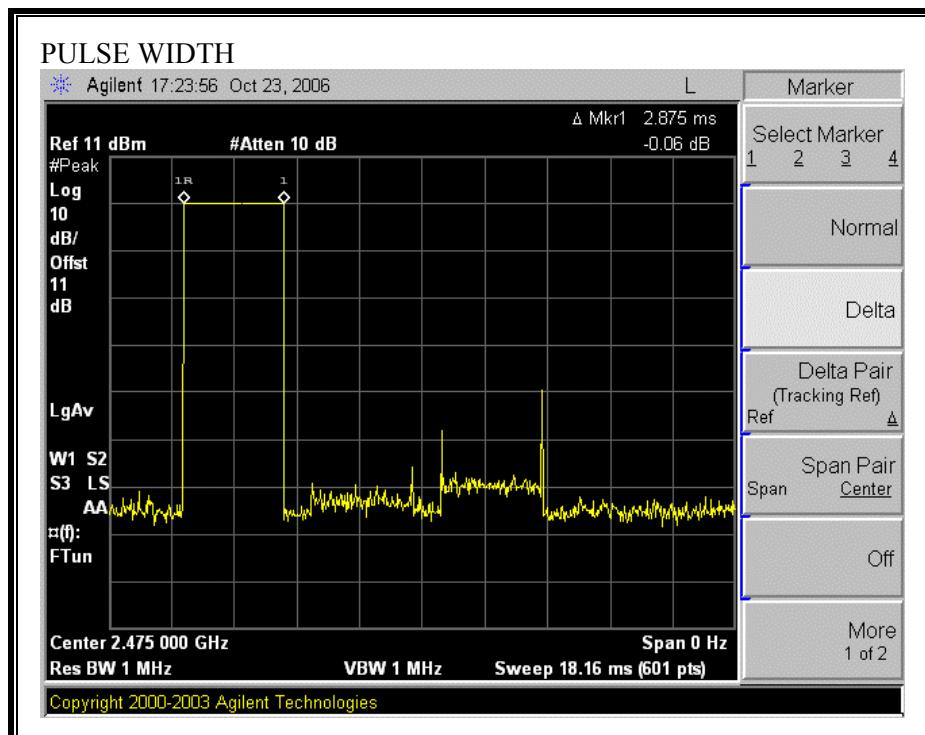

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

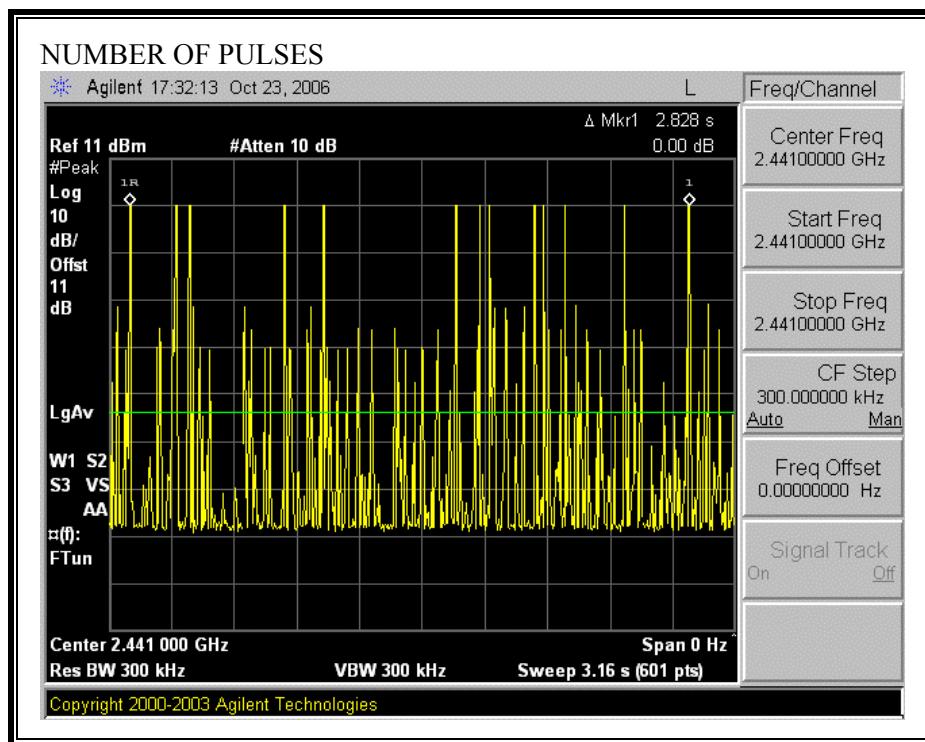

7.1.5. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain is -2 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer and the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


RESULTS


No non-compliance noted:

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	1.97	30	-28.03
Middle	2441	2.11	30	-27.89
High	2480	1.73	30	-28.27

OUTPUT POWER

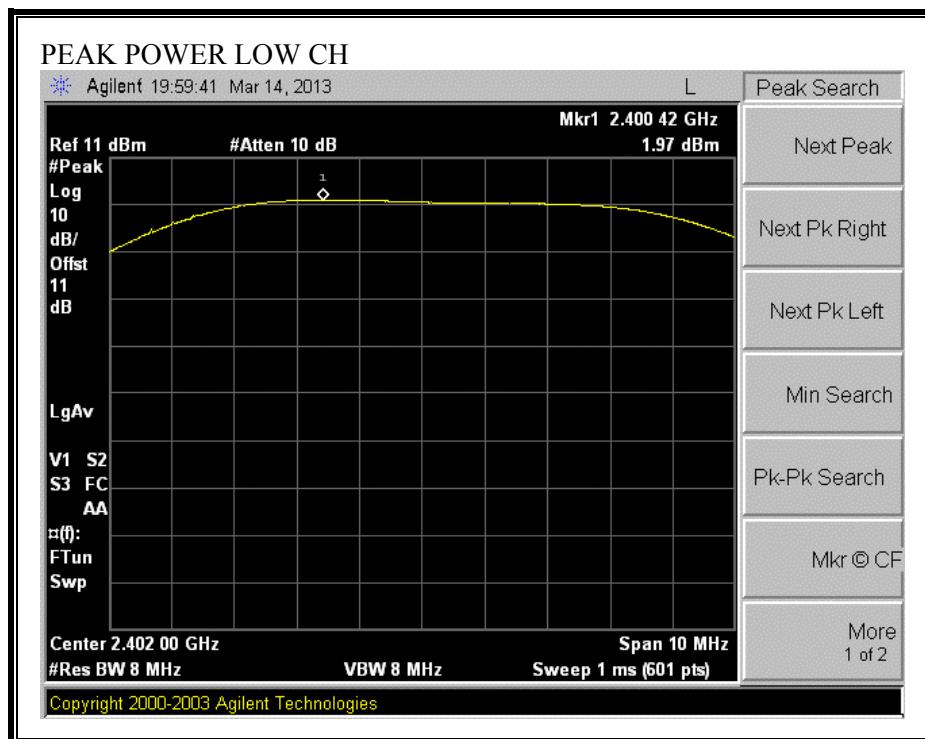

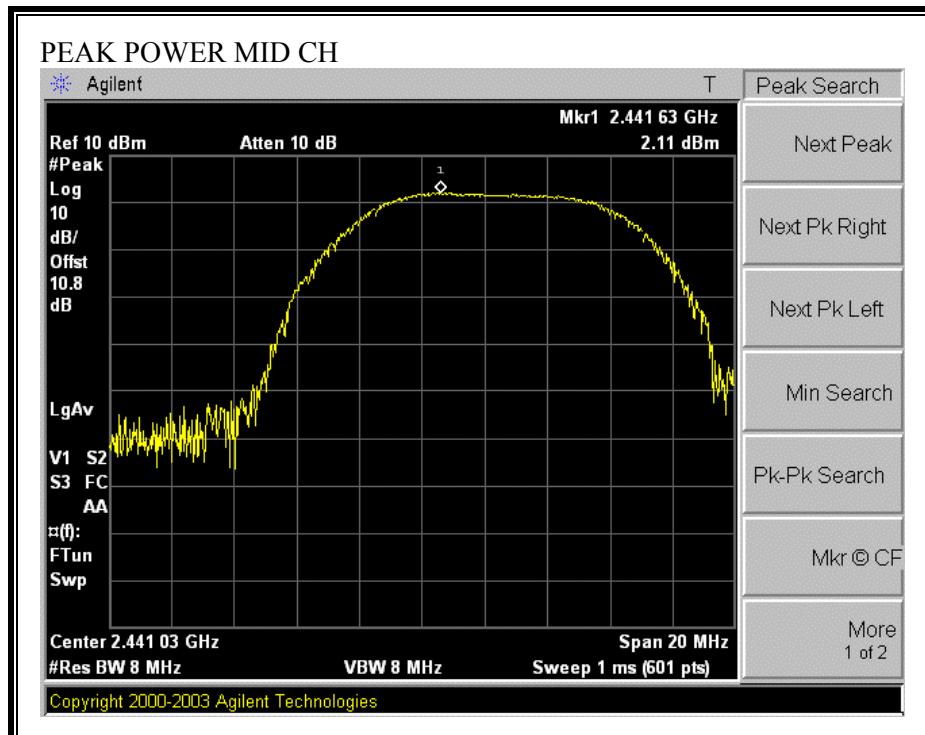

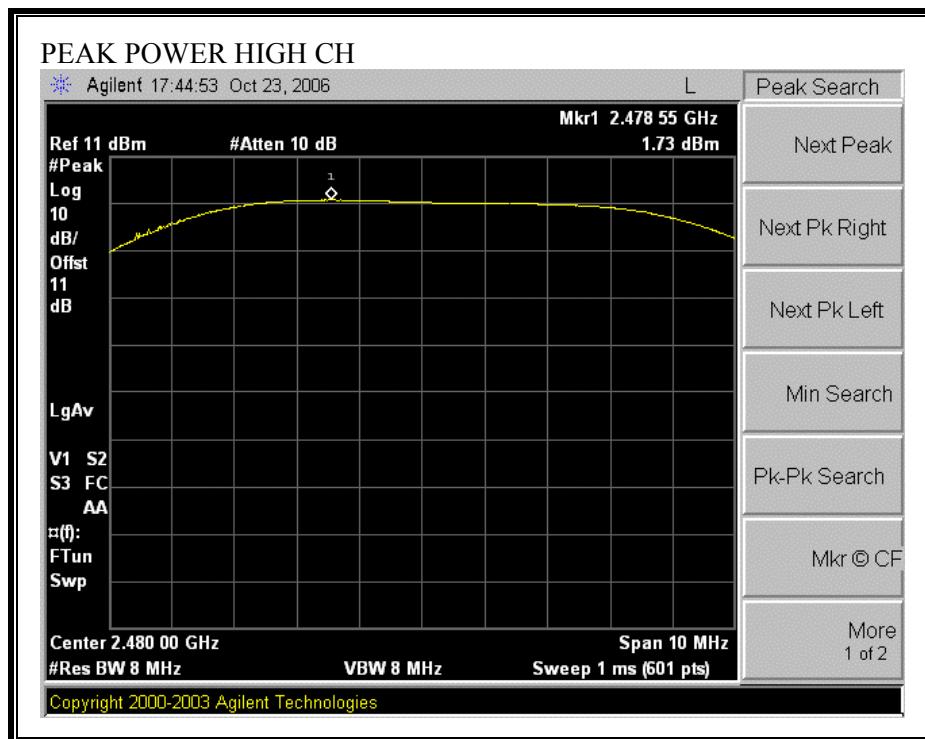

7.1.6. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P (\text{mW}) = P (\text{W}) / 1000 \text{ and}$$

$$d (\text{cm}) = 100 * d (\text{m})$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P (\text{mW}) = 10^{(P (\text{dBm}) / 10)} \text{ and}$$

$$G (\text{numeric}) = 10^{(G (\text{dBi}) / 10)}$$

yields

$$d = 0.282 * 10^{(P + G) / 20} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{(P + G) / 10} / (d^2)$$

LIMITS

From §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm²

RESULTS

No non-compliance noted: (MPE distance equals 20 cm)

Power Density Limit (mW/cm²)	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
1.0	2.11	-1.48	0.30

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

7.1.7. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 10.8 dB (including 10 dB pad and .8 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	-0.26
Middle	2441	-0.32
High	2480	-0.41

7.1.8. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

§15.247 (f) The digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.


RESULTS


No non-compliance noted:

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-6.26	8	-14.26
Middle	2441	-6.93	8	-14.93
High	2480	-6.61	8	-14.61

PEAK POWER SPECTRAL DENSITY

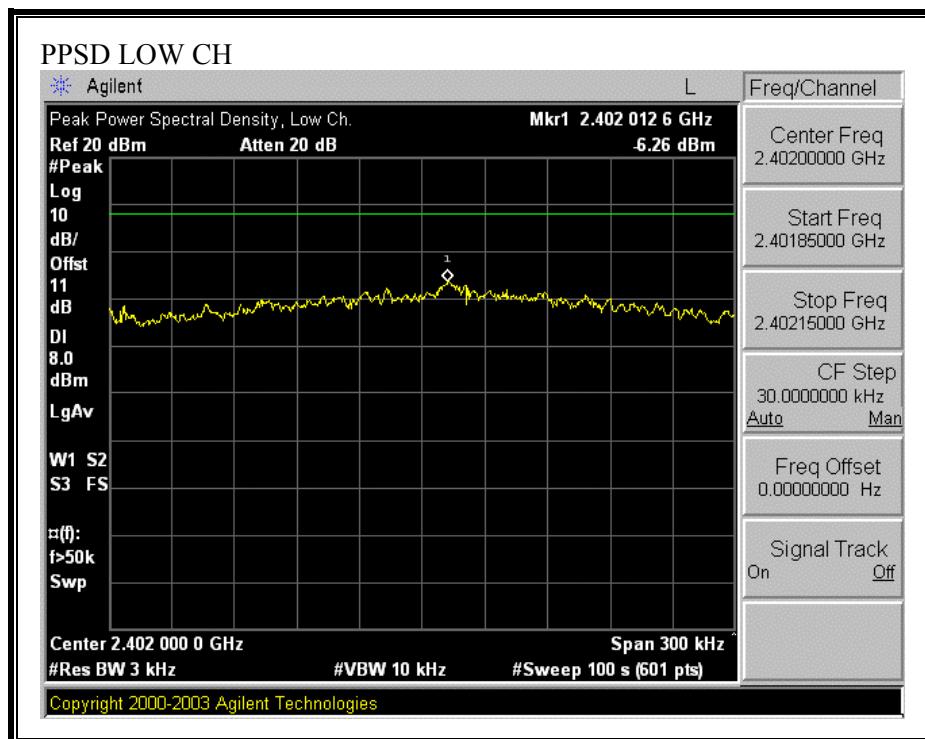

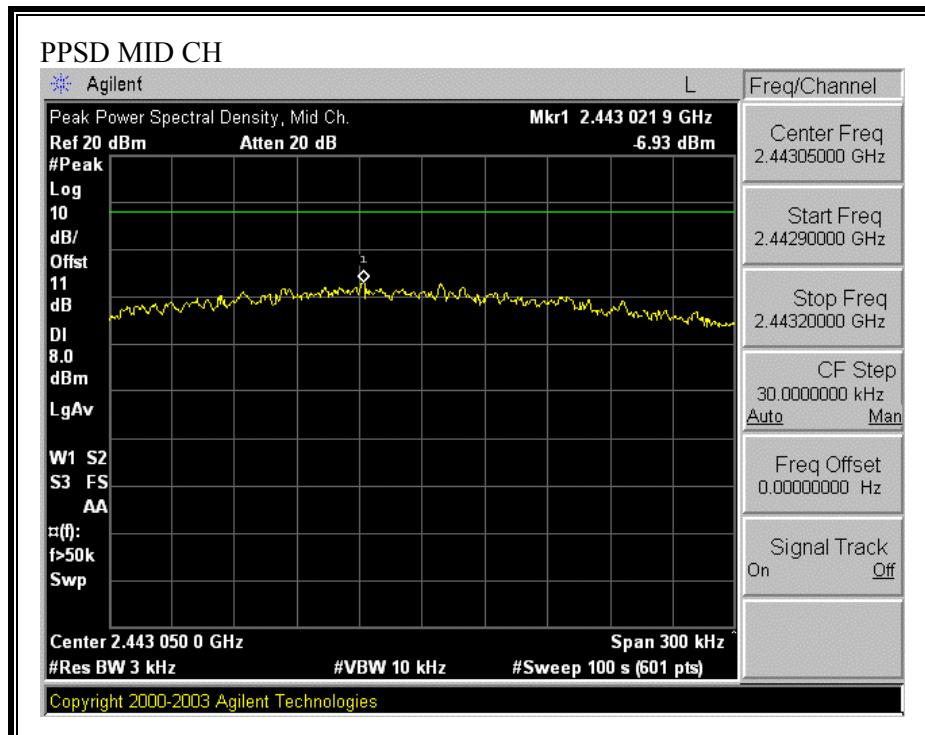

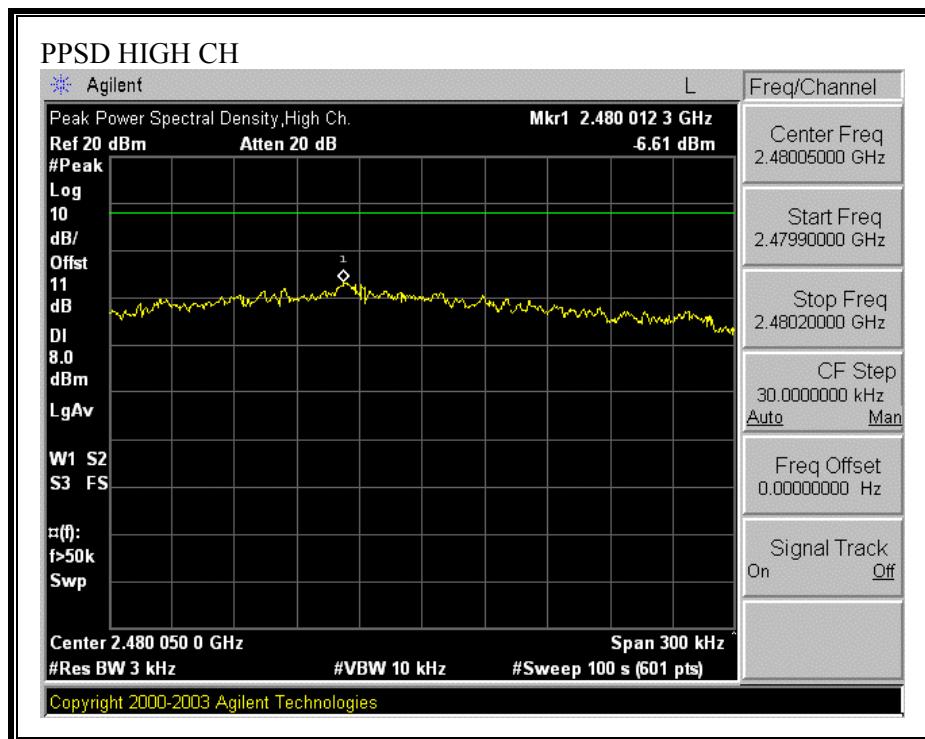

7.1.9. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS


No non-compliance noted:


SPURIOUS EMISSIONS, LOW CHANNEL

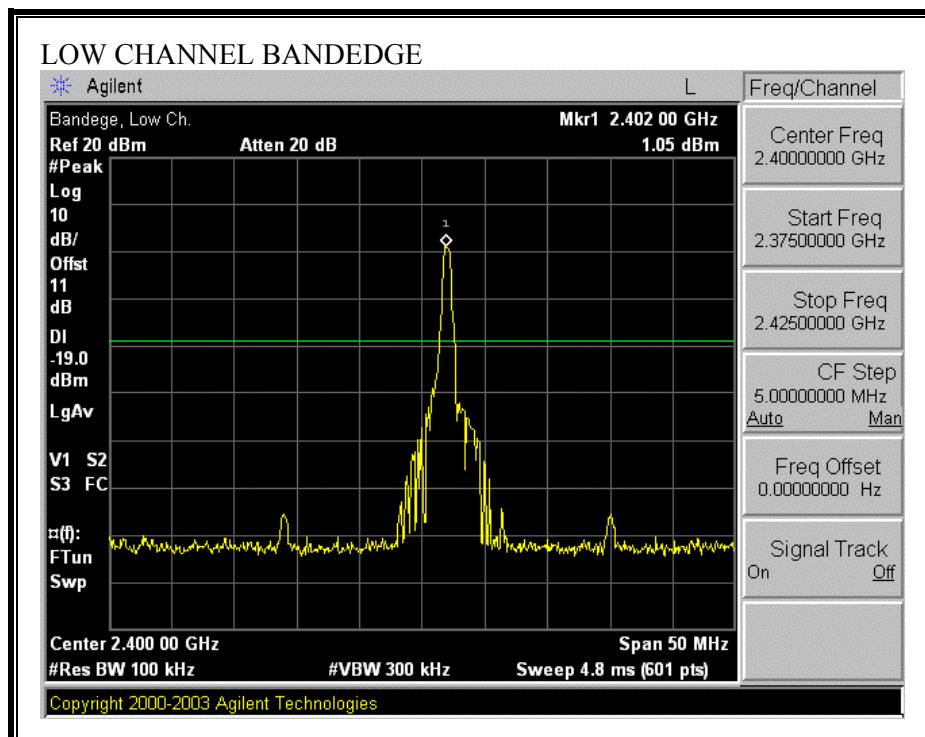

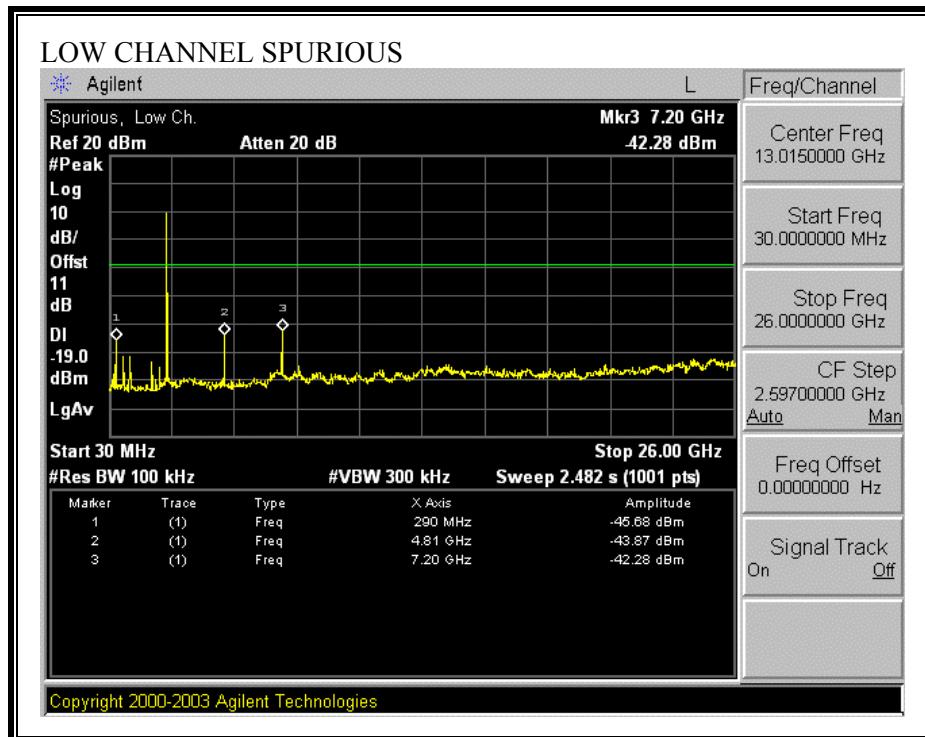



SPURIOUS EMISSIONS, MID CHANNEL

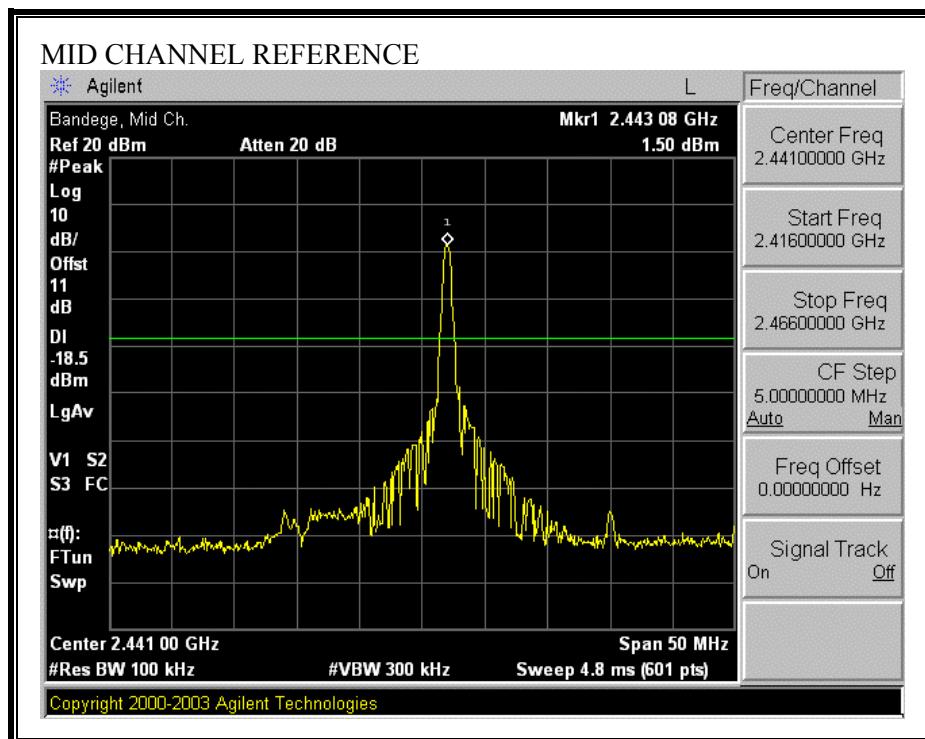

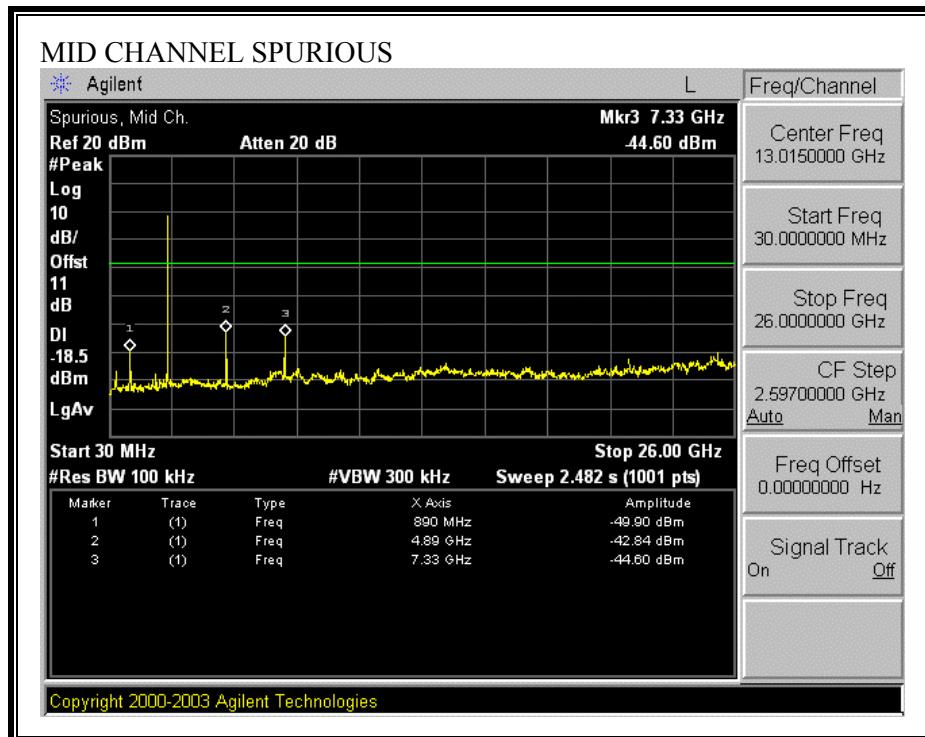


SPURIOUS EMISSIONS, HIGH CHANNEL

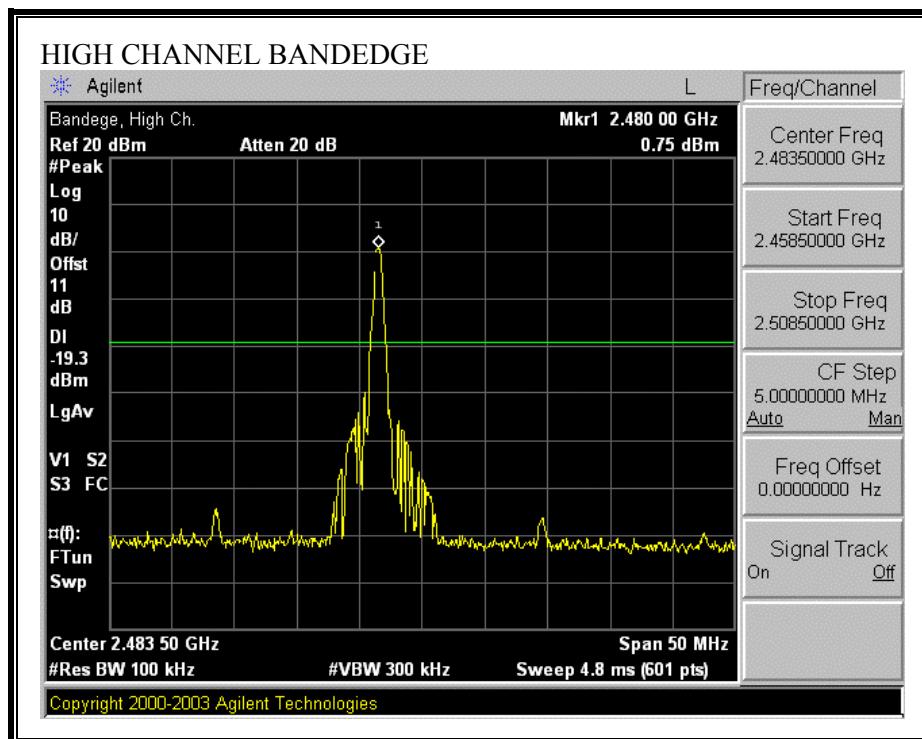

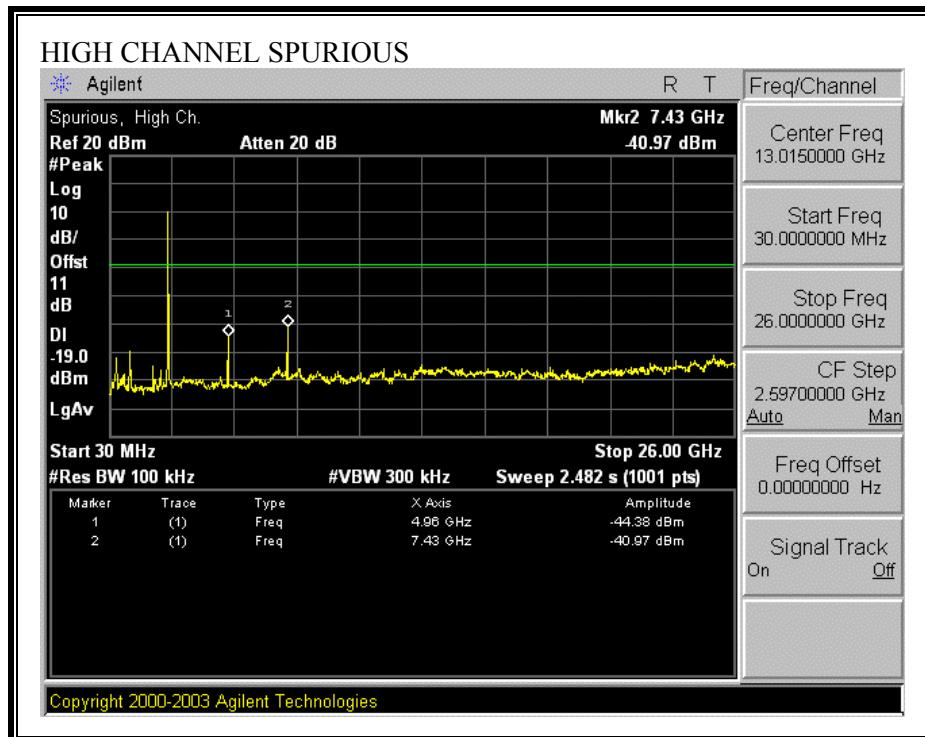

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

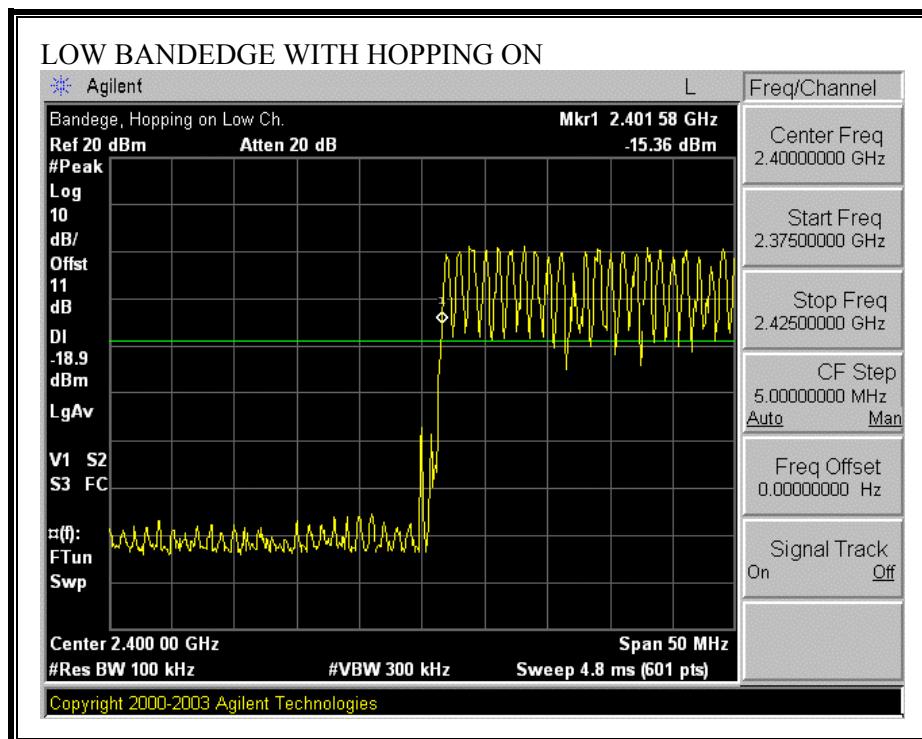



7.2. RADIATED EMISSIONS

7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


7.2.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

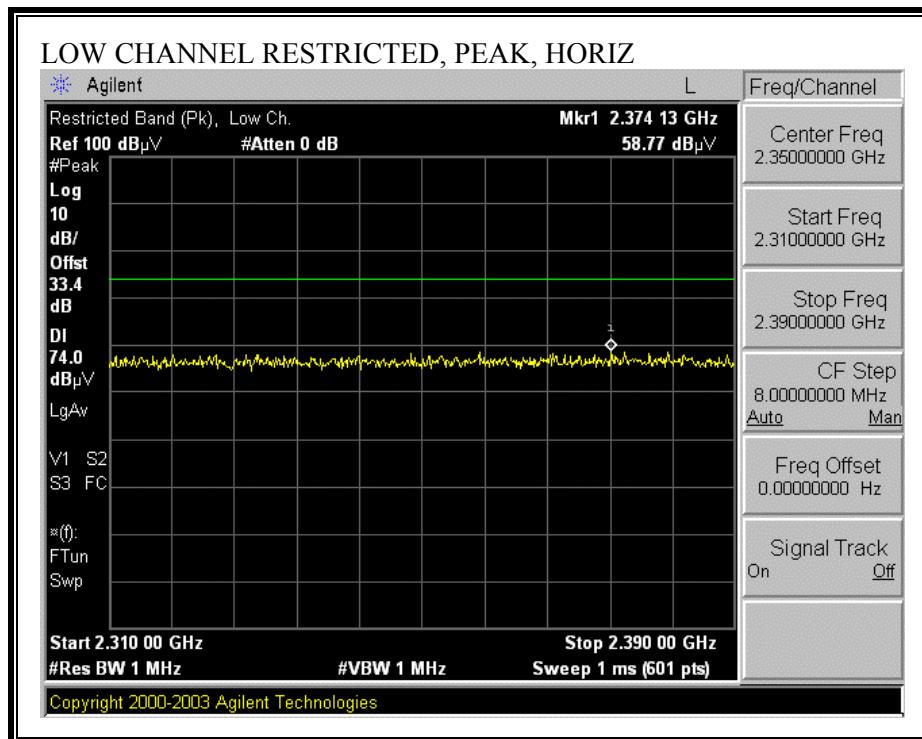

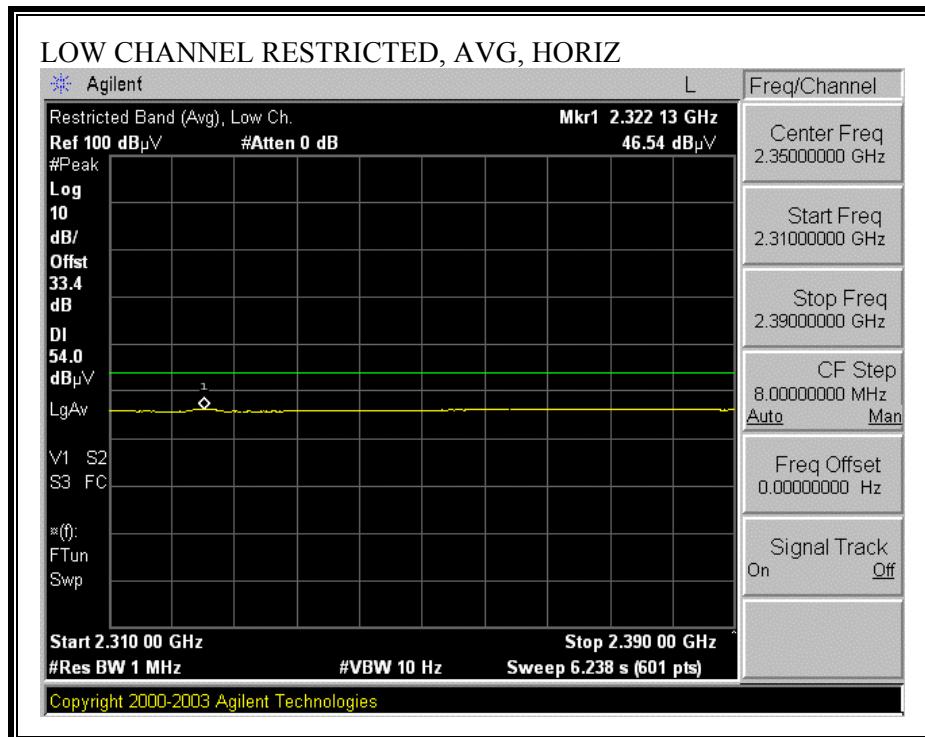



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

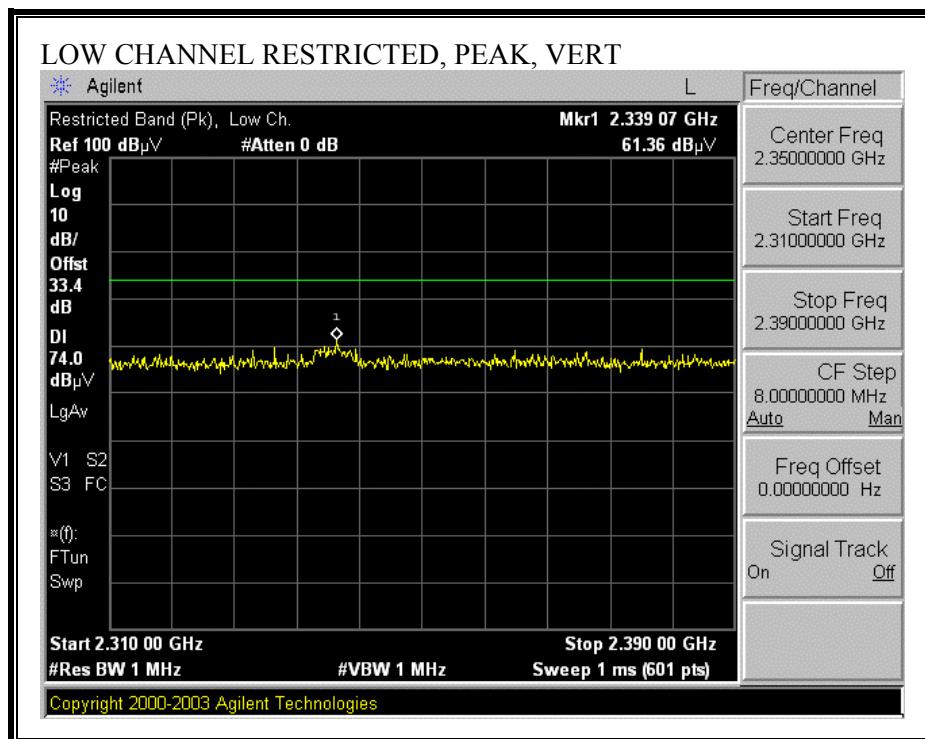

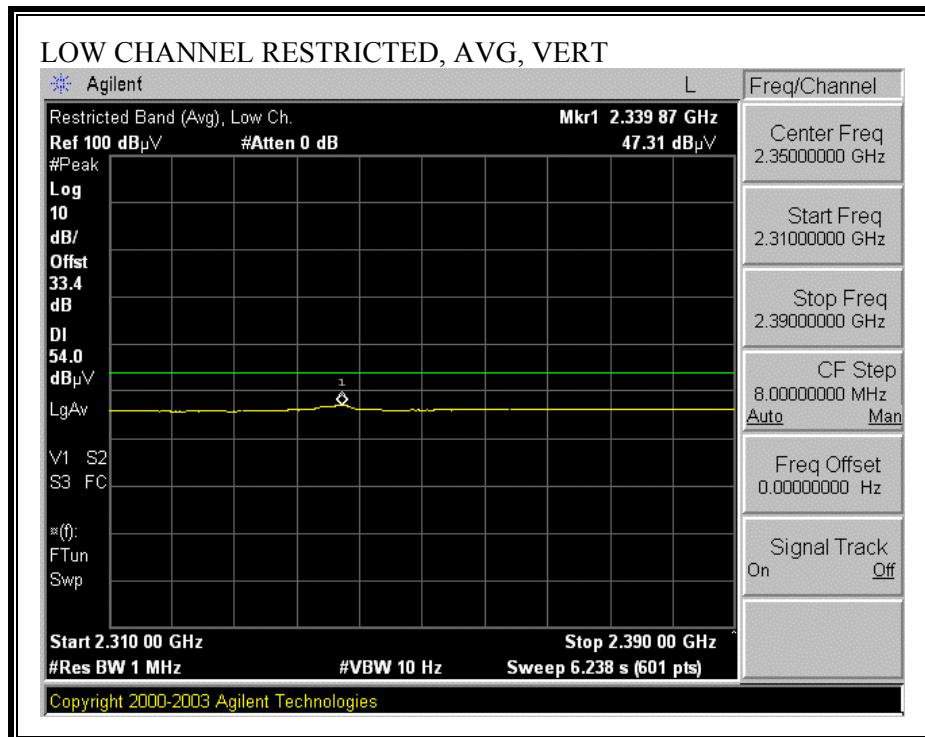



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

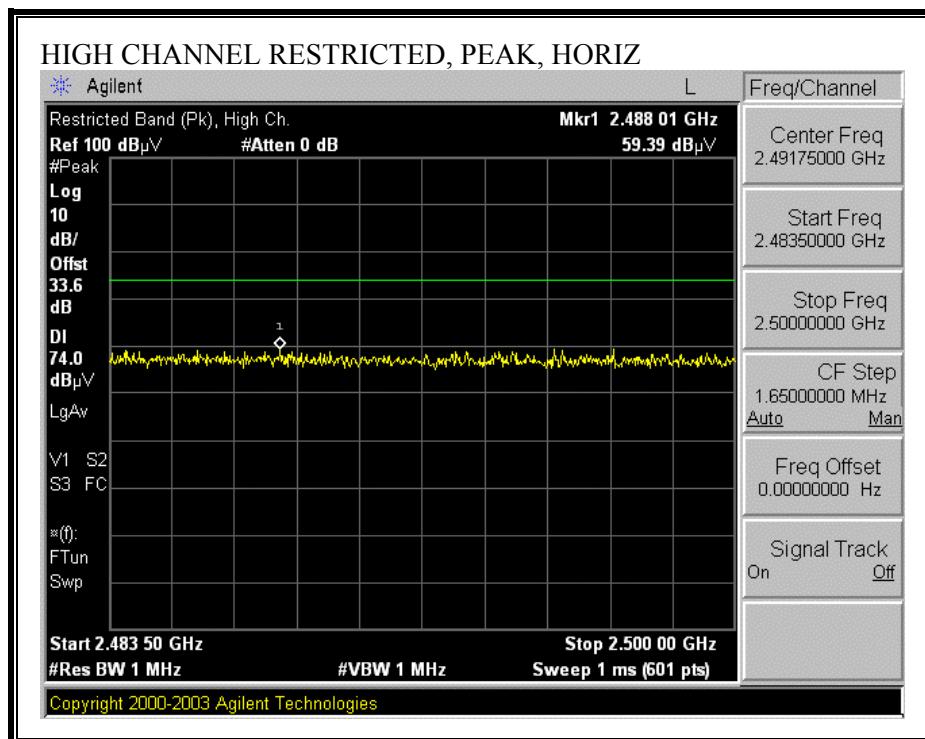

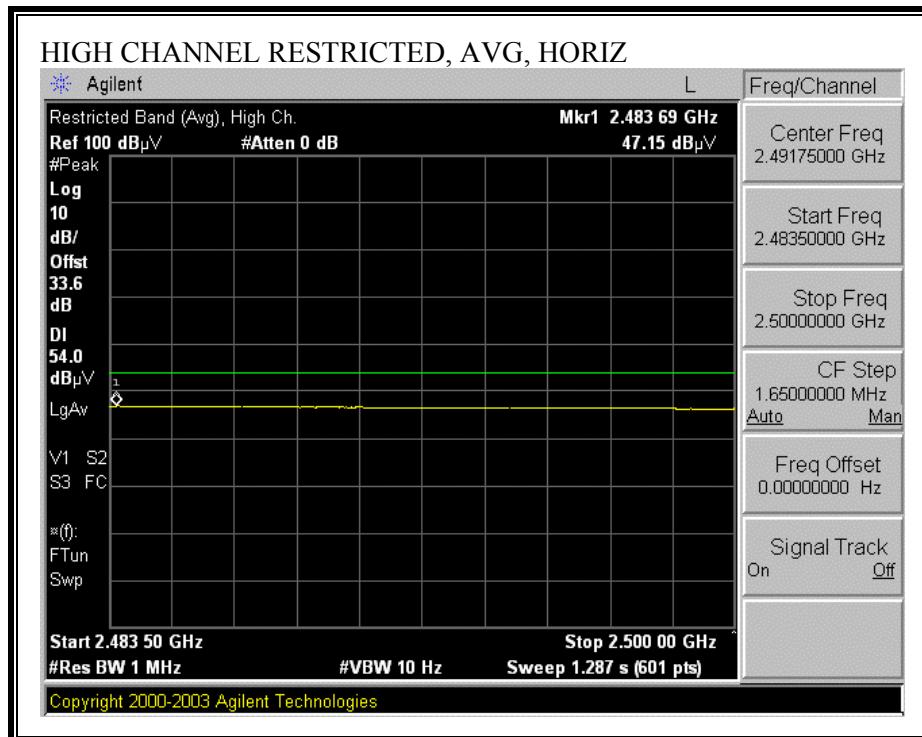

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

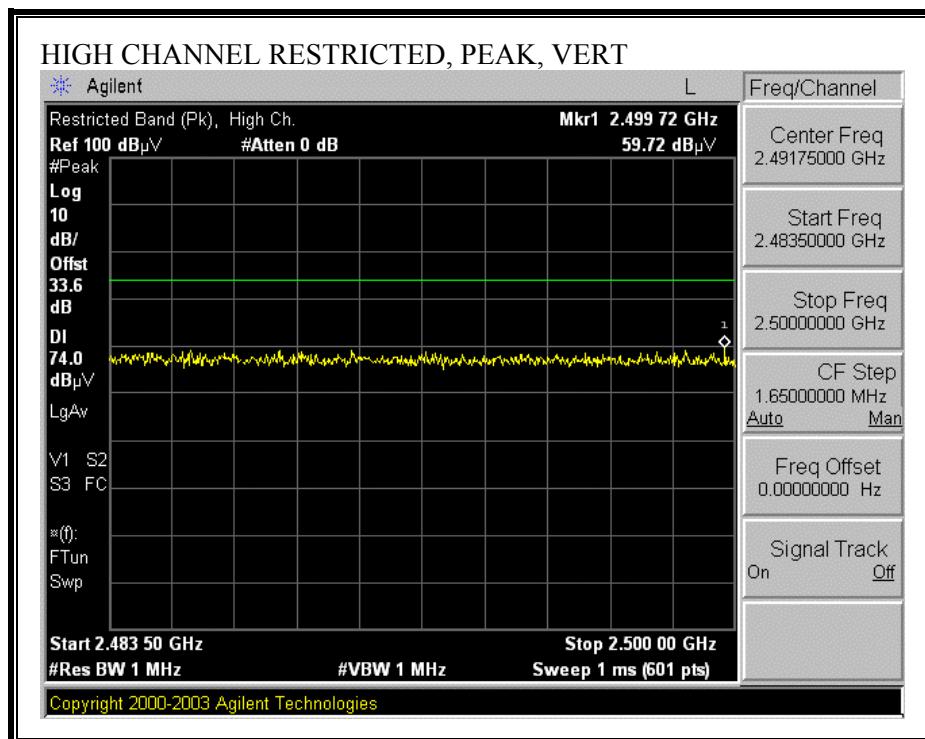

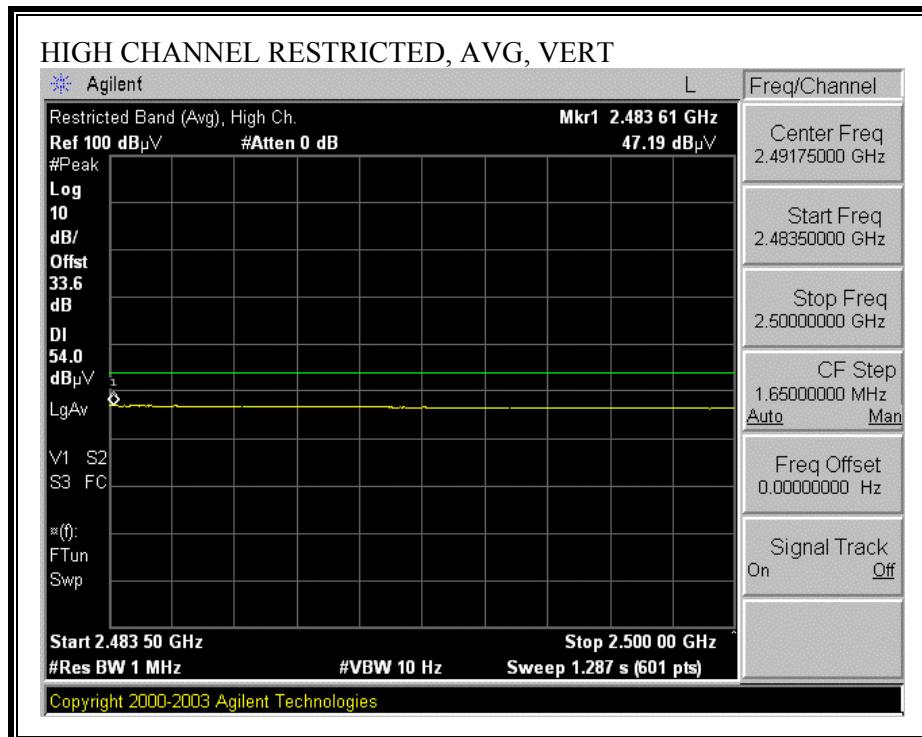

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site															
Company: GLOBAL CERTIFICATION CORPORATION Project #: 06U10658 Date: 10/24/2006 Test Engineer: THANH NGUYEN Configuration: EUT, Extender card, Laptop Mode: Transmit															
Test Equipment:															
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit			
T119; S/N: 29301 @3m			T145 Agilent 3008A0050									FCC 15.209			
Hi Frequency Cables															
2 foot cable			3 foot cable			12 foot cable			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz
Thanh 177079008						Thanh 208946003			HPF_4.0GHz						Average Measurements RBW=1MHz ; VBW=10Hz
f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
High Channel															
4.960	3.0	47.20	37.96	33.8	2.8	-34.9	0.0	0.6	49.6	40.3	74	54	-24.4	-13.7	V
7.444	3.0	47.30	38.77	35.2	3.3	-34.6	0.0	0.6	51.8	43.3	74	54	-22.2	-10.7	V
9.920	3.0	43.99	30.74	36.5	3.8	-35.1	0.0	0.8	50.0	36.8	74	54	-24.0	-17.2	V
4.960	3.0	46.57	36.65	33.8	2.8	-34.9	0.0	0.6	49.0	39.0	74	54	-25.0	-15.0	H
7.444	3.0	43.34	33.13	35.2	3.3	-34.6	0.0	0.6	47.9	37.7	74	54	-26.1	-16.3	H
9.920	3.0	43.09	30.75	36.5	3.8	-35.1	0.0	0.8	49.1	36.8	74	54	-24.9	-17.2	H
Mid Channel															
4.882	3.0	45.42	33.37	33.7	2.8	-34.9	0.0	0.6	47.7	35.7	74	54	-26.3	-18.3	V
7.323	3.0	44.74	35.81	35.2	3.3	-34.7	0.0	0.6	49.2	40.3	74	54	-24.8	-13.7	V
9.764	3.0	41.85	30.04	36.3	3.7	-35.0	0.0	0.8	47.7	35.9	74	54	-26.3	-18.1	V
4.882	3.0	45.35	37.69	33.7	2.8	-34.9	0.0	0.6	47.7	40.0	74	54	-26.3	-14.0	H
7.323	3.0	48.72	40.81	35.2	3.3	-34.7	0.0	0.6	53.2	45.3	74	54	-20.8	-8.7	H
9.764	3.0	42.18	30.86	36.3	3.7	-35.0	0.0	0.8	48.0	36.7	74	54	-26.0	-17.3	H
Low Channel															
4.804	3.0	46.27	38.18	33.7	2.8	-34.8	0.0	0.6	48.5	40.4	74	54	-25.5	-13.6	H
7.206	3.0	53.26	45.77	35.2	3.3	-34.7	0.0	0.6	50.7	50.2	74	54	-16.3	-3.8	H
9.608	3.0	43.64	32.41	36.2	3.7	-35.0	0.0	0.8	49.4	38.1	74	54	-24.6	-15.9	H
4.804	3.0	46.39	35.61	33.7	2.8	-34.8	0.0	0.6	48.6	37.8	74	54	-25.4	-16.2	V
7.206	3.0	51.00	42.46	35.2	3.3	-34.7	0.0	0.6	55.4	46.9	74	54	-18.6	-7.1	V
9.608	3.0	42.84	33.55	36.2	3.7	-35.0	0.0	0.8	48.6	39.3	74	54	-25.4	-14.7	V
No other emissions were detected above 4th harmonics															
Rev. 5.1.6															
f Measurement Frequency					Amp Preamp Gain					Avg Lim Average Field Strength Limit					
Dist Distance to Antenna					D Corr Distance Correct to 3 meters					Pk Lim Peak Field Strength Limit					
Read Analyzer Reading					Avg Average Field Strength @ 3 m					Avg Mar Margin vs. Average Limit					
AF Antenna Factor					Peak Calculated Peak Field Strength					Pk Mar Margin vs. Peak Limit					
CL Cable Loss					HPF High Pass Filter										

7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

HORIZONTAL DATA



FCC, VCCI, CISPR, CE, AUSTEL, NZ
UL, CSA, TUV, BSMI, DHHS, NVLAP

561F MONTEREY ROAD, SAN JOSE, CA 95037-9001
PHONE: (408) 463-0885 FAX: (408) 463-0888

Project #: 06U10658
Report #: 061026B1
Date & Time: 10/26/06 11:09 AM
Test Engr: Thanh Nguyen

Company: Global Certification Corporation
EUT Description: Bluetooth Serial Port Module
Test Configuration: EUT and Support Equipment
Type of Test: FCC&IC Class B
Mode of Operation: Transmit Worst case

[<< Main Sheet](#)

Freq. (MHz)	Reading (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Level (dBuV/m)	Limit FCC_B	Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)	Mark (P/Q/A)
90.00	52.90	8.82	2.53	29.07	35.18	43.50	-8.32	3mV	180.00	1.00	P
515.45	42.25	17.34	6.89	29.24	37.23	46.00	-8.77	3mV	0.00	1.50	P
355.57	45.68	14.51	5.45	28.49	37.16	46.00	-8.84	3mV	0.00	1.50	P
180.50	50.35	9.31	3.61	28.79	34.48	43.50	-9.02	3mV	180.00	1.00	P
795.50	34.25	19.84	9.09	28.54	34.65	46.00	-11.35	3mV	180.00	1.50	P
450.45	40.67	16.36	6.32	28.98	34.37	46.00	-11.63	3mH	0.00	1.50	P
6 Worst Data											

7.3. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

No non-compliance noted:


6 WORST EMISSIONS EUT

CONDUCTED EMISSIONS DATA (115VAC 60Hz)										
Freq. (MHz)	Reading			Closs (dB)	Limit	EN_B		Margin		Remark
	PK (dBuV)	QP (dBuV)	AV (dBuV)			QP	AV	QP (dB)	AV (dB)	
0.25	44.80	--	--	0.00	61.89	51.89	-17.09	-7.09	L1	
0.51	40.00	--	--	0.00	56.00	46.00	-16.00	-6.00	L1	
0.74	39.61	--	--	0.00	56.00	46.00	-16.39	-6.39	L1	
0.25	47.98	--	--	0.00	61.82	51.82	-13.84	-3.84	L2	
0.49	40.75	--	--	0.00	56.10	46.10	-15.35	-5.35	L2	
0.71	38.54	--	--	0.00	56.00	46.00	-17.46	-7.46	L2	
6 Worst Data										

LINE 1 RESULTS

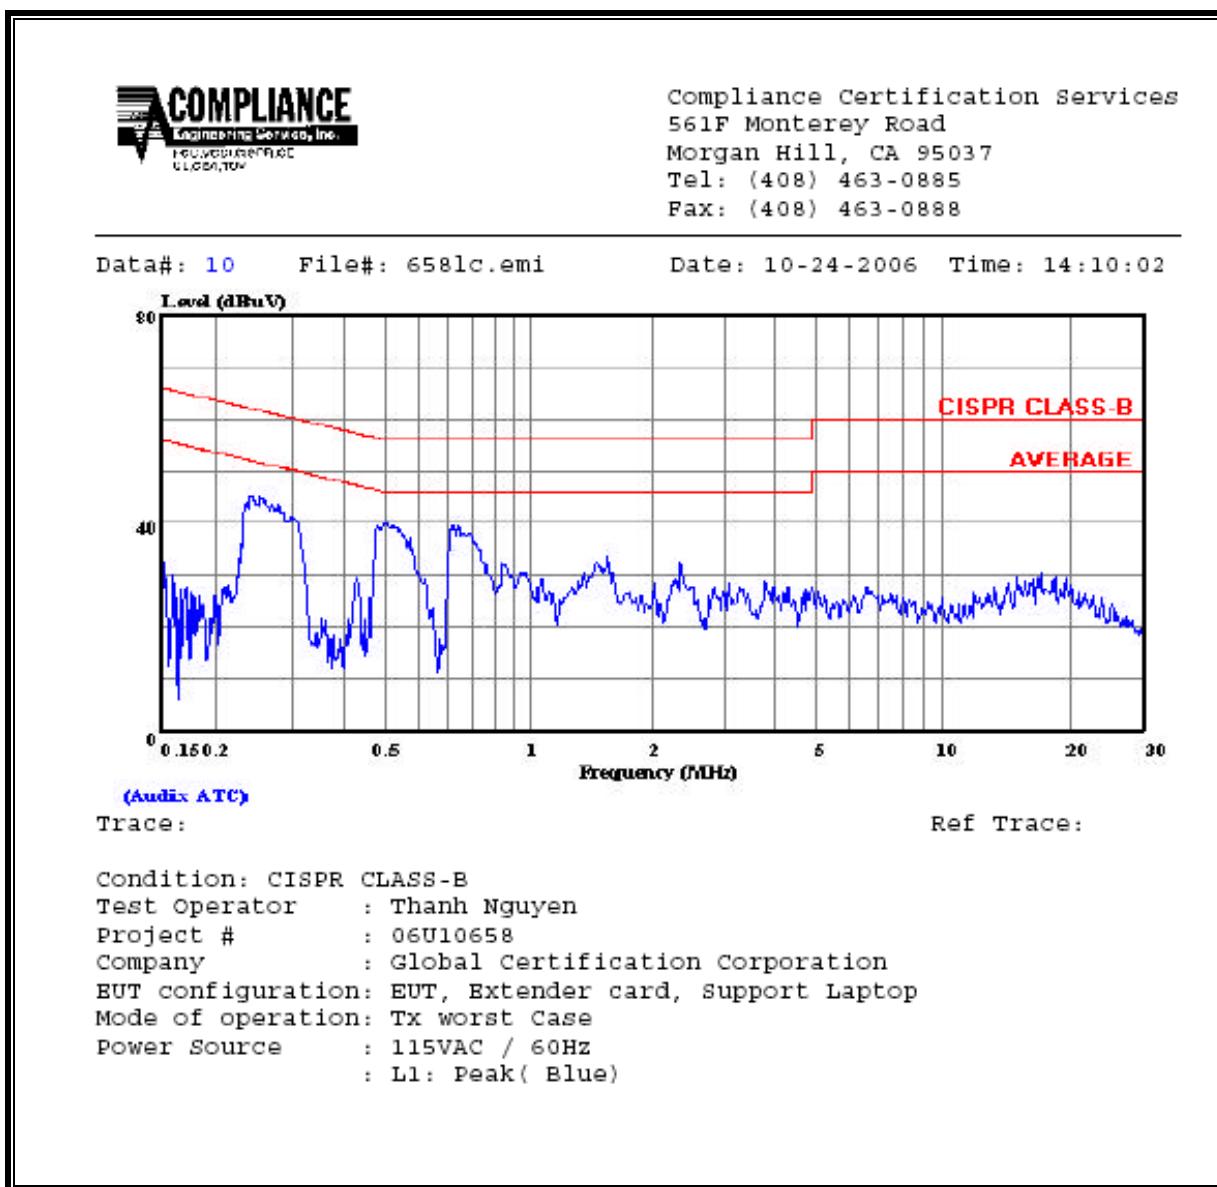


LINE 2 RESULTS

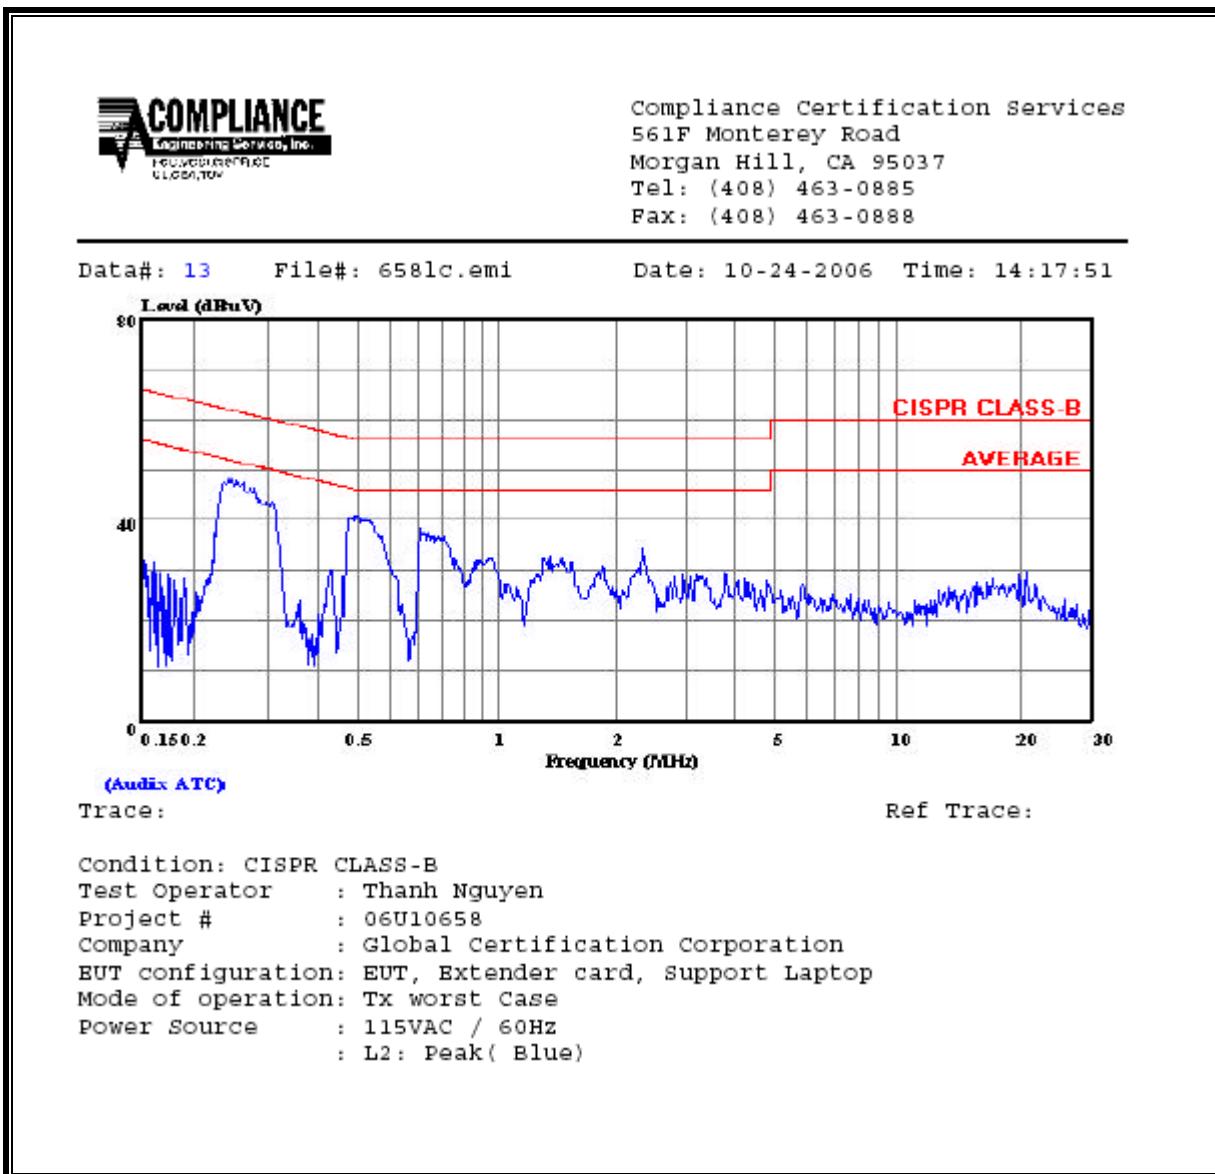


6 WORST EMISSIONS (Support Laptop)

CONDUCTED EMISSIONS DATA (115VAC 60Hz)										
Freq. (MHz)	Reading			Closs (dB)	Limit	EN_B		Margin		Remark
	PK (dBuV)	QP (dBuV)	AV (dBuV)			QP	AV	QP (dB)	AV (dB)	
0.15	57.96	--	46.03	0.00	66.00	56.00	-8.04	-9.97	L1	
0.21	53.16	--	41.05	0.00	63.09	53.09	-9.93	-12.04	L1	
0.28	50.71	--	38.91	0.00	60.76	50.76	-10.05	-11.85	L1	
0.15	59.16	--	47.25	0.00	66.00	56.00	-6.84	-8.75	L2	
0.28	50.20	--	38.76	0.00	60.73	50.73	-10.53	-11.97	L2	
0.51	46.57	--	38.25	0.00	56.00	46.00	-9.43	-7.75	L2	
6 Worst Data										

LINE 1 RESULTS

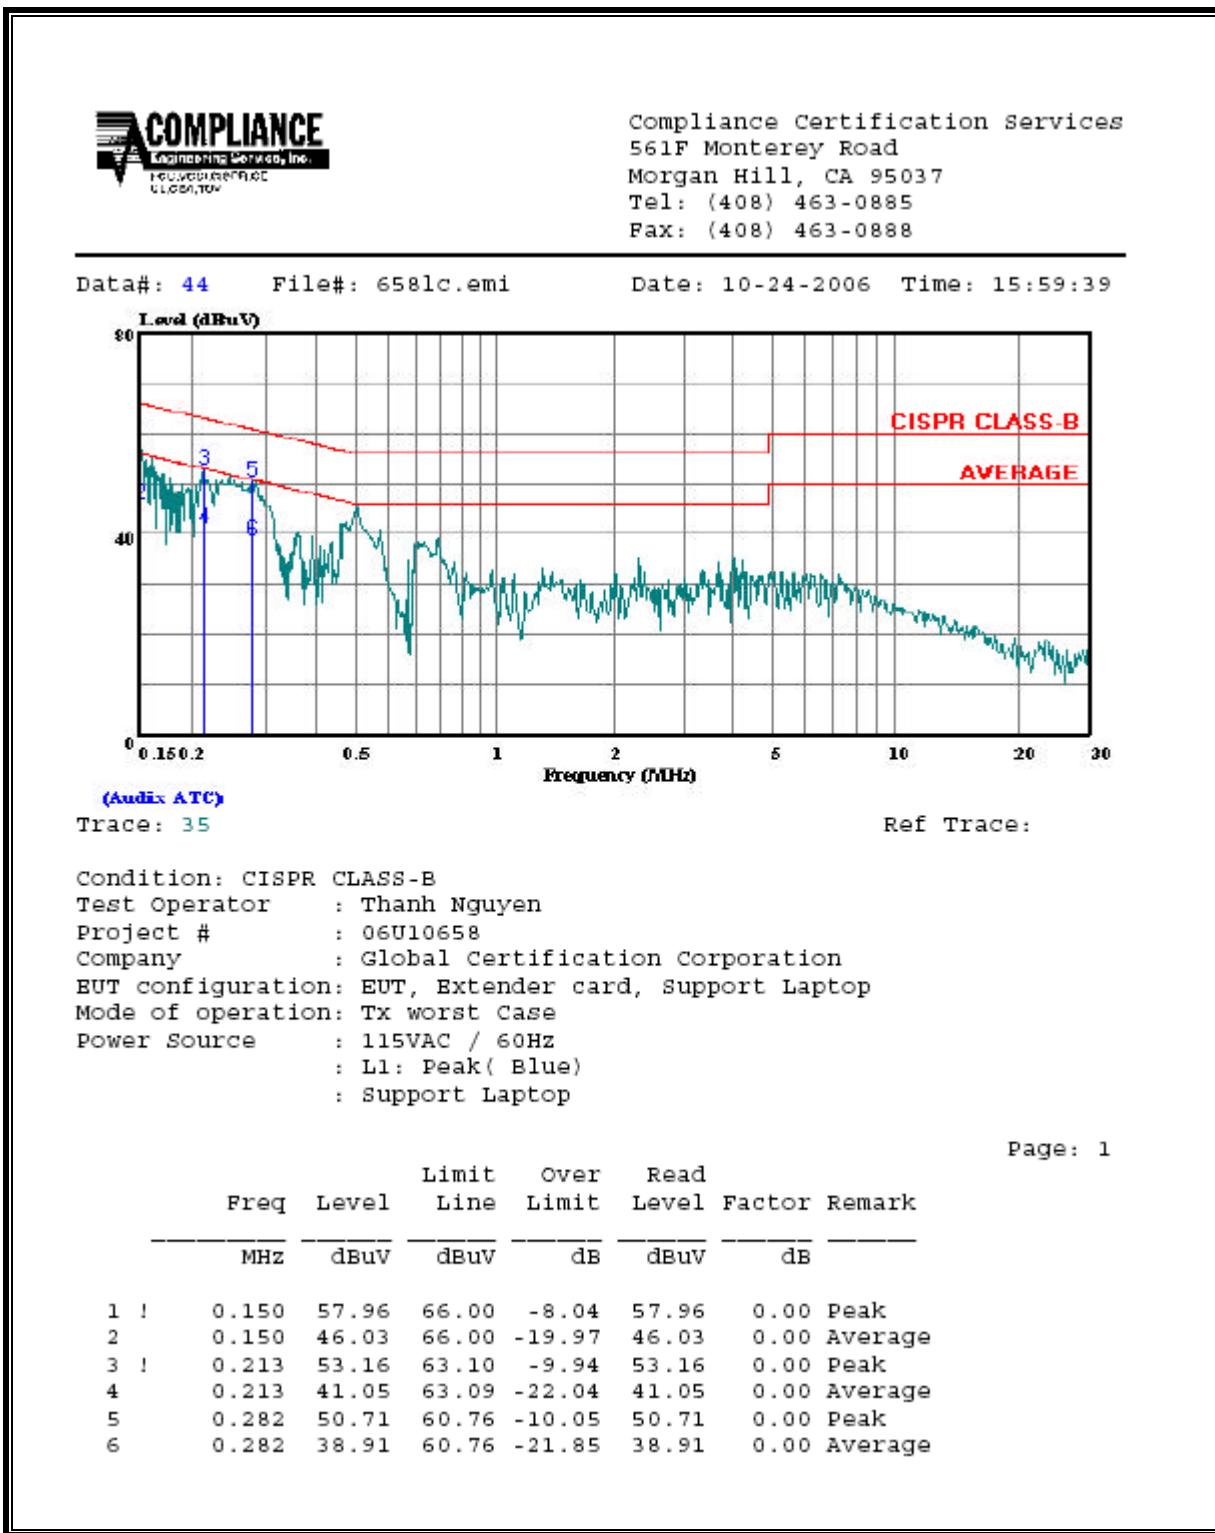


LINE 2 RESULTS

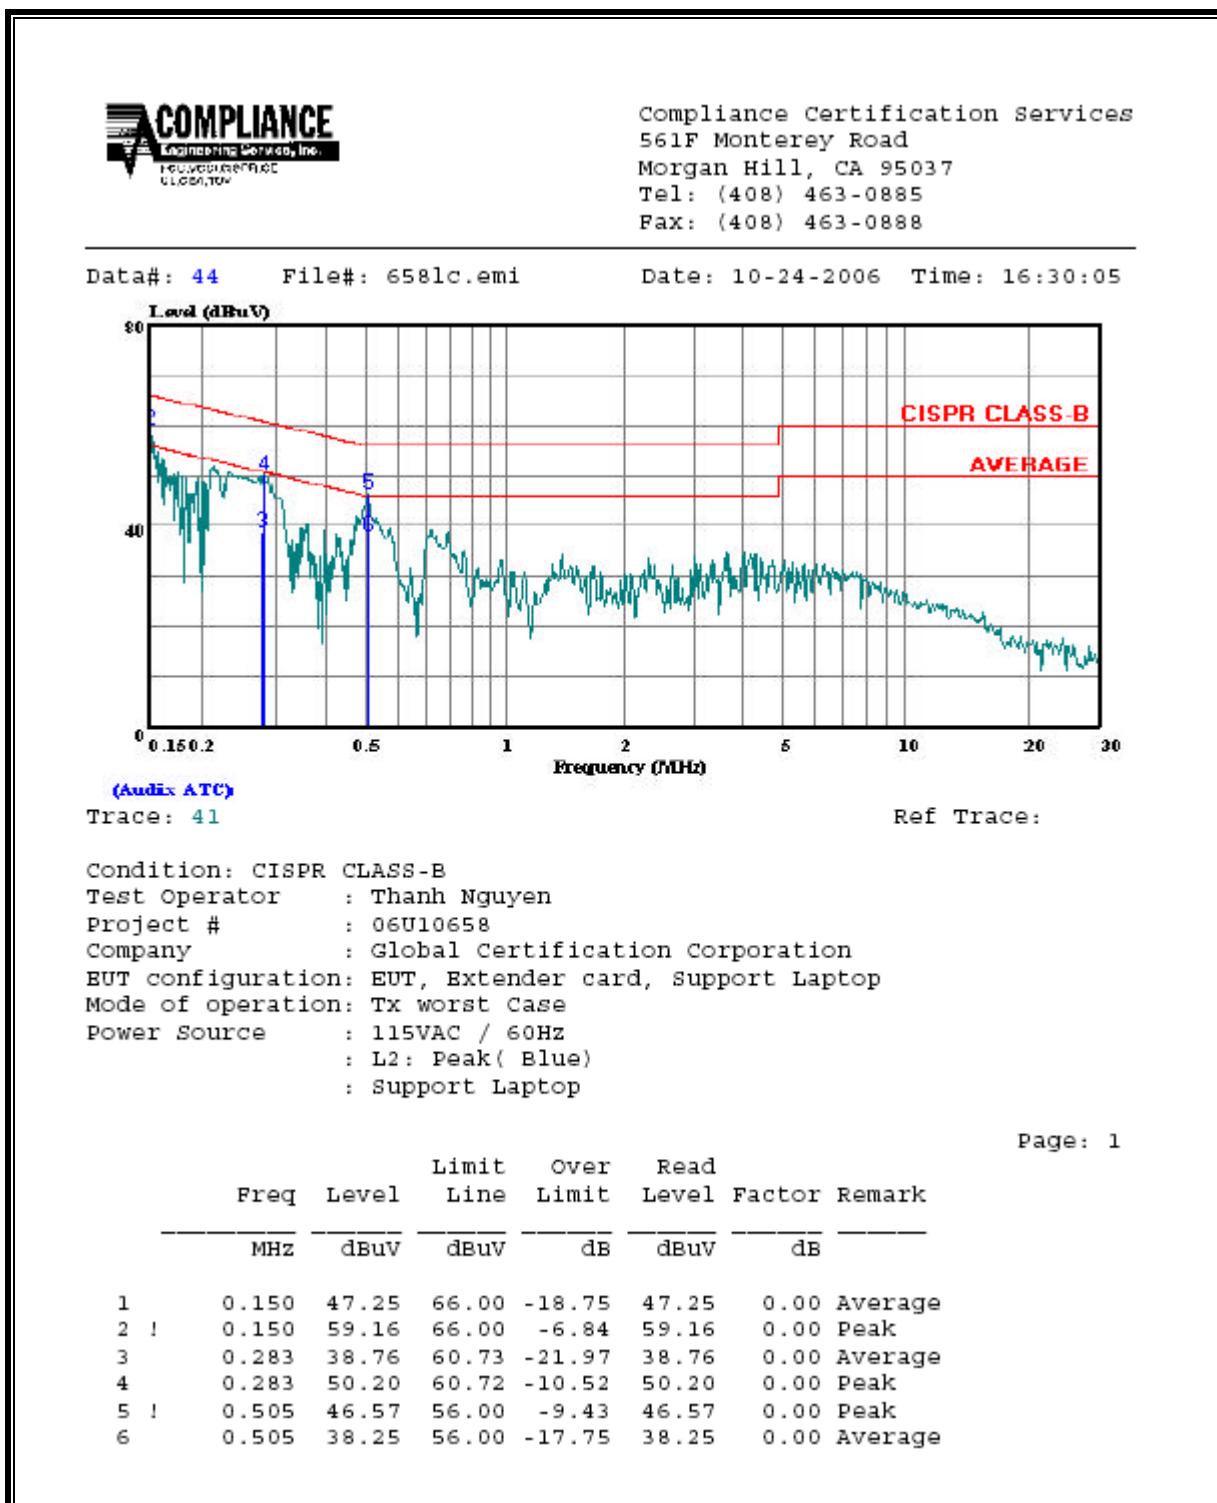



8. SETUP PHOTOS

ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

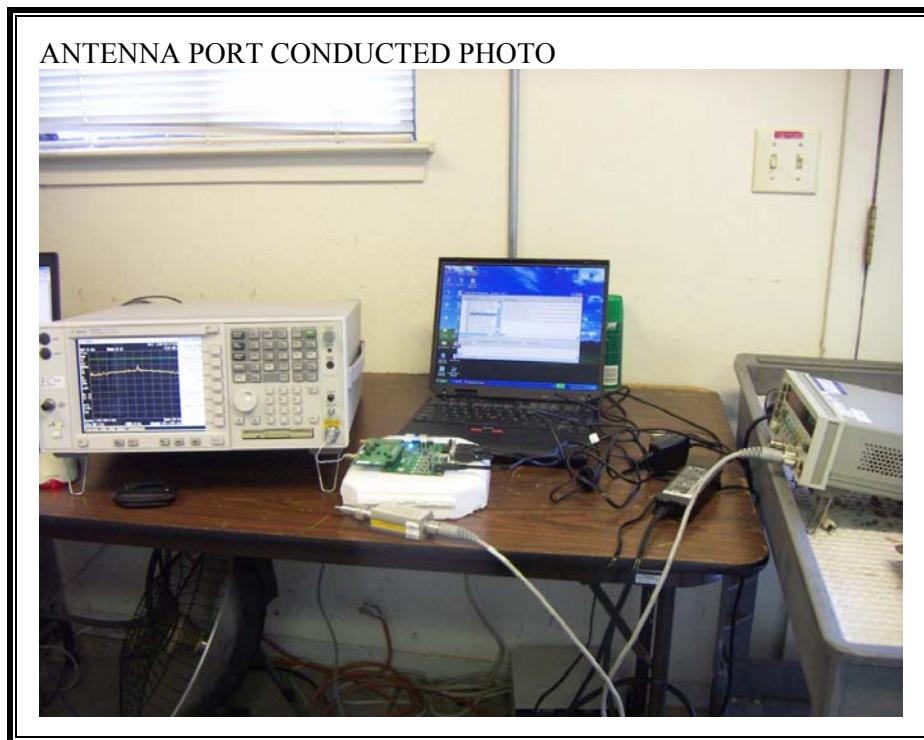


RADIATED RF MEASUREMENT SETUP

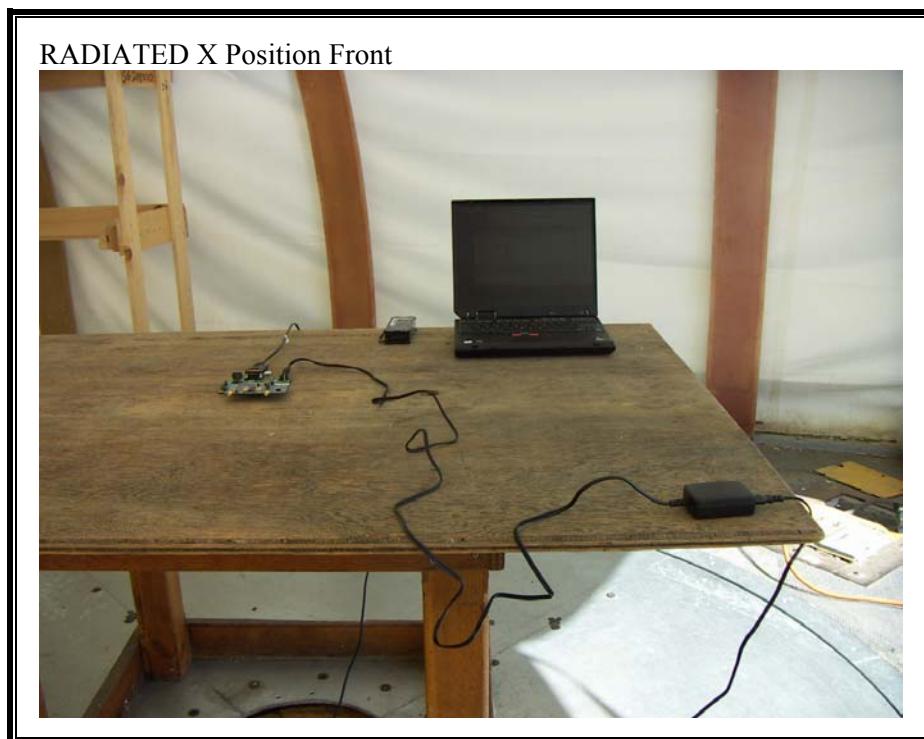


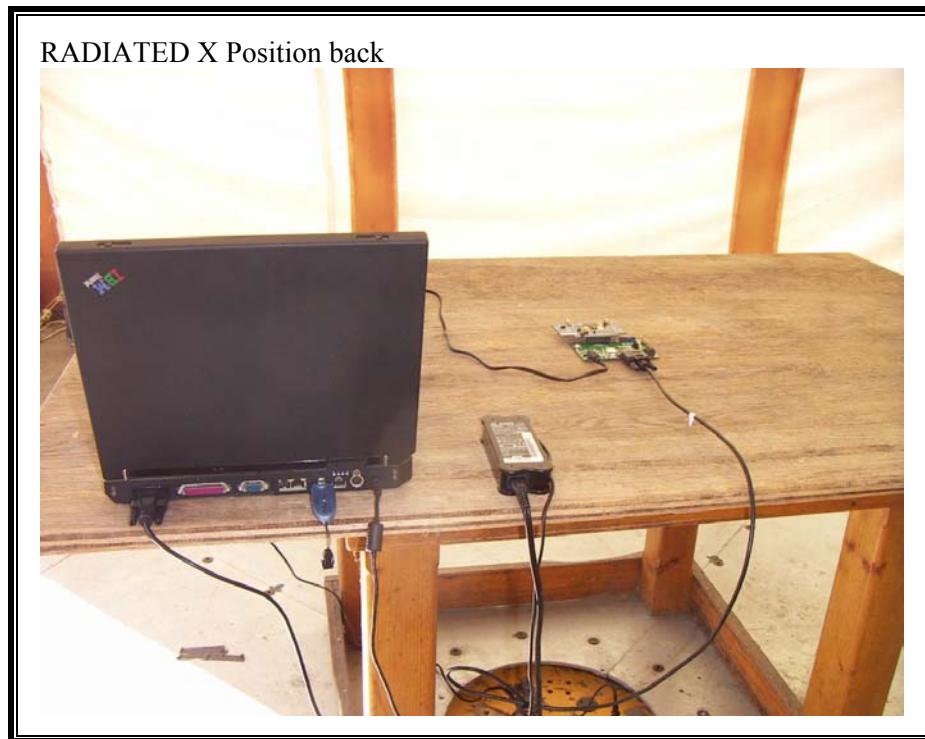


Y-AXIS PHOTO

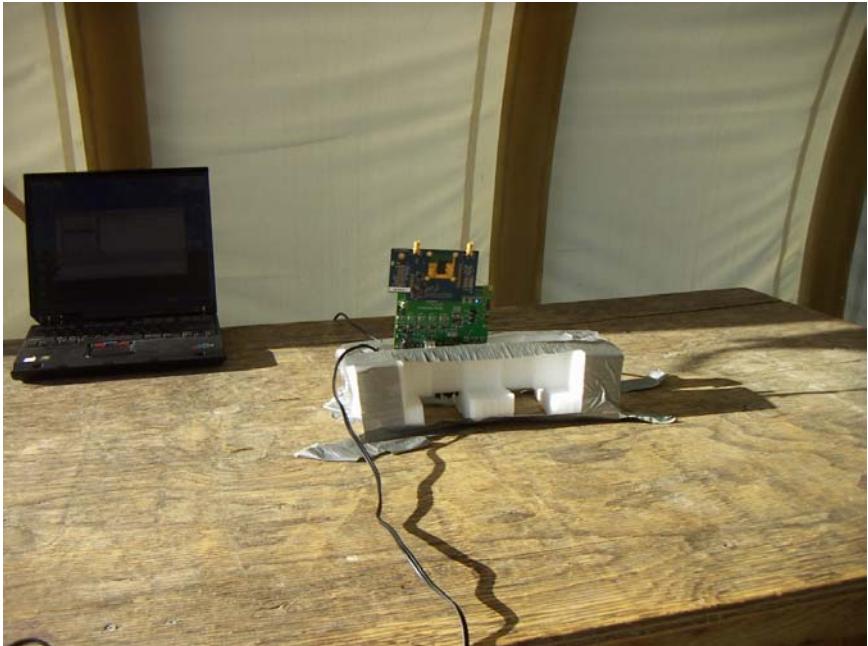

Z-AXIS PHOTO

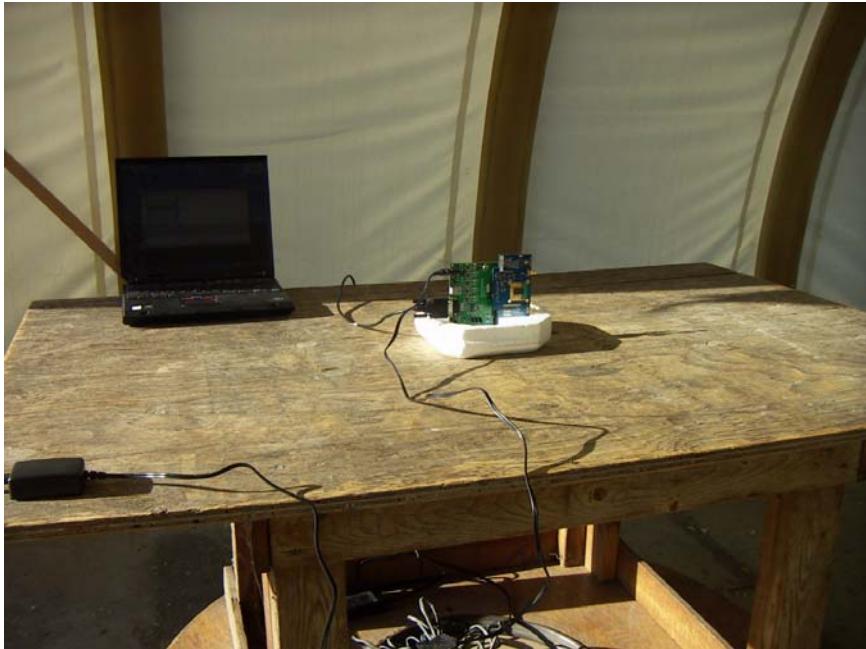


POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP

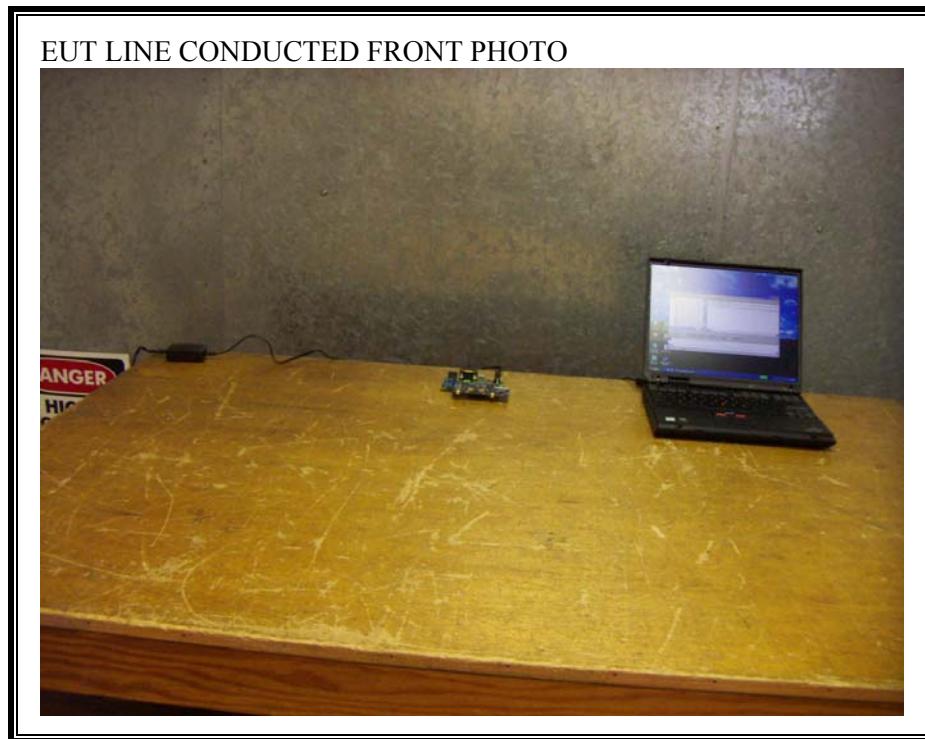

EUT LINE CONDUCTED BACK PHOTO



POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP(SUPPORT LAPTOP)

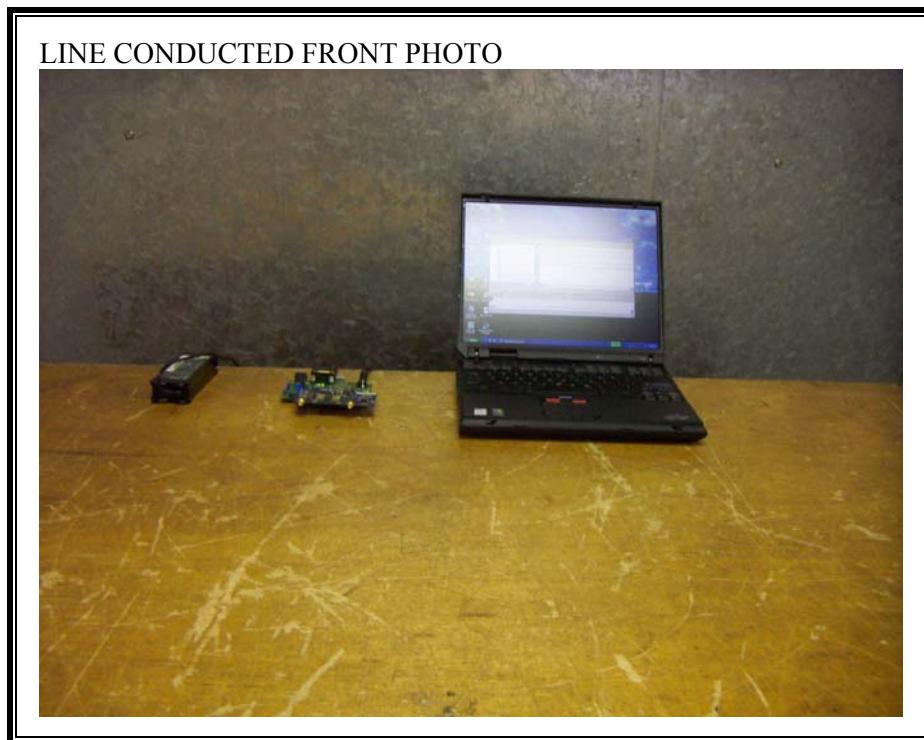

LINE CONDUCTED BACK PHOTO



END OF REPORT