

# **EXHIBIT 6**

## **TECHNICAL REPORT**

Product Safety Engineering, Inc.  
12955 Bellamy Bros. Blvd.  
Dade City, FL 33525

**FCC ID # NTX200**

# TEST REPORT



Accredited by the National Voluntary  
Laboratory Accreditation Program for the  
specific scope of accreditation under  
Lab Code 200074-0

Laboratory ID  
PRODUCT SAFETY ENGINEERING, INC.  
12955 Bellamy Brothers Boulevard  
Dade City, Florida 33525 USA  
PH (352) 588-2209 FX (352) 588-2544

Submitter ID  
Custom Manufacturing & Engineering  
7887 Bryan Dairy Road  
Suite 110  
Largo, FL 33777

Report Issue Date: 23 APR 98  
Sample S/N: NONE  
Sample Receipt Date: March 31, 1998

Test Report Number: 98F002B  
Model Designation: NTX200  
Product Description: Transceiver /  
Collector

Sample Test Date: see data sheets

Marketing Approval \_\_\_\_\_

Description of non-standard test method or test practice: *None*


Estimated Measurement Uncertainty: *Not Applicable*

Special limitations of use: *None*

Traceability: *reference standards of measurement have been calibrated by a competent body using standards traceable to the NIST.*

According to testing performed at Product Safety Engineering, Inc., the above-mentioned unit is in compliance with the electromagnetic compatibility requirements defined in regulations indicated on page (3) of the test report. The test results contained herein relate only to the model(s) identified above. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Project Engineer, I hereby declare that the equipment tested as specified above conforms to the requirements indicated on page (3) of the test report.

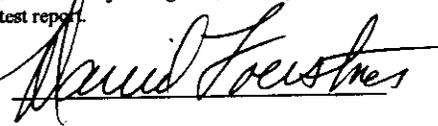Signature  Name David Foerstner  
Title Engineering Group Leader Date 23 APR 98

Reviewed by:  Date 23 APR 98  
Approved Signatory

This report may only be reproduced in full with written permission from Product Safety Engineering, Inc.  
This report is not to be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

Test Report Number 98F002B

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525  
Tel (352) 588-2209 Fax (352) 588-2544

## DIRECTORY - EMISSIONS

		Page(s)
<b>A) Documentation</b>		
Test report		1 - 10
Directory		2
Test Regulations		3
General Remarks		10
Test-setups (Photos)		11 - 12
<b>B) Test data</b>		
Conducted emissions	10/150 kHz - 30 MHz	5, 9
Radiated emissions	10 kHz - 30 MHz	5, 9
Radiated emissions	30 MHz - 1000 MHz	6, 9
Interference power	30 MHz - 300 MHz	6, 9
Equivalent Radiated emissions	1 GHz - 18 GHz	7, 9
<b>C) Appendix A</b>		
Test Equipment Calibration Information		A2
Test Data Sheets		A3 - A10
<b>D) Appendix B</b>		
System Under Test Description		B2 - B4
<b>E) Appendix C</b>		
Measurement Protocol		C1 - C2

*Test Report Number 98F002B*

## EMISSIONS TEST REGULATIONS :

The emissions tests were performed according to following regulations:

- EN 50081-1 : 1992

- EN 50081-2 : 1995

- EN 55011 : 1991

- Group 1

- Group 2

- Class A

- Class B

- EN 55014 : 1993

- Household appliances and similar

- Portable tools

- Semiconductor devices

- EN 55022 : 1994 / A1:1995

- Class A

- Class B

- AS/NZS 3548:1992

- Class A

- Class B

- VCCI : 1986

- Class A

- Class B

- FCC Part 15

- Class A

- Class B

- Certification

- Verification

- Notification

- Declaration of Conformity

- FCC Part 18

*Test Report Number 98F002B*

**Environmental conditions during testing:**

	LAB	OATS
Temperature:	_____	: _____
Relative Humidity	_____	: _____
Atmospheric pressure	_____	: _____ millibars
Power supply system	: <u>120</u> Volts <u>60</u> Hz <u>SINGLE</u> phase	

**Sign Explanations:**

- not applicable
- applicable

*Test Report Number 98F002B*

**Emissions Test Conditions: CONDUCTED EMISSIONS (Interference Voltage)**

**The CONDUCTED EMISSIONS (INTERFERENCE VOLTAGE) measurements were performed at the following test location:**

- Test not applicable

- Darby Test Site (Open Area Test Site)
- Darby Laboratory

**Test equipment used :**

Model Number	Manufacturer	Description	Serial Number
<input checked="" type="checkbox"/> - 8028-50	Solar	50 Ω LISN	829012, 829022
<input type="checkbox"/> - 3825/2	Solar	50 Ω LISN	924840
<input checked="" type="checkbox"/> - EMC-30	Electro-Metrics	EMI Receiver	191
<input type="checkbox"/> - 8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
<input type="checkbox"/> - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
<input type="checkbox"/> - 85662A	Hewlett Packard	Analyzer Display	2403A07352
<input type="checkbox"/> - 8028-50	Solar	50 Ω LISN	903725, 903726
<input type="checkbox"/> -			

**Emissions Test Conditions: RADIATED EMISSIONS (Magnetic Field)**

**The RADIATED EMISSIONS (MAGNETIC FIELD) measurements were performed at the following test location:**

- Darby Test Site (Open Area Test Site)
- 
- 

**at a test distance of :**

- 3 meters
- 30 meters

- Test not applicable

**Test equipment used :**

Model Number	Manufacturer	Description	Serial Number
<input type="checkbox"/> - 98005	Eaton	Log Periodic Antenna	1099
<input type="checkbox"/> - BIA-25	Electro-Metrics	Biconical Antenna	4283
<input type="checkbox"/> - 8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
<input type="checkbox"/> - 85662A	Hewlett-Packard	Analyzer Display	2403A07352
<input type="checkbox"/> - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
<input type="checkbox"/> - ALR-30M	Electro-Metrics	Loop Antenna	824
<input type="checkbox"/> - 8447D	Hewlett Packard	Preamplifier	2944A06832
<input type="checkbox"/> - EMC-30	Electro-Metrics	EMI Receiver	191

Test Report Number 98F002B

**Emissions Test Conditions: RADIATED EMISSIONS (Electric Field)**

The *RADIATED EMISSIONS (ELECTRIC FIELD)* measurements, in the frequency range of 30 MHz-1000 MHz, were tested in a horizontal and vertical polarization at the following test location :

- Test not applicable

- Darby Site (Open Area Test Site)
- Darby Lab
- 

at a test distance of :

- 3 meters
- 10 meters
- 30 meters

Test equipment used :

Model Number	Manufacturer	Description	Serial Number
<input checked="" type="checkbox"/> - 96005	Eaton	Log Periodic Antenna	1099
<input checked="" type="checkbox"/> - BIA-25	Electro-Metrics	Biconical Antenna	4283
<input checked="" type="checkbox"/> - 8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
<input checked="" type="checkbox"/> - 85662A	Hewlett-Packard	Analyzer Display	2403A07352
<input checked="" type="checkbox"/> - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
<input checked="" type="checkbox"/> - 8447D	Hewlett-Packard	Preamplifier (26dB)	2944A06832
<input type="checkbox"/> - EMC-30	Electro-Metrics	EMI Receiver	191
<input type="checkbox"/> - 8568B	Hewlett Packard	Spectrum Analyzer	2407A03213
<input type="checkbox"/> - 85650A	Hewlett Packard	Quasi-Peak Adapter	2043A00358
<input type="checkbox"/> - 85662A	Hewlett Packard	Analyzer Display	2340A05806
<input type="checkbox"/> - LPA30	EM LPA	Log Periodic	2280

**Emissions Test Conditions): INTERFERENCE POWER**

The *INTERFERENCE POWER* measurements were performed by using the absorbing clamp on the mains and interface cables in the frequency range 30 MHz - 300 MHz at the following test location :

- Test not applicable

- Darby Lab
- 
- 
- 
- 

Test equipment used :

Model Number	Manufacturer	Description	Serial Number
<input type="checkbox"/> - MDS-21	Rhode&Schwarz	Absorbing Clamp	8608447020
<input type="checkbox"/> - 8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
<input type="checkbox"/> - 85662A	Hewlett-Packard	Analyzer Display	2403A07352
<input type="checkbox"/> - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
<input type="checkbox"/> - 8447D	Hewlett-Packard	Amplifier (26 dB)	2944A06832

Test Report Number 98F002B

The *EQUIVALENT RADIATED EMISSIONS* measurements in the frequency range 1GHz - 5GHz were performed in a horizontal and vertical polarization at the following test location :

■ - Darby Test Site (Open Area Test Site)

- 
- 
- 

at a test distance of:

- 1 meters
- - 3 meters
- 10 meters

- Test not applicable

Test equipment used :

Model Number	Manufacturer	Description	Serial Number
■ - 8568B	Hewlett-Packard	Spectrum Analyzer	2618A02898
■ - 85662A	Hewlett-Packard	Analyzer Display	2542A11984
■ - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
■ - 8449B	Hewlett-Packard	Preamplifier	3008A00320
■ - 3115	Electro-Mechanics	Double Ridge Guide Horn	3810

Test Report Number 98F002B

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525  
Tel (352) 588-2209 Fax (352) 588-2544

## **Equipment Under Test (EUT) Test Operation Mode - Emission tests :**

**The device under test was operated under the following conditions during emissions testing:**

- Standby
- Test program (H - Pattern)
- Test program (color bar)
- Test program (customer specific)
- Practice operation
- Normal Operating Mode
- 

### **Configuration of the device under test:**

- See System Under Test Information in Appendix B

*Test Report Number 98F002B*

**Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525  
Tel (352) 588-2209 Fax (352) 588-2544**

## Emission Test Results:

### Conducted emissions 450 kHz - 30 MHz

The requirements are  - MET  - NOT MET

Minimum limit margin 10.0 dB at 22.1 MHz  
Maximum limit exceeding dB at MHz  
Remarks:

### Radiated emissions (magnetic field) 10 kHz - 30 MHz

The requirements are  - MET  - NOT MET

Minimum limit margin dB at MHz  
Maximum limit exceeding dB at MHz  
Remarks:

### Radiated emissions (electric field) 30 MHz - 1000 MHz

The requirements are  - MET  - NOT MET

Minimum limit margin 1.6 dB at 417.9 MHz  
Maximum limit exceeding dB at MHz  
Remarks:

### Interference Power at the mains and interface cables 30 MHz - 300 MHz

The requirements are  - MET  - NOT MET

Minimum limit margin dB at MHz  
Maximum limit exceeding dB at MHz  
Remarks:

### Radiated emissions 1 GHz - 5 GHz

The requirements are  - MET  - NOT MET

Minimum limit margin 1.8 dB at 4.180 GHz  
Maximum limit exceeding dB at GHz  
Remarks: AVERAGE DETECTOR USED

Test Report Number 98F002B

**GENERAL REMARKS:**

**SUMMARY:**

The requirements according to the technical regulations are

■ - met

□ - not met.

The device under test does

■ - fulfill the general approval requirements mentioned on page 3.

□ - not fulfill the general approval requirements mentioned on page 3.

Testing Start Date April 3, 1998

Testing End Date: April 3, 1998

- PRODUCT SAFETY ENGINEERING INC -

*Test Report Number 98F002B*

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525  
Tel (352) 588-2209 Fax (352) 588-2544

# **APPENDIX**

## **A**

### **Test Equipment Calibration Information**

#### **&**

### **Test Data Sheets**

## TEST EQUIPMENT CALIBRATION INFORMATION

Manufacturer	Model	Description	Serial Number	Cal Due
Hewlett Packard	8566B	Spectrum Analyzer	2421A00526	12/29/98
Hewlett Packard	85662A	Display	2403A07352	12/29/98
Hewlett Packard	85650A	Quasi-Peak Adapter	2043A00209	12/29/98
Hewlett Packard	8447D	Preamp 0.1 - 1,000 MHz	2944A06832	06/30/98
Hewlett Packard	8568B	Spectrum Analyzer	2407A03213	05/13/98
Hewlett Packard	85662A	Display	2340A05806	05/13/98
Hewlett Packard	85650A	Quasi-Peak Adapter	2043A00358	04/14/98
Hewlett Packard	8447D	Preamp 0.1 - 1,000 MHz	2944A06901	10/08/98
Hewlett Packard	8447D	Preamp 0.1 - 1,000 MHz	1937A03247	10/16/98
Hewlett Packard	8449B	Preamp 1 - 26.5 GHz	3008A00320	12/02/98
Hewlett Packard	8648B	Signal Generator	3443U00312	04/29/98
Hewlett Packard	8672A	Signal Generator	2211A02426	05/11/98
Hewlett Packard	6842A	Harmonic / Flicker Tester	3531A00149	12/19/98
Eaton	96005	Log Periodic Antenna	1099	09/16/98
Electro-Metrics	LPA 30	Log Periodic Antenna	2280	08/25/98
Electro-Metrics	BIA 30	Biconical Antenna	3852	08/25/98
Electro-Metrics	BIA 25	Biconical Antenna	4283	09/16/98
Electro-Mechanics	3115	Double Ridge Guide Ant.	3810	04/15/99
Electro-Metrics	ALR30M	Magnetic Loop Antenna	824	10/13/98
Solar	8012	LISN	924840	09/14/98
Solar	8028	LISN	829012/809022	09/01/98
Solar	8028	LISN	903725/903726	08/14/98
Schwartzbeck	MDS-21	Absorbing Clamp	02581	10/02/98
Haefely-Trench	PSD25B	ESD Tester	082999-38	01/06/99
Haefely-Trench	PEFT-1	EFT/B Tester	082628-29	01/13/99
Leader	LFG1310	Function Generator	8060233	10/03/98
Haefely-Trench	Psurge 4	Surge Tester	083372-13	10/08/98
Holaday Ind.	HI 4422	Isotropic Probe	90310	03/17/99
IFR Systems	A-8000	Spectrum Analyzer	1306	04/09/98
Fischer Custom	F-33-1	RF Current Probe	360	09/30/99
Electro-Metrics	EMC-30	EMI Receiver	191	09/22/98
Boonton	4220A	RF Power Meter	204103AA	10/15/98
Boonton	51011	RF Power Meter	28823	10/15/98

PRODUCT EMISSIONS

PRODUCT SAFETY ENGINEERING

Data File: TRANS/COLLECTOR FCC-B FIN 4-3-98

No	EMISSION FREQUENCY MHz	SPEC LIMIT dBuV/m	MEASUREMENTS			POL	SITE		CORR FACTOR dB	COMMENTS
			ABS	dLIM dB	MODE		HGT cm	AZM deg		
1	33.191	40.0	29.1	-10.9	QP	V	100	1		
2	57.160	40.0	28.6	-11.4	PK	V	100	90		
3	77.426	40.0	25.3	-14.7	PK	V	100	1		
4	132.760	43.5	23.1	-20.4	PK	V	100	1		
5	143.825	43.5	24.0	-19.5	PK	V	100	1		
6	417.964	46.0	90.7	44.7	PK	V	100	90	CW 1.6 dB UNDER	
7	835.938	46.0	55.3	9.3	PK	H	100	45	CW	
8	835.938	52.3	50.9		QP	H	100	45	PULSED 1.4 dB UNDER	

\*NOTE: CW and Pulsed Operation Both Investigated. Highest Level Noted.

15.231(e)

$$\begin{aligned} \text{LIMIT @ 418 MHz} &= 72.3 \text{ dBuV/m} \\ &+ 20.0 \text{ dB DUTY CYCLE REDUCTION} \\ \hline &92.3 \text{ dBuV/m} \end{aligned}$$

$$\text{LIMIT @ 836 MHz} = 52.3 \text{ dBuV/m}$$

## Custom Manufacturing & Engineering Transceiver / Collector

Measured @ 3 Meters

Frequency (GHz)	Spec Limit (dB $\mu$ V/M)	Peak Measurement (dB $\mu$ V/M)	Average Measurement (dB $\mu$ V/M)	$\Delta$ Limit	Polarity	Height (cm)
1.253	54.0	58.2	50.0	4.0	Hor	200
1.671	54.0	56.0	46.0	8.0	Hor	150
2.089	54.0	53.6	42.4	11.6	Vert	300
2.507	54.0	55.3	43.7	10.3	Vert	150
2.936	54.0	56.0	47.1	6.9	Vert	150
3.343	54.0	58.9	45.9	8.1	Hor	100
3.762	54.0	63.2	48.5	5.5	Hor	150
4.180	54.0	59.2	52.2	1.8	Hor	200


\* NOTE: CW and Pulsed Operation Both Investigated. Highest Level Noted.



43 APRIL 18

COLLECTOR

PRODUCT SAFETY ENGINEERING MKR 417.708 MHZ  
REF 107.0 dBµV ATTEN 10 dB 78.10 dBµV

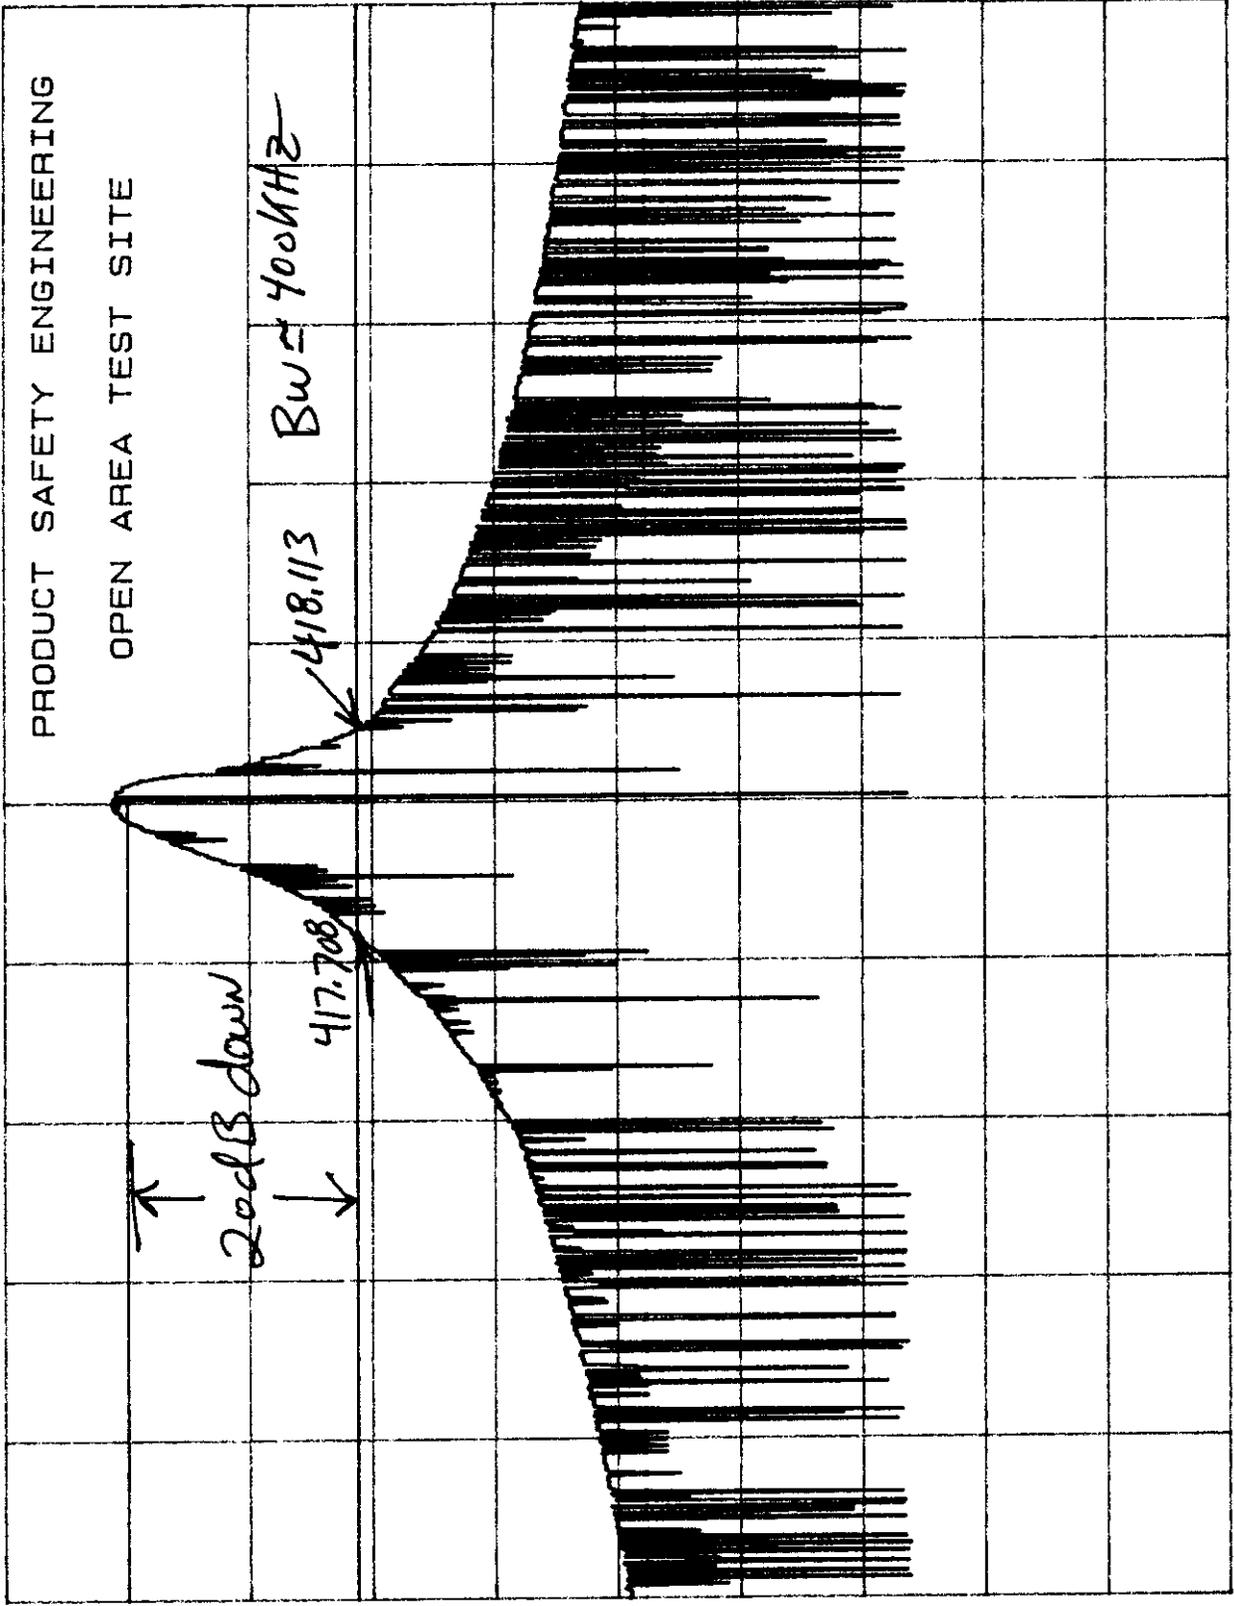

HP  
10 dB/

DL  
78.2  
dBµV

START 416.44 MHZ RES BW 1 MHZ VBW 1 MHZ STOP 419.51 MHZ SWP 100 msec

# Product Safety Engineering

CUSTOM MANUFACTURING AND ENG.

Date: 04/03/98  
Technician: MATT EICHEL  
Test Method: FCC-B  
Equipment: TRANS / COLLECTOR  
Mode of Op.: NORMAL  
Serial No.:

Time: 08:25:22.77  
Test Equip.: EMC-30  
Test Number: 1  
Sensor Loc.: SIDE 1  
Sensor Pol.:  
Ext. Atten.: 0 dB

Comment: 120V / 60 HZ


SPECS  
1) FCC-B (150 KHZ-30 MHz)  
2)  
3)  
4)

EMC-30 SETTINGS  
Detector: QuasiPeak  
Bandwidth: CISPR  
Dump/DwellIN/A  
RF Atten: 10 dB  
IF Atten: 10 dB

9m2  
4-3-98

ANTENNA FILES

OTHER FACTORS

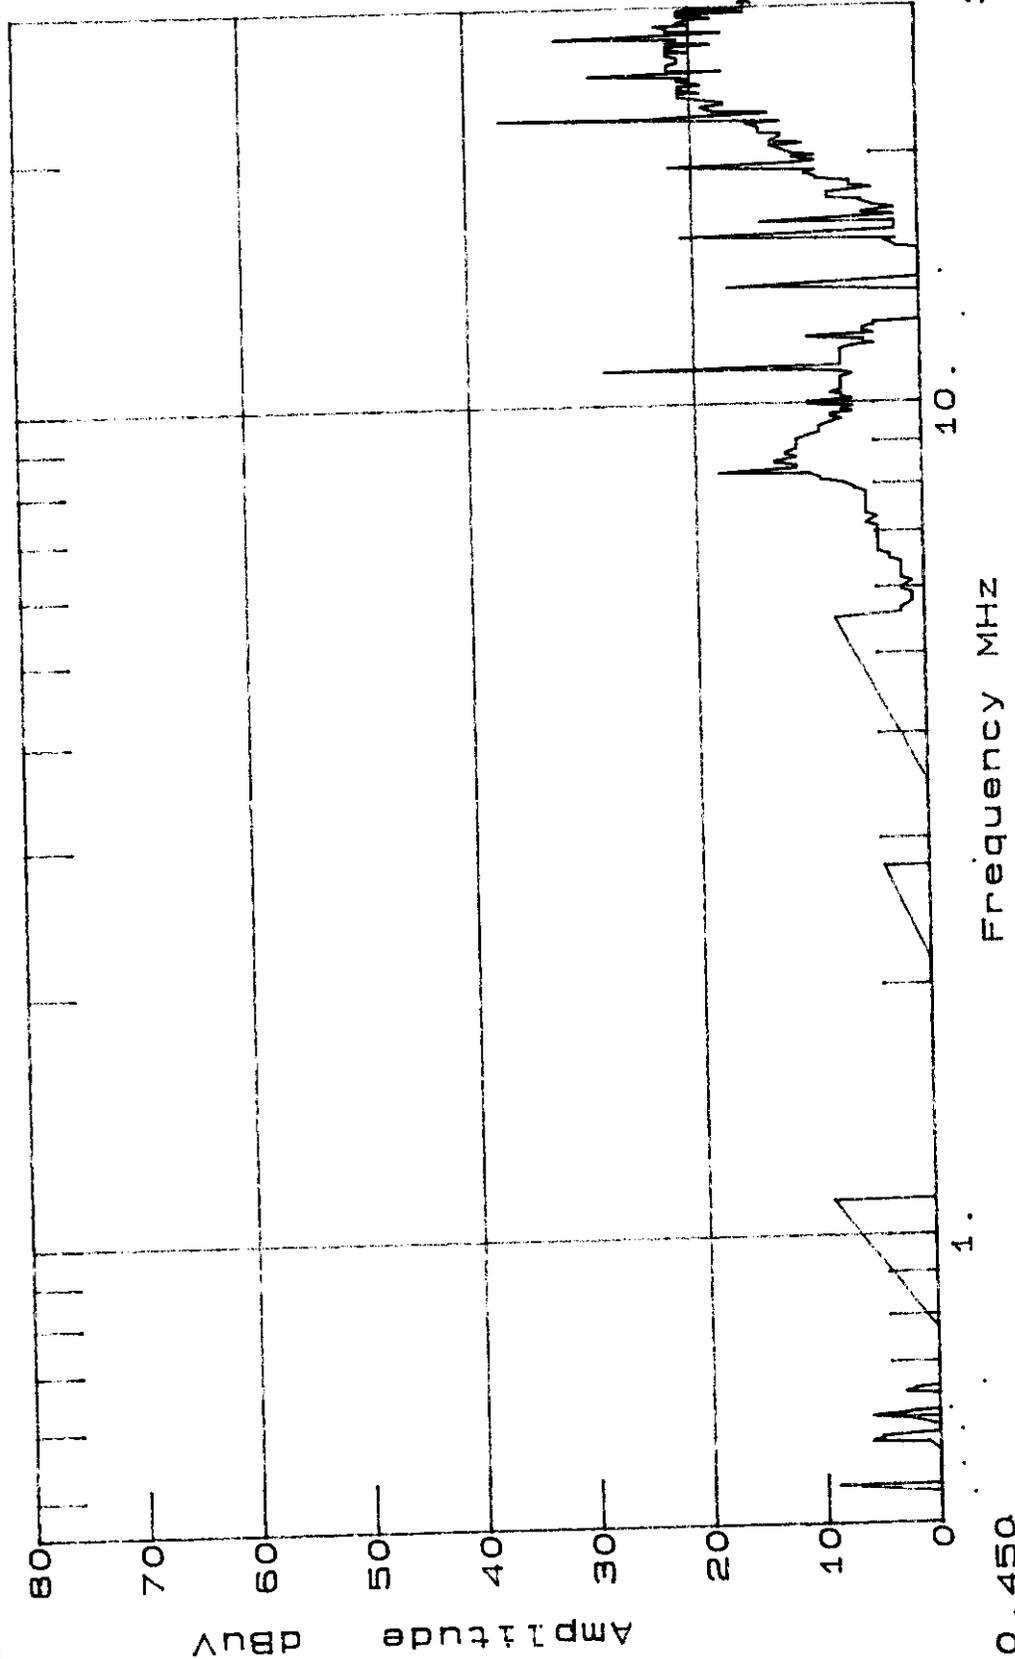

TEST TITLE: CUSTOM MANUFACTURING AND ENG.	PAGE 1
DATA FILE : 002_L.D30	Freq. (MHz)
Amplitude Units : dBuV	Threshold -20 dB
	0.4500

Freq(MHz)	Amp	FCC-B15.S30 vs Spec(dB)
11.0276	28.0	-20.000 *
22.1905	37.0	-11.000 *
24.9321	29.0	-19.000 *
27.6389	32.0	-16.000 *

*me*  
-3-43

# Product Safety Engineering

CUSTOM MANUFACTURING AND ENG.


Date : 04/03/98  
 Technician : MATT EICHEL  
 Test Method : FCC-B  
 Equipment : TRANS / COLLECTOR  
 Mode of Op. : NORMAL  
 Serial No. :  
 Time : 08:56:17.05  
 Test Equip. : EMC-30  
 Test Number : 1  
 Sensor Loc. : SIDE 2  
 Sensor Pol. :  
 Ext. Atten. : 0 dB

EMC-30 SETTINGS  
 Detector QuasiPeak  
 Bandwidth CISPR  
 Dump/DwellIN/A  
 RF Atten. 10 dB  
 IF Atten. 10 dB

SPECS  
 1) FCC-B (150 KHz-30 MHz)  
 2)  
 3)  
 4)

*1732*  
*1-3-98*

Comment : 120V / 60 HZ

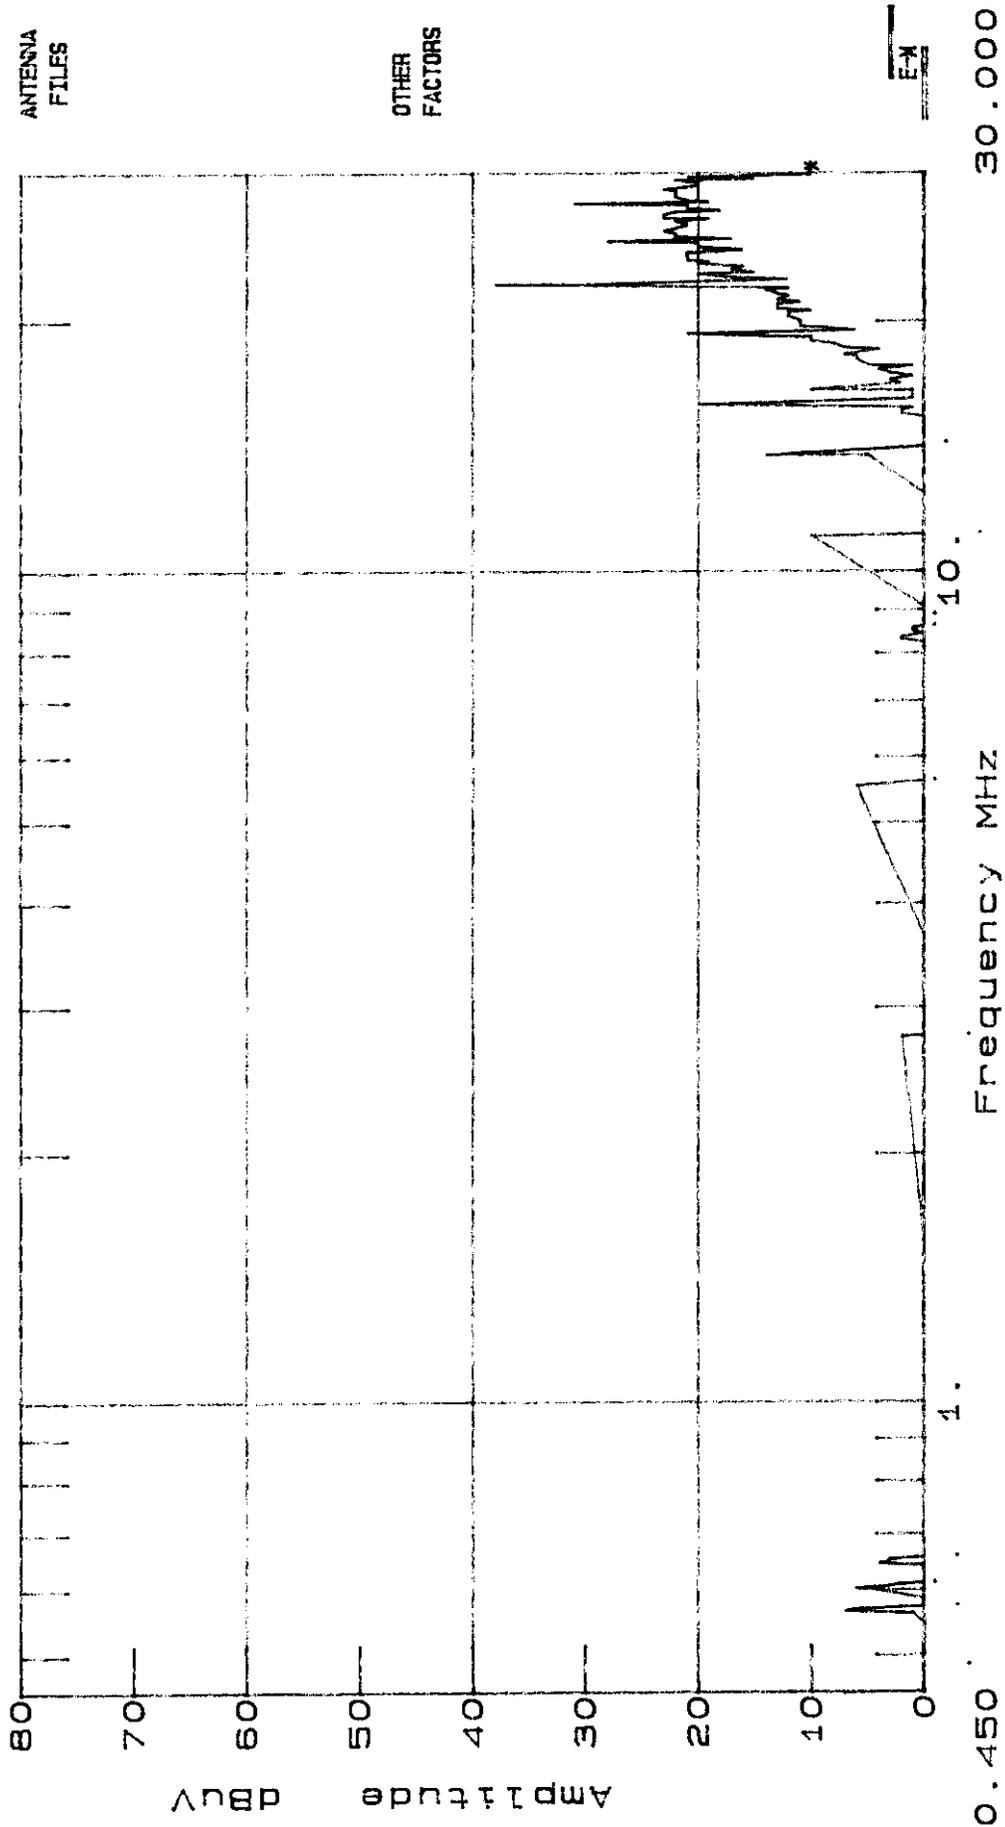

TEST TITLE: CUSTOM MANUFACTURING AND ENG.  
DATA FILE : 002\_N.D30  
Amplitude Units : dBuV                      Threshold -20 dB

PAGE 1  
Freq. (MHz)  
0.4500

Freq(MHz)	Amp	FCC-B15.S30 vs Spec(dB)
22.1871	38.0	-10.000 *
22.2005	29.0	-19.000 *
24.9355	28.0	-20.000 *
27.6423	31.0	-17.000 *

*9h2*  
*4-5-93*

# **APPENDIX**

## **B**

### **System Under Test Description**

SYSTEM COMPONENTS  
\*\*\*\*\*

DEVICE TYPE: CUSTOM MANUFACTURING AND ENGINEERING COLLECTOR BASE  
FCC ID#:

\*\*\*\*\*

DEVICE TYPE: CUSTOM MANUFACTURING TRANSCEIVER  
FCC ID#:

\*\*\*\*\*

DEVICE TYPE:  
FCC ID#:

\*\*\*\*\*

INTERFACE CABLES  
\*\*\*\*\*

DEVICE TYPE:TRANSCEIVER  
SHIELD:NO  
LENGTH:6 FEET  
CONNECTOR TYPE:DEDICATED TO RJ45 (FERRITE AT TRANSCEIVER END)  
PORT:XCVR ON COLLECTOR

\*\*\*\*\*

DEVICE TYPE:EUT COLLECTOR  
SHIELD:NO  
LENGTH:6 FEET  
CONNECTOR TYPE:RJ11 TO RJ11  
PORT:MODEM

\*\*\*\*\*

DEVICE TYPE:  
SHIELD:  
LENGTH:  
CONNECTOR TYPE:  
PORT:

\*\*\*\*\*

AC LINE CORDS  
\*\*\*\*\*

DEVICE TYPE: EUT  
SHIELD:NO  
LENGTH:6 FEET  
CONNECTOR TYPE:IEC TO DEDICATED

\*\*\*\*\*

DEVICE TYPE:  
SHIELD:  
LENGTH:  
CONNECTOR TYPE:

\*\*\*\*\*

# **APPENDIX**

## **C**

### **Measurement Protocol**

The test methodology followed during the collection of the data included within this technical report was ANSI C63.4:1992.

The EUT was powered with (120) VAC / (60) Hz during the collection of data included within.

The data is compared to the FCC Class B limits.

The "EMI" instrumentation is capable of calculating the final emission level based on the following formula:

Level at the receiver (dBuV) + Antenna Correction Factor(dB/M) + Cable Loss (dB) - Preamp Gain (dB) = Actual Level in dBuV/M.

The sample calculation below is based on the actual test data collected:

Observed Level	<u>96.5</u>	dBuV
ACF	<u>17.2</u>	dB/M
Cable Loss	<u>3.0</u>	dB
Preamp Gain	<u>26.0</u>	dB
Actual Level	<u>90.7</u>	dBuV/M @ <u>418</u> MHz

Please have a company official review this report and sign.

---