

**NATIONAL CERTIFICATION LABORATORY**

**8370 Court Avenue, Suite B-1  
Ellicott City MD 21043  
(410) 461-5548**

**FCC REPORT OF RADIO INTERFERENCE**

**for**

**Omni Control Systems  
15135 Memorial Dr., Ste. 5109  
Houston, TX 77079**

**FCC ID: NVD980310GMR1**

**September 18 , 1998**

## **TABLE OF CONTENTS**

Application Form 731  
FCC Label Drawing and Location

- 1.0** Introduction
- 1.1** Summary
- 2.0** Description of Equipment Under Test (EUT)
- 3.0** Test Configuration
- 4.0** Conducted Emissions Scheme
- 5.0** Radiated Emissions Scheme

### **TABLES**

- Table 1. Support Equipment
- Table 2. Interface Cables
- Table 3. Measurement Equipment

### **EXHIBITS**

- Exhibit 1. EUT Photographs
- Exhibit 2. Schematic Diagram
- Exhibit 3. User Manual

## 1.0 Introduction

This report has been prepared on behalf of Omni Control Systems to support the attached Application for Certification of a Part 15 Unintentional Radiator. The Equipment Under Test was the **SecuriTrim System** Radio Receiver.

Radio-Noise Emissions tests were performed according to **ANSI C63.4-1992 "Methods of Measurement of RFI from Low-Voltage Electronic Equipment in the Range of 9 KHz - 40 GHz"**. The measuring equipment conforms to ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation.

Testing was performed at National Certification Laboratory in Ellicott City, MD. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch. FCC acceptance was granted on May 26, 1993.

## 1.1 Summary

The **SecuriTrim System** Radio Receiver complies with the limits for a Unintentional Radiator.

## 2.0 Description of Equipment Under Test (EUT)

The EUT Features:


<u>FEATURES</u>	<u>FREQUENCY</u>
Relay Activation of Tilt/Trim function	311.00 MHz only
Superregenerative Design	
8-bit Pulse Decoding	
ON/OFF Keying	
Security Ignition Function	

### 3.0 Test Configuration

The EUT was setup on the test table in a manner which follows the general guidelines of ANSI C63.4, Section 6 "General Operating Conditions and Configurations".

An RF signal generator was used to cohere the spectral components of the emissions, as prescribed in ANSI C63.4, Section 12.1.1.1. An output level of -20 dBm at 311 MHz (CW) was fed into a 10 inch whip antenna in order to create a field level sufficient to accomplish this.

The EUT was configured in 3 orthogonal positions to determine the maximum RF level at each emission frequency. The data tables give the EUT position designation that produces worst-case field strength, in an X, Y, Z system. This is described below:

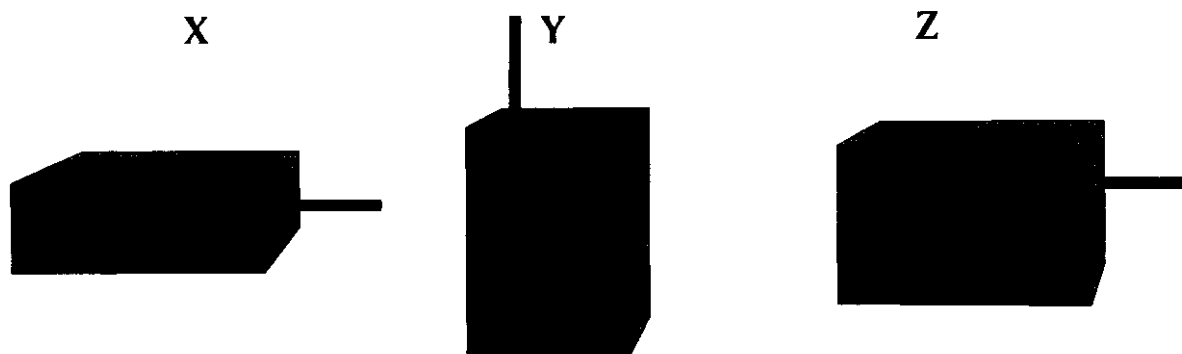

#### **4.0 Conducted Emissions Scheme**

The EUT is placed on an 80 cm high 1 X 1.5 m non-conductive table. Power to the CPU is provided through a Solar Corporation 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network bonded to a 2.2 X 2 meter horizontal ground plane, and a 2.2 X 2 meter vertical ground plane. The LISN has its AC input supplied from a filtered AC power source. A separate LISN provides AC power to the peripheral equipment. I/O cables are moved about to obtain maximum emissions.

The 50  $\Omega$  output of the LISN is connected to the input of the spectrum analyzer and emissions in the frequency range of 450 kHz to 30 MHz are searched. The detector function is set to quasi-peak and the resolution bandwidth is set at 9 kHz, with all post-detector filtering no less than 10 times the resolution bandwidth for final measurements. All emissions within 20 dB of the limit are recorded in the data tables.

#### **5.0 Radiated Emissions Scheme**

The EUT was initially scanned in the frequency range 30 to 2000 MHz indoors, at a distance of 1 meter to determine its emissions profile. The EUT was then placed on an 80 cm high 1 X 1.5 meter non-conductive motorized turntable for radiated testing on the 3-meter open area test site. The emissions from the EUT are measured continuously at every azimuth by rotating the turntable. Biconical and log periodic broadband antennas are mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna is varied between 1 and 4 meters. Cables are varied in position to produce maximum emissions. Both the horizontal and vertical field components are measured.

The output from the antenna is connected to the input of the spectrum analyzer. The detector function is set to quasi-peak. The resolution bandwidth of the spectrum analyzer system is set at 120 kHz, for measurements in the range 30 MHz - 1 GHz, and 1 MHz for measurements in the range of 1 - 2 GHz, with all post-detector filtering no less than 10 times the resolution bandwidth. All emissions within 20 dB of the limit are recorded in the data tables.

To convert the spectrum analyzer reading into a quantified E-field level to allow comparison with the FCC limits, it is necessary to account for various calibration factors. These factors include cable loss (CL) and antenna factors (AF). The AF/CL in dB/m is algebraically added to the Spectrum Analyzer Voltage in  $\text{dB}\mu\text{V}$  to obtain the Radiated Electric Field in  $\text{dB}\mu\text{V}/\text{m}$ . This level is then compared with the FCC limit.

**Example:**

Spectrum Analyzer Volt:  $\text{VdB}\mu\text{V}$

Composite Factor:  $\text{AF/CLdB}/\text{m}$

Electric Field:  $\text{EdB}\mu\text{V}/\text{m} = \text{VdB}\mu\text{V} + \text{AF/CLdB}/\text{m}$

Linear Conversion:  $\text{EuV}/\text{m} = \text{Antilog} (\text{EdB}\mu\text{V}/\text{m}/20)$

# FCC CLASS B RADIATED EMISSIONS DATA

FCC ID: NVD980310GMR1


CLIENT: OMNI CONTROL  
EUT: TILT/TRIM REC.

TUNING: 311.00 MHZ

3-METER TEST		QP LVL	DATE: 9/15/98				
FREQ MHz	POL H/V	SPEC A dBuV	AF/CL dB/m	E-FIELD dBuV/m	E-FIELD uV/m	LIMIT uV/m	MARG dB
308.14	H	27.0	14.0	41.0	112.2	200.0	-5.0
309.35	H	25.0	14.0	39.0	89.1	200.0	-7.0
310.21	H	22.0	14.0	36.0	63.1	200.0	-10.0
312.75	H	19.0	14.0	33.0	44.7	200.0	-13.0
618.63	H	17.0	20.0	37.0	70.8	200.0	-9.0
620.13	V	18.0	20.0	38.0	79.4	200.0	-8.0
621.35	H	15.0	20.0	35.0	56.2	200.0	-11.0
928.91	H	13.0	24.0	37.0	70.8	200.0	-9.0
930.85	V	14.0	24.0	38.0	79.4	200.0	-8.0

TEST ENGINEER

*D.O.*  
DANIEL OWENS

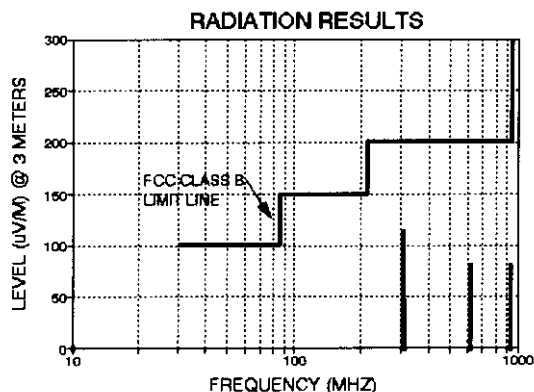

**Table 1**  
**Support Equipment**

---

MANUFACTURER	FCC ID #	SERIAL #
<b>POWER SUPPLY:</b> 12 VDC Adapter - ELPAC Model EV-1208	N/A	None



**Table 2**

**Interface Cables Used**

---

NONE USED	EUT does not have I/O Ports.
<b><u>Note:</u></b> There are no ferrite beads attached to any I/O cables for this test.	

**Table 3**  
**Measurement Equipment Used**

The following equipment is used to perform measurements:

<b>EQUIPMENT</b>	<b>SERIAL NUMBER</b>
Wavetek 2410A 1100 MHz Signal Generator	1362016
EMCO Model 3110 Biconical Antenna	1619
EMCO Model 3146 Log Periodic Antenna	1222
Solar 8012-50-R-24-BNC LISN	924867
Advantest Model R4131D Spectrum Analyzer	54378A
EMCO Model 3115 Ridge Horn Antenna	1238
4 Meter Antenna Mast	None
Motorized Turntable	None
RG-233U 50 ohm coax Cable	None