


RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET

Test Method:	Occupied Bandwidth			
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier	
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002	
Test Specification:	FCC Part 2	Paragraph: 2.1049	Date:	8/16/2006
Operating Mode:	Amplifying input signal			
Notes:	CDMA - Uplink (Low) - Output at 825.25 MHz			

11:02:17 AUG 14. 2006

REF 30.0 dBm AT 10 dB

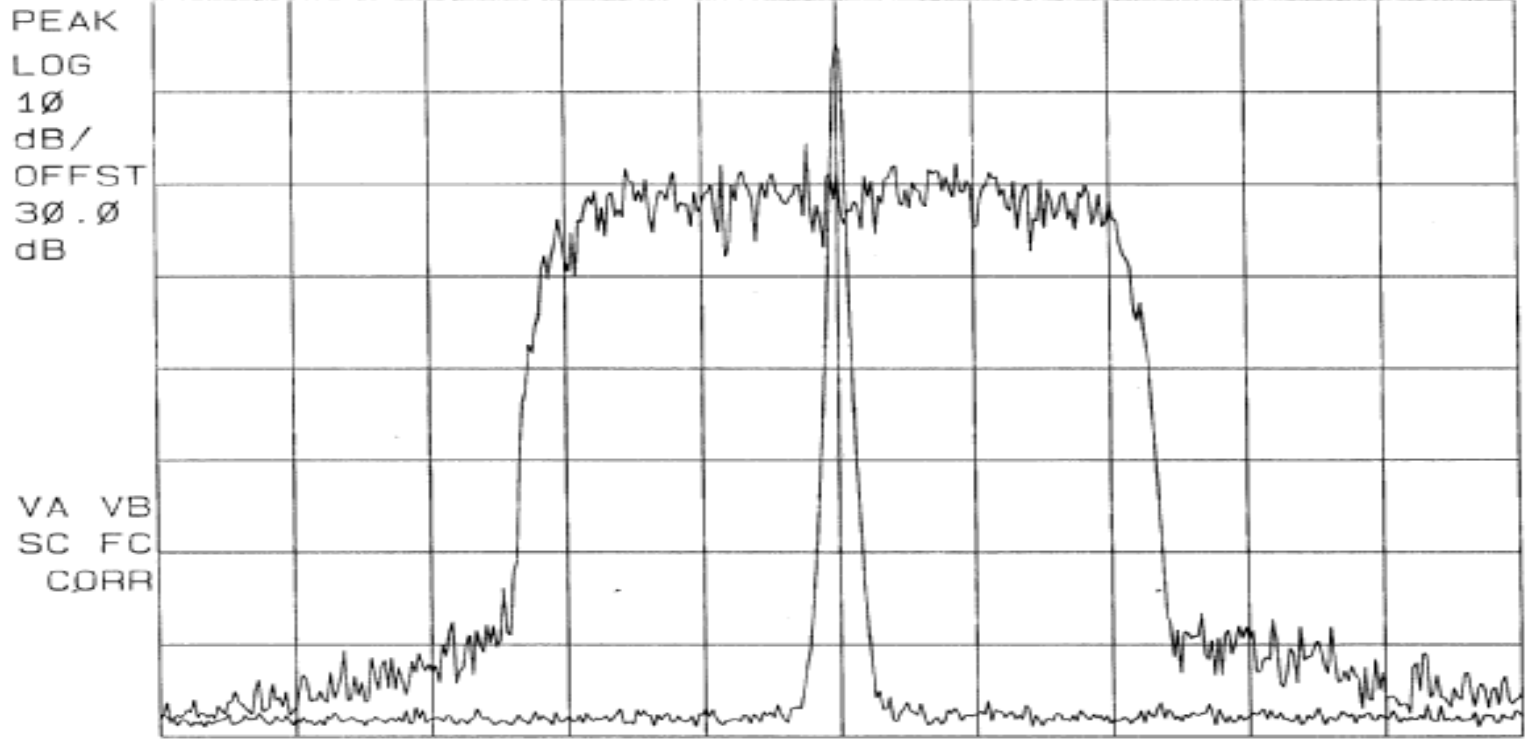

CENTER 825.25 MHz

#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz

SWP 33.3 msec

RETLIF TESTING LABORATORIES


EMISSIONS DATA SHEET

Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Uplink (Low) - Input at 825.25 MHz		

11: 11: 00 AUG 14, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

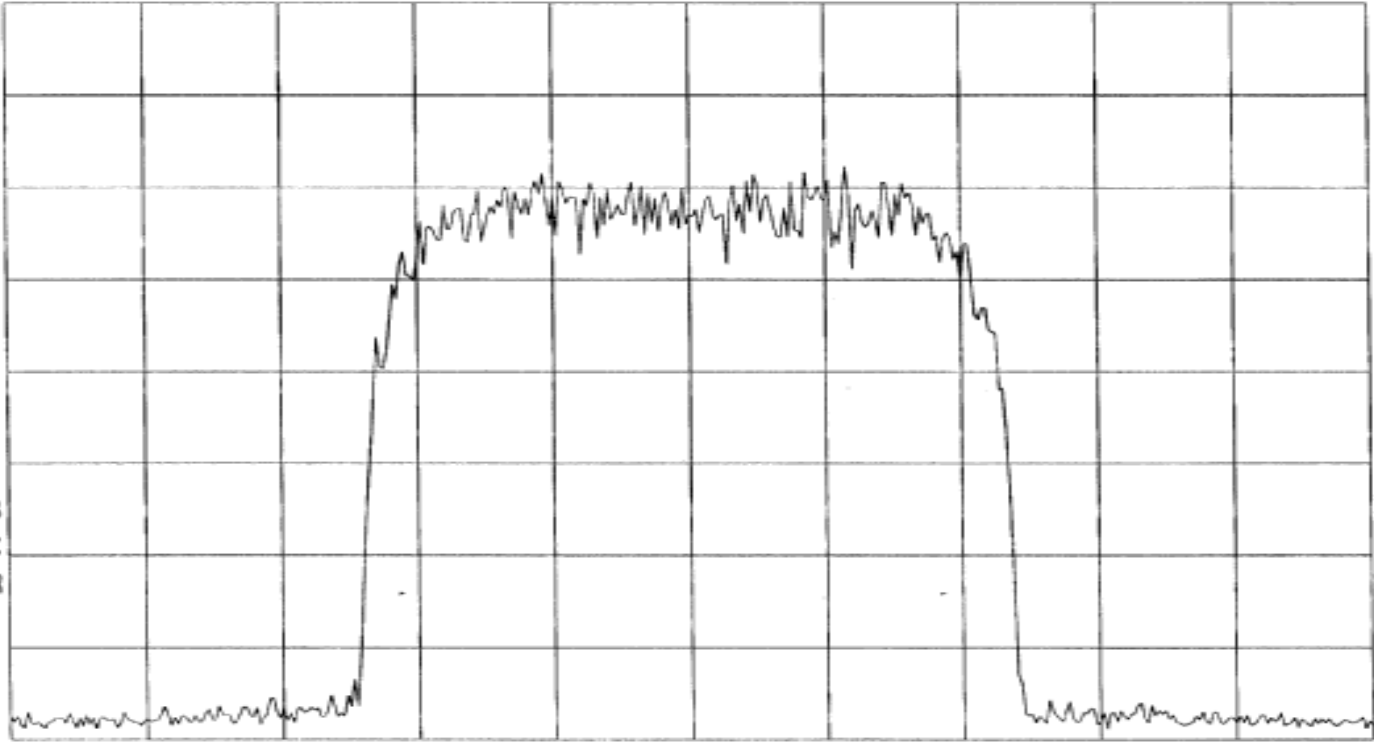

VA SB
SC FC
CORR

CENTER 825.25 MHz SPAN 10.00 MHz
#RES BW 30 KHz #VBW 100 KHz SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Uplink (High) - Output at 847.75 MHz		

11:05:34 AUG 14, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA VB
SC FC
CORR

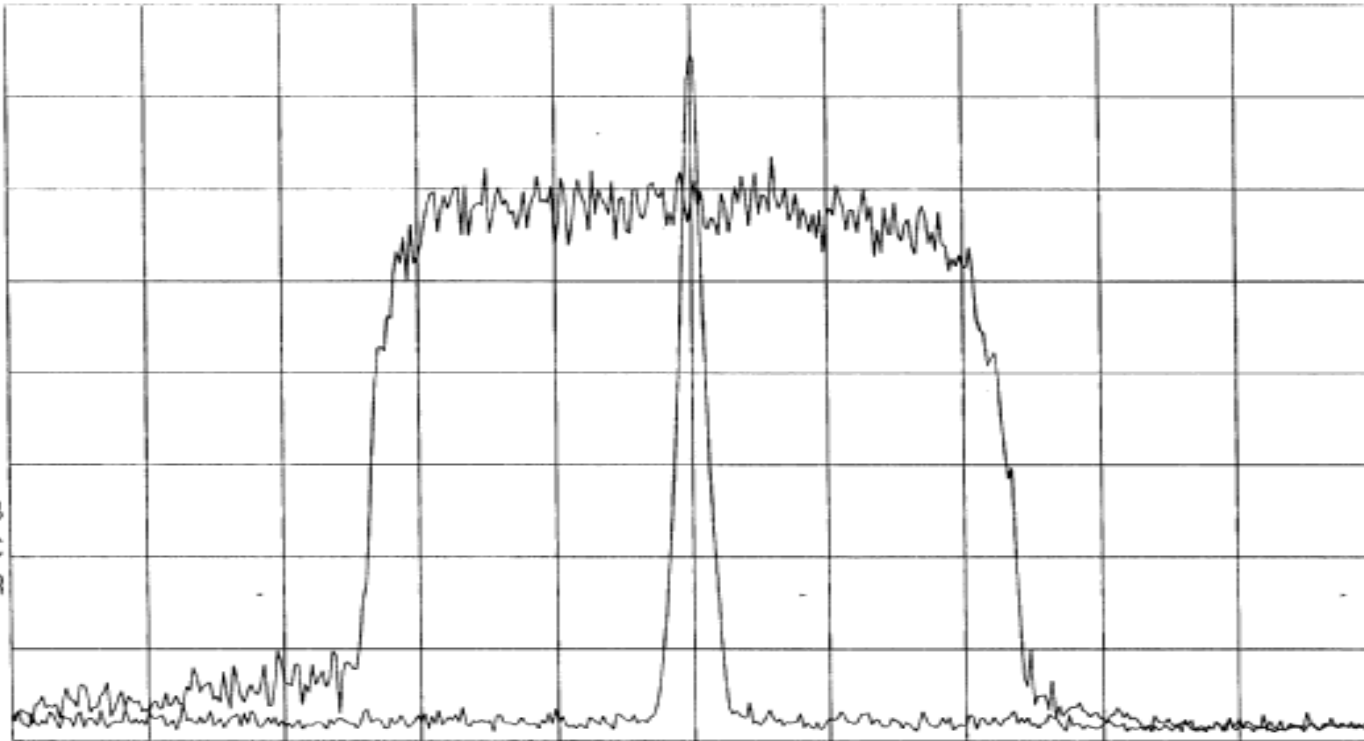

CENTER 847.75 MHz

#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz

SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Uplink (High) - Input at 847.75 MHz		

11:09:25 AUG 14, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

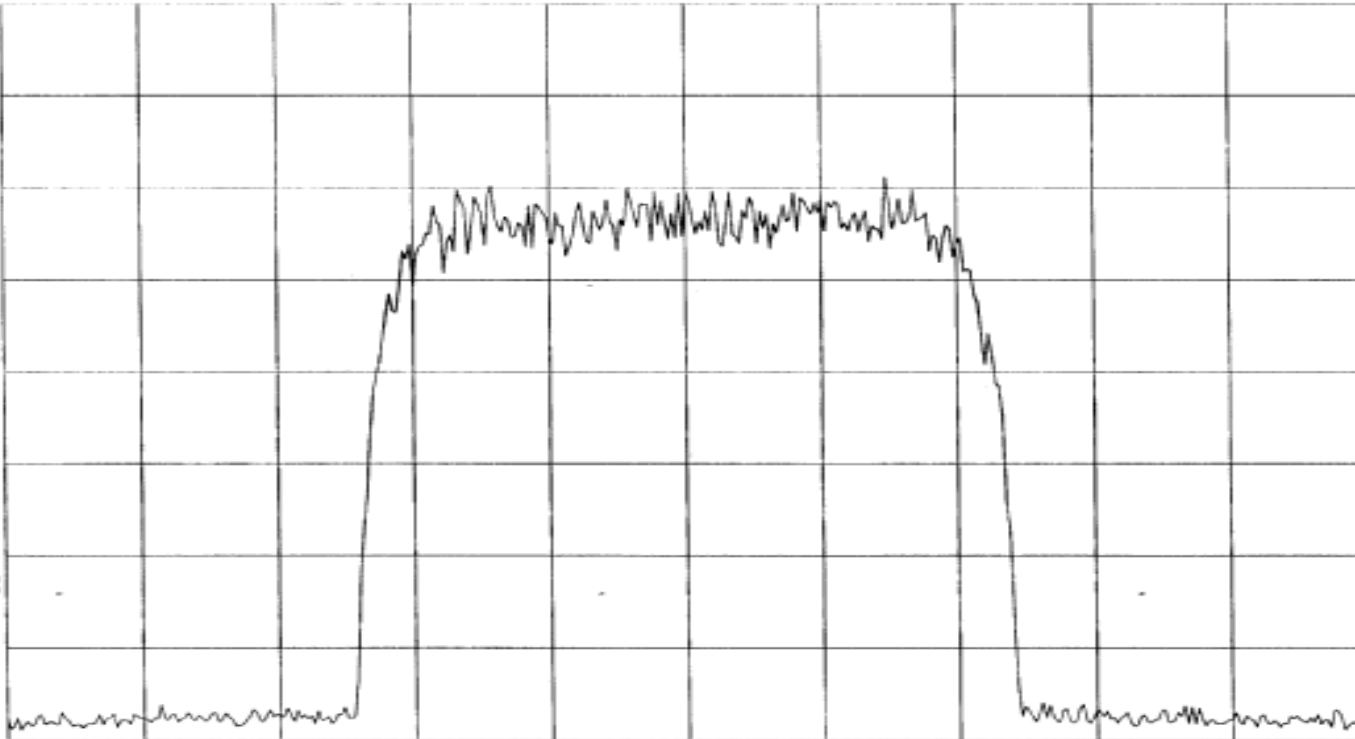

CENTER 847.75 MHz

#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz

SWP 33.3 msec


RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET

Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph: 2.1049	Date:
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Downlink (low) - Output at 870.25 MHz		

11: 18: 16 AUG 14, 2006

REF 30.0 dBm AT 10 dB

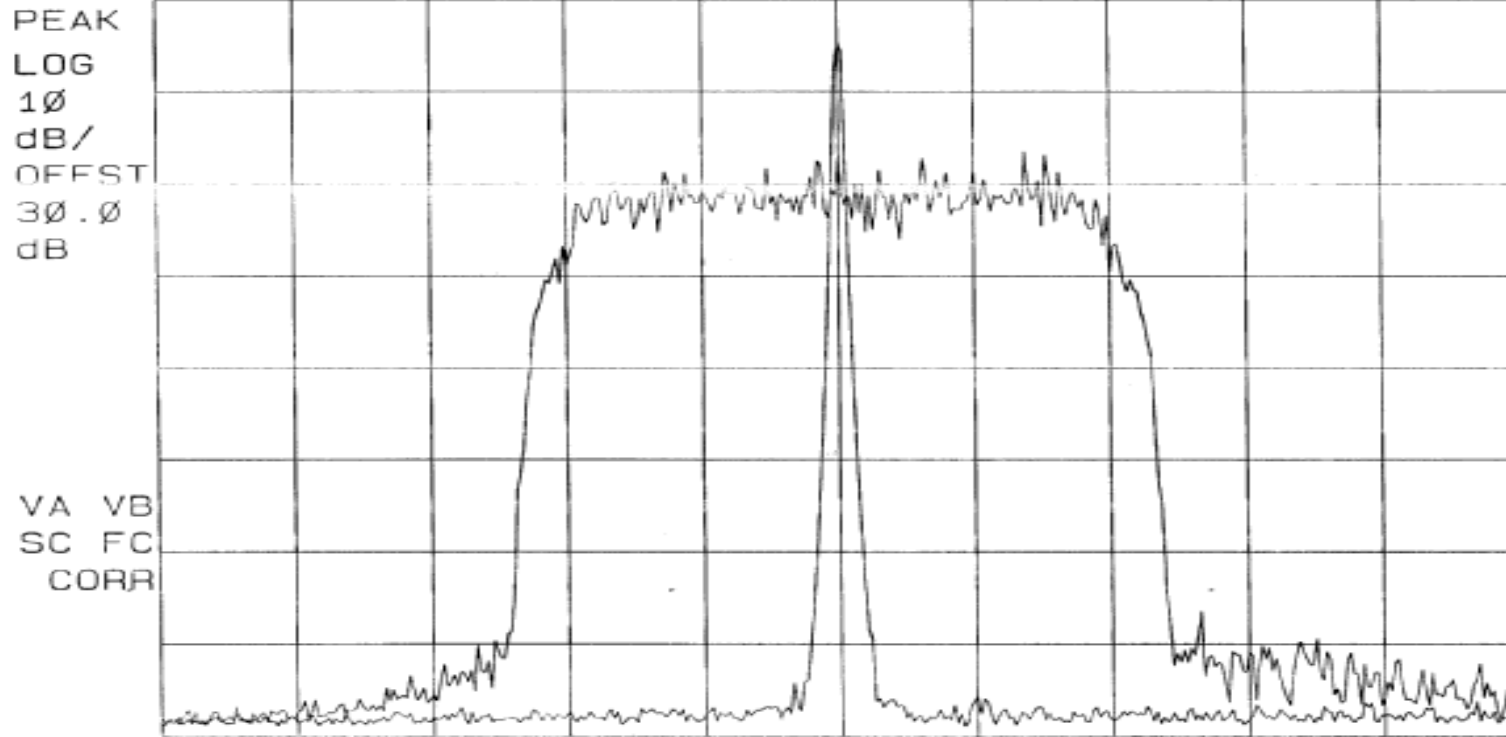

CENTER 870.25 MHz

#RES BW 30 KHz

#VBW 100 KHz

SPAN 10.00 MHz

SWP 33.3 msec

RETLIF TESTING LABORATORIES


EMISSIONS DATA SHEET

Test Method:	Occupied Bandwidth			
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier	
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002	
Test Specification:	FCC Part 2	Paragraph:	2.1049	
Operating Mode:	Amplifying input signal			
Notes:	CDMA - Downlink (low) - Input at 870.25 MHz			
Job No:	R-4609N-1		Technician:	M.Seamans
Date:	8/16/2006			

11:34:22 AUG 14, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

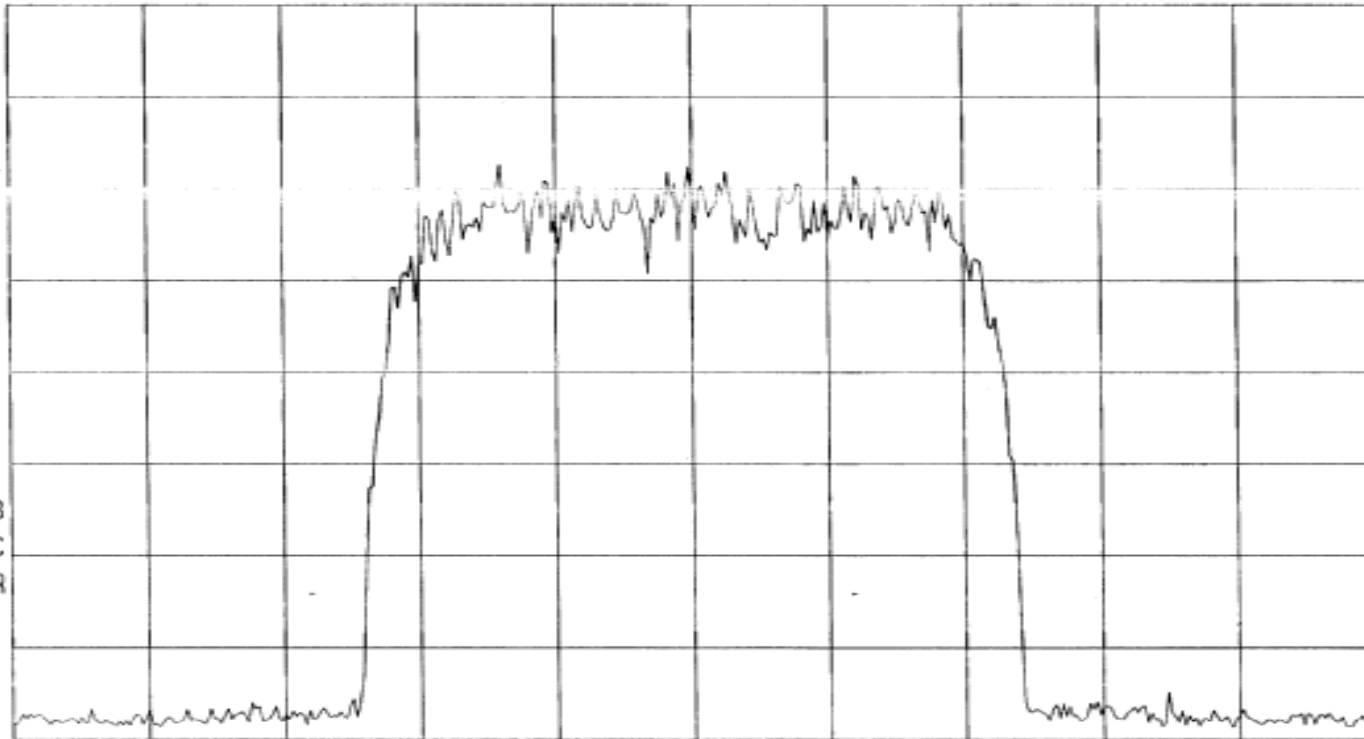

CENTER 870.25 MHz

#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz

SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph: 2.1049	Date:
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Downlink (High) - Output at 892.65 MHz		

11: 16: 03 AUG 14, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA VB
SC FC
CORR

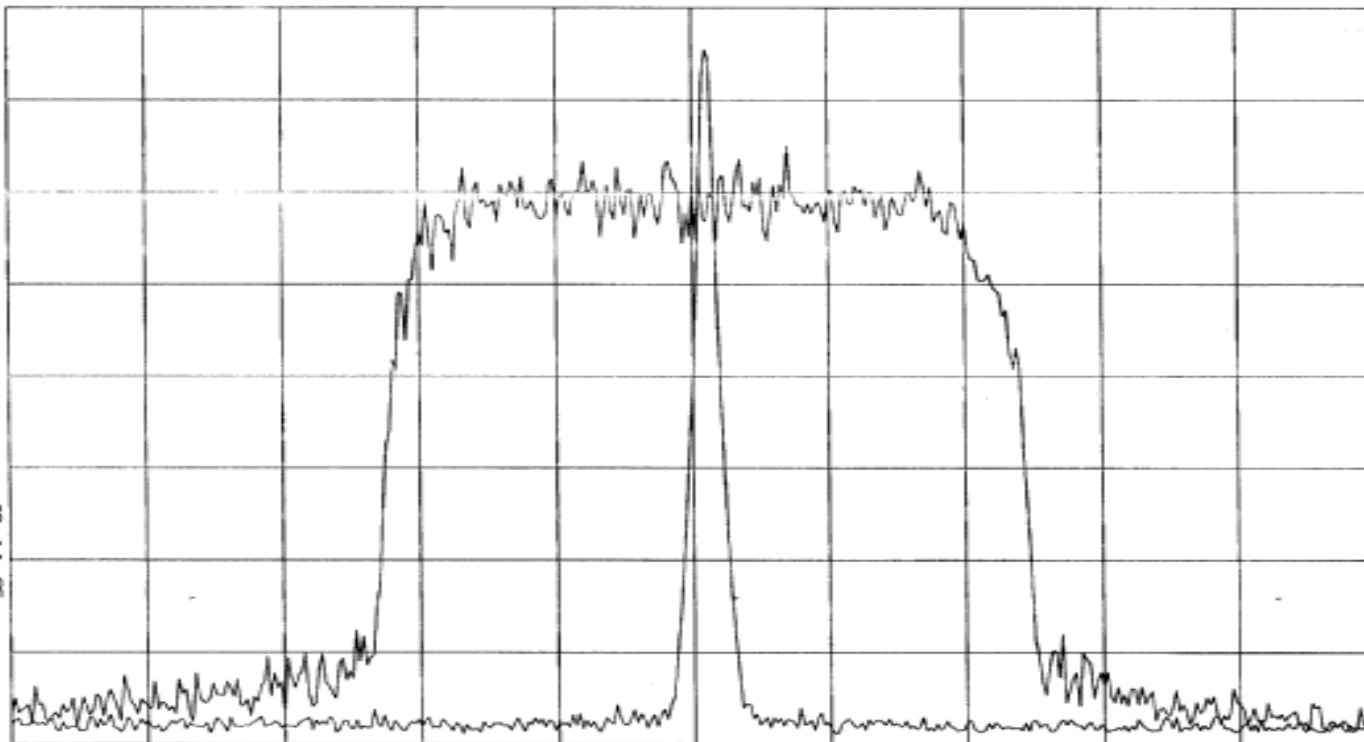

CENTER 892.65 MHz
#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz
SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth			
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier	
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002	
Test Specification:	FCC Part 2	Paragraph: 2.1049	Date:	8/16/2006
Operating Mode:	Amplifying input signal			
Notes:	CDMA - Downlink (High) - Input at 892.65 MHz			

11:37:15 AUG 14, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

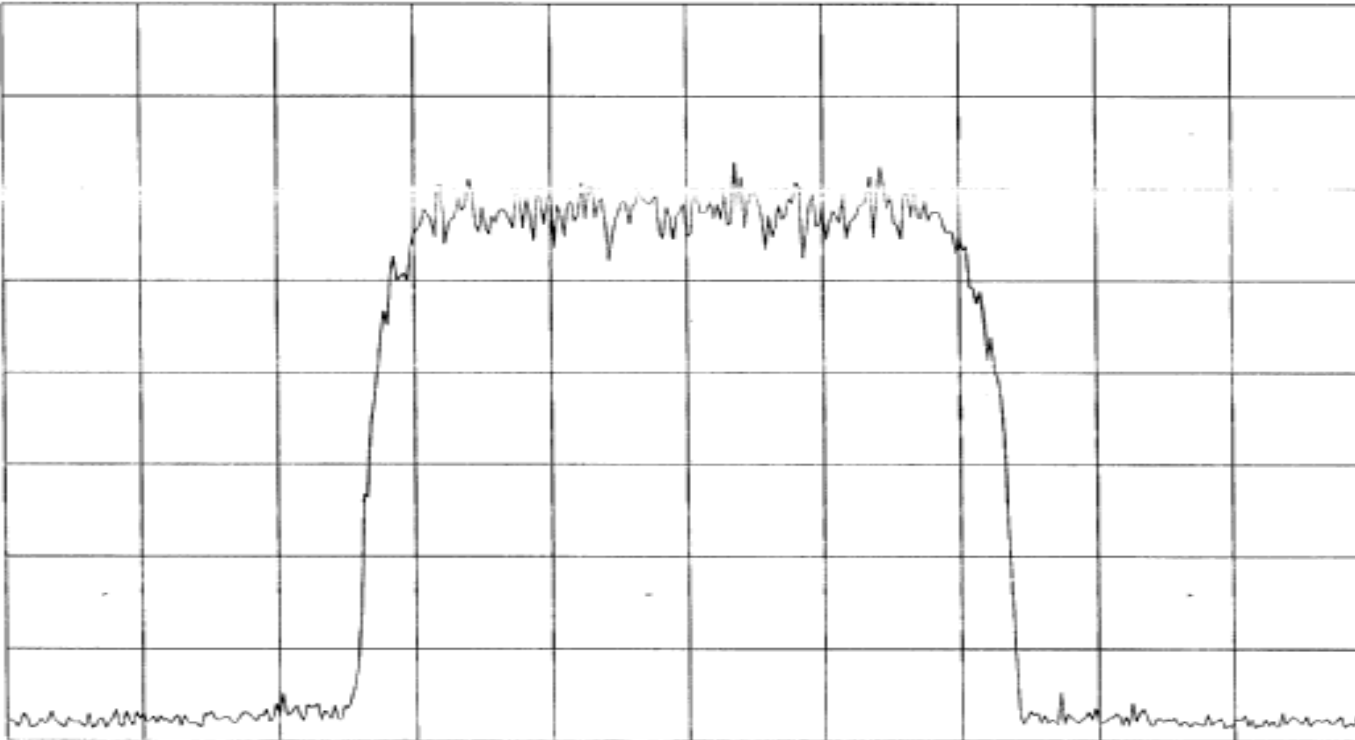

CENTER 892.75 MHz
#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz
SWP 33.3 msec