

FCC TEST REPORT FCC 47 CFR Part 15C Industry Canada RSS-210 Periodic operation in the 40.66-40.70 MHz and above 70 MHz	
Report Reference No.	G0M-1202-1744-TFC231P-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	  A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Filed Test Laboratory, Reg.-No.: 96970 IC OATS Filing assigned code: 3470A
Applicant's name	Kieback und Peter GmbH & Co. KG
Address	Tempelhofer Weg 50 12347 Berlin GERMANY
Test specification:	
Standard	47 CFR Part 15C RSS-210, Issue 8, 2010-12 RSS-Gen, Issue 3, 2010-12 ANSI C63.4:2009
Equipment under test (EUT):	
Product description	Room Operating Panel
Model No.	RBW3xx-FTL
Hardware version	66735101
Firmware / Software version	Funkchip_315
	FCC-ID: NY3RBW322FTL IC: 10353A-RBW322FTL
Test result	Passed

Possible test case verdicts:

- neither assessed nor tested : N/N
- required by standard but not appl. to test object : N/A
- required by standard but not tested : N/T
- not required by standard for the test object : N/R
- test object does meet the requirement : P (Pass)
- test object does not meet the requirement : F (Fail)

Testing:

Date of receipt of test item : 2012-02-23

Date (s) of performance of tests : 2012-02-23

Compiled by : Christian Weber

Tested by (+ signature) : Christian Weber
(Testing Manager)

C. Weber

Approved by (+ signature) : Jens Zimmermann
(Test Lab Manager)

J. Zimmermann

Date of issue : 2012-08-31

Total number of pages : 39

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Test Report No.: G0M-1202-1744-TFC231P-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany



REPORT INDEX

1	EQUIPMENT (TEST ITEM) DESCRIPTION:	4
1.1	Photos – Equipment External	5
1.2	Photos – Equipment internal	6
1.3	Photos – Test setup	7
1.4	Supporting Equipment Used During Testing	8
1.5	Test Modes	9
1.6	Test Equipment Used During Testing	10
1.7	Sample emission level calculation	11
2	RESULT SUMMARY	12
3	TEST CONDITIONS AND RESULTS	13
3.1	Test Conditions and Results – Occupied Bandwidth	13
3.2	Test Conditions and Results – Cease of transmission of automatically activated transmitters	15
3.3	Test Conditions and Results – Total transmission time	17
3.4	Test Conditions and Results – Field strength of fundamental and spurious emissions	19
3.5	Test Conditions and Results – Duty Cycle	21
3.6	Test Conditions and Results – Emission Bandwidth	23
3.7	Test Conditions and Results – Receiver radiated emissions	26
ANNEX A	Transmitter fundamental field strength	28
ANNEX B	Transmitter radiated spurious emissions	30
ANNEX C	Receiver radiated spurious emissions	36



1 Equipment (Test item) Description:

Description	Room Operating Panel	
Model	RBW3xx-FTL	
Serial number	None	
Hardware version	66735101	
Software / Firmware version	Funkchip_315	
FCC-ID	NY3RBW322FTL	
IC	10353A-RBW322FTL	
Equipment type	End product	
Radio type	Transceiver	
Radio technology	custom	
Operating frequency range	315 MHz	
Frequency range	F _{MID}	315 MHz
Spreading	None	
Modulations	unspecified	
Number of channels	1	
Channel spacing	None	
Number of antennas	1	
Antenna	Type	integrated
	Model	PCB antenna
	Manufacturer	see Manufacturer
	Gain	-10.0dBi
Manufacturer	Kieback und Peter GmbH & Co. KG Tempelhofer Weg 50 12347 Berlin GERMANY	
Power supply	V _{NOM}	3.6VDC (Lithium-Battery)
	V _{MIN}	N/A
	V _{MIN}	N/A
AC/DC-Adaptor	Model	N/A
	Vendor	N/A
	Input	N/A
	Output	N/A

1.1 Photos – Equipment External

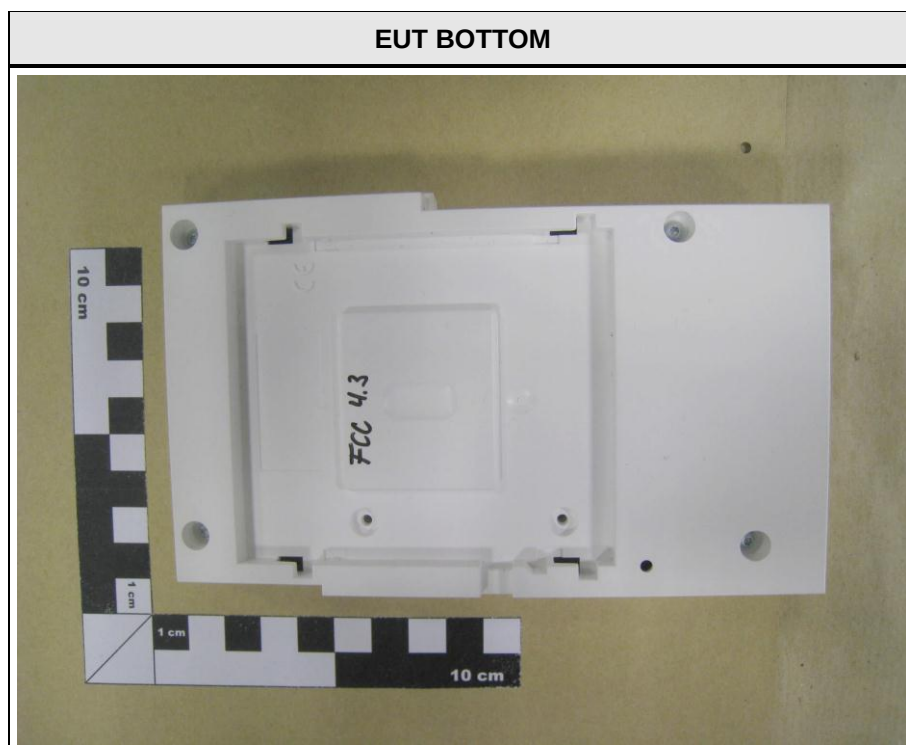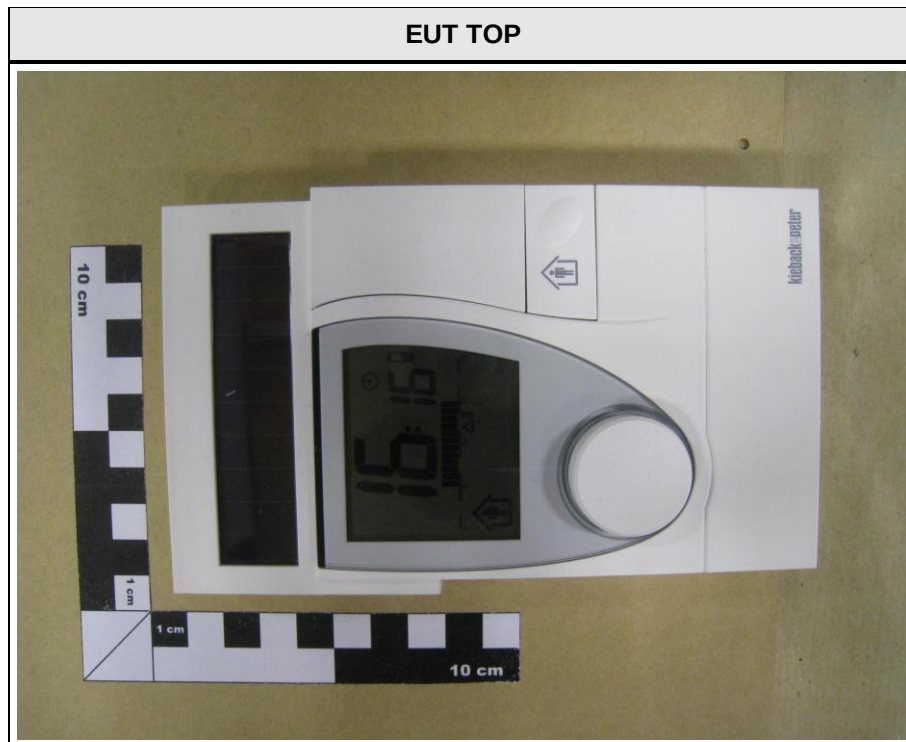


1.2 Photos – Equipment internal

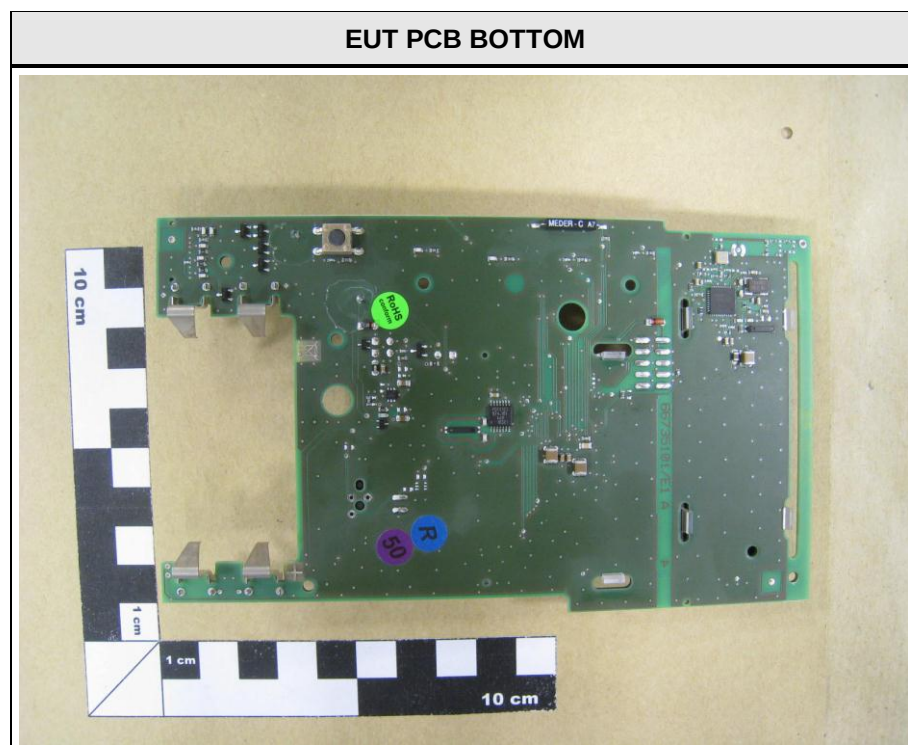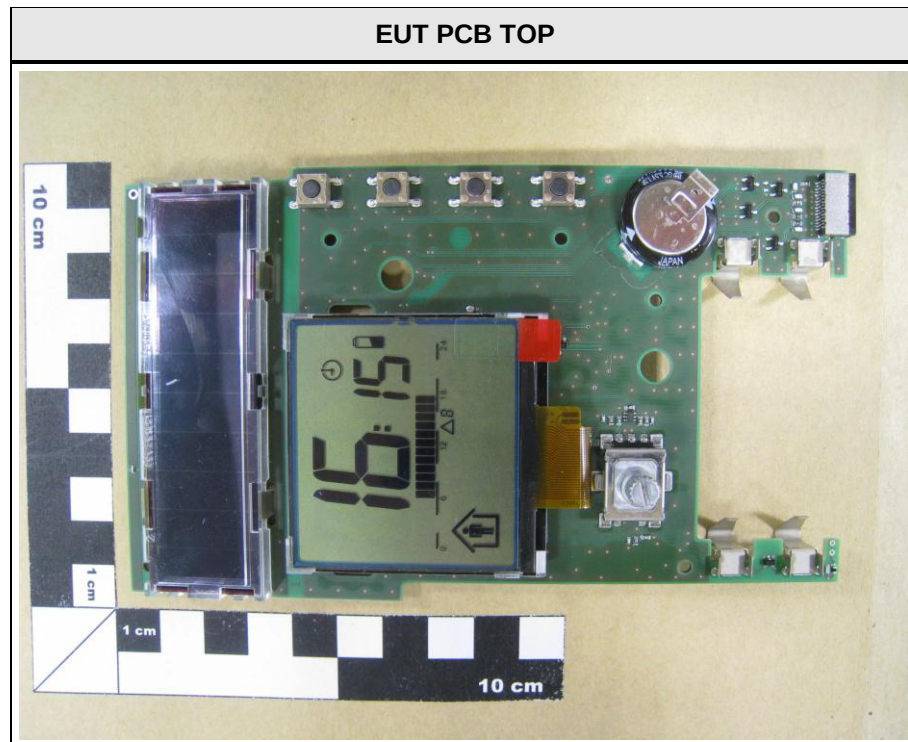

Test Report No.: G0M-1202-1744-TFC231P-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

1.3 Photos – Test setup

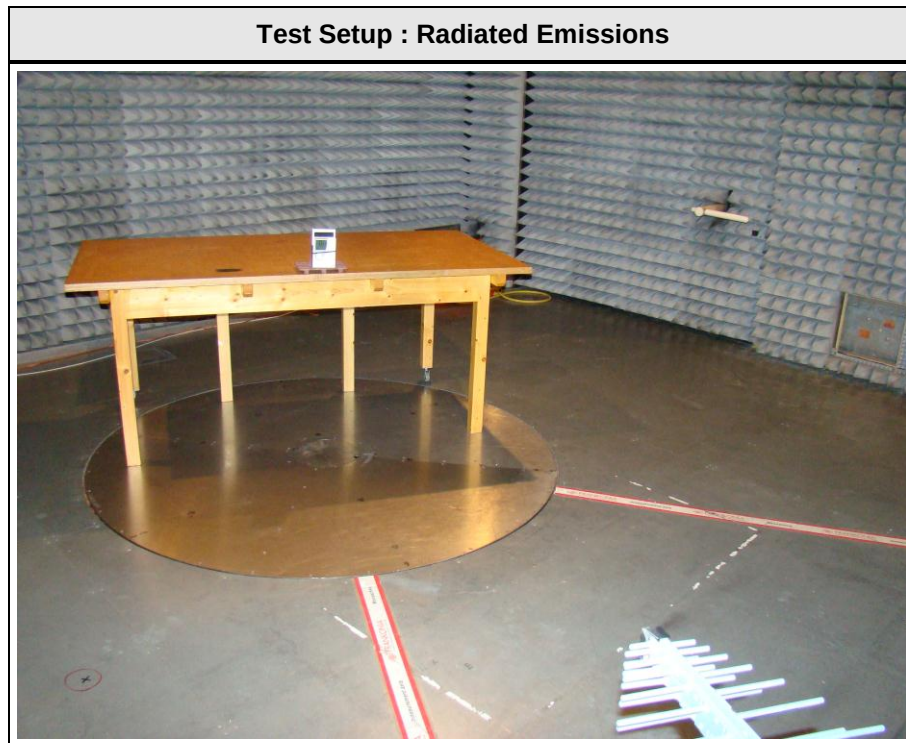

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
None				
*Note: Use the following abbreviations: AE : Auxiliary/Associated Equipment, or SIM : Simulator (Not Subjected to Test) CABL : Connecting cables				

1.5 Test Modes

Mode #	Description	
Single	General conditions:	EUT powered by fully charged battery
	Radio conditions:	Mode = standalone transmit Modulation = On Power level = Maximum
Receive	General conditions:	EUT powered by fully charged battery
	Radio conditions:	Mode = standalone receive

1.6 Test Equipment Used During Testing

Occupied Bandwidth					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	ETS 0496	Aug 10	Aug 12

Emission Bandwidth					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	ETS 0496	Aug 10	Aug 12

Cease of transmission					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	ETS 0496	Aug 10	Aug 12

Total transmission time					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	ETS 0496	Aug 10	Aug 12

Duty Cycle					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	ETS 0496	Aug 10	Aug 12

Field strength emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Semi-anechoic chamber	Frankonia	AC 5	ETS 0583	-	-
Spectrum Analyzer	R&S	FSIQ26	ETS 0413	Apr. 11	Apr. 12
Biconical Antenna	R&S	HK 116	ETS 0012	Jan 10	Jan 13
LPD Antenna	R&S	HL 223	ETS 0295	Feb 11	Feb 13
LPD Antenna	R&S	HL 025	ETS 0512	Feb 10	Feb 13

Test Report No.: G0M-1202-1744-TFC231P-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB μ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB μ V/m). The FCC limits are given in units of μ V/m. The following formula is used to convert the units of μ V/m to dB μ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{rclclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

2 Result Summary

FCC 47 CFR Part 15C, IC RSS-210				
Product Specific Standard Section	Requirement – Test	Reference Method	Result	Remarks
RSS-Gen 4.6.1	Occupied Bandwidth	RSS-Gen 4.6.1	N/R	Informational only
FCC 15.231(a)(1) IC RSS-210 A1.1.1(a)	Deactivation of manually operated transmitter	non specific	N/R	EUT not manually operated
FCC 15.231(a)(2) IC RSS-210 A1.1.1(b)	Cease of transmission of automatically operated transmitter	non specific	PASS	
FCC 15.231(a)(3) IC RSS-210 A1.1.1(c)	Total transmission time	non specific	PASS	
FCC 15.231(a)(4) IC RSS-210 A1.1.1(d)	Radio control during emergencies	non specific	N/R	EUT not for emergencies
FCC 15.231(a)(5)	Transmission of set-up information for security systems	non specific	N/R	EUT not for security systems
FCC 15.249(b) FCC 15.205 IC RSS-210 A1.1.2(1)	Field strength of fundamental and spurious emissions	ANSI C63.4	PASS	
FCC 15.231(b)(2) FCC 15.205 IC RSS-210 A1.1.2(2)	Duty cycle	non specific	PASS	
FCC 15.231(c) IC RSS-210 A1.1.3	Emission bandwidth	non specific	PASS	
FCC 15.231(d) IC RSS-210 A1.1.3	Emission bandwidth for the 40.66-40.70 MHz band	non specific	N/R	EUT is not operating in the 40.66-40.70 MHz band
FCC 15.231(d) IC RSS-210 A1.1.4	Frequency Stability for the 40.66-40.70 MHz band	non specific	N/R	EUT is not operating in the 40.66-40.70 MHz band
FCC 15.231(e) IC RSS-210 A1.1.5	Reduced field strength and spurious emissions of radiators operating at a rate exceeding 15.231(a)	ANSI C63.4	N/R	Not reduction used
IC RSS-210 Section 2.3 IC RSS-Gen 4.10 6.1	Receiver radiated spurious emissions	ANSI C63.4	PASS	
FCC § 15.107 FCC § 15.207 IC RSS-Gen 7.2.4	AC power line conducted emissions	ANSI C63.4	N/R	EUT exclusively battery powered
Remarks:				

Test Report No.: G0M-1202-1744-TFC231P-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

3 Test Conditions and Results


3.1 Test Conditions and Results – Occupied Bandwidth

Occupied Bandwidth acc. IC RSS-Gen			Verdict: PASS
Test according to measurement reference	Reference Method		
	RSS-Gen 4.6.1		
Test frequency range	Tested frequencies		
	F _{MID}		
EUT test mode	Single		
Limits			
None (Informational only)			
Test setup			
Spectrum Analyzer EUT			
Test procedure			
1. EUT set to test mode (Communication tester is used if needed) 2. Span set to at least twice the emission spectrum 3. Resolution bandwidth set to 1% of span 4. Occupied Bandwidth (99%) measurement with spectrum analyzer built in measurement function			
Test results			
Channel	Frequency [MHz]	Occupied Bandwidth [kHz]	
F _{MID}	315	582	
Comments: Measurement is applicable to all variants			

Occupied Bandwidth - F_{MID}

RSS Gen Occupied Bandwidth

EUT Room Operating Panel
Model RBW3xx-FTL
Approval Holder Kieback und Peter GmbH & Co. KG
Temperature / Voltage 23°C / Vnom
Test Site / Operator ETS Product Service AG
Test Specification Occupied Bandwidth
Comment 1 Channel.: 315 MHz
Comment 2 Spectrum analyzer with an integrated 99% power bandwidth function is used
Comment 3

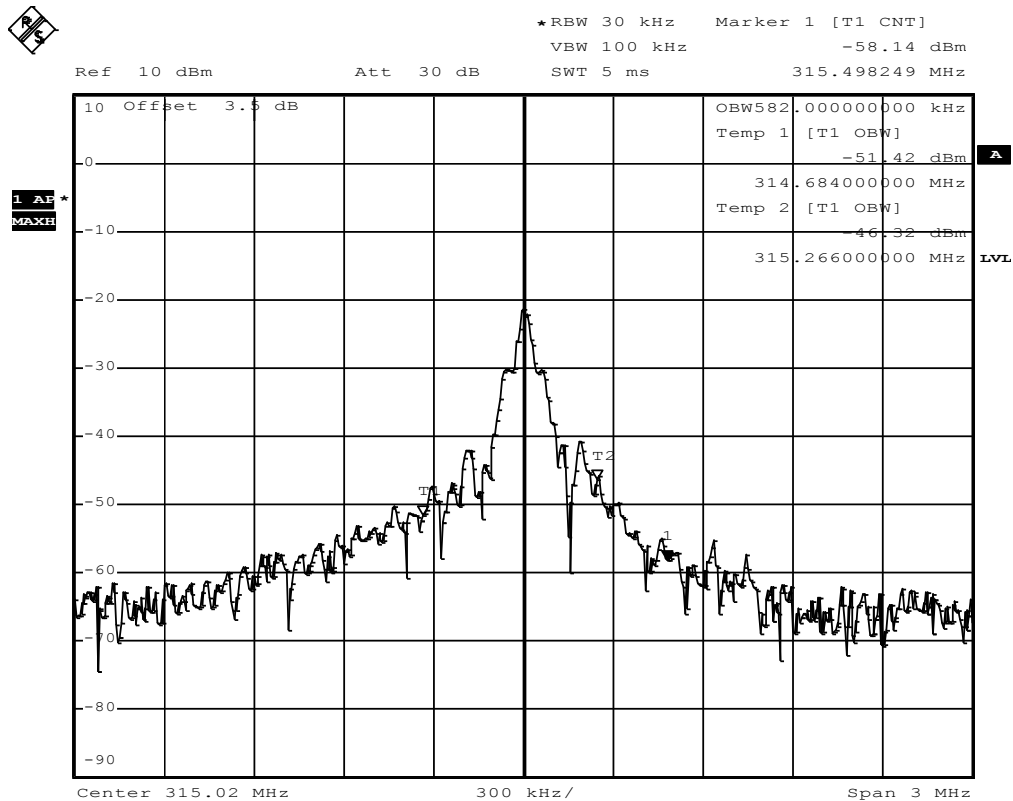

Comment: Occupied bandwidth: 14000 KHz
Date: 23.FEB.2012 10:37:27

Test Report No.: G0M-1202-1744-TFC231P-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.2 Test Conditions and Results – Cease of transmission of automatically activated transmitters


Cease of transmission of automatically activated transmitters acc. FCC 47 CFR 15.231 / IC RSS-210				Verdict: PASS
Test according referenced standards	Reference Method			
	FCC 15.231(a)(2) / IC RSS-210 A1.1.1(b)			
Test according to measurement reference	Reference Method			
	non specific			
Test frequency range	Tested frequencies			
	F _{MID}			
EUT test mode	Single			
Limits				
Cease of transmission after 5 seconds after activation				
Test setup				
Spectrum Analyzer EUT				
Test procedure				
1. EUT set to test mode 2. Center frequency is set to test frequency 3. Span it set to zero span 4. Resolution bandwidth is set large enough to accurately capture transmission burts 5. Transmission times after activation is measured				
Test results				
Channel	Frequency [MHz]	Transmission time [s]	Limit [s]	Margin [s]
F _{MID}	315	0.033	5	-4.967
Comments:				

Cease of transmission - F_{MID}

FCC 15.231(a)(2)

Cease of Transmission & Total transmission time & Duty Cycle

EUT Room Operating Panel
 Model RBW3xx-FTL
 Approval Holder Kieback und Peter GmbH & Co. KG
 Temperature / Voltage 23°C / V_{nom}
 Test Site / Operator ETS Product Service AG
 Test Specification Emission Bandwidth
 Comment 1 Channel.: 315 MHz
 Comment 2 Cease of transmission of automatically activated transmitter & Duty Cycle
 Comment 3 Duty cycle 3*1.8ms/100ms = 5.4ms/100ms -> -25.35dB -> 20dB used
 Signal is transmitted every 10 minutes;
 Transmission per hour = 6*5.4ms = 32.4ms

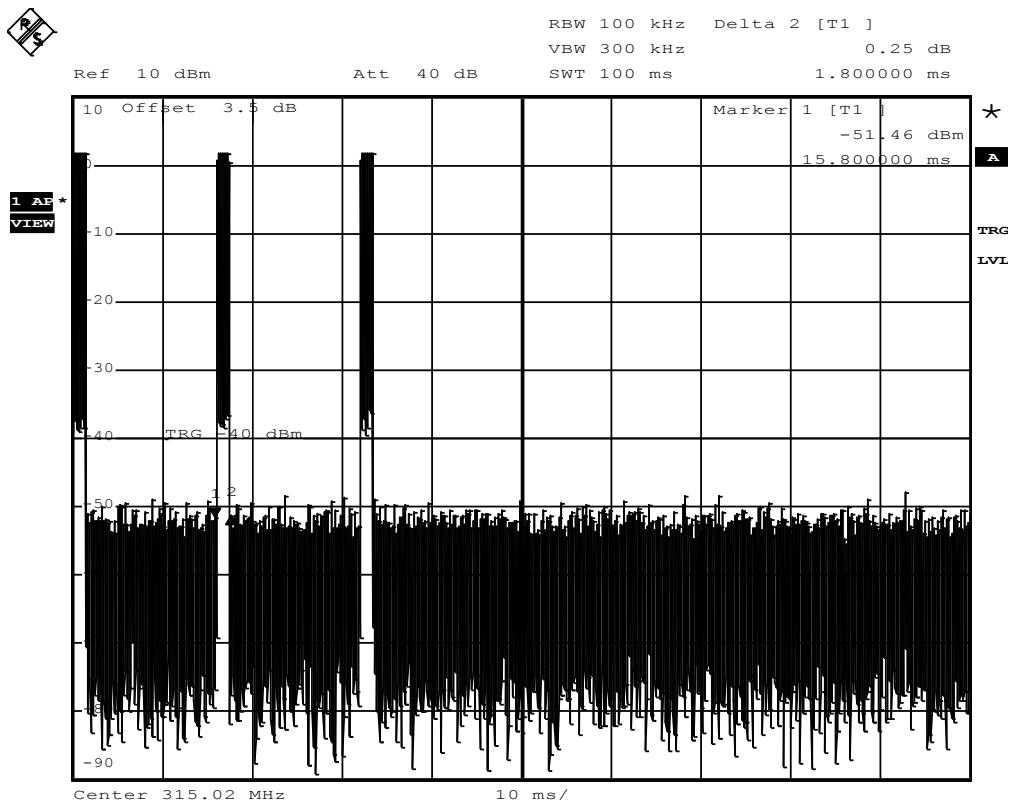

Comment: Occupied bandwidth: 14000 KHz
 Date: 23.FEB.2012 11:42:22

Test Report No.: G0M-1202-1744-TFC231P-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.3 Test Conditions and Results – Total transmission time


Total transmission time acc. FCC 47 CFR 15.231 / IC RSS-210				Verdict: PASS
Test according referenced standards	Reference Method			
	FCC 15.231(a)(3) / IC RSS-210 A1.1.1(c)			
Test according to measurement reference	Reference Method			
	non specific			
Test frequency range	Tested frequencies			
	F _{MID}			
EUT test mode	Single			
Limits				
Total transmission time shall not exceed 2 seconds per hour				
Test setup				
Spectrum Analyzer EUT				
Test procedure				
1. EUT set to test mode 2. Center frequency is set to test frequency 3. Span it set to zero span 4. Resolution bandwidth is set large enough to accurately capture transmission burts 5. Total transmission time is measured				
Test results				
Channel	Frequency [MHz]	Total transmission time [s]	Limit [s]	Margin [s]
F _{MID}	315	6 x 5.4ms = 0.0324	2	-1.968
Comments: * Physical distance between EUT and measurement antenna.				

Total transmission time - F_{MID}

FCC 15.231(a)(2)

Cease of Transmission & Total transmission time & Duty Cycle

EUT Room Operating Panel
 Model RBW3xx-FTL
 Approval Holder Kieback und Peter GmbH & Co. KG
 Temperature / Voltage 23°C / Vnom
 Test Site / Operator ETS Product Service AG
 Test Specification Emission Bandwidth
 Comment 1 Channel.: 315 MHz
 Comment 2 Cease of transmission of automatically activated transmitter & Duty Cycle
 Comment 3 Duty cycle 3*1.8ms/100ms = 5.4ms/100ms -> -25.35dB -> 20dB used
 Signal is transmitted every 10 minutes;
 Transmission per hour = 6*5.4ms = 32.4ms

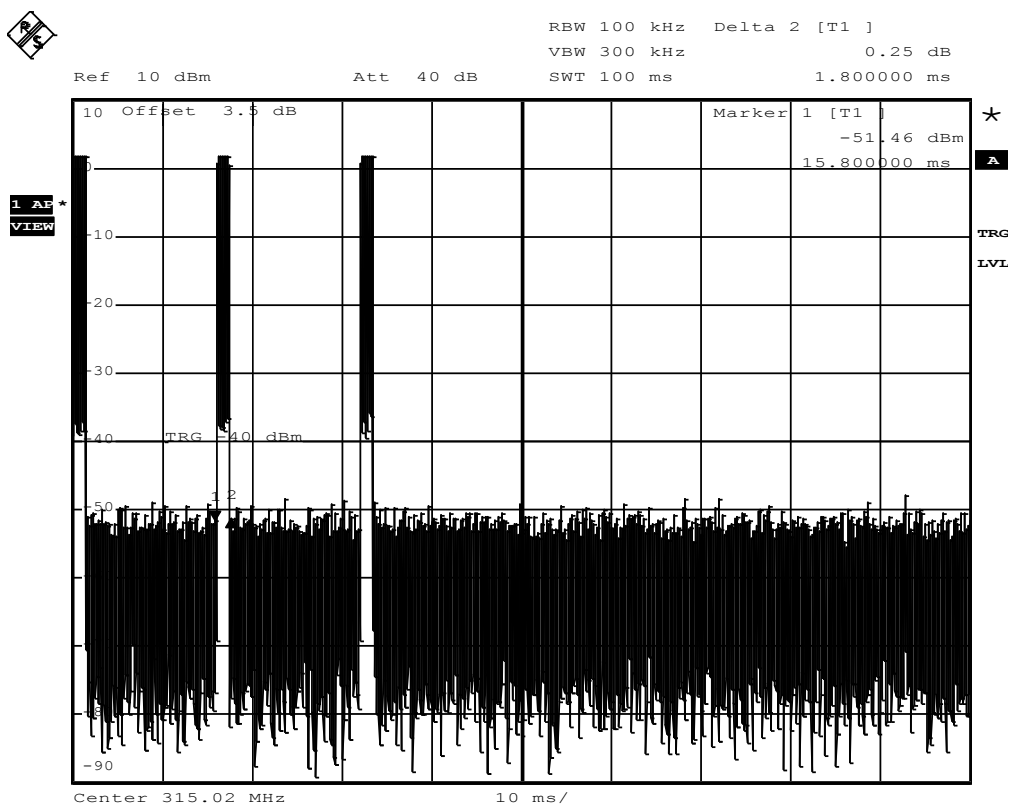

Comment: Occupied bandwidth: 14000 KHz
 Date: 23.FEB.2012 11:42:22

3.4 Test Conditions and Results – Field strength of fundamental and spurious emissions

Field strength of fundamental and spurious emissions acc. FCC 47 CFR 15.231 / IC RSS-210				Verdict: PASS	
Test according referenced standards		Reference Method			
		FCC 15.231(b) / IC RSS-210 A1.1.2(b)			
Test according to measurement reference		Reference Method			
		ANSI C63.4			
Test frequency range		Tested frequencies			
		30MHz – 10 th hamonic			
EUT test mode		Single			
Limits					
Fundamental Frequency [MHz]	Fundamental Limit [µV/m]	Fundamental Limit [dBµV/m]	Spurious Limit [dBµV/m]	Limit Distance [m]	
40.66-40.70	2250	66.95	46.95	3	
70-130	1250	61.94	41.94	3	
130-174	1250-3750	61.94 – 71.48	41.94 – 51.48	3	
174-260	3750	71.48	51.48	3	
260-470	3750-12500	71.48 – 81.94	51.48 – 61.94	3	
> 470	12500	81.94	61.94	3	
Detector = Quasi-Peak or Average					
Test setup					

Test Report No.: G0M-1202-1744-TFC231P-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Test procedure								
1. EUT set to test mode 2. Span it set according to measurement range 3. Resolution bandwidth below 1GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1MHz with peak/average detector is used above 1GHz 4. Markers are set to maximum emission levels								
Test results								
EUT Fundamental frequency				315 MHz				
EUT Fundamental Limit				Average = 75.62 dbμV/m / Peak = 95.62 dbμV/m				
EUT Spurious Limit				Average = 55.62 dbμV/m / Peak = 75.62 dbμV/m				
Channel	Frequency [MHz]	Emission [MHz]	Level [dbμV/m]	Detector	Pol.	Limit [dbμV/m]	Limit distance [m]*	Margin [dB]
F _{MID}	315	315	94	pk	ver	95.62	3	-1.62
F _{MID}	315	315	74	avg	ver	75.62	3	-1.62
F _{MID}	315	315	79	pk	hor	95.62	3	-16.62
F _{MID}	315	315	59	avg	hor	75.62	3	-16.62
F _{MID}	not significant spurious emissions							
Comments: * Physical distance between EUT and measurement antenna. ** Average value determined by duty cycle correction								

3.5 Test Conditions and Results – Duty Cycle


Total transmission time acc. FCC 47 CFR 15.231 / IC RSS-210			Verdict: PASS
Test according referenced standards	Reference Method		
	FCC 15.231(a)(3) / IC RSS-210 A1.1.1(c)		
Test according to measurement reference	Reference Method		
	non specific		
Test frequency range	Tested frequencies		
	F _{MID}		
EUT test mode	Single		
Limits			
None (only for peak to average correction, 20dB max)			
Test setup			
Spectrum Analyzer EUT			
Test procedure			
1. EUT set to test mode 2. Center frequency is set to test frequency 3. Span it set to zero span 4. Resolution bandwidth is set large enough to accurately capture transmission burts 5. Total transmission time is measured			
Test results			
Channel	Frequency [MHz]	Duty Cycle [% @ 100ms]	Duty Cycle correction [dB]
F _{MID}	315	5.4	25.35 -> 20dB
Comments: * Physical distance between EUT and measurement antenna.			

Duty Cycle - F_{MID}

FCC 15.231(a)(2)

Cease of Transmission & Total transmission time & Duty Cycle

EUT Room Operating Panel
 Model RBW3xx-FTL
 Approval Holder Kieback und Peter GmbH & Co. KG
 Temperature / Voltage 23°C / V_{nom}
 Test Site / Operator ETS Product Service AG
 Test Specification Emission Bandwidth
 Comment 1 Channel.: 315 MHz
 Comment 2 Cease of transmission of automatically activated transmitter & Duty Cycle
 Comment 3 Duty cycle 3*1.8ms/100ms = 5.4ms/100ms -> -25.35dB -> 20dB used
 Signal is transmitted every 10 minutes;
 Transmission per hour = 6*5.4ms = 32.4ms

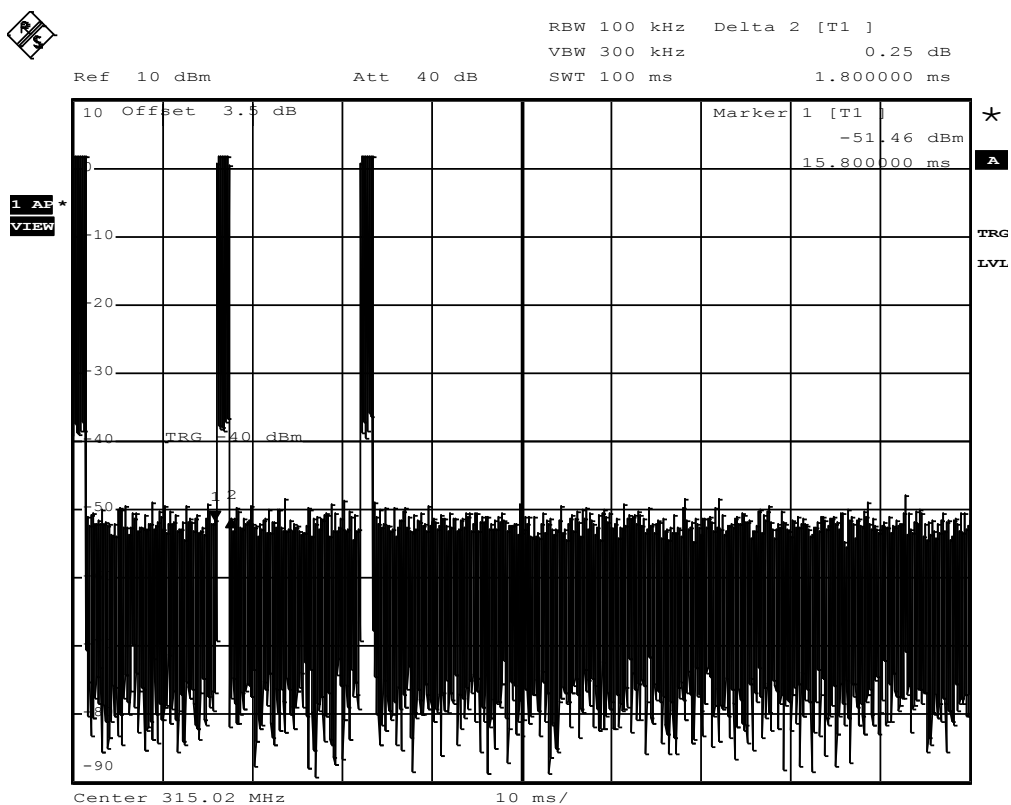

Comment: Occupied bandwidth: 14000 KHz
 Date: 23.FEB.2012 11:42:22


3.6 Test Conditions and Results – Emission Bandwidth

Emission Bandwidth acc. FCC 15.231 / IC RSS-210				Verdict: PASS
Test according to measurement reference	Reference Method			
	FCC 15.231(c) / IC RSS-210 A1.1.3			
Test frequency range	Tested frequencies			
	F _{MID}			
EUT test mode	Single			
Limits				
0.25% of center frequency				
Test setup				
Spectrum Analyzer EUT				
Test procedure				
1. EUT set to test mode (Communication tester is used if needed) 2. Span set to at least twice the emission spectrum 3. Resolution bandwidth set to 1% of span 4. For Industry Canada the occupied bandwidth (99%) is measurement with spectrum analyzer built in measurement function 5. For FCC the 20dB bandwidth is measurement with spectrum analyzer				
Test results - FCC				
Channel	Frequency [MHz]	Emission Bandwidth [kHz]	Limit [kHz]	Margin [kHz]
F _{MID}	315	318	787.5	-469.5
Test results – IC				
Channel	Frequency [MHz]	Emission Bandwidth [kHz]	Limit [kHz]	Margin [kHz]
F _{MID}	315	582	787.5	-205.5
Comments: Measurement is applicable to all variants				

FCC Emission Bandwidth - F_{MID}

FCC 15.231(c)
Emission Bandwidth

EUT Room Operating Panel
 Model RBW3xx-FTL
 Approval Holder Kieback und Peter GmbH & Co. KG
 Temperature / Voltage 23°C / Vnom
 Test Site / Operator ETS Product Service AG
 Test Specification Emission Bandwidth
 Comment 1 Channel.: 315 MHz
 Comment 2 20dB Bandwidth
 Comment 3

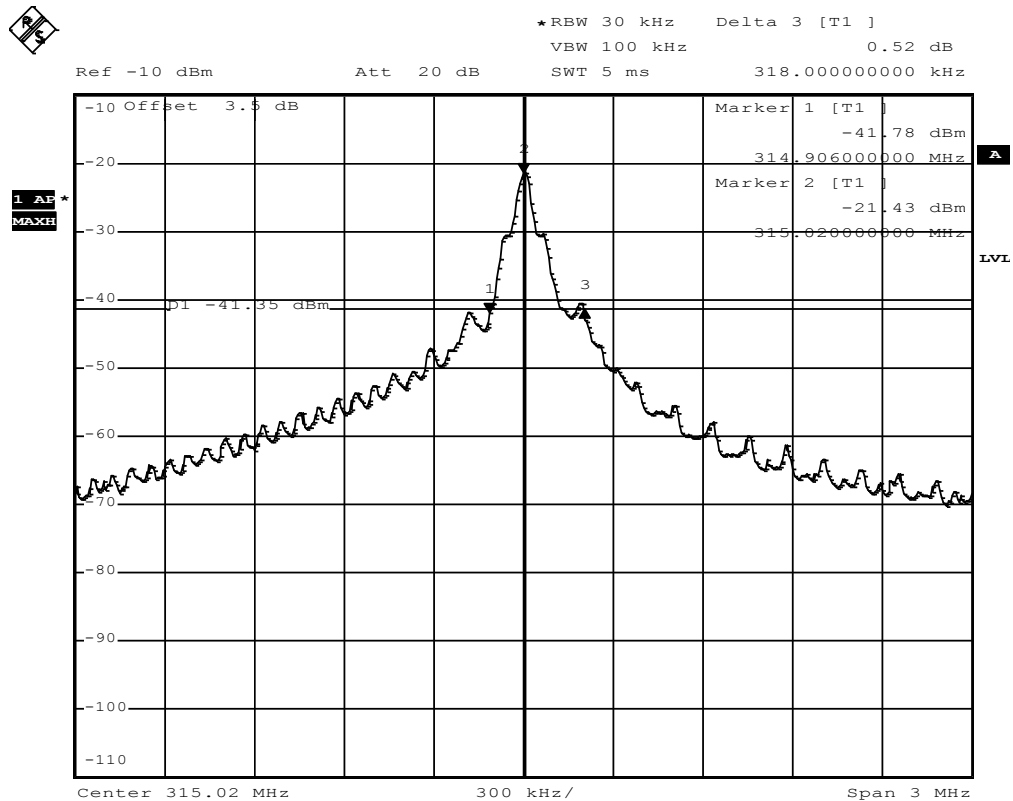


Comment: Occupied bandwidth: 14000 KHz
 Date: 23.FEB.2012 11:07:11

Test Report No.: G0M-1202-1744-TFC231P-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

IC Emission Bandwidth - F_{MID}
RSS-210
Emission Bandwidth

EUT	Room Operating Panel
Model	RBW3xx-FTL
Approval Holder	Kieback und Peter GmbH & Co. KG
Temperature / Voltage	23°C / Vnom
Test Site / Operator	ETS Product Service AG
Test Specification	Occupied Bandwidth
Comment 1	Channel.: 315 MHz
Comment 2	Spectrum analyzer with an integrated 99% power bandwidth function is used
Comment 3	

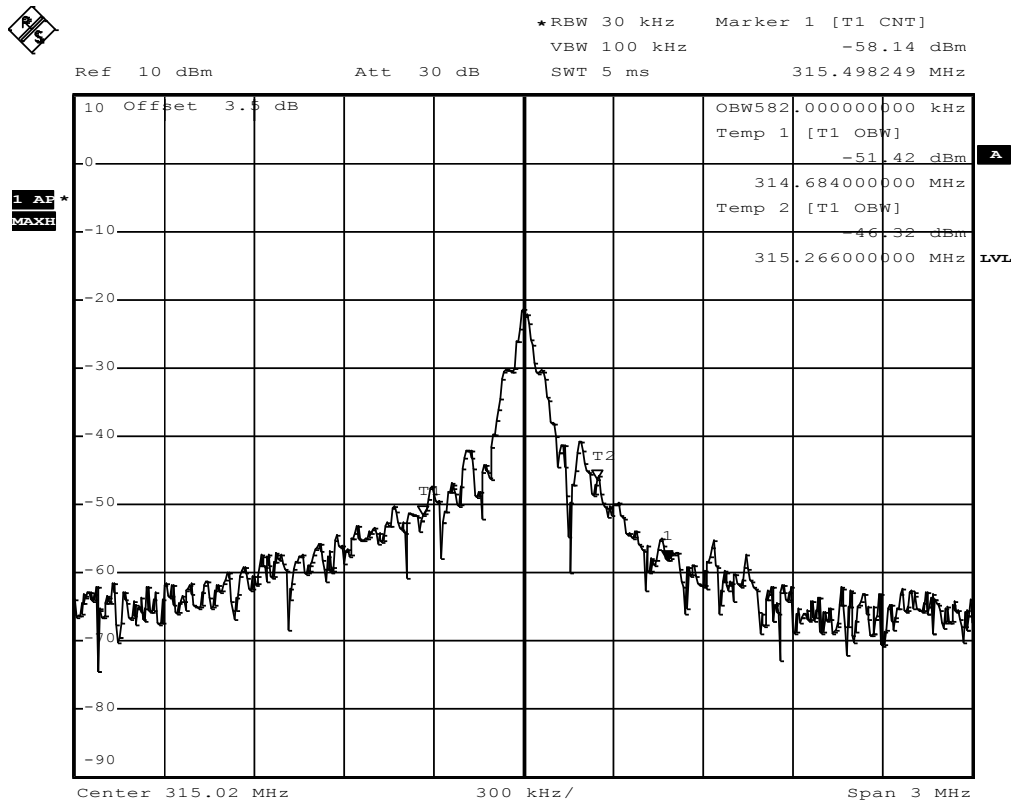


Comment: Occupied bandwidth: 14000 KHz
Date: 23.FEB.2012 10:37:27

Test Report No.: G0M-1202-1744-TFC231P-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.7 Test Conditions and Results – Receiver radiated emissions

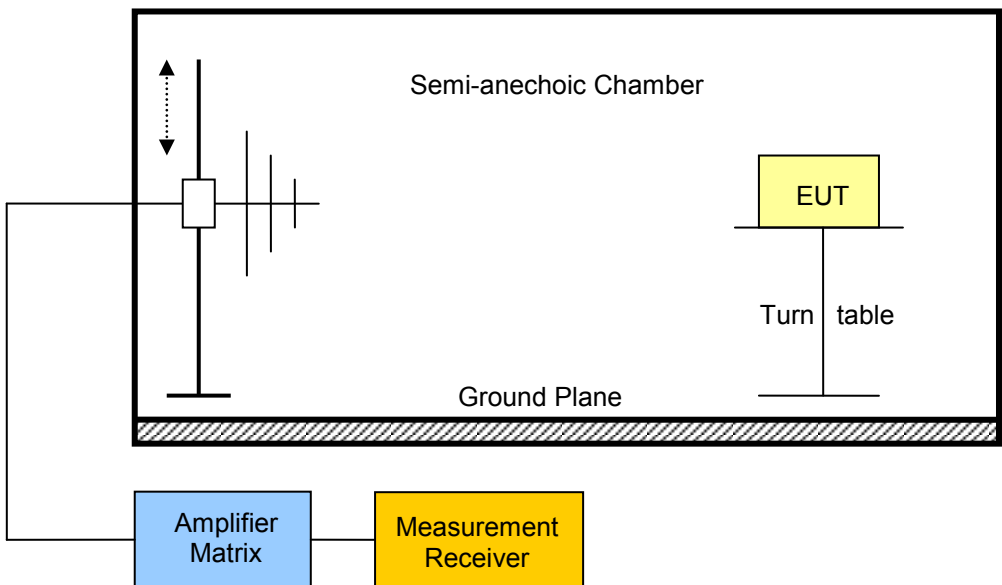Receiver radiated emissions acc. IC RSS-210				Verdict: PASS
Test according referenced standards	Reference Method			
	IC RSS-210 A8.5			
Test according to measurement reference	Reference Method			
	ANSI C63.4			
Test frequency range	Tested frequencies			
	30MHz – 3 th Harmonic			
EUT test mode	Receive			
Limits				
Frequency range [MHz]	Detector	Limit [µV/m]	Limit [dBµV/m]	Limit Distance [m]
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
> 1000	Average	500	54	3
Test setup				
				

Test Report No.: G0M-1202-1744-TFC231P-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Test procedure							
1. EUT set to receive mode (Communication tester is used if needed) 2. Span it set according to measurement range 3. Resolution bandwidth below 1GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1MHz with peak/average detector is used above 1GHz 4. Markers are set to peak emission levels							
Test results							
Channel	Frequency [MHz]	Emission [MHz]	Emission Level [db μ V/m]	Emission Level [μ V/m]	Det.	Limit [μ V/m]	Margin [μ V/m]
F _{MID}	315	900	33	44.67	pk	200.00	-155.33
Comments: * Physical distance between EUT and measurement antenna. The stated emission level corresponds to ambient noise floor. No real spurious emission has been measured.							


ANNEX A Transmitter fundamental field strength

Fundamental field strength according to FCC Part 15.231

Project number: G0M1202-1744

Manufacturer:	Kieback & Peter GmbH & Co. KG
EUT Name:	Room Operating Panel
Model:	RBW3xx-FTL
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pflug
Test Conditions:	Tnom: 23°C, Unom: 3.6 VDC (battery)
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3m
Mode:	315 MHz transmit fundamental
Test Date:	2012-02-23
Note:	

Index 8

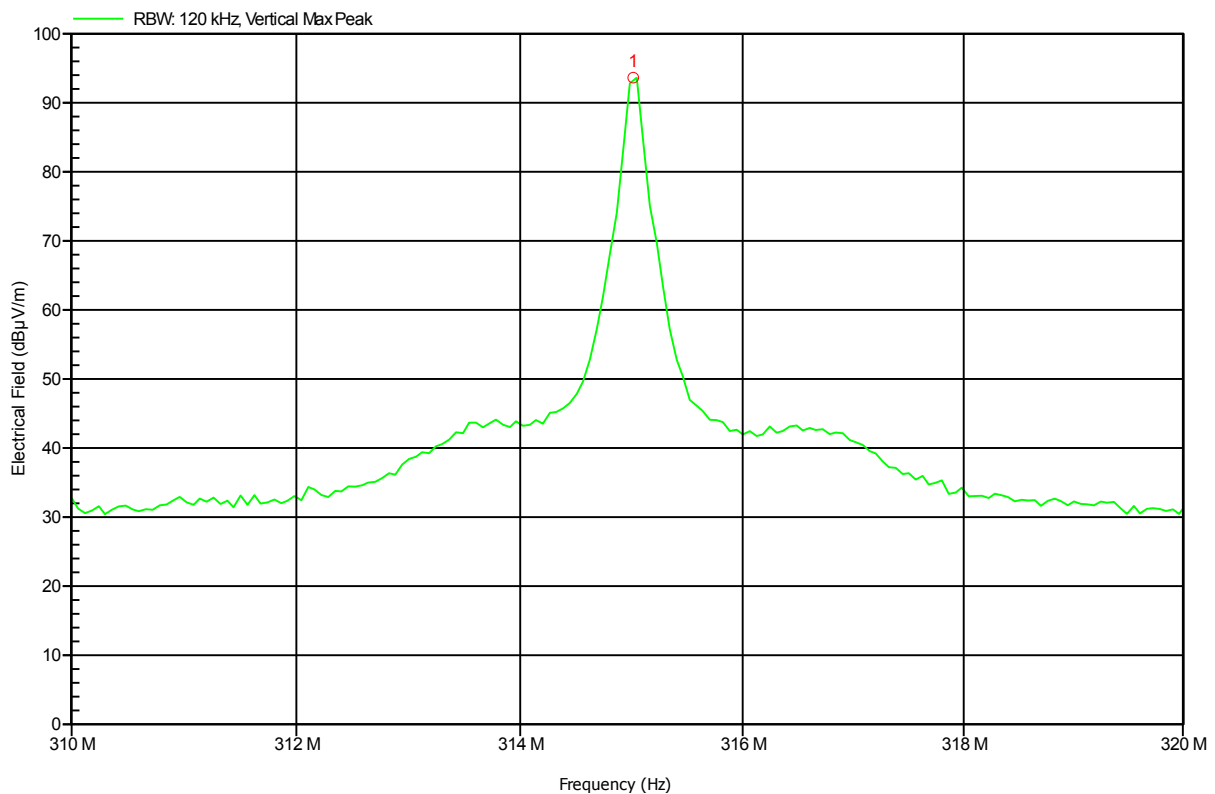

Frequency
315.014 MHz TX-

Test Report No.: G0M-1202-1744-TFC231P-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Fundamental field strength according to FCC Part 15.231

Project number: G0M1202-1744

Manufacturer: Kieback & Peter GmbH & Co. KG
 EUT Name: Room Operating Panel
 Model: RBW3xx-FTL
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pflug
 Test Conditions: Tnom: 23°C, Unom: 3.6 VDC (battery)
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3m
 Mode: 315 MHz transmit fundamental
 Test Date: 2012-02-23
 Note:

Index 9

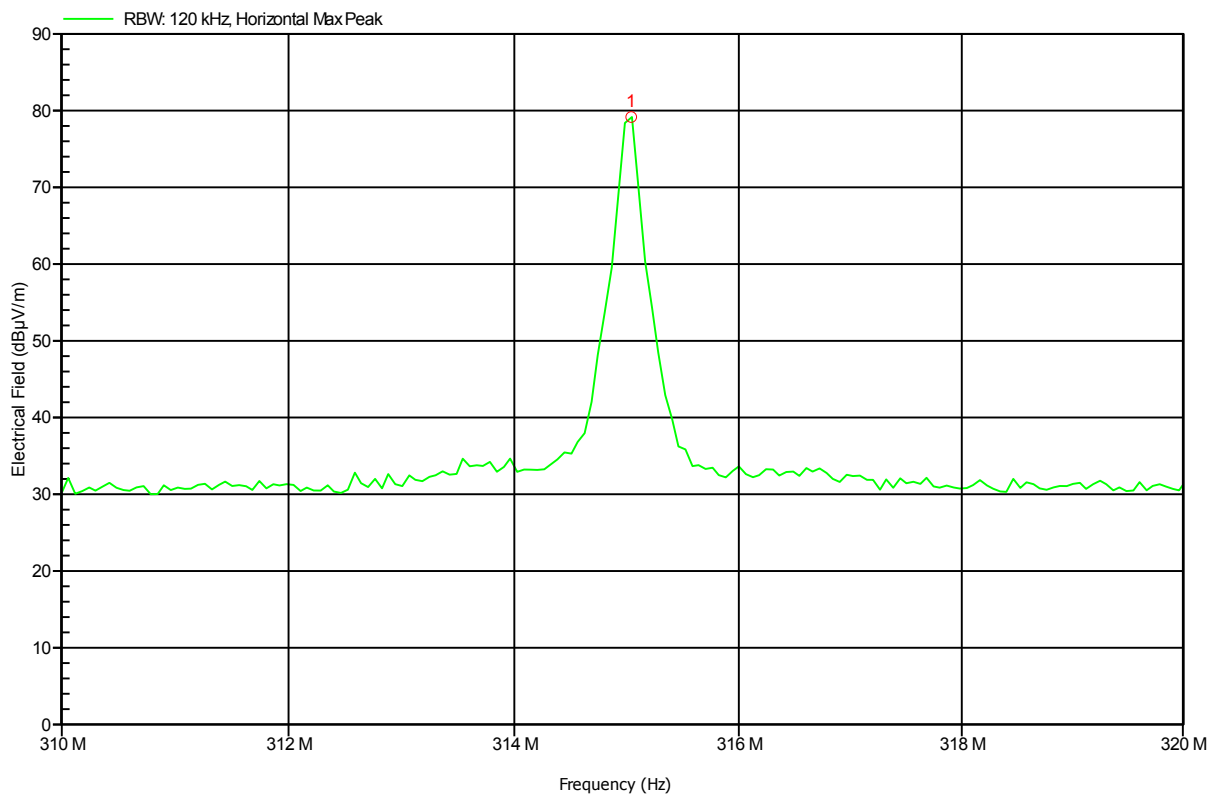

Frequency
 315.04 MHz TX

Test Report No.: G0M-1202-1744-TFC231P-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany


ANNEX B Transmitter radiated spurious emissions

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M1202-1744

Manufacturer:	Kieback & Peter GmbH & Co. KG
EUT Name:	Room Operating Panel
Model:	RBW3xx-FTL
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pflug
Test Conditions:	Tnom: 23°C, Unom: 3.6 VDC (battery)
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3m
Mode:	transmit
Test Date:	2012-02-23
Note:	

Index 2

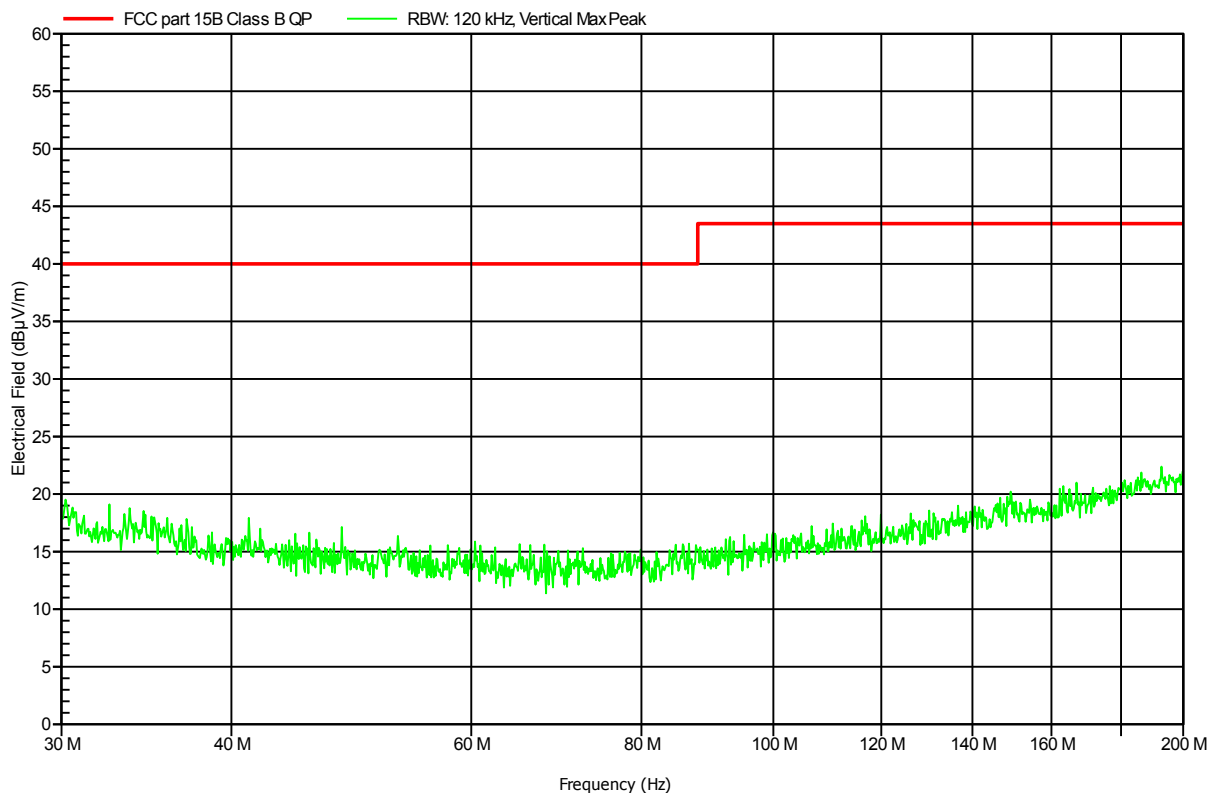

Test Report No.: G0M-1202-1744-TFC231P-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M1202-1744

Manufacturer: Kieback & Peter GmbH & Co. KG
 EUT Name: Room Operating Panel
 Model: RBW3xx-FTL
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pflug
 Test Conditions: Tnom: 23°C, Unom: 3.6 VDC (battery)
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3m
 Mode: transmit
 Test Date: 2012-02-23
 Note:

Index 1

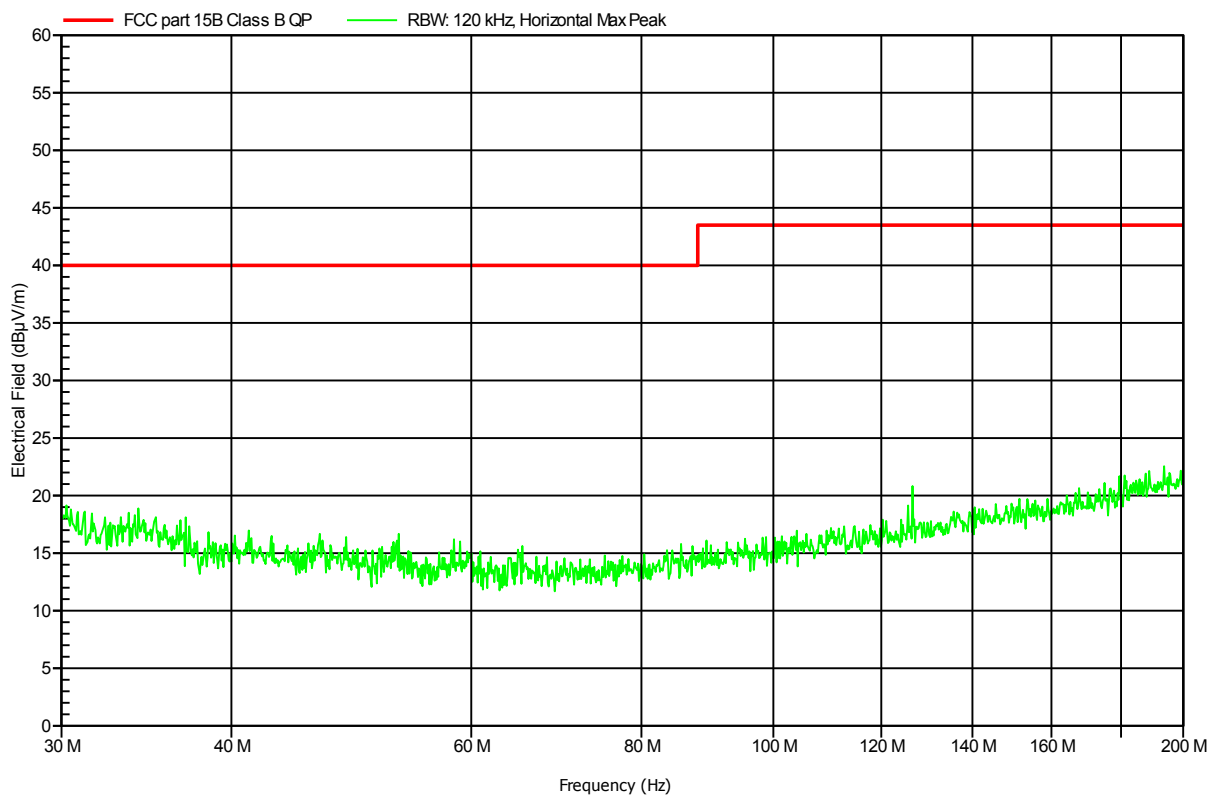

Test Report No.: G0M-1202-1744-TFC231P-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M1202-1744

Manufacturer: Kieback & Peter GmbH & Co. KG
 EUT Name: Room Operating Panel
 Model: RBW3xx-FTL
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pflug
 Test Conditions: Tnom: 23°C, Unom: 3.6 VDC (battery)
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3m
 Mode: transmit with notch-filter for 315 MHz
 Test Date: 2012-02-23
 Note:

Index 3

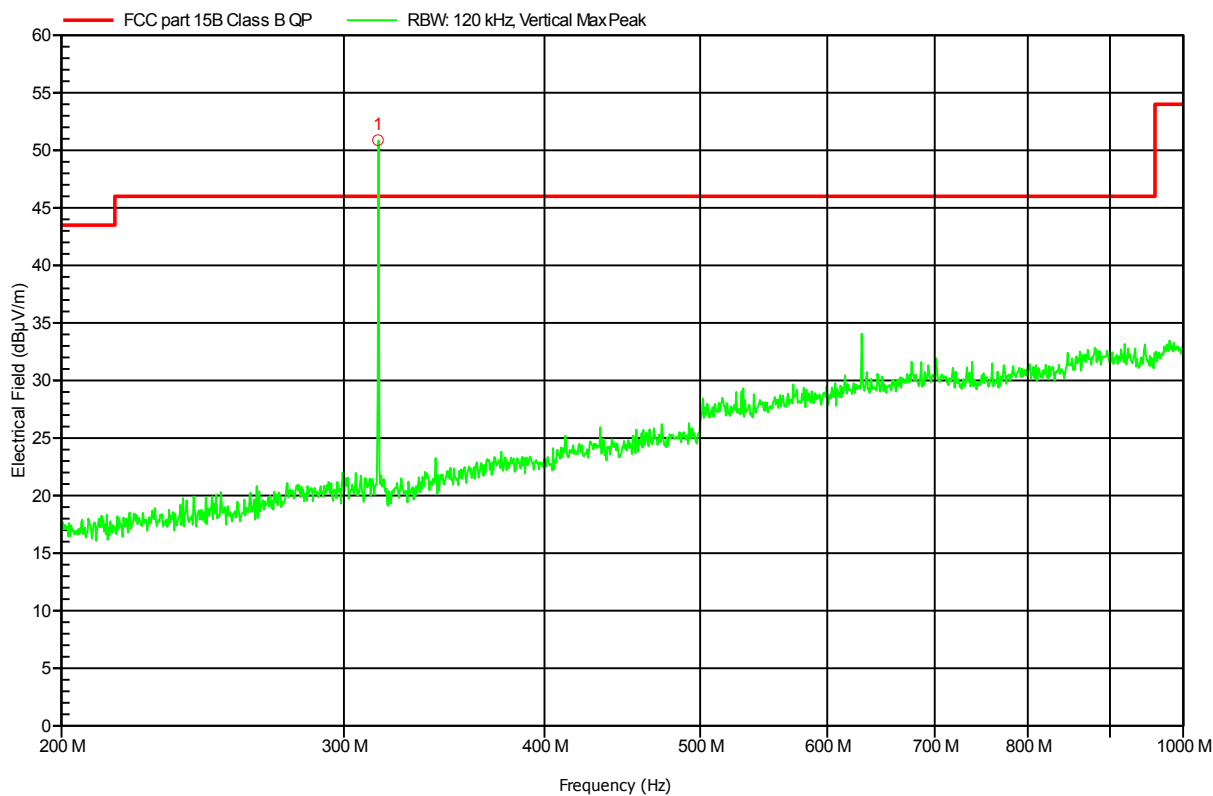

Frequency
 315.02 MHz TX-frequency

Test Report No.: G0M-1202-1744-TFC231P-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M1202-1744

Manufacturer: Kieback & Peter GmbH & Co. KG
 EUT Name: Room Operating Panel
 Model: RBW3xx-FTL
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pflug
 Test Conditions: Tnom: 23°C, Unom: 3.6 VDC (battery)
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3m
 Mode: transmit with notch-filter for 315 MHz
 Test Date: 2012-02-23
 Note:

Index 4

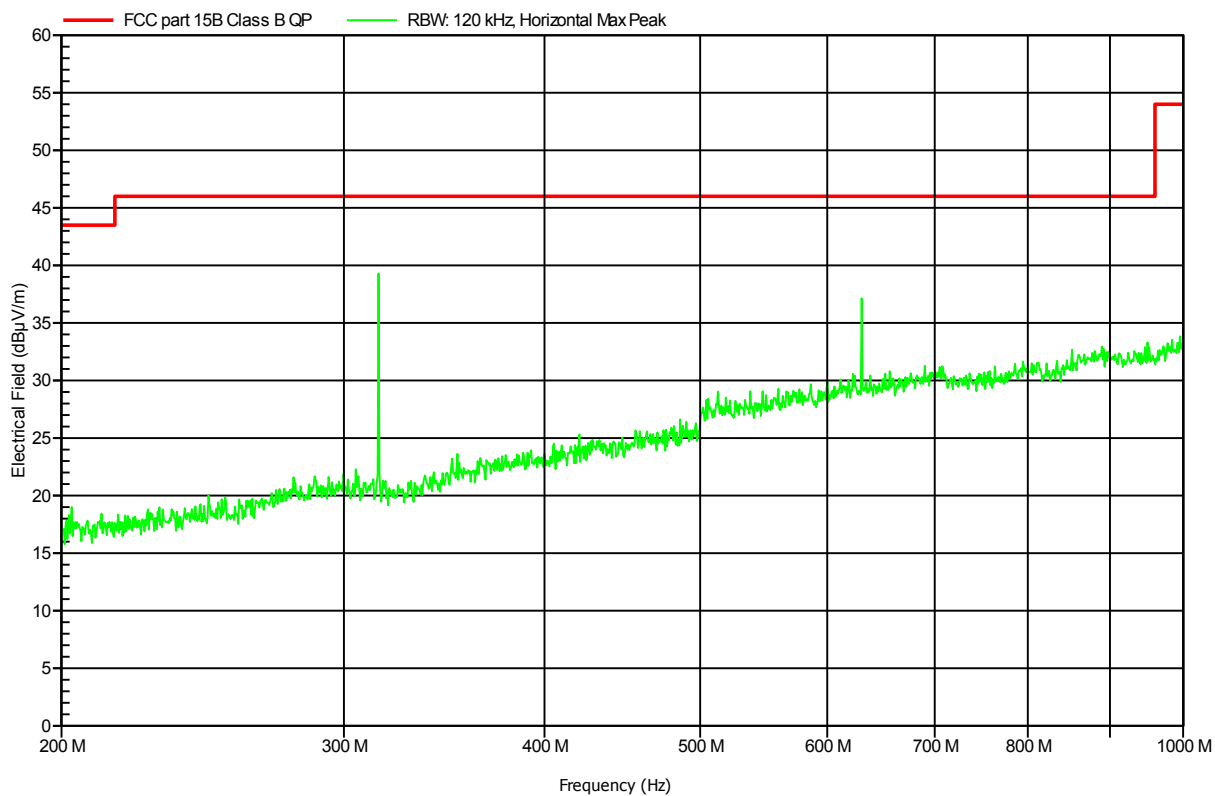

Frequency
 315.02 MHz TX-frequency

Test Report No.: G0M-1202-1744-TFC231P-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M1202-1744

Manufacturer: Kieback & Peter GmbH & Co. KG
 EUT Name: Room Operating Panel
 Model: RBW3xx-FTL
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pflug
 Test Conditions: Tnom: 23°C, Unom: 3.6 VDC (battery)
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 3m
 Mode: transmit
 Test Date: 2012-02-23
 Note:

Index 7

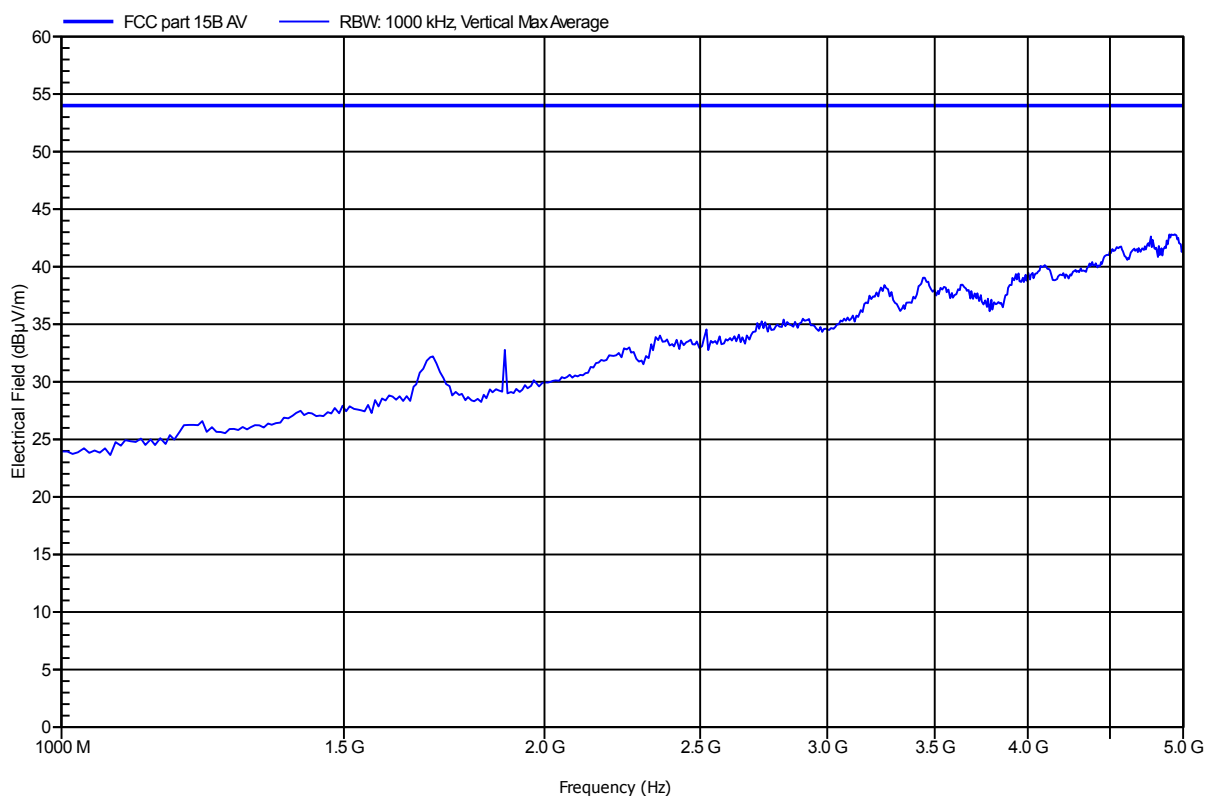

Test Report No.: G0M-1202-1744-TFC231P-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC Part 15B

Project number: G0M1202-1744

Manufacturer: Kieback & Peter GmbH & Co. KG
 EUT Name: Room Operating Panel
 Model: RBW3xx-FTL
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pflug
 Test Conditions: Tnom: 23°C, Unom: 3.6 VDC (battery)
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3m
 Mode: transmit
 Test Date: 2012-02-23
 Note:

Index 6

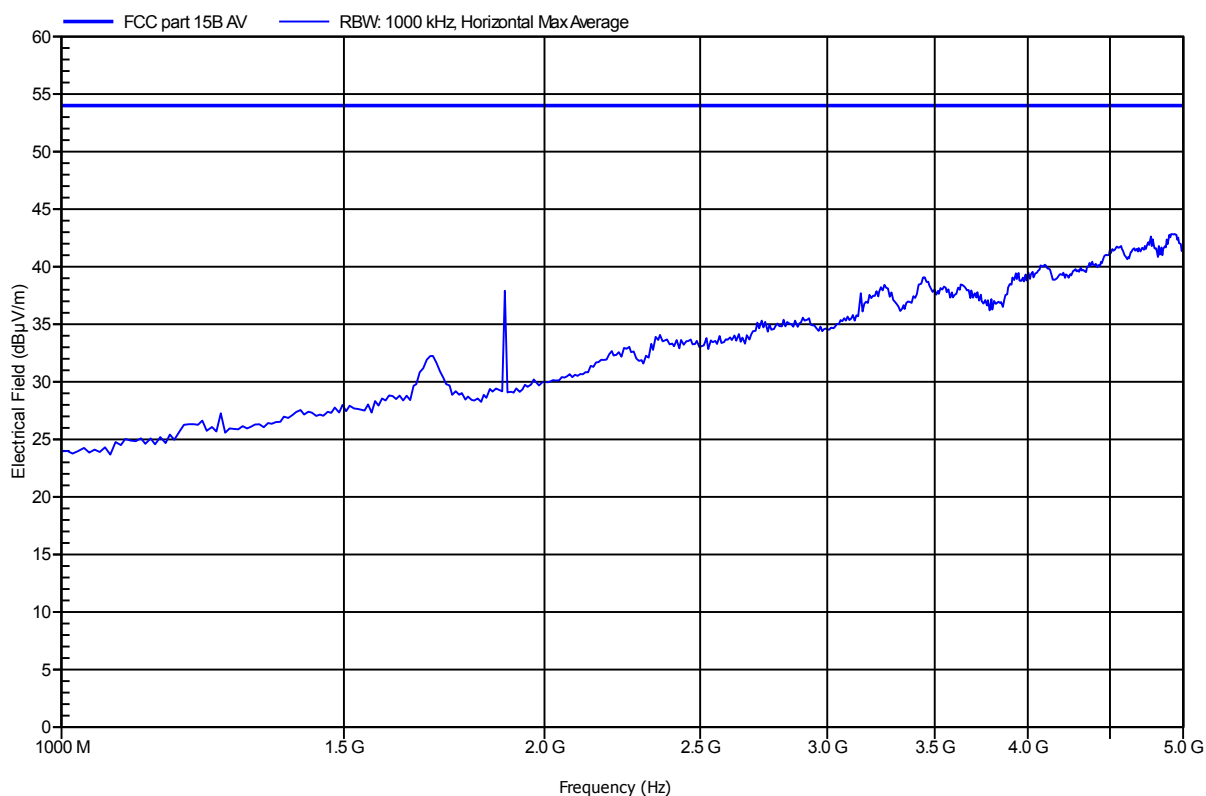

Test Report No.: G0M-1202-1744-TFC231P-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany


ANNEX C Receiver radiated spurious emissions

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M1202-1744

Manufacturer:	Kieback & Peter GmbH & Co. KG
EUT Name:	Room Operating Panel
Model:	RBW3xx-FTL
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pflug
Test Conditions:	Tnom: 23°C, Unom: 3.6 VDC (battery)
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3m
Mode:	RX
Test Date:	2012-02-23
Note:	

Index 12

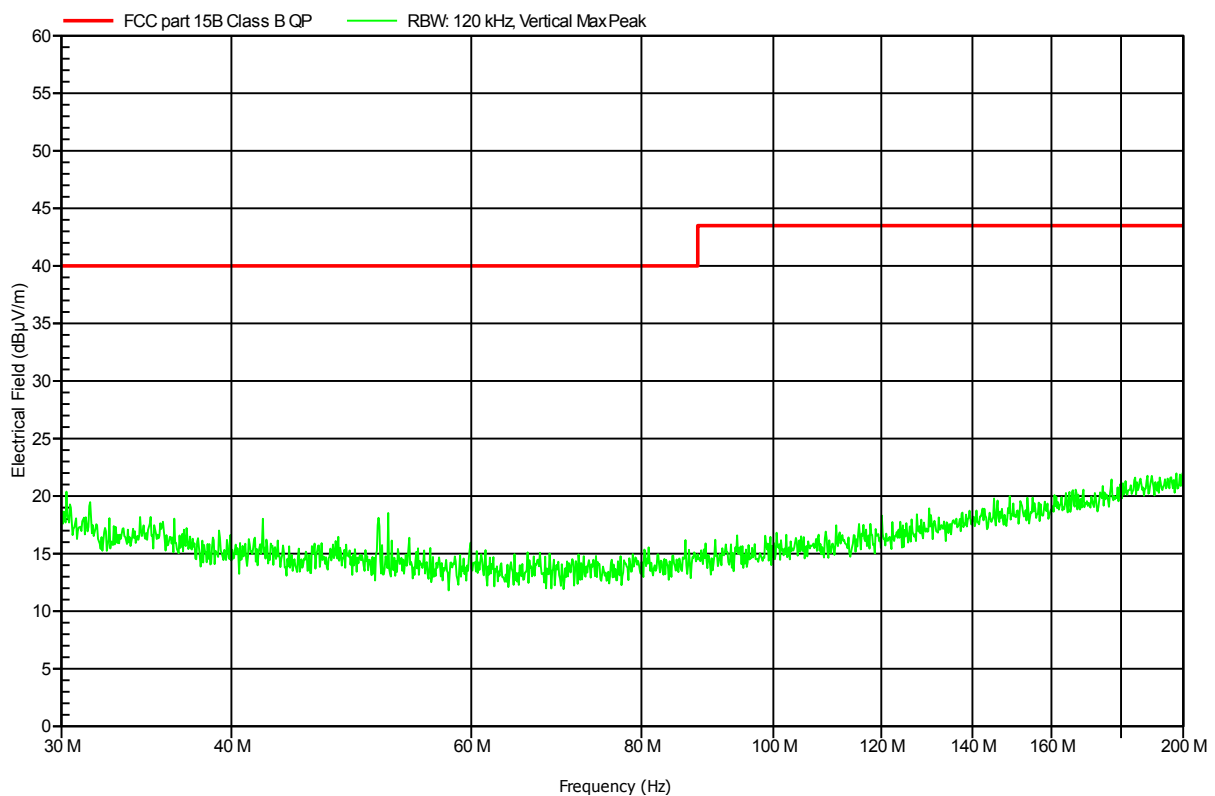

Test Report No.: G0M-1202-1744-TFC231P-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M1202-1744

Manufacturer:	Kieback & Peter GmbH & Co. KG
EUT Name:	Room Operating Panel
Model:	RBW3xx-FTL
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pflug
Test Conditions:	Tnom: 23°C, Unom: 3.6 VDC (battery)
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3m
Mode:	RX
Test Date:	2012-02-23
Note:	

Index 13

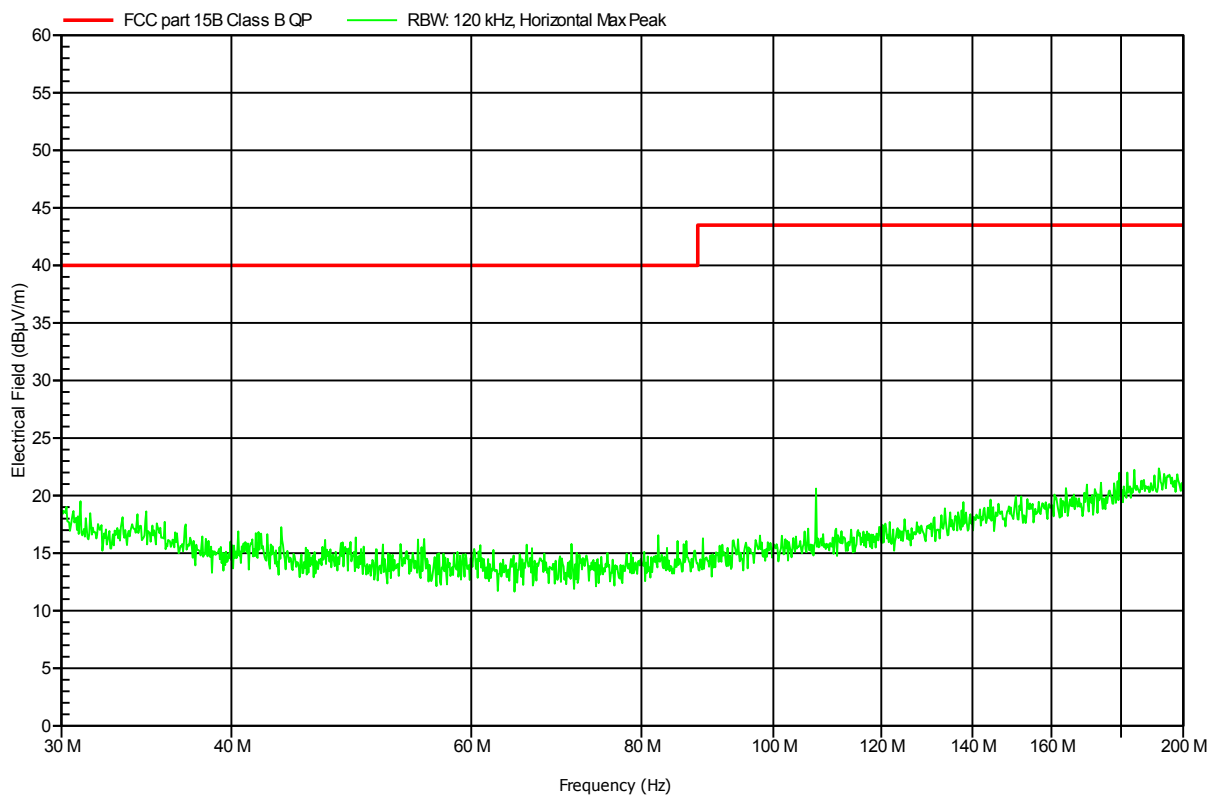

Test Report No.: G0M-1202-1744-TFC231P-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M1202-1744

Manufacturer: Kieback & Peter GmbH & Co. KG
 EUT Name: Room Operating Panel
 Model: RBW3xx-FTL
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pflug
 Test Conditions: Tnom: 23°C, Unom: 3.6 VDC (battery)
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3m
 Mode: RX
 Test Date: 2012-02-23
 Note:

Index 11

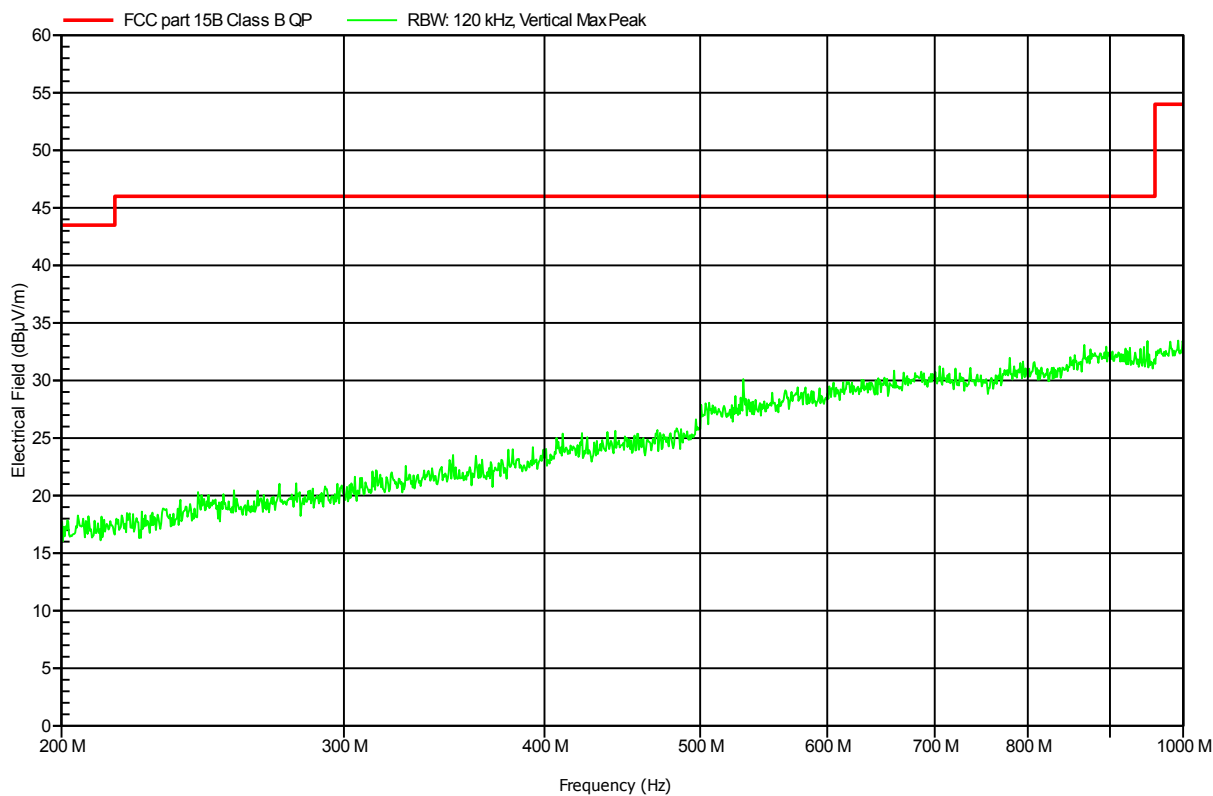

Test Report No.: G0M-1202-1744-TFC231P-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M1202-1744

Manufacturer: Kieback & Peter GmbH & Co. KG
 EUT Name: Room Operating Panel
 Model: RBW3xx-FTL
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pflug
 Test Conditions: Tnom: 23°C, Unom: 3.6 VDC (battery)
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3m
 Mode: RX
 Test Date: 2012-02-23
 Note:

Index 10

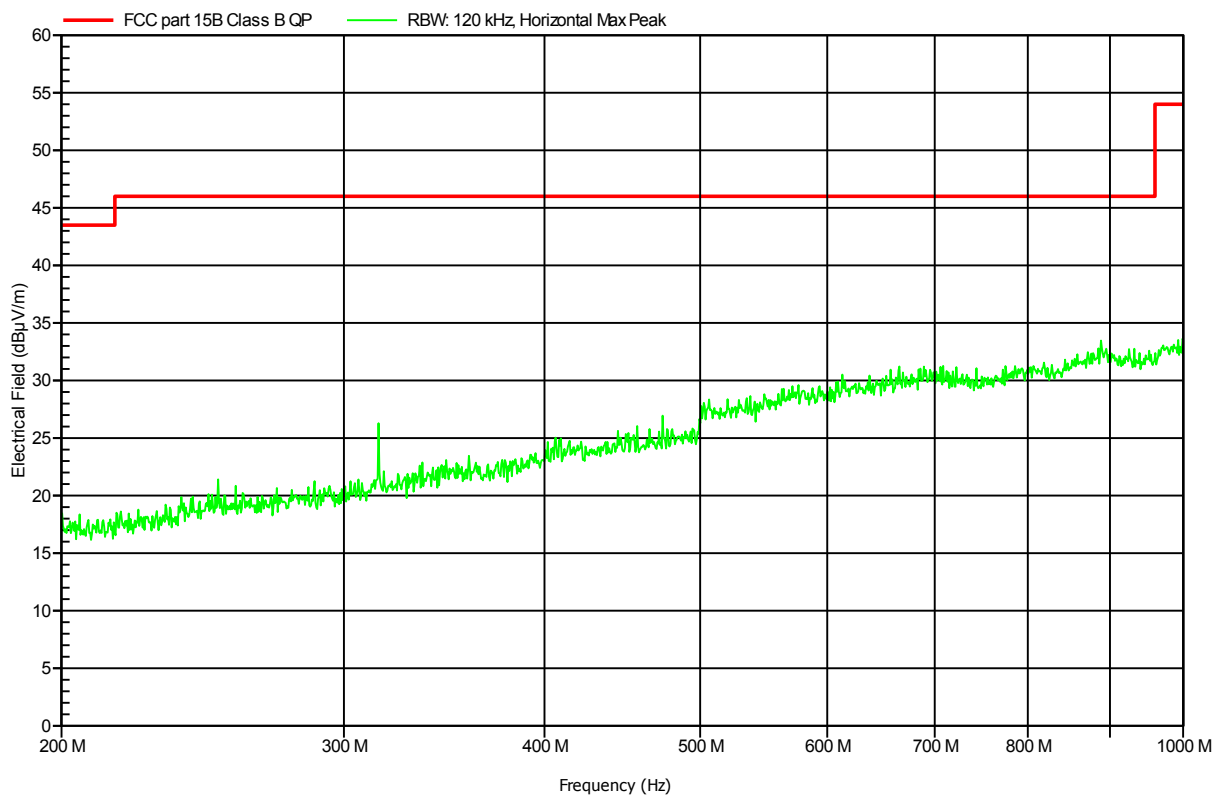

Test Report No.: G0M-1202-1744-TFC231P-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany