

INTERTEK TESTING SERVICES - Menlo Park


GWCOM, Power Amplifier for Base Station, Model: GWBASE2000UEPA Date of Test: 6/2-8/1998

1.0 Test Summary

FCC RULE	DESCRIPTION OF TEST	RESULT	PAGE
2.985	RF Power Output	Pass	3
90.205, 24.132(c)	Effective Radiated Power	Pass	4
2.989(I), 90.209(b)(5), 90.210, 24.133(a)(1)	Occupied Bandwidth, Bandwidth Limitation, Emission masks	Pass	5
2.991	Spurious emissions at antenna terminals	Pass	7
2.993, 15.109	Field Strength of Spurious Radiation	Pass	12
15.107	Line Conducted Emissions	Pass	15
2.995(a), 24.135(a)	Frequency Stability vs. Temperature	N/A	
2.995(d)(1), 24.135(a)	Frequency Stability vs. Voltage	N/A	



David Chernomordik
EMC Site Manager



Date

INTERTEK TESTING SERVICES - Menlo Park

GWCOM, Power Amplifier for Base Station, Model: GWBASE2000UEPA Date of Test: 6/2-8/1998

1.2 Product Description

The GWCom Inc. Model No.: GWBASE2000UEPA is a power amplifier for base station that provides two-way access for personal messaging units with both receive and transmit capability.

For more details, refer to the attached users manual.

INTERTEK TESTING SERVICES - Menlo Park

GWCOM, Power Amplifier for Base Station, Model: GWBASE2000UEPA Date of Test: 6/2-8/1998

2.0 RF Power Output, FCC §2.985(a)

2.1 Test Procedure

The amplifier's output was connected to a calibrated coaxial attenuator, the other end of which was connected to a spectrum analyzer. The resolution bandwidth and the video bandwidth of the spectrum analyzer were set up to 100 kHz and 100 kHz. The attenuator was included in spectrum analyzer OFFSET function.

Transmitter output was read off the spectrum analyzer in dBm.

2.2 Test Equipment

Hewlett Packard 8481A Power Sensor, 435B Power Meter
Hewlett Packard HP8566B Spectrum Analyzer, 100 Hz - 22 GHz
Tektronix 2782 Spectrum Analyzer, 100 Hz - 40 GHz

2.3 Test Results

Refer to the attached plot shown 41.3 dBm output power.

INTERTEK TESTING SERVICES - Menlo Park

GWCOM, Power Amplifier for Base Station, Model: GWBASE2000UEPA Date of Test: 6/2-8/1998

3.0 Effective Radiated Power, FCC § 90.205, § 24.132(a)

Requirement: The Effective Radiated Power (ERP) must not exceed 3500 Watts.

3.1 Test Procedure

The Duplexer "Wacom WP-678/794" and antenna "Scala OGB3-900" (5 dBi) were connected to the EUT.

The EUT was positioned on a non-conductive turntable, 0.8m above the ground plane on an open test site.

The radiated emission at the fundamental frequency was measured at 3m distance with a test antenna and spectrum analyzer. During the measurement, the resolution and video bandwidth of the spectrum analyzer were set to 100 kHz. The maximum emission was recorded with the rotation of the turntable and the raising and lowering of the test antenna. The spectrum analyzer reading was recorded.

The ERP was calculated as follows:

$$ERP_{(dBm)} = E_{(dBuV/m)} + 20 \log D - 10 \log 30 - 10 \log G - 90$$

where D = 3m, distance

G = 1.64, gain of half-wave dipole

3.2 Test Equipment

Hewlett Packard HP8566B Spectrum Analyzer
EMCO Horn antenna

3.3 Test Results

Refer to the table below.

Frequency MHz	Spectrum Analyzer Reading dB(uV)	Antenna Factor dB(1/m)	Cable loss dB	Field Strength dB(uV/m)	ERP dBm
930.4	117.1	23.0	3.0	143.1	45.7

INTERTEK TESTING SERVICES - Menlo Park

GWCOM, Power Amplifier for Base Station, Model: GWBASE2000UEPA Date of Test: 6/2-8/1998

4.0 Occupied Bandwidth, Bandwidth Limitation, Emission masks. FCC §2.989(I), 90.209(b)(5), 90.210, 24.133(a)(1)

4.1 Test Procedure

The RF output of the EUT was connected to the input of the spectrum analyzer through sufficient attenuation.

The spectrum with no modulation was plotted.

The EUT was set up to transmit pseudo-random pattern of 9.6 kb/s and the spectrum with modulation was plotted. The plots also were made for wideband data such as 0,1,0,1...and 1,1,0,0,1,1,0,0.....

4.2 Test Equipment

HP 8566B Spectrum Analyzer, 100 Hz - 22 GHz
Tektronix 2784 Spectrum Analyzer, 100 Hz - 40 GHz
HP 7470A Plotter

4.3 Test Results

For test results refer to the attached plots 4.3.a - 4.3.d shown emission on the amplifier's output.

The emissions on the amplifier's input (output of the base station) are presented in Appendix G. These plots are copies from Application for Base Station, FCC ID: NZAGWBASE2000URCS.

As can be seen, there are no noticeable changes in the occupied bandwidth on the input and on the output.

The EUT passed the emission mask tests for 20 kHz authorized bandwidth (for Part 90) and 45 kHz authorized bandwidth (for Part 24).

INTERTEK TESTING SERVICES - Menlo Park

GWCOM, Power Amplifier for Base Station, Model: GWBASE2000UEPA Date of Test: 6/2-8/1998

Emission Limitations, Occupied Bandwidth Plots:

Plot Number	Description
4.3.a	Output, random pattern, span 100 kHz, low channel
4.3.b	Output, 0,1,0,1....data, span 100 kHz, low channel
4.3.c	Output, 1,1,0,0,1,1....data, span 100 kHz, low channel
4.3.d	Output, random pattern, span 200 kHz, low channel
4.3.e	Output, 0,1,0,1....data, span 200 kHz, low channel
4.3.f	Output, 1,1,0,0,1,1....data, span 200 kHz, low channel
4.3.g	Output, random pattern, span 200 kHz, high channel
4.3.h	Output, 0,1,0,1....data, span 200 MHz, high channel
4.3.i	Output, 1,1,0,0,1,1....data, span 200 kHz, high channel

PLOT# 4.3.a

GWCOM. GWBASE 2000U


REF 26.0 dBm ATTN 40 dB

MKR 930.424 55 MHz

25.90 dBm

hp

10 dB/

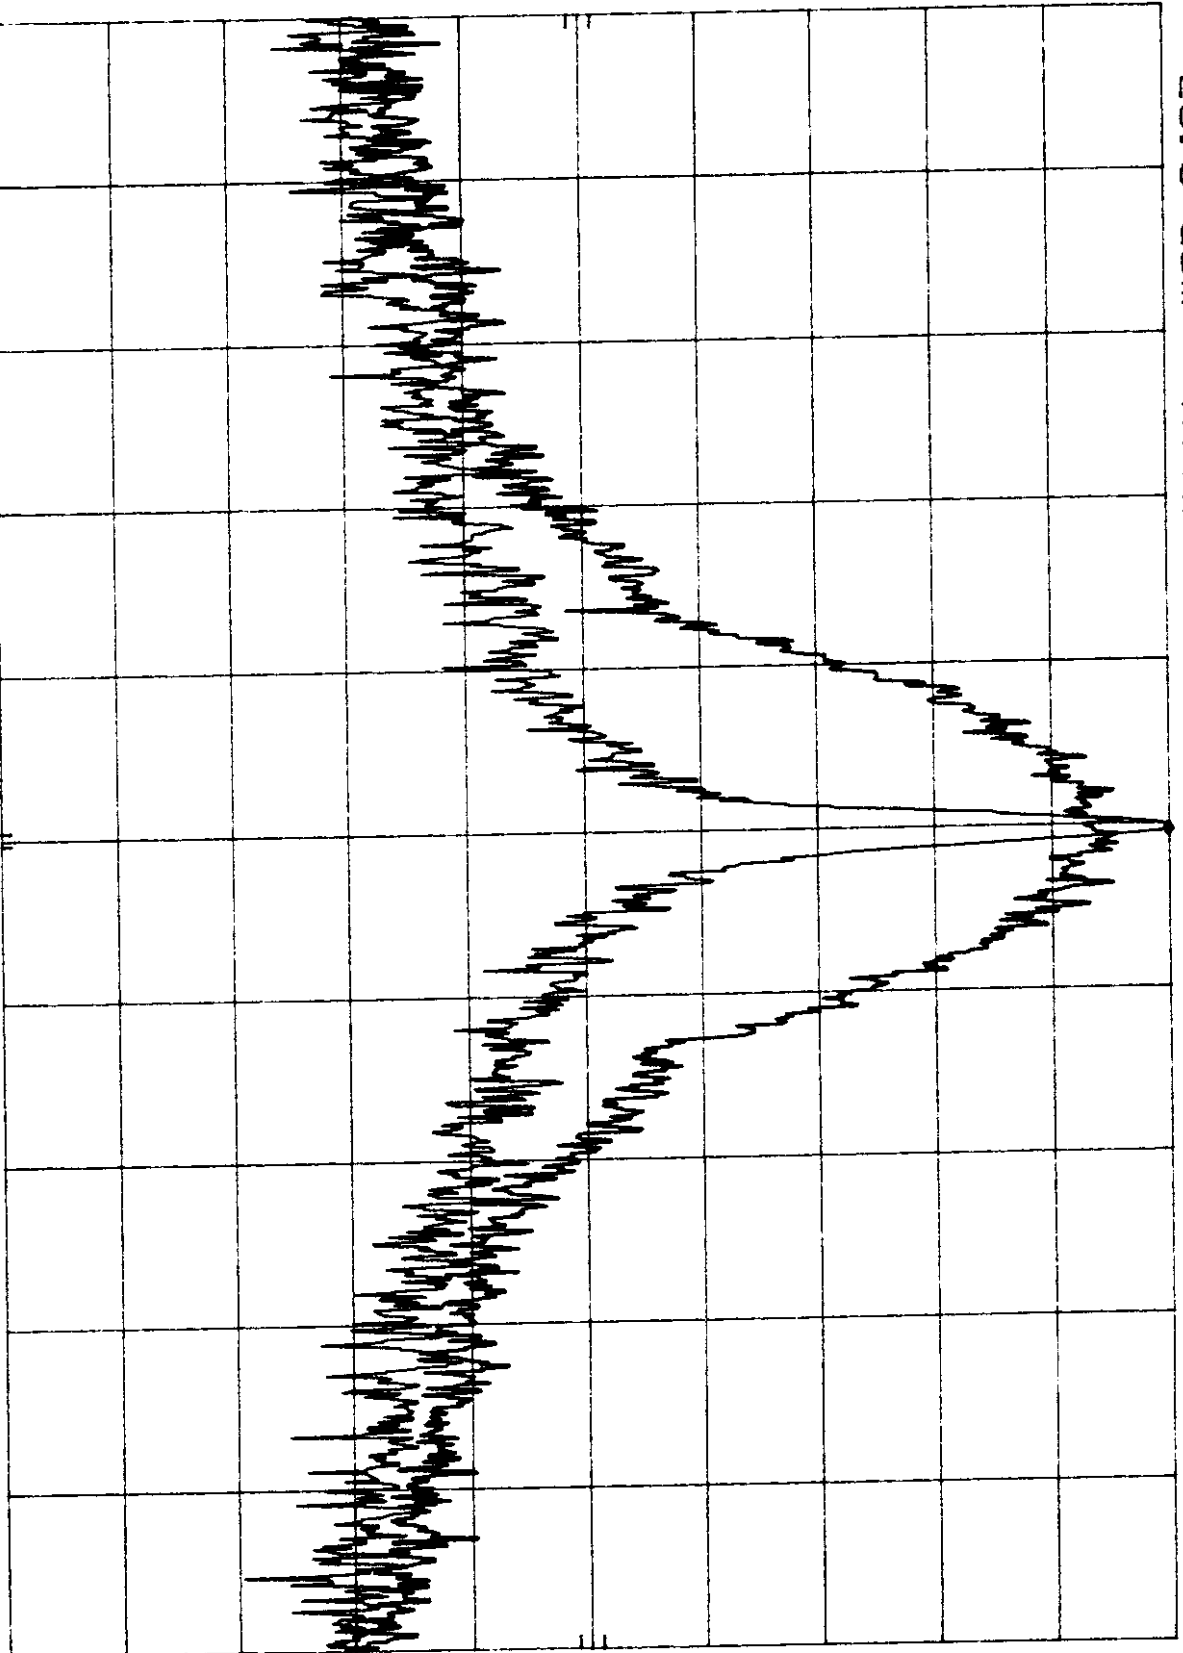

CENTER 930.424 4 MHz

RES BW 300 Hz

VBW 300 Hz

SPAN 50.0 kHz
SWP 1.50 sec

INTERTEK TESTING SERVICES - Menlo Park

GWCOM, Power Amplifier for Base Station, Model: GWBASE2000UEPA Date of Test: 6/2-8/1998

5.0 Out of Band Emissions at Antenna Terminals , FCC §2.991

Out of Band Emissions:

The power of emissions must be attenuated below the power of the unmodulated carrier (P) on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth - at least $43 + 10 \log P$ dB.

5.1 Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The pseudo-random modulating signals was set up. The plots were made to show compliance with the emissions attenuation at the edges of the assigned frequency bands: 928 - 930 MHz for Part 24, 930 - 931 MHz for Part 90. Sufficient scans were also taken to show the out of band emissions if any up to 10th harmonic.

5.2 Test Equipment

HP 8566B Spectrum Analyzer, 100 Hz - 22 GHz
Tektronix 2784 Spectrum Analyzer, 100 Hz - 40 GHz
Leader LFG-1300S Function Generator
Leader LMV-182 AC Millivolt meter

5.3 Test Results

Refer to the attached plots.

The EUT passed the test.

INTERTEK TESTING SERVICES - Menlo Park

GWCOM, Power Amplifier for Base Station, Model: GWBASE2000UEPA Date of Test: 6/2-8/1998

Plots of Out of Band Emissions at Antenna Terminal are attached.

PLOT NUMBER	DESCRIPTION
5.3.a	Part 90, scan 929 - 930.5 MHz, High Channel, 929.99 MHz
5.3.b	Part 90, scan 928.5 - 930 MHz, Low Channel, 929.01 MHz
5.3.c - 5.3.f	Scan 1 MHz - 10 GHz

INTERTEK TESTING SERVICES - Menlo Park

GWCOM, Power Amplifier for Base Station, Model: GWBASE2000UEPA Date of Test: 6/2-8/1998

6.0 Field Strength of Spurious Radiation, FCC § 2.993, §15.109

6.1 Test Procedure

For radiated emission measurement below 1GHz, an antenna was connected to the transmitted output. For radiated emission measurement above 1GHz, a 50 Ohm coaxial load was connected to the transmitter output. The transmitter was placed on a wooden turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

The spurious harmonic attenuation was calculated as the difference between E in dB(uV/m) at the fundamental frequency and at the spurious emission frequency.

6.2 Test Equipment

EMCO 3115 Horn Antenna
HP 8566B Spectrum Analyzer
Tektronix 2784 Spectrum Analyzer
High Pass Filter
Preamplifier

INTERTEK TESTING SERVICES - Menlo Park

GWCOM, Power Amplifier for Base Station, Model: GWBASE2000UEPA Date of Test: 6/2-8/1998

6.4 Test Results

Spurious Harmonic Attenuation

Test site: #1
Test Engineer: D. Chernomordik
Operation Mode: Transmitting at 930.425 MHZ
For harmonic measurements, the Output is terminated with dummy load

38.6

Frequency MHz	Antenna Pol.	SA Reading dB(uV)	Antenna Factor dB(1/m)	Pre-amp. Correct. dB	Cable loss dB	Distance Correct. dB	Field Strength dB(uV/m)	Spurious attenuat. dB	Margin dB
930.4	V	117.1	23.0	0	3.0	0	143.1	-	-
1860.8	V	34.1	24.7	0	1.0	0	59.8	83.3	-29.0
2791.3	V	82.0	28.1	-28.4	2.3	0	84.0	59.1	-4.8
3721.7	H	66.3	31.5	-27.8	2.7	0	72.7	70.4	-16.1
4652.1	H	61.6	32.2	-28.0	3.2	0	69.0	74.1	-19.8
5582.6	V	52.4	34.4	-28.3	3.7	0	62.2	80.9	-26.6
6513.0	H	46.1	34.0	-28.0	4.2	0	56.3	86.8	-32.5
7443.4	H	41.2	35.8	-28.0	4.3	0	53.3	89.8	-35.5
8373.8	V	35.6	37.0	-27.2	4.8	0	50.2	92.9	-38.6
9304.3	V	40.1	37.8	-27.0	5.0	0	55.9	87.2	-32.9

Note: Measurements were made at 3 m distance

Limit of spurious emission attenuation equals $43 + 10 \log P = 54.3 \text{ dB}$

Justification: Passed

INTERTEK TESTING SERVICES - Menlo Park

GWCOM, Power Amplifier for Base Station, Model: GWBASE2000UEPA Date of Test: 6/2-8/1998

FCC Part 15.109 Radiated Emission

Test site: #1
Test Engineer: D. Chernomordik
Operation Mode: Transmitting at 930.425 MHz. with Duplexer and antenna

Frequency MHz	Antenna Pol.	SA Reading dB(uV)	Antenna Factor dB(1/m)	Pre-amp. Correct. dB	Cable loss dB	Field Strength dB(uV/m)	Limit dB(uV/m)	Margin dB
50.2	V	21.3	6.5	0	0.6	28.4	40.0	-11.6
75.2	V	17.6	5.6	0	0.7	23.9	40.0	-16.1
125.3	H	14.7	7.7	0	0.9	23.3	43.5	-20.2
150.3	H	15.9	9.3	0	1.0	26.2	43.5	-17.3
200.5	V	18.0	10.1	0	1.1	29.2	43.5	-14.3
225.5	V	15.5	10.9	0	1.1	27.5	46.0	-18.5
250.6	V	21.9	11.6	0	1.2	34.7	46.0	-11.3
275.6	H	21.6	12.5	0	1.3	35.4	46.0	-10.6
300.7	V	28.0	13.2	0	1.4	42.6	46.0	-3.4
350.8	V	26.6	14.6	0	1.5	42.7	46.0	-3.3
375.9	H	14.7	15.2	0	1.6	31.5	46.0	-14.5
400.9	H	24.0	16.0	0	1.7	41.7	46.0	-4.3
856.8	V	16.3	20.5	0	2.1	38.9	46.0	-7.1

Note: All measurements were made at 3 m distance.
All other emissions not reported are at least 20 dB below the limit.
Frequency range investigated is from 30 to 5000 MHz.

INTERTEK TESTING SERVICES - Menlo Park

GWCOM, Power Amplifier for Base Station, Model: GWBASE2000UEPA Date of Test: 6/2-8/1998

7.0 Line Conducted Emissions, FCC § 15.107

7.1 Test Procedure

Test procedure described in the ANSI C63.4 Standard was employed.

The EUT was connected to an AC line through the LISNs.

Both HOT and NEUTRAL leads were tested.

INTERTEK TESTING SERVICES - Menlo Park

GWCOM, Power Amplifier for Base Station, Model: GWBASE2000UEPA Date of Test: 6/2-8/1998

7.3 Test Results

Refer to the attached plots. The EUT passed the test.

PLOT# 4.3.b


GWCOM. GWBASE 2000U

REF 26.0 dBm ATTEN 40 dB

MKR 930.424 55 MHz
25.90 dBm

HP

10 dB/

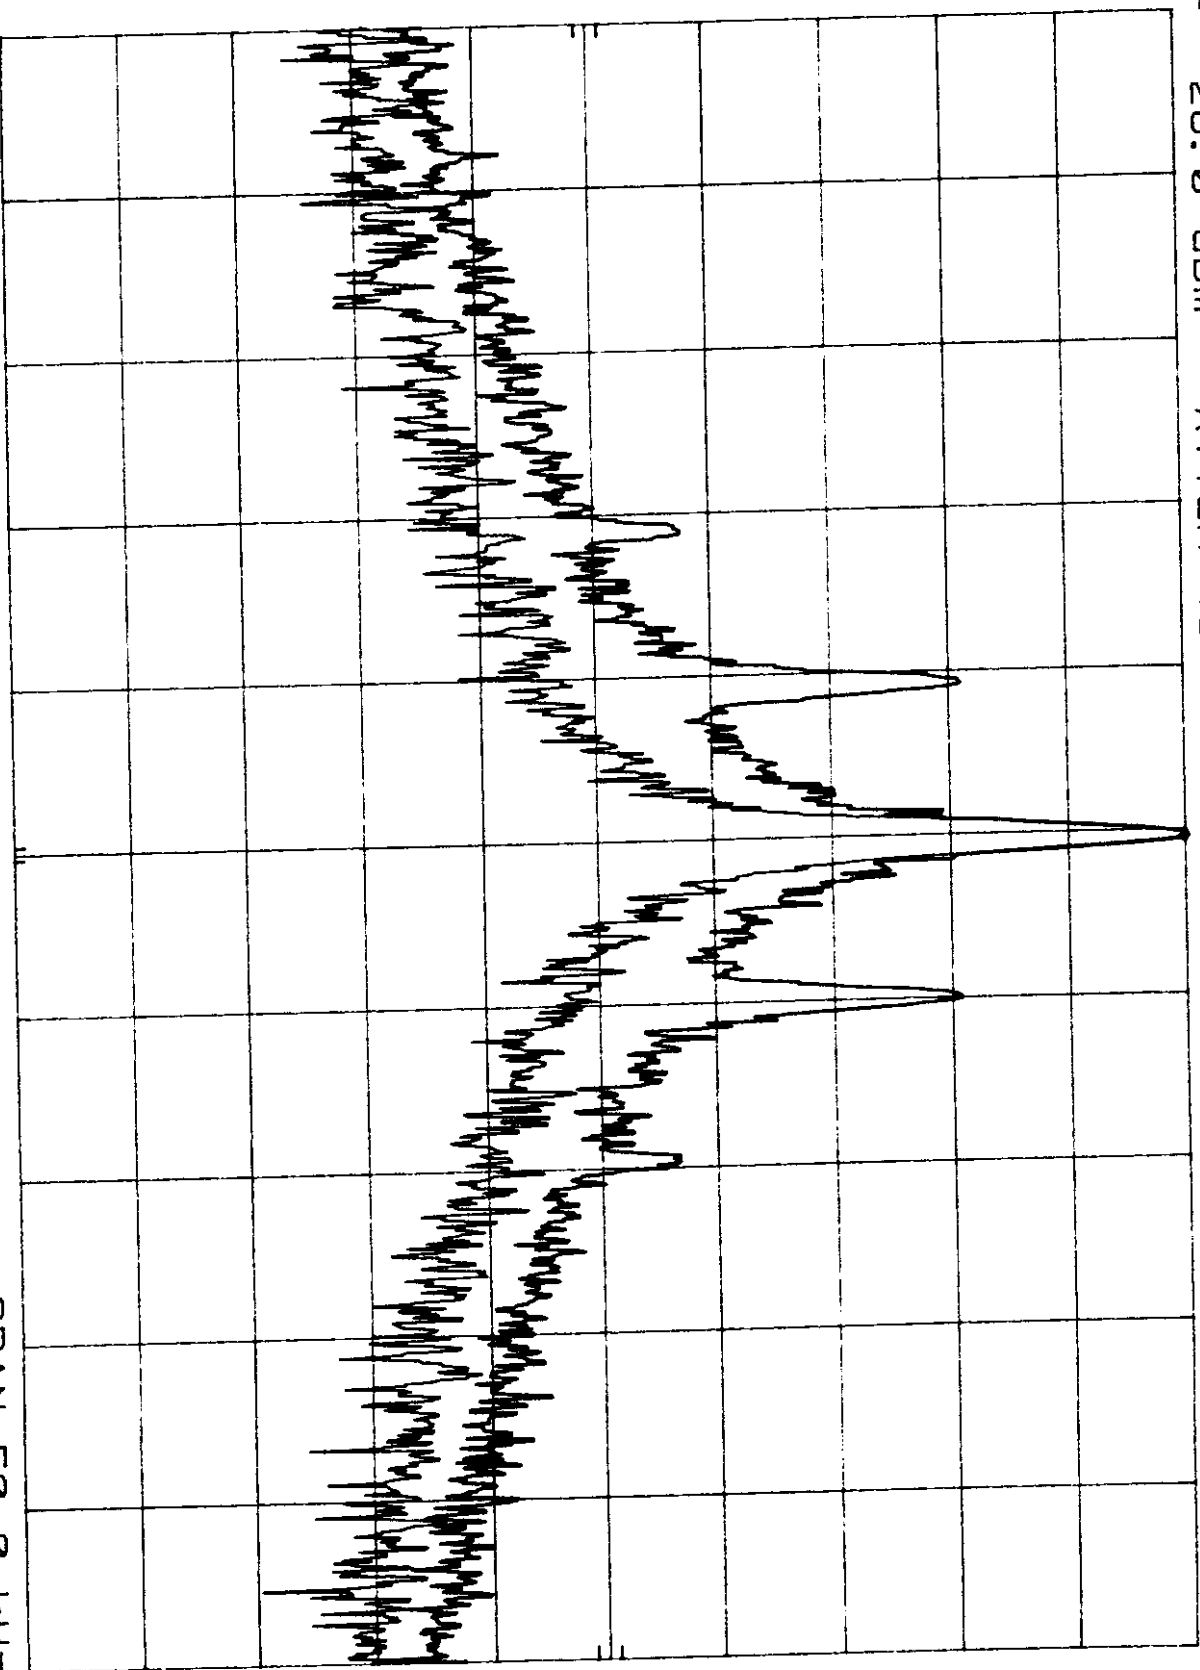

CENTER 930.424 4 MHz

RES BW 300 Hz

VBW 300 Hz

SPAN 50.0 kHz
SWP 1.50 sec

PLOT# 4.3.c

CWCOM, CWBASE 2000U


REF 26.0 dBm ATTEN 40 dB

MKR 930.424 55 MHz

25.90 dBm

HP

10 dB/

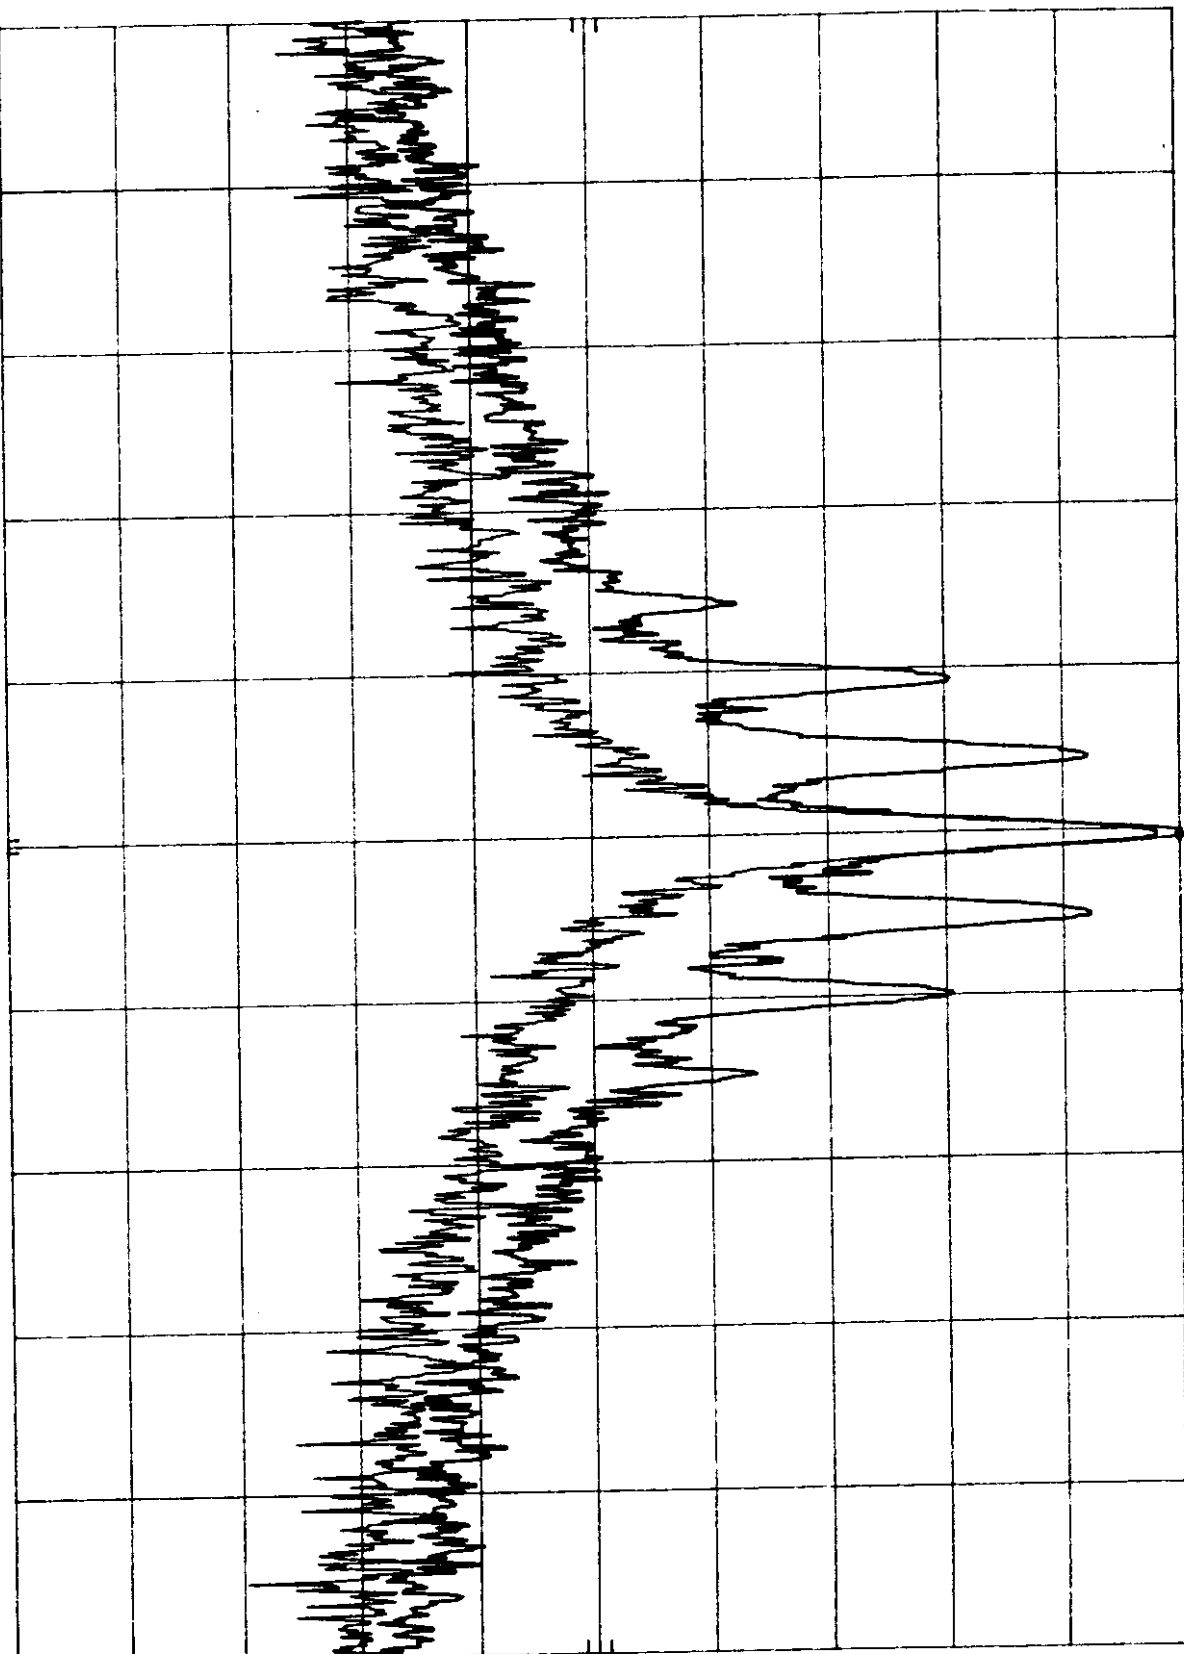

CENTER 930.424 4 MHz

RES BW 300 Hz

VBW 300 Hz

SPAN 50.0 kHz
SWP 1.50 sec

PLOT# 4.3.d

GWCOM, GWBASE 2000U


REF 26.0 dBm ATTEN 40 dB

MKR 930.424 9 MHz

20.30 dBm

hp

10 dB/

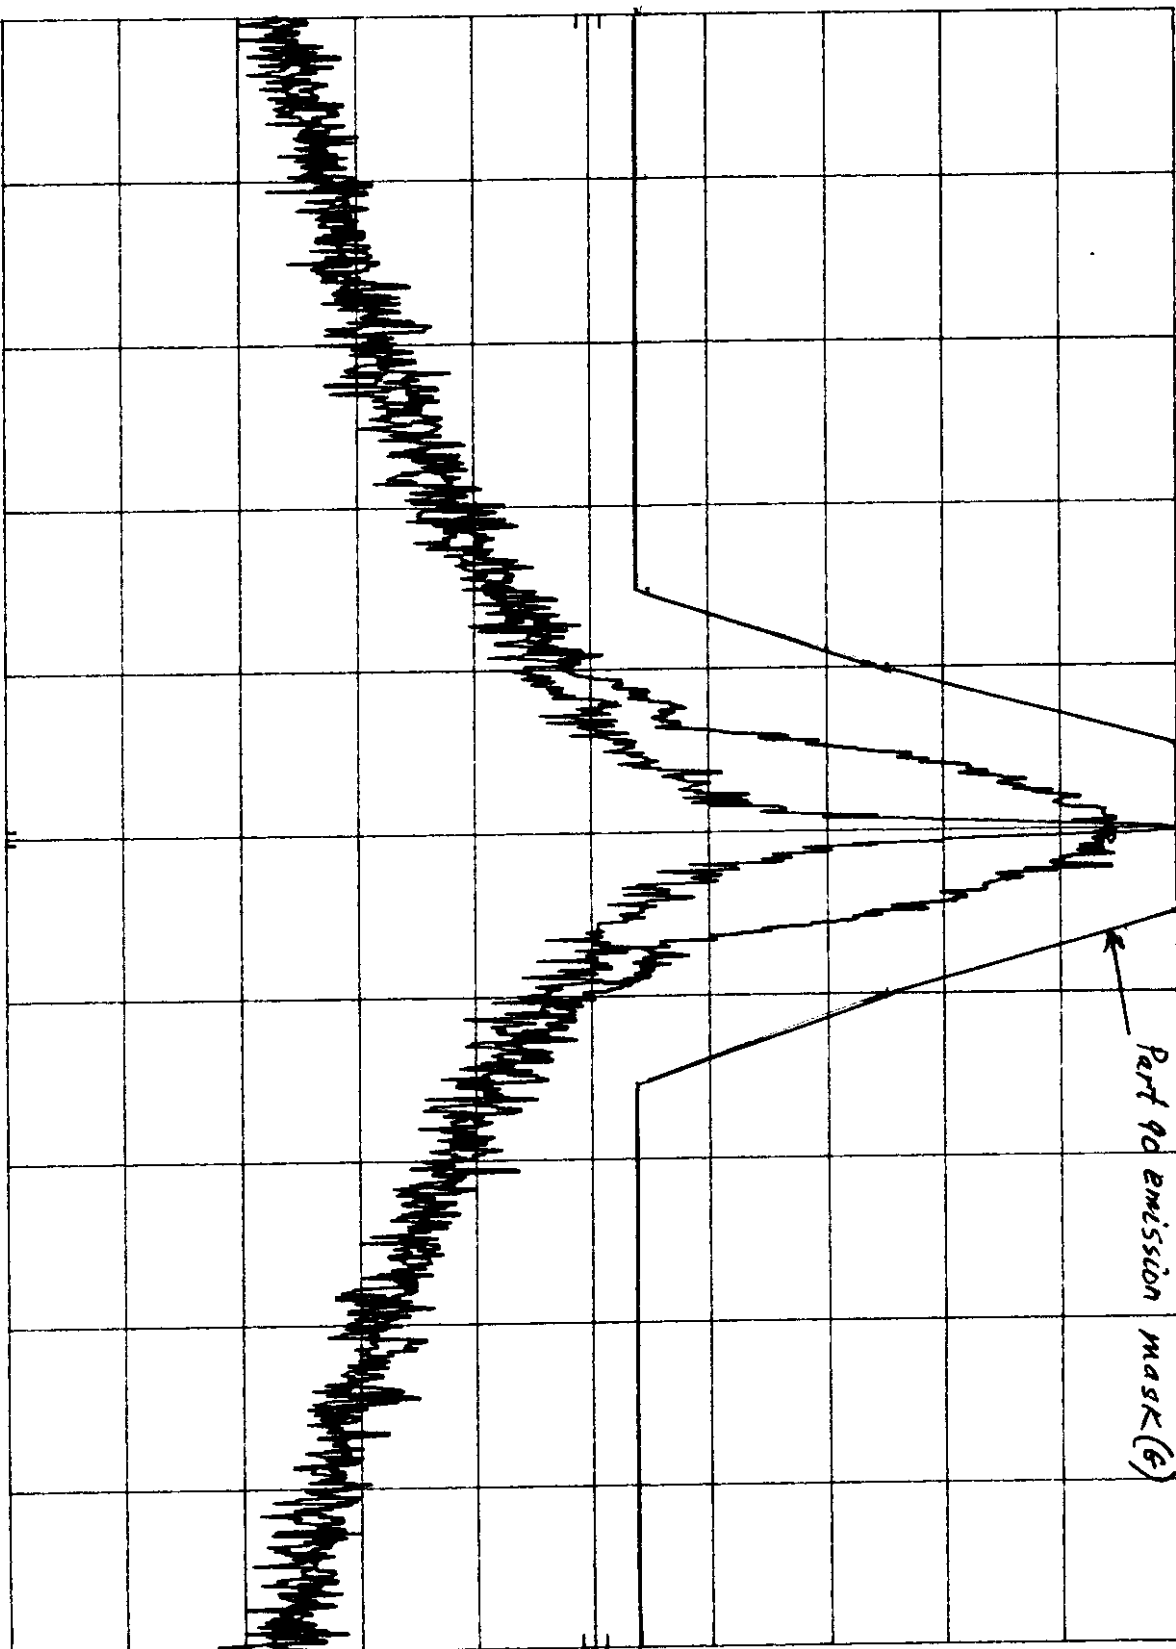

CENTER 930.424 MHz

RES BW 300 Hz

VBW 300 Hz

SWP 3.00 sec

SPAN 100 kHz

PLOT# 4.3.e

GWCOM. GWBASE 2000U


REF 26.0 dBm ATTEN 40 DB

MKR 930.424 S MHz

25.80 dBm

hp

10 dB/

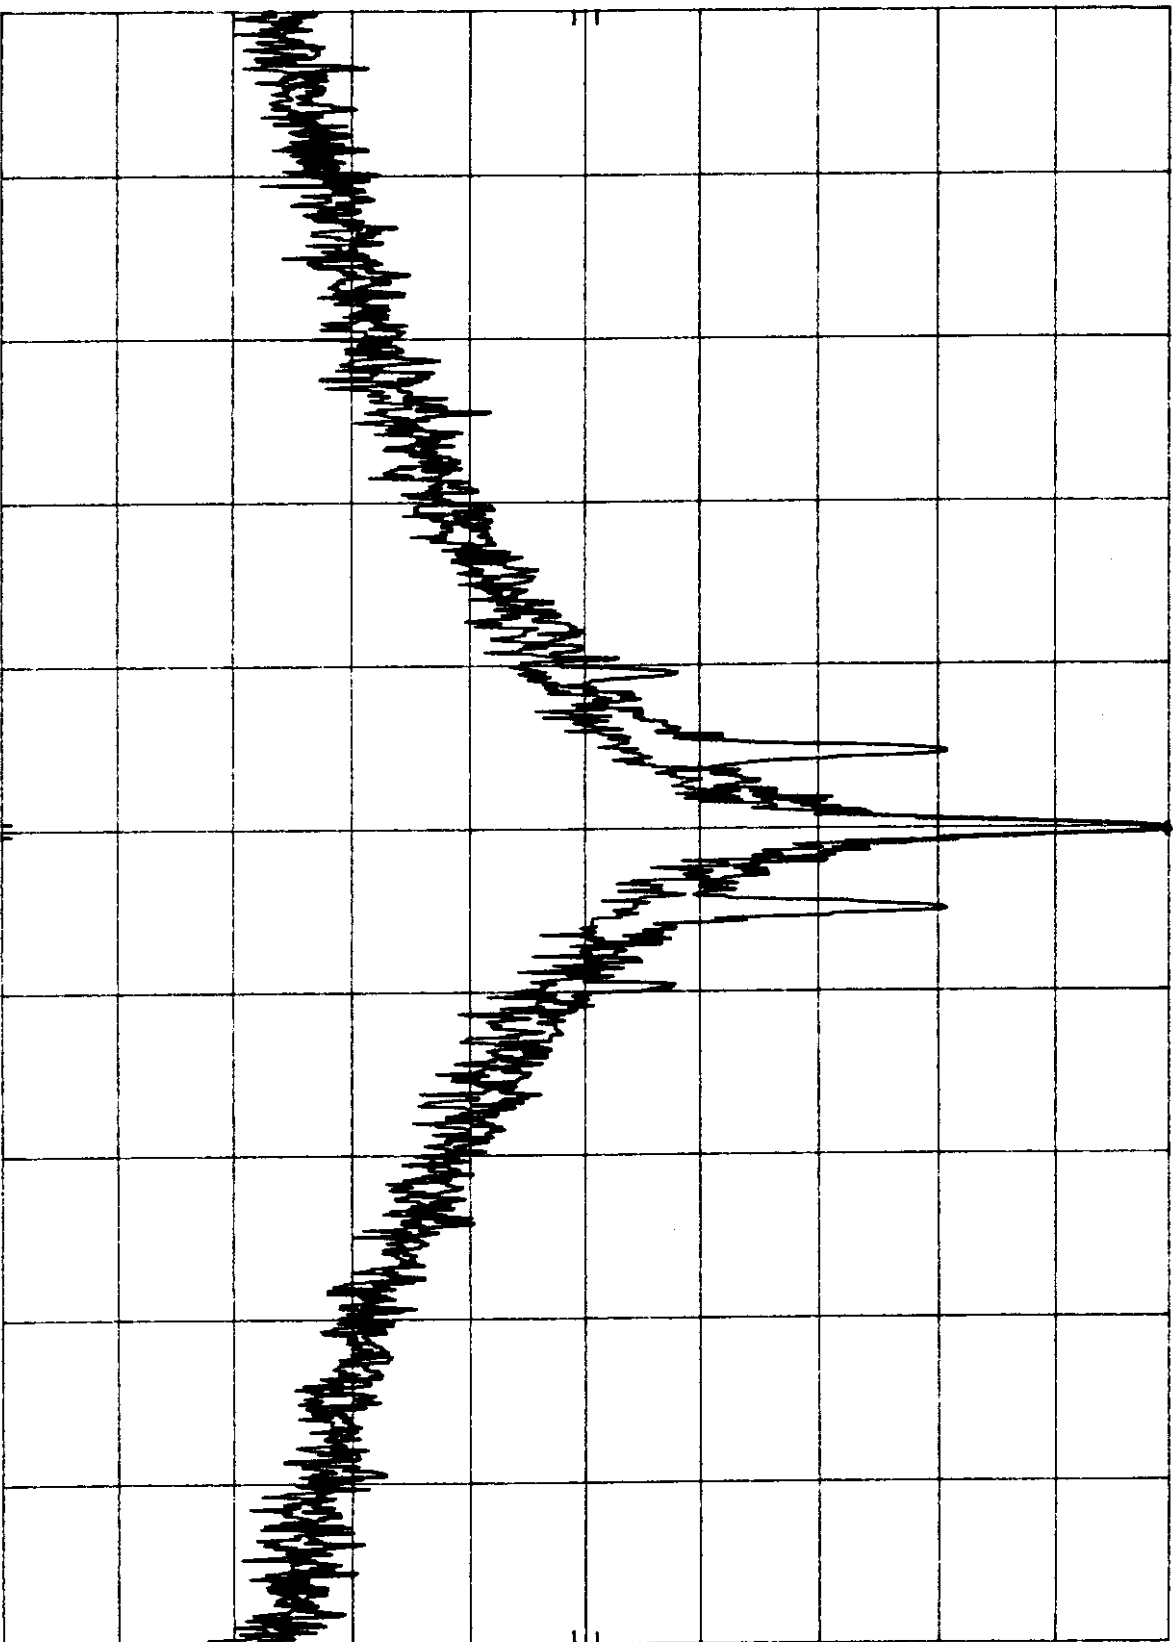

CENTER 930.424 MHz

RES BW 300

Hz

VBW 300

Hz

SPAN 100 KHz

SWP 3.00 sec

PLOT# 4.3.f

GWCOM, GWBASE 2000U


REF 26.0 dBm ATTN 40 dB

MKR 930.424 6 MHz

26.00 dBm

hp

10 dB/

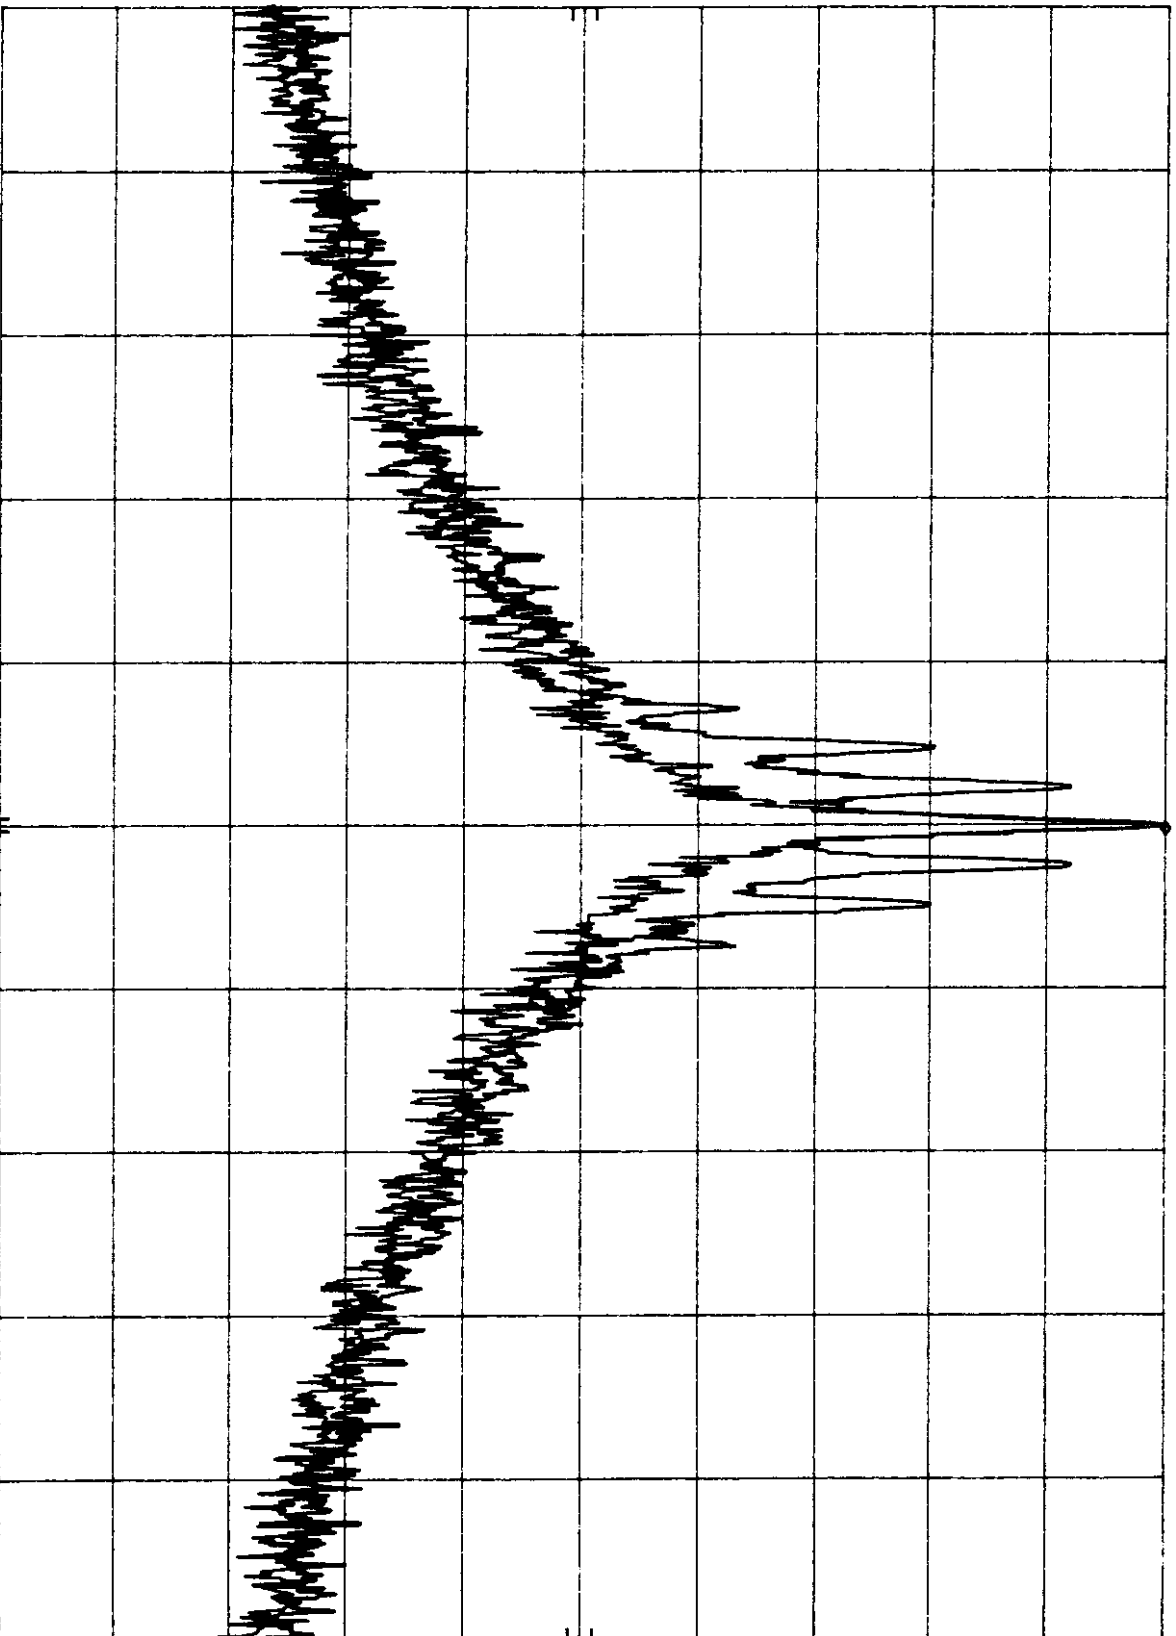

CENTER 930.424 MHz

RES BW 300 Hz

VBW 300 Hz

SPAN 100 kHz

SWP 3.00 sec

PLOT# 4.3.9

GWCOM. GBASE 2000U


REF 26.0 DBm ATTEN 40 DB

MKR 930.424 6 MHZ

21.10 DBm

HP

10 DB/

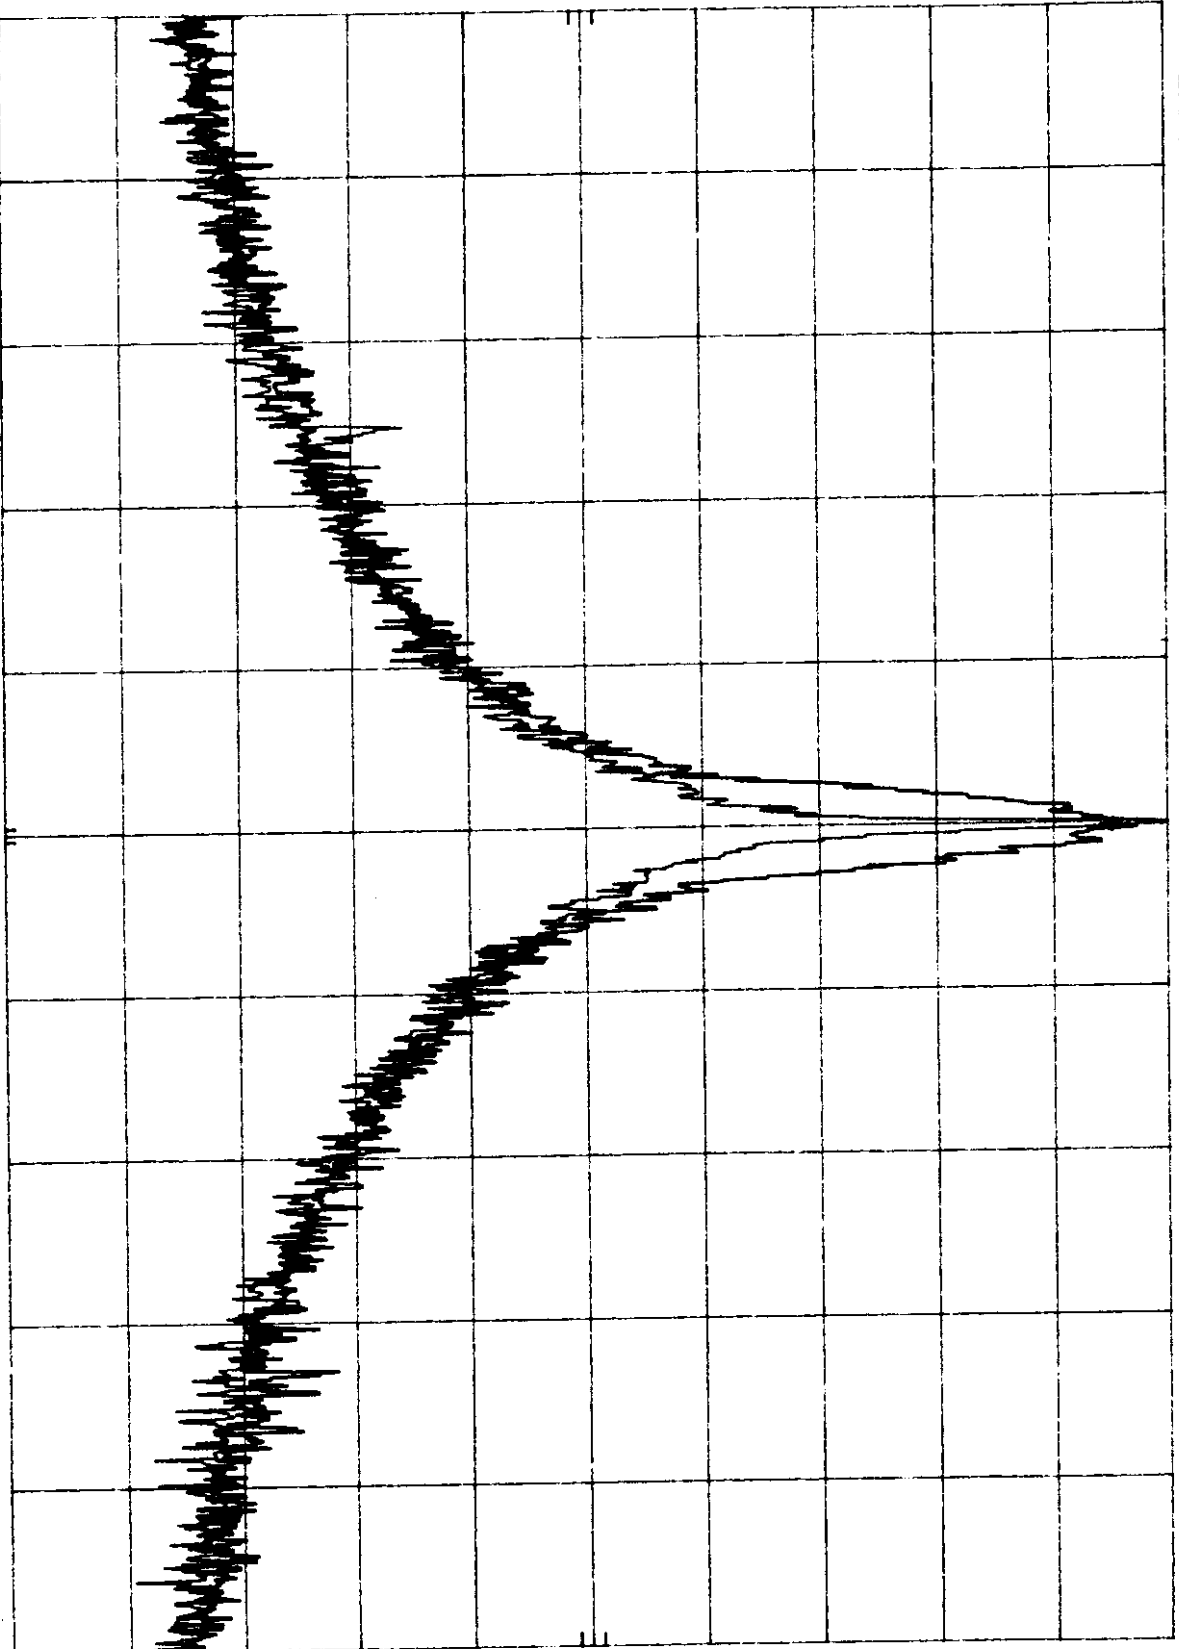

CENTER

930.424 MHZ

RES BW 300

HZ

VBW 300

HZ

SWP 6.00

sec

SPAN 201 kHz


PLOT# 4.3.h

hP CWCOM. CWBASE 2000U

REF 26.0 dBm ATTEN 40 dB

MKR 930.424 B MHz
25.90 dBm

10 dB/

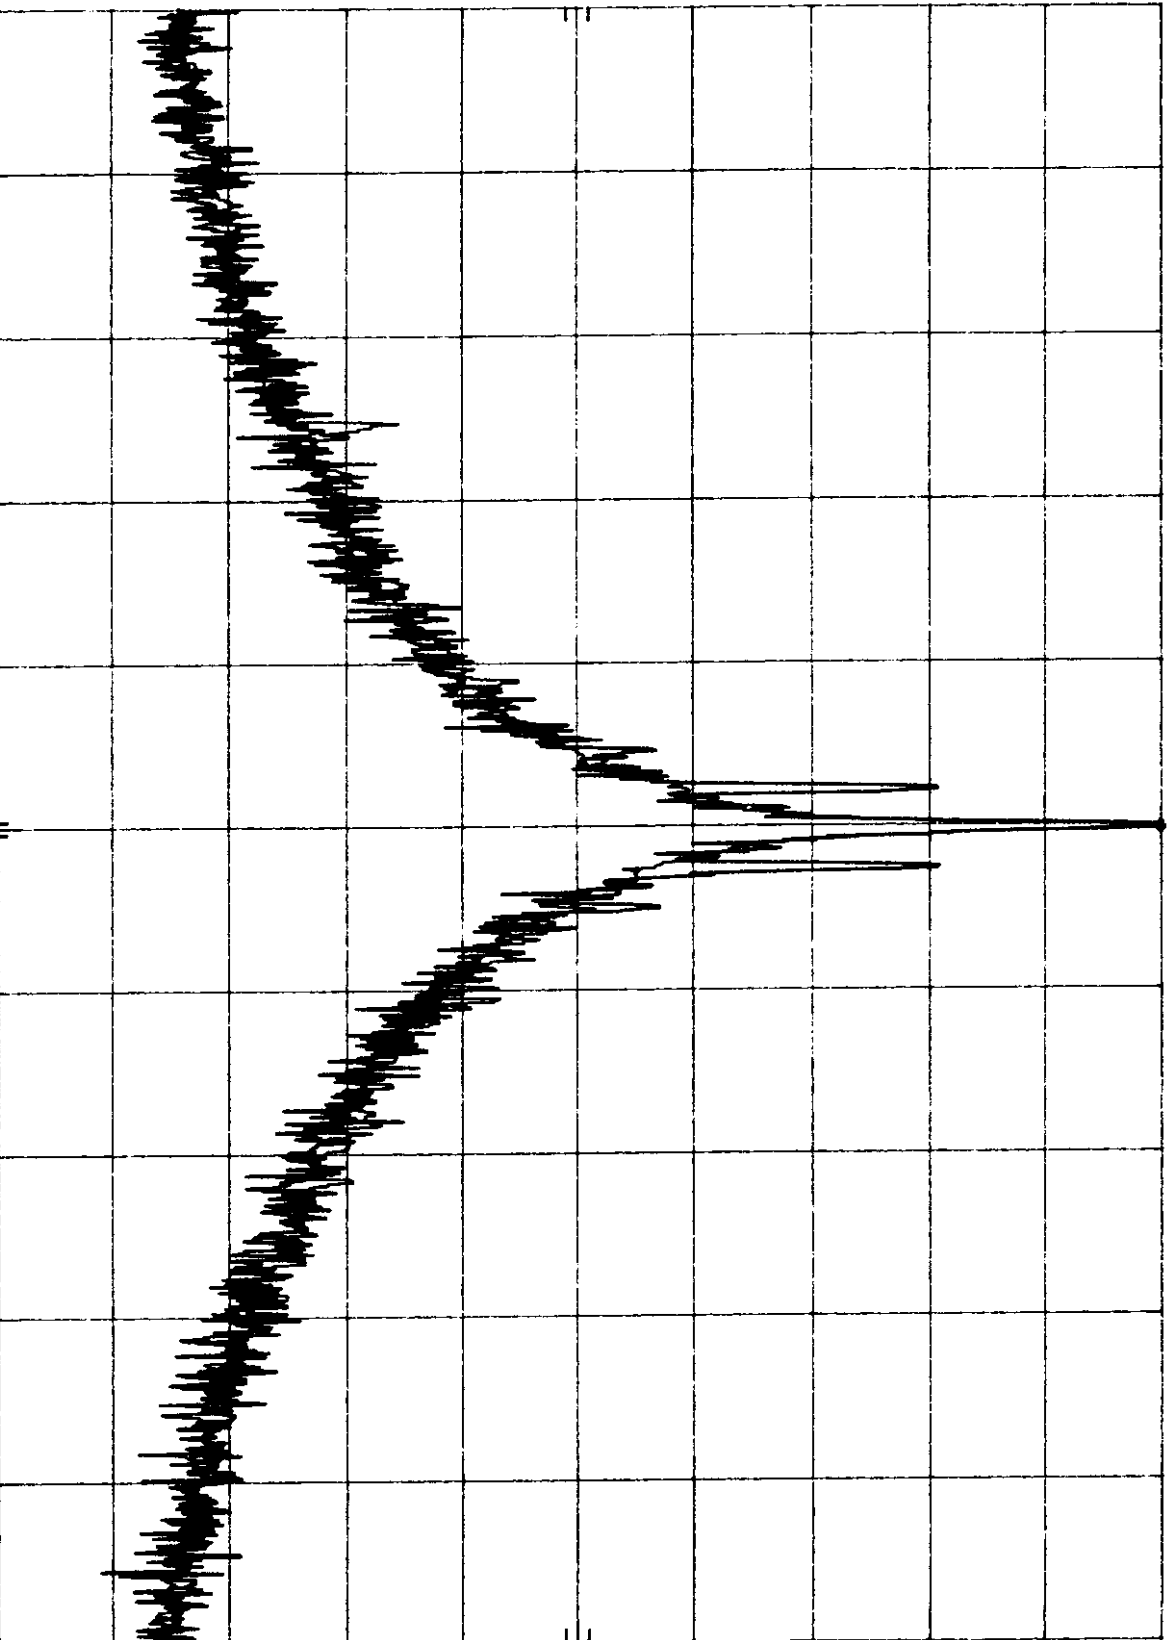

CENTER 930.424 MHz

RES BW 300 Hz

VBW 300 Hz


SPAN 201 kHz
SWP 6.00 sec

hp

10 dB/

PLOT# 4.3.i
GWCMD, CWBASE 2000U
REF 26.0 dBm ATTN 40 dB

MKR 930.424 6 MHz
25.80 dBm

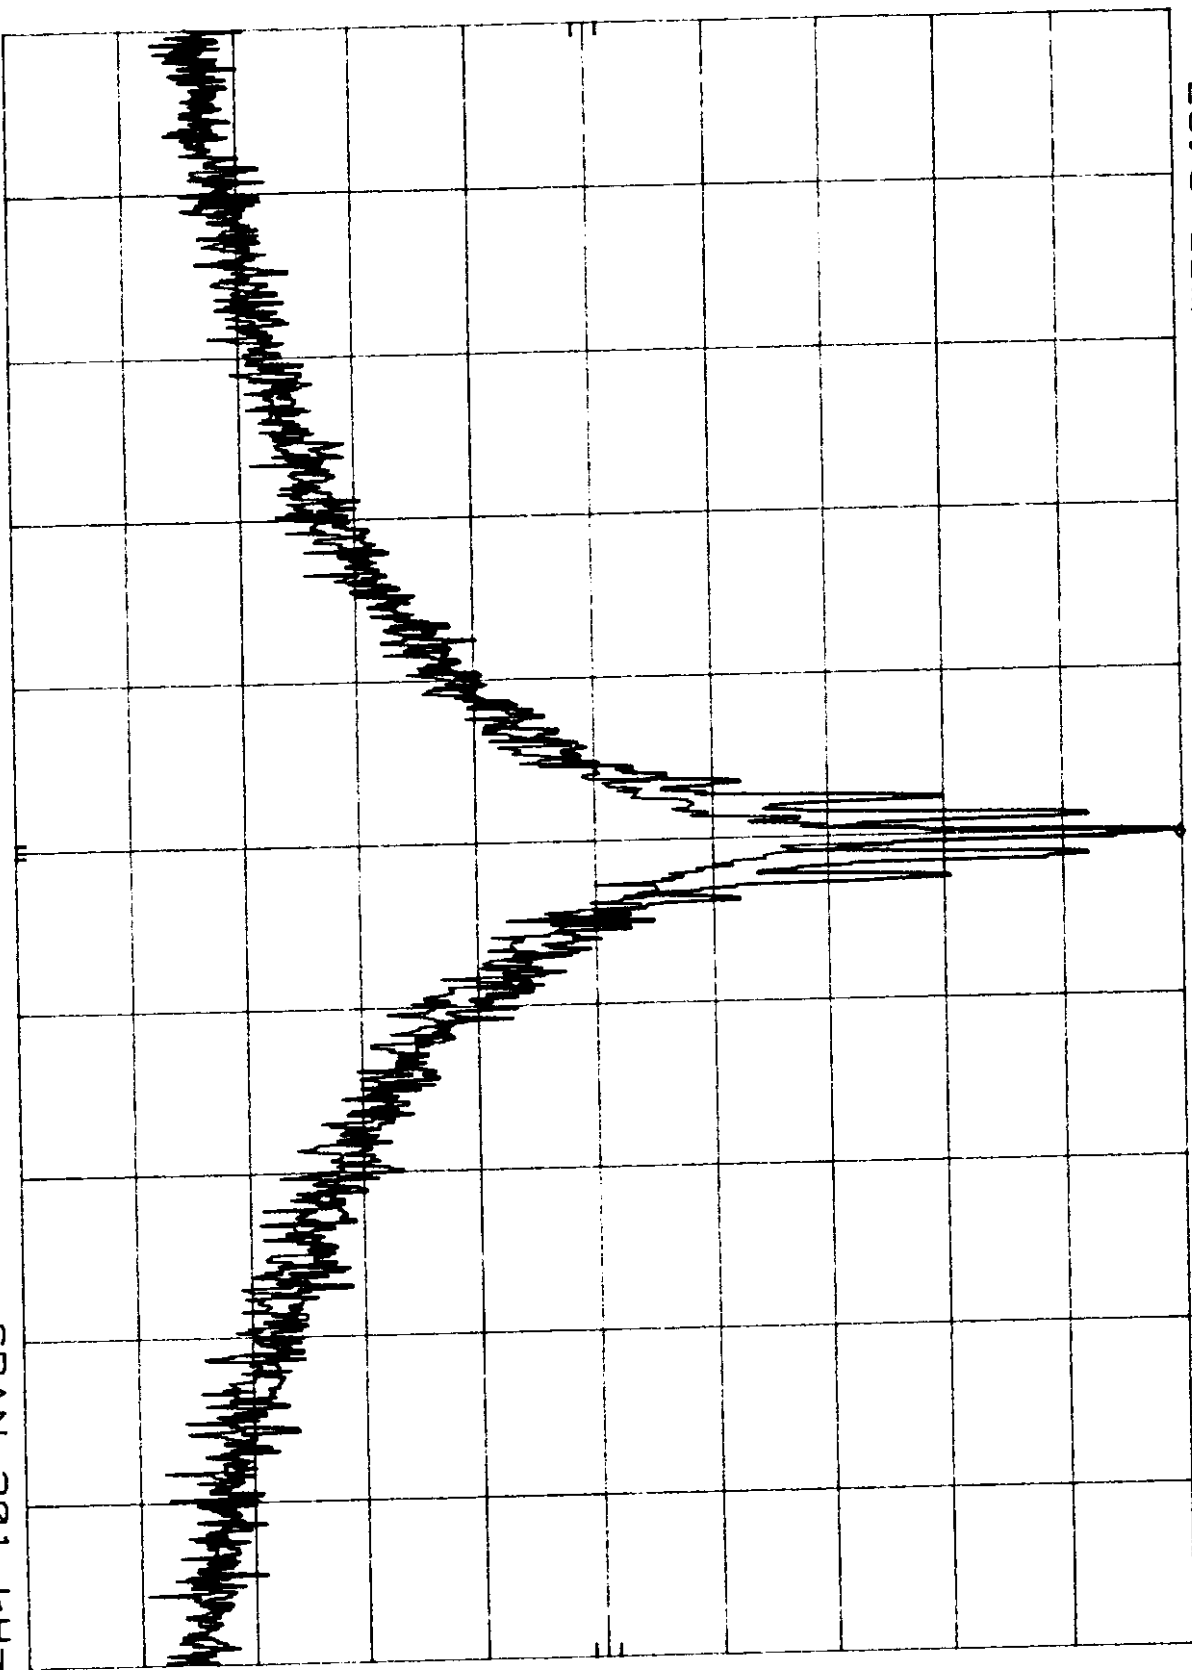

CENTER 930.424 MHz
RES BW 300 Hz
VBW 300 Hz
SPAN 201 kHz
SWP 6.00 sec

INTERTEK TESTING SERVICES - Menlo Park

GWCOM, Power Amplifier for Base Station, Model: GWBASE2000UEPA **Date of Test: 6/2-8/1998**

8.0 Frequency Stability vs Temperature, FCC § 2.995(a), 24.135(a)

8.1 Test Procedure

The RF output of the EUT was connected to a spectrum analyzer via feedthrough attenuators. The EUT was placed inside the temperature chamber. The RF output cable exited the chamber through an opening.

After the temperature stabilized for approximately 20 minutes, the frequency of the output signal was recorded from the spectrum analyzer.

8.2 Test Equipment

Thermotron Ind. Temperature Chamber, Model S-8C
Hewlett Packard 8591E Spectrum Analyzer
AC Power Source, Model 1501L-1M

8.3 Test Results

Not Applicable

INTERTEK TESTING SERVICES - Menlo Park

GWCOM, Power Amplifier for Base Station, Model: GWBASE2000UEPA **Date of Test: 6/2-8/1998**

9.0 Frequency Stability vs Voltage, FCC 2.995(d)(2), 24.135(a)

9.1 Test Procedure

An external variable AC power source was connected to the EUT. The frequency of the transmitter was measured for 115% of the AC nominal value and for 85% of the nominal value.

9.2 Test Equipment

Hewlett Packard 8591E Spectrum Analyzer
AC Power Source, Model 1501L-1M

9.3 Test Results.

Not Applicable.

INTERTEK TESTING SERVICES - Menlo Park

GWCOM, Power Amplifier for Base Station, Model: GWBASE2000UEPA Date of Test: 6/2-8/1998

Appendix A - Photographs

See attached.

INTERTEK TESTING SERVICES - Menlo Park

GWCOM, Power Amplifier for Base Station, Model: GWBASE2000UEPA Date of Test: 6/2-8/1998

Appendix G

Occupied Bandwidth Plots for the amplifier input (output of the Base Station Transmitter)



INTERTEK TESTING SERVICES - Menlo Park

GWCOM, Inc., Base Station, Model: GWBASE2000URCS


Date of Test: June 2-8, 1998

Emission Limitations, Occupied Bandwidth Plots:


Plot Number	Description of Modulation
4.3.a	Random pattern, span 50 kHz
4.3.b	0,1,0,1....data, span 50 kHz
4.3.c	1,1,0,0,1,1....data, span 50 kHz
4.3.d	Random pattern, span 100 kHz
4.3.e	0,1,0,1....data, span 100 kHz
4.3.f	1,1,0,0,1,1....data, span 100 kHz
4.3.g	Random pattern, span 200 kHz
4.3.h	0,1,0,1....data, span 200 MHz
4.3.i	1,1,0,0,1,1....data, span 200 kHz

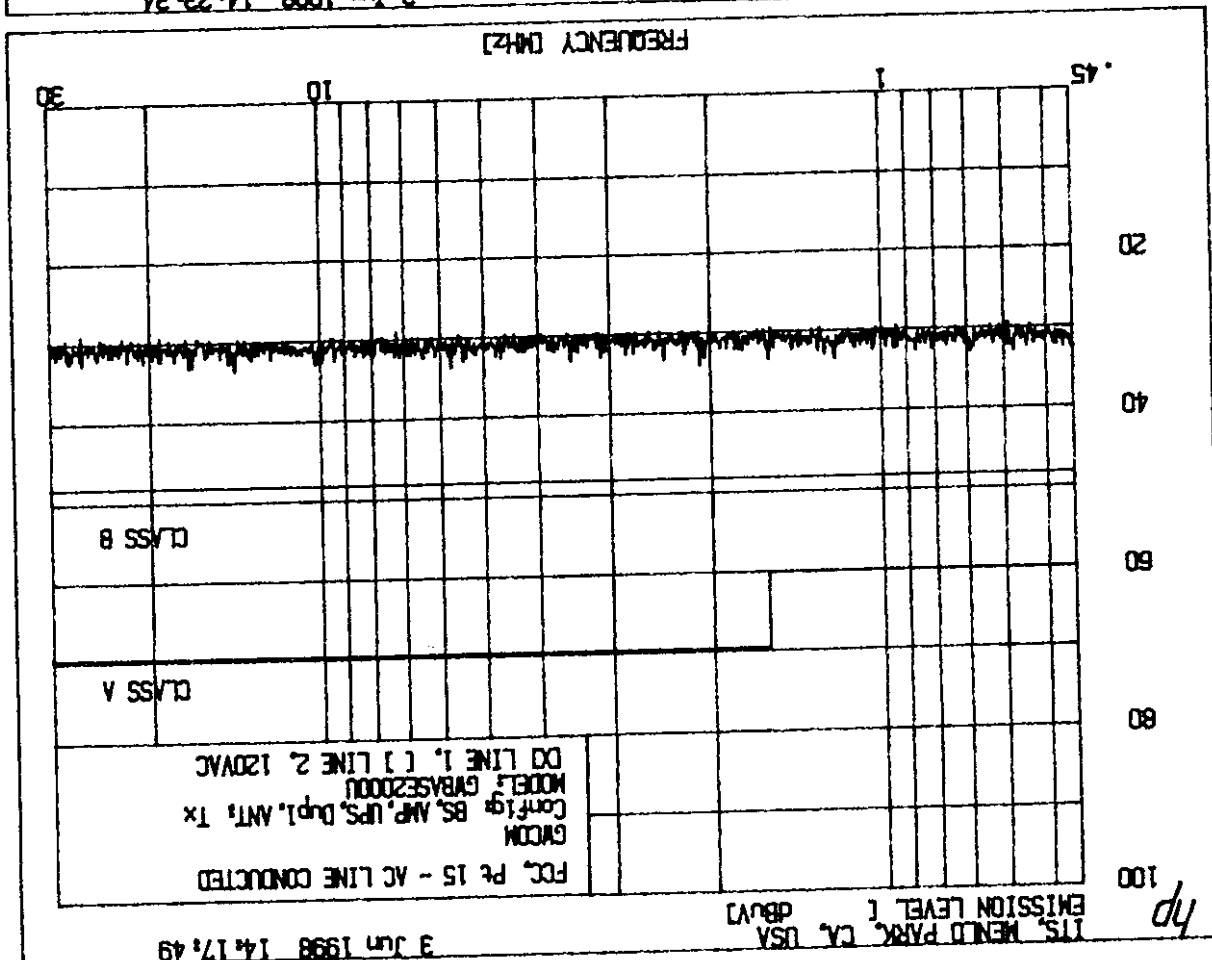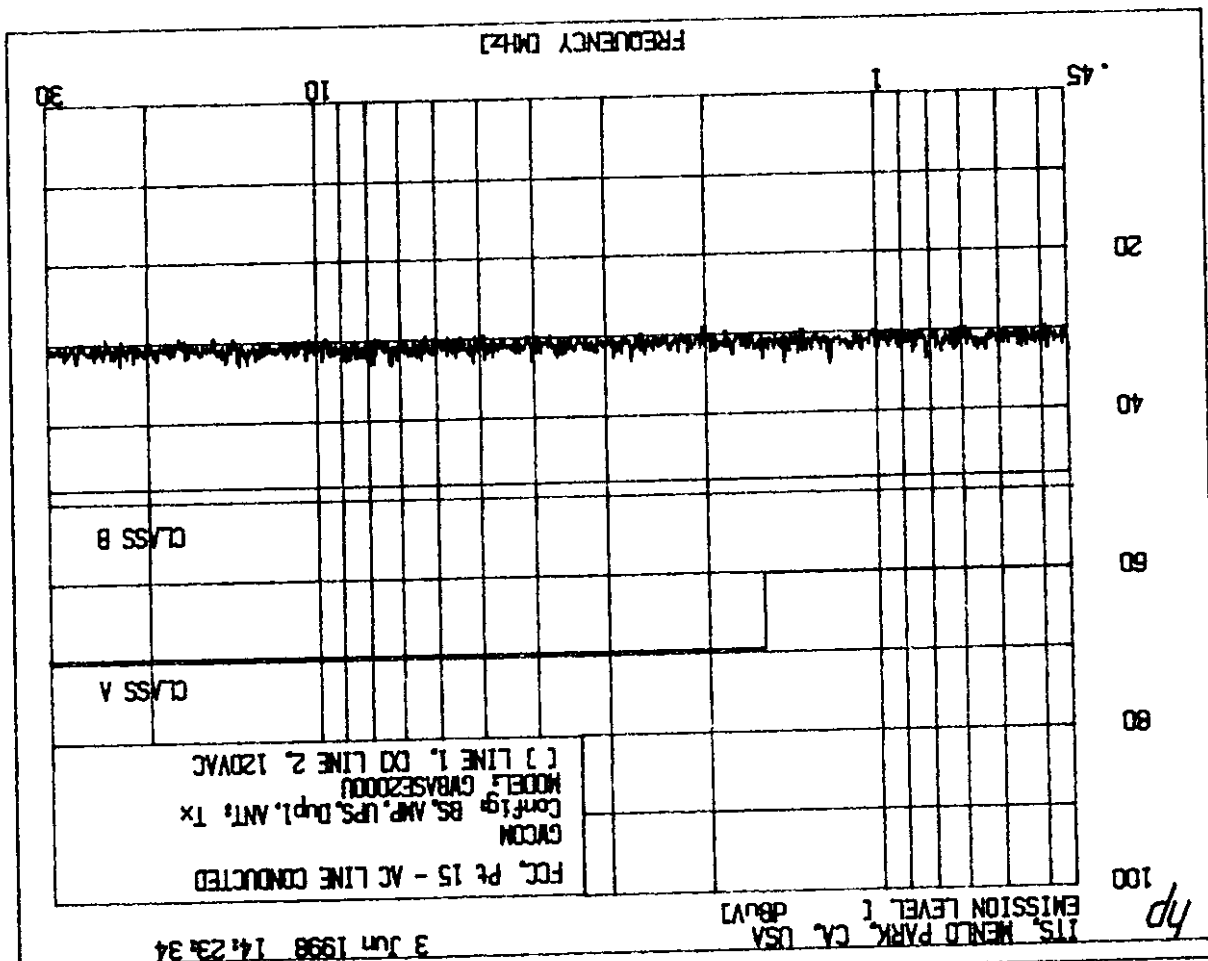

PLOT# 5.3.e

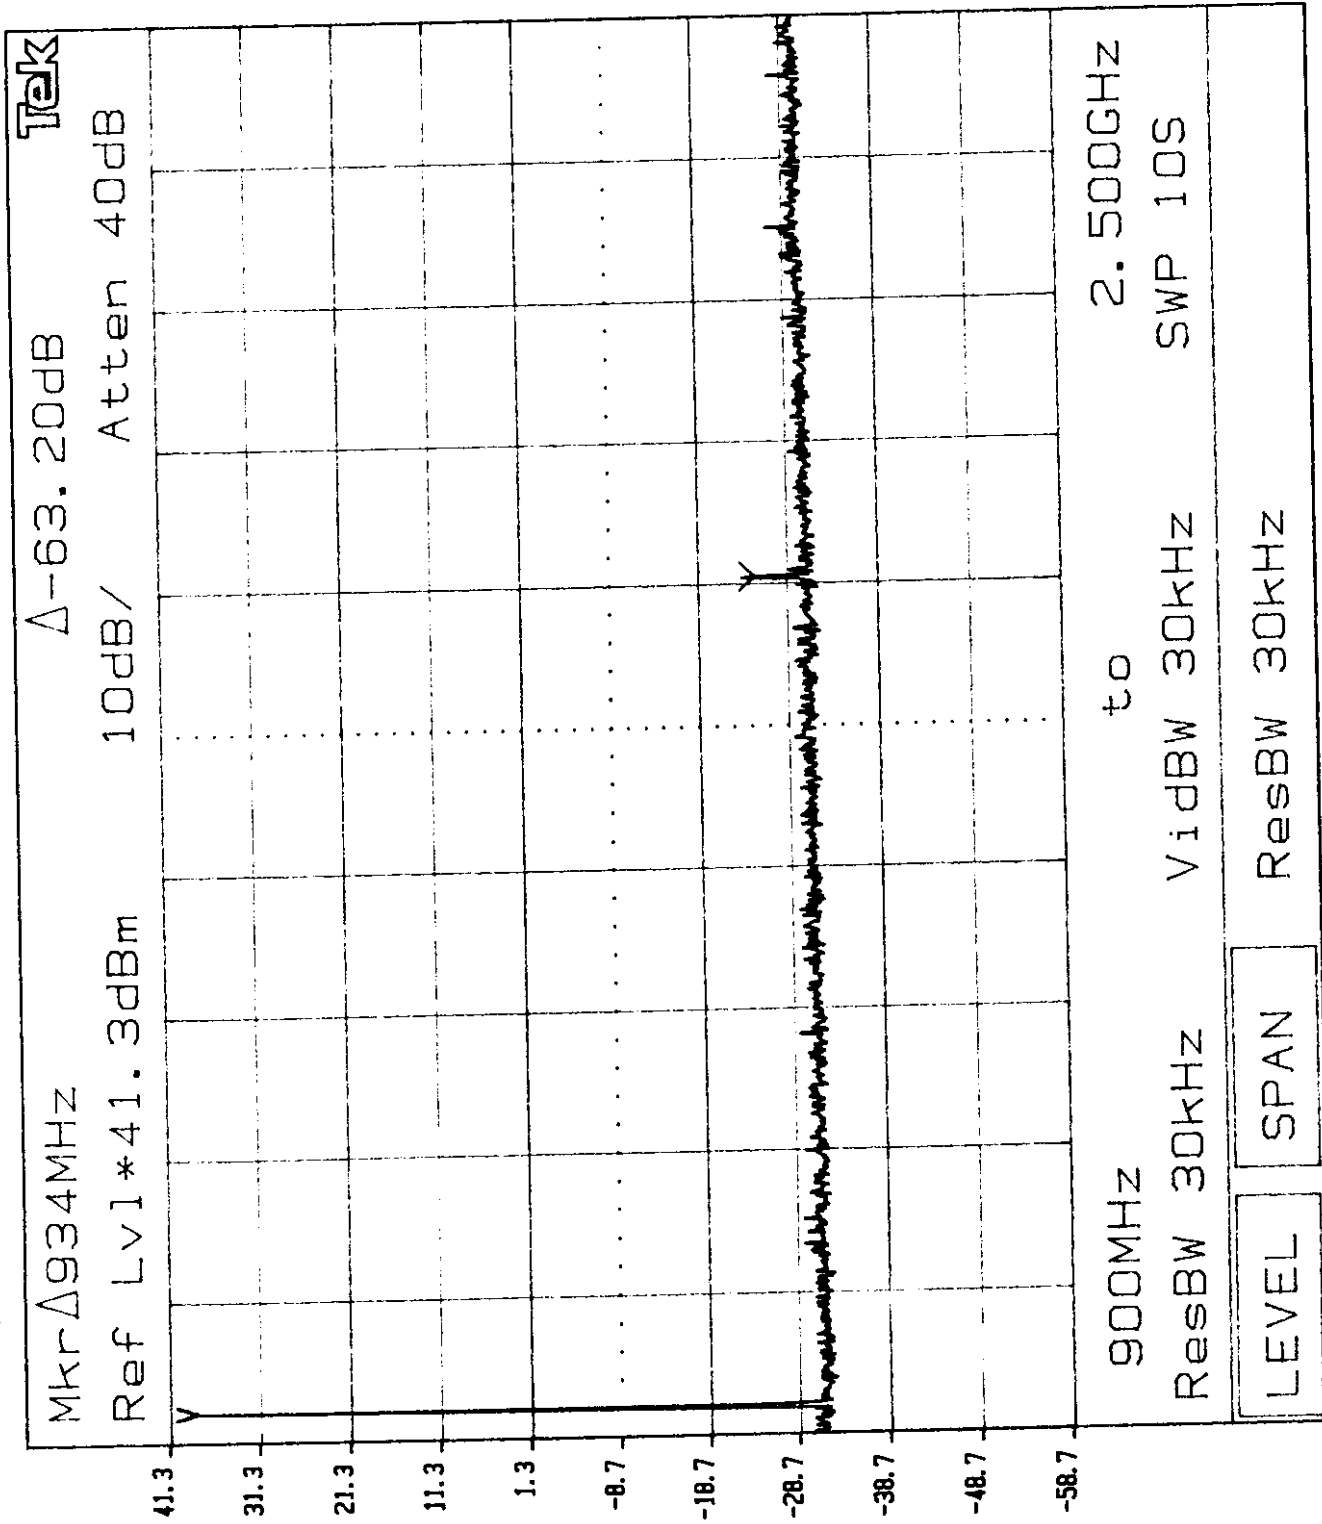

PLOT# 5.3.f

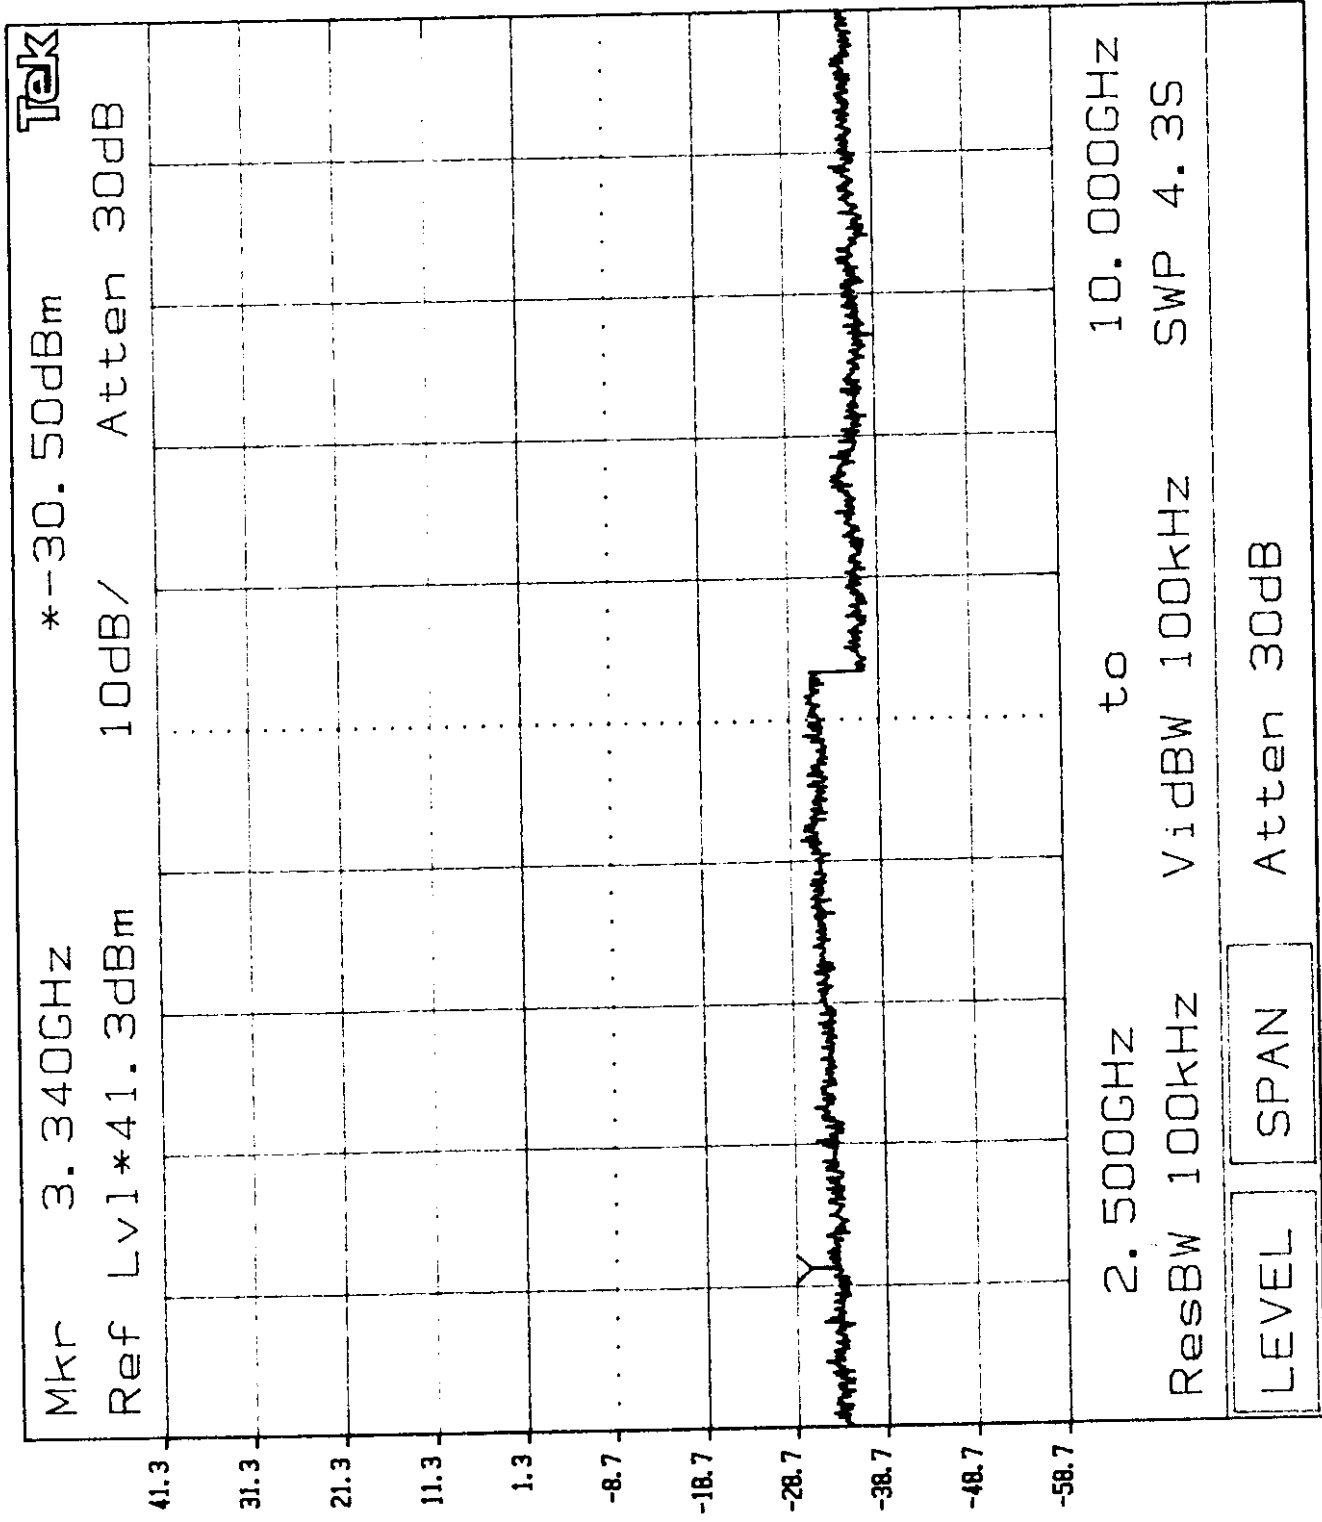

2784


Tektronix


KEYPAD

KNOB 1

KNOB 2

PLOT# 5.3.d

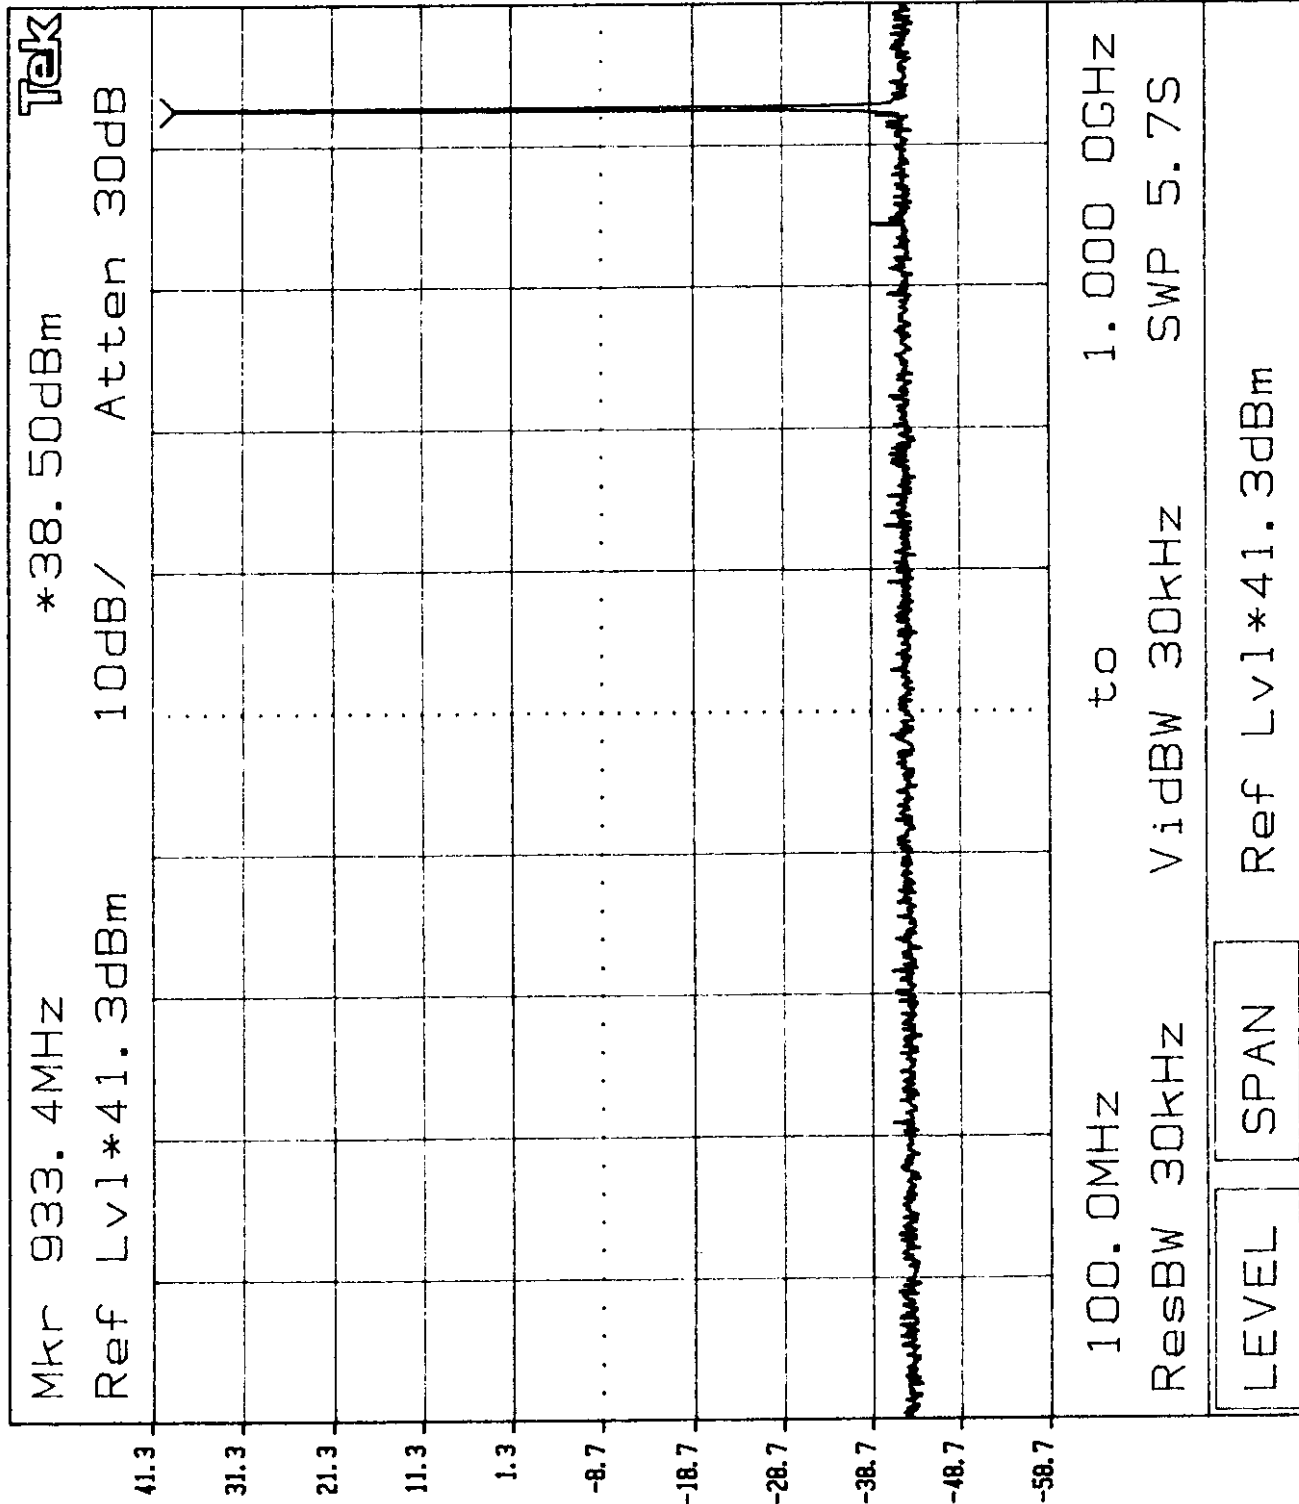

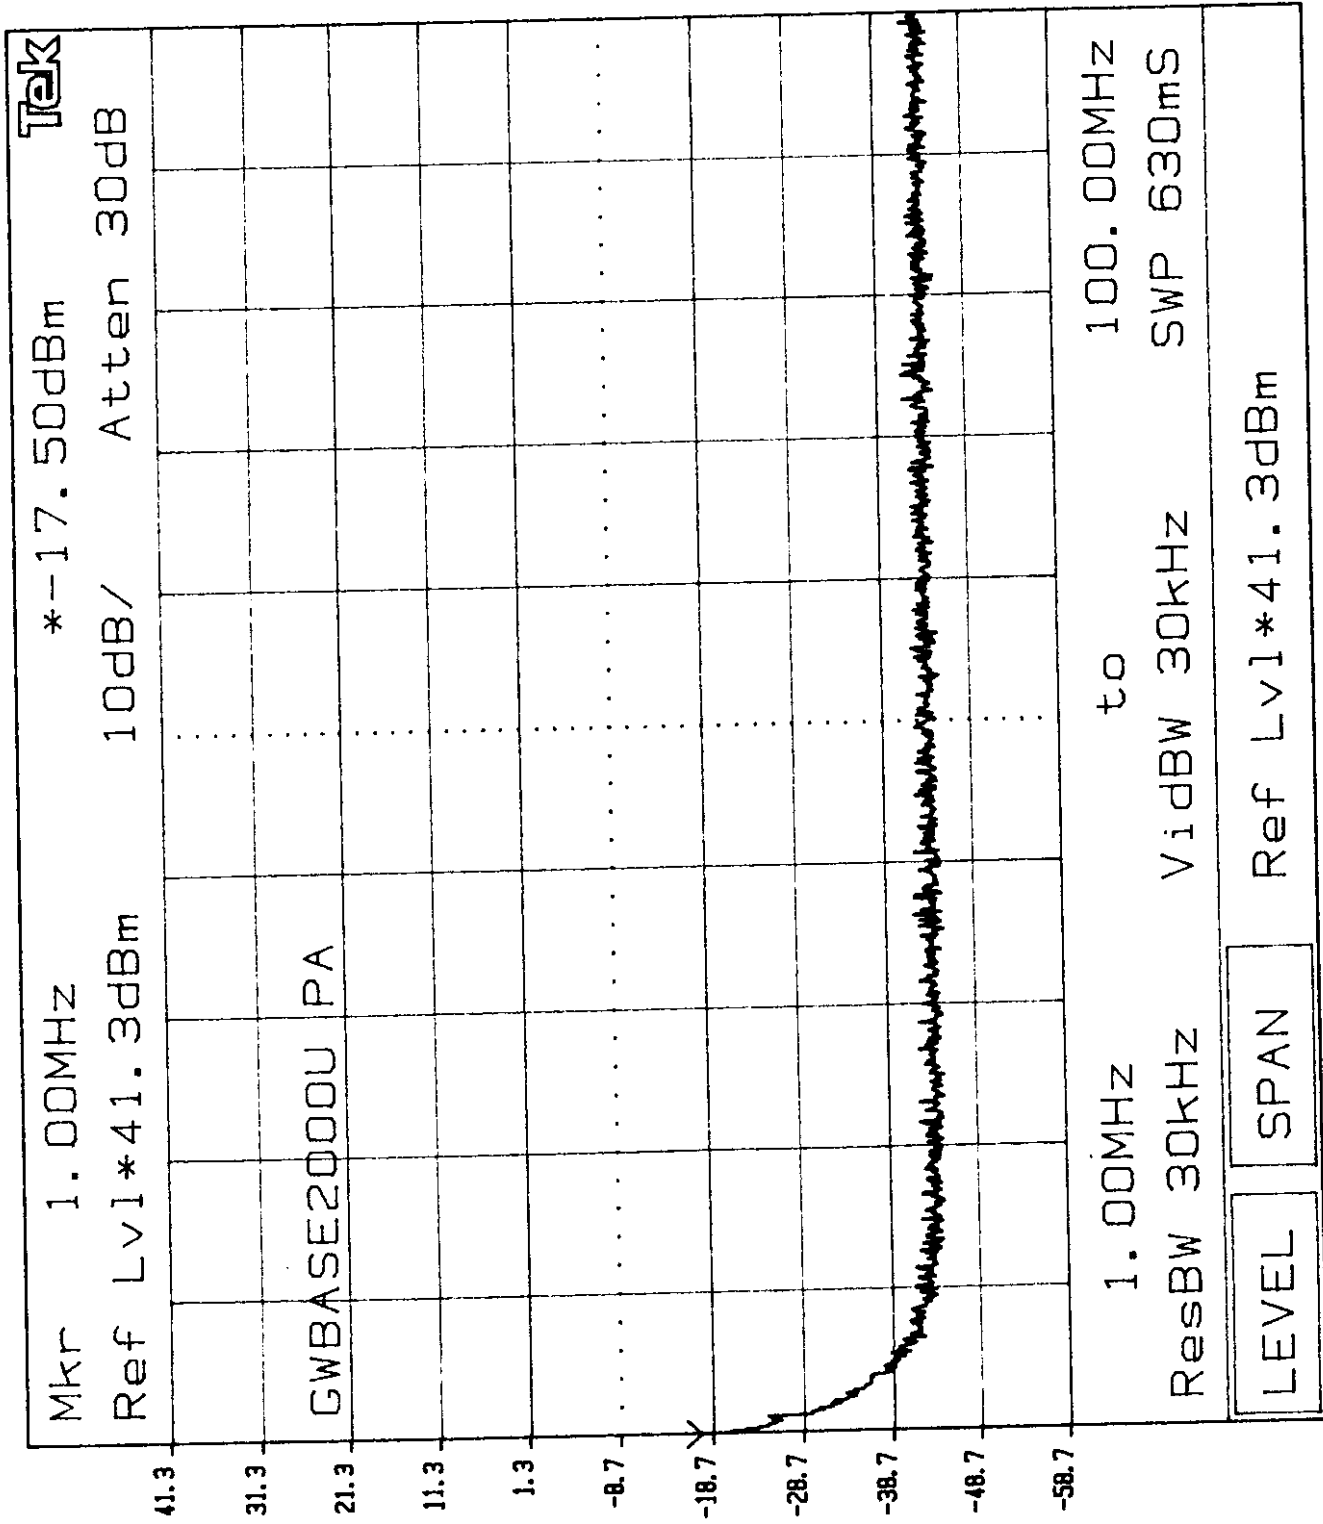

PLOT# 5.3.b

GWCOM. GWBASE2000U PA

MKR 929.001 MHz
-24.00 dBm

REF 41.3 dBm ATTEN 40 dB


hp

10 dB/

OFFSET

21.8

dB

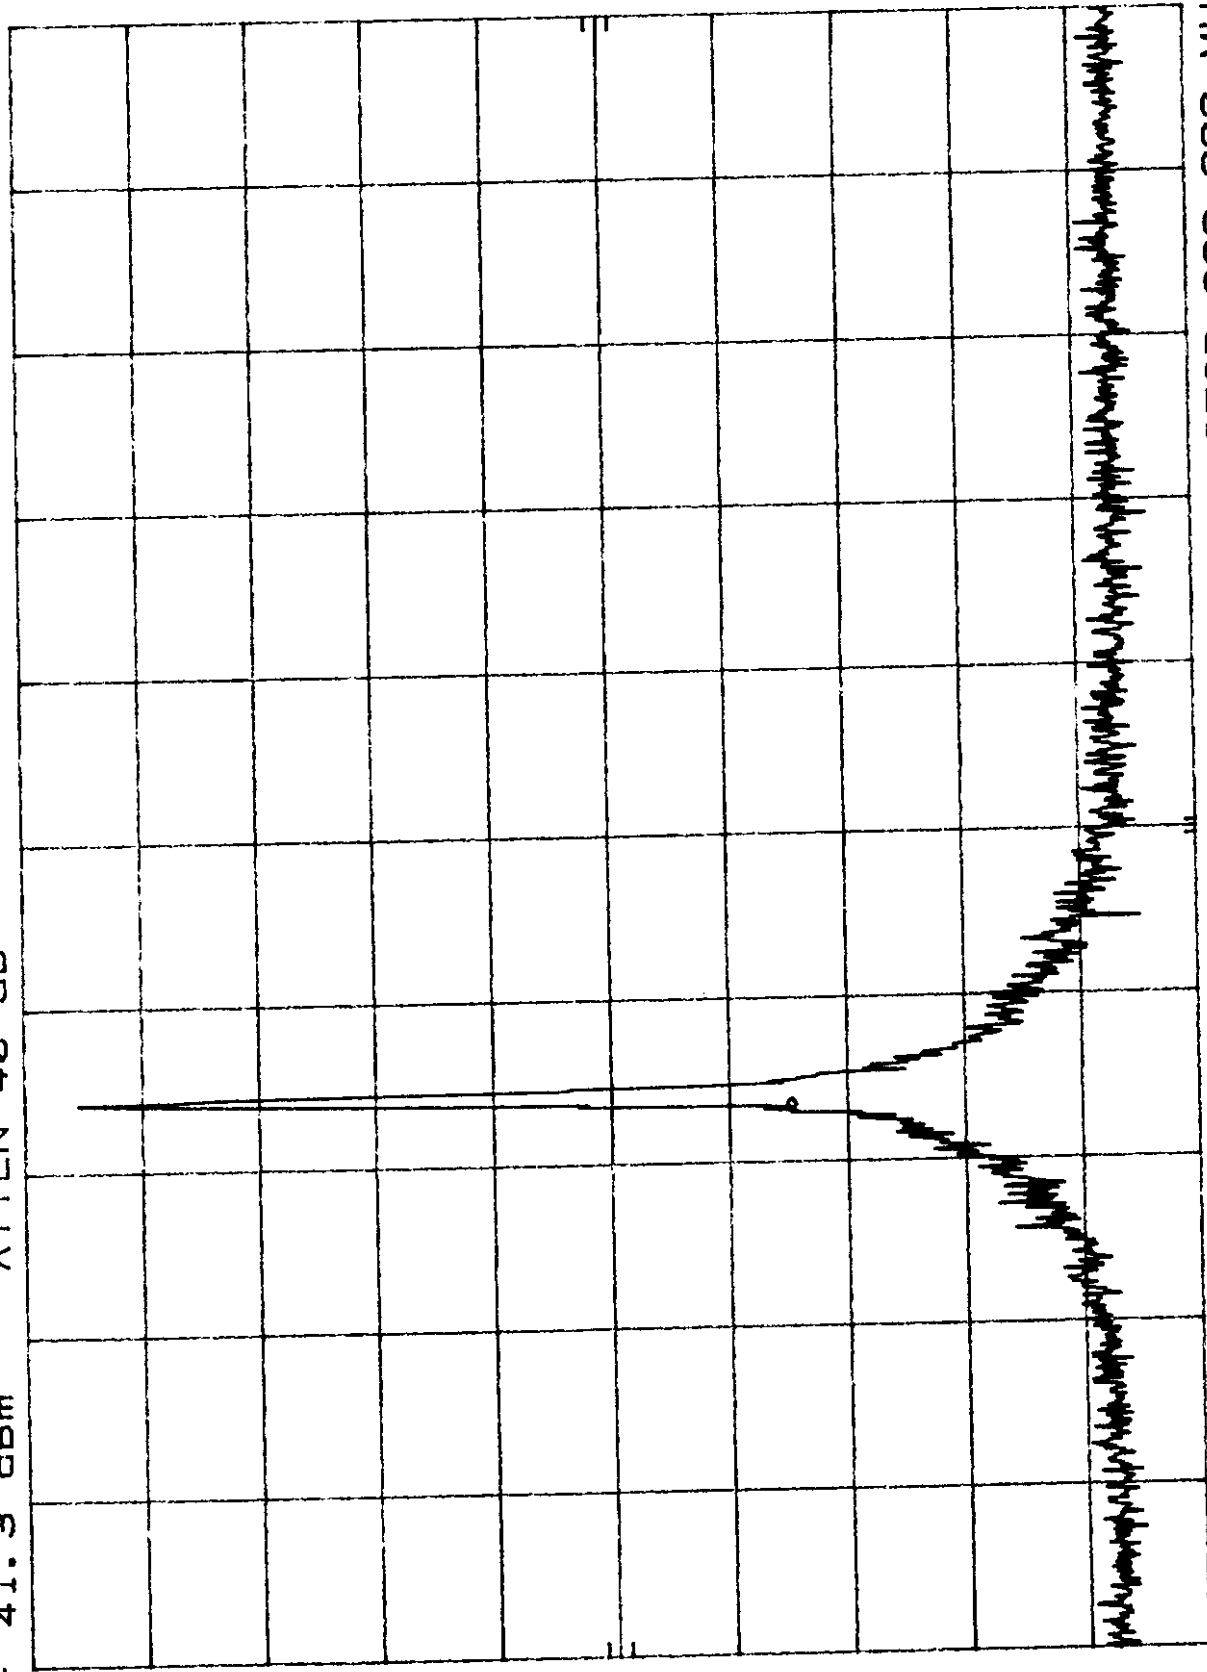

START 928.500 MHz

RES BW 300 Hz

VBW 300 Hz

STOP 930.000 MHz

SWP 30 sec

PLOT# 5.3.a


MKR 930.000 MHz
-26.80 dBm

GWCOM, GWBASE2000U PA
REF 41.3 dBm ATTN 30 dB

h₀

10 dB/

OFFSET
21.8
dB

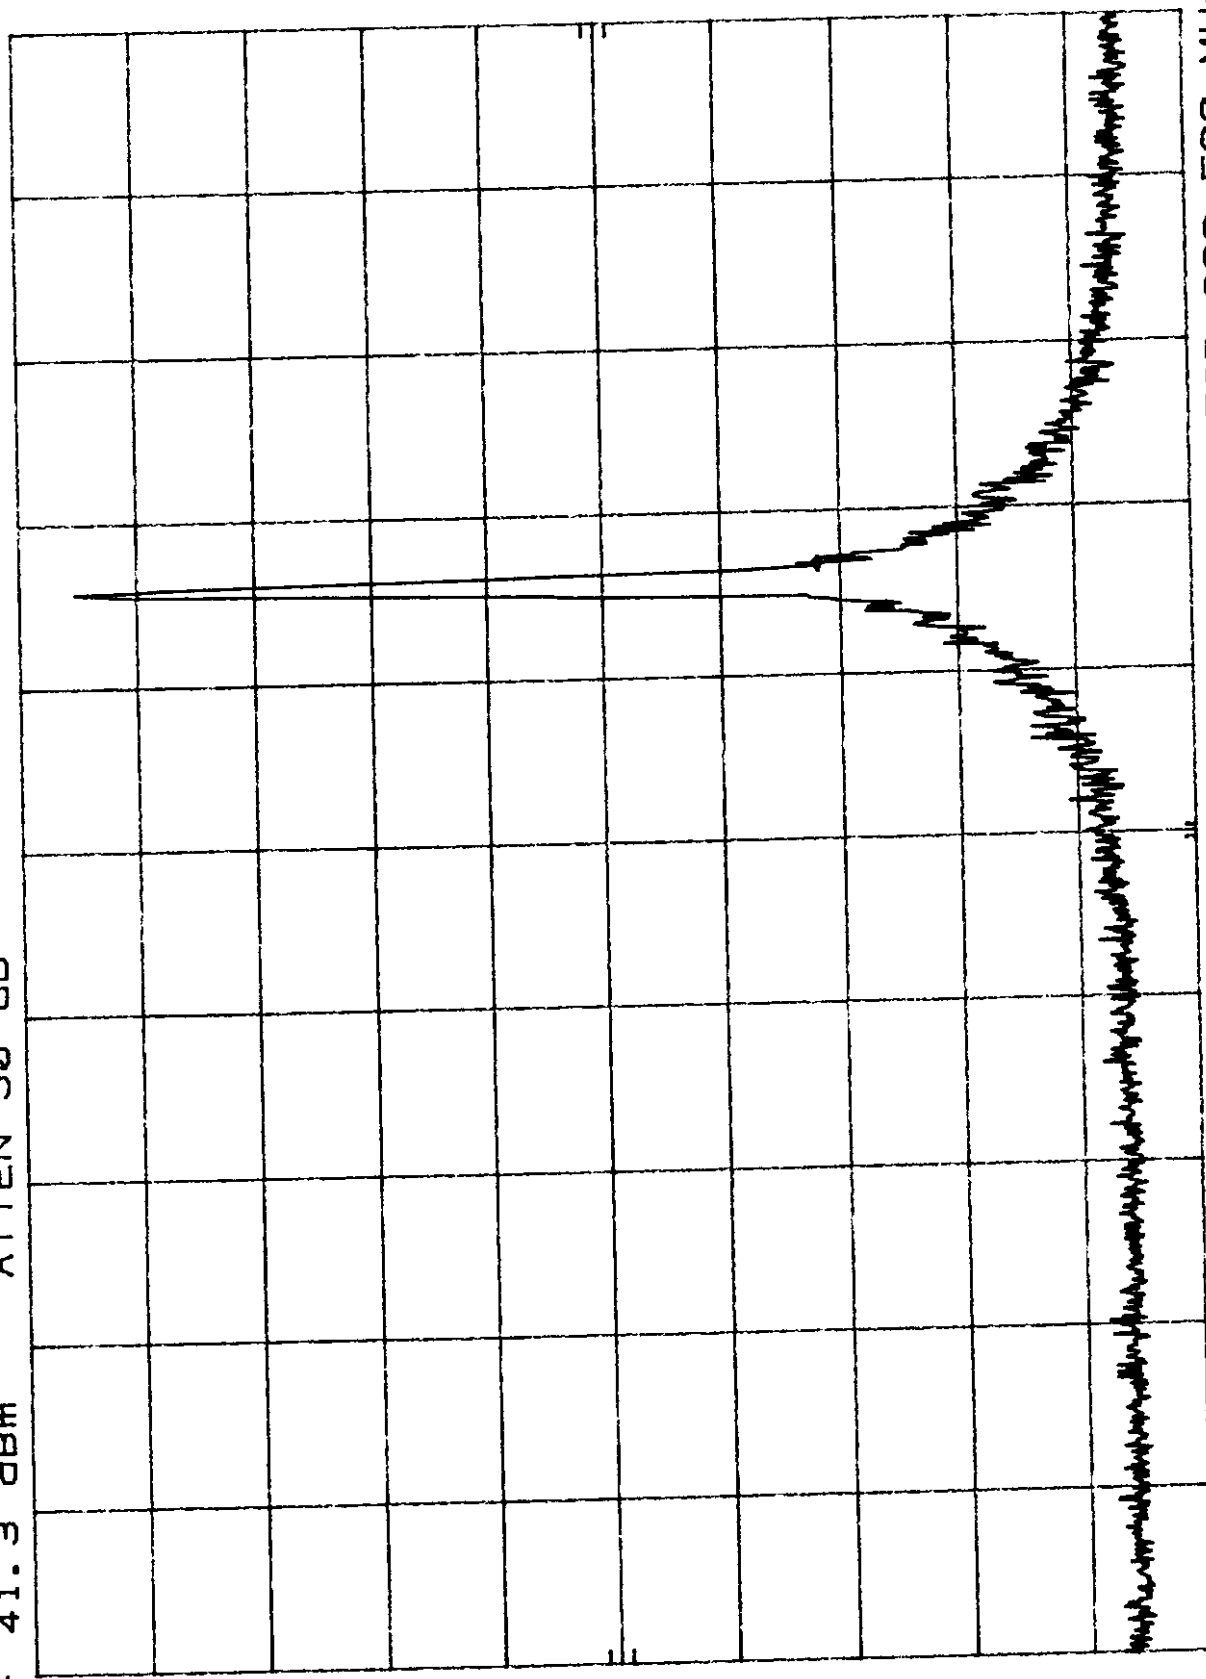

STOP 930.500 MHz
SWP 30 sec

START 929.000 MHz
RES BW 300 Hz
VBW 300 Hz

PLOT# 4.3.e

GWCOM, GWBASE2000U PA

MKR 930.4242 MHz

REF 41.3 dBm

ATTEN 40 dB

41.20 dBm


hp

10 dB/

OFFSET

21.8

dB

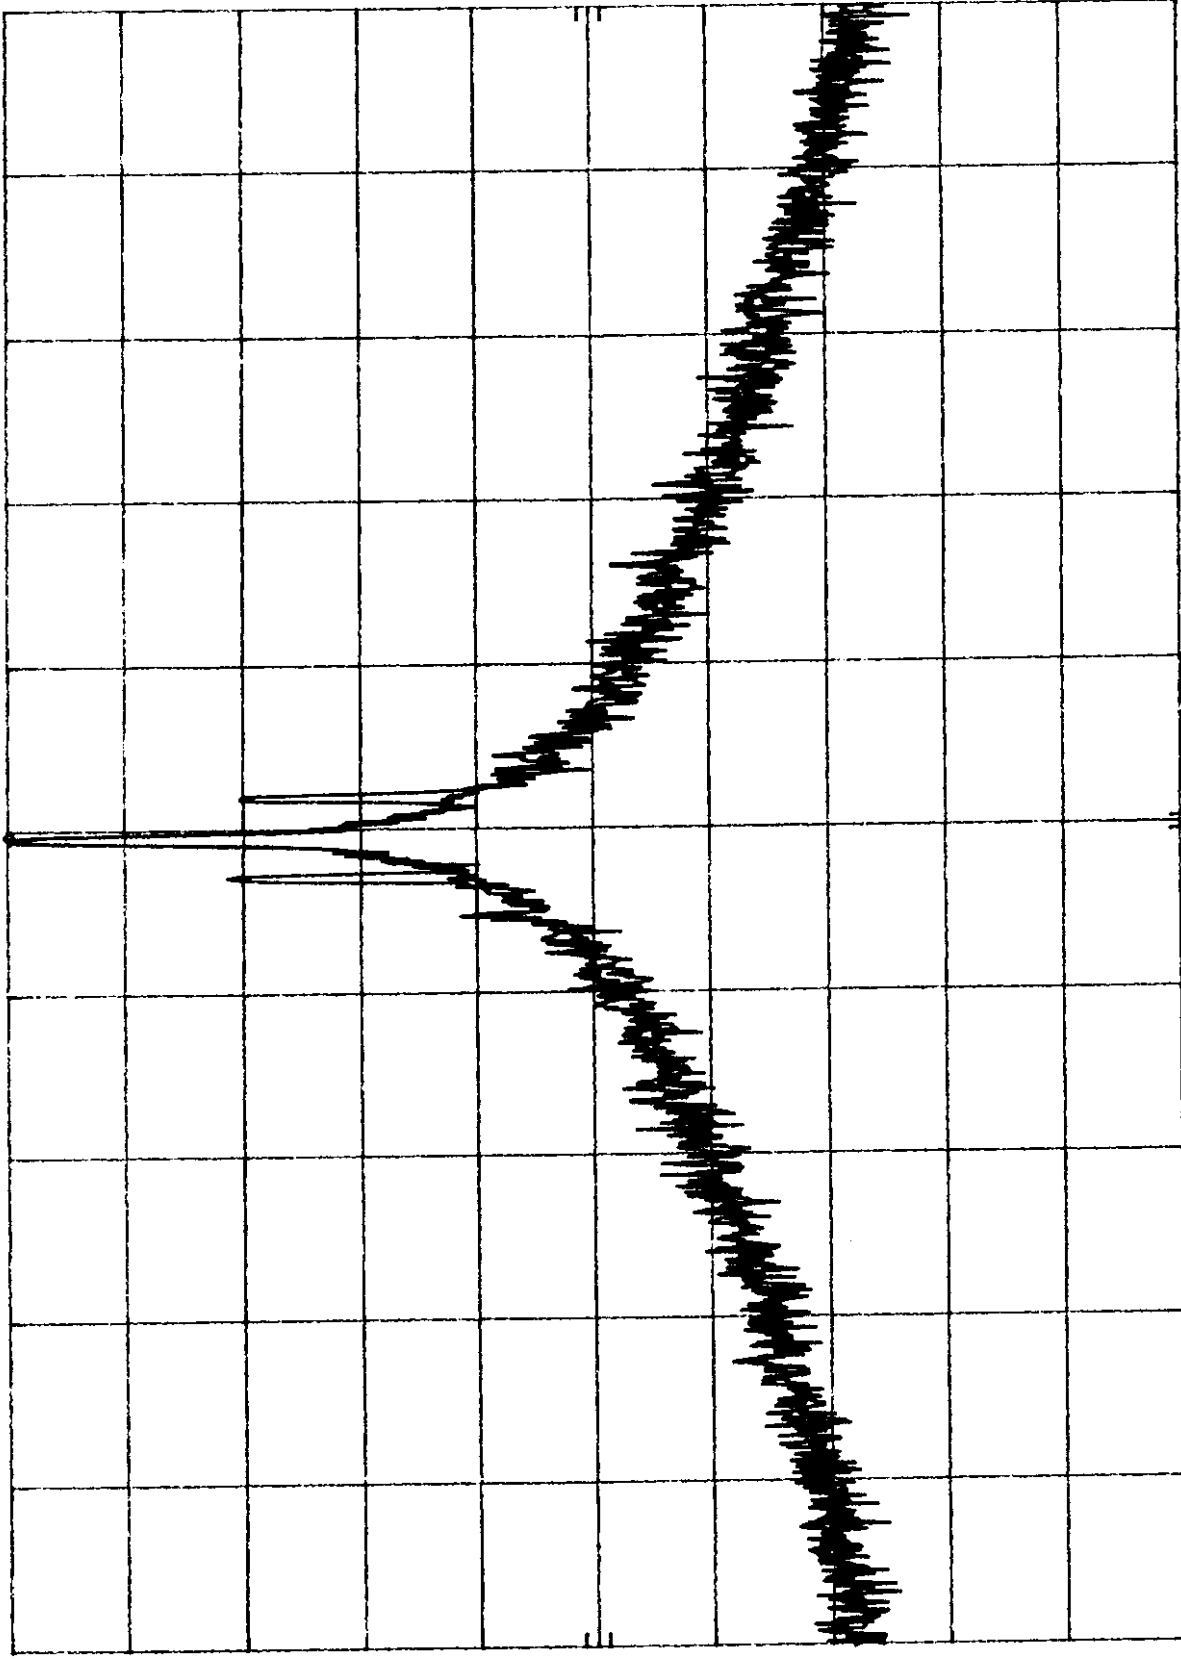

CENTER 930.4250 MHz

RES BW 300 Hz

VBW 300 Hz

SPAN 200.0 KHz

SWP 5.0 sec

PLOT# 4.3.f

GWCOM, GWBASE2000U PA

REF 41.3 dBm

ATTEN 40 dB

MKR 930.4242 MHz
41.20 dBm


hp

10 dB/

OFFSET

21.8

dB

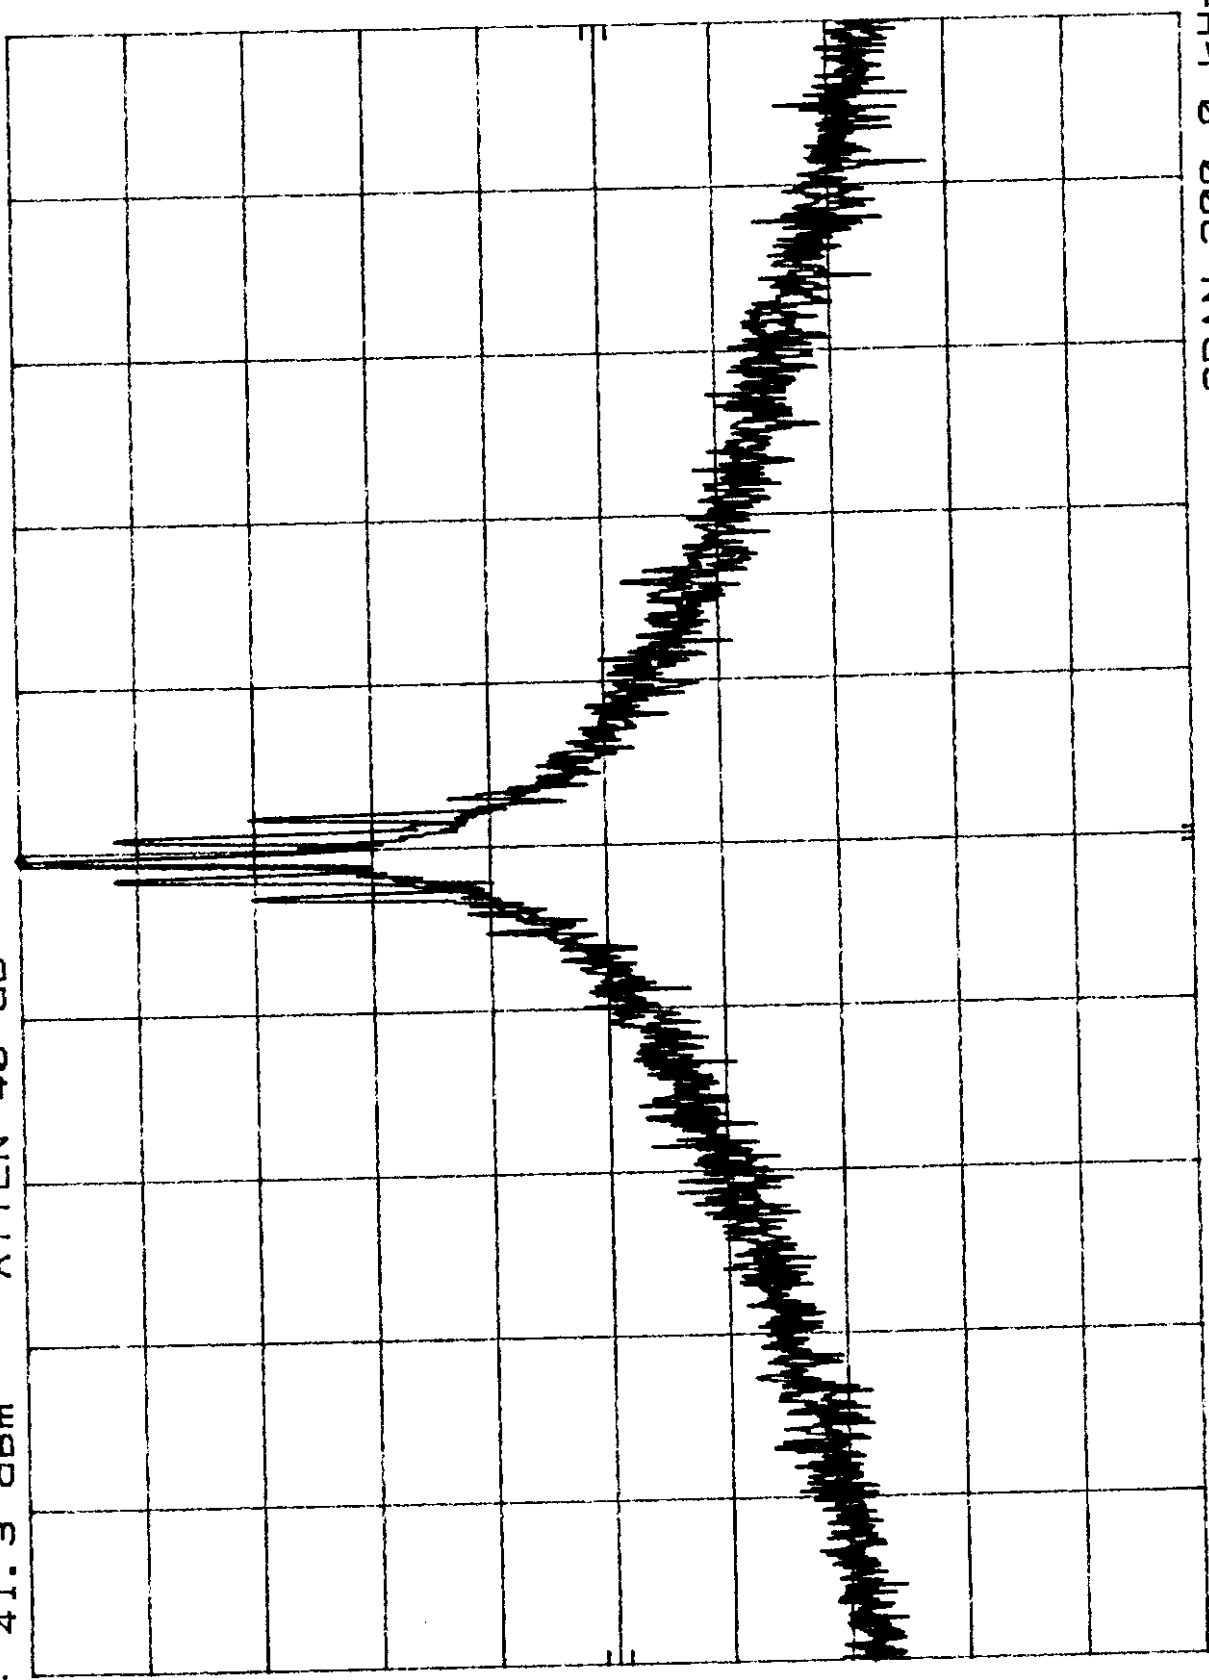

SPAN 200.0 KHz

SWP 5.0 sec

VBW 300 Hz

CENTER 930.4250 MHz
RES BW 300 Hz

PLOT# 4.3.g

GWCOM. GWBASE2000U PA

REF 41.3 dBm

ATTEN 40 dB

MKR 931.0346 MHz
-26.50 dBm


hp

10 dB/

OFFSET

21.8

dB

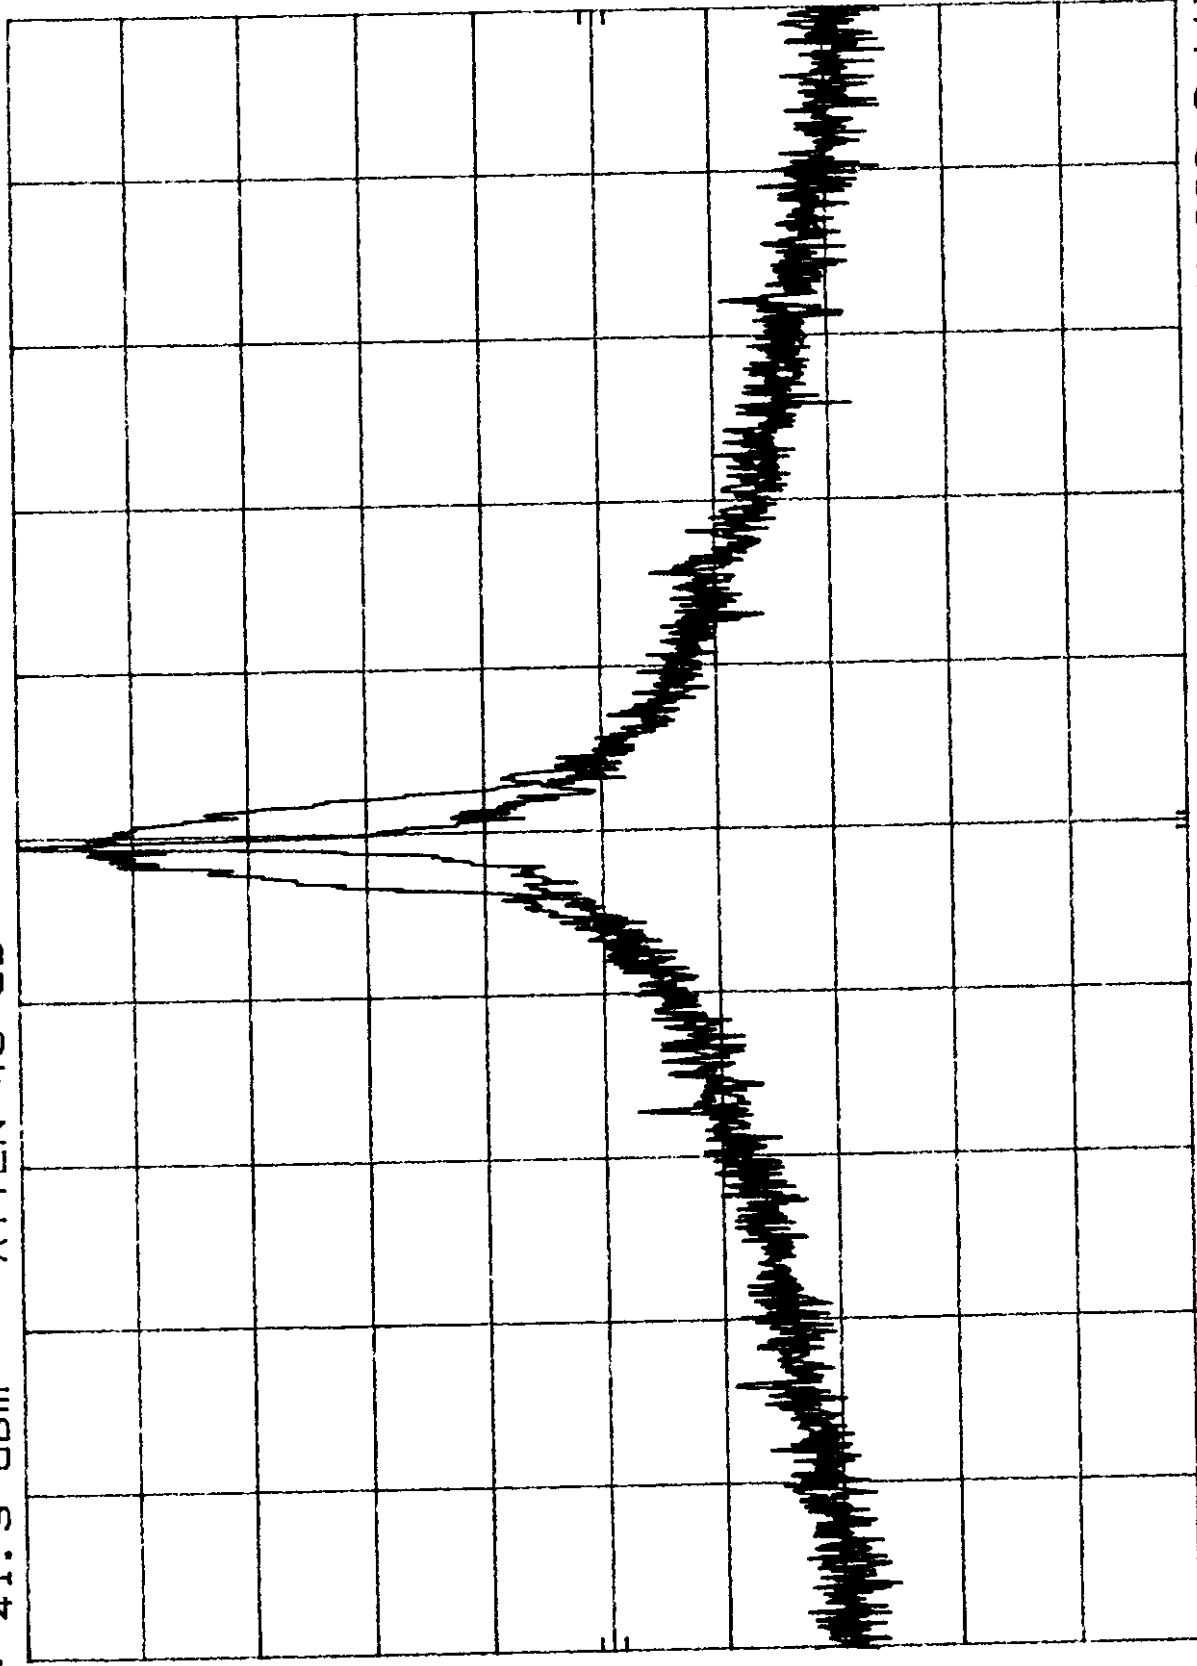

CENTER 930.9750 MHz

RES BW 300 Hz

VBW 300 Hz

SPAN 200.0 KHz

SWP 5.0 sec

PLOT# 4.3.h

GWCOM, GWBASE2000U PA

REF 41.3 dBm

ATTEN 40 dB

MKR 931.0346 MHz
-26.50 dBm


h₀

10 dB/

OFFSET

21.8

dB

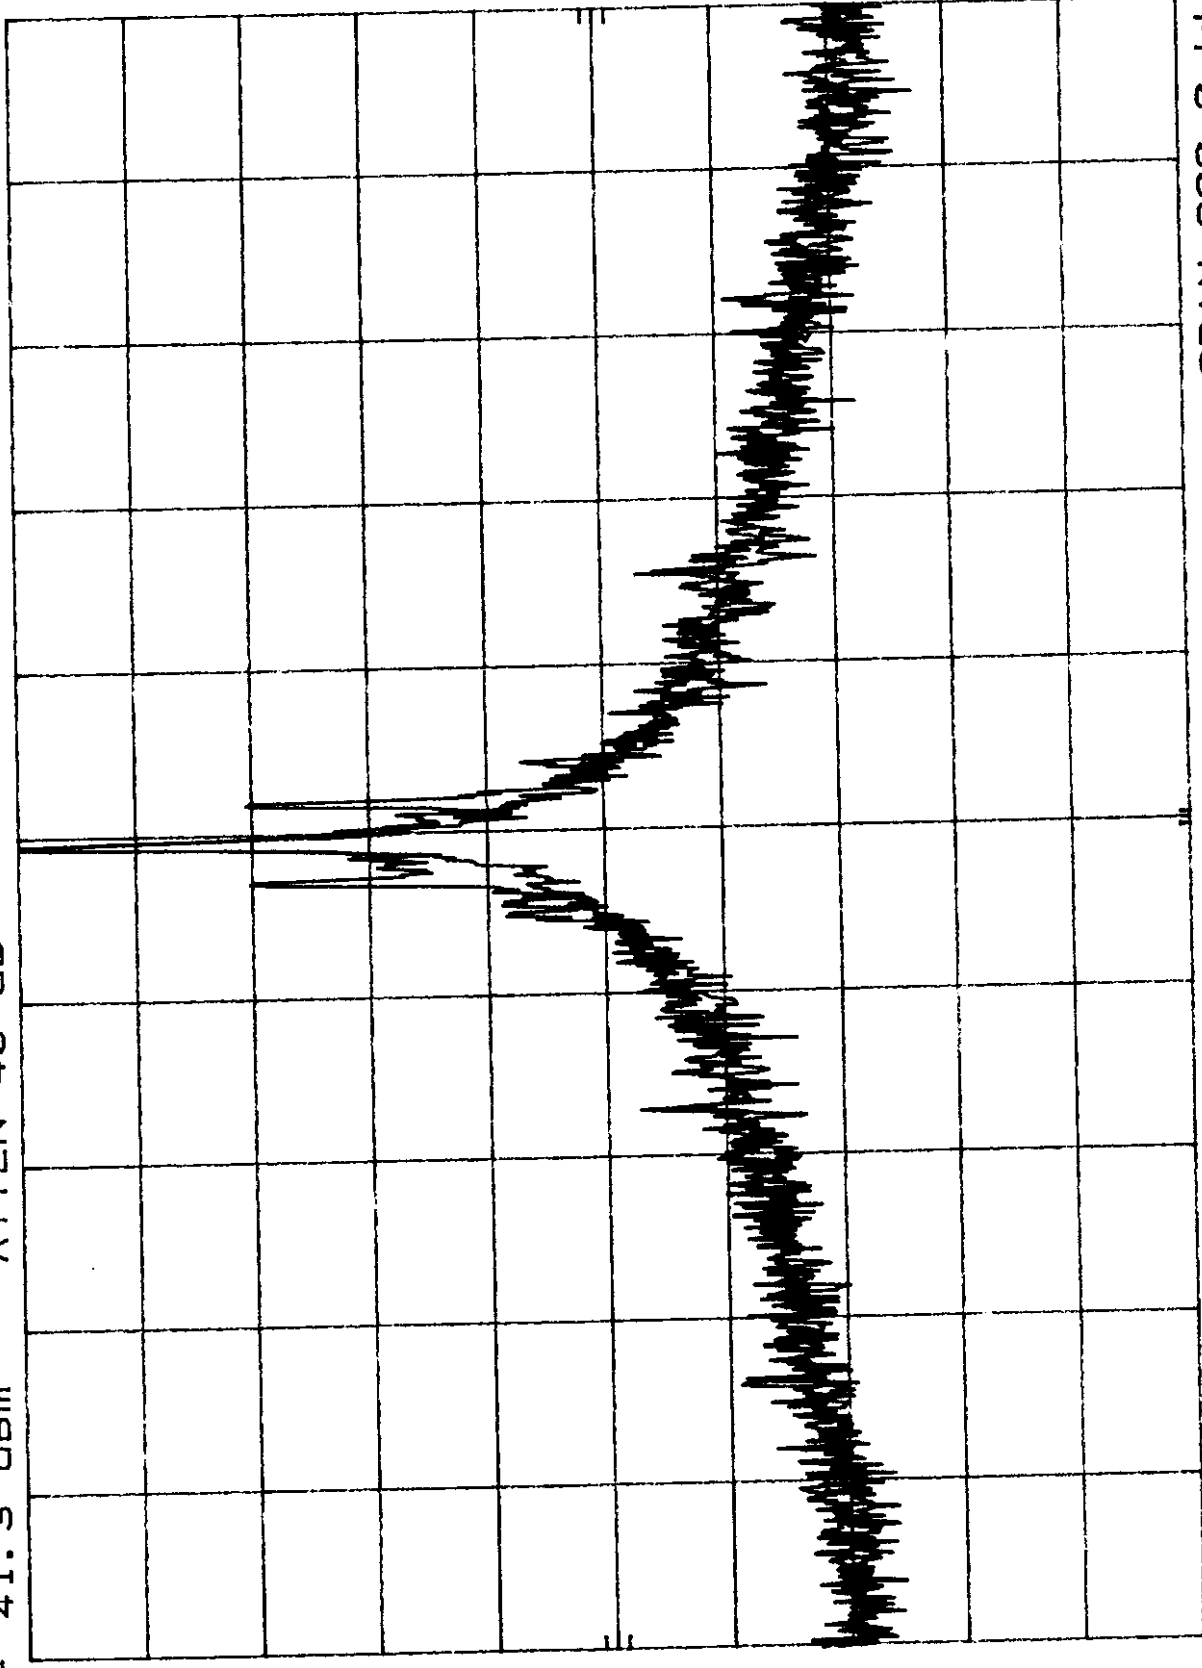

SPAN 200.0 kHz
SWP 5.0 sec

VBW 300 Hz

CENTER 930.9750 MHz
RES BW 300 Hz

PLOT# 4.3.i

GWCOM. GWBASE2000U PA

REF 41.3 dBm

ATTEN 40 dB

MKR 931.0346 MHz
-26.50 dBm


hp

10 dB/

OFFSET

21.8

dB

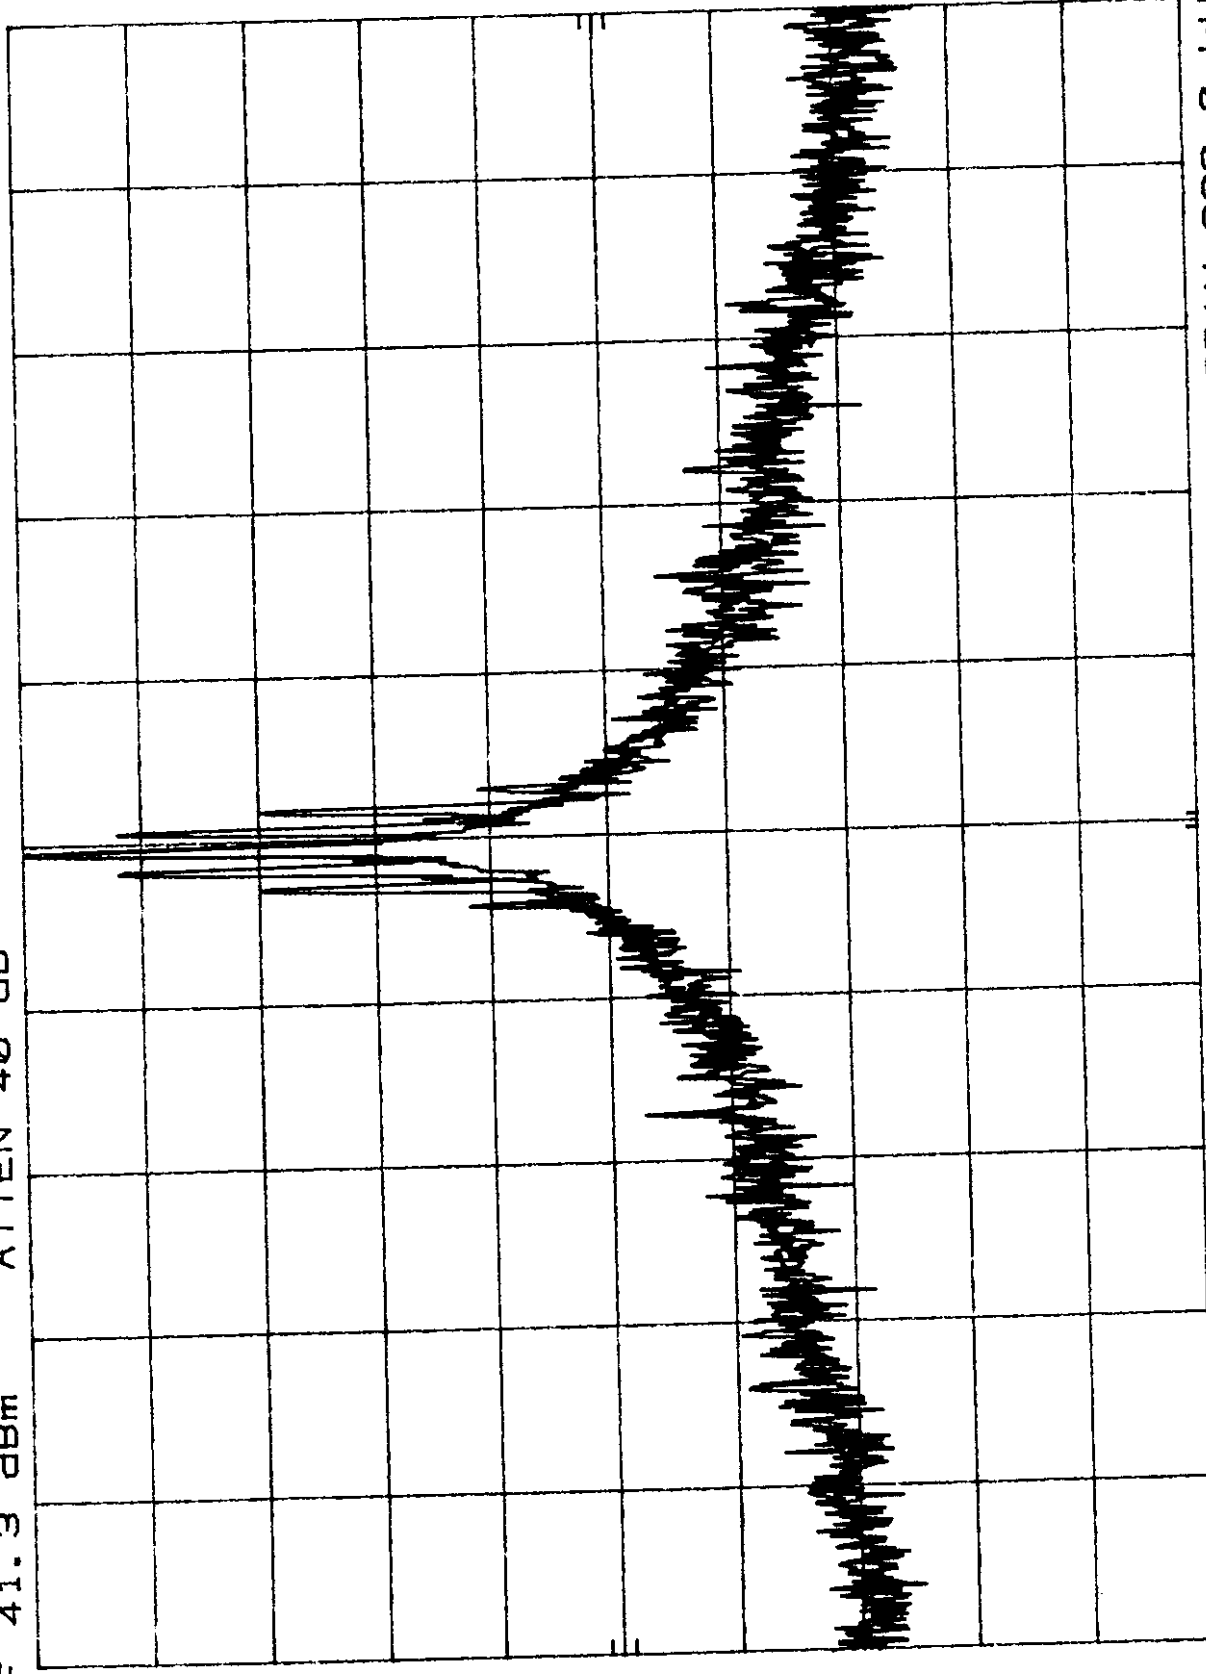

CENTER 930.9750 MHz

RES BW 300 Hz

VBW 300 Hz

SPAN 200.0 KHz

SWP 5.0 sec

PLOT# 4.3.d

GWCOM. GWBASE2000U PA

REF 41.3 dBm ATTN 40 dB

MKR 930.4242 MHz
41.20 dBm


hp

10 dB/

OFFSET

21.8

dB

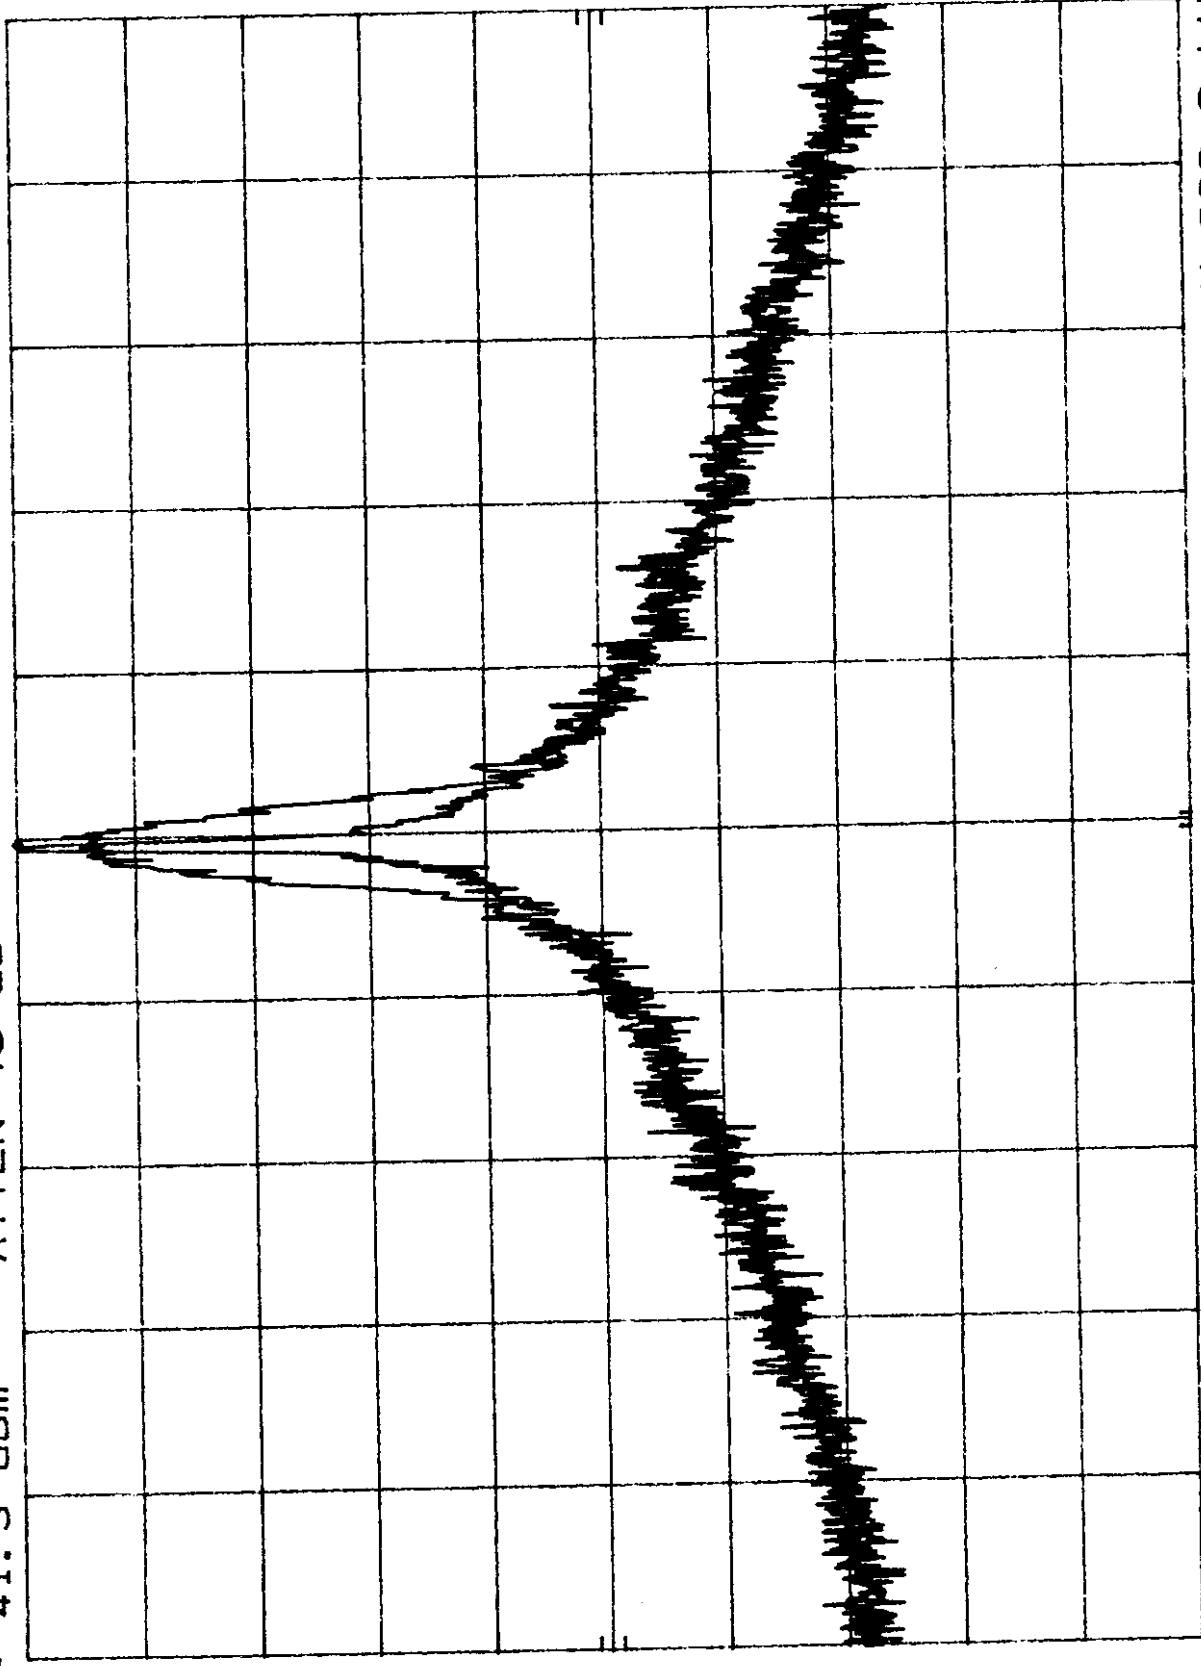

CENTER 930.4250 MHz

RES BW 300 Hz

VBW 300 Hz

SPAN 200.0 KHz

SWP 5.0 sec

PLOT# 4.3.C

GWCOM. GWBASE2000U PA

REF 41.3 dBm ATTN 40 dB

MKR 930.4244 MHz
41.30 dBm


hp

10 dB/

OFFSET

21.8

dB

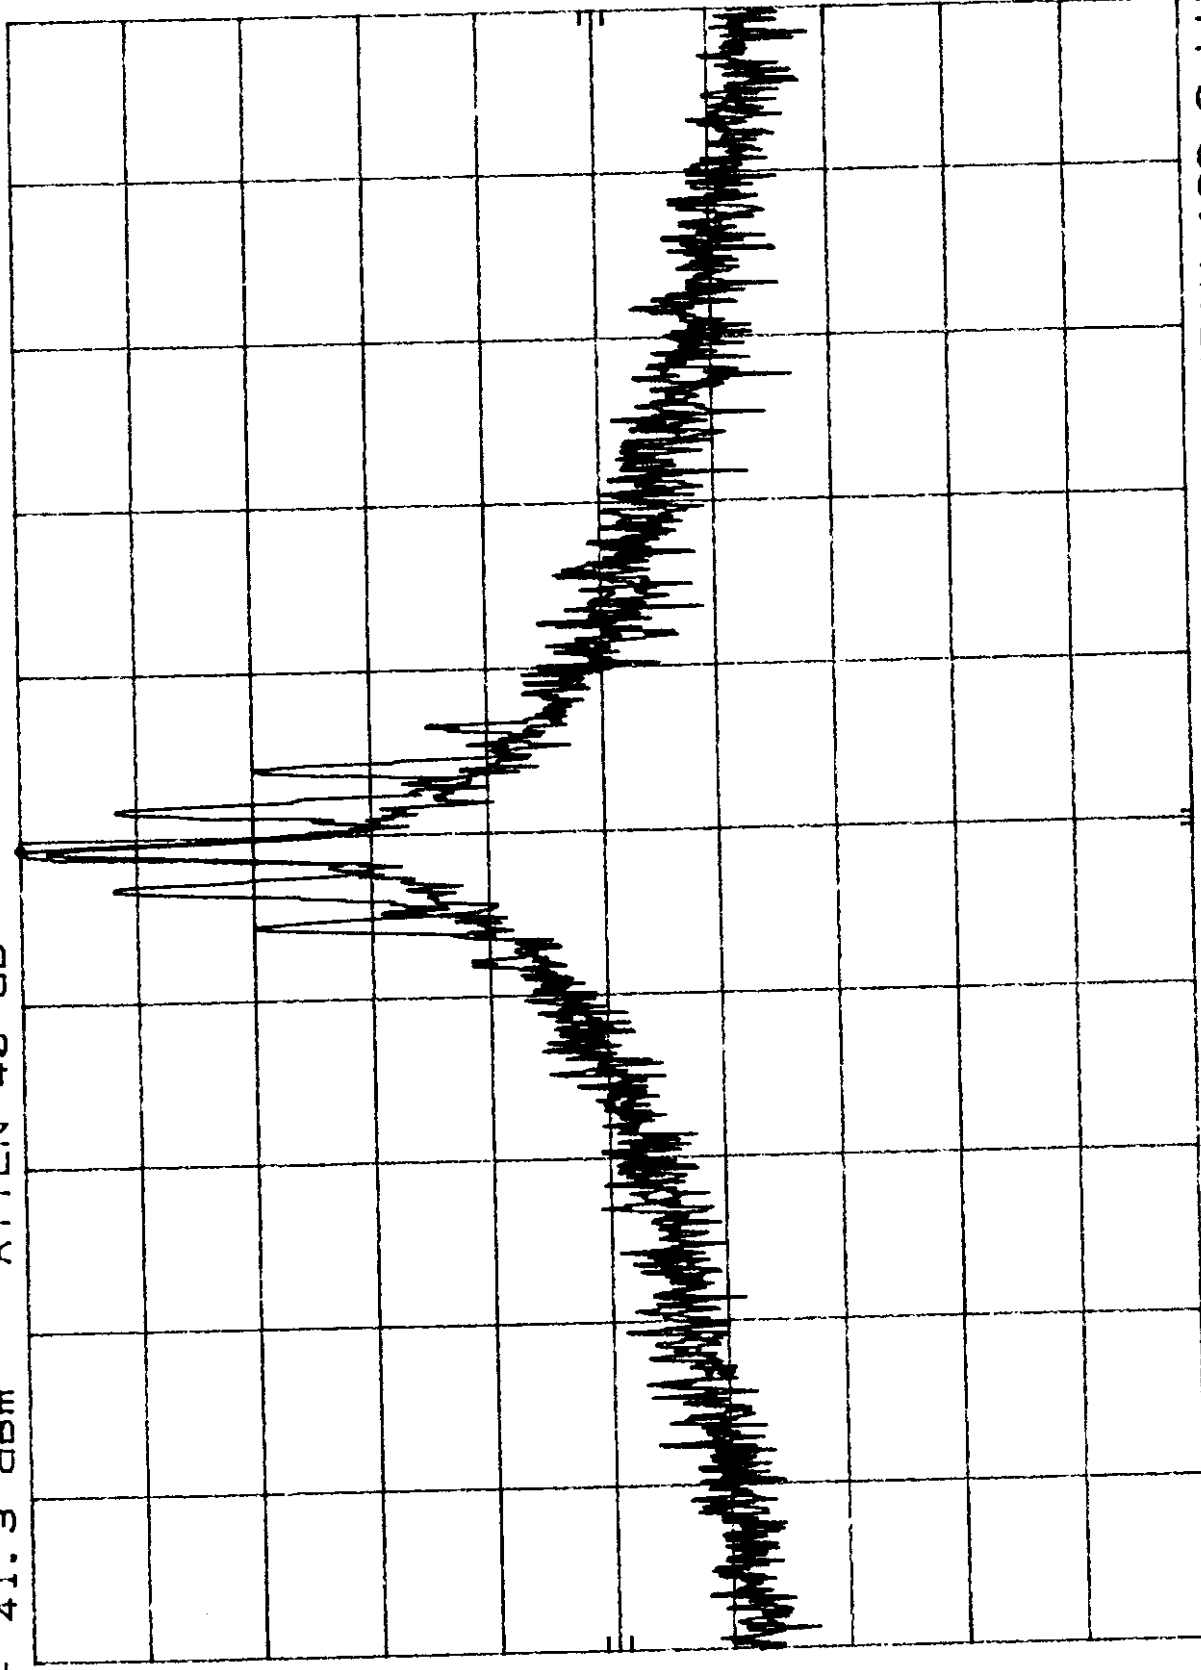

SPAN 100.0 kHz

SWP 2.0 sec

VBW 300 Hz

CENTER 930.4250 MHz
RES BW 300 Hz

PLOT# 4.3.b

GWCOM, GWBASE2000U PA


MKR 930.4244 MHz
41.30 dBm

REF 41.3 dBm ATTN 40 dB

hp

10 dB/

OFFSET
21.8
dB

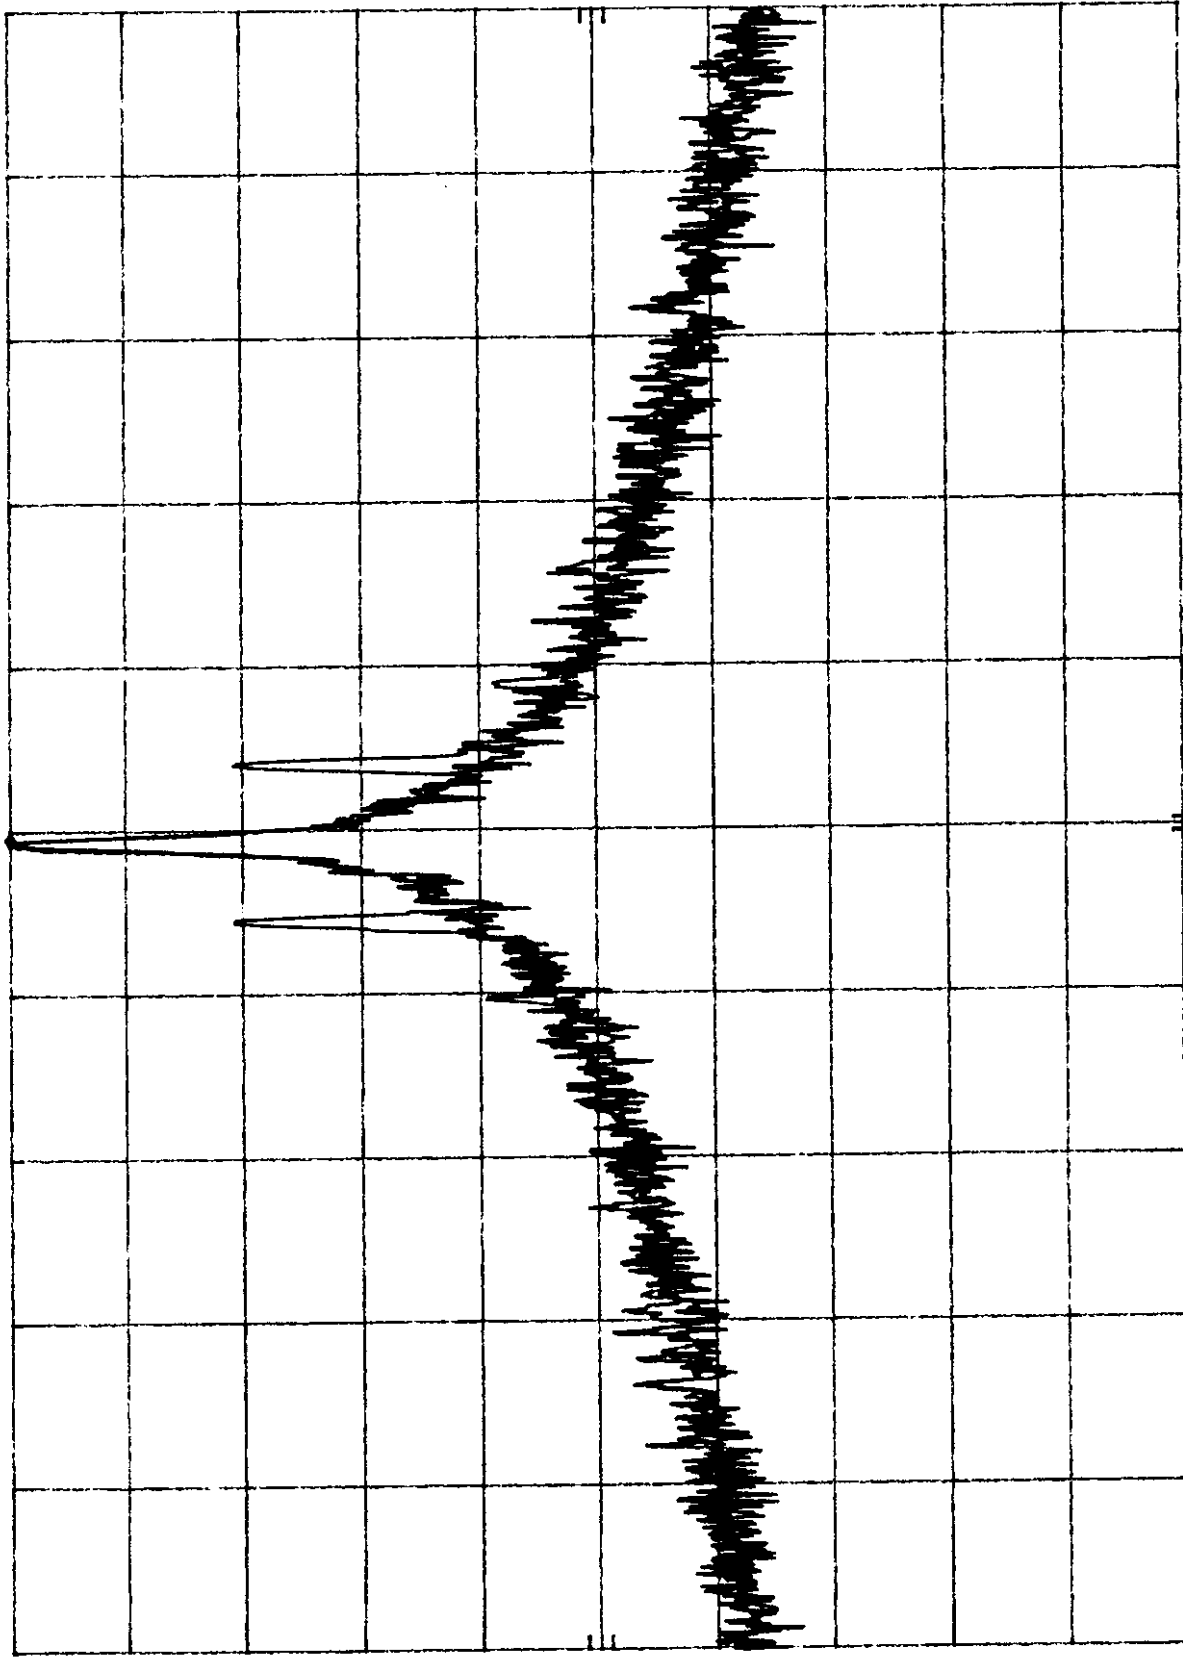

CENTER 930.4250 MHz

RES BW 300 Hz

VBW 300 Hz

SPAN 100.0 KHz

SWP 2.0 sec

PLOT# 4.3.a

GWCOM. GWBASE2000U PA

MKR 930.4244 MHz
41.30 dBm

REF 41.3 dBm ATTEN 40 dB


HP

10 dB/

OFFSET

21.8

dB

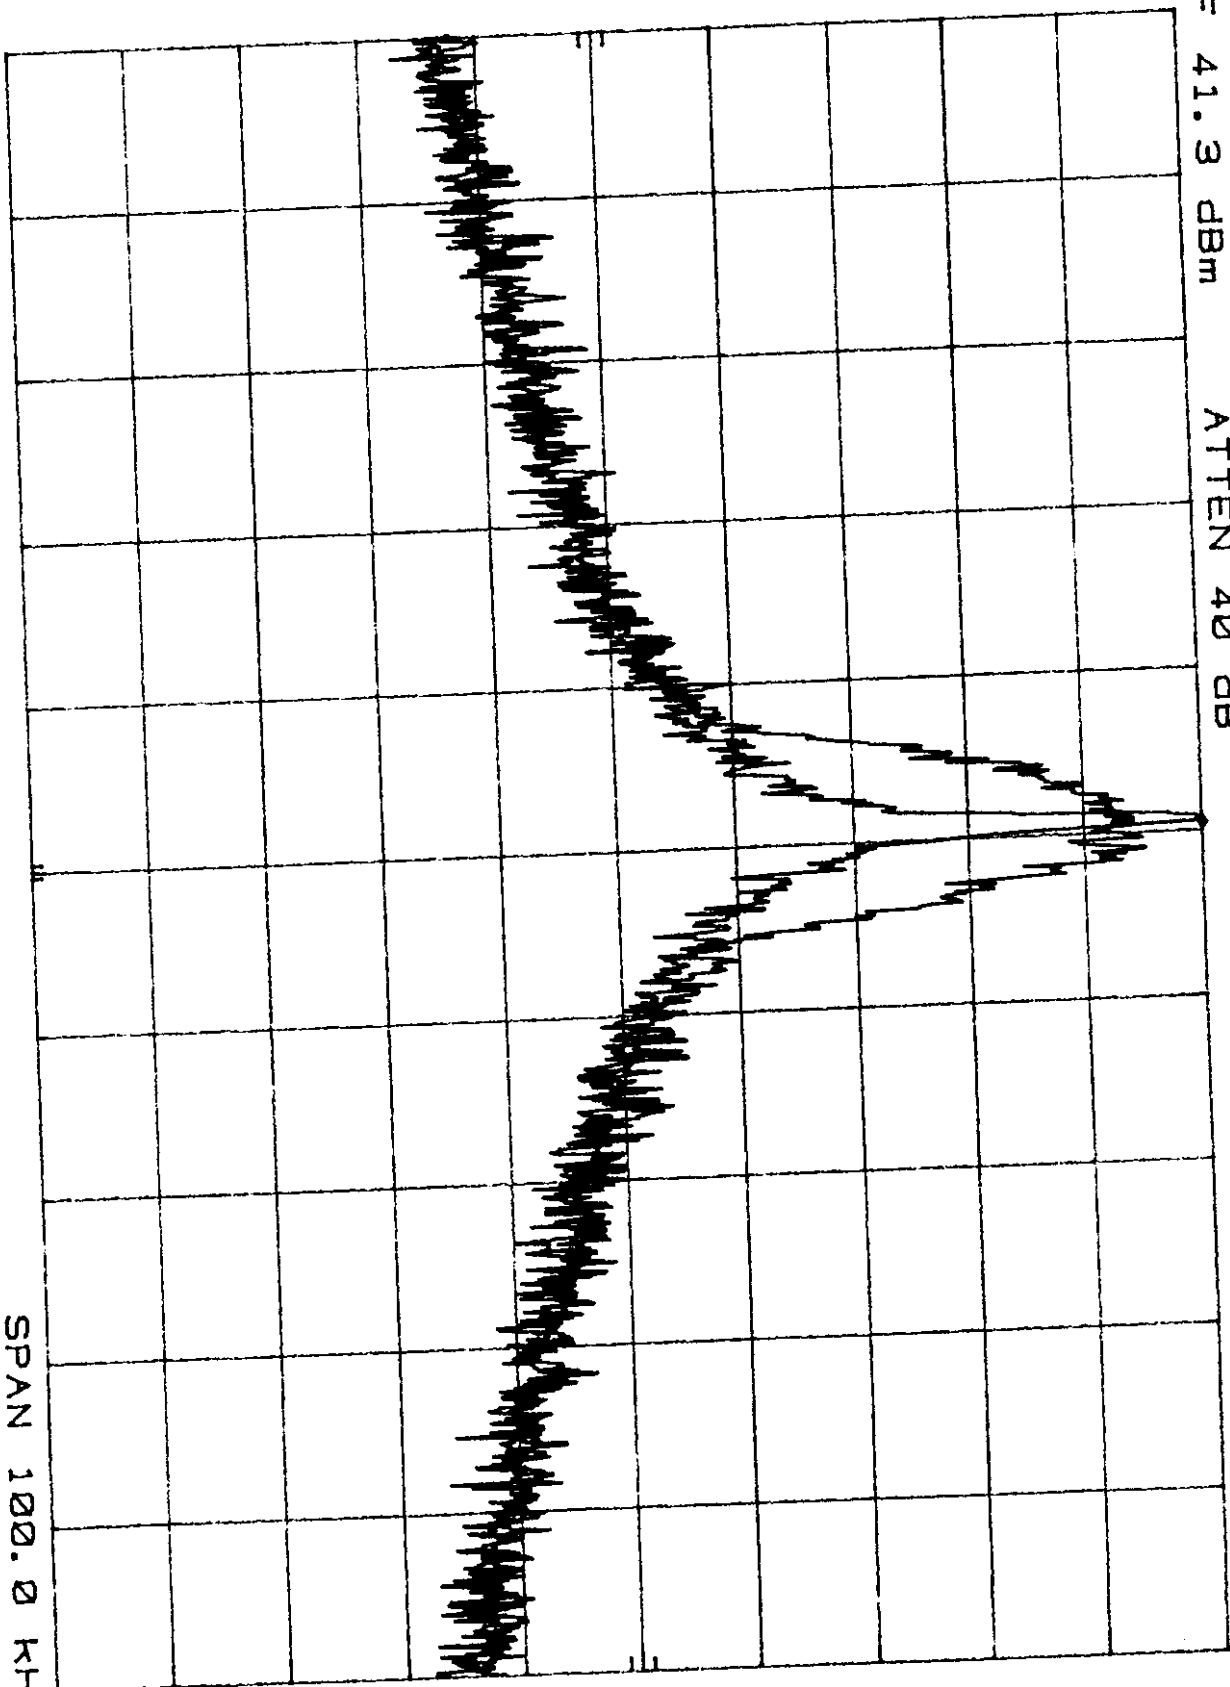

CENTER 930.4250 MHz

RES BW 300 Hz

VBW 300 Hz


SPAN 100.0 KHz
SWP 2.0 sec

HP

GWCOM. BASE2000U PA
REF 51.8 dBm ATTEN 40 dB
MKR 930.4367 MHz
41.30 dBm

10 dB/

OFFSET
21.8
dB

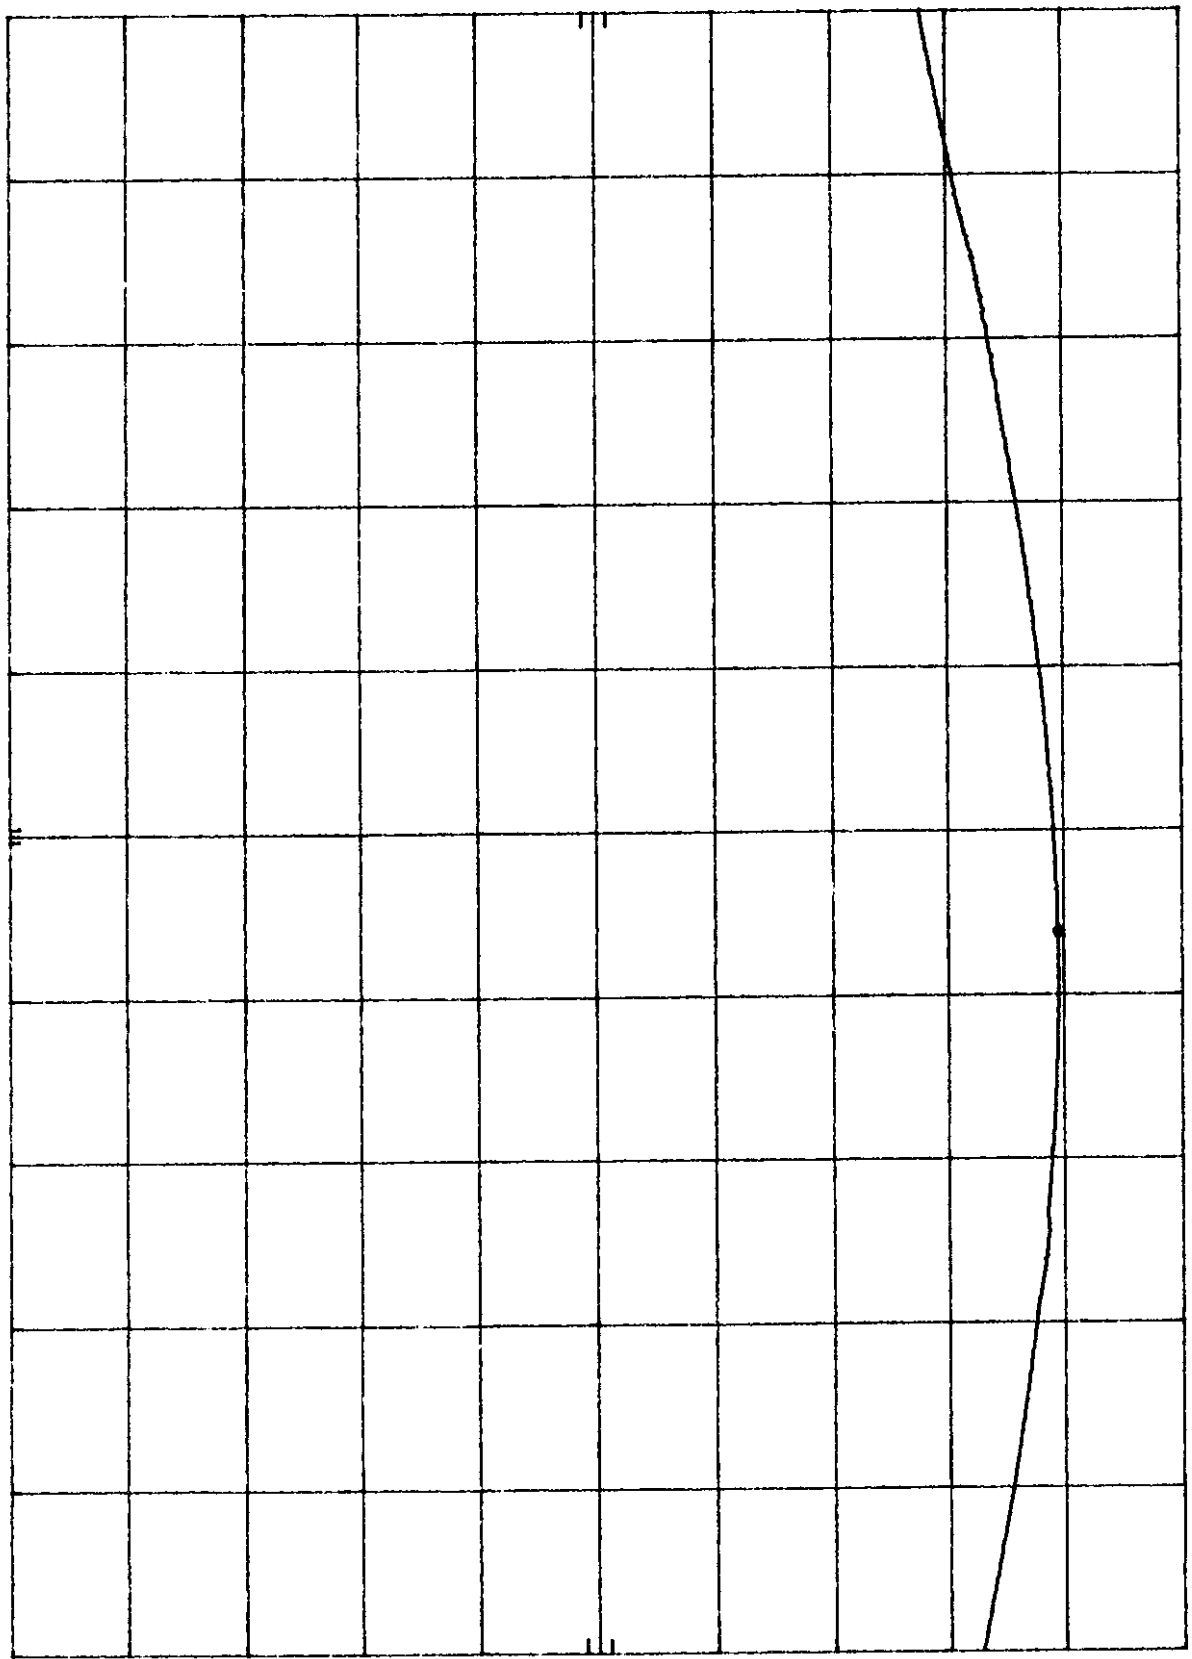

CENTER 930.4245 MHz
RES BW 100 KHz
VBW 100 KHz
SPAN 200.0 KHz
SWP 20 msec