



47 CFR PART 22 SUBPART H & 24 SUBPART E

TEST REPORT

of

Portable GNSS receiver

Trade Name: MobileMapper 10
Brand Name: ASHTECH
Model Name: MobileMapper 10
Report No: SH11030016R02
FCC ID: NZI802140
IC: 9288A-802140

prepared for

ASHTECH S.A.S
ZAC LA FLEURIAYE BP 60433 RUE THOMAS EDISON
44474 CARQUEFU CEDEX FRANCE



**Shenzhen Electronic Product Quality Testing Center
Morlab Laboratory**

3/F, Electronic Testing Building, Shahe Road, Xili,
Nanshan District, Shenzhen, 518055 P. R. China

Tel: +86 755 86130398

Fax: +86 755 86130218



Bluetooth®



Authorized Test Lab

LAB CODE 20081223-00

NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. Any objections should be raised to us within thirty workdays since the date of issue.

TABLE OF CONTENT

1.	TEST CERTIFICATION.....	4
2.	GENERAL INFORMATION	5
2.1	EUT Description	5
2.2	Test Standards and Results	6
2.3	Facilities and Accreditations.....	7
2.3.1	Facilities	7
2.3.2	Test Environment Conditions.....	7
3.	47 CFR PART 2, PART 22H & 24E REQUIREMENTS	8
3.1	Frequencies.....	8
3.1.1	Requirement	8
3.1.2	Test Description	8
3.1.3	Test Result.....	9
3.2	Conducted RF Output Power	16
3.2.1	Requirement	16
3.2.2	Test Description	16
3.2.3	Test Result.....	16
3.3	20dB Occupied Bandwidth	27
3.3.1	Definition	27
3.3.2	Test Description	27
3.3.3	Test Verdict.....	27
3.4	Frequency Stability.....	38
3.4.1	Requirement	38
3.4.2	Test Description	38
3.4.3	Test Verdict.....	38
3.5	Conducted Out of Band Emissions	41
3.5.1	Requirement	41
3.5.2	Test Description	41
3.5.3	Test Result.....	41
3.6	Band Edge	52
3.6.1	Requirement	52

3.6.2	Test Description	52
3.6.3	Test Result.....	52
3.7	Transmitter Radiated Power (EIRP/ERP)	59
3.7.1	Requirement	59
3.7.2	Test Procedure	59
3.7.3	Test Result.....	61
3.8	Radiated Out of Band Emissions	64
3.8.1	Requirement	64
3.8.2	Test Description	64
3.8.3	Test Procedure	64
3.8.4	Test Result.....	65

1. TEST CERTIFICATION

Equipment under Test: Portable GNSS receiver

Brand Name: ASHTECH

Model Name: MobileMapper 10

FCC ID: NZI802140

IC: 9288A-802140

Applicant: Beijing UniStrong Science & Technology Co., Ltd

6F East, A2 Building, #9 Jiuxianqiao East Road, Chaoyang
District, Beijing 100015, China

Manufacturer: Beijing UniStrong Science & Technology Co., Ltd

6F East, A2 Building, #9 Jiuxianqiao East Road, Chaoyang
District, Beijing 100015, China

Test Standards: 47 CFR Part 2

47 CFR Part 22 Subpart H

47 CFR Part 24 Subpart E

Test Date(s): Mar. 18, 2011 – Mar. 23, 2011

Test Result: PASS

* We Hereby Certify That:

The equipment under test was tested by Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. The test data, data evaluation, test procedures and equipment configurations shown in this report were made in accordance with the requirement of related FCC rules.

The test results of this report only apply for the tested sample equipment identified above. The test report shall be invalid without all the signatures of the test engineer, the reviewer and the approver.

Tested by:

Yan Jie

Yang Jie

Dated:

2011.4.20

Reviewed by:

Zhang Jun

Zhang Jun

Dated:

2011.4.20

Approved by:

Wei Bei

Wei Bei

Dated:

2011.4.20



2. GENERAL INFORMATION

2.1 EUT Description

EUT Type.....: Portable GNSS receiver
Model Name: MobileMapper 10
Frequency Range.....: GSM 850MHz:
Tx: 824.20 - 848.80MHz (at intervals of 200kHz);
Rx: 869.20 - 893.80MHz (at intervals of 200kHz)
GSM 1900MHz:
Tx: 1850.20 - 1909.80MHz (at intervals of 200kHz);
Rx: 1930.20 - 1989.80MHz (at intervals of 200kHz)
Modulation Type.....: GMSK,8-PSK
Power Supply.....: Battery
Brand name: DBK
Mode Name.: MG-4LH
Capacitance: 3000mAh
Rated voltage: 3.7V
Charge limited: 4.2V
Manufacturer: SHENZHEN DBK ELECTRONICS CO., LTD
DBK Ind. Park, the north of longguan Rd.
Hualian community, Longhua Town, Baoan District, Shenzhen
Ancillary Equipments.....: AC Adapter (Charger for Battery)
Brand name: PHIHONG
Mode Name.: PSAI05R-050Q
Rated Input: AC100~240 V, 300mA, Max 4.2 W, 50/60 Hz
Rated Output: DC5 V, 1000 mA
Manufacturer: PHIHONG TECHNOLOGY CO.,LTD
PHIHONG TECHNOLOGY CO.,LTD, Yinhu Industry park ,Qingxi district,Dongguan City,Guangdong Province

Note 1: The transmitter (Tx) frequency arrangement of the GSM 850MHz band used by the EUT can be represented with the formula $F(n)=824.2+0.2*(n-128)$, $128 \leq n \leq 251$; the lowest, middle, highest channel numbers (ARFCHs) used and tested in this report are separately 128 (824.2MHz), 190 (836.6MHz) and 251 (848.8MHz).

Note 2: The transmitter (Tx) frequency arrangement of the PCS 1900MHz band used by the EUT can be represented with the formula $F(n)=1850.2+0.2*(n-512)$, $512 \leq n \leq 810$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately

512 (1850.2MHz), 661 (1880.0MHz) and 810 (1909.8MHz).

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 22 and Part 24 for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2 (10-1-05 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22 (10-1-05 Edition)	Public Mobile Services
3	47 CFR Part 24 (10-1-05 Edition)	Personal Communications Services
4	ANSI/TIA/EIA-603-C (2004)	Land Mobile FM or PM - Communications Equipment - Measurement and Performance Standards
5	ANSI C63.4-2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

Test detailed items/section required by FCC rules & IC rules and results are as below:

No.	FCC rules	IC rules	Description	Result
1	2.106 22.905 24.229	N/A	Frequencies	PASS
2	2.1046	N/A	Conducted RF Output Power	PASS
3	2.1049	N/A	20dB Occupied Bandwidth	PASS
4	2.1055 22.355 24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability	PASS
5	2.1051 2.1057 22.917 24.238	RSS-132 (4.5.1) RSS-133 (6.5.1)	Conducted Out of Band Emissions	PASS
6	2.1051 2.1057 22.917 24.238	RSS-132 (4.5.1) RSS-133 (6.5.1)	Band Edge	PASS
7	22.913 24.232	RSS-132(4.4) SRSP-503(5.1.3) RSS-133 (6.4) SRSP-510(5.1.2)	Transmitter Radiated Power (EIPR/ERP)	PASS
8	2.1053 2.1057 22.917 24.238	RSS-132 (4.5.1) RSS-133 (6.5.1)	Radiated Out of Band Emissions	PASS

2.3 Facilities and Accreditations

2.3.1 Facilities

Shenzhen Electronic Product Quality Testing Center Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

All measurement facilities used to collect the measurement data are located at Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen 518055 CHINA. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

2.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	20 - 25
Relative Humidity (%):	40 - 60
Atmospheric Pressure (kPa):	96

3. 47 CFR PART 2, PART 22H & 24E REQUIREMENTS

3.1 Frequencies

3.1.1 Requirement

According to FCC section 22.905, the frequency blocks assignment for the cellular radiotelephone service is listed as below:


- (a) Channel Block A:
Mobile 824 - 835MHz, Base 869 - 880MHz;
Mobile 845 - 846.5MHz, Base 890 - 891.5MHz
- (b) Channel Block B:
Mobile 835 - 845 MHz, Base 880 - 890MHz;
Mobile 846.5 - 849 MHz, Base 891.5 - 894MHz

According to FCC section 24.229, the frequencies available in the Broadband PCS services are listed as below, in accordance with the frequency allocations table of FCC section 2.106.

- (a) The following frequency blocks are available for assignment on an MTA basis:
Block A: 1850 - 1865MHz paired with 1930 - 1945MHz;
Block B: 1870 - 1885MHz paired with 1950 - 1965MHz.
- (b) The following frequency blocks are available for assignment on a BTA basis:
Block C: 1895 - 1910 MHz paired with 1975 - 1990MHz;
Block D: 1865 - 1870 MHz paired with 1945 - 1950MHz;
Block E: 1885 - 1890 MHz paired with 1965 - 1970MHz;
Block F: 1890 - 1895 MHz paired with 1970 - 1975MHz.

3.1.2 Test Description

1. Test Setup:

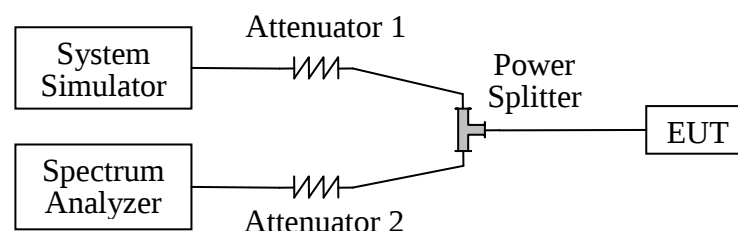

The EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna

terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
SS	Agilent	E5515C	GB46040102	2010.9	1year
Spectrum Analyzer	R&S	FSP30	101020	2010.9	1year
Spectrum Analyzer	Agilent	E4440A	MY46187763	2010.9	1year
Spectrum Analyzer	Rohde Schwarz	FSU26	200880	2010.10	1year
Power Splitter	HP	11667B	00164	(n.a.)	(n.a.)
Power Splitter	Mini-Circuits	ZFRSC-183-S+	765001016	(n.a.)	(n.a.)
Attenuator 1	Mini-Circuits	10dB	(n.a.)	(n.a.)	(n.a.)
Attenuator 2	Resnet	10dB	(n.a.)	(n.a.)	(n.a.)
Attenuator 2	Resnet	10dB	(n.a.)	(n.a.)	(n.a.)

3.1.3 Test Result


The Tx frequency arrangement of the GSM 850MHz band employed by the EUT should be from 824.2MHz to 848.8MHz (the corresponding frequency block is from 824MHz to 849MHz), and Tx frequency arrangement of the PCS 1900MHz band employed by the EUT should be from 1850.2MHz to 1909.8MHz (the corresponding frequency block is from 1850MHz to 1910MHz). Here the lowest and highest channels are tested to verify the EUT's using the frequency block required.

1. Test Verdict:

The required frequency block is employed legally, the verdict is PASS.


Band	Channel	Frequency (MHz)	Measured Carrier (MHz)	Refer to Plot
GSM 850MHz	128	824.2	824.26	Plot A1
	251	848.8	848.74	Plot B1
GSM 1900MHz	512	1850.2	1850.26	Plot C1
	810	1909.8	1909.93	Plot D1
GPRS 850MHz	128	824.2	824.26	Plot E1
	251	848.8	848.86	Plot F1
GPRS 1900MHz	512	1850.2	1850.26	Plot G1
	810	1909.8	1909.86	Plot H1
EGPRS 850MHz	128	824.2	824.20	Plot I1
	251	848.8	848.80	Plot J1
EGPRS 1900MHz	512	1850.2	1850.20	Plot K1
	810	1909.8	1909.80	Plot L1

2. Test Plot:

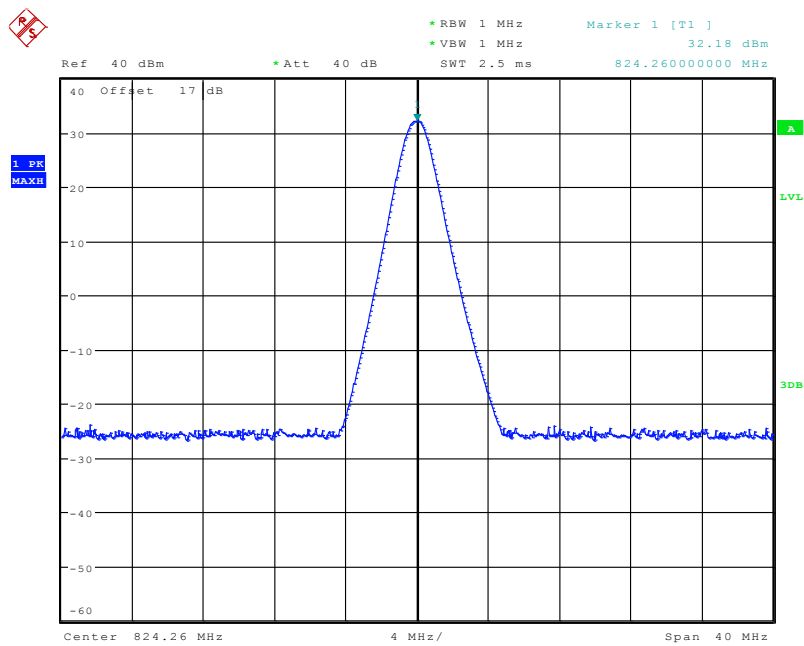


Date: 18.MAR.2011 12:03:48

(Plot A1: GSM 850MHz Channel = 128)

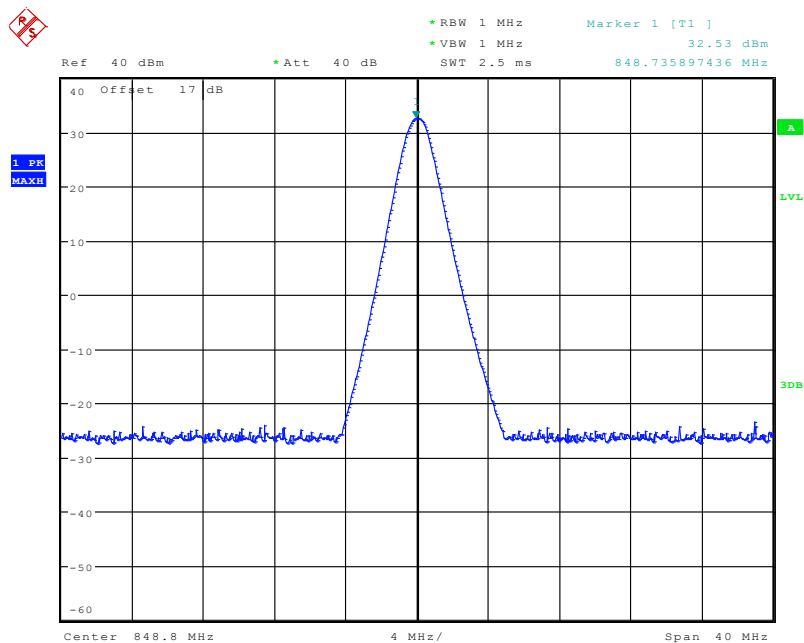


Date: 18.MAR.2011 12:14:19

(Plot B1: GSM 850MHz Channel = 251)

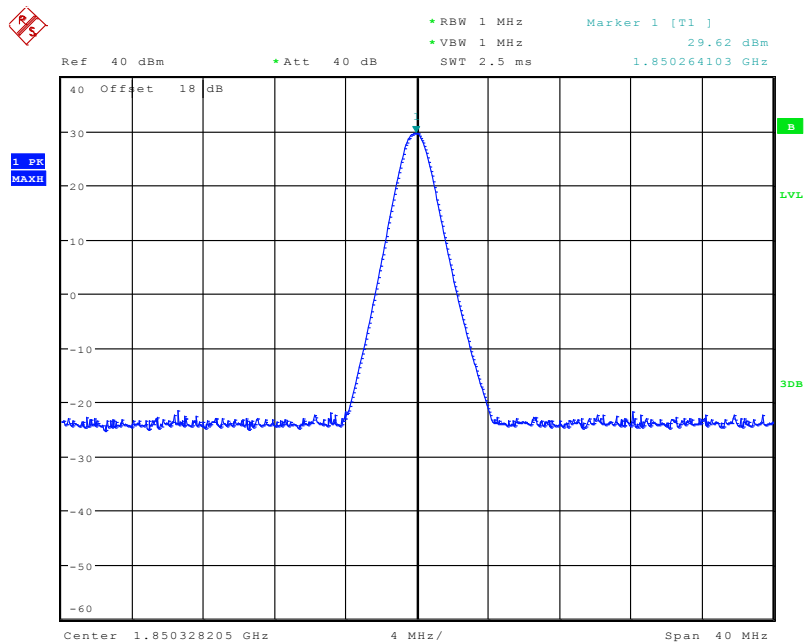


Date: 18.MAR.2011 12:17:51

(Plot C1: GSM 1900MHz Channel = 512)

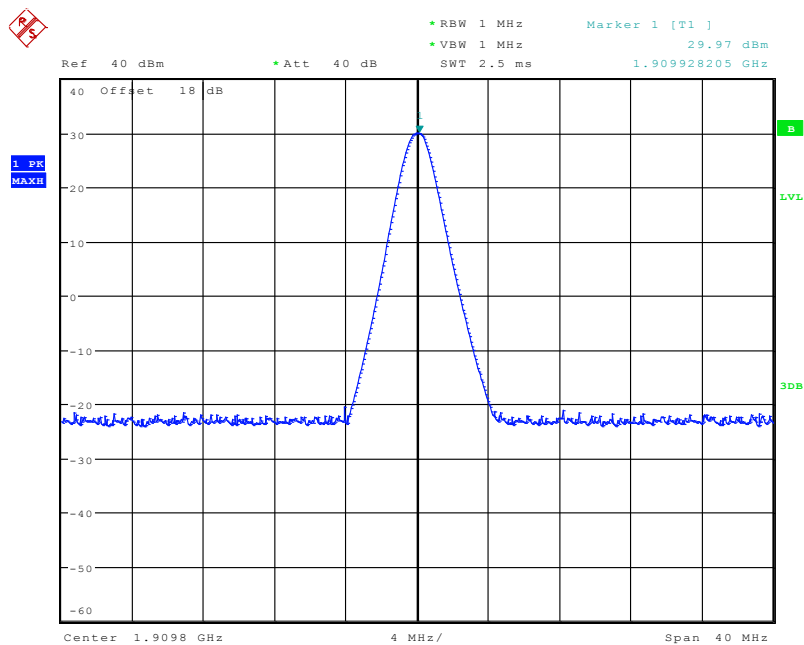


Date: 18.MAR.2011 12:19:45

(Plot D1: GSM 1900MHz Channel = 810)

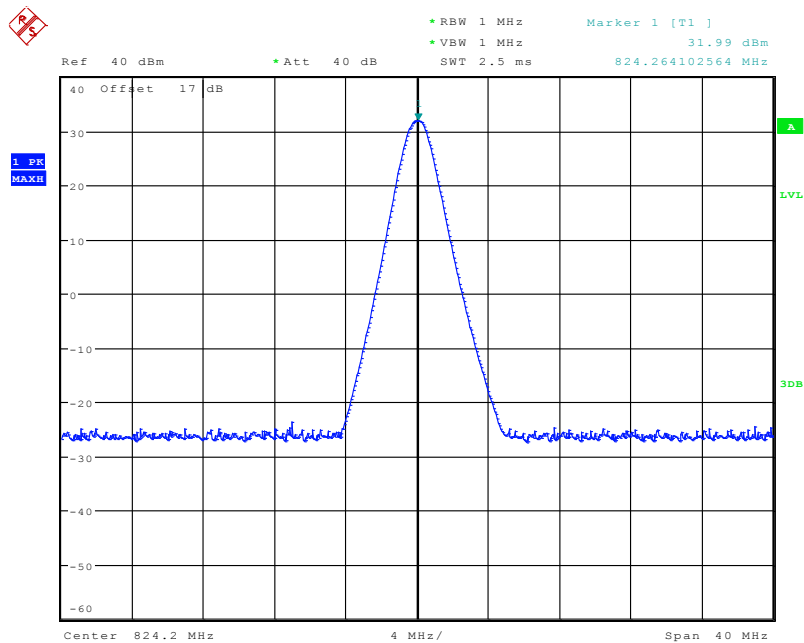


Date: 18.MAR.2011 12:21:51

(Plot E1: GPRS 850MHz Channel = 128)

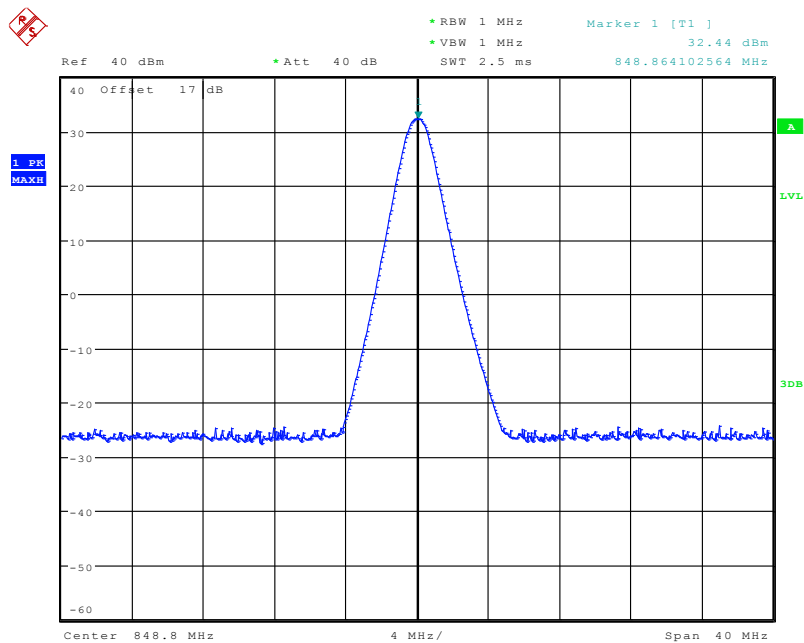


Date: 18.MAR.2011 12:30:33

(Plot F1: GPRS 850MHz Channel = 251)

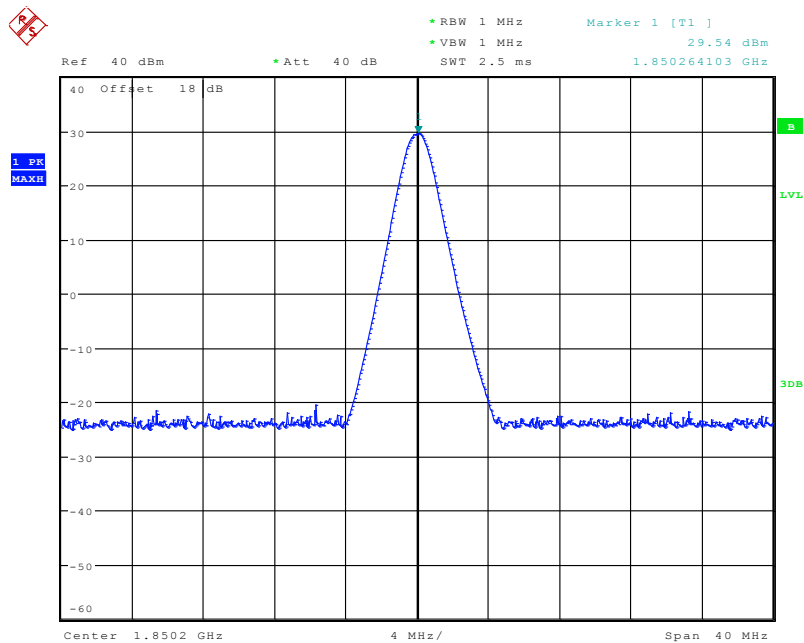


Date: 18.MAR.2011 12:31:21

(Plot G1: GPRS 1900MHz Channel = 512)

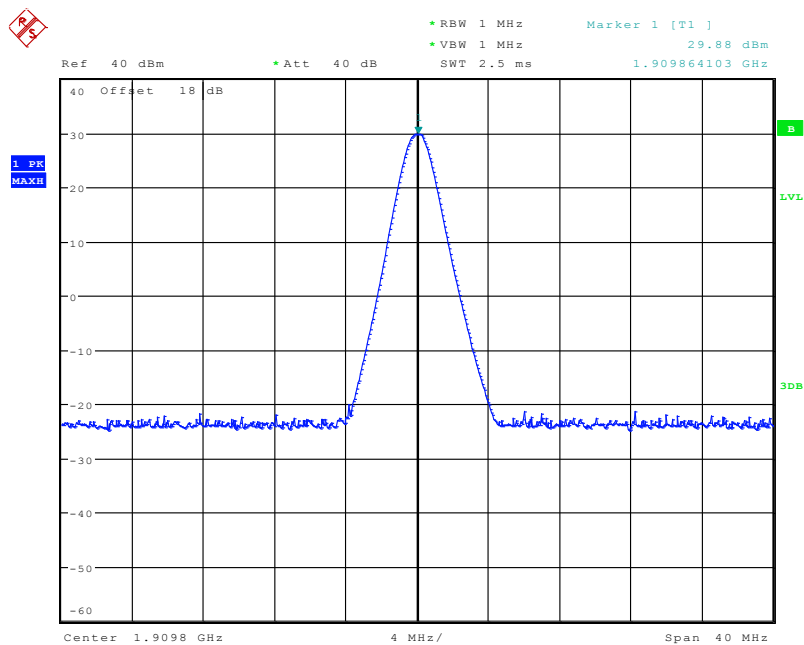


Date: 18.MAR.2011 12:32:15

(Plot H1: GPRS 1900MHz Channel = 810)

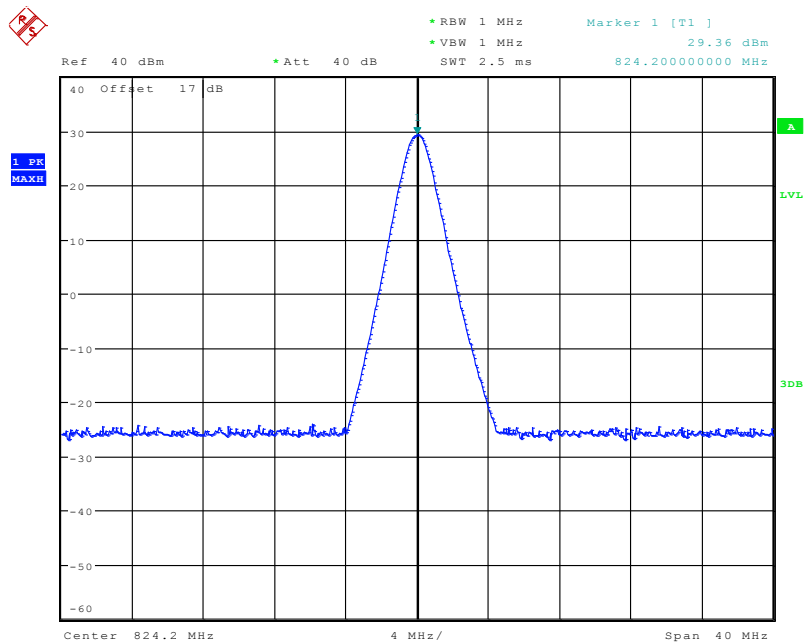


Date: 21.MAR.2011 10:42:24

(Plot I1: EGPRS 850MHz Channel = 128)

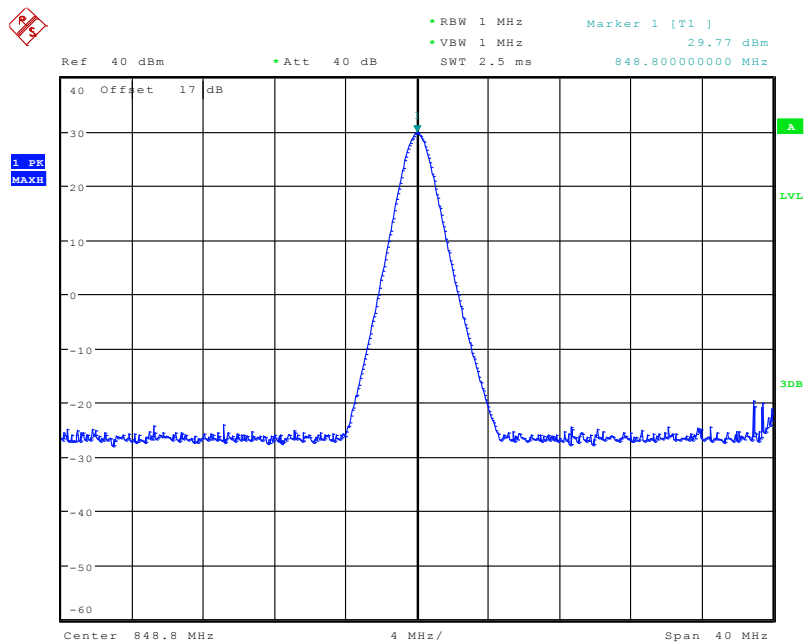


Date: 21.MAR.2011 10:43:57

(Plot J1: EGPRS 850MHz Channel = 251)

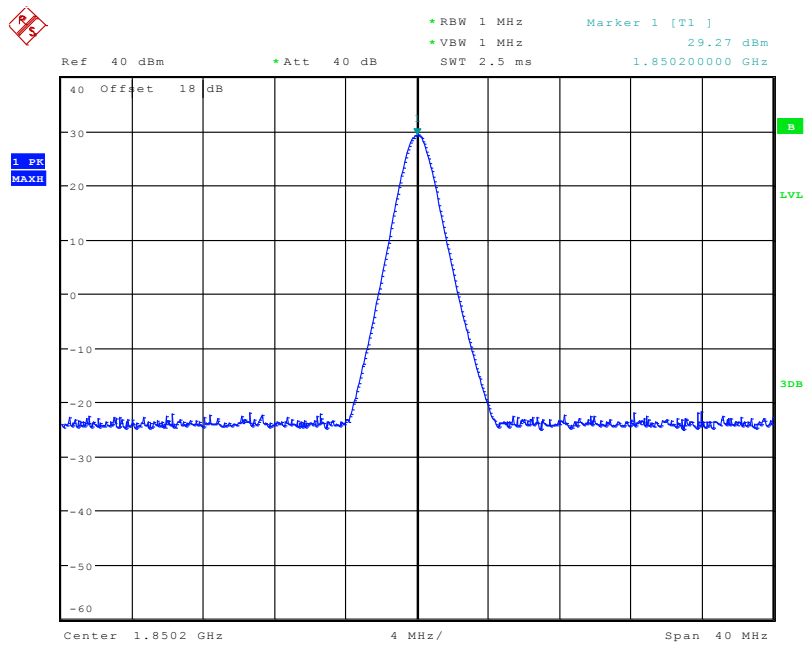

Date: 21.MAR.2011 10:45:01

(Plot K1: EGPRS 1900MHz Channel = 512)

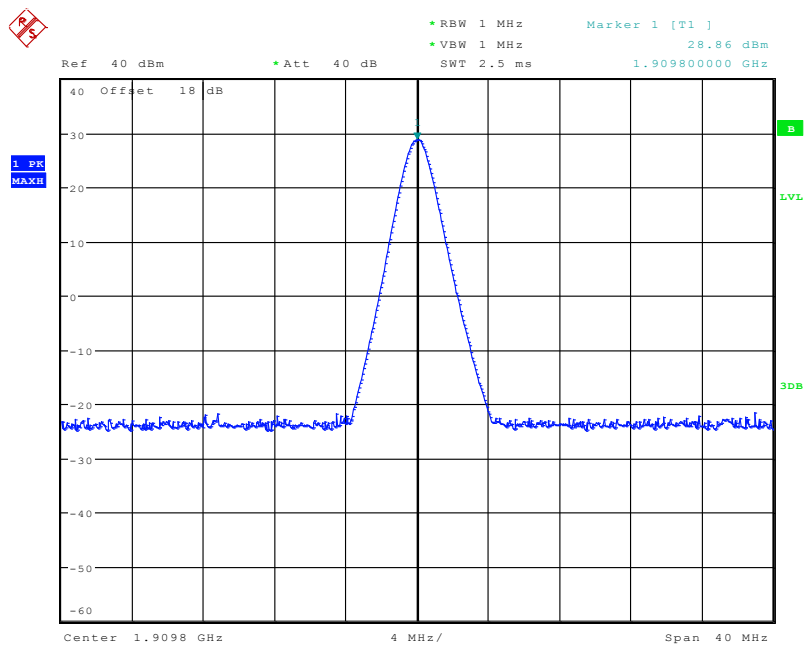

Date: 21.MAR.2011 10:46:31

(Plot L1: EGPRS 1900MHz Channel = 810)

3.2 Conducted RF Output Power

3.2.1 Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

3.2.2 Test Description

See section 3.1.2 of this report.

3.2.3 Test Result


Here the lowest, middle and highest channels are selected to perform testing to verify the conducted RF output power of the EUT. For the GSM 850MHz operates at PCL=5 (where Power Class is 4), the rated conducted RF output power is 32.3dBm within the tolerance of ± 0.4 dB, and For the GSM 1900MHz operates at PCL=0 (where Power Class is 1), the rated conducted RF output power is 29.6dBm within the tolerance of ± 0.4 dB.

1. Test Verdict:

Band	Channel	Frequency (MHz)	Measured Output Power		Rated Output Power		Verdict
			dBm	Refer to Plot	dBm	Tolerance (dB)	
GSM 850MHz	128	824.26	32.18	Plot A2	32.3	± 0.4	PASS
	190	836.66	32.35	Plot B2			PASS
	251	848.74	32.53	Plot C2			PASS
GSM 1900MHz	512	1850.26	29.62	Plot D2	29.6	± 0.4	PASS
	661	1880.00	29.76	Plot E2			PASS
	810	1909.93	29.97	Plot F2			PASS
GPRS 850MHz	128	824.26	31.99	Plot G2	32.3	± 0.4	PASS
	190	836.60	32.15	Plot H2			PASS
	251	848.86	32.44	Plot I2			PASS
GPRS 1900MHz	512	1850.26	29.54	Plot J2	29.6	± 0.4	PASS
	661	1880.00	29.64	Plot K2			PASS
	810	1909.86	29.88	Plot L2			PASS


Band	Channel	Frequency (MHz)	Measured Output Power		Rated Output Power		Verdict
			dBm	Refer to Plot	dBm	Tolerance (dB)	
EGPRS 850MHz	128	824.20	29.36	Plot M2	29.4	±0.4	PASS
	190	836.54	29.41	Plot N2			PASS
	251	848.80	29.77	Plot O2			PASS
EGPRS 1900MHz	512	1850.20	29.27	Plot P2	29	±0.4	PASS
	661	1880.00	29.12	Plot Q2			PASS
	810	1909.80	28.86	Plot R2			PASS

2. Test Plot:

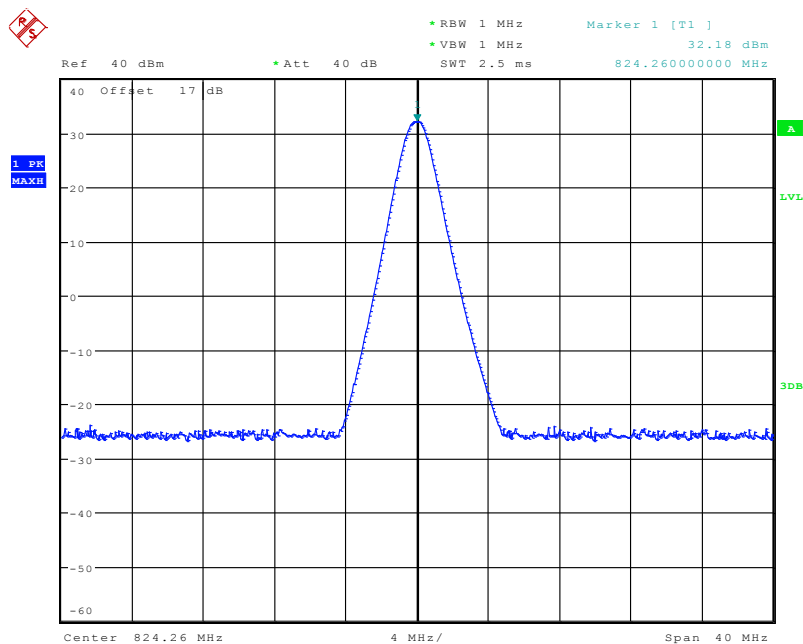


Date: 18.MAR.2011 12:03:48

(Plot A2: GSM 850MHz Channel = 128)

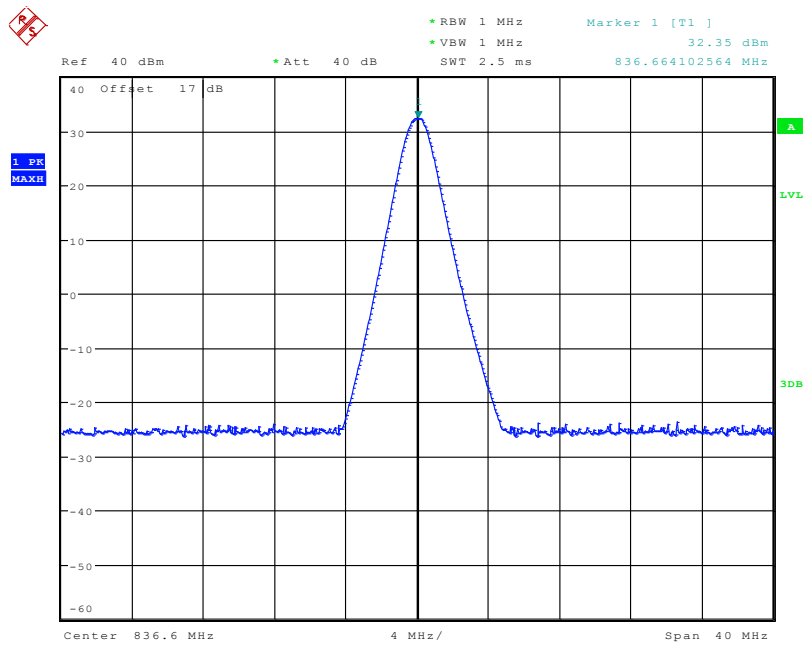


Date: 18.MAR.2011 12:13:07

(Plot B2: GSM 850MHz Channel = 190)

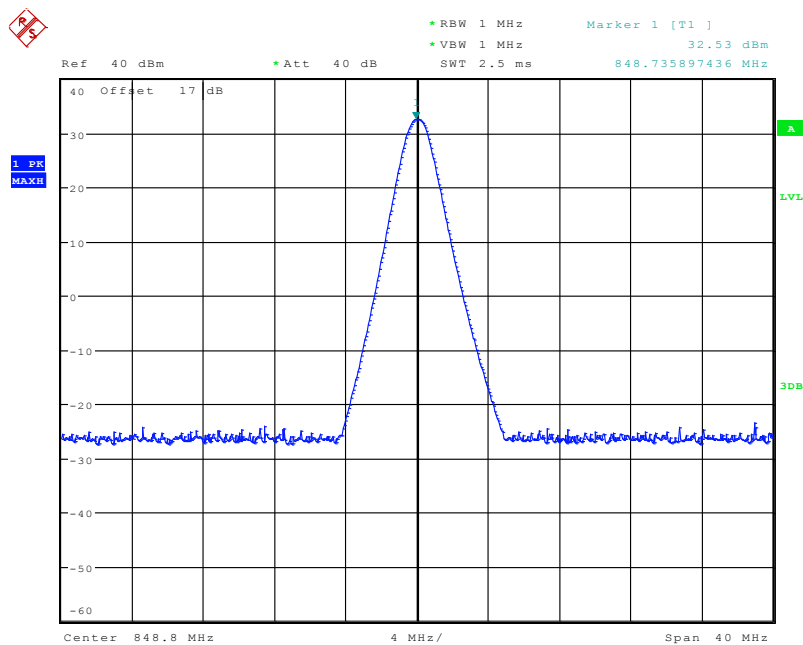


Date: 18.MAR.2011 12:14:19

(Plot C2: GSM 850MHz Channel = 251)

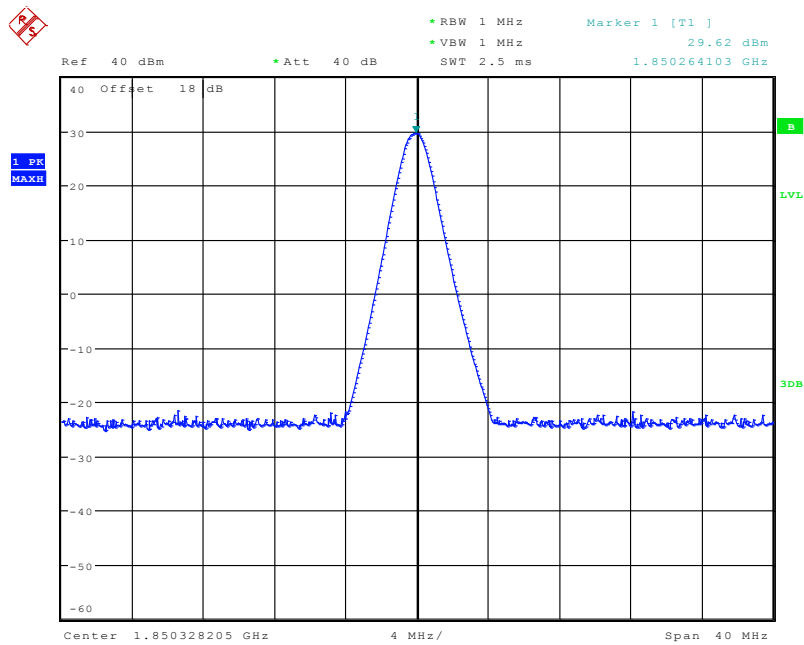


Date: 18.MAR.2011 12:17:51

(Plot D2: GSM 1900MHz Channel = 512)

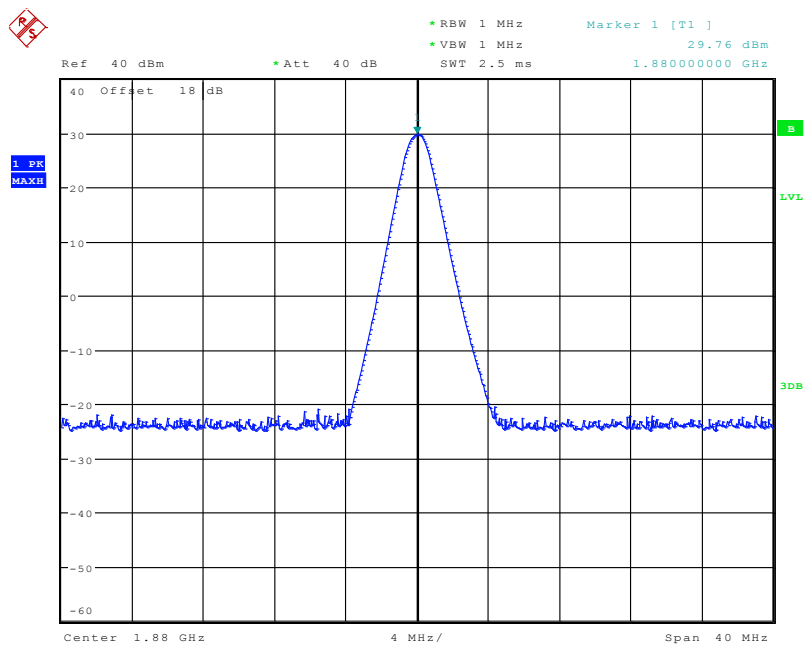


Date: 18.MAR.2011 12:18:42

(Plot E2: GSM 1900MHz Channel = 661)

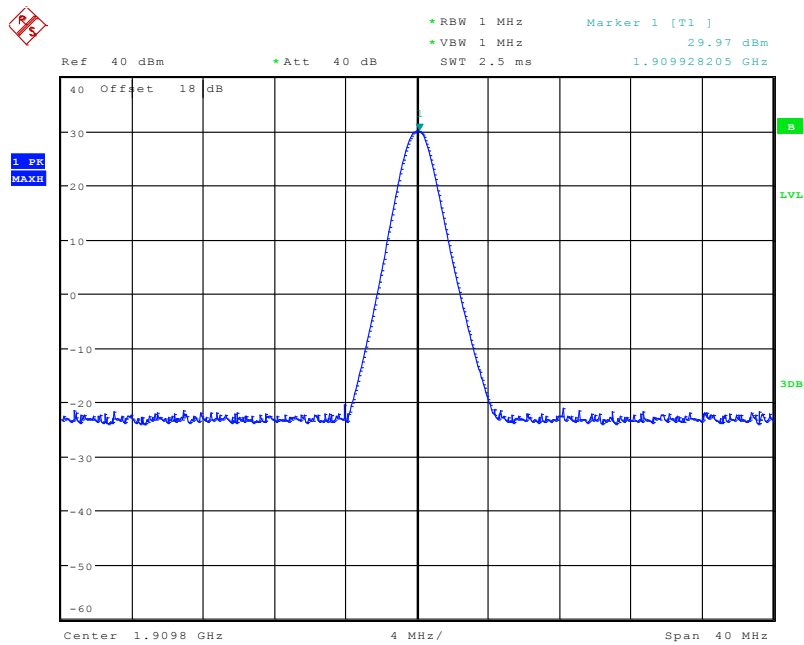


Date: 18.MAR.2011 12:19:45

(Plot F2: GSM 1900MHz Channel = 810)

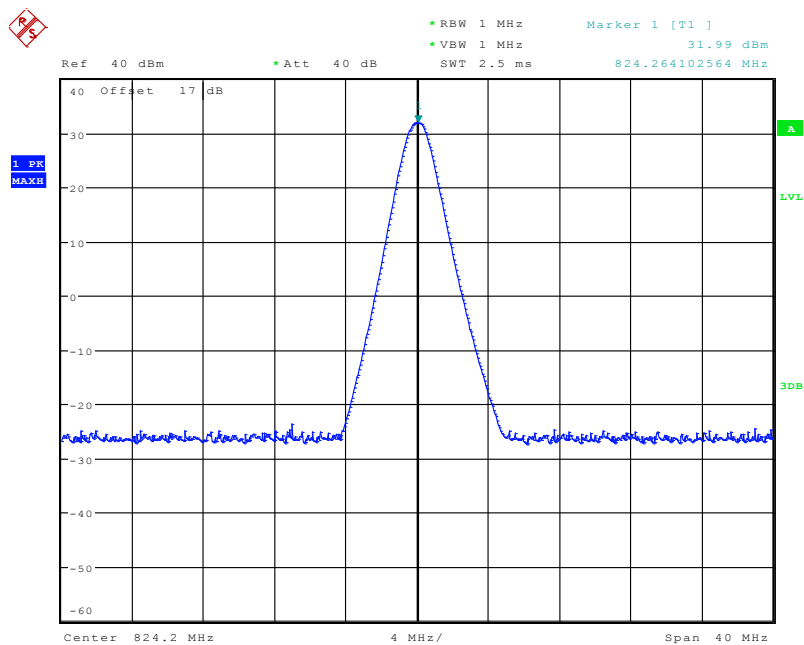


Date: 18.MAR.2011 12:21:51

(Plot G2:GPRS 850MHz Channel = 128)

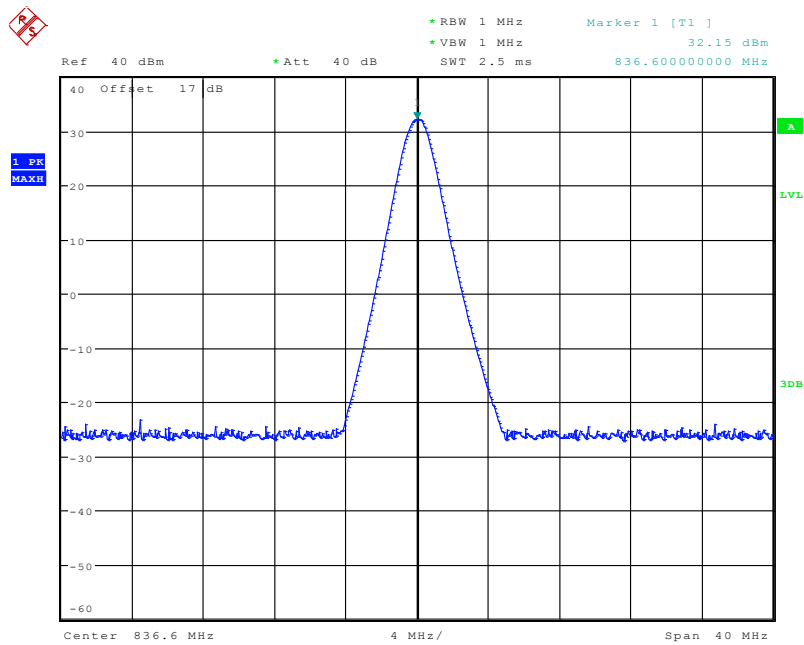


Date: 18.MAR.2011 12:22:46

(Plot H2: GPRS 850MHz Channel = 190)

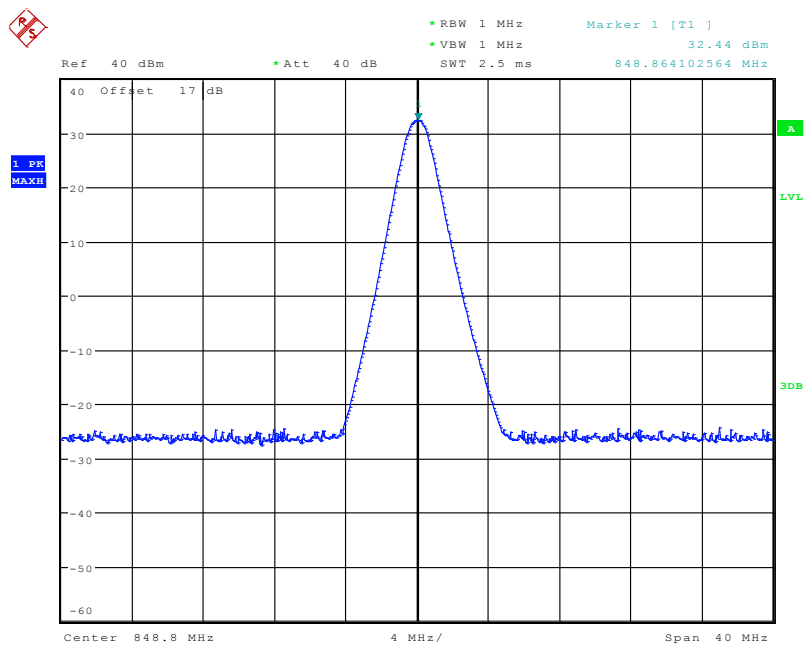


Date: 18.MAR.2011 12:30:33

(Plot I2: GPRS 850MHz Channel = 251)

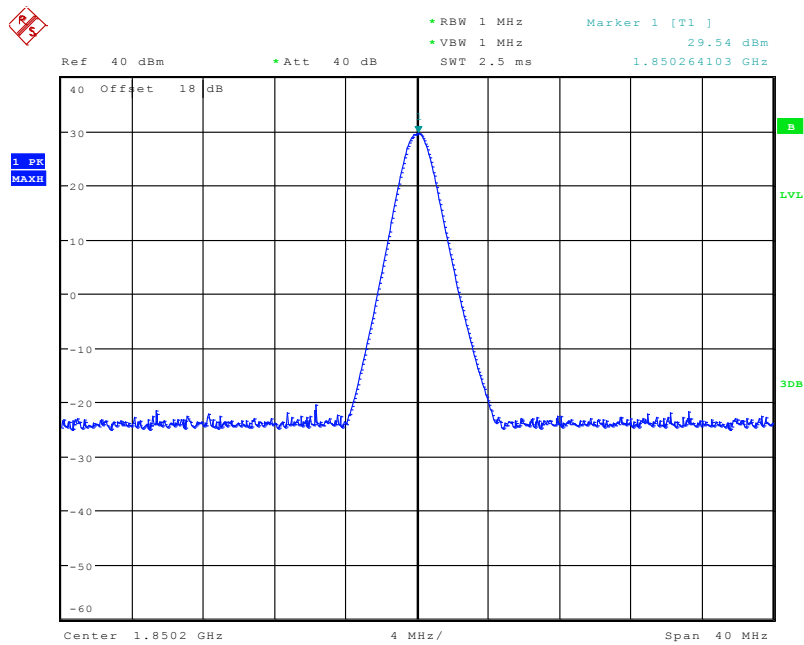


Date: 18.MAR.2011 12:31:21

(Plot J2: GPRS 1900MHz Channel = 512)

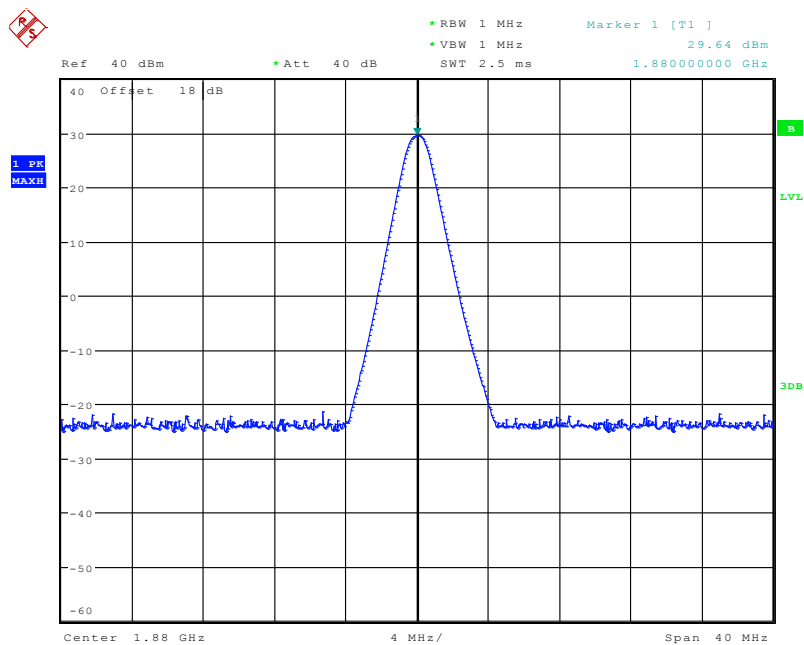


Date: 18.MAR.2011 12:31:48

(Plot K2: GPRS 1900MHz Channel = 661)

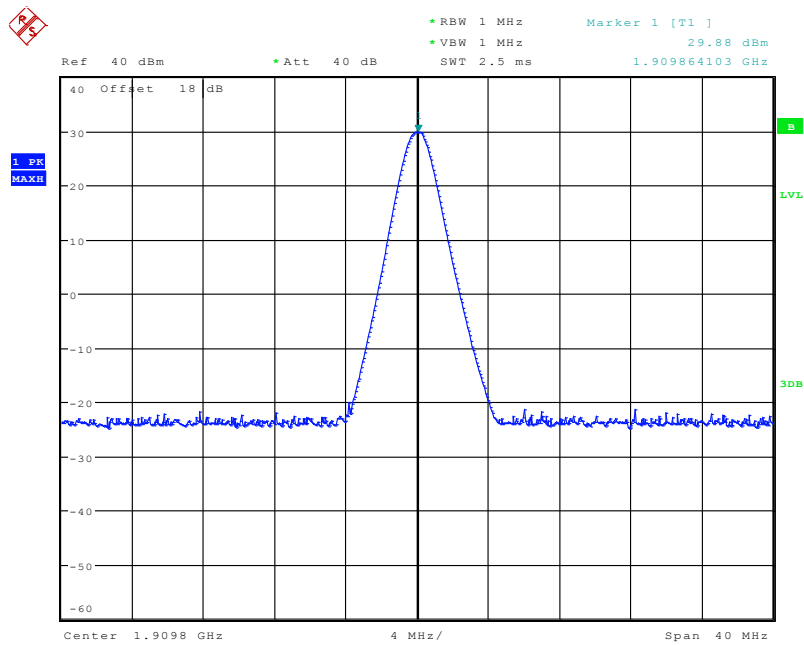


Date: 18.MAR.2011 12:32:15

(Plot L2: GPRS 1900MHz Channel = 810)

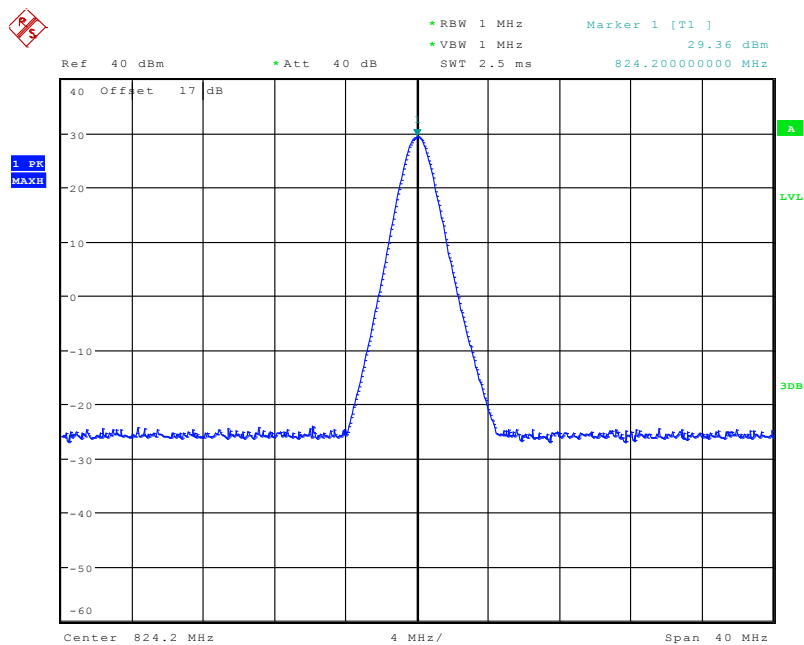


Date: 21.MAR.2011 10:42:24

(Plot M2:EGPRS 850MHz Channel = 128)

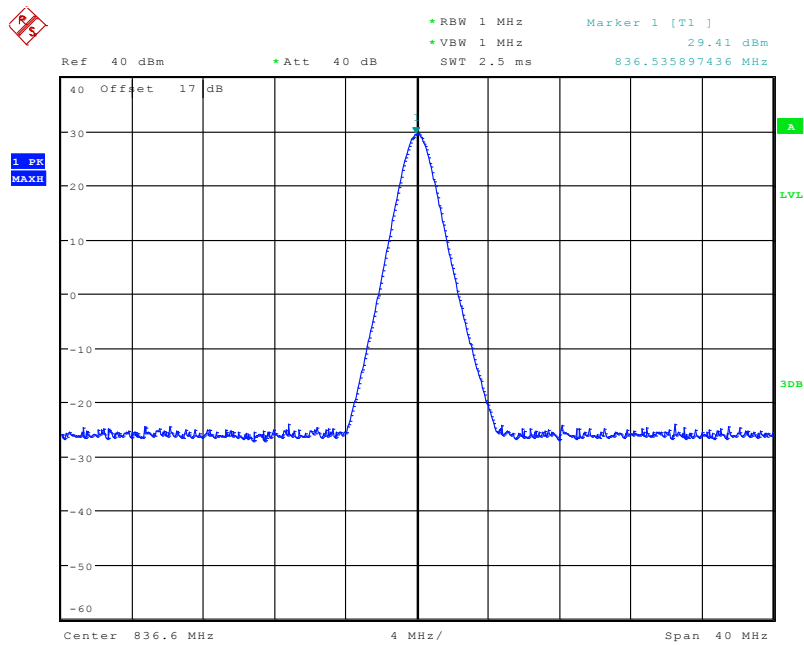


Date: 21.MAR.2011 10:43:36

(Plot N2:EGPRS 850MHz Channel = 190)

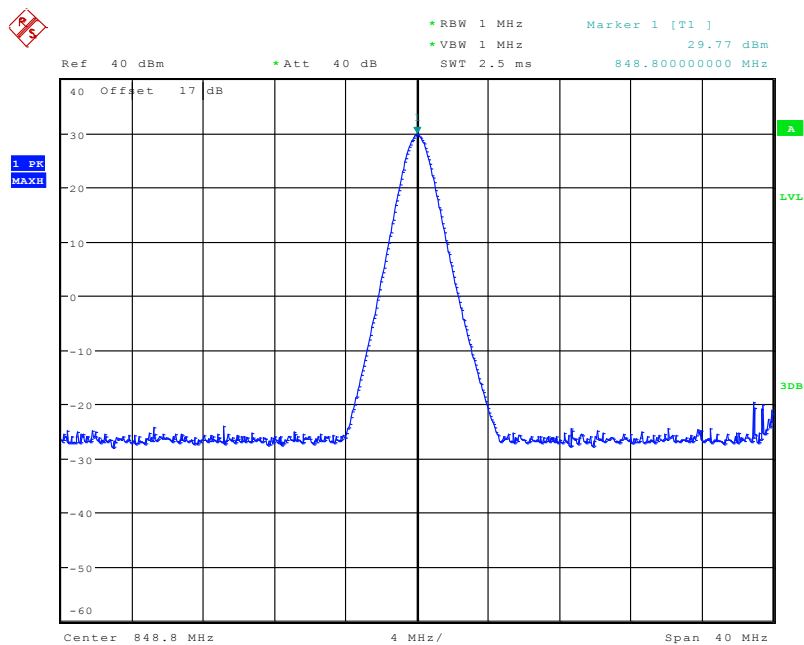


Date: 21.MAR.2011 10:43:57

(Plot O2:EGPRS 850MHz Channel = 251)

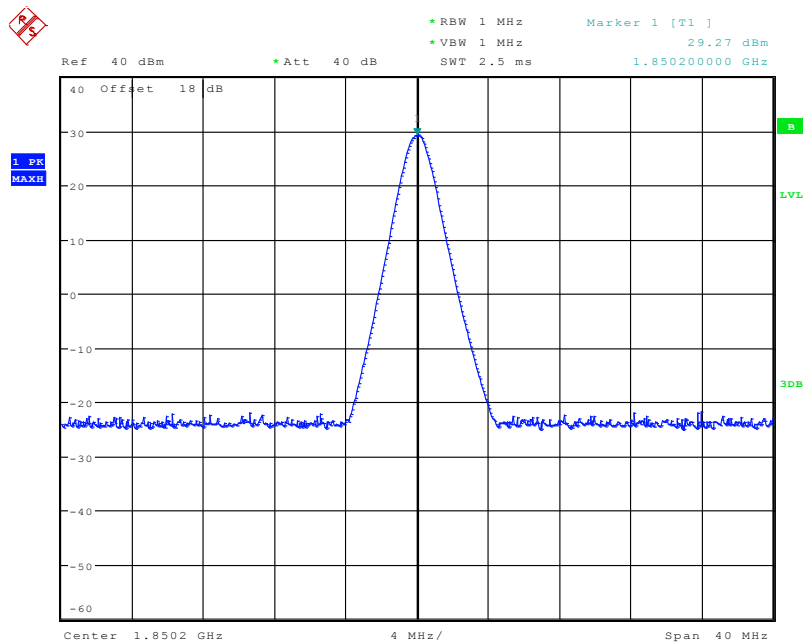


Date: 21.MAR.2011 10:45:01

(Plot P2:EGPRS 1900MHz Channel = 512)

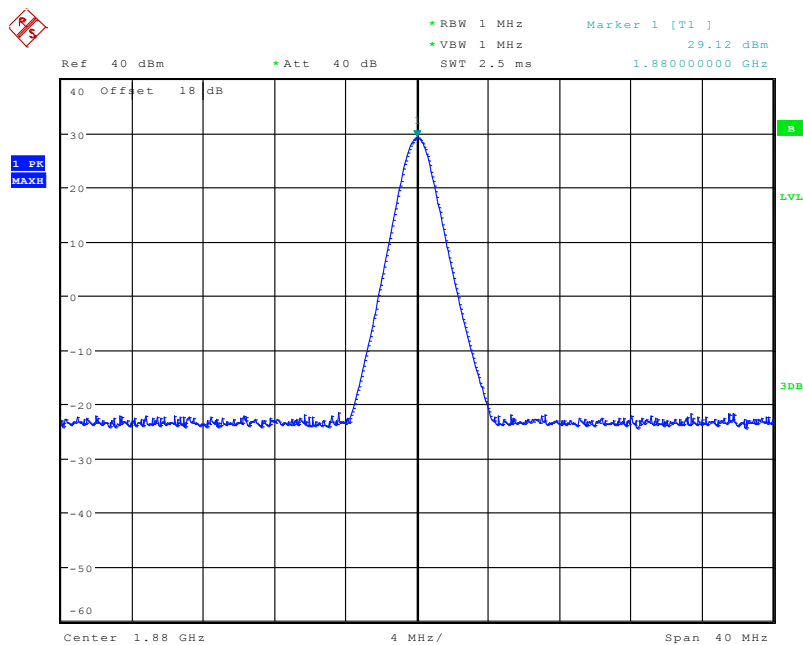

Date: 21.MAR.2011 10:46:02

(Plot Q2:EGPRS 1900MHz Channel = 661)

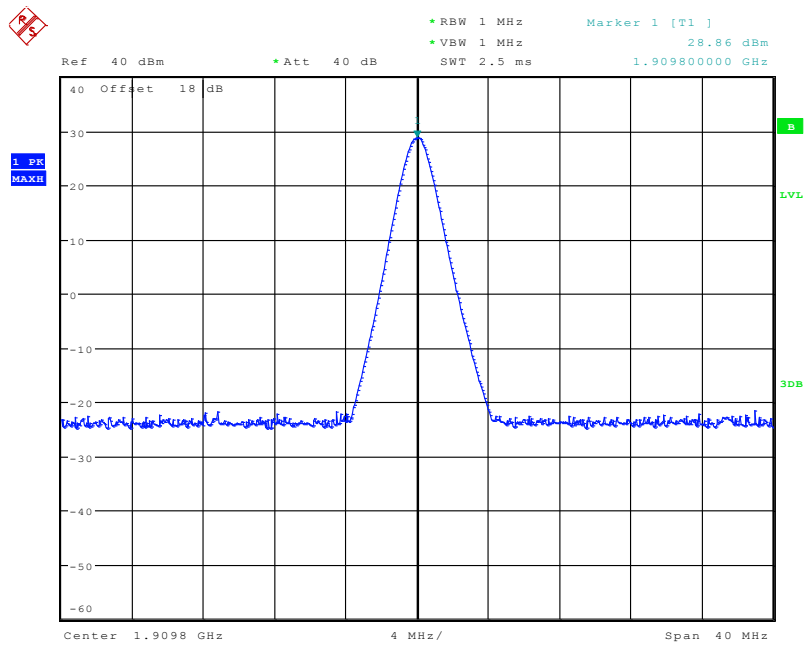

Date: 21.MAR.2011 10:46:31

(Plot R2:EGPRS 1900MHz Channel = 810)

3.3 20dB Occupied Bandwidth

3.3.1 Definition

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power as reference.

3.3.2 Test Description

See section 3.1.2 of this report.

3.3.3 Test Verdict

Here the lowest, middle and highest channels are tested to record the 20dB occupied bandwidth, it's about 300kHz.


1. Test Verdict:

Band	Channel	Measured 20dB Occupied Bandwidth (kHz)	Refer to Plot
GSM 850MHz	128	254.8077	Plot A3
	190	250.0000	Plot B3
	251	250.0000	Plot C3
GSM 1900MHz	512	250.0000	Plot D3
	661	250.0000	Plot E3
	810	250.0000	Plot F3

Band	Channel	Measured 99% Occupied Bandwidth (kHz)	Refer to Plot
GPRS 850MHz	128	250.0000	Plot G3
	190	250.0000	Plot H3
	251	245.1923	Plot I3
GPRS 1900MHz	512	245.1923	Plot J3
	661	250.0000	Plot K3
	810	245.1923	Plot L3


Band	Channel	Measured 20dB Occupied Bandwidth (kHz)	Refer to Plot
EGPRS 850MHz	128	250.0000	Plot M3
	190	245.1923	Plot N3
	251	250.0000	Plot O3
EGPRS 1900MHz	512	240.3846	Plot P3
	661	240.3846	Plot Q3
	810	245.1923	Plot R3

2. Test Plot:

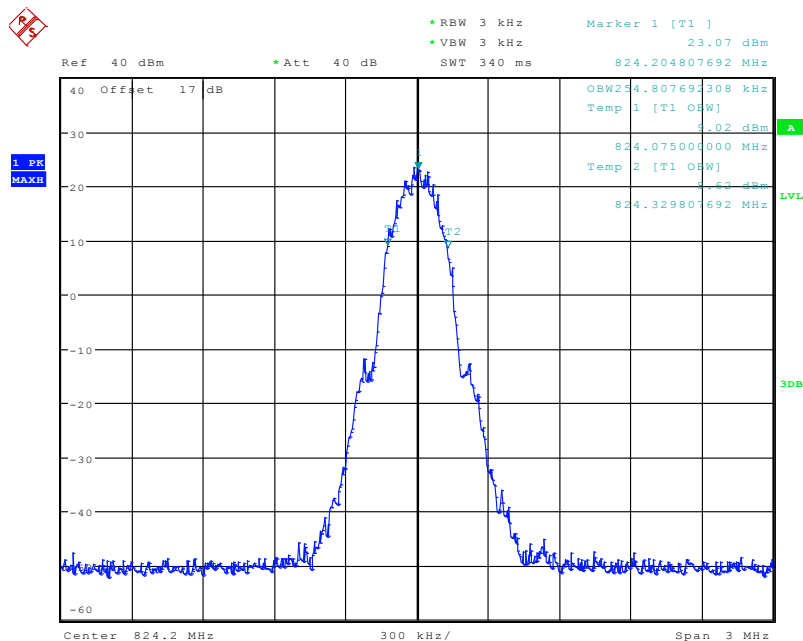


Date: 18.MAR.2011 14:13:56

(Plot A3: GSM 850MHz Channel = 128)

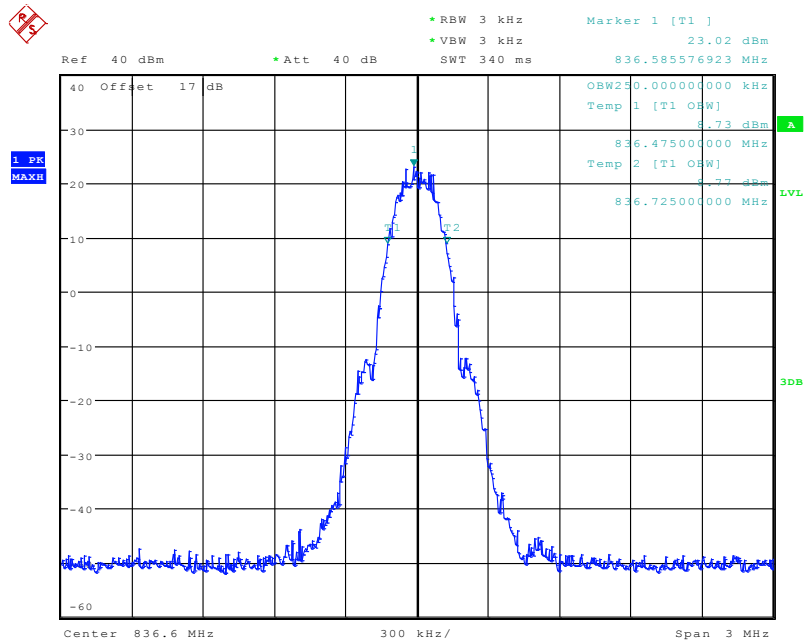


Date: 18.MAR.2011 14:17:56

(Plot B3: GSM 850MHz Channel = 190)

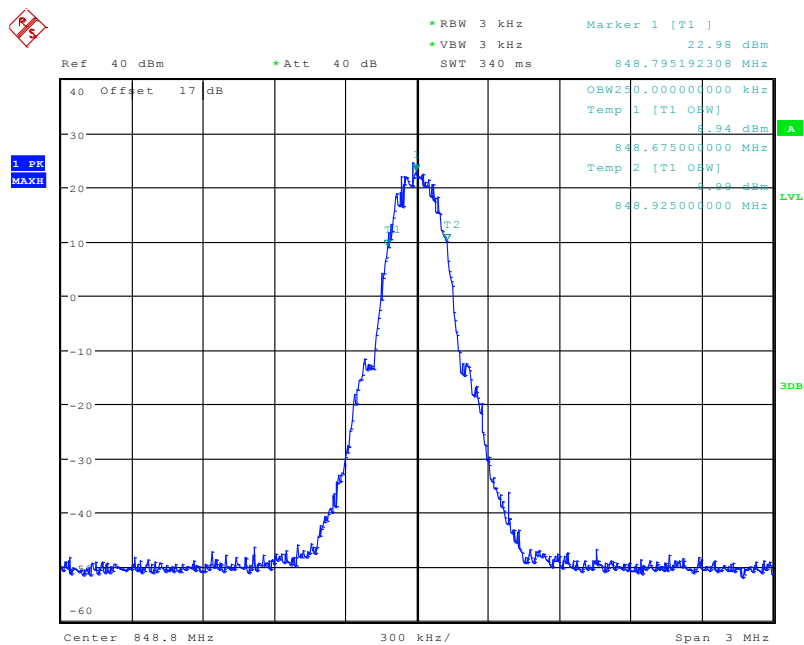


Date: 18.MAR.2011 14:20:44

(Plot C3: GSM 850MHz Channel = 251)

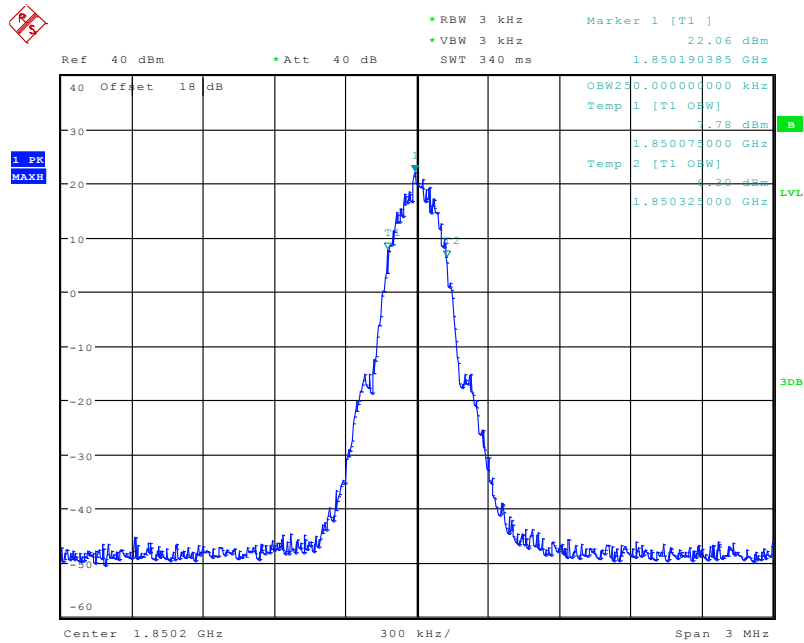


Date: 18.MAR.2011 14:25:21

(Plot D3: GSM 1900MHz Channel = 512)

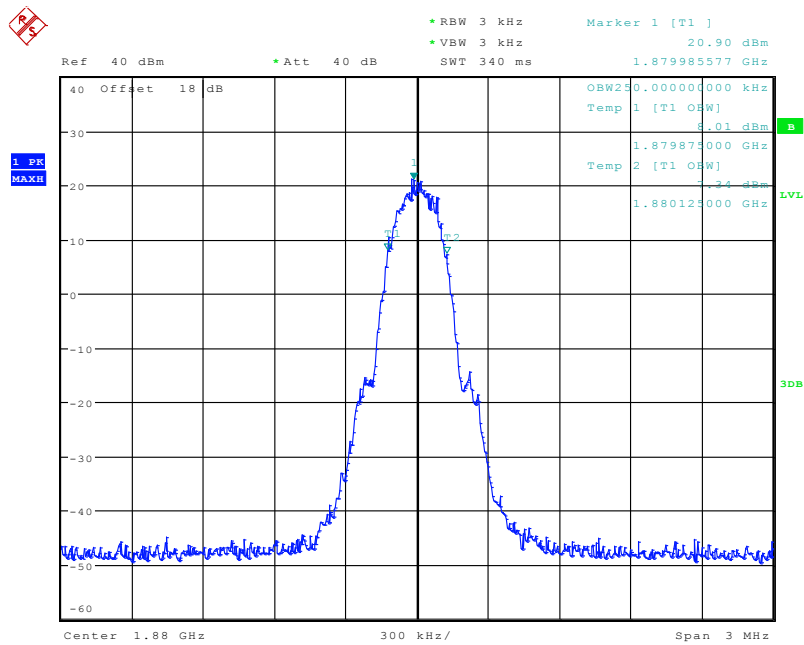


Date: 18.MAR.2011 14:28:39

(Plot E3: GSM 1900MHz Channel = 661)

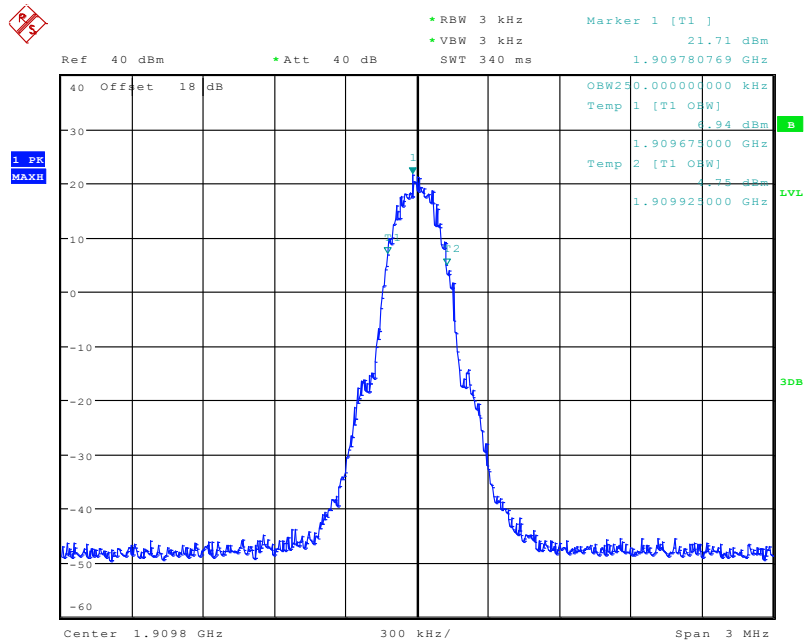


Date: 18.MAR.2011 14:30:10

(Plot F3: GSM 1900MHz Channel = 810)

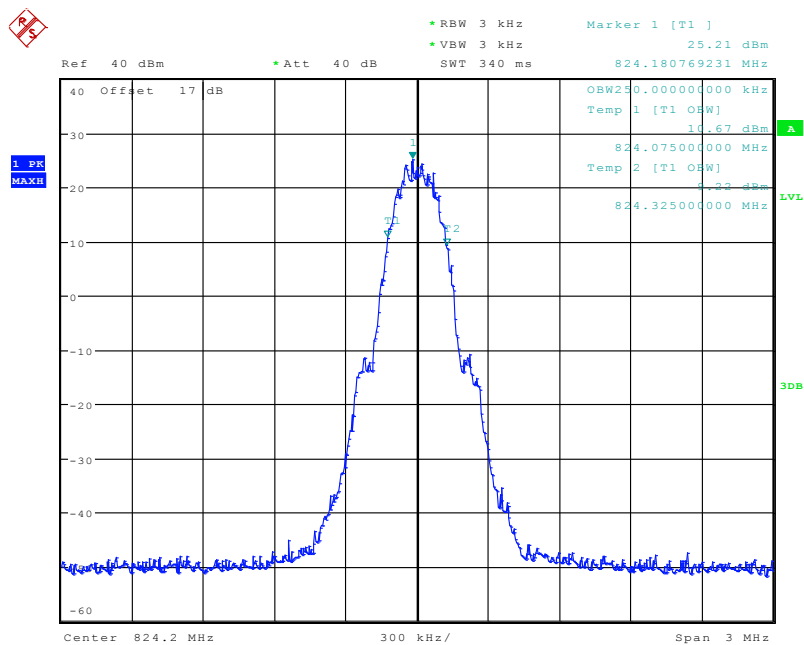


Date: 21.MAR.2011 10:10:31

(Plot G3: GPRS 850MHz Channel = 128)

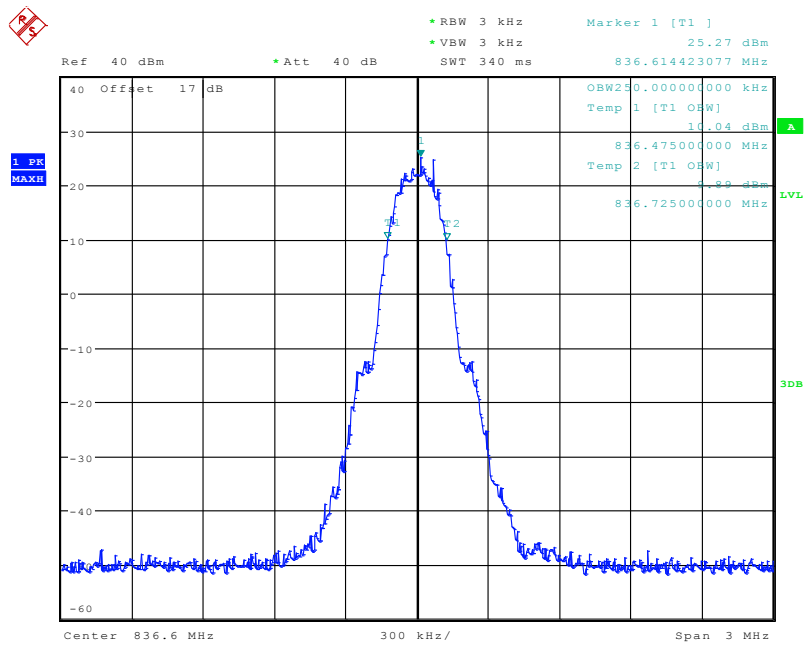


Date: 21.MAR.2011 10:12:54

(Plot H3: GPRS 850MHz Channel = 190)

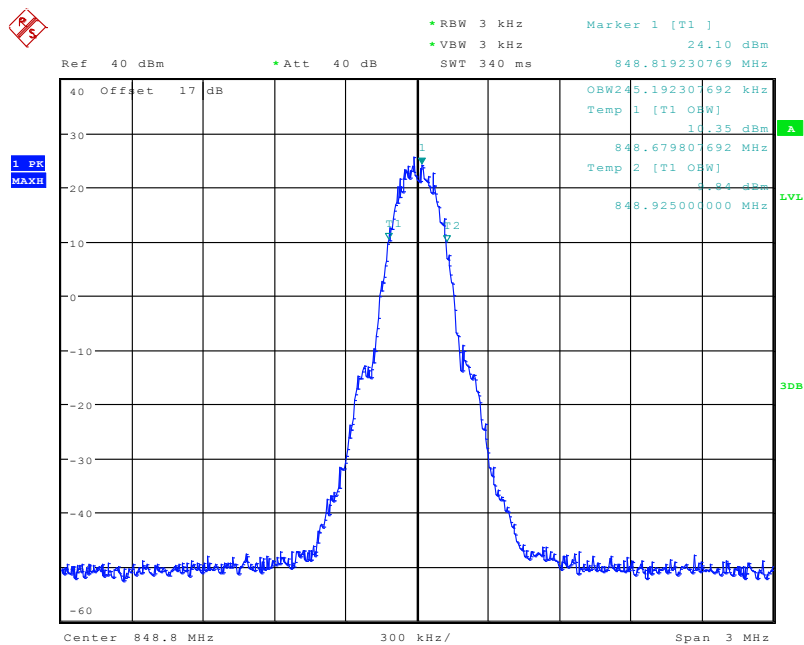


Date: 21.MAR.2011 10:13:53

(Plot I3: GPRS 850MHz Channel = 251)

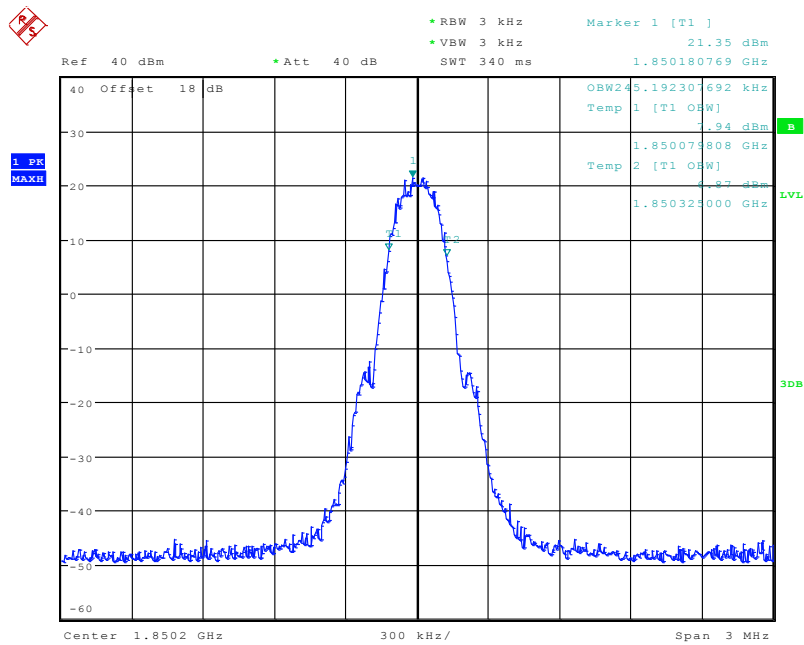


Date: 21.MAR.2011 11:15:51

(Plot J3: GPRS 1900MHz Channel = 512)

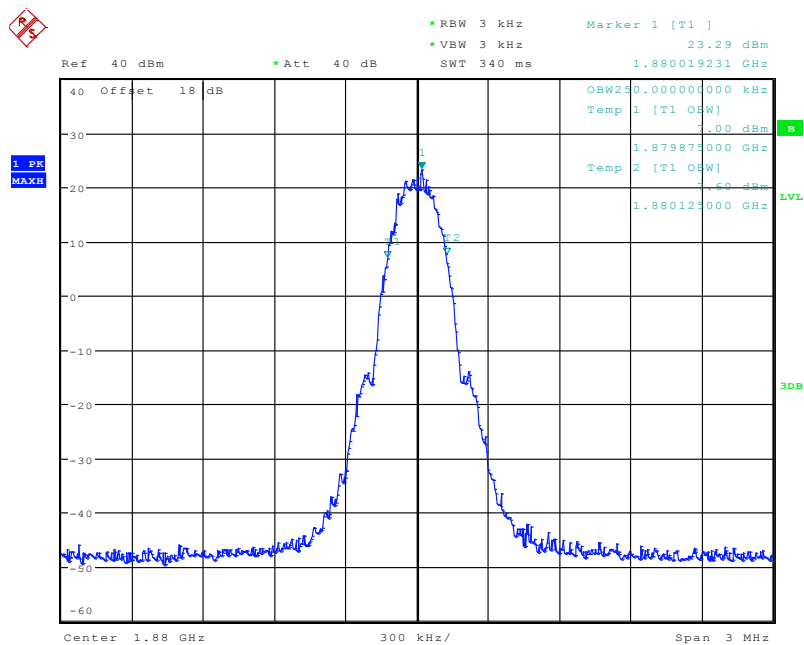


Date: 21.MAR.2011 10:28:32

(Plot K3: GPRS 1900MHz Channel = 661)

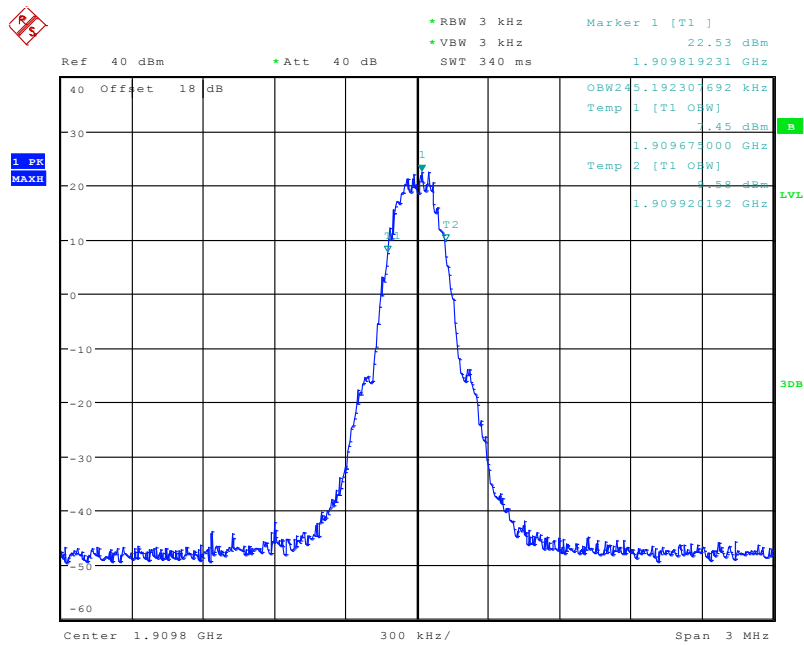


Date: 21.MAR.2011 10:31:14

(Plot L3: GSM 1900MHz Channel = 810)

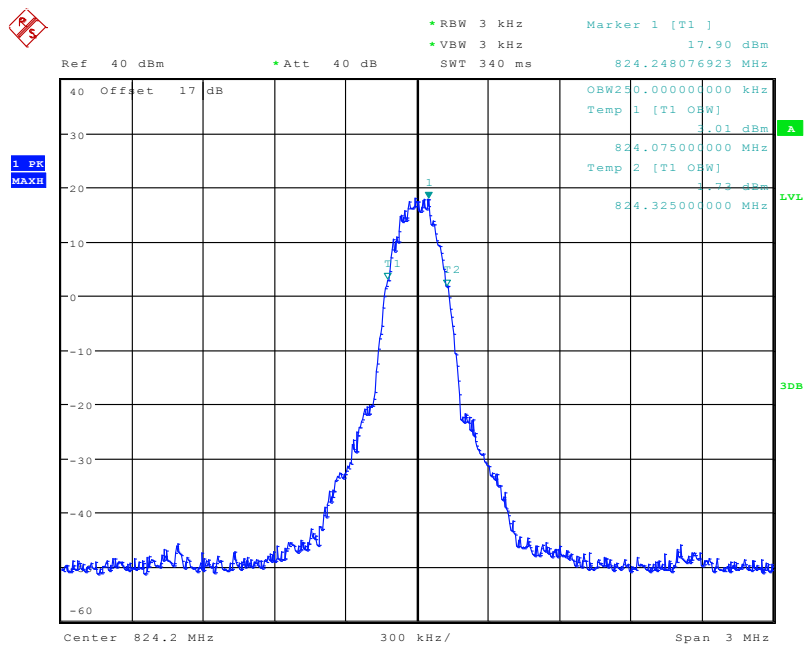


Date: 21.MAR.2011 10:35:30


(Plot G3: GPRS 850MHz Channel = 128)

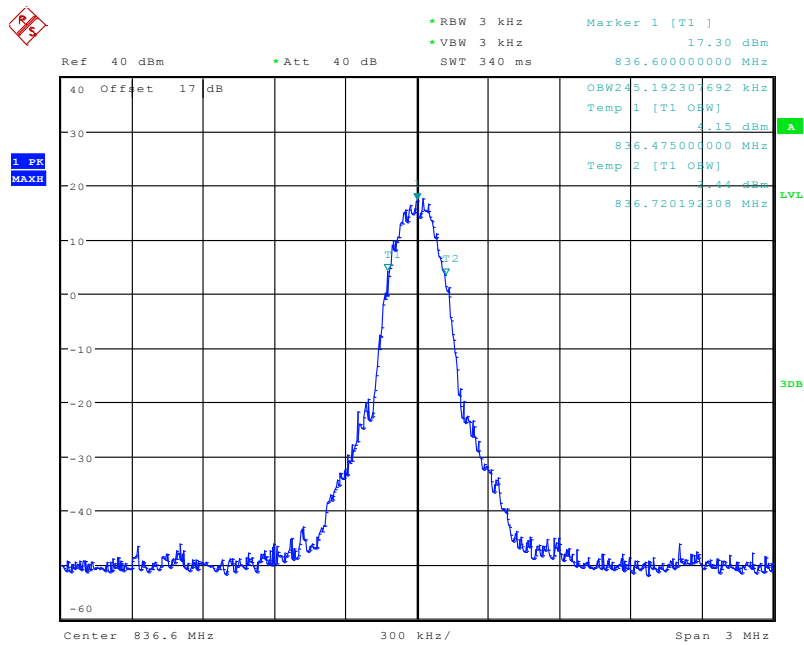

(Plot H3: GPRS 850MHz Channel = 190)

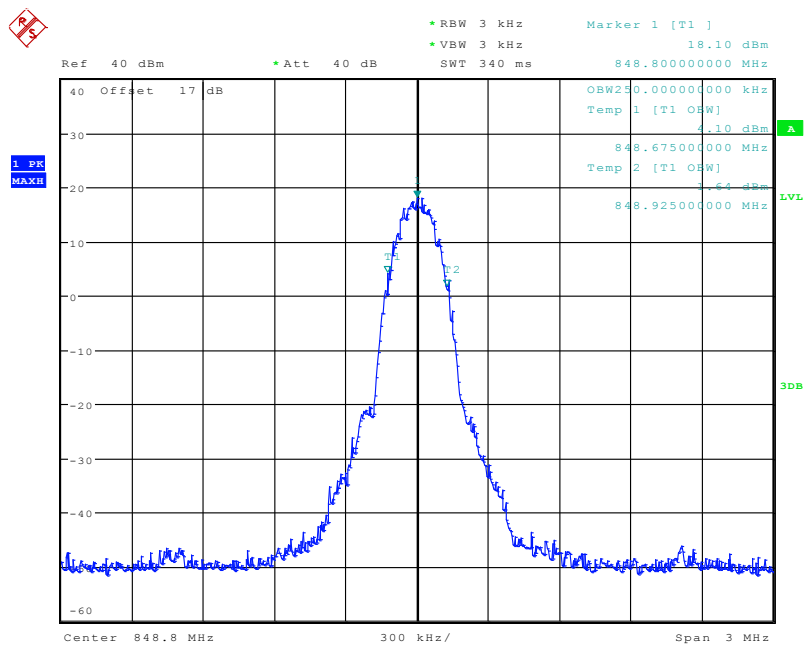


(Plot I3: GPRS 850MHz Channel = 251)

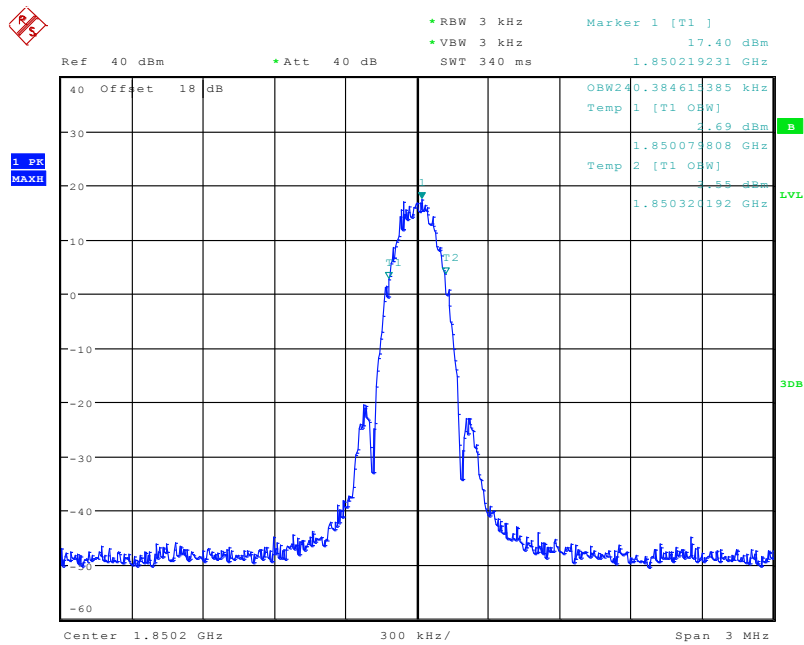


Date: 21.MAR.2011 10:53:02

(Plot J3: GPRS 1900MHz Channel = 512)

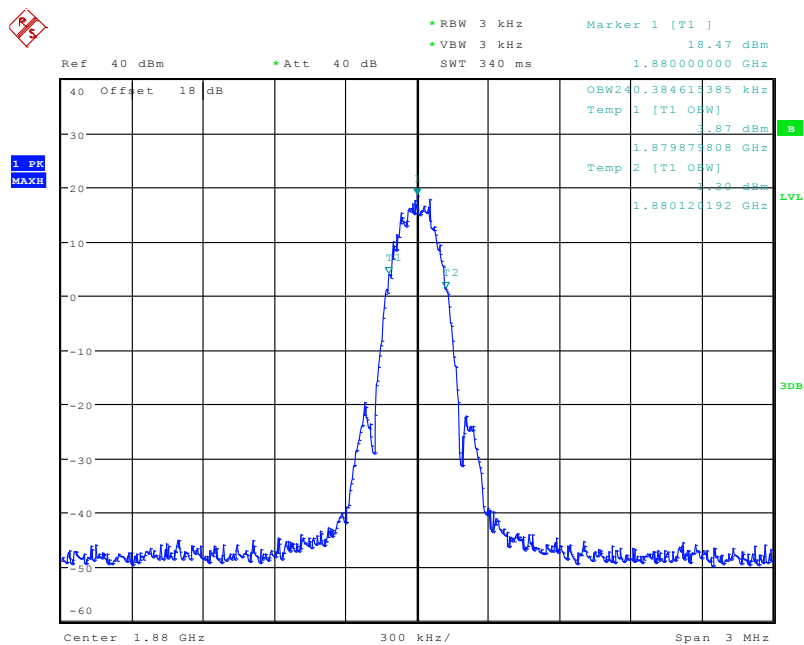

Date: 21.MAR.2011 10:50:21

(Plot K3: GPRS 1900MHz Channel = 661)

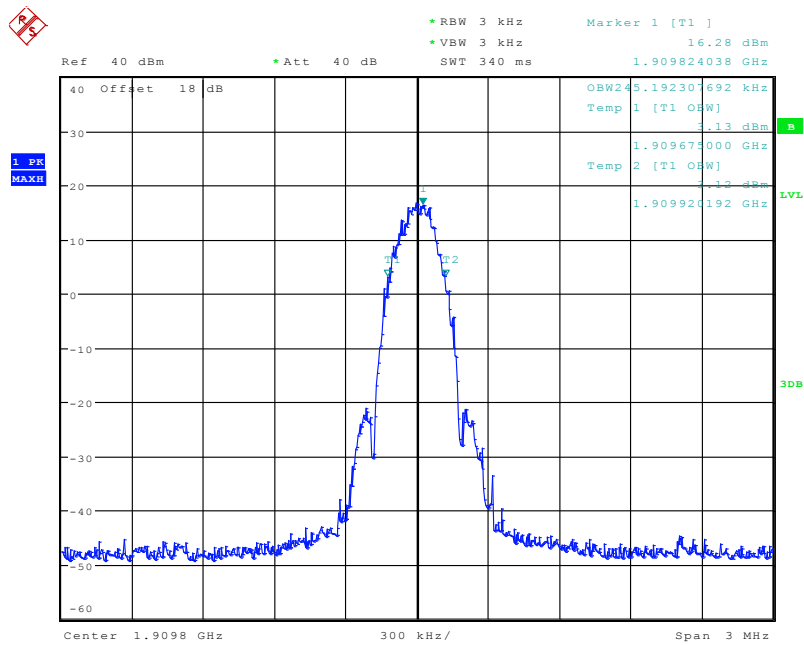

Date: 21.MAR.2011 10:48:33

(Plot L3: GSM 1900MHz Channel = 810)

3.4 Frequency Stability


3.4.1 Requirement

According to FCC section 22.355 and FCC section 24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- The temperature is varied from -30 °C to +50 °C at intervals of not more than 10 °C.
- For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

3.4.2 Test Description

1. Test Setup:

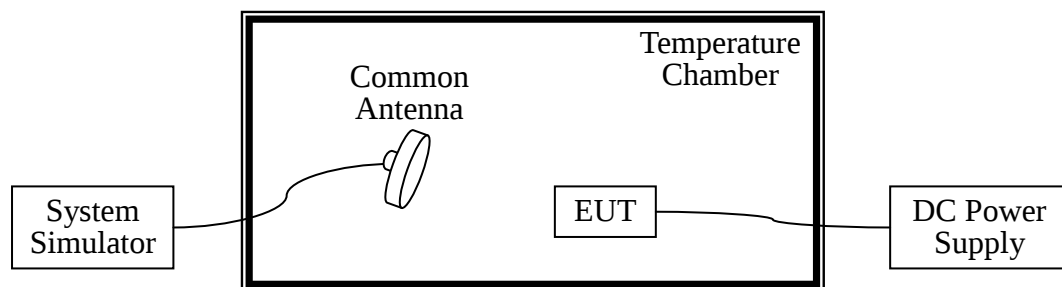

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS via a Common Antenna.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Rohde&Schwarz	CMU200	105571	2010.9	1year
System Simulator	Agilent	E5515C	GB46040102	2010.9	1year
DC Power Supply	Good Will	GPS-3030DD	EF920938	2009.10	2year
Temperature Chamber	YinHe Experimental Equip.	HL4003T	(n.a.)	2010.9	1year

3.4.3 Test Verdict

The nominal, highest and lowest extreme voltages are separately 3.7VDC, 4.2VDC and 3.6VDC,

which are specified by the applicant; the normal temperature here used is 25 °C. The frequency deviation limit is $\pm 2.5\text{ppm}$.

Band	Test Conditions		Frequency Deviation						Verdict
	Power (VDC)	Temperature (°C)	Low Channel		Middle Channel		High Channel		Limit $\pm 2.5\text{ppm}$ (ppm)
			Dev. Freq. Hz	Deviation (ppm)	Dev. Freq. Hz	Deviation (ppm)	Dev. Freq. Hz	Deviation (ppm)	
GSM 850MHz	3.7	-30	--	--	--	--	--	--	PASS
		-20	--	--	--	--	--	--	
		-10	1	0	-3	0	2	0	
		0	-4	0	-6	0	6	0	
		+10	5	0	-2	0	-1	0	
		+20	-8	0	-8	0	-6	0	
		+30	3	0	-1	0	-2	0	
		+40	2	0	-2	0	1	0	
		+50	-2	0	-1	0	2	0	
	4.2	+25	4	0	2	0	-2	0	
	3.6	+25	-1	0	5	0	4	0	
GSM 1900MHz	3.7	-30	--	--	--	--	--	--	PASS
		-20	--	--	--	--	--	--	
		-10	-9	0	-7	0	-6	0	
		0	-6	0	-5	0	-4	0	
		+10	6	0	9	0	5	0	
		+20	-4	0	1	0	2	0	
		+30	-5	0	-2	0	1	0	
		+40	-3	0	4	0	2	0	
		+50	-1	0	3	0	2	0	
	4.2	+25	3	0	-3	0	-3	0	
	3.6	+25	-5	0	-8	0	-9	0	
GPRS 850MHz	3.7	-30	--	--	--	--	--	--	PASS
		-20	--	--	--	--	--	--	
		-10	7	0	4	0	8	0	
		0	-4	0	-7	0	-5	0	
		+10	6	0	3	0	7	0	
		+20	-8	0	-6	0	-9	0	
		+30	4	0	6	0	5	0	
		+40	-6	0	-3	0	-5	0	
		+50	8	0	5	0	7	0	
	4.2	+25	4	0	-3	0	-1	0	

	3.6	+25	-7	0	-6	0	-5	0	
GPRS 1900MHZ	3.7	-30	--	--	--	--	--	--	PASS
		-20	--	--	--	--	--	--	
		-10	3	0	3	0	4	0	
		0	5	0	4	0	6	0	
		+10	-5	0	-5	0	-6	0	
		+20	-3	0	-6	0	-7	0	
		+30	-6	0	-4	0	-8	0	
		+40	-5	0	-8	0	-9	0	
		+50	-3	0	-6	0	-6	0	
	4.2	+25	-6	0	-4	0	-3	0	
	3.6	+25	-4	0	-5	0	-6	0	
EGPRS 850MHz	3.7	-30	--	--	--	--	--	--	PASS
		-20	--	--	--	--	--	--	
		-10	4	0	4	0	9	0	
		0	-1	0	-2	0	-4	0	
		+10	-5	0	-5	0	-6	0	
		+20	-8	0	9	0	-7	0	
		+30	-5	0	3	0	8	0	
		+40	6	0	6	0	5	0	
		+50	3	0	-3	0	4	0	
	4.2	+25	2	0	-9	0	3	0	
	3.6	+25	-8	0	-3	0	8	0	
EGPRS 1900MHZ	3.7	-30	--	--	--	--	--	--	PASS
		-20	--	--	--	--	--	--	
		-10	3	0	4	0	-2	0	
		0	-6	0	-6	0	-2	0	
		+10	-1	0	-4	0	-1	0	
		+20	4	0	8	0	-6	0	
		+30	8	0	-2	0	-8	0	
		+40	-3	0	4	0	-4	0	
		+50	6	0	-1	0	-1	0	
	4.2	+25	1	0	8	0	-9	0	
	3.6	+25	-5	0	-9	0	-3	0	
	3.6	+25	-2	0	-3	0	-6	0	

Note:

1. The EUT stops transmitting at temperatures -20 °C and -30 °C.
2. The manufacturer declared that the EUT could work properly between temperatures -10 °C~50 °C.

3.5 Conducted Out of Band Emissions

3.5.1 Requirement

According to FCC section 22.917(a) and FCC section 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm.

3.5.2 Test Description

See section 3.1.2 of this report.

3.5.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.


Test Verdict:

Band	Channel	Frequency (GHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
GSM 850MHz	128	3.109	-22.99	Plot A4	-13	PASS
	190	3.125	-23.18	Plot B4		PASS
	251	2.676	-24.12	Plot C4		PASS
GSM 1900MHz	512	18.109	-22.53	Plot D4	-13	PASS
	661	17.308	-23.22	Plot E4		PASS
	810	3.109	-23.18	Plot F4		PASS
GPRS 850MHz	128	5.288	-24.37	Plot G4	-13	PASS
	190	5.192	-24.22	Plot H4		PASS
	251	3.125	-23.49	Plot I4		PASS
GPRS 1900MHz	512	16.186	-22.61	Plot J4	-13	PASS
	661	16.186	-22.93	Plot K4		PASS
	810	4.519	-22.72	Plot L4		PASS
EGPRS 850MHz	128	4.407	-23.79	Plot M4	-13	PASS
	190	3.494	-24.28	Plot N4		PASS
	251	2.436	-24.16	Plot O4		PASS


Band	Channel	Frequency (GHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
EGPRS 1900MHz	128	16.571	-23.11	PlotP4	-13	PASS
	190	16.987	-22.89	PlotQ4		PASS
	251	16.186	-23.79	Plot R4		PASS

3. Test Plot for the Whole Measurement Frequency Range:


Note: the power of the EUT transmitting frequency should be ignored.

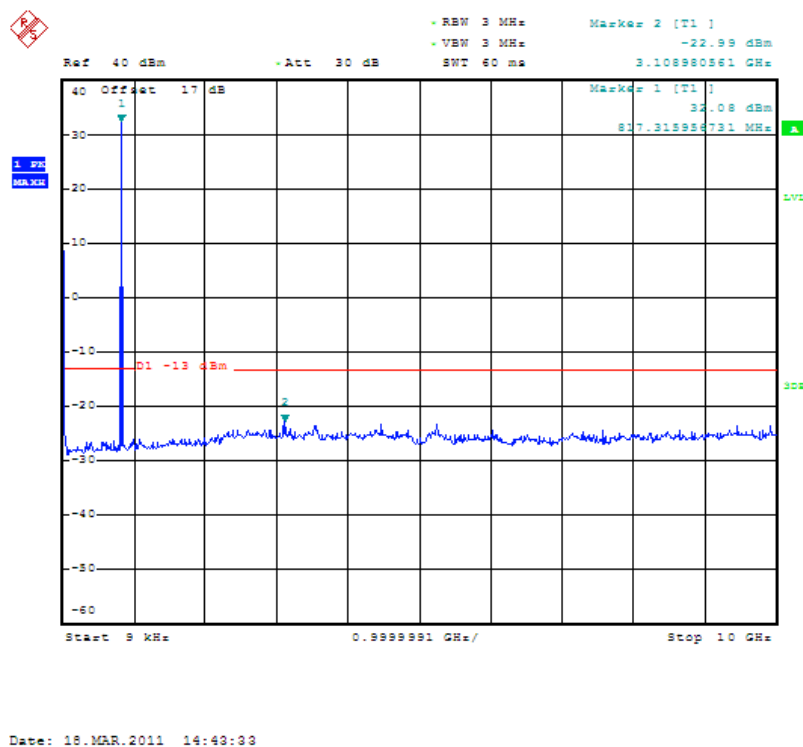


(Plot A4.:GSM 850MHz Channel = 128, 9KHz to 10GHz)

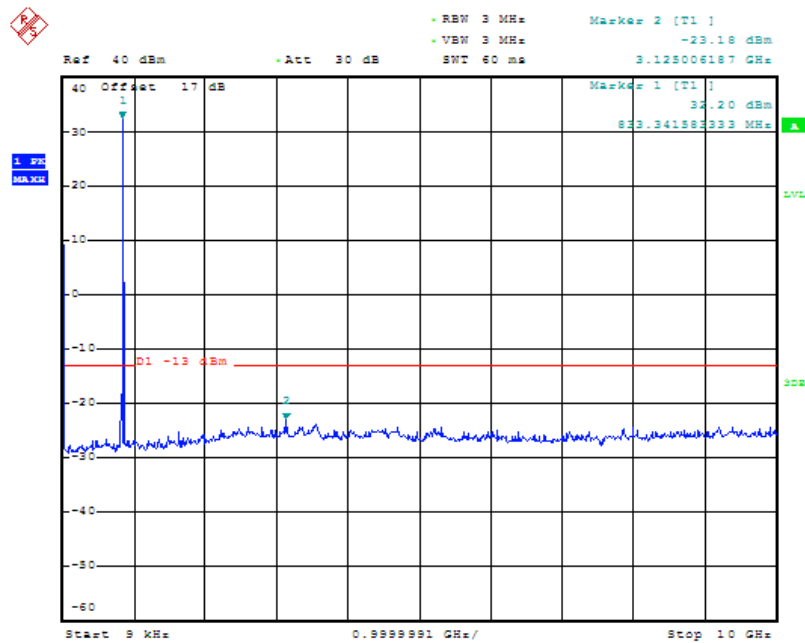

(Plot B4.:GSM 850MHz Channel = 190, 9KHz to 10GHz)

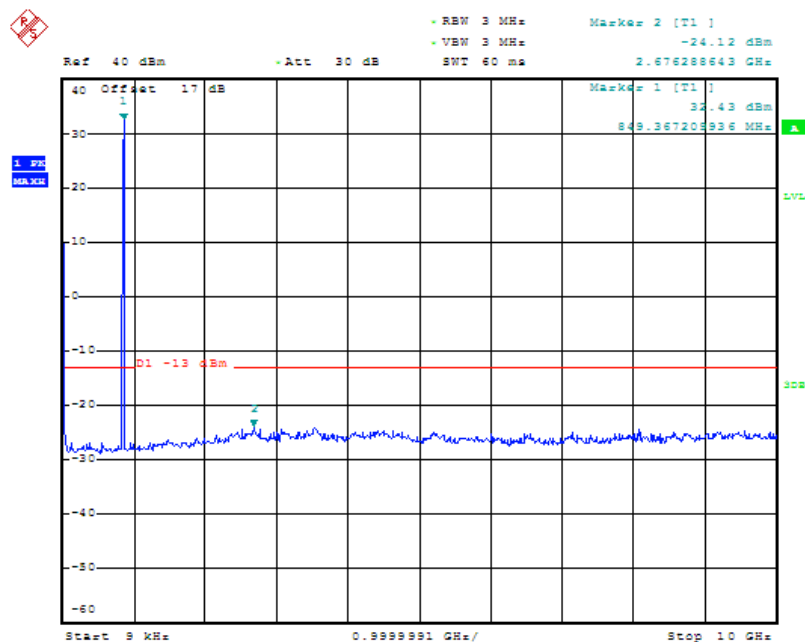


(Plot C4.:GSM 850MHz Channel = 251, 9KHz to 10GHz)

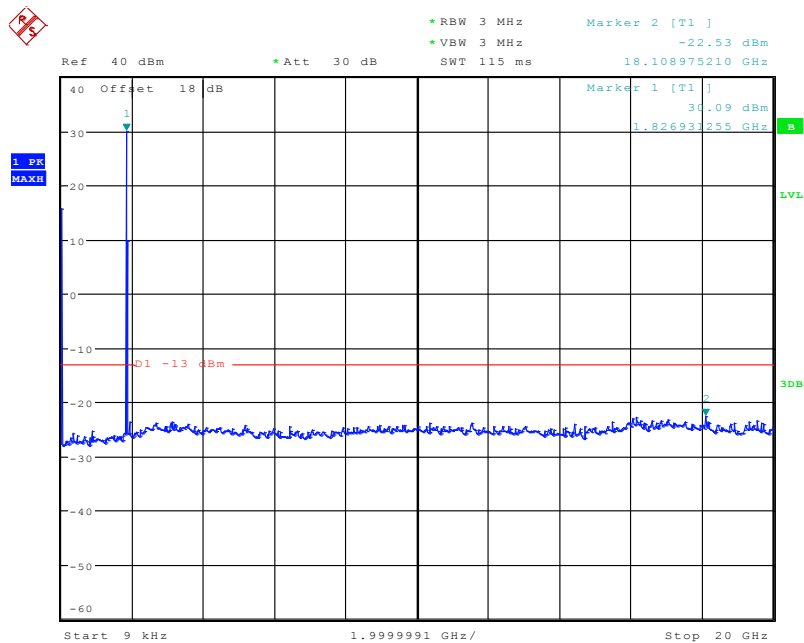


Date: 21.MAR.2011 11:17:28

(Plot D4.:GSM 1900MHz Channel = 512, 9KHz to 20GHz)

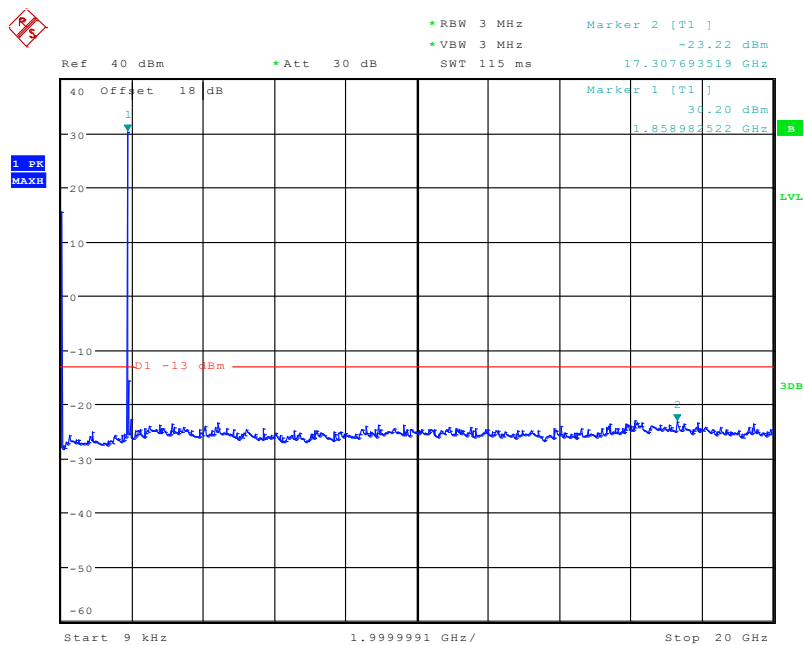


Date: 21.MAR.2011 11:18:04

(Plot E4.: GSM 1900MHz Channel = 661, 9KHz to 20GHz)

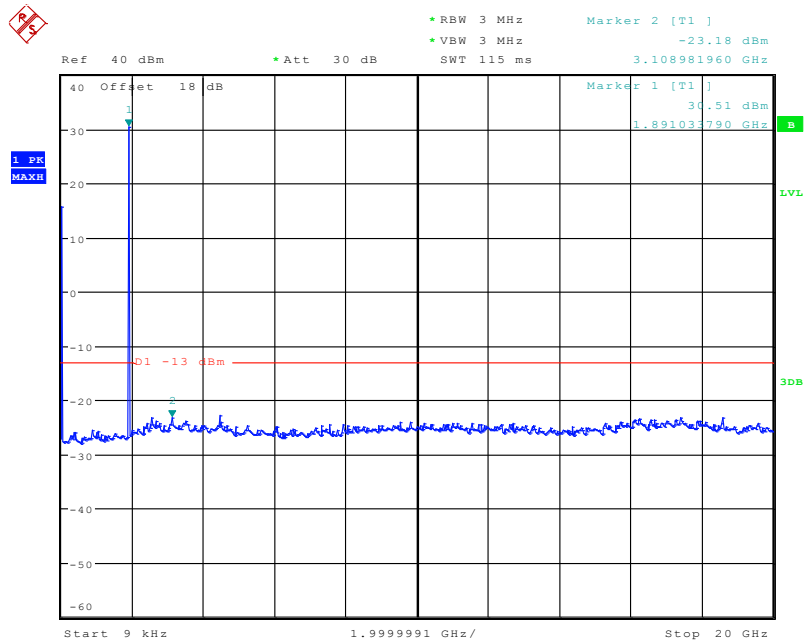


Date: 21.MAR.2011 11:18:34

(Plot F4.: GSM 1900MHz Channel = 810, 9KHz to 20GHz)

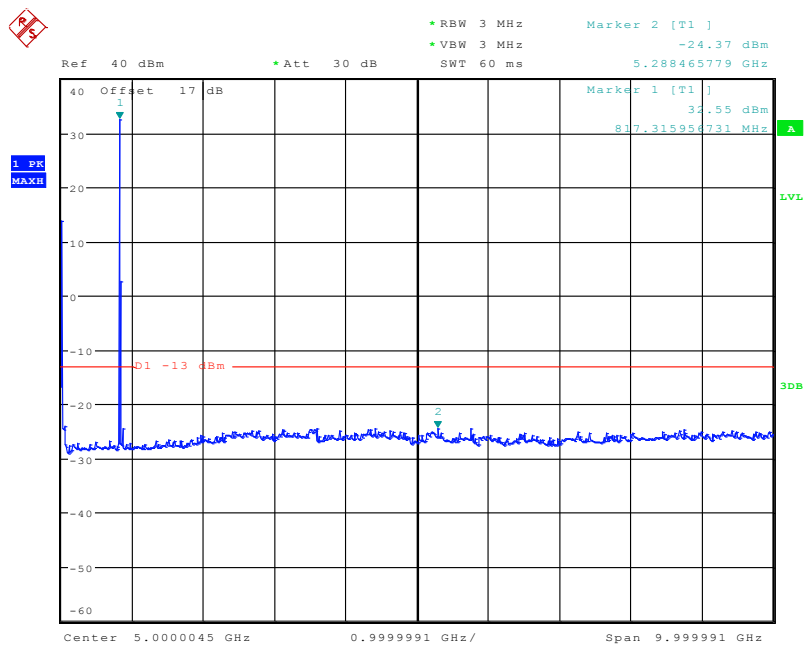


Date: 21.MAR.2011 11:09:23

(Plot G4.:GPRS 850MHz Channel = 128, 9KHz to 10GHz)

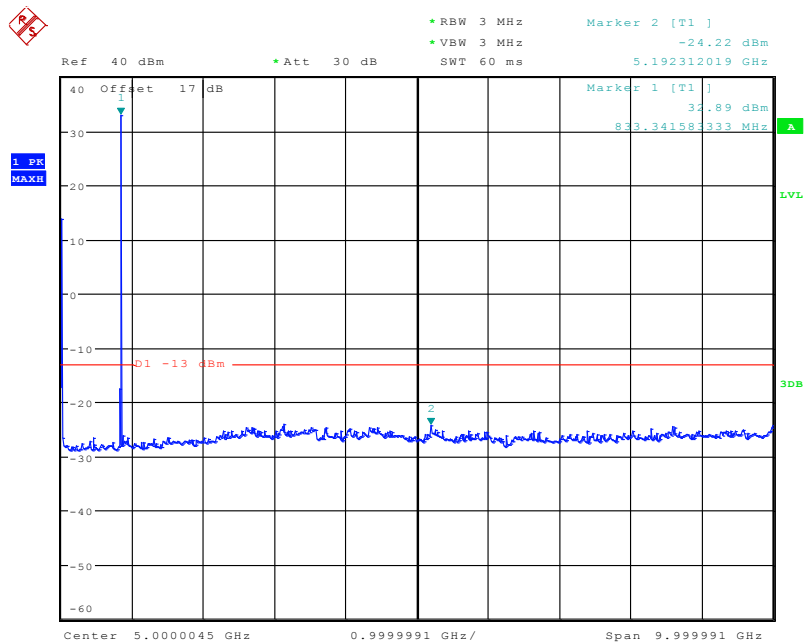


Date: 21.MAR.2011 11:09:53

(Plot H4.: GPRS 850MHz Channel = 190, 9KHz to 10GHz)

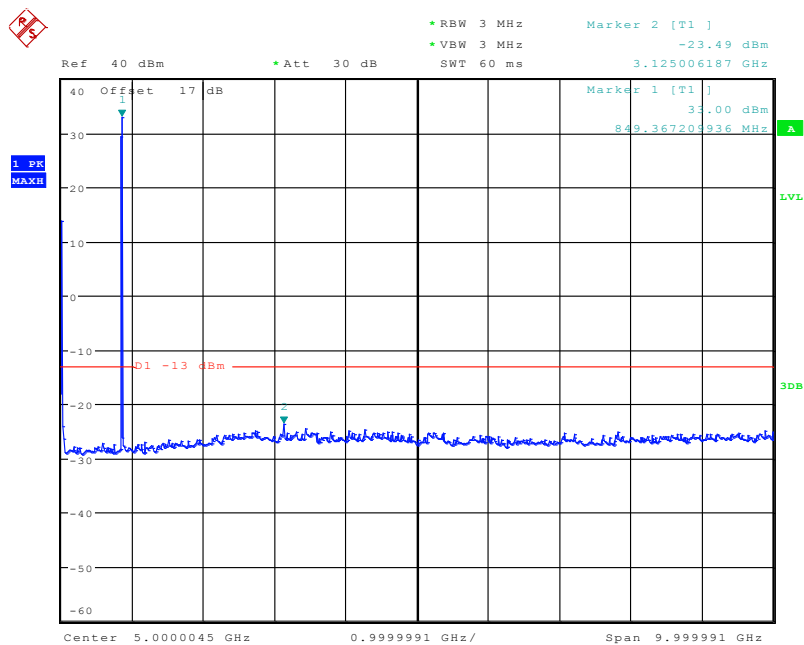


Date: 21.MAR.2011 11:10:12

(Plot I4.: GPRS 850MHz Channel = 251, 9KHz to 10GHz)

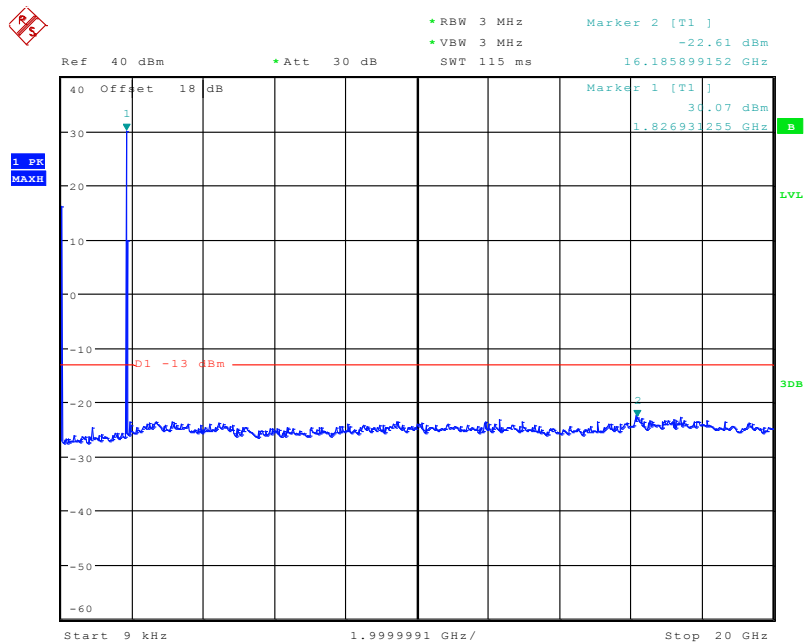


Date: 21.MAR.2011 11:12:33

(Plot J4.: GPRS 1900MHz Channel = 512, 9KHz to 20GHz)

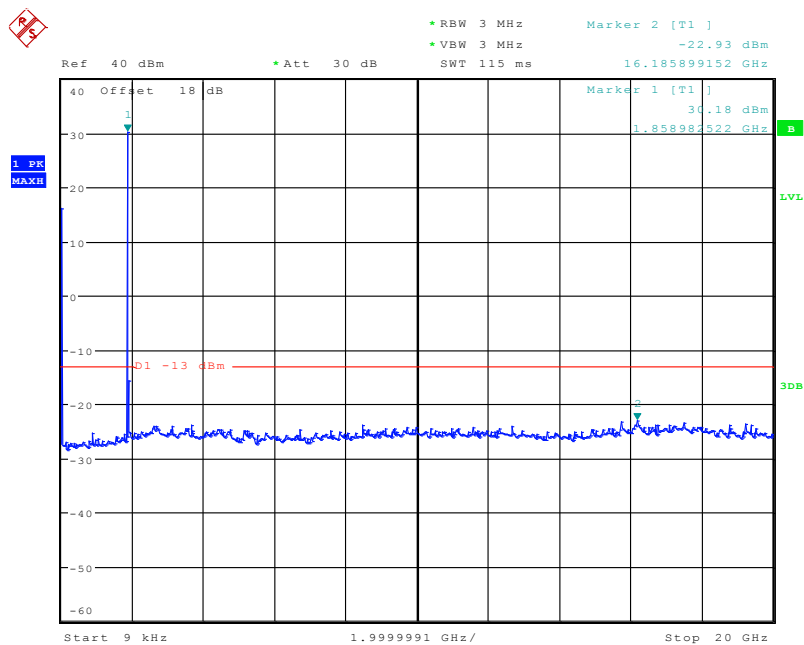


Date: 21.MAR.2011 11:13:00

(Plot K4.: GPRS 1900MHz Channel = 661, 9KHz to 20GHz)

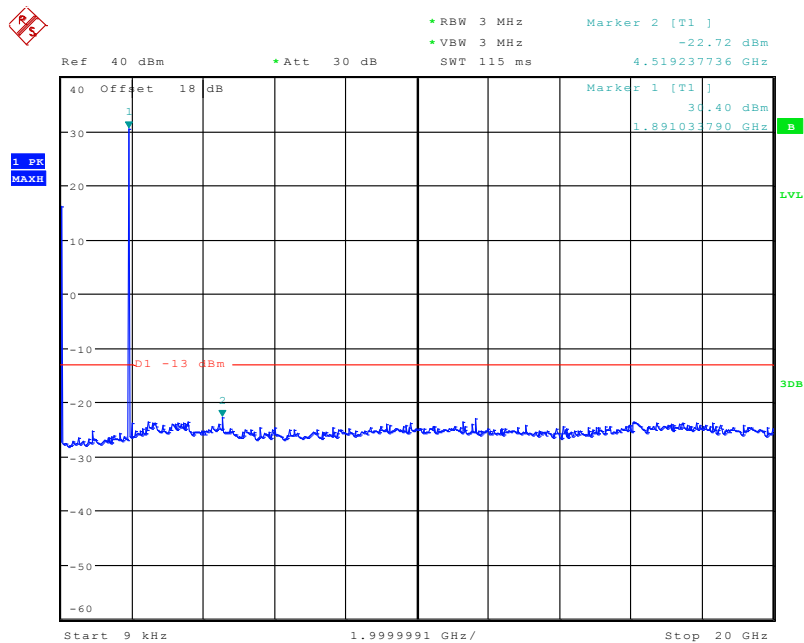


Date: 21.MAR.2011 11:13:27

(Plot L4.: GPRS 1900MHz Channel = 810, 9KHz to 20GHz)

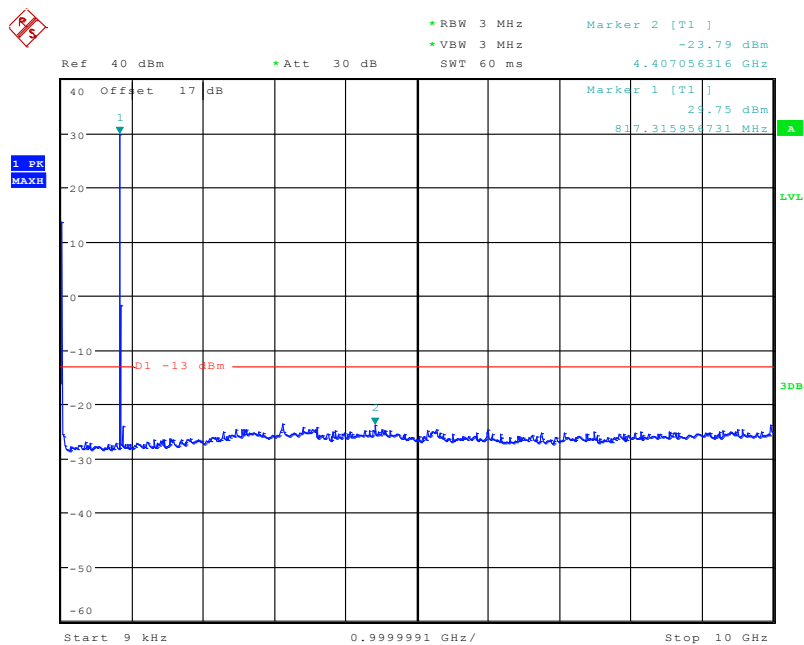


Date: 21.MAR.2011 11:27:51

(Plot M4.:EGPRS 850MHz Channel = 128, 9KHz to 10GHz)

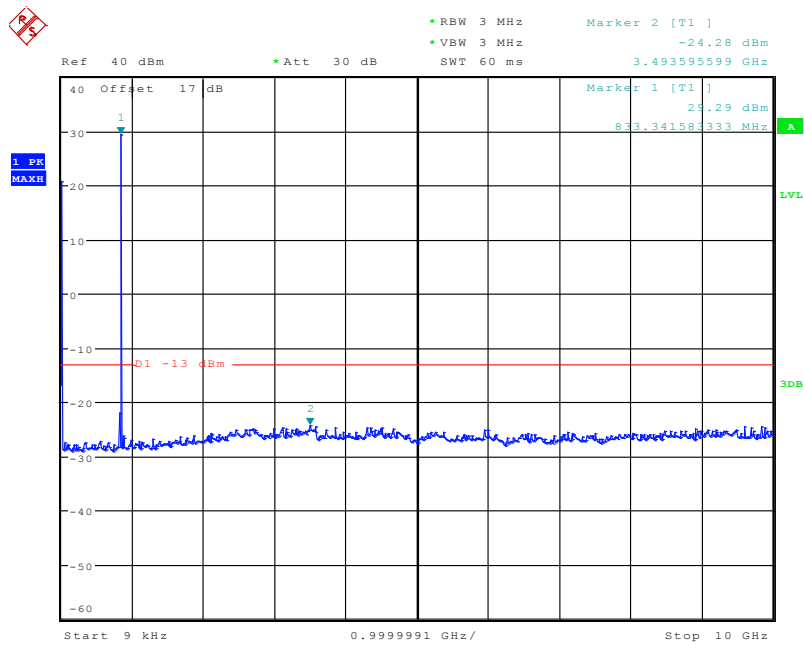


Date: 21.MAR.2011 11:28:24

(Plot N4.:EGPRS 850MHz Channel = 190, 9KHz to 10GHz)

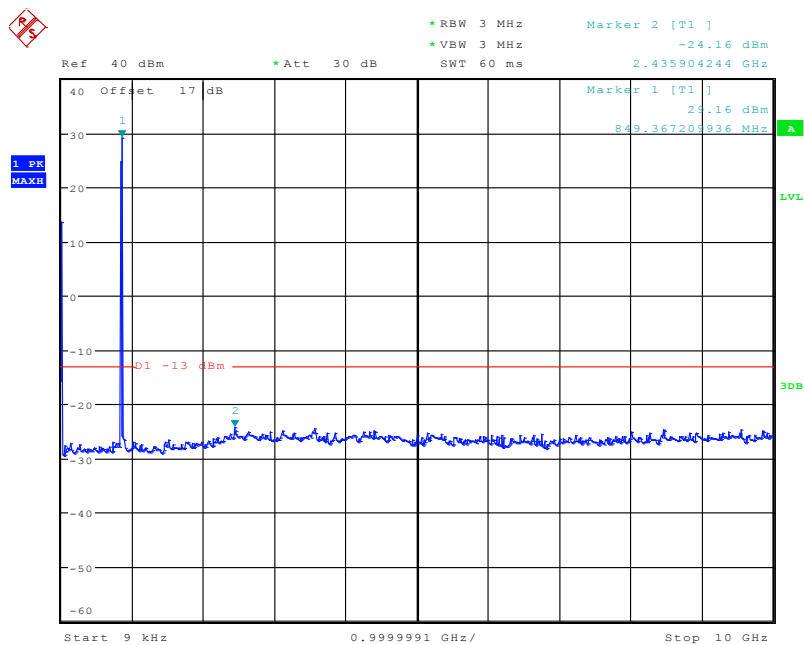


Date: 21.MAR.2011 11:28:46

(Plot O4.:EGPRS 850MHz Channel = 251, 9KHz to 10GHz)

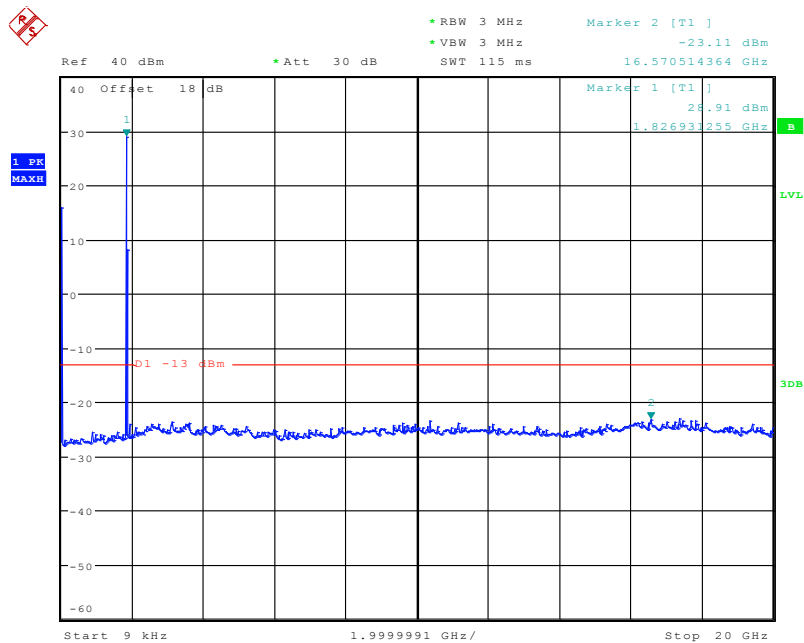


Date: 21.MAR.2011 11:35:35

(Plot P4.:EGPRS 1900MHz Channel = 512, 9KHz to 20GHz)

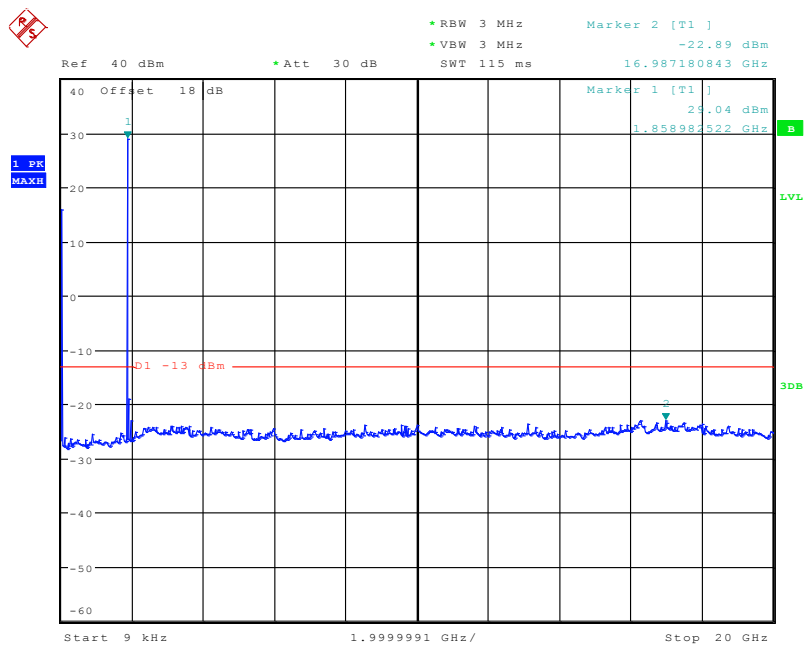

Date: 21.MAR.2011 11:36:08

(Plot Q4.:EGPRS 1900MHz Channel = 661, 9KHz to 20GHz)

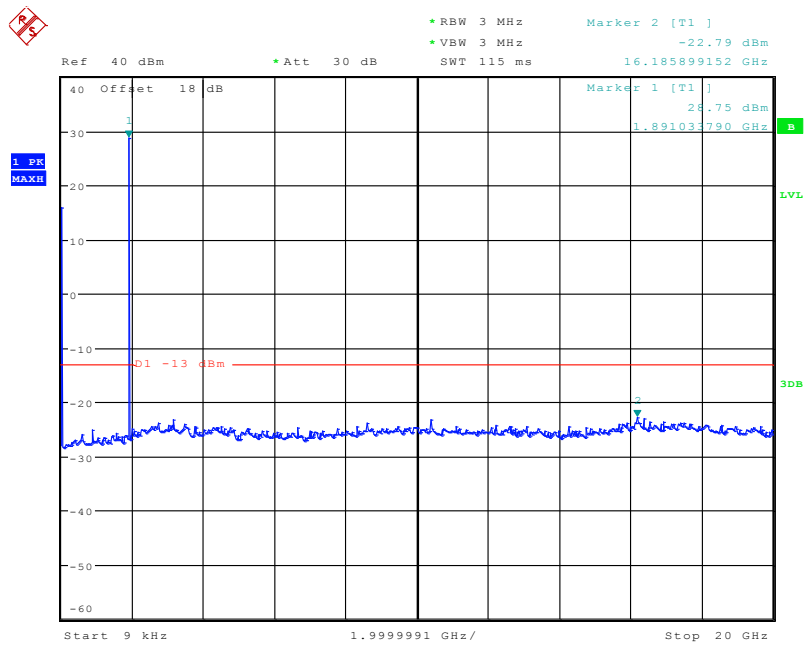

Date: 21.MAR.2011 11:36:32

(Plot R4.:EGPRS 1900MHz Channel = 810, 9KHz to 20GHz)

3.6 Band Edge

3.6.1 Requirement

According to FCC section 22.917(b) and FCC section 24.238(b), in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth (26dB emission bandwidth) of the fundamental emission of the transmitter may be employed.

3.6.2 Test Description

See section 3.1.2 of this report.


3.6.3 Test Result

The lowest and highest channels are tested to verify the band edge emissions.

Test Verdict:


Band	Channel	Frequency (MHz)	Measured Max. Band Edge Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
GSM 850MHz	128	823.979	-14.17	Plat A5	-13	PASS
	251	849.024	-14.88	Plot B5		PASS
GSM 1900MHz	512	1849.997	-13.40	Plat C5		PASS
	810	1910.022	-14.31	Plot D5		PASS
GPRS 850MHz	128	823.989	-13.15	Plat E5		PASS
	251	849.014	-13.55	Plot F5		PASS
GPRS 1900MHz	512	1849.982	-14.39	Plat G5		PASS
	810	1910.019	-13.80	Plot H5		PASS
EGPRS 850MHz	128	823.976	-20.38	Plat I5		PASS
	251	849.002	-21.65	Plot J5		PASS
EGPRS 1900MHz	512	1849.982	-20.09	Plat K5		PASS
	810	1910.006	-21.45	Plot L5		PASS

4. Test Plot:

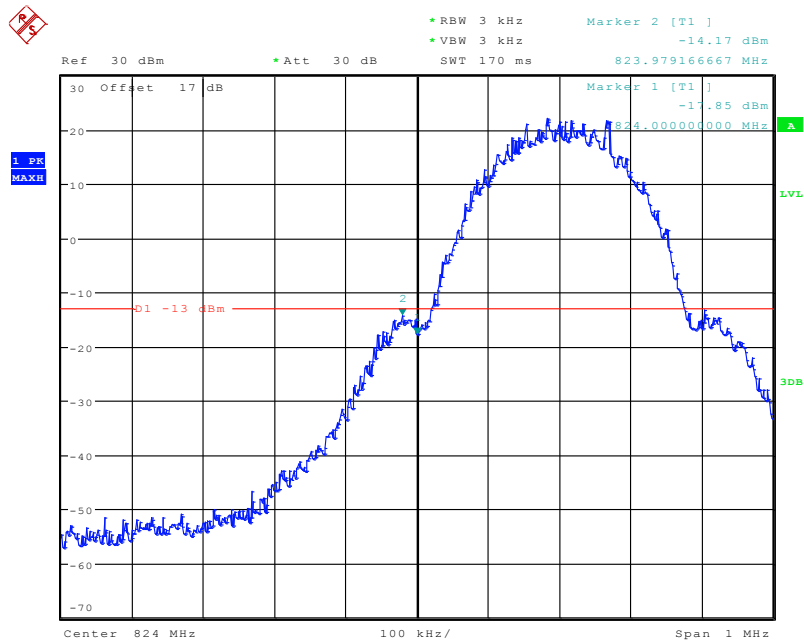


Date: 21.MAR.2011 11:47:53

(Plot A5: GSM 850MHz Channel = 128)

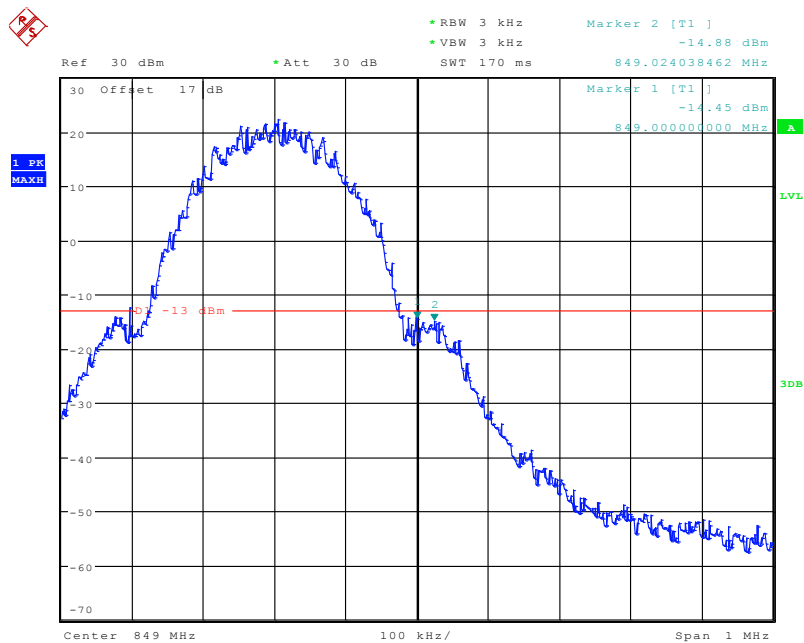


Date: 21.MAR.2011 11:49:22

(Plot B5: GSM 850MHz Channel = 251)

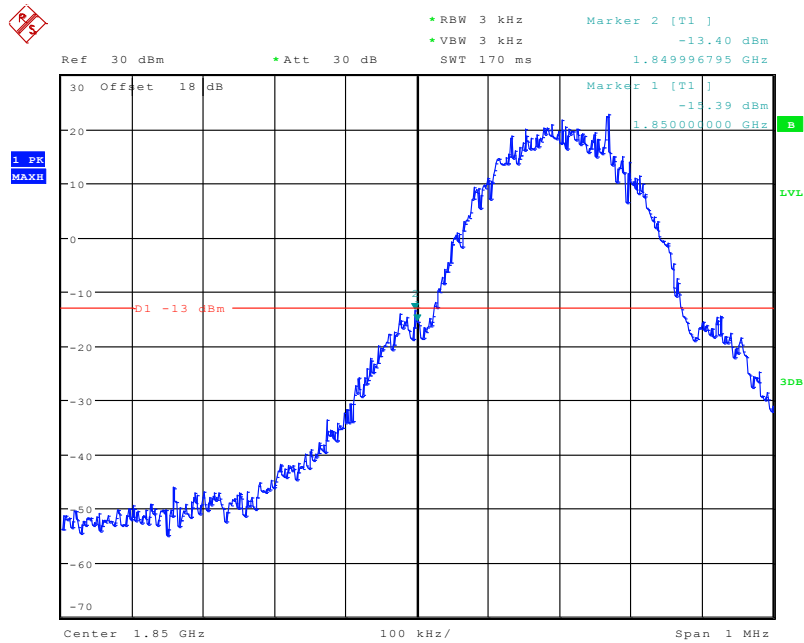


Date: 21.MAR.2011 11:52:06

(Plot C5: GSM 1900MHz Channel = 512)

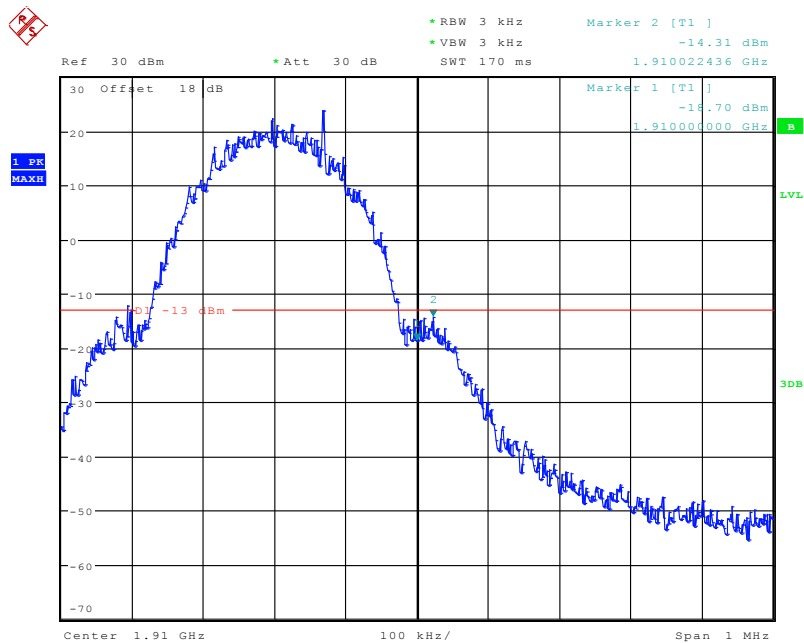


Date: 21.MAR.2011 11:53:39

(Plot D5: GSM 1900MHz Channel = 810)

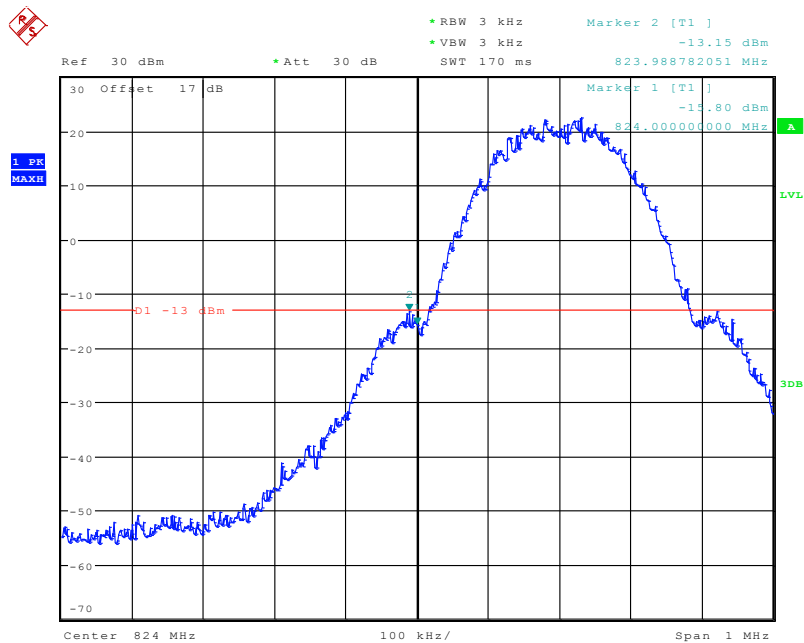


Date: 21.MAR.2011 11:56:37

(Plot E5: GPRS 850MHz Channel = 128)

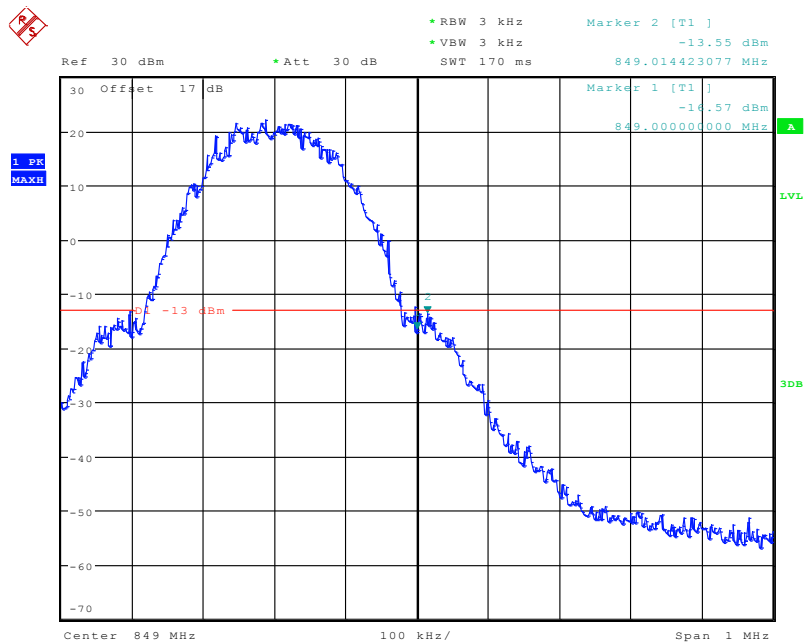


Date: 21.MAR.2011 11:57:23

(Plot F5: GPRS 850MHz Channel = 251)

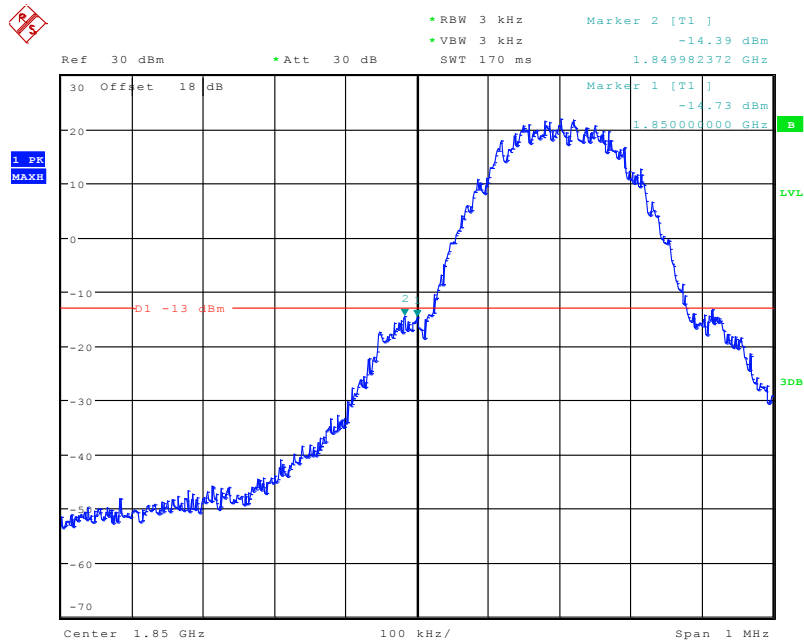


Date: 21.MAR.2011 11:58:24

(Plot G5: GPRS 1900MHz Channel = 512)

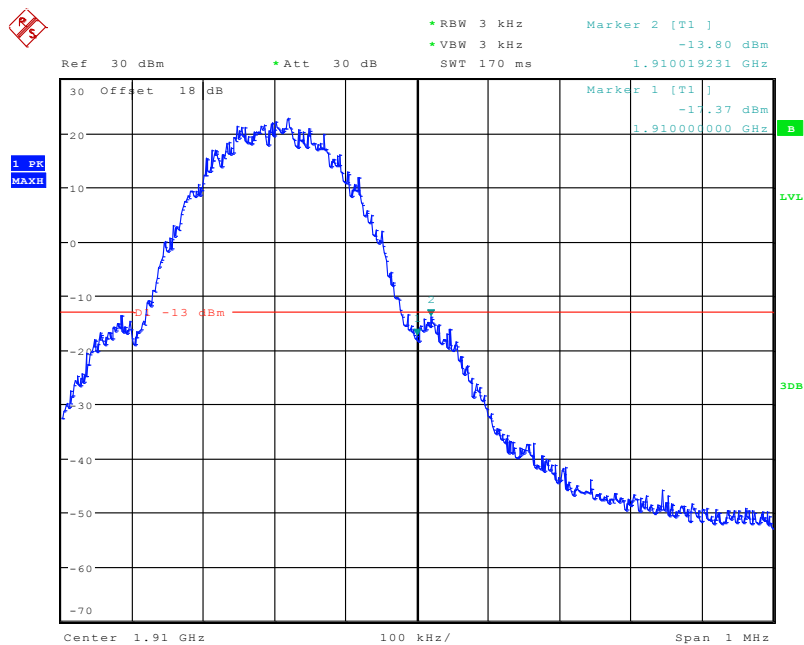


Date: 21.MAR.2011 11:59:04

(Plot H5: GPRS 1900MHz Channel = 810)

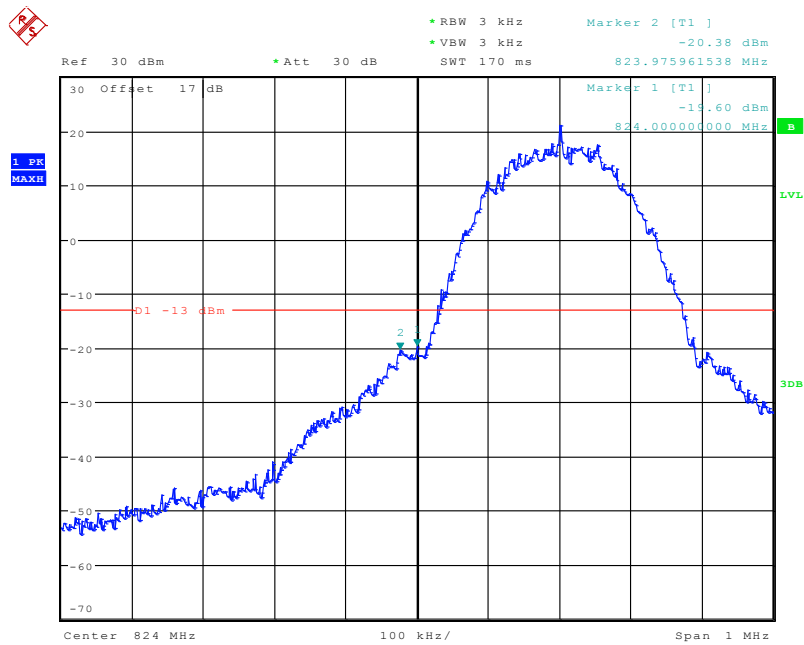


Date: 21.MAR.2011 14:26:55

(Plot I5: EGPRS 850MHz Channel = 128)

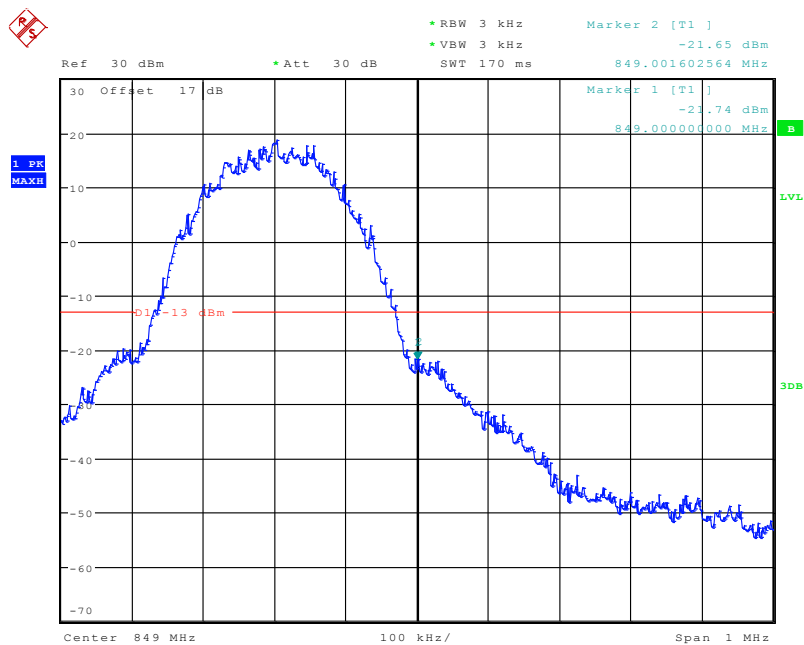


Date: 21.MAR.2011 14:27:47

(Plot J5: EGPRS 850MHz Channel = 251)

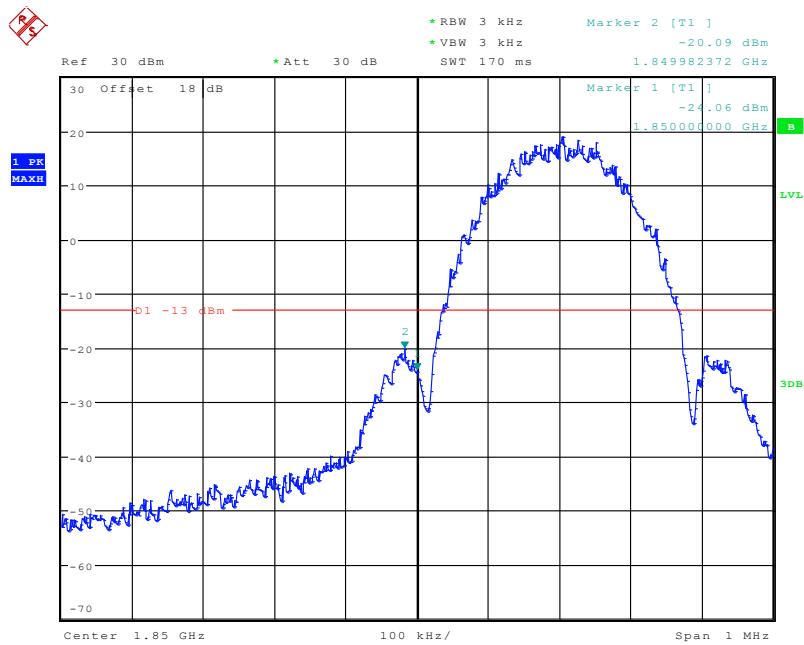

Date: 21.MAR.2011 14:30:14

(Plot K5: EGPRS 1900MHz Channel = 512)

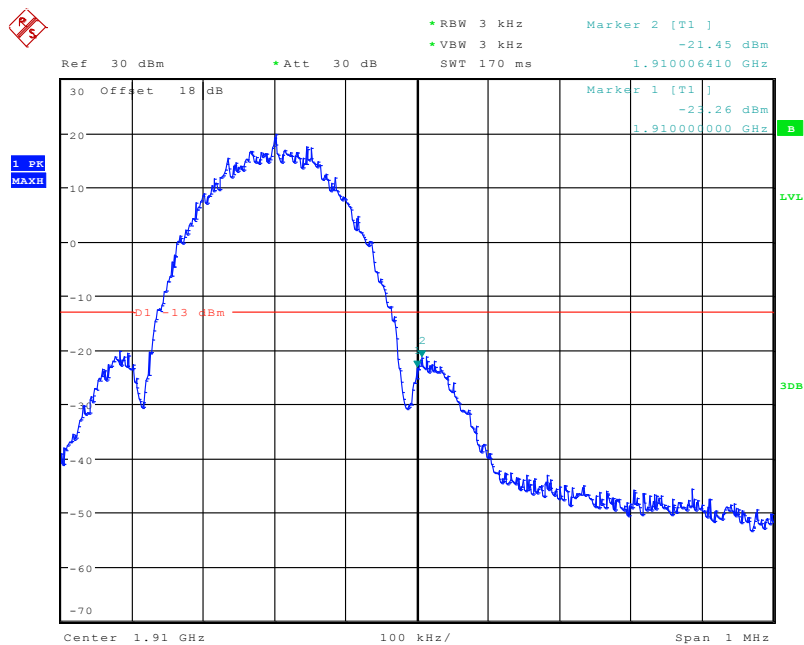

Date: 21.MAR.2011 14:31:34

(Plot L5: EGPRS 1900MHz Channel = 810)


3.7 Transmitter Radiated Power (EIRP/ERP)


3.7.1 Requirement

According to FCC section 22.913, the Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7Watts, and FCC section 24.232, the broadband PCS mobile station is limited to 2Watts e.i.r.p. peak power.

3.7.2 Test Procedure

1. Test Setup:

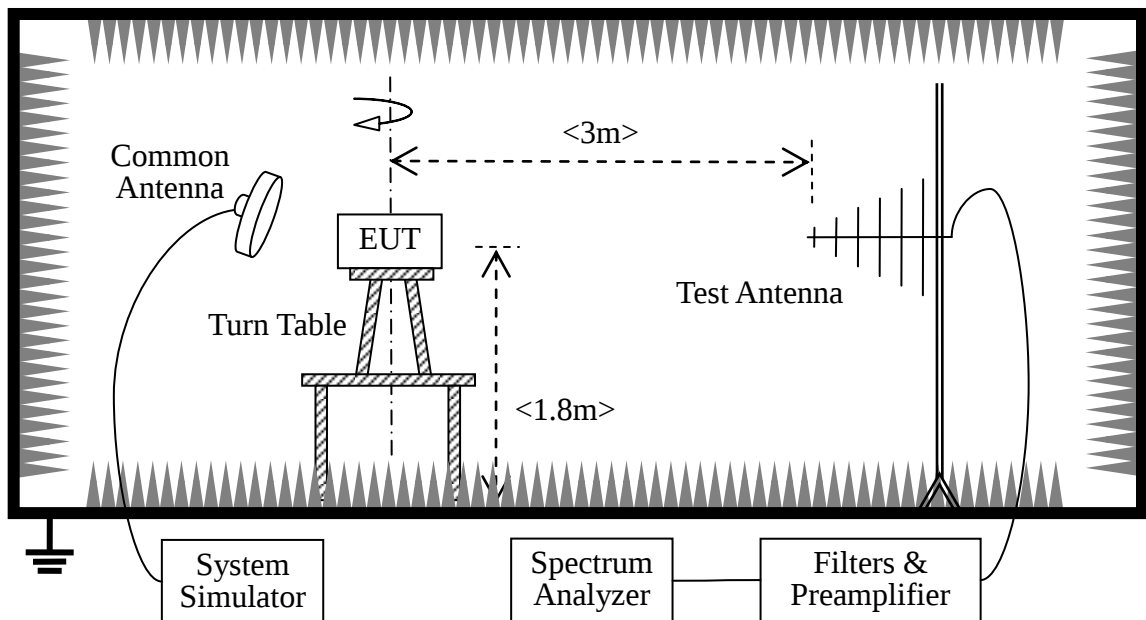

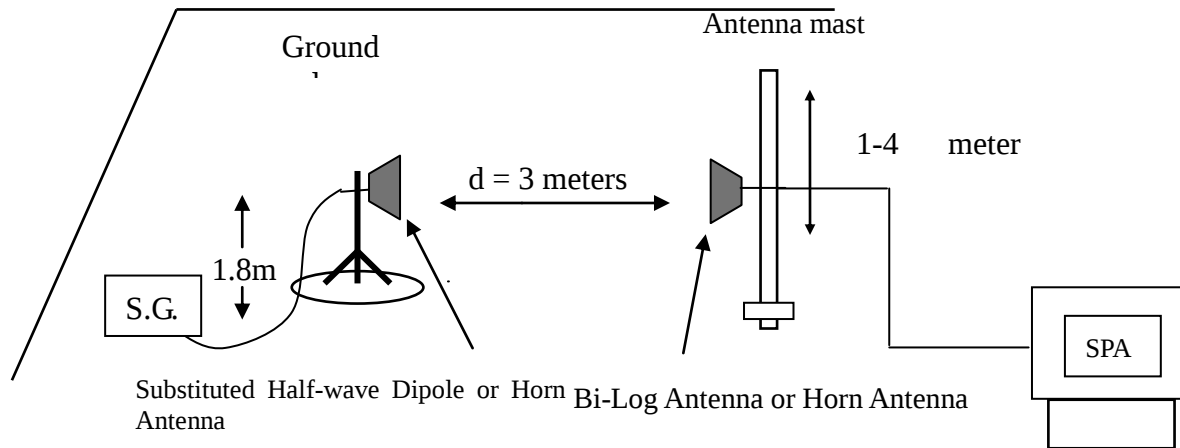

The measurements procedures in TIA-603C-2004 are used.

1. EUT was placed on a 1.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.8m. Detected emissions were maximized at each frequency by rotating the EUT through 360 ° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (P_r).
3. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
4. The cable loss (P_{cl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test. The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} + P_{cl} + G_a$$
5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
SS	Agilent	E5515C	GB46040102	2010.9	1year
Spectrum Analyzer	Agilent	E4440A	MY46187763	2010.9	1year
Spectrum Analyzer	R&S	FSP30	101020	2010.9	1year
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2009.10	2year
Test Antenna - Bi-Log	Rohde&Schwarz	HL562	100385	2010.9	1year
Test Antenna - Horn	Rohde&Schwarz	HF906	100565	2010.9	1year

3.7.3 Test Result

The Turn Table is actuated to turn from 0 ° to 360 °, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested. All modes are tested, including (GSM850 GPRS850 EDGE850 and PCS1900 GPRS1900 EDGE1900).

Limits:

	Burst Peak ERP (dBm)
GSM850	≤38.5dBm (7W)
GPRS850	≤38.5dBm (7W)
EGPRS850	≤38.5dBm (7W)

Measurement result

GSM850

Channel	Peak ERP (dBm)	P _{cl} Cable Loss (dB)	G _a Antenna Gain(dB)	Correction (dBm)	P _{Mea} (dBm)	Polarization
128	28.14	10.01	5.05	2.15	15.23	Horizontal
190	28.37	10.03	5.07	2.15	15.42	Horizontal
251	28.54	10.05	5.11	2.15	15.53	Horizontal
128	27.17	10.01	5.05	2.15	14.26	Vertical
190	27.32	10.03	5.07	2.15	14.37	Vertical
251	27.47	10.05	5.11	2.15	14.46	Vertical

GPRS850

Channel	Peak ERP (dBm)	P _{cl} Cable Loss (dB)	G _a Antenna Gain(dB)	Correction (dBm)	P _{Mea} (dBm)	Polarization
---------	----------------	---------------------------------	---------------------------------	------------------	------------------------	--------------

128	27.98	10.01	5.05	2.15	15.07	Horizontal
190	28.20	10.03	5.07	2.15	15.25	Horizontal
251	28.31	10.05	5.11	2.15	15.30	Horizontal
128	27.07	10.01	5.05	2.15	14.16	Vertical
190	27.23	10.03	5.07	2.15	14.28	Vertical
251	27.35	10.05	5.11	2.15	14.34	Vertical

EGPRS850

Channel	Peak ERP (dBm)	P _{cl} Cable Loss (dB)	G _a Antenna Gain(dB)	Correction (dBm)	P _{Mea} (dBm)	Polarization
4132	19.21	10.01	5.05	2.15	6.30	Horizontal
4183	19.33	10.03	5.07	2.15	6.38	Horizontal
4233	19.54	10.05	5.11	2.15	6.53	Horizontal
4132	18.05	10.01	5.05	2.15	5.14	Vertical
4183	18.17	10.03	5.07	2.15	5.22	Vertical
4233	18.25	10.05	5.11	2.15	5.24	Vertical

Remark:

$$\text{ERP(dBm)} = P_{\text{Mea}} + P_{\text{cl}} + G_a - 2.15$$

Limits:

	Burst Peak EIRP (dBm)
GSM1900	≤33dBm (2W)
GPRS1900	≤33dBm (2W)
EGPRS1900	≤33dBm (2W)

Measurement result

GSM1900

Channel	Peak ERP (dBm)	P _{cl} Cable Loss (dB)	G _a Antenna Gain(dB)	P _{Mea} (dBm)	Polarization
512	25.33	12.05	5.52	7.76	Horizontal
661	25.51	12.08	5.64	7.79	Horizontal
810	25.63	12.11	5.61	7.91	Horizontal
512	24.01	12.05	5.52	6.44	Vertical

661	24.23	12.08	5.64	6.51	Vertical
810	24.34	12.11	5.61	6.62	Vertical

GPRS1900

Channel	Peak ERP (dBm)	P _{cl} Cable Loss (dB)	G _a Antenna Gain(dB)	P _{Mea} (dBm)	Polarization
512	25.18	12.05	5.52	7.61	Horizontal
661	25.20	12.08	5.64	7.48	Horizontal
810	25.41	12.11	5.61	7.69	Horizontal
512	23.54	12.05	5.52	5.97	Vertical
661	23.78	12.08	5.64	6.06	Vertical
810	23.97	12.11	5.61	6.25	Vertical

EGPRS1900

Channel	Peak ERP (dBm)	P _{cl} Cable Loss (dB)	G _a Antenna Gain(dB)	P _{Mea} (dBm)	Polarization
4132	16.54	12.05	5.05	-1.03	Horizontal
4183	16.67	12.08	5.07	-1.05	Horizontal
4233	16.88	12.11	5.11	-0.84	Horizontal
4132	16.15	12.05	5.05	-1.42	Vertical
4183	16.24	12.08	5.07	-1.48	Vertical
4233	16.51	12.11	5.11	-1.21	Vertical

Remark:

$$\text{EIRP(dBm)} = P_{\text{Mea}} + P_{\text{cl}} + G_a$$

3.8 Radiated Out of Band Emissions

3.8.1 Requirement

According to FCC section 22.917(a) and section 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm.

3.8.2 Test Description

See section 3.7.2 of this report.

3.8.3 Test Procedure

1. Perform test system setup as section 2.4.2
2. Make a limit line whose value is -13dBm on the Spectrum Analyzer, and set the RBW of the Spectrum Analyzer to 1MHz.
3. The lowest and the highest channel were selected to perform tests respectively.
4. Employ the bi-log Test Antenna as the test system receiving antenna and set the frequency range of the Spectrum Analyzer from 30MHz to 3GHz.
5. The measurement is performed with the Test Antenna at both horizontal and vertical polarization respectively. Set the polarization of the Test Antenna to be horizontal.
6. Actuate the Turn Table to turn from 0 degrees to 360 degrees to find the maximum reading via the Spectrum Analyzer, mark the fundamental frequency and the harmonics thereof, after then record the harmonics and the plot.
7. Set the polarization of the Test Antenna to be vertical, then repeat step 6.
8. Employ the horn Test Antenna as the test system receiving antenna and set the frequency range of the Spectrum Analyzer from 3GHz to 10th harmonic of the fundamental frequency (here used 10GHz), then repeat step 5 to 7.
9. Set the frequency range of the Spectrum Analyzer suitably to capture the waveform; search peak and mark it; finally record the peak and the plot.

3.8.4 Test Result

Table for the Harmonics

NOTE: “---” in the table following means that the emission power was too small to be measured and was at least 12dB below the limit. All modes are tested, including (GSM850 GPRS850 EGPRS850 and PCS1900 GPRS1900 EGPRS1900).

I GSM 850MHz

No.	Frequency (MHz)	Emission Power (dBm)		Limit (dBm)
		Test Antenna Vertical	Test Antenna Horizontal	
TCH number set to 190 (836.6MHz)				
1	59.949	---	-86.383	-13
2	150.280	---	-88.980	-13
3	240.005	-72.135	---	-13
4	1672.875	-41.688	-47.106	-13
5	2509.313	---	-41.139	-13
6	2510.063	-45.546	---	-13
7	3346.500	---	-50.787	-13
8	5018.625	-51.945	-51.154	-13

II GSM 1900MHz

No.	Frequency (MHz)	Emission Power (dBm)		Limit (dBm)
		Test Antenna Vertical	Test Antenna Horizontal	
TCH number set to 661 (1880.2MHz)				
1	95.960	---	-89.972	-13
2	105.054	-73.441	---	-13
3	240.005	-78.601	---	-13
4	3757.500	---	-50.288	-13
5	3759.375	-50.041	---	-13
6	7518.750	---	-43.379	-13
7	7520.625	-47.470	---	-13
8	9399.375	-52.749	---	-13
9	11280.000	---	-50.718	-13

III GPRS 850MHz

No.	Frequency (MHz)	Emission Power (dBm)		Limit (dBm)
		Test Antenna Vertical	Test Antenna Horizontal	
TCH number set to 190 (836.6MHz)				
1	51.946	-85.591	---	-13
2	115.360	---	-83.697	-13
3	239.884	-80.982	---	-13
4	1672.875	-41.095	-42.126	-13
5	2509.688	-44.312	-41.603	-13
6	3345.625	---	-50.759	-13
7	5019.500	-44.312	-48.201	-13
8	8367.250	---	-44.835	-13

IV GPRS 1900MHz

No.	Frequency (MHz)	Emission Power (dBm)		Limit (dBm)
		Test Antenna Vertical	Test Antenna Horizontal	
TCH number set to 661 (1880.2MHz)				
1	155.373	---	-84.537	-13
2	217.938	---	-86.939	-13
3	240.005	-81.864	---	-13
4	624.004	-71.964	---	-13
5	3759.375	-40.384	---	-13
6	5638.125	---	51.594	-13
7	7518.750	-47.553	-39.793	-13
8	8058.750	---	-52.742	-13
9	9399.375	-49.732	---	-13
10	11280.000	-47.864	---	-13

V EGPRS 850MHz

No.	Frequency (MHz)	Emission Power (dBm)		Limit (dBm)
		Test Antenna Vertical	Test Antenna Horizontal	
TCH number set to 190 (836.6MHz)				
1	44.793	-70.283	---	-13
2	95.718	---	-88.528	-13
3	149.916	---	-92.113	-13
4	240.005	-78.157	---	-13
5	1673.063	-45.489	-52.556	-13


No.	Frequency (MHz)	Emission Power (dBm)		Limit (dBm)
		Test Antenna Vertical	Test Antenna Horizontal	
6	2509.688	-45.851	-45.722	-13
7	4183.000	---	-51.615	-13

VI EGPRS 1900MHz

No.	Frequency (MHz)	Emission Power (dBm)		Limit (dBm)
		Test Antenna Vertical	Test Antenna Horizontal	
TCH number set to 661 (1880.2MHz)				
1	59.949	---	-84.632	-13
2	105.296	-74.476	---	-13
3	121.786	---	-81.528	-13
4	158.040	---	-82.782	-13
5	624.004	-71.791	----	-13
6	3759.375	---	-51.354	-13


1. Test Plot

MORLAB-RSE-FCC-GSM 850 30M-18G

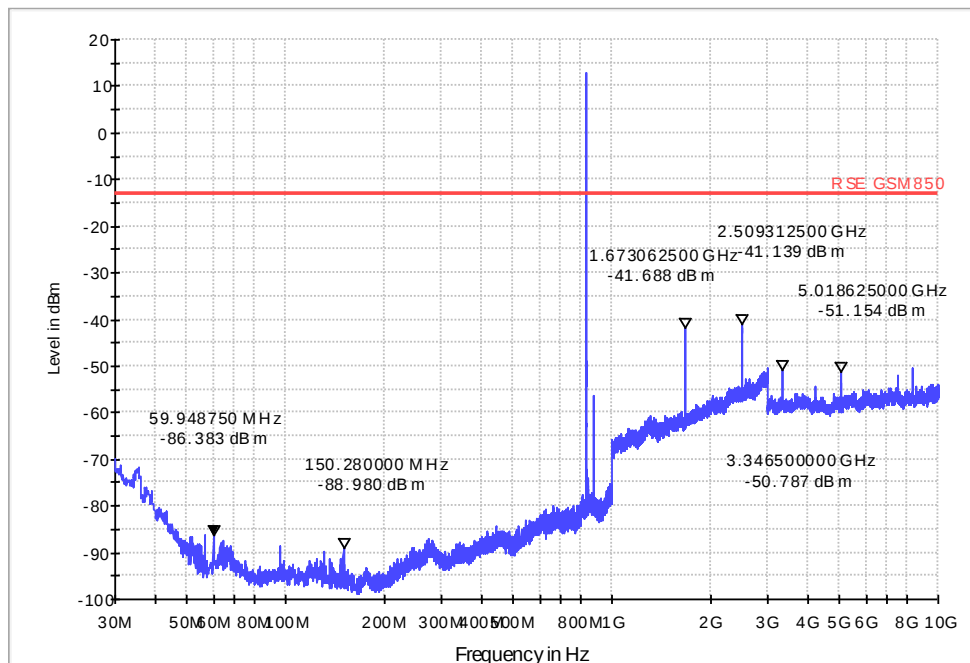


GSM850 CH190-H 30MHz-10GHz

MORLAB-RSE-FCC-GSM 850 30M-18G

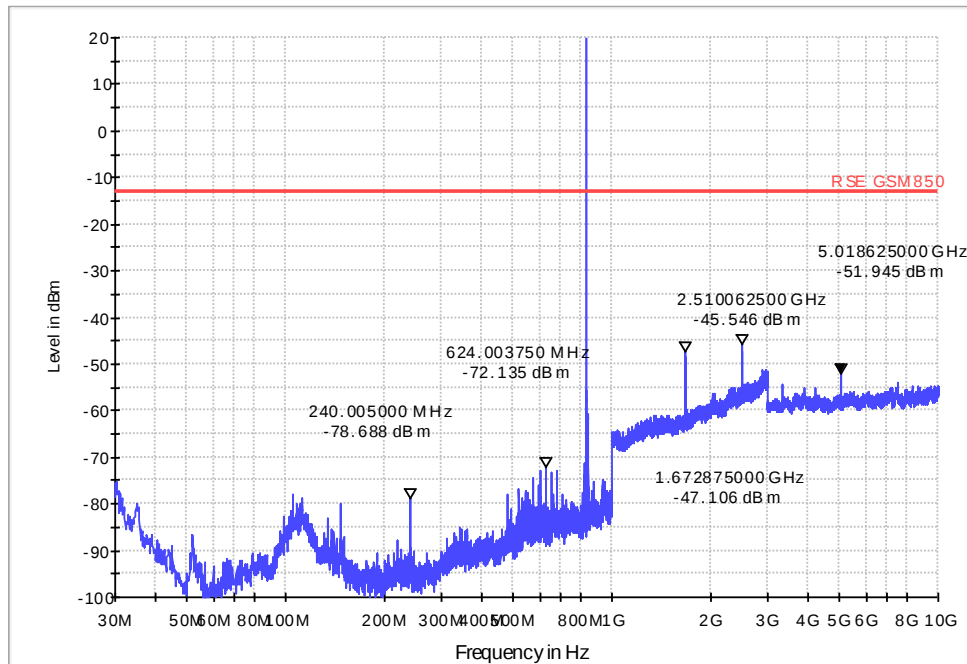


GSM850 CH190-V 30MHz-10GHz


MORLAB-RSE-FCC-GSM1900 30M-20G

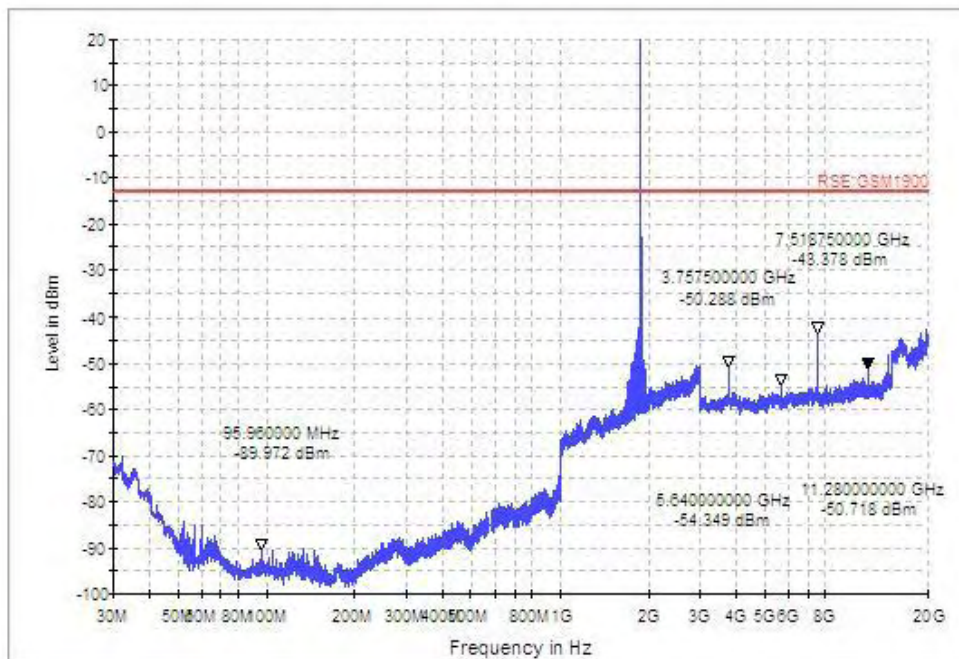

GSM1900 CH661-H 30MHz-20GHz

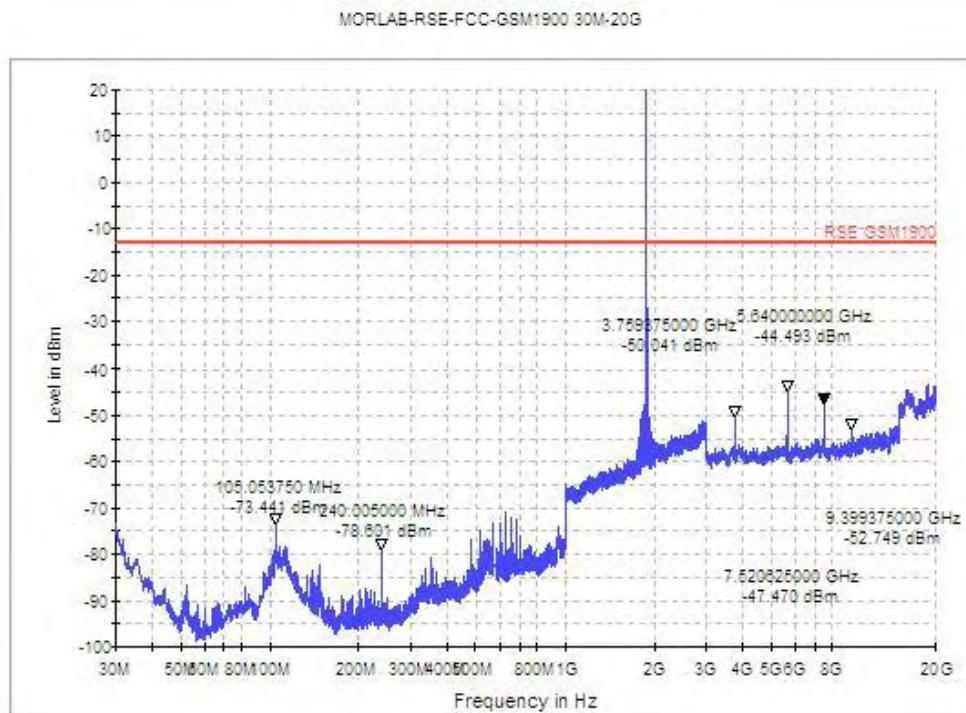


GSM1900 CH661-V 30MHz-20GHz

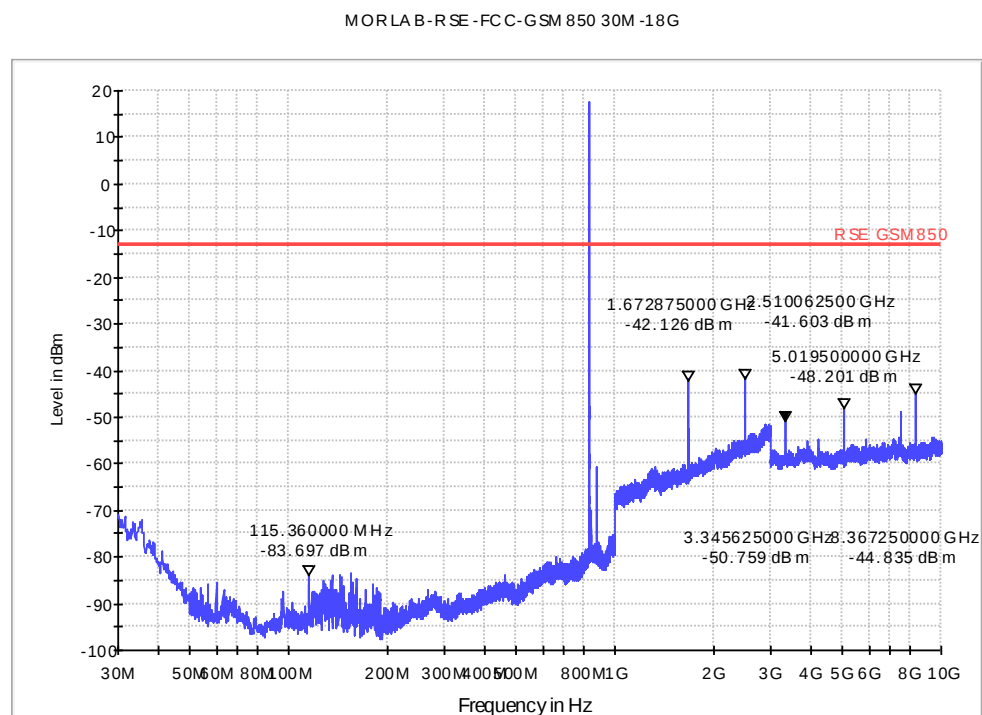


GPRS850 CH190-H 30MHz-10GHz

MORLAB-RSE-FCC-GSM 850 30M-18G

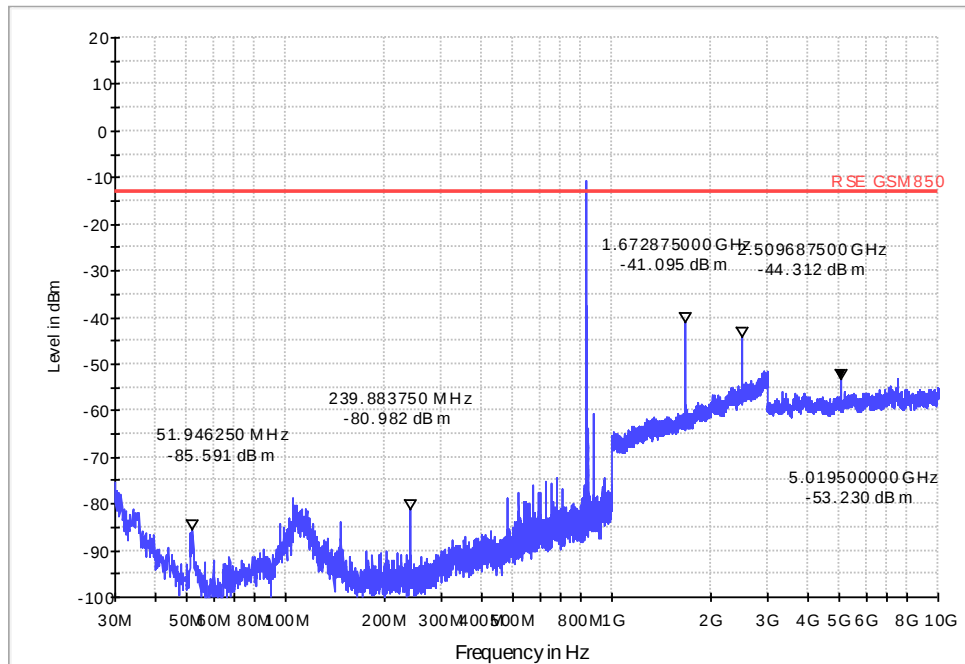


GPRS850 CH190-V 30MHz-10GHz


MORLAB-RSE-FCC-GSM1900 30M-20G

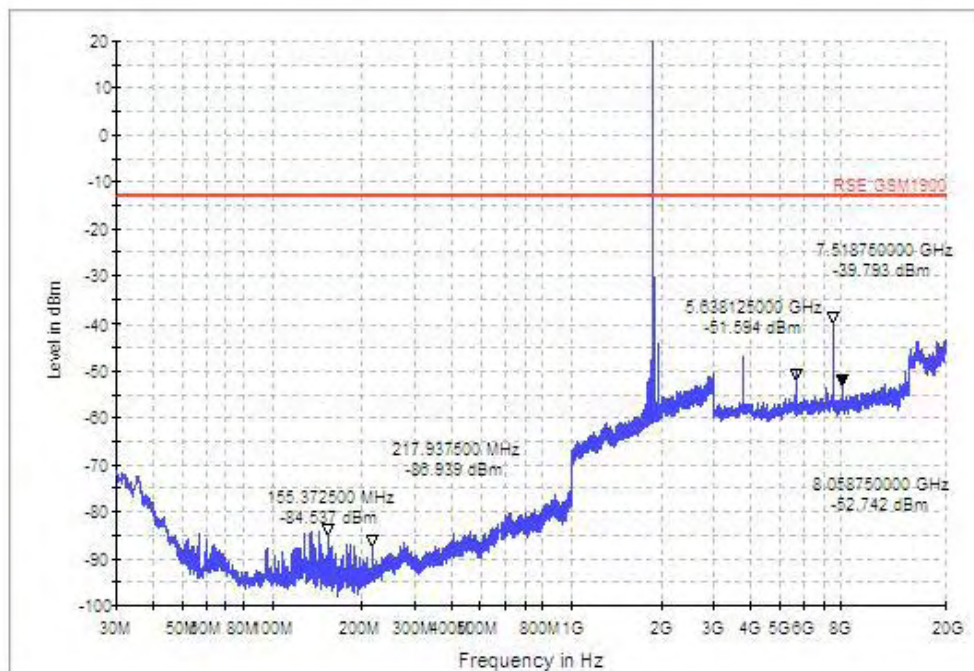

GPRS1900 CH661-H 30MHz-20GHz

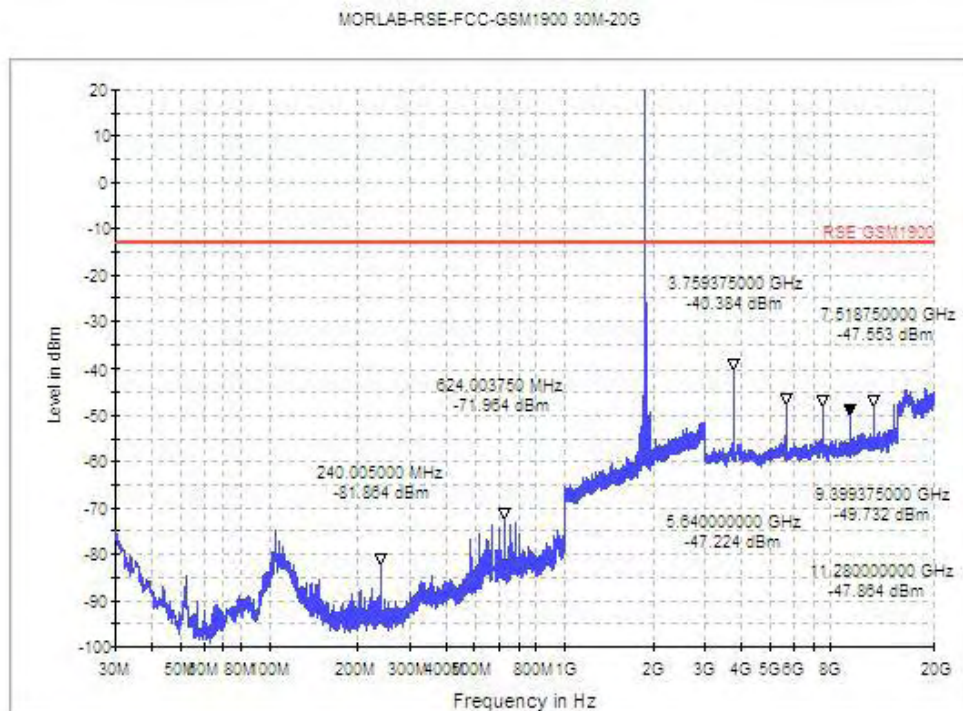


GPRS1900 CH661-V 30MHz-20GHz

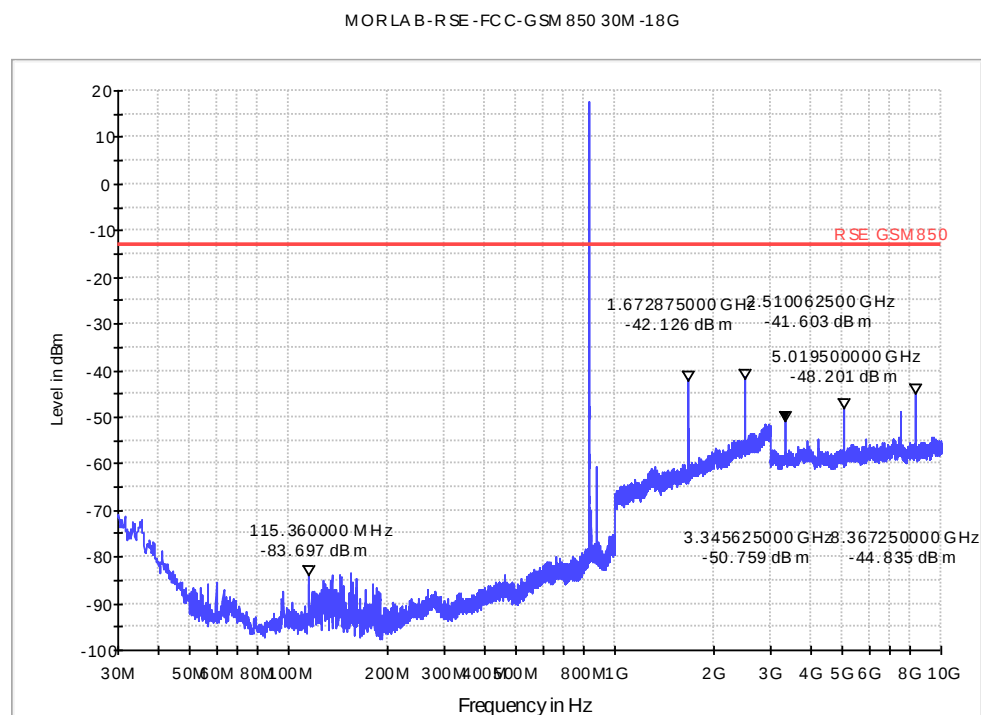


EGPRS850 CH190-H 30MHz-10GHz

MORLAB-RSE-FCC-GSM 850 30M-18G

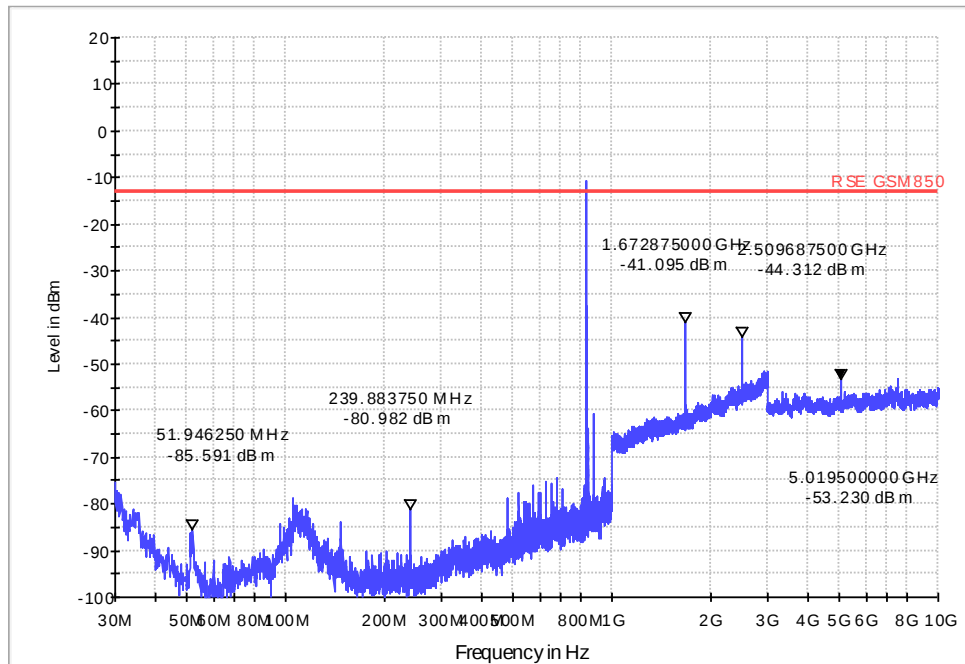


EGPRS850 CH190-V 30MHz-10GHz

MORLAB-RSE-FCC-GSM1900 30M-20G

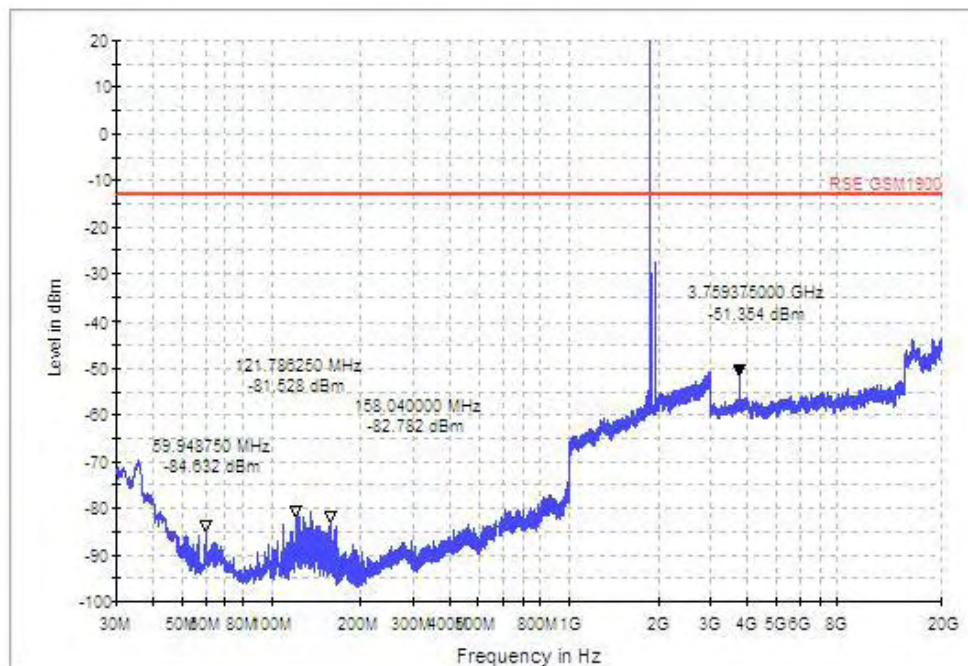

EGPRS1900 CH661-H 30MHz-20GHz

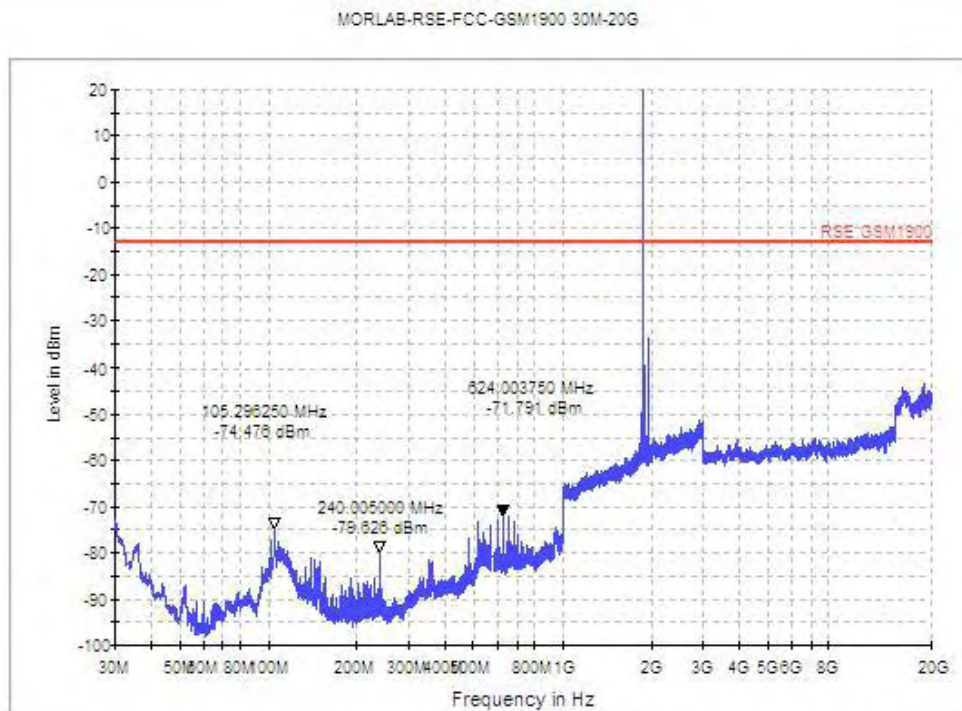

EGPRS1900 CH661-V 30MHz-20GHz

**** END OF REPORT ****