

***MEASUREMENT REPORT  
of  
PDA with WiFi and Bluetooth capabilities***

**Applicant : PalmOne, Inc.**

**EUT : PDA**

**Model : LifeDrive**

**FCC ID : O3W830**

**Tested by :**

***Training Research Co., Ltd.***

**TEL : 886-2-26935155      FAX : 886-2-26934440**

No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

# CERTIFICATION

**We here by verify that:**

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (2003) as a reference. All test were conducted by **Training Research Co., Ltd.**, 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart B (Declaration of Conformity) and C Section 15.247.

**Applicant** : PalmOne, Inc.

**Applicant address** : 400 N. McCarthy Blvd. Milpitas, CA 95035

**Product Name** : LifeDrive

**Model Name** : LifeDrive

**FCC ID** : O3W830

**Report No.** : I2215050059

**Test Date** : January 21, 2005

Prepared by:



Jack Tsai

Approved by:



Frank Tsai

**Conditions of issue :**

- (1) This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.
- (2) This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.
- (3) This test report, measurements made by TRC are traceable to the NIST only Conducted and Radiated Method.

★ NVLAP LAB CODE: 200174-0

# ***Federal Communications Commission***

## **Declaration of Conformity (DoC)**

*for the following equipment:*

**Product name** : LifeDrive

**Model name** : LifeDrive

**Trade name** : PalmOne

Is herewith confirmed and found to comply with the requirements of CFR 47 part15 Subpart B - Unintentional Radiators regulation. The results of electromagnetic mission evaluation are shown in the report number : I2215050059

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received,  
including interference that may cause undesired operation

<i><b>Manufacturer</b></i>	<i><b>USA local representative</b></i>
<b>Company name:</b> Inventec Appliances Corp.	To be determined
<b>Computer address:</b> 37, Wugung 5 <sup>th</sup> Rd., Wugu Shiang, Taipei, Taiwan	
<b>ZIP / Postal code:</b> 248	
<b>Contact person:</b> Sam Hsiao	
<b>Title:</b> Senior Engineer	
<b>Internet e-mail address:</b> hsiao.sam@iac.com.tw	
<b>Tel / Fax:</b> 886-2-22999329 / 886-2-22994163	

## Tables of Contents

<b>I. GENERAL .....</b>	6
1.1 Introduction .....	6
1.2 Description of EUT .....	6
1.3 Test method .....	7
1.4 Description of Support Equipment .....	8
1.5 Configuration of System Under Test .....	10
1.6 Verify the Frequency and Channel .....	12
1.7 Test Procedure .....	13
1.8 Location of the Test Site .....	13
1.9 General Test Condition .....	13
<b>II. Section 15.101(a) : Equipment Authorization of Unintentional Radiators .....</b>	14
<b>III. Section 15.203 : Antenna Requirement.....</b>	15
<b>IV. Section 15.207 : Power Line Conducted Emissions for AC Powered Units .....</b>	16
4.1 Test Condition & Setup .....	16
4.2 List of Test Instruments .....	17
4.3 Test Result of Conducted Emissions .....	18
Adapter#1: DSC-51F 52100	
Standby .....	18
IEEE 802.11b Channel 01 .....	19
IEEE 802.11b Channel 06 .....	19
IEEE 802.11b Channel 11 .....	20
Adapter#2: SCP0501000P	
Standby .....	20
IEEE 802.11b Channel 01 .....	21
IEEE 802.11b Channel 06 .....	21
IEEE 802.11b Channel 11 .....	22
<b>V. Section 15.247(a) : Technical Description of the EUT .....</b>	23

<b>VI. Section 15.247(a)(2) : Bandwidth for Direct Sequence System</b>	24
6.1 Test Condition & Setup	24
6.2 Test Instruments Configuration	24
6.3 List of Test Instruments	24
6.4 Test Result of Bandwidth	24
Channel 01	25
Channel 06	26
Channel 11	27
<b>VII. Section 15.247(b) : Power Output</b>	28
7.1 Test Condition & Setup	28
7.2 List of Test Instruments	28
7.3 Test Result	28
<b>VIII. Section 15.247(c) : Spurious Emissions (Radiated)</b>	29
8.1 Test Condition & Setup	29
8.2 List of Test Instruments	31
8.3 Test Result of Spurious Radiated Emissions	32
RX mode	32
IEEE 802.11b Channel 01	34
IEEE 802.11b Channel 06	36
IEEE 802.11b Channel 11	38
8.4 Test Result of Bandedge	40
IEEE 802.11b Channel 01	41
IEEE 802.11b Channel 11	42
<b>IX. Section 15.247(d) : Power Spectral Density</b>	43
9.1 Test Condition & Setup	43
9.2 Test Instruments Configuration	43
9.3 List of Test Instruments	43
9.4 Test Result of Power Spectral Density	43
Channel 01	44
Channel 06	45
Channel 11	46

## I . GENERAL

### 1.1 Introduction

The following measurement report is submitted on behalf of applicant in support that the certification in accordance with Part 2 Subpart J and Part 15 Subpart A, B and C of the Commission's Rules and Regulations.

### 1.2 Description of EUT

**FCC ID** : O3W830

**Product Name** : LifeDrive

**Model Name** : LifeDrive

**Frequency Range** : 2412MHz to 2462MHz

**Support Channel** : 11 Channels

**Channel Spacing** : 5 MHz

**Modulation Skill** : DBPSK / DQPSK / CCK

**Power Type** : (1) Rechargeable Battery  
or (2) Power adapter  
Mfg.: NetBit  
Model: DSC-51F 52100  
I/P: 100-240VAC, 50-60Hz, 0.2A 20VA  
O/P: 5.2VDC, 1.0A  
Power cable 175cm length, non-shielded, with ferrite core  
or (3) Power adapter  
Mfg.: Palm  
Model: SCP0501000P  
I/P: 100-240VAC, 50-60Hz, 300mA ; O/P: 5VDC, 1000mA  
Power cable 180cm length, non-shielded, with ferrite core

**Data Cable** : USB cable, 182cm length, shielded, with ferrite core

### 1.3 Test method

#### **PDA connected PC:**

- (1) Connected PDA to the USB interface of PC.
- (2) The power port of USB cable is connected with the AC power source via a power adaptor.
- (3) The headphone jack of PDA body is connected with the earphone.

#### **PDA only (EUT Stand on three orthogonal planes respectively, record worst-case in report):**

- (4) The USB jack of PDA body is connected with the USB cable un-termination.
- (5) The power port of USB cable is connected with the AC power source via a power adaptor.
- (6) The headphone jack of PDA body is connected with the earphone.
- (7) The PDA software of applicant is operated under the Palm OS, and making EUT to the linking mode with support equipments (another PDA) in the unintentional test.
- (8) Set different channel (CH1/CH6/CH11) being tested and repeat the procedures above.
  - (a) Radiated for intentional test:  
making EUT to the mode of continuous TX or RX
  - (b) Conducted and radiated for unintentional test:  
making EUT to the linking mode with another PDA.

## 1.4 Description of Support Equipment

In order to construct the minimum testing, following equipment were used as the support units.

**PC** : **IBM 8434**

Model No. : IVG

Serial No. : 99CCZG9

FCC ID : DoC (Declaration of Confirmation) Approved

BSMI : R33026

Power type : 100 ~ 127VAC/200 ~ 240VAC, 6A/3A, 50 ~ 60Hz, Switching

Power cord : Non-shielded, 1.8m length, Plastic hood, No ferrite core

**Monitor** : **HP 15' Color Monitor**

Model No. : D2827A

Serial No. : KR91161719

FCC ID : C5F7NFCMC1518X

BSMI : 3872B039

Power type : 100 ~ 240 VAC / 50 ~ 60 Hz, Switching

Power cord : Shielded, 1.83m long, No ferrite core

Data cable : Shielded, 1.46m long, with two ferrite cores

**PS2 Keyboard:** **IBM**

Model No. : KB-0225

Serial No. : 0110406

FCC ID : DoC Approved

BSMI : R31310

Power type : By PC

Data cable : Shielded, 2.17m length, Plastic hood, No ferrite core

**Mouse** : **HP**

Model No. : M-UR89

Serial No. : LZS21750238

FCC ID : DoC Approved

BSMI : 3892D767

Power type : By PC

Power cord : Shielded, 1.80m length, No ferrite core

**USB**

**Gamepad** : **Rockfire**  
Model No. : QF-337uv  
Serial No. : 10600545  
FCC ID : None (CE approval)  
BSMI : 3862A574  
Power type : By PC  
Data Cable : Shielded, 1.81m long, Plastic, with ferrite core

**Fax/Modem** : **Aceex**

Model No. : DM-1414  
Serial No. : 9010583  
FCC ID : IFAXDM1414  
Power type : 100 VAC / 50 ~ 60 Hz, Switching  
Power Cord : Non-shielded, 1.90m length, Plastic hoods, No ferrite bead  
Data Cable : RS-232→Shielded, 1.30m length, Metal hoods, No bead  
RJ-11Cx2→Non-shielded, 7' long, Plastic hoods, No bead

**Printer** : **EPSON STYLUS C63.**


Model No. : B241A  
Serial No. : FAPY155090  
FCC ID : DoC  
BSMI : R33126  
Power type : Switching, Non-shielded, 198cm length, No ferrite core  
Data Cable : Shielded, 150cm length, Plastic hood, No ferrite core

**Earphone** : **God Information Technology Co., Ltd.**

Model No. : MIC-A01  
Serial No. : GIT-2001A001  
FCC ID : None (CE approval)  
Power type : By PDA  
Data Cable : Non-Shielded, 1.34m length, no ferrite core

## 1.5 Configuration of System Under Test

### 1.5.1 Conducted and Radiated of Unintentional

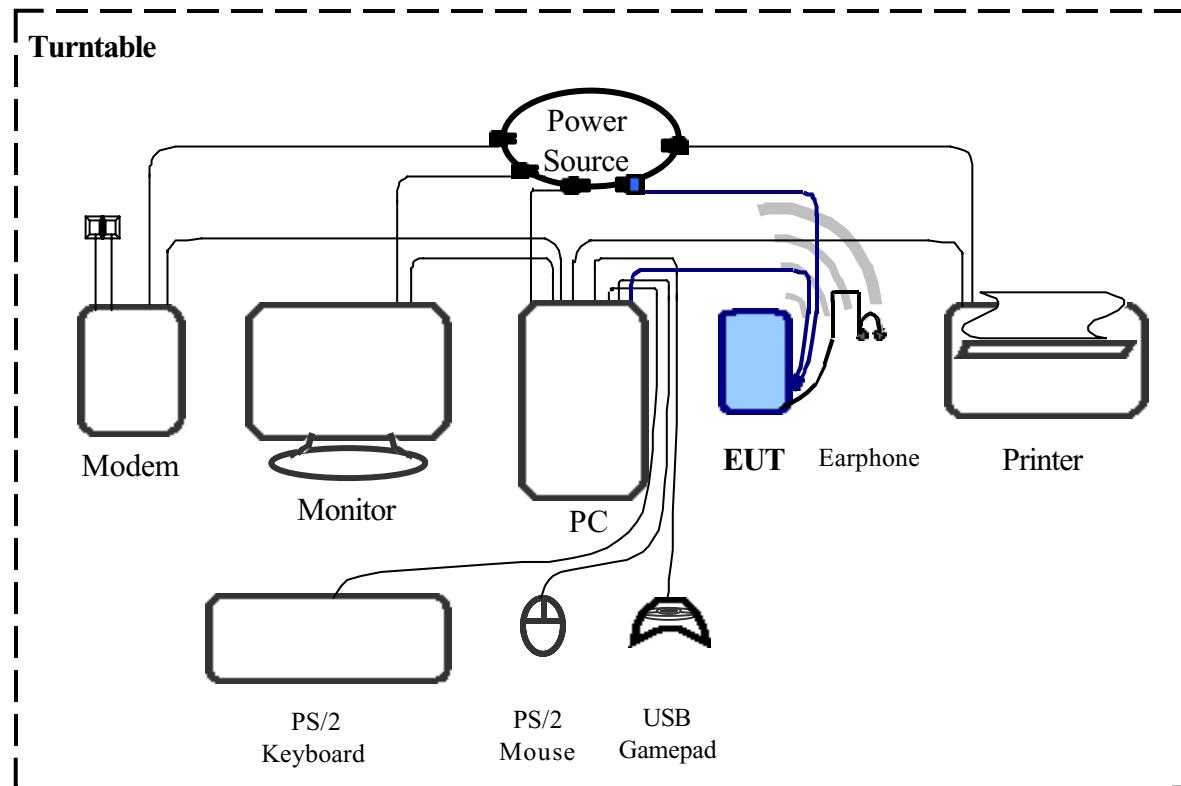

## Connections of Equipment

PC: \*VGA Port --- a monitor

\*Serial A-Port --- an external modem


\*Parallel Port --- a printer

\*PS/2 Ports --- a PS/2 key

\*USB A-Port --- a USB gamepad

## \*USB B-Port --- EUT

### 1.5.2 Radiated of Intentional

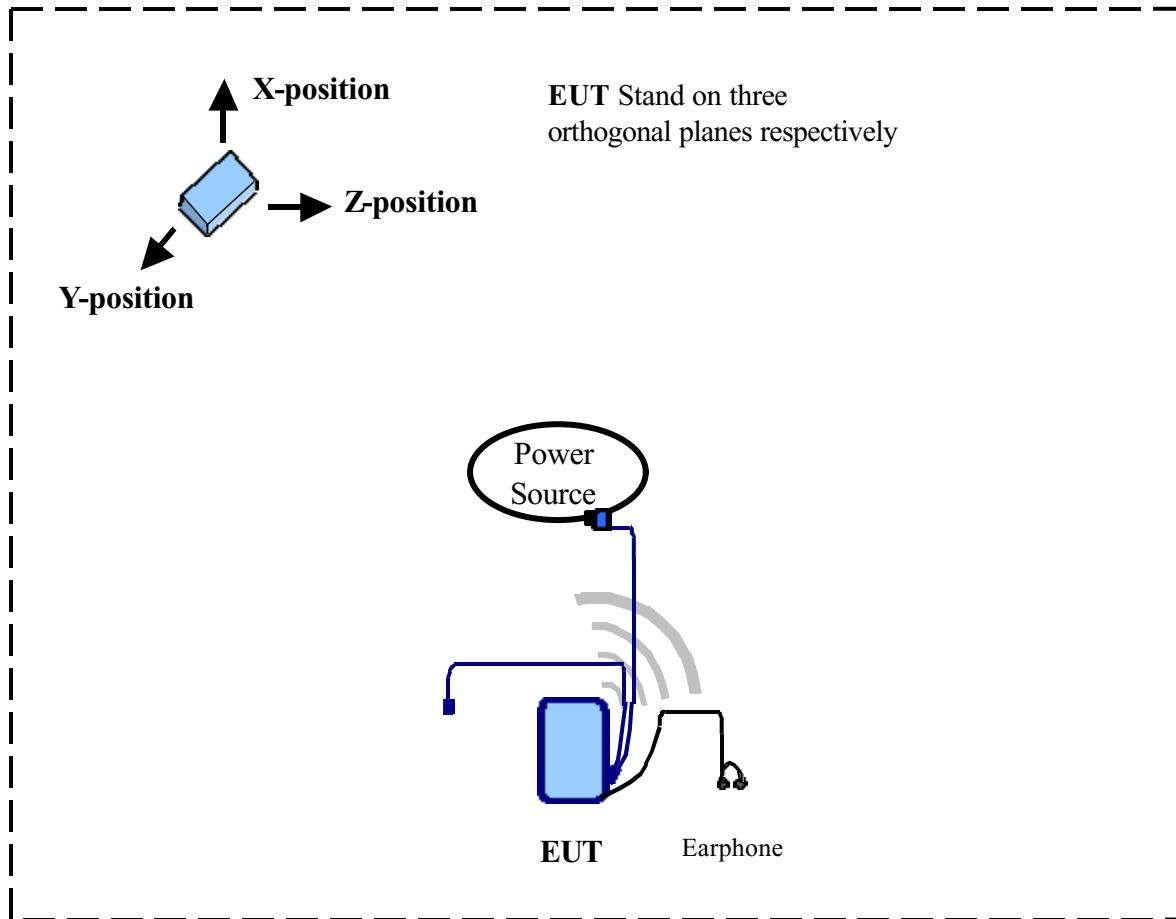

### Connections of Equipment

#### EUT:

USB Cable \*USB cable x 1 --- 124cm length, shielded, with ferrite core

Switching Adaptor \*Power cable x 1 --- 175/180cm length, non-shielded, with ferrite core

Earphone: \*Data cable x 1 --- 182cm length, non-shielded, no ferrite core

## 1.6 Verify the Frequency and Channel

Channel	Frequency (GHz)
1	2.412
2	2.417
3	2.422
4	2.427
5	2.432
6	2.437
7	2.442
8	2.447
9	2.452
10	2.457
11	2.462

Note:

1. This is for confirming that all frequencies are in 2.412GHz to 2.462GHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz  
(The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 2.412GHz to 2.462GHz. So all the items as followed in testing report are need to test these three frequencies:  
Top: Channel – 1; Middle: Channel – 6; Bottom: Channel – 11.

### **1.7 Test Procedure**

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (2003) and the pre-setup was written on 1.3 test method, the detail setup was written on each test item.

### **1.8 Location of the Test Site**

The radiated emissions measurements required by the rules were performed on the **three-meter, Anechoic Chamber (FCC Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a anechoic chamber also located at Training Research Co., Ltd.

No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

### **1.9 General Test Condition**

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

In test, they were set in high power and continuously transmitting mode that controlled by computer. The CH01, CH06 and CH11 of EUT were all tested. The setting up procedure is recorded on 1.3 test method.

## **II. Section 15.101(a): Equipment authorization of unintentional radiators**

The EUT equipped with a USB interface and should be operated with the computer. It was categorized to *Class B personal computers and peripherals* as cannot be operated stand-alone. The authorization requires **Declaration of Conformity (DoC)** and the items required such as Section 15.107 (Conducted limits) and Section 15.109 (Radiated emission limits) is same as Section 15.207 and 15.247(C).

### **III. Section 15.203: Antenna requirement**

The EUT is equipped with an integral antenna, it is permanently installed inside its case. The antenna cannot be removed or modified without any tools from outside in order to prevent the un-authorized modification. This makes that complies with the antenna requirement stated in Section 15.203 is inapplicable to this EUT.

## IV. Section 15.207: Power Line Conducted Emissions for AC Powered Units

### 4.1 Test Condition & Setup

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak and average detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150KHz to 30MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.3.

There is a test condition apply in this test item, the test procedure description as <1.3>. Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11).

## 4.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Calibration Date
EMI Receiver	8546A	HP	3520A00242	08/05/05
RF Filter Section	85460A	HP	3448A00217	08/05/05
LISN (EUT)	LISN-01	TRC	99-05	10/07/05
LISN (Support E.)	LISN-01	TRC	9912-03, 04	11/04/05
Pre-amplifier	15542 ZFL-500	Mini – Circuits	0 0117	05/20/05
6dB Attenuator	MCL BW-S6W2	Mini – Circuits	9915 – Conducted	05/20/05
10dB Attenuator	A5542 VAT010	Mini – Circuits	0215 – Conducted	05/20/05
Coaxial Cable (2 meter)	A30A30-0058-50FS-2M	Jyebao	SMA-08	05/20/05
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	Jyebao	SMA-09	05/20/05
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-01	05/20/05
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-02	05/20/05
Auto Switch Box (< 30MHz)	ASB-01	TRC	9904-01	05/20/05

### 4.3 Test Result of Power Line Conducted Emissions

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord. Show as follows.

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

*Test mode: Standby mode for DSC-51F 52100 Adapter*

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dB $\mu$ V)	QP (dB $\mu$ V)	Average (dB $\mu$ V)	QP-limit (dB $\mu$ V)	AVG-limit (dB $\mu$ V)	Margin (dB)
Line 1	530.070	50.47	48.27	33.93	56.00	46.00	-7.73
	593.395	48.89	47.65	32.45	56.00	46.00	-8.35
	669.290	52.82	49.36	35.05	56.00	46.00	-6.64
	797.250	48.92	47.05	31.96	56.00	46.00	-8.95
	7736.900	56.09	52.19	40.65	60.00	50.00	-7.81
	9136.090	59.03	53.82	43.44	60.00	50.00	-6.18
Line 2	455.735	50.84	49.85	37.28	57.37	47.37	-7.52
	532.680	53.01	50.84	37.70	56.00	46.00	-5.16
	589.775	53.55	51.87	38.77	56.00	46.00	-4.13
	723.055	53.27	50.43	38.09	56.00	46.00	-5.57
	7683.220	51.74	49.09	33.47	60.00	50.00	-6.91
	8959.280	58.82	55.39	45.04	60.00	50.00	-4.61

NOTE:

- (1)Margin = Peak Amplitude – Limit, *The reading amplitudes are all under limit.*
- (2)A "+" sign in the margin column means the emission is OVER the Class B Limit and "–" sign of means UNDER the Class B limit

## Test mode: IEEE 802.11b CH01 for DSC-51F 52100 Adapter

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	399.440	48.11	46.60	33.88	58.91	48.91	-12.31
	454.700	47.08	45.12	31.23	57.37	47.37	-12.25
	530.660	47.08	46.46	32.95	56.00	46.00	-9.54
	588.785	47.66	45.60	32.39	56.00	46.00	-10.40
	672.140	48.16	46.51	32.27	56.00	46.00	-9.49
	728.995	47.69	44.94	29.76	56.00	46.00	-11.06
Line 2	447.860	47.73	46.97	36.52	57.63	47.63	-10.66
	528.315	49.56	47.70	33.44	56.00	46.00	-8.30
	590.735	52.44	48.70	36.26	56.00	46.00	-7.30
	708.040	49.40	46.85	32.36	56.00	46.00	-9.15
	849.640	49.26	45.50	31.04	56.00	46.00	-10.50
	15959.240	53.12	47.66	37.86	60.00	50.00	-12.14

## Test mode: IEEE 802.11b CH06 for DSC-51F 52100 Adapter

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	391.000	45.52	---	---	59.11	49.11	-3.59
	515.520	48.78	46.21	35.04	56.00	46.00	-9.79
	637.785	46.30	44.53	33.45	56.00	46.00	-11.47
	690.295	45.56	42.93	31.97	56.00	46.00	-13.07
	8740.000	45.26	---	---	60.00	50.00	-4.74
	16559.540	49.73	45.44	35.38	60.00	50.00	-14.56
Line 2	381.095	46.54	44.71	35.94	59.51	49.51	-13.57
	514.580	52.09	50.00	37.86	56.00	46.00	-6.00
	633.795	48.27	46.83	36.10	56.00	46.00	-9.17
	679.765	49.61	46.64	32.80	56.00	46.00	-9.36
	1570.725	44.05	39.36	28.45	56.00	46.00	-16.64
	16552.170	52.21	47.80	37.38	60.00	50.00	-12.20

**Test mode: IEEE 802.11b CH11 for DSC-51F 52100 Adapter**

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	509.580	49.84	47.18	36.54	56.00	46.00	-8.82
	638.700	45.68	44.56	32.62	56.00	46.00	-11.44
	765.810	44.08	41.53	30.71	56.00	46.00	-14.47
	3741.000	40.28	---	---	56.00	46.00	-5.72
	7890.000	44.12	---	---	60.00	50.00	-5.88
	16331.310	49.50	45.75	35.57	60.00	50.00	-14.25
Line 2	382.175	47.20	44.63	36.32	59.51	49.51	-13.19
	512.910	52.60	49.61	38.92	56.00	46.00	-6.39
	631.860	49.73	46.54	34.63	56.00	46.00	-9.46
	678.140	50.12	47.00	32.51	56.00	46.00	-9.00
	803.915	47.34	44.20	29.27	56.00	46.00	-11.80
	16849.280	52.05	47.39	37.69	60.00	50.00	-12.31

**Test mode: Standby mode for SCP0501000P Adapter**

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	191.000	48.44	---	---	64.83	54.83	-6.39
	231.000	48.24	---	---	63.69	53.69	-5.45
	285.000	43.51	---	---	62.14	52.14	-8.63
	404.240	46.27	46.18	42.65	58.83	48.83	-6.18
	569.000	35.26	---	---	56.00	46.00	-10.74
	6740.000	41.79	---	---	60.00	50.00	-8.21
Line 2	174.000	51.11	---	---	65.31	55.31	-4.20
	188.810	52.55	40.80	35.99	64.66	54.66	-23.86
	229.000	48.91	---	---	63.74	53.74	-4.83
	401.000	44.59	---	---	58.83	48.83	-4.24
	461.000	40.41	---	---	57.11	47.11	-6.70
	7080.000	43.49	---	---	60.00	50.00	-6.51

## Test mode: IEEE 802.11b CH01 for SCP0501000P Adapter

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	174.000	40.32	---	---	65.31	55.31	-14.99
	229.000	37.83	---	---	63.74	53.74	-15.91
	401.000	35.83	---	---	58.83	48.83	-13.00
	575.000	30.07	---	---	56.00	46.00	-15.93
	802.000	29.90	---	---	56.00	46.00	-16.10
	1256.000	28.60	---	---	56.00	46.00	-17.40
Line 2	229.000	38.73	---	---	63.74	53.74	-15.01
	401.000	41.46	---	---	58.83	48.83	-7.37
	575.000	36.50	---	---	56.00	46.00	-9.50
	802.000	31.47	---	---	56.00	46.00	-14.53
	1091.000	31.35	---	---	56.00	46.00	-14.65
	6710.000	34.72	---	---	60.00	50.00	-15.28

## Test mode: IEEE 802.11b CH06 for SCP0501000P Adapter

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	172.000	39.35	---	---	65.37	55.37	-16.02
	229.000	36.57	---	---	63.74	53.74	-17.17
	401.000	35.93	---	---	58.83	48.83	-12.90
	575.000	30.14	---	---	56.00	46.00	-15.86
	802.000	29.79	---	---	56.00	46.00	-16.21
	1256.000	29.44	---	---	56.00	46.00	-16.56
Line 2	401.000	41.95	---	---	58.83	48.83	-6.88
	575.000	34.04	---	---	56.00	46.00	-11.96
	858.000	31.65	---	---	56.00	46.00	-14.35
	1091.000	31.25	---	---	56.00	46.00	-14.75
	1320.000	30.32	---	---	56.00	46.00	-15.68
	7010.000	34.54	---	---	60.00	50.00	-15.46

## Test mode: IEEE 802.11b CH11 for SCP0501000P Adapter

Conductor	Power	Connected	Emissions		Class B		
	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	172.000	38.31	---	---	65.37	55.37	-17.06
	401.000	35.81	---	---	58.83	48.83	-13.02
	575.000	30.86	---	---	56.00	46.00	-15.14
	802.000	29.39	---	---	56.00	46.00	-16.61
	1038.000	29.35	---	---	56.00	46.00	-16.65
	1256.000	28.81	---	---	56.00	46.00	-17.19
Line 2	401.000	41.16	---	---	58.83	48.83	-7.67
	575.000	33.21	---	---	56.00	46.00	-12.79
	858.000	31.35	---	---	56.00	46.00	-14.65
	1091.000	31.98	---	---	56.00	46.00	-14.02
	1320.000	31.11	---	---	56.00	46.00	-14.89
	6940.000	35.31	---	---	60.00	50.00	-14.69

## **V. Section 15.247 (a): Technical description of the EUT**


*Direct Sequence System* is a spread spectrum system in which the carrier has been modulated by a high speed spreading code and an information data stream. The high speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal. In the operational description demonstrates the operation principles of the Baseband processor employed by the EUT, shows that which is a complete DSSS baseband processor and meets the definition of the Direct sequence spread spectrum system.

## VI. Section 15.247(a)(2): Bandwidth for Direct Sequence System.

### 6.1 Test Condition & Setup

The transmitter bandwidth measurements were performed by the contact manner. The EUT was set to transmit continuously, also various channels were investigated to find the maximum occupied bandwidth. The output of the EUT was connected to the spectrum analyzer. The bandwidth of the fundamental frequency is observed by the spectrum analyzer with 100kHz RBW and 100kHz VBW.

### 6.2 Test Instruments Configuration

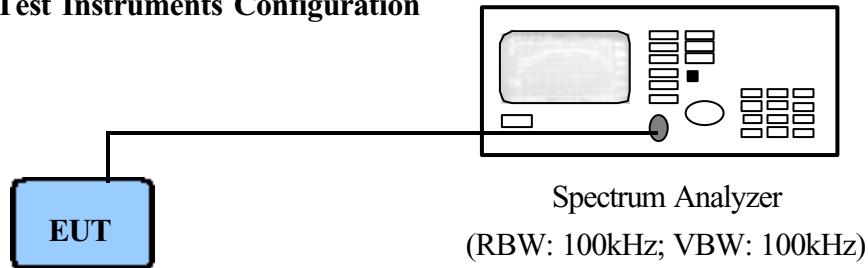

*The EUT at maximal power output and channel number and set antenna kit*

### 6.3 List of Test Instruments

Calibration Date				
Instrument Name	Model	Brand	Serial No.	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	11/02/05


### 6.4 Test Result of Bandwidth

Channel	Bandwidth
01	10.68 MHz
06	10.68 MHz
11	10.72 MHz

Note:


1. The data in the above table are summarizing the following attachment spectrum analyzer hard copy. According to the guidance, we'd made the measurement with the spectrum analyzer's resolution bandwidth ( $RBW=100kHz$ ) and set the  $span>>RBW$ . The results show the measured 6dB bandwidth comply with the minimum 500kHz requirement.
2. The attachments show these on the following pages.

**6dB Bandwidth of Channel 1 (The minimum 6dB BW at least 500kHz)**

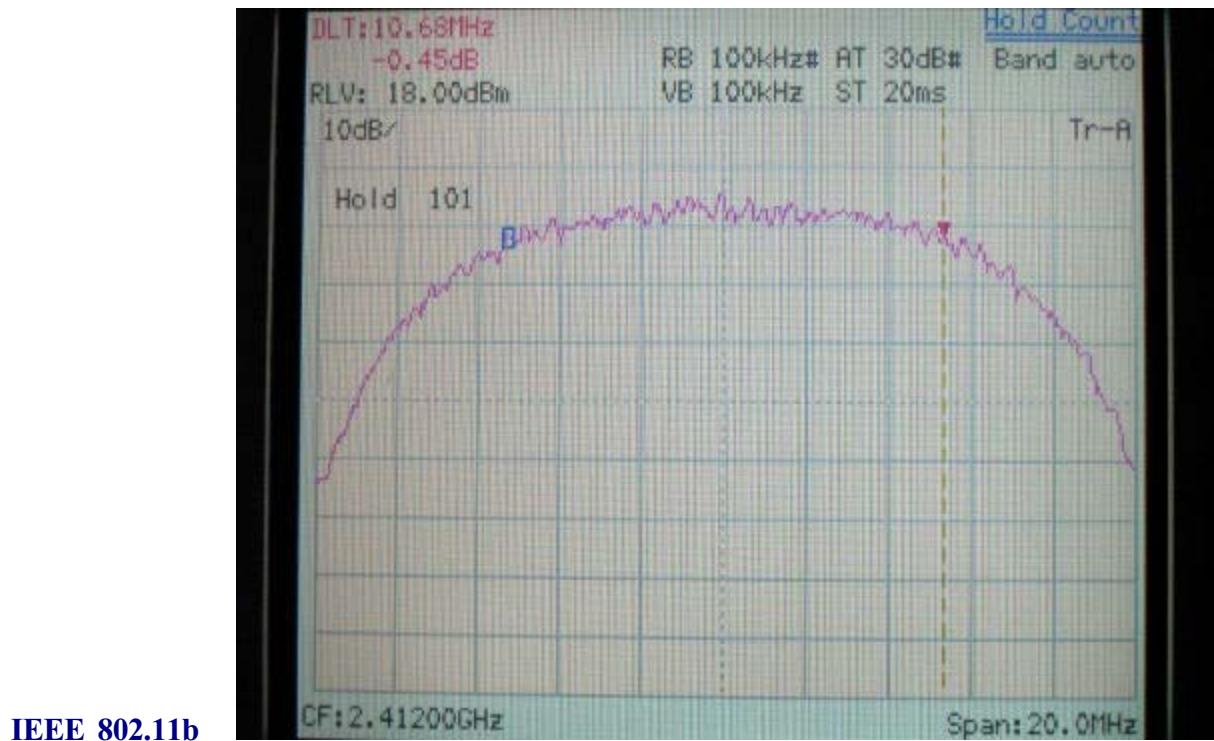


IEEE 802.11b

**6dB Bandwidth of Channel 6 (The minimum 6dB BW at least 500kHz)**

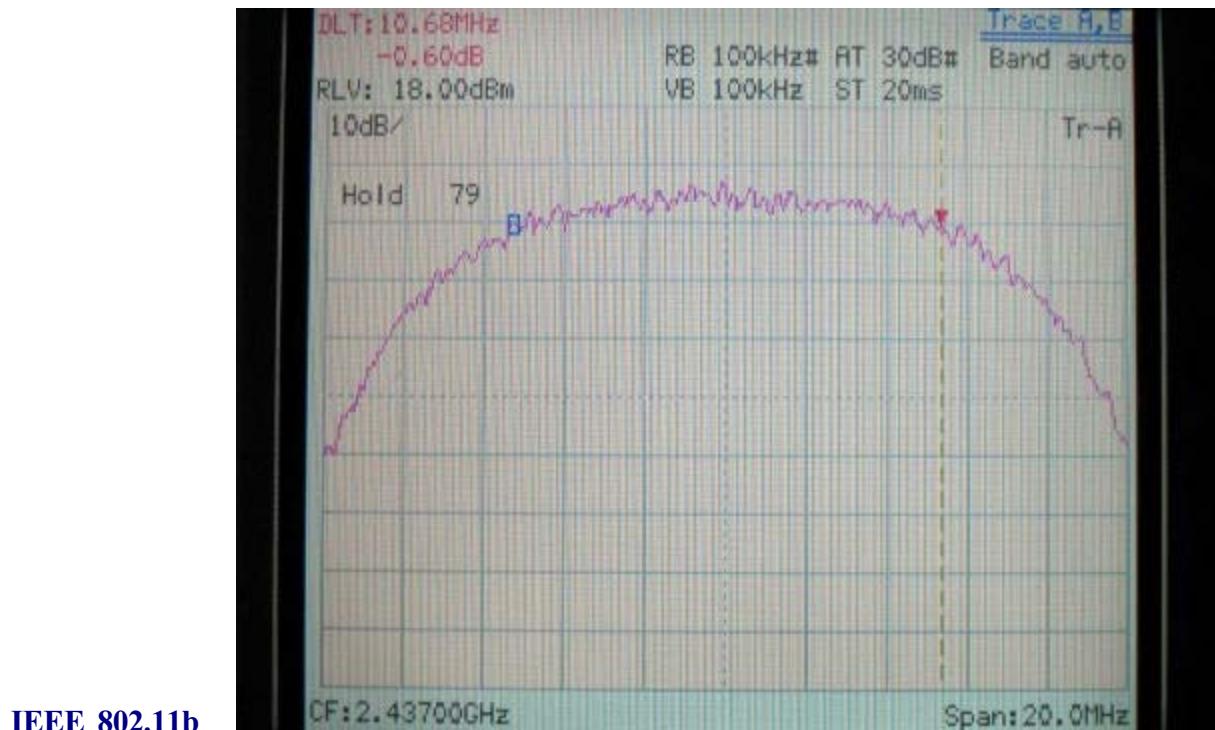


**6dB Bandwidth of Channel 11 (The minimum 6dB BW at least 500kHz)**

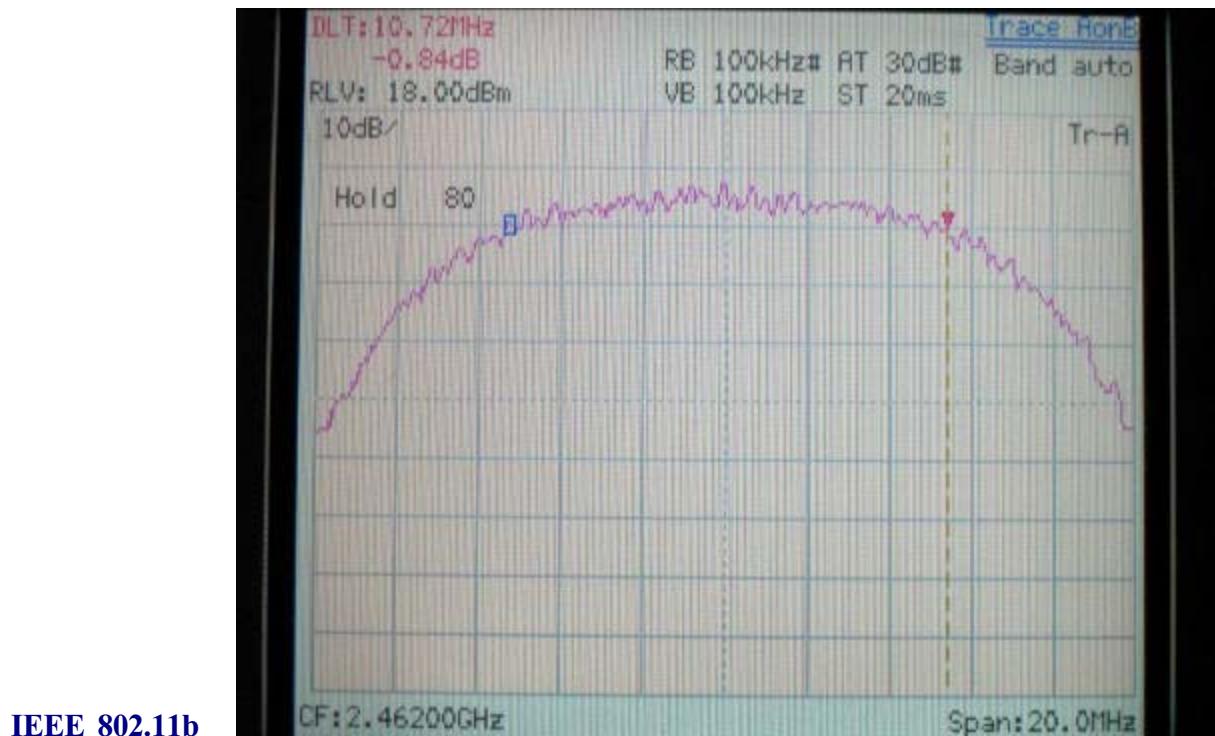

## VII. Section 15.247(b): Power Output

### 7.1 Test Condition & Setup

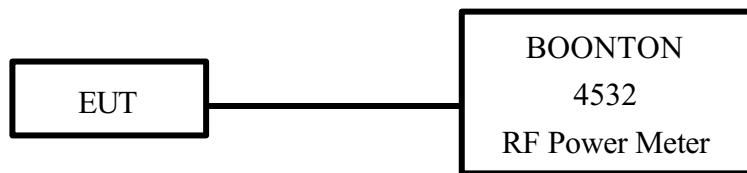

1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every test. The values of the output power of the EUT will be shown in the dBm directly are the transmitter output peak power. Recording as follows.

### 7.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Next time
RF Power Meter	4532	BOONTON	117501	04/16/05
Peak Power Sensor	57340	BOONTON	2696	04/16/05

### 7.3 Test Result

#### Formula:

$$\text{RF output power of EUT} + |\text{Cable loss}| = \text{Output peak power}$$

Channel	RF Output dBm	Cable Loss dBm	Output Peak Power	
			dBm	mW
802.11b CH01	16.08	1.00	17.08	51.05
802.11b CH06	16.71	1.00	17.71	59.02
802.11b CH11	17.30	1.00	18.30	67.61

## VIII. Section 15.247 (C): Spurious Emissions (Radiated)

### 8.1 Test Condition & Setup

We'd performed the test by the *radiated emission* skill: The EUT was placed in an anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 85460A EMI Receiver, SCHWARZECK whole range Small Biconical Antenna (Model No.: UBAA9114 & BBVU9135) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/HP Horn Antenna (Model 3115 / 84125-80008) for 1G - 25GHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition applies in this test item, the test procedure description as the following:

Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11). The setting up procedure is recorded on <1.3>

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dB $\mu$ V/m) is determined by algebraically adding the measured reading in dB $\mu$ V, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

**For frequency between 30MHz to 1000MHz**

FIa (dB $\mu$ V/m) = FIr (dB $\mu$ V) + Correction Factors

FIa : Actual Field Intensity

FIr : Reading of the Field Intensity

Correction Factors = Antenna Factor + (Cable Loss – Amplifier Gain) + Switching Box Loss

**For frequency between 1GHz to 25GHz**

FIa (dB $\mu$ V/m) = FIr (dB $\mu$ V) + Correction Factor

FIa : Actual Field Intensity

FIr : Reading of the Field Intensity

Correction Factors = Antenna Factor + (Cable Loss – Amplifier Gain) + Switching Box Loss

## 8.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Calibration Date
EMI Receiver	8546A	HP	3520A00242	08/05/05
RF Filter Section	85460A	HP	3448A00217	08/05/05
Small Biconical Antenna	UBAA9114 & BBVU9135	SCHWARZECK	127	10/11/05
Pre-amplifier	PA1F	TRC	1FAC	05/20/05
Auto Switch Box (>30MHz)	ASB-01	TRC	9904-01	05/20/05
Coaxial Cable (Double shielded, 15 meter)	A30A30-0058-50FS-15M	JYEBAO	SMA-01	05/20/05
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	JYEBAO	SMA-02	05/20/05
Spectrum Analyzer	8564E	HP	3720A00840	08/13/05
Microwave Preamplifier	84125C	HP	US36433002	08/13/05
Horn Antenna	3115	EMCO	9104-3668	03/18/05
Standard Guide Horn Antenna	84125-80008	HP	18-26.5GHz	03/18/05
Standard Guide Horn Antenna	84125-80001	HP	26.5-40GHz	03/18/05
Horn Antenna	1196E (3115)	HP (EMCO)	9704-5178	03/12/05
Pre-amplifier	PA2F	TRC	2F1GZ	03/20/05
Coaxial Cable (3 miter)	A30A30-0058-50FST118	JYEBAO	MSA-05	03/20/05
Coaxial Cable (1 meter)	A30A30-0058-50FST118	JYEBAO	MSA-04	03/20/05

### 8.3 Test Result of Spurious Radiated Emissions

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following. (worst case)

Test Conditions: Temperature : 25 ° C Humidity : 73 % RH

*Test mode: RX mode for 30MHz to 1GHz [Horizontal]*

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB $\mu$ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB $\mu$ V)	Ant. H. (m)	Table (°)			Limit (dB $\mu$ V/m)	Margin (dB)
192.47	38.58	1.00	262	-3.70	34.88	43.50	-8.62
210.66	40.55	1.00	81	-3.90	36.65	43.50	-6.85
290.69	40.94	1.00	317	-3.77	37.17	46.00	-8.83
366.75	36.86	1.00	288	-2.15	34.71	46.00	-11.29
419.21	38.81	1.00	271	-0.23	38.58	46.00	-7.42
470.37	32.44	1.00	302	1.78	34.22	46.00	-11.78

*Test mode: RX mode for 30MHz to 1GHz [Vertical]*

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB $\mu$ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB $\mu$ V)	Ant. H. (m)	Table (°)			Limit (dB $\mu$ V/m)	Margin (dB)
55.46	28.20	1.00	256	2.86	31.06	40.00	-8.94
160.95	40.16	1.00	37	-3.50	36.66	43.50	-6.84
175.50	37.68	1.00	323	-3.77	33.91	43.50	-9.59
210.66	37.36	1.00	341	-3.90	33.46	43.50	-10.04
468.92	33.30	1.00	186	1.73	35.03	46.00	-10.97
728.40	26.86	1.00	300	10.05	36.91	46.00	-9.09

Note:

1. Margin = Amplitude – limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction factor = Antenna factor + (Cable Loss – Amplitude gain) + Switching Box Loss

## Test mode: RX mode for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected Amplitude	Limit	Margin
MHz	m	degree	dB $\mu$ V	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB
1864.17	1.00	141	35.24	---	2.53	37.77	---
3351.67	1.00	324	31.90	---	10.03	41.93	---
5901.67	1.00	288	27.91	---	17.76	45.67	---
9478.75	1.00	174	23.40	---	23.30	46.70	---
21768.33	1.00	153	47.82	---	2.77	50.59	---

## Test mode: RX mode for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected Amplitude	Limit	Margin
MHz	m	degree	dB $\mu$ V	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB
1361.25	1.00	50	37.74	---	0.56	38.30	---
3110.83	1.00	247	31.57	---	9.47	41.04	---
6085.83	1.00	14	27.41	---	18.00	45.41	---
9478.75	1.00	197	24.40	---	23.30	47.70	---
21973.75	1.00	158	49.16	---	2.93	52.09	---
24548.54	1.00	6	49.66	---	2.46	52.12	---

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

## Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB $\mu$ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB $\mu$ V)	Ant. H. (m)	Table (°)			Limit (dB $\mu$ V/m)	Margin (dB)
143.97	27.89	1.00	89	-2.97	24.92	43.50	-18.58
217.94	30.52	1.00	288	-3.95	26.57	46.00	-19.43
291.90	43.24	1.00	300	-3.76	39.48	46.00	-6.52
339.19	43.23	1.00	308	-2.94	40.29	46.00	-5.71
391.32	32.40	1.00	230	-1.30	31.10	46.00	-14.90
439.82	29.43	1.00	170	0.60	30.03	46.00	-15.97

## Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB $\mu$ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB $\mu$ V)	Ant. H. (m)	Table (°)			Limit (dB $\mu$ V/m)	Margin (dB)
73.65	31.44	1.00	176	0.91	32.35	40.00	-7.65
240.97	30.93	1.00	158	-4.01	26.92	46.00	-19.08
289.47	35.43	1.00	170	-3.78	31.65	46.00	-14.35
339.19	31.93	1.00	161	-2.94	28.99	46.00	-17.01
387.69	29.59	1.00	213	-1.43	28.16	46.00	-17.84
599.87	23.32	1.00	229	6.67	29.99	46.00	-16.01

## Test mode: IEEE 802.11b CH01 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected Amplitude	Limit	Margin
MHz	m	degree	dB $\mu$ V	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB
2358.33	1.00	335	38.00	---	9.09	47.09	---
7233.75	1.00	174	35.94	---	10.07	46.01	---
9650.42	1.00	224	35.61	---	11.47	47.08	---
12061.04	1.00	151	36.77	---	9.81	46.58	---
19296.25	1.00	3	49.31	---	1.60	50.91	---
21708.12	1.00	24	46.44	---	2.87	49.31	---

## Test mode: IEEE 802.11b CH01 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected Amplitude	Limit	Margin
MHz	m	degree	dB $\mu$ V	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB
2152.08	1.00	275	38.33	---	8.52	46.85	---
4823.12	1.00	345	38.44	---	3.76	42.20	---
7233.75	1.00	66	35.61	---	10.07	45.68	---
9650.42	1.00	19	35.77	---	11.47	47.24	---
12061.04	1.00	61	37.44	---	9.81	47.25	---
19296.25	1.00	9	49.21	---	1.60	50.81	---

## Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB $\mu$ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB $\mu$ V)	Ant. H. (m)	Table (°)			Limit (dB $\mu$ V/m)	Margin (dB)
146.40	31.74	1.00	288	-3.04	28.70	43.50	-14.80
220.36	34.85	1.00	297	-3.97	30.88	46.00	-15.12
243.40	35.76	1.00	118	-4.01	31.75	46.00	-14.25
291.90	42.92	1.00	308	-3.76	39.16	46.00	-6.84
340.40	43.95	1.00	308	-2.92	41.03	46.00	-4.97
391.32	35.50	1.00	101	-1.30	34.20	46.00	-11.80

## Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB $\mu$ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB $\mu$ V)	Ant. H. (m)	Table (°)			Limit (dB $\mu$ V/m)	Margin (dB)
74.86	31.87	1.00	163	0.77	32.64	40.00	-7.36
240.97	30.79	1.00	165	-4.01	26.78	46.00	-19.22
290.69	35.59	1.00	177	-3.77	31.82	46.00	-14.18
339.19	31.74	1.00	255	-2.94	28.80	46.00	-17.20
387.69	29.81	1.00	203	-1.43	28.38	46.00	-17.62
599.87	23.59	1.00	235	6.67	30.26	46.00	-15.74

## Test mode: IEEE 802.11b CH06 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected Amplitude	Limit	Margin
MHz	m	degree	dB $\mu$ V	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB
1954.17	1.00	136	37.16	---	8.81	45.97	---
4871.46	1.00	80	38.10	---	3.95	42.05	---
7312.29	1.00	98	35.61	---	10.30	45.91	---
9747.08	1.00	19	36.10	---	11.89	47.99	---
12187.92	1.00	293	38.60	---	9.74	48.34	---
24371.46	1.00	171	46.83	---	3.26	50.09	---

## Test mode: IEEE 802.11b CH06 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected Amplitude	Limit	Margin
MHz	m	degree	dB $\mu$ V	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB
2152.08	1.00	334	39.83	---	8.52	48.35	---
4871.46	1.00	157	38.44	---	3.95	42.39	---
7312.29	1.00	67	36.27	---	10.30	46.57	---
9747.08	1.00	252	35.77	---	11.89	47.66	---
12187.92	1.00	342	39.44	---	9.74	49.18	---
24371.46	1.00	159	47.08	---	3.26	50.34	---

## Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB $\mu$ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB $\mu$ V)	Ant. H. (m)	Table (°)			Limit (dB $\mu$ V/m)	Margin (dB)
143.97	29.61	1.00	107	-2.97	26.64	43.50	-16.86
217.94	31.55	1.00	305	-3.95	27.60	46.00	-18.40
291.90	43.47	1.00	300	-3.76	39.71	46.00	-6.29
341.61	43.25	1.00	317	-2.89	40.36	46.00	-5.64
390.11	32.00	1.00	230	-1.34	30.66	46.00	-15.34
438.61	28.77	1.00	170	0.55	29.32	46.00	-16.68

## Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB $\mu$ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB $\mu$ V)	Ant. H. (m)	Table (°)			Limit (dB $\mu$ V/m)	Margin (dB)
54.25	28.05	1.00	190	3.02	31.07	40.00	-8.93
76.07	29.46	1.00	98	0.62	30.08	40.00	-9.92
216.72	29.80	1.00	210	-3.94	25.86	46.00	-20.14
291.90	33.98	1.00	239	-3.76	30.22	46.00	-15.78
340.40	34.41	1.00	40	-2.92	31.49	46.00	-14.51
650.80	24.98	1.00	165	8.48	33.46	46.00	-12.54

## Test mode: IEEE 802.11b CH11 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected Amplitude	Limit	Margin
MHz	m	degree	dB $\mu$ V	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB
2397.92	1.00	52	39.84	---	9.20	49.04	---
4925.83	1.00	359	39.11	---	4.13	43.24	---
7384.79	1.00	155	34.94	---	10.42	45.36	---
9849.79	1.00	214	34.61	---	11.93	46.54	---
12308.75	1.00	0	39.11	---	9.56	48.67	---
24619.37	1.00	195	46.69	---	3.01	49.70	---

## Test mode: IEEE 802.11b CH11 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected Amplitude	Limit	Margin
MHz	m	degree	dB $\mu$ V	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB
2150.00	1.00	250	36.83	---	8.51	45.34	---
4925.83	1.00	84	38.61	---	4.13	42.74	---
7384.79	1.00	115	34.11	---	10.42	44.53	---
9849.79	1.00	34	35.44	---	11.93	47.37	---
12308.75	1.00	0	37.44	---	9.56	47.00	---
24619.37	1.00	211	46.60	---	3.01	49.61	---

## 8.4 Test Result of the Bandedge


If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either *at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in § 15.209(a)*,

We perform this section by the *radiated manner*, the RBW is set to 100kHz and VBW>RBW. We'd made the observation *up to 10<sup>th</sup> harmonics and the criterion is all the harmonic/spurious emissions must be 20dB below the highest emission level measured*. If the emissions fall in the restricted bands stated in the Part15.205(a) must also *comply with the radiated emission limits specified in Part15.209(a)*. (*Peak mode: RBW=VBW=1MHz, Average mode: RBW=1MHz; VBW=10Hz*)

The following pages show our observations referring to the channel 1 and 11 respectively.

Test Condition & Setup: same as < 8.1 >

## CH01 of IEEE 802.11b

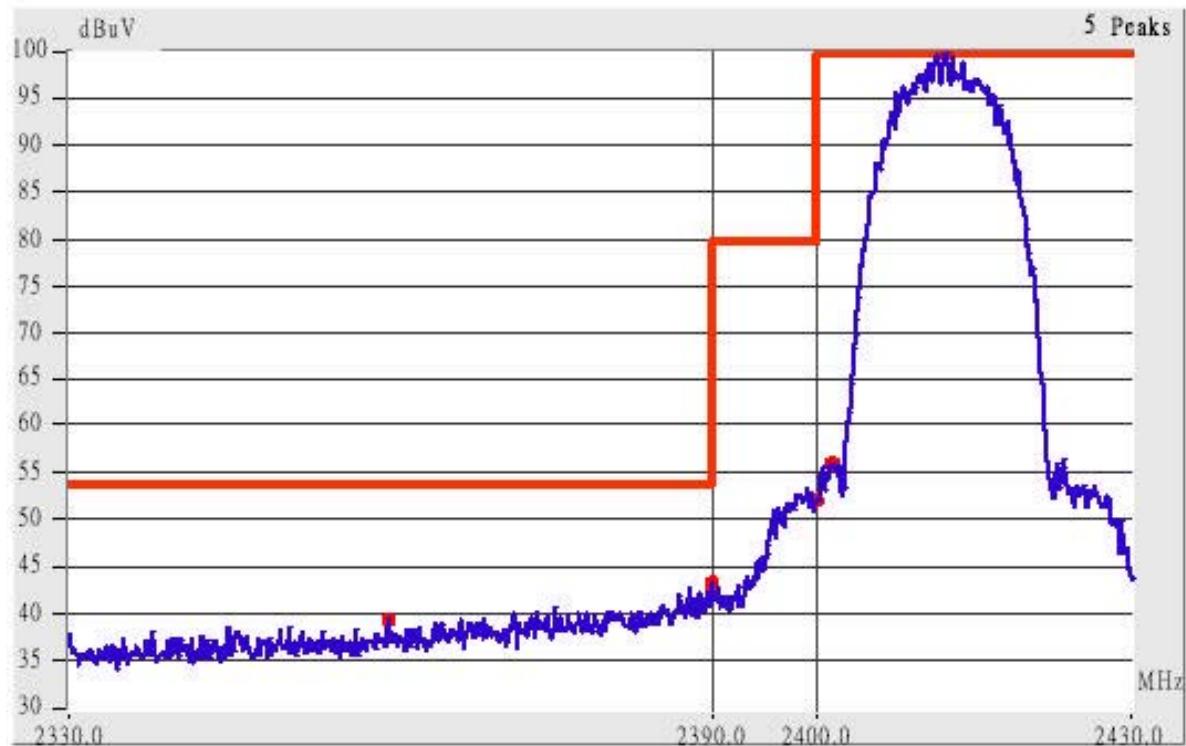


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

1. The lobe left by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

Radiated Emission					Corrected Amplitude		Class B (3m)			
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	(dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Margin (dB)	
					Peak	Average	Peak	Ave.		
2386.33	Hor	1.00	146	9.17	52.01	---	73.96	53.96	-1.95	
2390.02	Hor	1.00	191	9.18	50.52	---	73.96	53.96	-3.44	
2384.82	Ver	1.00	199	9.17	48.83	---	73.96	53.96	-5.13	
2390.02	Ver	1.00	27	9.18	49.18	---	73.96	53.96	-4.78	

## CH11 of IEEE 802.11b

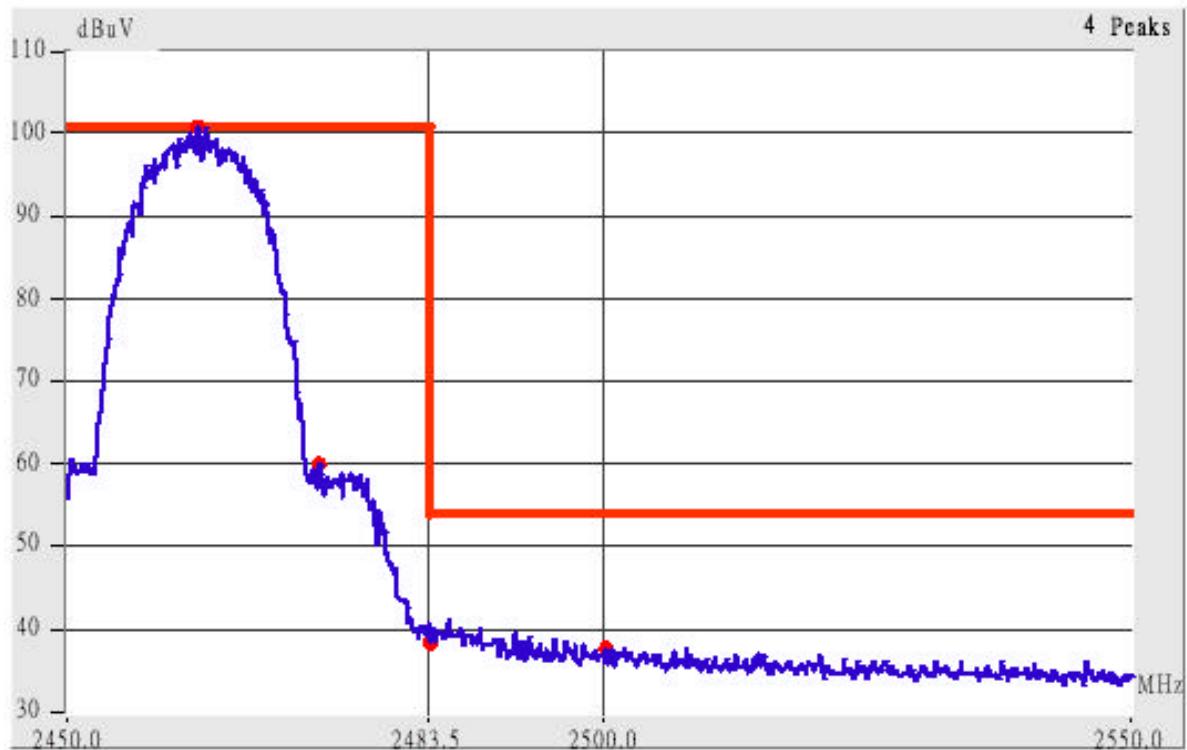

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

1. The lobe right by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below


Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	(dB $\mu$ V/m)		Limit (dB $\mu$ V/m)	Margin (dB)	
					Peak	Average			
2483.50	Hor	1.00	155	9.44	49.78	---	73.96	53.96	-4.18
2488.98	Hor	1.00	155	9.46	50.13	---	73.96	53.96	-3.83
2500.01	Hor	1.00	141	9.49	45.99	---	73.96	53.96	-7.97
2502.46	Hor	1.00	156	9.49	48.33	---	73.96	53.96	-5.63
2483.50	Ver	1.00	136	9.44	47.61	---	73.96	53.96	-6.35
2487.82	Ver	1.00	134	9.46	50.12	---	73.96	53.96	-3.84
2503.16	Ver	1.00	137	9.50	47.00	---	73.96	53.96	-6.96

## IX. Section 15.247(d): Power Spectral Density

### 9.1 Test Condition & Setup

The tests below are running with the EUT transmitter set at high power in TDD mode. The EUT is needed to force selection of output power level and channel number. While testing, the EUT was set to transmit continuously and to be tested by the contact manner with the spectrum analyzer.

### 9.2 Test Instruments Configuration

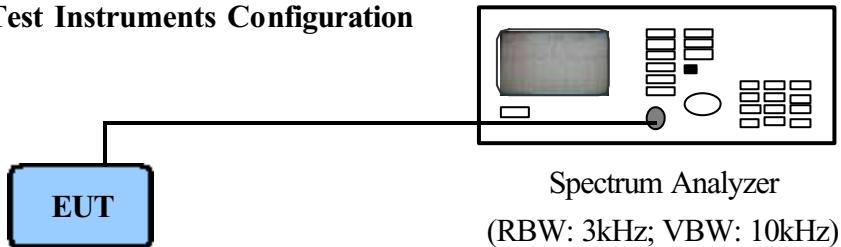

### 9.3 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Calibration Date
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	11/02/05

### 9.4 Test Result of Power spectral density


The following table shows a summary of the test results of the Power Spectral Density.

Channel	Ppr (dBm)	Cable Loss (dB)	Ppq (dBm)	Limit (dB)	Margin (dB)
802.11b CH01	-11.46	1.00	-10.46	8.00	-18.46
802.11b CH06	-10.66	1.00	-9.66	8.00	-17.66
802.11b CH11	-10.03	1.00	-9.03	8.00	-17.03


Note:

1. The following pages show the results of spectrum reading.
2. Ppr: spectrum read power density (using peak search mode),  
Ppq: actual peak power density in the spread spectrum band.
3. Ppq = Ppr + |Cable Loss|

**Power Spectral Density for CH01**

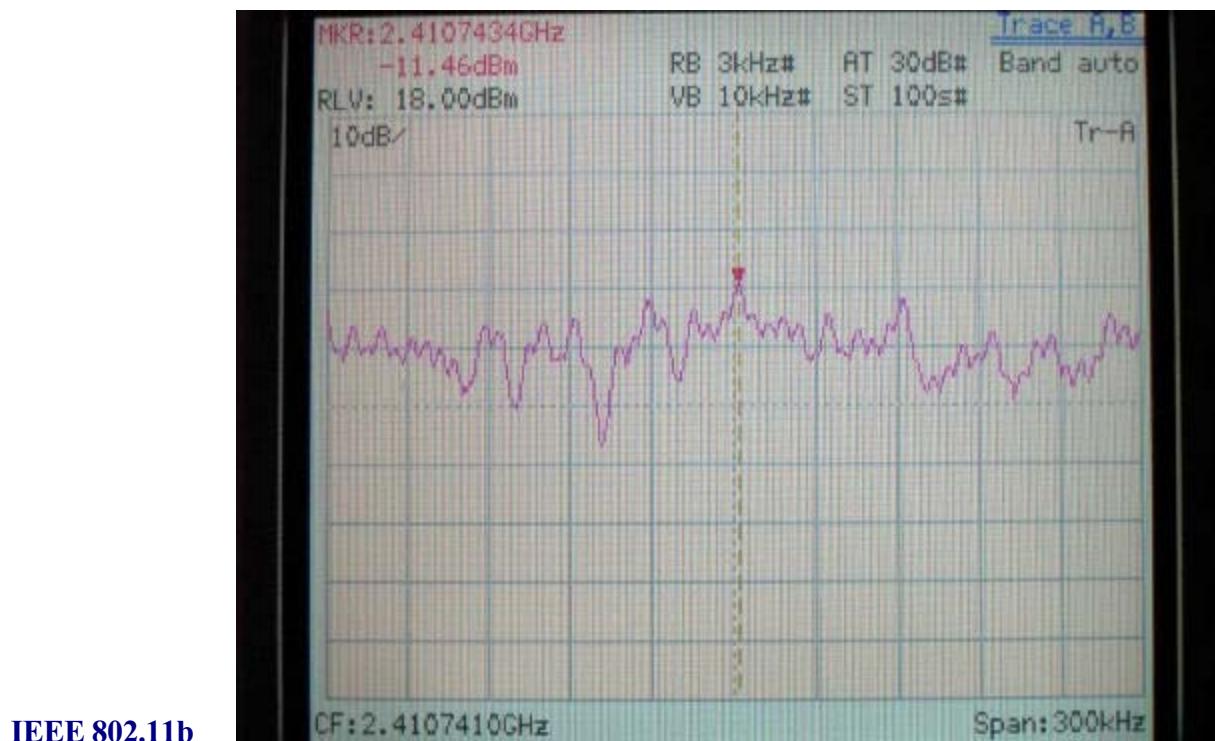

**Power Spectral Density for CH06**

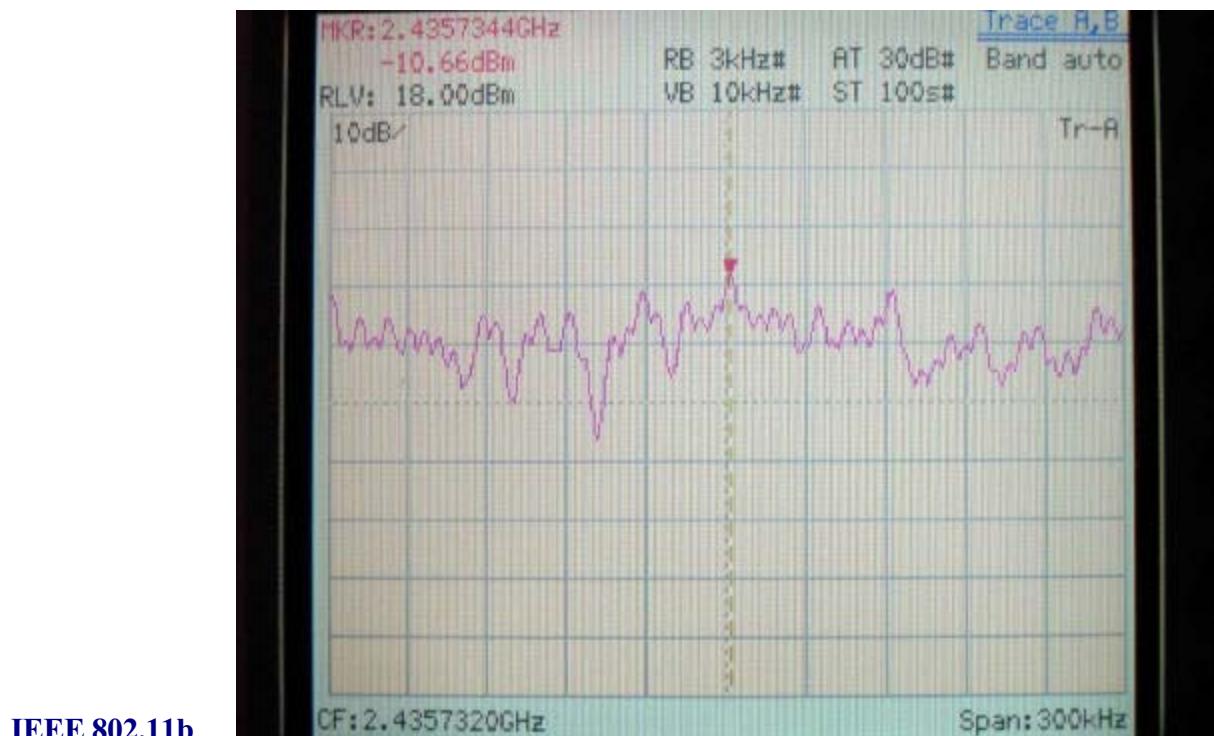

**Power Spectral Density for CH11**

